


Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA 9120D,
Comment 2: Freq:1.925GHz Pmax:12.83dBm RBW: 5 MHz

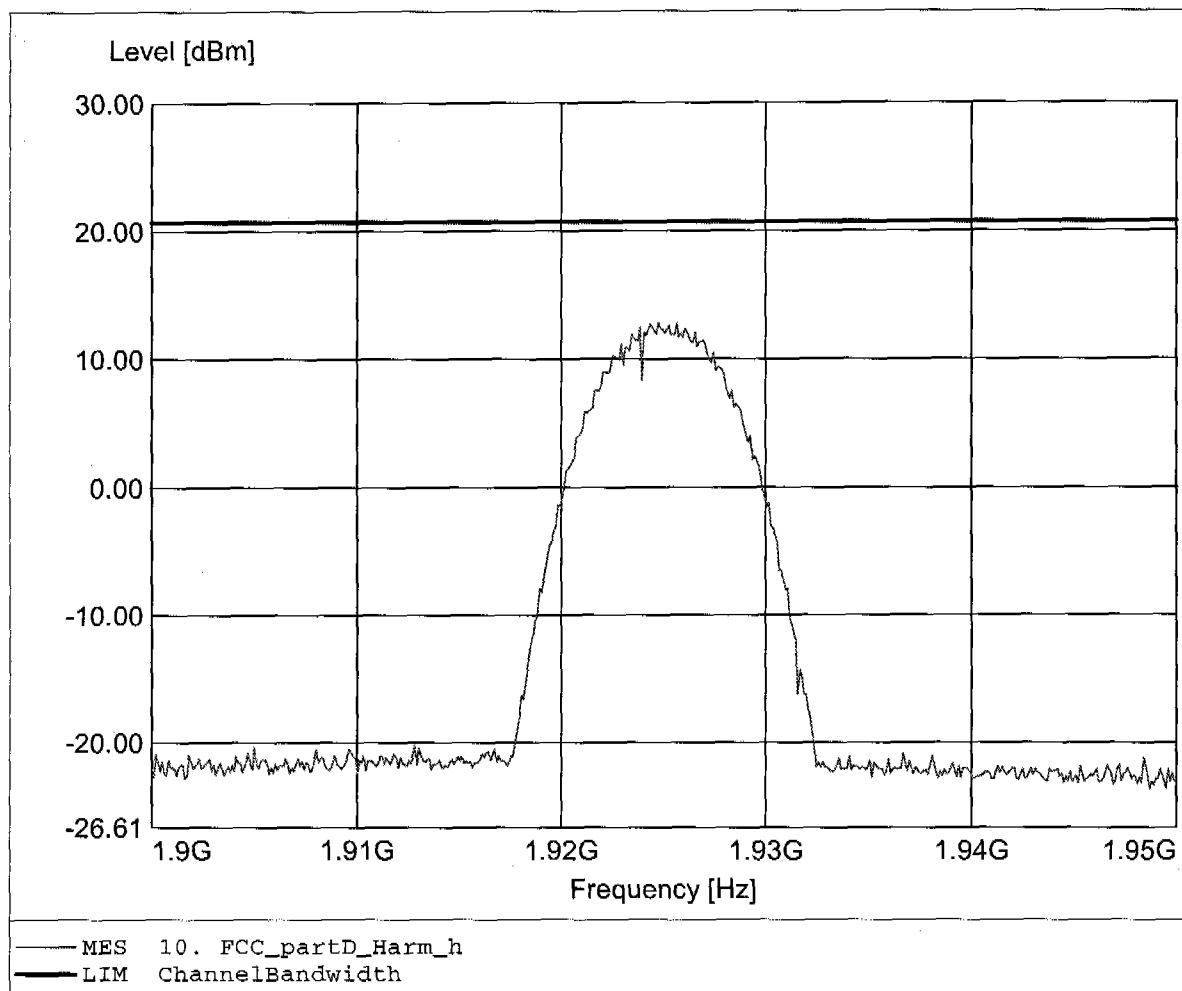

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA 9120D,
Comment 2: Freq:1.925GHz Pmax:18.85dBm RBW: 5 MHz

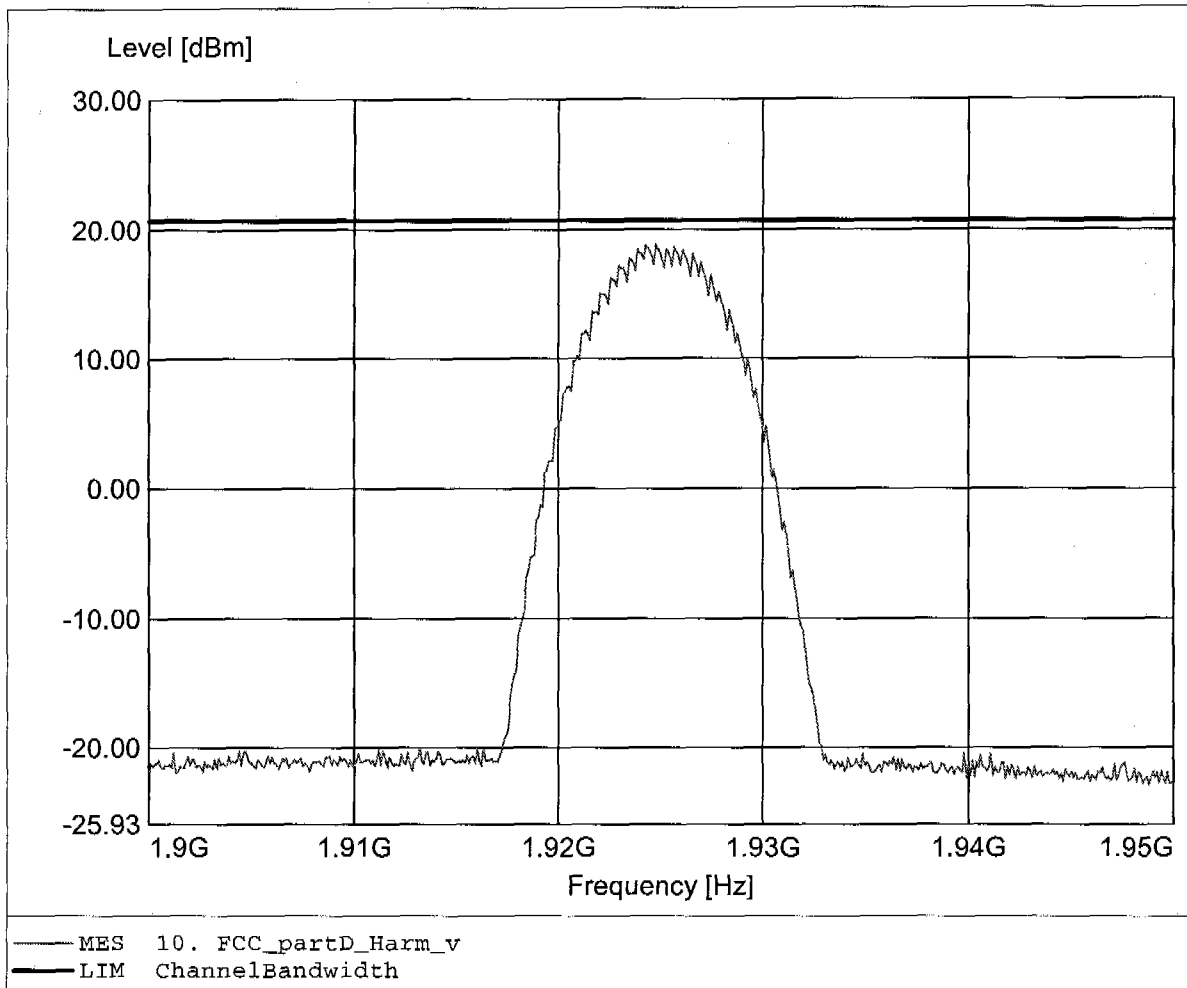

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA 9120D,
Comment 2: Freq:1.925GHz Pmax:13.22dBm RBW: 5 MHz

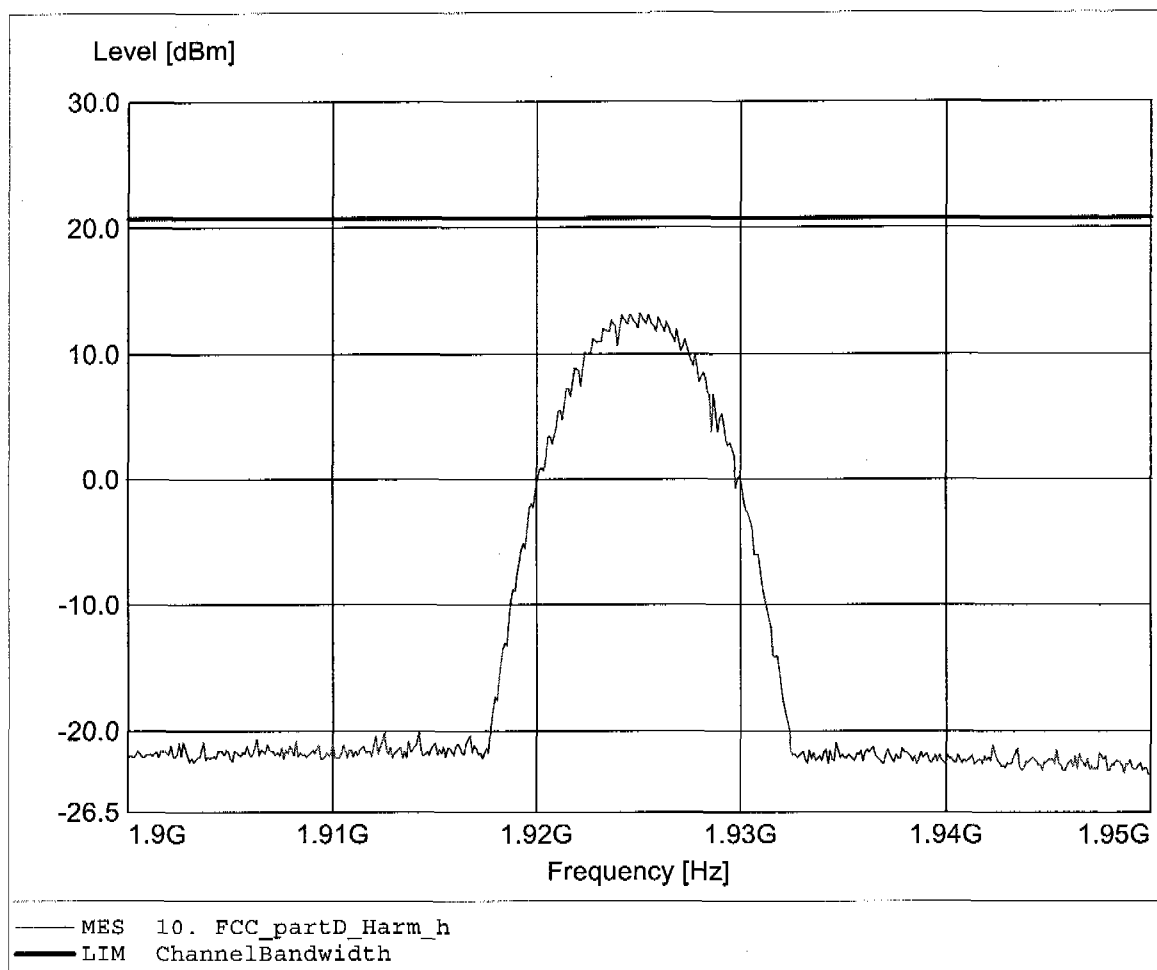

Peak Transmit Power, Radiated

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: BBHA 9120D,
Comment 2: Freq:1.925GHz Pmax:16.34dBm RBW: 5 MHz

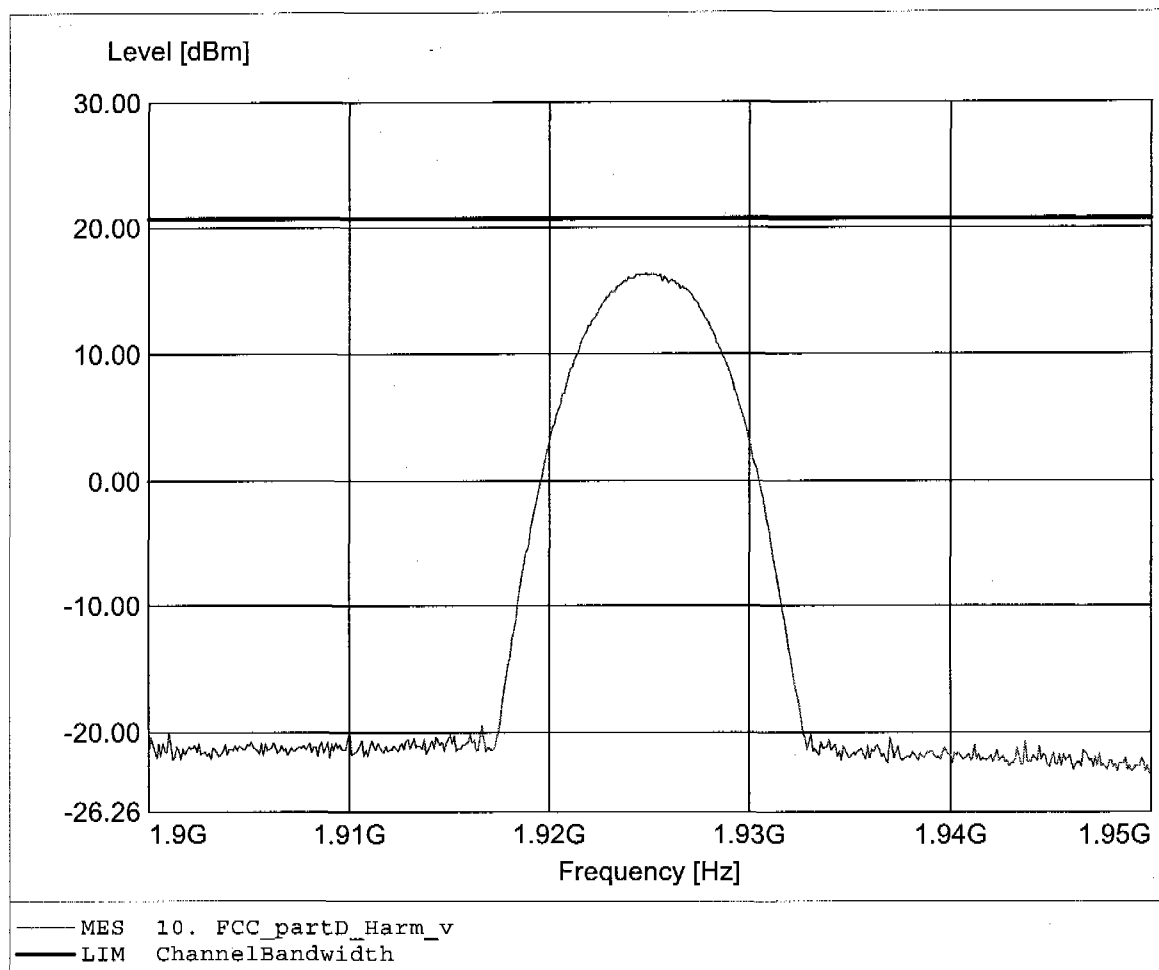

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq: 157.756MHz Pmax:-66.44dBm RBW: 100 kHz

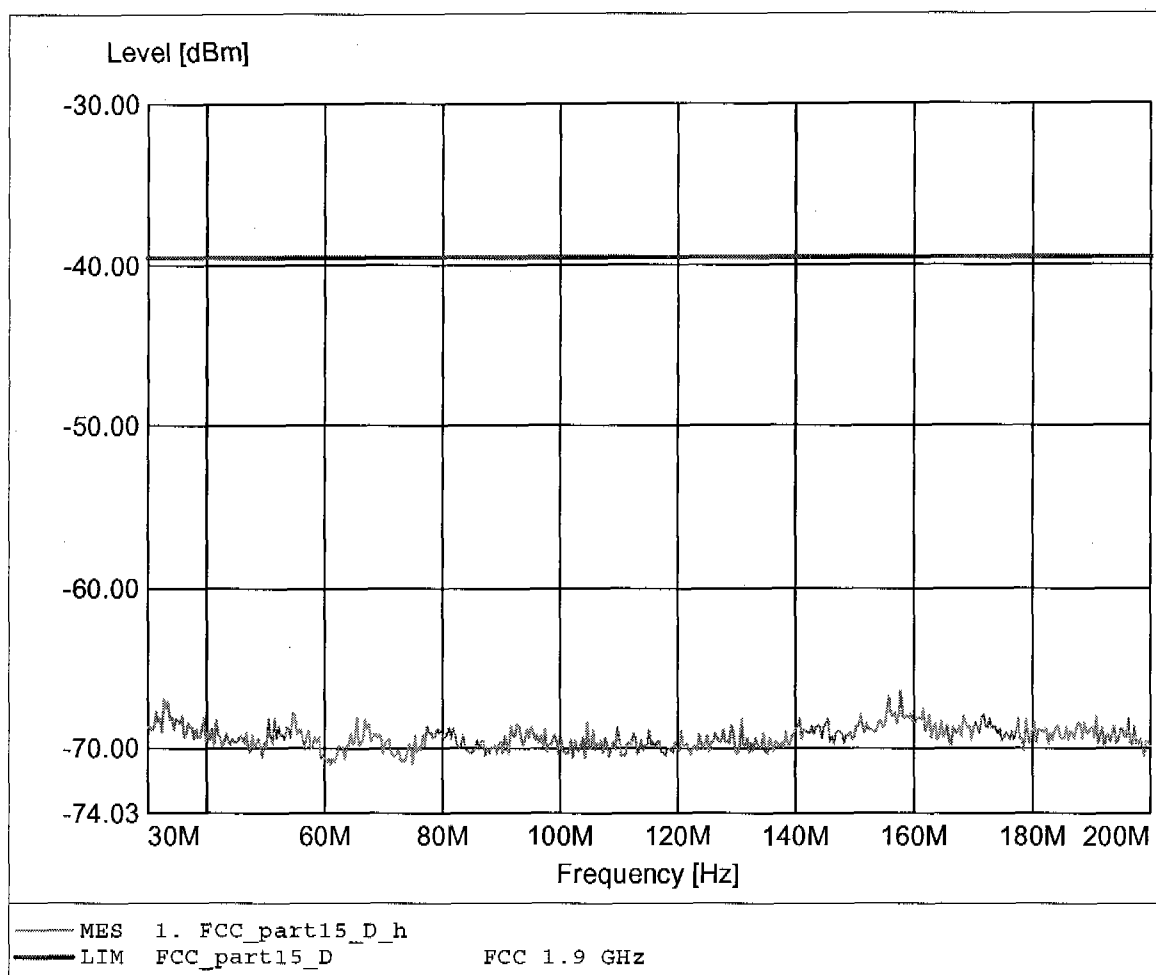

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:183.166MHz Pmax:-63.98dBm RBW: 100 kHz

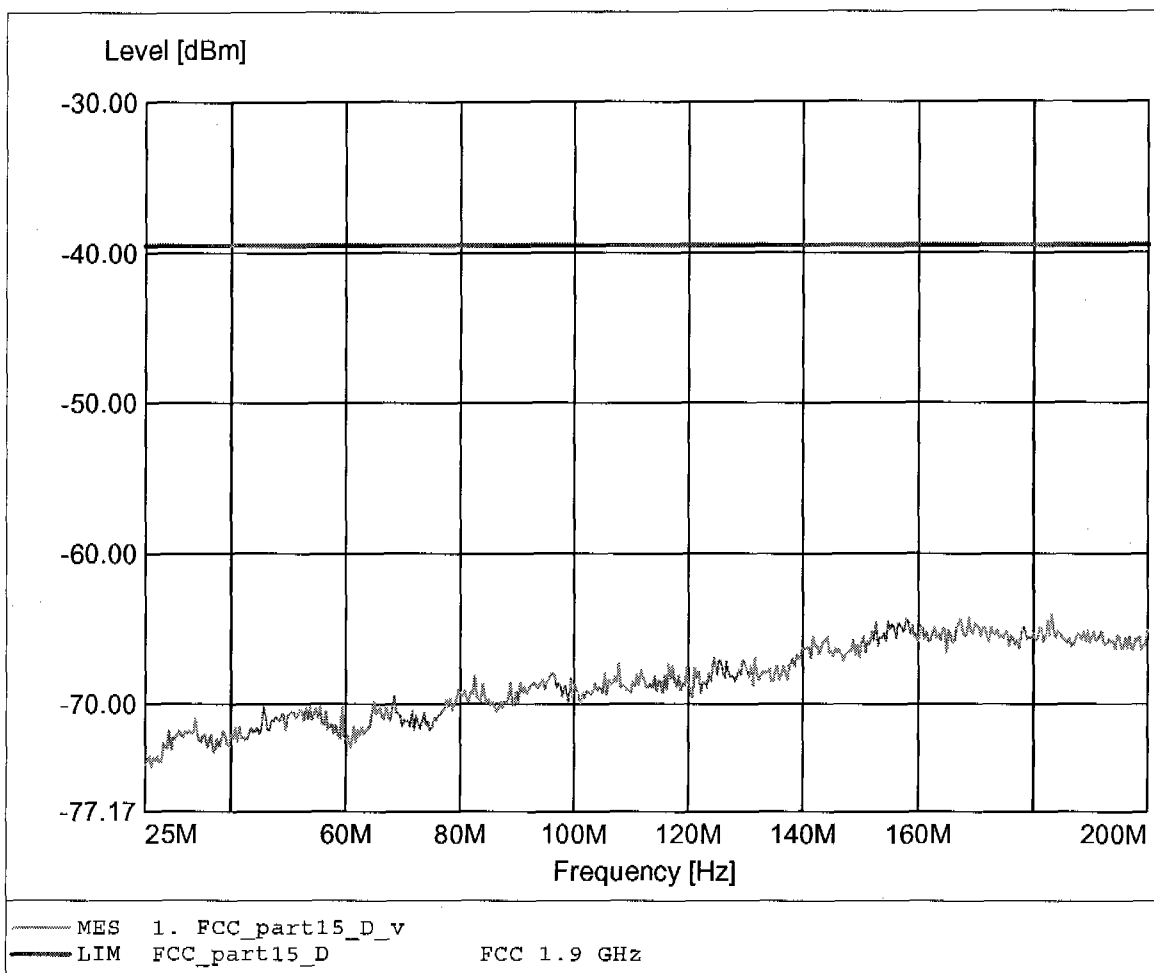

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 817.234MHz Pmax: -73.72dBm RBW: 100 kHz

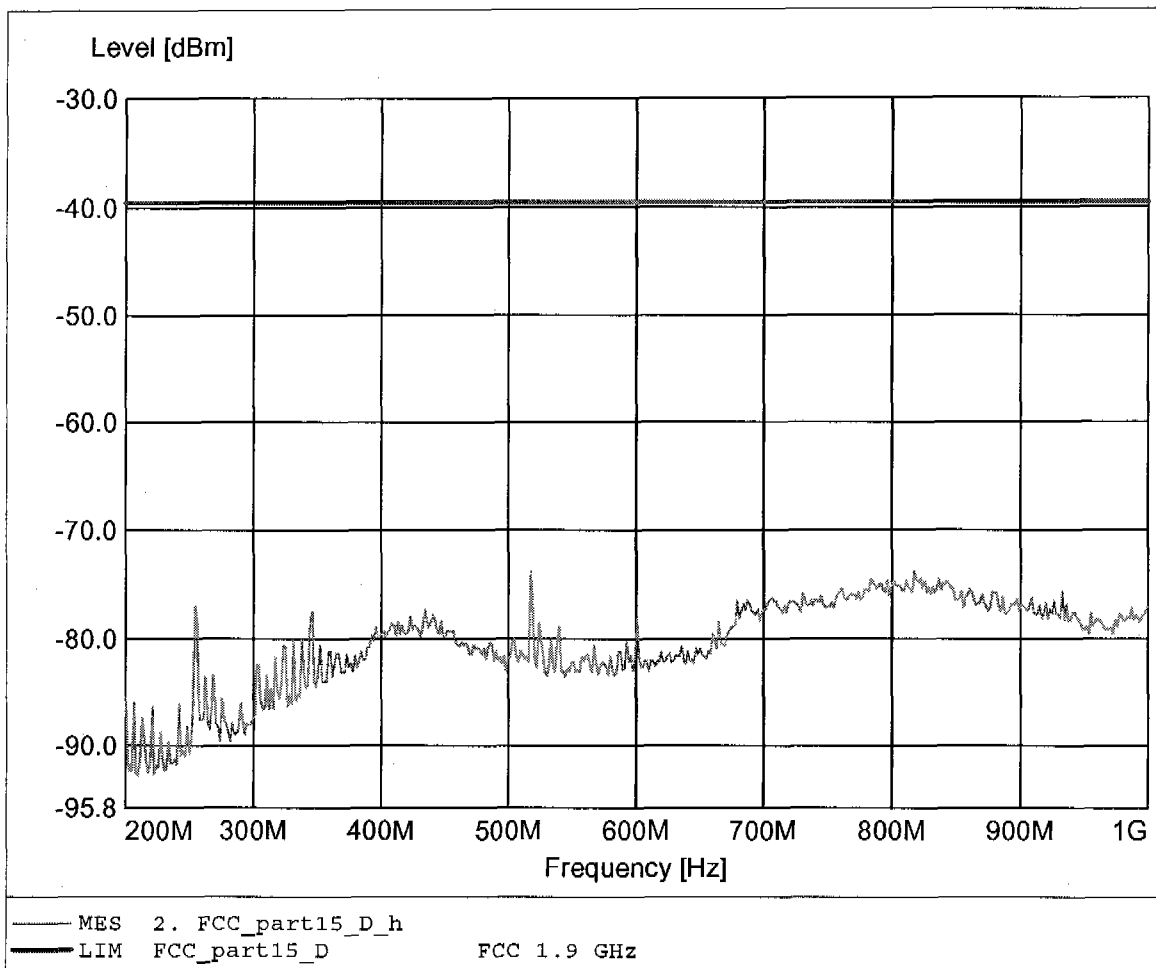

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 913.427MHz Pmax:-69.10dBm RBW: 100 kHz

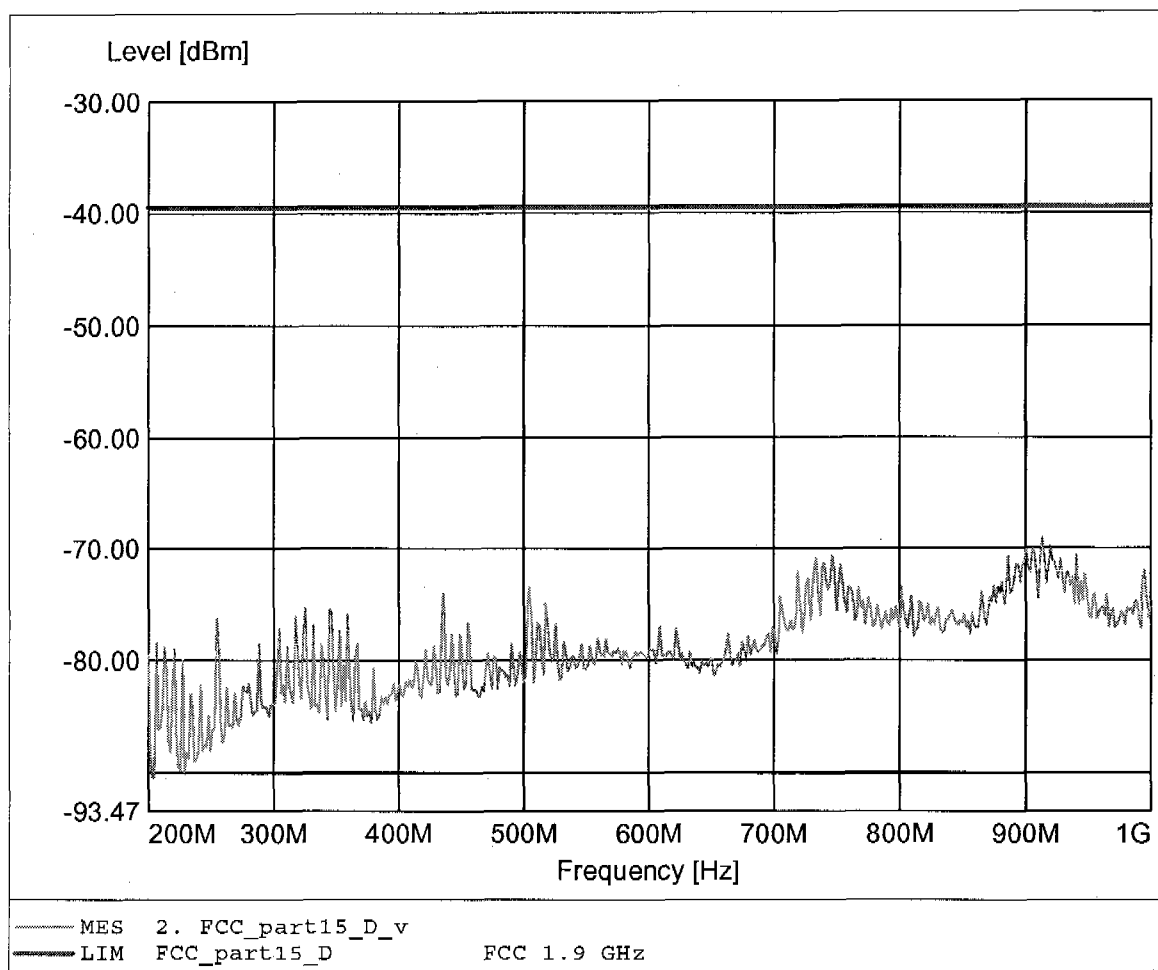

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.913GHz Pmax: -57.47dBm RBW: 1 MHz

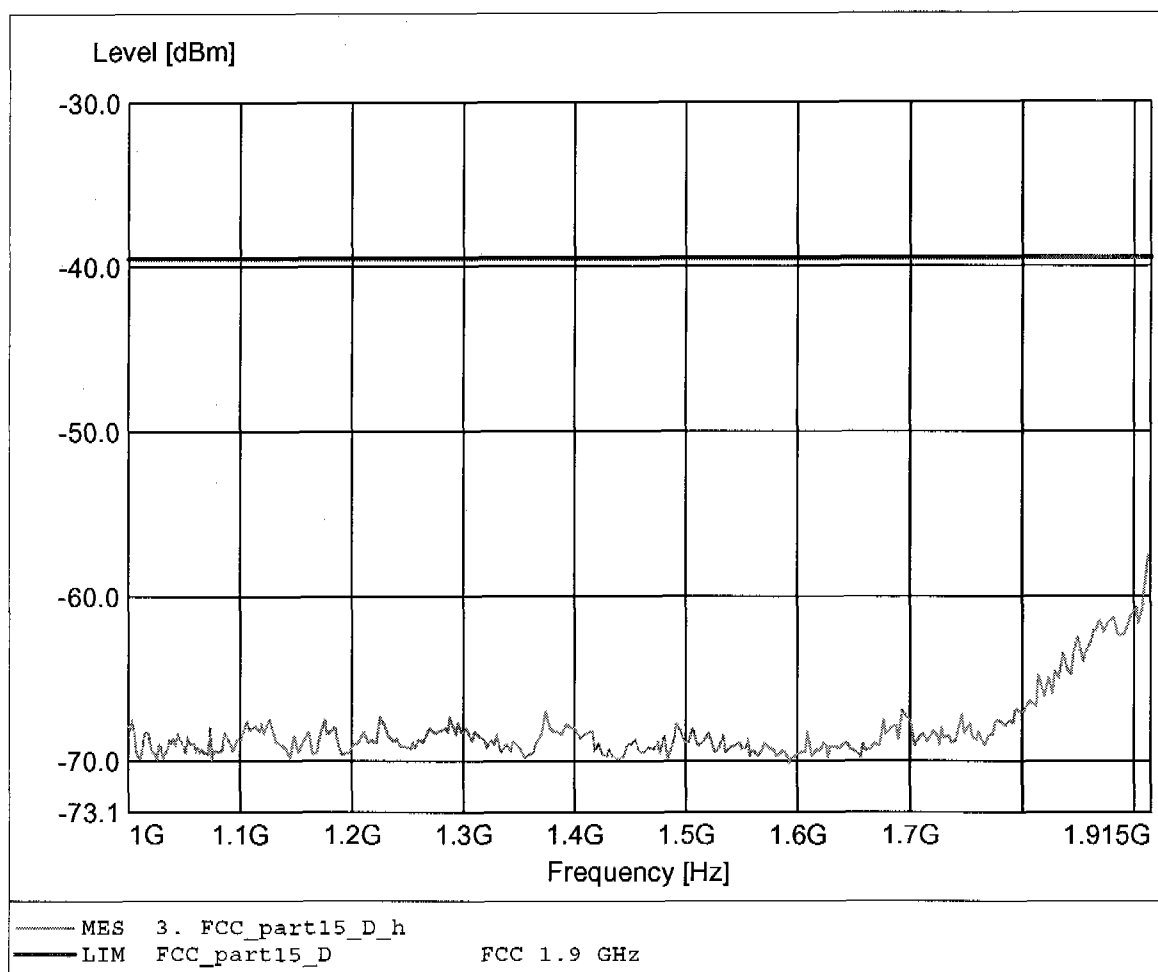

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.913GHz Pmax: -55.02dBm RBW: 1 MHz

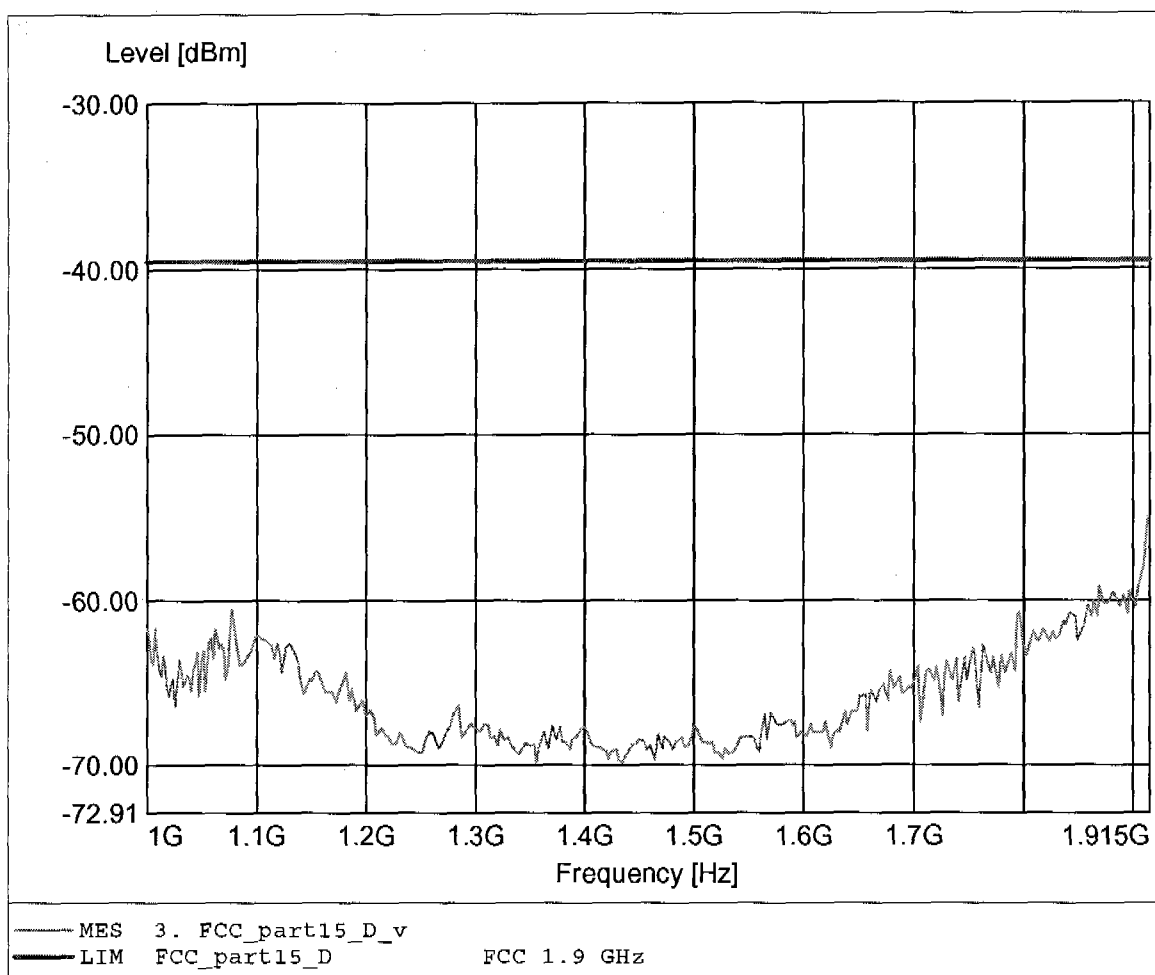

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.920GHz Pmax: -43.33dBm RBW: 10 kHz

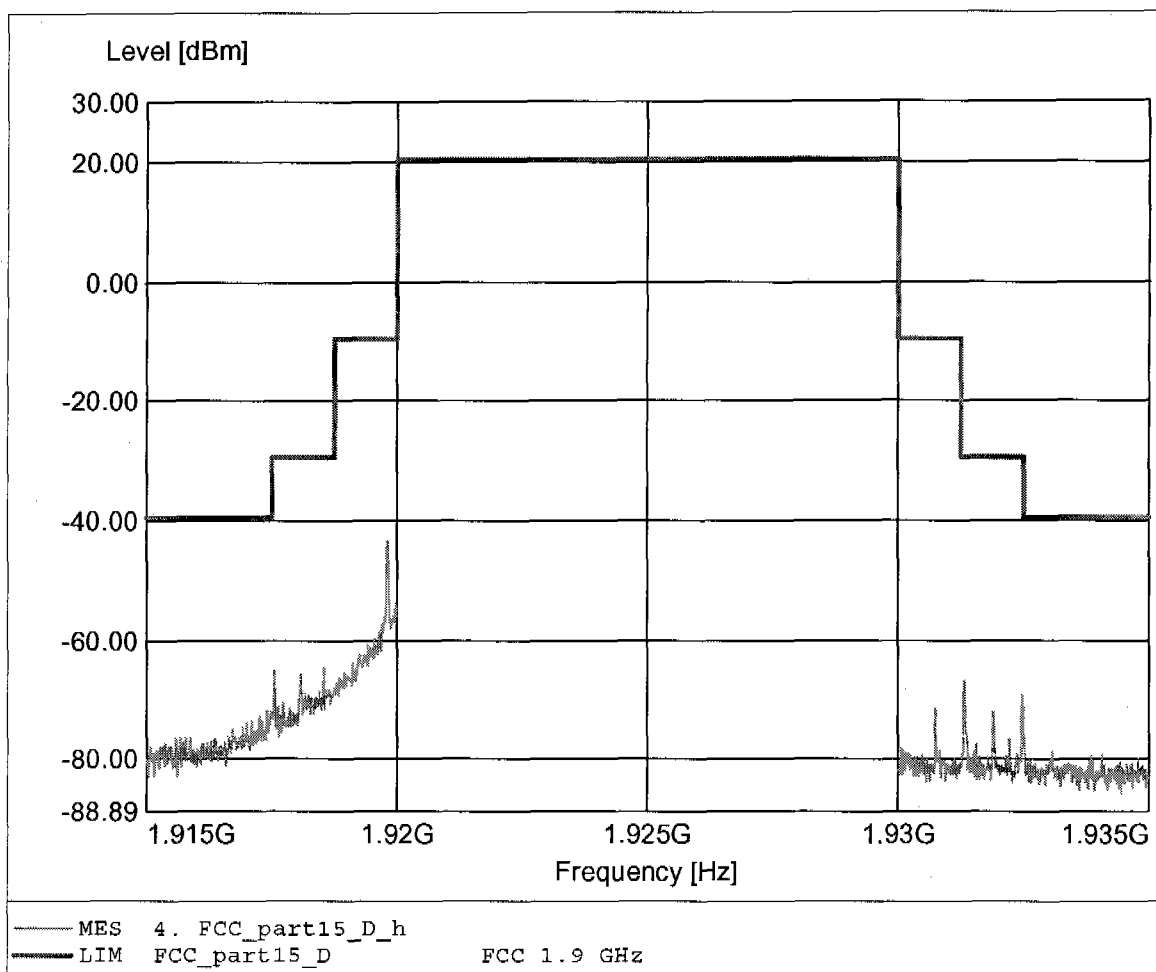

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.920GHz Pmax: -41.25dBm RBW: 10 kHz

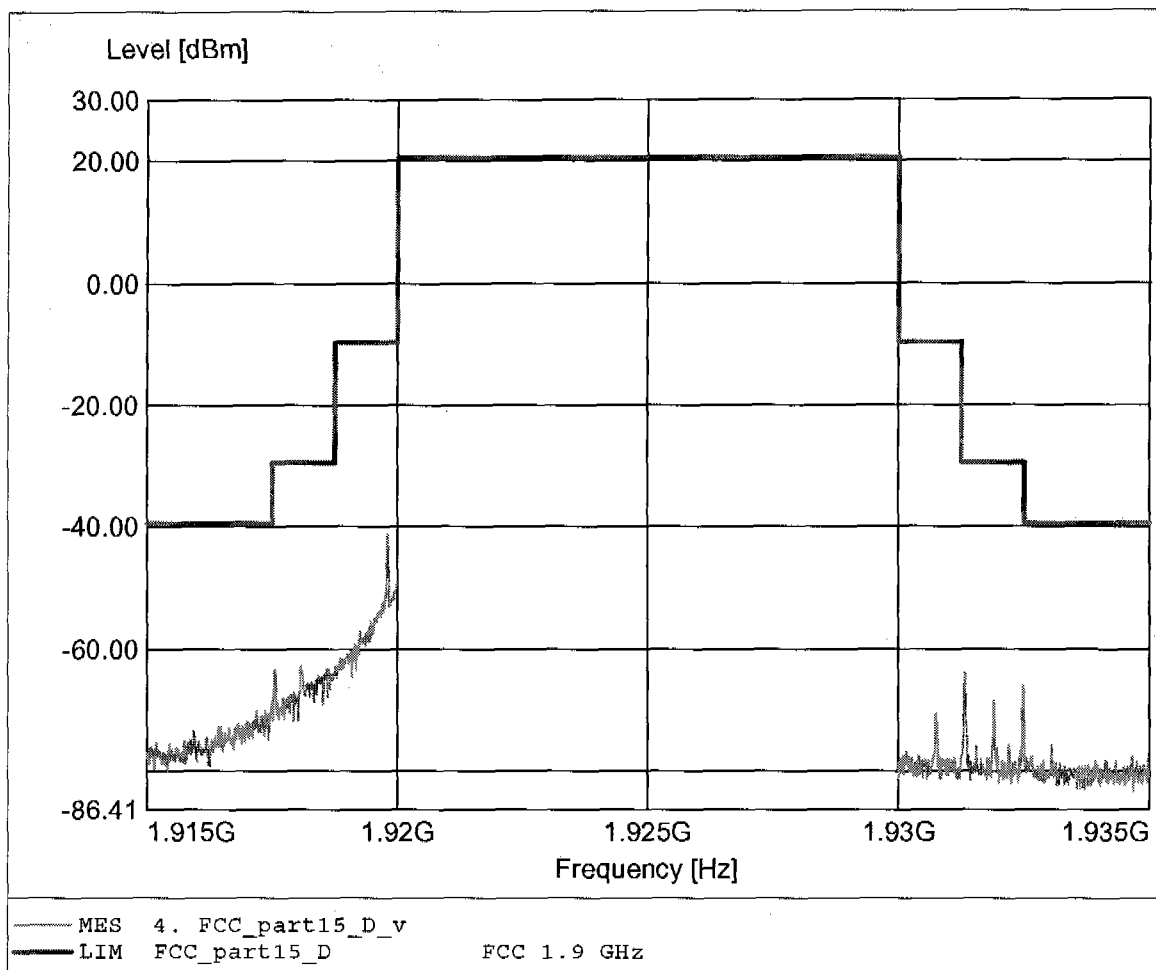

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.843GHz Pmax: -51.08dBm RBW: 1 MHz

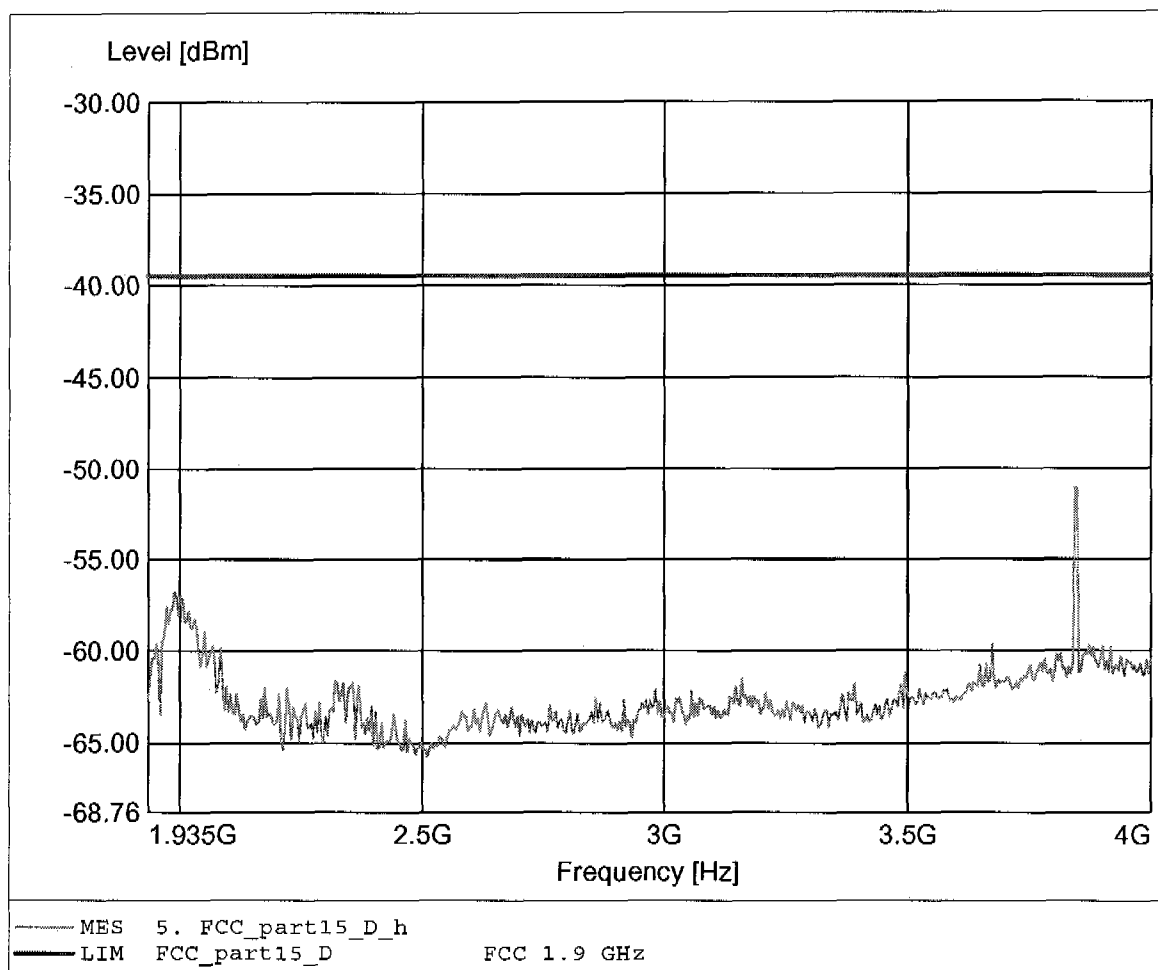

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 2.009GHz Pmax: -51.35dBm RBW: 1 MHz

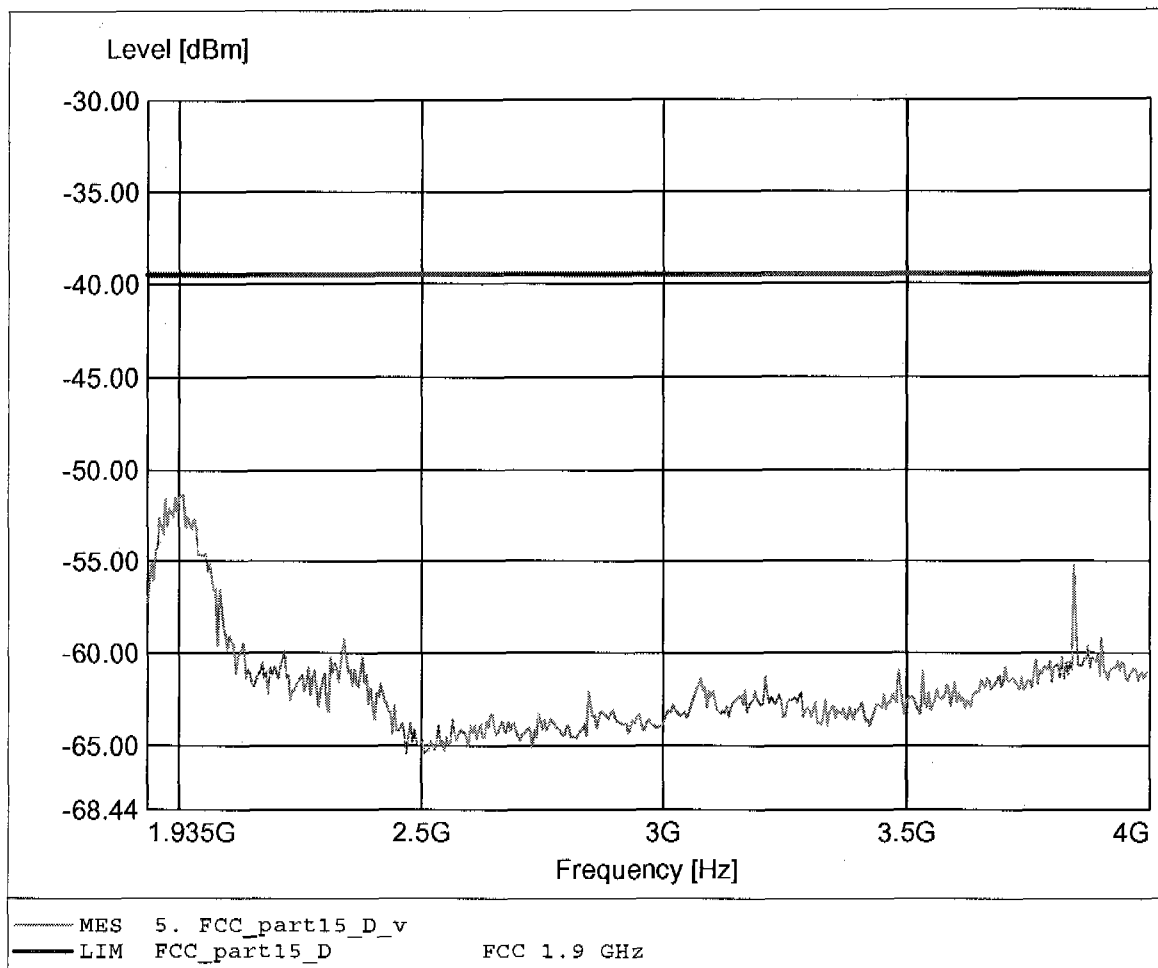

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 7.687GHz Pmax: -53.12dBm RBW: 1 MHz

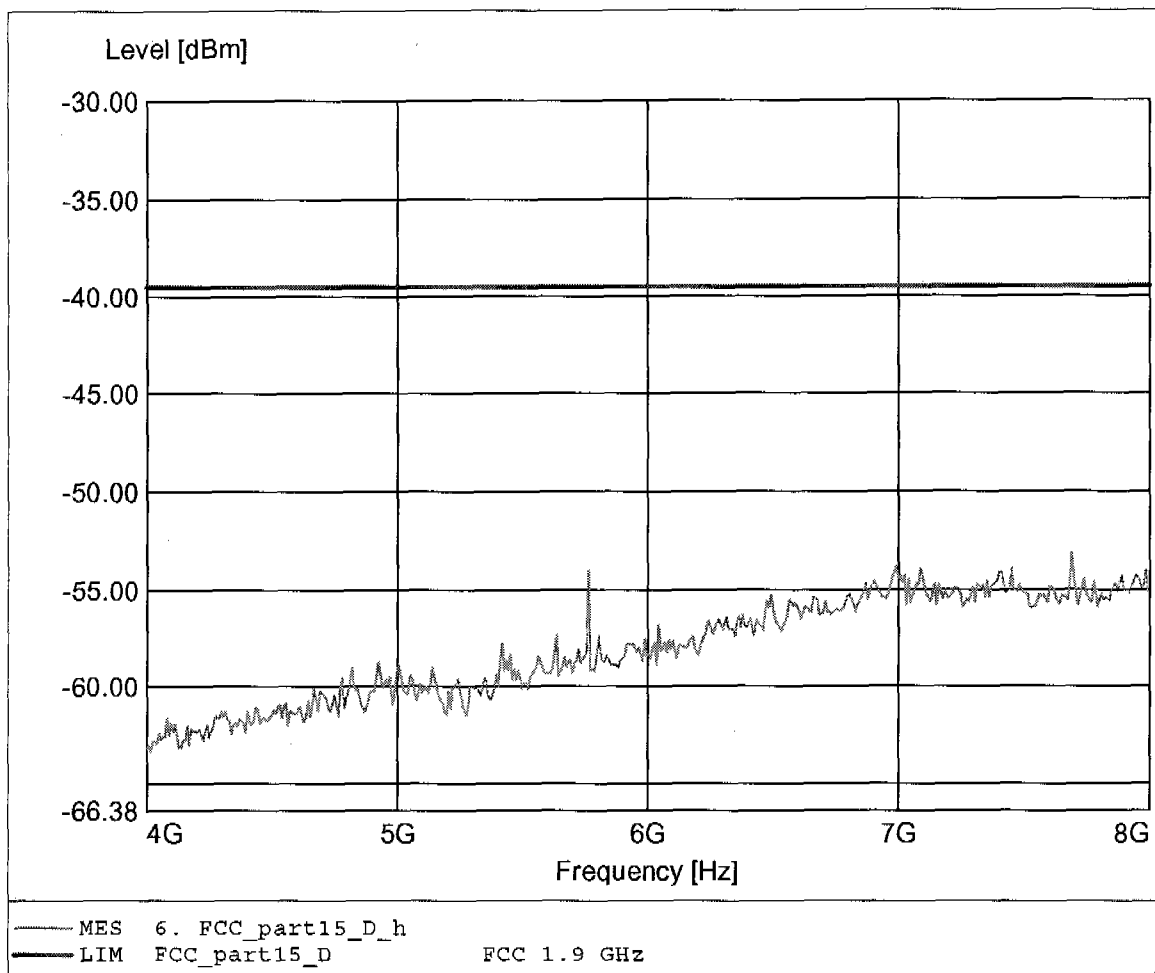

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 7.687GHz Pmax:-51.31dBm RBW: 1 MHz

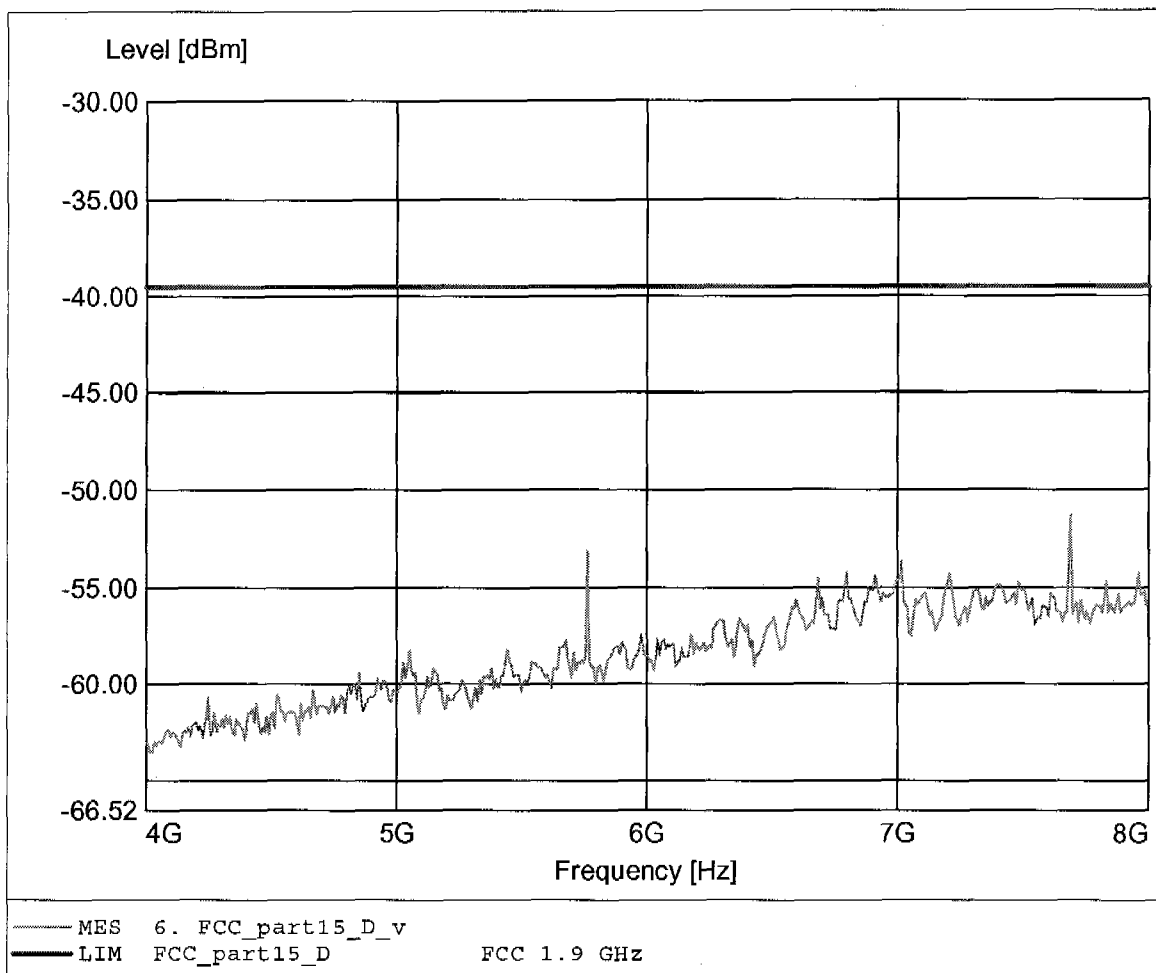

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.479GHz Pmax: -51.68dBm RBW: 1 MHz

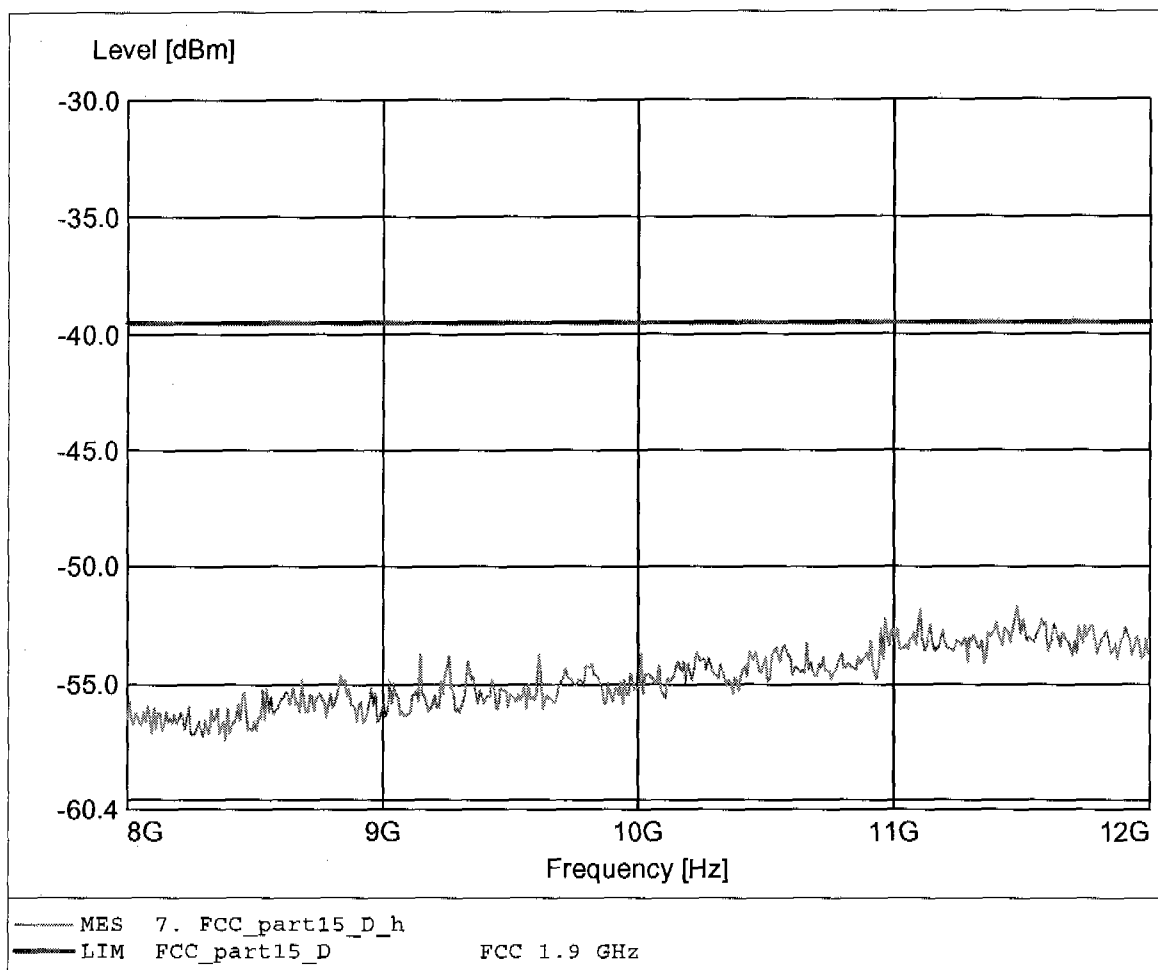

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.535GHz Pmax: -51.42dBm RBW: 1 MHz

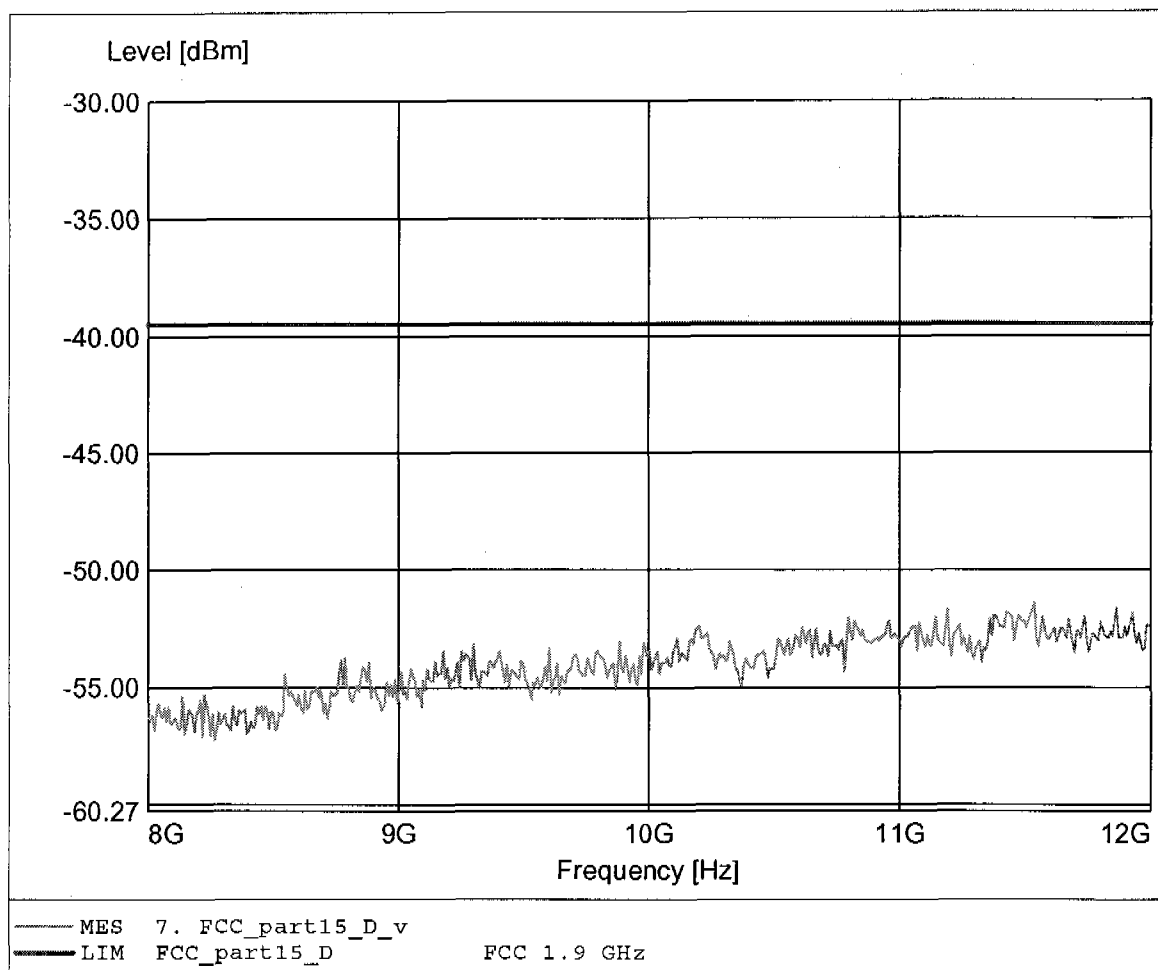

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.890GHz Pmax: -47.22dBm RBW: 1 MHz

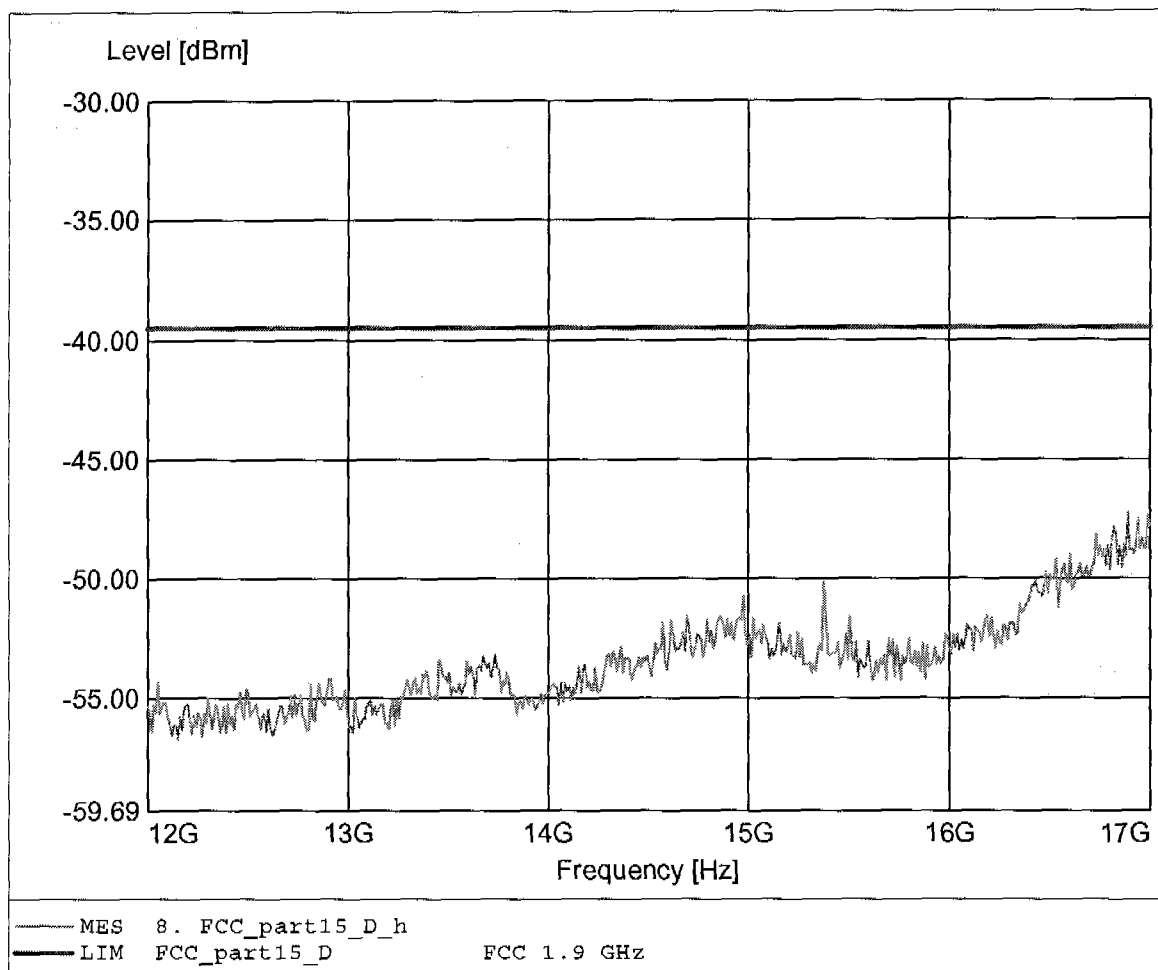

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.138GHz Pmax: -49.16dBm RBW: 1 MHz

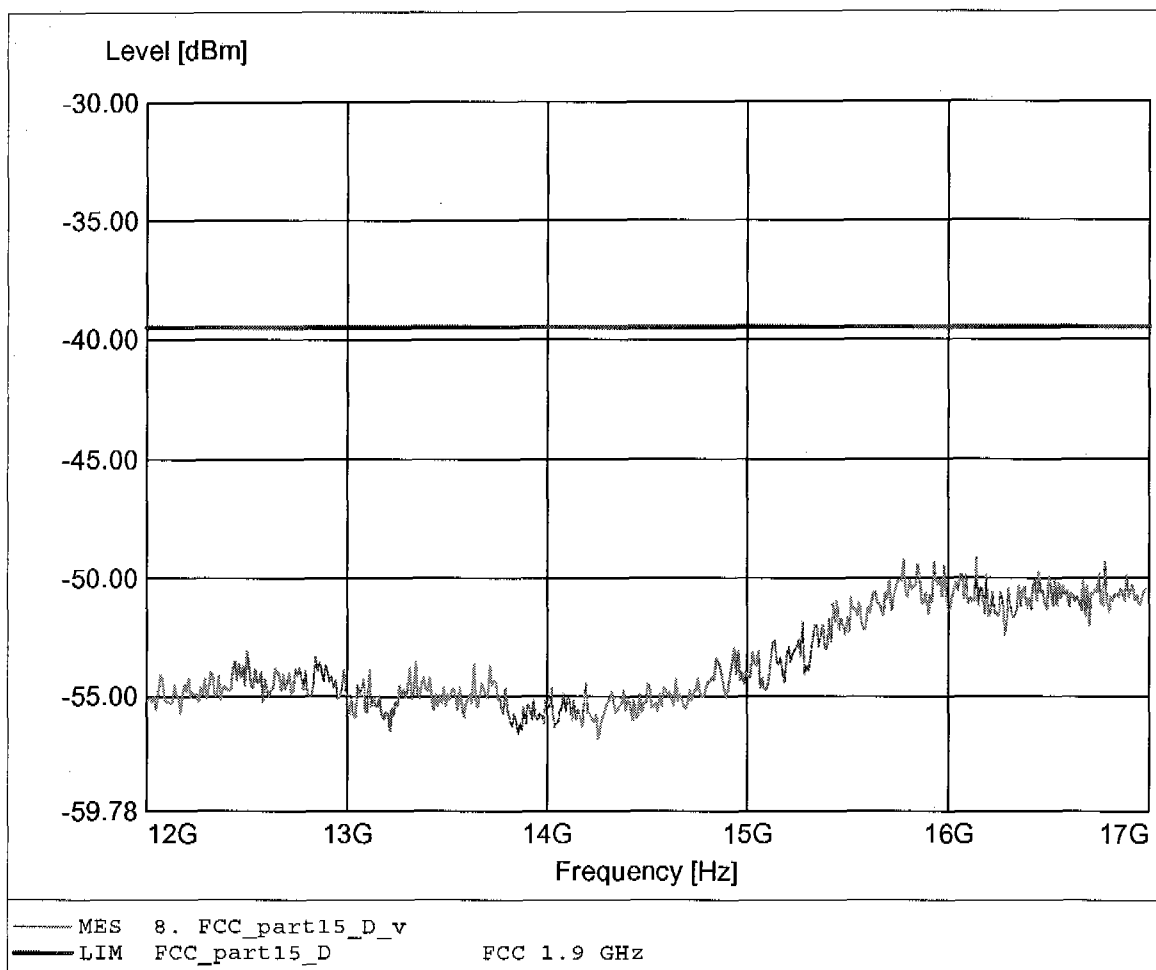

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 18.503GHz Pmax: -46.30dBm RBW: 1 MHz

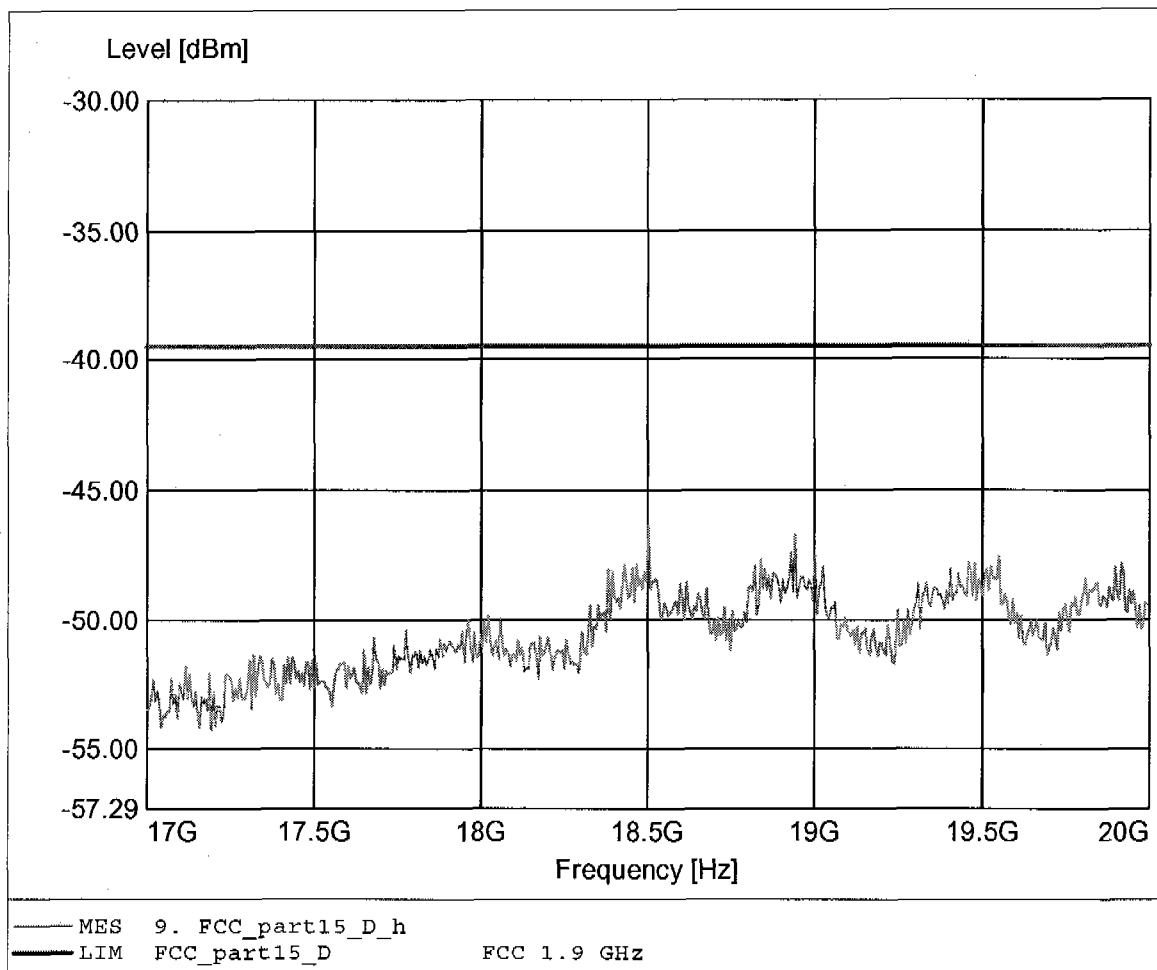

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 18.942GHz Pmax: -46.79dBm RBW: 1 MHz

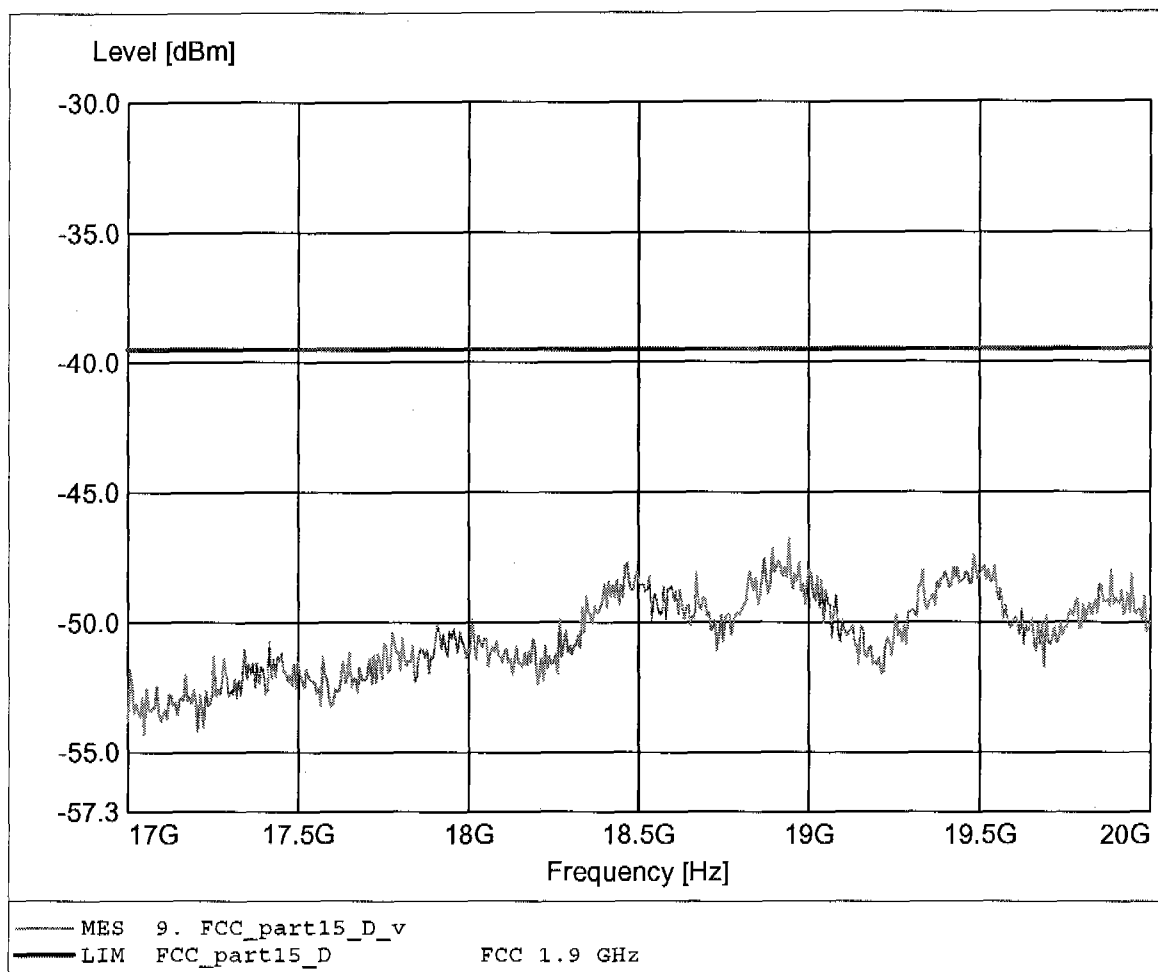

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:156.393MHz Pmax:-66.11dBm RBW: 100 kHz

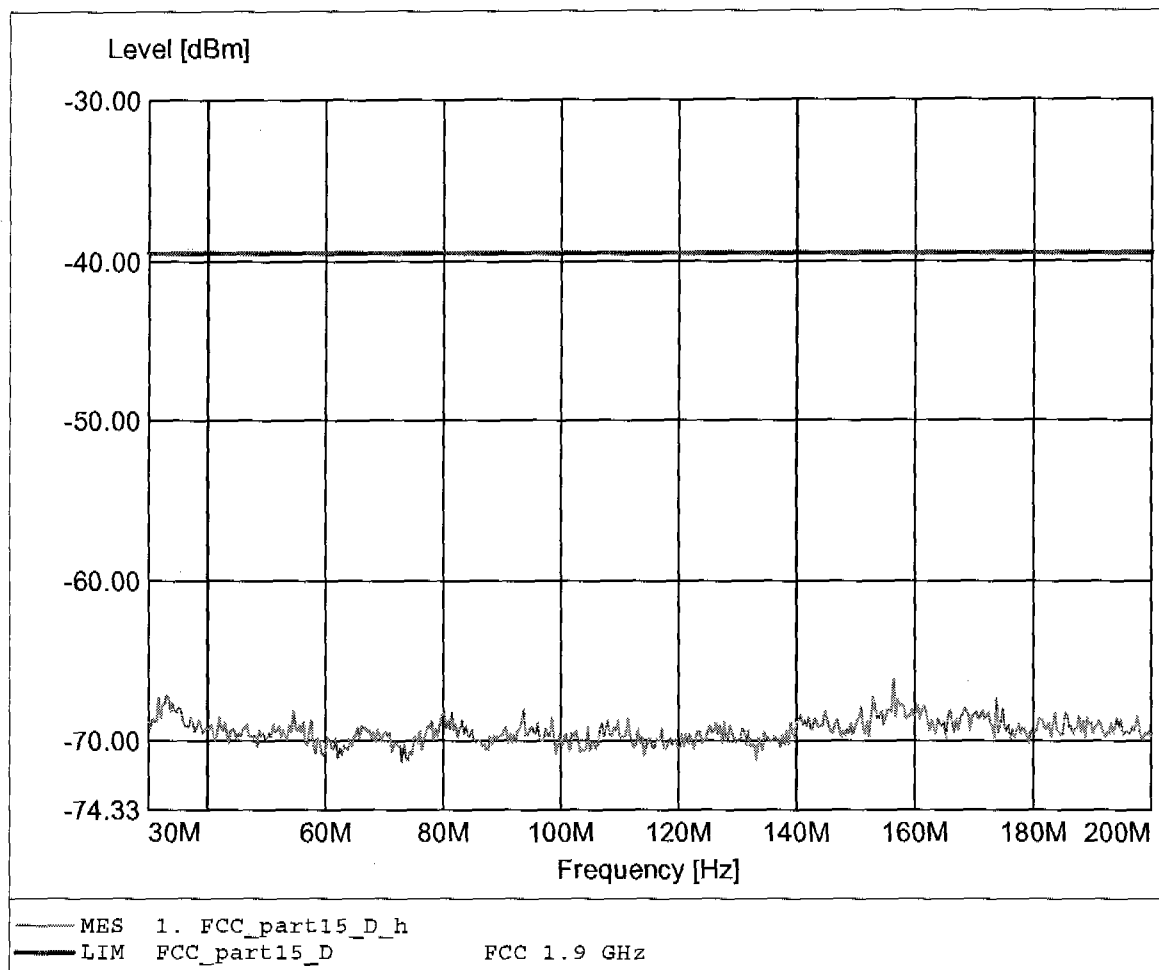

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:173.697MHz Pmax:-64.08dBm RBW: 100 kHz

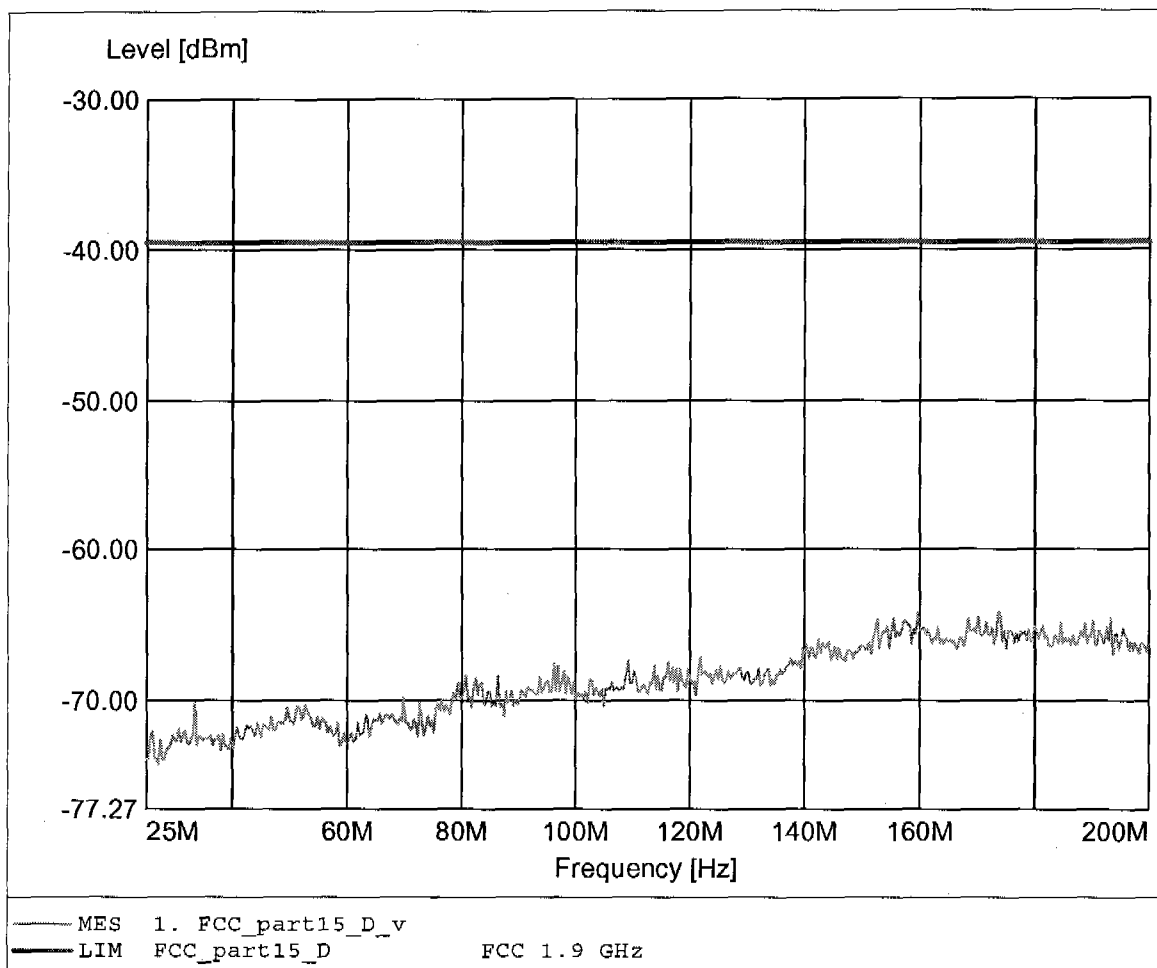

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 826.854MHz Pmax:-74.00dBm RBW: 100 kHz

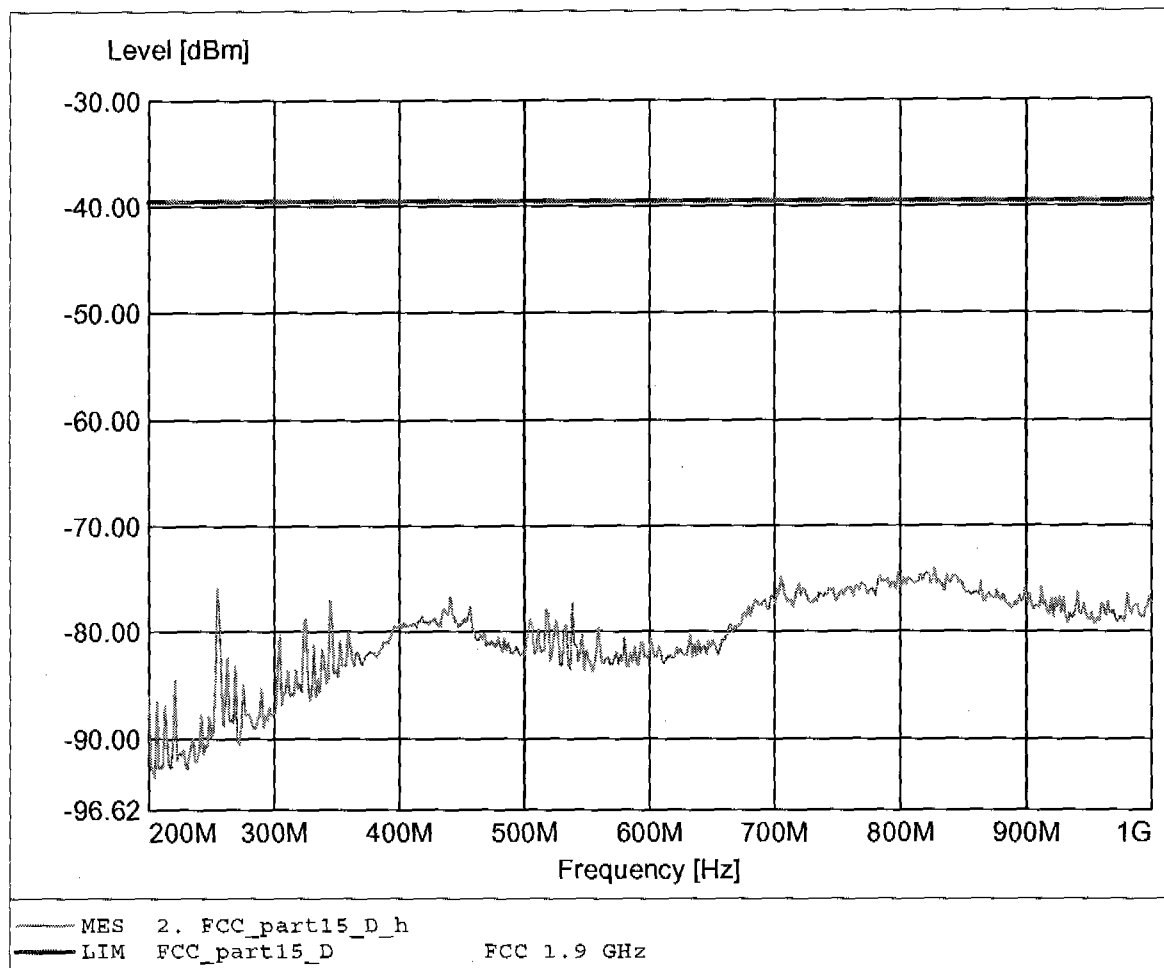

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 913.427MHz Pmax:-69.72dBm RBW: 100 kHz

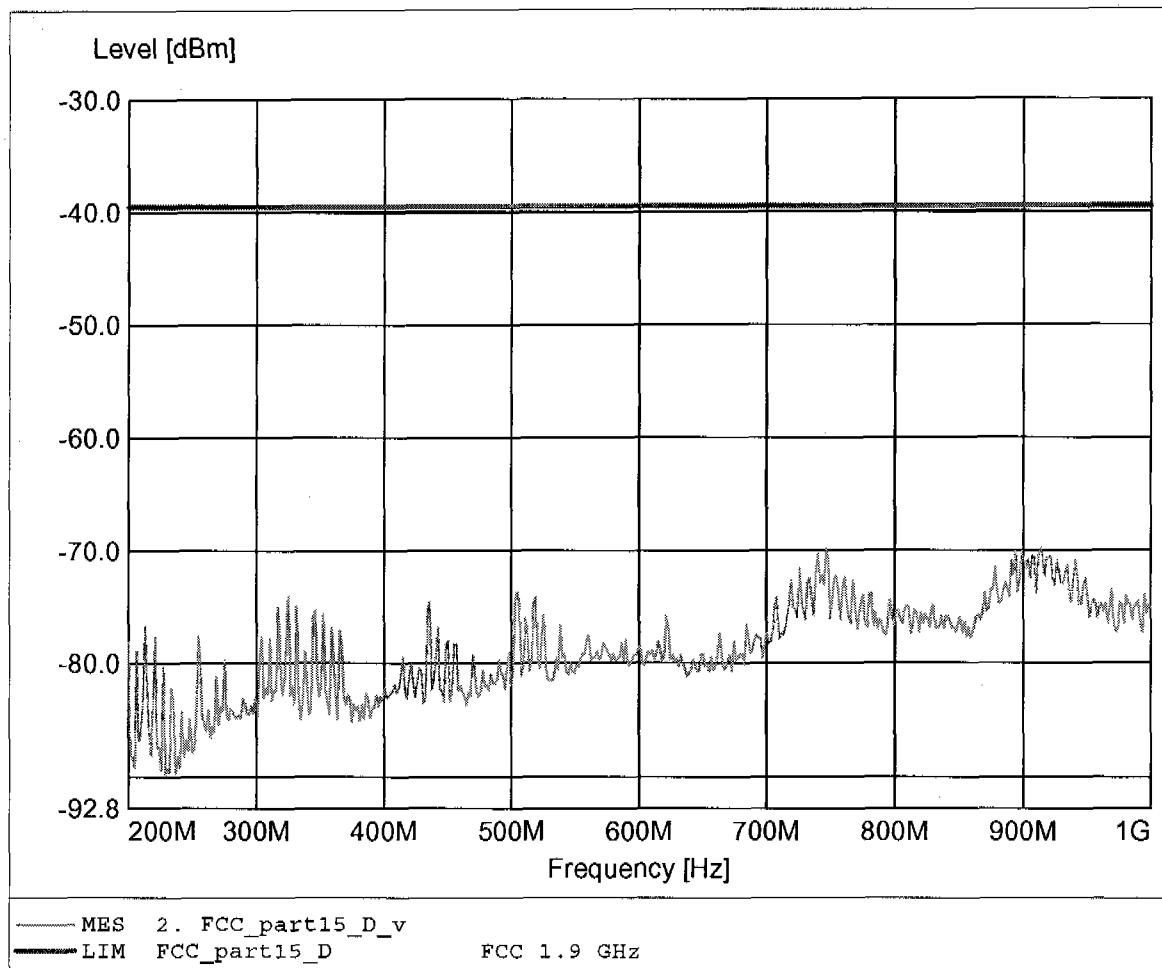

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.908GHz Pmax: -59.99dBm RBW: 1 MHz

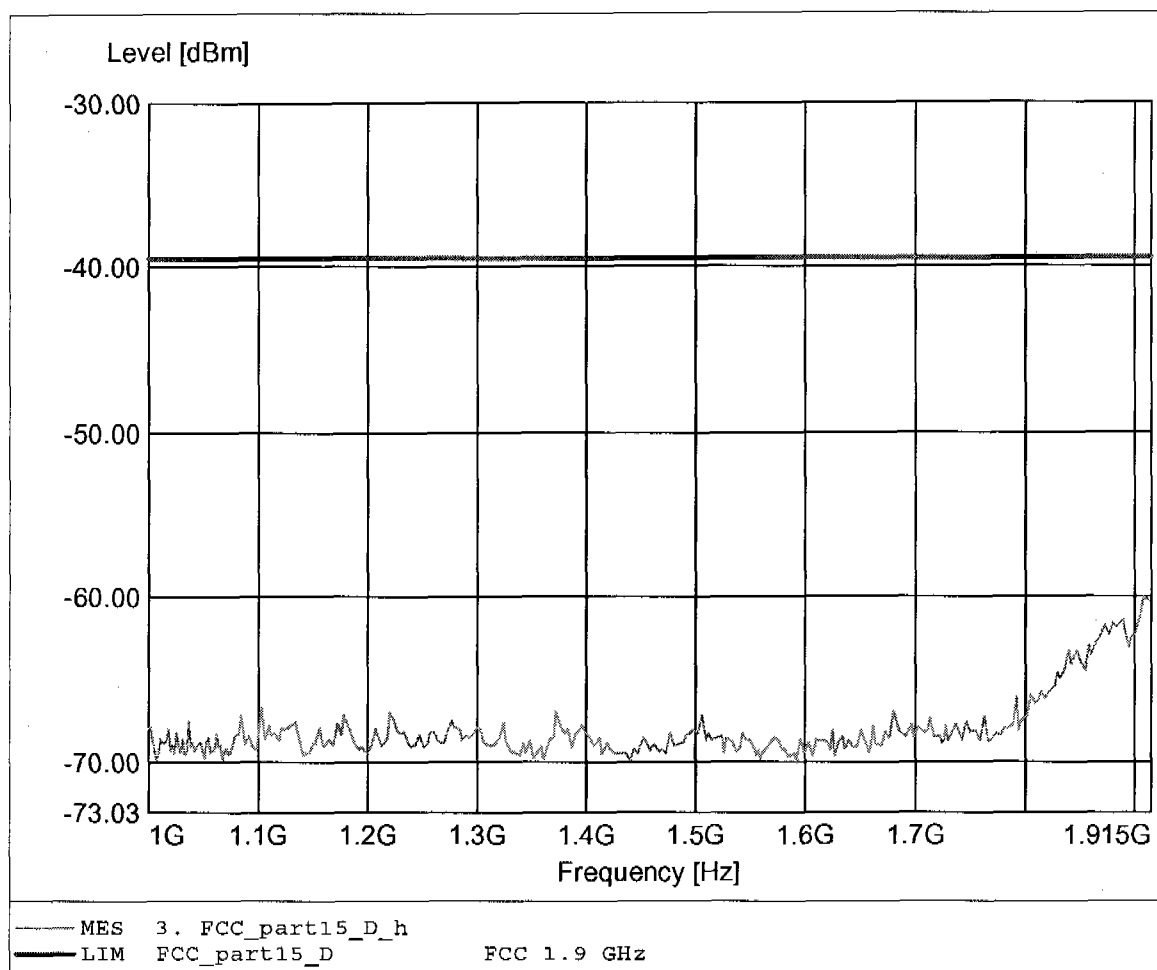

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.913GHz Pmax: -58.86dBm RBW: 1 MHz

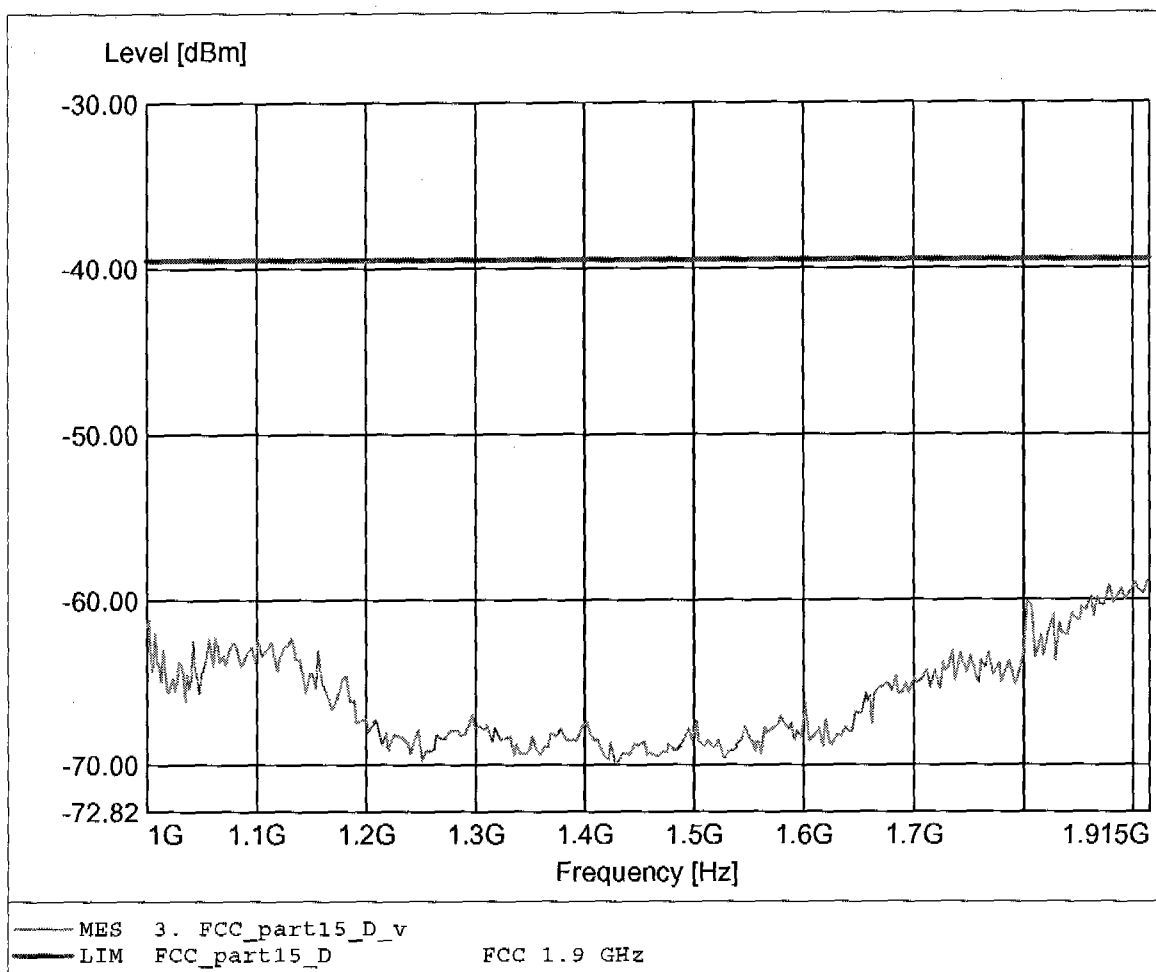

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.915GHz Pmax:-64.83dBm RBW:10 kHz

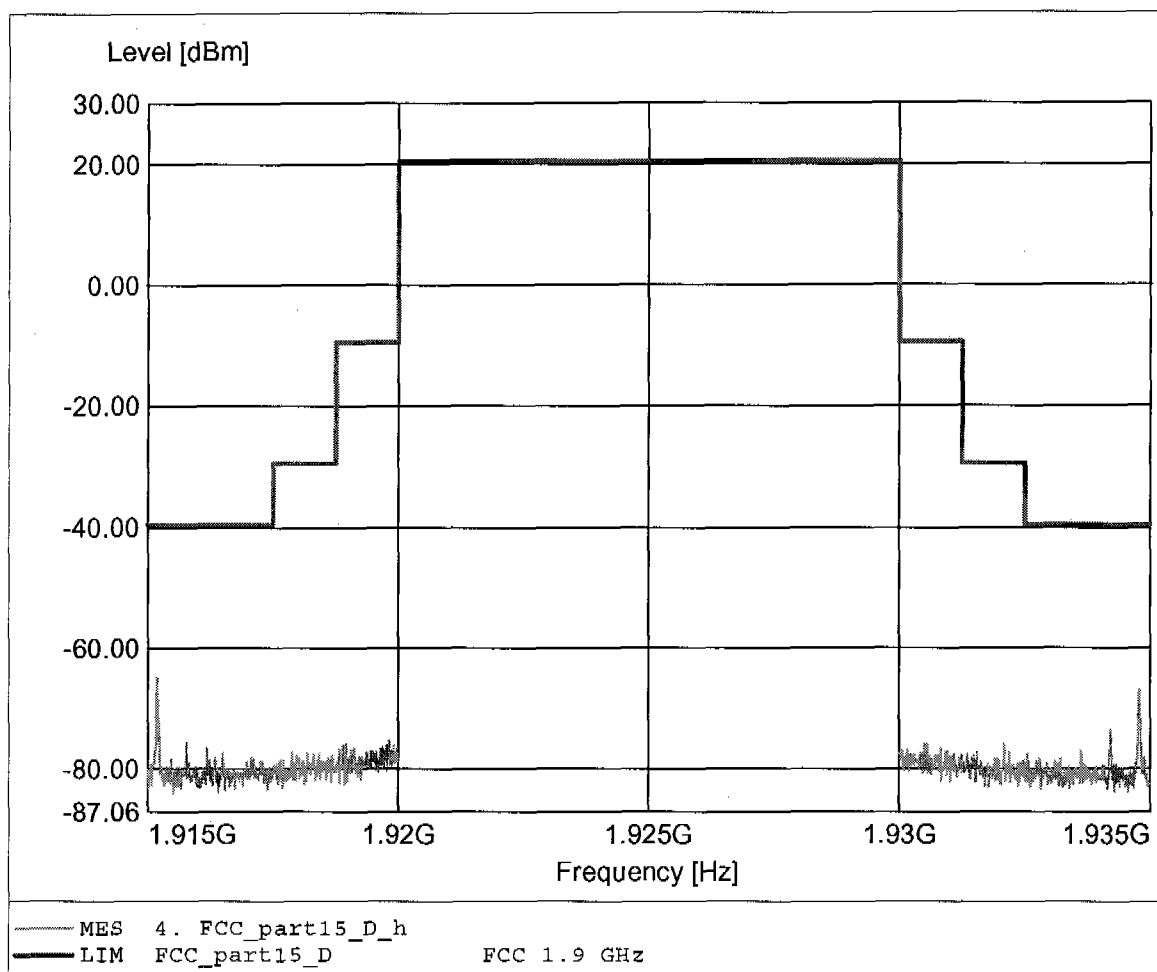

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.915GHz Pmax: -63.29dBm RBW: 10 kHz

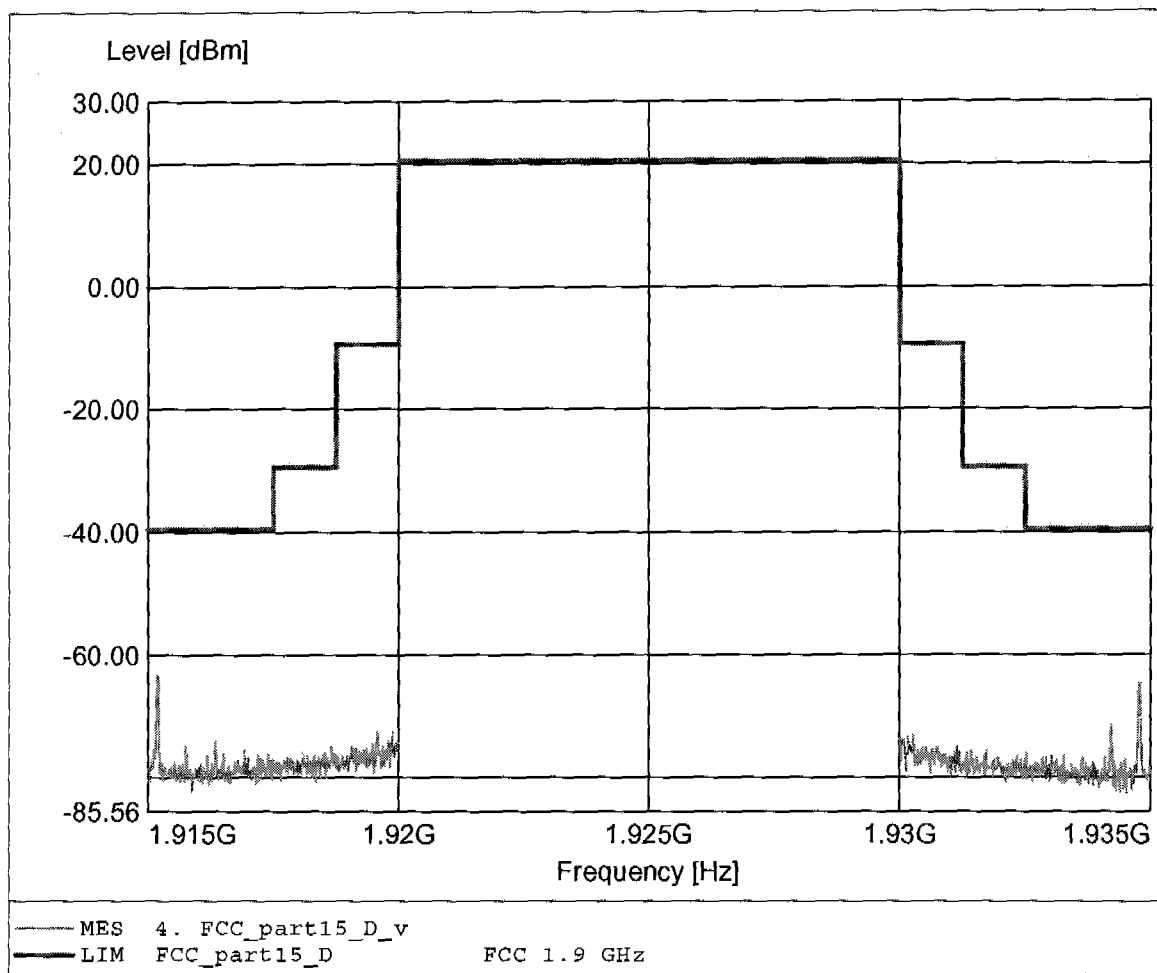

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.851GHz Pmax: -49.35dBm RBW: 1 MHz

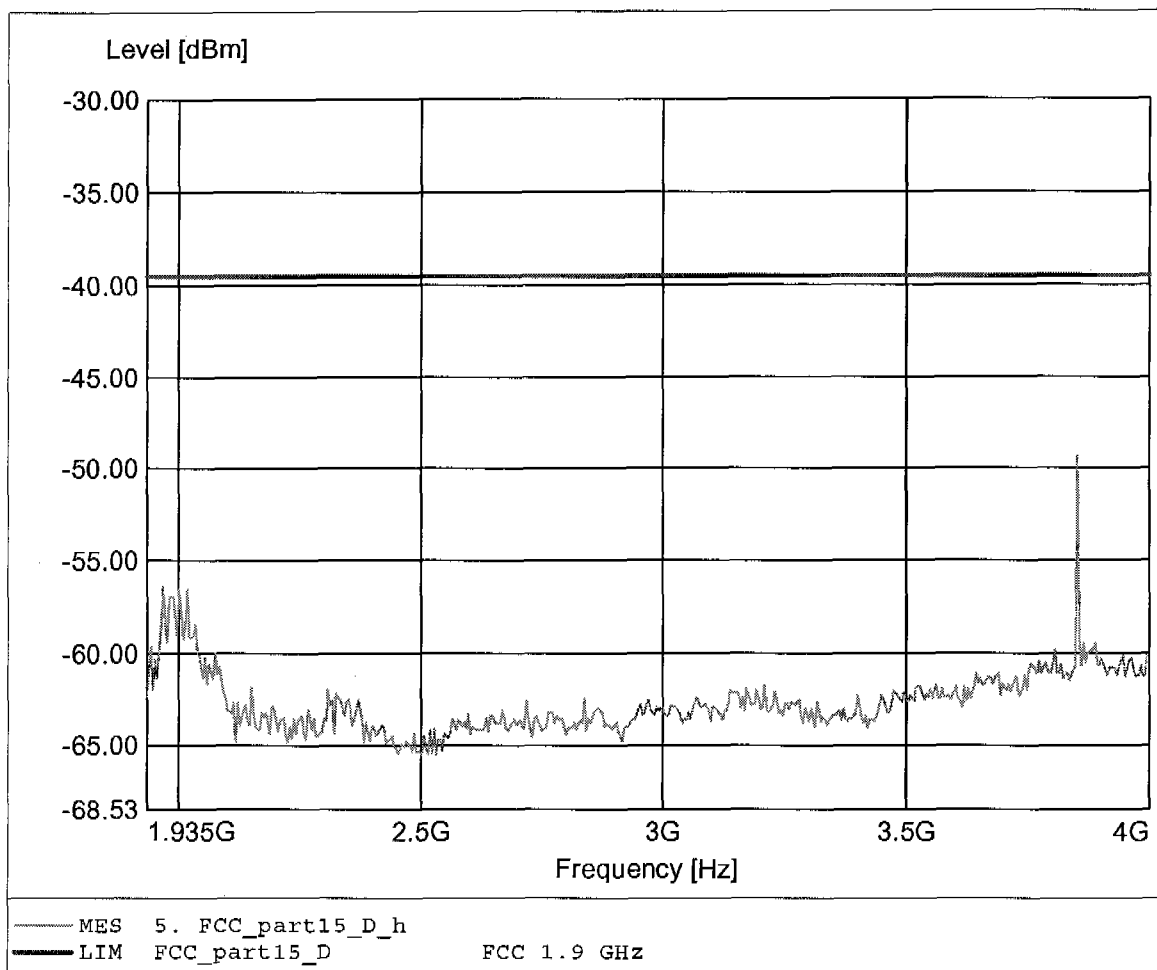

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.985GHz Pmax:-51.24dBm RBW: 1 MHz

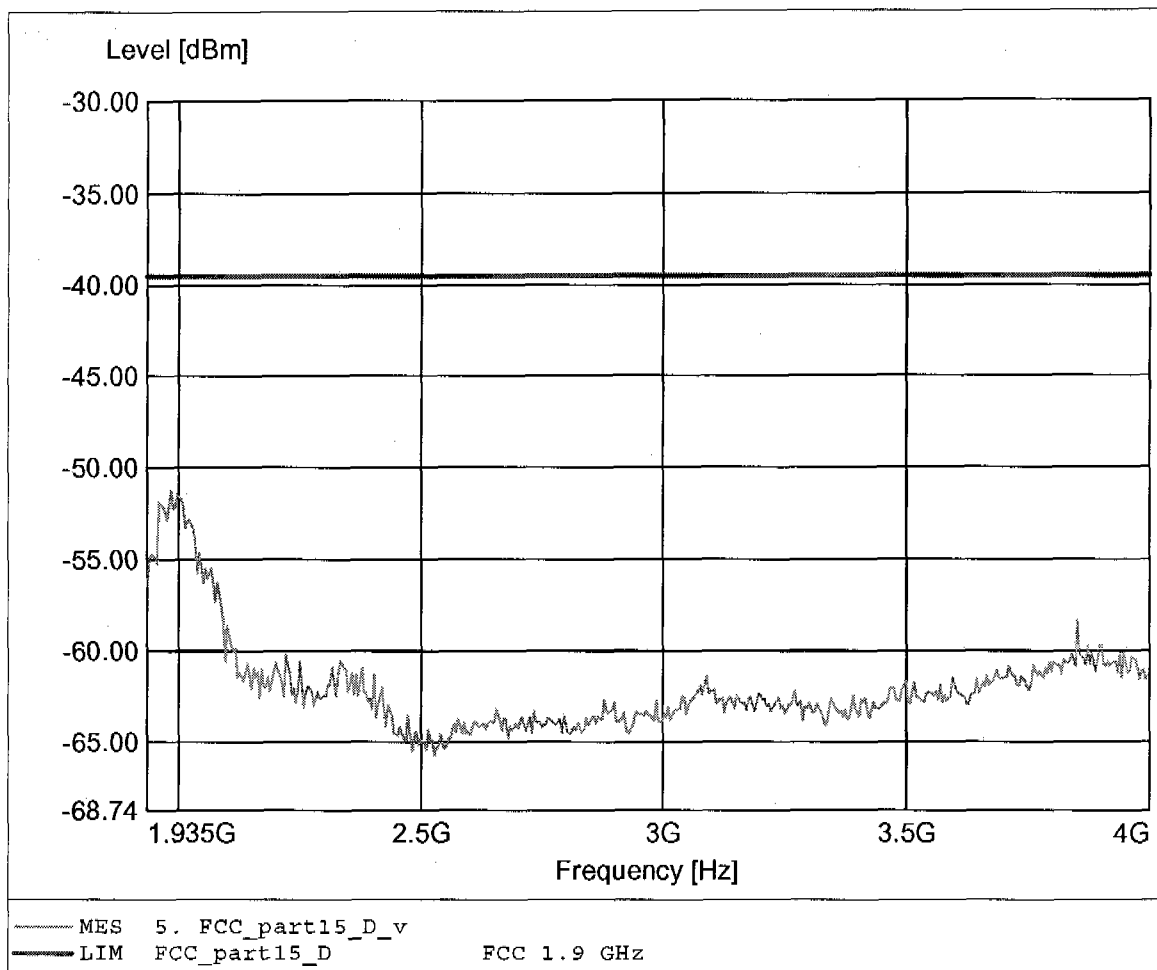

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 5.772GHz Pmax: -51.00dBm RBW: 1 MHz

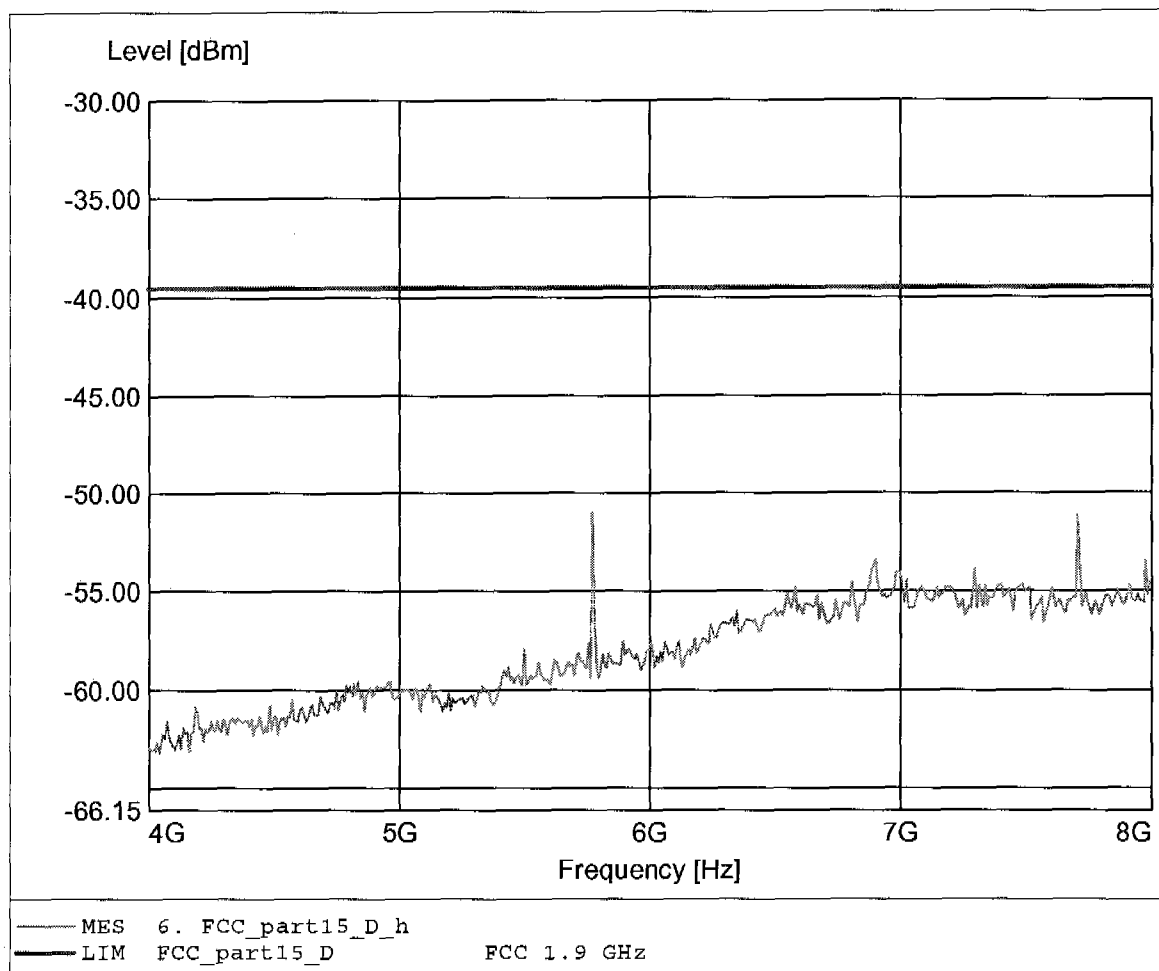

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 7.703GHz Pmax: -50.72dBm RBW: 1 MHz

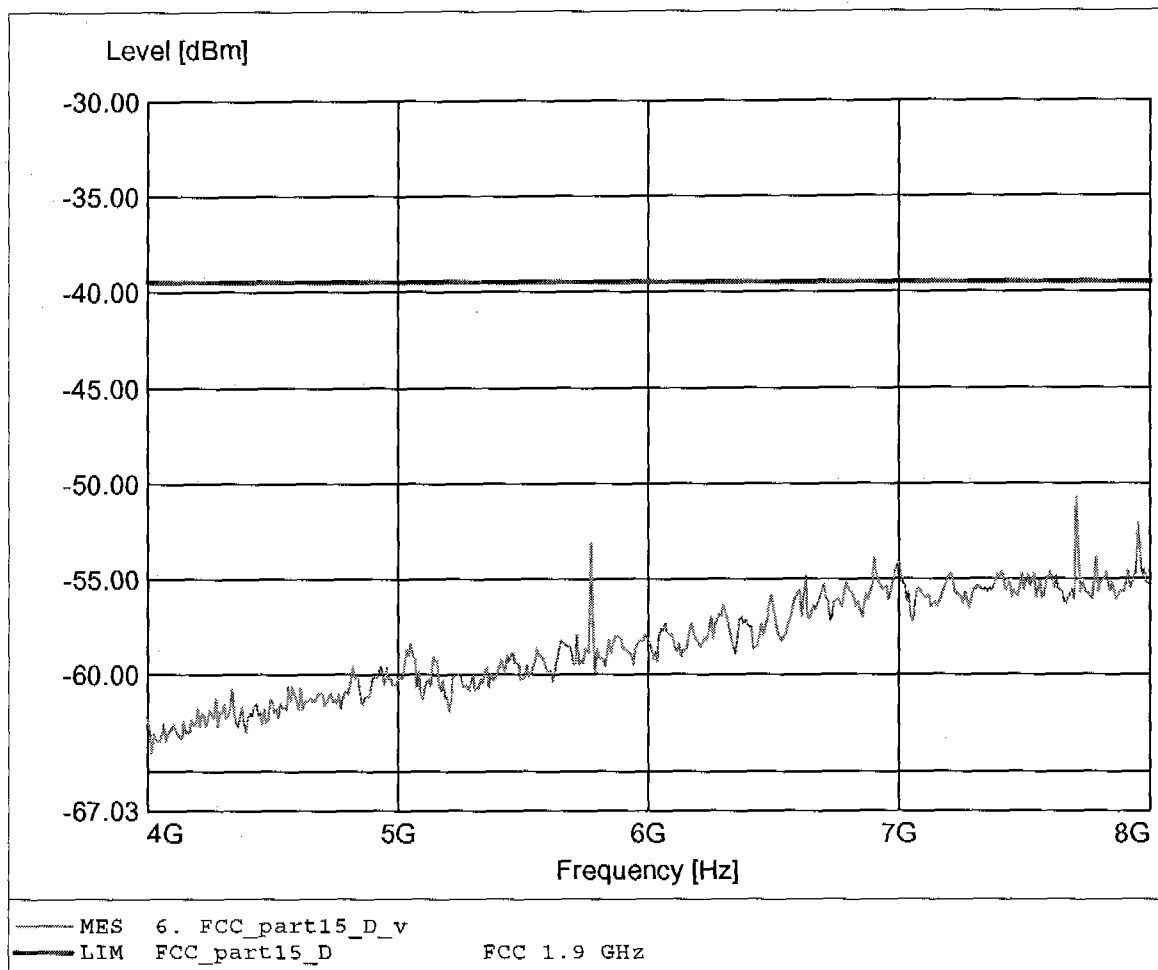

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.559GHz Pmax: -51.29dBm RBW: 1 MHz

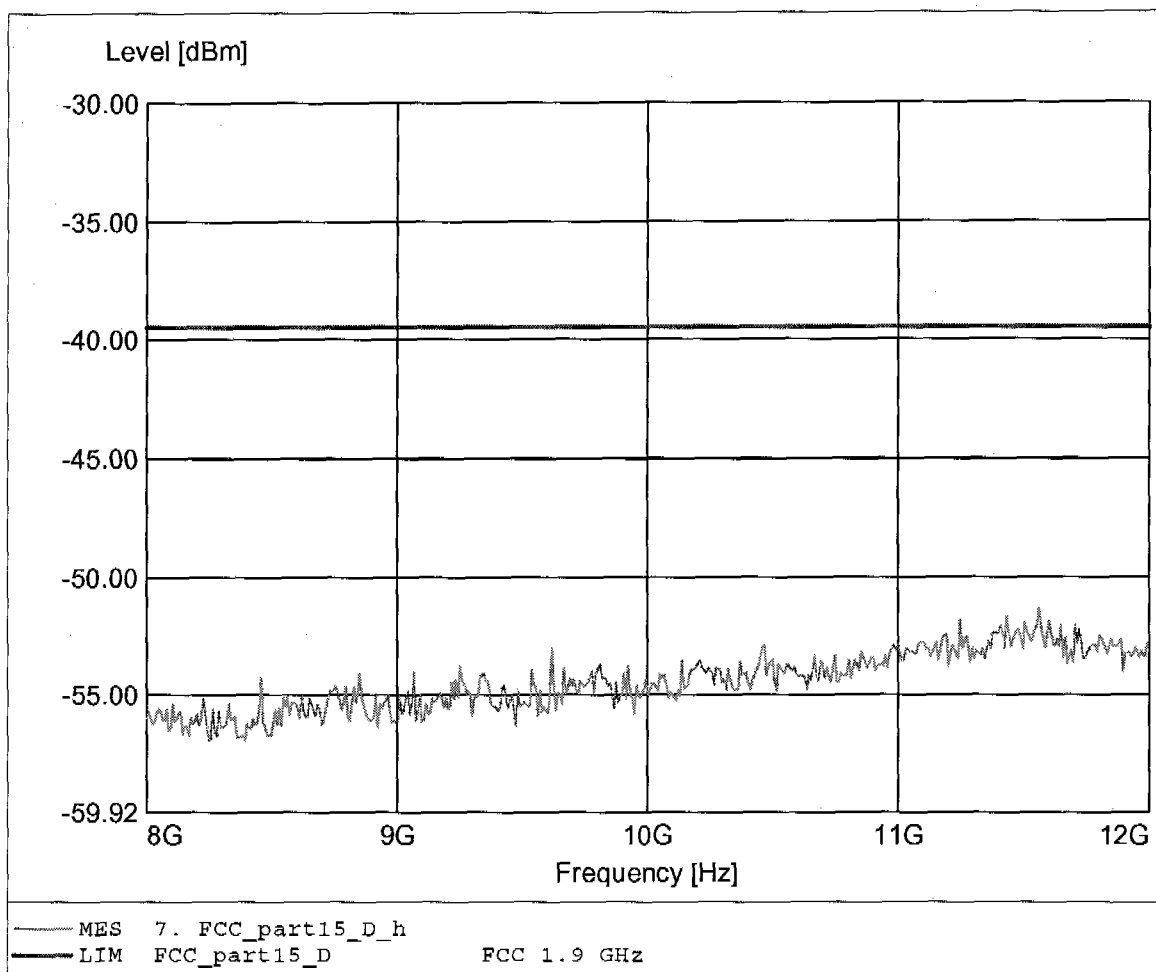

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.407GHz Pmax: -51.19dBm RBW: 1 MHz

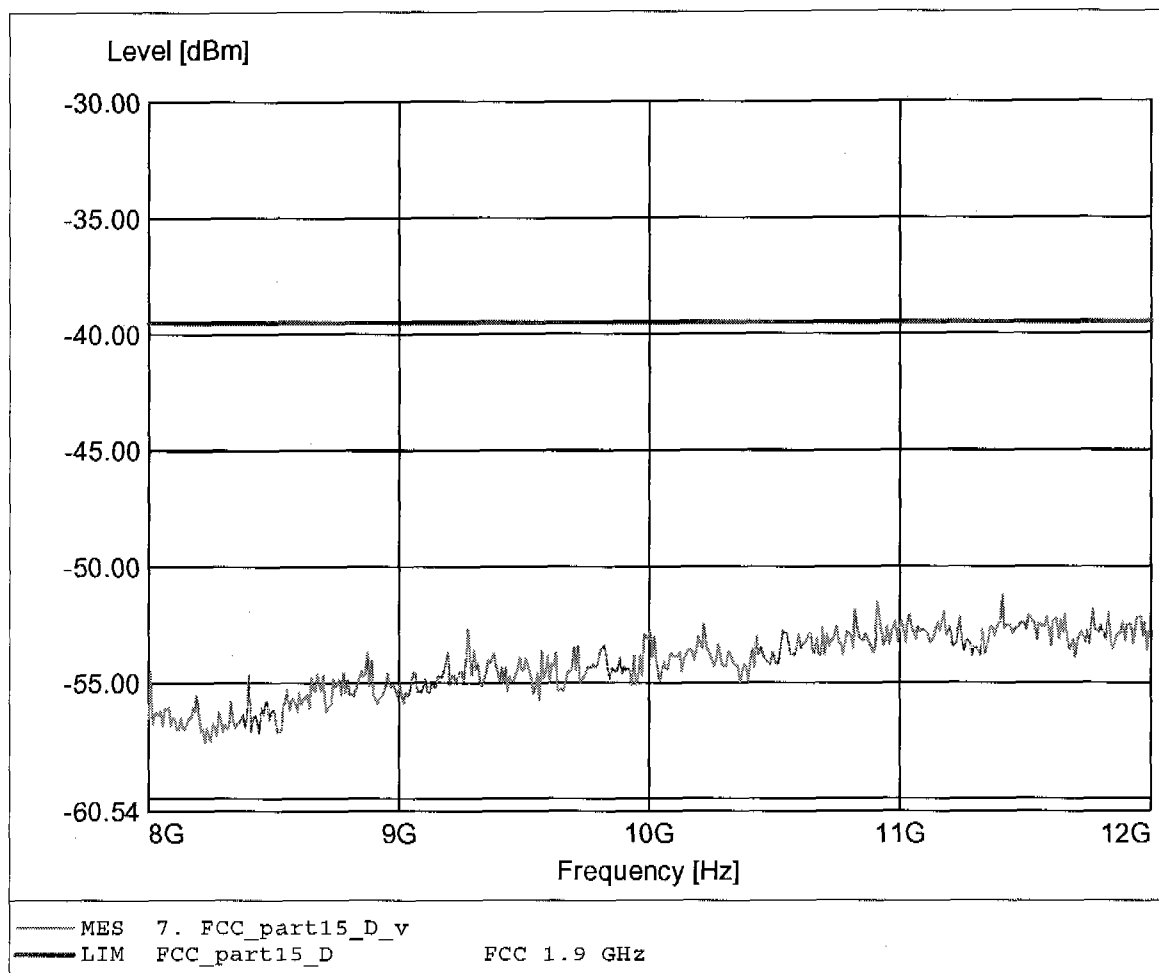

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.940GHz Pmax: -47.77dBm RBW: 1 MHz

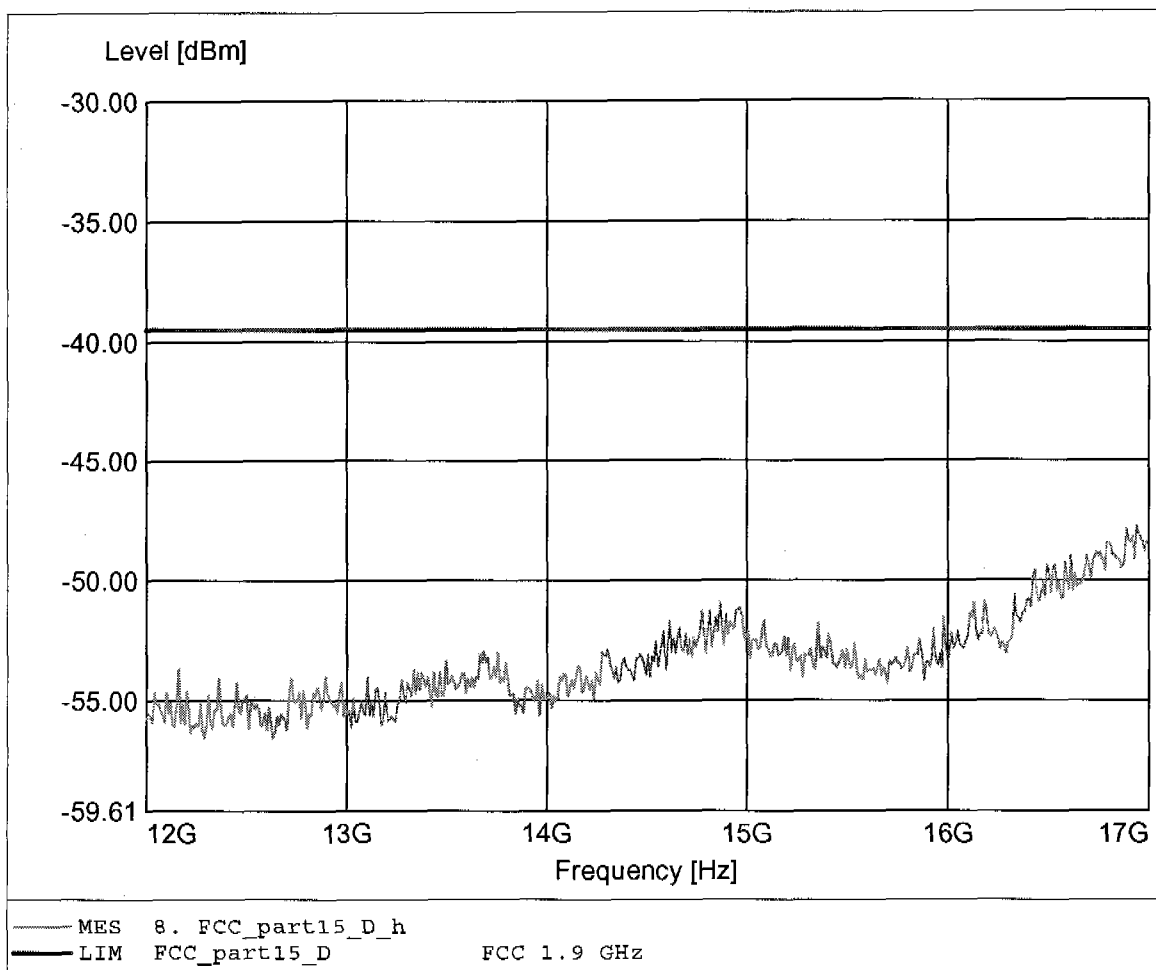

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.409GHz Pmax: -48.97dBm RBW: 1 MHz

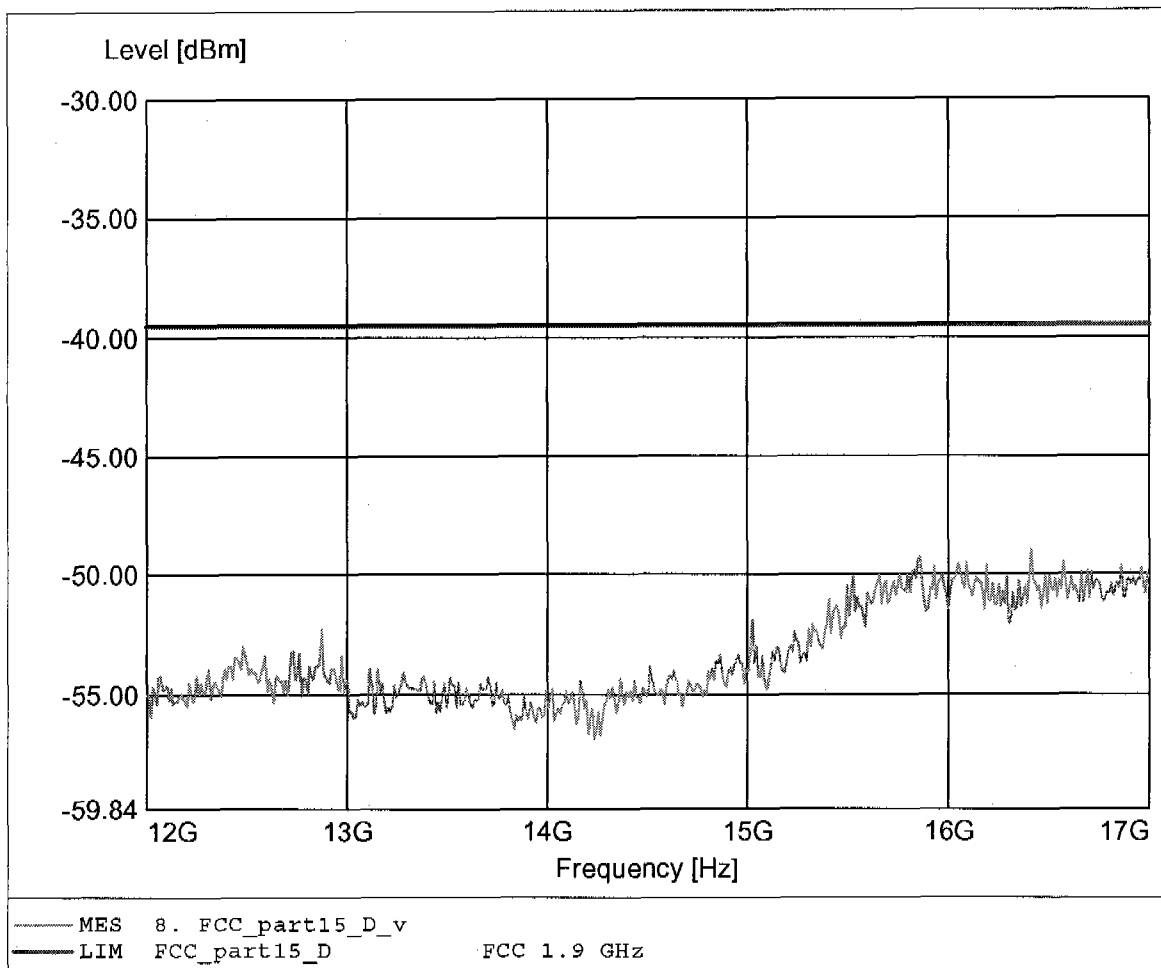

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 19.543GHz Pmax: -46.57dBm RBW: 1 MHz

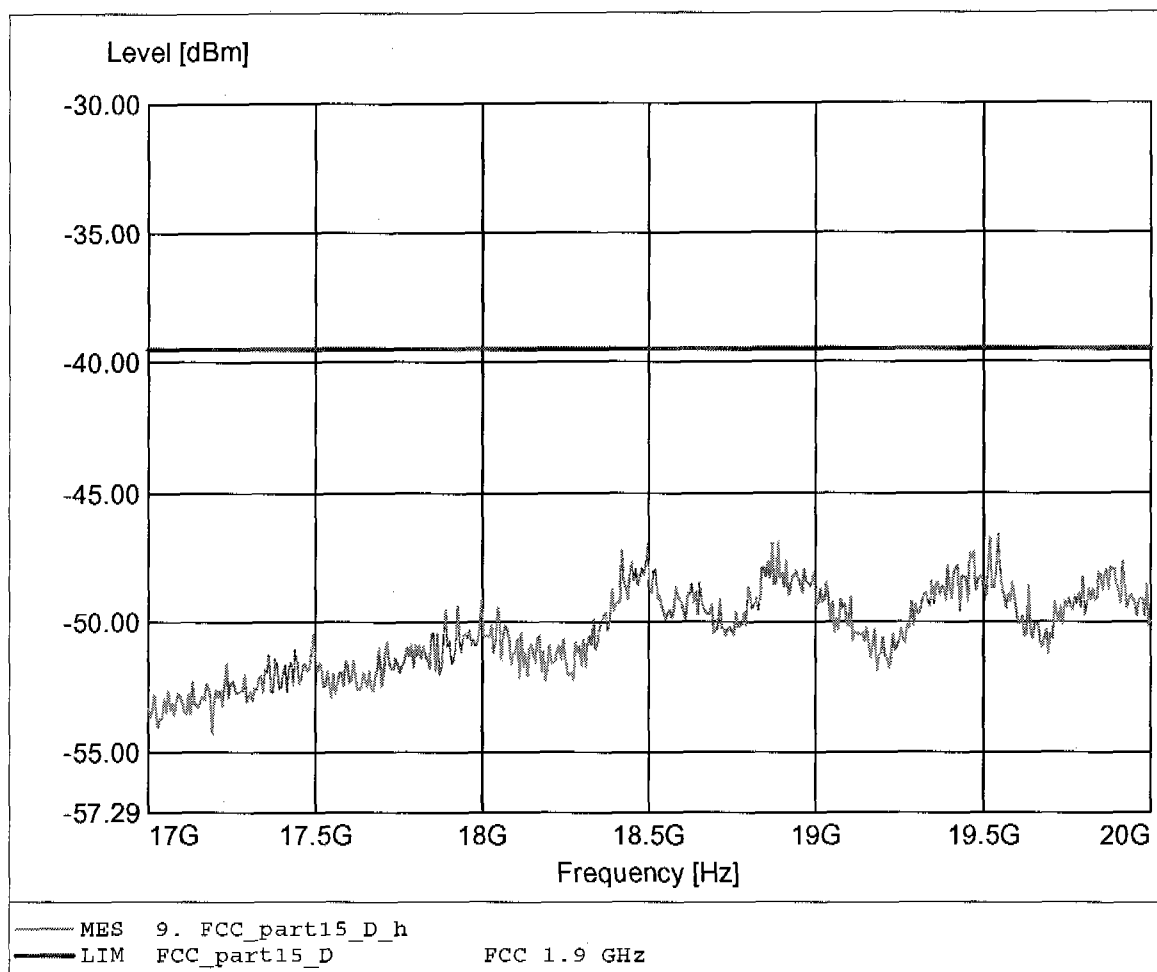

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 18.966GHz Pmax: -46.31dBm RBW: 1 MHz

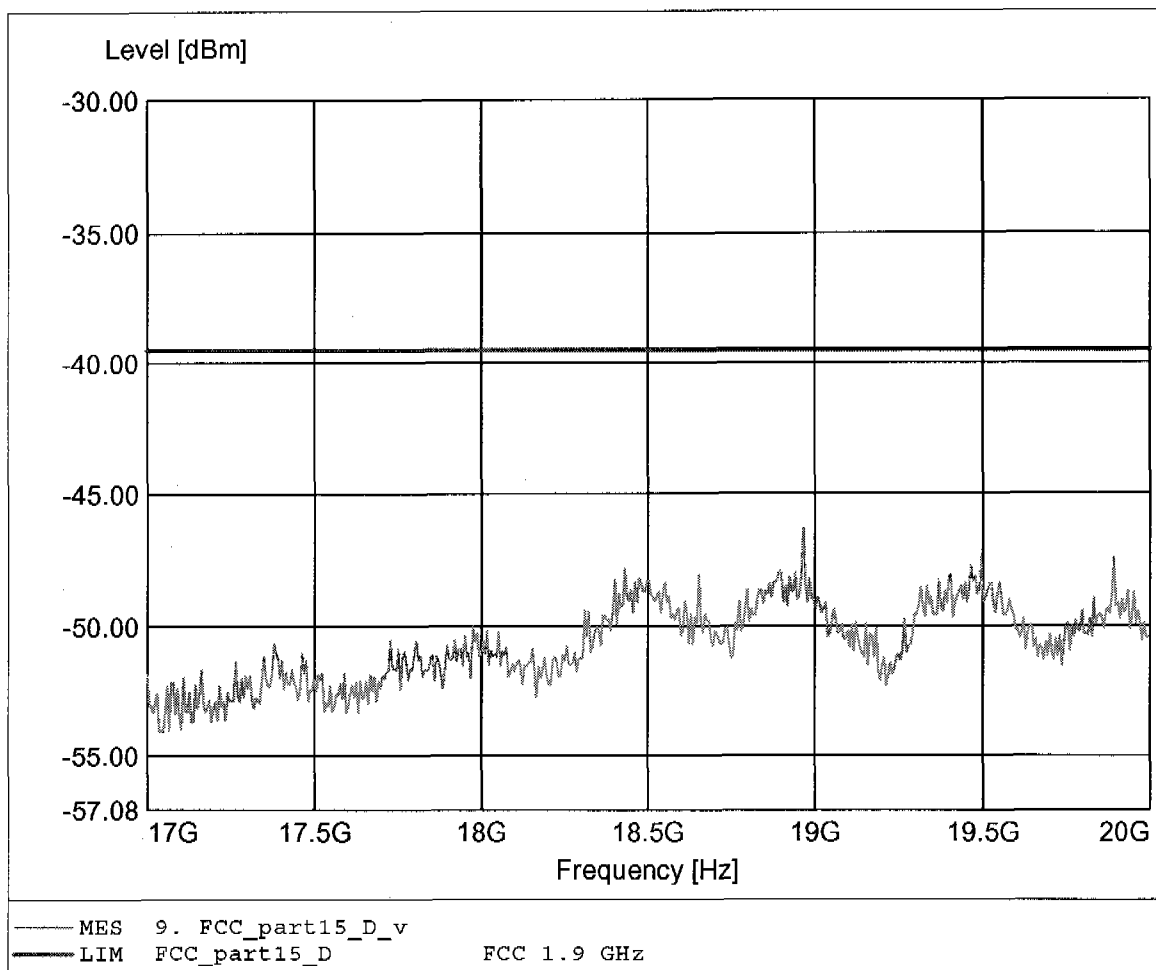

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:158.096MHz Pmax:-65.57dBm RBW: 100 kHz

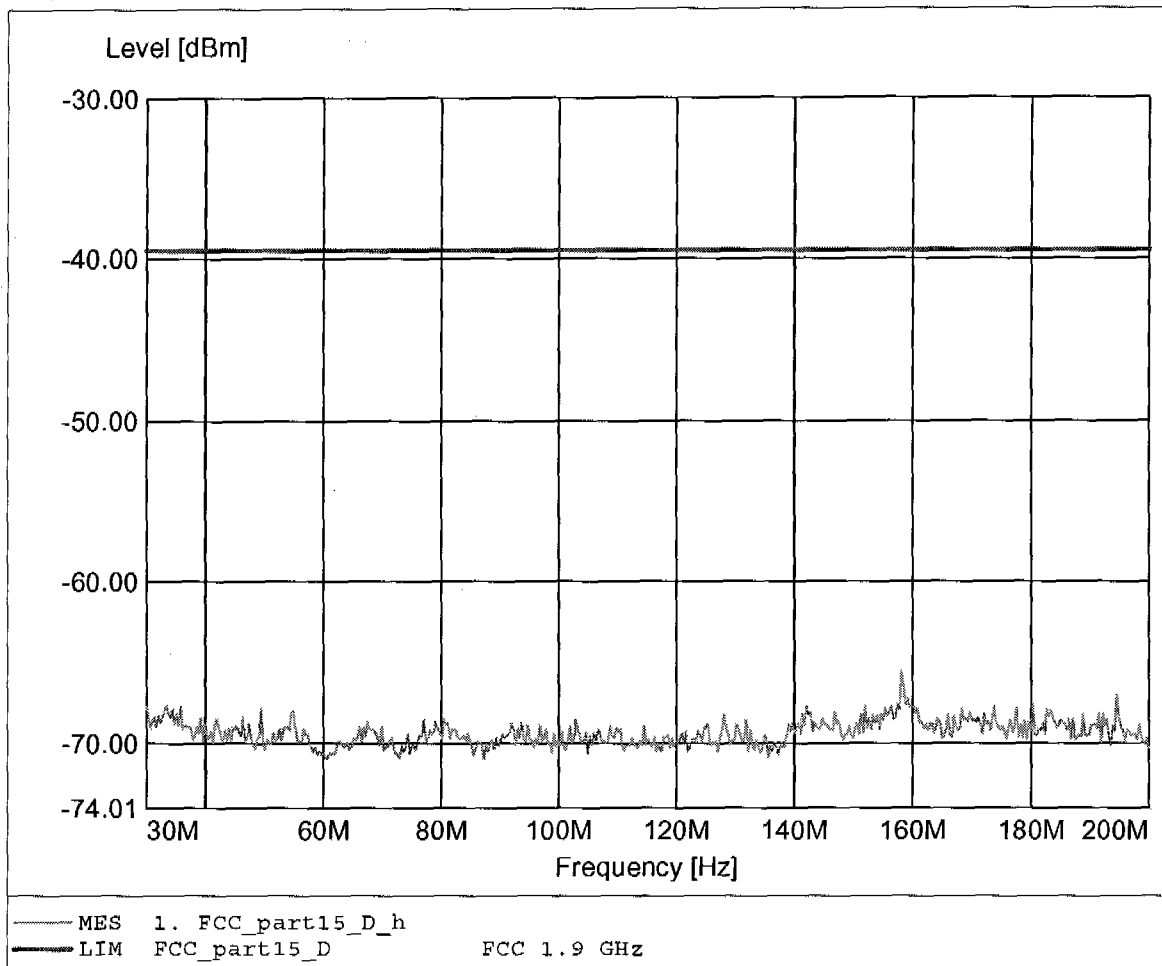

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:160.721MHz Pmax:-63.86dBm RBW: 100 kHz

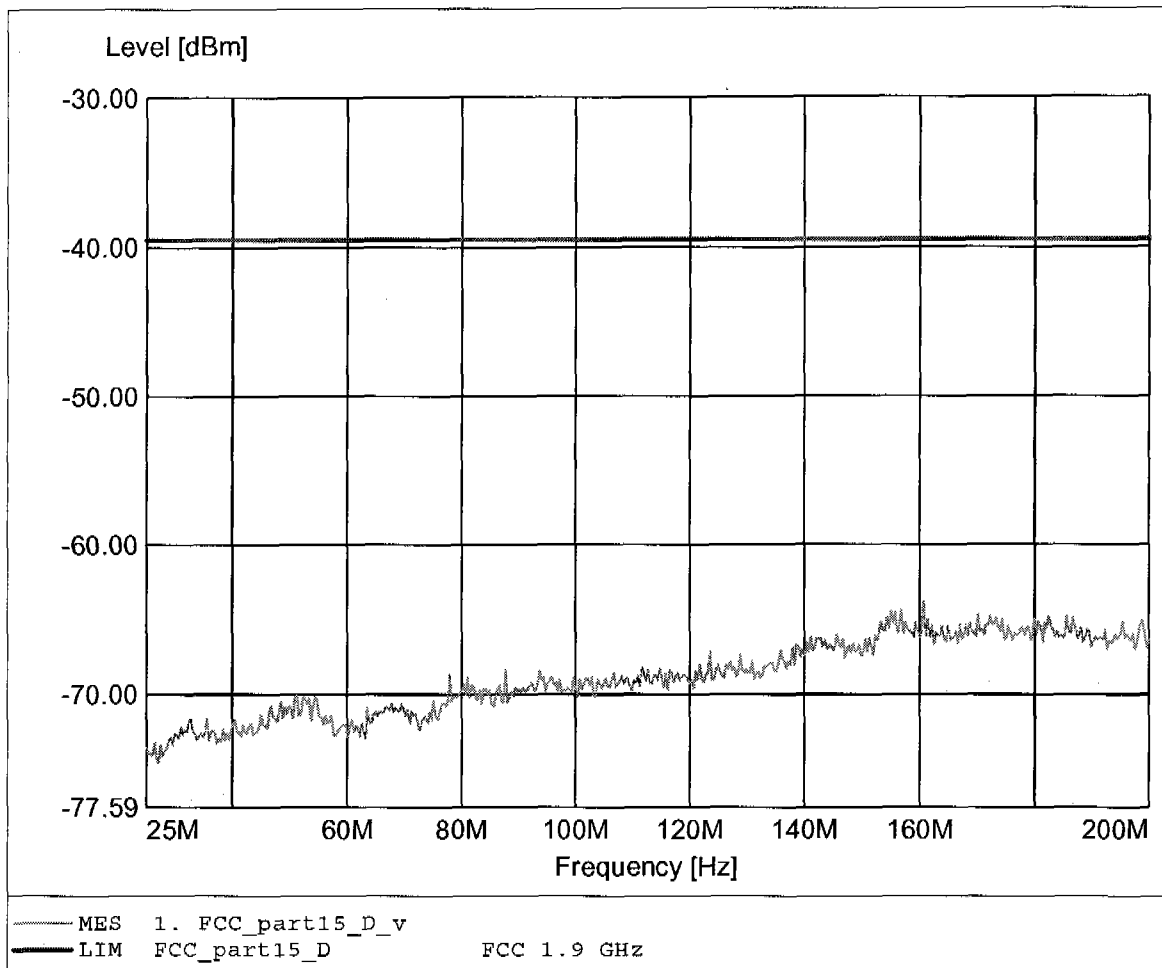

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 826.854MHz Pmax:-74.02dBm RBW: 100 kHz

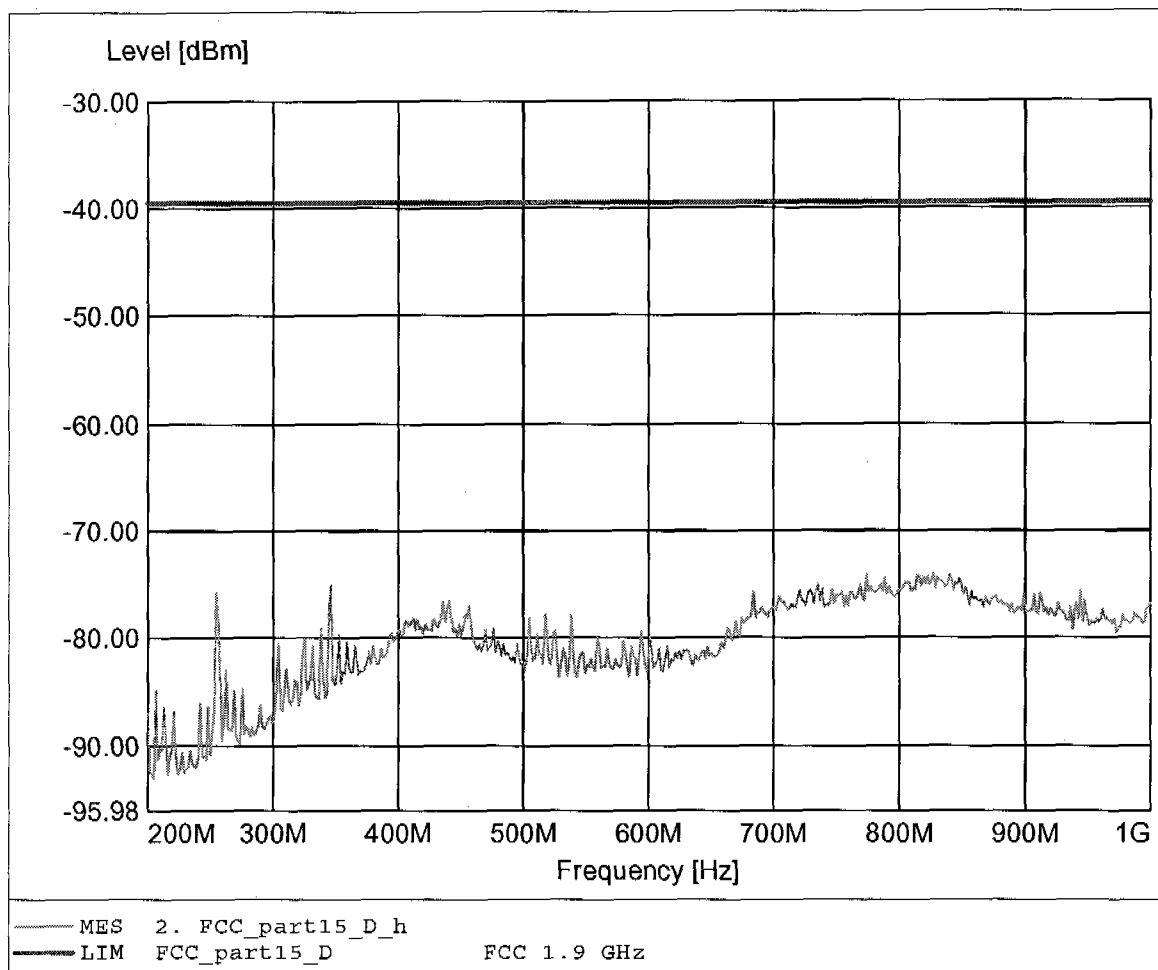

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 913.427MHz Pmax:-68.85dBm RBW: 100 kHz

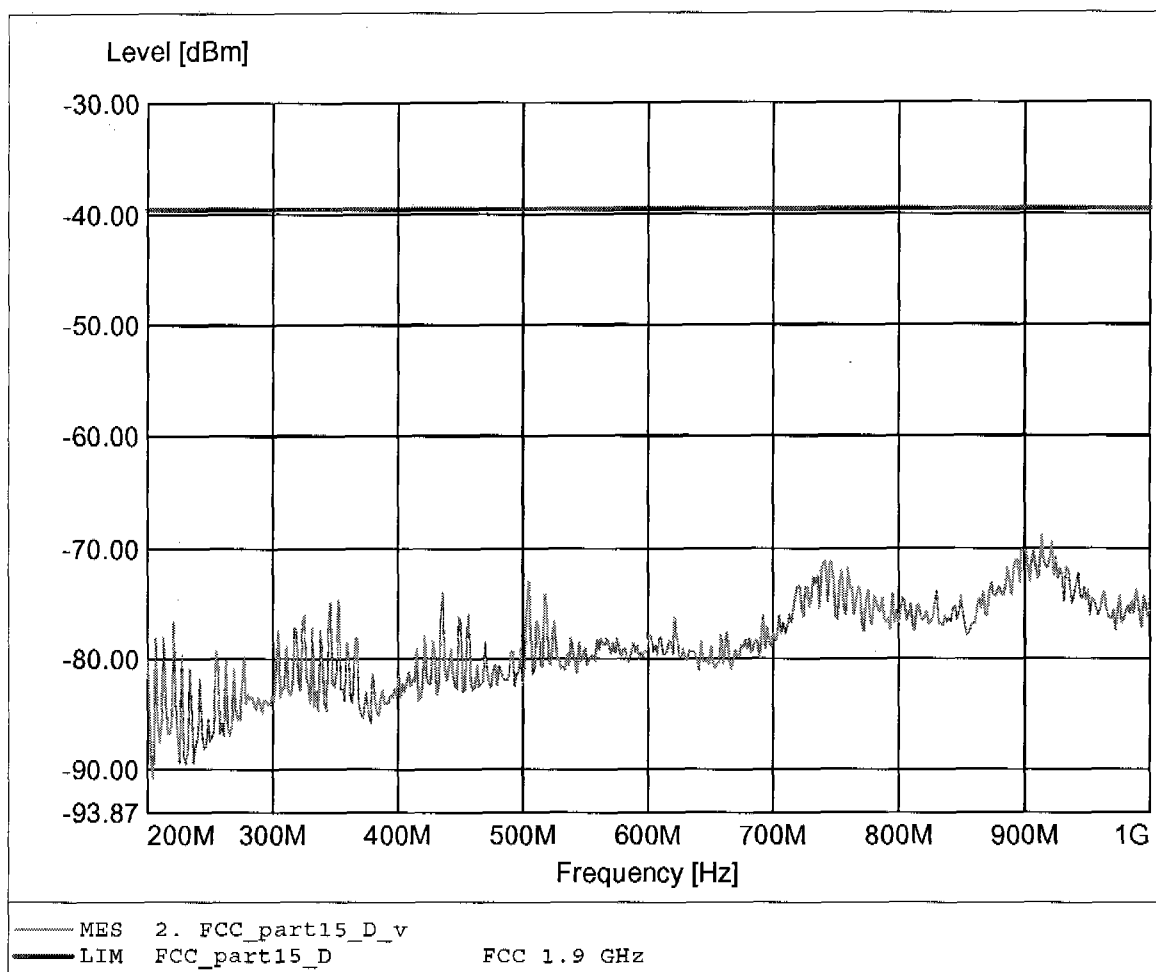

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.908GHz Pmax: -60.19dBm RBW: 1 MHz

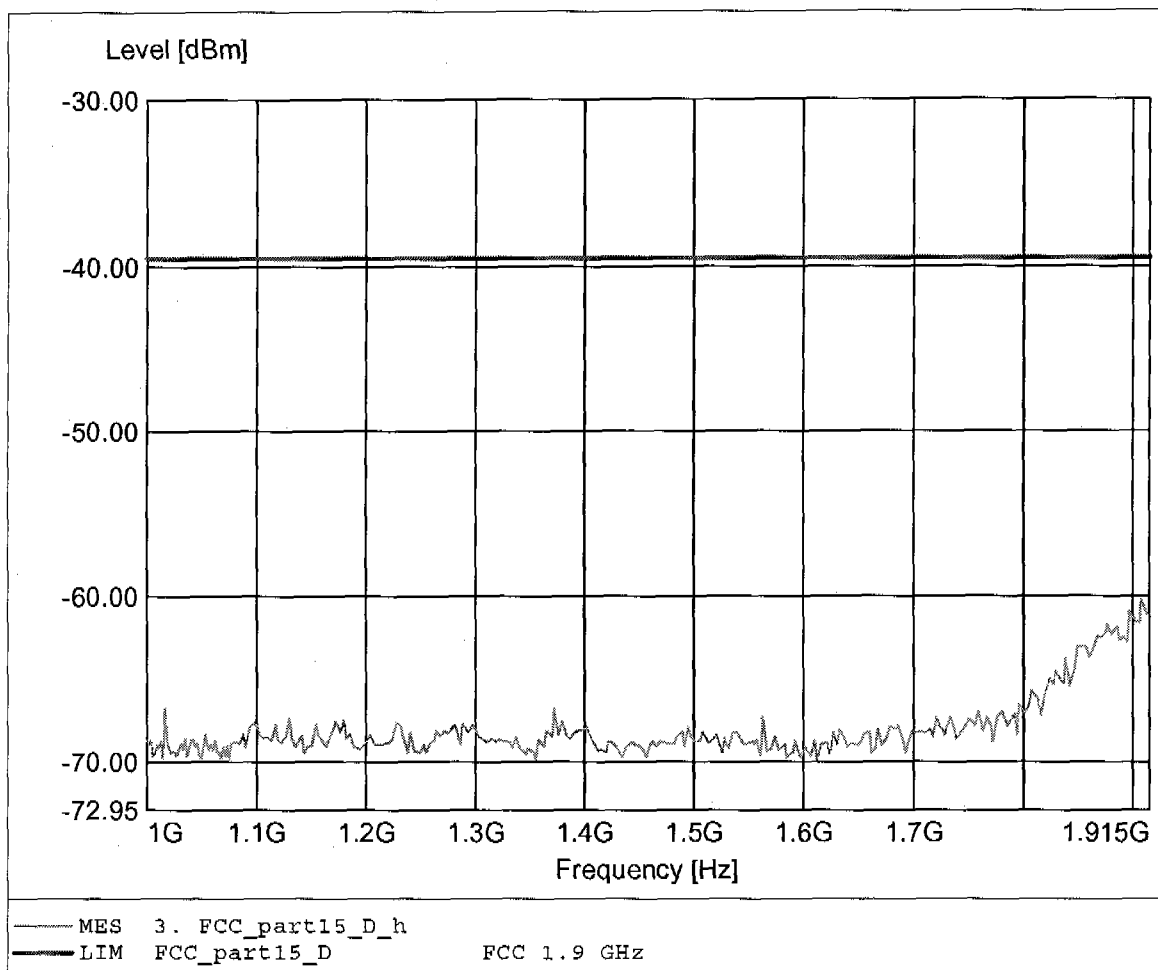

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.915GHz Pmax: -57.75dBm RBW: 1 MHz

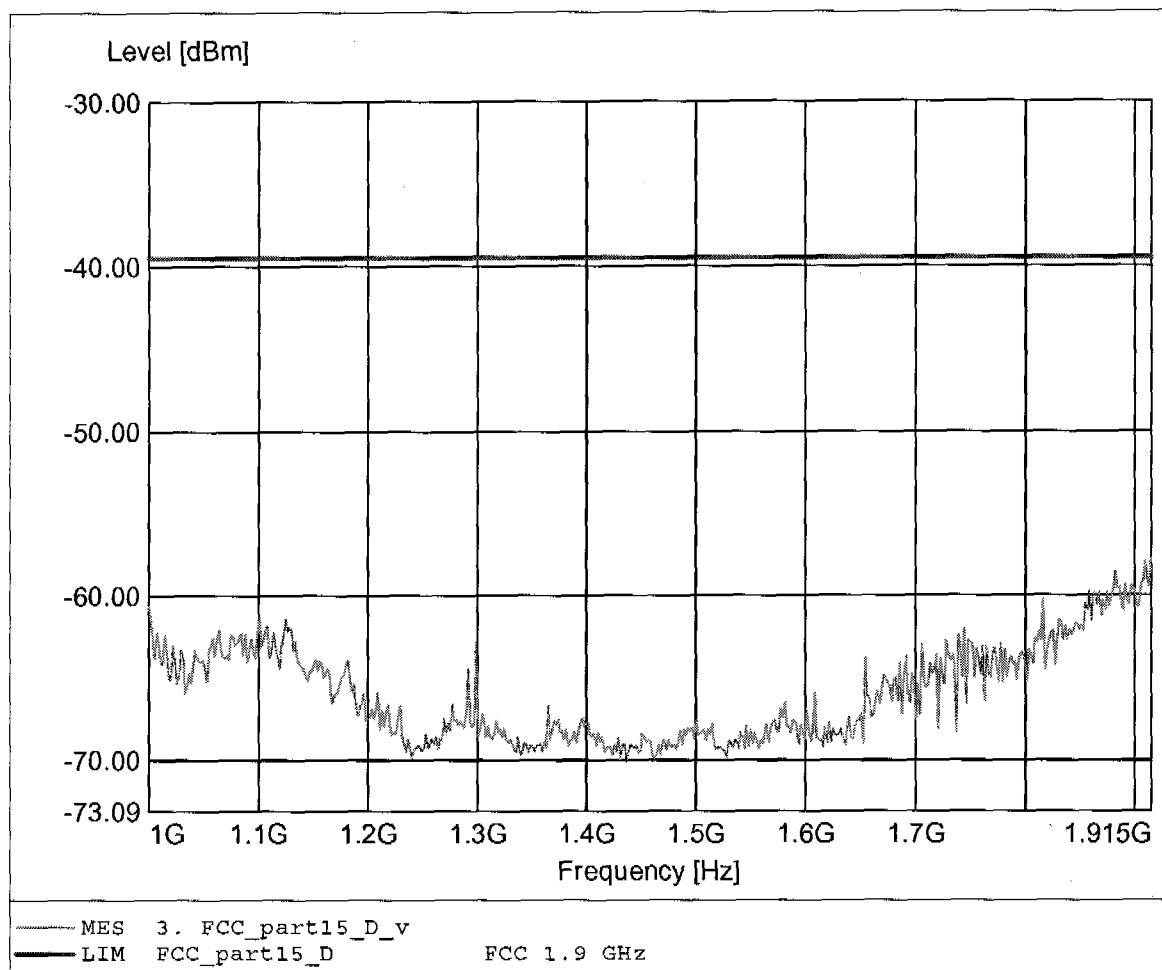

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.930GHz Pmax:-55.19dBm RBW:10 kHz

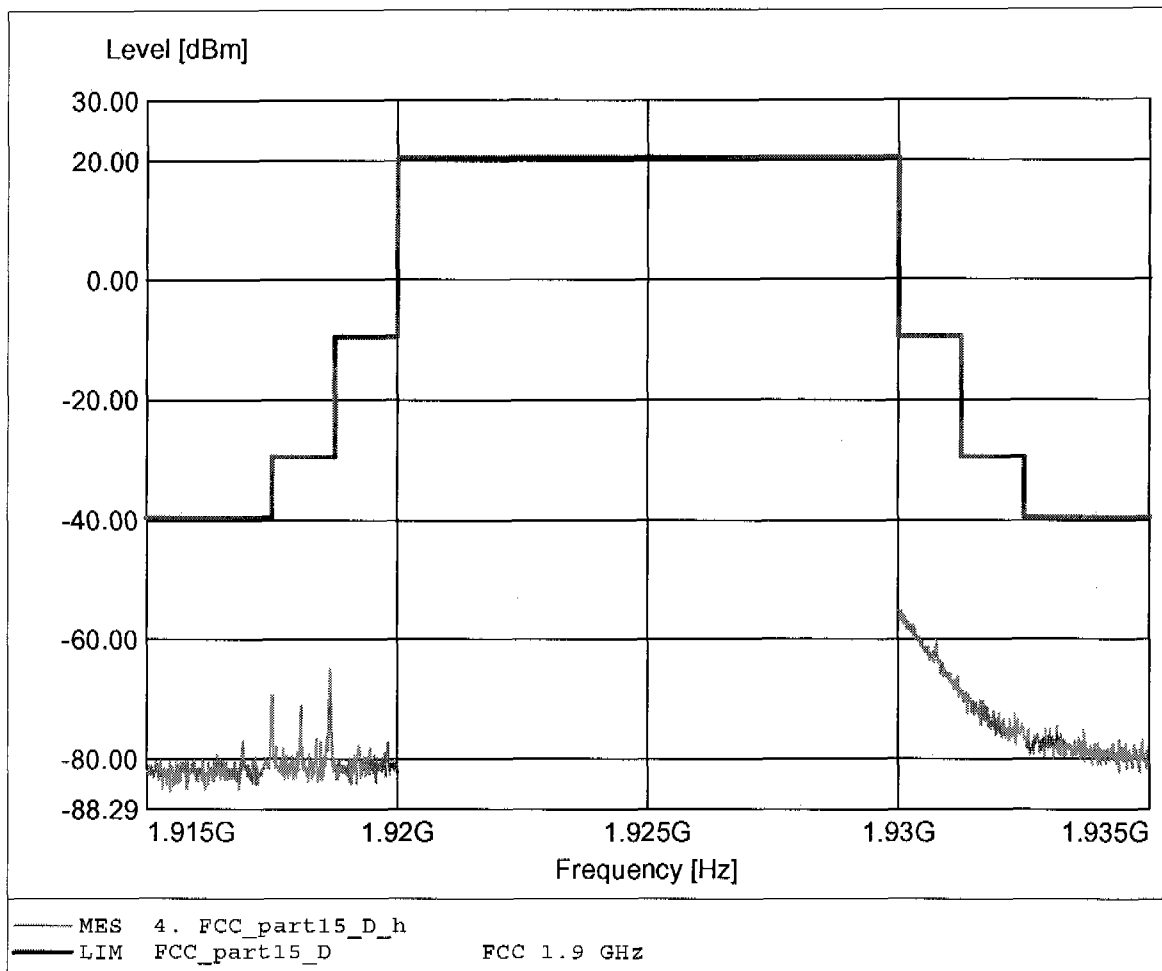

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.930GHz Pmax:-49.16dBm RBW:10 kHz

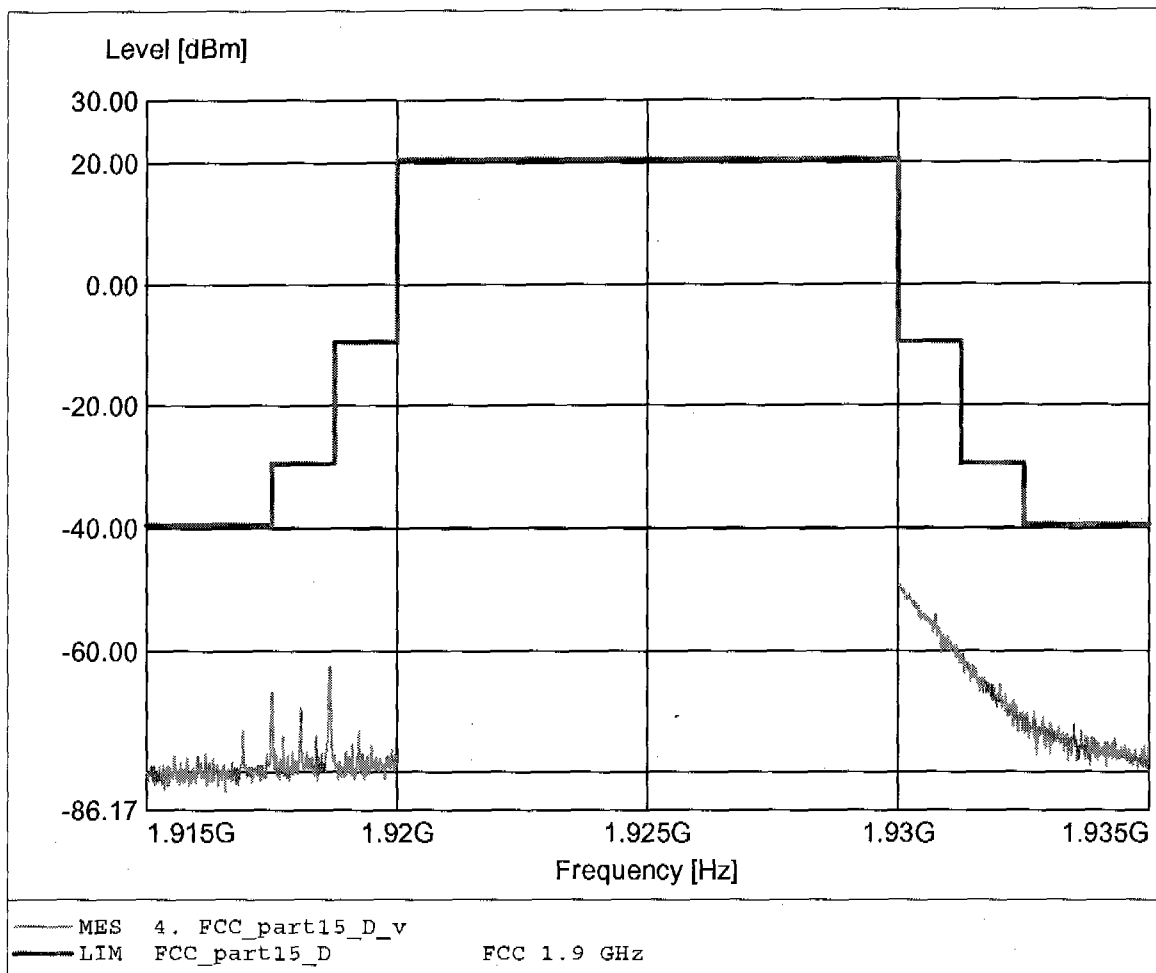

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.859GHz Pmax: -50.62dBm RBW: 1 MHz

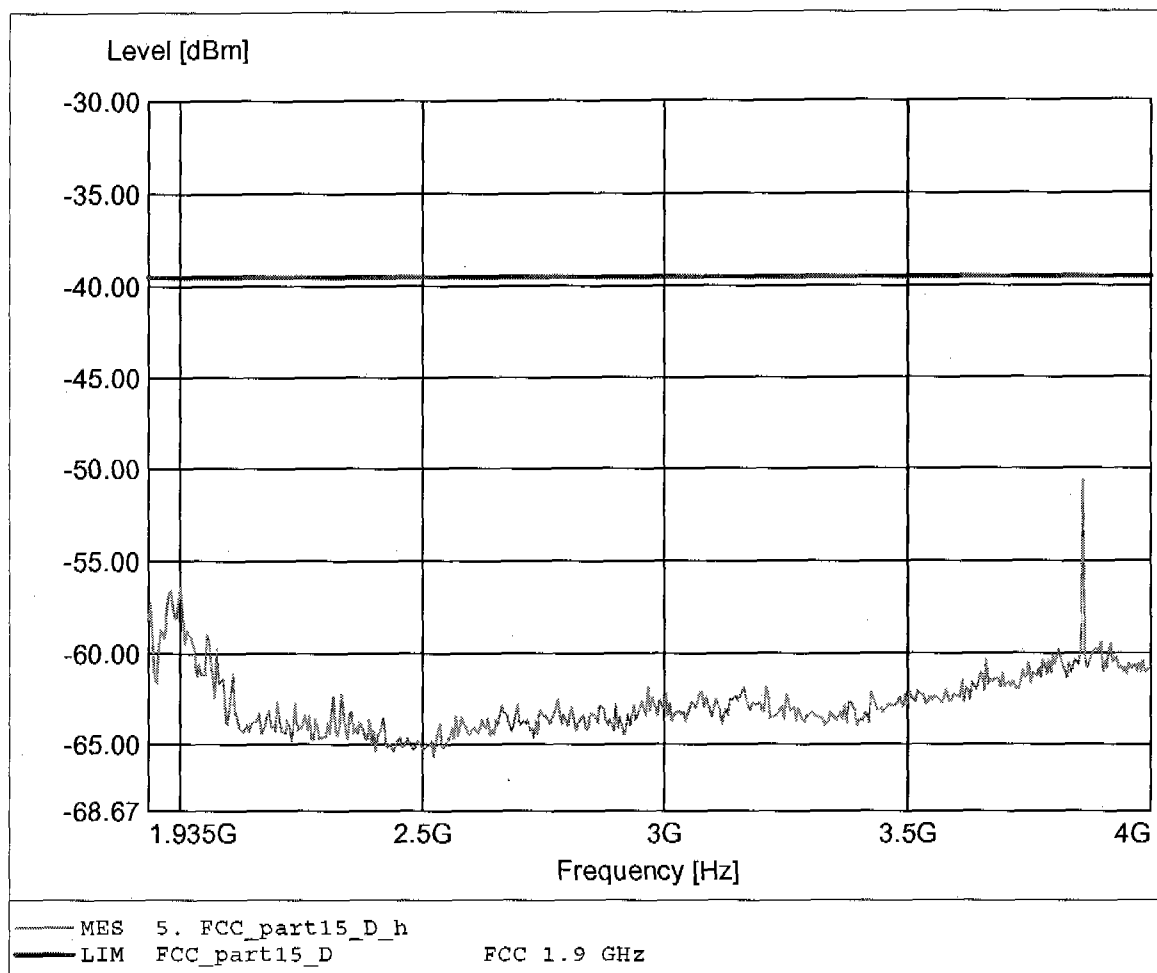

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.976GHz Pmax: -51.38dBm RBW: 1 MHz

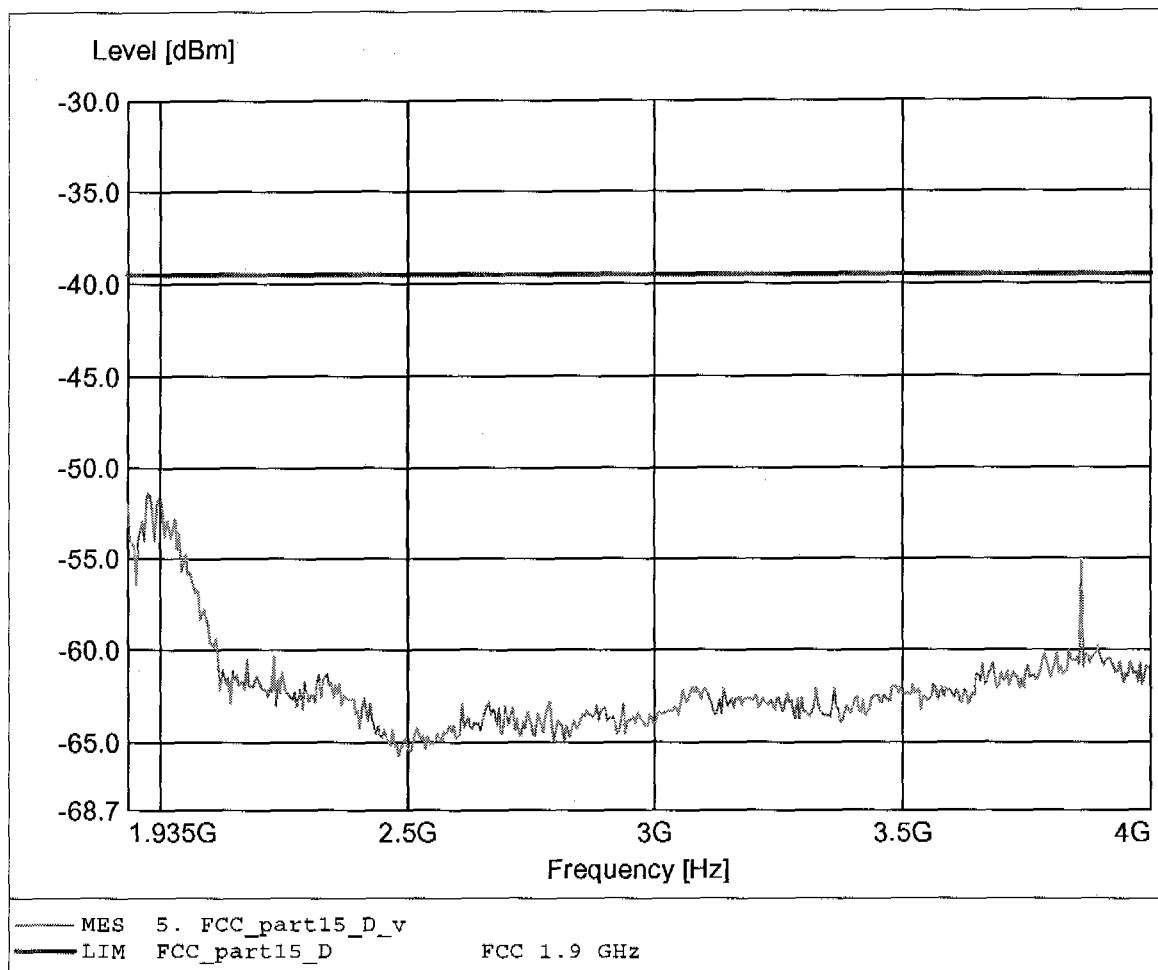

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 7.719GHz Pmax:-50.73dBm RBW: 1 MHz

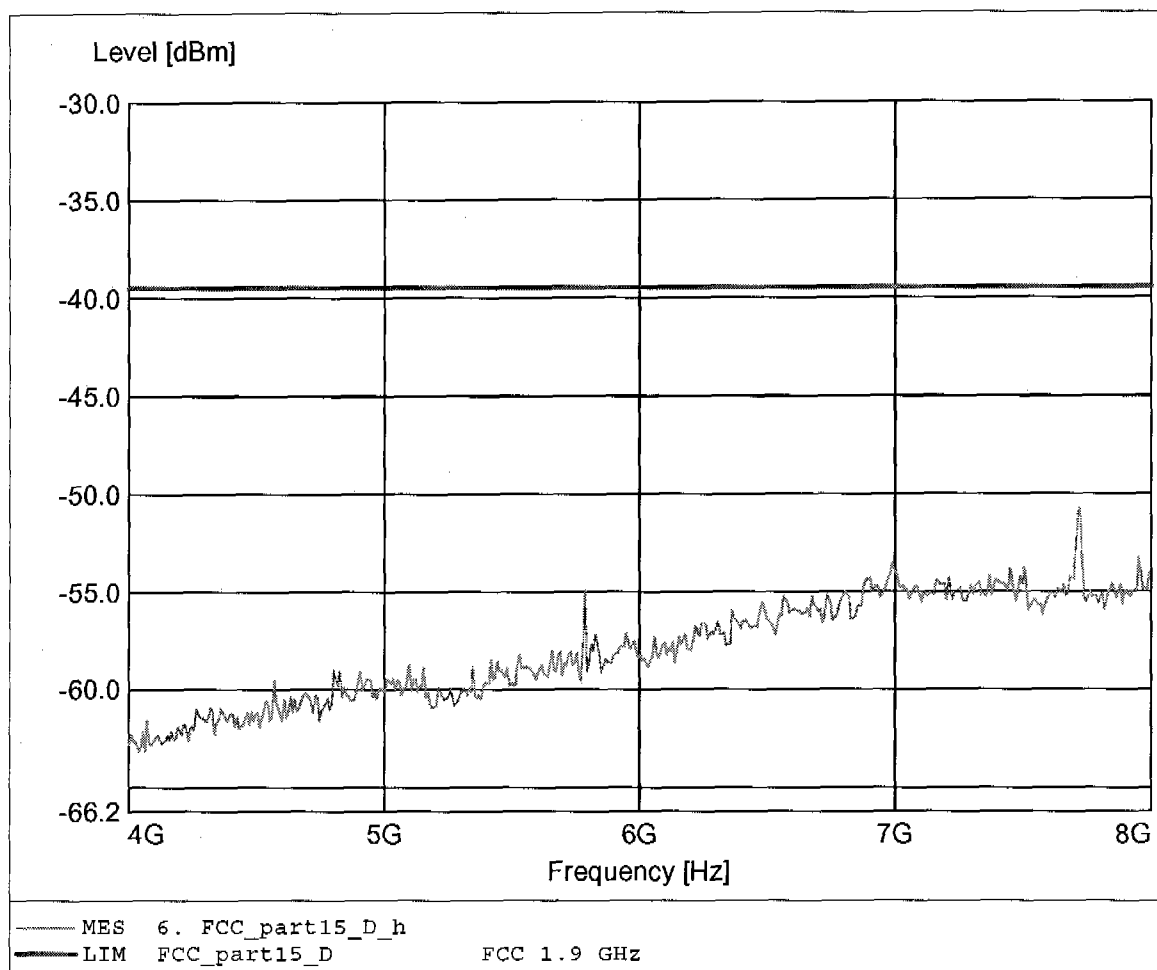

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 7.719GHz Pmax: -51.96dBm RBW: 1 MHz

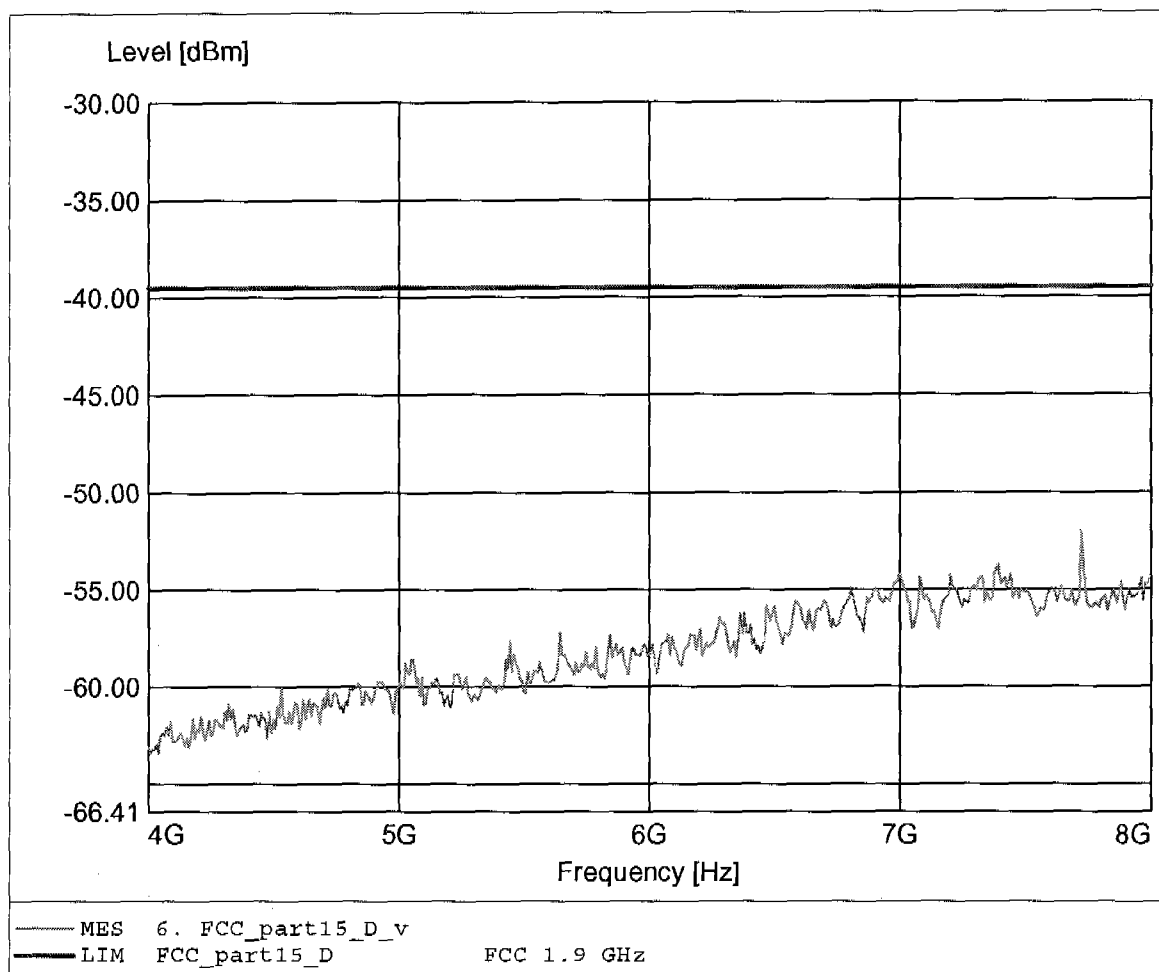

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.110GHz Pmax: -51.36dBm RBW: 1 MHz

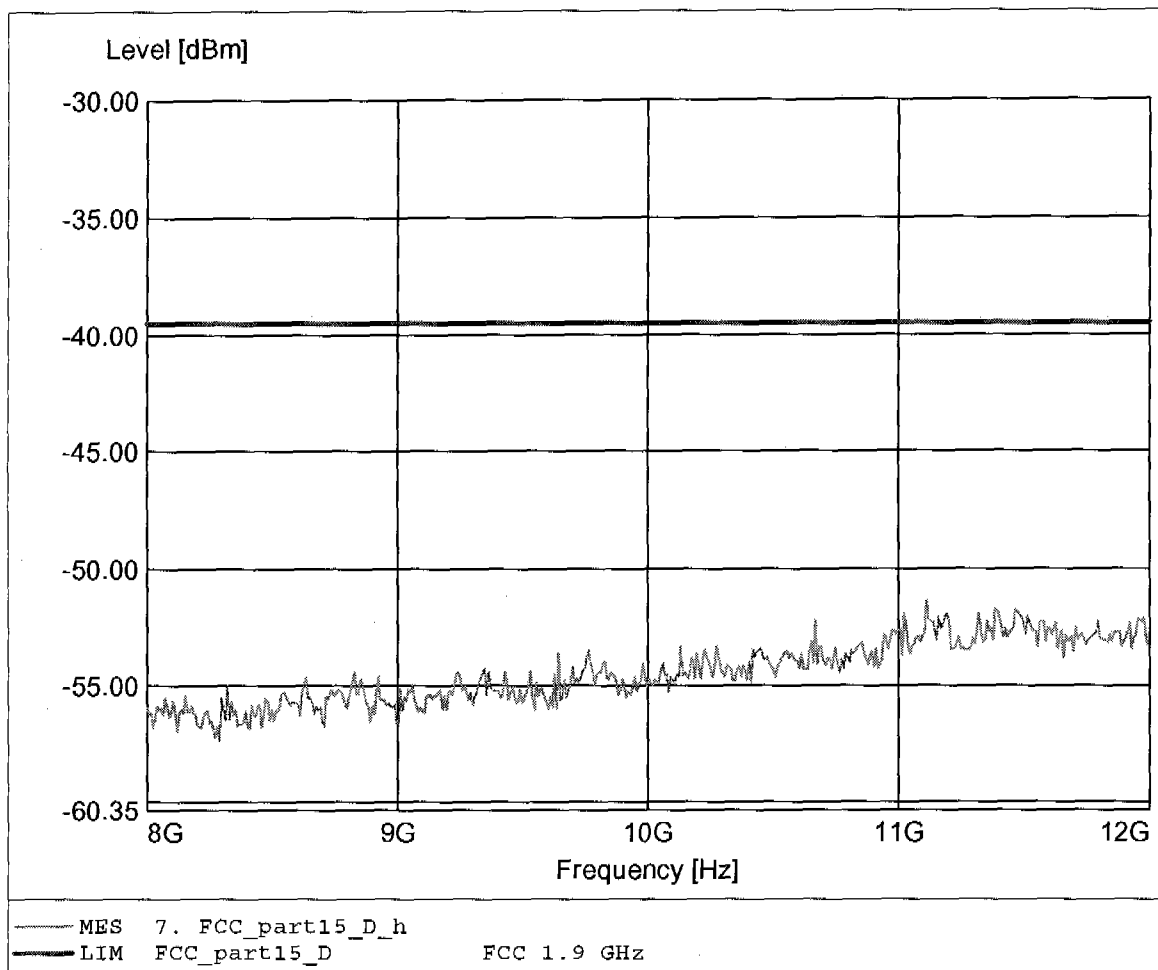

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.575GHz Pmax: -50.53dBm RBW: 1 MHz

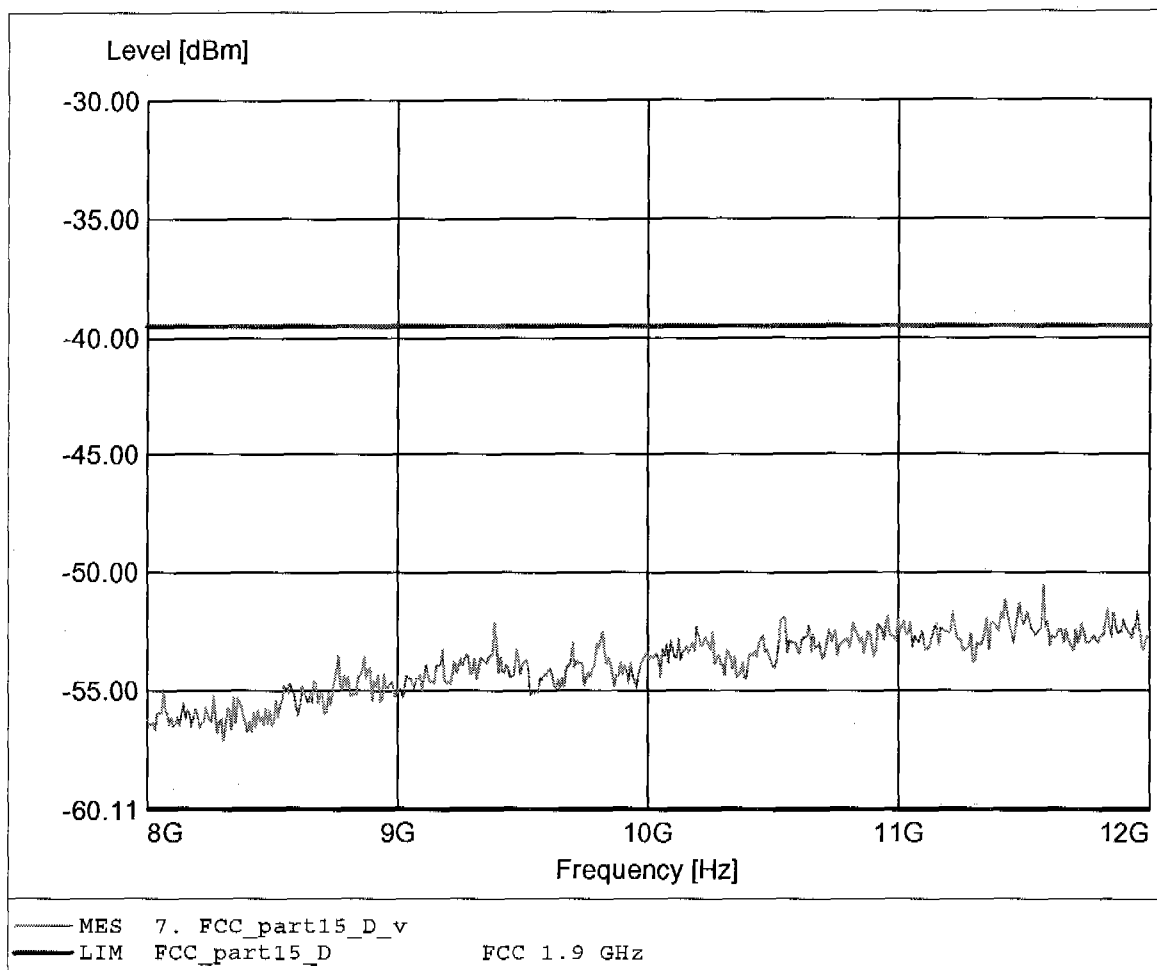

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.910GHz Pmax: -47.42dBm RBW: 1 MHz

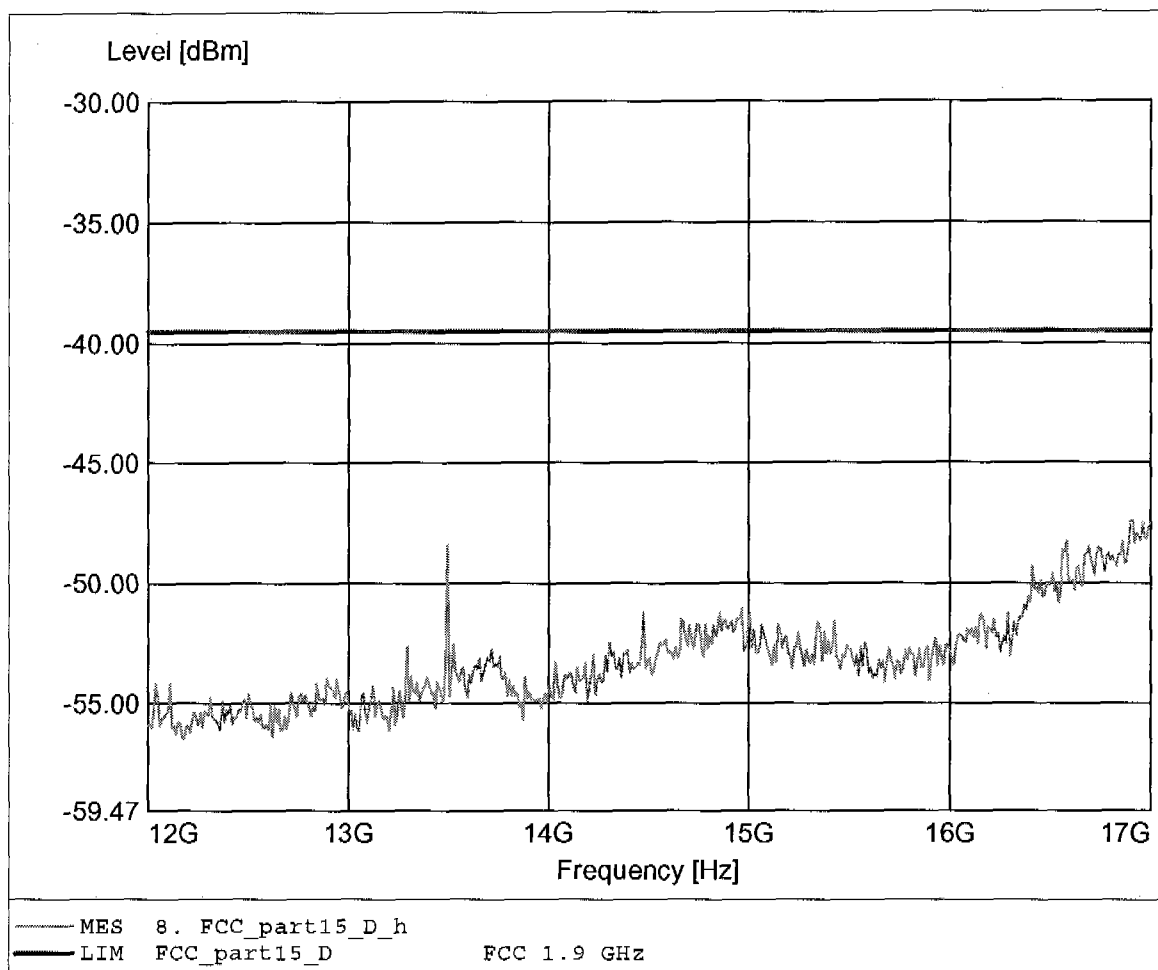

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 15.427GHz Pmax: -48.46dBm RBW: 1 MHz

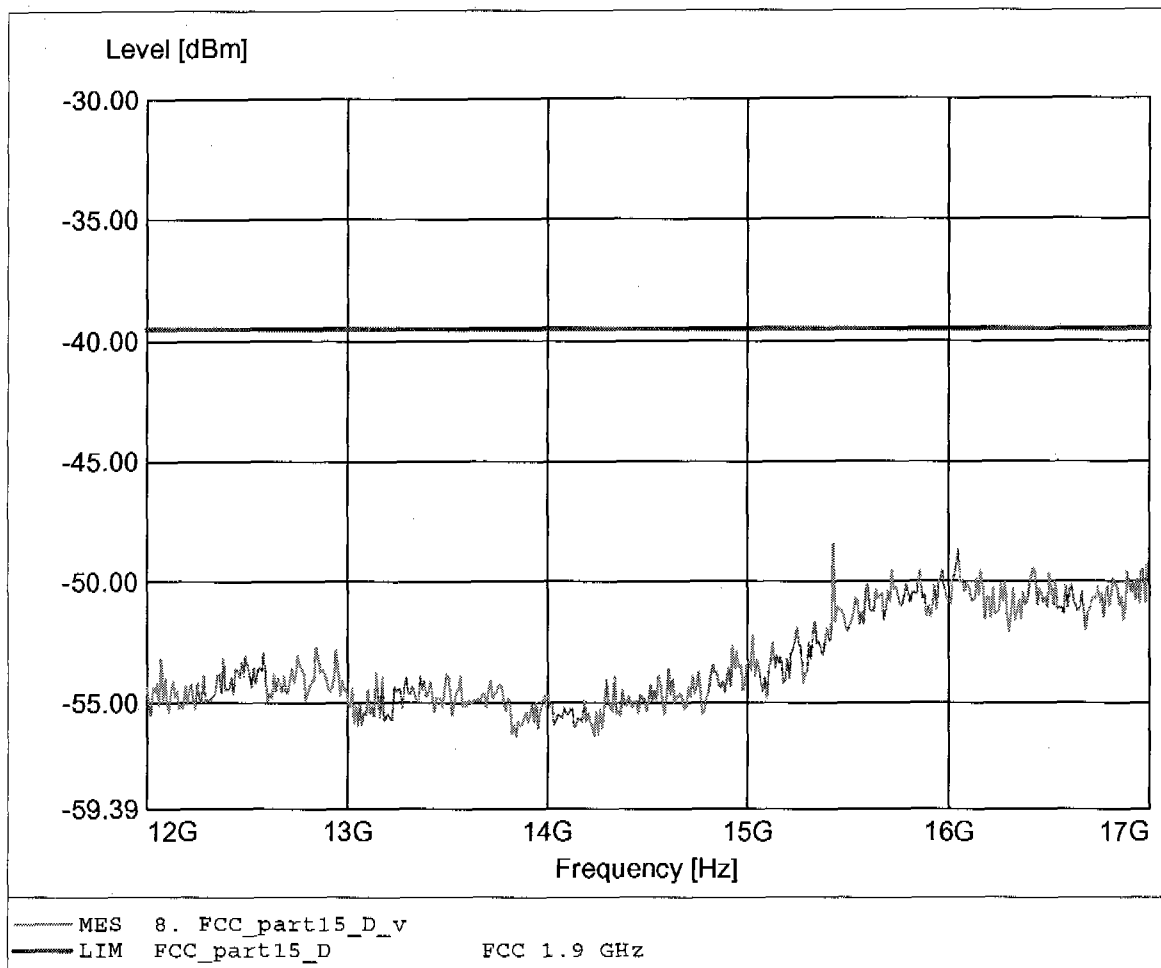

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 18.497GHz Pmax: -46.98dBm RBW: 1 MHz

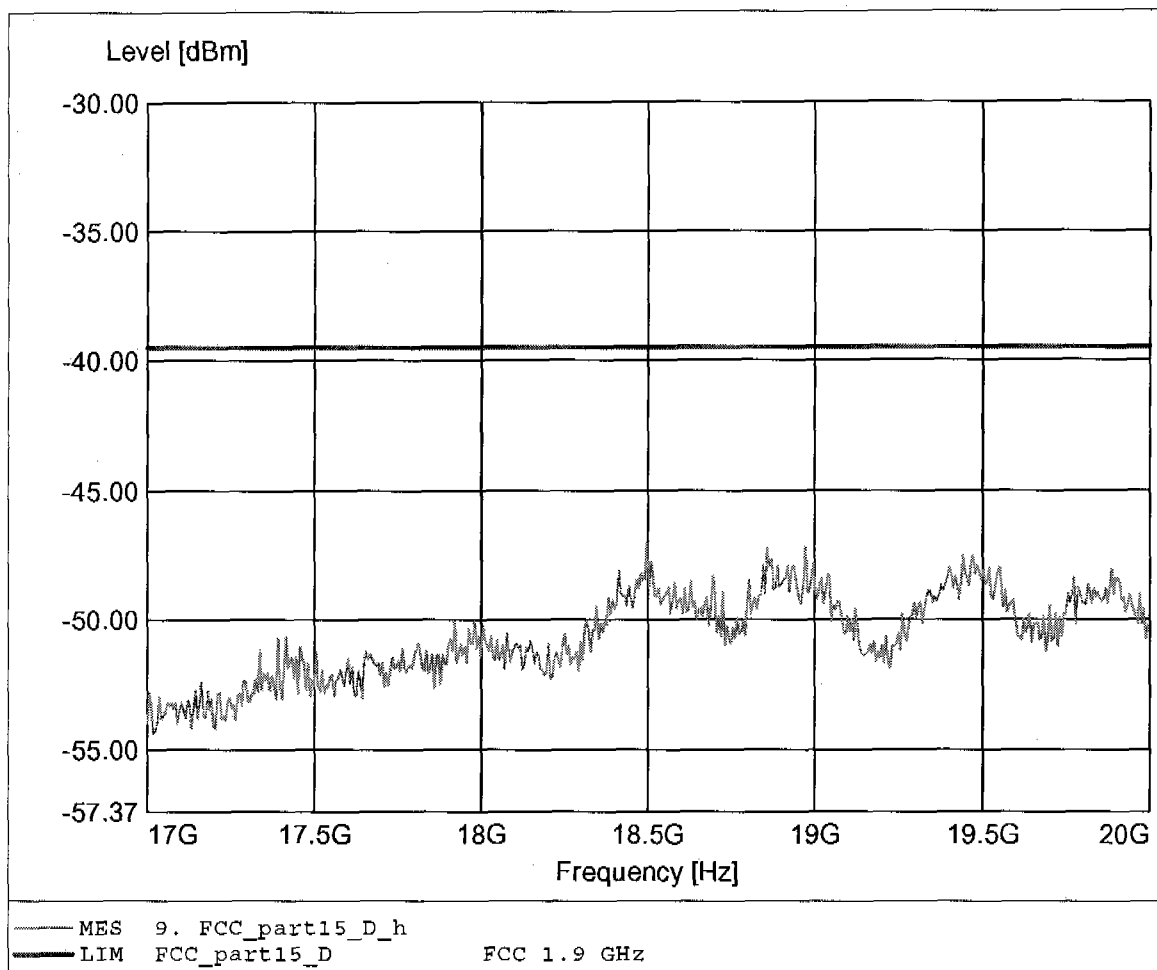

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 1 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 18.978GHz Pmax: -46.75dBm RBW: 1 MHz

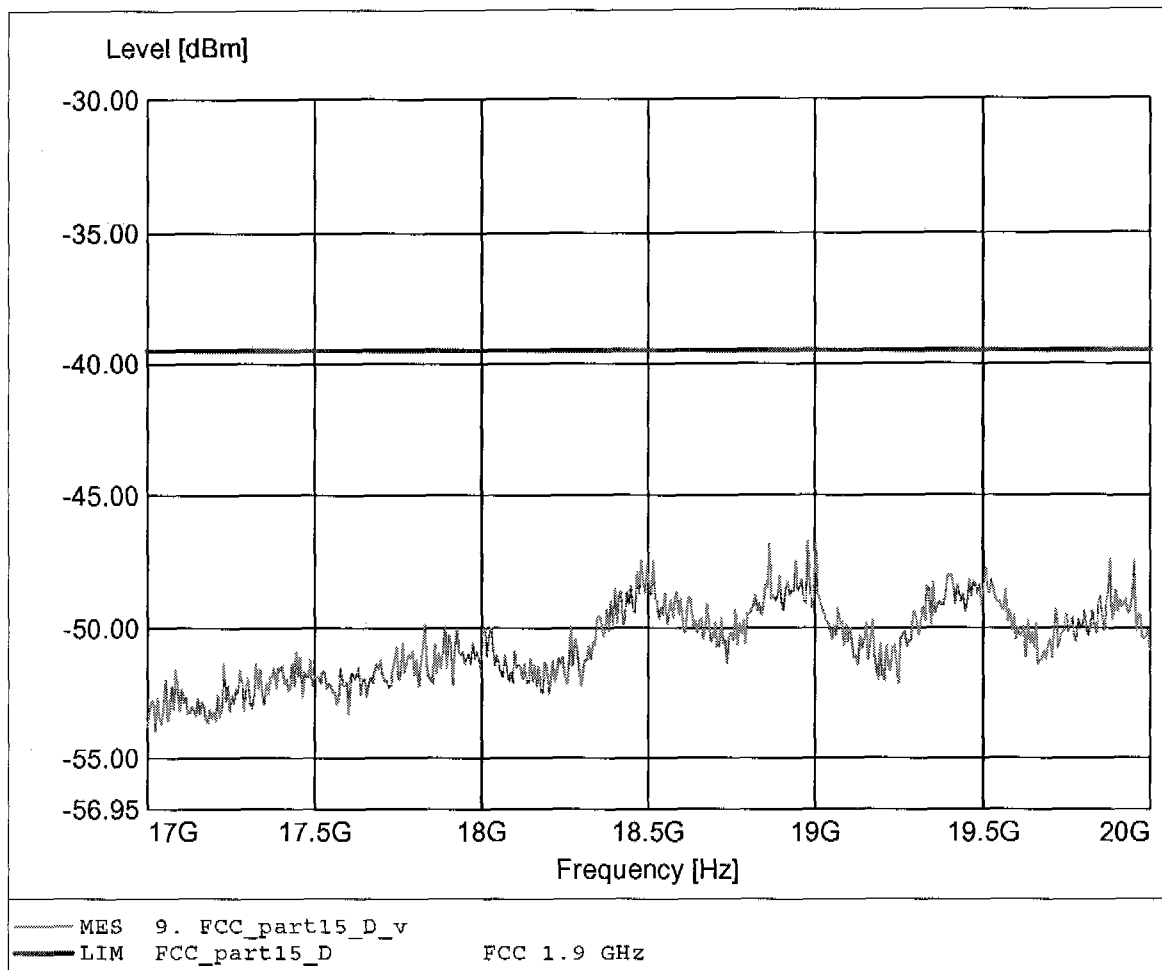

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq: 33.407MHz Pmax: -67.31dBm RBW: 100 kHz

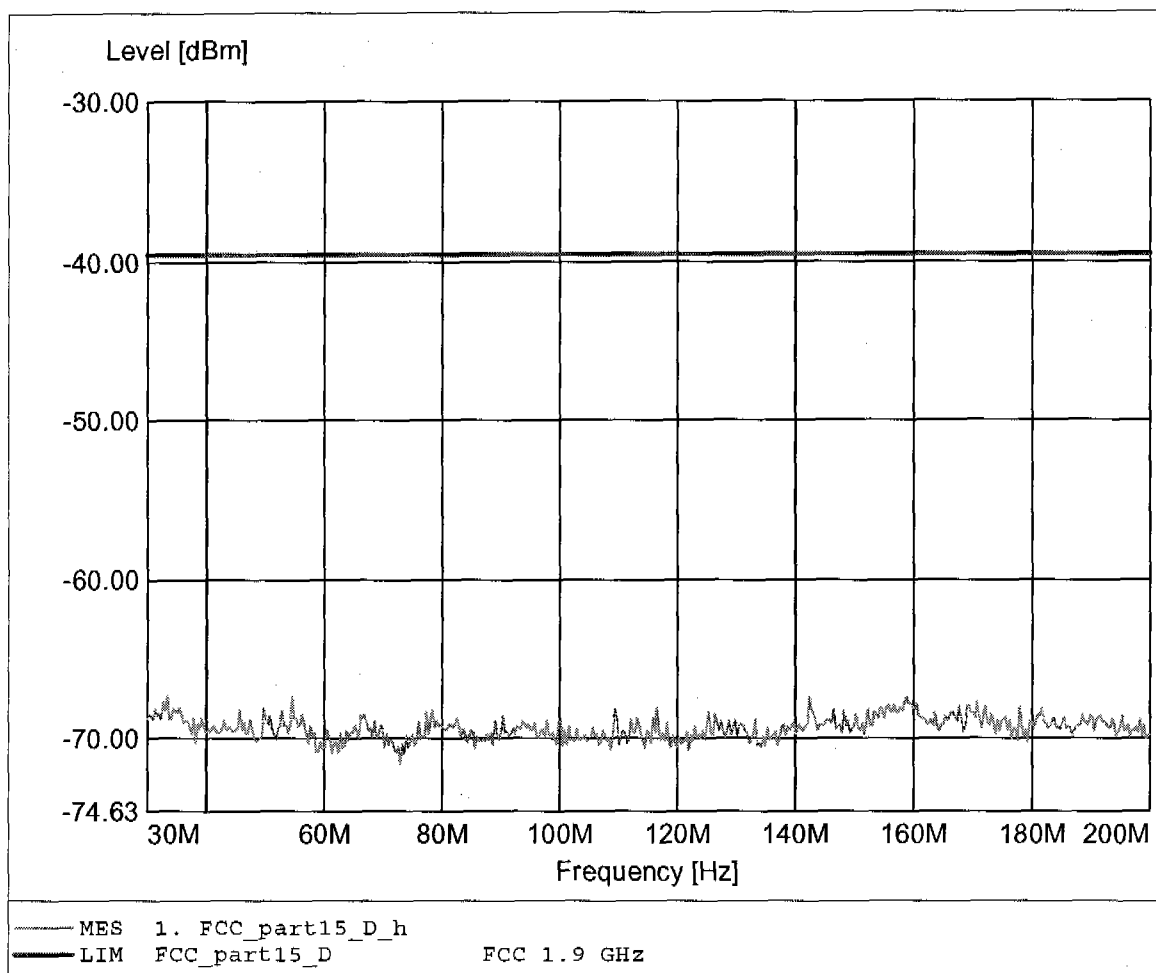

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:155.812MHz Pmax:-64.28dBm RBW: 100 kHz

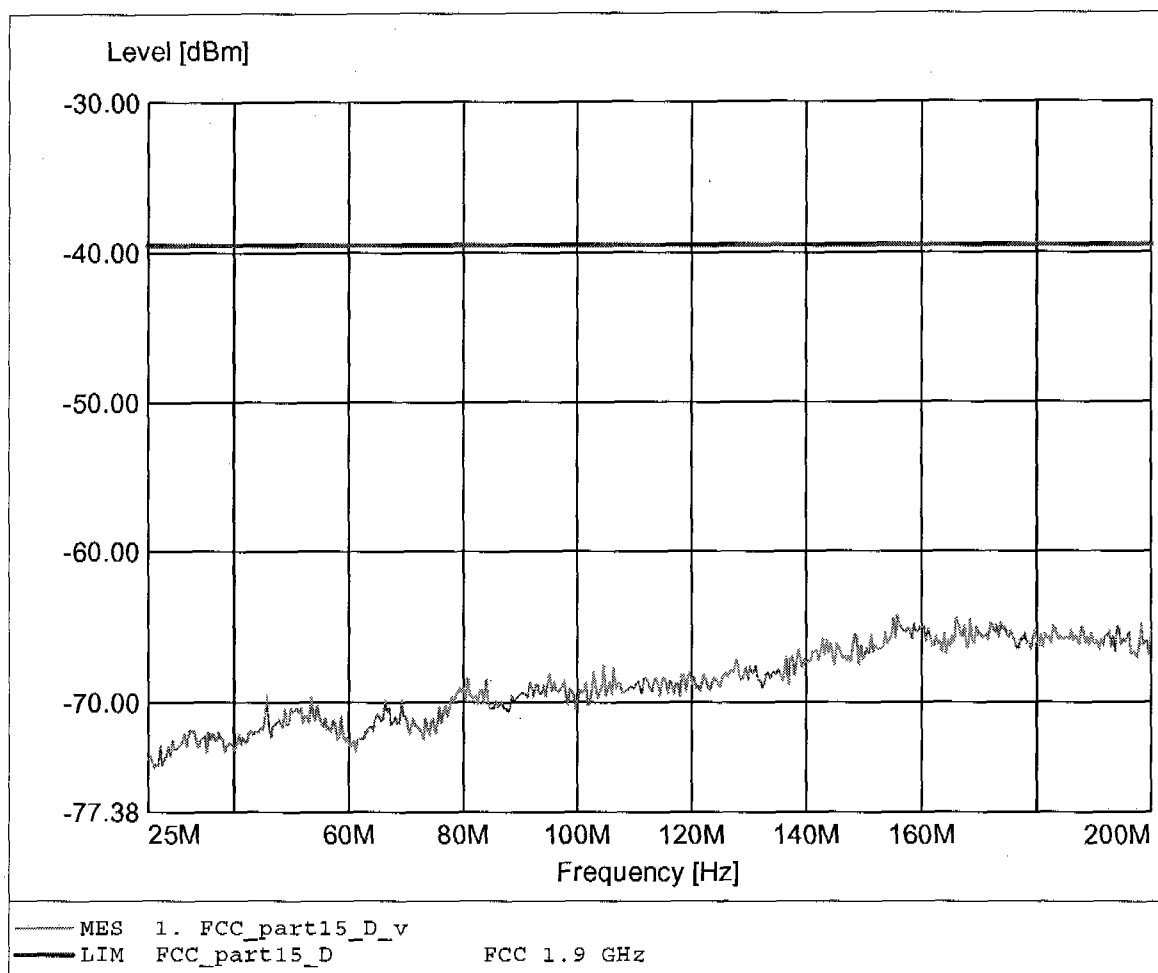

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.636 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 804.409MHz Pmax: -73.60dBm RBW: 100 kHz

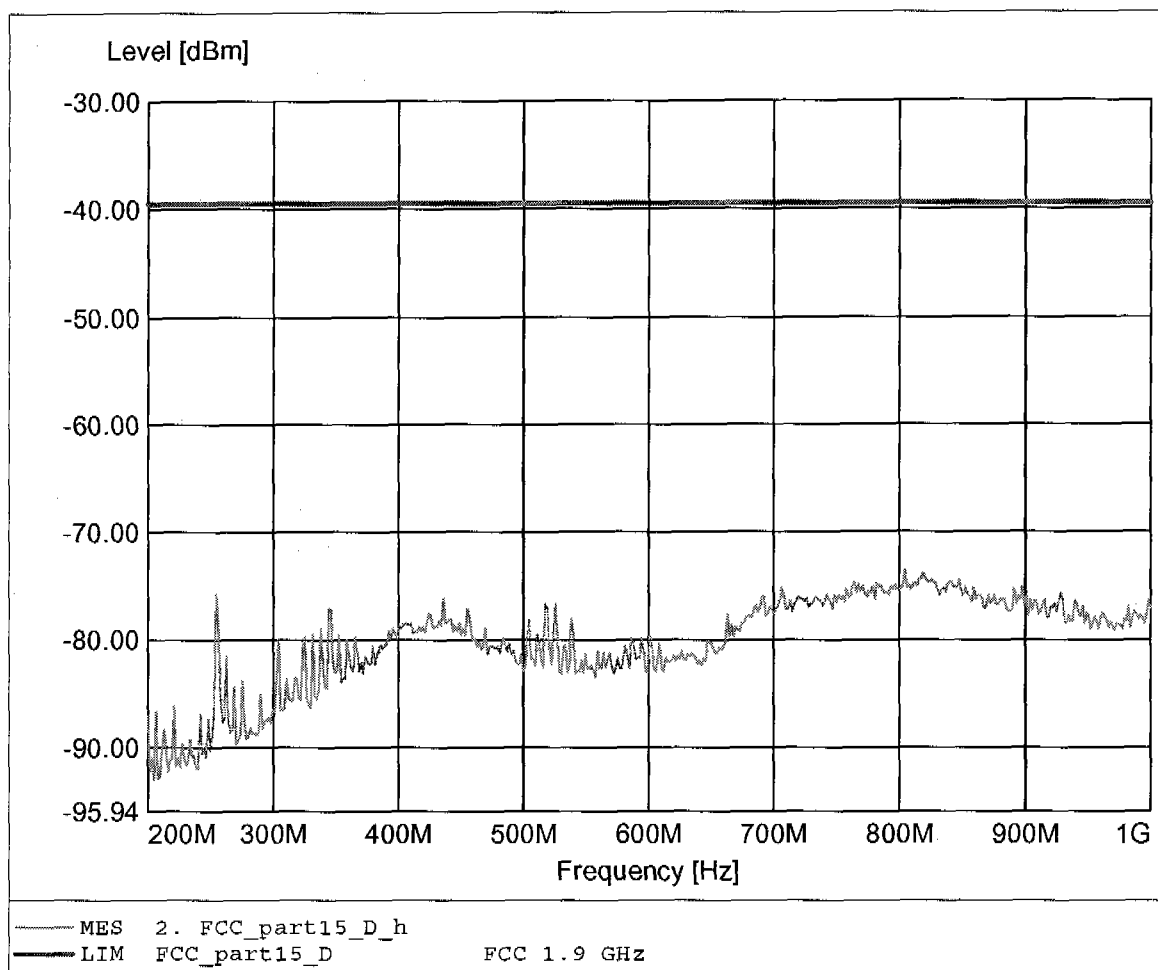

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.636 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 913.427MHz Pmax:-68.84dBm RBW: 100 kHz

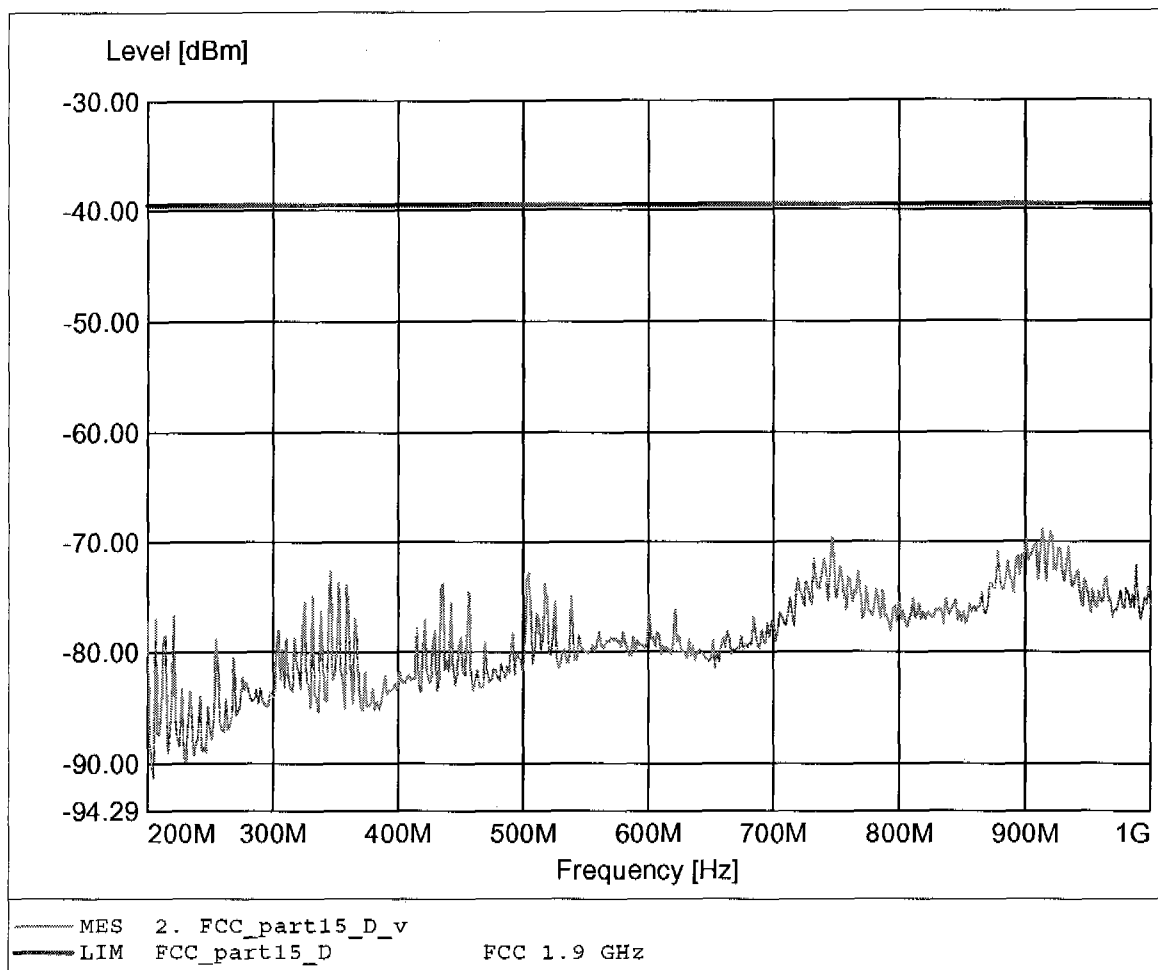

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.911GHz Pmax: -57.54dBm RBW: 1 MHz

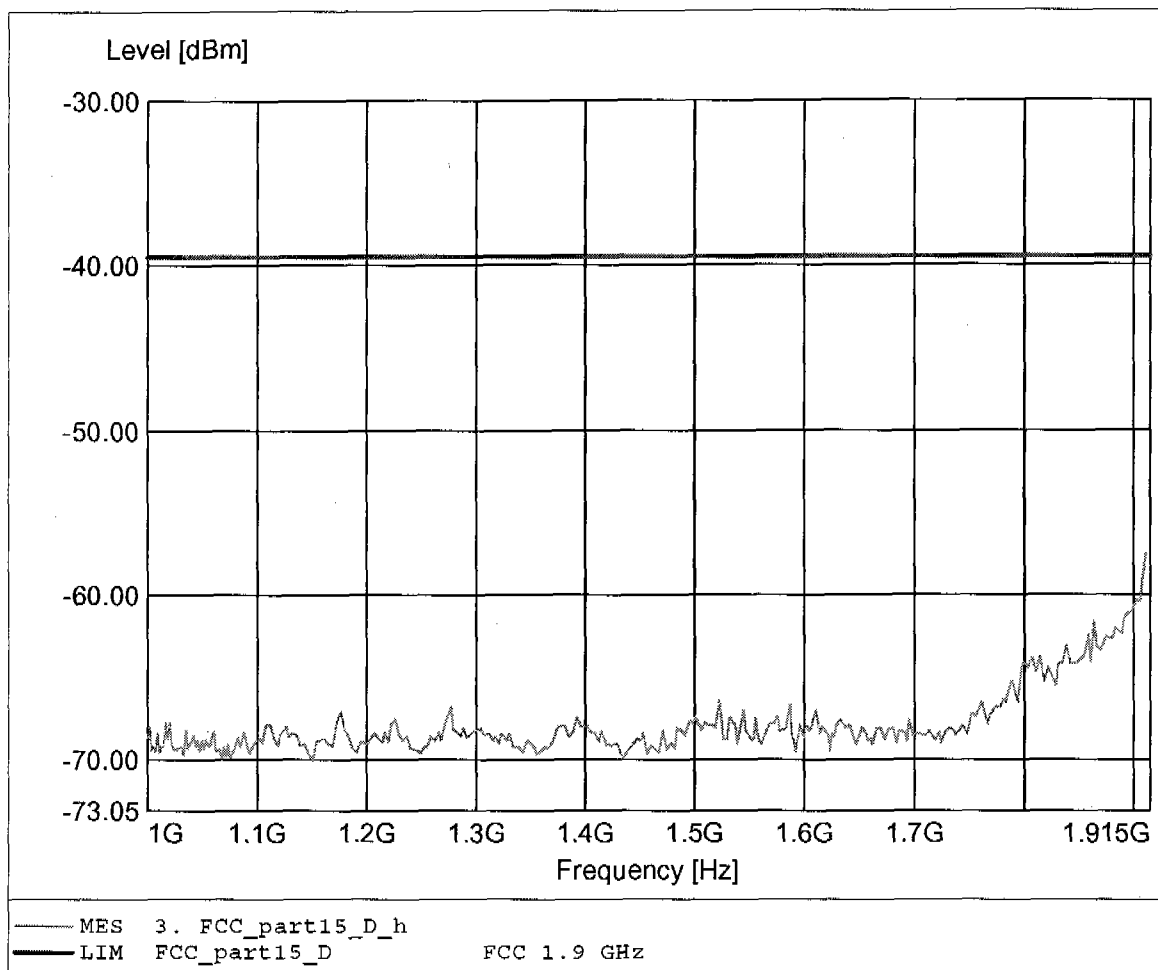

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.915GHz Pmax: -49.38dBm RBW: 1 MHz

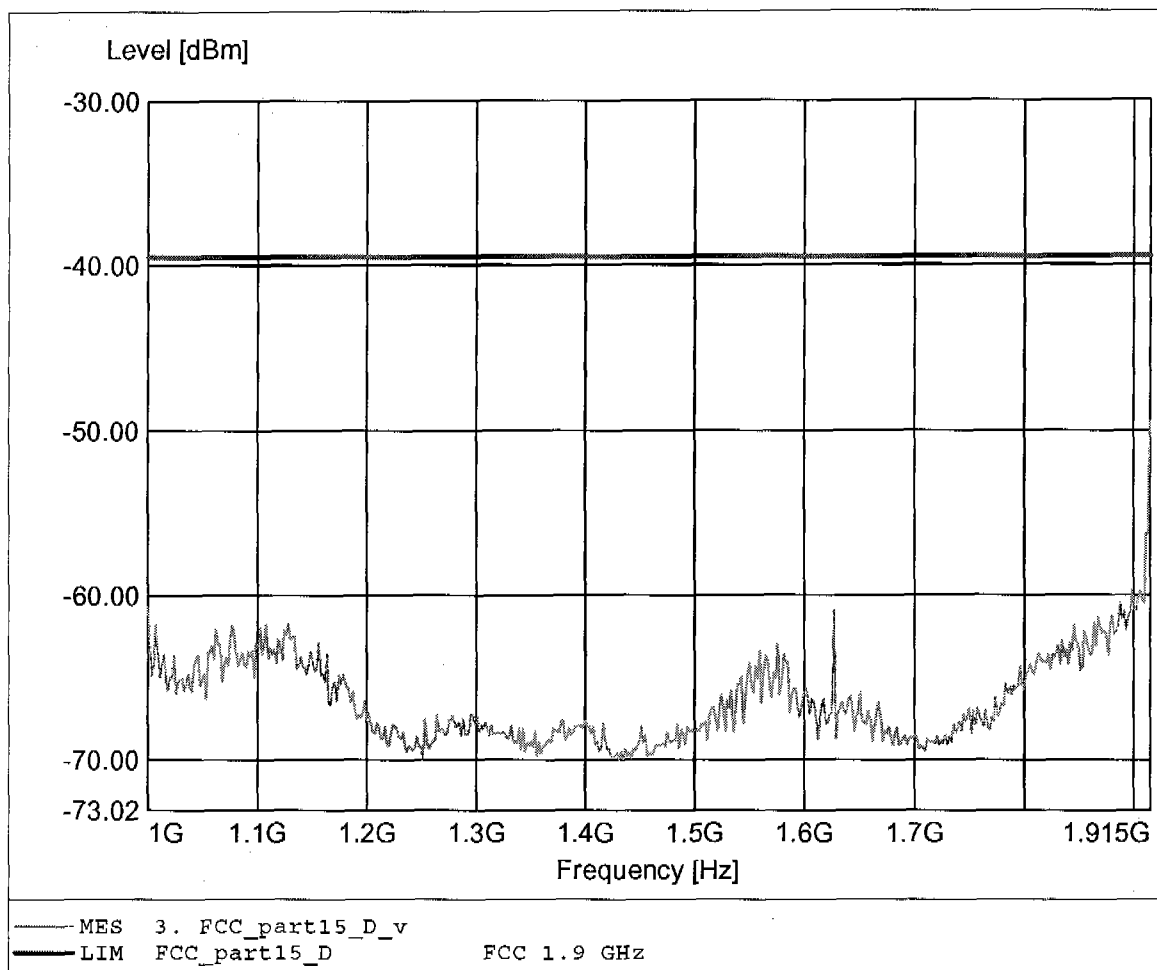

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.920GHz Pmax: -44.33dBm RBW: 10 kHz

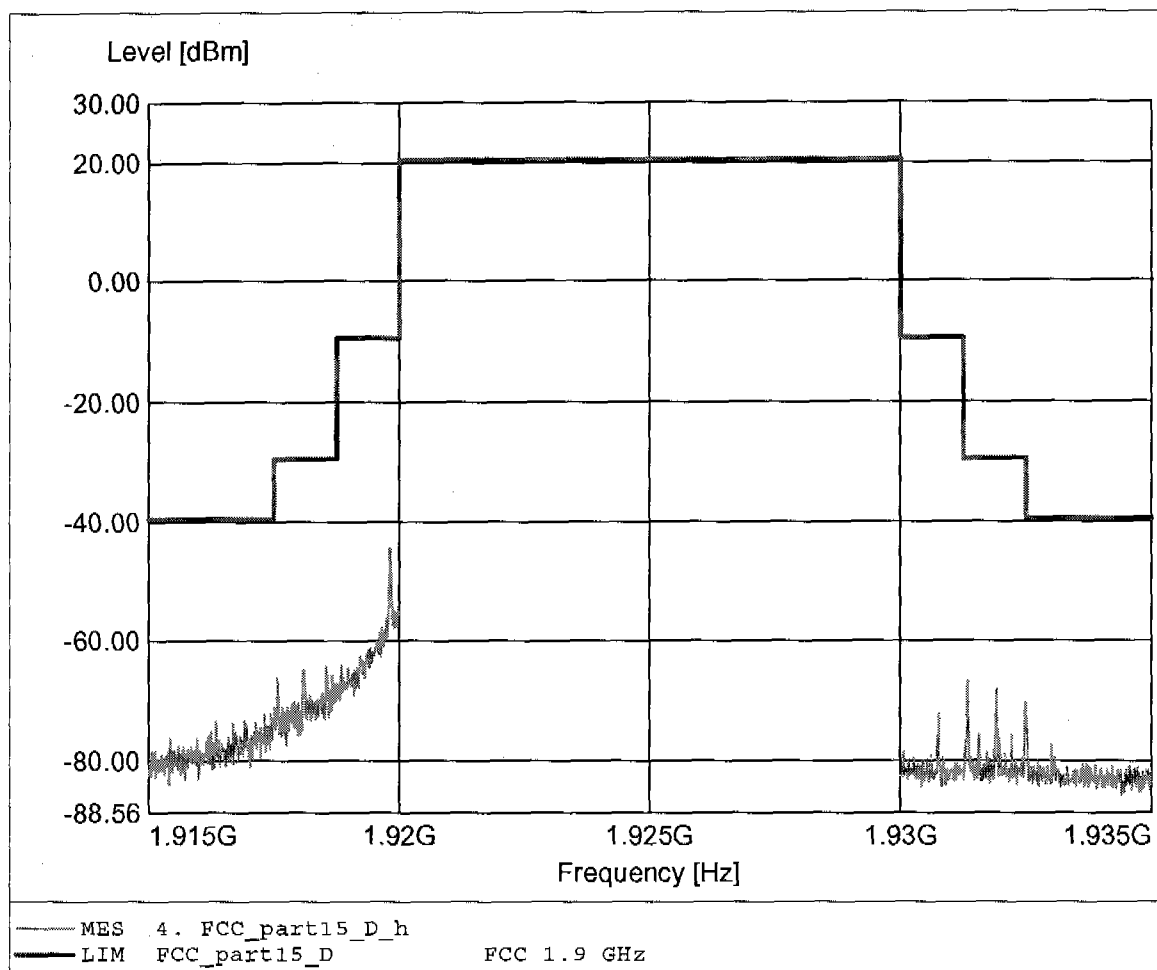

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.920GHz Pmax: -42.14dBm RBW: 10 kHz

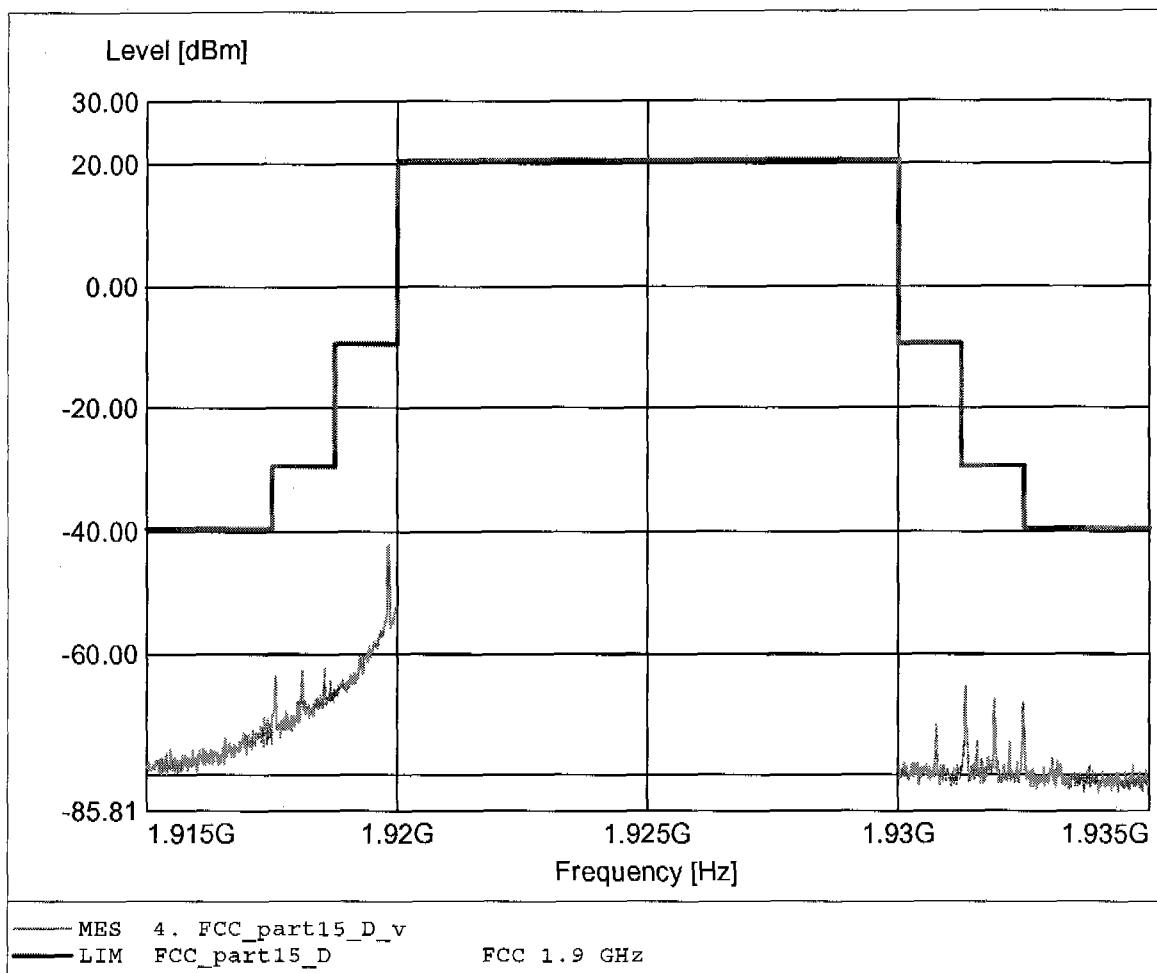

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.843GHz Pmax: -49.54dBm RBW: 1 MHz

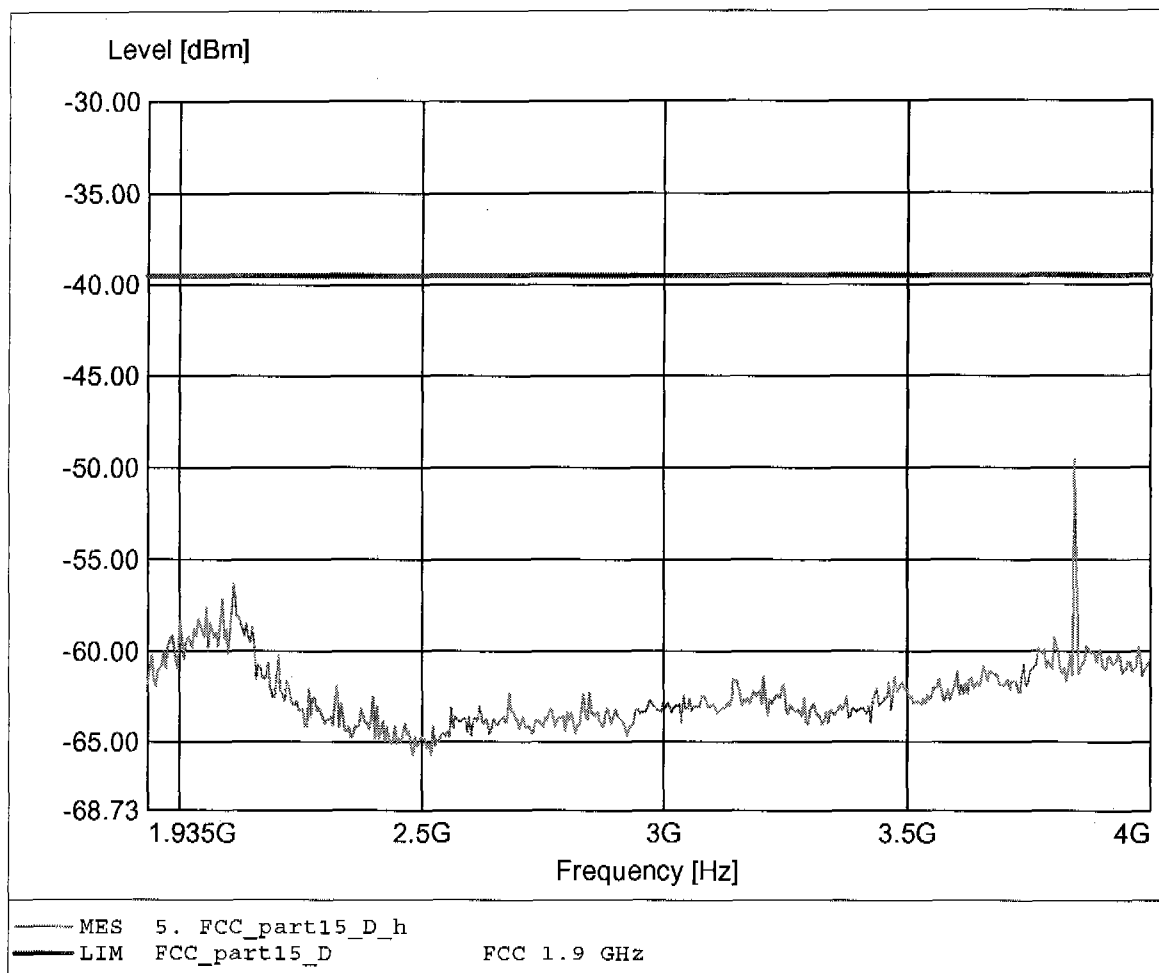

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.843GHz Pmax: -49.10dBm RBW: 1 MHz

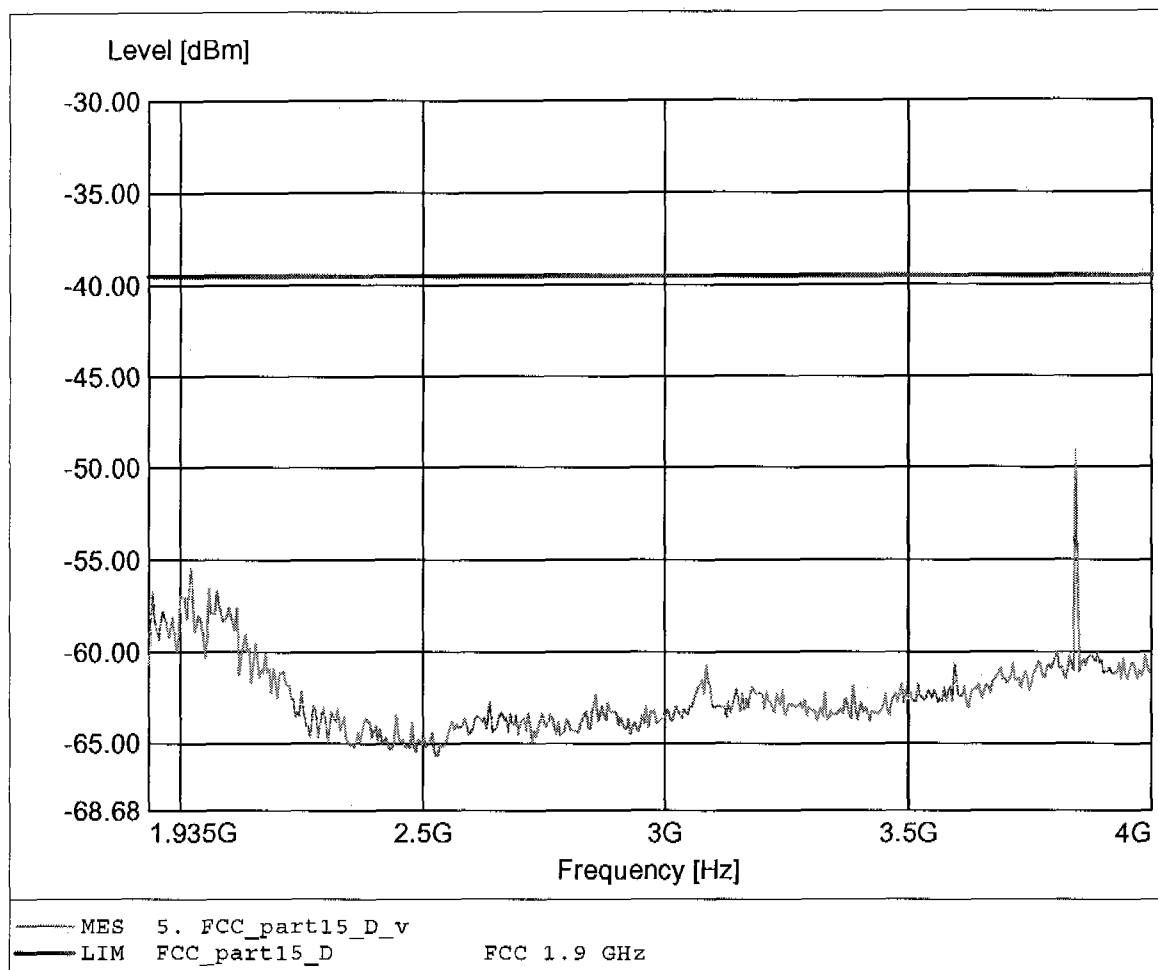

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 5.764GHz Pmax: -48.89dBm RBW: 1 MHz

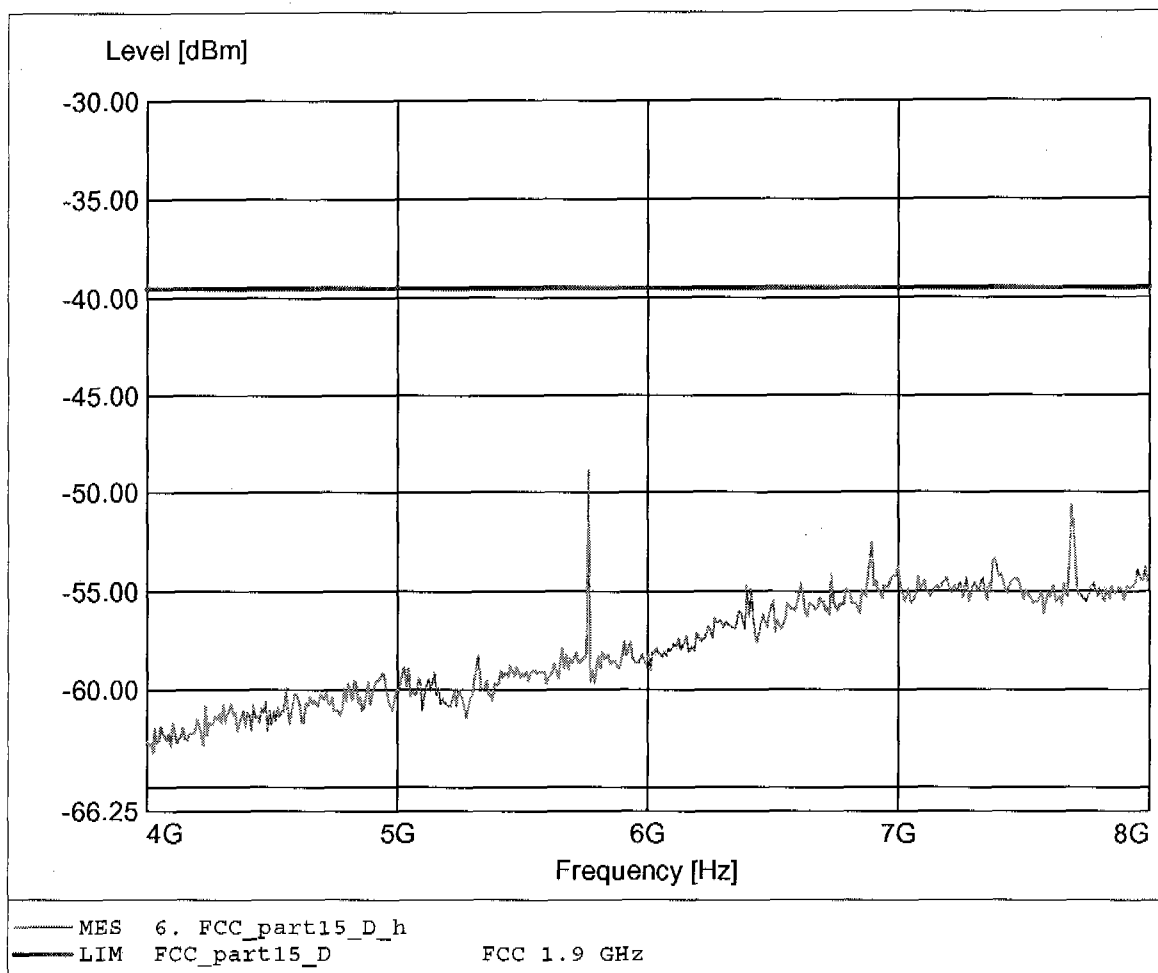

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 7.687GHz Pmax: -52.09dBm RBW: 1 MHz

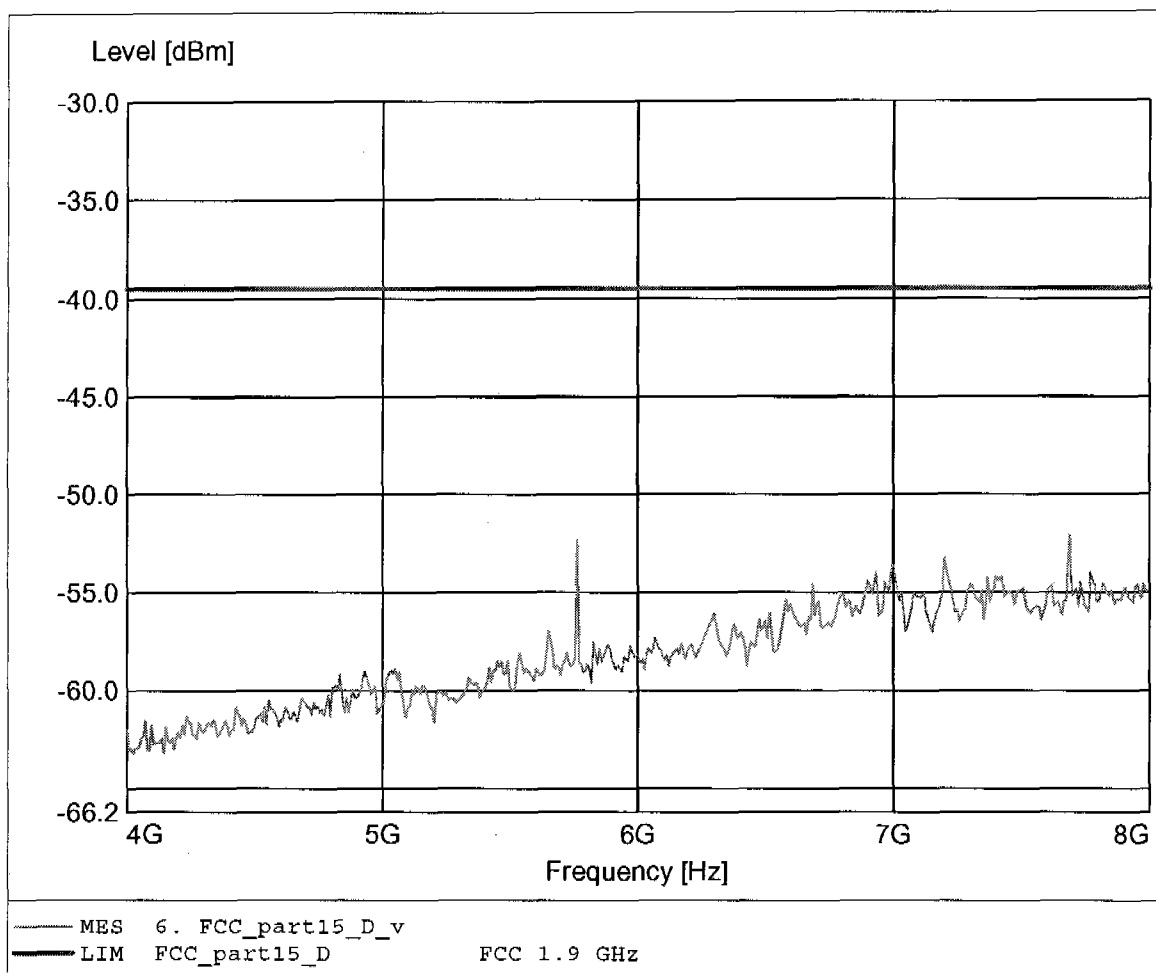

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.535GHz Pmax: -48.96dBm RBW: 1 MHz

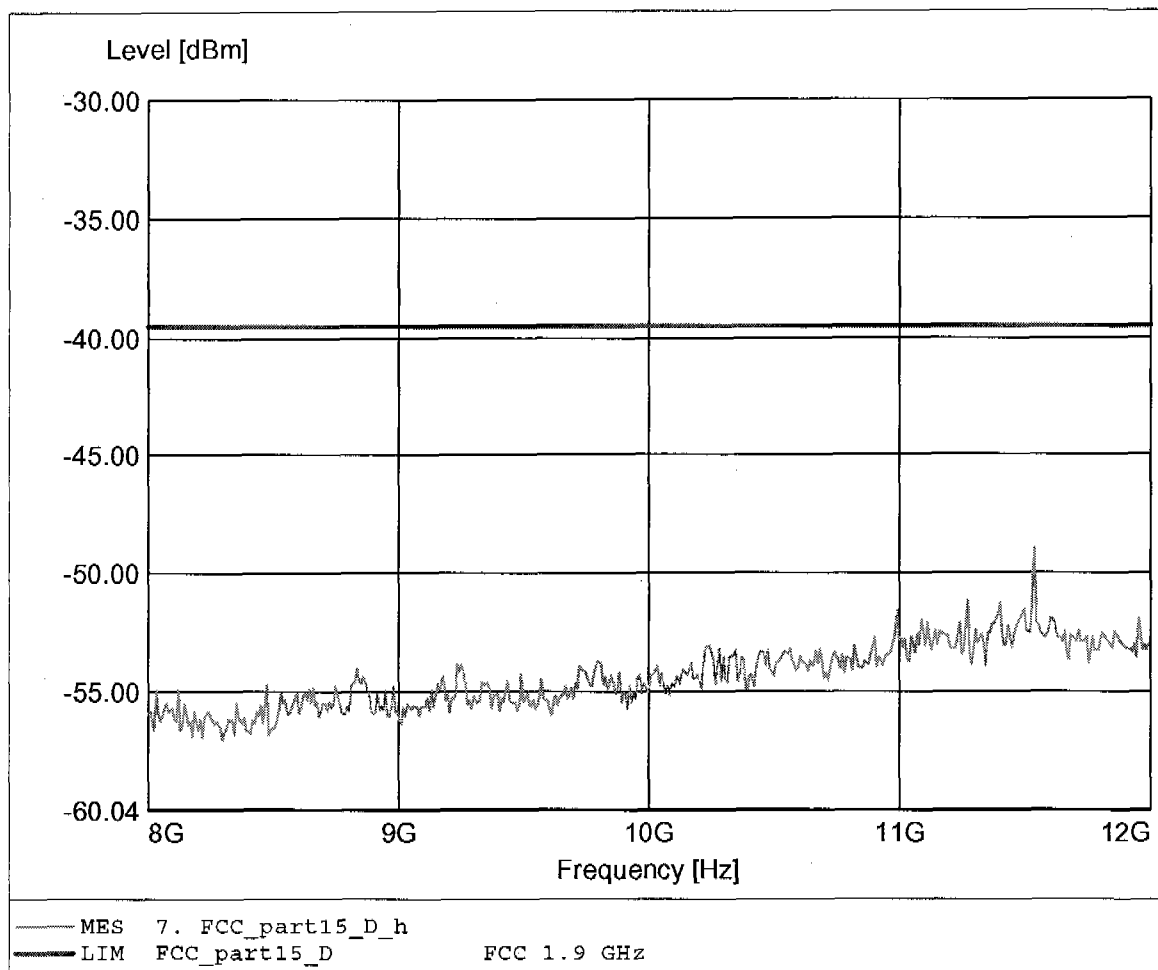

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.535GHz Pmax: -51.25dBm RBW: 1 MHz

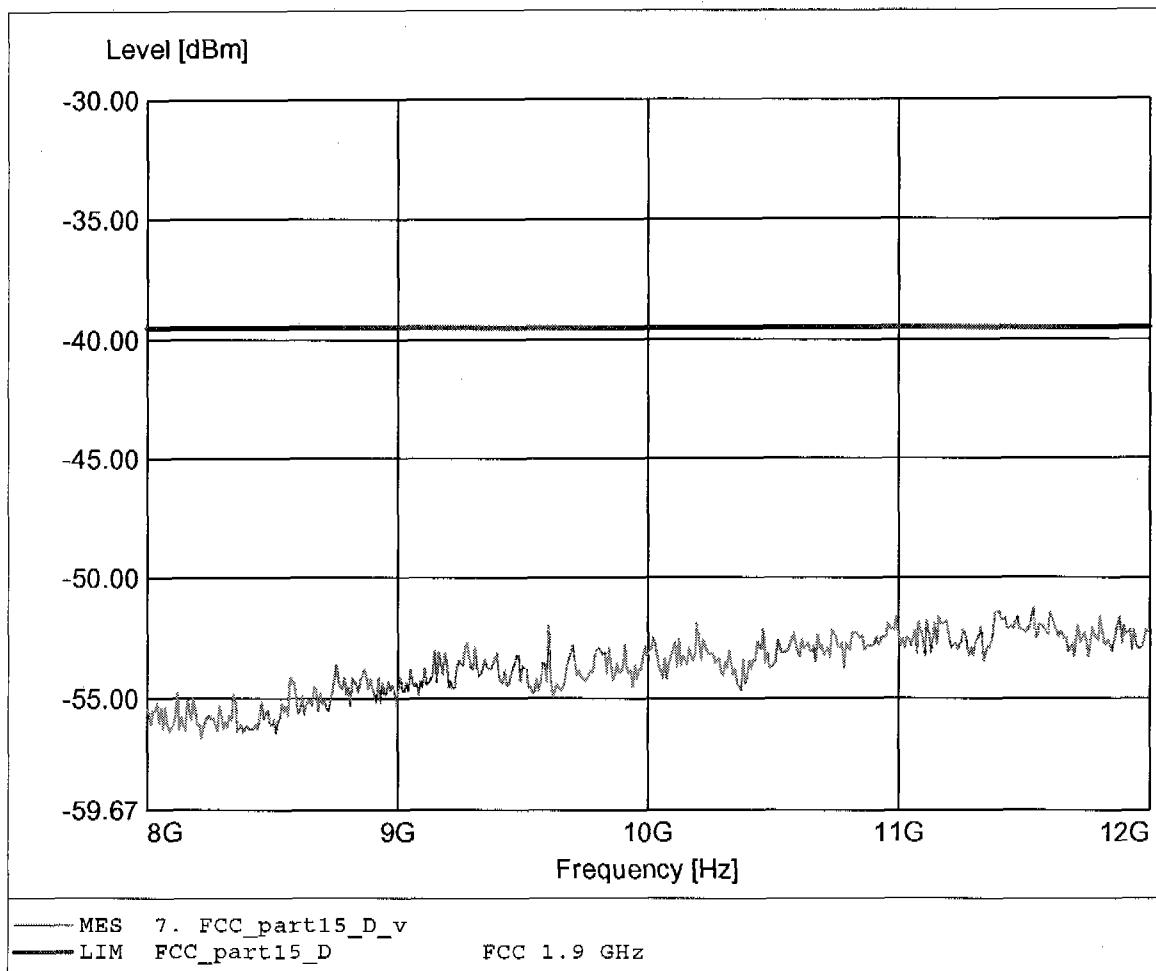

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 17.000GHz Pmax: -47.69dBm RBW: 1 MHz

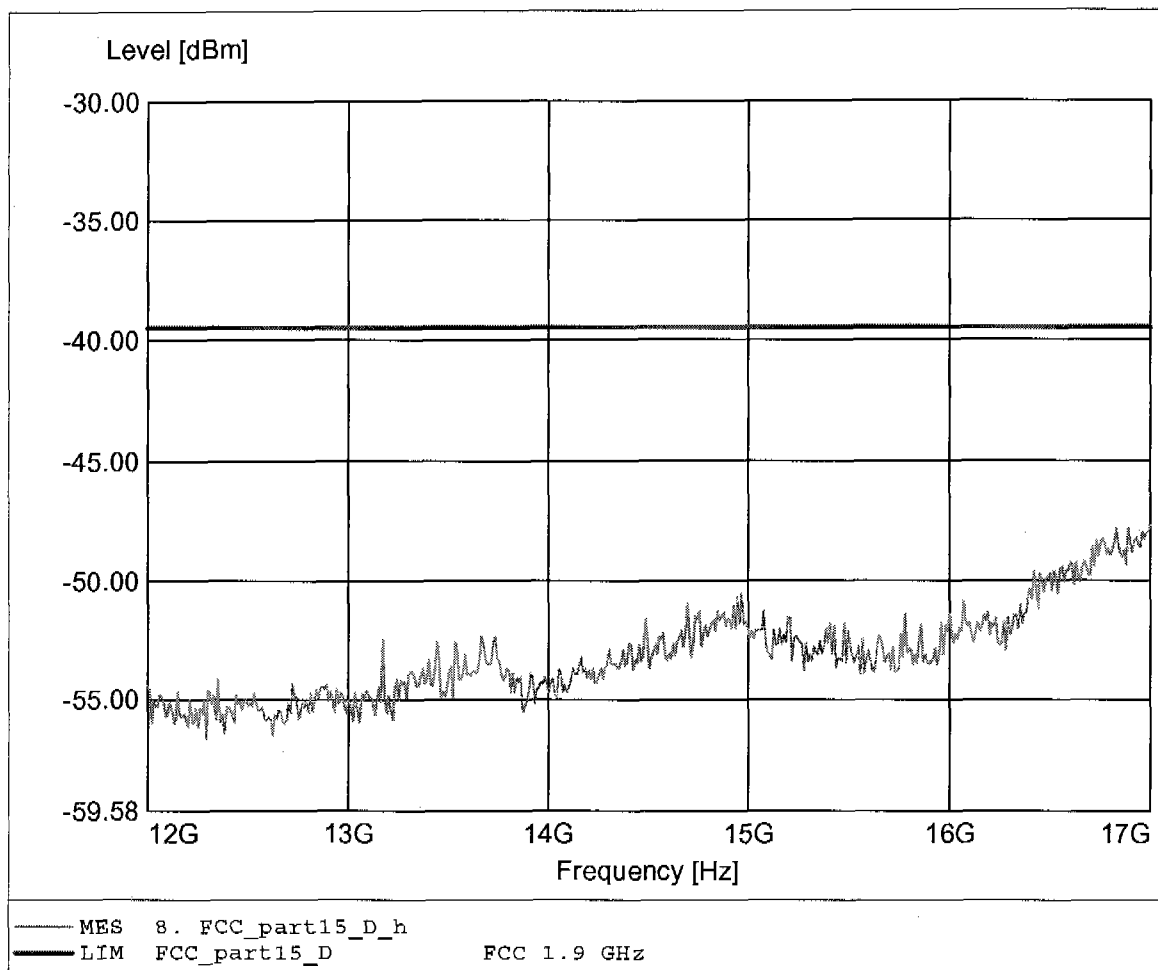

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.399GHz Pmax: -49.58dBm RBW: 1 MHz

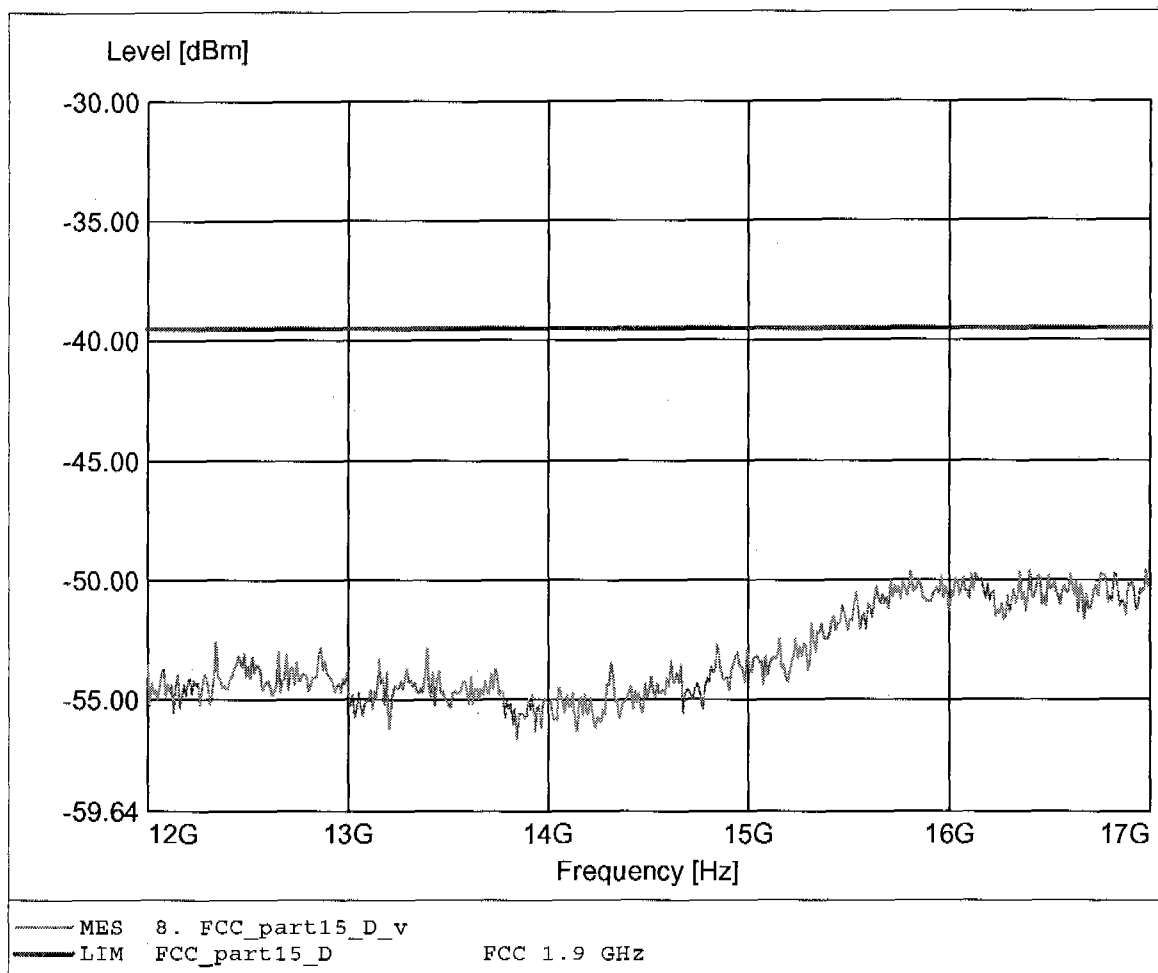

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq:19.874GHz Pmax:-46.55dBm RBW: 1 MHz

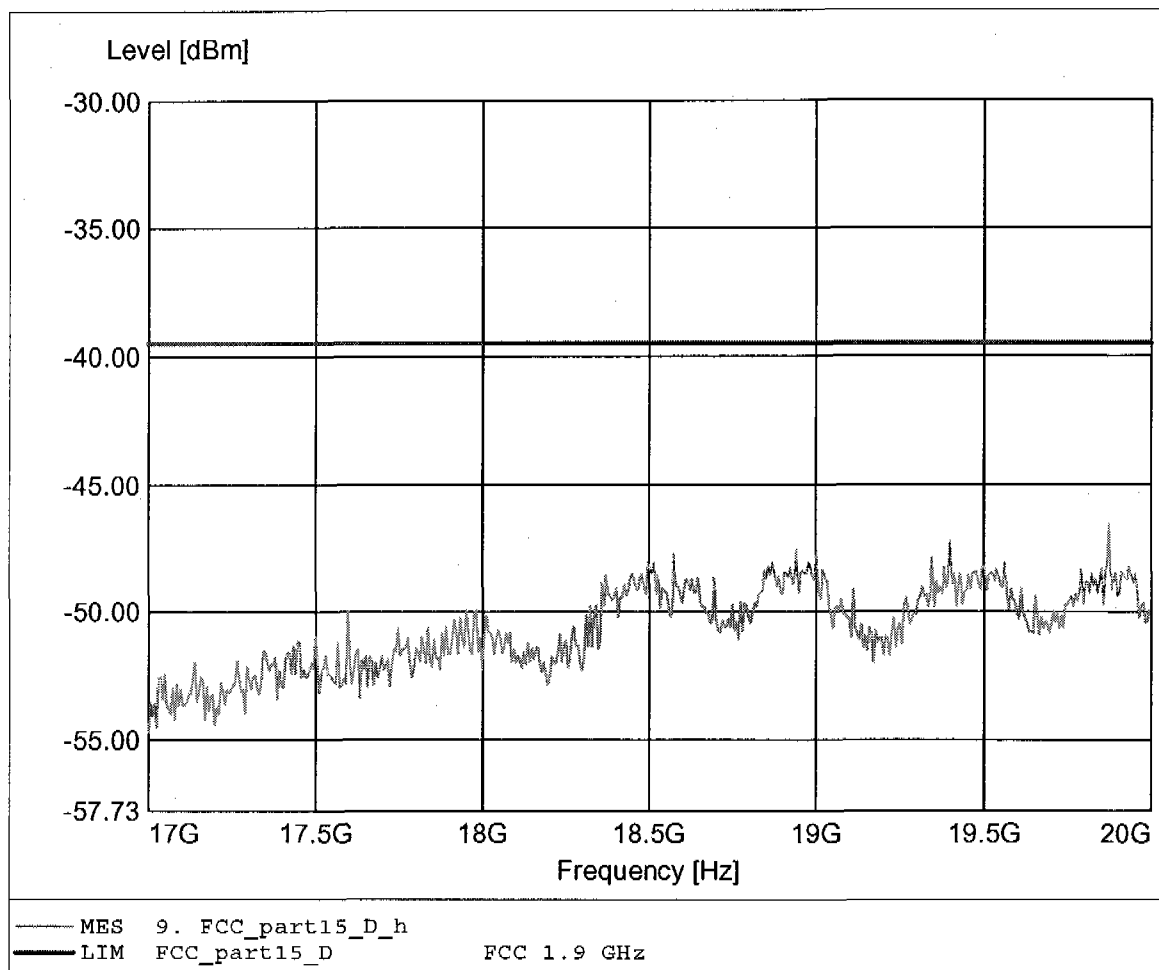

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1921.536 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 19.525GHz Pmax: -46.98dBm RBW: 1 MHz

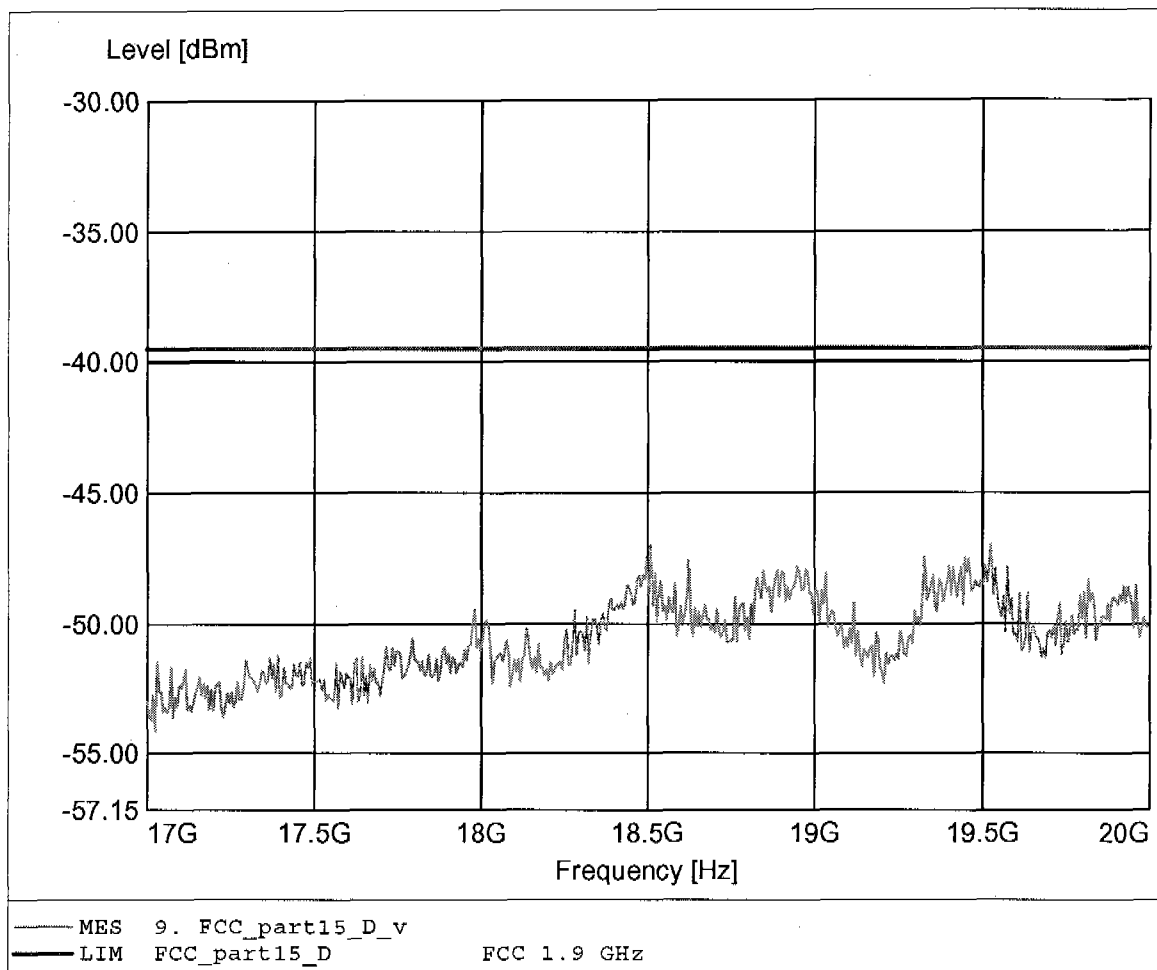

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:156.052MHz Pmax:-66.45dBm RBW: 100 kHz

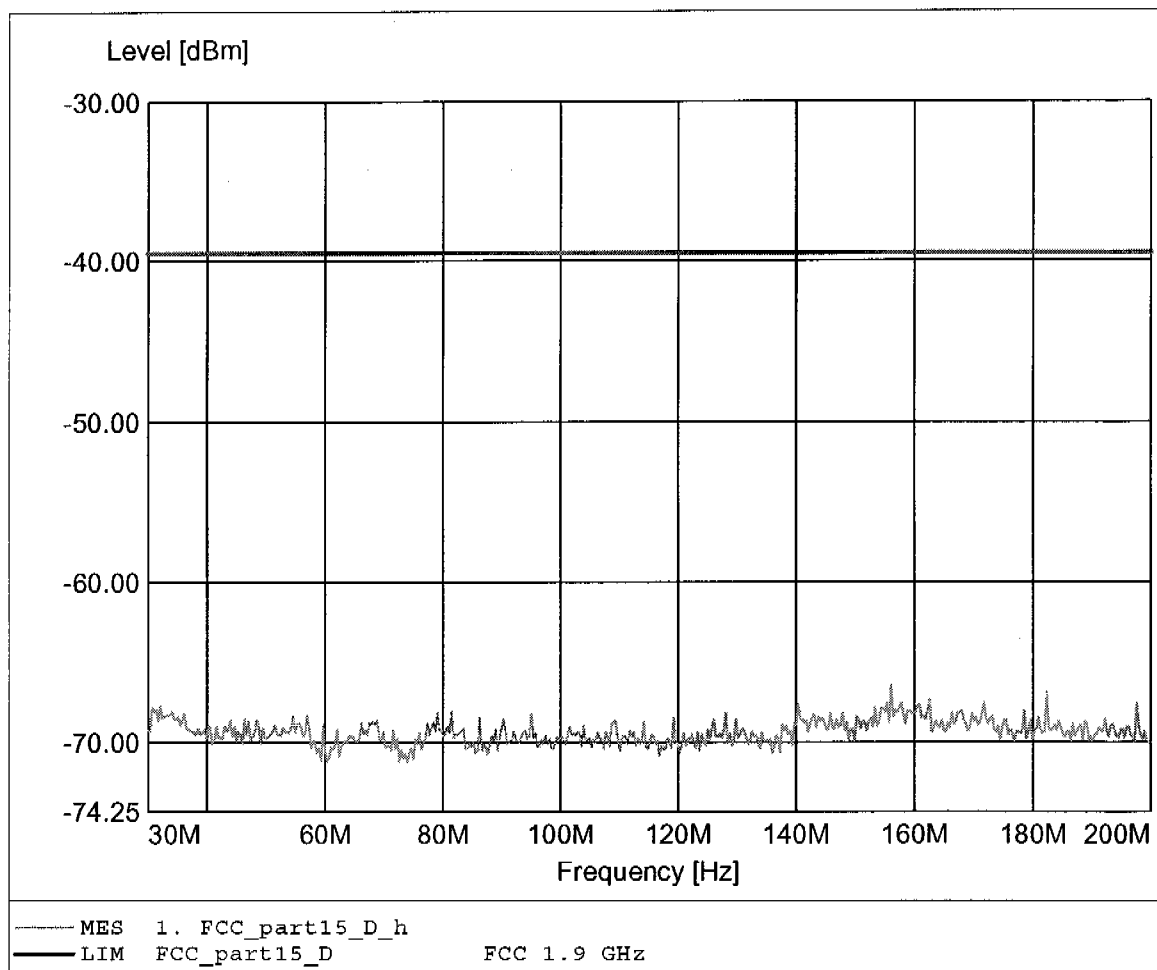

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:169.489MHz Pmax:-64.07dBm RBW: 100 kHz

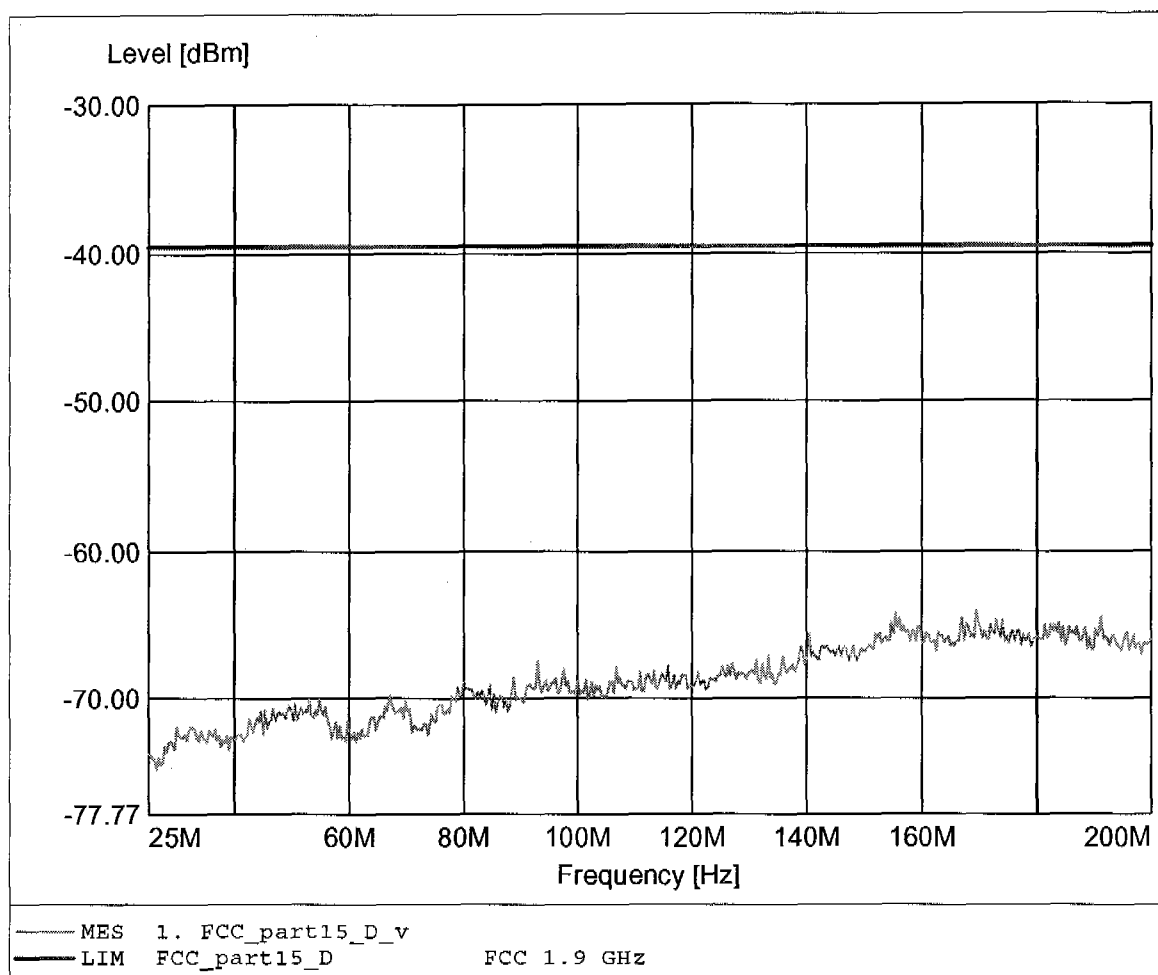

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 820.441MHz Pmax: -74.25dBm RBW: 100 kHz

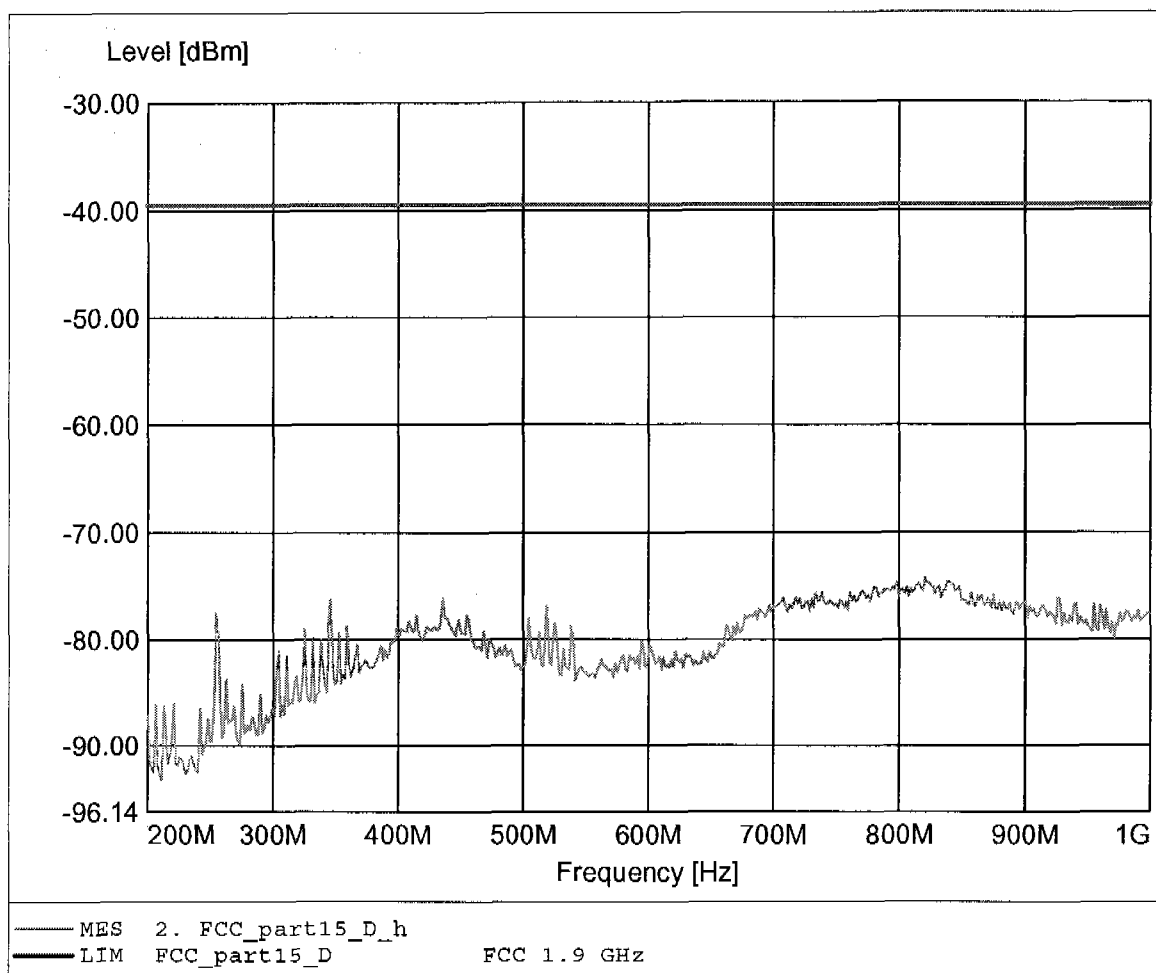

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 900.601MHz Pmax: -69.10dBm RBW: 100 kHz

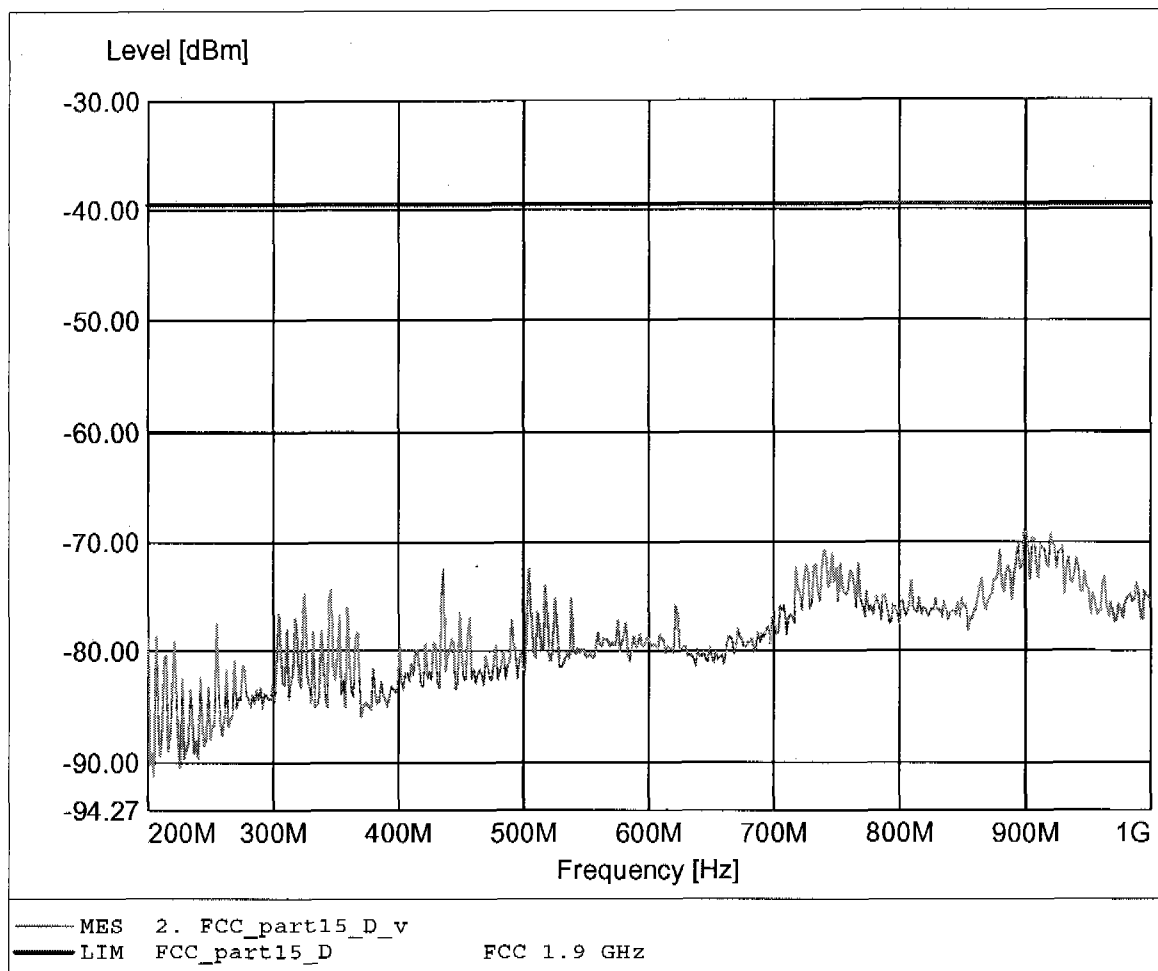

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.913GHz Pmax: -60.25dBm RBW: 1 MHz

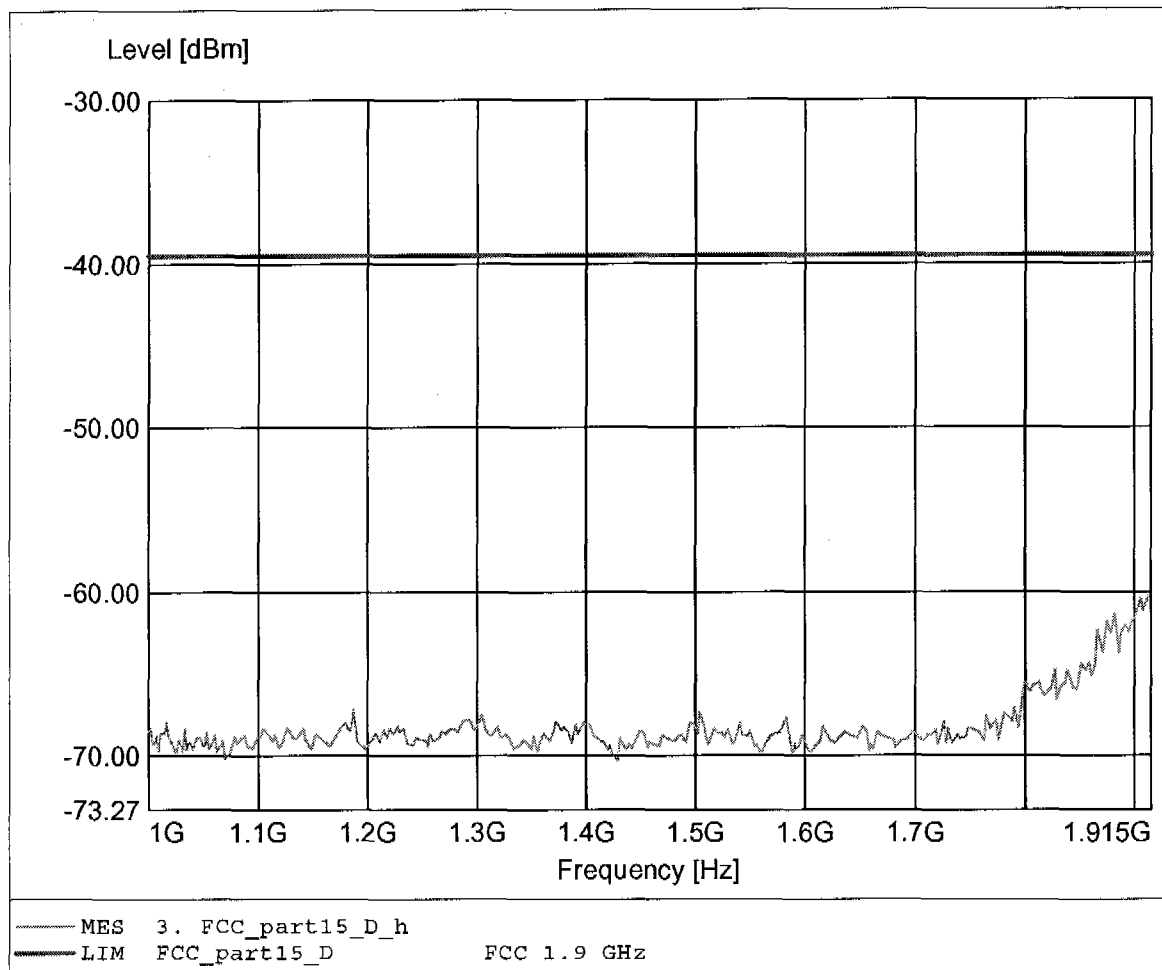

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.915GHz Pmax: -57.15dBm RBW: 1 MHz

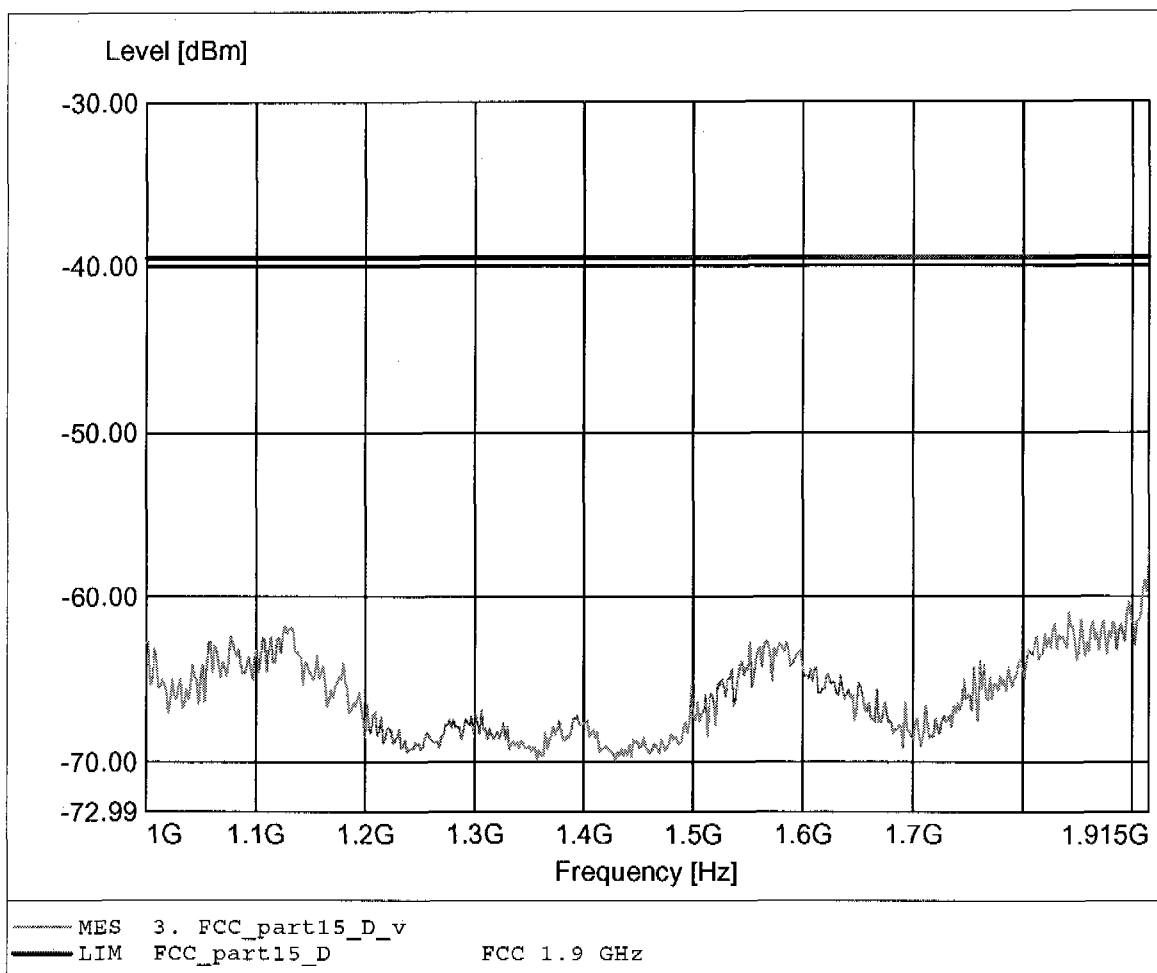

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.915GHz Pmax: -66.11dBm RBW: 10 kHz

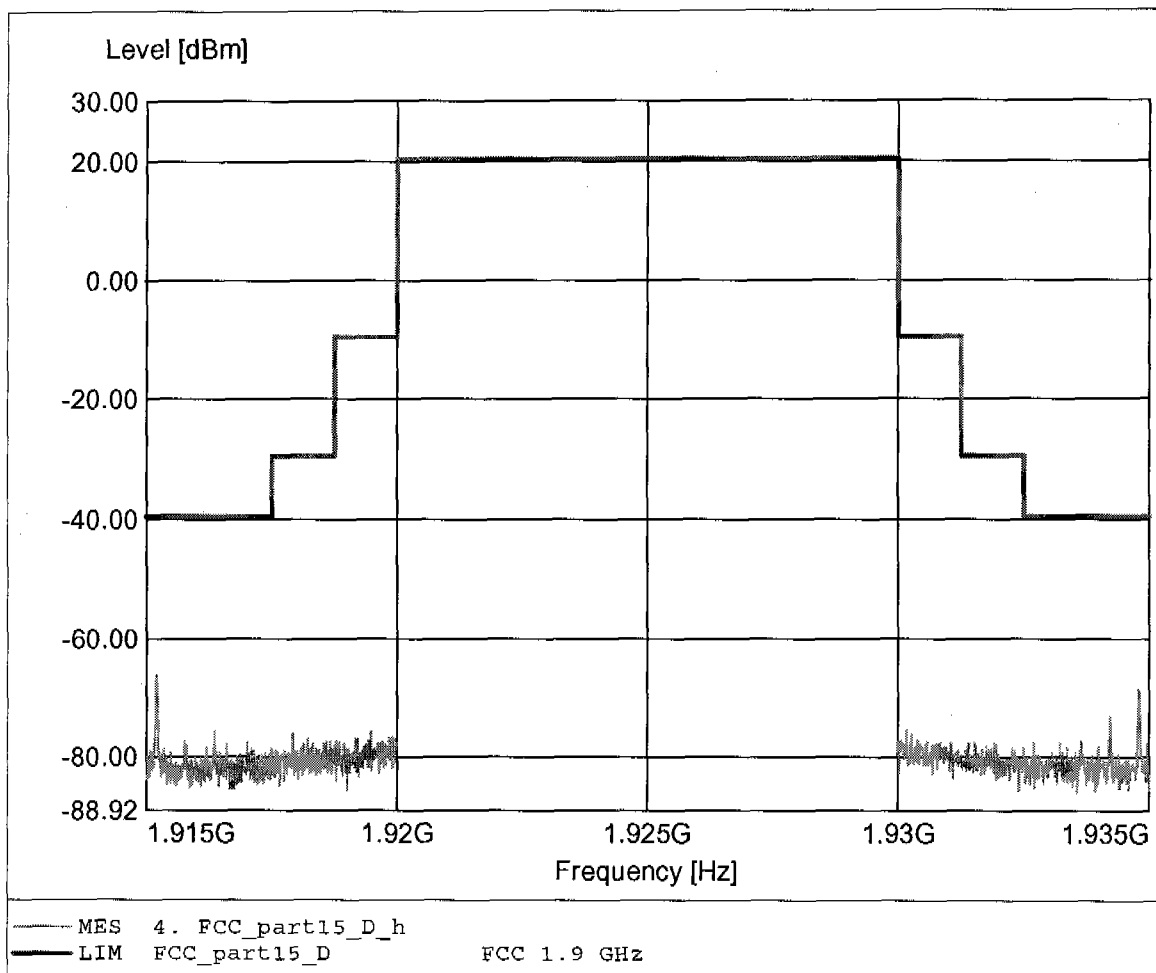

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.915GHz Pmax:-65.12dBm RBW:10 kHz

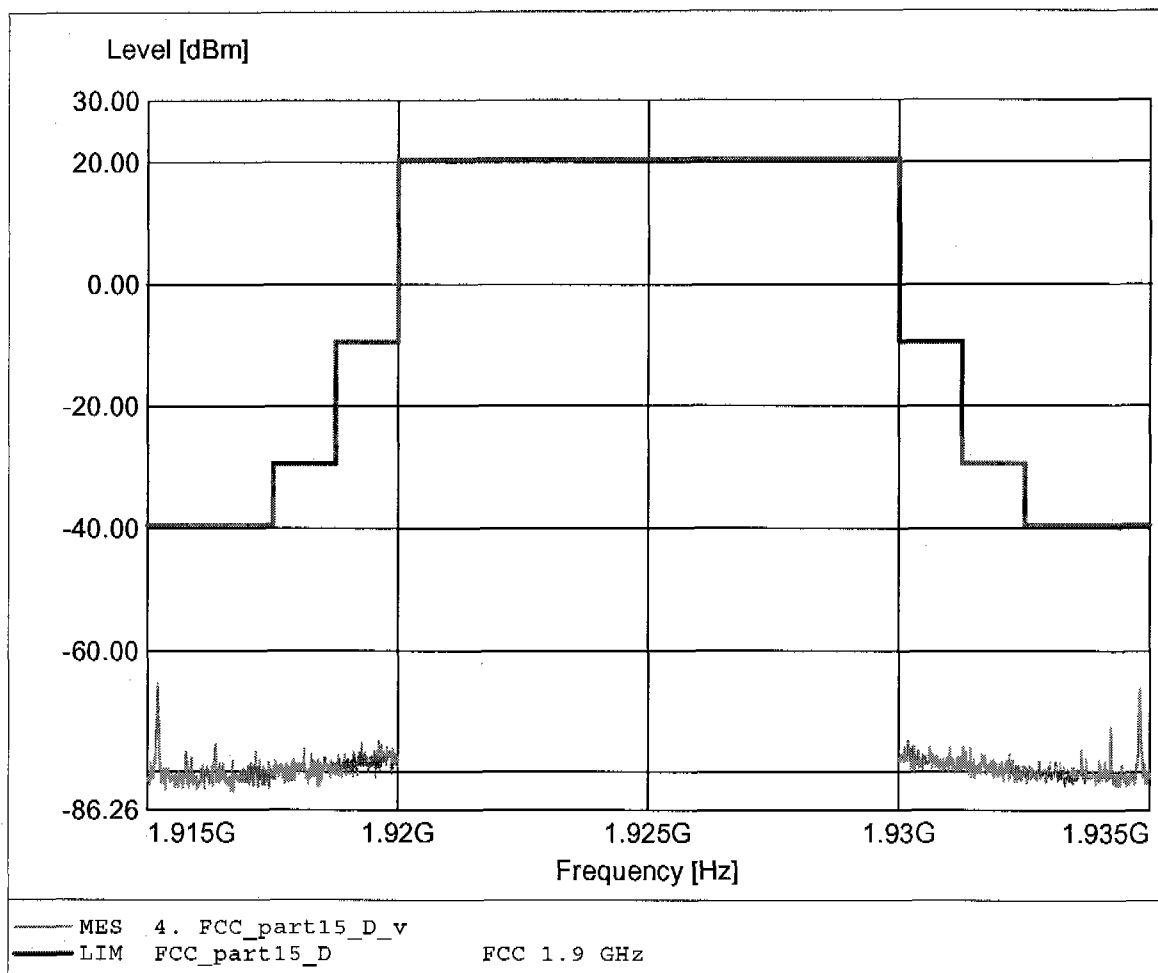

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.851GHz Pmax: -48.55dBm RBW: 1 MHz

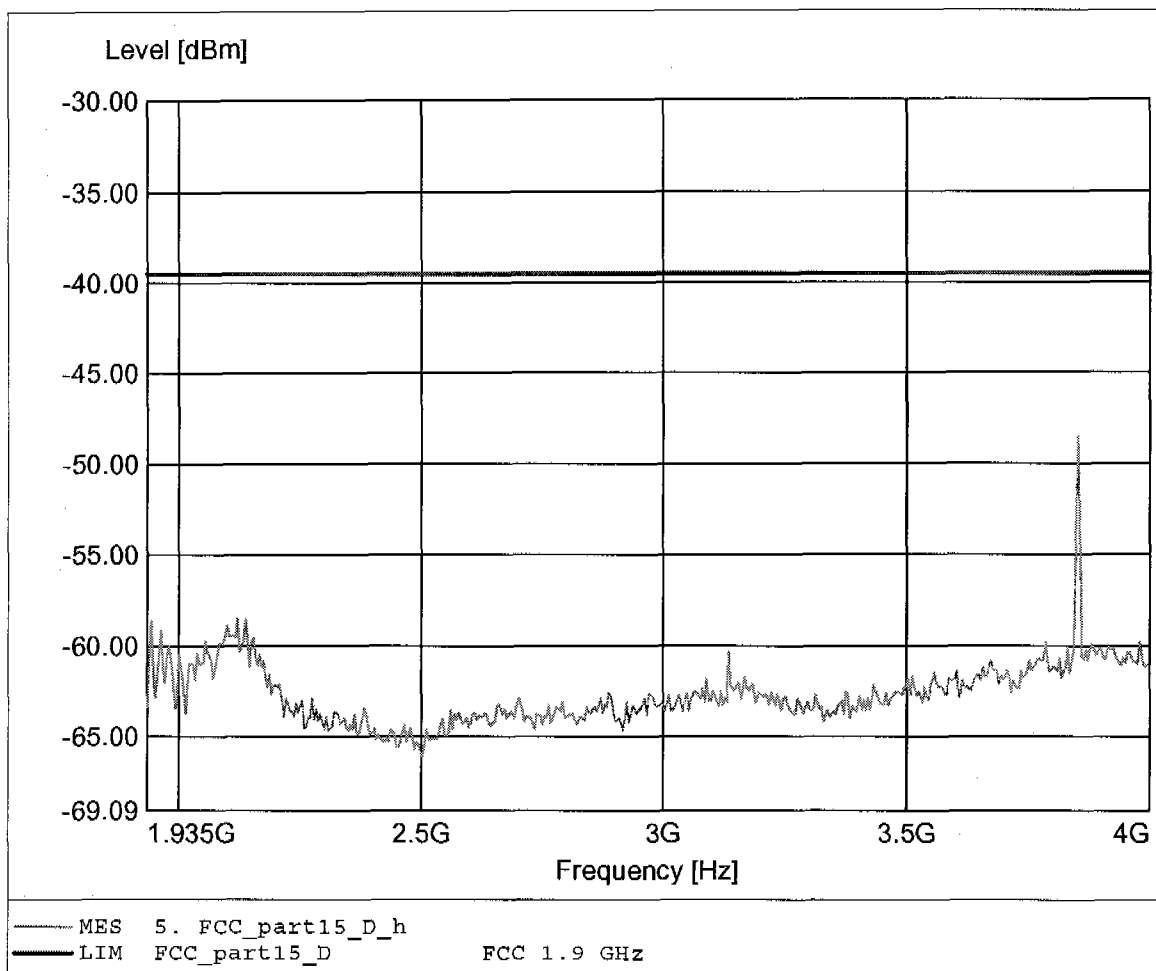

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.851GHz Pmax: -47.34dBm RBW: 1 MHz

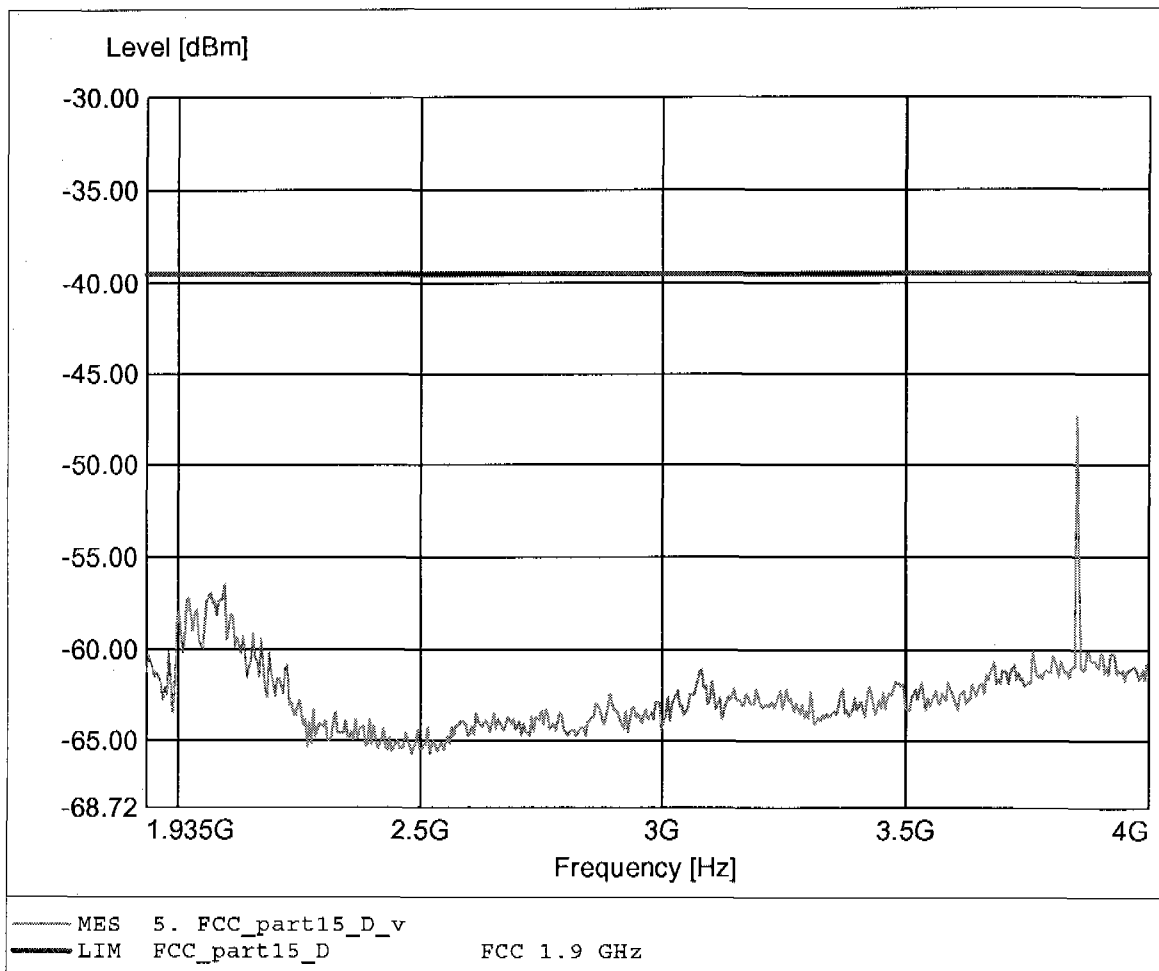

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 7.703GHz Pmax: -46.14dBm RBW: 1 MHz

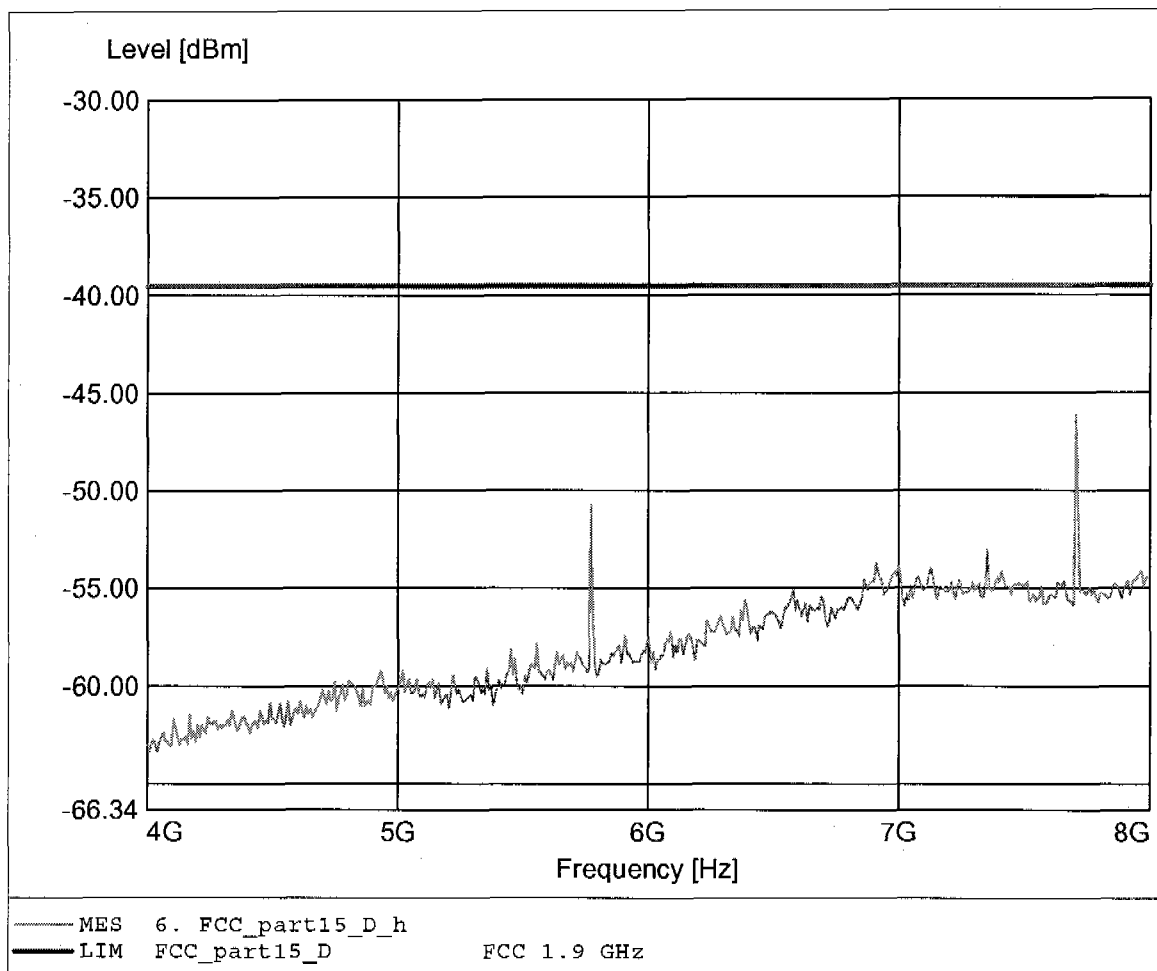

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 7.703GHz Pmax: -50.75dBm RBW: 1 MHz

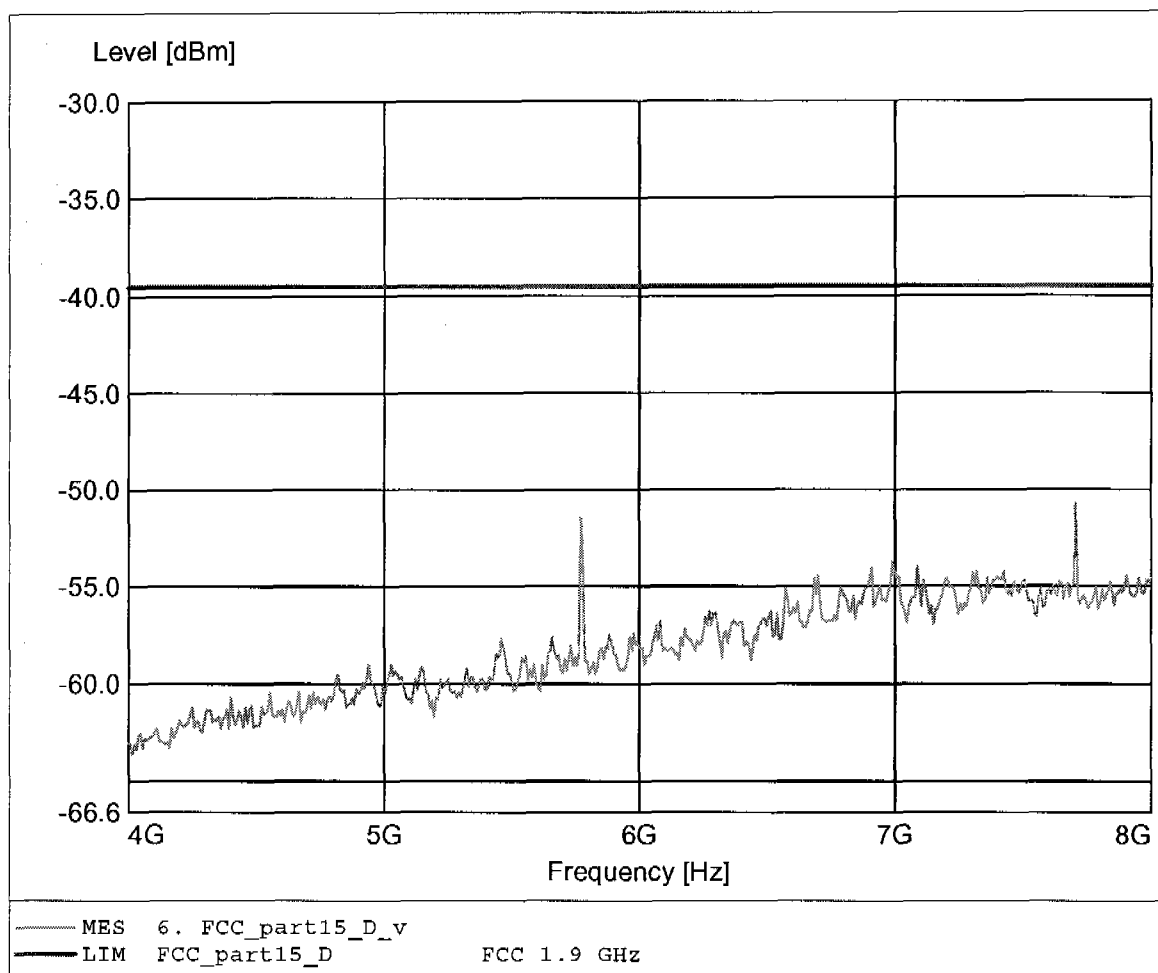

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.503GHz Pmax: -50.37dBm RBW: 1 MHz

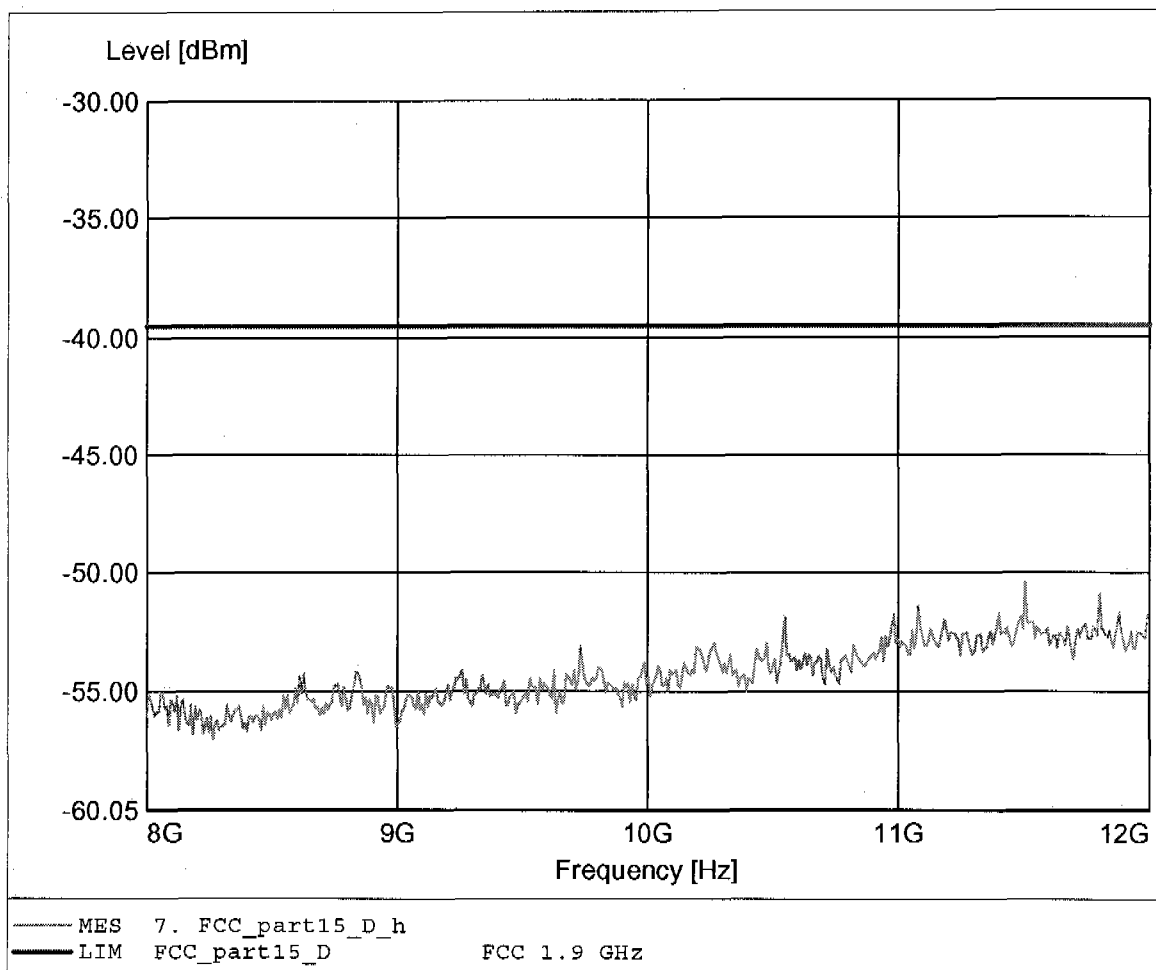

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.415GHz Pmax: -51.08dBm RBW: 1 MHz

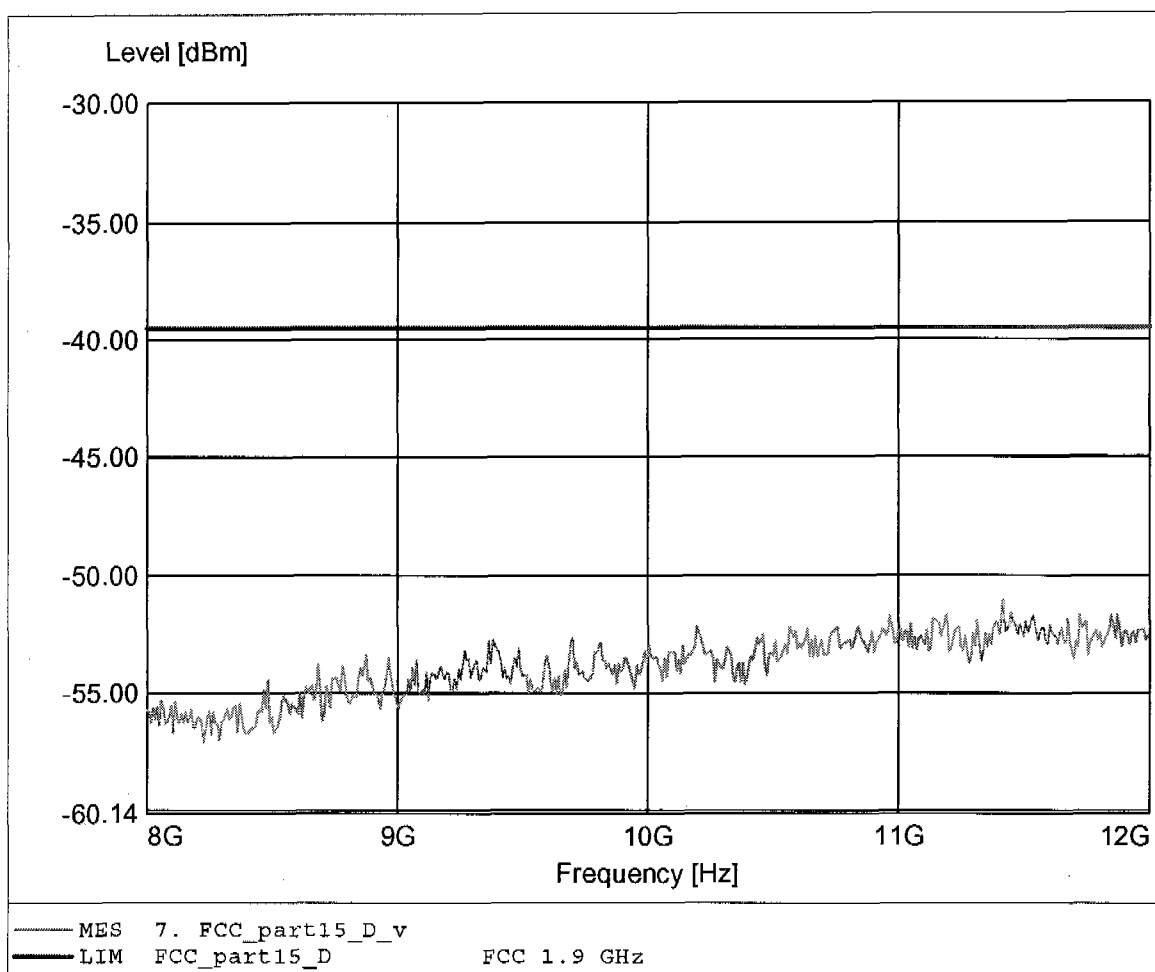

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.990GHz Pmax: -47.27dBm RBW: 1 MHz

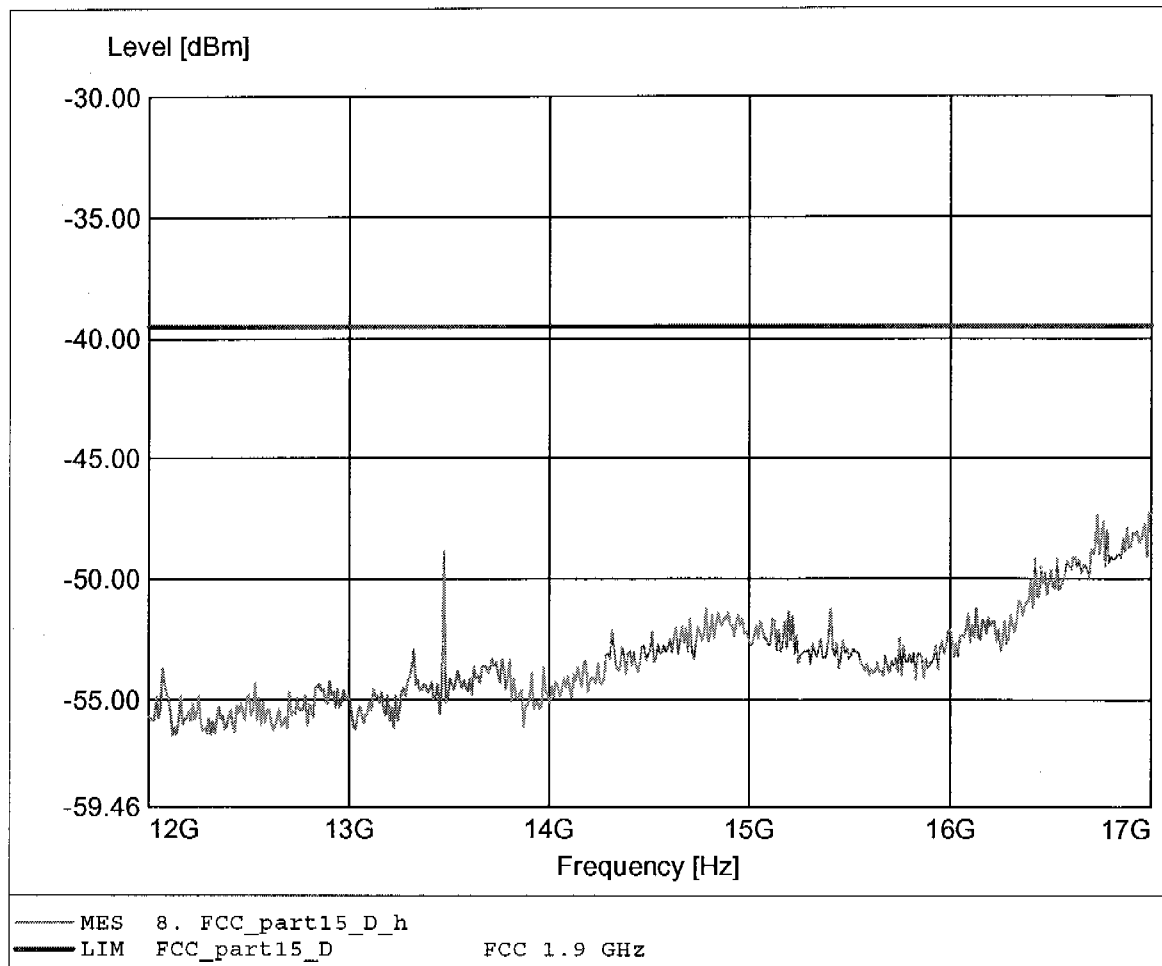

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.369GHz Pmax: -48.99dBm RBW: 1 MHz

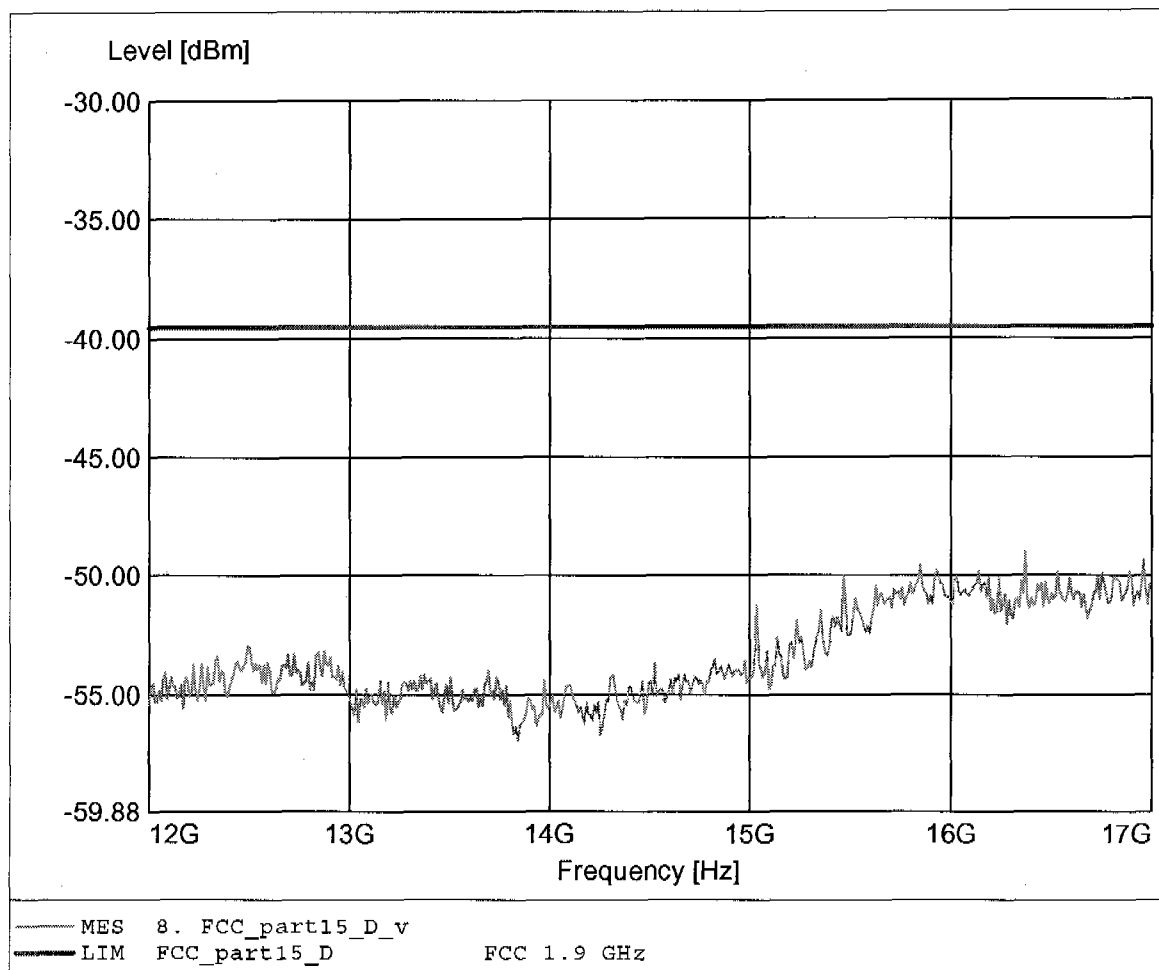

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 18.954GHz Pmax: -46.34dBm RBW: 1 MHz

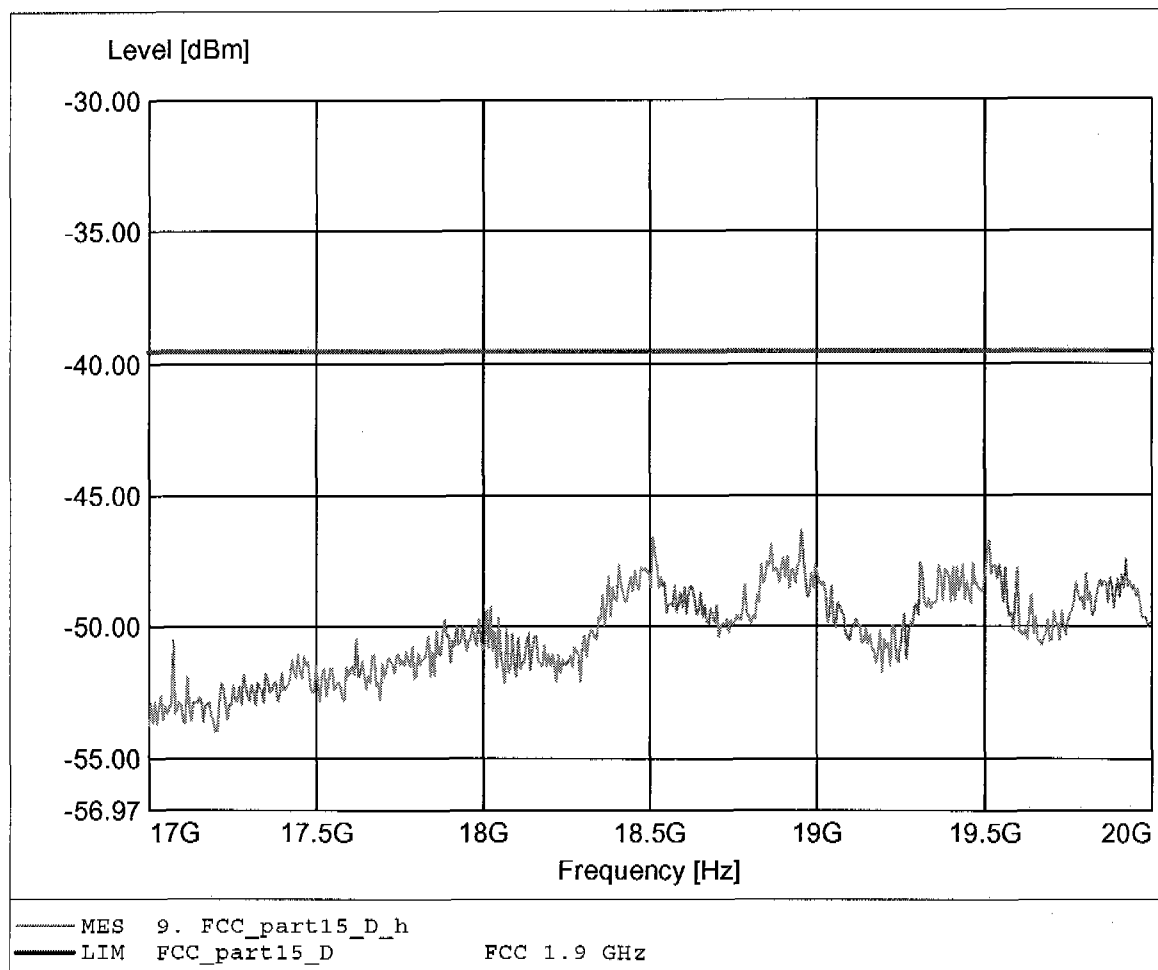

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1924.992 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq:19.483GHz Pmax:-46.80dBm RBW: 1 MHz

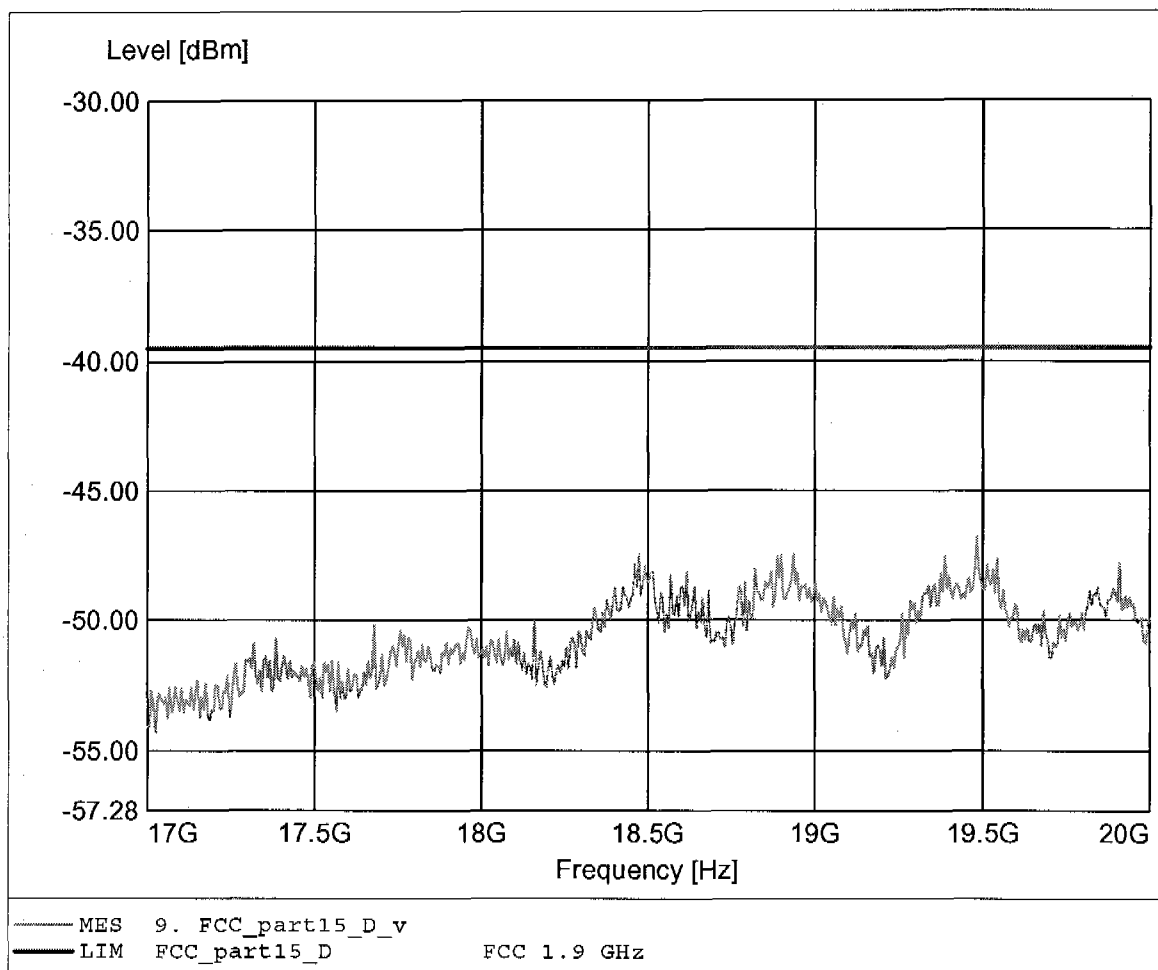

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq: 170.361 MHz Pmax: -66.44 dBm RBW: 100 kHz

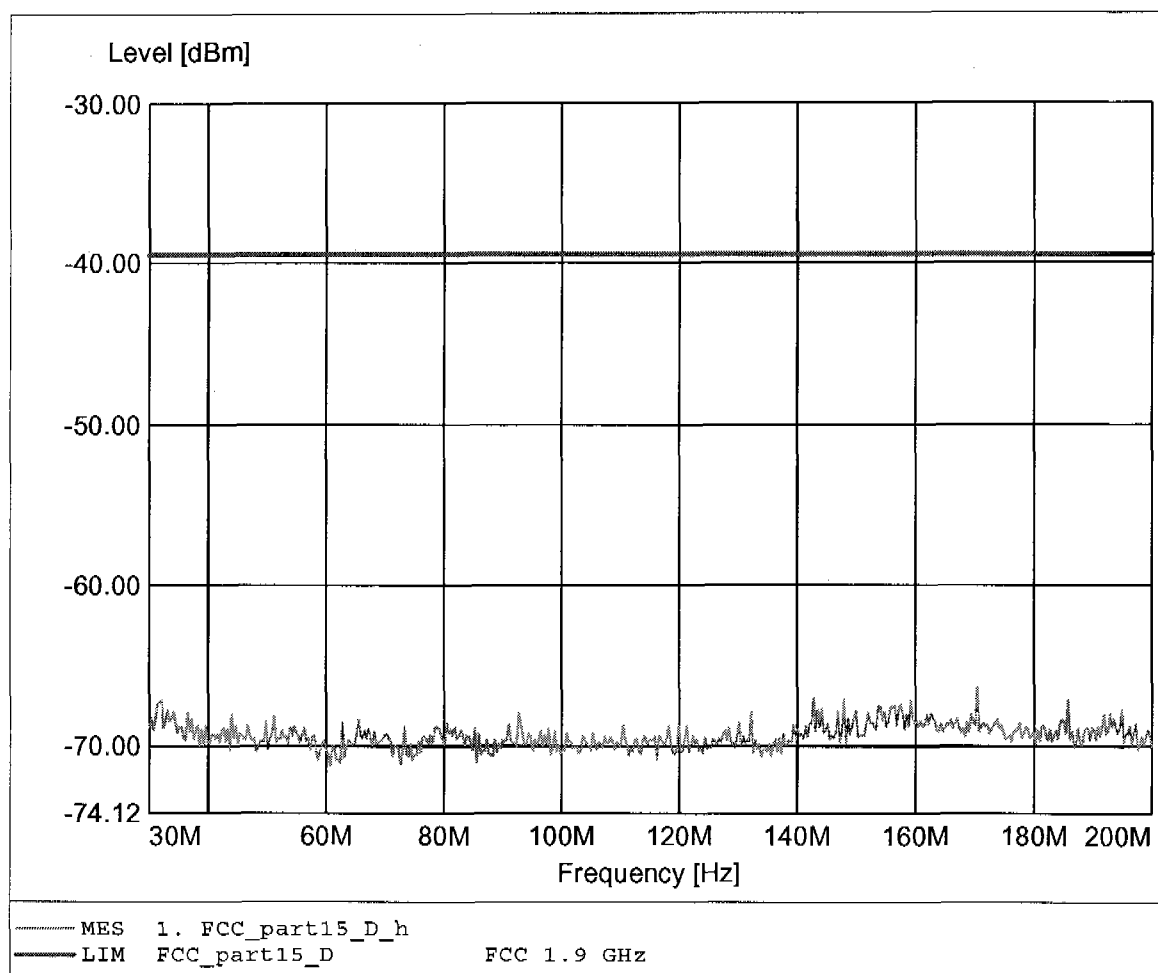

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HK 116,
Comment 2: Freq:168.788MHz Pmax:-64.13dBm RBW: 100 kHz

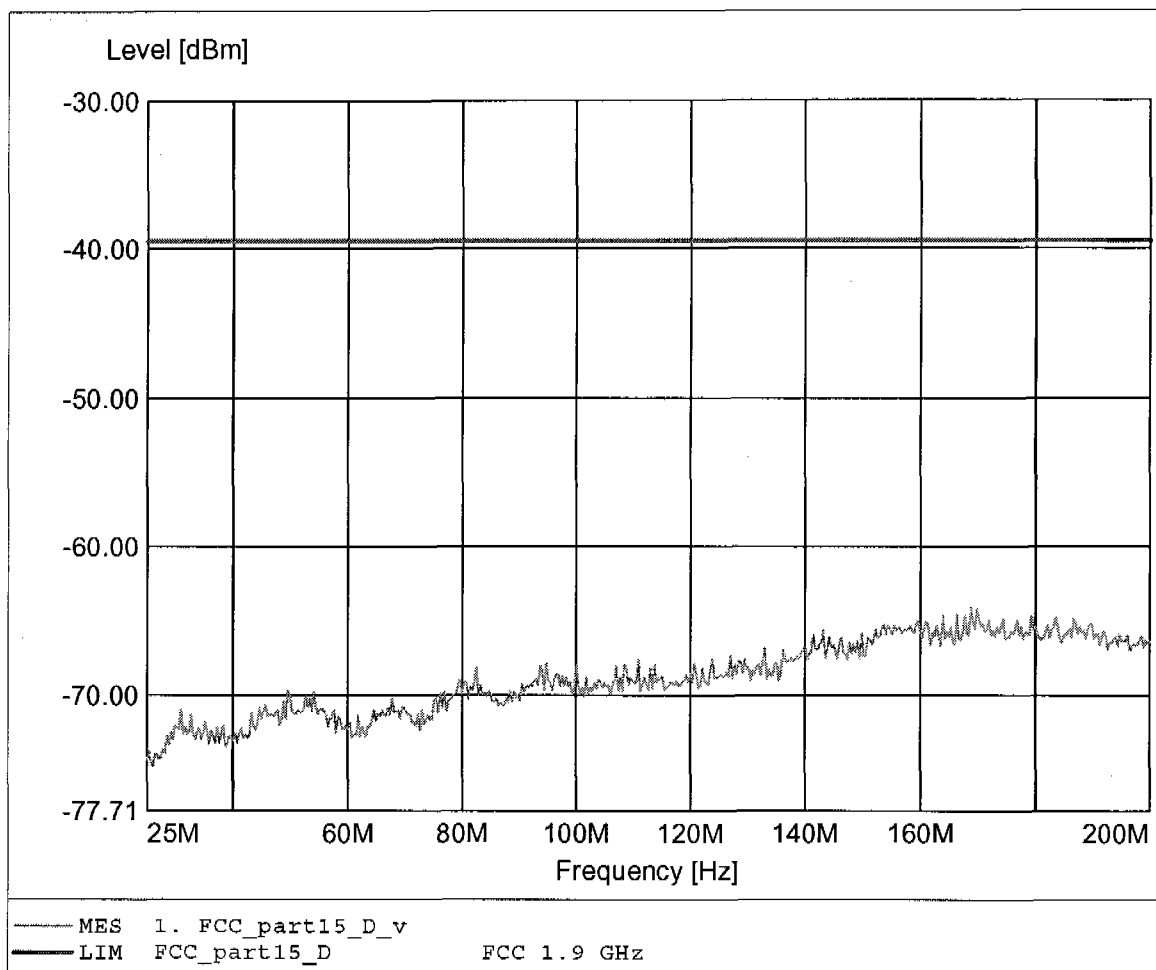

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 841.283MHz Pmax:-74.18dBm RBW: 100 kHz

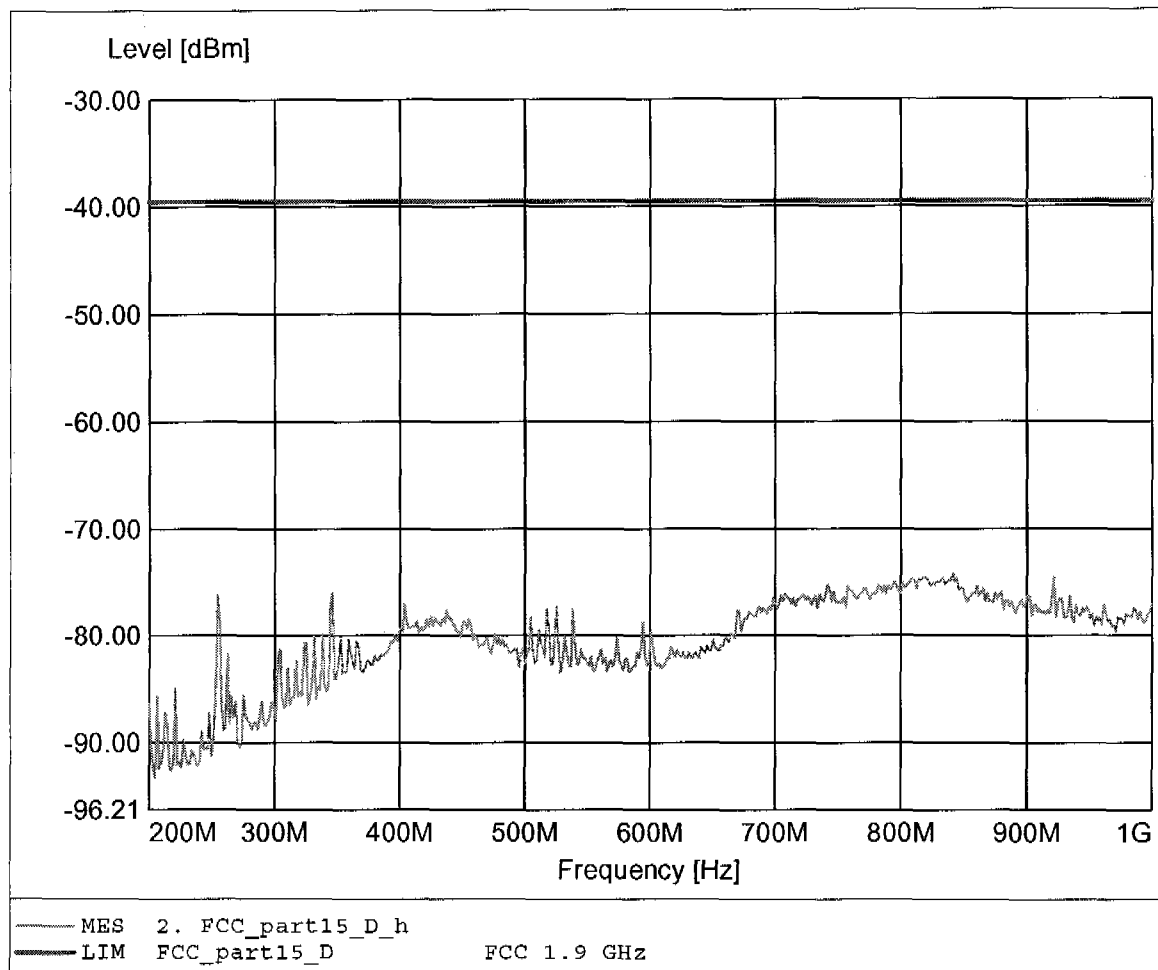

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 223, ampl.
Comment 2: Freq: 898.998MHz Pmax: -68.80dBm RBW: 100 kHz

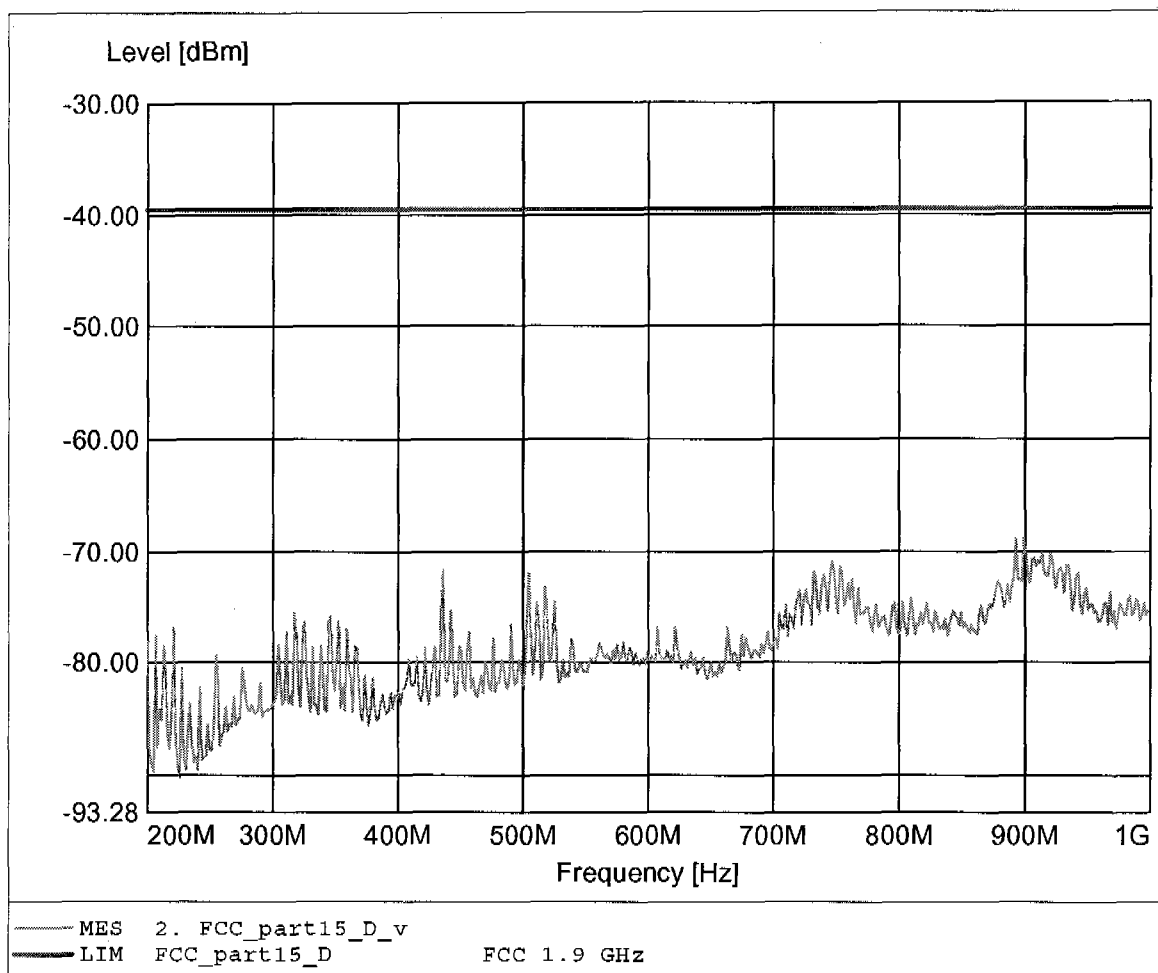

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.913GHz Pmax: -59.97dBm RBW: 1 MHz

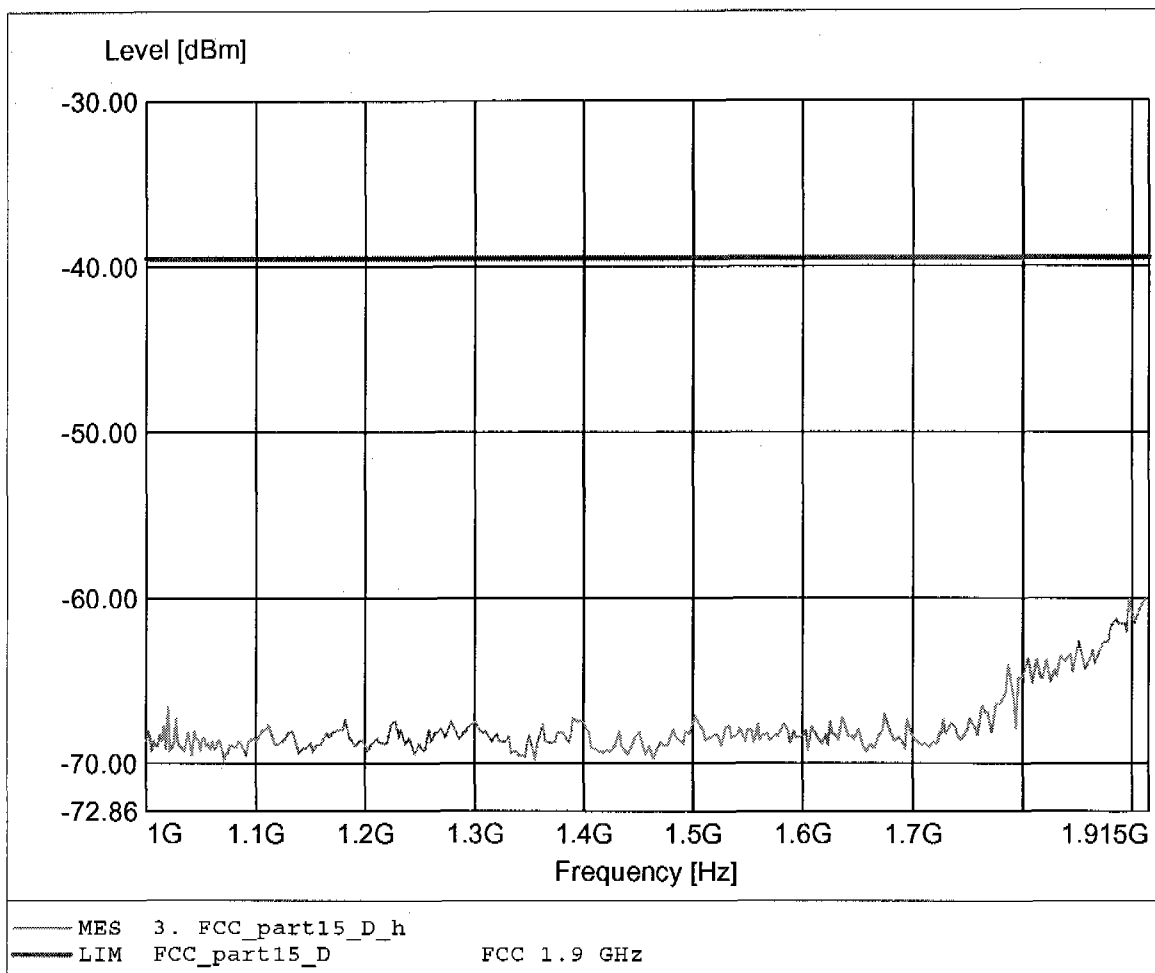

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.908GHz Pmax: -59.08dBm RBW: 1 MHz

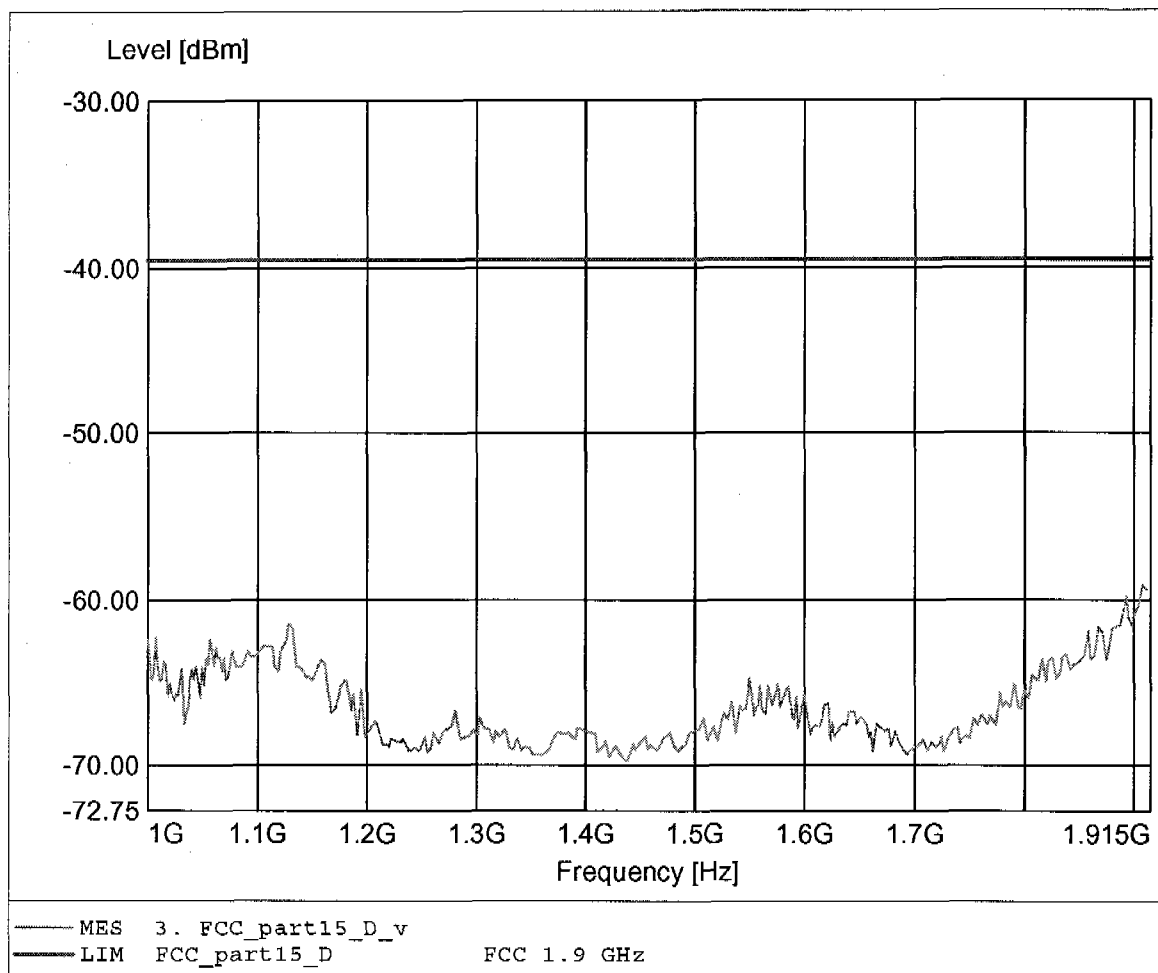

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq:1.930GHz Pmax:-54.89dBm RBW:10 kHz

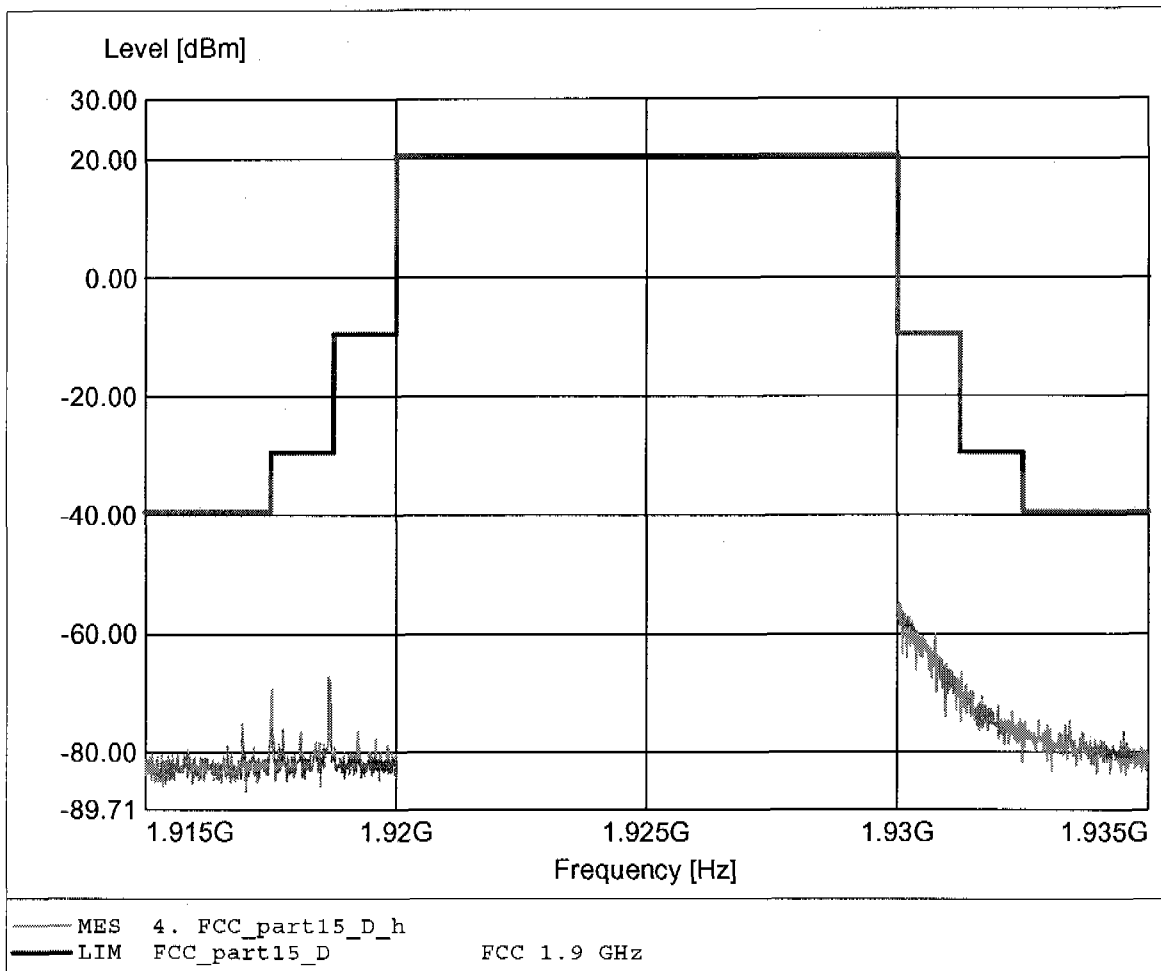

Spurious emissions under normal conditions

FCC PART 15, SUBPART D (ANSI C63.17-1998, Subclause 6.1.6.3)


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 1.930GHz Pmax: -52.93dBm RBW: 10 kHz

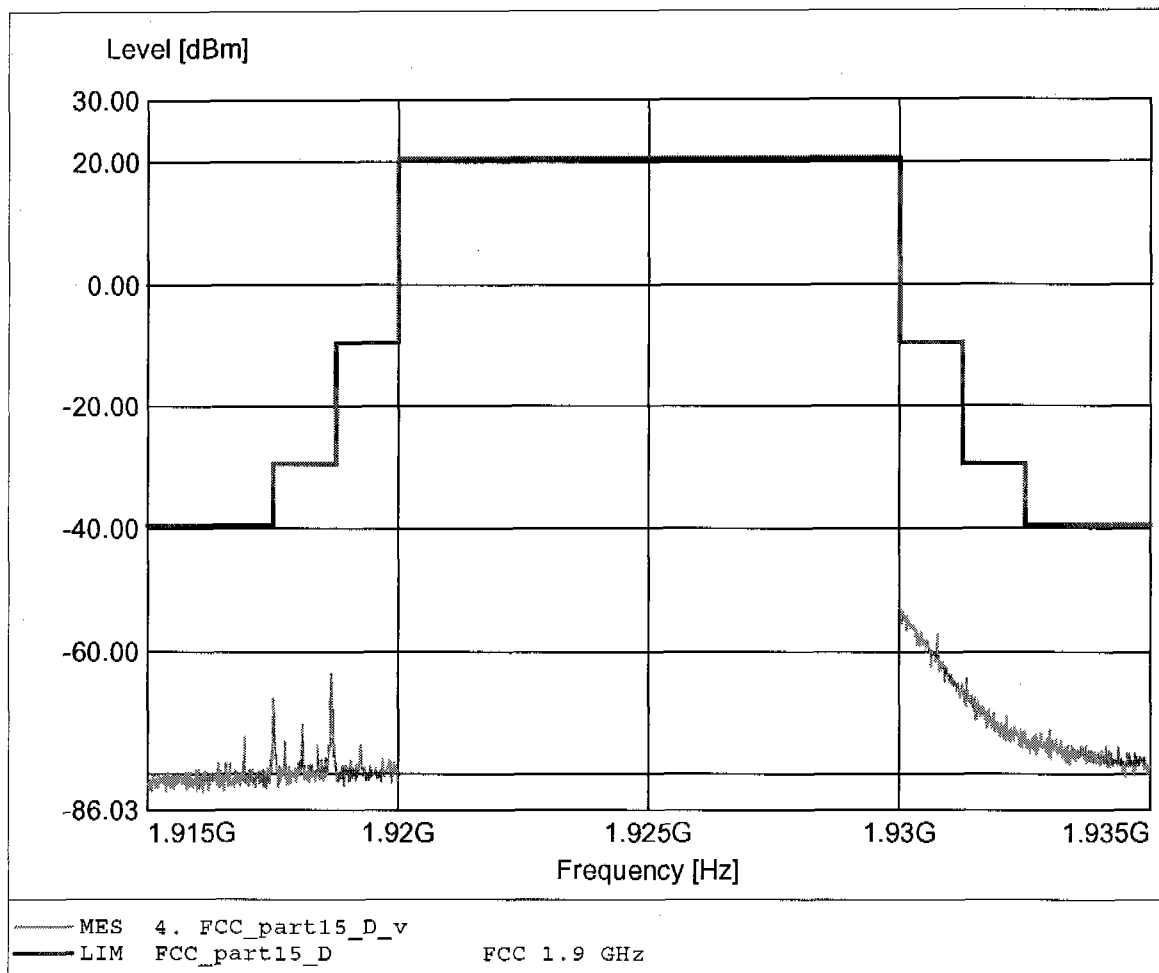

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.859GHz Pmax: -50.64dBm RBW: 1 MHz

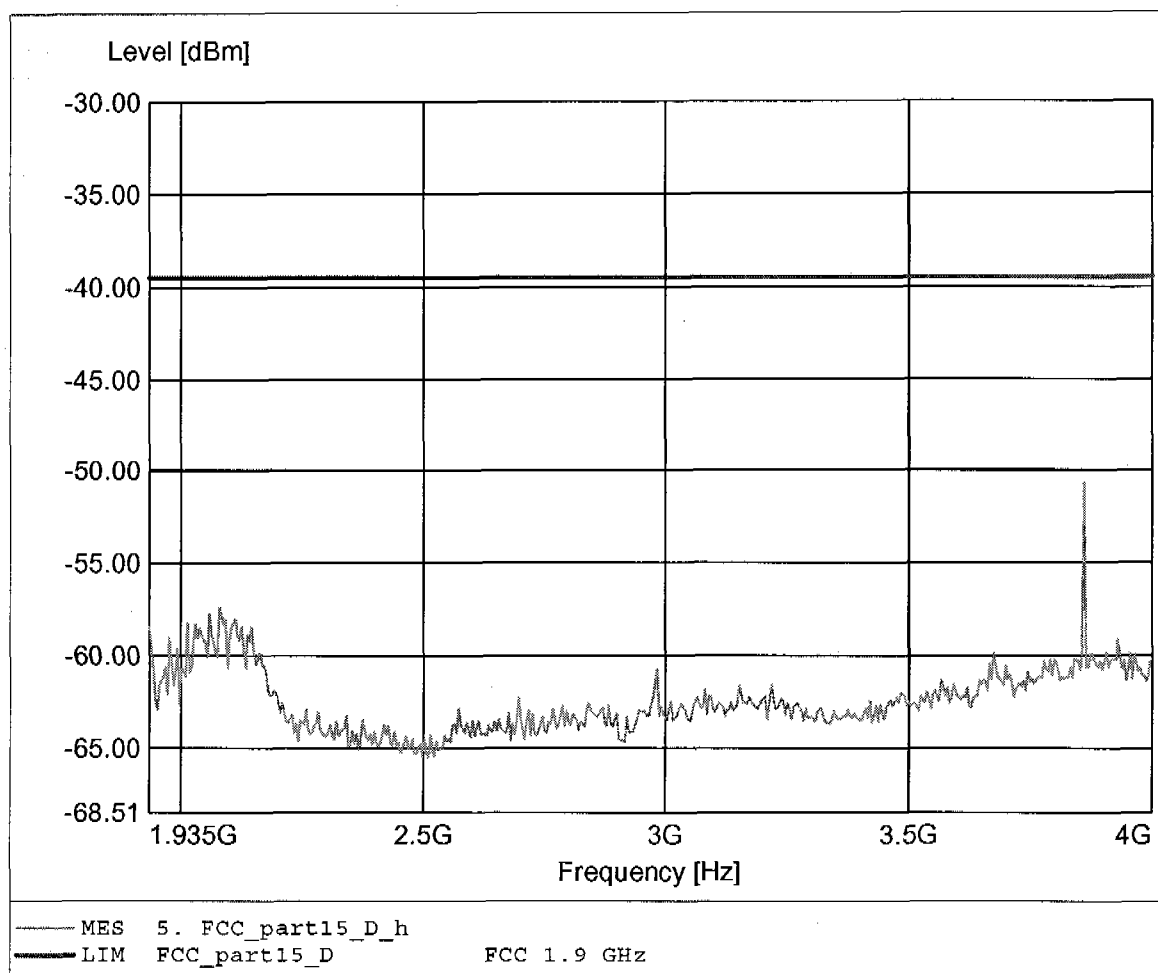

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, ampl.
Comment 2: Freq: 3.859GHz Pmax: -49.83dBm RBW: 1 MHz

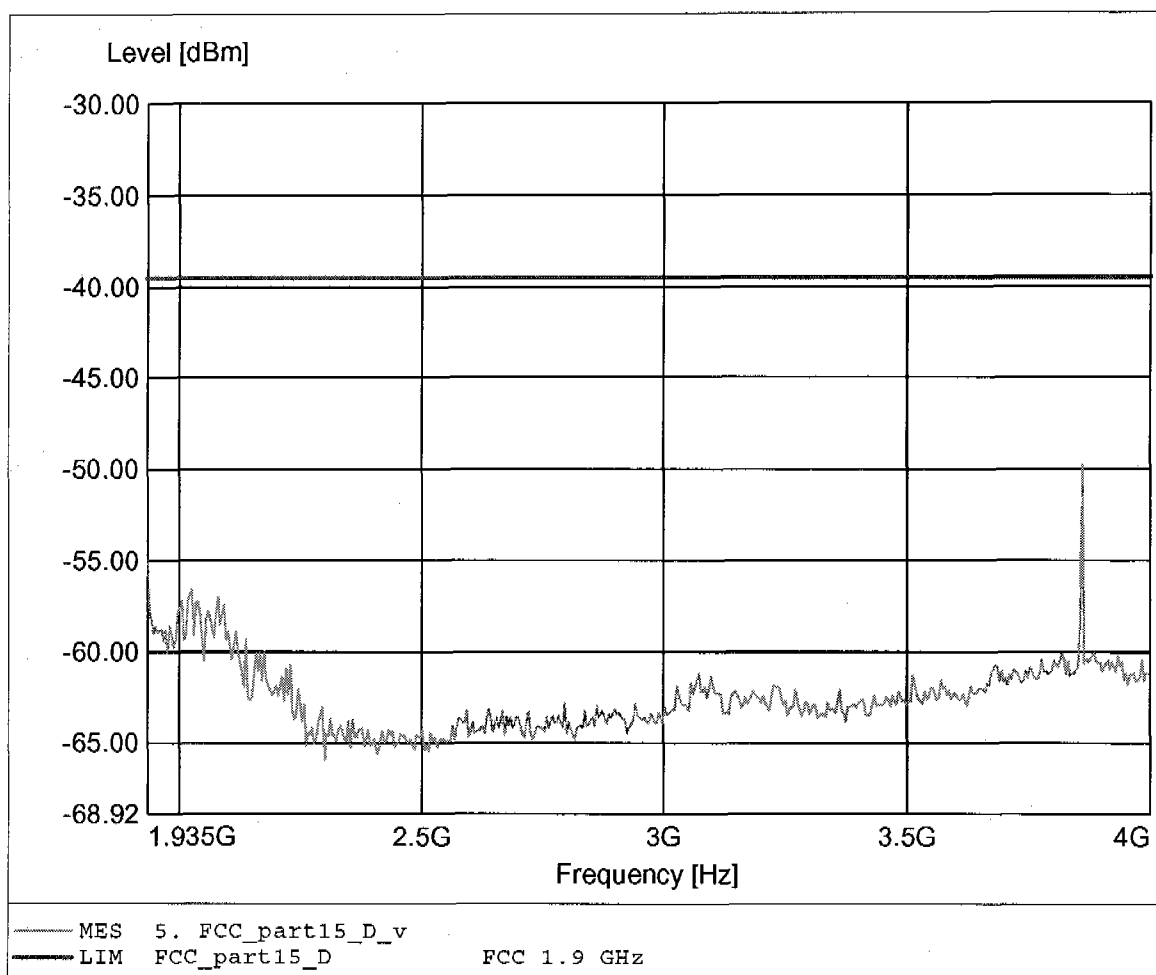

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 7.719GHz Pmax: -47.28dBm RBW: 1 MHz

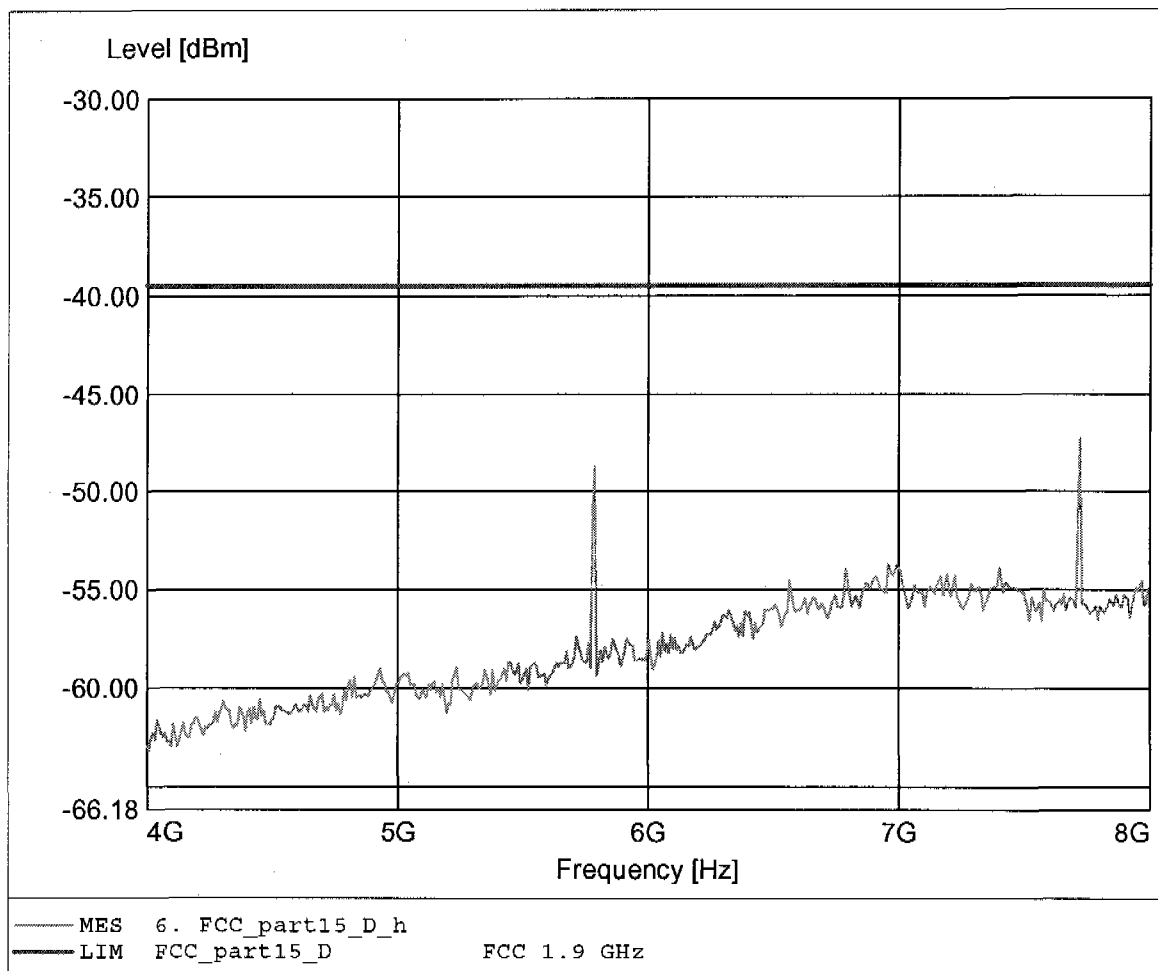

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 5.788GHz Pmax: -49.74dBm RBW: 1 MHz

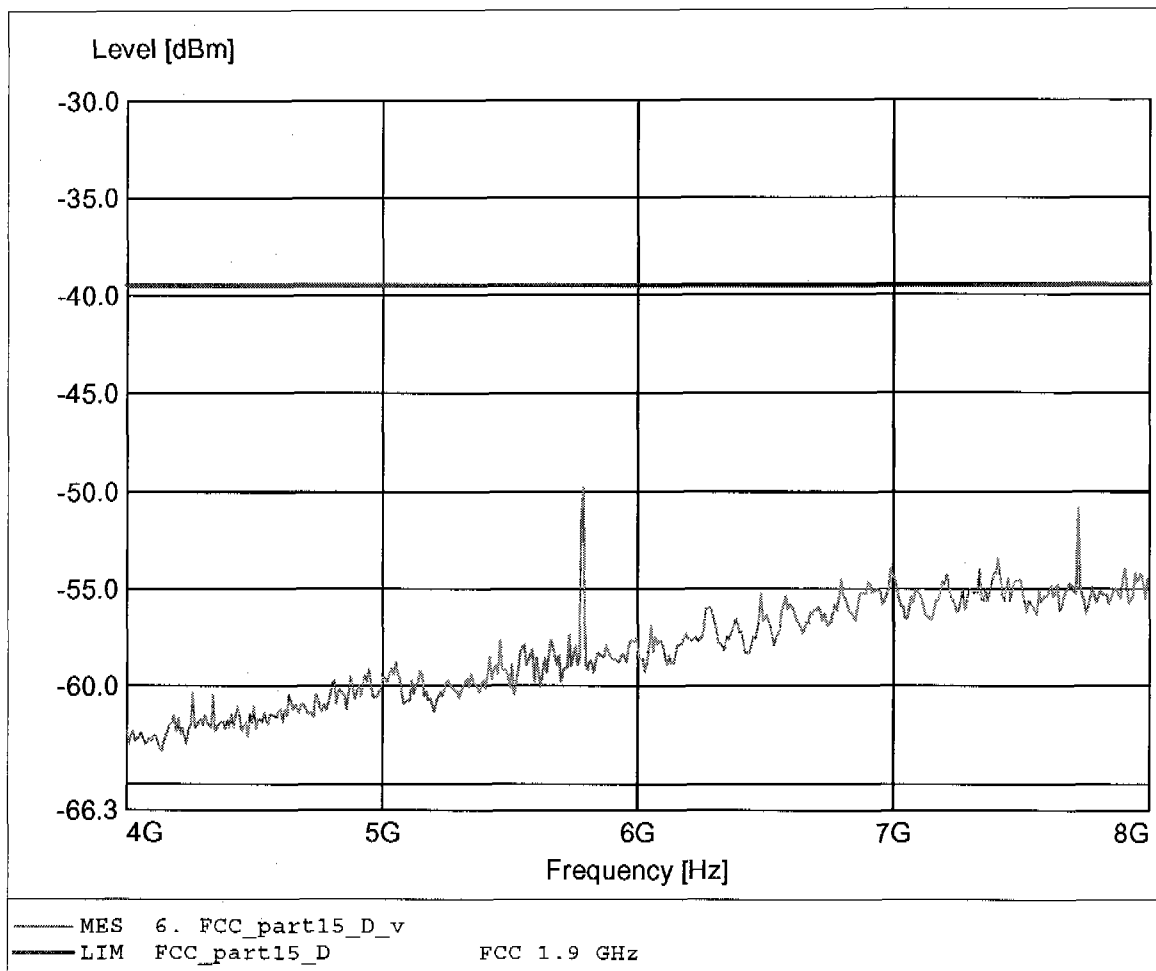

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.575GHz Pmax: -49.84dBm RBW: 1 MHz

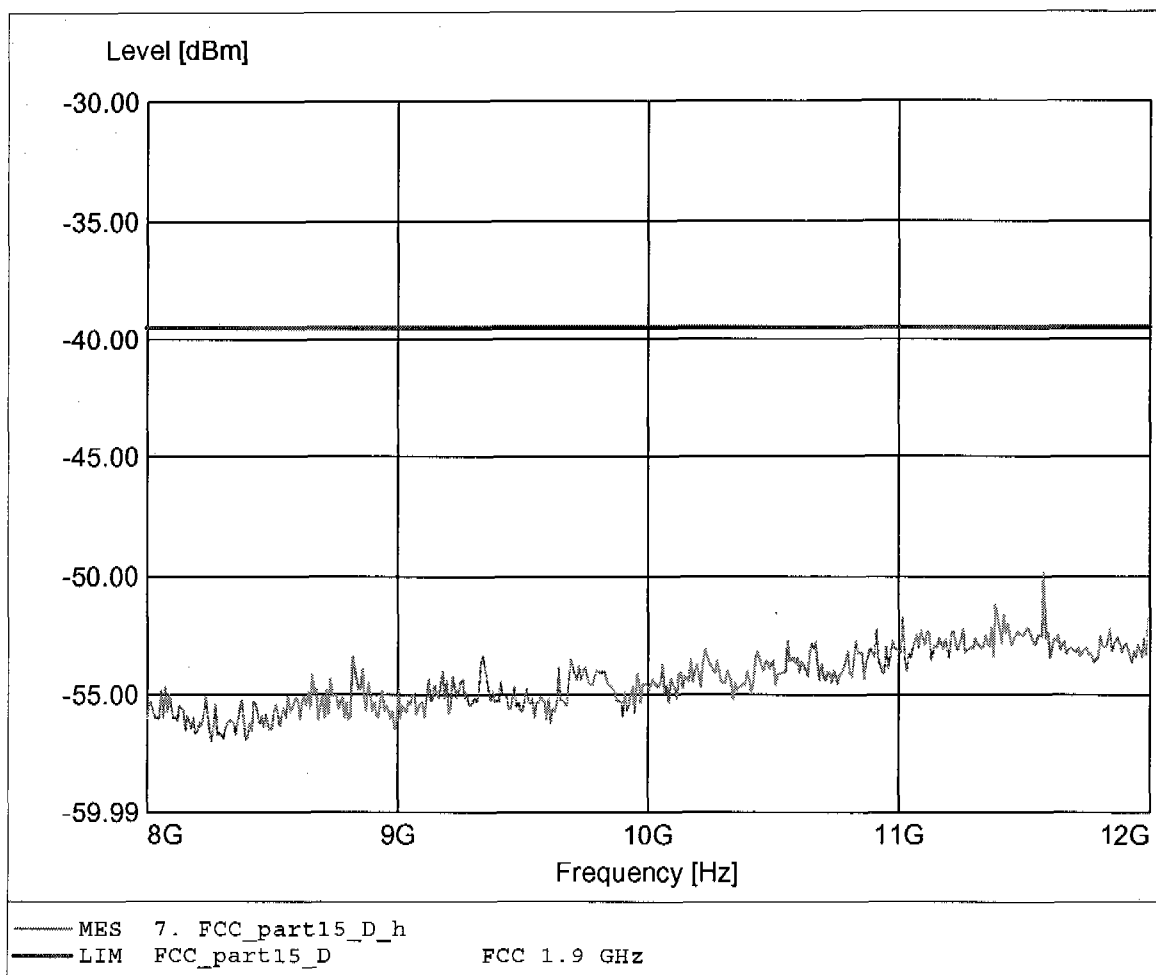

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 11.471GHz Pmax: -51.46dBm RBW: 1 MHz

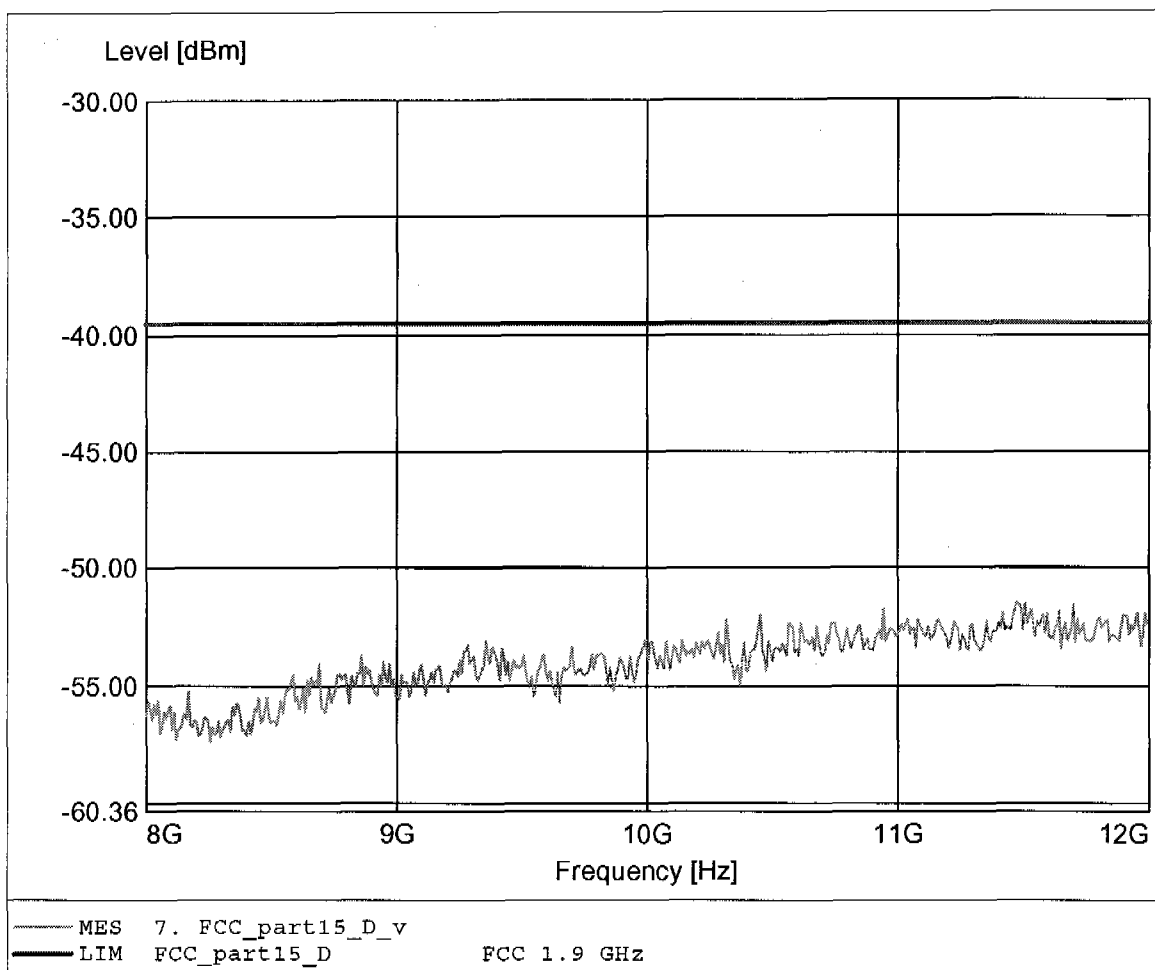

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.990GHz Pmax: -47.70dBm RBW: 1 MHz

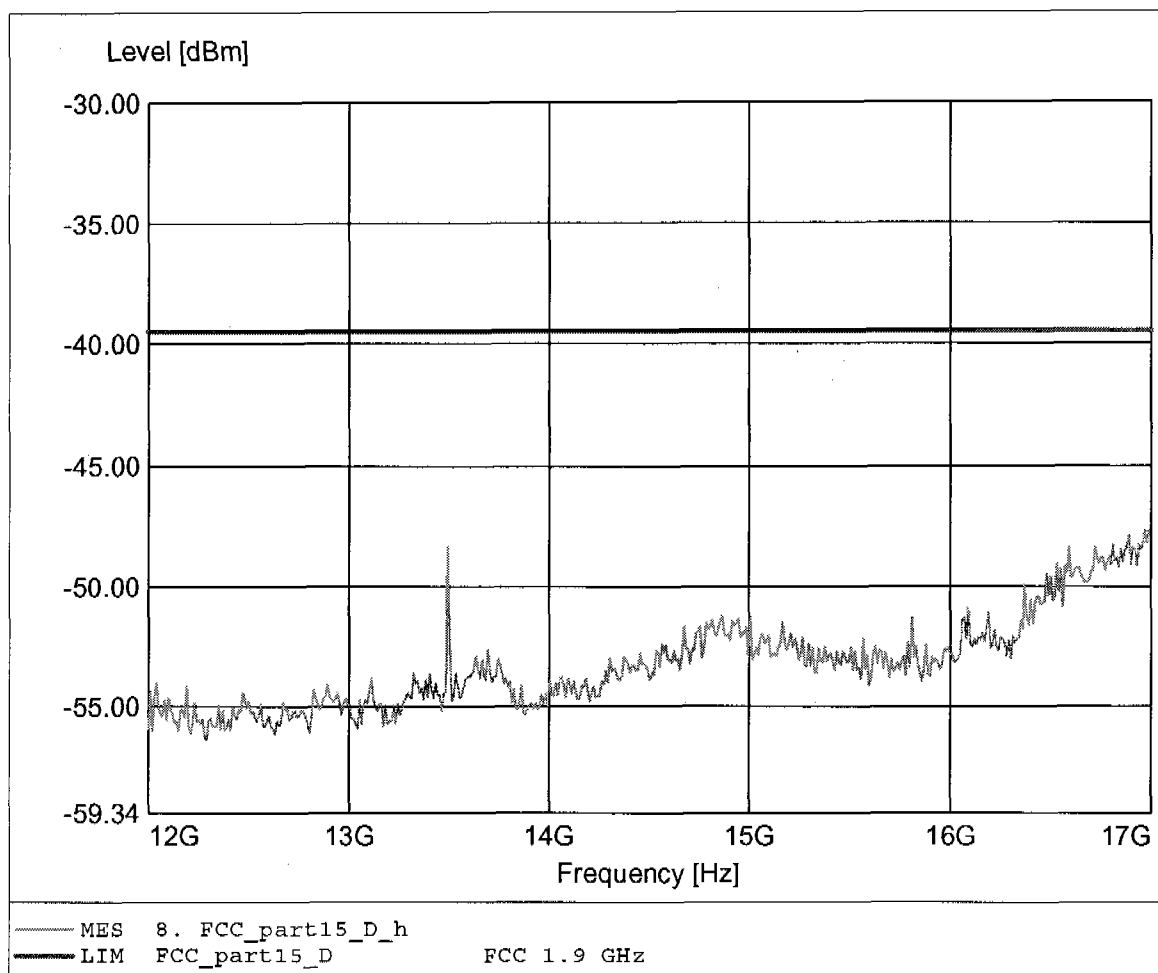

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: BBHA 9120D, HP+ampl.
Comment 2: Freq: 16.188GHz Pmax: -48.70dBm RBW: 1 MHz

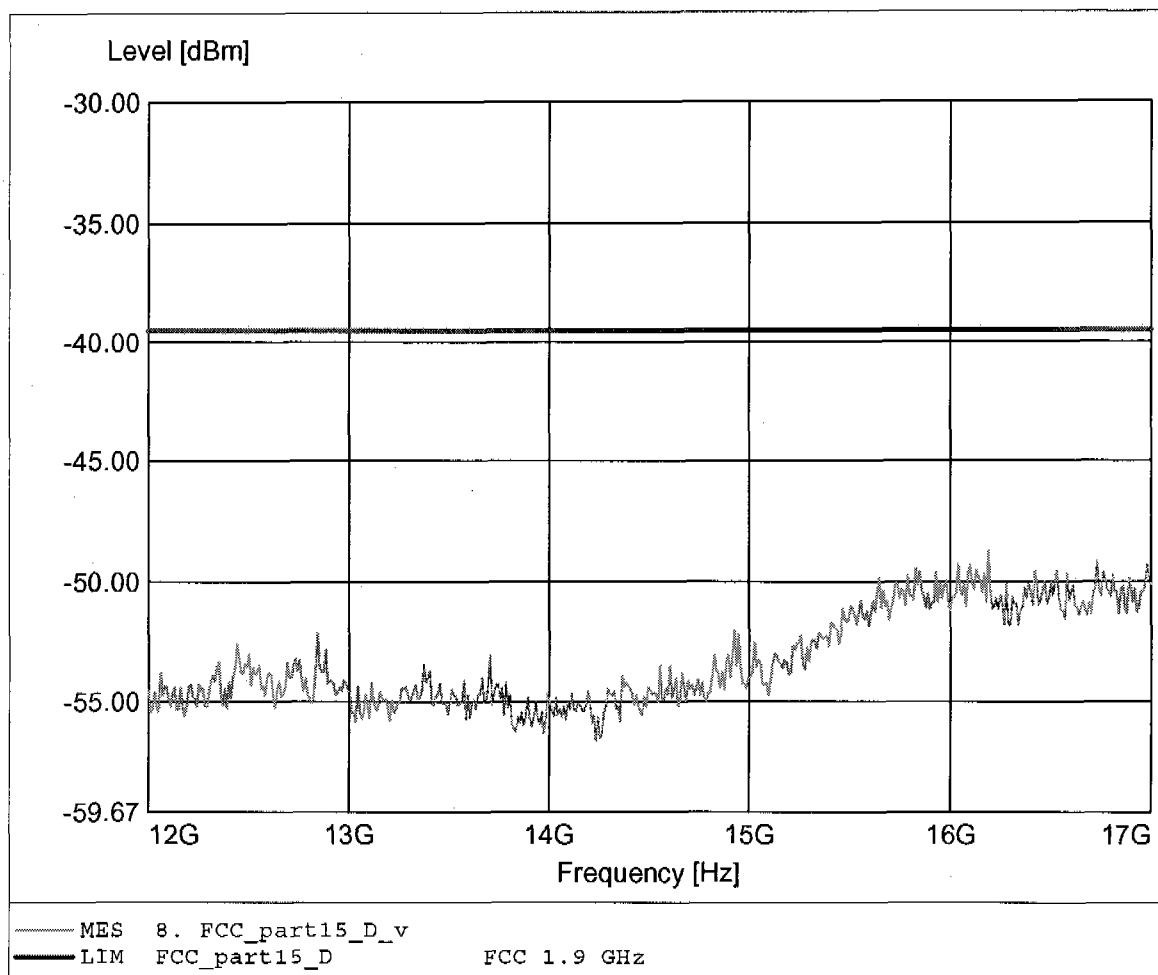

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D


Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 18.960GHz Pmax: -46.56dBm RBW: 1 MHz

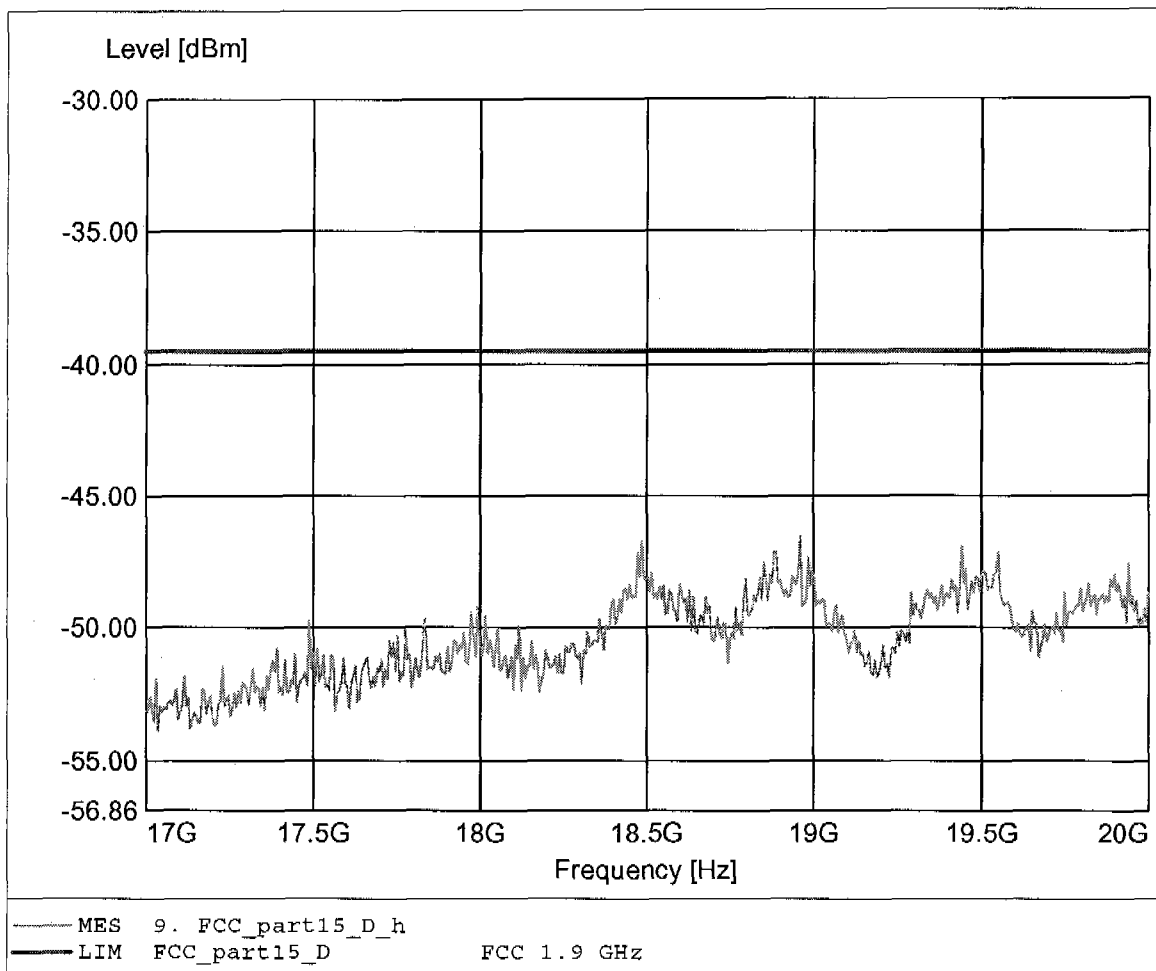

Spurious emissions under normal conditions

FCC RULES PART 15, SUBPART D

Approval Holder: RTX Products A/S
EUT: RTX 3055
Model: 3055.2 (Handset) / Antenna 2 / 1928.448 MHz
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 3.6 V DC
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 1m, Ant.: HL 025, ampl.: 18-26 GHz
Comment 2: Freq: 18.882GHz Pmax: -47.29dBm RBW: 1 MHz

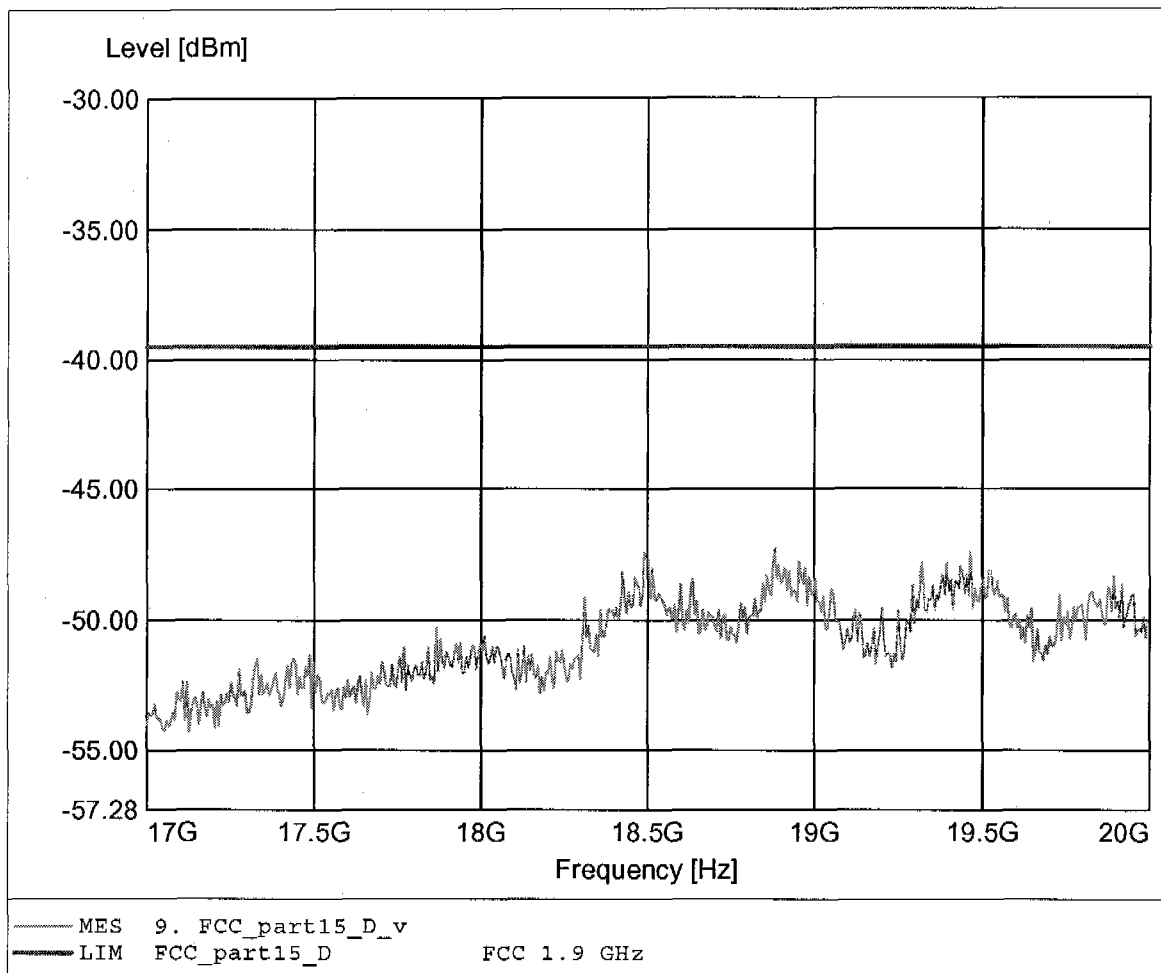

Appendix T

Frame period

Frame Repetition Stability / Frame Period and Jitter

Tested according ANSI C63.17-1998 Section 6.2.3 /

Measurement Results Portable Part

Test Performed	Criteria
Frame Period	10 ms
Frame repetition stability	10 ppm
Jitter	25 μ s

Frame Repetition Stability

Frequency (MHz)	Standard Deviation (Hz)	Mean (Hz)	Frame Repetition Stability (ppm)
1924,992	9,28431E-07	99,99999977	0,028


$$\text{Frame Repetition Stability} = 3 * \text{Standard Deviation} / \text{Frame Rate} * 10E06$$

Jitter Measurement

Frequency (MHz)	Standard Deviation (μ s)	Mean (ms)	Jitter (μ s)
1924,992	0,0925	10,00000002	0,278

$$\text{Jitter} = 3 * \text{Standard Deviation}$$

Frame Period

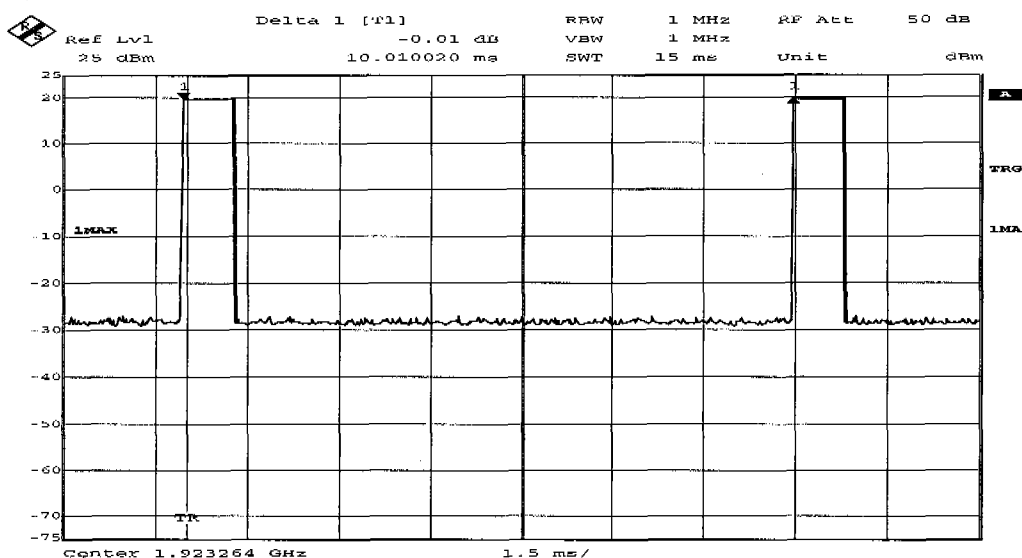

Title: Frame Periode DECT PP
Comment A: FCC 15.232 (c)
Date: 16.MAR.2005 09:42:30

Appendix U

Frequency stability

Frequency Stability § 15.323 (f)

Tested according ANSI C63.17-1998 Section 6.2.3 / 6.2.4

Measurement results Portable Part

Temp °C	Supply Voltage	Frequency of carrier (MHz)	delta f(min) (KHz)	delta f(max) (KHz)	maximum delta f (ppm)	Mean (MHz)	Deviation ppm
20	Vnom	1924,992	-5,5	4,3	-2,86	1924,988602	Reference
-10	Vnom	1924,992	-3,7	0	-1,92	1924,990175	-0,82
55	Vnom	1924,992	-2,9	0,9	-1,51	1924,990964	-1,23


Limit : 10 ppm

$$\text{Deviation ppm} = \frac{FR - FM}{FR} * 10^6$$


FR = Reference frequency of carrier at 20°C and Vnom

FM = Measured frequency of carrier

Histogram at 20°C

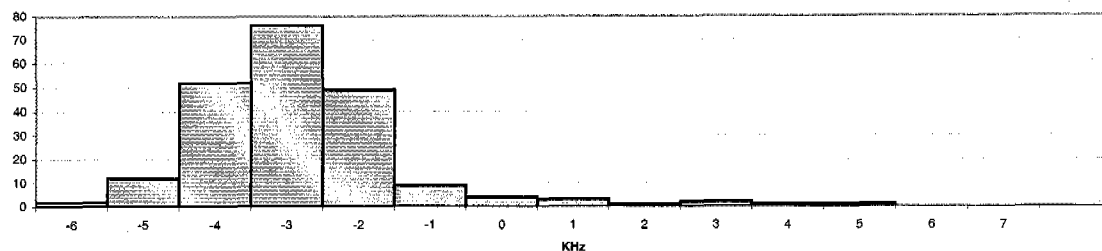

Histogram at -10°C

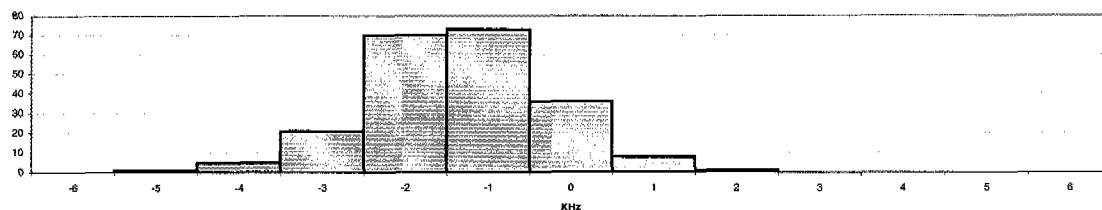

Histogram at 55°C

