

Appendix B

Coordination with fixed microwave service

UTAM, Inc.

SECTION 15.307(b) AFFIDAVIT

I, Michael Stima, Managing Director of UTAM, Inc., hereby swear and affirm that:

RTX America, Inc.

is a participating member of UTAM, Inc. in good standing for purposes of Section 15.307(b) of the FCC rules.

Subscribed to and sworn this 2nd day of November 2005



Michael Stima, Managing Director
UTAM, Inc.
1170 U.S. Hwy 22
P.O. Box 8126
Bridgewater, New Jersey 08807
Tel: (508) 526-3636

Affidavit #: RTX110205

Appendix C

Reference to Subpart B

Appendix D


Labeling requirements

Appendix E

Conducted limits AC Power line

EMI voltage test in the ac-mains according to FCC part 15

EUT: Handset RTX3080
Manufacturer: RTX America Inc.
Operating Condition: Unom: 120 VAC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: RTX3080 mode: ALL OPERATING MODES
Start of Test: ADAPTOR: A30650

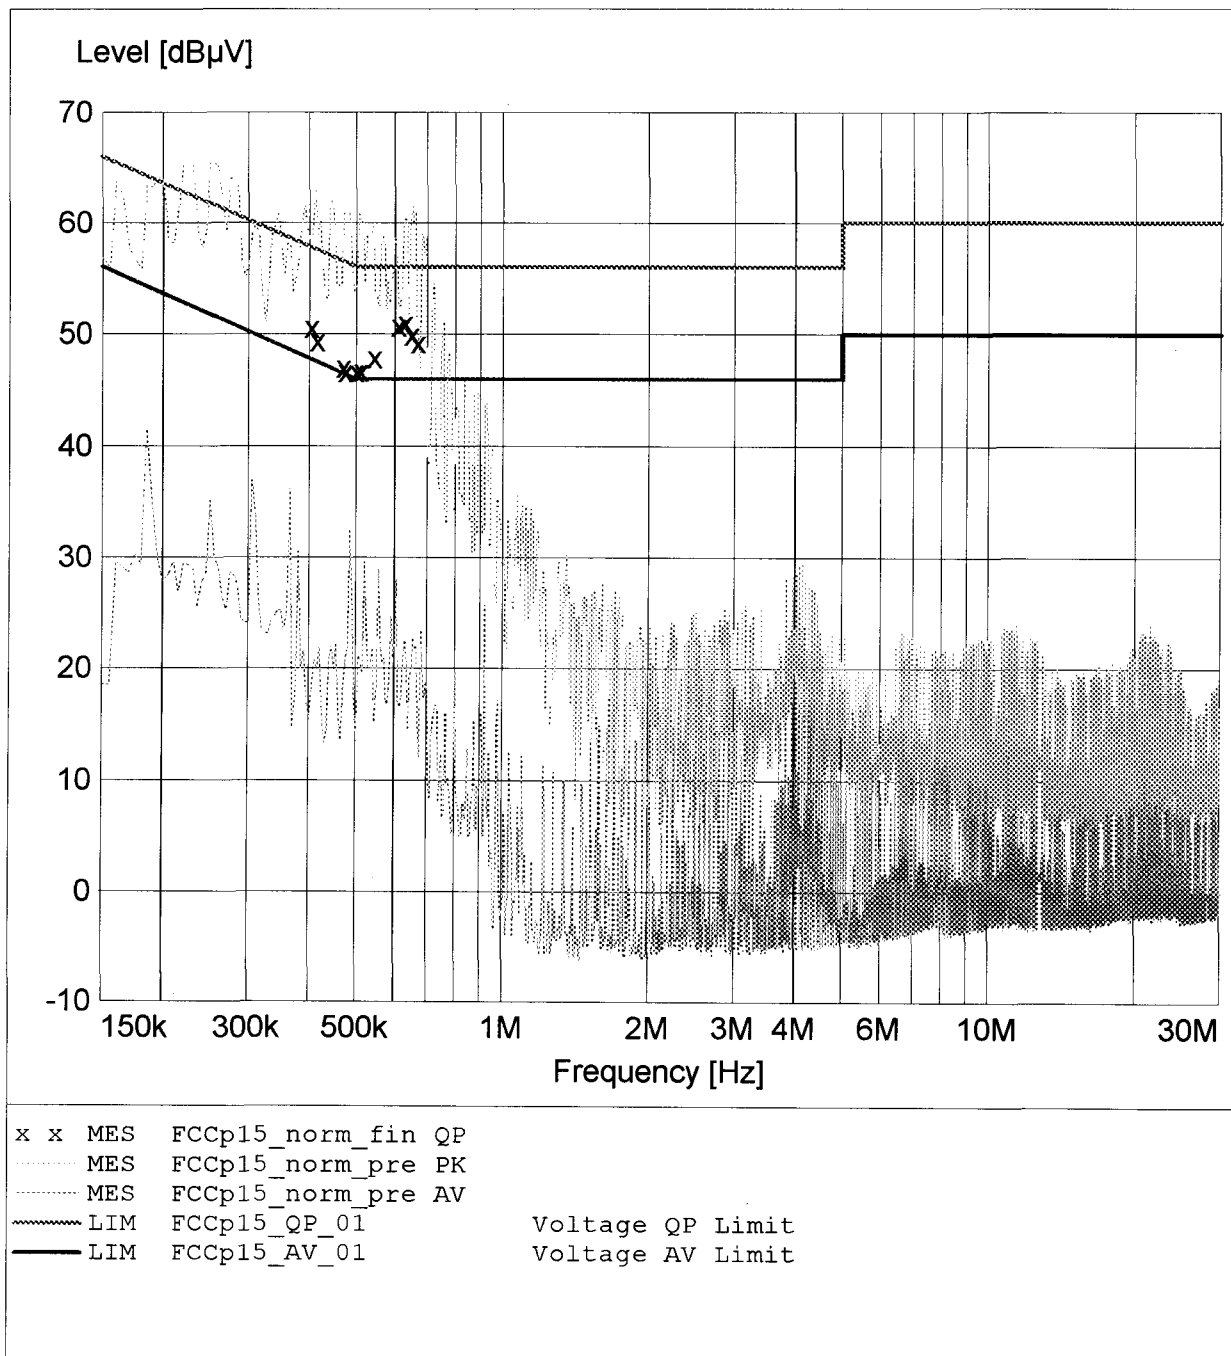

EMI voltage test in the ac-mains according to FCC part 15

EUT: Handset RTX3080
Manufacturer: RTX America Inc.
Operating Condition: Unom: 120 VAC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: RTX3080 mode: ALL OPERATING MODES
Start of Test: ADAPTOR: A30650


MEASUREMENT RESULT: "FCCp15_norm_fin QP"

23.09.2005 09:16

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.405000	50.60	10.0	58	7.2	---	---
0.415000	49.40	10.0	58	8.1	---	---
0.470000	47.00	10.0	57	9.5	---	---
0.475000	46.60	10.1	56	9.8	---	---
0.500000	46.60	10.1	56	9.4	---	---
0.510000	46.70	10.1	56	9.3	---	---
0.545000	47.90	10.1	56	8.1	---	---
0.610000	50.70	10.1	56	5.3	---	---
0.630000	51.00	10.1	56	5.0	---	---
0.650000	49.90	10.1	56	6.1	---	---
0.670000	49.20	10.1	56	6.8	---	---

EMI voltage test in the ac-mains according to FCC part 15

EUT: Handset RTX3080
Manufacturer: RTX America Inc.
Operating Condition: Unom: 120 VAC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: RTX3080 mode: ALL OPERATING MODES
Start of Test: ADAPTOR: A30650

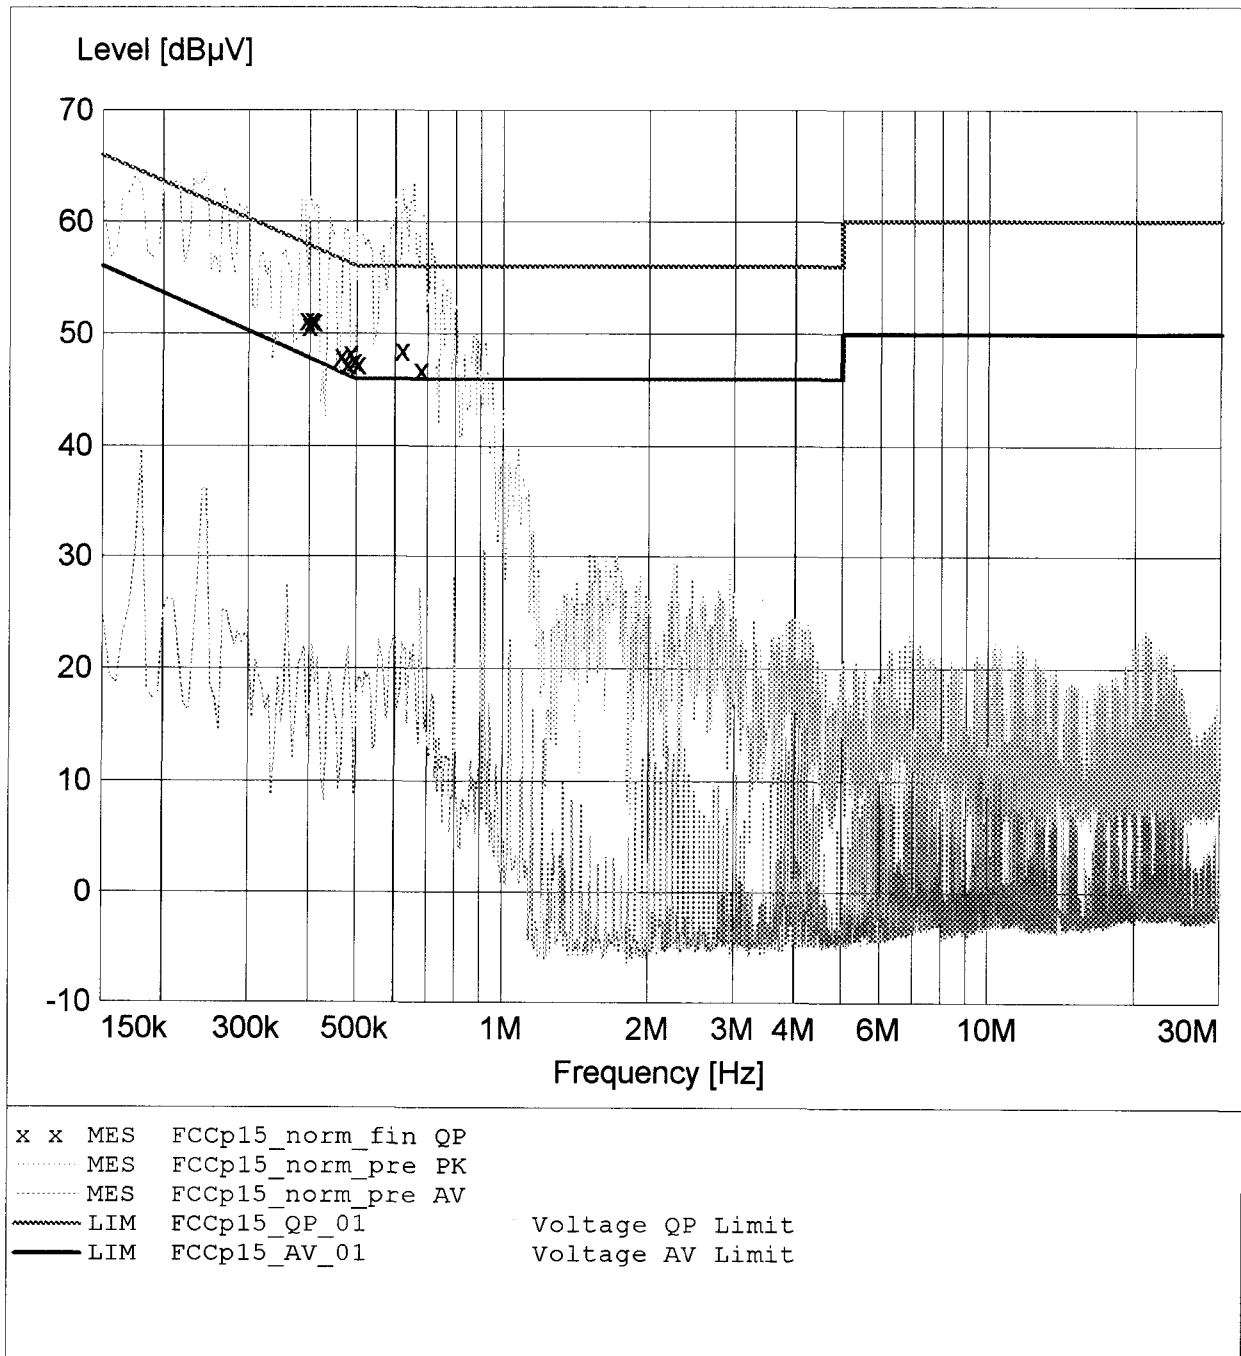

EMI voltage test in the ac-mains according to FCC part 15

EUT: Handset RTX3080
Manufacturer: RTX America Inc.
Operating Condition: Unom: 120 VAC (AC/DC-ADAPTOR) , Tnom: 23°C
Test Site: ETS
Operator: Mr. Marquardt
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: RTX3080 mode: ALL OPERATING MODES
Start of Test: ADAPTOR: A30650

MEASUREMENT RESULT: "FCCp15_norm_fin QP"

23.09.2005 09:52

Frequency MHz	Level dBµV	Transd dB	Limit dBµV	Margin dB	Line	PE
0.395000	51.20	10.0	58	6.7	---	---
0.400000	50.70	10.0	58	7.1	---	---
0.405000	51.20	10.0	58	6.5	---	---
0.410000	51.10	10.0	58	6.6	---	---
0.465000	48.00	10.0	57	8.6	---	---
0.480000	47.30	10.1	56	9.0	---	---
0.485000	48.30	10.1	56	8.0	---	---
0.495000	47.60	10.1	56	8.5	---	---
0.505000	47.30	10.1	56	8.7	---	---
0.620000	48.50	10.1	56	7.5	---	---
0.680000	46.80	10.1	56	9.2	---	---

Appendix F

Emission band width


FCC Part 15.303(b) Emission bandwidth

Testprocedure ANSI 63.17-1998 6.1.3 UPCS

EUT	Handset RTX3080
Model	RTX3080
Applicant	RTX America Inc.
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.3 Emission bandwidth

Measured Bandwidth	Emission Bandwidth = 1.45MHz
Max. Permitted BW	Limit = 2.5 MHz

Test result	Verdict = PASS
-------------	----------------

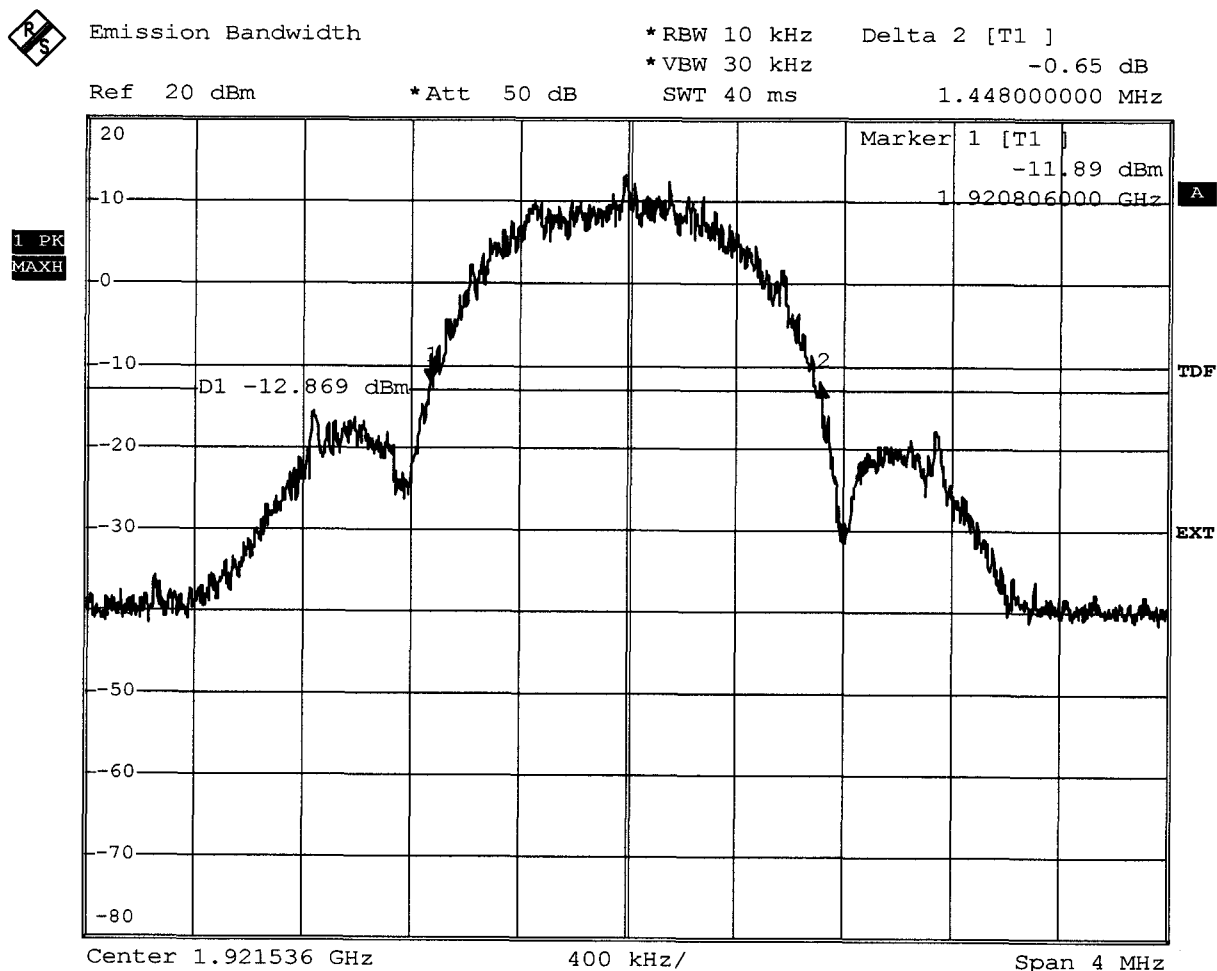

Comment: Ansi C63.17-1998 6.1.3
Date: 23.AUG.2005 11:11:36

Measurement diagram

**Additional values as required for the detailed threshold monitoring bandwidth test
ANSI C63.17-1988 7.4.2**

-6 dB points

Lower frequency : 1921.104MHz
Higher frequency : 1921.862MHz


-12 dB points

Lower frequency : 1920.952MHz
Higher frequency : 1922.114MHz

FCC Part 15.303(b) Emission bandwidth

Testprocedure ANSI 63.17-1998 6.1.3 UPCS

EUT	Handset RTX3080
Model	RTX3080
Applicant	RTX America Inc.
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.3 Emission bandwidth
Measured Bandwidth	Emission Bandwidth = 1.44MHz
Max. Permitted BW	Limit = 2.5 MHz
Test result	Verdict = PASS

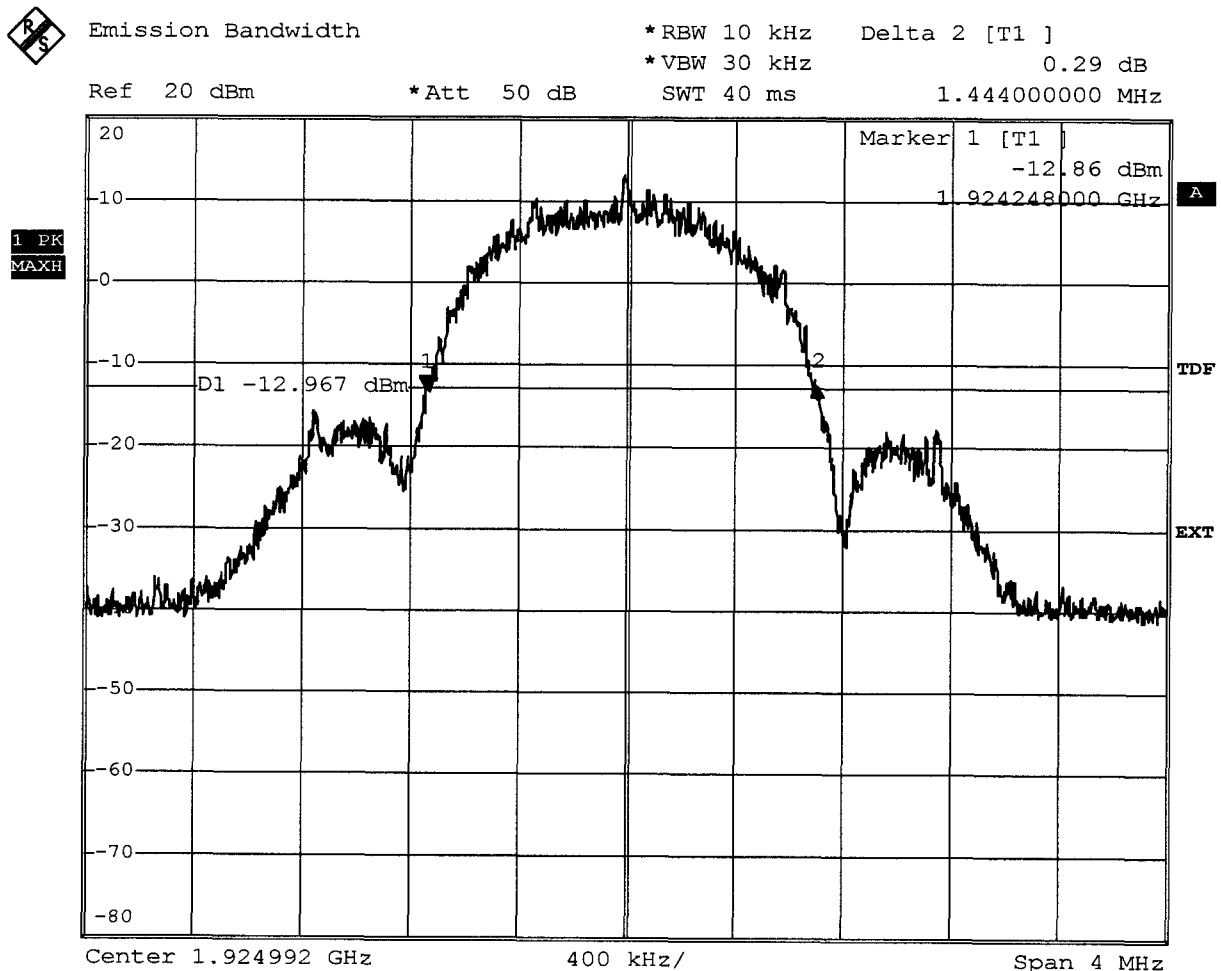

Comment: Ansi C63.17-1998 6.1.3
Date: 23.AUG.2005 11:09:02

Measurement diagram



**Additional values as required for the detailed threshold monitoring bandwidth test
ANSI C63.17-1988 7.4.2**

-6 dB points

Lower frequency : 1924.564MHz
Higher frequency : 1925.322MHz


-12 dB points

Lower frequency : 1924.404MHz
Higher frequency : 1925.574MHz

FCC Part 15.303(b) Emission bandwidth

Testprocedure ANSI 63.17-1998 6.1.3 UPCS

EUT	Handset RTX3080
Model	RTX3080
Applicant	RTX America Inc.
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.3 Emission bandwidth
Measured Bandwidth	Emission Bandwidth = 1.45MHz
Max. Permitted BW	Limit = 2.5 MHz
Test result	Verdict = PASS

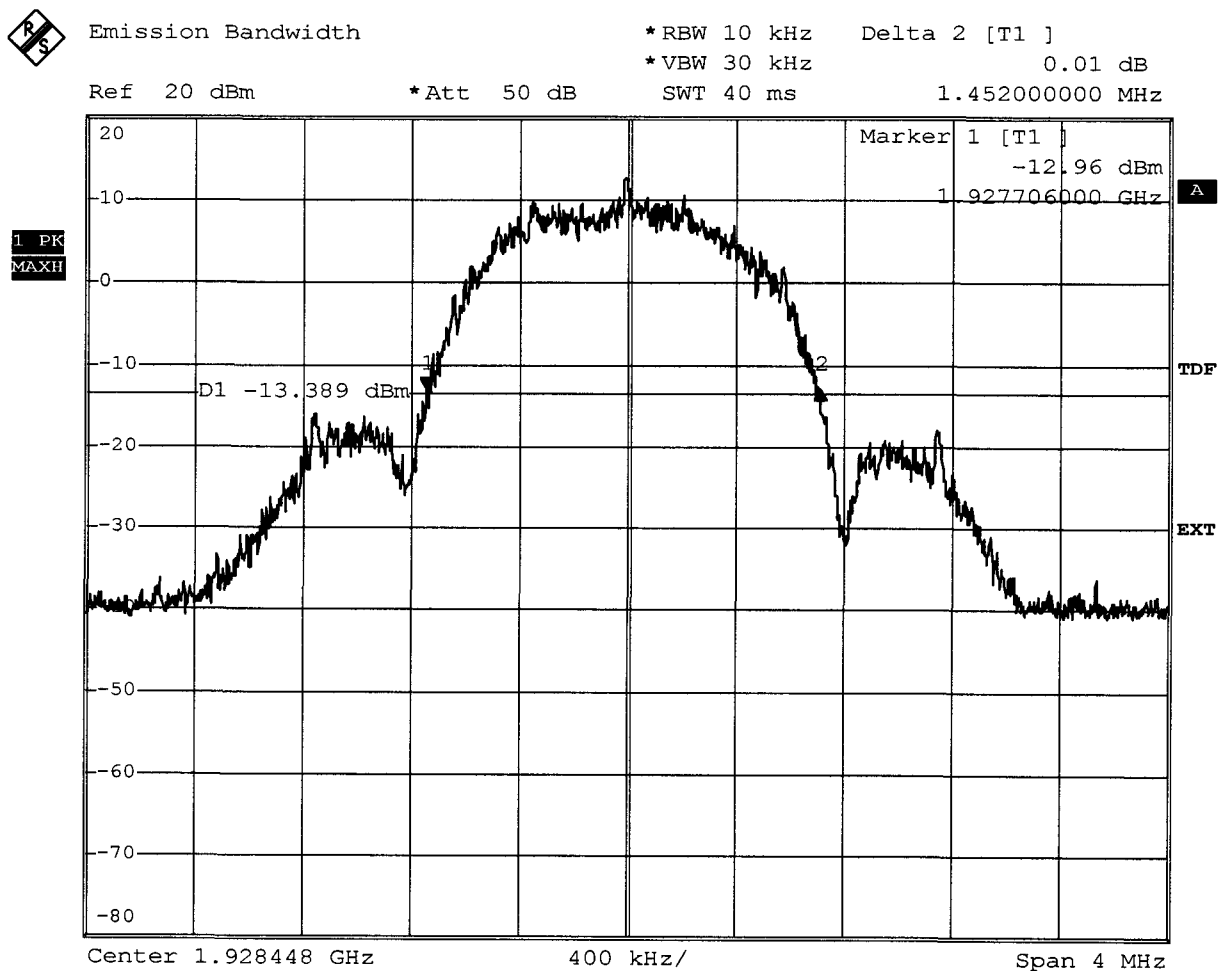

Comment: Ansi C63.17-1998 6.1.3
 Date: 23.AUG.2005 11:13:23

Measurement diagram

**Additional values as required for the detailed threshold monitoring bandwidth test
ANSI C63.17-1988 7.4.2**

-6 dB points

Lower frequency : 1928.01MHz
Higher frequency : 1928.84MHz

-12 dB points

Lower frequency : 1927.866MHz
Higher frequency : 1929.028MHz

Appendix G

Peak Transmit Power

FCC Part 15.319(c) Peak Transmit Power limit

Testprocedure ANSI 63.17-1998 6.1.2 UPCS

EUT Handset RTX3080
 Model RTX3080
 Applicant RTX America Inc.
 Temperat. / Voltage 23°C
 Test Site / Operator ETS Reichenwalde
 Test Specification 6.1.2 Peak transmit power

Measured Bandwidth 1.452MHz
 Max. Permitted Power 20,8 dBm
 Measured Power 20,72 dBm
 Test result Verdict = PASS



Peak transmit power

RBW 3 MHz

Marker 1 [T1]

*VBW 10 MHz


20.36 dBm

Ref 25 dBm

*Att 40 dB

SWT 880 µs

319.000000 µs

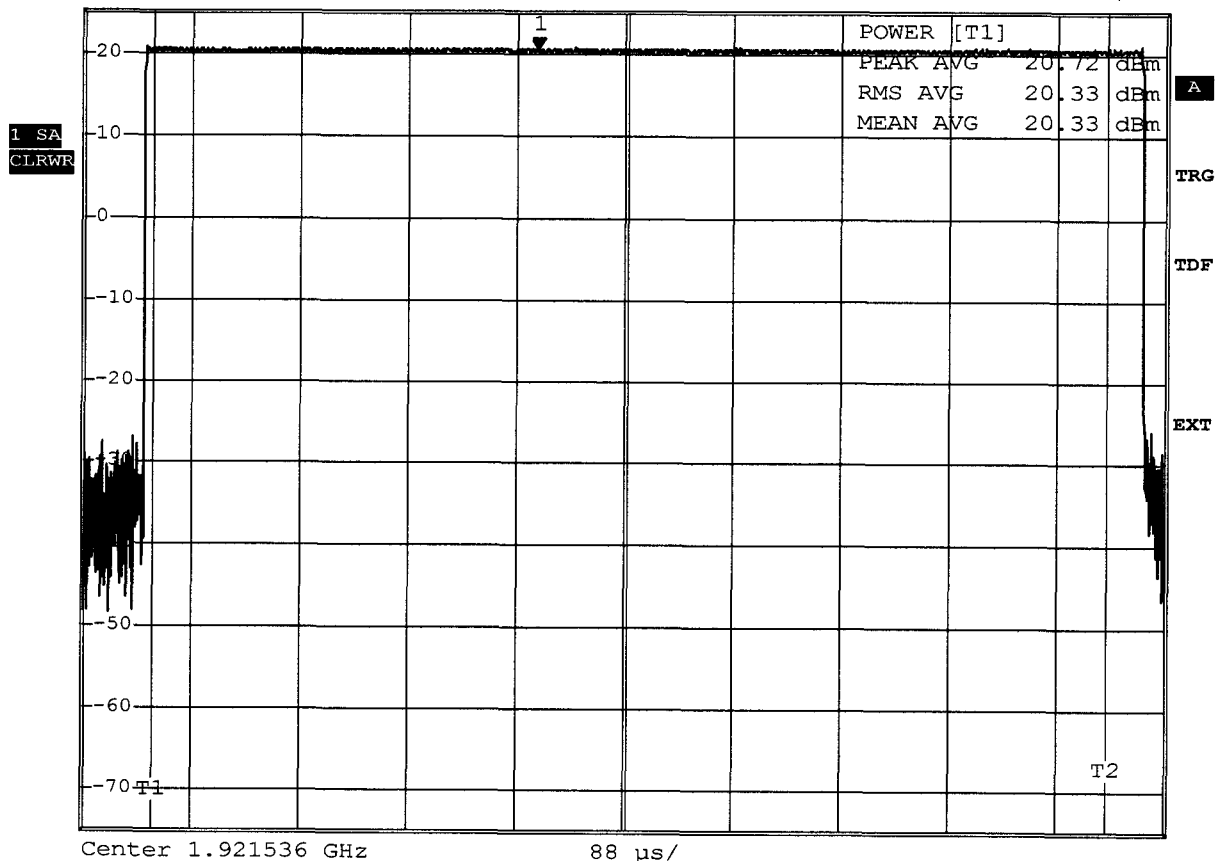

Comment: Ansi C63.17-1998 6.1.2
 Date: 23.AUG.2005 11:22:03

Measurement diagram

FCC Part 15.319(c) Peak Transmit Power limit

Testprocedure ANSI 63.17-1998 6.1.2
UPCS

EUT Handset RTX3080
 Model RTX3080
 Applicant RTX America Inc.
 Temperat. / Voltage 23°C
 Test Site / Operator ETS Reichenwalde
 Test Specification 6.1.2 Peak transmit power

Measured Bandwidth 1.452MHz
 Max. Permitted Power 20,8 dBm
 Measured Power 20,61 dBm
 Test result Verdict = PASS



Peak transmit power

RBW 3 MHz

Marker 1 [T1]

*VBW 10 MHz


20.24 dBm

Ref 25 dBm

*Att 40 dB

SWT 880 µs

319.000000 µs

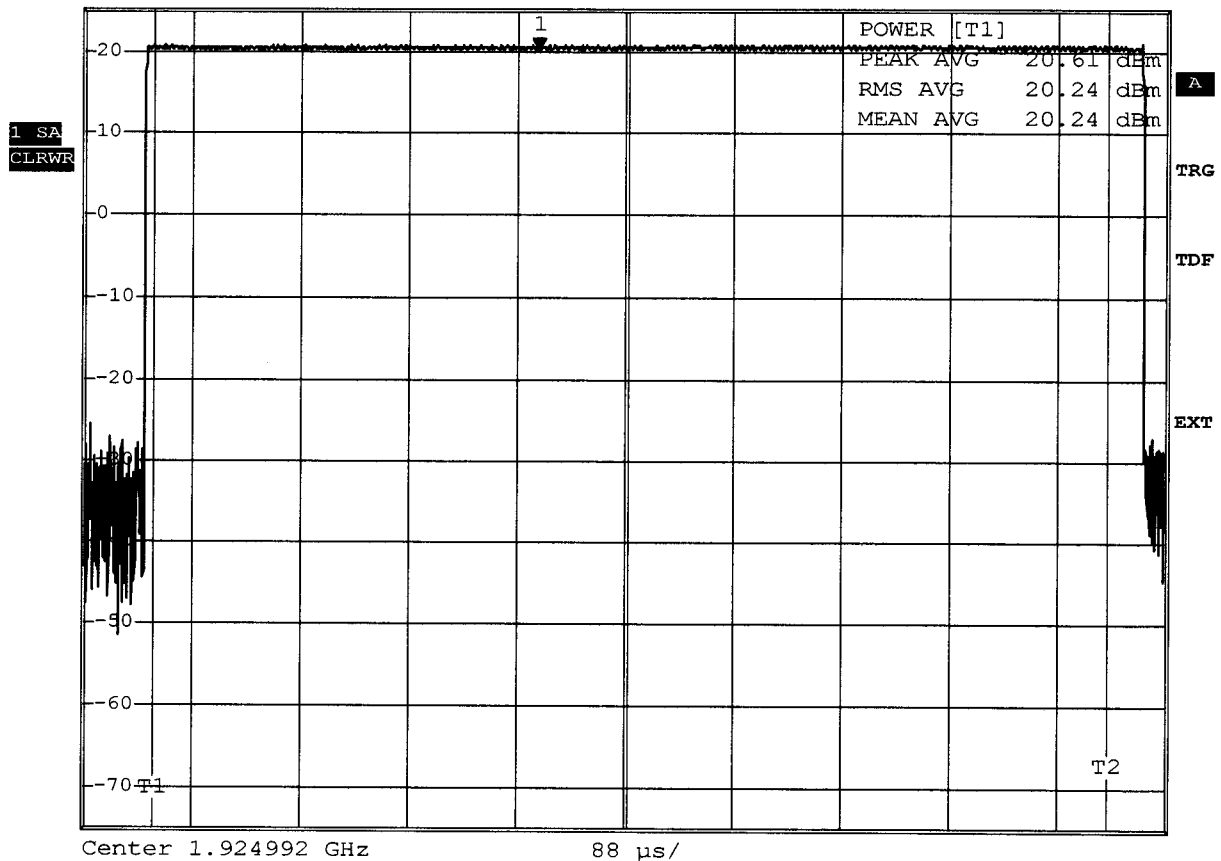

Comment: Ansi C63.17-1998 6.1.2
 Date: 23.AUG.2005 11:20:27

Measurement diagram

FCC Part 15.319(c) Peak Transmit Power limit

Testprocedure ANSI 63.17-1998 6.1.2
UPCS

EUT Handset RTX3080
 Model RTX3080
 Applicant RTX America Inc.
 Temperat. / Voltage 23°C
 Test Site / Operator ETS Reichenwalde
 Test Specification 6.1.2 Peak transmit power

Measured Bandwidth 1.452MHz
 Max. Permitted Power 20,8 dBm
 Measured Power 20,52 dBm
 Test result Verdict = PASS



Peak transmit power

RBW 3 MHz

Marker 1 [T1]

*VBW 10 MHz


20.12 dBm

Ref 25 dBm

*Att 40 dB

SWT 880 µs

93.000000 µs

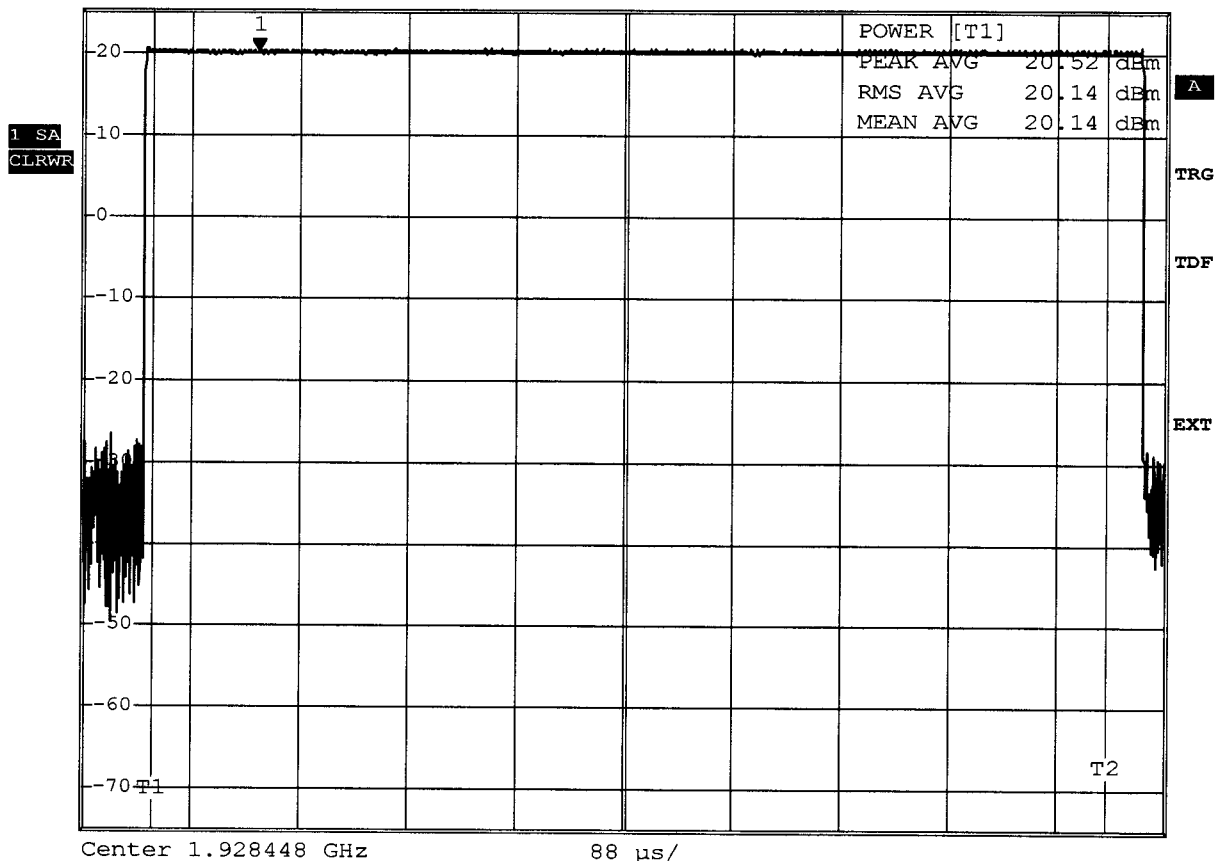

Comment: Ansi C63.17-1998 6.1.2
 Date: 23.AUG.2005 11:16:36

Measurement diagram

Appendix H


Power spectral density

FCC Part 15.319(d) Power spectral density

Testprocedure ANSI 63.17-1998 6.1.5
UPCS

EUT	Handset RTX3080
Model	RTX3080
Applicant	RTX America Inc.
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.5 Power spectral density

Test step 1 initial condition

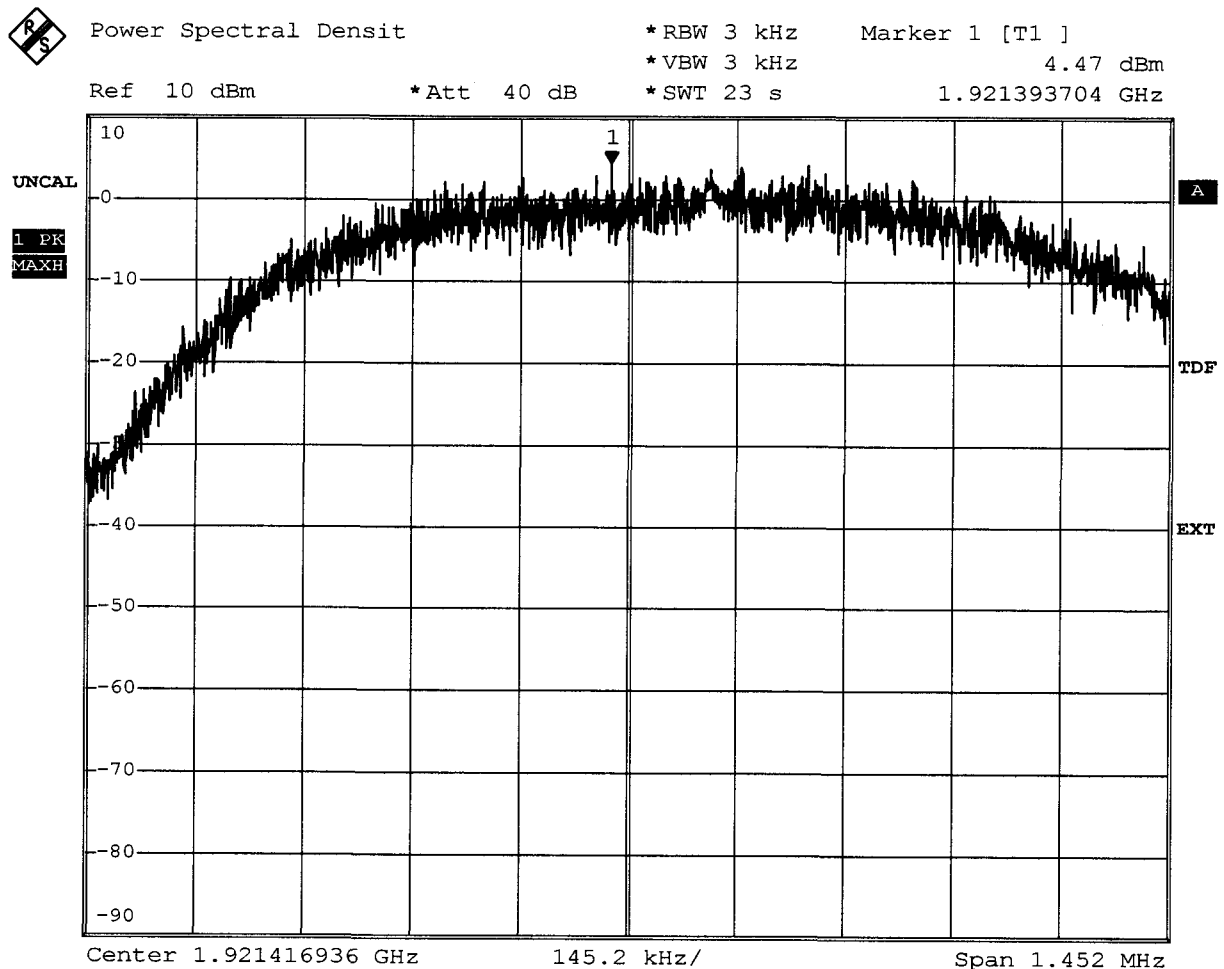

Comment: Ansi C63.17-1998 6.1.5
Date: 23.AUG.2005 11:27:01


Measurement diagram

FCC Part 15.319(d) Power spectral density

Testprocedure ANSI 63.17-1998 6.1.5
UPCS

EUT	Handset RTX3080
Model	RTX3080
Applicant	RTX America Inc.
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.5 Power spectral density

Test step 1 initial condition

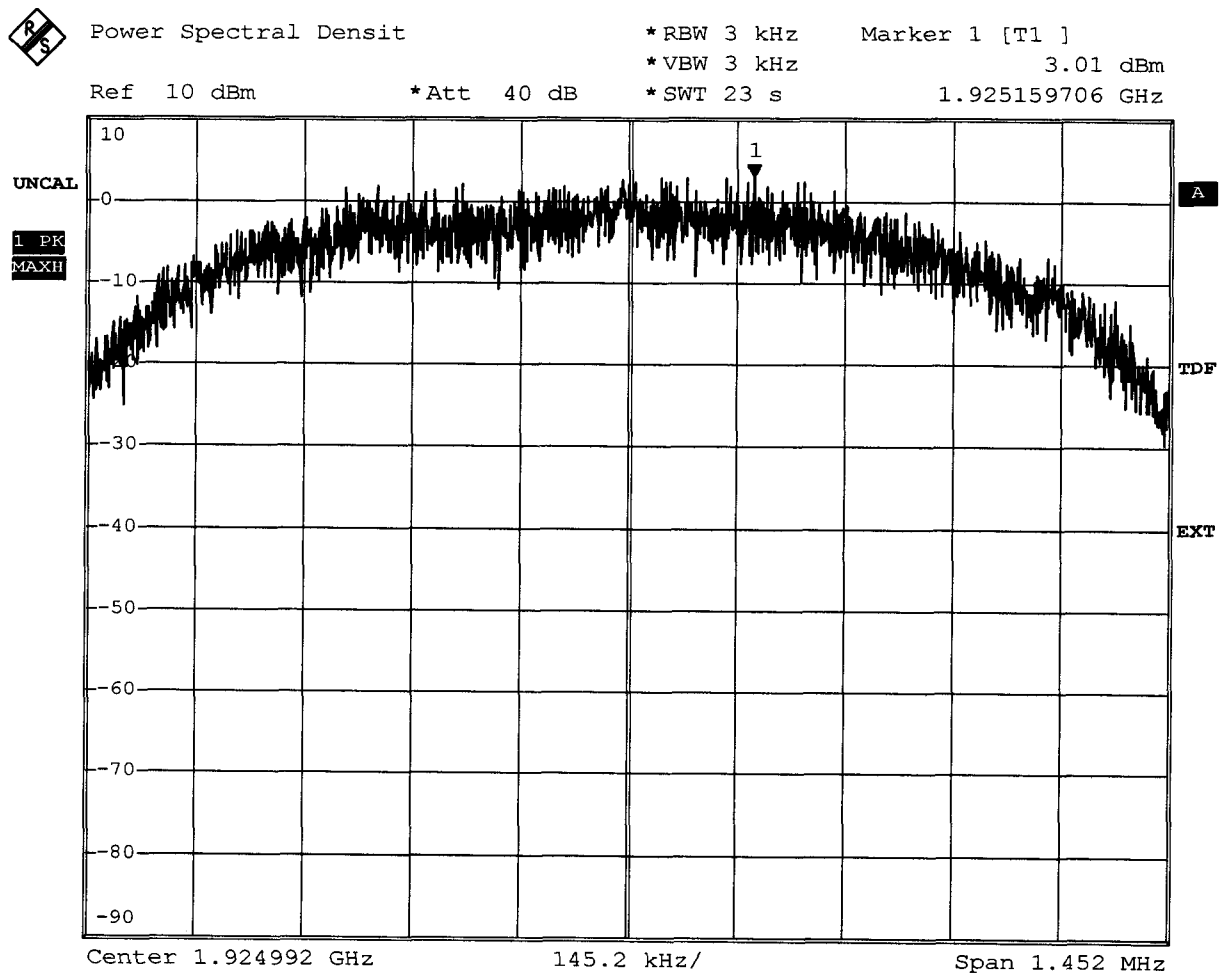

Comment: Ansi C63.17-1998 6.1.5
Date: 23.AUG.2005 11:45:31


Measurement diagram

FCC Part 15.319(d) Power spectral density

Testprocedure ANSI 63.17-1998 6.1.5 UPCS

EUT	Handset RTX3080
Model	RTX3080
Applicant	RTX America Inc.
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.5 Power spectral density

Test step 1 initial condition

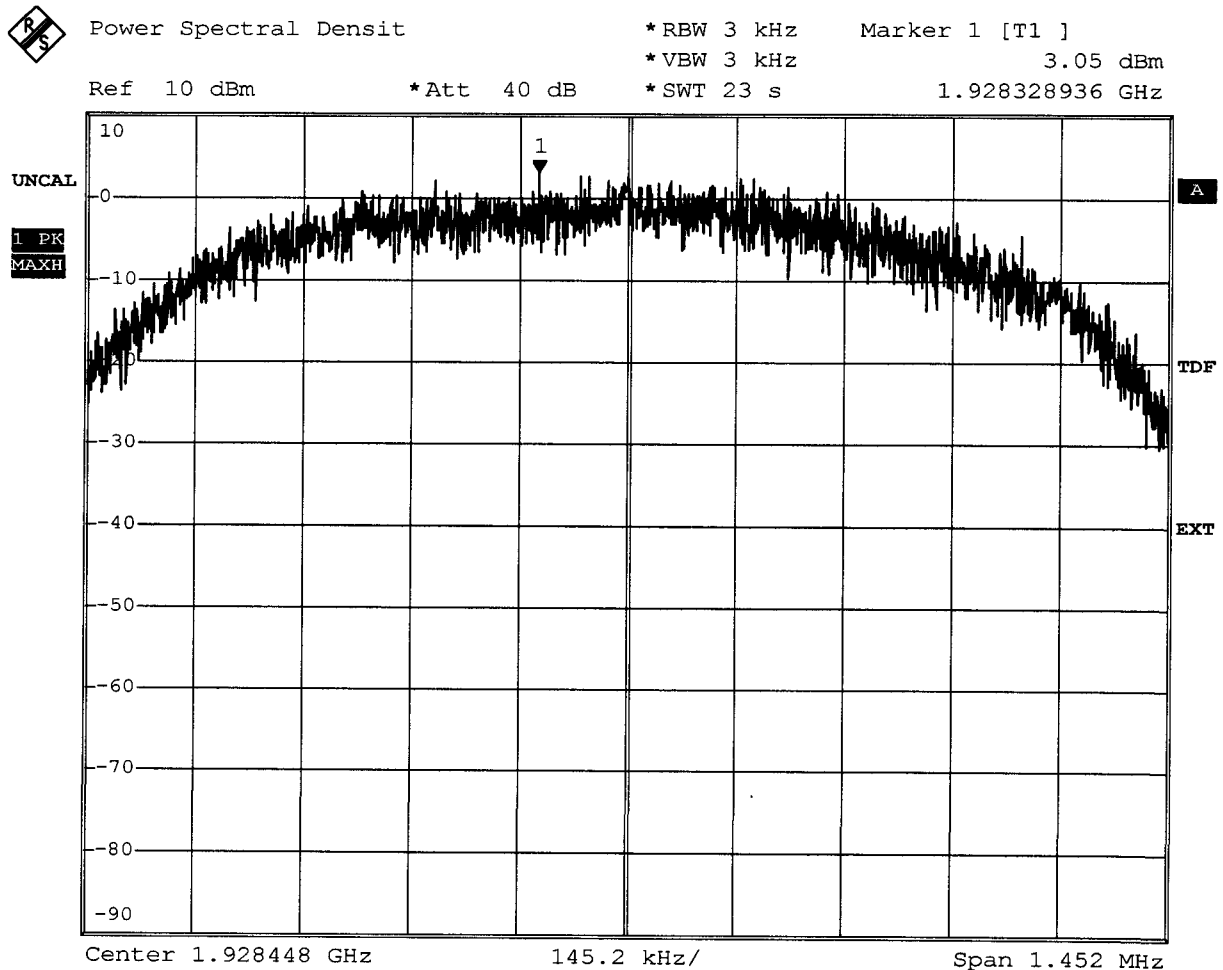

Comment: Ansi C63.17-1998 6.1.5
 Date: 23.AUG.2005 12:33:41


Measurement diagram

FCC Part 15.319(d) Power spectral density

Testprocedure ANSI 63.17-1998 6.1.5
UPCS

EUT	Handset RTX3080
Model	RTX3080
Applicant	RTX America Inc.
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.5 Power spectral density

Measured Maximum	4.031 dBm
Value in mW	2.53mW
Maximal permitted	limit=3mW
Test result	Verdict = PASS

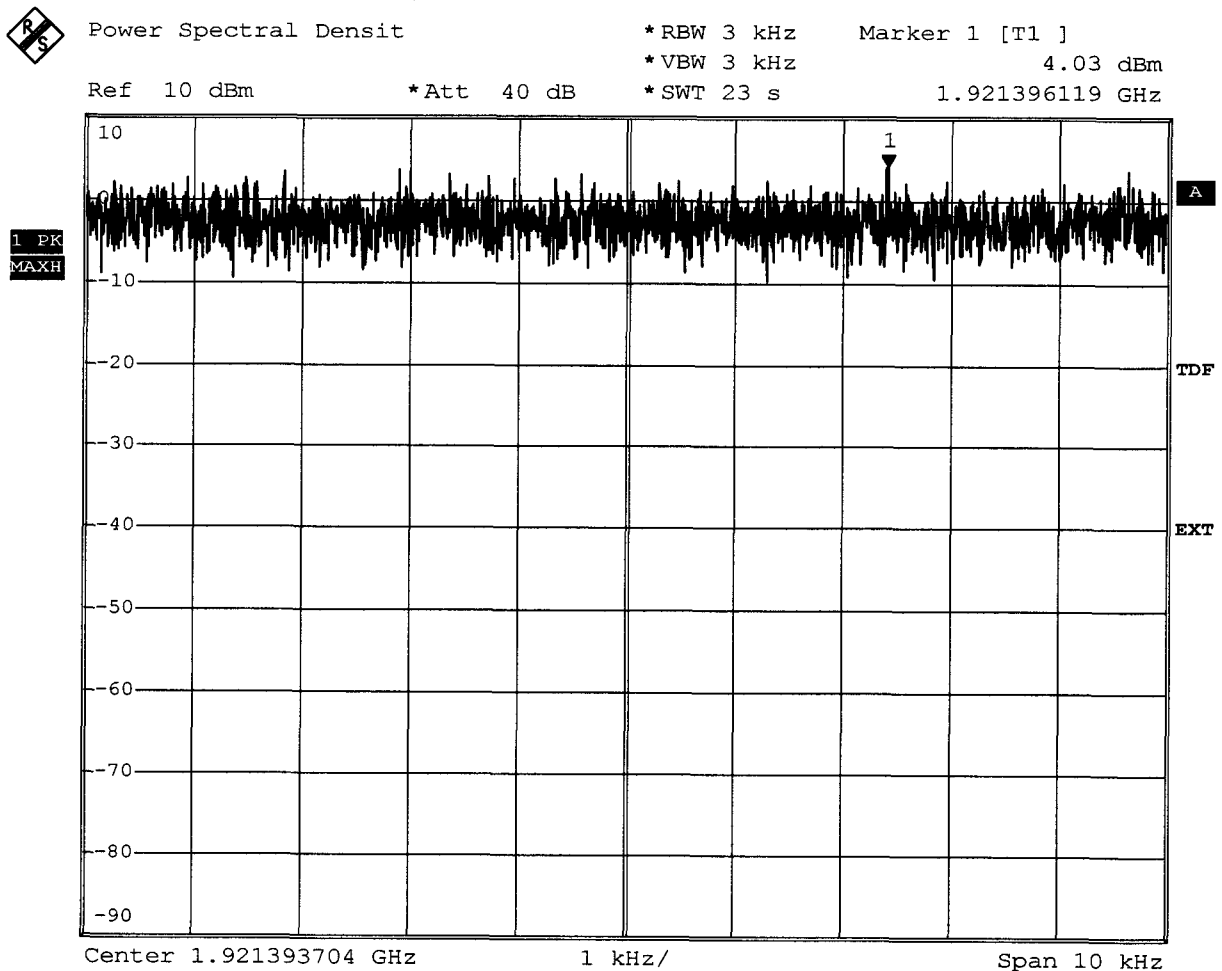

Comment: Ansi C63.17-1998 6.1.5
Date: 23.AUG.2005 11:27:54

Measurement diagram

FCC Part 15.319(d) Power spectral density

Testprocedure ANSI 63.17-1998 6.1.5 UPCS

EUT	Handset RTX3080
Model	RTX3080
Applicant	RTX America Inc.
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.5 Power spectral density

Measured Maximum	4.209 dBm
Value in mW	2.636mW
Maximal permitted	limit=3mW
Test result	Verdict = PASS



Power Spectral Densit

*RBW 3 kHz

Marker 1 [T1]

*VBW 3 kHz


4.21 dBm

Ref 10 dBm

*Att 40 dB

*SWT 23 s

1.925159816 GHz

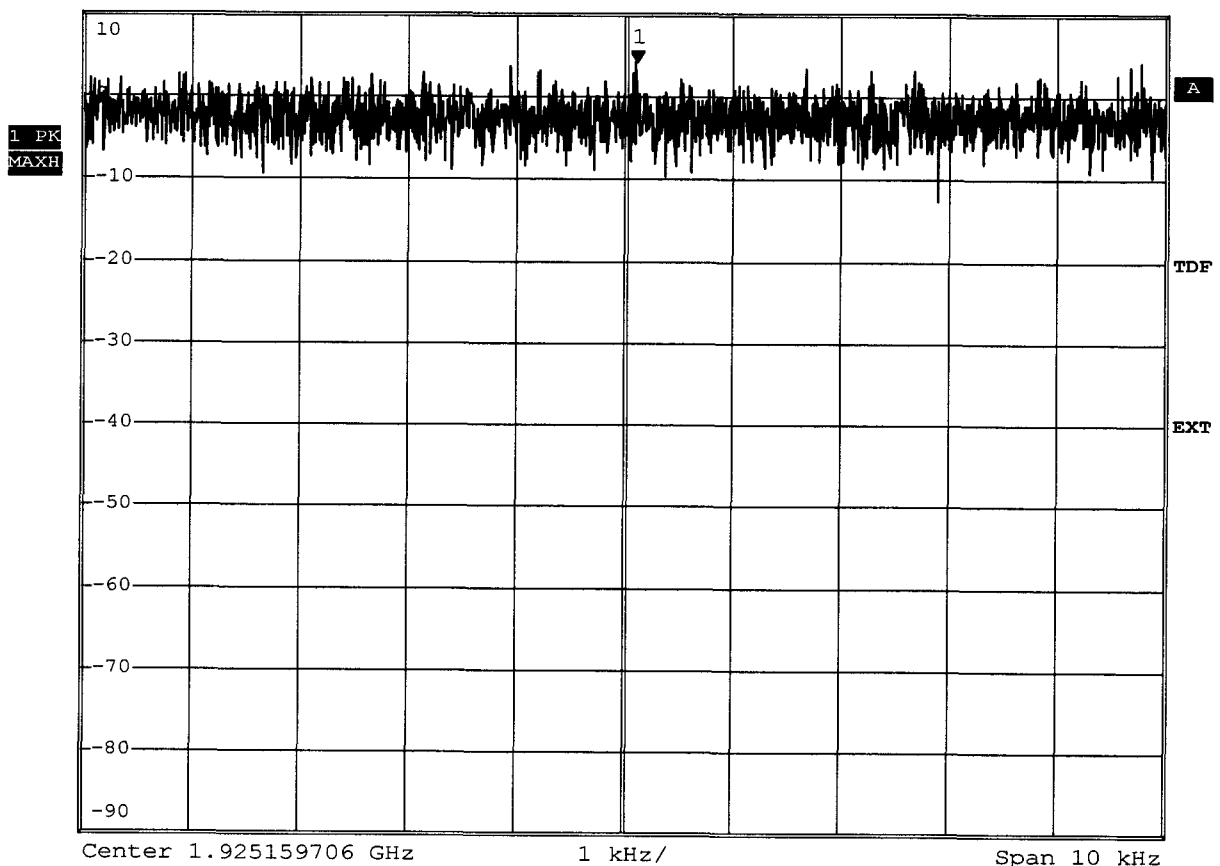

Comment: Ansi C63.17-1998 6.1.5

Date: 23.AUG.2005 11:46:23

Measurement diagram

FCC Part 15.319(d) Power spectral density

Testprocedure ANSI 63.17-1998 6.1.5
UPCS

EUT	Handset RTX3080
Model	RTX3080
Applicant	RTX America Inc.
Temperature	23°C
Test Site / Operator	ETS Reichenwalde
Test Specification	6.1.5 Power spectral density

Measured Maximum	2.972 dBm
Value in mW	1.983mW
Maximal permitted	limit=3mW
Test result	Verdict = PASS




Power Spectral Densit

*RBW 3 kHz Marker 1 [T1]
 *VBW 3 kHz 2.97 dBm
 *SWT 23 s 1.928325196 GHz

Ref 10 dBm

*Att 40 dB

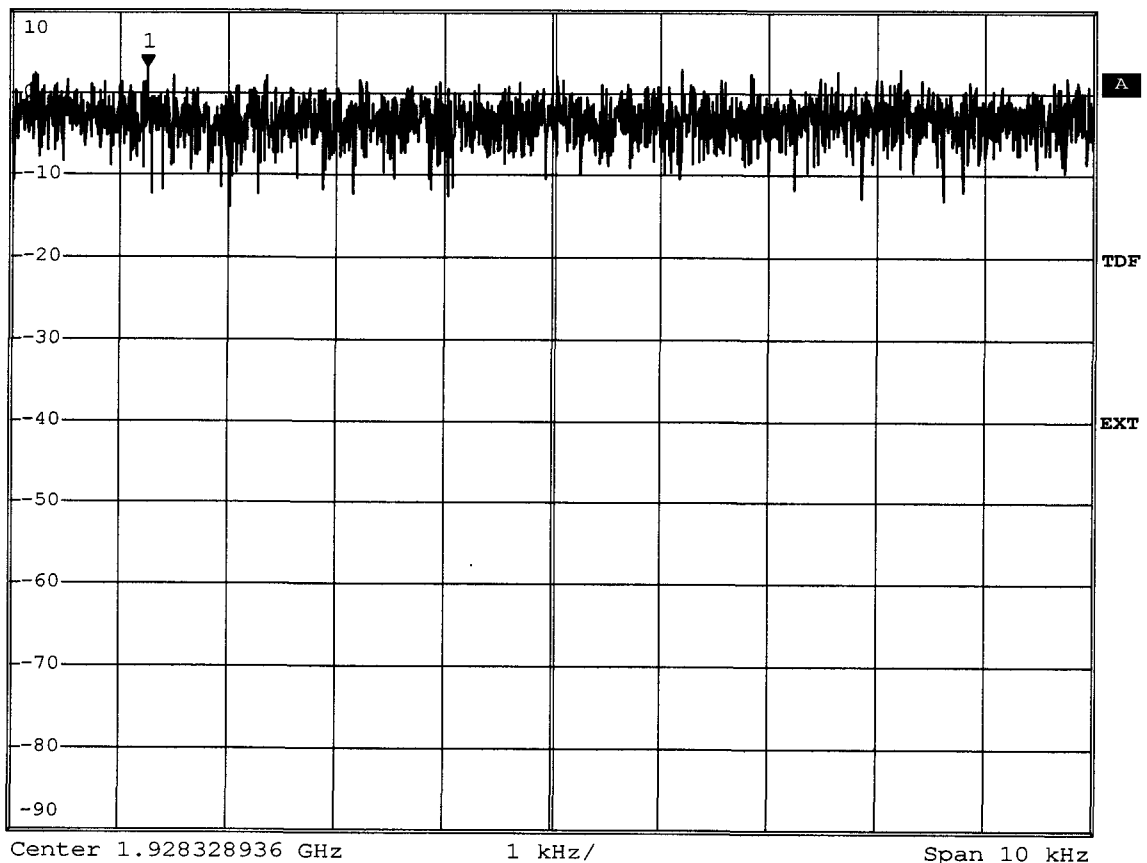1 PK
MAXH

Comment: Ansi C63.17-1998 6.1.5
 Date: 23.AUG.2005 12:34:33

Measurement diagram

Appendix I


Directional gain of the antenna

Appendix J

Radio frequency radiation exposure


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 1 / ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.928GHz Pmax:8.65dBm RBW: 5 MHz

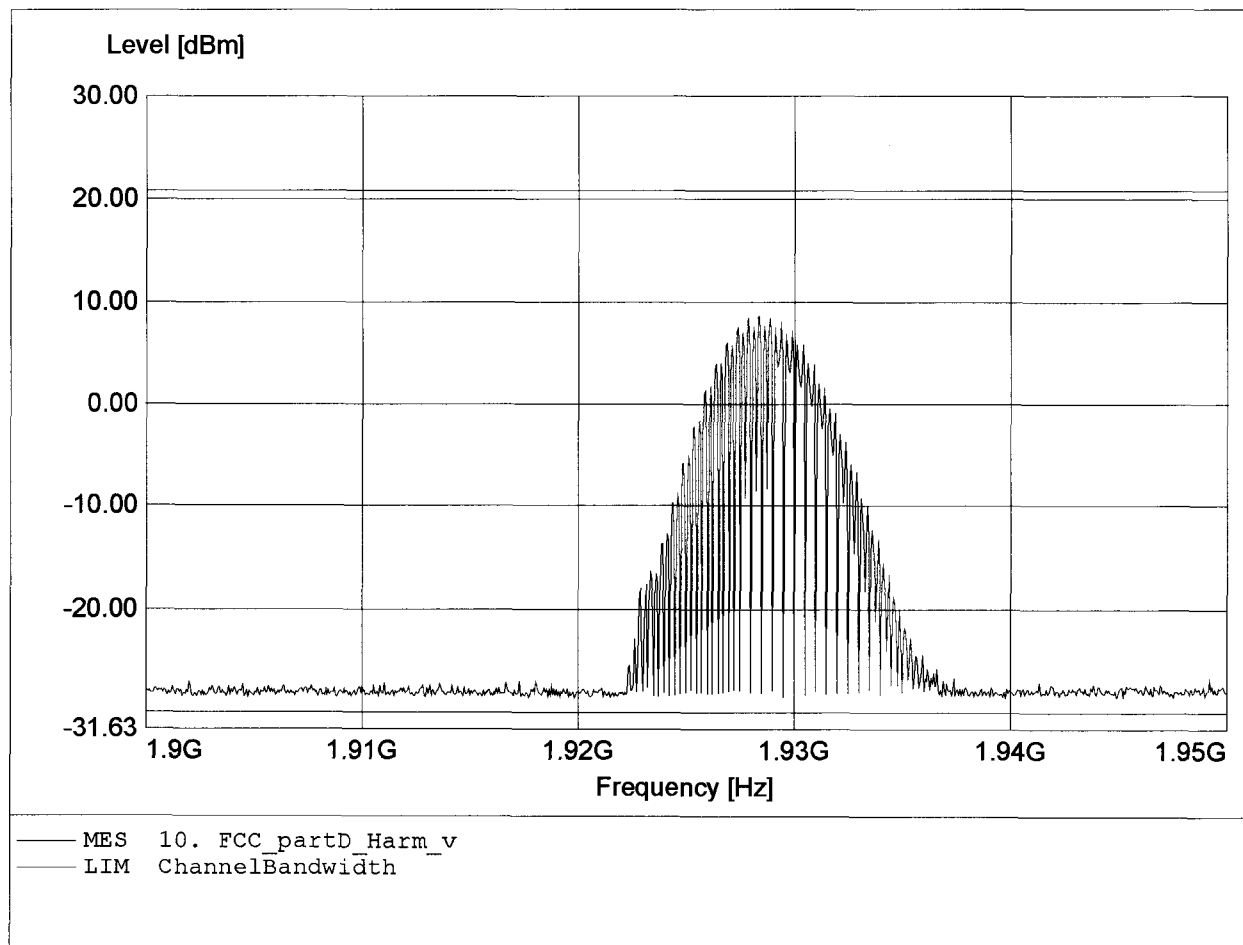


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 1 / ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.929GHz Pmax:19.70dBm RBW: 5 MHz

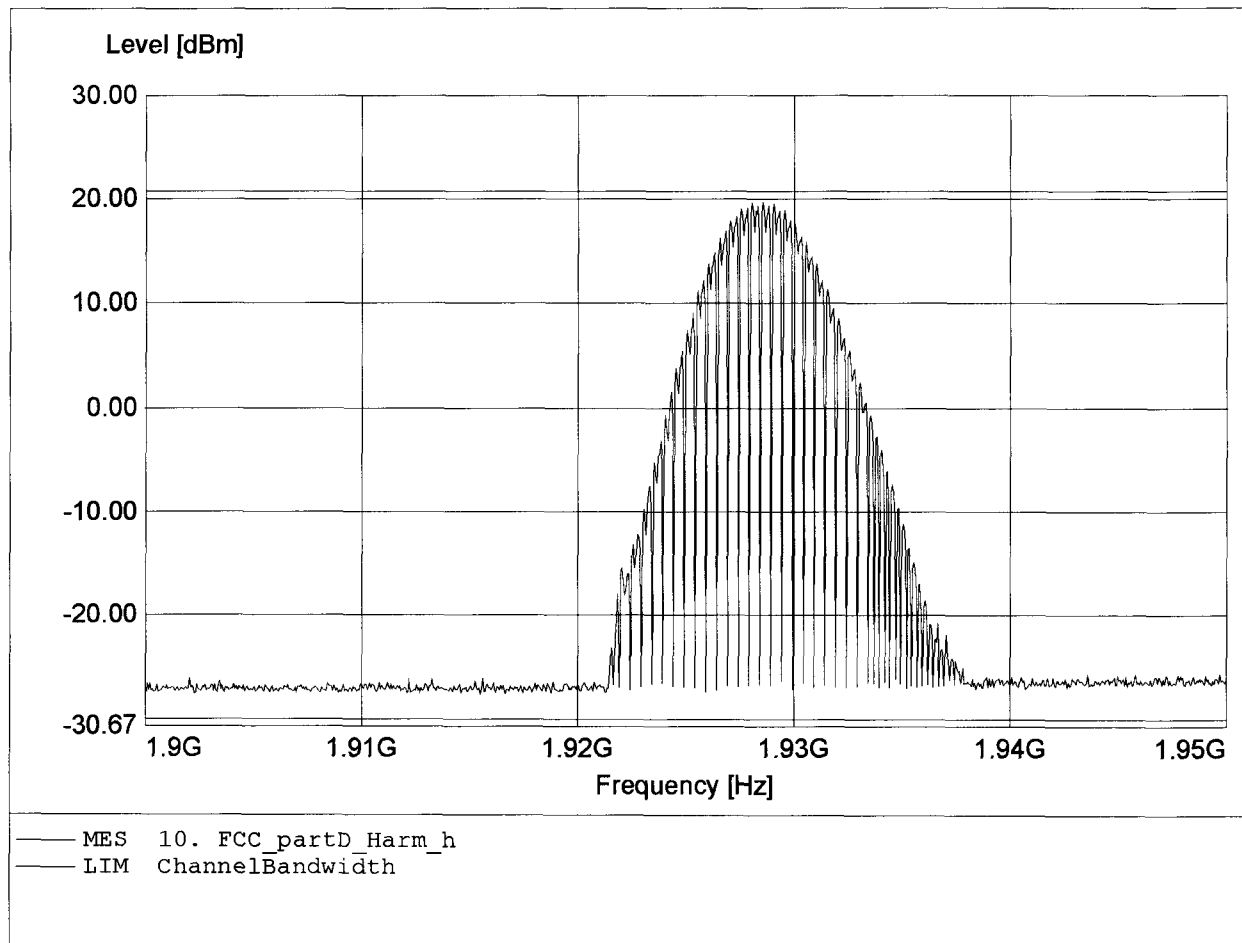


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 1 / ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.925GHz Pmax:8.87dBm RBW: 5 MHz

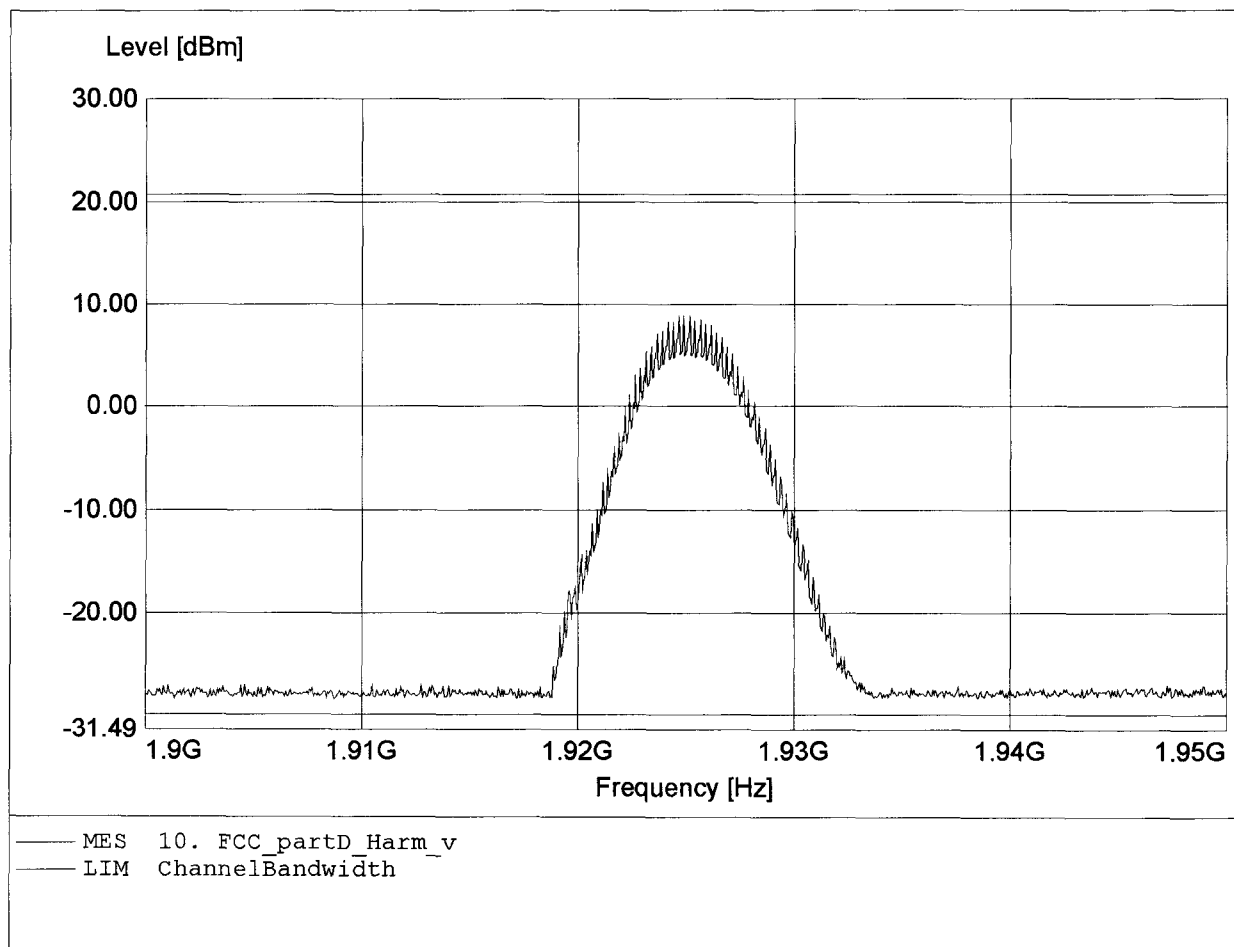


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 1 / ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.925GHz Pmax:19.89dBm RBW: 5 MHz

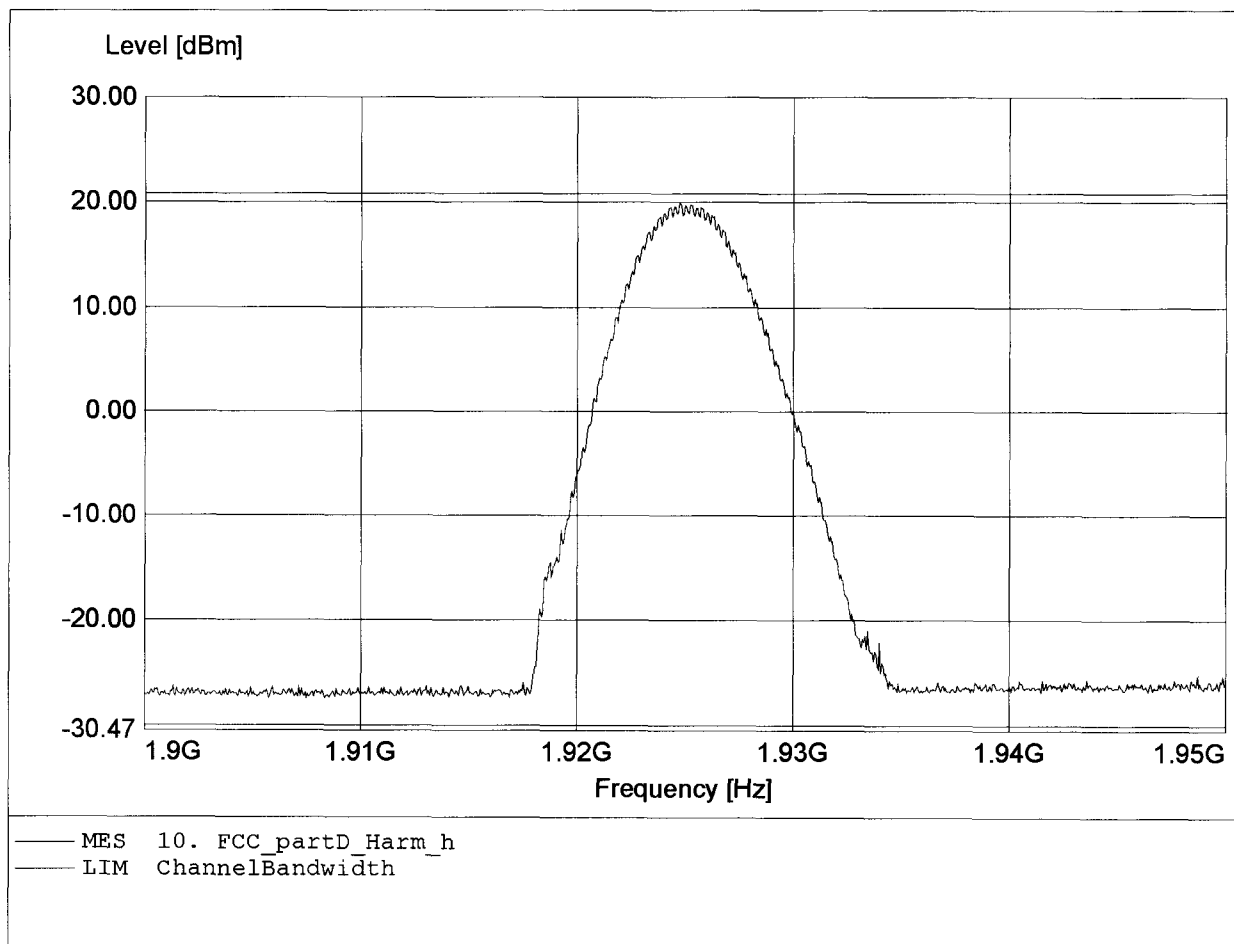


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 1 / ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.921GHz Pmax:9.37dBm RBW: 5 MHz

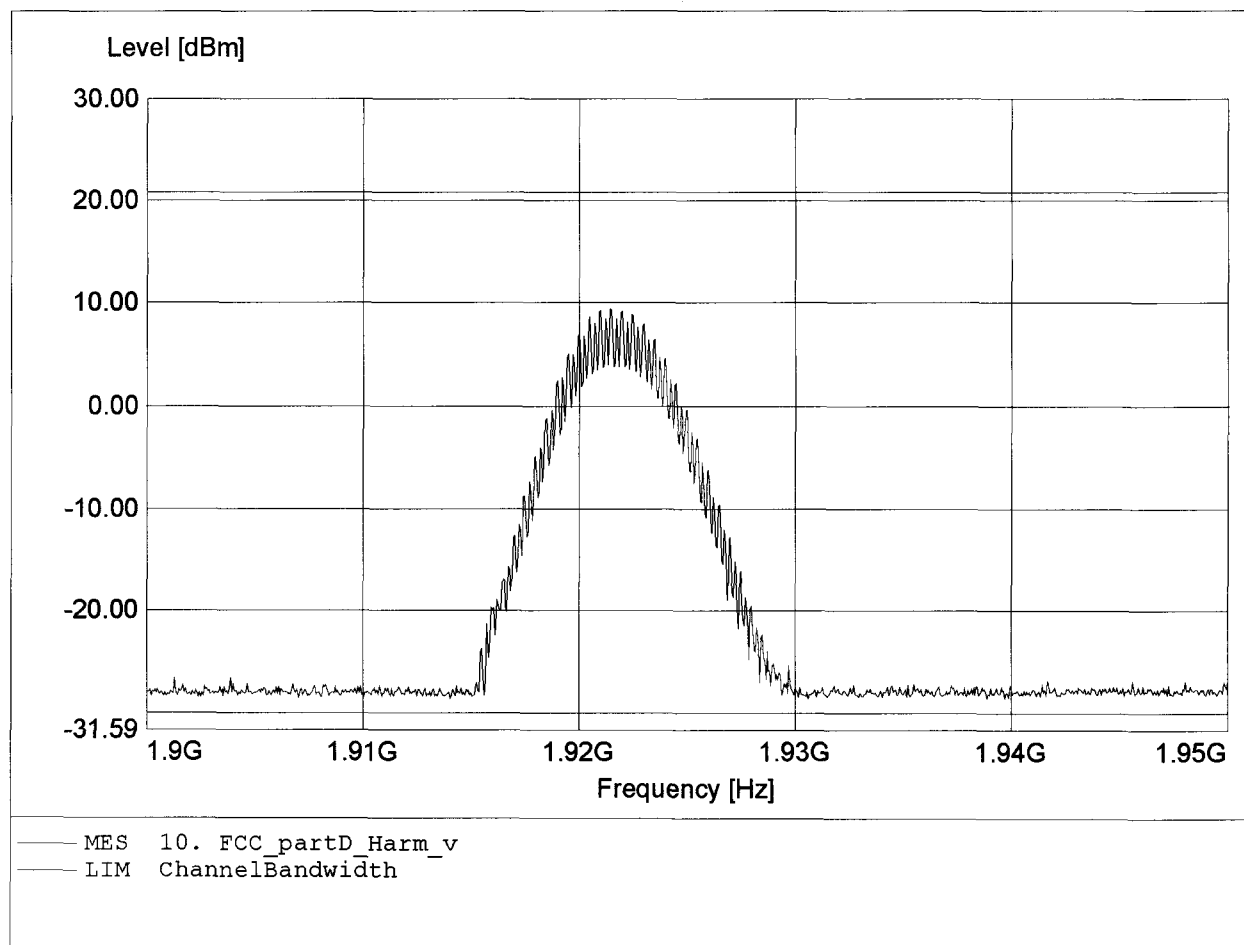


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 1 / ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.922GHz Pmax:20.24dBm RBW: 5 MHz

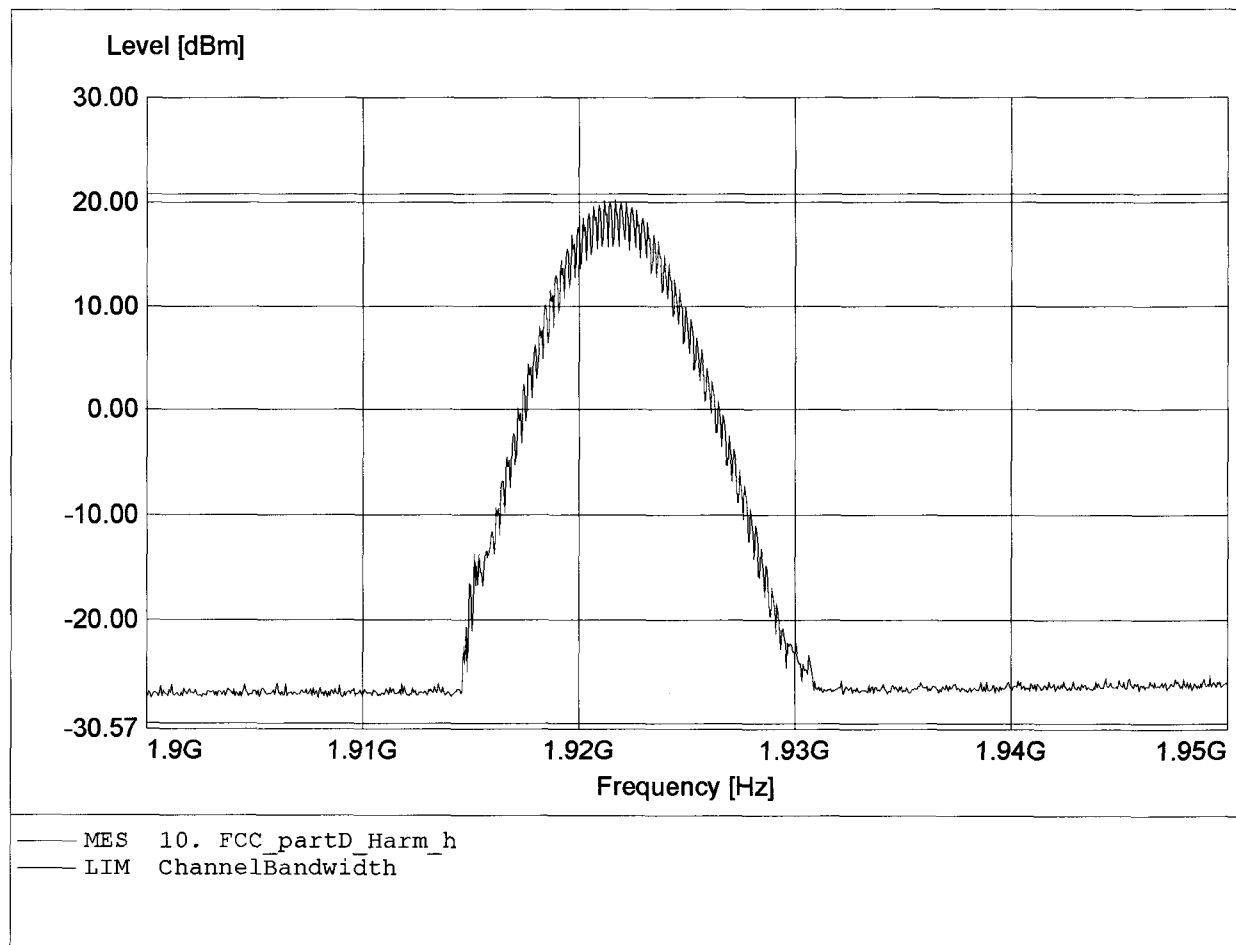


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 2 / ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.928GHz Pmax:4.64dBm RBW: 5 MHz

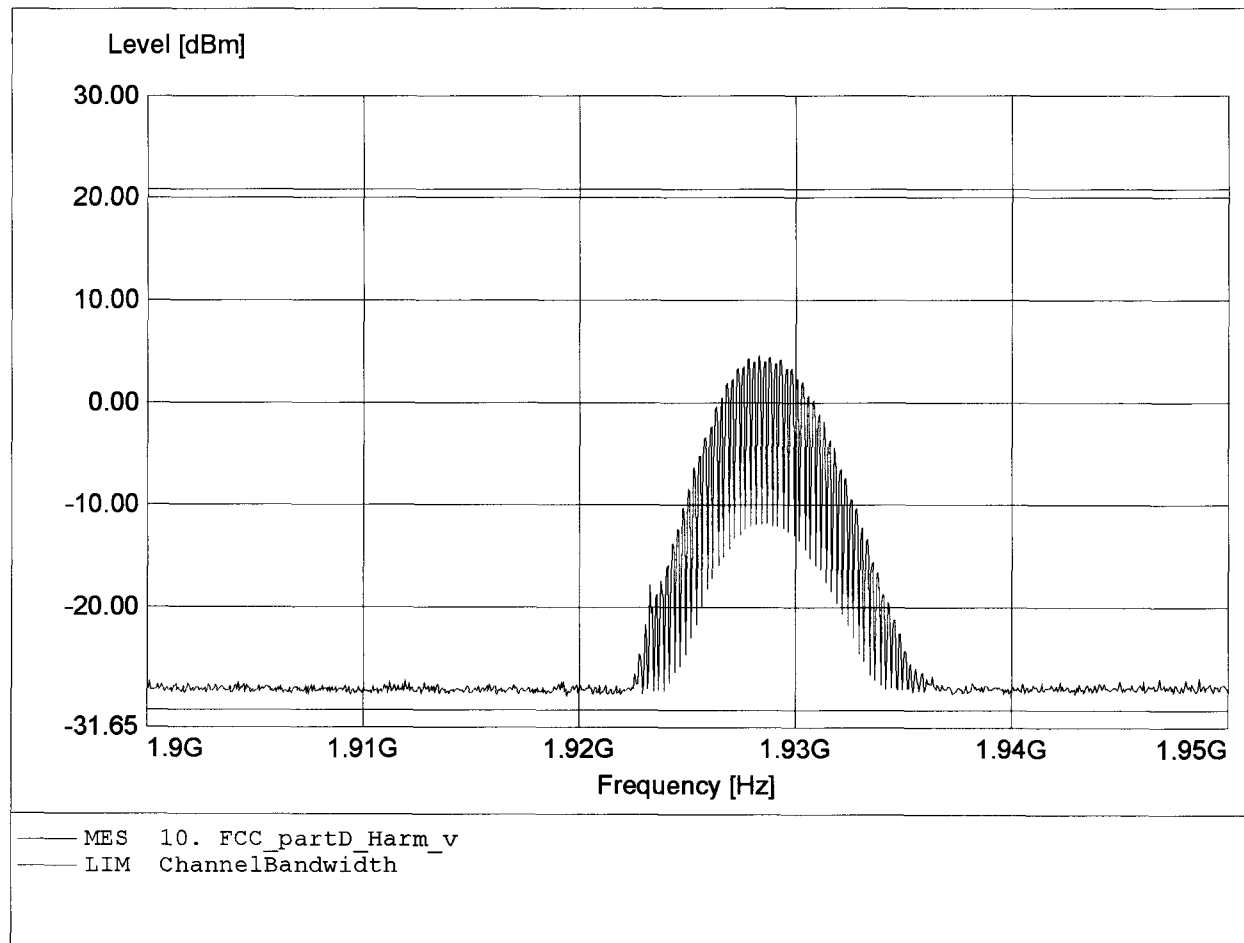


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 2 / ch.: 0
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.928GHz Pmax:19.46dBm RBW: 5 MHz

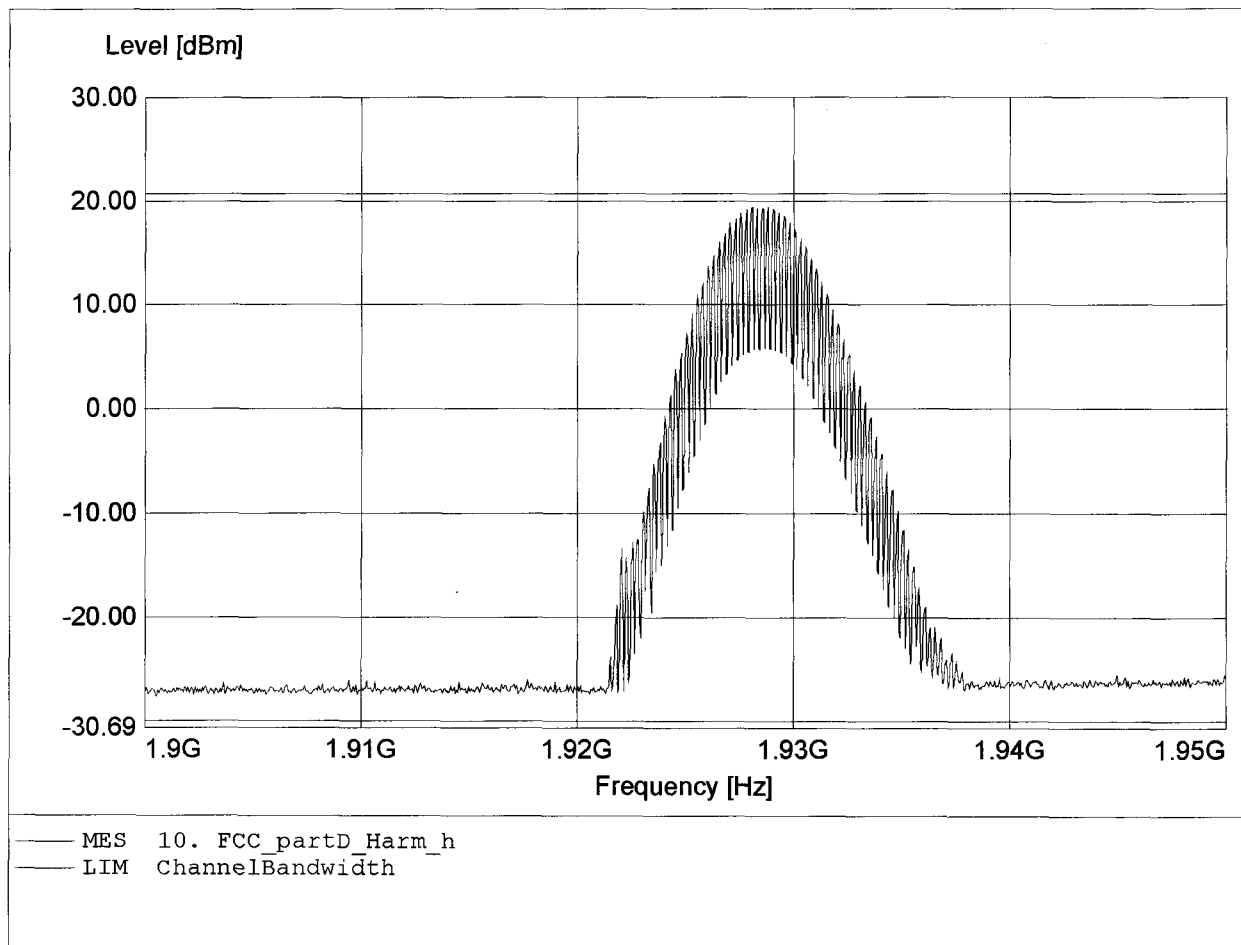


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 2 / ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.925GHz Pmax:5.08dBm RBW: 5 MHz

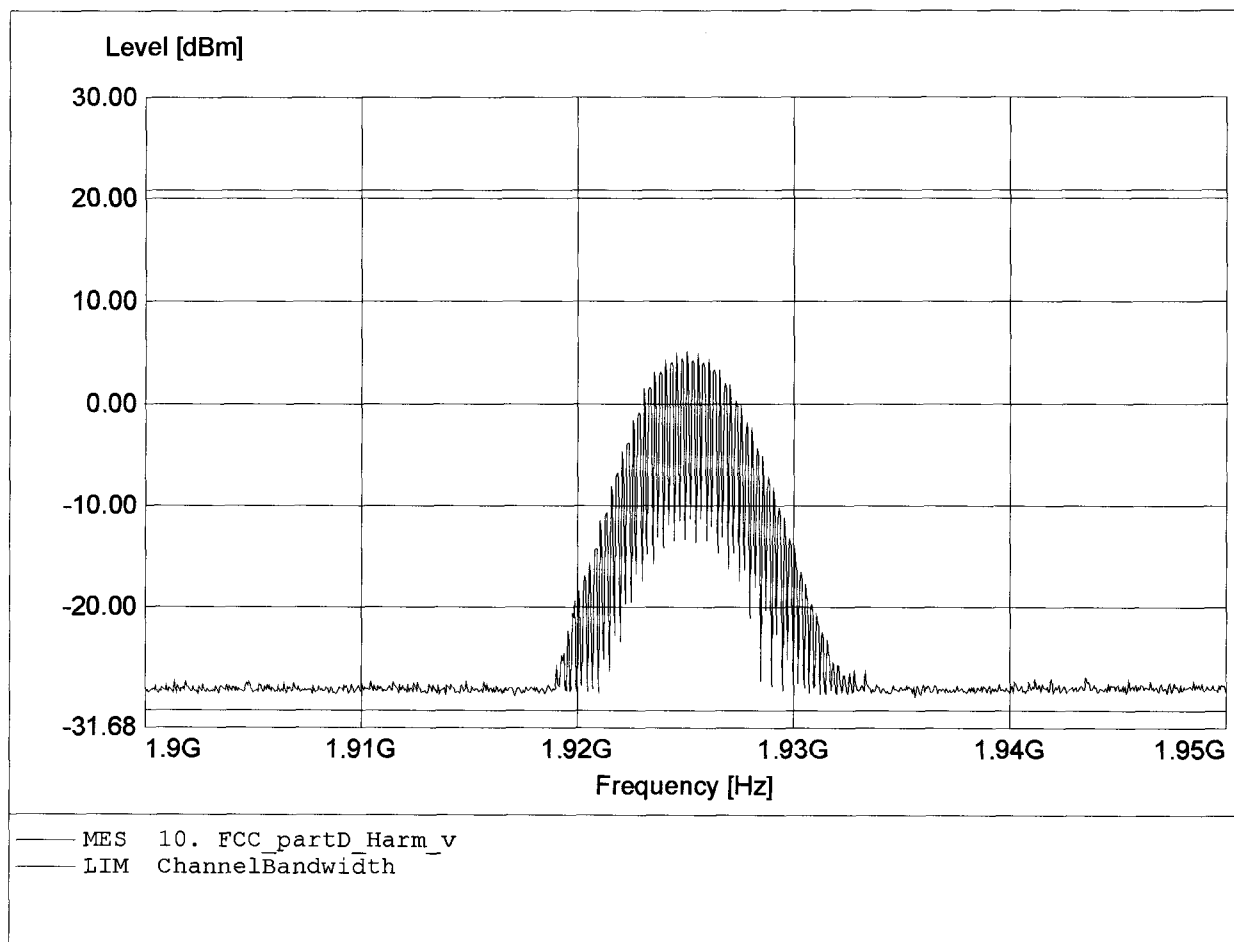


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 2 / ch.: 2
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.925GHz Pmax:19.97dBm RBW: 5 MHz

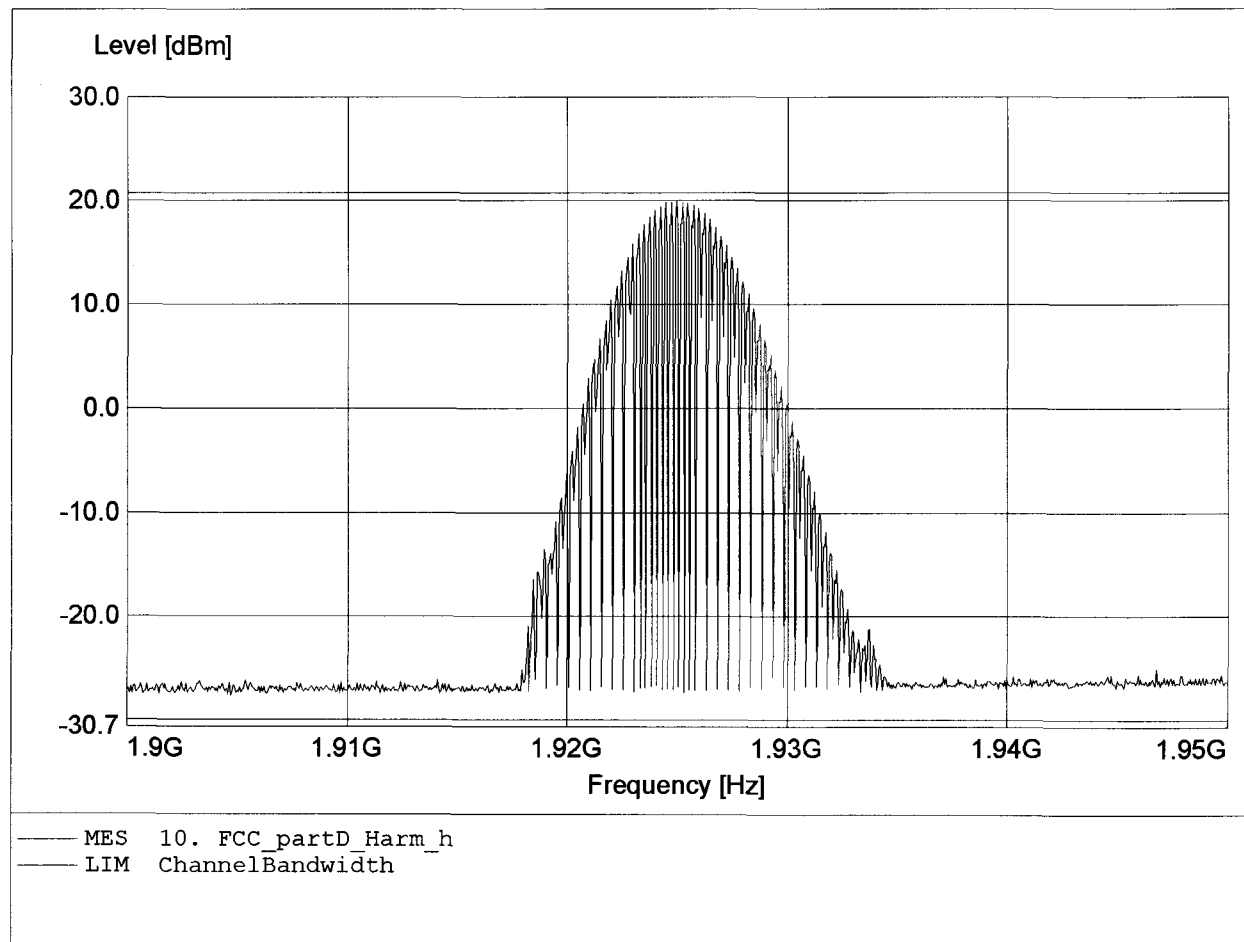


Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 2 / ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.921GHz Pmax:5.52dBm RBW: 5 MHz

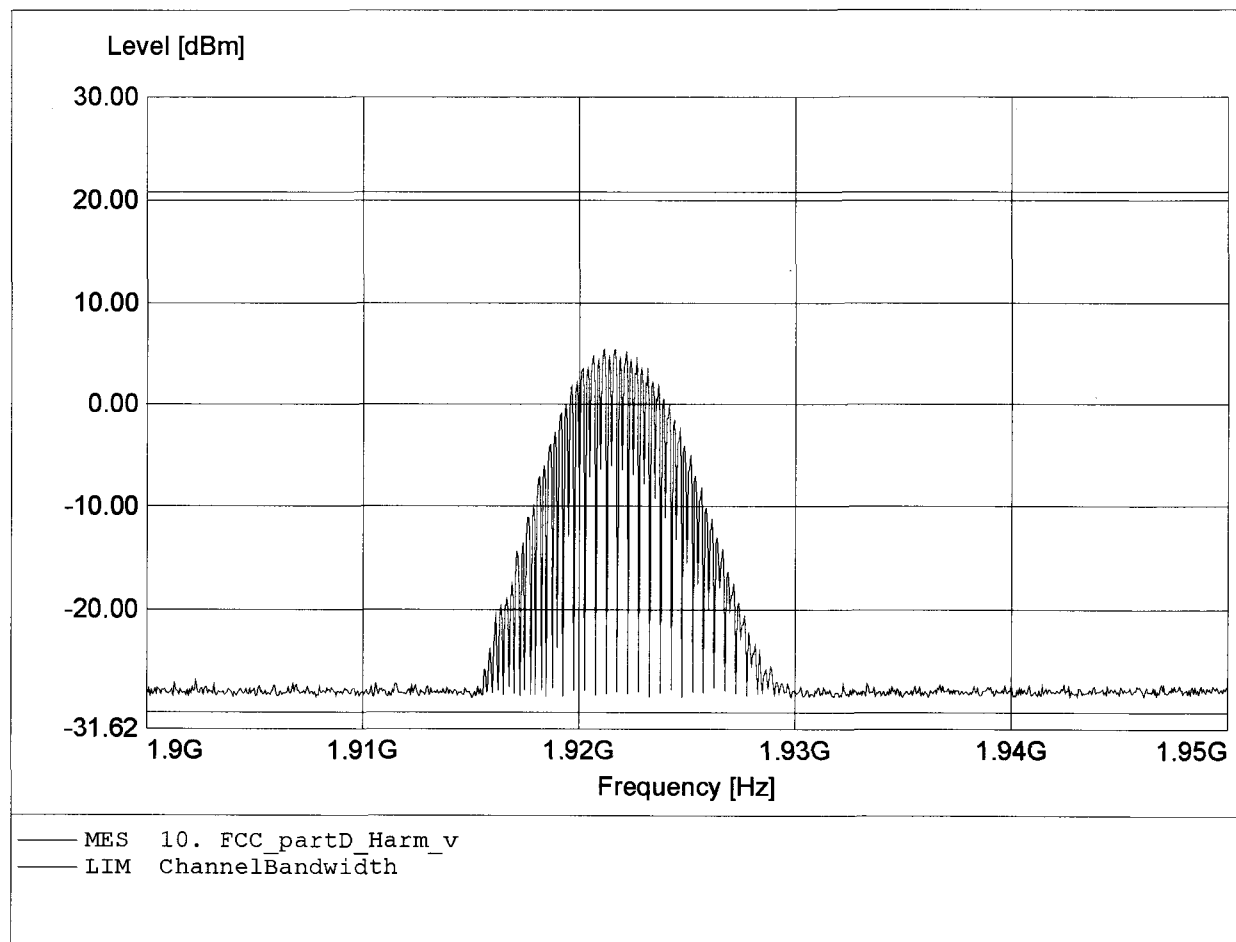

Peak Transmit Power, Radiated
FCC RULES PART 15, SUBPART D

Applicant: RTX America Inc.
EUT: Handset RTX3080
Model: RTX3080 / ant.: 2 / ch.: 4
Temperature/ Voltage: Temp.: 23°C, Unom.: 2x1.2 VDC
Test Site / Operator: ETS / Mr. Marquardt
Test Specification: Fully anechoic chamber / mode: Tx
Comment 1: Dist.: 3m, Ant.: HL 025,
Comment 2: Freq:1.922GHz Pmax:20.39dBm RBW: 5 MHz

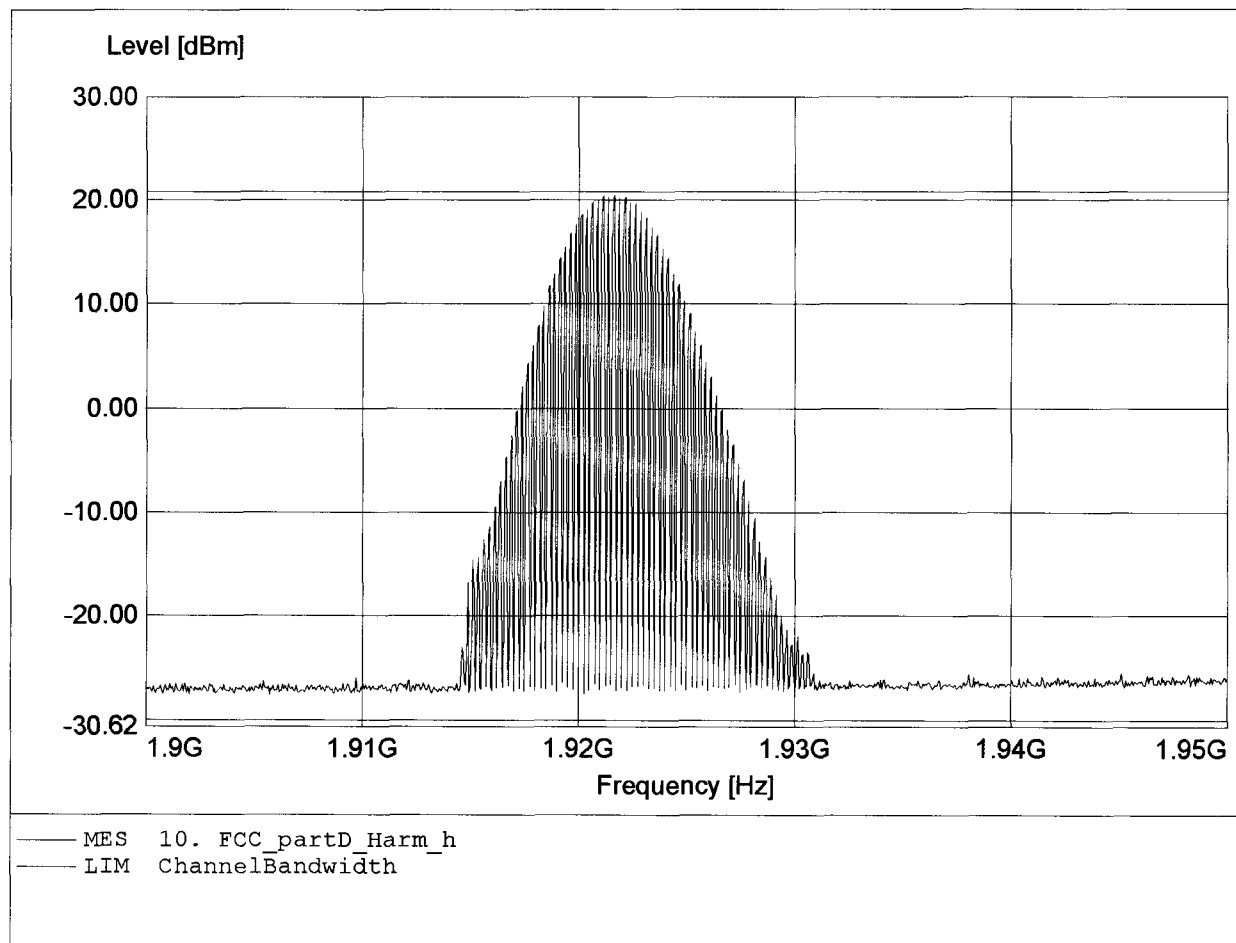

Appendix K

Monitoring threshold

Test case ANSI_7.3.1.1.1_lower_threshold.xml
 Date 26.08.2005 10:40:04
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: initial setup
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHZ	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	
	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	
00:13:41.2343750	-71,5 -73,9	-70,9 -73,9	-50 -71,2	-71,1 -73,9	-71 -73,8	-74 dBm
00:14:13.9062500	-50,1 -71,6	-72 -74,9	-71,4 -74,9	-71,3 -74,8	-71,3 -74,8	-75 dBm
00:14:55.3281250	-71,9 -75,9	-72,6 -75,8	-72,7 -75,9	-49,9 -71,9	-72,2 -75,8	-76 dBm
00:15:31.3437500	-72,4 -76,6	-72,3 -76,7	-48,6 -71,7	-72,3 -76,5	-73 -76,7	-77 dBm
00:15:43.5781250	-74,2 -77,8	-50,7 -73,2	-74 -77,8	-74 -77,8	-73,9 -77,8	-78 dBm
00:16:08.8125000	-47,9 -71,8	-74,5 -78,5	-74,1 -78,7	-74,8 -78,7	-74,5 -78,6	-79 dBm
00:16:26.3125000	-48,3 -72,2	-74,1 -79,3	-74,7 -79,6	-74,9 -79,5	-75 -79,6	-80 dBm
00:16:42.6718750	-50,9 -74,1	-76,3 -80,5	-75,7 -80,6	-76,1 -80,5	-75,5 -80,6	-81 dBm
00:17:09.2656250	-76,3 -81,6	-75,9 -81,4	-64,6 -81,5	-52,2 -77	-16,7 -34,4	Lower treshold at - 82 dBm

Log file

Test case ANSI 7.3.2.1.2_least_interfered_channel.xml
 Date 19.08.2005 10:44:41
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.3.2.1.2_a
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	
01:42:29.8125000	-81,4 -91,1	-60 -83,6	-82,5 -90,8	-81,2 -91,1	-81,5 -91,1	No interference
01:42:36.0312500	-52,9 -56,2	-39,8 -55,7	-53,5 -56,2	-61,1 -63,3	-68,3 -70,3	Interference on
01:42:54.7031250	-52,6 -55,9	-52,5 -55,7	-51,7 -55,9	-44,1 -61,6	-16,9 -36,6	OK 1
01:43:05.2656250	-55,8 -56,2	-53,3 -56,2	-55,8 -56,2	-62,6 -63,3	-42,5 -65,3	
01:43:20.1250000	-52,5 -55,9	-50,7 -55,9	-52,2 -56	-40,8 -61,7	-16,8 -36,9	OK 2
01:43:28.5781250	-55,9 -56,2	-55,8 -56,2	-55,8 -56,2	-62,4 -63,3	-42,2 -65	
01:43:44.6250000	-52,6 -55,8	-52,2 -55,9	-50 -55,8	-41,2 -61,6	-16,7 -36,6	OK 3
01:43:53.2656250	-55,8 -56,2	-53,3 -56,2	-55,9 -56,2	-62,5 -63,4	-42,5 -65,2	
01:44:05.1406250	-52,6 -55,9	-52 -55,9	-48,5 -55,9	-41,3 -61,4	-16,7 -37,3	OK 4
01:44:13.8750000	-55,8 -56,2	-55,8 -56,2	-55,9 -56,2	-62,5 -63,3	-58,6 -70,1	
01:45:37.8437500	-52,7 -55,8	-52,2 -55,8	-49,2 -55,9	-45,6 -61,7	-16,7 -36,8	OK 5

Log file

Test case ANSI_7.3.2.1.2_least_interfered_channel.xml
 Date 19.08.2005 10:51:56
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.3.2.1.2_b
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	
01:51:12.7656250	-82,7 -91	-82,2 -91	-80,3 -90,7	-81,5 -91,1	-58,7 -82,5	Interference off
01:51:21.8593750	-55,8 -56,2	-55,8 -56,2	-53,7 -56,2	-68,4 -70,4	-54,8 -63,3	Interference on
01:51:47.8125000	-52,2 -55,9	-51,8 -55,9	-40,4 -55,6	-16,9 -36,5	-42,6 -62,4	Ok 1
01:51:55.0781250	-55,8 -56,2	-55,8 -56,2	-55,8 -56,2	-60,2 -70,2	-62,3 -63,3	
01:52:07.0312500	-52,3 -55,8	-50,9 -55,7	-46 -55,8	-16,9 -36,8	-41,4 -62,2	Ok 2
01:52:14.2343750	-55,8 -56,2	-53,3 -56,2	-55,8 -56,2	-61,8 -70,3	-62,4 -63,4	
01:52:23.1562500	-52,3 -55,9	-49,1 -55,9	-42,8 -55,5	-16,9 -36,5	-41,7 -62,4	Ok 3
01:52:29.5937500	-53,1 -56,2	-55,8 -56,2	-55,8 -56,2	-60,1 -70,3	-62,5 -63,3	
01:52:40.2812500	-52,3 -55,8	-52,1 -55,8	-43,1 -55,6	-16,9 -36,3	-43 -62,4	Ok 4
01:53:00.8281250	-55,8 -56,2	-55,9 -56,2	-55,8 -56,2	-56,5 -70	-62,3 -63,3	
01:53:12.6875000	-52,7 -55,9	-52,1 -55,9	-44,2 -55,7	-16,8 -36,3	-42,2 -62,5	Ok 5

Log file

Test case ANSI_7.3.2.1.2_least_interfered_channel.xml
 Date 19.08.2005 10:58:53
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.3.2.1.2_c
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	
01:56:50.6250000	-81,6 -90,9	-59,9 -83,4	-80,6 -91	-82,3 -91	-81,7 -91,1	Interference off
01:56:59.7031250	-52,9 -56,2	-51,5 -56,2	-53,8 -56,2	-67,5 -70,3	-73,8 -77,1	Interference on
01:57:16.5781250	-52,6 -55,8	-52,4 -55,7	-50,7 -56	-40,9 -65,4	-16,9 -36,9	OK 1
01:57:23.0312500	-55,9 -56,2	-55,9 -56,2	-55,8 -56,3	-68,6 -70,4	-42,8 -66,6	
01:57:49.7187500	-52,7 -55,9	-52,2 -55,9	-51 -56	-41,7 -65,6	-16,7 -36,6	OK 2
01:57:58.1875000	-55,7 -56,2	-55,9 -56,2	-55,8 -56,2	-68,7 -70,4	-42,7 -66,6	
01:58:08.0156250	-52,5 -55,9	-52,2 -55,9	-52,2 -56	-42,2 -65,2	-16,9 -37,1	OK 3
01:58:15.6406250	-55,8 -56,2	-55,9 -56,2	-55,8 -56,2	-67,8 -70,4	-58,2 -76,1	
01:58:24.9375000	-52,5 -55,9	-52,2 -55,9	-50,9 -56	-44,5 -65,5	-16,6 -36,9	OK 4
01:59:02.6875000	-55,7 -56,2	-55,8 -56,2	-44,7 -56,1	-68,7 -70,4	-73,8 -77,1	
02:00:15.2343750	-52,5 -55,9	-52,5 -55,9	-49,8 -55,9	-44,7 -65,5	-16,9 -37,1	OK 5

Log file

Test case ANSI 7.3.2.1.2_least_interfered_channel.xml
 Date 19.08.2005 11:05:20
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.3.2.1.2_d
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHZ	1923.264 MHZ	1924.992 MHZ	1926.720 MHZ	1928.448 MHZ	Comment
	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	
02:04:06.3750000	-80,5 -90,9	-81,7 -90,9	-80,8 -90,8	-82,4 -91,1	-57,9 -81,8	Interference off
02:04:15.3125000	-55,8 -56,2	-55,8 -56,2	-55,8 -56,2	-73,5 -77,1	-42,4 -65,2	Interferenc on
02:05:08.5937500	-52,5 -55,9	-48,5 -55,7	-42,1 -55,5	-16,8 -37,1	-43,4 -67,9	Ok 1
02:05:19.9531250	-55,8 -56,2	-55,8 -56,2	-55,9 -56,2	-58,9 -76,2	-68,4 -70,3	
02:05:28.7968750	-52,1 -55,9	-51,7 -55,7	-42,6 -55,6	-17 -36,6	-42,9 -67,6	Ok 2
02:05:35.1562500	-52,8 -53,2	-53 -53,7	-53,6 -54	-57,4 -74,5	-67,6 -69,4	
02:05:46.2812500	-52,2 -55,9	-50,8 -55,7	-44,6 -55,7	-17 -37,1	-44,3 -67,8	OK 3
02:05:52.6562500	-55,8 -56,2	-55,8 -56,2	-55,8 -56,2	-42,6 -66,5	-68,5 -70,4	
02:06:03.3906250	-52,4 -55,8	-52 -55,8	-43,4 -55,8	-16,9 -36,4	-45 -67,6	OK 4
02:06:14.3906250	-53,1 -56,2	-53,3 -56,2	-53,6 -56,2	-56,3 -75,6	-67,7 -70,3	
02:06:23.5937500	-52,1 -55,9	-51,4 -55,9	-39,2 -55,4	-16,9 -36,7	-44,3 -67,4	OK 5

Log file

Appendix L

Monitoring of intended transmit window and maximum reaction time

Test case ANSI_7.5_reaction_time_mid_ch.xml
 Date 26.08.2005 14:18:50
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.5_mid_ch_50 / 35 / 57 μ s
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	
00:48:31.6093750	-82,2 -90,8	-81,8 -90,9	-81,5 -90,7	-47,7 -71,9	-82,2 -90,8	No interference
00:48:38.5000000	-15,9 -36,2	-51,2 -80,4	-73,2 -89,2	-80,6 -90,7	-79,3 -90,6	Test connection
00:48:43.8906250	-48,1 -70,9	-73 -76,5	-70,8 -85,4	-73,1 -76,1	-72,8 -76,2	50 ms
00:48:49.2812500	-45,9 -70,1	-73,4 -76,5	-70,9 -85,2	-72,6 -75,9	-72,3 -76,1	No connection
00:49:19.3750000	-73,3 -76,2	-47,9 -70,9	-65,1 -81,5	-72,3 -76	-73,1 -76,2	35 μ s
00:49:24.6718750	-73 -76,2	-45,8 -70,2	-64,6 -81,5	-72,4 -76	-72,3 -76,1	No connection
00:49:56.6093750	-47,9 -70,9	-72,9 -76,6	-61,4 -75,5	-73 -76,1	-72,6 -76,1	75 μ s on the start of slot
00:50:01.5625000	-71,5 -75,9	-46,2 -70,3	-61,7 -75,4	-72,1 -76	-72,9 -76,1	No connection
00:50:30.0937500	-72,9 -76,1	-48,4 -71,2	-62 -75,5	-73 -76	-72,9 -76,1	75 μ s on the midd. of slot
00:50:34.5937500	-72,2 -76,1	-46,3 -70,5	-59,7 -75,3	-72,3 -75,9	-73,3 -76,2	No connection
00:51:01.9375000	-48,1 -71	-73,5 -76,5	-60,9 -75,5	-72,6 -76,1	-72,7 -76,1	75 μ s on the end of slot
00:51:06.5937500	-46,5 -70,5	-73 -76,6	-60,7 -75,3	-72,6 -76	-71,7 -76,2	No connection

Log file

Test case ANSI_7.5_reaction_time_low_ch.xml
 Date 26.08.2005 11:52:19
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.5_low_ch_35 / 50 / 75us
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	
00:39:26.4687500	-82,2 -90,7	-48,4 -72,6	-79,6 -90,6	-80,6 -90,6	-81,1 -90,6	NO interference
00:39:35.1093750	-79,4 -90,4	-66,9 -89,9	-52,1 -78,5	-15 -36,1	-50,9 -79,5	Test connection
00:39:43.2187500	-71 -85,3	-72,2 -76,1	-73,1 -76,2	-47,6 -70,5	-72,8 -76,2	35 µs
00:39:48.9843750	-71,8 -85,4	-71,8 -75,8	-72,5 -76,2	-45,9 -69,9	-73 -76,1	No connection
00:40:24.7343750	-48,3 -72,2	-73 -76,1	-73,3 -76,3	-72,7 -76	-72,8 -76,2	50 µs
00:40:32.2500000	-66,1 -82,5	-71,8 -75,8	-46 -70,1	-71,8 -76	-72,7 -76,1	No connection
00:41:00.7656250	-62,2 -76,1	-73 -76,2	-73 -76,2	-48 -70,8	-72,5 -76,2	75 µs on the start of slot
00:41:06.8906250	-61,4 -75,8	-72,8 -76,1	-72 -76	-46,6 -70,3	-72,9 -76,2	No connection
00:42:23.6562500	-62,3 -76,1	-73 -76,1	-48,1 -70,9	-73 -76	-73 -76,2	75 µs on the midd. of slot
00:42:27.4843750	-60,4 -76	-72,9 -76,1	-46,2 -70,4	-73 -76,1	-72,2 -76	No connection
00:42:55.5625000	-48,2 -71	-72,7 -76,1	-72,9 -76,2	-72,5 -76,1	-72,8 -76,1	75 µs on the end of slot
00:43:00.0625000	-61,8 -76,2	-72,4 -75,9	-72,1 -76,2	-46,5 -70,3	-72,8 -76	No connection

Log file

Test case ANSI_7.5_reaction_time_high_ch.xml
 Date 26.08.2005 11:43:01
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.5_high_ch_50 / 35 / 75us
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	
00:30:45.2031250	-81,4 -90,7	-48,4 -72,6	-81,7 -90,7	-81,6 -90,8	-82,1 -90,7	No interference
00:30:53.0468750	-52,9 -79	-16,2 -36,3	-51,2 -80,4	-70,8 -89,9	-79,8 -90,5	Test connection
00:31:01.6406250	-72,8 -76,1	-46,6 -71	-72,9 -76,4	-73,5 -76,6	-70,8 -84,8	50 µs
00:31:08.9687500	-73,2 -76,2	-46 -70,4	-72,9 -76,4	-72,7 -76,6	-70,6 -84,8	No connection
00:31:40.0312500	-48,3 -71,1	-73 -76,5	-73,3 -76,3	-73,6 -76,7	-64,7 -81	35 µs
00:31:46.8906250	-46,2 -70,5	-72,5 -76,3	-72,7 -76,4	-72,4 -76,4	-65 -80,9	No connection
00:32:25.1406250	-73 -76,1	-72,9 -76,6	-73,7 -76,9	-48,1 -70,9	-60,5 -75	75 µs on start of slot
00:32:30.8125000	-72 -76	-72,4 -76,3	-73,1 -76,8	-46,5 -70,3	-60,5 -75	No connection
00:33:02.7812500	-72,6 -76,1	-72,9 -76,6	-73,7 -77	-47,9 -70,7	-61,2 -75,2	75 µs on midd. of slot
00:33:09.6406250	-71,7 -76	-71,5 -76,4	-73 -76,9	-46,4 -70,3	-61,2 -75,2	No connection
00:33:38.7031250	-49 -71,6	-73 -76,5	-73,2 -77	-72,6 -76,1	-60,6 -74,6	75 µs on end of slot
00:33:46.9375000	-46,1 -70,3	-73 -76,5	-73,1 -76,9	-72,5 -76	-60,6 -74,6	No connection

Log file

Appendix M

Monitoring band width

Test case ANSI_7.4.1_monitoring_bandwidth.xml
 Date 26.08.2005 11:12:58
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.4.1 simple compliance test_low_-30%
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	
	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	
00:01:50.7812500	-80,9 -90,5	-82,2 -90,8	-81,7 -90,6	-47,8 -72,1	-81,1 -90,5	Interference off
00:02:50.8281250	-82,1 -90,8	-72,7 -76,1	-72,9 -76,2	-73 -76,1	-72,7 -76,2	Interference on
00:03:20.9531250	-80,6 -90,7	-46,1 -70,3	-72,5 -76,2	-72,6 -76,1	-72,8 -76,2	No connection

Log file

Test case ANSI_7.4.1_monitoring_bandwidth.xml
 Date 26.08.2005 11:17:41
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.4.1 simple compliance test_low_+30%
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	
	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	
00:08:04.0312500	-48,5 -72,8	-80,1 -90,8	-80,2 -90,8	-82,1 -90,8	-81,8 -90,6	No interference
00:08:15.4375000	-48,6 -72,9	-73,2 -76,1	-72,9 -76,2	-72,6 -76	-72,9 -76,1	Interference on
00:08:45.6718750	-81,9 -90,7	-73 -76,1	-72,9 -76,2	-48,2 -70,9	-72,5 -76,1	No connection

Log file

Test case ANSI_7.4.1_monitoring_bandwidth.xml
 Date 26.08.2005 11:20:23
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.4.1 simple compliance test_mid_-30%
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHZ	1923.264 MHZ	1924.992 MHZ	1926.720 MHZ	1928.448 MHZ	Comment
	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	
	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	
00:10:58.9843750	-48,5 -72,8	-81,1 -90,9	-81,2 -90,7	-81,3 -90,8	-82 -90,7	No Interference
00:11:08.8750000	-48,3 -71,1	-73 -76,6	-81,7 -90,8	-73,1 -76,1	-72,8 -76,2	Interference on
00:11:24.9531250	-71,5 -75,7	-46,8 -70,8	-80,9 -90,7	-72,4 -76	-72,9 -76,1	No connection

Log file

Test case ANSI_7.4.1_monitoring_bandwidth.xml
 Date 26.08.2005 11:23:31
 Reference to the EUT G0M20508-9731 / RTX3080

 Comment: 7.4.1 simple compliance test_mid_+30%

 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	
	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	
00:14:06.6718750	-82,1 -90,9	-48,4 -72,6	-81,6 -90,7	-82,1 -90,8	-81,9 -90,8	No interference
00:14:19.6250000	-73,6 -77,4	-48,4 -71,2	-80,6 -90,7	-72,7 -76,1	-72,6 -76,1	Interference on
00:14:35.8281250	-72,3 -77,3	-46,3 -70,4	-80,6 -90,8	-72,4 -76	-72,7 -76,2	No connection

Log file

Test case ANSI_7.4.1_monitoring_bandwidth.xml
 Date 26.08.2005 11:26:16
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.4.1 simple compliance test_high_-30%
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHZ	1923.264 MHZ	1924.992 MHZ	1926.720 MHZ	1928.448 MHZ	Comment
	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	
	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	
00:16:46.6406250	-48,4 -72,6	-81,6 -90,9	-81,1 -90,7	-82,3 -90,7	-81,8 -90,8	No interference
00:17:13.7187500	-48,2 -71	-73,2 -76,5	-73,5 -76,4	-73,5 -76,6	-80,7 -90,9	Interference on
00:17:23.5781250	-46,8 -70,6	-73,1 -76,5	-72,5 -76,2	-72,7 -76,5	-81,3 -90,7	No connection

Log file

Test case ANSI_7.4.1_monitoring_bandwidth.xml
 Date 26.08.2005 11:31:48
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: 7.4.1 simple compliance test_high_+30%
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHz	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	Peak in dBm	
	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	RMS in dBm	
00:22:32.2968750	-81,4 -90,7	-80,7 -90,7	-81,4 -90,7	-81,6 -90,5	-81,4 -90,6	Interferer off
00:22:39.1875000	-72,4 -76,1	-72,4 -76,5	-73 -76,5	-47,9 -70,9	-81,8 -90,8	Interferer on
00:22:48.5156250	-71,5 -75,9	-73,1 -76,5	-72,1 -76,3	-46,2 -70,2	-81,5 -90,8	No connection

Log file

Appendix N

Random waiting interval

Appendix O

Duration of Transmission

Test case ANSI_8.2.2. Transmission_duration_PP_only.xml
 Date 27.08.2005 07:26:34
 Reference to the EUT G0M20508-9731 / RTX3080
 Comment: initial setup
 Handset RTX3080
 RTX Telecom A/S

The LOG table shows the level changes on each Channel of the transmission system

Time stamp	1921.536 MHZ	1923.264 MHz	1924.992 MHz	1926.720 MHz	1928.448 MHz	Comment
	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	Peak in dBm RMS in dBm	
00:11:56.4062500	-15,9 -36,1	-54,5 -82,1	-63,9 -85,9	-78,5 -90,6	-81 -90,7	
00:31:56.5468750	-64,2 -84,5	-54,4 -82,6	-45,2 -65,6	-16,6 -34	-43,7 -69,1	
00:51:56.5937500	-61 -83,1	-45,7 -65,7	-16,7 -34,3	-43,8 -68,4	-56,8 -83,1	
01:11:56.7187500	-40,3 -64,8	-16,7 -33,8	-44,1 -68,3	-56,8 -83,3	-69,2 -86	
01:21:56.7968750	-63,8 -86,3	-59 -82,3	-45,4 -65,5	-16,8 -34,4	-44,2 -68,9	
01:31:56.7968750	-16,7 -34	-43,2 -68,8	-56,4 -80,4	-64,4 -84,9	-71,7 -87,4	
01:41:56.8593750	-56,8 -82	-46 -65,2	-16,7 -33,5	-45,4 -68,3	-57,4 -82,7	
01:51:56.9531250	-16,6 -34,1	-44,7 -69	-56 -79,9	-68,7 -86,1	-71,2 -87,2	
02:01:57.0468750	-63,9 -84,4	-59,7 -83,5	-45,1 -65,3	-16,4 -33,5	-44,7 -68,4	
02:11:57.0312500	-16,6 -33,8	-44,7 -68,7	-57,5 -80,5	-64,5 -84,6	-70,3 -87,2	
02:21:57	-16,7 -33,6	-16,8 -34,2	-45 -68,2	-57,3 -81,2	-66,8 -85,3	
02:21:57.0781250	-45,9 -65,5	-16,7 -33,9	-42,6 -68,3	-58,3 -83	-66,9 -85,8	
02:31:57.0625000	-42,9 -65,6	-40,4 -65,4	-16,6 -33,6	-46,4 -68	-56,9 -82,8	
03:21:57.2656250	-16,6 -33,5	-43,6 -68,3	-45,3 -65,2	-16,5 -34,9	-44,9 -68,6	
03:21:57.4375000	-65,4 -85	-55,9 -82,8	-40 -64,7	-16,5 -33,8	-45,2 -68,6	
03:31:57.4687500	-16,6	-44,4	-56,5	-64,3	-67,6	

Log file

	-34	-68,7	-80,8	-84,6	-87	
03:51:57.5625000	-61,6 -83,9	-57,1 -82,7	-45,9 -65,7	-16,7 -34,1	-46,7 -69,1	
04:01:57.5937500	-16,5 -34	-45,9 -68,7	-56,5 -80,5	-64,6 -84,9	-69,6 -87	
04:11:57.5312500	-16,7 -33,3	-44,7 -68,6	-45 -65,5	-16,2 -33,8	-43,9 -69,2	
04:21:57.6250000	-55,3 -82,2	-40,4 -65,4	-16,6 -33,7	-45,2 -68,5	-57 -82,7	
04:31:57.7500000	-41,8 -65,1	-16,8 -34,1	-45,3 -68,5	-57,4 -82,9	-68,7 -86,4	

 Log file

 ELECTRONIC TECHNOLOGY SYSTEMS DR. GENZ GMBH
 Storkower Str. 38C, D-15526 REICHENWALDE B. BERLIN