

Appendix A: Test Results

APPENDIX A: TEST RESULTS	1
APPENDIX A.1: TEST RESULTS OF FIELD STRENGTH OF FUNDAMENTAL & HARMONICS.....	2
30MHz - 1GHz	2
1GHz - 18GHz.....	4
APPENDIX A.2: TEST RESULTS OF 20dB BANDWIDTH	16
APPENDIX A.3: TEST RESULTS OF 99% BANDWIDTH.....	18
APPENDIX A.4: TEST RESULTS OF BAND EDGE	20
APPENDIX A.5: TEST RESULTS OF CONDUCTED EMISSION ON AC MAINS.....	24


Appendix A.1: Test Results of Field strength of fundamental & harmonics

Note: The testing was carried out within frequency range 9kHz to the tenth harmonics. The measurement results below 30MHz and 18GHz to 26.5GHz were greater than 20dB below the limit, so only the radiated spurious emissions from 30MHz to 18GHz were reported.

30MHz - 1GHz

EUT Information

EUT Name:	Lenovo EOS 2.4G Dongle Gen3
Model:	DGRFPDO
Test Mode:	2.4G Mid CH
Order No/Sample No:	168473368/A003705468-010
Test Voltage:	DC 5V From USB
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

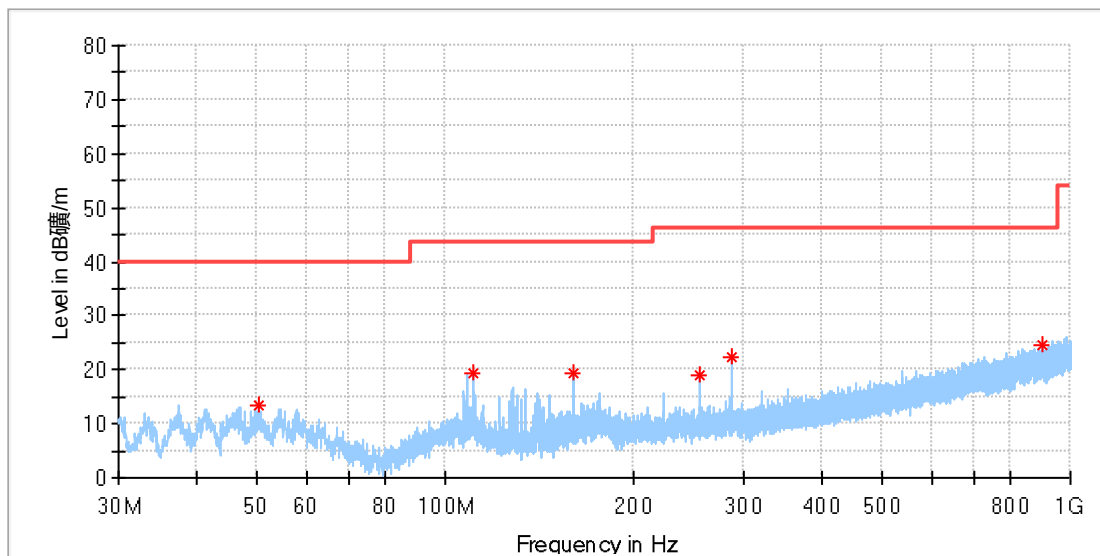

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
50.332692	13.23	40.00	26.77	100.0	H	40.0	-18.6
111.069615	19.40	43.50	24.10	100.0	H	16.0	-19.5
160.017308	19.23	43.50	24.27	100.0	H	146.0	-22.0
256.010000	19.14	46.00	26.86	100.0	H	324.0	-17.6
288.020000	22.41	46.00	23.59	100.0	H	40.0	-16.9
904.865385	24.52	46.00	21.48	100.0	H	342.0	-5.4

Final_Result

Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G Mid CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

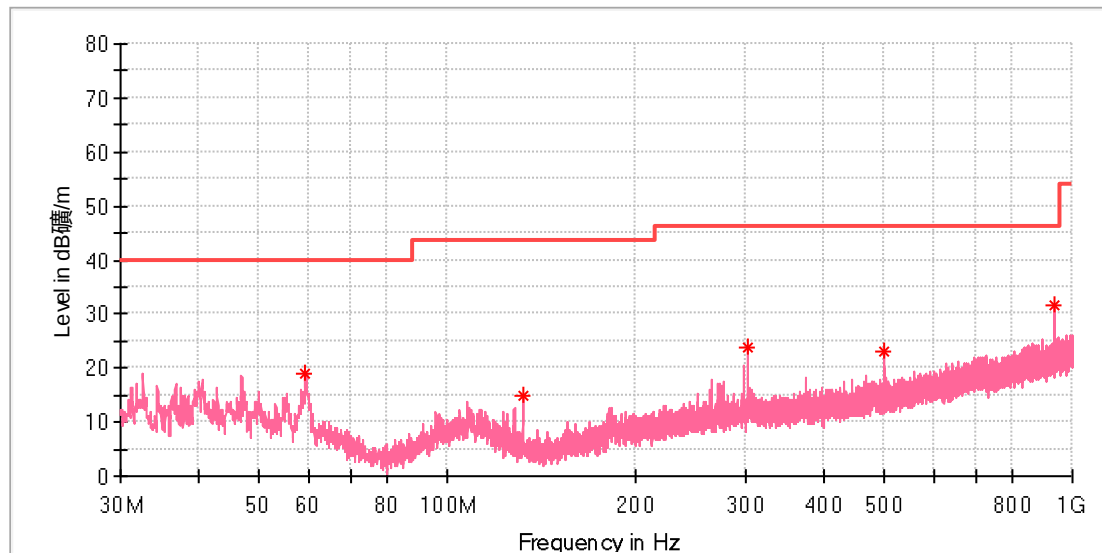

Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
59.174615	19.15	40.00	20.85	100.0	V	3.0	-19.2
131.961923	15.05	43.50	28.45	100.0	V	103.0	-22.3
303.316154	23.67	46.00	22.33	100.0	V	18.0	-16.6
498.845769	22.90	46.00	23.10	100.0	V	18.0	-12.3
937.546923	31.76	46.00	14.24	100.0	V	178.0	-5.0

Final_Result


Frequency (MHz)	QuasiPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

1GHz - 18GHz

Note: The highest waveform in the figure is 2.4GHz Fundamental.

EUT Information

EUT Name:	Lenovo EOS 2.4G Dongle Gen3
Model:	DGRFPDO
Test Mode:	2.4G L CH
Order No/Sample No:	168473368/A003705468-010
Test Voltage:	DC 5V From USB
Remark:	Temp 23 Humi:58%
Test Standard:	FCC 15.249
Tested By:	Kei Zhang
Reviewed By:	Terry Yin

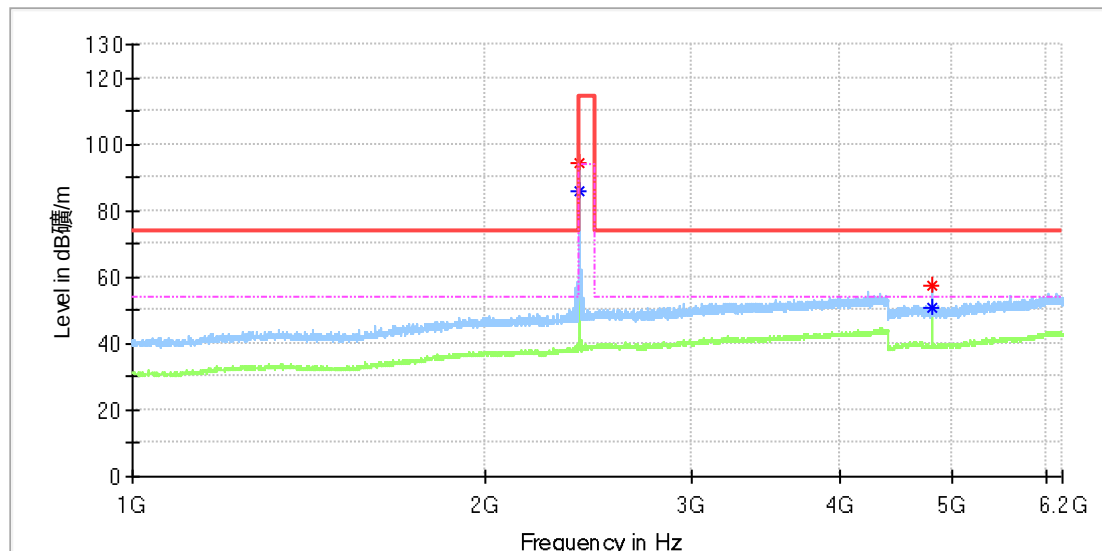

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2402.000000	---	86.10	94.00	7.90	150.0	H	334.0	7.0
2402.500000	94.21	---	114.00	19.79	150.0	H	334.0	7.0
4804.500000	57.54	---	74.00	16.46	150.0	H	243.0	11.8
4805.500000	---	50.69	54.00	3.31	150.0	H	281.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G L CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

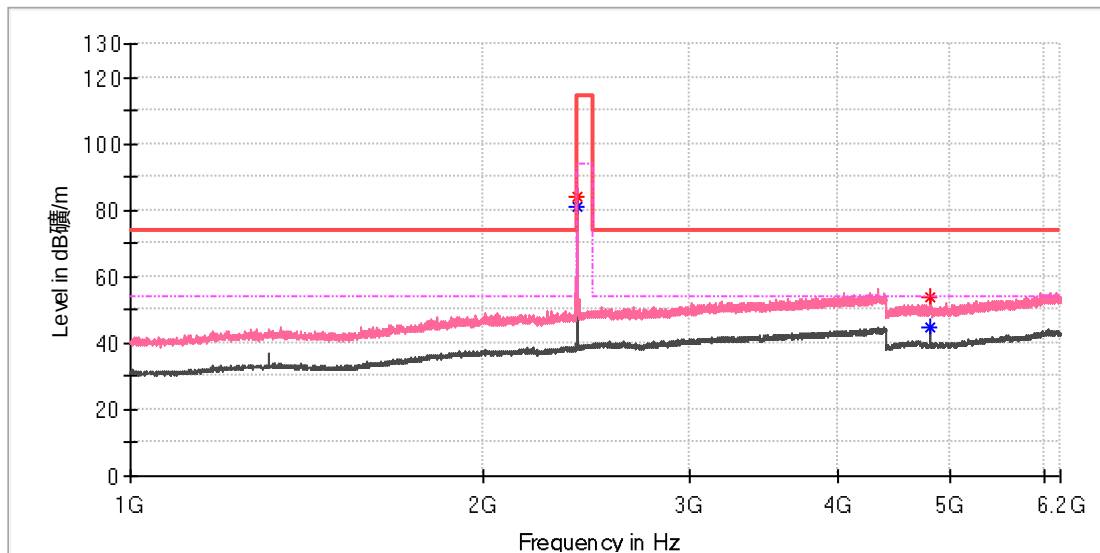

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2402.500000	---	81.14	94.00	12.86	150.0	V	155.0	7.0
2403.500000	84.03	---	114.00	29.97	150.0	V	155.0	7.0
4806.000000	---	44.97	54.00	9.03	150.0	V	13.0	11.8
4806.500000	53.81	---	74.00	20.19	150.0	V	13.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G L CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

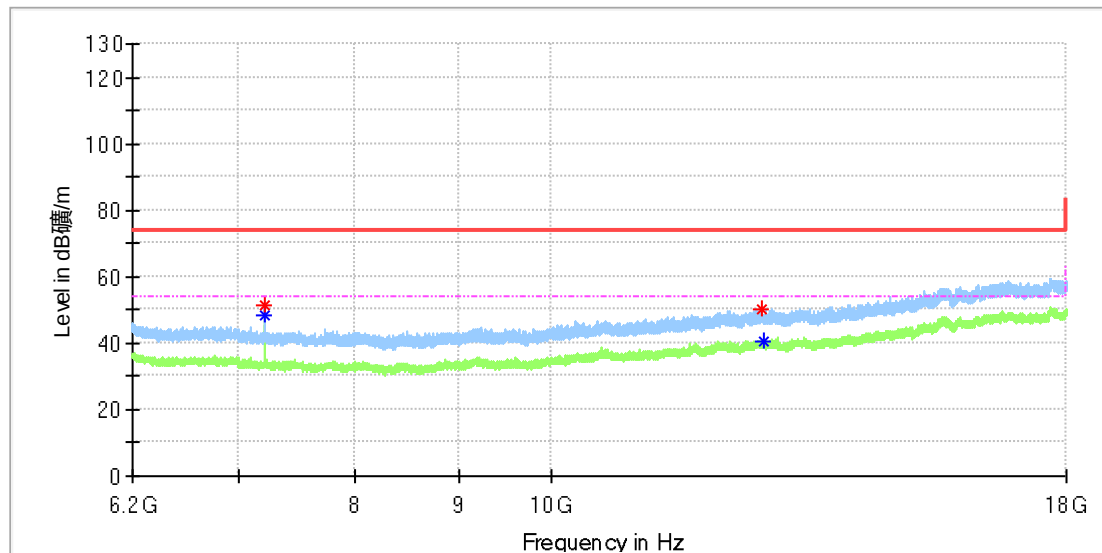

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7207.425000	51.63	---	74.00	22.37	150.0	H	0.0	8.8
7207.425000	---	48.43	54.00	5.57	150.0	H	0.0	8.8
12701.800000	50.39	---	74.00	23.61	150.0	H	65.0	15.1
12736.216667	---	40.67	54.00	13.33	150.0	H	0.0	15.2

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G L CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

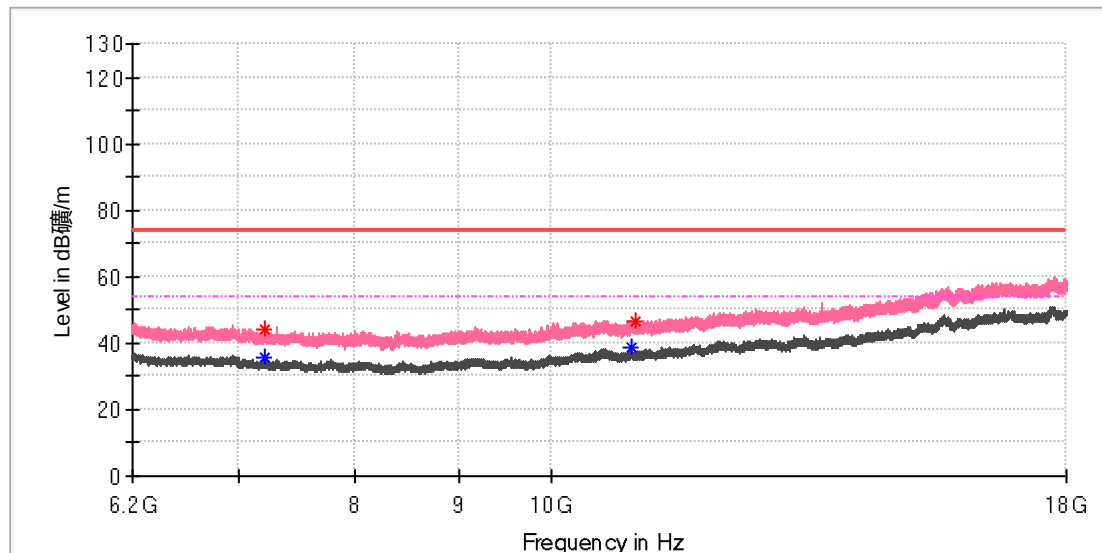

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7209.883333	---	35.62	54.00	18.38	150.0	V	203.0	8.7
7216.766667	43.90	---	74.00	30.10	150.0	V	346.0	8.7
10967.691667	---	38.75	54.00	15.25	150.0	V	120.0	12.2
11020.300000	46.75	---	74.00	27.25	150.0	V	322.0	12.2

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G Mid CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

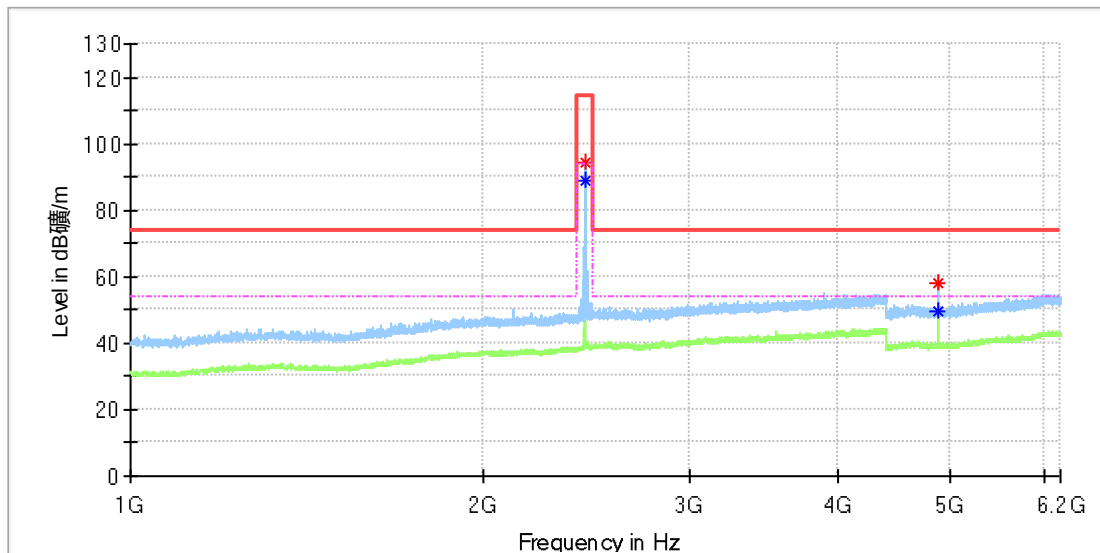

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2439.500000	94.10	---	114.00	19.90	150.0	H	74.0	7.4
2440.500000	---	88.79	94.00	5.21	150.0	H	207.0	7.4
4880.000000	---	49.29	54.00	4.71	150.0	H	104.0	11.8
4880.500000	58.23	---	74.00	15.77	150.0	H	104.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G Mid CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

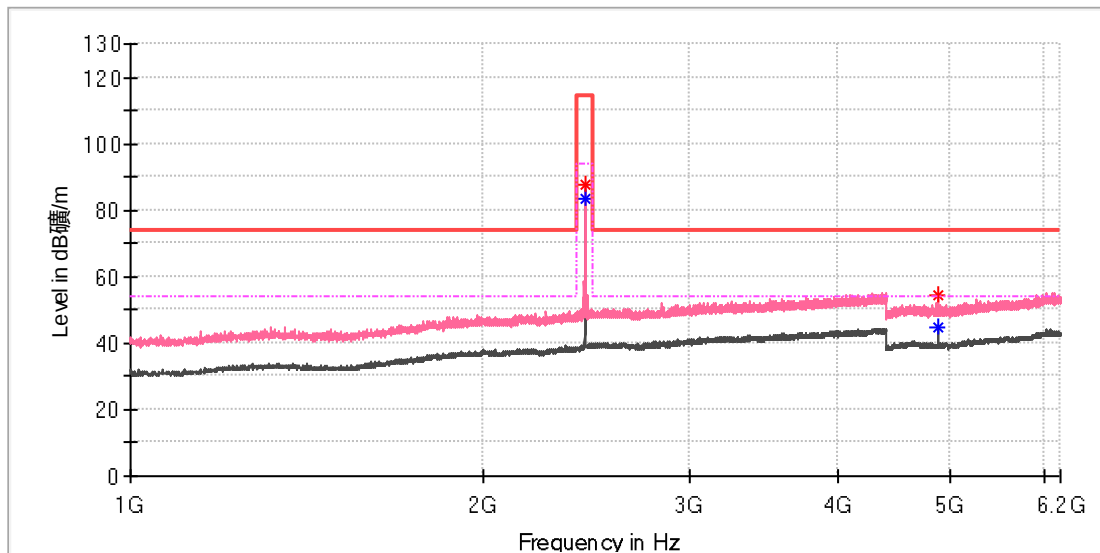

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2440.500000	87.70	---	114.00	26.30	150.0	V	7.0	7.4
2440.500000	---	83.67	94.00	10.33	150.0	V	7.0	7.4
4878.500000	---	44.82	54.00	9.18	150.0	V	14.0	11.8
4879.000000	54.19	---	74.00	19.81	150.0	V	14.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G Mid CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

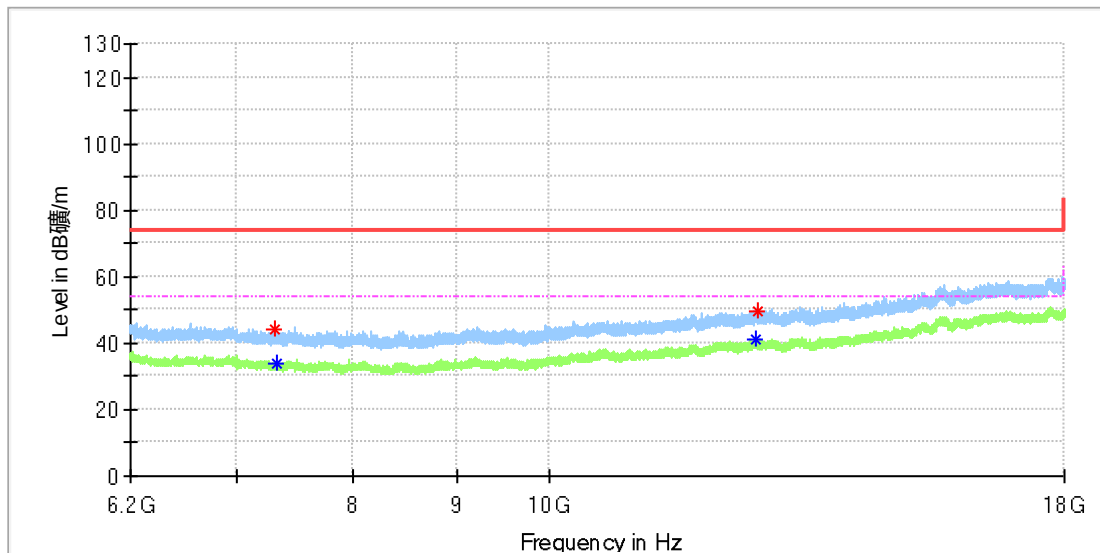

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7307.233333	43.97	---	74.00	30.03	150.0	H	85.0	8.3
7320.508333	---	33.97	54.00	20.03	150.0	H	109.0	8.2
12648.208333	---	40.99	54.00	13.01	150.0	H	310.0	15.0
12682.625000	49.80	---	74.00	24.20	150.0	H	323.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G Mid CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

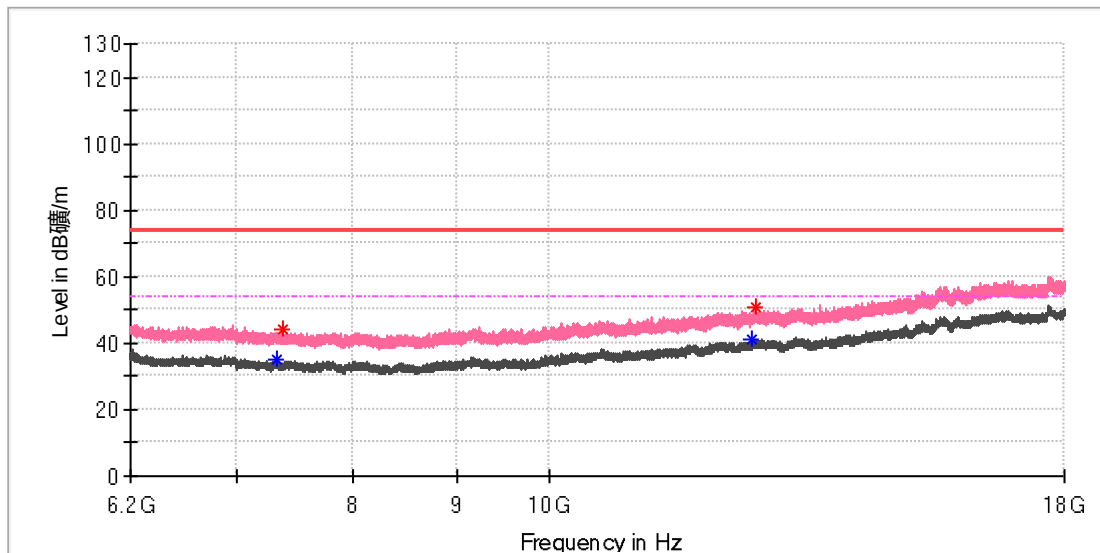

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7326.900000	---	34.77	54.00	19.23	150.0	V	44.0	8.1
7384.425000	44.29	---	74.00	29.71	150.0	V	44.0	8.2
12601.500000	---	41.12	54.00	12.88	150.0	V	31.0	14.9
12659.025000	50.57	---	74.00	23.43	150.0	V	92.0	15.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G H CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

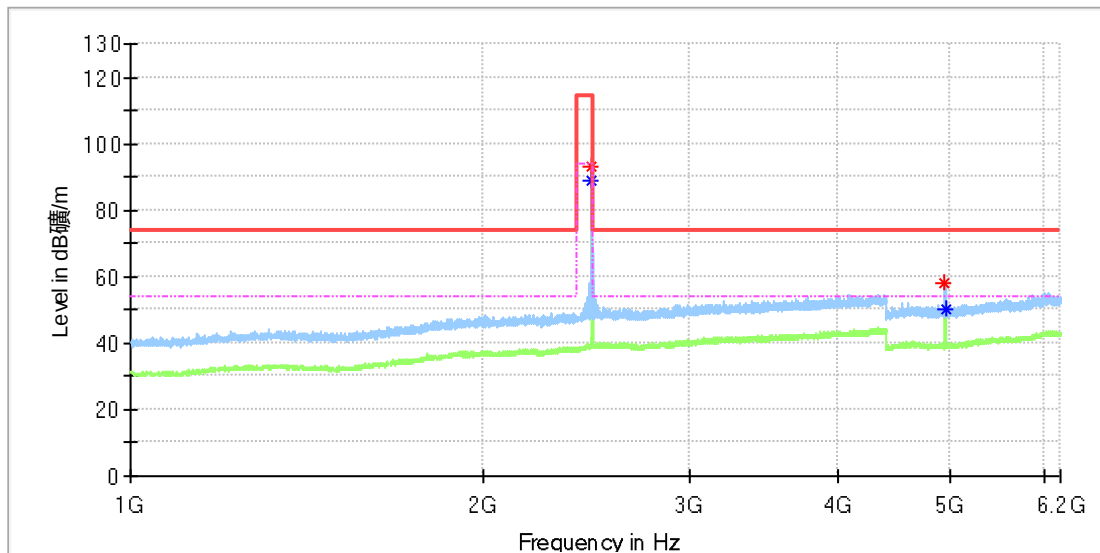

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2473.500000	92.97	---	114.00	21.03	150.0	H	330.0	7.4
2473.500000	---	89.02	94.00	4.98	150.0	H	330.0	7.4
4945.000000	58.02	---	74.00	15.98	150.0	H	80.0	11.8
4946.500000	---	50.16	54.00	3.84	150.0	H	88.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G H CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

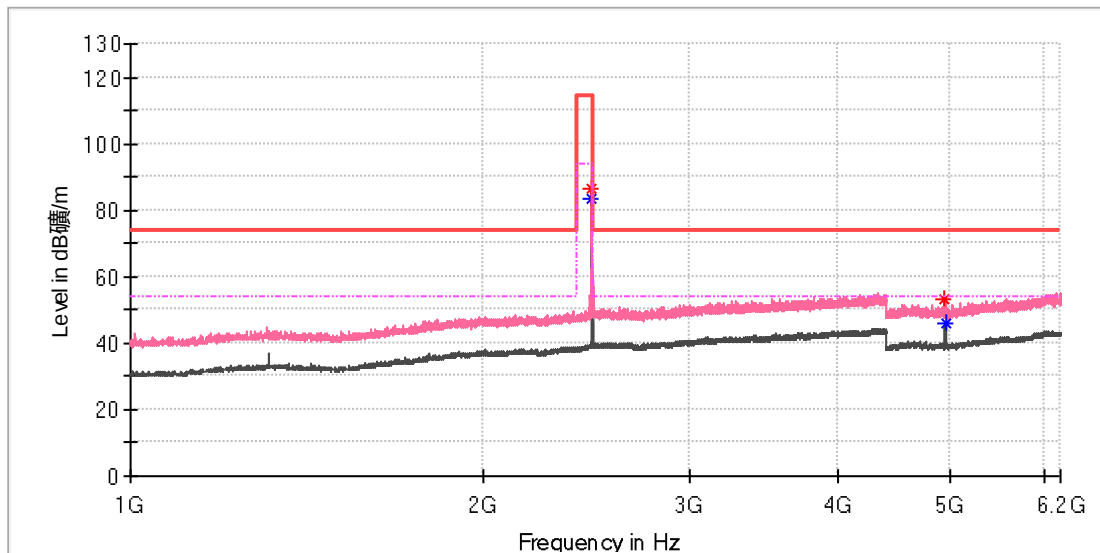

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2472.500000	86.41	---	114.00	27.59	150.0	V	358.0	7.4
2472.500000	---	83.16	94.00	10.84	150.0	V	358.0	7.4
4945.000000	53.42	---	74.00	20.58	150.0	V	4.0	11.8
4946.000000	---	45.82	54.00	8.18	150.0	V	35.0	11.8

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G H CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

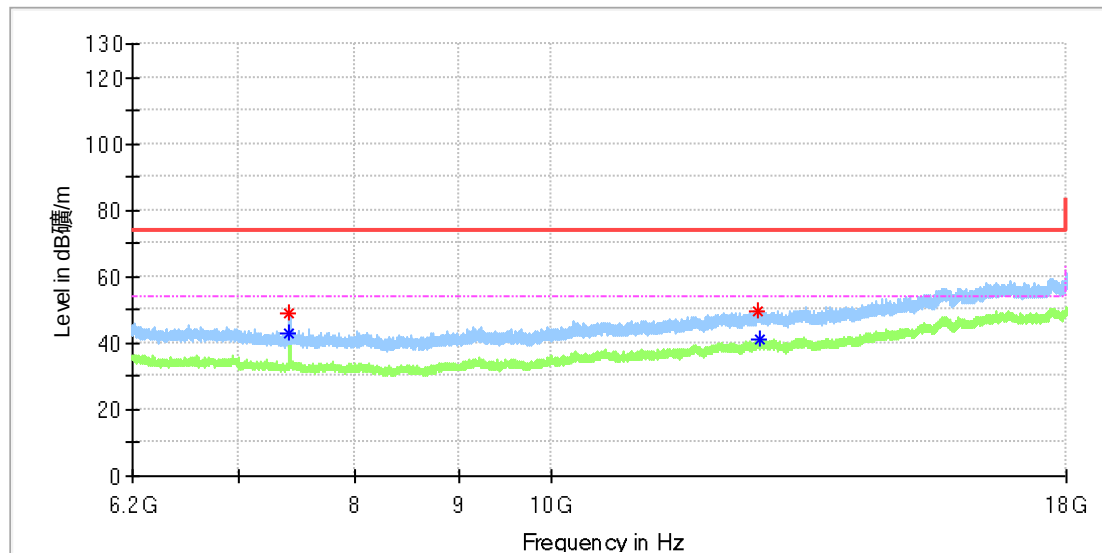

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7416.875000	---	43.18	54.00	10.82	150.0	H	0.0	8.3
7417.366667	48.94	---	74.00	25.06	150.0	H	0.0	8.3
12664.925000	49.54	---	74.00	24.46	150.0	H	105.0	15.0
12679.183333	---	41.08	54.00	12.92	150.0	H	189.0	15.1

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G H CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

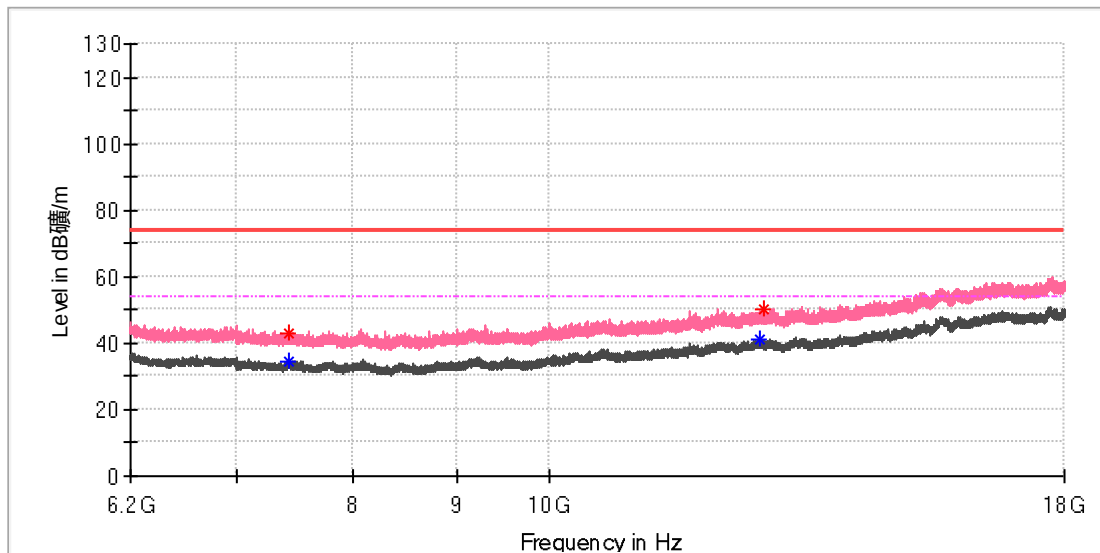



Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
7420.808333	---	34.74	54.00	19.26	150.0	V	34.0	8.4
7432.608333	43.05	---	74.00	30.95	150.0	V	173.0	8.4
12703.766667	---	41.22	54.00	12.78	150.0	V	173.0	15.1
12786.366667	50.15	---	74.00	23.85	150.0	V	47.0	15.3

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---



Appendix A.2: Test Results of 20dB Bandwidth

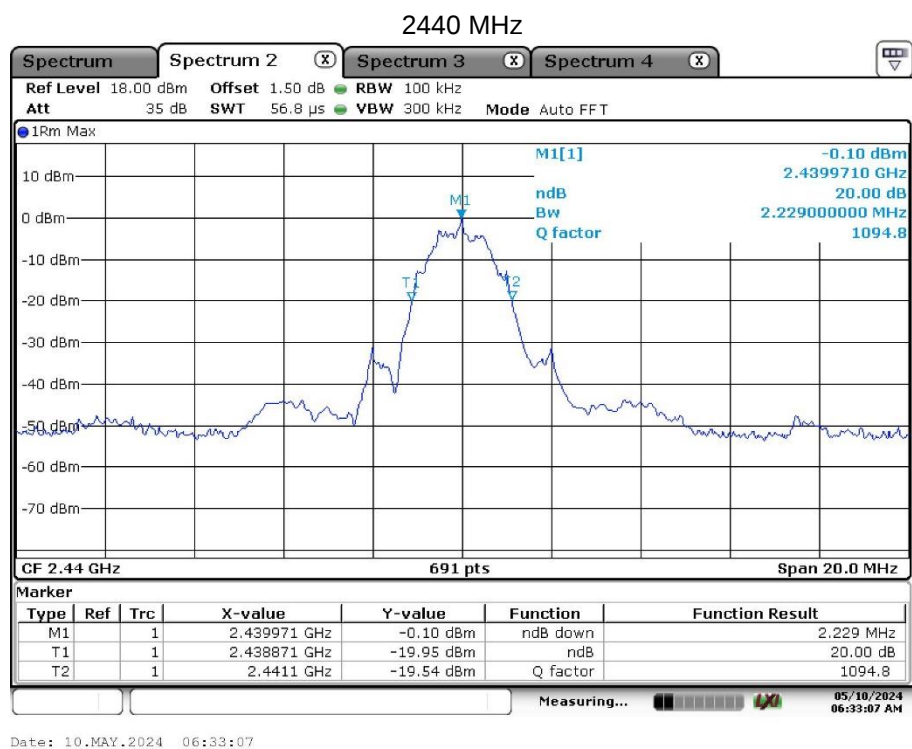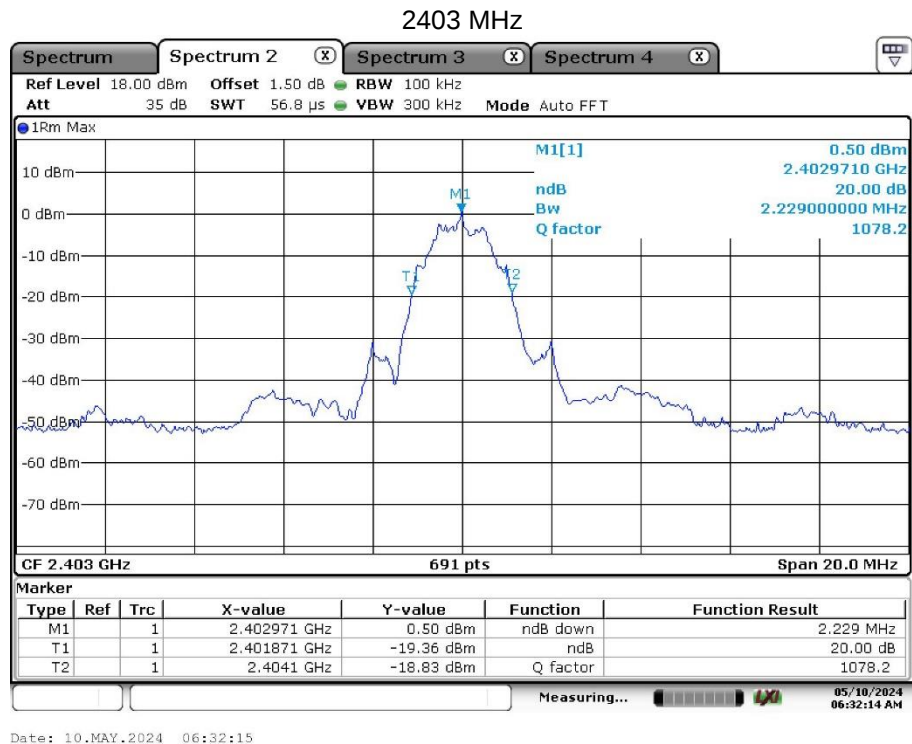


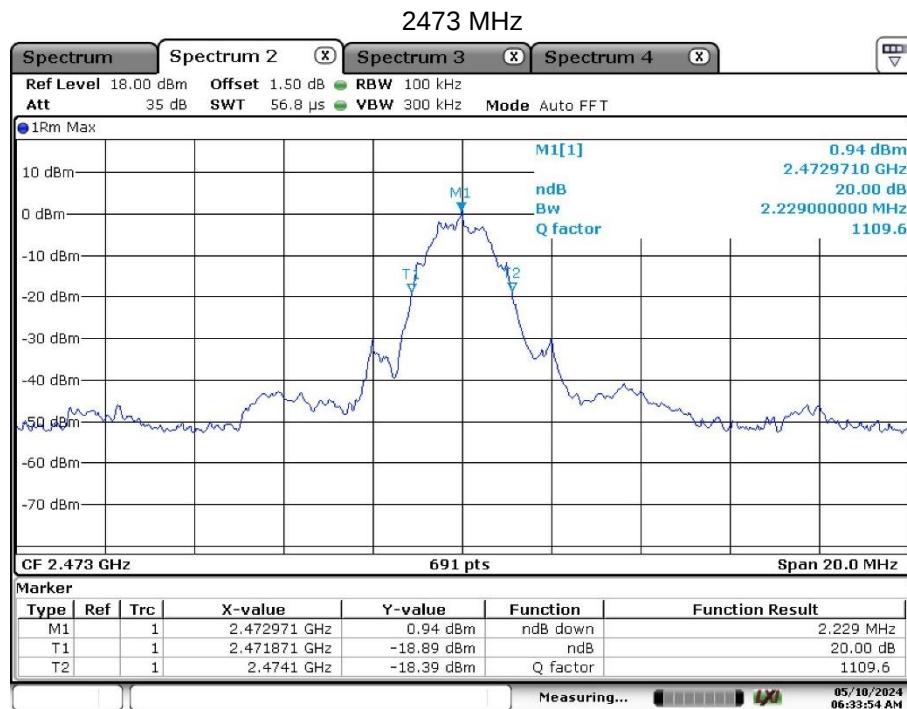

Date: 10.MAY.2024 06:33:54

Appendix A.3: Test Results of 99% Bandwidth

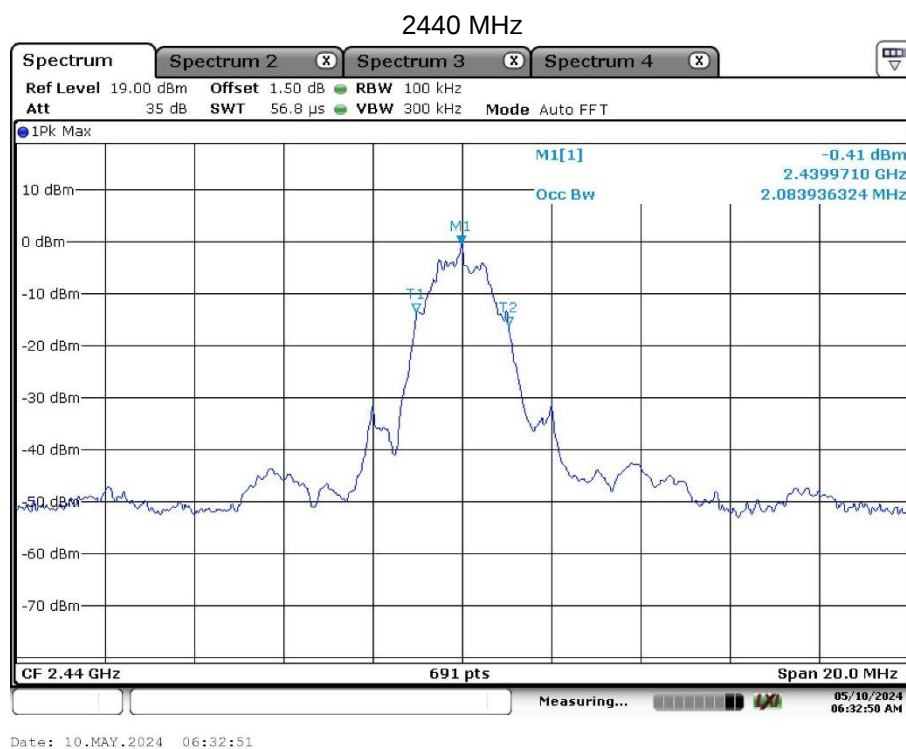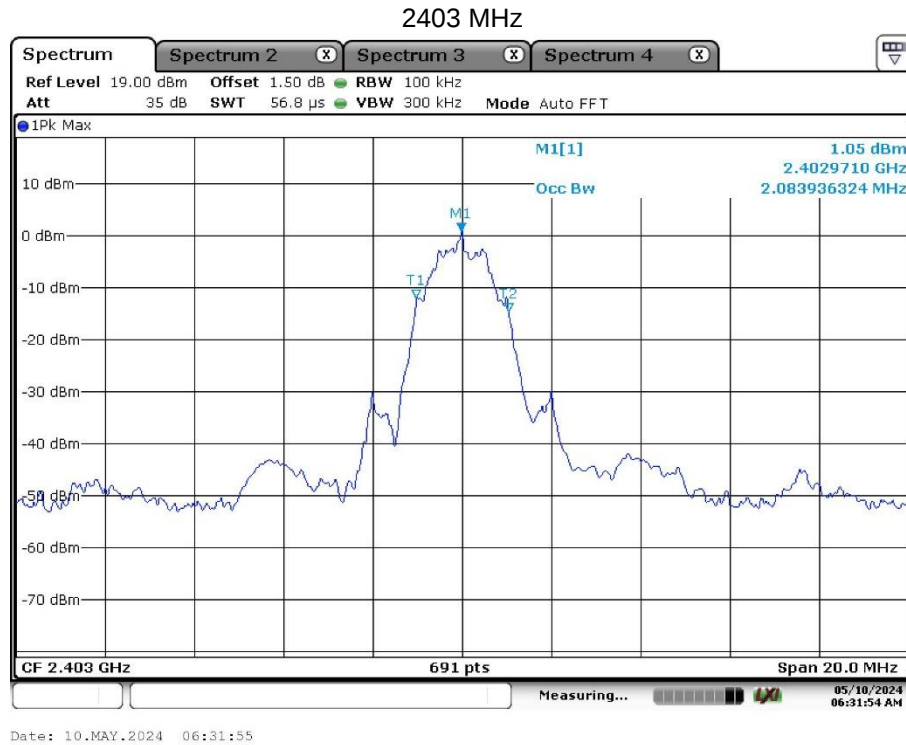

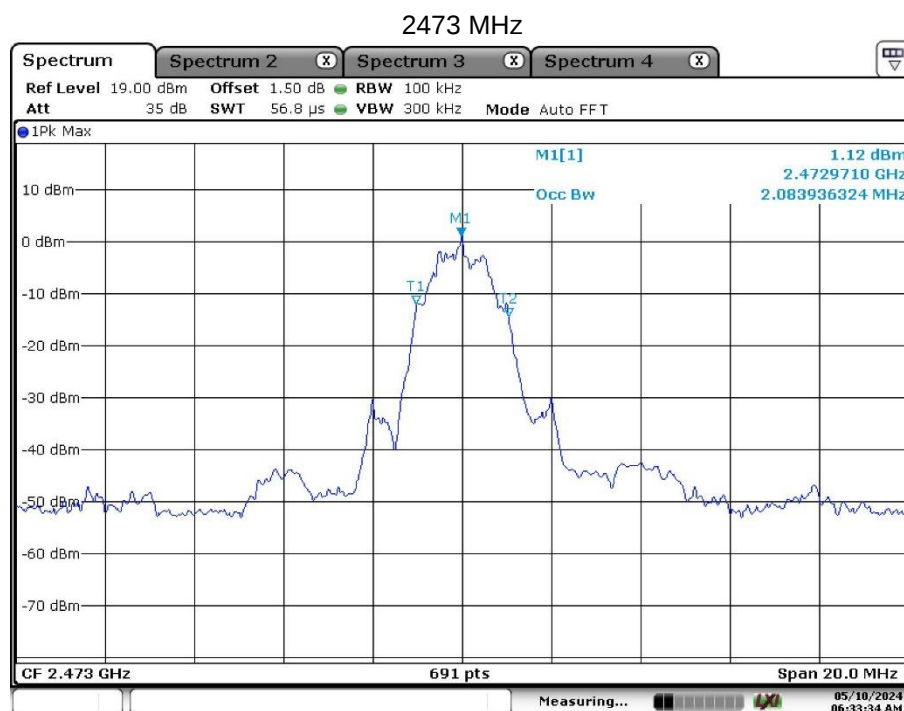


Date: 10.MAY.2024 06:33:34

Appendix A.4: Test Results of Band Edge

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G L CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

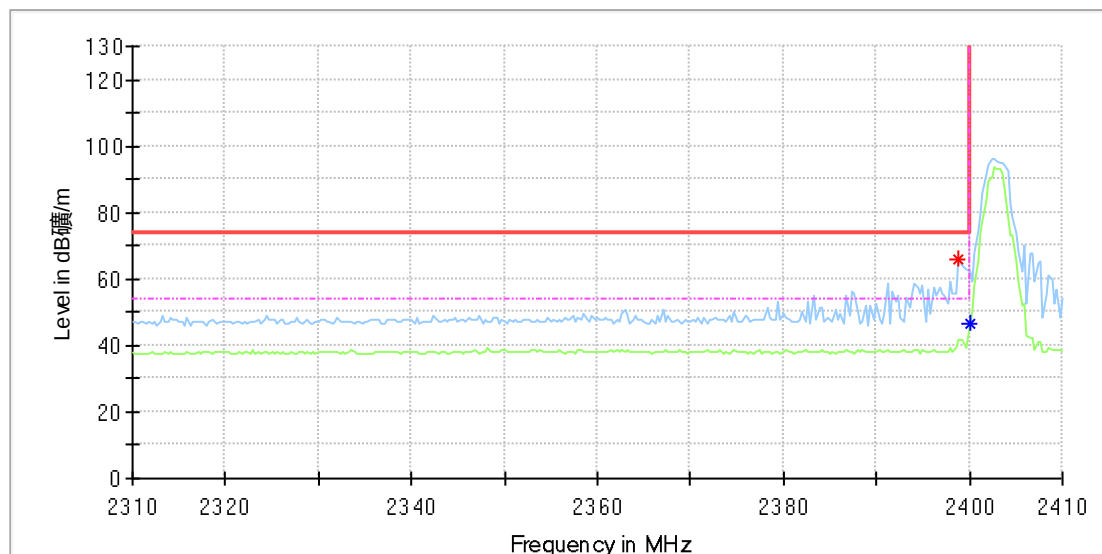

Critical Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2398.823529	65.88	---	74.00	8.12	150.0	H	340.0	7.0
2400.000000	---	46.65	54.00	7.35	150.0	H	202.0	7.0

Final Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G L CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

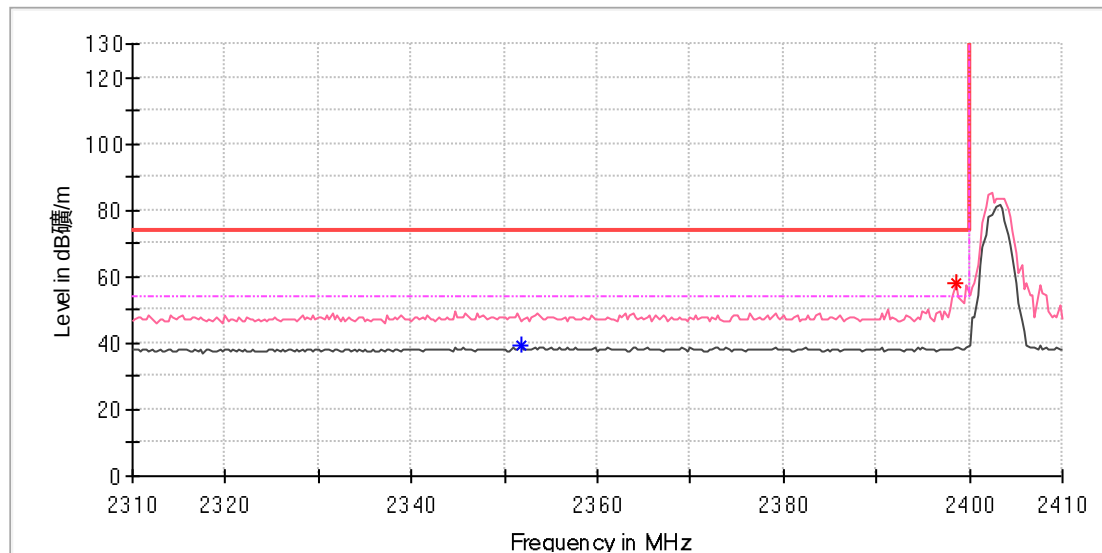

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2351.764706	---	39.41	54.00	14.59	150.0	V	93.0	6.9
2398.529412	57.75	---	74.00	16.25	150.0	V	1.0	7.0

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G H CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

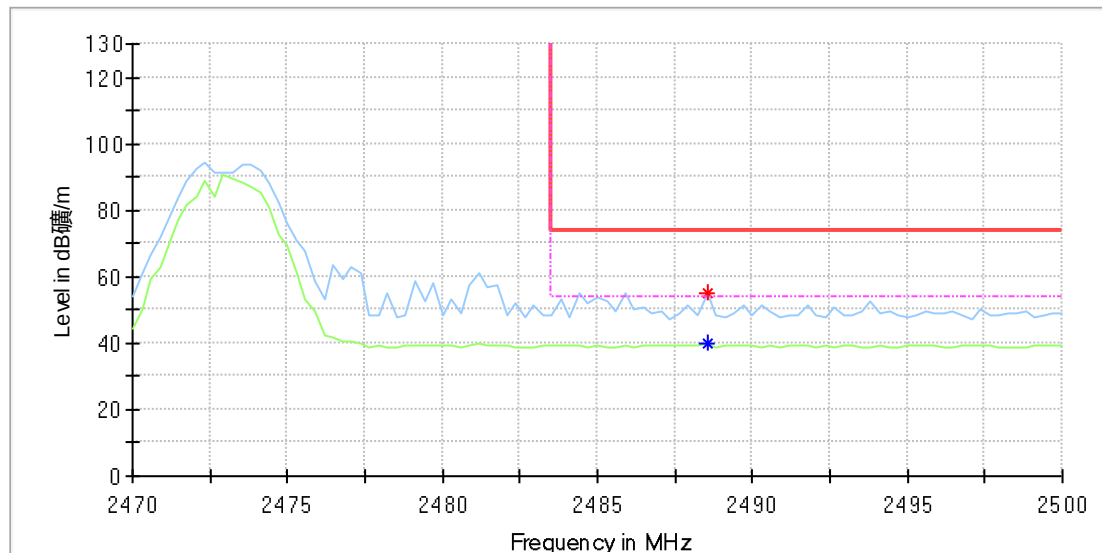

Critical_Freqs


Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2488.529412	---	39.80	54.00	14.20	150.0	H	313.0	7.4
2488.529412	54.92	---	74.00	19.08	150.0	H	313.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---

EUT Information

EUT Name: Lenovo EOS 2.4G Dongle Gen3
Model: DGRFPDO
Test Mode: 2.4G H CH
Order No/Sample No: 168473368/A003705468-010
Test Voltage: DC 5V From USB
Remark: Temp 23 Humi:58%
Test Standard: FCC 15.249
Tested By: Kei Zhang
Reviewed By: Terry Yin

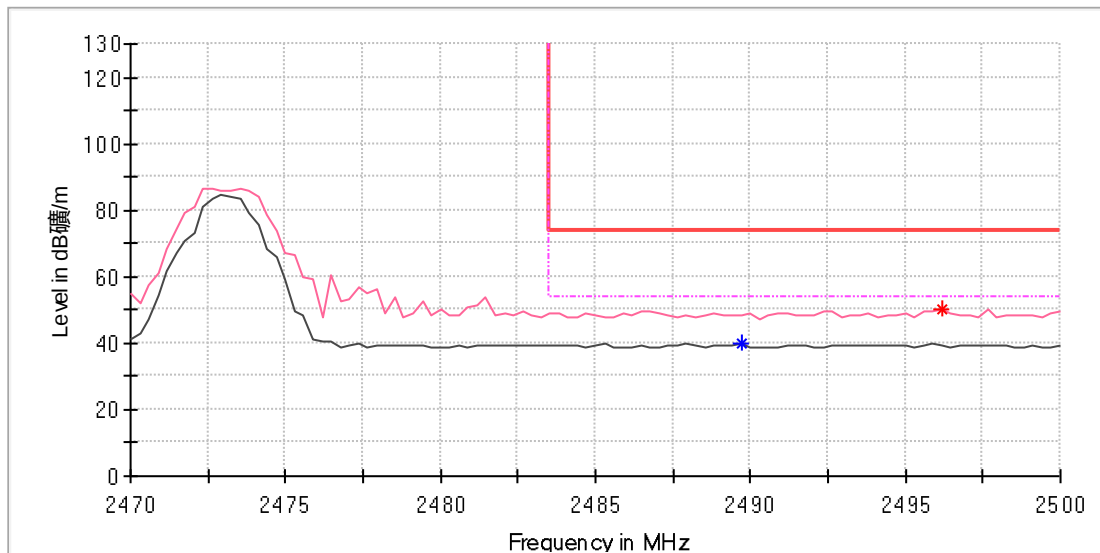


Critical_Freqs

Frequency (MHz)	MaxPeak (dBμV/m)	Average (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
2489.705882	---	39.89	54.00	14.11	150.0	V	1.0	7.4
2496.176471	50.20	---	74.00	23.80	150.0	V	196.0	7.4

Final_Result

Frequency (MHz)	MaxPeak (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB/m)
---	---	---	---	---		---	---


Appendix A.5: Test Results of Conducted Emission on AC Mains

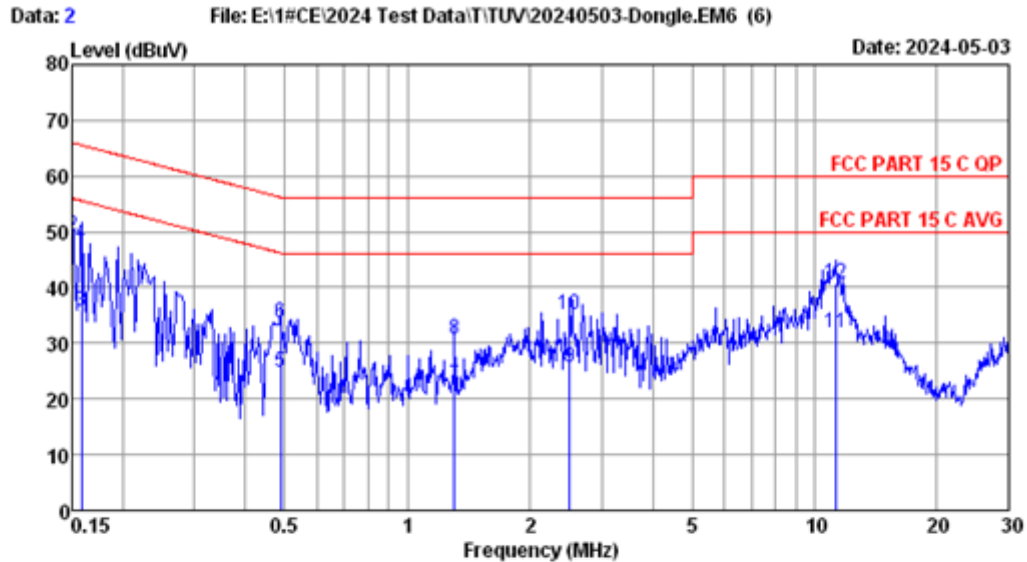

Site no :1# CE Data No :2
Dis./Lisn :2023 ENV216-L
Limit :FCC PART 15 B QP
Env./Ins. :Temp:23.9°C Humi:53% Engineer :Hongjie
EUT :DGRFPDO
Power Rating :PC USB operated
Test Mode :Running

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.150	9.62	0.01	26.79	36.42	56.00	19.58	Average
2	0.150	9.62	0.01	39.66	49.29	66.00	16.71	QP
3	0.158	9.62	0.01	26.20	35.83	55.56	19.73	Average
4	0.158	9.62	0.01	38.08	47.71	65.56	17.85	QP
5	0.489	9.58	0.02	15.30	24.90	46.19	21.29	Average
6	0.489	9.58	0.02	24.10	33.70	56.19	22.49	QP
7	1.303	9.58	0.03	12.80	22.41	46.00	23.59	Average
8	1.303	9.58	0.03	21.19	30.80	56.00	25.20	QP
9	2.500	9.67	0.04	16.11	25.82	46.00	20.18	Average
10	2.500	9.67	0.04	25.36	35.07	56.00	20.93	QP
11	11.317	9.91	0.09	21.89	31.89	50.00	18.11	Average
12	11.317	9.91	0.09	30.81	40.81	60.00	19.19	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector, the EUT shall be deemed to meet both limits and measurement with average detector is unnecessary.

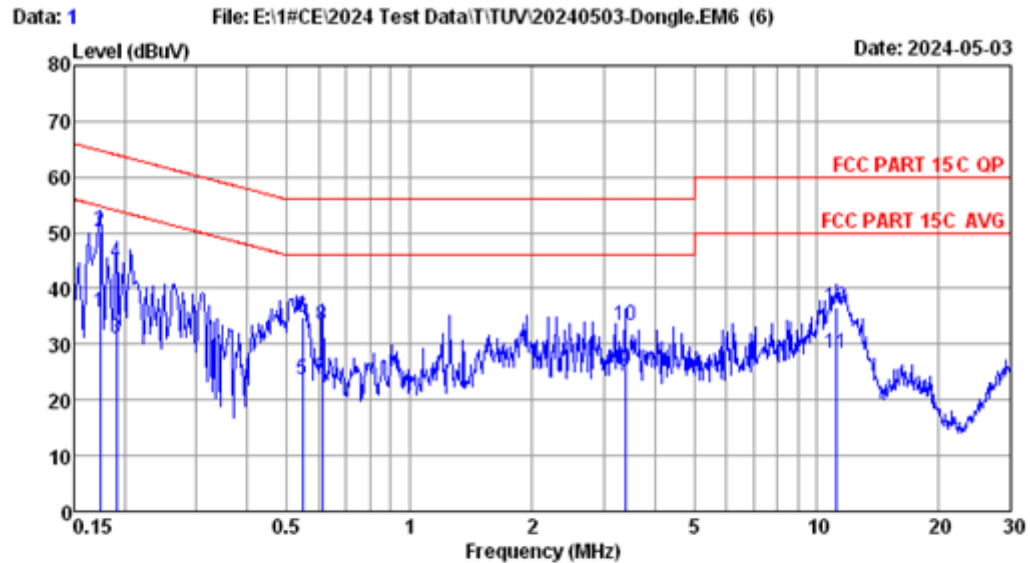

Site no :1# CE Data No :1
Dis./Lisn :2023 ENV216-N
Limit :FCC PART 15 B QP
Env./Ins. :Temp:23.9°C Humi:53% Engineer :Hongjie
EUT :DGRFPDO
Power Rating :PC USB operated
Test Mode :Running

No	Freq (MHz)	LISN Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Emission Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.174	9.69	0.01	25.96	35.66	54.77	19.11	Average
2	0.174	9.69	0.01	40.44	50.14	64.77	14.63	QP
3	0.190	9.70	0.01	21.20	30.91	54.02	23.11	Average
4	0.190	9.70	0.01	34.85	44.56	64.02	19.46	QP
5	0.546	9.73	0.02	13.89	23.64	46.00	22.36	Average
6	0.546	9.73	0.02	25.07	34.82	56.00	21.18	QP
7	0.611	9.74	0.02	14.11	23.87	46.00	22.13	Average
8	0.611	9.74	0.02	23.53	33.29	56.00	22.71	QP
9	3.381	9.36	0.05	15.80	25.21	46.00	20.79	Average
10	3.381	9.36	0.05	23.83	33.24	56.00	22.76	QP
11	11.139	8.85	0.08	19.49	28.42	50.00	21.58	Average
12	11.139	8.85	0.08	27.68	36.61	60.00	23.39	QP

Remarks: 1.Emission Level=LISN Factor+Cable Loss+Reading.
2.If the average limit is met when using a quasi-peak detector,
the EUT shall be deemed to meet both limits and measurement
with average detector is unnecessary.