
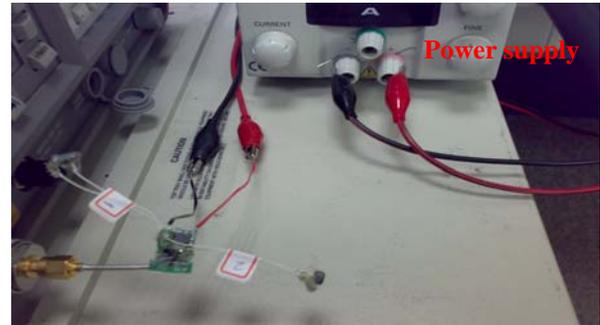


# Dongle test mode procedure

## Step1.


As below picture, add DC +5V voltage.

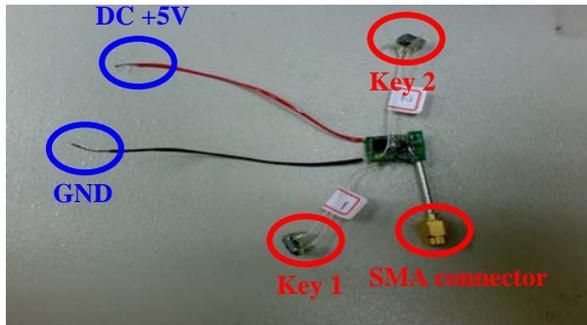


## Step2.

- I. Key 1: Channel switch (2402MHz、2438 MHz、2474 MHz)
- II. Key 2: Test mode switch (Carrier、ShockBurst、Sensitivity)

Dongle initial status is “Carrier mode and 2402MHz”

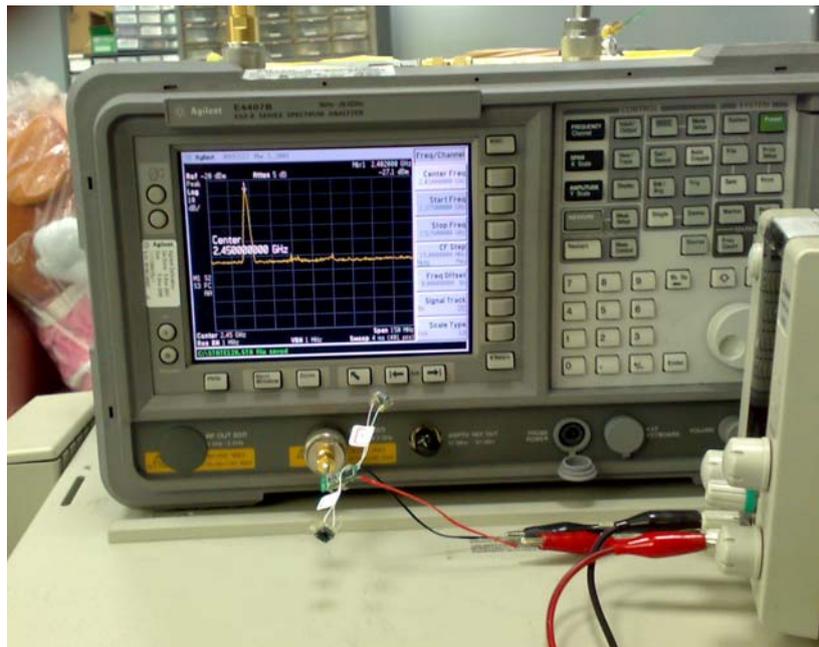

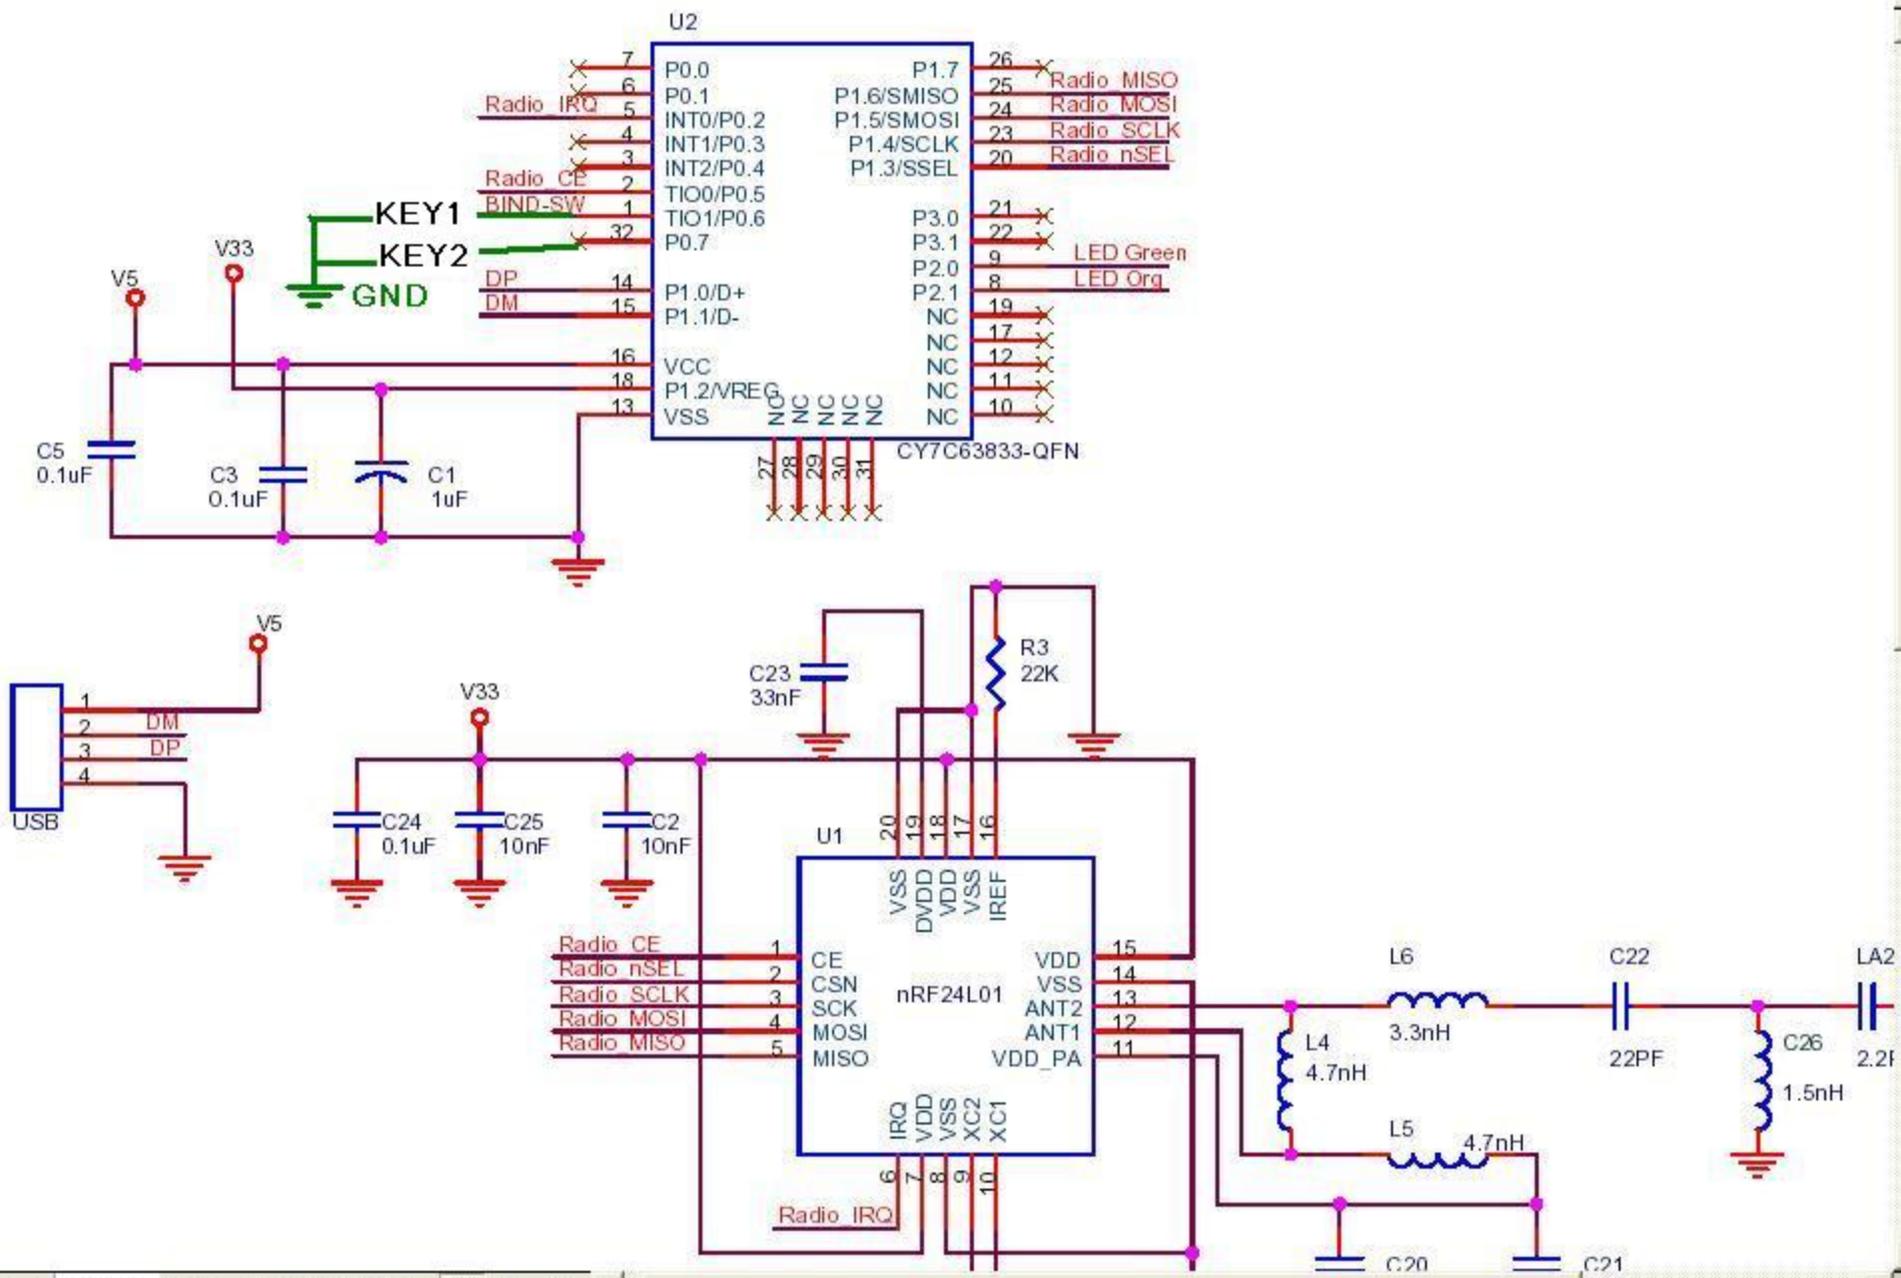

Bookmarks  
Thumbnails  
Comments  
Signatures