



## MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation*

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

November 20, 2013

Electronic Systems Technology  
415 N. Quay Street  
Kennewick, WA 99336

Dear Todd Elliot,

Enclosed is the EMC Wireless test report for compliance testing of the Electronic Systems Technology, 195c, tested to the requirements of Title 47 of the Code of Federal Regulations (CFR), Part 15 Subpart B and ICES-003, Issue 5 August 2012 for a Class B Digital Device, Part 90 and RSS-119, Issue 11, June 2011 for Land Mobile Radio Services.

Thank you for using the services of MET Laboratories, Inc. If you have any questions regarding these results or if MET can be of further service to you, please feel free to contact me.

Sincerely yours,  
MET LABORATORIES, INC.

Jennifer Warnell  
Documentation Department

Reference: (\Electronic Systems Technology\EMC39952-FCC90)

Certificates and reports shall not be reproduced except in full, without the written permission of MET Laboratories, Inc.



## **MET Laboratories, Inc. *Safety Certification - EMI - Telecom Environmental Simulation***

914 WEST PATAPSCO AVENUE • BALTIMORE, MARYLAND 21230-3432 • PHONE (410) 354-3300 • FAX (410) 354-3313

33439 WESTERN AVENUE • UNION CITY, CALIFORNIA 94587 • PHONE (510) 489-6300 • FAX (510) 489-6372

3162 BELICK STREET • SANTA CLARA, CALIFORNIA 95054 • PHONE (408) 748-3585 • FAX (510) 489-6372

13301 MCCALLEN PASS • AUSTIN, TEXAS 78753 • PHONE (512) 287-2500 • FAX (512) 287-2513

---

### **Electromagnetic Compatibility Criteria Test Report**

For the

**Electronic Systems Technology  
195c**

Tested under

**The FCC and IC Verification Rules  
Contained in Title 47 of the CFR, Part 15 B and ICES-003  
for a Class B Digital Device  
&  
Part 90 and RSS-119  
for Private Land Mobile Radio Services**

**MET Report: EMC39952-FCC90**

November 20, 2013

**Prepared For:  
Electronic Systems Technology  
415 N. Quay Street  
Kennewick, WA 99336**

**Prepared By:  
MET Laboratories, Inc.  
914 W. Patapsco Ave.  
Baltimore, MD 21230**

## Electromagnetic Compatibility Criteria Test Report

For the

**Electronic Systems Technology  
195c**

Tested under

**The FCC and IC Verification Rules  
Contained in Title 47 of the CFR, Part 15 B and ICES-003  
for a Class B Digital Device  
&  
Part 90 and RSS-119  
for Private Land Mobile Radio Services**

**MET Report: EMC39952-FCC90**



Shawn McMillen, Project Engineer  
Electromagnetic Compatibility Lab



Jennifer Warnell  
Documentation Department

**Engineering Statement:** The measurements shown in this report were made in accordance with the procedures indicated, and the emissions from this equipment were found to be within the limits applicable. I assume full responsibility for the accuracy and completeness of these measurements, and for the qualifications of all persons taking them. It is further stated that upon the basis of the measurements made, the equipment tested is capable of operation in accordance with the requirements of Part 15 B and Part 90 of the FCC Rules and ICES-003 and RSS-199 of the Industry Canada standards under normal use and maintenance.



Asad Bajwa,  
Director, Electromagnetic Compatibility Lab

## Report Status Sheet

Revision	Report Date	Reason for Revision
Ø	November 20, 2013	Initial Issue.

## Table of Contents

<b>1. Executive Summary .....</b>	<b>1</b>
<b>1.1. Testing Summary .....</b>	<b>2</b>
<b>2. Equipment Configuration.....</b>	<b>3</b>
<b>2.1. Overview.....</b>	<b>4</b>
<b>2.2. Test Site .....</b>	<b>5</b>
<b>2.3. Description of Test Sample.....</b>	<b>5</b>
<b>2.4. Equipment Configuration.....</b>	<b>5</b>
<b>2.5. Support Equipment .....</b>	<b>5</b>
<b>2.6. Ports and Cabling Information .....</b>	<b>5</b>
<b>2.7. Mode of Operation.....</b>	<b>6</b>
<b>2.8. Method of Monitoring EUT Operation .....</b>	<b>6</b>
<b>2.9. Modifications .....</b>	<b>6</b>
<b>2.9.1. Modifications to EUT .....</b>	<b>6</b>
<b>2.9.2. Modifications to Test Standard .....</b>	<b>6</b>
<b>2.10. Disposition of EUT .....</b>	<b>6</b>
<b>3. Electromagnetic Compatibility Criteria for Unintentional Radiators .....</b>	<b>7</b>
<b>3.1. §Conducted Emissions Limits .....</b>	<b>8</b>
<b>3.2. Radiated Emissions Limits.....</b>	<b>12</b>
<b>4. Electromagnetic Compatibility Criteria for Intentional Radiators .....</b>	<b>15</b>
<b>4.1. RF Output Power .....</b>	<b>16</b>
<b>4.2. Modulation Charactistics .....</b>	<b>19</b>
<b>4.3. Occupied Bandwidth.....</b>	<b>20</b>
<b>4.4. Emission Mask .....</b>	<b>23</b>
<b>4.5. Spurious Emissions at Antenna Terminals .....</b>	<b>28</b>
<b>4.6. Frequency Stability .....</b>	<b>33</b>
<b>4.7. Field Strength of Spurious Radiation.....</b>	<b>35</b>
<b>4.8. Transient Frequency Behavior .....</b>	<b>43</b>
<b>5. Test Equipment .....</b>	<b>44</b>
<b>6. Certification Label &amp; User's Manual Information .....</b>	<b>46</b>
<b>6.1. Verification Information .....</b>	<b>47</b>
<b>6.2. Label and User's Manual Information .....</b>	<b>51</b>

All references to section numbers are taken directly from the standard/specification used. Only sections requiring testing or evaluation are included.

## List of Tables

Table 1. Equipment Configuration .....	5
Table 2. Support Equipment .....	5
Table 3. Ports and Cabling Information .....	5
Table 4. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b) .....	8
Table 5. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz) .....	9
Table 6. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz) .....	10
Table 7. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b) .....	12
Table 8. Radiated Emissions Limits, Test Results, FCC Limits .....	13
Table 9. Radiated Emissions Limits, Test Results, ICES-003 Limits, 30 MHz – 1 GHz .....	14
Table 10. Frequency Stability, 6.25 kHz .....	33
Table 11. Frequency Stability, 12.5 kHz .....	34

## List of Figures

Figure 1. RF Power Output Test Setup .....	16
Figure 2. Occupied Bandwidth Test Setup .....	20
Figure 3. Emission Mask Test Setup .....	23
Figure 4. Spurious Emissions at Antenna Terminals Test Setup .....	28

## List of Photographs

Photograph 1. Conducted Emissions, Test Setup .....	11
Photograph 2. Radiated Spurious Emissions, Test Setup, Below 1 GHz .....	42
Photograph 3. Radiated Spurious Emissions, Test Setup, Above 1 GHz .....	42

## List of Plots

Plot 1. Conducted Emission, Phase Line Plot .....	9
Plot 2. Conducted Emission, Neutral Line Plot .....	10
Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits .....	13
Plot 4. Radiated Emissions, 30 MHz – 1 GHz, ICES-003 Limits .....	14
Plot 5. RF Power Output, Low Channel, 450 MHz, Average, 6.25 kHz .....	17
Plot 6. RF Power Output, Mid Channel, 460 MHz, Average, 6.25 kHz .....	17
Plot 7. RF Power Output, High Channel, 470 MHz, Average, 6.25 kHz .....	17
Plot 8. RF Power Output, Low Channel, 450 MHz, Average, 12.5 kHz .....	18
Plot 9. RF Power Output, Mid Channel, 460 MHz, Average, 12.5 kHz .....	18
Plot 10. RF Power Output, High Channel, 470 MHz, Average, 12.5 kHz .....	18
Plot 11. Occupied Bandwidth, Low Channel, 450 MHz, 6.25 kHz .....	21
Plot 12. Occupied Bandwidth, Mid Channel, 460 MHz, 6.25 kHz .....	21
Plot 13. Occupied Bandwidth, High Channel, 470 MHz, 6.25 kHz .....	21
Plot 14. Occupied Bandwidth, Low Channel, 450 MHz, 12.5 kHz .....	22
Plot 15. Occupied Bandwidth, Mid Channel, 460 MHz, 12.5 kHz .....	22
Plot 16. Occupied Bandwidth, High Channel, 470 MHz, 12.5 kHz .....	22
Plot 17. Emission Mask E, Low Channel, 450 MHz, 6.25 kHz, Low Power .....	24
Plot 18. Emission Mask E, Mid Channel, 460 MHz, 6.25 kHz, Low Power .....	24
Plot 19. Emission Mask E, High Channel, 470 MHz, 6.25 kHz, Low Power .....	24
Plot 20. Emission Mask E, Low Channel, 450 MHz, 6.25 kHz, High Power .....	25
Plot 21. Emission Mask E, Mid Channel, 460 MHz, 6.25 kHz, High Power .....	25
Plot 22. Emission Mask E, High Channel, 470 MHz, 6.25 kHz, High Power .....	25
Plot 23. Emission Mask D, Low Channel, 450 MHz, 12.5 kHz, Low Power .....	26

Plot 24. Emission Mask D, Mid Channel, 460 MHz, 12.5 kHz, Low Power .....	26
Plot 25. Emission Mask D, High Channel, 470 MHz, 12.5 kHz, Low Power.....	26
Plot 26. Emission Mask D, Low Channel, 450 MHz, 12.5 kHz, High Power.....	27
Plot 27. Emission Mask D, Mid Channel, 460 MHz, 12.5 kHz, High Power .....	27
Plot 28. Emission Mask D, High Channel, 470 MHz, 12.5 kHz, High Power .....	27
Plot 29. Conducted Spurious Emissions, Low Channel, 450 MHz, 6.25 kHz, 30 MHz – 1 GHz .....	29
Plot 30. Conducted Spurious Emissions, Low Channel, 450 MHz, 6.25 kHz, 1 GHz – 5 GHz.....	29
Plot 31. Conducted Spurious Emissions, Mid Channel, 460 MHz, 6.25 kHz, 30 MHz – 1 GHz.....	29
Plot 32. Conducted Spurious Emissions, Mid Channel, 460 MHz, 6.25 kHz, 1 GHz – 5 GHz .....	30
Plot 33. Conducted Spurious Emissions, High Channel, 470 MHz, 6.25 kHz, 30 MHz – 1 GHz .....	30
Plot 34. Conducted Spurious Emissions, High Channel, 470 MHz, 6.25 kHz, 1 GHz – 5 GHz .....	30
Plot 35. Conducted Spurious Emissions, Low Channel, 450 MHz, 12.5 kHz, 30 MHz – 1 GHz .....	31
Plot 36. Conducted Spurious Emissions, Low Channel, 450 MHz, 12.5 kHz, 1 GHz – 5 GHz.....	31
Plot 37. Conducted Spurious Emissions, Mid Channel, 460 MHz, 12.5 kHz, 30 MHz – 1 GHz.....	31
Plot 38. Conducted Spurious Emissions, Mid Channel, 460 MHz, 12.5 kHz, 1 GHz – 5 GHz .....	32
Plot 39. Conducted Spurious Emissions, High Channel, 470 MHz, 12.5 kHz, 30 MHz – 1 GHz .....	32
Plot 40. Conducted Spurious Emissions, High Channel, 470 MHz, 12.5 kHz, 1 GHz – 5 GHz .....	32
Plot 41. Radiated Spurious Emissions, Low Channel, 450 MHz, 6.25 kHz, 30 MHz – 1 GHz .....	36
Plot 42. Radiated Spurious Emissions, Low Channel, 450 MHz, 6.25 kHz, 1 GHz – 5 GHz.....	36
Plot 43. Radiated Spurious Emissions, Mid Channel, 460 MHz, 6.25 kHz, 30 MHz – 1 GHz.....	37
Plot 44. Radiated Spurious Emissions, Mid Channel, 460 MHz, 6.25 kHz, 1 GHz – 5 GHz.....	37
Plot 45. Radiated Spurious Emissions, High Channel, 470 MHz, 6.25 kHz, 30 MHz – 1 GHz.....	38
Plot 46. Radiated Spurious Emissions, High Channel, 470 MHz, 6.25 kHz, 1 GHz – 5 GHz .....	38
Plot 47. Radiated Spurious Emissions, Low Channel, 450 MHz, 12.5 kHz, 30 MHz – 1 GHz .....	39
Plot 48. Radiated Spurious Emissions, Low Channel, 450 MHz, 12.5 kHz, 1 GHz – 5 GHz.....	39
Plot 49. Radiated Spurious Emissions, Mid Channel, 460 MHz, 12.5 kHz, 30 MHz – 1 GHz .....	40
Plot 50. Radiated Spurious Emissions, Mid Channel, 460 MHz, 12.5 kHz, 1 GHz – 5 GHz.....	40
Plot 51. Radiated Spurious Emissions, High Channel, 470 MHz, 12.5 kHz, 30 MHz – 1 GHz.....	41
Plot 52. Radiated Spurious Emissions, High Channel, 470 MHz, 12.5 kHz, 1 GHz – 5 GHz .....	41

## List of Terms and Abbreviations

<b>AC</b>	Alternating Current
<b>ACF</b>	Antenna Correction Factor
<b>Cal</b>	Calibration
<i>d</i>	Measurement Distance
<b>dB</b>	Decibels
<b>dB<sub>μ</sub>A</b>	Decibels above one <b>microamp</b>
<b>dB<sub>μ</sub>V</b>	Decibels above one <b>microvolt</b>
<b>dB<sub>μ</sub>A/m</b>	Decibels above one <b>microamp per meter</b>
<b>dB<sub>μ</sub>V/m</b>	Decibels above one <b>microvolt per meter</b>
<b>DC</b>	Direct Current
<b>E</b>	Electric Field
<b>DSL</b>	Digital Subscriber Line
<b>ESD</b>	Electrostatic Discharge
<b>EUT</b>	Equipment Under Test
<i>f</i>	Frequency
<b>FCC</b>	Federal Communications Commission
<b>GRP</b>	Ground Reference Plane
<b>H</b>	Magnetic Field
<b>HCP</b>	Horizontal Coupling Plane
<b>Hz</b>	Hertz
<b>IEC</b>	International Electrotechnical Commission
<b>kHz</b>	kilohertz
<b>kPa</b>	kilopascal
<b>kV</b>	kilovolt
<b>LISN</b>	Line Impedance Stabilization Network
<b>MHz</b>	Megahertz
<b>μH</b>	<b>microhenry</b>
<b>μ</b>	<b>microfarad</b>
<b>μs</b>	<b>microseconds</b>
<b>NEBS</b>	Network Equipment-Building System
<b>PRF</b>	Pulse Repetition Frequency
<b>RF</b>	Radio Frequency
<b>RMS</b>	Root-Mean-Square
<b>TWT</b>	Traveling Wave Tube
<b>V/m</b>	<b>Volts per meter</b>
<b>VCP</b>	Vertical Coupling Plane



Electronic Systems Technology  
195c

Electromagnetic Compatibility  
Executive Summary  
CFR Title 47 Part 15B & Part 90; ICES-003 & RSS-119

## I. Executive Summary



## 1. Testing Summary

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC 47CFR Part 15, and Part 90. All tests were conducted using measurement procedure ANSI TIA/EIA-603-A-2004.

Title 47 of the CFR, Part 15, Part 90, and FCC 04-265 Reference and Test Description	Industry Canada References	Compliance
47 CFR Part 15.107 (a) Conducted Emissions	ICES-003, Issue 5 August 2012	Compliant
47 CFR Part 15.109 (a) Radiated Emissions	ICES-003, Issue 5 August 2012	Compliant
§2.1046, §90.205 RF Output Power	RSS-119, Section 5.4	Compliant
§2.1047, §90.207 Modulation Characteristics, Audio Frequency & Filter Response	RSS-119, Section 5.2	Not Applicable – device does not support voice
§2.1049, 90.210(d) Occupied Bandwidth (Emission Mask)	RSS-119, Section 5.5 RSS-GEN 99% Bandwidth	Compliant
§2.1051, §90.210(d) Spurious Emissions at Antenna Terminals	RSS-GEN, 4.9 RSS-119, Section 4.2 & 5.8	Compliant
§2.1055, §90.213 Frequency Stability	RSS-119, Section 5.3	Compliant
§2.1053, §90.210 Field Strength of Spurious Radiation	RSS-119, Section 5.8	Compliant
§90.214 Transient Frequency Behavior	RSS-119, Section 5.9	Not Applicable



Electronic Systems Technology  
195c

Electromagnetic Compatibility  
Equipment Configuration  
CFR Title 47 Part 15B & Part 90; ICES-003 & RSS-119

## II. Equipment Configuration



## 2. Equipment Configuration

### 2.1. Overview

MET Laboratories, Inc. was contracted by Electronic Systems Technology to perform testing on the 195c purchase order number 1600.

This document describes the test setups, test methods, required test equipment, and the test limit criteria used to perform compliance testing of the Electronic Systems Technology, 195c.

An EMC evaluation to determine compliance of the TB 4.9 with the requirements of Part 90 was conducted. (All references are to the most current version of Title 47 of the Code of Federal Regulations in effect). In accordance with §2.1033, the following data is presented in support of the Certification of the TB4.9. Electronic Systems Technology should retain a copy of this document and it should be kept on file for at least five years after the manufacturing of the EUT has been **permanently** discontinued. The results obtained relate only to the item(s) tested.

<b>Model(s) Tested:</b>	195c
<b>Model(s) Covered:</b>	195c
<b>Filing Option:</b>	Original
<b>EUT Specifications:</b>	Primary Power Source: 48 VDC Remote Power; 12 VDC Axillary Power
	FCC ID: ENPESTEEM195C
	IC: 2163A-192195C
	Type of Modulations: 4-level FSK
<b>Analysis:</b>	EUT Frequency Ranges: 450 – 470 MHz
	The results obtained relate only to the item(s) tested.
	Temperature (15-35° C)
	Relative Humidity (30-60%)
<b>Environmental Test Conditions:</b>	Barometric Pressure (860-1060 mbar)
	Shawn McMillen
	November 20, 2013



## 2.2. Test Site

All testing was performed at MET Laboratories, Inc., 914 W. Patapsco Ave., Baltimore, MD 21230. All equipment used in making physical determinations is accurate and bears recent traceability to the National Institute of Standards and Technology.

Radiated Emissions measurements were performed in a semi-anechoic chamber (equivalent to an Open Area Test Site). In accordance with §2.948(a)(3), a complete site description is contained at MET Laboratories.

## 2.3. Description of Test Sample

The Electronic Systems Technology 195c, Equipment Under Test (EUT), is a 450 – 570 MHz pole-mounted radio modem with 6.25 kHz and 12.5 kHz channel spacing. Modulation is 4-level FSK. It is utilized in industrial applications for accessing and programming remote programmable logic controllers from fixed locations.

## 2.4. Equipment Configuration

Ref. ID	Name / Description	Model Number	Serial Number
--	EUT (ip 172.18.32.102)	195c	C-15102

**Table 1. Equipment Configuration**

## 2.5. Support Equipment

Electronic Systems Technology supplied the support equipment necessary for the operation and testing of the 195c. All support equipment supplied is listed in the following Support Equipment List.

Ref. ID	Name / Description	Manufacturer	Model Number
2	Dell Laptop w/power supply	PP08L	P3373 A02
3	Qty(2) 300-ft RJ-45 to RJ45 cables	--	--
4	Qty(2) 20-ft RJ45- to RJ45 cables with terminal block adaptor / dummy loads	--	--
5	30-Watt AC adaptor 48VDC Power Supply for EUT testing	SL Power Electronics	PW183RB4800F01

**Table 2. Support Equipment**

## 2.6. Ports and Cabling Information

Ref. ID	Port name on EUT	Cable Description or reason for no cable	Qty.	Length as tested (m)	Max Length (m)	Shielded? (Y/N)	Termination Box ID & Port Name
1	RS-485	20-ft, dummy load	1	6.5		N	Dummy load
2	Ethernet	300-ft, worst case length	1	100		Y	Laptop Ethernet
3	RS-232 Data	20-ft dummy load	1	6.5		N	Dummy Load
4	RMT Power	300-ft, worst case length	1	100		Y	48VDC supply, PWR-LAN-OUT port

**Table 3. Ports and Cabling Information**



## 2.7. Mode of Operation

The following tests will be performed by the test engineer:

- 1) RF Power Output
- 2) Modulation Characteristics
- 3) Modulation Limiting
- 4) Occupied Bandwidth
- 5) Spurious Emissions at Antenna Terminals
- 6) Field Strength of Spurious Emissions (with dummy load attached to antenna terminals)
- 7) Frequency Stability
- 8) Transient Frequency Behavior

## 2.8. Method of Monitoring EUT Operation

Status LED will be off when no carrier is detected.

Status LED will be yellow when carrier detected.

Status LED will be red when transmitting.

## 2.9. Modifications

### 2.9.1. Modifications to EUT

No modifications were made to the EUT.

### 2.9.2. Modifications to Test Standard

No modifications were made to the test standard.

## 2.10. Disposition of EUT

The test sample including all support equipment submitted to the Electro-Magnetic Compatibility Lab for testing was returned to Electronic Systems Technology upon completion of testing.



### III. Electromagnetic Compatibility Criteria for Unintentional Radiators



### 3. Electromagnetic Compatibility Criteria

#### 3.1. Conducted Emissions Limits

**Test Requirement(s):** **15.107 (a)** Except for Class A digital devices, for equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 4. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals.

**15.107 (b)** For a Class A digital device that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in Table 4. Compliance with this provision shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminals. The lower limit applies at the band edges.

Frequency range (MHz)	Class A Conducted Limits (dB $\mu$ V)		Class B Conducted Limits (dB $\mu$ V)	
	Quasi-Peak	Average	Quasi-Peak	Average
0.15- 0.50	79	66	66 - 56	56 - 46
0.5 – 5	73	60	56	46
5 - 30	73	60	60	50

Note 1 — The lower limit shall apply at the transition frequencies.  
Note 2 — The limit decreases linearly with the logarithm if the frequency in the range 0.15 MHz to 0.5 MHz.

**Table 4. Conducted Limits for Radio Frequency Devices calculated from FCC Part 15 Subsections 15.107(a) (b)**

**Test Procedures:**

The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing, test conditions, and test procedures of ANSI C63.4 were used. The EUT was powered through a 50 $\Omega$ /50 $\mu$ H LISN. An EMI receiver, connected to the measurement port of the LISN, scanned the frequency range from 150 kHz to 30 MHz in order to find the peak conducted emissions. All peak emissions within 6 dB of the limit were re-measured using a quasi-peak and/or average detector as appropriate.

**Test Results:**

The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.


**Test Engineer(s):** Surinder Singh

**Test Date(s):** 06/05/13

## Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

Frequency (MHz)	Uncorrected Meter Reading (dB $\mu$ V) QP	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) QP	Limit (dB $\mu$ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB $\mu$ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) AVG	Limit (dB $\mu$ V) AVG	Margin (dB) AVG
0.153	47.24	0	47.24	65.84	-18.6	33.68	0	33.68	55.84	-22.16
0.329	41.59	0	41.59	59.48	-17.89	38.47	0	38.47	49.48	-11.01
0.728	38.28	0	38.28	56	-17.72	34.72	0	34.72	46	-11.28
1.193	36.43	0	36.43	56	-19.57	34.78	0	34.78	46	-11.22
6.083	43.59	0	43.59	60	-16.41	41.39	0	41.39	50	-8.61
19.233	20.62	0	20.62	60	-39.38	12.49	0	12.49	50	-37.51


Table 5. Conducted Emissions - Voltage, AC Power, Phase Line (120 VAC, 60 Hz)

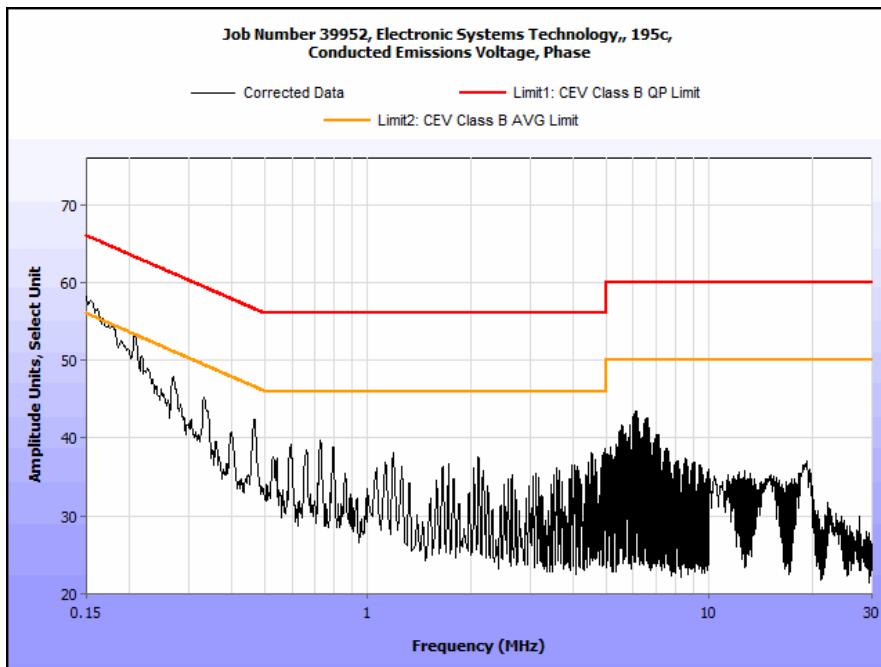

Plot 1. Conducted Emission, Phase Line Plot

**Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)**

Frequency (MHz)	Uncorrected Meter Reading (dB $\mu$ V) QP	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) QP	Limit (dB $\mu$ V) QP	Margin (dB) QP	Uncorrected Meter Reading (dB $\mu$ V) Avg.	Cable Loss (dB)	Corrected Measurement (dB $\mu$ V) AVG	Limit (dB $\mu$ V) AVG	Margin (dB) AVG
0.154	45.84	0	45.84	65.78	-19.94	22.17	0	22.17	55.78	-33.61
0.327	39.21	0	39.21	59.53	-20.32	34.98	0	34.98	49.53	-14.55
0.727	37.73	0	37.73	56	-18.27	35.37	0	35.37	46	-10.63
4.96	38.14	0	38.14	56	-17.86	36.78	0	36.78	46	-9.22
6.08	43.43	0	43.43	60	-16.57	41.21	0	41.21	50	-8.79
19.366	22.95	0	22.95	60	-37.05	13.88	0	13.88	50	-36.12

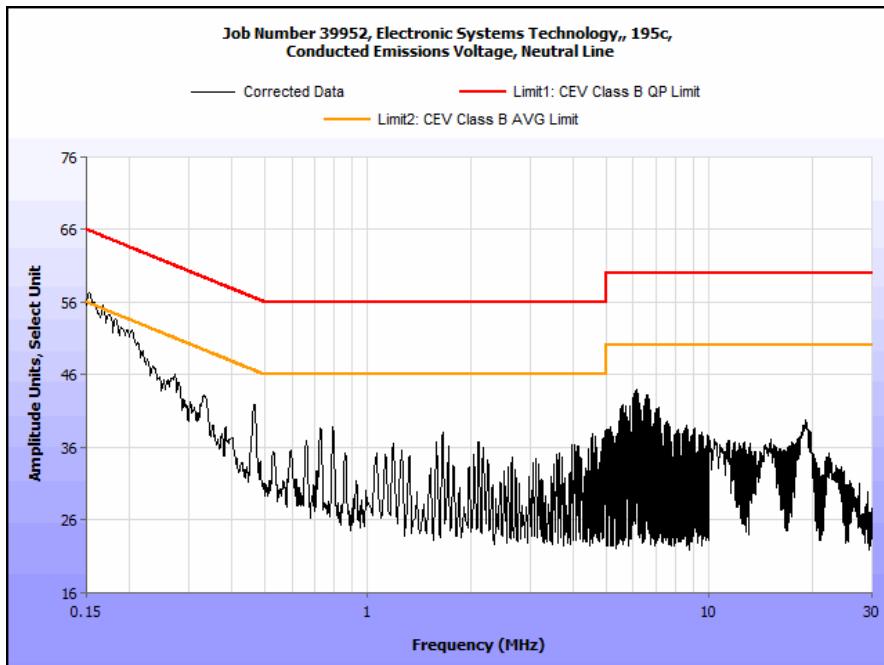**Table 6. Conducted Emissions - Voltage, AC Power, Neutral Line (120 VAC, 60 Hz)**


## Conducted Emission Limits Test Setup



Photograph 1. Conducted Emissions, Test Setup



### 3.2. Radiated Emissions Limits

**Test Requirement(s):** **15.109 (a)** Except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the Class B limits expressed in Table 7.

**15.109 (b)** The field strength of radiated emissions from a Class A digital device, as determined at a distance of 10 meters, shall not exceed the Class A limits expressed in Table 7.

Frequency (MHz)	Field Strength (dB $\mu$ V/m)	
	§15.109 (b), Class A Limit (dB $\mu$ V) @ 10m	§15.109 (a), Class B Limit (dB $\mu$ V) @ 3m
30 - 88	39.00	40.00
88 - 216	43.50	43.50
216 - 960	46.40	46.00
Above 960	49.50	54.00

**Table 7. Radiated Emissions Limits calculated from FCC Part 15, §15.109 (a) (b)**

**Test Procedures:** The EUT was placed on a non-metallic table, 80 cm above the ground plane inside a semi-anechoic chamber. The method of testing and test conditions of ANSI C63.4 were used. An antenna was located 3 m from the EUT on an adjustable mast. A pre-scan was first performed in order to find prominent radiated emissions. For final emissions measurements at each frequency of interest, the EUT was rotated and the antenna height was varied between 1 m and 4 m in order to maximize the emission. Measurements in both horizontal and vertical polarities were made and the data was recorded. Unless otherwise specified, measurements were made using a quasi-peak detector with a 120 kHz bandwidth.

**Test Results:** The EUT was compliant with the Class B requirement(s) of this section. Measured emissions were below applicable limits.

**Test Engineer(s):** Shawn McMillen


**Test Date(s):** 10/21/13

## Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dB $\mu$ V)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
55.551102	357	H	1.92	6.71	7.54	0.52	0.00	14.77	40.00	-25.23
55.551102	357	V	1.92	26.42	7.54	0.52	0.00	34.48	40.00	-5.52
95.09684	67	H	1.92	21.72	8.93	0.75	0.00	31.40	43.50	-12.10
95.09684	127	V	1.92	18.79	8.93	0.75	0.00	28.47	43.50	-15.03
195.31263	-1	H	1.92	16.73	11.93	0.91	0.00	29.57	43.50	-13.93
195.31263	61	V	1.92	16.30	11.93	0.91	0.00	29.14	43.50	-14.36
350	57	H	1.92	23.78	15.20	1.40	0.00	40.38	46.00	-5.62
350	-2	V	1.92	22.95	15.20	1.40	0.00	39.55	46.00	-6.45
400.00591	50	H	1.92	10.24	16.20	1.60	0.00	28.04	46.00	-17.96
400.00591	-2	V	1.92	14.46	16.20	1.60	0.00	32.26	46.00	-13.74

Table 8. Radiated Emissions Limits, Test Results, FCC Limits

Note: The EUT was tested at 3 m.

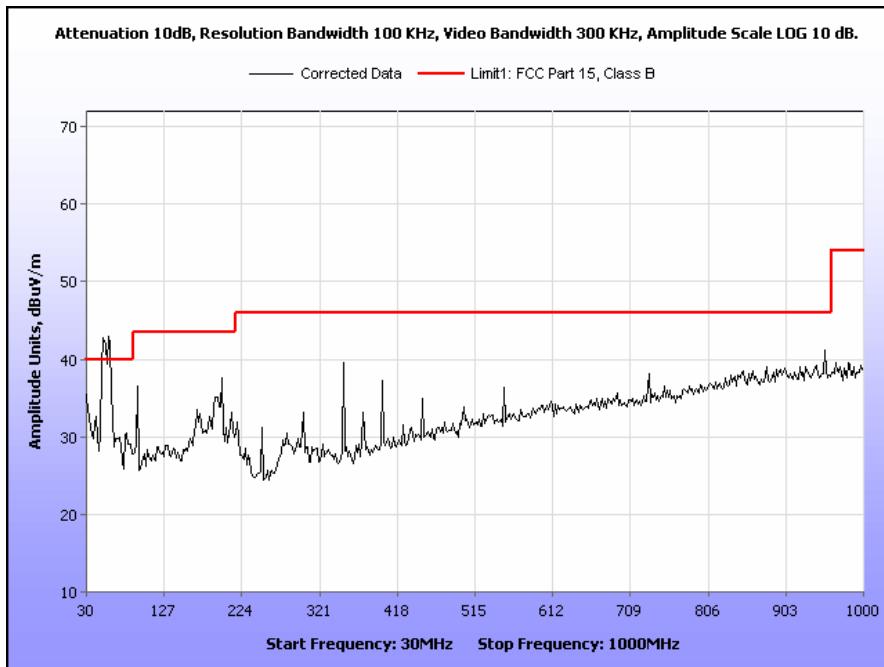


Plot 3. Radiated Emissions, 30 MHz - 1 GHz, FCC Limits

## Radiated Emissions Limits Test Results, Class B

Frequency (MHz)	EUT Azimuth (Degrees)	Antenna Polarity (H/V)	Antenna HEIGHT (m)	Uncorrected Amplitude (dB $\mu$ V)	Antenna Correction Factor (dB) (+)	Cable Loss (dB) (+)	Distance Correction Factor (dB) (-)	Corrected Amplitude (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)
55.551102	357	H	1.92	6.71	7.54	0.52	10.46	4.31	30.00	-25.69
55.551102	357	V	1.92	26.42	7.54	0.52	10.46	24.02	30.00	-5.98
95.09684	67	H	1.92	21.72	8.93	0.75	10.46	20.94	30.00	-9.06
95.09684	127	V	1.92	18.79	8.93	0.75	10.46	18.01	30.00	-11.99
195.31263	-1	H	1.92	16.73	11.93	0.91	10.46	19.11	30.00	-10.89
195.31263	61	V	1.92	16.30	11.93	0.91	10.46	18.68	30.00	-11.32
195.31263	154	H	1.92	18.02	11.93	0.91	10.46	20.40	30.00	-9.60
350	57	H	1.92	23.78	15.20	1.40	10.46	29.92	37.00	-7.08
350	-2	V	1.92	22.95	15.20	1.40	10.46	29.09	37.00	-7.91
400.00591	50	H	1.92	10.24	16.20	1.60	10.46	17.58	37.00	-19.42

Table 9. Radiated Emissions Limits, Test Results, ICES-003 Limits, 30 MHz – 1 GHz

Note: The EUT was tested at 3 m.

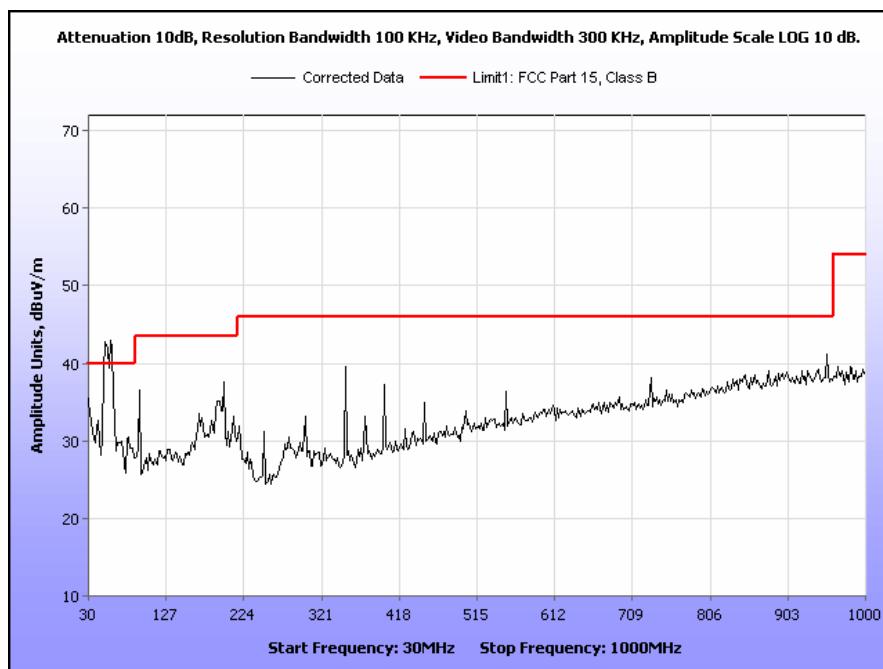

Plot 4. Radiated Emissions, 30 MHz – 1 GHz, ICES-003 Limits



Electronic Systems Technology  
195c

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 15B & Part 90; ICES-003 & RSS-119

---

## IV. Electromagnetic Compatibility Criteria for Intentional Radiators

## 4. Electromagnetic Compatibility RF Power Output Requirements

### 4.1. RF Output Power

**Test Requirement(s):** **§2.1046 and §90.205**

**Test Procedures:** As required by 47 CFR §2.1046, *RF power output measurements* were made at the RF output terminals using a Spectrum Analyzer.


A laptop was connected to EUT to control the RF power output and frequency channel. The EUT was connected to a Spectrum Analyzer via an attenuator to measure power. Measurements were made at the low, mid and high channels of each appropriate frequency range. Plots were correct for attenuator and cable loss.

**Test Results:** Equipment is compliant with the requirements of this section.


All RF Power output measurements were direct connection to RF output Terminal of EUT from a Spectrum Analyzer.

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** 10/15/13

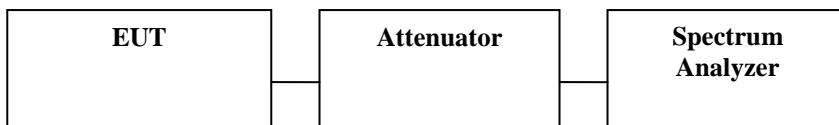


**Figure 1. RF Power Output Test Setup**

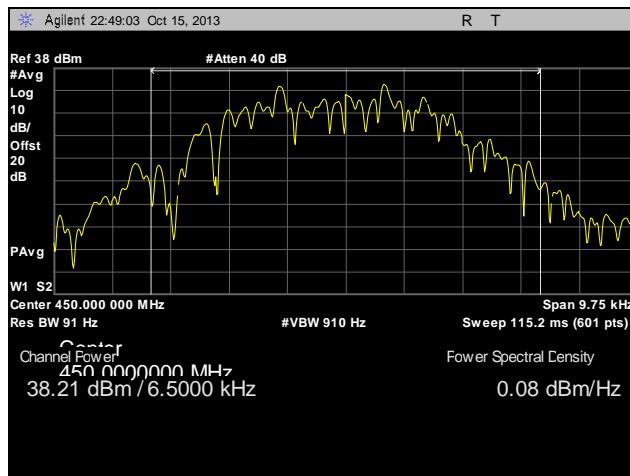


Plot 5. RF Power Output, Low Channel, 450 MHz, Average, 6.25 kHz




Plot 6. RF Power Output, Mid Channel, 460 MHz, Average, 6.25 kHz

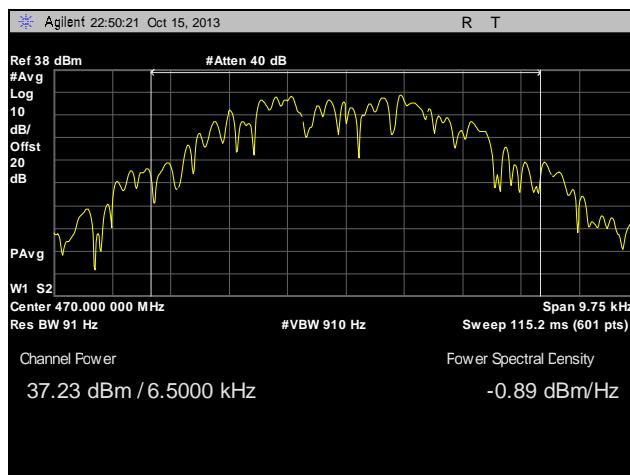


Plot 7. RF Power Output, High Channel, 470 MHz, Average, 6.25 kHz

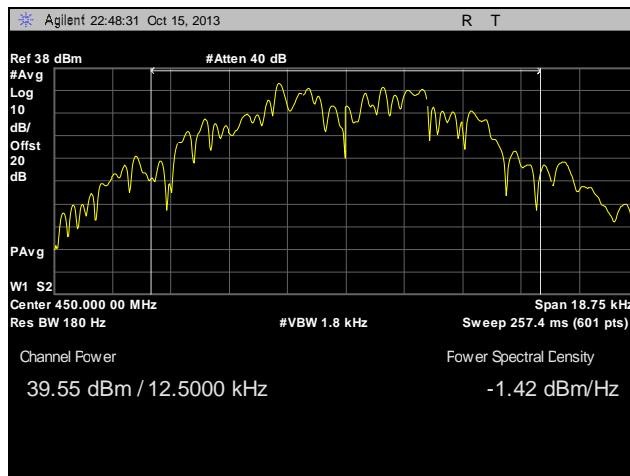

Plot 8. RF Power Output, Low Channel, 450 MHz, Average, 12.5 kHz

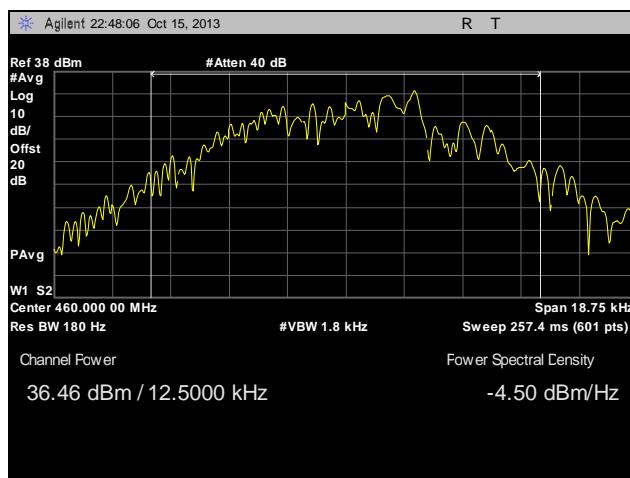

Plot 9. RF Power Output, Mid Channel, 460 MHz, Average, 12.5 kHz

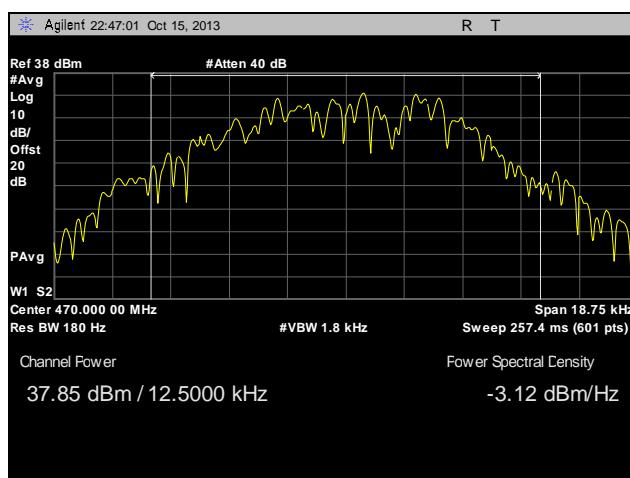

Plot 10. RF Power Output, High Channel, 470 MHz, Average, 12.5 kHz



Electronic Systems Technology  
195c

Electromagnetic Compatibility  
Intentional Radiators  
CFR Title 47 Part 15B & Part 90; ICES-003 & RSS-119

#### 4.2. Modulation Characteristics

**Test Requirement(s):** §2.1047 and §90.207

**Test Results:** Equipment was not applicable with Section §2.1047 and §90.207. The devices does not have audio.

#### 4.3. Occupied Bandwidth

**Test Requirement(s):** §2.1049


**Test Procedures:** As required by 47 CFR 2.1049, *occupied bandwidth measurements* were made at the RF output terminals using a Spectrum Analyzer.

A laptop was connected to EUT to control the RF frequency channel. The EUT was connected to a Spectrum Analyzer via attenuator. The RBW of the Spectrum Analyzer was set to at least 1% of the channel bandwidth. Measurements were carried out at the low, mid, and high channels of the TX band.


**Test Results:** Equipment complies with Section §2.1049.

**Test Engineer(s):** Shawn McMillen


**Test Date(s):** 10/15/13




**Figure 2. Occupied Bandwidth Test Setup**

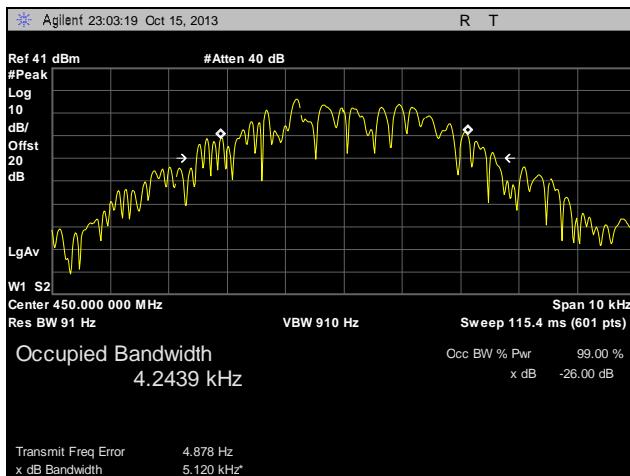


Plot 11. Occupied Bandwidth, Low Channel, 450 MHz, 6.25 kHz

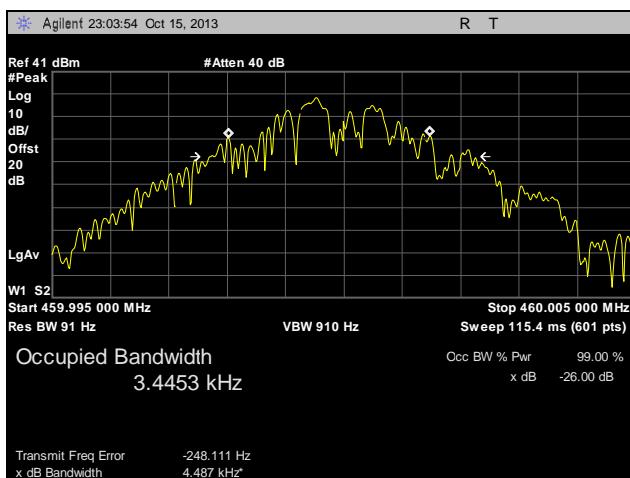


Plot 12. Occupied Bandwidth, Mid Channel, 460 MHz, 6.25 kHz

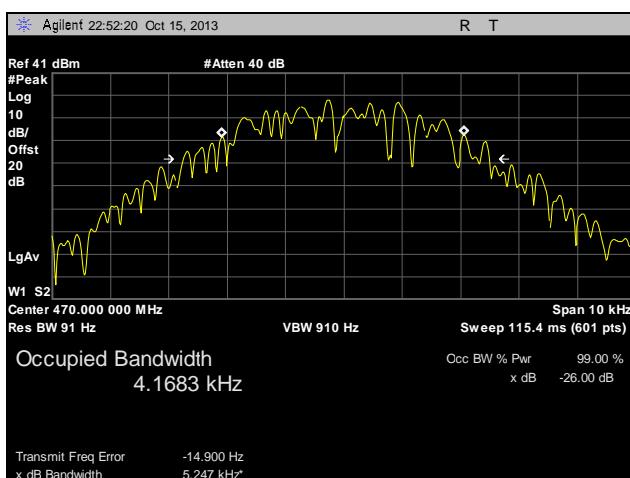


Plot 13. Occupied Bandwidth, High Channel, 470 MHz, 6.25 kHz

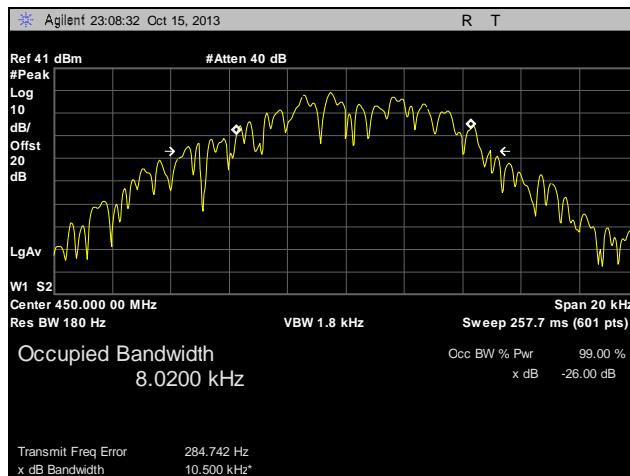

Plot 14. Occupied Bandwidth, Low Channel, 450 MHz, 12.5 kHz

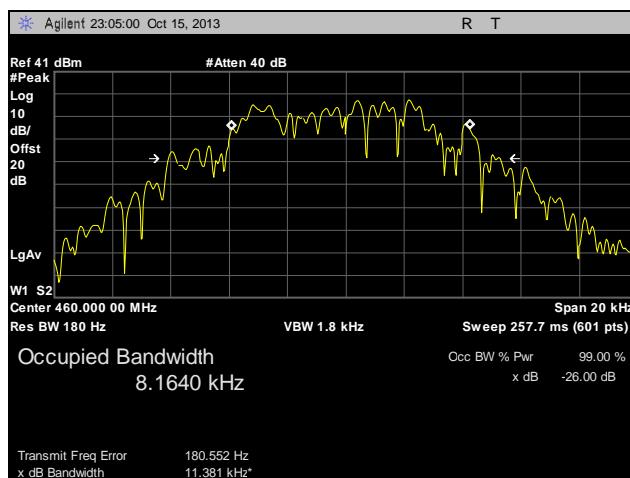

Plot 15. Occupied Bandwidth, Mid Channel, 460 MHz, 12.5 kHz

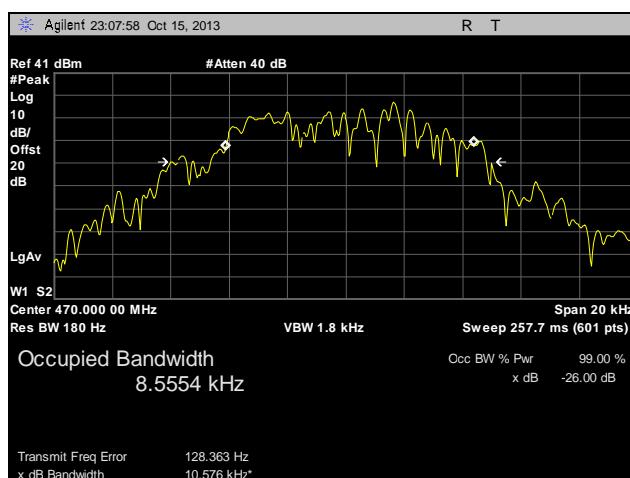

Plot 16. Occupied Bandwidth, High Channel, 470 MHz, 12.5 kHz

#### 4.4. Emission Mask

**Test Requirement(s):** §90.210 with FCC 04-265 (Emissions Mask)

**Test Procedures:** A laptop was connected to the EUT to control the RF output frequency channel. The EUT was connected to a spectrum analyzer. The measured power was set relative to zero dB reference. The RBW of the spectrum analyzer was set to at least 1% of the channel bandwidth.

**Test Results:** Equipment complies with Section §90.210 with FCC 04-265.

For the 421 – 512 MHz range:


Equipment designed to operate with a 12.5 kHz channel bandwidth must meet the requirements of Emission Mask D for device that do not have an audio low pass filter. Transmitters designed to operate with a 6.25 kHz or less bandwidth shall meet Emission Mask E.

The EUT does not exceed the Emission Masks limit.


The following pages show measurements of Emission Mask plots:

**Test Engineer(s):** Shawn McMillen


**Test Date(s):** 10/15/13




**Figure 3. Emission Mask Test Setup**

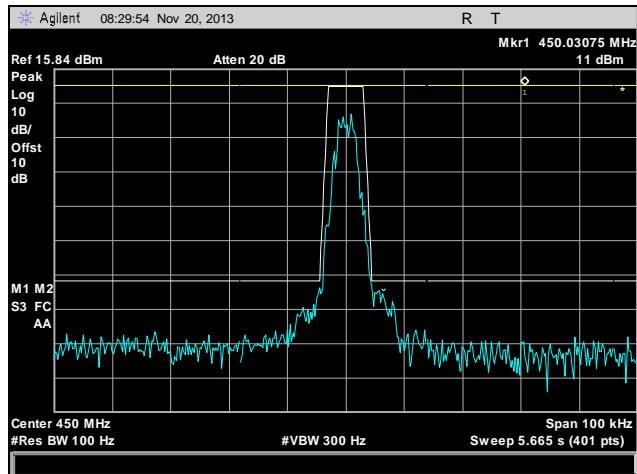


Plot 17. Emission Mask E, Low Channel, 450 MHz, 6.25 kHz, Low Power

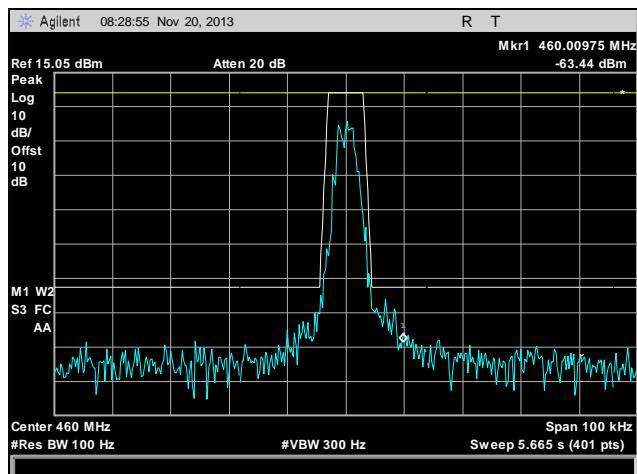


Plot 18. Emission Mask E, Mid Channel, 460 MHz, 6.25 kHz, Low Power

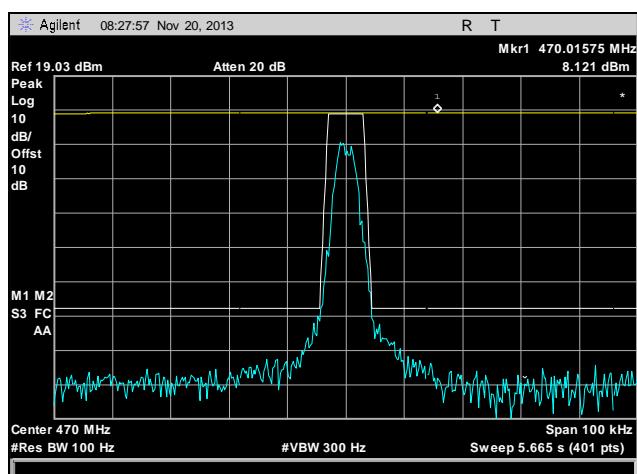


Plot 19. Emission Mask E, High Channel, 470 MHz, 6.25 kHz, Low Power

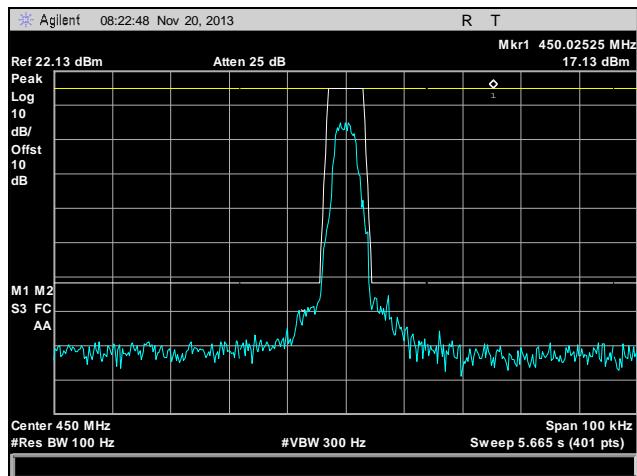


Plot 20. Emission Mask E, Low Channel, 450 MHz, 6.25 kHz, High Power

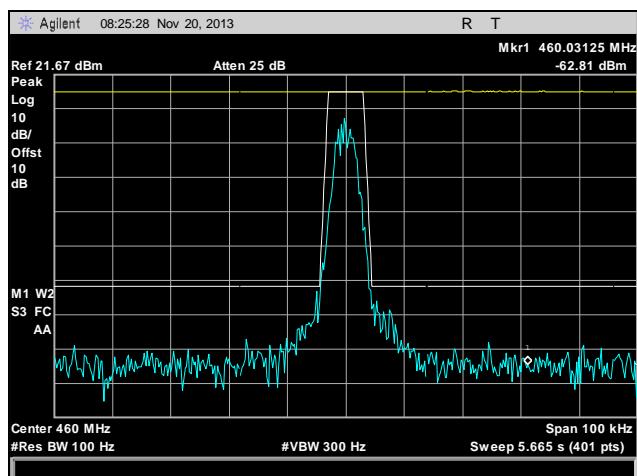


Plot 21. Emission Mask E, Mid Channel, 460 MHz, 6.25 kHz, High Power

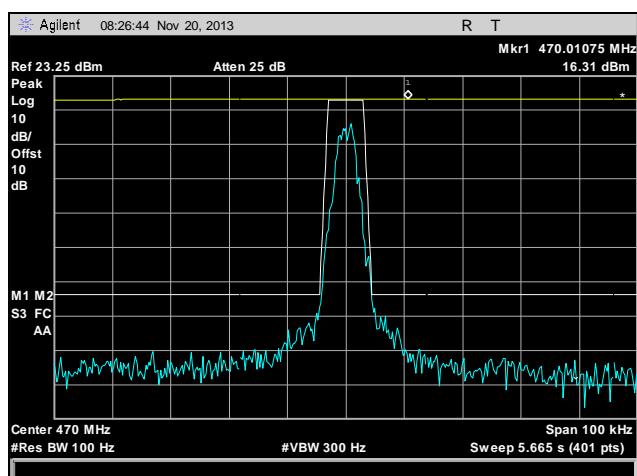


Plot 22. Emission Mask E, High Channel, 470 MHz, 6.25 kHz, High Power

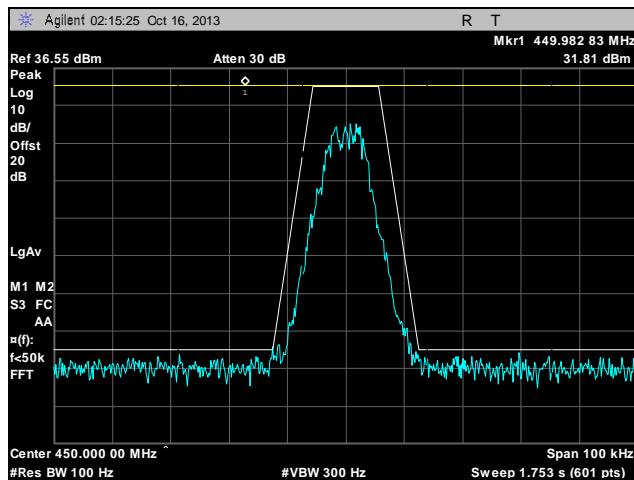


Plot 23. Emission Mask D, Low Channel, 450 MHz, 12.5 kHz, Low Power

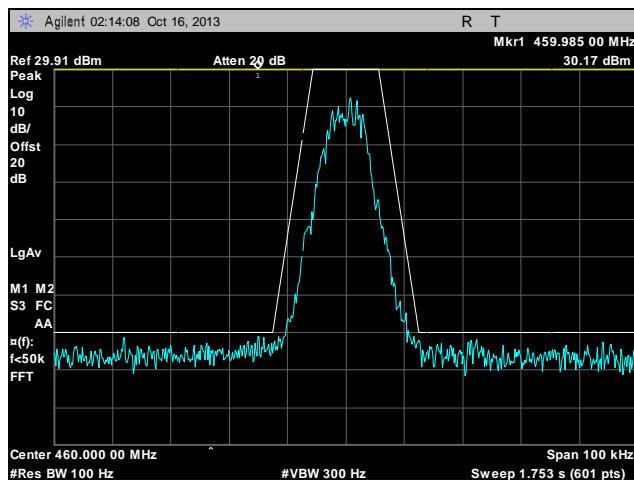


Plot 24. Emission Mask D, Mid Channel, 460 MHz, 12.5 kHz, Low Power

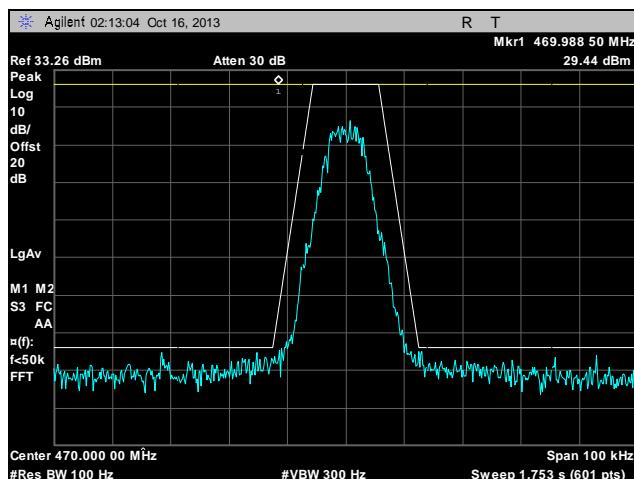


Plot 25. Emission Mask D, High Channel, 470 MHz, 12.5 kHz, Low Power

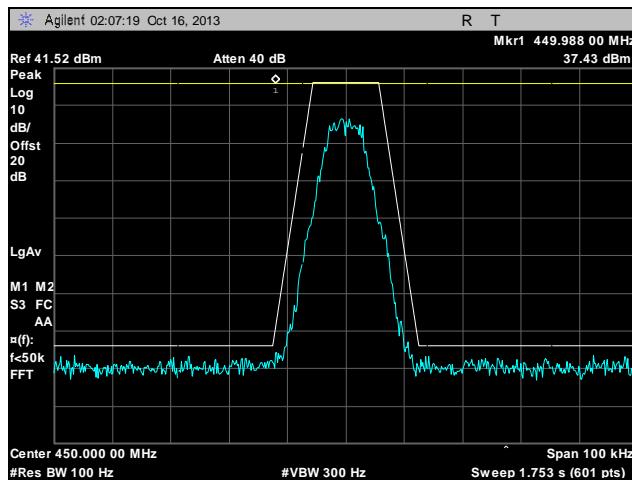

Plot 26. Emission Mask D, Low Channel, 450 MHz, 12.5 kHz, High Power

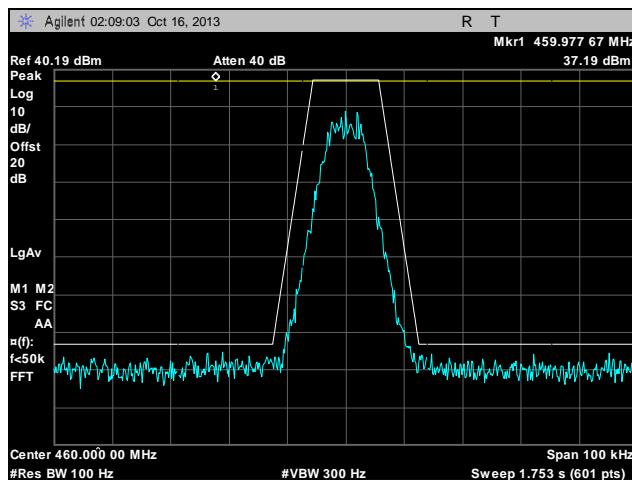

Plot 27. Emission Mask D, Mid Channel, 460 MHz, 12.5 kHz, High Power

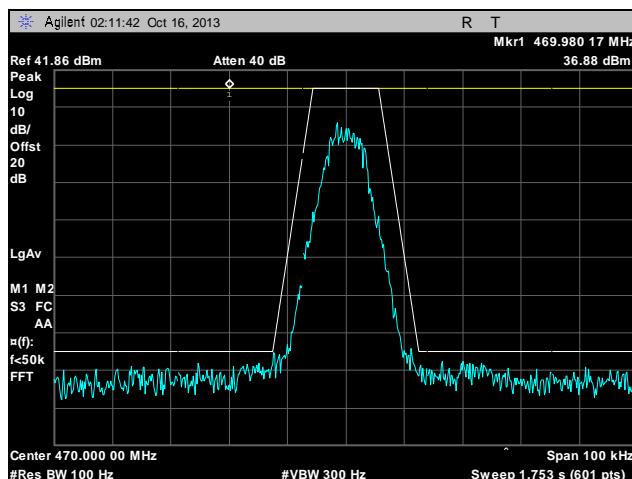

Plot 28. Emission Mask D, High Channel, 470 MHz, 12.5 kHz, High Power

#### 4.5. Spurious Emissions at Antenna Terminals

**Test Requirement(s):** **§2.1051 Measurements required: Spurious emissions at antenna terminals:** The radio frequency voltage or powers generated within the equipment and appearing on a spurious frequency shall be checked at the equipment output terminals when properly loaded with a suitable artificial antenna. Curves or equivalent data shall show the magnitude of each harmonic and other spurious emission that can be detected when the equipment is operated under the conditions specified in §2.1049 as appropriate. The magnitude of spurious emissions which are attenuated more than 20 dB below the permissible value need not be specified.


**Test Procedures:** As required by 47 CFR §2.1051, *spurious emissions at antenna terminal measurements* were made at the RF output terminals using a Spectrum Analyzer.

A laptop was connected to EUT to control the RF power output and frequency channel. The EUT was connected to a Spectrum Analyzer through an attenuator. The Spectrum Analyzer was set to sweep 30 MHz and up to 10<sup>th</sup> harmonic of the fundamental or 40 GHz whichever is the lesser. Measurements were made in all applicable frequency bands.


**Test Results:** Equipment complies with Section §2.1051, and §90.210 with FCC 04-265.

**Test Engineer(s):** Shawn McMillen


**Test Date(s):** 10/15/13




**Figure 4. Spurious Emissions at Antenna Terminals Test Setup**

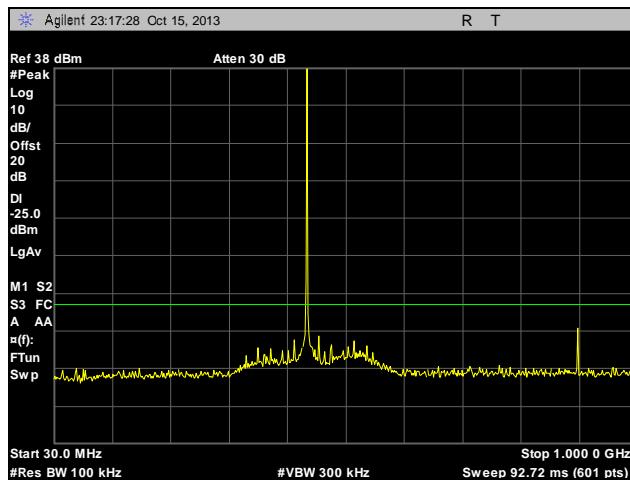


**Plot 29. Conducted Spurious Emissions, Low Channel, 450 MHz, 6.25 kHz, 30 MHz – 1 GHz**

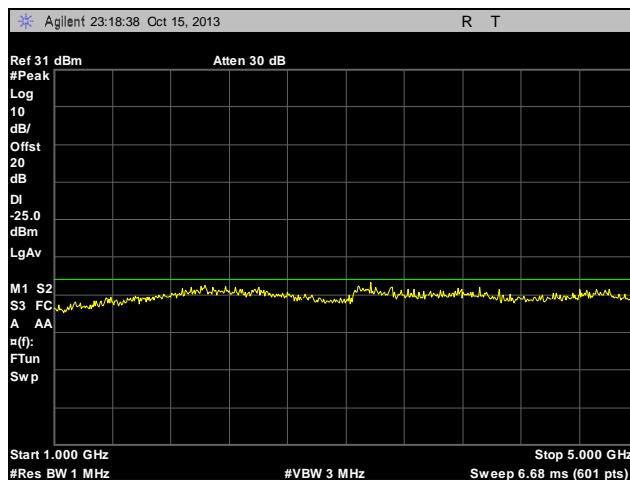


**Plot 30. Conducted Spurious Emissions, Low Channel, 450 MHz, 6.25 kHz, 1 GHz – 5 GHz**

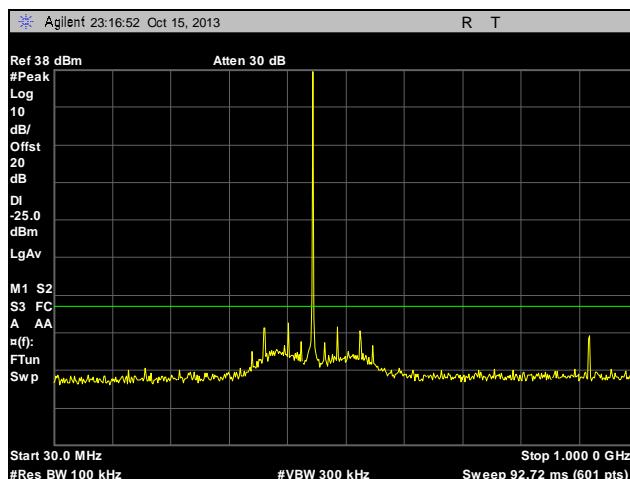


**Plot 31. Conducted Spurious Emissions, Mid Channel, 460 MHz, 6.25 kHz, 30 MHz – 1 GHz**

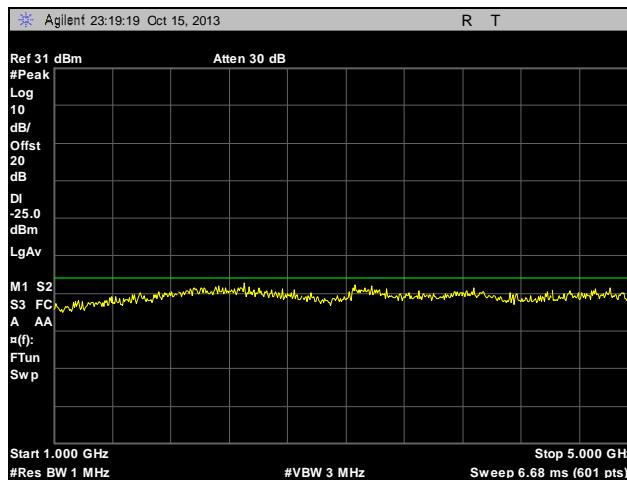


Plot 32. Conducted Spurious Emissions, Mid Channel, 460 MHz, 6.25 kHz, 1 GHz – 5 GHz

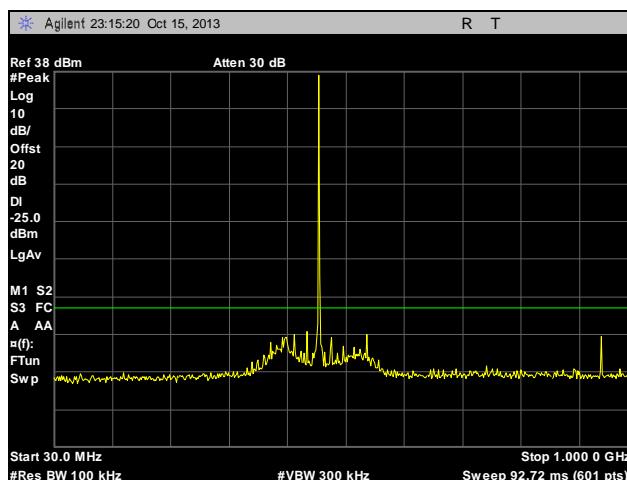


Plot 33. Conducted Spurious Emissions, High Channel, 470 MHz, 6.25 kHz, 30 MHz – 1 GHz

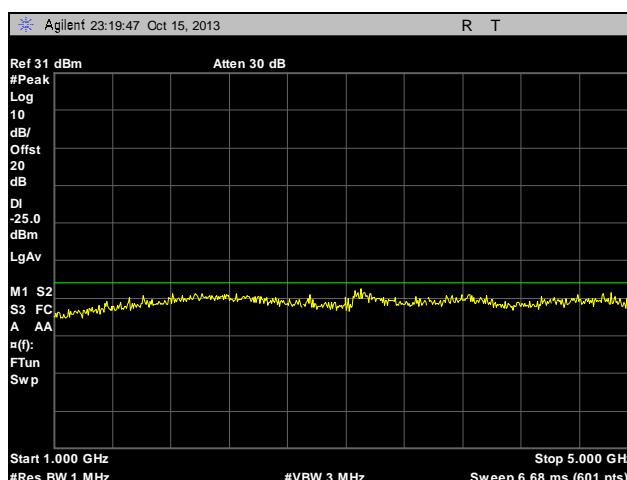


Plot 34. Conducted Spurious Emissions, High Channel, 470 MHz, 6.25 kHz, 1 GHz – 5 GHz

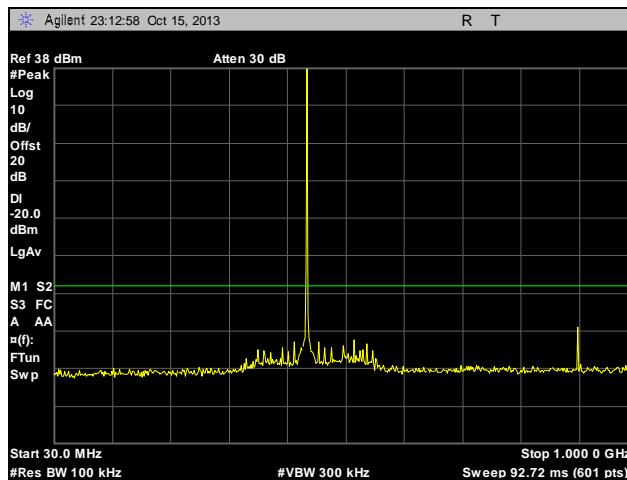


**Plot 35. Conducted Spurious Emissions, Low Channel, 450 MHz, 12.5 kHz, 30 MHz – 1 GHz**

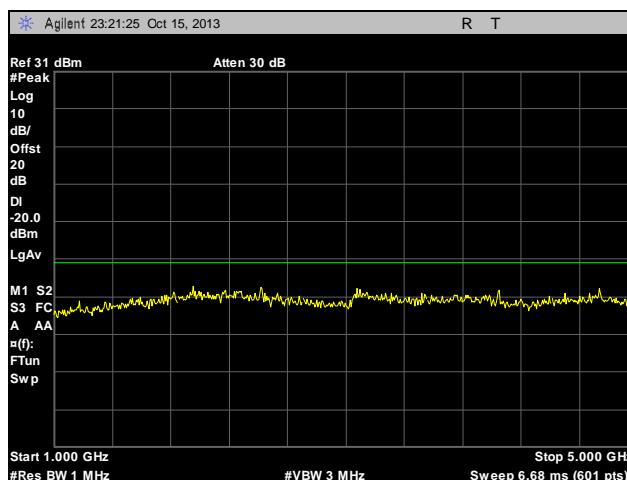


**Plot 36. Conducted Spurious Emissions, Low Channel, 450 MHz, 12.5 kHz, 1 GHz – 5 GHz**

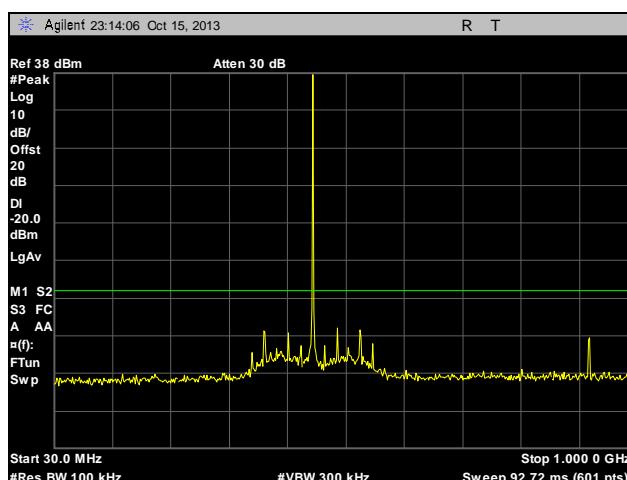


**Plot 37. Conducted Spurious Emissions, Mid Channel, 460 MHz, 12.5 kHz, 30 MHz – 1 GHz**

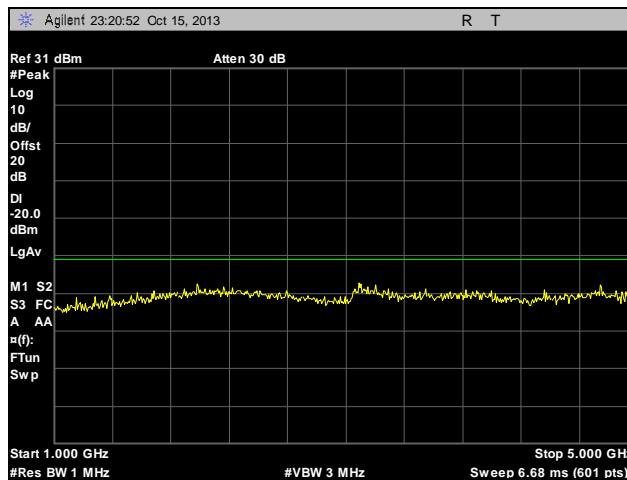

Plot 38. Conducted Spurious Emissions, Mid Channel, 460 MHz, 12.5 kHz, 1 GHz – 5 GHz

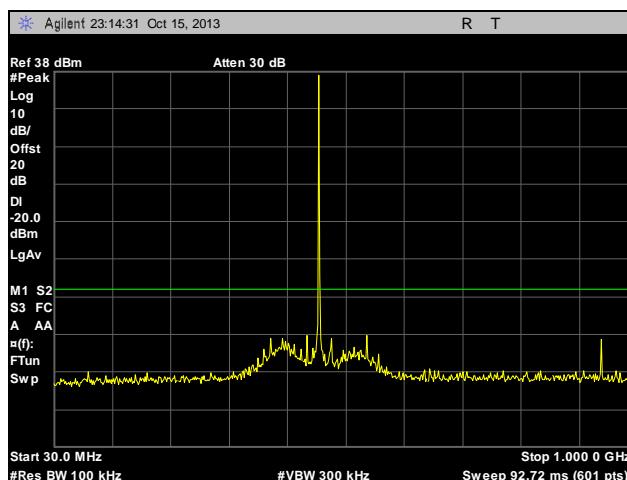

Plot 39. Conducted Spurious Emissions, High Channel, 470 MHz, 12.5 kHz, 30 MHz – 1 GHz

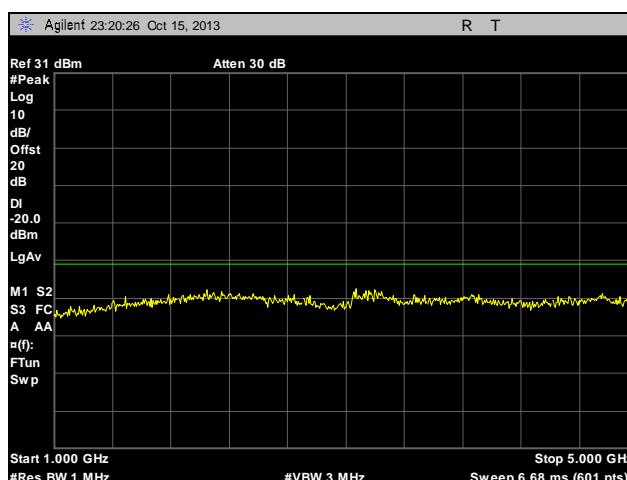

Plot 40. Conducted Spurious Emissions, High Channel, 470 MHz, 12.5 kHz, 1 GHz – 5 GHz



## 4.6. Frequency Stability

**Test Requirement(s):** §2.1055

**Test Procedures:** As required by 47 CFR 2.1055, *Frequency Stability measurements* were made at the RF output terminals using a direct connect to a Spectrum Analyzer.

The EUT was placed in the Environmental Chamber with the support equipment on the outside. The EUT was set to transmit at its mid channel using a CW carrier. The frequency drift was investigated for every 10°C increment until the unit was stabilized. Measurements were made using the frequency counter function of the spectrum analyzer for the frequency ranges requiring a limit of 5ppm.

For frequency ranges requiring a limit of 1ppm, the EUT was connected to a Digital Mobile Test Set. A call was set up and the Frequency Error was given in Hz.

Operational voltage for the EUT is 7.4 VDC when operated from a DC source and 120 VAC when supplied by a power supply. Reference temperature was set at 20°C. In either case, the voltage was varied by  $\pm 15\%$  of nominal.

**Test Results:** Equipment complies with Section §2.1055 and §90.213.

**Test Engineer(s):** Shawn McMillen

**Test Date(s):** 10/25/13

Test Frequency (MHz)	Temperature (deg. C)	Voltage (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
460	50	7.4	53	0.1152	0.5
460	40	7.4	38	0.0826	0.5
460	30	7.4	12	0.0261	0.5
460	20	7.4	0	0.0000	0.5
460	10	7.4	-32	-0.0696	0.5
460	0	7.4	-89	-0.1935	0.5
460	-10	7.4	-128	-0.2783	0.5
460	-20	7.4	-149	-0.3239	0.5
460	-30	7.4	-174	-0.3783	0.5

Test Frequency (MHz)	Temperature (deg. C)	Voltage (VAC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
460	20	102	5	0.0109	0.5
460	20	120	0	0.0000	0.5
460	20	138	2	0.0043	0.5

**Table 10. Frequency Stability, 6.25 kHz**



Test Frequency (MHz)	Temperature (deg. C)	Voltage (VDC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
460	50	120	55	0.1196	1.5
460	40	120	43	0.0935	1.5
460	30	120	19	0.0413	1.5
460	20	120	0	0.0000	1.5
460	10	120	-20	-0.0435	1.5
460	0	120	-91	-0.1978	1.5
460	-10	120	-120	-0.2609	1.5
460	-20	120	-158	-0.3435	1.5
460	-30	120	-144	-0.3130	1.5

Test Frequency (MHz)	Temperature (deg. C)	Voltage (VAC)	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)
460	20	102	9	0.0196	1.5
460	20	120	0	0.0000	1.5
460	20	138	11	0.0239	1.5

Table 11. Frequency Stability, 12.5 kHz



## 4.7. Field Strength of Spurious Radiation

**Test Requirement(s): §2.1053 Measurements required: Field strength of spurious radiation.**

**§ 2.1053 (a)** Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, power leads, or intermediate circuit elements under normal conditions of installation and operation. Curves or equivalent data shall be supplied showing the magnitude of each harmonic and other spurious emission. For this test, single sideband, independent sideband, and controlled carrier transmitters shall be modulated under the conditions specified in paragraph (c) of § 2.1049, as appropriate. For equipment operating on frequencies below 890 MHz, an open field test is normally required with the measuring instrument antenna located in the far-field at all test frequencies. In the event it is either impractical or impossible to make open field measurements (e.g. a broadcast transmitter installed in a building) measurements will be accepted of the equipment as installed. Such measurements must be accompanied by a description of the site where the measurements were made showing the location of any possible source of reflections which might distort the field strength measurements. Information submitted shall include the relative radiated power of each spurious emission with reference to the rated power output of the transmitter, assuming all emissions are radiated from half-wave dipole antennas.

**§ 2.1053 (b):** The measurements specified in paragraph (a) of this section shall be made for the following equipment:

- (1) Those in which the spurious emissions are required to be 60 dB or more below the mean power of the transmitter.
- (2) All equipment operating on frequencies higher than 25 MHz.
- (3) All equipment where the antenna is an integral part of, and attached directly to the transmitter.
- (4) Other types of equipment as required, when deemed necessary by the Commission.

**Test Procedures:**

As required by 47 CFR §2.1053, *field strength of radiated spurious measurements* was made in accordance with the procedures of TIA/EIA-603-A-2001 "Land Mobile FM or PM Communications Equipment Measurement and Performance Standards".


Radiated emission measurements were performed inside a 3 meter semi-anechoic chamber. The EUT's RF ports were terminated to 50ohm load. The EUT was tested using both bandwidths and at the low, mid, and high channels. The EUT was rotated about 360° and the receiving antenna scanned from 1-4m in order to capture the maximum emission. The plots are corrected for cable loss, antenna correction factor, and distance correction. The field strength was mathematically corrected to an E.I.R.P. Harmonic emissions up to the 10<sup>th</sup> or 40GHz, whichever was the lesser, were investigated.

The spectrum analyzer was set to 1MHz RBW and 3MHz VBW above 1 GHz and 100 kHz RBW and 300 kHz VBW below 1 GHz. The spectrum was investigated from 30MHz to the 10<sup>th</sup> harmonic of the carrier.


**Test Results:** Equipment complies with Section §2.1055 and §90.210.

**Test Engineer(s):** Shawn McMillen


**Test Date(s):** 10/21/13

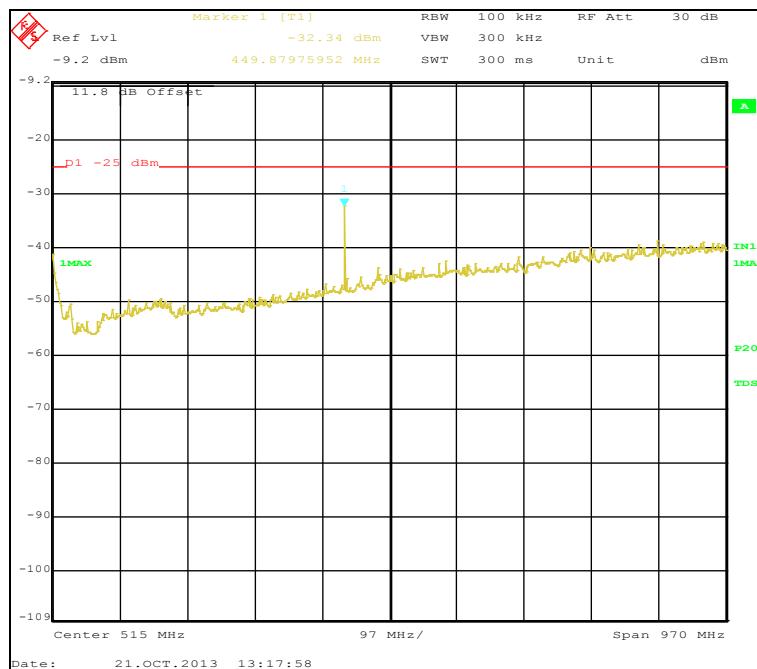


**Plot 41. Radiated Spurious Emissions, Low Channel, 450 MHz, 6.25 kHz, 30 MHz – 1 GHz**

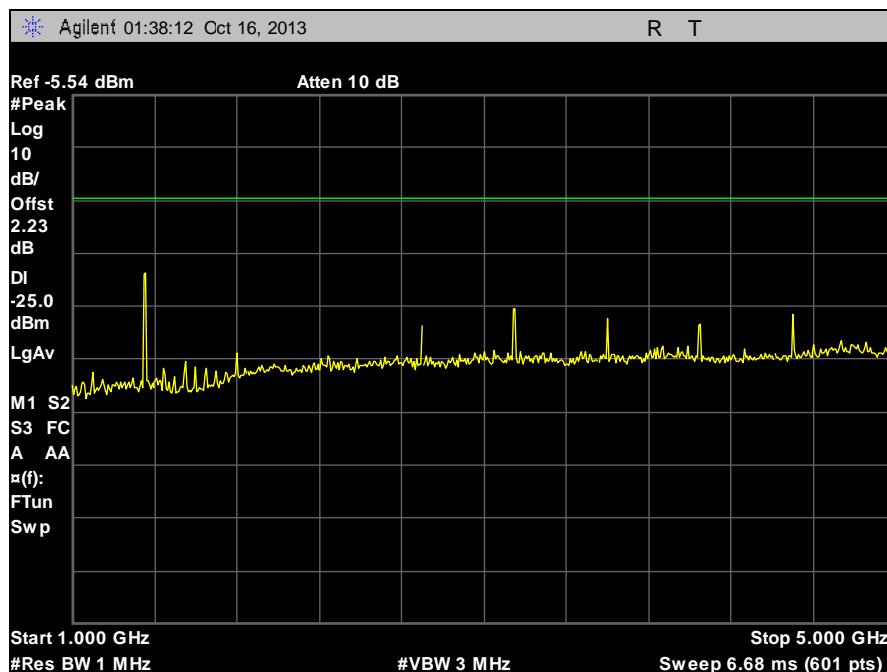


**Plot 42. Radiated Spurious Emissions, Low Channel, 450 MHz, 6.25 kHz, 1 GHz – 5 GHz**

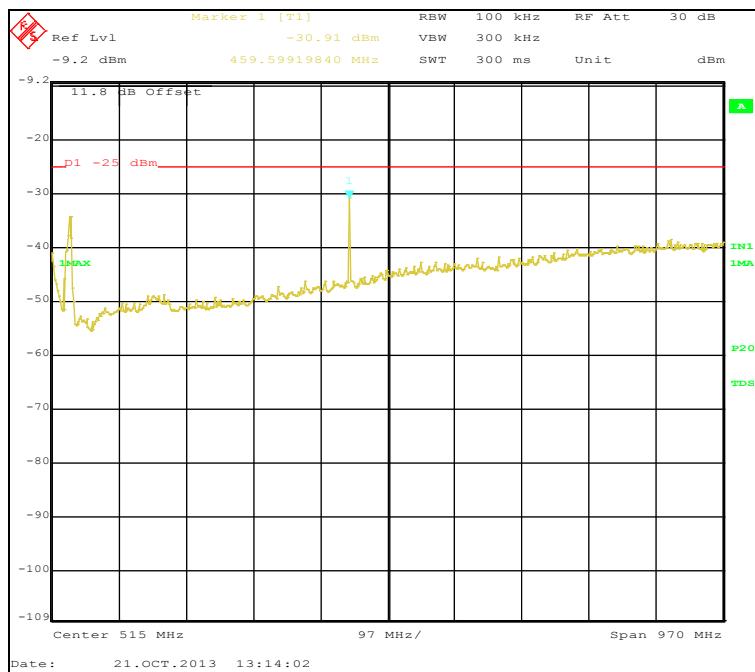


Plot 43. Radiated Spurious Emissions, Mid Channel, 460 MHz, 6.25 kHz, 30 MHz – 1 GHz

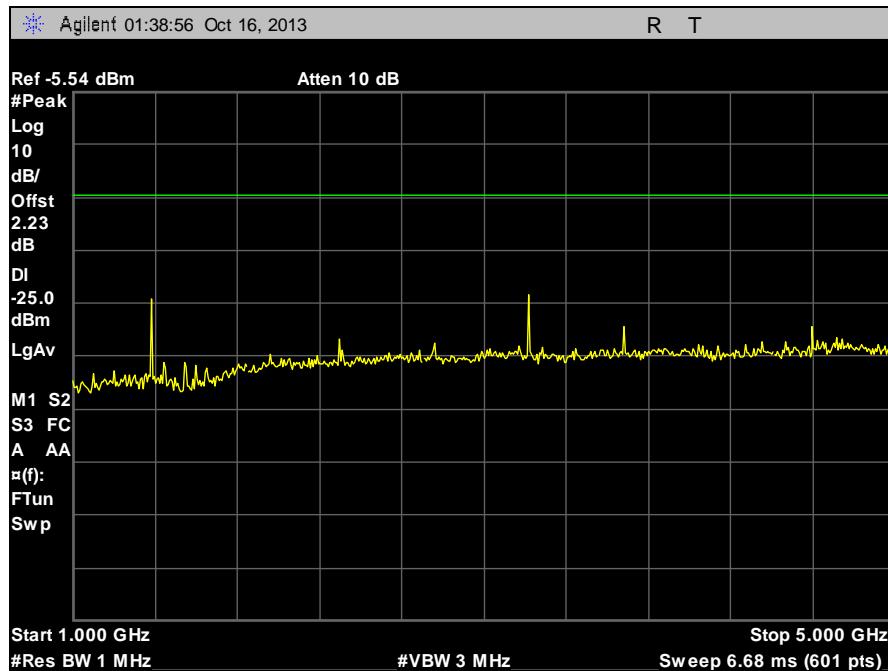


Plot 44. Radiated Spurious Emissions, Mid Channel, 460 MHz, 6.25 kHz, 1 GHz – 5 GHz

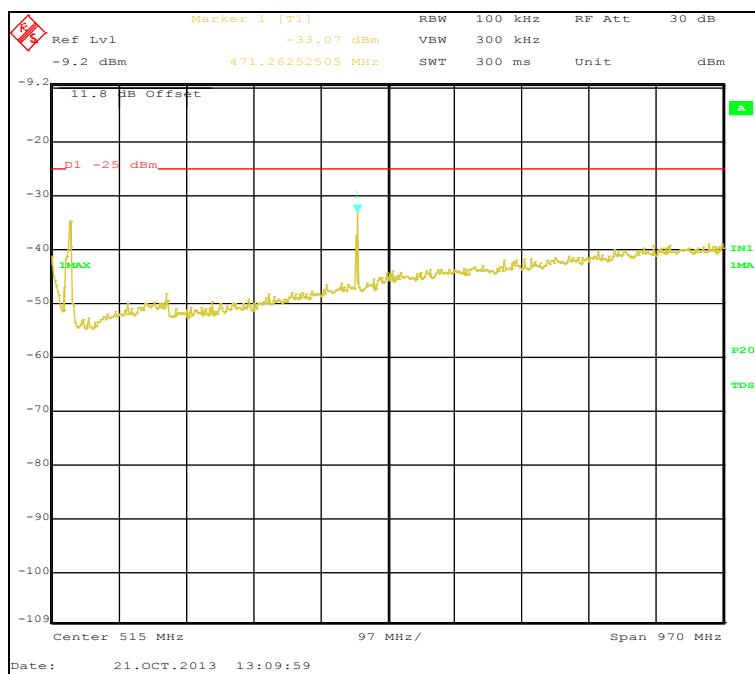


Plot 45. Radiated Spurious Emissions, High Channel, 470 MHz, 6.25 kHz, 30 MHz – 1 GHz

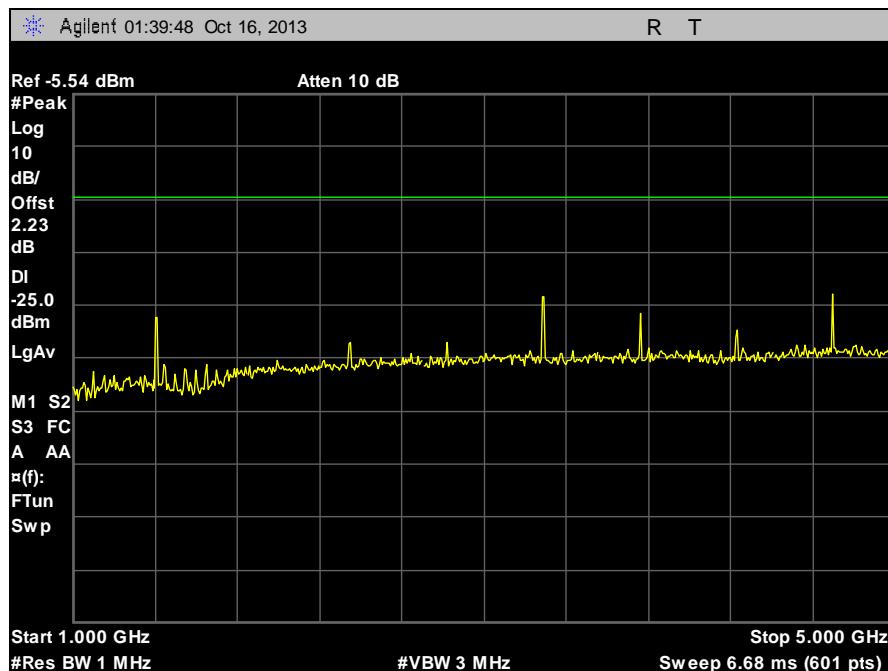


Plot 46. Radiated Spurious Emissions, High Channel, 470 MHz, 6.25 kHz, 1 GHz – 5 GHz

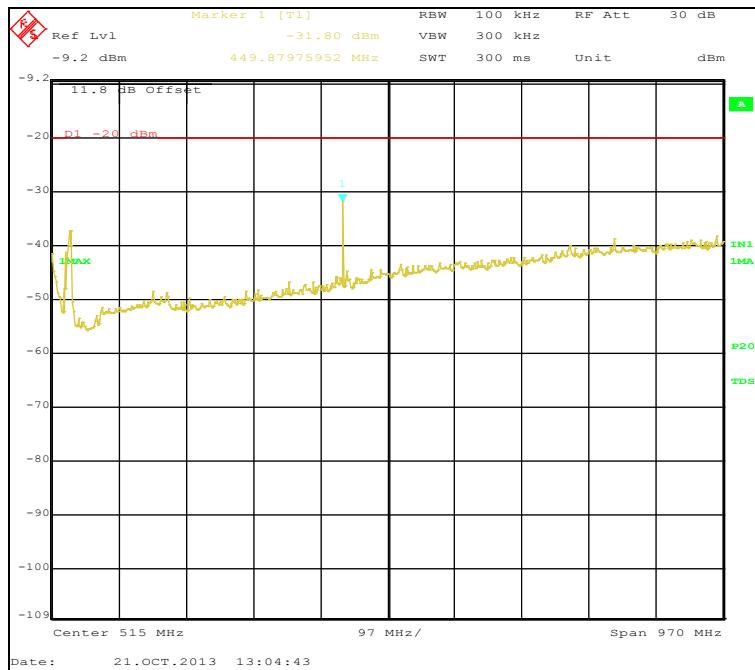


Plot 47. Radiated Spurious Emissions, Low Channel, 450 MHz, 12.5 kHz, 30 MHz – 1 GHz

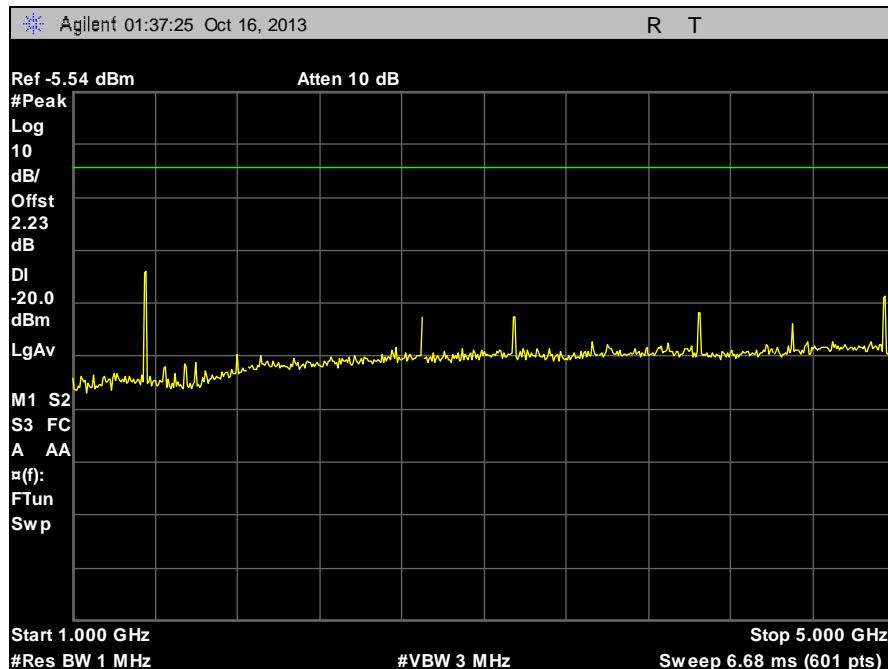


Plot 48. Radiated Spurious Emissions, Low Channel, 450 MHz, 12.5 kHz, 1 GHz – 5 GHz

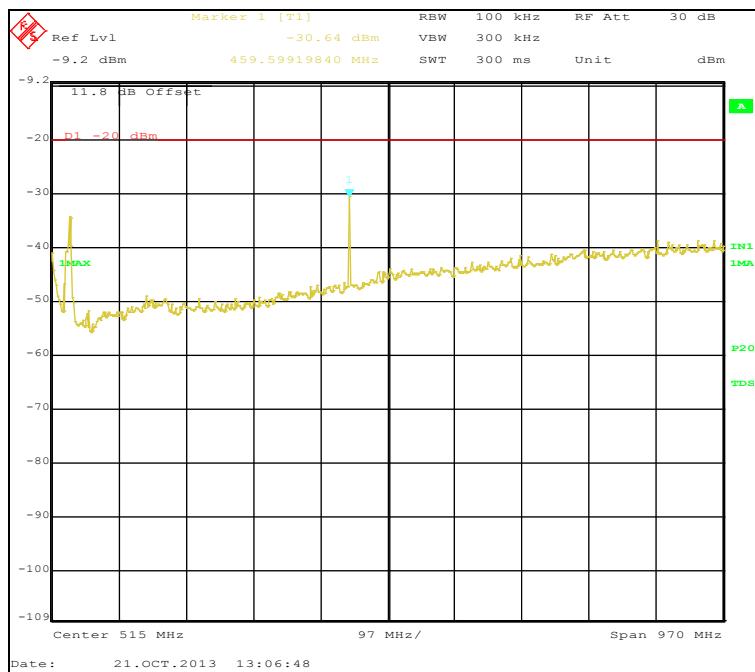


Plot 49. Radiated Spurious Emissions, Mid Channel, 460 MHz, 12.5 kHz, 30 MHz – 1 GHz

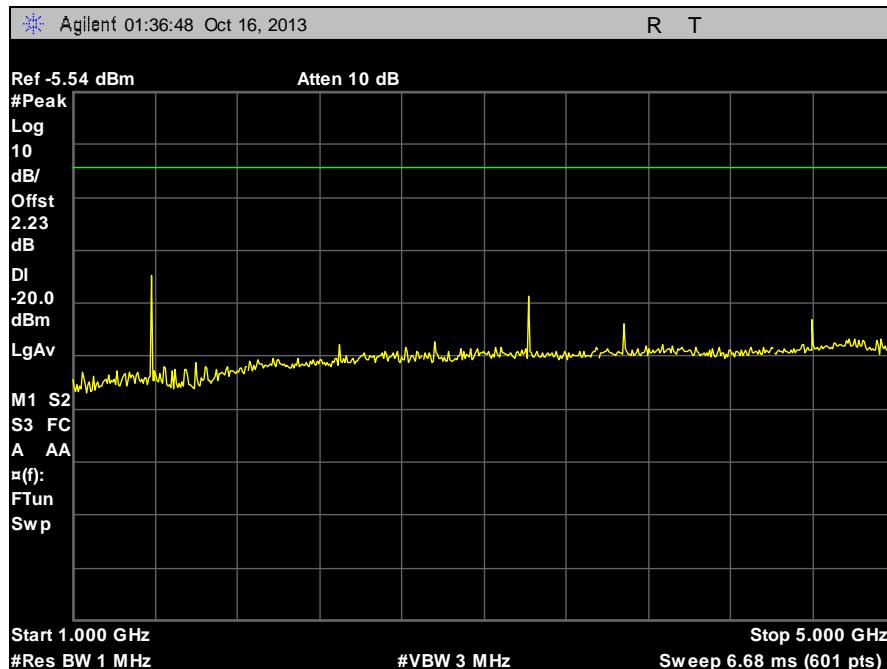


Plot 50. Radiated Spurious Emissions, Mid Channel, 460 MHz, 12.5 kHz, 1 GHz – 5 GHz

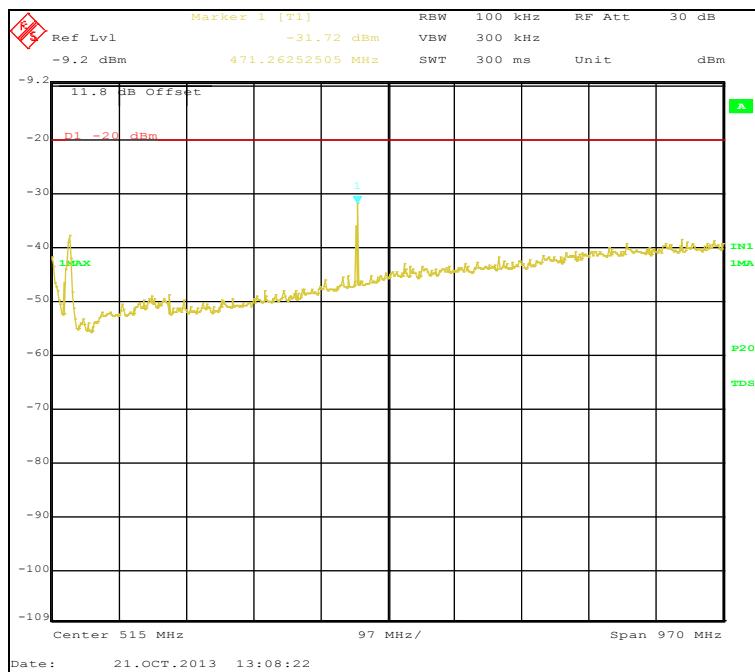


Plot 51. Radiated Spurious Emissions, High Channel, 470 MHz, 12.5 kHz, 30 MHz – 1 GHz

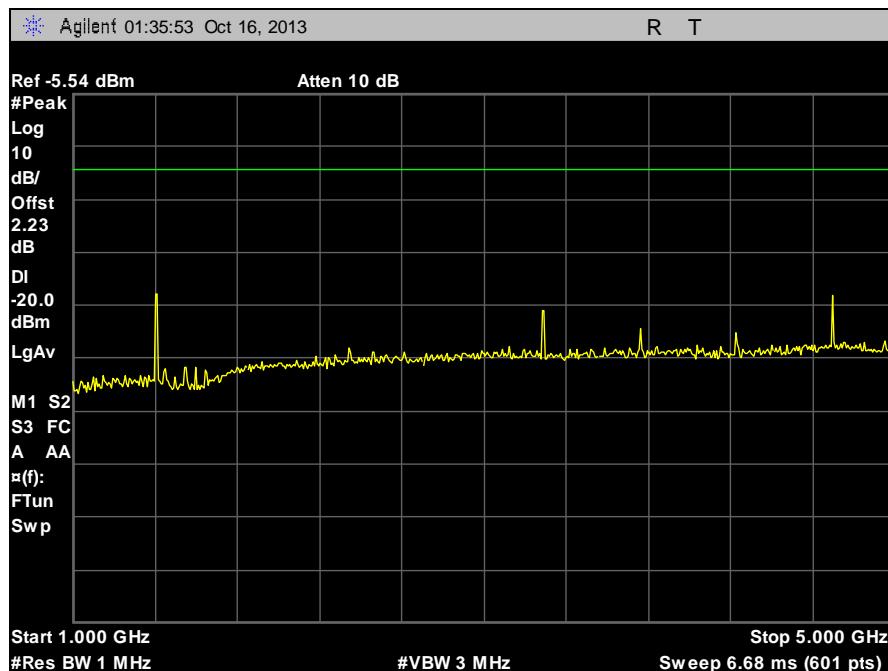

Plot 52. Radiated Spurious Emissions, High Channel, 470 MHz, 12.5 kHz, 1 GHz – 5 GHz

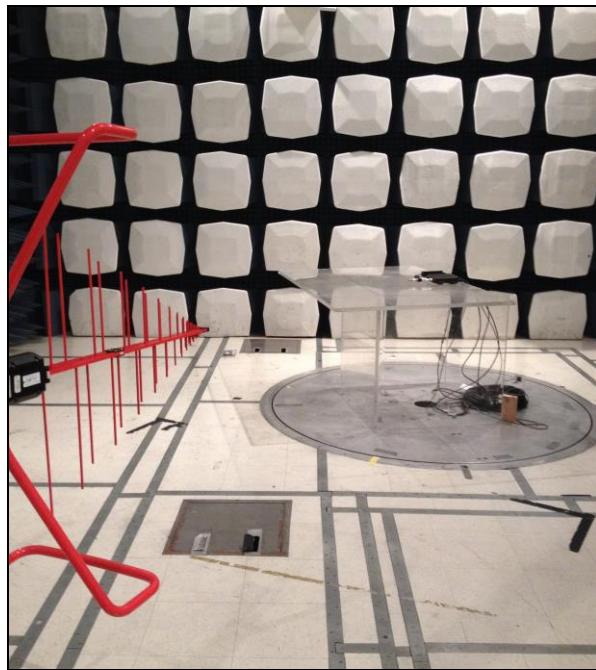

**Photograph 2. Radiated Spurious Emissions, Test Setup, Below 1 GHz**

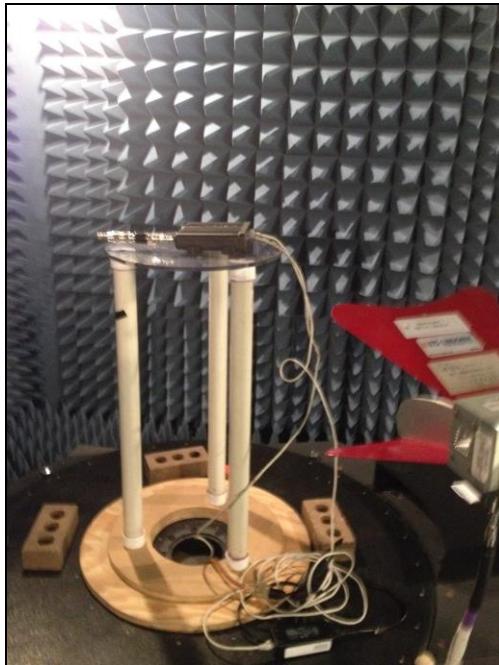

**Photograph 3. Radiated Spurious Emissions, Test Setup, Above 1 GHz**



## 4.8. Transient Frequency Behavior

Test Requirement(s): **§90.214 Transient frequency behavior**

Transmitters designed to operate in the 150-174 MHz and 421-512 MHz frequency bands must maintain transient frequencies within the maximum frequency difference limits during the time intervals indicated:

Time intervals <sup>1,2</sup>	Maximum frequency difference <sup>3</sup>	All equipment	
		150 to 174 MHz	421 to 512 MHz
Transient Frequency Behavior for Equipment Designed to Operate on 25 kHz Channels			
$t_1$ <sup>4</sup>	$\pm 25.0$ kHz	5.0 ms	10.0 ms
$t_2$	$\pm 12.5$ kHz	20.0 ms	25.0 ms
$t_3$ <sup>4</sup>	$\pm 25.0$ kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 12.5 kHz Channels			
$t_1$ <sup>4</sup>	$\pm 12.5$ kHz	5.0 ms	10.0 ms
$t_2$	$\pm 6.25$ kHz	20.0 ms	25.0 ms
$t_3$ <sup>4</sup>	$\pm 12.5$ kHz	5.0 ms	10.0 ms
Transient Frequency Behavior for Equipment Designed to Operate on 6.25 kHz Channels			
$t_1$ <sup>4</sup>	$\pm 6.25$ kHz	5.0 ms	10.0 ms
$t_2$	$\pm 3.125$ kHz	20.0 ms	25.0 ms
$t_3$ <sup>4</sup>	$\pm 6.25$ kHz	5.0 ms	10.0 ms

<sup>1</sup> $t_{on}$  is the instant when a 1 kHz test signal is completely suppressed, including any capture time due to phasing.

$t_1$  is the time period immediately following  $t_{on}$ .

$t_2$  is the time period immediately following  $t_1$ .

$t_3$  is the time period from the instant when the transmitter is turned off until  $t_{off}$ .

$t_{off}$  is the instant when the 1 kHz test signal starts to rise.

<sup>2</sup> During the time from the end of  $t_2$  to the beginning of  $t_3$ , the frequency difference must not exceed the limits specified in § 90.213.

<sup>3</sup> Difference between the actual transmitter frequency and the assigned transmitter frequency.

<sup>4</sup> If the transmitter carrier output power rating is 6 watts or less, the frequency difference during this time period may exceed the maximum frequency difference for this time period.

**Test Results:** Equipment was not applicable with Section §90.214. The device has no voice.



Electronic Systems Technology  
195c

Electromagnetic Compatibility  
Test Equipment  
CFR Title 47 Part 15B & Part 90; ICES-003 & RSS-119

## V. Test Equipment



## 5. Test Equipment

Calibrated test equipment utilized during testing was maintained in a current state of calibration per the requirements of ISO/IEC 17025:2005.

MET Asset #	Equipment	Manufacturer	Model	Last Cal Date	Cal Due Date
1T4409	EMI RECEIVER	ROHDE & SCHWARZ	ESIB7	07/16/2012	07/16/2014
1T4787	HYGROMETER / THERMOMETER / BAROMETER / DEW POINT PEN	CONTROL COMPANY	15-078-198, FB70423, 245CD	02/15/2012	02/15/2014
1T4814	COMB GENERATOR	COM-POWER	CGO-5100	SEE NOTE	
1T4300A	SEMI-ANECHOIC CHAMBER # 1 (FCC)	EMC TEST SYSTEMS	NONE	07/24/2012	07/24/2015
1T4751	ANTENNA - BILOG	SUNOL SCIENCES	JB6	01/08/2013	07/08/2014
1T4829	SPECTRUM ANALYZER	AGILENT	E4407B	05/14/2013	11/14/2014
1T4771	PSA SPECTRUM ANALYZER	AGILENT TECHNOLOGIES	E4446A	02/15/2013	08/15/2014
1T4548	AC POWER SOURCE	CALIFORNIA INSTRUMENTS	1251P	SEE NOTE	
1T4813	TRUE RMS MULTIMETER	FLUKE	115	10/22/2012	04/22/2014
1T4505	TEMPERATURE CHAMBER	TEST EQUITY	115	12/02/2012	12/02/2013
1T4757	ANTENNA; HORN	ETS-LINDGREN	3117	09/03/2013	03/03/2015
1T4300	SEMI-ANECHOIC CHAMBER # 1 (NSA)	EMC TEST SYSTEMS	NONE	07/24/2012	01/24/2014
1T4148	SHIELD ROOM #2 SEMI-ANECHOIC	RANTEC	20	SEE NOTE	
1T4566	FIELD PROBE, 27 MHZ - 60 GHZ	AMPLIFIER RESEARCH	FP7060	10/08/2012	04/08/2014
1T4475	POWER METER	HEWLETT PACKARD	EPM-442A	09/12/2012	03/12/2014
1T4458	POWER SENSOR	AGILENT TECHNOLOGIES	E9304A	05/12/2012	11/12/2013
1T4299	SIGNAL GENERATOR	HEWLETT PACKARD	E4432B	04/24/2012	10/24/2013
RENTAL	MODULATION DOMAIN ANALYZER	HEWLETT PACKARD	53310A	04/30/2013	04/30/2014
RENTAL	TETRA TEST SET	MARCONI INSTRUMENTS	2968	N/A	

Note: Functionally tested equipment is verified using calibrated instrumentation at the time of testing.

## VI. Certification & User's Manual Information

## 6. Certification Label & User's Manual Information

### 6.1. Certification Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart I — Marketing of Radio frequency devices:

#### **§ 2.801 Radio-frequency device defined.**

As used in this part, a radio-frequency device is any device which in its operation is capable of Emitting radio-frequency energy by radiation, conduction, or other means. Radio- frequency devices include, but are not limited to:

- (a) The various types of radio communication transmitting devices described throughout this chapter.
- (b) *The incidental, unintentional and intentional radiators defined in Part 15 of this chapter.*
- (c) The industrial, scientific, and medical equipment described in Part 18 of this chapter.
- (d) Any part or component thereof which in use emits radio-frequency energy by radiation, conduction, or other means.

#### **§ 2.803 Marketing of radio frequency devices prior to equipment authorization.**

- (a) Except as provided elsewhere in this chapter, no person shall sell or lease, or offer for sale or lease (including advertising for sale or lease), or import, ship or distribute for the purpose of selling or leasing or offering for sale or lease, any radio frequency device unless:
  - (1) In the case of a device subject to certification, such device has been authorized by the Commission in accordance with the rules in this chapter and is properly identified and labeled as required by §2.925 and other relevant sections in this chapter; or
  - (2) In the case of a device that is not required to have a grant of equipment authorization issued by the Commission, but which must comply with the specified technical standards prior to use, such device also complies with all applicable administrative (including verification of the equipment or authorization under a Declaration of Conformity, where required), technical, labeling and identification requirements specified in this chapter.
- (d) Notwithstanding the provisions of paragraph (a) of this section, the offer for sale solely to business, commercial, industrial, scientific or medical users (but not an offer for sale to other parties or to end users located in a residential environment) of a radio frequency device that is in the conceptual, developmental, design or pre-production stage is permitted prior to equipment authorization or, for devices not subject to the equipment authorization requirements, prior to a determination of compliance with the applicable technical requirements *provided* that the prospective buyer is advised in writing at the time of the offer for sale that the equipment is subject to the FCC rules and that the equipment will comply with the appropriate rules before delivery to the buyer or to centers of distribution.

(e)(1) Notwithstanding the provisions of paragraph (a) of this section, prior to equipment authorization or determination of compliance with the applicable technical requirements any radio frequency device may be operated, but not marketed, for the following purposes and under the following conditions:

- (i) *Compliance testing;*
- (ii) Demonstrations at a trade show provided the notice contained in paragraph (c) of this section is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iii) Demonstrations at an exhibition conducted at a business, commercial, industrial, scientific or medical location, but excluding locations in a residential environment, provided the notice contained in paragraphs (c) or (d) of this section, as appropriate, is displayed in a conspicuous location on, or immediately adjacent to, the device;
- (iv) Evaluation of product performance and determination of customer acceptability, provided such operation takes place at the manufacturer's facilities during developmental, design or pre-production states; or
- (v) Evaluation of product performance and determination of customer acceptability where customer acceptability of a radio frequency device cannot be determined at the manufacturer's facilities because of size or unique capability of the device, provided the device is operated at a business, commercial, industrial, scientific or medical user's site, but not at a residential site, during the development, design or pre-production stages.

(e)(2) For the purpose of paragraphs (e)(1)(iv) and (e)(1)(v) of this section, the term *manufacturer's facilities* includes the facilities of the party responsible for compliance with the regulations and the manufacturer's premises, as well as the facilities of other entities working under the authorization of the responsible party in connection with the development and manufacture, but not the marketing, of the equipment.

(f) For radio frequency devices subject to verification and sold solely to business, commercial, industrial, scientific and medical users (excluding products sold to other parties or for operation in a residential environment), parties responsible for verification of the devices shall have the option of ensuring compliance with the applicable technical specifications of this chapter at each end user's location after installation, provided that the purchase or lease agreement includes a provision that such a determination of compliance be made and is the responsibility of the party responsible for verification of the equipment.

---

**The following is extracted from Title 47 of the Code of Federal Regulations, Part 2, Subpart Y — Equipment Authorization Procedures:**

**§ 2.901 Basis and Purpose**

- (a) In order to carry out its responsibilities under the Communications Act and the various treaties and international regulations, and in order to promote efficient use of the radio spectrum, the Commission has developed technical standards for radio frequency equipment and parts or components thereof. The technical standards applicable to individual types of equipment are found in that part of the rules governing the service wherein the equipment is to be operated.<sup>1</sup> *In addition to the technical standards provided, the rules governing the service may require that such equipment be verified by the manufacturer or importer,* be authorized under a Declaration of Conformity, or receive an equipment authorization from the Commission by one of the following procedures: certification or registration.
- (b) The following sections describe the verification procedure, the procedure for a Declaration of Conformity, and the procedures to be followed in obtaining certification from the Commission and the conditions attendant to such a grant, whichever is applicable.

**§ 2.902 Certification.**

- (a) Certification is an equipment authorization issued by the Commission, based on representation and test data submitted by the applicant.
- (b) Certification attaches to all units subsequently marketed by the grantee which are identical (see Section 2.908) to the sample tested except for permissive changes or other variations authorized by the Commission pursuant to Section 2.1043.

---

<sup>1</sup> In this case, the equipment is subject to the rules of Part 15. More specifically, the equipment falls under Subpart B (of Part 15), which deals with unintentional radiators.

## § 2.948 Description of measurement facilities.

- (a) Each party making measurements of equipment that is subject to an equipment authorization under Part 15 or Part 18 of this chapter, regardless of whether the measurements are filed with the Commission or kept on file by the party responsible for compliance of equipment marketed within the U.S. or its possessions, shall compile a description of the measurement facilities employed.
  - (1) If the measured equipment is subject to the verification procedure, the description of the measurement facilities shall be retained by the party responsible for verification of the equipment.
    - (i) *If the equipment is verified through measurements performed by an independent laboratory, it is acceptable for the party responsible for verification of the equipment to rely upon the description of the measurement facilities retained by or placed on file with the Commission by that laboratory. In this situation, the party responsible for the verification of the equipment is not required to retain a duplicate copy of the description of the measurement facilities.*
    - (ii) If the equipment is verified based on measurements performed at the installation site of the equipment, no specific site calibration data is required. It is acceptable to retain the description of the measurement facilities at the site at which the measurements were performed.
  - (2) If the equipment is to be authorized by the Commission under the certification procedure, the description of the measurement facilities shall be filed with the Commission's Laboratory in Columbia, Maryland. The data describing the measurement facilities need only be filed once but must be updated as changes are made to the measurement facilities or as otherwise described in this section. At least every three years, the organization responsible for filing the data with the Commission shall certify that the data on file is current.

## 6.2. Label and User's Manual Information

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart A — General:

### § 15.19 Labeling requirements.

(a) *In addition to the requirements in Part 2 of this chapter, a device subject to certification or verification shall be labeled as follows:*

(1) Receivers associated with the operation of a licensed radio service, e.g., FM broadcast under Part 73 of this chapter, land mobile operation under Part 90, etc., shall bear the following statement in a conspicuous location on the device:

This device complies with Part 15 of the FCC Rules. Operation is subject to the condition that this device does not cause harmful interference.

(2) A stand-alone cable input selector switch, shall bear the following statement in a conspicuous location on the device:

This device is verified to comply with Part 15 of the FCC Rules for use with cable television service.

(3) All other devices shall bear the following statement in a conspicuous location on the device:

*This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.*

(4) Where a device is constructed in two or more sections connected by wires and marketed together, the statement specified under paragraph (a) of this section is required to be affixed only to the main control unit.

(5) When the device is so small or for such use that it is not practicable to place the statement specified under paragraph (a) of this section on it, the information required by this paragraph shall be placed in a prominent location in the instruction manual or pamphlet supplied to the user or, alternatively, shall be placed on the container in which the device is marketed. However, the FCC identifier or the unique identifier, as appropriate, must be displayed on the device.

---

### § 15.21 Information to user.

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

The following is extracted from Title 47 of the Code of Federal Regulations, Part 15, Subpart B — Unintentional Radiators:

### § 15.105 Information to the user.

(a) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a residential environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

# End of Report