

# Itron, Inc.

## TEST REPORT FOR

**Mobile Collection Device, MC3**  
**Model: DCU5310C**

**Tested to The Following Standards:**

**FCC Part 15 Subpart C Section(s)**

**15.207 & 15.247**  
**(FHSS 902-928MHz)**

**Report No.: 104623-10**

**Date of issue: January 12, 2021**



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

**Test Certificate # 803.01**

This report contains a total of 46 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

## TABLE OF CONTENTS

Administrative Information .....	3
Test Report Information .....	3
Report Authorization .....	3
Test Facility Information .....	4
Software Versions.....	4
Site Registration & Accreditation Information .....	4
Summary of Results.....	5
Modifications During Testing.....	5
Conditions During Testing.....	5
Equipment Under Test.....	6
General Product Information.....	7
FCC Part 15 Subpart C .....	13
15.247(b)(2) Output Power .....	13
15.247(d) Radiated Spurious Emissions.....	17
15.35(c) Duty Cycle Correction Factor.....	32
Supplemental Information.....	45
Measurement Uncertainty .....	45
Emissions Test Details.....	45

## ADMINISTRATIVE INFORMATION

### Test Report Information

**REPORT PREPARED FOR:**

Ittron, Inc.  
2111 N. Molter Road  
Liberty Lake, WA 99019

Representative: Jay Holcomb  
Customer Reference Number: 226650

**REPORT PREPARED BY:**

Kim Romero  
CKC Laboratories, Inc.  
5046 Sierra Pines Drive  
Mariposa, CA 95338

Project Number: 104623

**DATE OF EQUIPMENT RECEIPT:**  
**DATE(S) OF TESTING:**

December 2, 2020  
December 2, 4, 9, and 14, 2020

### Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



*Steve Behm*  
Director of Quality Assurance & Engineering Services  
CKC Laboratories, Inc.

## Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

### TEST LOCATION(S):

CKC Laboratories, Inc.  
110 Olinda Place  
Brea, CA 92823

## Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.19

## Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Canada	Japan
Canyon Park, Bothell, WA	US0103	US1024	3082C	A-0136
Brea, CA	US0103	US1024	3082D	A-0136
Fremont, CA	US0103	US1024	3082B	A-0136
Mariposa, CA	US0103	US1024	3082A	A-0136

\*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

## SUMMARY OF RESULTS

**Standard / Specification: FCC Part 15 Subpart C - 15.247 (FHSS 902-928MHz)**

Test Procedure	Description	Modifications	Results
15.247(a)(1)(i)	Occupied Bandwidth	NA	NP
15.247(a)(1)	Carrier Separation	NA	NP
15.247(a)(1)(i)	Number of Hopping Channels	NA	NP
15.247(a)(1)(i)	Average Time of Occupancy	NA	NP
15.247(b)(2)	Output Power	NA	Pass
15.247(d)	RF Conducted Emissions & Band Edge	NA	NP
15.247(d)	Radiated Emissions	NA	Pass
15.247(d)	Band Edge (Radiated)	NA	NP
15.207	AC Conducted Emissions	NA	NA1

NA = Not Applicable

NA1 = Not applicable because the EUT is connected to 12V car battery and shall not be connected to public utility AC power line.

NP = CKC Laboratories was not contracted to perform testing.

### ISO/IEC 17025 Decision Rule

The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

## Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

### Summary of Conditions

No modifications were made during testing.

**Modifications listed above must be incorporated into all production units.**

## Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

### Summary of Conditions

None

## EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

### Configuration 1 (MC4Max+tablet)

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Receiver Antenna	PCTEL	SUB-0275-001/H	S15180005
Automobile Adapter	Lind Electronics, Inc.	PA1555-2155 FB	NA
Tablet	Panasonic	FZ-G1	NA
5dBi Antenna	PCTEL	Generic	NA
Mobile Collection Device, MC3	ltron, Inc.	DCU5310C	74007940

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Power Supply	Extech Instruments	382225	P99250026

### Configuration 2 (MC4Max+laptop)

*Equipment Tested:*

Device	Manufacturer	Model #	S/N
Receiver Antenna	PCTEL	SUB-0275-001/H	S15180005
Power Supply	Panasonic	CF-AA5713A M3	5713AM314Z14641A
Laptop	Panasonic	CF-VEK33	T1126Z
5dBi Antenna	PCTEL	Generic	NA
Mobile Collection Device, MC3	ltron, Inc.	DCU5310C	74007940

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Power Supply	Extech Instruments	382225	P99250026

### Configuration 3 (MC3Lite+tablet)

Device	Manufacturer	Model #	S/N
Automobile Adapter	Lind Electronics, Inc.	PA1555-2155 FB	NA
Tablet	Panasonic	FZ-G1	NA
5dBi Antenna	PCTEL	Generic	NA
Mobile Collection Device, MC3	ltron, Inc.	DCU5310C	74007956

*Support Equipment:*

Device	Manufacturer	Model #	S/N
Power Supply	Extech Instruments	382225	P99250026

**Configuration 4 (MC3Lite+laptop)**

Device	Manufacturer	Model #	S/N
Power Supply	Panasonic	CF-AA5713A M3	5713AM314Z14641A
Laptop	Panasonic	CF-VEK33	T1126Z
5dBi Antenna	PCTEL	Generic	NA
Mobile Collection Device, MC3	Ittron, Inc.	DCU5310C	74007956

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Power Supply	Extech Instruments	382225	P99250026

**General Product Information:**

Product Information		Manufacturer-Provided Details
Equipment Type:		Stand-Alone Equipment
Type of Wideband System:		FHSS
Operating Frequency Range:		908-924MHz
Number of Hopping Channels:		81
Receiver Bandwidth and Synchronization:	The manufacturer declares the receiver input bandwidth matches the transmit channel bandwidth and shifts frequencies in synchronization with the transmitter.	
Modulation Type(s):	12.5kbps FM	
Maximum Duty Cycle:	45mS	
Number of TX Chains:	1	
Antenna Type(s) and Gain:	External / 5dbi	
Beamforming Type:	NA	
Antenna Connection Type:	External Connector	
Nominal Input Voltage:	13.8Vdc from car battery / 5Vdc charger	
Firmware / Software used for Test:	Arm Version: 7.66.00.01 DSP Version: 5.70.00.00 FPGA Version: 3.02 PSoC Version: 3.01 MC3 SuperRaptor Test ver.4.0.3.5	


**EUT and Accessory Photo(s)**



MC2Lite



MC4Max

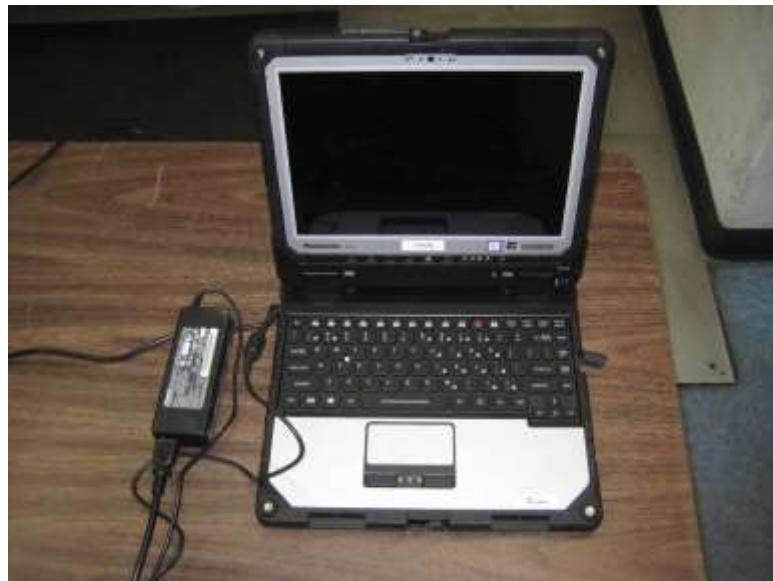

Laptop and Power Adapter



Tablet



Tablet Power Adapter



Antennas


**Support Equipment Photo(s)**




12V Power Supply

## Block Diagram of Test Setup(s)

### Test Setup Block Diagram

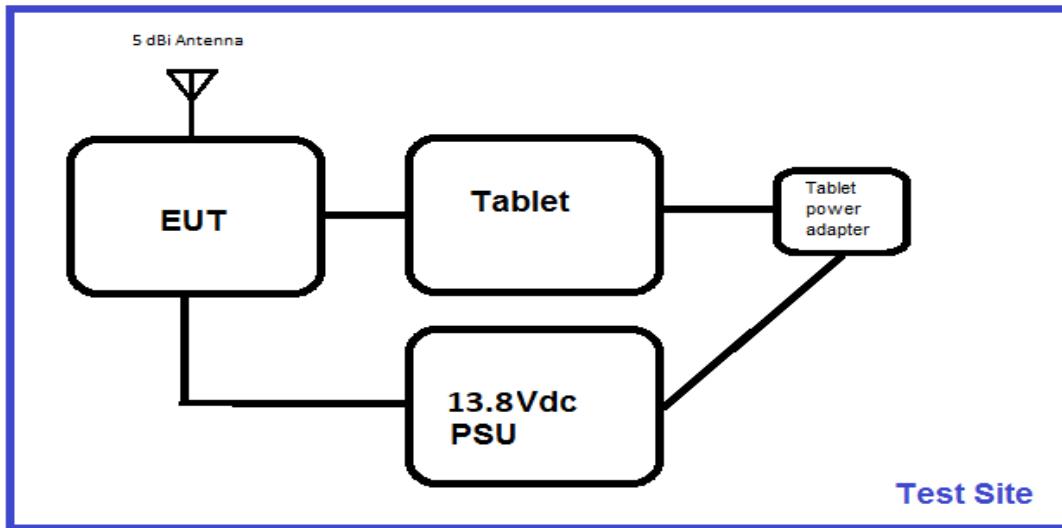

### Test Setup Block Diagram

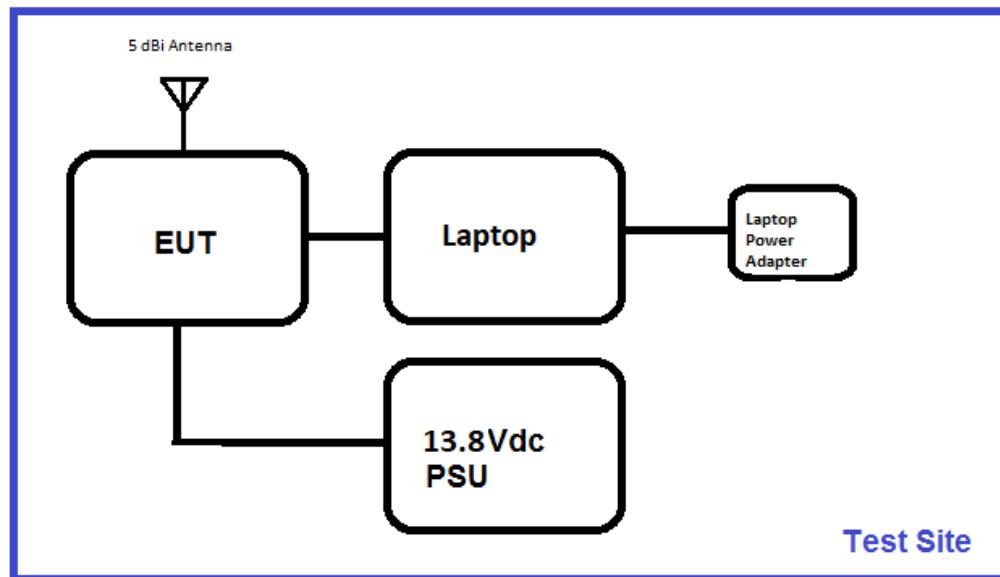

## FCC Part 15 Subpart C

### 15.247(b)(2) Output Power

Test Setup/Conditions			
Test Location:	Brea Lab A	Test Engineer:	Don Nguyen
Test Method:	ANSI C63.10 (2013)	Test Date(s):	12/2/2020
Configuration:	1		
Test Setup:	The EUT is placed on test bench. Input voltage is 13.8Vdc from external power supply. USB port is connected to a touchscreen tablet. The computer is sending command to the EUT using software MC3 SuperRaptor Test ver.4.0.3.5 The EUT is set to continuously transmit. Operating frequency: 908-924MHz Frequency of measurement: 902-928MHz RBW=300kHz VBW=910kHz		
	Note: Power output is verified for c2pc.		

Environmental Conditions			
Temperature (°C)	25	Relative Humidity (%):	30

Test Equipment					
Asset# I	Description	Manufacturer	Model	Cal Date	Cal Due
03643	Spectrum Analyzer	Agilent	E4440A	5/20/2020	5/20/2022
03432	Attenuator	Aeroflex/Weinschel	90-30-34	10/22/2019	10/22/2021
P07246	Cable	H&S	32022-29094K-29094K-24TC	5/29/2020	5/29/2022

Test Data Summary - Voltage Variations					
Frequency (MHz)	Modulation	V <sub>Minimum</sub> (dBm)	V <sub>Nominal</sub> (dBm)	V <sub>Maximum</sub> (dBm)	Max Deviation from V <sub>Nominal</sub> (dB)
908	12.5kbps FM	NA	29.49	NA	NA
916	12.5kbps FM	NA	29.42	NA	NA
924	12.5kbps FM	NA	29.64	NA	NA

Test performed using operational mode with the highest output power, representing worst case.

NA: This equipment is battery powered. Power output tests were performed using an external power supply to simulate a fresh battery.

### **Parameter Definitions:**

Measurements performed at input voltage  $V_{\text{Nominal}} \pm 15\%$ .

Parameter	Value
$V_{\text{Nominal}}$ :	13.8
$V_{\text{Minimum}}$ :	NA
$V_{\text{Maximum}}$ :	NA

NA: This equipment is battery powered. Power output tests were performed using an external power supply to simulate a fresh battery.

### **Test Data Summary - Voltage Variations**


This equipment is battery powered. Power output tests were performed using an external power supply to simulate a fresh battery.

### **Test Data Summary - RF Conducted Measurement**


$Limit = \begin{cases} 30 \text{ dBm Conducted}/36 \text{ dBm EIRP} & | \geq 50 \text{ Channels} \\ 24 \text{ dBm Conducted}/30 \text{ dBm EIRP} & | < 50 \text{ Channels} \text{ (min 25)} \end{cases}$

Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Measured (dBm)	Limit (dBm)	Results
908	12.5kbps FM	5	29.49	$\leq 30$	Pass
916	12.5kbps FM	5	29.42	$\leq 30$	Pass
924	12.5kbps FM	5	29.64	$\leq 30$	Pass


### **Plots**

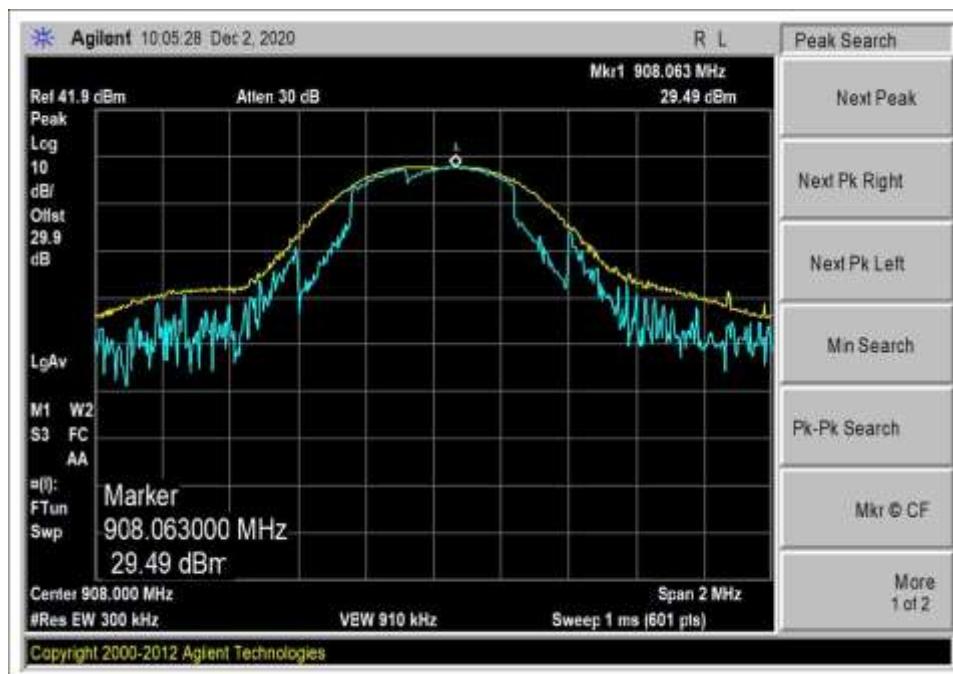

Low Channel, Power

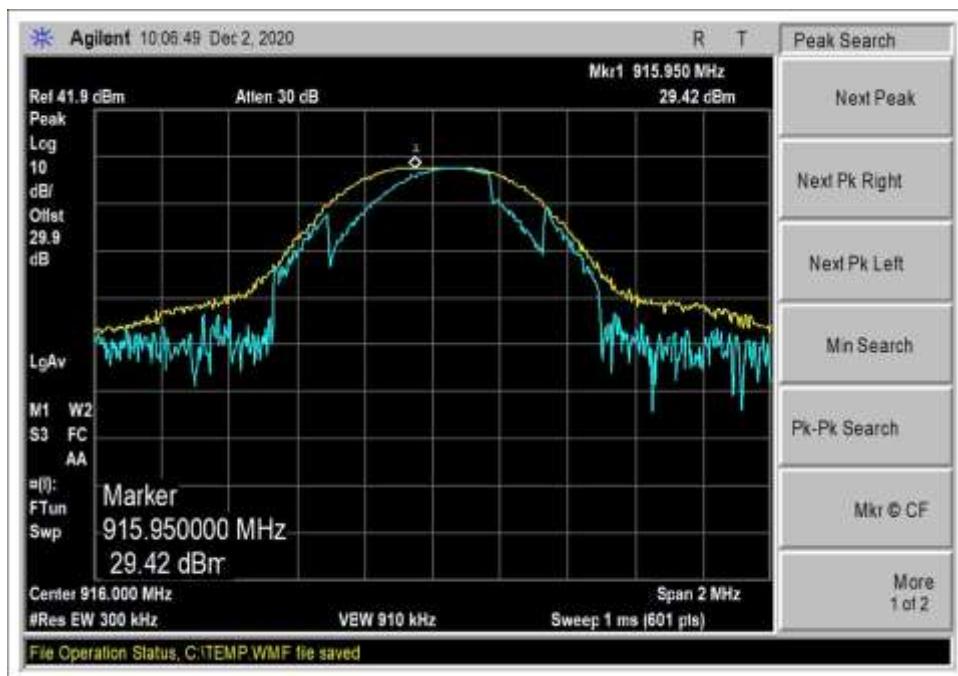

Middle Channel, Power

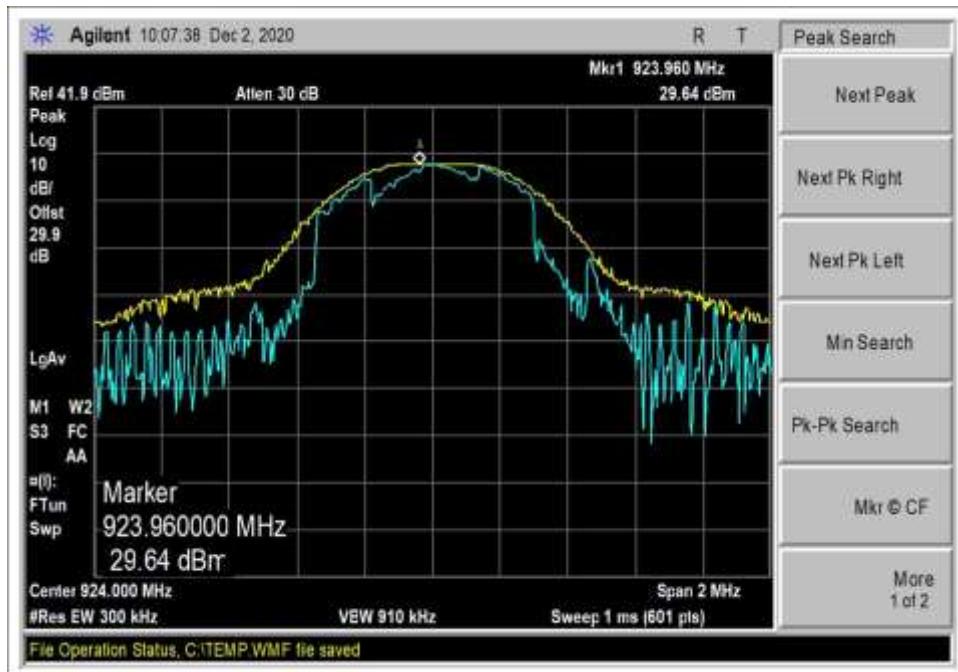

High Channel, Power

**Test Setup Photo(s)**



## 15.247(d) Radiated Spurious Emissions

### Test Setup / Conditions / Data

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **104623** Date: 12/9/2020  
 Test Type: **Maximized Emissions** Time: 09:17:14  
 Tested By: Don Nguyen Sequence#: 1  
 Software: EMITest 5.03.19

**Equipment Tested:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Support Equipment:**

Device	Manufacturer	Model #	S/N
Configuration 1			

**Test Conditions / Notes:**

The EUT is placed on turn table. Input voltage is 13.8Vdc from external power supply. GPS, L/R receiver, and main antenna ports are connected to external antennas. USB port is connected to a touchscreen computer. The computer is sending command to the EUT using software MC3 SuperRaptor Test ver.4.0.3.5. The EUT is set into transmitter mode. The EUT is rotated in three orthogonal orientation. Data represents the worst case orientation. The antenna of the EUT is mounted to a 52" diameter aluminum plate to represent a vehicle roof. The aluminum plate is supported by foam blocks. The EUT is directly below the plate, on the test table.

Operating Frequency: 908-924MHz

Frequency of Measurement: 9k-9280MHz  
 9kHz to 150kHz RBW=0.2kHz, VBW=0.6kHz  
 150kHz to 30MHz RBW=9kHz, VBW=27kHz  
 30-1000MHz, RBW=120kHz, VBW=360kHz  
 1000-9280MHz, RBW=1MHz, VBW=3MHz

Test Environment Conditions:


Temperature: 24°C

Relative Humidity: 22%

Site A

Duty correction factor is applied to RSM readings above 1GHz per KDB 558074 clause 9.b  
 Correction factor =  $20\log(44.67\text{ms}/100\text{ms}) = -7.0\text{dB}$

Note: Per manufacturer, installation manual shall state that a minimum of 12" of separation between the omni TX antenna and receiver antennas is required and the receiver antenna side-lookers are to be mounted "parallel" to the omni TX antenna.

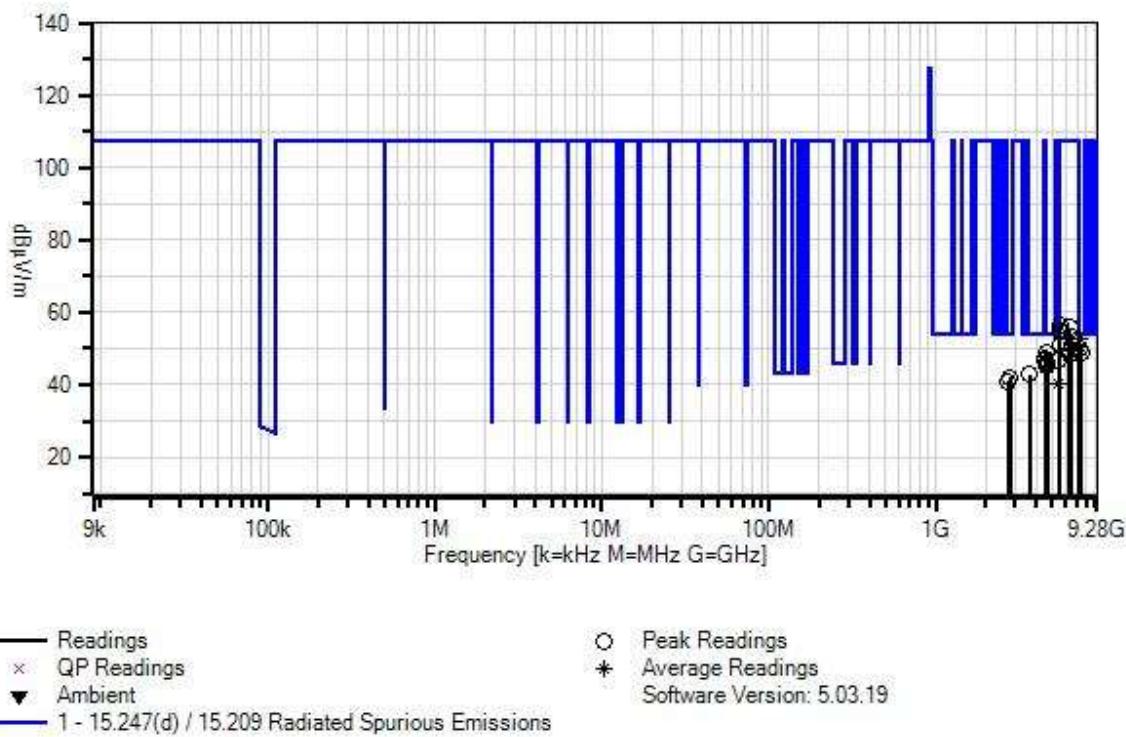Itron, Inc. WO#: 104623 Sequence#: 1 Date: 12/9/2020  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Horiz

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN00314	Loop Antenna	6502	4/13/2020	4/13/2022
	AN00309	Preamp	8447D	12/24/2019	12/24/2021
	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
	ANP01911	Cable-Amplitude +15C to +45C (dB)	RG214/U	1/2/2020	1/2/2022
	ANP05050	Cable	RG223/U	12/24/2018	12/24/2020
	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T1	AN03643	Test Data Correction Factor		2/19/2020	2/19/2022
T2	AN00786	Spectrum Analyzer	E4440A	5/20/2020	5/20/2022
T3	AN00849	Preamp	83017A	5/20/2020	5/20/2022
T4	ANP06360	Horn Antenna	3115	3/17/2020	3/17/2022
T5	ANP07246	Cable	L1-PNMNNM-48	8/8/2019	8/8/2021
T6	AN03169	High Pass Filter	HM1155-11SS	5/8/2019	5/8/2021

<b>Measurement Data:</b>			Reading listed by margin.				Test Distance: 3 Meters					
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar	
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m			
			MHz	dB $\mu$ V	dB	dB	dB					Ant
1	7263.700M	53.8	-7.0	+0.0	-37.2	+36.0	+0.0	52.7	54.0	-1.3	Horiz	
	Ave		+6.1	+0.8	+0.2							
^	7263.700M	55.1	+0.0	+0.0	-37.2	+36.0	+0.0	61.0	54.0	+7.0	Horiz	
			+6.1	+0.8	+0.2							
^	7263.700M	53.8	+0.0	+0.0	-37.2	+36.0	+0.0	59.7	54.0	+5.7	Horiz	
			+6.1	+0.8	+0.2							RMS
4	7263.533M	51.8	-7.0	+0.0	-37.2	+36.0	+0.0	50.7	54.0	-3.3	Horiz	
	Ave		+6.1	+0.8	+0.2							
^	7263.533M	54.0	+0.0	+0.0	-37.2	+36.0	+0.0	59.9	54.0	+5.9	Horiz	
			+6.1	+0.8	+0.2							
^	7263.533M	51.8	+0.0	+0.0	-37.2	+36.0	+0.0	57.7	54.0	+3.7	Horiz	
			+6.1	+0.8	+0.2							RMS
7	7328.283M	43.8	+0.0	+0.0	-37.3	+36.2	+0.0	49.8	54.0	-4.2	Vert	
			+6.1	+0.8	+0.2							
8	7391.900M	42.9	+0.0	+0.0	-37.3	+36.3	+0.0	49.1	54.0	-4.9	Horiz	
			+6.1	+0.9	+0.2							
9	4579.783M	48.2	+0.0	+0.0	-37.4	+32.6	+0.0	48.7	54.0	-5.3	Horiz	
			+4.5	+0.6	+0.2							
10	4539.733M	47.0	+0.0	+0.0	-37.4	+32.6	+0.0	47.5	54.0	-6.5	Horiz	
			+4.5	+0.6	+0.2							
11	4540.433M	46.3	+0.0	+0.0	-37.4	+32.6	+0.0	46.8	54.0	-7.2	Vert	
			+4.5	+0.6	+0.2							
12	5447.983M	43.8	+0.0	+0.0	-37.2	+34.1	+0.0	46.7	54.0	-7.3	Vert	
			+5.1	+0.7	+0.2							
13	4620.250M	45.6	+0.0	+0.0	-37.4	+32.7	+0.0	46.2	54.0	-7.8	Horiz	
			+4.5	+0.6	+0.2							
14	4579.867M	45.0	+0.0	+0.0	-37.4	+32.6	+0.0	45.5	54.0	-8.5	Vert	
			+4.5	+0.6	+0.2							
15	4620.100M	44.6	+0.0	+0.0	-37.4	+32.7	+0.0	45.2	54.0	-8.8	Vert	
			+4.5	+0.6	+0.2							
16	3631.967M	44.0	+0.0	+0.0	-38.1	+31.9	+0.0	42.7	54.0	-11.3	Vert	
			+4.0	+0.7	+0.2							
17	2772.100M	46.7	+0.0	+0.0	-38.5	+29.7	+0.0	42.0	54.0	-12.0	Vert	
			+3.5	+0.4	+0.2							
18	2723.967M	45.9	+0.0	+0.0	-38.5	+29.6	+0.0	41.0	54.0	-13.0	Vert	
			+3.4	+0.4	+0.2							
19	5448.350M	44.6	-7.0	+0.0	-37.2	+34.1	+0.0	40.5	54.0	-13.5	Horiz	
	Ave		+5.1	+0.7	+0.2							
^	5448.350M	48.5	+0.0	+0.0	-37.2	+34.1	+0.0	51.4	54.0	-2.6	Horiz	
			+5.1	+0.7	+0.2							
^	5448.350M	44.6	+0.0	+0.0	-37.2	+34.1	+0.0	47.5	54.0	-6.5	Horiz	
			+5.1	+0.7	+0.2							RMS
22	5544.517M	53.6	+0.0	+0.0	-37.3	+34.1	+0.0	56.4	107.2	-50.8	Vert	
			+5.1	+0.7	+0.2							
23	6356.533M	51.8	+0.0	+0.0	-37.1	+34.4	+0.0	55.8	107.2	-51.4	Vert	
			+5.7	+0.8	+0.2							
24	6356.483M	51.8	+0.0	+0.0	-37.1	+34.4	+0.0	55.8	107.2	-51.4	Horiz	
			+5.7	+0.8	+0.2							

25	5544.350M	52.2	+0.0	+0.0	-37.3	+34.1	+0.0	55.0	107.2	-52.2	Horiz
			+5.1	+0.7	+0.2						
26	6467.683M	49.2	+0.0	+0.0	-37.2	+34.4	+0.0	53.1	107.2	-54.1	Horiz
			+5.8	+0.7	+0.2						
27	5496.333M	48.3	+0.0	+0.0	-37.2	+34.1	+0.0	51.2	107.2	-56.0	Horiz
			+5.1	+0.7	+0.2						
28	6467.733M	47.3	+0.0	+0.0	-37.2	+34.4	+0.0	51.2	107.2	-56.0	Vert
			+5.8	+0.7	+0.2						
29	6412.567M	45.2	+0.0	+0.0	-37.1	+34.4	+0.0	49.2	107.2	-58.0	Horiz
			+5.8	+0.7	+0.2						
30	6411.900M	44.5	+0.0	+0.0	-37.1	+34.4	+0.0	48.5	107.2	-58.7	Vert
			+5.8	+0.7	+0.2						
31	6411.900M	44.5	+0.0	+0.0	-37.1	+34.4	+0.0	48.5	107.2	-58.7	Vert
			+5.8	+0.7	+0.2						

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **104623** Date: 12/14/2020  
 Test Type: **Maximized Emissions** Time: 11:21:32  
 Tested By: Don Nguyen Sequence#: 2  
 Software: EMITest 5.03.19

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 2			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 2			

***Test Conditions / Notes:***

The EUT is placed on turn table. Input voltage is 13.8Vdc from external power supply. GPS, L/R receiver, and main antenna ports are connected to external antennas. USB port is connected to a touchscreen computer. The computer is sending command to the EUT using software MC3 SuperRaptor Test ver.4.0.3.5. The EUT is set into transmitter mode. The EUT is rotated in three orthogonal orientation. Data represents the worst case orientation. The antenna of the EUT is mounted to a 52" diameter aluminum plate to represent a vehicle roof. The aluminum plate is supported by foam blocks. The EUT is directly below the plate, on the test table.

Operating Frequency: 908-924MHz

Frequency of Measurement: 9k-9280MHz

9kHz to 150kHz RBW=0.2kHz, VBW=0.6kHz

150kHz to 30MHz RBW=9kHz, VBW=27kHz

30-1000MHz, RBW=120kHz, VBW=360kHz

1000-9280MHz, RBW=1MHz, VBW=3MHz

Test Environment Conditions:

Temperature: 24°C


Relative Humidity: 22%

Site A

Duty correction factor is applied to RSM readings above 1GHz per KDB 558074 clause 9.b

Correction factor =  $20\log(44.67\text{ms}/100\text{ms}) = -7.0\text{dB}$

Note: Per manufacturer, installation manual shall state that a minimum of 12" of separation between the omni TX antenna and receiver antennas is required and the receiver antenna side-lookers are to be mounted "parallel" to the omni TX antenna.

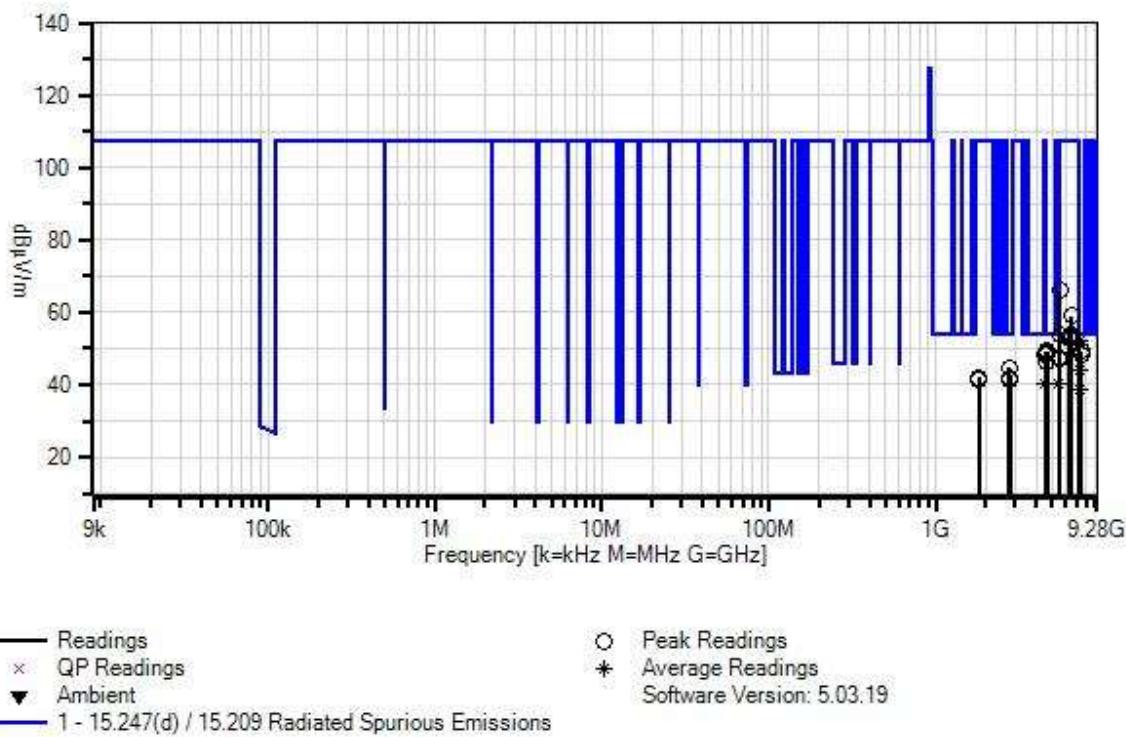Itron, Inc. WO#: 104623 Sequence#: 2 Date: 12/14/2020  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Horiz

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN00314	Loop Antenna	6502	4/13/2020	4/13/2022
	AN00309	Preamp	8447D	12/24/2019	12/24/2021
	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
	ANP05050	Cable	RG223/U	12/24/2018	12/24/2020
	ANP01911	Cable-Amplitude +15C to +45C (dB)	RG214/U	1/2/2020	1/2/2022
	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T1	AN03643	Test Data Correction Factor		2/19/2020	2/19/2022
T2	AN03643	Spectrum Analyzer	E4440A	5/20/2020	5/20/2022
T3	AN00786	Preamp	83017A	5/20/2020	5/20/2022
T4	AN00849	Horn Antenna	3115	3/17/2020	3/17/2022
T5	ANP06360	Cable	L1-PNMNNM-48	8/8/2019	8/8/2021
T6	ANP07246	Cable	32022-29094K- 29094K-24TC	5/29/2020	5/29/2022
T7	AN03169	High Pass Filter	HM1155-11SS	5/8/2019	5/8/2021

<b>Measurement Data:</b>			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
			MHz	dB $\mu$ V	dB	dB	dB			dB	Ant
1	7263.700M	53.2	-7.0	+0.0	-37.2	+36.0	+0.0	52.1	54.0	-1.9	Horiz
	Ave		+6.1	+0.8	+0.2						
^	7263.700M	54.6	+0.0	+0.0	-37.2	+36.0	+0.0	60.5	54.0	+6.5	Horiz
			+6.1	+0.8	+0.2						
^	7263.700M	53.2	+0.0	+0.0	-37.2	+36.0	+0.0	59.1	54.0	+5.1	Horiz
			+6.1	+0.8	+0.2						RMS
4	7263.733M	51.9	-7.0	+0.0	-37.2	+36.0	+0.0	50.8	54.0	-3.2	Vert
	Ave		+6.1	+0.8	+0.2						
^	7263.733M	53.6	+0.0	+0.0	-37.2	+36.0	+0.0	59.5	54.0	+5.5	Vert
			+6.1	+0.8	+0.2						
^	7263.733M	51.9	+0.0	+0.0	-37.2	+36.0	+0.0	57.8	54.0	+3.8	Vert
			+6.1	+0.8	+0.2						RMS
7	7392.317M	43.2	+0.0	+0.0	-37.3	+36.3	+0.0	49.4	54.0	-4.6	Horiz
			+6.1	+0.9	+0.2						
8	4620.183M	48.7	+0.0	+0.0	-37.4	+32.7	+0.0	49.3	54.0	-4.7	Horiz
			+4.5	+0.6	+0.2						
9	4580.083M	48.6	+0.0	+0.0	-37.4	+32.6	+0.0	49.1	54.0	-4.9	Horiz
			+4.5	+0.6	+0.2						
10	4579.750M	48.1	+0.0	+0.0	-37.4	+32.6	+0.0	48.6	54.0	-5.4	Vert
			+4.5	+0.6	+0.2						
11	7392.017M	42.4	+0.0	+0.0	-37.3	+36.3	+0.0	48.6	54.0	-5.4	Vert
			+6.1	+0.9	+0.2						
12	4540.317M	47.7	+0.0	+0.0	-37.4	+32.6	+0.0	48.2	54.0	-5.8	Vert
			+4.5	+0.6	+0.2						
13	5447.983M	44.6	+0.0	+0.0	-37.2	+34.1	+0.0	47.5	54.0	-6.5	Vert
			+5.1	+0.7	+0.2						
14	4619.983M	45.6	+0.0	+0.0	-37.4	+32.7	+0.0	46.2	54.0	-7.8	Vert
			+4.5	+0.6	+0.2						
15	2747.800M	49.4	+0.0	+0.0	-38.5	+29.7	+0.0	44.6	54.0	-9.4	Vert
			+3.4	+0.4	+0.2						
16	7327.767M	45.0	-7.0	+0.0	-37.3	+36.2	+0.0	44.0	54.0	-10.0	Horiz
	Ave		+6.1	+0.8	+0.2						
^	7327.767M	48.2	+0.0	+0.0	-37.3	+36.2	+0.0	54.2	54.0	+0.2	Horiz
			+6.1	+0.8	+0.2						
^	7327.767M	45.0	+0.0	+0.0	-37.3	+36.2	+0.0	51.0	54.0	-3.0	Horiz
			+6.1	+0.8	+0.2						RMS
19	2772.017M	46.8	+0.0	+0.0	-38.5	+29.7	+0.0	42.1	54.0	-11.9	Vert
			+3.5	+0.4	+0.2						
20	2748.000M	46.0	+0.0	+0.0	-38.5	+29.7	+0.0	41.2	54.0	-12.8	Horiz
			+3.4	+0.4	+0.2						
21	4540.350M	46.9	-7.0	+0.0	-37.4	+32.6	+0.0	40.4	54.0	-13.6	Horiz
	Ave		+4.5	+0.6	+0.2						
^	4540.350M	50.0	+0.0	+0.0	-37.4	+32.6	+0.0	50.5	54.0	-3.5	Horiz
			+4.5	+0.6	+0.2						
^	4540.350M	46.9	+0.0	+0.0	-37.4	+32.6	+0.0	47.4	54.0	-6.6	Horiz
			+4.5	+0.6	+0.2						RMS

24	5448.350M	44.3	-7.0	+0.0	-37.2	+34.1	+0.0	40.2	54.0	-13.8	Horiz
	Ave		+5.1	+0.7	+0.2						
^	5448.350M	48.7	+0.0	+0.0	-37.2	+34.1	+0.0	51.6	54.0	-2.4	Horiz
			+5.1	+0.7	+0.2						
^	5448.350M	44.3	+0.0	+0.0	-37.2	+34.1	+0.0	47.2	54.0	-6.8	Horiz
			+5.1	+0.7	+0.2						RMS
27	7327.717M	39.8	-7.0	+0.0	-37.3	+36.2	+0.0	38.8	54.0	-15.2	Vert
	Ave		+6.1	+0.8	+0.2						
^	7327.717M	44.9	+0.0	+0.0	-37.3	+36.2	+0.0	50.9	54.0	-3.1	Vert
			+6.1	+0.8	+0.2						
^	7327.717M	39.8	+0.0	+0.0	-37.3	+36.2	+0.0	45.8	54.0	-8.2	Vert
			+6.1	+0.8	+0.2						RMS
30	5544.633M	63.1	+0.0	+0.0	-37.3	+34.1	+0.0	65.9	107.2	-41.3	Vert
			+5.1	+0.7	+0.2						
31	6468.567M	55.1	+0.0	+0.0	-37.2	+34.4	+0.0	59.0	107.2	-48.2	Vert
			+5.8	+0.7	+0.2						
32	5544.300M	51.2	+0.0	+0.0	-37.3	+34.1	+0.0	54.0	107.2	-53.2	Horiz
			+5.1	+0.7	+0.2						
33	6468.467M	50.0	+0.0	+0.0	-37.2	+34.4	+0.0	53.9	107.2	-53.3	Horiz
			+5.8	+0.7	+0.2						
34	6411.667M	49.7	+0.0	+0.0	-37.1	+34.4	+0.0	53.7	107.2	-53.5	Vert
			+5.8	+0.7	+0.2						
35	6355.717M	49.1	+0.0	+0.0	-37.1	+34.4	+0.0	53.1	107.2	-54.1	Vert
			+5.7	+0.8	+0.2						
36	6412.283M	48.8	+0.0	+0.0	-37.1	+34.4	+0.0	52.8	107.2	-54.4	Horiz
			+5.8	+0.7	+0.2						
37	6355.750M	48.4	+0.0	+0.0	-37.1	+34.4	+0.0	52.4	107.2	-54.8	Horiz
			+5.7	+0.8	+0.2						
38	5496.067M	44.5	+0.0	+0.0	-37.2	+34.1	+0.0	47.4	107.2	-59.8	Vert
			+5.1	+0.7	+0.2						
39	1815.983M	50.5	+0.0	+0.0	-38.8	+26.8	+0.0	41.9	107.2	-65.3	Vert
			+2.8	+0.4	+0.2						
40	1816.000M	49.7	+0.0	+0.0	-38.8	+26.8	+0.0	41.1	107.2	-66.1	Horiz
			+2.8	+0.4	+0.2						



Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112  
Customer: **Itron, Inc.**  
Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
Work Order #: **104623** Date: 12/4/2020  
Test Type: **Maximized Emissions** Time: 14:59:51  
Tested By: Don Nguyen Sequence#: 1  
Software: EMITest 5.03.19

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 3			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 3			

***Test Conditions / Notes:***

The EUT is placed on turn table. Input voltage is 13.8Vdc from external power supply. GPS and main antenna ports are connected to an external antenna. USB port is connected to a touchscreen computer. The computer is sending command to the EUT using software MC3 SuperRaptor Test ver.4.0.3.5. The EUT is set into transmitter mode. The EUT is rotated in three orthogonal orientation. Data represents the worst case orientation. The antenna of the EUT is mounted to a 52" diameter aluminum plate to represent a vehicle roof. The aluminum plate is supported by foam blocks. The EUT is directly below the plate, on the test table.

Operating Frequency: 908-924MHz

Frequency of Measurement: 9k-9280MHz

9kHz to 150kHz RBW=0.2kHz, VBW=0.6kHz

150kHz to 30MHz RBW=9kHz, VBW=27kHz

30-1000MHz, RBW=120kHz, VBW=360kHz

1000-9280MHz, RBW=1MHz, VBW=3MHz

Test Environment Conditions:


Temperature: 24°C

Relative Humidity 22%

Site A

Duty correction factor is applied to average reading above 1GHz per FCC part 15.35c

Correction factor =  $20\log(44.67\text{ms}/100\text{ms}) = -7.0\text{dB}$

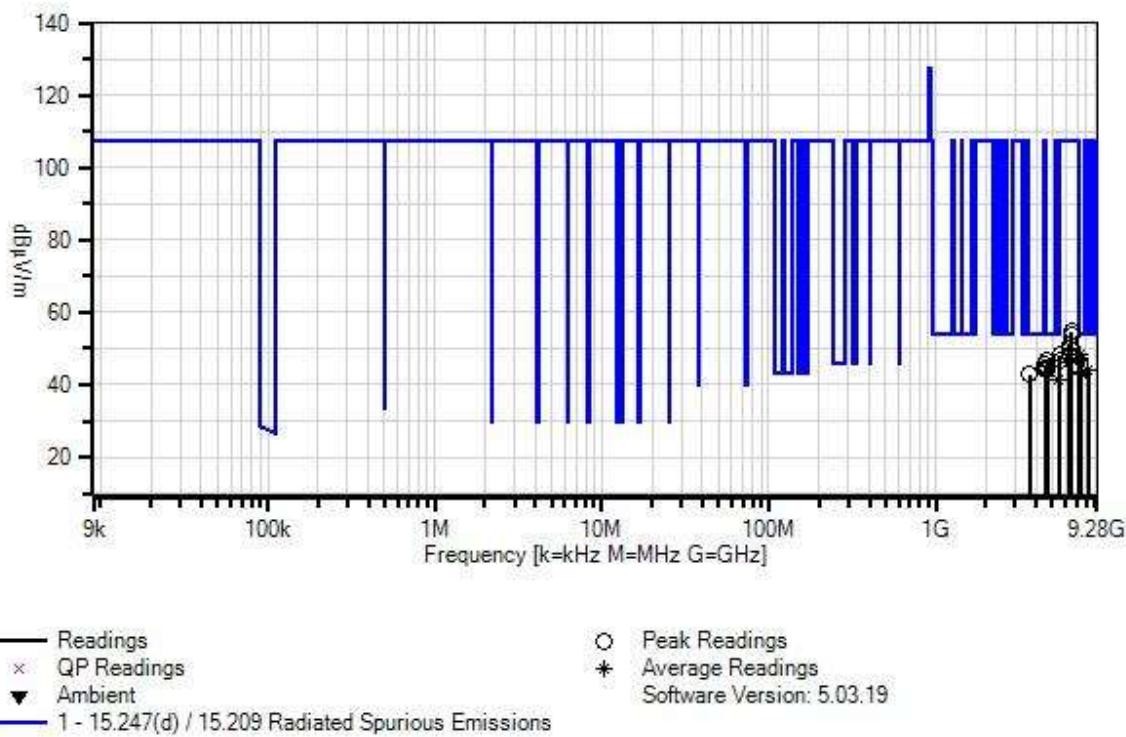Itron, Inc. WO#: 104623 Sequence#: 1 Date: 12/4/2020  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Vert

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN00314	Loop Antenna	6502	4/13/2020	4/13/2022
	AN00309	Preamp	8447D	12/24/2019	12/24/2021
	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
	ANP01911	Cable-Amplitude +15C to +45C (dB)	RG214/U	1/2/2020	1/2/2022
	ANP05050	Cable	RG223/U	12/24/2018	12/24/2020
	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T1	AN03643	Test Data Correction Factor		2/19/2020	2/19/2022
T2	AN00786	Spectrum Analyzer	E4440A	5/20/2020	5/20/2022
T3	AN00849	Preamp	83017A	5/20/2020	5/20/2022
T4	ANP06360	Horn Antenna	3115	3/17/2020	3/17/2022
T5	ANP07246	Cable	L1-PNMNNM-48	8/8/2019	8/8/2021
T6	AN03169	High Pass Filter	HM1155-11SS	5/8/2019	5/8/2021

<b>Measurement Data:</b>			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7		Table	dB $\mu$ V/m	dB $\mu$ V/m		
			MHz	dB $\mu$ V	dB	dB	dB			dB	Ant
1	7264.217M	49.5	-7.0	+0.0	-37.2	+36.0	+0.0	48.4	54.0	-5.6	Horiz
	Ave		+6.1	+0.8	+0.2						
^	7264.217M	49.5	+0.0	+0.0	-37.2	+36.0	+0.0	55.4	54.0	+1.4	Horiz
			+6.1	+0.8	+0.2						
3	7328.067M	48.2	-7.0	+0.0	-37.3	+36.2	+0.0	47.2	54.0	-6.8	Horiz
	Ave		+6.1	+0.8	+0.2						
^	7328.067M	48.2	+0.0	+0.0	-37.3	+36.2	+0.0	54.2	54.0	+0.2	Horiz
			+6.1	+0.8	+0.2						
5	7327.950M	47.9	-7.0	+0.0	-37.3	+36.2	+0.0	46.9	54.0	-7.1	Vert
	Ave		+6.1	+0.8	+0.2						
^	7327.950M	47.9	+0.0	+0.0	-37.3	+36.2	+0.0	53.9	54.0	-0.1	Vert
			+6.1	+0.8	+0.2						
7	7264.300M	48.0	-7.0	+0.0	-37.2	+36.0	+0.0	46.9	54.0	-7.1	Vert
	Ave		+6.1	+0.8	+0.2						
^	7264.300M	48.0	+0.0	+0.0	-37.2	+36.0	+0.0	53.9	54.0	-0.1	Vert
			+6.1	+0.8	+0.2						
9	4619.833M	46.1	+0.0	+0.0	-37.4	+32.7	+0.0	46.7	54.0	-7.3	Vert
			+4.5	+0.6	+0.2						
10	4539.983M	45.1	+0.0	+0.0	-37.4	+32.6	+0.0	45.6	54.0	-8.4	Vert
			+4.5	+0.6	+0.2						
11	4580.300M	44.3	+0.0	+0.0	-37.4	+32.6	+0.0	44.8	54.0	-9.2	Horiz
			+4.5	+0.6	+0.2						
12	4540.000M	43.9	+0.0	+0.0	-37.4	+32.6	+0.0	44.4	54.0	-9.6	Horiz
			+4.5	+0.6	+0.2						
13	4620.067M	43.7	+0.0	+0.0	-37.4	+32.7	+0.0	44.3	54.0	-9.7	Horiz
			+4.5	+0.6	+0.2						
14	8171.733M	44.0	-7.0	+0.0	-37.2	+36.8	+0.0	44.2	54.0	-9.8	Vert
	Ave		+6.4	+0.9	+0.3						
^	8171.733M	44.0	+0.0	+0.0	-37.2	+36.8	+0.0	51.2	54.0	-2.8	Vert
			+6.4	+0.9	+0.3						
16	7392.383M	44.5	-7.0	+0.0	-37.3	+36.3	+0.0	43.7	54.0	-10.3	Vert
	Ave		+6.1	+0.9	+0.2						
^	7392.383M	44.5	+0.0	+0.0	-37.3	+36.3	+0.0	50.7	54.0	-3.3	Vert
			+6.1	+0.9	+0.2						
^	7392.383M	44.5	+0.0	+0.0	-37.3	+36.3	+0.0	43.7	54.0	-10.3	Vert
			+6.1	+0.9	+0.2						
19	7392.167M	43.9	-7.0	+0.0	-37.3	+36.3	+0.0	43.1	54.0	-10.9	Horiz
	Ave		+6.1	+0.9	+0.2						
^	7392.167M	43.9	+0.0	+0.0	-37.3	+36.3	+0.0	50.1	54.0	-3.9	Horiz
			+6.1	+0.9	+0.2						
21	3631.950M	44.2	+0.0	+0.0	-38.1	+31.9	+0.0	42.9	54.0	-11.1	Vert
			+4.0	+0.7	+0.2						
22	5448.233M	45.7	-7.0	+0.0	-37.2	+34.1	+0.0	41.6	54.0	-12.4	Horiz
	Ave		+5.1	+0.7	+0.2						
^	5448.233M	45.7	+0.0	+0.0	-37.2	+34.1	+0.0	48.6	54.0	-5.4	Horiz
			+5.1	+0.7	+0.2						

24	5448.483M	45.7	-7.0	+0.0	-37.2	+34.1	+0.0	41.6	54.0	-12.4	Vert
	Ave		+5.1	+0.7	+0.2						
^	5448.483M	45.7	+0.0	+0.0	-37.2	+34.1	+0.0	48.6	54.0	-5.4	Vert
			+5.1	+0.7	+0.2						
26	6468.283M	50.7	+0.0	+0.0	-37.2	+34.4	+0.0	54.6	107.2	-52.6	Vert
			+5.8	+0.7	+0.2						
27	6467.633M	50.1	+0.0	+0.0	-37.2	+34.4	+0.0	54.0	107.2	-53.2	Horiz
			+5.8	+0.7	+0.2						
28	6355.650M	47.2	+0.0	+0.0	-37.1	+34.4	+0.0	51.2	107.2	-56.0	Horiz
			+5.7	+0.8	+0.2						
29	6355.800M	45.9	+0.0	+0.0	-37.1	+34.4	+0.0	49.9	107.2	-57.3	Vert
			+5.7	+0.8	+0.2						
30	6412.117M	44.6	+0.0	+0.0	-37.1	+34.4	+0.0	48.6	107.2	-58.6	Horiz
			+5.8	+0.7	+0.2						
31	5544.300M	45.5	+0.0	+0.0	-37.3	+34.1	+0.0	48.3	107.2	-58.9	Vert
			+5.1	+0.7	+0.2						
32	6411.883M	43.9	+0.0	+0.0	-37.1	+34.4	+0.0	47.9	107.2	-59.3	Vert
			+5.8	+0.7	+0.2						
33	5544.067M	44.1	+0.0	+0.0	-37.3	+34.1	+0.0	46.9	107.2	-60.3	Horiz
			+5.1	+0.7	+0.2						

Test Location: CKC Laboratories Inc. • 110 N. Olinda Pl. • Brea, CA 92823 • 714-993-6112  
 Customer: **Itron, Inc.**  
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**  
 Work Order #: **104623** Date: 12/14/2020  
 Test Type: **Maximized Emissions** Time: 15:48:29  
 Tested By: Don Nguyen Sequence#: 4  
 Software: EMITest 5.03.19

***Equipment Tested:***

Device	Manufacturer	Model #	S/N
Configuration 4			

***Support Equipment:***

Device	Manufacturer	Model #	S/N
Configuration 4			

***Test Conditions / Notes:***

The EUT is placed on turn table. Input voltage is 13.8Vdc from external power supply. GPS and main antenna ports are connected to external antennas. USB port is connected to a touchscreen computer. The computer is sending command to the EUT using software MC3 SuperRaptor Test ver.4.0.3.5. The EUT is set into transmitter mode. The EUT is rotated in three orthogonal orientation. Data represents the worst case orientation. The antenna of the EUT is mounted to a 52" diameter aluminum plate to represent a vehicle roof. The aluminum plate is supported by foam blocks. The EUT is directly below the plate, on the test table.

Operating Frequency: 908-924MHz

Frequency of Measurement: 9k-9280MHz  
 9kHz to 150kHz RBW=0.2kHz, VBW=0.6kHz  
 150kHz to 30MHz RBW=9kHz, VBW=27kHz  
 30-1000MHz, RBW=120kHz, VBW=360kHz  
 1000-9280MHz, RBW=1MHz, VBW=3MHz

Test Environment Conditions:


Temperature: 24°C

Relative Humidity: 22%

Site A

Duty correction factor is applied to RSM readings above 1GHz per KDB 558074 clause 9.b

Correction factor =  $20\log(44.67\text{ms}/100\text{ms}) = -7.0\text{dB}$

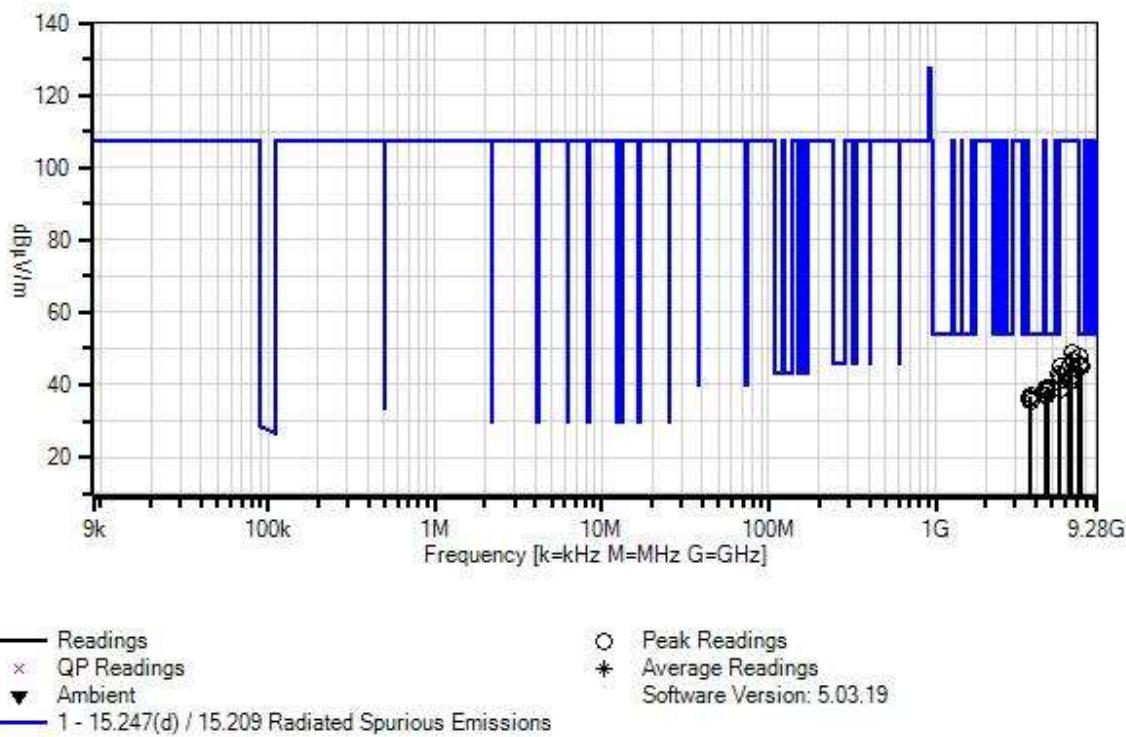Itron, Inc. WO#: 104623 Sequence#: 4 Date: 12/14/2020  
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Horiz

**Test Equipment:**

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN00314	Loop Antenna	6502	4/13/2020	4/13/2022
	AN00309	Preamp	8447D	12/24/2019	12/24/2021
	ANP05281	Attenuator	1B	4/7/2020	4/7/2022
	ANP01911	Cable-Amplitude +15C to +45C (dB)	RG214/U	1/2/2020	1/2/2022
	ANP05050	Cable	RG223/U	12/24/2018	12/24/2020
	AN01993	Biconilog Antenna	CBL6111C	6/11/2019	6/11/2021
T1	AN03643	Test Data Correction Factor	E4440A	2/19/2020	2/19/2022
	T2	AN00786	Preamp	5/20/2020	5/20/2022
	T3	AN00849	Horn Antenna	3/17/2020	3/17/2022
	T4	ANP06360	Cable	8/8/2019	8/8/2021
	T5	ANP07246	32022-29094K- 29094K-24TC	5/29/2020	5/29/2022
	T6	AN03169	High Pass Filter	HM1155-11SS	5/8/2019
					5/8/2021

<b>Measurement Data:</b>			Reading listed by margin.				Test Distance: 3 Meters				
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB $\mu$ V/m	dB $\mu$ V/m		
	MHz	dB $\mu$ V	dB	dB	dB	dB	Table	dB $\mu$ V/m	dB $\mu$ V/m	dB	Ant
1	7264.417M	48.8	-7.0 +0.8	-37.2 +0.2	+36.0	+6.1	+0.0	47.7	54.0	-6.3	Vert
2	7264.033M	46.6	-7.0 +0.8	-37.2 +0.2	+36.0	+6.1	+0.0	45.5	54.0	-8.5	Horiz
3	7391.533M	45.9	-7.0 +0.9	-37.3 +0.2	+36.3	+6.1	+0.0	45.1	54.0	-8.9	Horiz
4	7327.983M	46.1	-7.0 +0.8	-37.3 +0.2	+36.2	+6.1	+0.0	45.1	54.0	-8.9	Horiz
5	7391.333M	45.8	-7.0 +0.9	-37.3 +0.2	+36.3	+6.1	+0.0	45.0	54.0	-9.0	Vert
6	5447.600M	47.2	-7.0 +0.7	-37.2 +0.2	+34.1	+5.1	+0.0	43.1	54.0	-10.9	Vert
7	5448.033M	44.8	-7.0 +0.7	-37.2 +0.2	+34.1	+5.1	+0.0	40.7	54.0	-13.3	Horiz
8	4619.983M	45.5	-7.0 +0.6	-37.4 +0.2	+32.7	+4.5	+0.0	39.1	54.0	-14.9	Vert
9	4540.033M	45.0	-7.0 +0.6	-37.4 +0.2	+32.6	+4.5	+0.0	38.5	54.0	-15.5	Vert
10	4620.117M	44.8	-7.0 +0.6	-37.4 +0.2	+32.7	+4.5	+0.0	38.4	54.0	-15.6	Horiz
11	4579.983M	44.5	-7.0 +0.6	-37.4 +0.2	+32.6	+4.5	+0.0	38.0	54.0	-16.0	Vert
12	4579.983M	43.6	-7.0 +0.6	-37.4 +0.2	+32.6	+4.5	+0.0	37.1	54.0	-16.9	Horiz
13	3696.117M	44.8	-7.0 +0.7	-38.1 +0.2	+32.2	+4.0	+0.0	36.8	54.0	-17.2	Horiz
14	4540.033M	43.3	-7.0 +0.6	-37.4 +0.2	+32.6	+4.5	+0.0	36.8	54.0	-17.2	Horiz
15	3632.033M	44.8	-7.0 +0.7	-38.1 +0.2	+31.9	+4.0	+0.0	36.5	54.0	-17.5	Horiz
16	3632.033M	44.4	-7.0 +0.7	-38.1 +0.2	+31.9	+4.0	+0.0	36.1	54.0	-17.9	Vert
17	3695.983M	43.6	-7.0 +0.7	-38.1 +0.2	+32.2	+4.0	+0.0	35.6	54.0	-18.4	Vert
18	6468.200M	52.0	-7.0 +0.7	-37.2 +0.2	+34.4	+5.8	+0.0	48.9	107.2	-58.3	Horiz
19	6468.633M	50.0	-7.0 +0.7	-37.2 +0.2	+34.4	+5.8	+0.0	46.9	107.2	-60.3	Vert
20	6356.367M	48.9	-7.0 +0.8	-37.1 +0.2	+34.4	+5.7	+0.0	45.9	107.2	-61.3	Vert
21	5543.683M	49.2	-7.0 +0.7	-37.3 +0.2	+34.1	+5.1	+0.0	45.0	107.2	-62.2	Vert
22	5544.117M	46.4	-7.0 +0.7	-37.3 +0.2	+34.1	+5.1	+0.0	42.2	107.2	-65.0	Horiz
23	6356.033M	44.9	-7.0 +0.8	-37.1 +0.2	+34.4	+5.7	+0.0	41.9	107.2	-65.3	Horiz

24	6411.983M	43.6	-7.0 +0.7	-37.1 +0.2	+34.4	+5.8	+0.0	40.6	107.2	-66.6	Vert
25	6411.983M	43.6	-7.0 +0.7	-37.1 +0.2	+34.4	+5.8	+0.0	40.6	107.2	-66.6	Horiz
26	5495.983M	42.9	-7.0 +0.7	-37.2 +0.2	+34.1	+5.1	+0.0	38.8	107.2	-68.4	Horiz

### 15.35(c) Duty Cycle Correction Factor

Test Data Summary			
Antenna Port	Operational Mode	Measured On Time (mS / P <sub>obs</sub> )	Calculated DCCF (dB)
1	Hopping	44.67	-7.0

Observation Period, P<sub>obs</sub> is the duration of the pulse train or maximum 100ms

Measured results are calculated as follows:

$$On\ Time = \left( \sum_{Bursts} RF\ Burst\ On\ Time + \sum_{Control} Control\ Signal\ On\ time \right) \Big|_{P_{obs} \text{ (max 100ms)}}$$


Measured Values:

Parameter	Value
Observation Period (P <sub>obs</sub> ):	100ms
Number of RF Bursts / P <sub>obs</sub> :	1
On time of RF Burst:	44.67ms
Number of Control or other signals / P <sub>obs</sub> :	0
On time of Control or other Signals:	0
Total Measured On Time:	44.67

Duty Cycle Correction Factor (DCCF) is calculated in accordance with ANSI C63.10:

$$DCCF = 20 \cdot \log \left( \frac{On\ Time}{P_{obs}} \right)$$

### Plot (s)

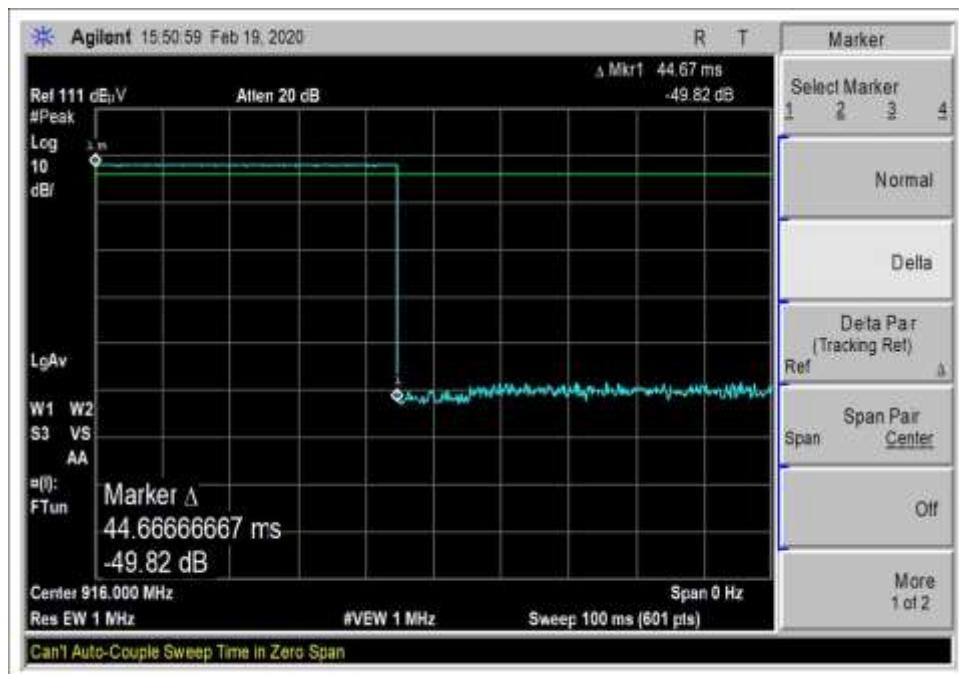

### Test Setup Photo (s)



X Axis; Configuration 1 & 2



Y Axis; Configuration 1 & 2



Z Axis; Configuration 1 & 2



X Axis; Configuration 3 & 4



Y Axis; Configuration 3 & 4



Z Axis; Configuration 3 & 4



Below 1GHz; Configuration 1



Below 1GHz; Configuration 1



Below 1GHz; Configuration 2



Below 1GHz; Configuration 2



Below 1GHz; Configuration 3



Below 1GHz; Configuration 4



Below 1GHz; Configuration 4



Above 1GHz; Configuration 1



Above 1GHz; Configuration 1



Above 1GHz; Configuration 2



Above 1GHz; Configuration 2



Above 1GHz; Configuration 3



Above 1GHz; Configuration 3



Above 1GHz; Configuration 4



Above 1GHz; Configuration 4

## SUPPLEMENTAL INFORMATION

### Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

### Emissions Test Details

#### TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

#### CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB $\mu$ V/m, the spectrum analyzer reading in dB $\mu$ V was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	(dB $\mu$ V)
+ Antenna Factor	(dB/m)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	(dB $\mu$ V/m)

## TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

## SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

### Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

### Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

### Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.