

Itron, Inc.

TEST REPORT FOR

AMR Transceiver Device For Communicating With Utility Meters Model: IMRA

Tested To The Following Standards:

FCC Part 15 Subpart C Section(s)

15.207 & 15.249

Report No.: 99513-2

Date of issue: June 1, 2017



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing	5
Conditions During Testing	5
Equipment Under Test	6
General Product Information	6
FCC Part 15 Subpart C	7
15.215(c) Occupied Bandwidth (20dB BW)	7
15.249(a) Field Strength of Fundamental	9
15.249(a) Radiated Emissions and Band Edge	14
15.207 AC Conducted Emissions	24
Supplemental Information	35
Measurement Uncertainty	35
Emissions Test Details	35

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Ittron, Inc.
2111 N. Molter Road
Liberty Lake, WA 99019

REPORT PREPARED BY:

CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

REPRESENTATIVE: Jay Holcomb
Customer Reference Number: 114073

Project Number: 99513

DATE OF EQUIPMENT RECEIPT:
DATE(S) OF TESTING:

April 11, 2017
April 11 - May 3, 2017

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
CKC Laboratories, Inc.
22116 23rd Drive S.E., Suite A
Canyon Park, Bothell, WA 98021

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.02

Site Registration & Accreditation Information

Location	CB #	TAIWAN	CANADA	FCC	JAPAN
Canyon Park Bothell, WA	US0081	SL2-IN-E-1145R	3082C-1	US1022	A-0148

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C - 15.249

Test Procedure	Description	Modifications	Results
15.215(c)	Occupied Bandwidth 20dB BW	NA	Pass
15.249(a)	Field Strength of Fundamental	NA	Pass
15.249(a)	Radiated Emissions and Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	Pass

NA = Not Applicable

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

None

EQUIPMENT UNDER TEST (EUT)

During testing numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
AMR Transceiver Device For Communicating With Utility Meters	Itron, Inc.	IMRA	66030023

Support Equipment:

Device	Manufacturer	Model #	S/N
Laptop	Dell	E6410	46TXXN1
AC Adapter for Laptop	Dell	DA130PE1-00	N/A

Configuration 2

Equipment Tested:

Device	Manufacturer	Model #	S/N
AMR Transceiver Device For Communicating With Utility Meters	Itron, Inc.	IMRA	66030023

Support Equipment:

Device	Manufacturer	Model #	S/N
AC Adapter	Itron, Inc.	GUSB05	N/A

General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Modulation Type(s):	FSK
Maximum Duty Cycle:	100%
Antenna Type(s) and Gain:	Internal PIFA 1.2dBi
Antenna Connection Type:	Integral
Nominal Input Voltage:	120VAC, 60Hz
Firmware / Software used for Test:	DPS Firmware 5.71 / MC3 Test v4.0.3.4

FCC Part 15 Subpart C

15.215(c) Occupied Bandwidth (20dB BW)


Test Setup/Conditions			
Test Location:	Canyon Park C3	Test Engineer:	M. Atkinson
Test Method:	ANSI C63.10 (2013)	Test Date(s):	4/20/2017
Configuration:	1		
Configuration:	Frequency Range: 908MH Frequency tested: 908MHz Firmware power setting: Max Power EUT Firmware: 5.71 Protocol /MCS/Modulation: FSK Antenna type: Internal PIFA Antenna Gain: 1.2 dBi. Duty Cycle: 100% (Test Mode) Test Mode: Continuously transmitting Test Setup: EUT is transmitting sitting on foam table high. Modifications Added: None		

Environmental Conditions			
Temperature (°C)	20-22	Relative Humidity (%):	30-40

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	11/18/2015	11/18/2017
P06540	Cable	Andrews	Heliax	10/29/2015	10/29/2017
P05963	Cable	Belden	RG-214	2/15/2016	2/15/2018
P05360	Cable	Belden	RG214	11/30/2016	11/30/2018
01991	Biconilog Antenna	Chase	CBL6111C	3/11/2016	3/11/2018
P05657	Attenuator	Patternack	PE7004-6	12/22/2015	12/22/2017
02307	Preamp	HP	8447D	2/15/2016	2/15/2018

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
908	1	FSK	191.5	None	NA

Plot

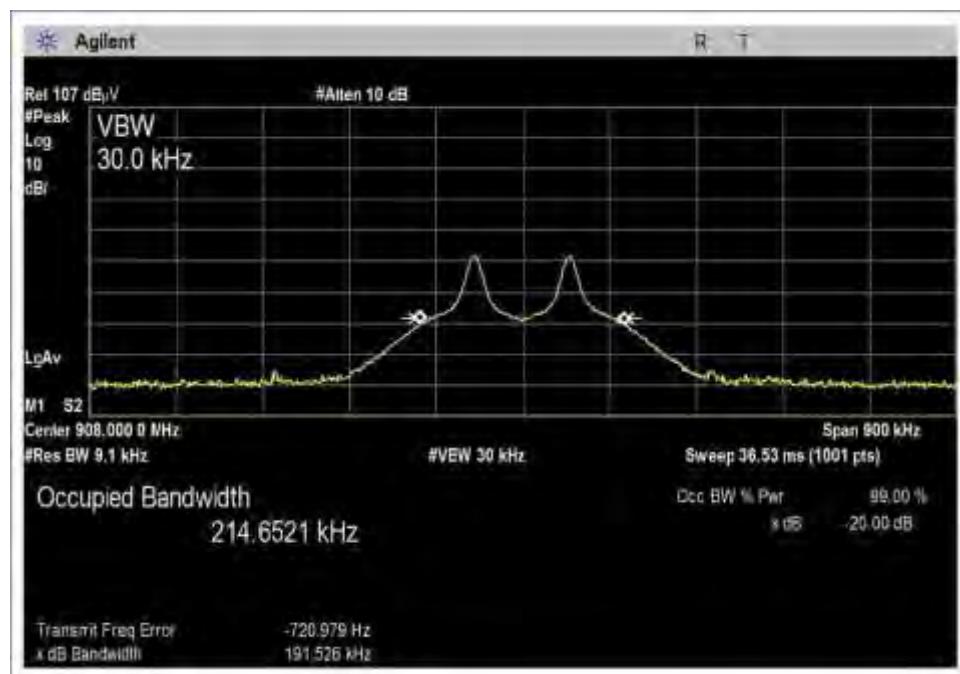

Test Setup Photo



15.249(a) Field Strength of Fundamental

Test Data Summary - Voltage Variations

Frequency (MHz)	Modulation / Ant Port	V _{Minimum} (dBuV/m)	V _{Nominal} (dBuV/m)	V _{Maximum} (dBuV/m)	Max Deviation from V _{Nominal} (dB)
908	FSK	73.5	73.4	73.3	0.1

Test performed using operational mode with the highest output power, representing worst case.

Parameter Definitions:


Measurements performed at input voltage V_{Nominal} ± 15%.

Parameter	Value
V _{Nominal} :	120 VAC
V _{Minimum} :	102.00 VAC
V _{Maximum} :	138.00 VAC

Test Data Summary – Radiated Field Strength Measurement

Frequency (MHz)	Modulation	Ant. Type	Measured (dBuV/m @ 3m)	Limit (dBuV/m @ 3m)	Results
908	FSK	Internal PIFA 1.2dBi	73.4	≤94	Pass

Plot

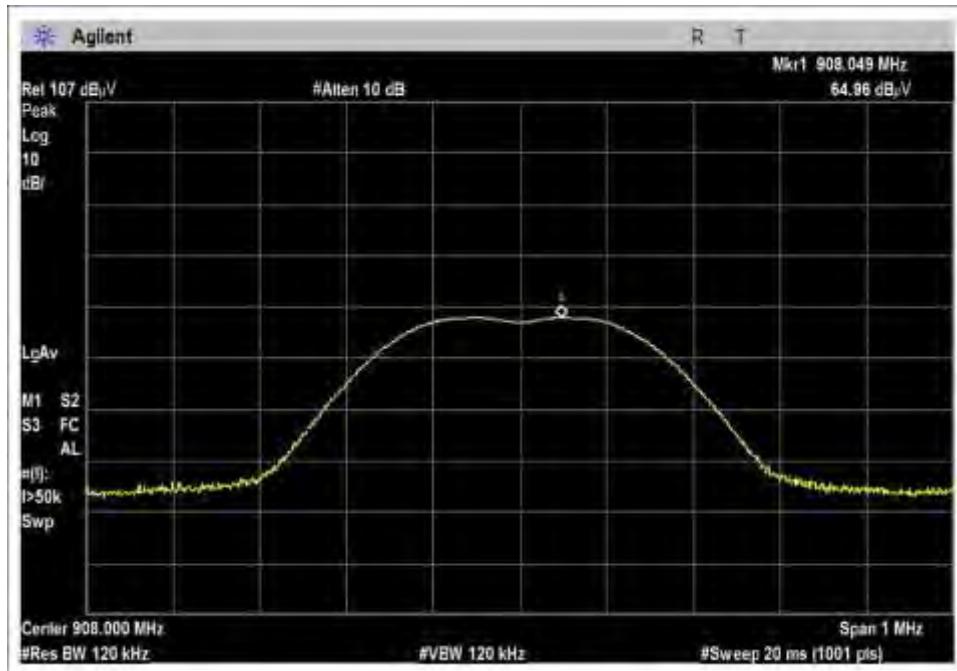



Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC
Customer: **Itron, Inc.**
Specification: **15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter)**
Work Order #: **99513** Date: 4/30/2017
Test Type: **Maximized Emissions** Time: 09:04:36
Tested By: Michael Atkinson Sequence#: 7
Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Frequency Range: 908MHz
Frequency tested: 908MHz
Firmware power setting: Max Power
EUT Firmware: 5.71
Protocol /MCS/Modulation: FSK


Antenna type: Internal PIFA
Antenna Gain: 1.2 dBi.

Temperature: 20-26°C
Relative Humidity: 36-41%

Canyon Park Lab C3

Duty Cycle: 100% (Test Mode)

Test Mode: Continuously transmitting
Test Setup: EUT is transmitting sitting on foam table. X, Y, Z axis investigated, both antenna polarities investigated, worst case data reported.
Modifications Added: None
Test Method: ANSI C63.10 (2013)

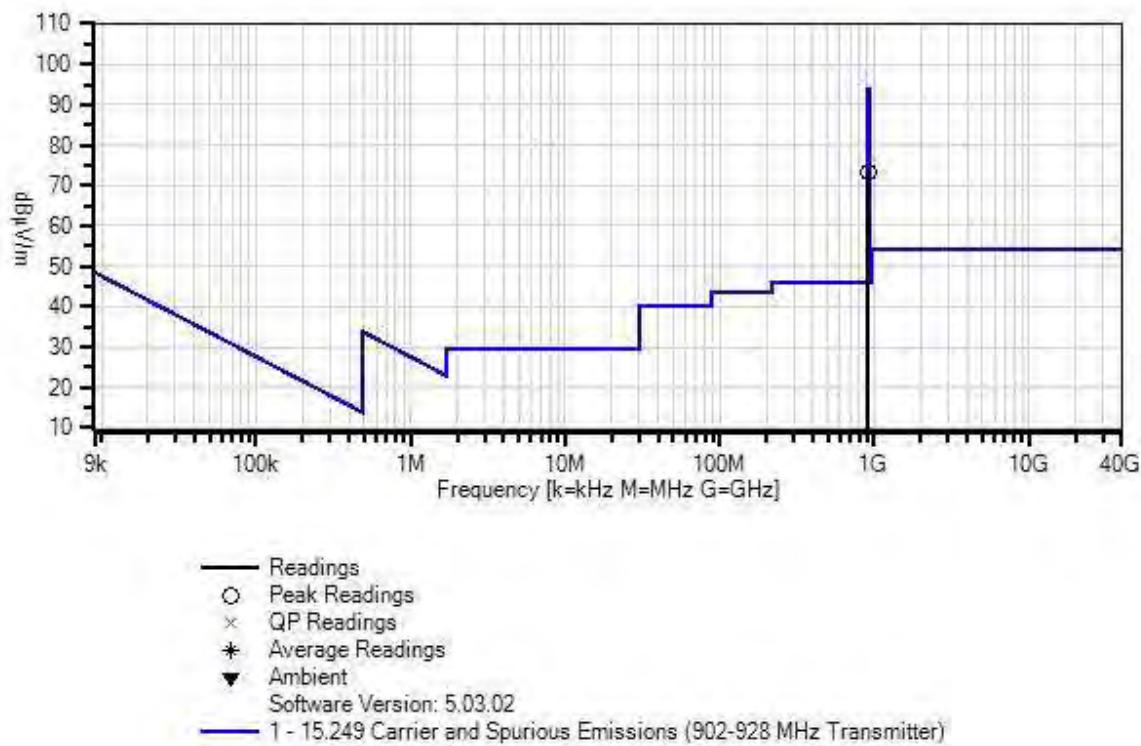Itron, Inc WO#: 99513 Sequence#: 7 Date: 4/30/2017
 15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter) Test Distance: 3 Meters Horiz

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/18/2015	11/18/2017
T1	ANP06540	Cable	Heliax	10/29/2015	10/29/2017
T2	ANP05963	Cable	RG-214	2/15/2016	2/15/2018
T3	ANP05360	Cable	RG214	11/30/2016	11/30/2018
T4	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T5	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T6	AN02307	Preamp	8447D	2/15/2016	2/15/2018

Measurement Data: Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	T5	T6			Table	dB μ V/m	dB μ V/m		Ant
1	908.049M	65.0	+0.3	+2.4	+2.1	+25.0	+0.0	73.4	94.0	-20.6	Horiz
			+6.0	-27.4							

Test Setup Photos



Below 1GHz



X Axis



Y Axis



Z Axis

15.249(a) Radiated Emissions and Band Edge

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC
 Customer: **Itron, Inc.**
 Specification: **15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter)**
 Work Order #: **99513** Date: **5/3/2017**
 Test Type: **Maximized Emissions** Time: **16:24:38**
 Tested By: Michael Atkinson Sequence#: 3
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Temperature: 20 to 26°C
Humidity: 31 to 41%
Pressure: 99.3 to 102.5kPa
Frequency Range: 9kHz-9.28GHz
Frequency tested: 908MHz
Firmware power setting: Max Power
EUT Firmware: 5.71
Protocol /MCS/Modulation: FSK
Antenna type: Internal PIFA
Antenna Gain: 1.2 dBi.
Duty Cycle: 100% (Test Mode)
Test Mode: Continuously transmitting.
Test Setup: EUT is transmitting sitting on foam table. X, Y, Z axis investigated, both antenna polarities investigated, worst case data reported.
Modifications Added: None
Test Method: ANSI C63.10 (2013)

Itron, Inc WO#: 99513 Sequence#: 3 Date: 5/3/2017
15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter) Test Distance: 3 Meters Vert

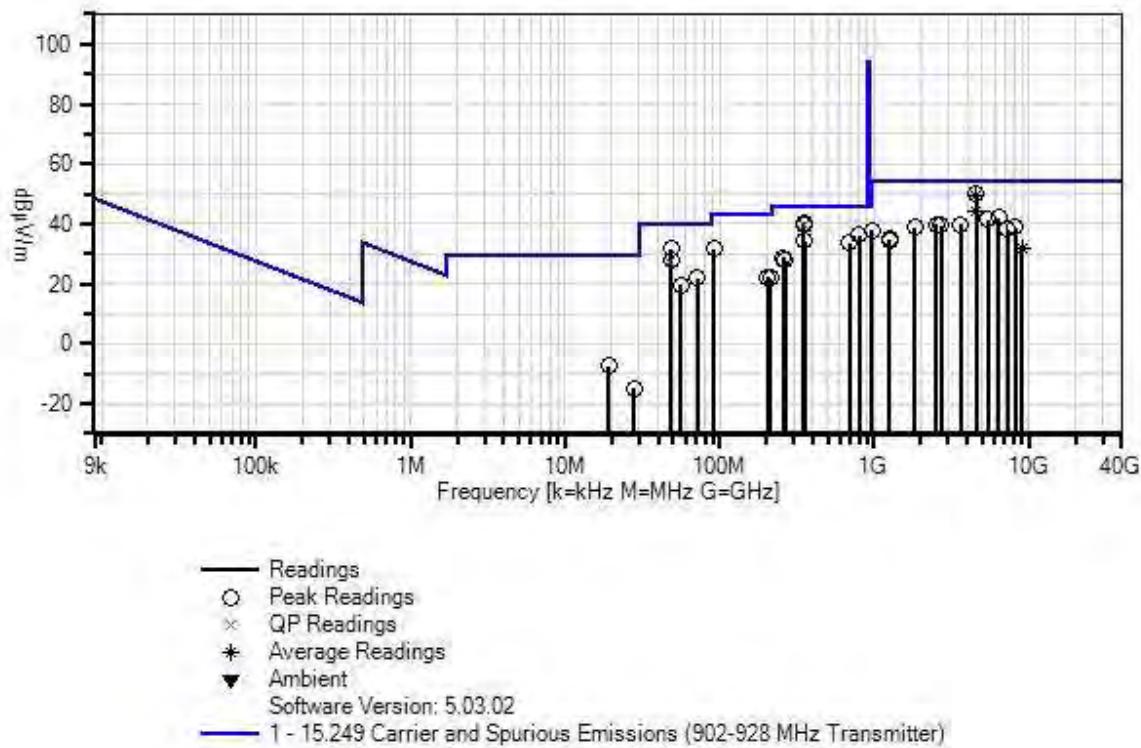

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02673	Spectrum Analyzer	E4446A	10/12/2015	10/12/2017
T1	ANP06540	Cable	Heliax	10/29/2015	10/29/2017
T2	ANP05305	Cable	ETSI-50T	2/15/2016	2/15/2018
T3	AN01467	Horn Antenna- ANSI C63.5 Calibration	3115	8/12/2015	8/12/2017
T4	ANP06935	Cable	32026-29801- 29801-18	3/11/2016	3/11/2018
	AN02872	Spectrum Analyzer	E4440A	11/18/2015	11/18/2017
T5	ANP05963	Cable	RG-214	2/15/2016	2/15/2018
T6	ANP05360	Cable	RG214	11/30/2016	11/30/2018
T7	AN02307	Preamp	8447D	2/15/2016	2/15/2018
T8	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T9	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T10	AN00052	Loop Antenna	6502	4/8/2016	4/8/2018
T11	AN03540	Preamp	83017A	5/2/2017	5/2/2019

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7	T8					
			T9	T10	T11						
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	4539.760M	45.0	+0.9	+4.2	+32.5	+0.5	+0.0	50.0	54.0	-4.0	Vert
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.1						
2	4539.960M	44.5	+0.9	+4.2	+32.5	+0.5	+0.0	49.5	54.0	-4.5	Horiz
	Ave		+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.1						
^	4539.940M	47.6	+0.9	+4.2	+32.5	+0.5	+0.0	52.6	54.0	-1.4	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.1						
4	348.200M	43.9	+0.2	+0.0	+0.0	+0.0	+0.0	40.5	46.0	-5.5	Vert
			+1.7	+1.2	-27.3	+14.8					
			+6.0	+0.0	+0.0						
5	351.100M	43.1	+0.2	+0.0	+0.0	+0.0	+0.0	39.8	46.0	-6.2	Vert
			+1.7	+1.2	-27.3	+14.9					
			+6.0	+0.0	+0.0						
6	348.582M	43.0	+0.2	+0.0	+0.0	+0.0	+0.0	39.6	46.0	-6.4	Vert
	QP		+1.7	+1.2	-27.3	+14.8					
			+6.0	+0.0	+0.0						
7	48.400M	43.4	+0.1	+0.0	+0.0	+0.0	+0.0	31.8	40.0	-8.2	Vert
			+0.6	+0.4	-27.9	+9.2					
			+6.0	+0.0	+0.0						
8	4540.267M	39.5	+0.9	+4.2	+32.5	+0.5	+0.0	44.5	54.0	-9.5	Vert
	Ave		+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.1						
9	797.300M	29.2	+0.3	+0.0	+0.0	+0.0	+0.0	36.2	46.0	-9.8	Vert
			+2.3	+1.9	-27.8	+24.3					
			+6.0	+0.0	+0.0						

10	353.000M	37.5	+0.2	+0.0	+0.0	+0.0	+0.0	34.2	46.0	-11.8	Horiz
			+1.7	+1.2	-27.3	+14.9					
			+6.0	+0.0	+0.0						
11	92.100M	42.7	+0.1	+0.0	+0.0	+0.0	+0.0	31.7	43.5	-11.8	Vert
			+1.0	+0.5	-27.7	+9.1					
			+6.0	+0.0	+0.0						
12	6355.570M	34.3	+1.3	+4.7	+34.7	+0.6	+0.0	42.1	54.0	-11.9	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.5						
13	48.400M	39.4	+0.1	+0.0	+0.0	+0.0	+0.0	27.8	40.0	-12.2	Vert
			+0.6	+0.4	-27.9	+9.2					
			+6.0	+0.0	+0.0						
14	5447.950M	35.5	+1.0	+4.5	+33.1	+0.6	+0.0	41.6	54.0	-12.4	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.1						
15	693.500M	30.1	+0.3	+0.0	+0.0	+0.0	+0.0	33.5	46.0	-12.5	Horiz
			+2.1	+1.8	-28.0	+21.2					
			+6.0	+0.0	+0.0						
16	48.052M	38.8	+0.1	+0.0	+0.0	+0.0	+0.0	27.4	40.0	-12.6	Vert
QP			+0.6	+0.4	-27.9	+9.4					
			+6.0	+0.0	+0.0						
17	3631.940M	38.5	+0.7	+3.7	+29.8	+0.5	+0.0	39.8	54.0	-14.2	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.4						
18	2503.000M	42.1	+0.6	+2.9	+27.7	+0.4	+0.0	39.7	54.0	-14.3	Vert
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-34.0						
19	2723.940M	40.4	+0.7	+3.0	+28.7	+0.4	+0.0	39.4	54.0	-14.6	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.8						
20	8171.720M	29.6	+1.3	+5.3	+36.7	+0.7	+0.0	38.9	54.0	-15.1	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-34.7						
21	1817.060M	43.1	+0.5	+2.5	+26.9	+0.3	+0.0	38.8	54.0	-15.2	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-34.5						
22	7264.640M	29.8	+1.2	+4.6	+35.9	+0.6	+0.0	38.2	54.0	-15.8	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.9						
23	968.000M	28.2	+0.4	+0.0	+0.0	+0.0	+0.0	37.8	54.0	-16.2	Vert
			+2.5	+2.2	-27.1	+25.5					
			+6.1	+0.0	+0.0						
24	257.000M	34.5	+0.2	+0.0	+0.0	+0.0	+0.0	28.7	46.0	-17.3	Horiz
			+1.5	+1.0	-27.0	+12.5					
			+6.0	+0.0	+0.0						
25	263.800M	33.6	+0.2	+0.0	+0.0	+0.0	+0.0	27.9	46.0	-18.1	Horiz
			+1.5	+1.0	-27.0	+12.6					
			+6.0	+0.0	+0.0						
26	71.700M	35.2	+0.1	+0.0	+0.0	+0.0	+0.0	21.8	40.0	-18.2	Vert
			+0.7	+0.5	-27.8	+7.1					
			+6.0	+0.0	+0.0						

27	1261.000M	43.6	+0.4	+2.1	+24.2	+0.3	+0.0	34.9	54.0	-19.1	Vert
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-35.7						
28	1261.000M	42.9	+0.4	+2.1	+24.2	+0.3	+0.0	34.2	54.0	-19.8	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-35.7						
29	56.200M	33.8	+0.1	+0.0	+0.0	+0.0	+0.0	19.8	40.0	-20.2	Horiz
			+0.6	+0.4	-27.9	+6.8					
			+6.0	+0.0	+0.0						
30	203.600M	31.7	+0.2	+0.0	+0.0	+0.0	+0.0	22.2	43.5	-21.3	Horiz
			+1.4	+0.9	-27.2	+9.2					
			+6.0	+0.0	+0.0						
31	213.300M	30.8	+0.2	+0.0	+0.0	+0.0	+0.0	22.0	43.5	-21.5	Vert
			+1.4	+0.9	-27.2	+9.9					
			+6.0	+0.0	+0.0						
32	9080.480M	20.0	+1.3	+6.1	+37.7	+0.7	+0.0	31.9	54.0	-22.1	Horiz
Ave			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.9						
^	9080.480M	34.3	+1.3	+6.1	+37.7	+0.7	+0.0	46.2	54.0	-7.8	Horiz
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+0.0	-33.9						
34	19.173M	24.1	+0.0	+0.3	+0.0	+0.0	-40.0	-7.3	29.5	-36.8	Groun
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+8.3	+0.0						
35	28.051M	18.6	+0.0	+0.3	+0.0	+0.0	-40.0	-14.9	29.5	-44.4	Groun
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+6.2	+0.0						
36	429.000k	39.4	+0.0	+0.0	+0.0	+0.0	-80.0	-30.9	15.0	-45.9	Groun
			+0.0	+0.0	+0.0	+0.0					
			+0.0	+9.7	+0.0						

Band Edge

Band Edge Summary

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dBuV/m @3m)	Limit (dBuV/m @3m)	Results
902	FSK	Internal PIFA 1.2dBi	35.3	<46	Pass
928	FSK	Internal PIFA 1.2dBi	36.2	<46	Pass

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC
 Customer: **Itron, Inc.**
 Specification: **15.249 Carrier and Spurious Emissions (902-928 MHz Transmitter)**
 Work Order #: **99513** Date: 4/30/2017
 Test Type: **Maximized Emissions** Time: 09:08:22
 Tested By: Michael Atkinson Sequence#: 8
 Software: EMITest 5.03.02

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Temperature: 20 to 26°C

Humidity: 31 to 41%

Pressure: 99.3 to 102.5kPa

Frequency Range: Band Edge

Frequency tested: 908MHz

Firmware power setting: Max Power

EUT Firmware: 5.71

Protocol /MCS/Modulation: FSK

Antenna type: Internal PIFA

Antenna Gain: 1.2 dBi.

Duty Cycle: 100% (Test Mode)

Test Mode: Continuously transmitting.

Test Setup: EUT is transmitting sitting on foam table. X, Y, Z axis investigated, both antenna polarities investigated, worst case data reported.

Modifications Added: None

Test Method: ANSI C63.10 (2013)


Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/18/2015	11/18/2017
T1	ANP06540	Cable	Heliax	10/29/2015	10/29/2017
T2	ANP05963	Cable	RG-214	2/15/2016	2/15/2018
T3	ANP05360	Cable	RG214	11/30/2016	11/30/2018
T4	AN01991	Biconilog Antenna	CBL6111C	3/11/2016	3/11/2018
T5	ANP05657	Attenuator	PE7004-6	12/22/2015	12/22/2017
T6	AN02307	Preamp	8447D	2/15/2016	2/15/2018

Measurement Data: Reading listed by margin. Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6			Table	dB μ V/m	dB μ V/m		
	MHz	dB μ V	dB	dB	dB	dB				dB	Ant
1	928.000M	27.4	+0.4	+2.4	+2.1	+25.1	+0.0	36.2	46.0	-9.8	Horiz
			+6.1	-27.3							
2	902.000M	27.0	+0.3	+2.4	+2.1	+24.9	+0.0	35.3	46.0	-10.7	Horiz
			+6.0	-27.4							

Band Edge Plot

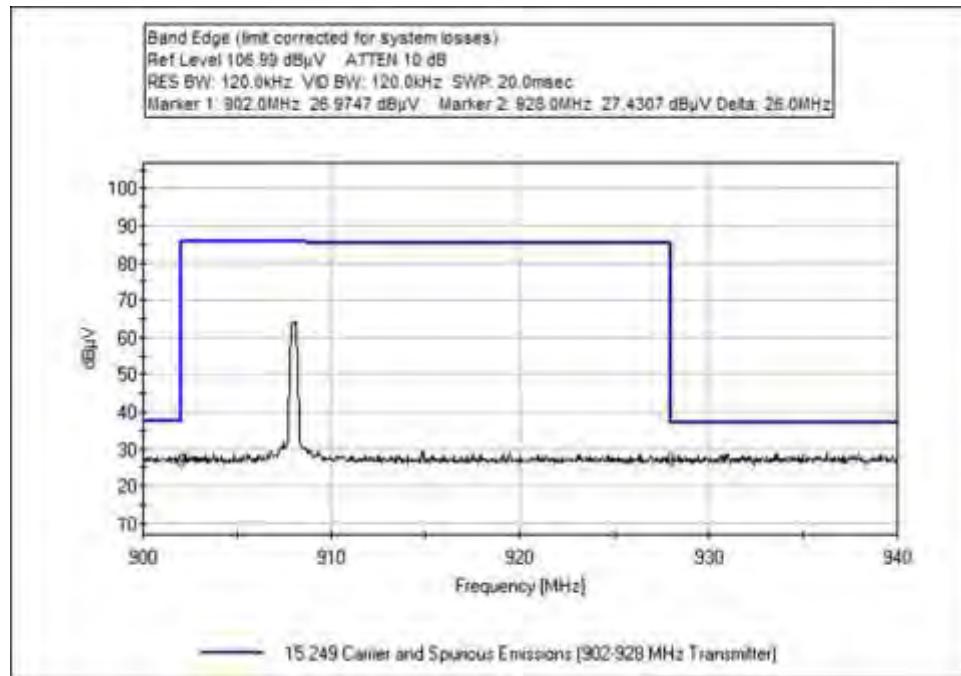

Test Setup Photos



Below 1GHz



Above 1GHz



X Axis



Y Axis



Z Axis

15.207 AC Conducted Emissions

Test Setup / Conditions / Data

Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC
 Customer: **Itron, Inc.**
 Specification: **15.207 AC Mains - Quasi-peak**
 Work Order #: **99513** Date: 4/11/2017
 Test Type: **Conducted Emissions** Time: 12:04:53
 Tested By: Michael Atkinson Sequence#: 13
 Software: EMITest 5.03.02 115VAC 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Temperature: 22°C
Humidity: 30%
Pressure: 102.2kPa
Canyon Park Lab C3
Frequency Range: 0.15-30MHz
Frequency tested: 908MHz
Firmware power setting: Max Power
EUT Firmware: 5.71
Protocol /MCS/Modulation: FSK
Antenna type: Internal PIFA
Antenna Gain: 1.5 dBi.
Duty Cycle: 100% (Test Mode)
Test Mode: Continuously transmitting
Test Setup: EUT connected to USB AC Adapter via USB cable. USB AC Adapter connected to AC mains through LISN.
Modifications Added: None
Test Method: ANSI C63.10 (2013)

Itron, Inc WO#: 99513 Sequence#: 13 Date: 4/11/2017
15.207 AC Mains - Quasi-peak Test Lead: 115VAC 60Hz Line

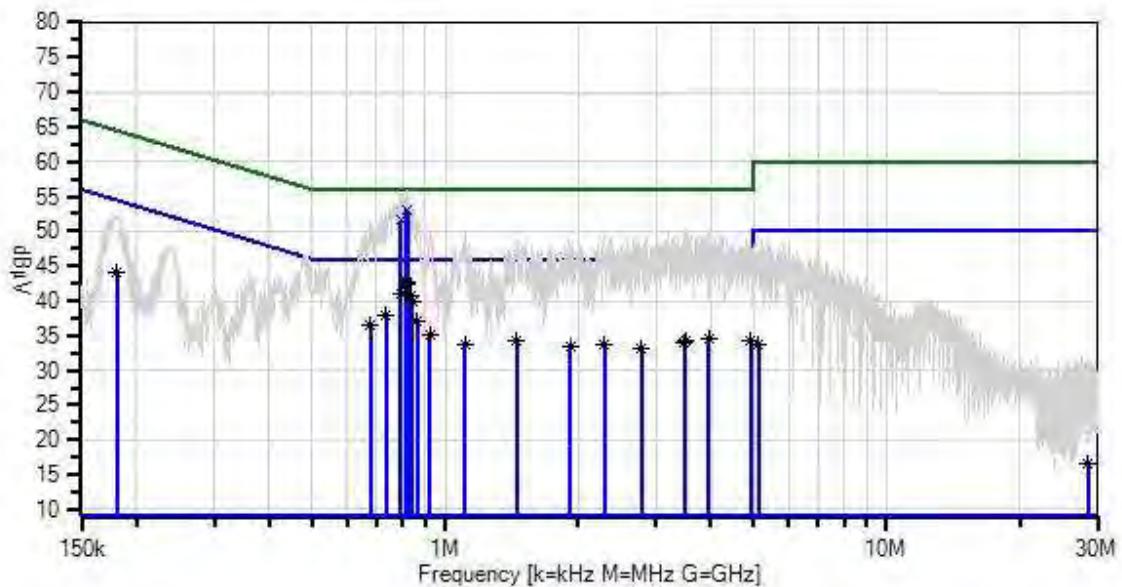

— Sweep Data
x QP Readings
Software Version: 5.03.02

— Readings
* Average Readings
— 1 - 15.207 AC Mains - Average

○ Peak Readings
▼ Ambient
— 2 - 15.207 AC Mains - Quasi-peak

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/18/2015	11/18/2017
T1	ANP06540	Cable	Heliax	10/29/2015	10/29/2017
T2	ANP05305	Cable	ETSI-50T	2/15/2016	2/15/2018
T3	AN02611	High Pass Filter	HE9615-150K-50-720B	2/18/2016	2/18/2018
T4	ANP06219	Attenuator	768-10	4/12/2016	4/12/2018
T5	AN01492	50uH LISN-Line	3816/2NM	8/5/2015	8/5/2017
	AN01492	50uH LISN-Neutral	3816/2NM	8/5/2015	8/5/2017

Measurement Data:

Reading listed by margin.

Test Lead: Line

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5				Table	dB μ V	dB μ V		
			MHz	dB μ V	dB	dB	dB				Ant
1	817.373k	43.4	+0.0	+0.1	+0.2	+9.1	+0.0	53.2	56.0	-2.8	Line
	QP		+0.4								
2	822.510k	43.1	+0.0	+0.1	+0.2	+9.1	+0.0	52.9	56.0	-3.1	Line
	QP		+0.4								
3	817.373k	32.9	+0.0	+0.1	+0.2	+9.1	+0.0	42.7	46.0	-3.3	Line
	Ave		+0.4								
^	817.373k	46.2	+0.0	+0.1	+0.2	+9.1	+0.0	56.0	56.0	+0.0	Line
			+0.4								
5	822.510k	32.5	+0.0	+0.1	+0.2	+9.1	+0.0	42.3	46.0	-3.7	Line
	Ave		+0.4								
^	822.509k	45.8	+0.0	+0.1	+0.2	+9.1	+0.0	55.6	56.0	-0.4	Line
			+0.4								
7	791.178k	41.8	+0.0	+0.1	+0.2	+9.1	+0.0	51.6	56.0	-4.4	Line
	QP		+0.4								
8	791.178k	31.1	+0.0	+0.1	+0.2	+9.1	+0.0	40.9	46.0	-5.1	Line
	Ave		+0.4								
^	791.177k	45.7	+0.0	+0.1	+0.2	+9.1	+0.0	55.5	56.0	-0.5	Line
			+0.4								
10	836.892k	31.0	+0.0	+0.1	+0.2	+9.1	+0.0	40.8	46.0	-5.2	Line
	Ave		+0.4								
^	836.891k	43.3	+0.0	+0.1	+0.2	+9.1	+0.0	53.1	56.0	-2.9	Line
			+0.4								
12	842.542k	30.2	+0.0	+0.1	+0.2	+9.1	+0.0	40.0	46.0	-6.0	Line
	Ave		+0.4								
^	842.541k	44.3	+0.0	+0.1	+0.2	+9.1	+0.0	54.1	56.0	-1.9	Line
			+0.4								
14	734.587k	28.1	+0.0	+0.1	+0.2	+9.1	+0.0	37.9	46.0	-8.1	Line
	Ave		+0.4								
^	734.587k	42.7	+0.0	+0.1	+0.2	+9.1	+0.0	52.5	56.0	-3.5	Line
			+0.4								

16	865.656k	27.4	+0.0	+0.1	+0.2	+9.1	+0.0	37.2	46.0	-8.8	Line
	Ave		+0.4								
^	865.655k	42.1	+0.0	+0.1	+0.2	+9.1	+0.0	51.9	56.0	-4.1	Line
		+0.4									
18	678.647k	26.8	+0.0	+0.1	+0.2	+9.1	+0.0	36.6	46.0	-9.4	Line
	Ave	+0.4									
^	678.646k	41.8	+0.0	+0.1	+0.2	+9.1	+0.0	51.6	56.0	-4.4	Line
		+0.4									
20	180.610k	33.1	+0.0	+0.0	+0.3	+9.1	+0.0	44.0	54.5	-10.5	Line
	Ave	+1.5									
^	180.610k	41.3	+0.0	+0.0	+0.3	+9.1	+0.0	52.2	64.5	-12.3	Line
		+1.5									
22	925.751k	25.2	+0.0	+0.1	+0.2	+9.1	+0.0	35.0	46.0	-11.0	Line
	Ave	+0.4									
^	925.751k	40.9	+0.0	+0.1	+0.2	+9.1	+0.0	50.7	56.0	-5.3	Line
		+0.4									
24	3.948M	24.9	+0.0	+0.1	+0.1	+9.1	+0.0	34.6	46.0	-11.4	Line
	Ave	+0.4									
^	3.948M	40.1	+0.0	+0.1	+0.1	+9.1	+0.0	49.8	56.0	-6.2	Line
		+0.4									
26	1.452M	24.4	+0.0	+0.1	+0.2	+9.1	+0.0	34.2	46.0	-11.8	Line
	Ave	+0.4									
^	1.452M	38.9	+0.0	+0.1	+0.2	+9.1	+0.0	48.7	56.0	-7.3	Line
		+0.4									
28	3.507M	24.5	+0.0	+0.1	+0.1	+9.1	+0.0	34.2	46.0	-11.8	Line
	Ave	+0.4									
^	3.507M	40.4	+0.0	+0.1	+0.1	+9.1	+0.0	50.1	56.0	-5.9	Line
		+0.4									
30	4.912M	24.4	+0.0	+0.1	+0.1	+9.1	+0.0	34.2	46.0	-11.8	Line
	Ave	+0.5									
^	4.912M	40.2	+0.0	+0.1	+0.1	+9.1	+0.0	50.0	56.0	-6.0	Line
		+0.5									
32	3.477M	24.4	+0.0	+0.1	+0.1	+9.1	+0.0	34.1	46.0	-11.9	Line
	Ave	+0.4									
^	3.477M	40.2	+0.0	+0.1	+0.1	+9.1	+0.0	49.9	56.0	-6.1	Line
		+0.4									
34	2.290M	24.1	+0.0	+0.1	+0.1	+9.1	+0.0	33.8	46.0	-12.2	Line
	Ave	+0.4									
^	2.290M	40.3	+0.0	+0.1	+0.1	+9.1	+0.0	50.0	56.0	-6.0	Line
		+0.4									
36	1.112M	23.8	+0.0	+0.1	+0.2	+9.1	+0.0	33.6	46.0	-12.4	Line
	Ave	+0.4									
^	1.112M	40.0	+0.0	+0.1	+0.2	+9.1	+0.0	49.8	56.0	-6.2	Line
		+0.4									

38	1.924M	23.5	+0.0	+0.1	+0.2	+9.1	+0.0	33.3	46.0	-12.7	Line
	Ave		+0.4								
^	1.924M	38.5	+0.0	+0.1	+0.2	+9.1	+0.0	48.3	56.0	-7.7	Line
		+0.4									
40	2.788M	23.5	+0.0	+0.1	+0.1	+9.1	+0.0	33.2	46.0	-12.8	Line
	Ave	+0.4									
^	2.788M	40.0	+0.0	+0.1	+0.1	+9.1	+0.0	49.7	56.0	-6.3	Line
		+0.4									
42	5.117M	23.8	+0.0	+0.1	+0.1	+9.1	+0.0	33.6	50.0	-16.4	Line
	Ave	+0.5									
^	5.117M	39.3	+0.0	+0.1	+0.1	+9.1	+0.0	49.1	60.0	-10.9	Line
		+0.5									
44	28.600M	6.4	+0.0	+0.3	+0.2	+9.1	+0.0	16.5	50.0	-33.5	Line
	Ave	+0.5									
^	28.600M	22.7	+0.0	+0.3	+0.2	+9.1	+0.0	32.8	60.0	-27.2	Line
		+0.5									



Test Location: CKC Laboratories, Inc. • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC
Customer: **Itron, Inc.**
Specification: **15.207 AC Mains - Quasi-peak**
Work Order #: **99513** Date: 4/11/2017
Test Type: **Conducted Emissions** Time: 11:54:23
Tested By: Michael Atkinson Sequence#: 12
Software: EMITest 5.03.02 115VAC 60Hz

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Temperature: 22°C
Humidity: 30%
Pressure: 102.2kPa
Canyon Park Lab C3
 Frequency Range: 0.15-30MHz
Frequency tested: 908MHz
Firmware power setting: Max Power
EUT Firmware: 5.71
Protocol /MCS/Modulation: FSK
 Antenna type: Internal PIFA
Antenna Gain: 1.2 dBi.
 Duty Cycle: 100% (Test Mode)
Test Mode: Continuously transmitting
Test Setup: EUT connected to USB AC Adapter via USB cable. USB AC Adapter connected to AC mains through LISN.
Modifications Added: None
Test Method: ANSI C63.10 (2013)

Itron, Inc WO#: 99513 Sequence#: 12 Date: 4/11/2017
15.207 AC Mains - Quasi-peak Test Lead: 115VAC 60Hz Return

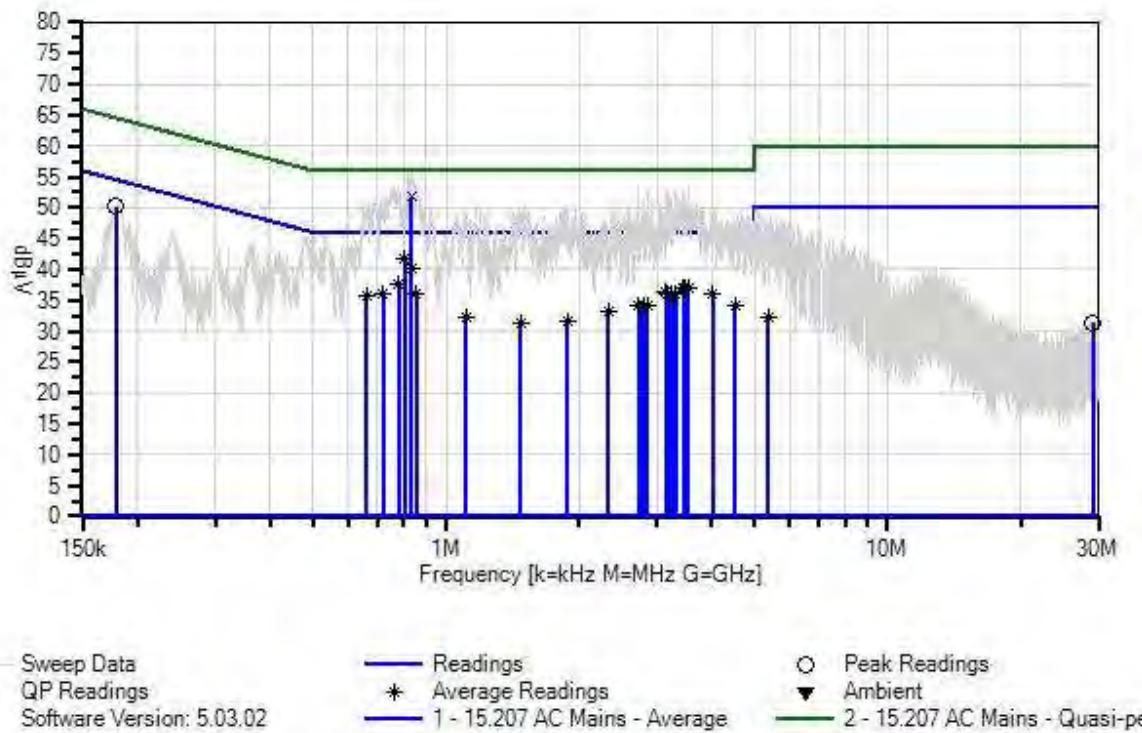

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/18/2015	11/18/2017
T1	ANP06540	Cable	Heliax	10/29/2015	10/29/2017
T2	ANP05305	Cable	ETSI-50T	2/15/2016	2/15/2018
T3	AN02611	High Pass Filter	HE9615-150K-50-720B	2/18/2016	2/18/2018
T4	ANP06219	Attenuator	768-10	4/12/2016	4/12/2018
	AN01492	50uH LISN-Line	3816/2NM	8/5/2015	8/5/2017
T5	AN01492	50uH LISN-Neutral	3816/2NM	8/5/2015	8/5/2017

Measurement Data:

Reading listed by margin.

Test Lead: Return

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5				Table	dB μ V	dB μ V		
			MHz	dB μ V	dB	dB	dB				Ant
1	833.810k	41.9	+0.0	+0.1	+0.2	+9.1	+0.0	51.7	56.0	-4.3	Retur
	QP		+0.4								
2	806.073k	31.8	+0.0	+0.1	+0.2	+9.1	+0.0	41.6	46.0	-4.4	Retur
	Ave		+0.4								
^	806.073k	42.2	+0.0	+0.1	+0.2	+9.1	+0.0	52.0	56.0	-4.0	Retur
			+0.4								
4	833.810k	30.5	+0.0	+0.1	+0.2	+9.1	+0.0	40.3	46.0	-5.7	Retur
	Ave		+0.4								
^	833.809k	46.1	+0.0	+0.1	+0.2	+9.1	+0.0	55.9	56.0	-0.1	Retur
			+0.4								
6	780.905k	27.8	+0.0	+0.1	+0.2	+9.1	+0.0	37.6	46.0	-8.4	Retur
	Ave		+0.4								
^	780.904k	43.7	+0.0	+0.1	+0.2	+9.1	+0.0	53.5	56.0	-2.5	Retur
			+0.4								
8	3.534M	27.4	+0.0	+0.1	+0.1	+9.1	+0.0	37.1	46.0	-8.9	Retur
	Ave		+0.4								
^	3.534M	43.9	+0.0	+0.1	+0.1	+9.1	+0.0	53.6	56.0	-2.4	Retur
			+0.4								
10	3.480M	27.2	+0.0	+0.1	+0.1	+9.1	+0.0	36.9	46.0	-9.1	Retur
	Ave		+0.4								
^	3.480M	42.1	+0.0	+0.1	+0.1	+9.1	+0.0	51.8	56.0	-4.2	Retur
			+0.4								
12	3.455M	27.2	+0.0	+0.1	+0.1	+9.1	+0.0	36.9	46.0	-9.1	Retur
	Ave		+0.4								
^	3.455M	43.2	+0.0	+0.1	+0.1	+9.1	+0.0	52.9	56.0	-3.1	Retur
			+0.4								
14	3.150M	26.6	+0.0	+0.1	+0.1	+9.1	+0.0	36.3	46.0	-9.7	Retur
	Ave		+0.4								
^	3.150M	41.9	+0.0	+0.1	+0.1	+9.1	+0.0	51.6	56.0	-4.4	Retur
			+0.4								

16	3.185M	26.5	+0.0	+0.1	+0.1	+9.1	+0.0	36.2	46.0	-9.8	Retur
	Ave		+0.4								
^	3.185M	42.9	+0.0	+0.1	+0.1	+9.1	+0.0	52.6	56.0	-3.4	Retur
		+0.4									
18	720.073k	26.4	+0.0	+0.1	+0.2	+9.1	+0.0	36.2	46.0	-9.8	Retur
	Ave	+0.4									
^	720.072k	41.5	+0.0	+0.1	+0.2	+9.1	+0.0	51.3	56.0	-4.7	Retur
		+0.4									
20	4.024M	26.4	+0.0	+0.1	+0.1	+9.1	+0.0	36.1	46.0	-9.9	Retur
	Ave	+0.4									
^	4.024M	40.0	+0.0	+0.1	+0.1	+9.1	+0.0	49.7	56.0	-6.3	Retur
		+0.4									
22	3.246M	26.4	+0.0	+0.1	+0.1	+9.1	+0.0	36.1	46.0	-9.9	Retur
	Ave	+0.4									
^	3.246M	41.7	+0.0	+0.1	+0.1	+9.1	+0.0	51.4	56.0	-4.6	Retur
		+0.4									
24	3.317M	26.3	+0.0	+0.1	+0.1	+9.1	+0.0	36.0	46.0	-10.0	Retur
	Ave	+0.4									
^	3.317M	42.9	+0.0	+0.1	+0.1	+9.1	+0.0	52.6	56.0	-3.4	Retur
		+0.4									
26	857.437k	26.1	+0.0	+0.1	+0.2	+9.1	+0.0	35.9	46.0	-10.1	Retur
	Ave	+0.4									
^	857.437k	43.9	+0.0	+0.1	+0.2	+9.1	+0.0	53.7	56.0	-2.3	Retur
		+0.4									
28	660.900k	25.8	+0.0	+0.1	+0.2	+9.1	+0.0	35.6	46.0	-10.4	Retur
	Ave	+0.4									
^	660.900k	41.7	+0.0	+0.1	+0.2	+9.1	+0.0	51.5	56.0	-4.5	Retur
		+0.4									
30	4.510M	24.5	+0.0	+0.1	+0.1	+9.1	+0.0	34.3	46.0	-11.7	Retur
	Ave	+0.5									
^	4.510M	40.2	+0.0	+0.1	+0.1	+9.1	+0.0	50.0	56.0	-6.0	Retur
		+0.5									
32	2.800M	24.4	+0.0	+0.1	+0.1	+9.1	+0.0	34.1	46.0	-11.9	Retur
	Ave	+0.4									
^	2.800M	41.8	+0.0	+0.1	+0.1	+9.1	+0.0	51.5	56.0	-4.5	Retur
		+0.4									
34	2.726M	24.3	+0.0	+0.1	+0.1	+9.1	+0.0	34.0	46.0	-12.0	Retur
	Ave	+0.4									
^	2.726M	43.7	+0.0	+0.1	+0.1	+9.1	+0.0	53.4	56.0	-2.6	Retur
		+0.4									
36	2.862M	24.3	+0.0	+0.1	+0.1	+9.1	+0.0	34.0	46.0	-12.0	Retur
	Ave	+0.4									
^	2.862M	43.2	+0.0	+0.1	+0.1	+9.1	+0.0	52.9	56.0	-3.1	Retur
		+0.4									
38	2.330M	23.4	+0.0	+0.1	+0.1	+9.1	+0.0	33.1	46.0	-12.9	Retur
	Ave	+0.4									
^	2.330M	42.5	+0.0	+0.1	+0.1	+9.1	+0.0	52.2	56.0	-3.8	Retur
		+0.4									
40	1.112M	22.4	+0.0	+0.1	+0.2	+9.1	+0.0	32.2	46.0	-13.8	Retur
	Ave	+0.4									
^	1.112M	41.6	+0.0	+0.1	+0.2	+9.1	+0.0	51.4	56.0	-4.6	Retur
		+0.4									

42	1.886M	21.9	+0.0	+0.1	+0.2	+9.1	+0.0	31.7	46.0	-14.3	Retur
	Ave		+0.4								
^	1.886M	41.9	+0.0	+0.1	+0.2	+9.1	+0.0	51.7	56.0	-4.3	Retur
		+0.4									
44	178.810k	39.3	+0.0	+0.0	+0.3	+9.1	+0.0	50.2	64.5	-14.3	Retur
		+1.5									
45	1.472M	21.6	+0.0	+0.1	+0.2	+9.1	+0.0	31.4	46.0	-14.6	Retur
	Ave	+0.4									
^	1.472M	40.0	+0.0	+0.1	+0.2	+9.1	+0.0	49.8	56.0	-6.2	Retur
		+0.4									
47	5.364M	22.6	+0.0	+0.1	+0.1	+9.1	+0.0	32.4	50.0	-17.6	Retur
	Ave	+0.5									
^	5.364M	38.8	+0.0	+0.1	+0.1	+9.1	+0.0	48.6	60.0	-11.4	Retur
		+0.5									
49	29.150M	21.3	+0.0	+0.3	+0.2	+9.1	+0.0	31.3	60.0	-28.7	Retur
		+0.4									

Test Setup Photo



SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	(dB μ V)
+ Antenna Factor	(dB/m)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	(dB μ V/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.