



element

Starkey Laboratories, Inc.

G Series AI RIC R

FCC 15.247:2025

RSS-247 Issue 3:2023

RSS-Gen Issue 5:2018+A1:2019+A2:2021

Bluetooth Low Energy (DTS) Radio

Report: STAK0362.1 Rev. 1, Issue Date: May 20, 2025



TABLE OF CONTENTS

Section	Page Number
Certificate of Test	3
Revision History	5
Accreditations.....	6
Facilities	7
Measurement Uncertainty	8
Test Setup Block Diagrams.....	9
Product Description	12
Configurations	13
Modifications	14
Power Settings and Antenna Information	15
Occupied Bandwidth (99%)	16
Duty Cycle.....	20
DTS Bandwidth (6 dB)	25
Output Power	29
Equivalent Isotropic Radiated Power	33
Power Spectral Density	35
Band Edge Compliance	39
Spurious Conducted Emissions	42
Radiated Spurious Emissions Restricted Band Edge.....	48
Spurious Radiated Emissions	51
End of Report.....	59

CERTIFICATE OF TEST



Last Date of Test: May 6, 2025
Starkey Laboratories, Inc.
EUT: G Series AI RIC R

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2025	
RSS-247 Issue 3:2023	ANSI C63.10:2020
RSS-Gen Issue 5:2018+A1:2019+A2:2021	

Guidance

FCC KDB 558074 v05r02:2019

Notice 2021 - CEB0001

Results

Test Description	Result	FCC Section(s)	RSS Section(s)	ANSI C63.10 Section(s)	Comments
Powerline Conducted Emissions	N/A	15.207	RSS-Gen 8.8	6.2	Not required for a battery powered EUT.
Occupied Bandwidth (99%)	Pass	KDB 558074 -2.1	RSS-Gen 6.7	6.9.3	
Duty Cycle	Pass	KDB 558074 -6.0	RSS-Gen 3.2	11.6	
DTS Bandwidth (6 dB)	Pass	15.247(a)(2), KDB 558074 -8.2	RSS-247 5.2(a)	11.8.2	
Output Power	Pass	15.247(b)(3), KDB 558074 -8.3.1	RSS-247 5.4(d, f), RSS-Gen 6.12	11.9.1.1	
Equivalent Isotropic Radiated Power	Pass	15.247(b)(3), KDB 558074 -8.3.1	RSS-247 5.4(d, f), RSS-Gen 6.12	11.9.1.1	
Power Spectral Density	Pass	15.247(e), KDB 558074 -8.4	RSS-247 5.2(b)	11.10.2	
Band Edge Compliance	Pass	15.247(d), KDB 558074 -8.5	RSS-247 5.5	11.11	
Spurious Conducted Emissions	Pass	15.247(d), KDB 558074 -8.5	RSS-247 5.5	11.11	
Radiated Spurious Emissions Restricted Band Edge	Pass	15.247(d), KDB 558074 - 8.6, 8.7	RSS-247 5.5, RSS-Gen 6.13, 8.10	11.12.1, 11.13.2, 6.6	
Spurious Radiated Emissions	Pass	15.247(d), KDB 558074 - 8.6, 8.7	RSS-247 5.5, RSS-Gen 6.13, 8.10	11.12.1, 11.13.2, 6.4, 6.5, 6.6	

Deviations From Test Standards

None

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

CERTIFICATE OF TEST



Approved By:

A handwritten signature in black ink, appearing to read 'Jeff Alcoke'.

Jeff Alcoke, Senior EMC Test Engineer
Signed for and on behalf of Element

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		
01	Corrected power settings from “rated power” to “test software” power settings	2025-05-22	15

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Each laboratory is accredited by A2LA to ISO / IEC 17025, and as a product certifier to ISO / IEC 17065 which allows Element to certify transmitters to FCC and IC specifications.

FDA - Recognized by the FDA as an Accreditation Scheme for Conformity Assessment (ASCA)-accredited testing laboratory for basic safety and essential performance.

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB) and as a CAB for the acceptance of test data.

European Union

European Commission – Recognized as an EU Notified Body validated for the EMCD and RED Directives.

United Kingdom

BEIS – Recognized by the UK as an Approved Body under the UK Radio Equipment and UK EMC Regulations.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

[California](#)

[Minnesota](#)

[Oregon](#)

[Washington](#)


FACILITIES

Testing was performed at the following location(s)

Location	Labs ⁽¹⁾	Address	A2LA ⁽²⁾	ISED ⁽³⁾	BSMI ⁽⁴⁾	VCCI ⁽⁵⁾	CAB ⁽⁶⁾	FDA ⁽⁷⁾
<input type="checkbox"/> California	OC01-17	41 Tesla Irvine, CA 92618 (949) 861-8918	3310.04	2834B	SL2-IN-E-1154R	A-0029	US0158	TL-55
<input checked="" type="checkbox"/> Minnesota	MN01-11	9349 W Broadway Ave. Brooklyn Park, MN 55445 (612) 638-5136	3310.05	2834E	SL2-IN-E-1152R	A-0109	US0175	TL-57
<input type="checkbox"/> Oregon	EV01-12	6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	3310.02	2834D	SL2-IN-E-1017	A-0108	US0017	TL-56
<input type="checkbox"/> Washington	NC01-05	19201 120th Ave NE Bothell, WA 98011 (425) 984-6600	3310.06	2834F	SL2-IN-E-1153R	A-0110	US0157	TL-67
<input type="checkbox"/> Offsite	N/A	See Product Description	N/A	N/A	N/A	N/A	N/A	N/A

See data sheets for specific labs

- (1) The lab designations denote individual rooms within each location. (OC01, OC02, OC03, etc.)
- (2) A2LA Certificate No.
- (3) ISED Company No.
- (4) BSMI No.
- (5) VCCI Site Filing No.
- (6) CAB Identifier. Recognized Phase I CAB for ISED, ACMA, BSMI, IDA, KCC/RRA, MOC, NCC, OFCA
- (7) FDA ASCA No.

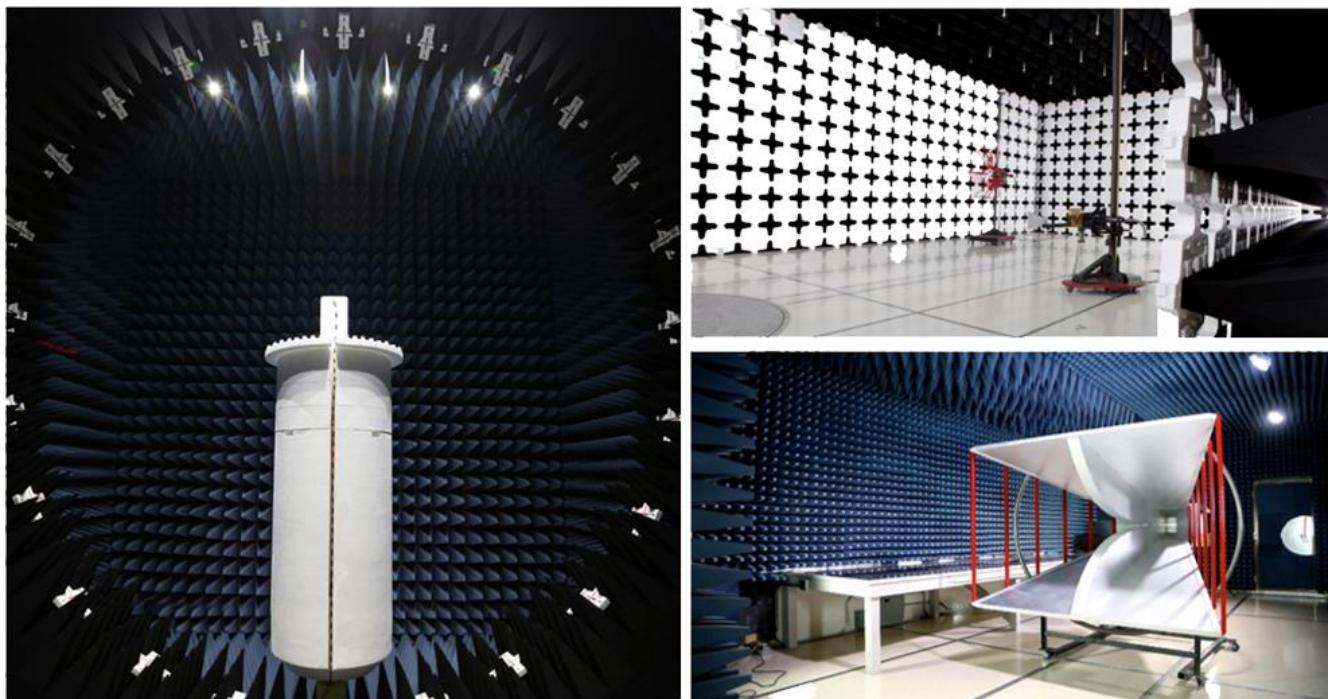

MEASUREMENT UNCERTAINTY

Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation reported is based on statistical analysis that was performed by the laboratory. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty ($k=2$) can be found in the table below. A lab specific value may also be found in the applicable test description section. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable) and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Various Measurements

Test	All Labs (+/-)
Frequency Accuracy (%)	0.0007
Amplitude Accuracy (dB)	1.2
Conducted Power (dB)	1.2
Radiated Power via Substitution (dB)	0.7
Temperature (degrees C)	0.7
Humidity (% RH)	2.5
Voltage (AC) (%)	1
Voltage (DC) (%)	0.7
Near-field Measurement of E-Field (dB)	1.89
Near-field Measurement of H-Field (dB)	2.65

Field Strength Measurements (dB)

Range	MN05 (+/-)
10kHz-30MHz	1.8
30MHz-1GHz 3m	4.6
1GHz-6GHz	5.1
6GHz-40GHz	5.3


TEST SETUP BLOCK DIAGRAMS

Measurement Bandwidths

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

Unless otherwise stated, measurements were made using the bandwidths and detectors specified. No video filter was used.


Antenna Port Conducted Measurements

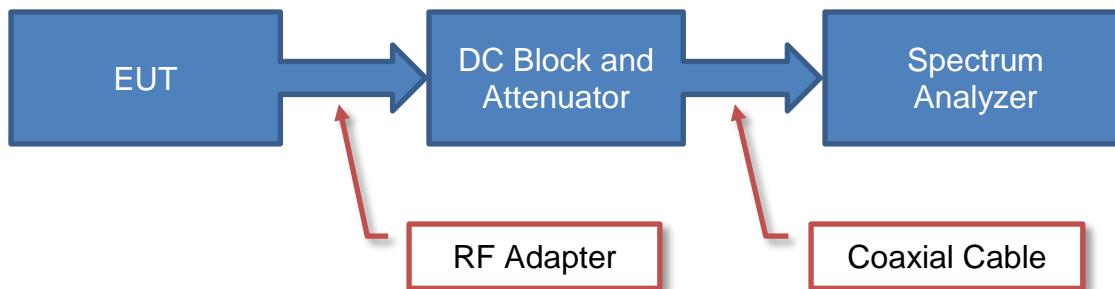

Sample Calculation (logarithmic units)

$$\begin{array}{ccc} \text{Measured} & \text{Measured} & \text{Reference} \\ \text{Value} & = & \text{Level} \\ 71.2 & = & 42.6 \\ & & + \\ & & \text{Level} \\ & & \text{Offset} \\ & & 28.6 \end{array}$$

Near Field Test Fixture Measurements

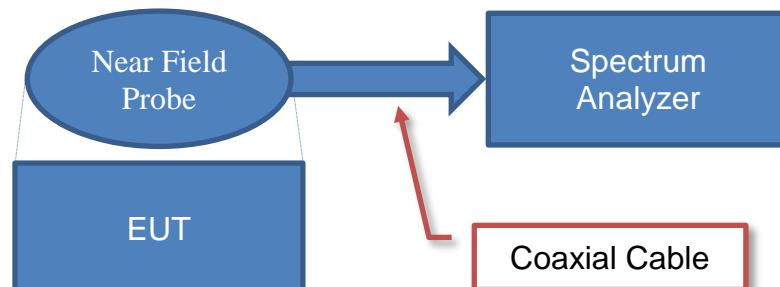


Sample Calculation (logarithmic units)

$$\begin{array}{ccc} \text{Measured} & \text{Measured} & \text{Reference} \\ \text{Value} & = & \text{Level} \\ 71.2 & = & 42.6 \\ & & + \\ & & \text{Level} \\ & & \text{Offset} \\ & & 28.6 \end{array}$$

TEST SETUP BLOCK DIAGRAMS

Emissions Measurements

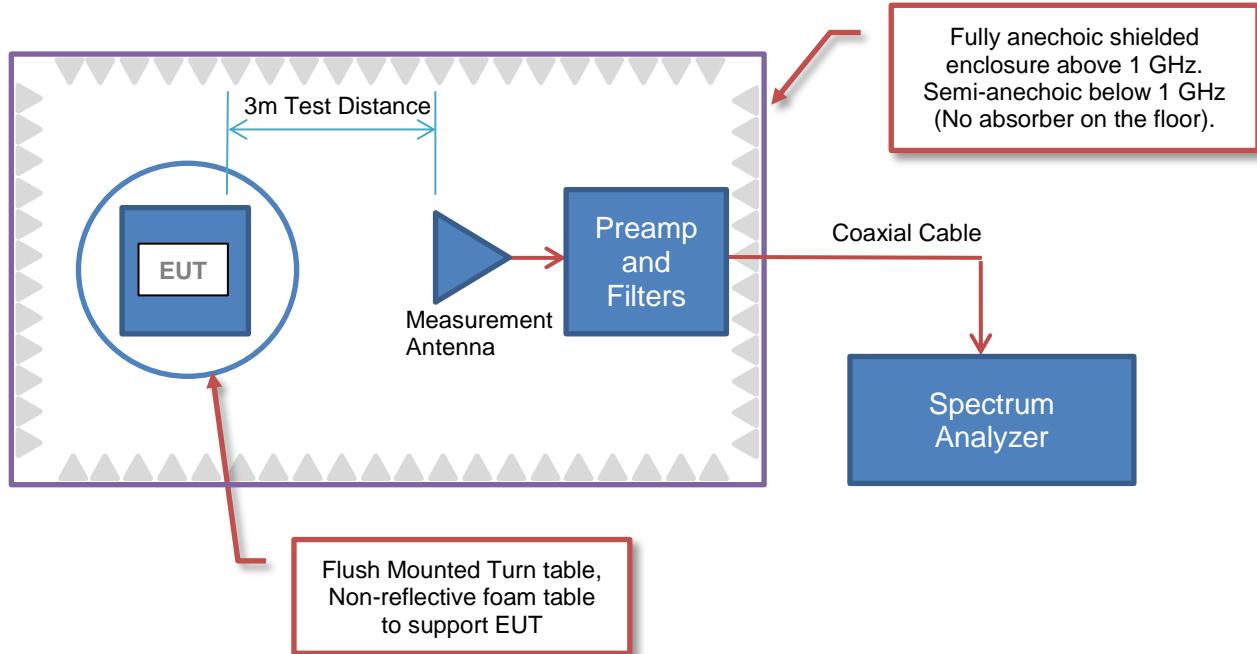

Sample Calculation (logarithmic units)

Radiated Emissions:

Factor						
Measured Level (Amplitude)	Antenna Factor	Cable Factor	Amplifier Gain	Distance Adjustment Factor	External Attenuation	Field Strength
42.6	28.6	3.1	- 40.8	0.0	0.0	= 33.5

Conducted Emissions:

Factor				
Measured Level (Amplitude)	Transducer Factor	Cable Factor	External Attenuation	Adjusted Level
26.7	0.3	0.1	20.0	= 47.1


Radiated Power (ERP/EIRP) – Substitution Method:

Measured Level into Substitution Antenna (Amplitude dBm)	Substitution Antenna Factor (dBi)	EIRP to ERP (if applicable)	Measured power (dBm ERP/EIRP)
10.0	6.0	- 2.15	= 13.9/16.0

TEST SETUP BLOCK DIAGRAMS

Bore Sighting (>1GHz)

The diameter of the illumination area is the dimension of the line tangent to the EUT formed by 3 dB beamwidth of the measurement antenna at the measurement distance. At a 3 meter test distance, the diameter of the illumination area was 3.8 meters at 1 GHz and greater than 2.1 meters up to 6 GHz. Above 1 GHz, when required by the measurement standard, the antenna is pointed for both azimuth and elevation to maintain the receive antenna within the cone of radiation from the EUT. The specified measurement detectors were used for comparison of the emissions to the peak and average specification limits.

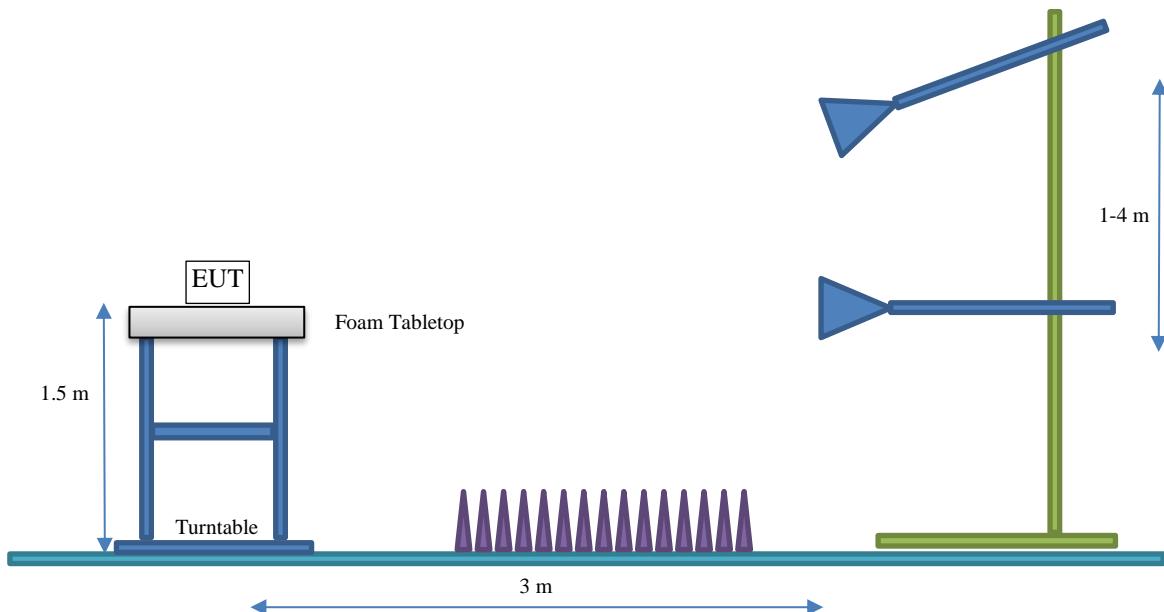

PRODUCT DESCRIPTION



Client and Equipment under Test (EUT) Information

Company Name:	Starkey Laboratories, Inc.
Address:	6600 Washington Ave S
City, State, Zip:	Eden Prairie, MN 55344-3404
Test Requested By:	Bill Mitchell
EUT:	G Series AI RIC R
First Date of Test:	March 31, 2025
Last Date of Test:	May 6, 2025
Receipt Date of Samples:	March 31, 2025
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

| **Functional Description of the EUT:** |
| Hearing aid |
| **Testing Objective:** |
| To demonstrate compliance of the Bluetooth radio to FCC 15.247/RSS-247 requirements. |

CONFIGURATIONS



Configuration STAK0362-1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
G Series AI RIC R	Starkey Laboratories, Inc.	G Series AI RIC R	250579971

Configuration STAK0362-2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
G Series AI RIC R	Starkey Laboratories, Inc.	G Series AI RIC R	250579977

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2025-03-31	Band Edge Compliance	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2025-03-31	Duty Cycle	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2025-03-31	DTS Bandwidth (6 dB)	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2025-03-31	Equivalent Isotropic Radiated Power	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2025-03-31	Occupied Bandwidth (99%)	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2025-03-31	Output Power	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2025-03-31	Power Spectral Density	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2025-03-31	Spurious Conducted Emissions	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
9	2025-04-03	Spurious Radiated Emissions	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
10	2025-05-07	Radiated Spurious Emissions Restricted Band Edge	Tested as delivered to test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

POWER SETTINGS AND ANTENNAS



The power settings, antenna gain value(s) and cable loss (if applicable) used for the testing contained in this report were provided by the customer and will affect the validity of the results. Element assumes no responsibility for the accuracy of this information. The power settings below reflect the maximum power that the EUT is allowed to transmit at during normal operation.

ANTENNA GAIN (dBi)

Type	Provided by:	Frequency Range (MHz)	Gain (dBi)
Folded Bowtie	Starkey	2400-2483.5 MHz	-6

The EUT was tested using the power settings provided by the manufacturer which were based upon:

Test software settings Software / firmware used for testing: 8.5.0.2
 Rated power settings

SETTINGS FOR ALL TESTS IN THIS REPORT

Modulation Types / Data Rates	Type	Channel	Position	Frequency (MHz)	Power Setting (dBm)
BLE GFSK 1 Mbps, 2 Mbps	DTS	37	Low Channel	2402	4
		18	Mid Channel	2442	4
		39	High Channel	2480	4

OCCUPIED BANDWIDTH (99%)

TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The 99% occupied bandwidth was measured with the EUT configured for continuous modulated operation.

Per ANSI C63.10, 6.9.3, the spectrum analyzer was configured as follows:

The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

The resolution bandwidth (RBW) of the spectrum analyzer was set to the range of 1% to 5% of the occupied bandwidth (OBW) and video bandwidth (VBW) bandwidth was set to at least 3 times the resolution bandwidth. The analyzer sweep time was set to auto to prevent video filtering or averaging. A sample detector was used unless the device was not able to be operated in a continuous transmit mode, in which case a peak detector was used.

The spectrum analyzer occupied bandwidth measurement function was used to sum the power of the transmission in linear terms to obtain the 99% bandwidth.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2024-05-22	2025-05-22
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2024-08-28	2025-08-28
Block - DC	Fairview Microwave	SD3379	ANH	2024-08-28	2025-08-28
Attenuator	S.M. Electronics	SA26B-20	RFW	2025-02-03	2026-02-03
Generator - Signal	Agilent	N5183A	TIK	2025-02-13	2028-02-13

OCCUPIED BANDWIDTH (99%)



EUT:	G Series AI RIC R	Work Order:	STAK0362
Serial Number:	250579977	Date:	2025-03-31
Customer:	Starkey Laboratories, Inc.	Temperature:	22.1°C
Attendees:	John Quach	Relative Humidity:	27.4%
Customer Project:	None	Bar. Pressure (PMSL):	1018 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery	Configuration:	STAK0362-2

COMMENTS

Power 4 dBm

DEVIATIONS FROM TEST STANDARD

None

CONCLUSION


N/A

Tested By

TEST RESULTS

	Value	Limit	Result
BLE/GFSK 1 Mbps			
Low Channel, 2402 MHz	1.076 MHz	N/A	N/A
Mid Channel, 2442 MHz	1.078 MHz	N/A	N/A
High Channel, 2480 MHz	1.08 MHz	N/A	N/A
BLE/GFSK 2 Mbps			
Low Channel, 2402 MHz	2.16 MHz	N/A	N/A
Mid Channel, 2442 MHz	2.158 MHz	N/A	N/A
High Channel, 2480 MHz	2.149 MHz	N/A	N/A


OCCUPIED BANDWIDTH (99%)

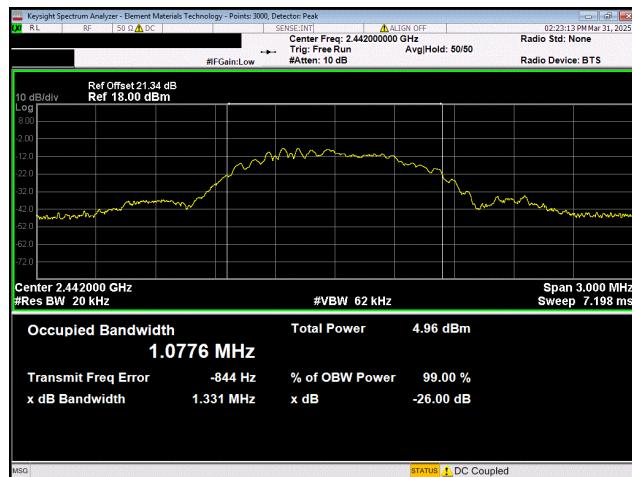

**BLE/GFSK 1 Mbps
Low Channel, 2402 MHz**




**BLE/GFSK 1 Mbps
High Channel, 2480 MHz**

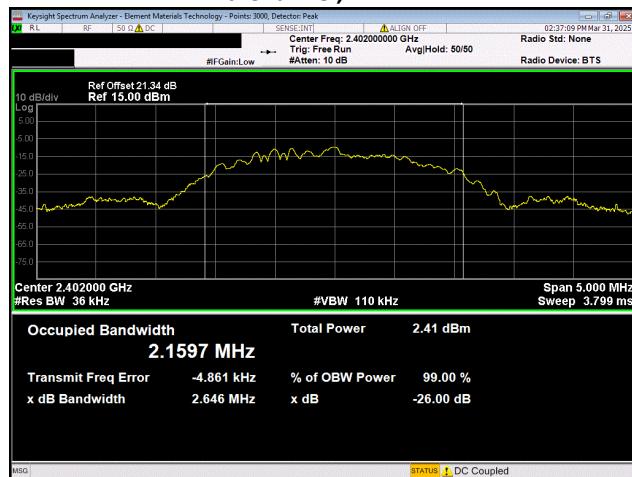


**BLE/GFSK 2 Mbps
Low Channel, 2402 MHz**

OCCUPIED BANDWIDTH (99%)

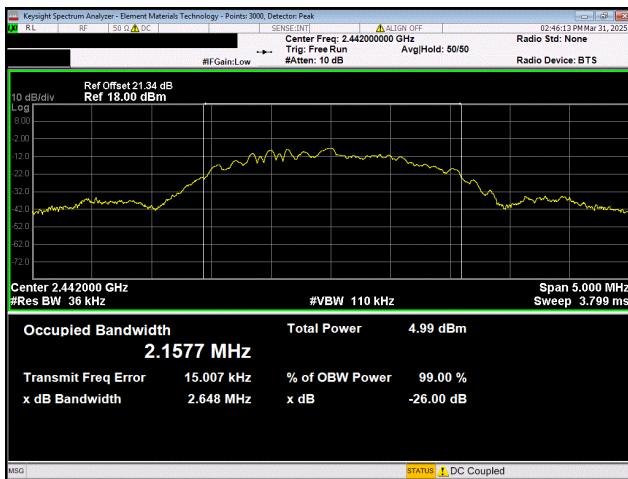

BLE/GFSK 2 Mbps
Mid Channel, 2442 MHz

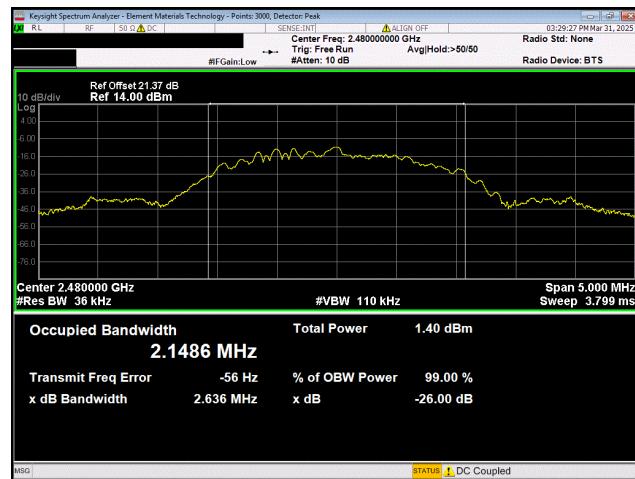

BLE/GFSK 2 Mbps
High Channel, 2480 MHz

DUTY CYCLE

TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2024-05-22	2025-05-22
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2024-08-28	2025-08-28
Block - DC	Fairview Microwave	SD3379	ANH	2024-08-28	2025-08-28
Attenuator	S.M. Electronics	SA26B-20	RFW	2025-02-03	2026-02-03
Generator - Signal	Agilent	N5183A	TIK	2025-02-13	2028-02-13

DUTY CYCLE

EUT:	G Series AI RIC R	Work Order:	STAK0362
Serial Number:	250579977	Date:	2025-03-31
Customer:	Starkey Laboratories, Inc.	Temperature:	22.1°C
Attendees:	John Quach	Relative Humidity:	27.5%
Customer Project:	None	Bar. Pressure (PMSL):	1018 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery	Configuration:	STAK0362-2

COMMENTS

Power 4 dBm

DEVIATIONS FROM TEST STANDARD

None

CONCLUSION

N/A




Tested By


TEST RESULTS

	Pulse Width	Period	Number of Pulses	Value (%)	Limit N/A ()	Results
BLE/GFSK 1 Mbps						
Low Channel, 2402 MHz	407.3 us N/A	625.1 us N/A	1 5	65.2 N/A	N/A N/A	N/A N/A
Mid Channel, 2442 MHz	408 us N/A	625.1 us N/A	1 5	65.3 N/A	N/A N/A	N/A N/A
High Channel, 2480 MHz	406.5 us N/A	625 us N/A	1 5	65 N/A	N/A N/A	N/A N/A
BLE/GFSK 2 Mbps						
Low Channel, 2402 MHz	218.8 us N/A	625 us N/A	1 5	35 N/A	N/A N/A	N/A N/A
Mid Channel, 2442 MHz	220.1 us N/A	625.1 us N/A	1 5	35.2 N/A	N/A N/A	N/A N/A
High Channel, 2480 MHz	218.7 us N/A	625.1 us N/A	1 5	35 N/A	N/A N/A	N/A N/A


DUTY CYCLE

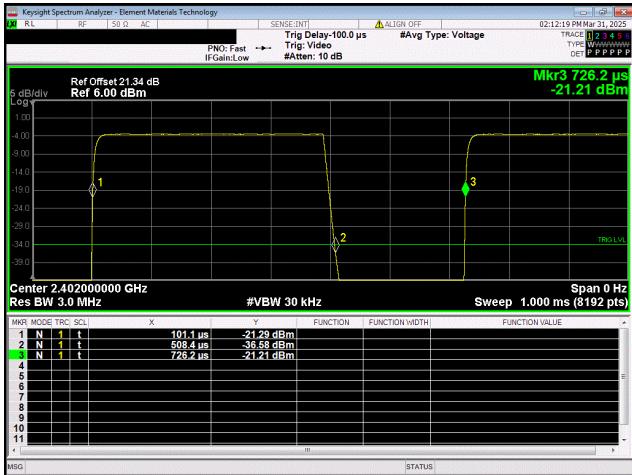


BLE/GFSK 1 Mbps
Low Channel, 2402 MHz

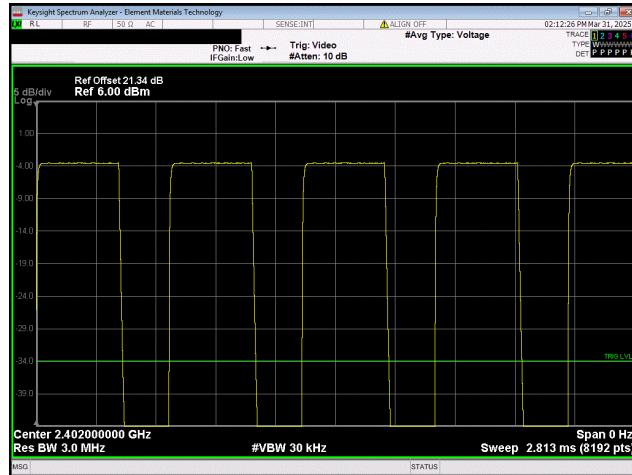


BLE/GFSK 1 Mbps
Low Channel, 2402 MHz

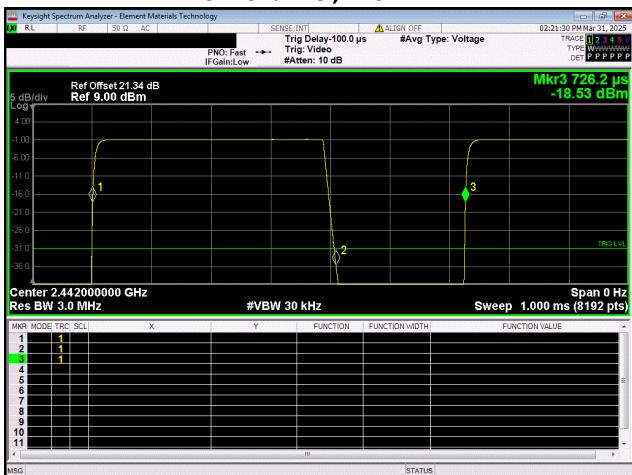


BLE/GFSK 1 Mbps
Mid Channel, 2442 MHz

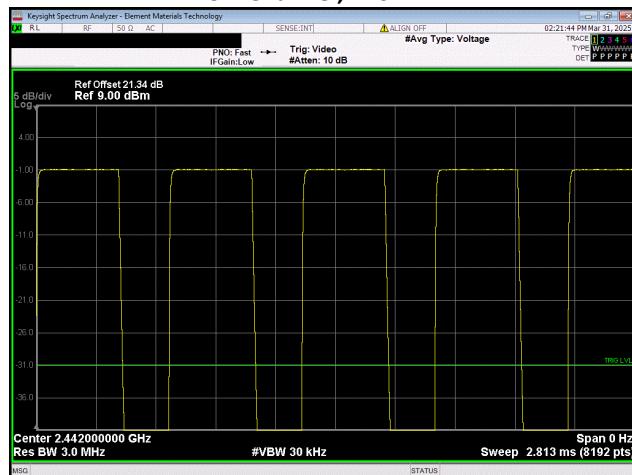

BLE/GFSK 1 Mbps
Mid Channel, 2442 MHz

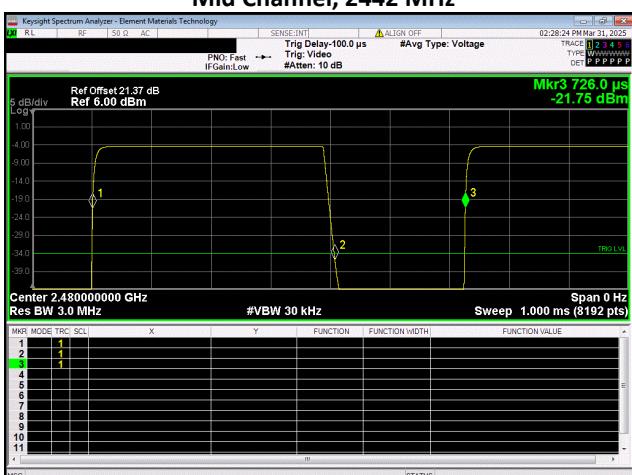


BLE/GFSK 1 Mbps
High Channel, 2480 MHz

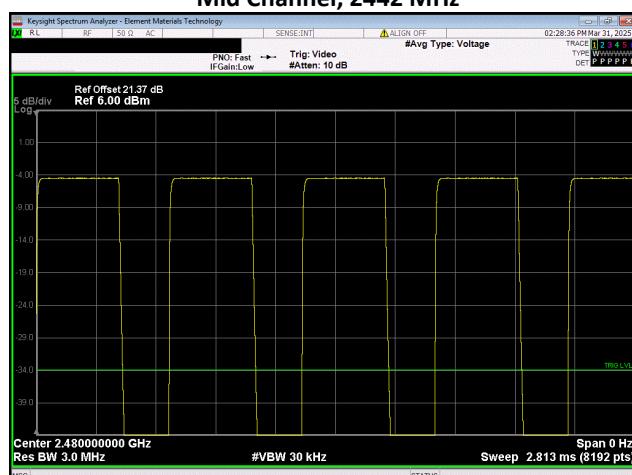


BLE/GFSK 1 Mbps
High Channel, 2480 MHz


DUTY CYCLE

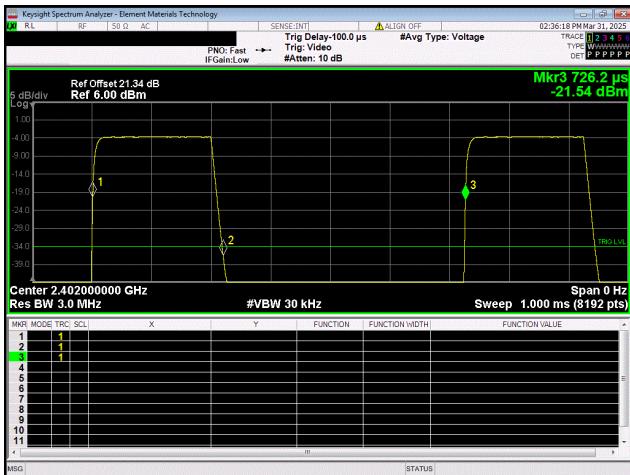


BLE/GFSK 2 Mbps
Low Channel, 2402 MHz

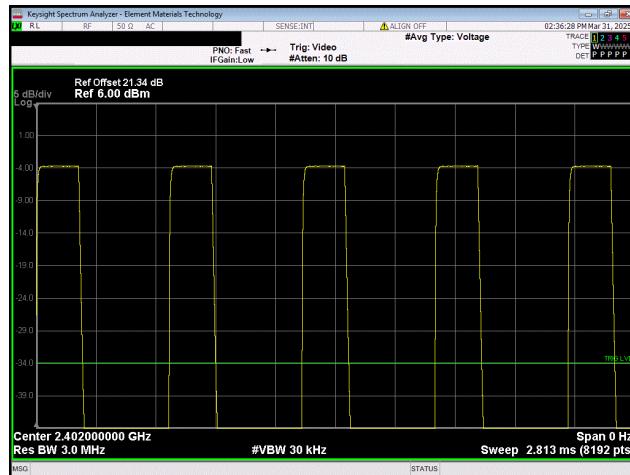

BLE/GFSK 2 Mbps
Low Channel, 2402 MHz

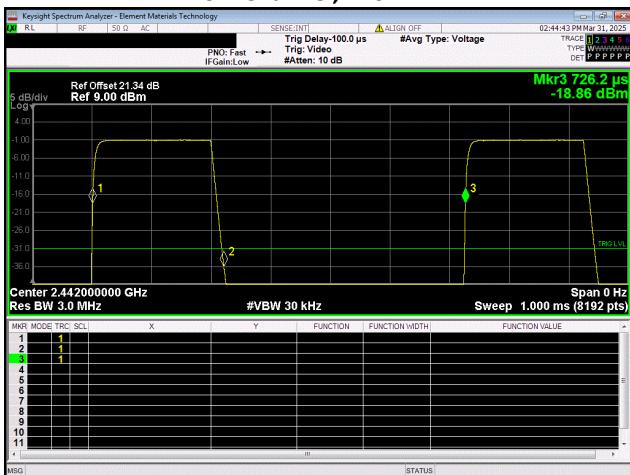


BLE/GFSK 2 Mbps
Mid Channel 2442 MHz

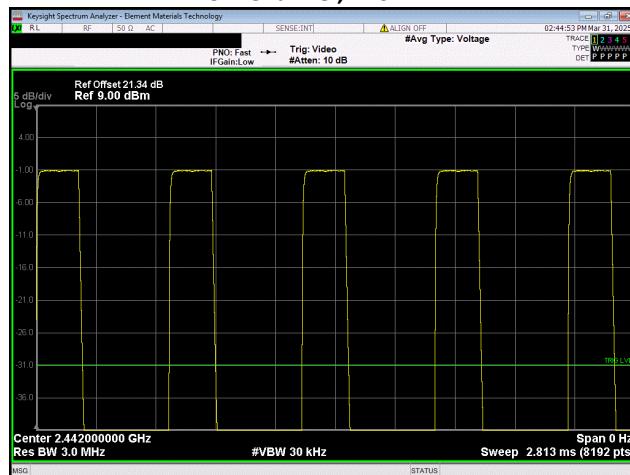


BLE/GFSK 2 Mbps
Mid Channel 2442 MHz

DUTY CYCLE

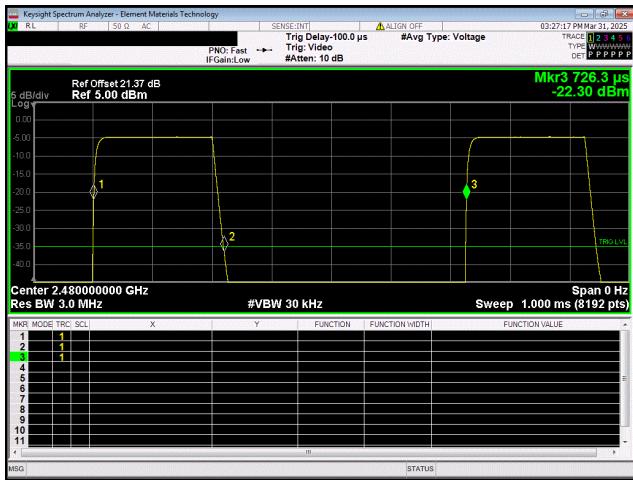

BLE/GFSK 2 Mbps
High Channel, 2480 MHz

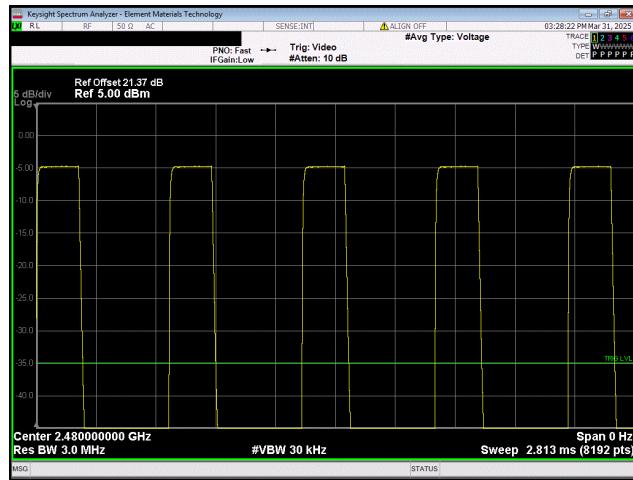

BLE/GFSK 2 Mbps
High Channel, 2480 MHz

DTS BANDWIDTH (6 dB)

TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The EUT was set to the channels and modes listed in the datasheet.

The 6dB DTS bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2024-05-22	2025-05-22
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2024-08-28	2025-08-28
Block - DC	Fairview Microwave	SD3379	ANH	2024-08-28	2025-08-28
Attenuator	S.M. Electronics	SA26B-20	RFW	2025-02-03	2026-02-03
Generator - Signal	Agilent	N5183A	TIK	2025-02-13	2028-02-13

DTS BANDWIDTH (6 dB)

EUT:	G Series AI RIC R	Work Order:	STAK0362
Serial Number:	250579977	Date:	2025-03-31
Customer:	Starkey Laboratories, Inc.	Temperature:	22.2°C
Attendees:	John Quach	Relative Humidity:	27.5%
Customer Project:	None	Bar. Pressure (PMSL):	1018 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery	Configuration:	STAK0362-2

COMMENTS

Power 4 dBm

DEVIATIONS FROM TEST STANDARD

None

CONCLUSION

Pass



Tested By

TEST RESULTS

	Value	Limit (≥)	Result
BLE/GFSK 1 Mbps			
Low Channel, 2402 MHz	745.047 kHz	500 kHz	Pass
Mid Channel, 2442 MHz	734.54 kHz	500 kHz	Pass
High Channel, 2480 MHz	749.799 kHz	500 kHz	Pass
BLE/GFSK 2 Mbps			
Low Channel, 2402 MHz	1.267 MHz	500 kHz	Pass
Mid Channel, 2442 MHz	1.27 MHz	500 kHz	Pass
High Channel, 2480 MHz	1.273 MHz	500 kHz	Pass


DTS BANDWIDTH (6 dB)



BLE/GFSK 1 Mbps
Low Channel, 2402 MHz




BLE/GFSK 1 Mbps
High Channel, 2480 MHz

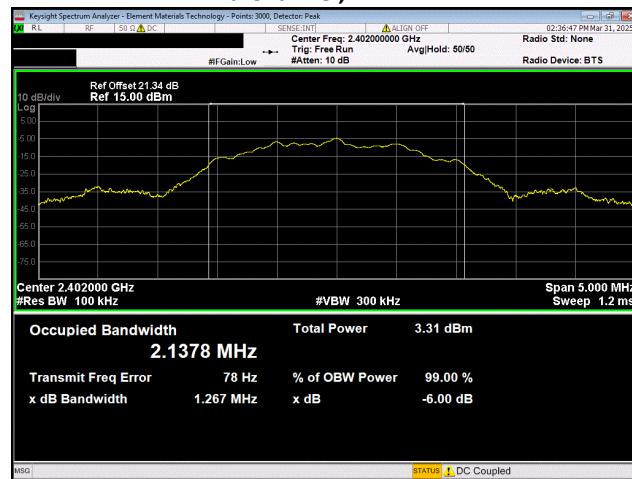


BLE/GFSK 2 Mbps
Low Channel, 2402 MHz

DTS BANDWIDTH (6 dB)

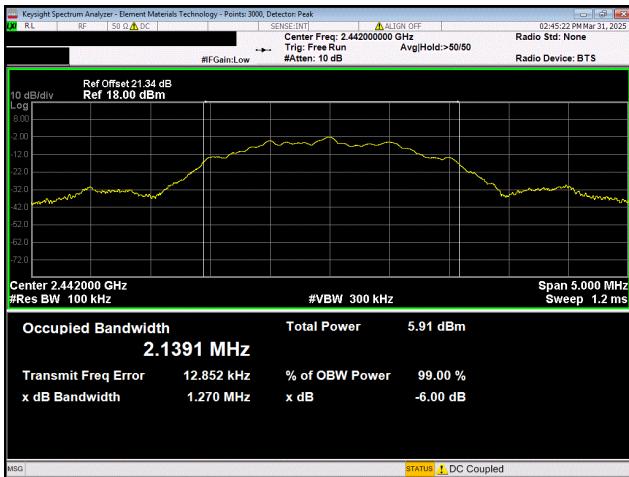

BLE/GFSK 2 Mbps
Mid Channel, 2442 MHz

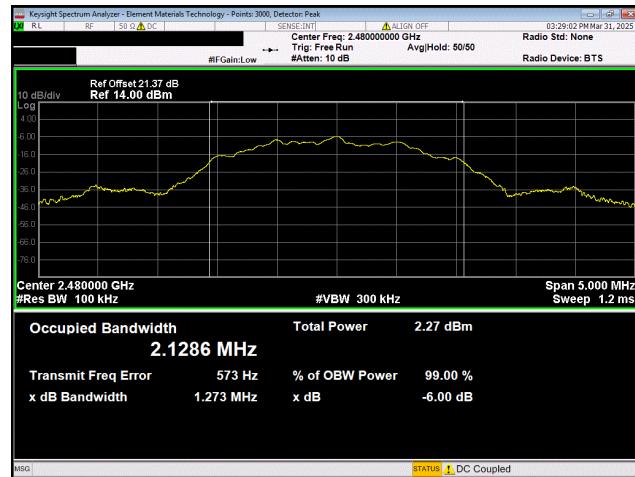

BLE/GFSK 2 Mbps
High Channel, 2480 MHz

OUTPUT POWER

TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2024-05-22	2025-05-22
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2024-08-28	2025-08-28
Block - DC	Fairview Microwave	SD3379	ANH	2024-08-28	2025-08-28
Attenuator	S.M. Electronics	SA26B-20	RFW	2025-02-03	2026-02-03
Generator - Signal	Agilent	N5183A	TIK	2025-02-13	2028-02-13

OUTPUT POWER

EUT:	G Series AI RIC R	Work Order:	STAK0362
Serial Number:	250579977	Date:	2025-03-31
Customer:	Starkey Laboratories, Inc.	Temperature:	22.1°C
Attendees:	John Quach	Relative Humidity:	27.4%
Customer Project:	None	Bar. Pressure (PMSL):	1018 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery	Configuration:	STAK0362-2

COMMENTS

Power 4 dBm

DEVIATIONS FROM TEST STANDARD

None

CONCLUSION

Pass




Tested By


TEST RESULTS

	Out Pwr (dBm)	Limit (dBm)	Result
BLE/GFSK 1 Mbps			
Low Channel, 2402 MHz	-3.357	30	Pass
Mid Channel, 2442 MHz	-0.748	30	Pass
High Channel, 2480 MHz	-4.305	30	Pass
BLE/GFSK 2 Mbps			
Low Channel, 2402 MHz	-3.25	30	Pass
Mid Channel, 2442 MHz	-0.658	30	Pass
High Channel, 2480 MHz	-4.327	30	Pass


OUTPUT POWER

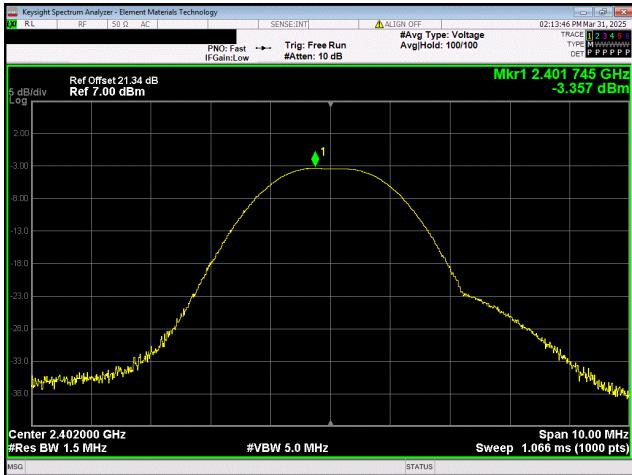


BLE/GFSK 1 Mbps
Low Channel, 2402 MHz

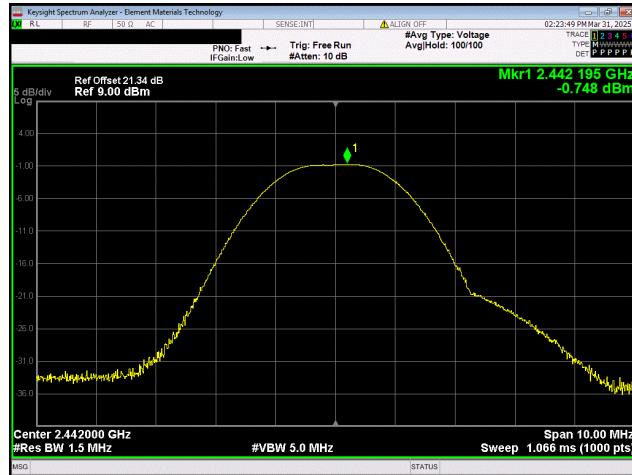

BLE/GFSK 1 Mbps
Mid Channel, 2442 MHz

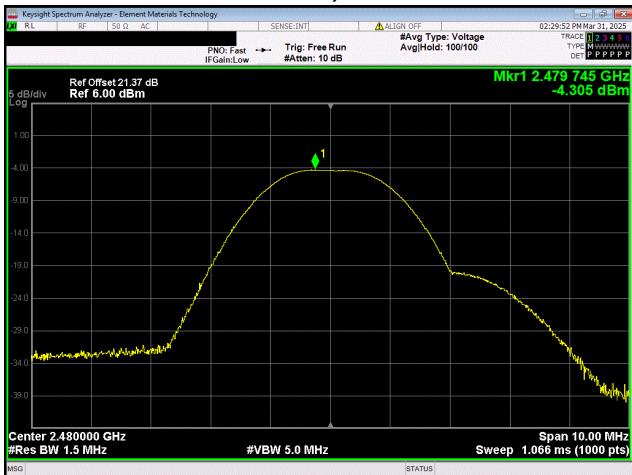


BLE/GFSK 1 Mbps
High Channel, 2480 MHz

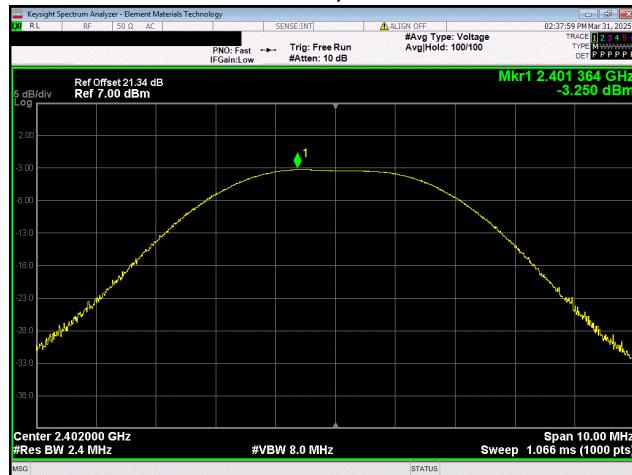


BLE/GFSK 2 Mbps
Low Channel, 2402 MHz

OUTPUT POWER

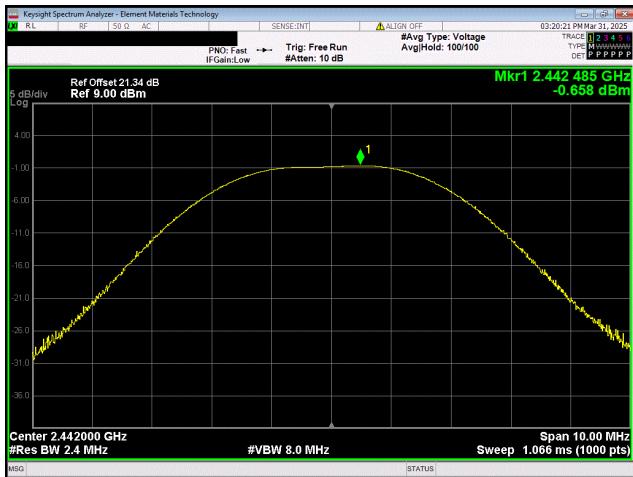

BLE/GFSK 2 Mbps
Mid Channel, 2442 MHz

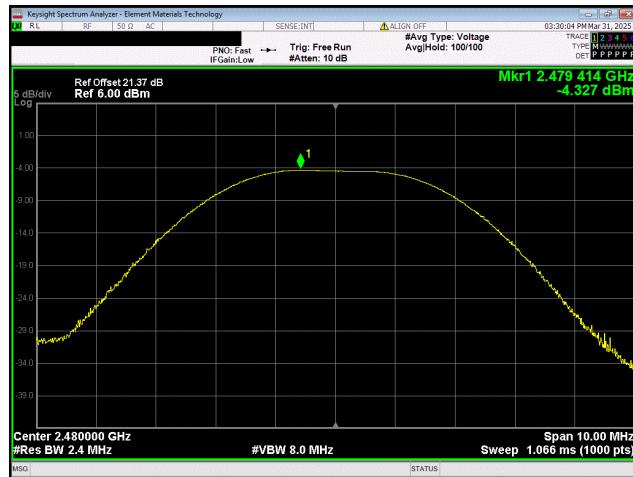

BLE/GFSK 2 Mbps
High Channel, 2480 MHz

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The transmit frequency was set to the required channels in each band. The transmit power was set to its default maximum.

Prior to measuring peak transmit power the DTS bandwidth (B) was measured.

The method found in ANSI C63.10 Section 11.9.1.1 was used because the RBW on the analyzer was greater than the DTS Bandwidth of the radio.

Equivalent Isotropic Radiated Power (EIRP) = Max Measured Power + Antenna gain (dBi)

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2024-05-22	2025-05-22
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2024-08-28	2025-08-28
Block - DC	Fairview Microwave	SD3379	ANH	2024-08-28	2025-08-28
Attenuator	S.M. Electronics	SA26B-20	RFW	2025-02-03	2026-02-03
Generator - Signal	Agilent	N5183A	TIK	2025-02-13	2028-02-13

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)



EUT:	G Series AI RIC R	Work Order:	STAK0362
Serial Number:	250579977	Date:	2025-03-31
Customer:	Starkey Laboratories, Inc.	Temperature:	22.1°C
Attendees:	John Quach	Relative Humidity:	27.5%
Customer Project:	None	Bar. Pressure (PMSL):	1018 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery	Configuration:	STAK0362-2

COMMENTS

Power 4 dBm

DEVIATIONS FROM TEST STANDARD

None

CONCLUSION

Pass

Tested By

TEST RESULTS

	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
BLE/GFSK 1 Mbps					
Low Channel, 2402 MHz	-3.357	-6	-9.357	36	Pass
Mid Channel, 2442 MHz	-0.748	-6	-6.748	36	Pass
High Channel, 2480 MHz	-4.305	-6	-10.305	36	Pass
BLE/GFSK 2 Mbps					
Low Channel, 2402 MHz	-3.25	-6	-9.25	36	Pass
Mid Channel, 2442 MHz	-0.658	-6	-6.658	36	Pass
High Channel, 2480 MHz	-4.327	-6	-10.327	36	Pass

POWER SPECTRAL DENSITY



TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The maximum power spectral density measurements was measured using the channels and modes as called out on the following data sheets.

Per the procedure outlined in ANSI C63.10 the peak power spectral density was measured in a 3 kHz RBW.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2024-05-22	2025-05-22
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2024-08-28	2025-08-28
Block - DC	Fairview Microwave	SD3379	ANH	2024-08-28	2025-08-28
Attenuator	S.M. Electronics	SA26B-20	RFW	2025-02-03	2026-02-03
Generator - Signal	Agilent	N5183A	TIK	2025-02-13	2028-02-13

POWER SPECTRAL DENSITY



EUT:	G Series AI RIC R	Work Order:	STAK0362
Serial Number:	250579977	Date:	2025-03-31
Customer:	Starkey Laboratories, Inc.	Temperature:	22°C
Attendees:	John Quach	Relative Humidity:	27.5%
Customer Project:	None	Bar. Pressure (PMSL):	1018 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery	Configuration:	STAK0362-2

COMMENTS

Power 4 dBm

DEVIATIONS FROM TEST STANDARD

None

CONCLUSION


Pass

Tested By


TEST RESULTS

	Value dBm/3kHz	Limit ≤ (dBm/3kHz)	Results
BLE/GFSK 1 Mbps			
Low Channel, 2402 MHz	-18.671	8	Pass
Mid Channel, 2442 MHz	-16.131	8	Pass
High Channel, 2480 MHz	-19.63	8	Pass
BLE/GFSK 2 Mbps			
Low Channel, 2402 MHz	-21.132	8	Pass
Mid Channel, 2442 MHz	-18.556	8	Pass
High Channel, 2480 MHz	-22.22	8	Pass


POWER SPECTRAL DENSITY

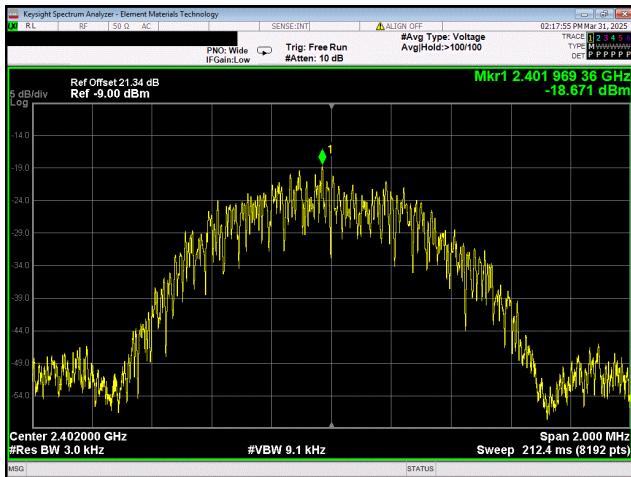


**BLE/GFSK 1 Mbps
Low Channel, 2402 MHz**

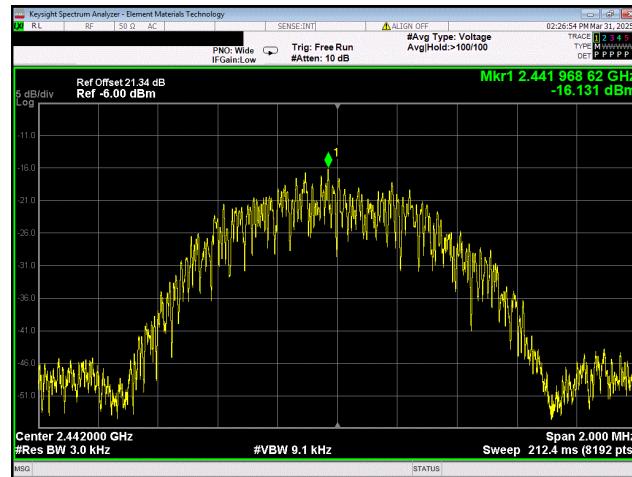

**BLE/GFSK 1 Mbps
Mid Channel, 2442 MHz**


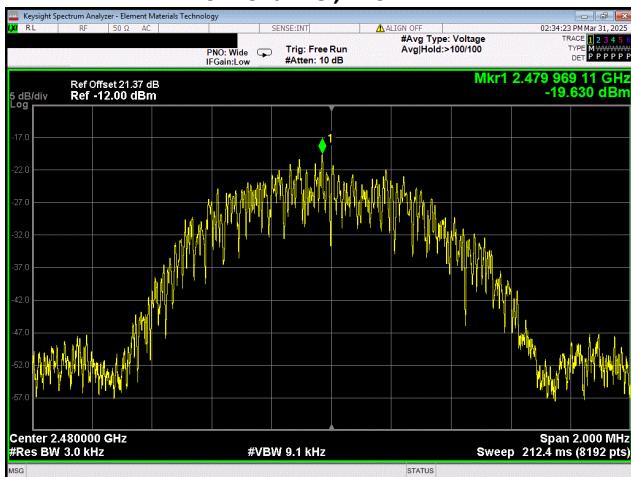


**BLE/GFSK 1 Mbps
High Channel, 2480 MHz**

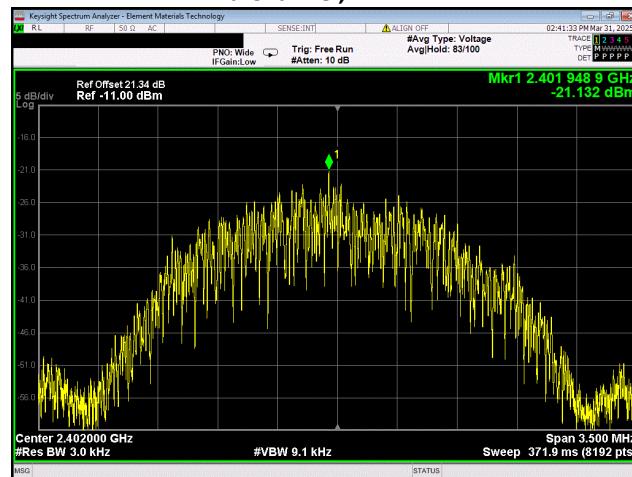

**BLE/GFSK 2 Mbps
Low Channel, 2402 MHz**

POWER SPECTRAL DENSITY

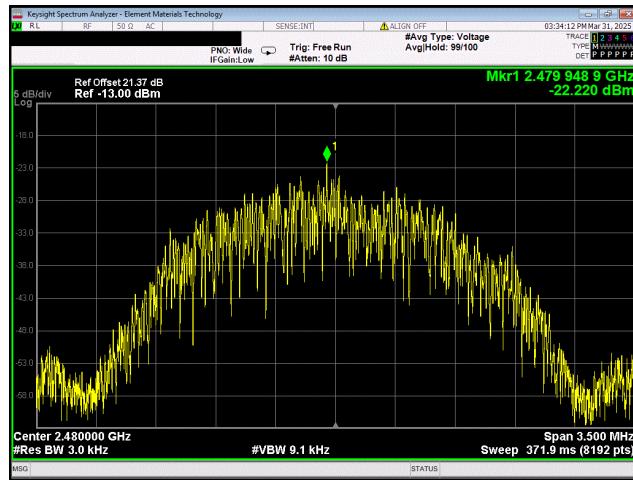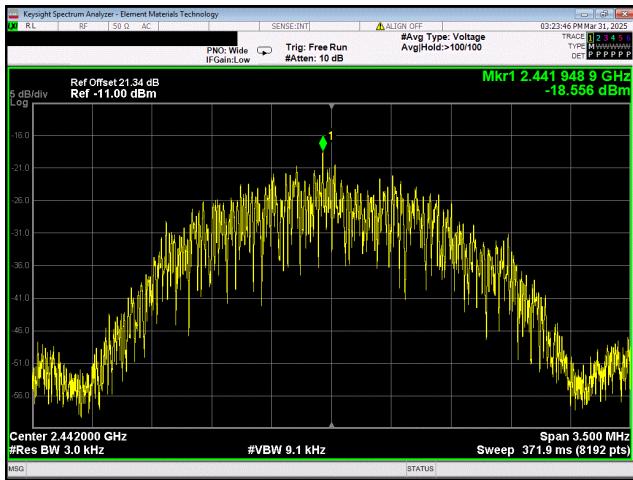

BAND EDGE COMPLIANCE

TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in each available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge. The analyzer screen captures for this test show an example of the emission mask for the test mode also used during the radiated spurious emissions at the restricted band edges test.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2024-05-22	2025-05-22
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2024-08-28	2025-08-28
Block - DC	Fairview Microwave	SD3379	ANH	2024-08-28	2025-08-28
Attenuator	S.M. Electronics	SA26B-20	RFW	2025-02-03	2026-02-03
Generator - Signal	Agilent	N5183A	TIK	2025-02-13	2028-02-13

BAND EDGE COMPLIANCE



EUT:	G Series AI RIC R	Work Order:	STAK0362
Serial Number:	250579977	Date:	2025-03-31
Customer:	Starkey Laboratories, Inc.	Temperature:	22°C
Attendees:	John Quach	Relative Humidity:	27.6%
Customer Project:	None	Bar. Pressure (PMSL):	1018 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery	Configuration:	STAK0362-1

COMMENTS

Power 4 dBm

DEVIATIONS FROM TEST STANDARD

None

CONCLUSION


Pass

Tested By

TEST RESULTS

	Value (dBc)	Limit ≤ (dBc)	Result
BLE/GFSK 1 Mbps			
Low Channel, 2402 MHz	-36.52	-20	Pass
High Channel, 2480 MHz	-44.29	-20	Pass
BLE/GFSK 2 Mbps			
Low Channel, 2402 MHz	-27.84	-20	Pass
High Channel, 2480 MHz	-42.79	-20	Pass


BAND EDGE COMPLIANCE

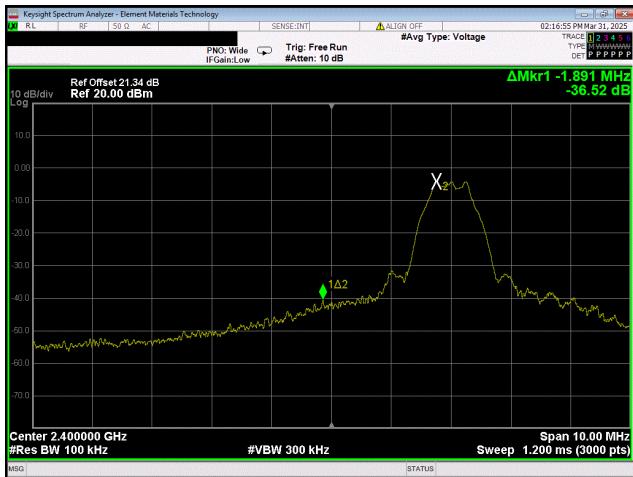


BLE/GFSK 1 Mbps
Low Channel, 2402 MHz



BLE/GFSK 1 Mbps
High Channel, 2480 MHz

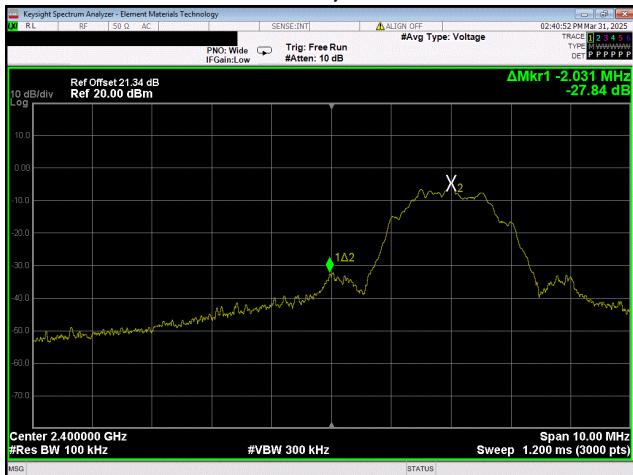

BLE/GFSK 2 Mbps
Low Channel, 2402 MHz

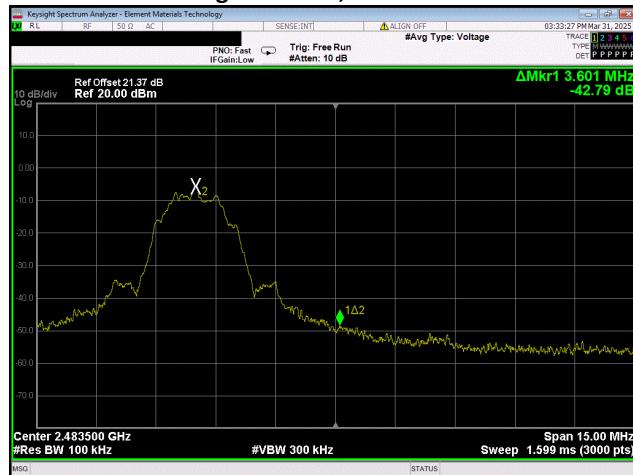

BLE/GFSK 2 Mbps
High Channel, 2480 MHz

SPURIOUS CONDUCTED EMISSIONS



TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The spurious RF conducted emissions were measured with the EUT set to low, medium and high transmit frequencies. The EUT was transmitting at the data rate(s) listed in the datasheet. For each transmit frequency, the fundamental was measured with a 100 kHz resolution bandwidth and the highest value was recorded. The rest of the spectrum was then measured with a 100 kHz resolution bandwidth and the highest value was found. The difference between the value found on the fundamental and the rest of the spectrum was compared against the limit to determine compliance.

The reference level offset for the fundamental screen capture was based on a measured value of the loss between the spectrum analyzer and the EUT which was verified at the time of test. The remaining screen capture(s) use an internal transducer factor on the analyzer to correct the displayed trace based on the cable loss over frequency. The reference level offset for the additional screen capture(s) is then based on the expected attenuator value and any other losses.

Fundamental Offset = Ref Lvl Offset showing measured composite factor of all losses

Remaining Screen capture(s) Offset = "Internal" cable loss factor not shown on screen capture + Ref Lvl Offset showing expected attenuator value and any other losses

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	2024-05-22	2025-05-22
Cable	Micro-Coax	UFD150A-1-0720-200200	MNL	2024-08-28	2025-08-28
Block - DC	Fairview Microwave	SD3379	ANH	2024-08-28	2025-08-28
Attenuator	S.M. Electronics	SA26B-20	RFW	2025-02-03	2026-02-03
Generator - Signal	Agilent	N5183A	TIK	2025-02-13	2028-02-13

SPURIOUS CONDUCTED EMISSIONS



EUT:	G Series AI RIC R	Work Order:	STAK0362
Serial Number:	250579977	Date:	2025-03-31
Customer:	Starkey Laboratories, Inc.	Temperature:	22°C
Attendees:	John Quach	Relative Humidity:	27.4%
Customer Project:	None	Bar. Pressure (PMSL):	1018 mbar
Tested By:	Christopher Heintzelman	Job Site:	MN11
Power:	Battery	Configuration:	STAK0362-2

COMMENTS

Power 4 dBm

DEVIATIONS FROM TEST STANDARD

None

CONCLUSION

Pass

Tested By


TEST RESULTS

	Frequency Range	Measured Freq (MHz)	Max Value (dBc)	Limit ≤ (dBc)	Result
BLE/GFSK 1 Mbps					
Low Channel, 2402 MHz	Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	2402.01 1850.79 24929.8	N/A -31.79 -32.66	N/A -20 -20	N/A Pass Pass
Mid Channel, 2442 MHz	Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	2442 1853.84 24826.03	N/A -35.85 -35.65	N/A -20 -20	N/A Pass Pass
High Channel, 2480 MHz	Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	2480 1855.36 24993.9	N/A -40.9 -31.65	N/A -20 -20	N/A Pass Pass
BLE/GFSK 2 Mbps					
Low Channel, 2402 MHz	Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	2402 1858.41 24961.85	N/A -33.75 -32.32	N/A -20 -20	N/A Pass Pass
Mid Channel, 2442 MHz	Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	2441.99 1753.36 24963.37	N/A -35.71 -35.21	N/A -20 -20	N/A Pass Pass
High Channel, 2480 MHz	Fundamental 30 MHz - 12.5 GHz 12.5 GHz - 25 GHz	2480 1858.41 24957.27	N/A -33.01 -31.08	N/A -20 -20	N/A Pass Pass


SPURIOUS CONDUCTED EMISSIONS




BLE/GFSK 1 Mbps
Low Channel, 2402 MHz

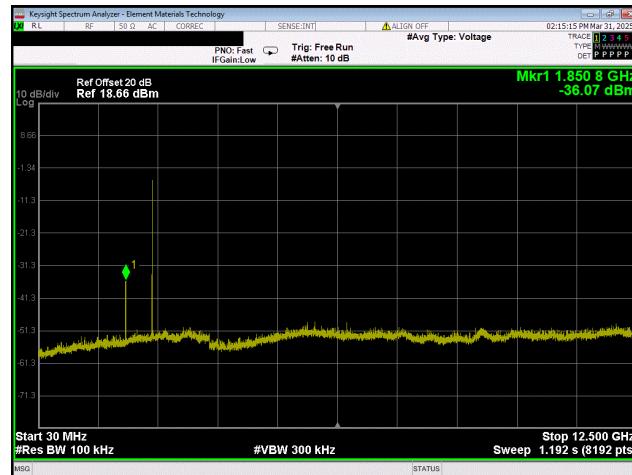


BLE/GFSK 1 Mbps
Low Channel, 2402 MHz

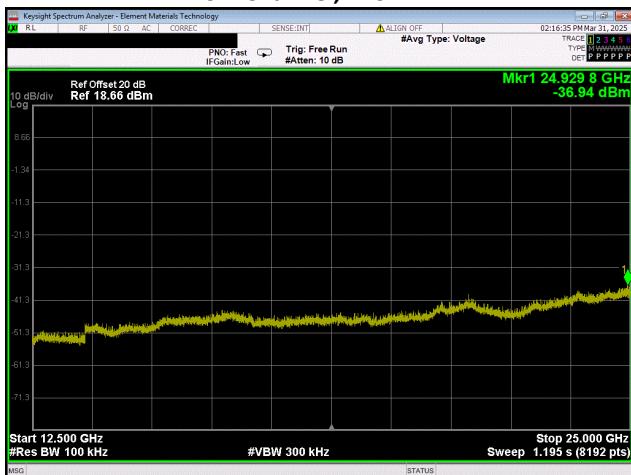


BLE/GFSK 1 Mbps
Low Channel, 2402 MHz

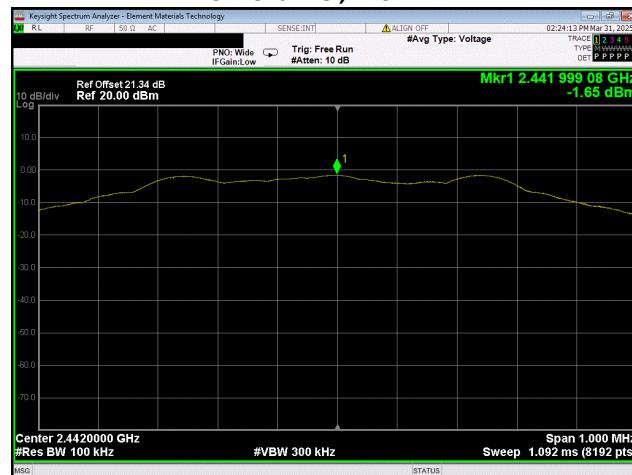

BLE/GFSK 1 Mbps
Low Channel, 2402 MHz

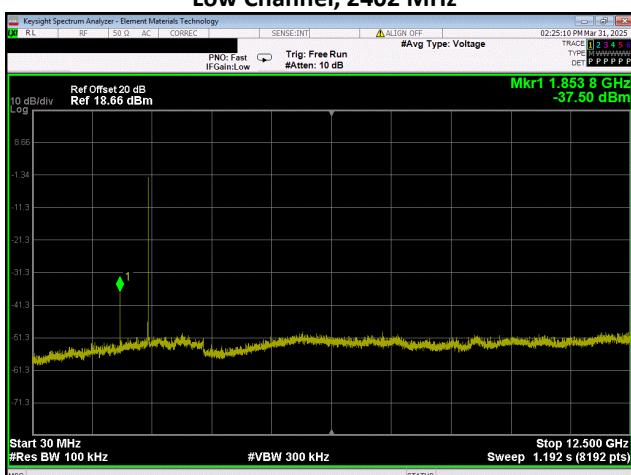

BLE/GFSK 1 Mbps
Mid Channel, 2442 MHz

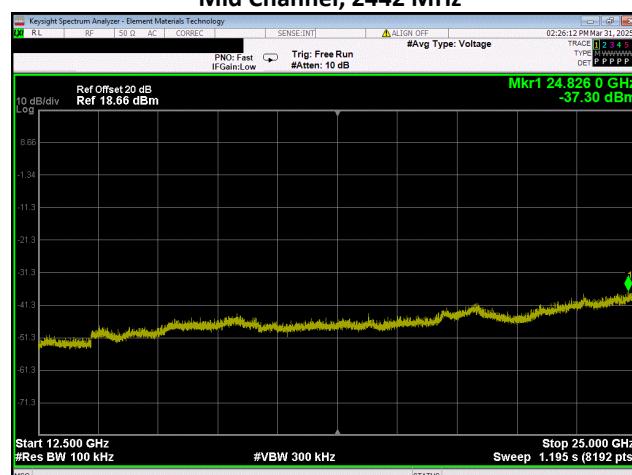


BLE/GFSK 1 Mbps
Mid Channel, 2442 MHz


SPURIOUS CONDUCTED EMISSIONS




BLE/GFSK 1 Mbps
High Channel, 2480 MHz

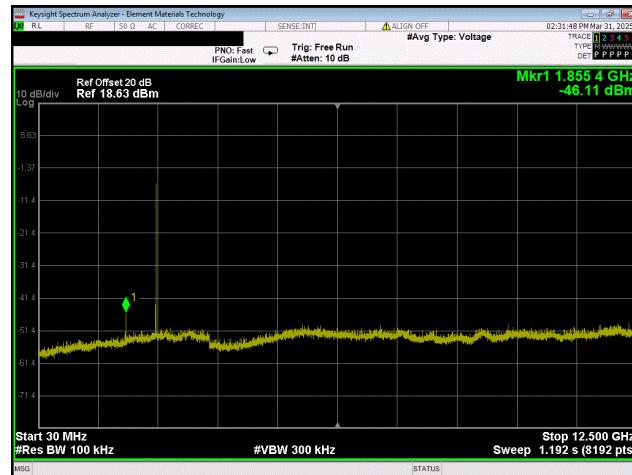


BLE/GFSK 1 Mbps
High Channel, 2480 MHz

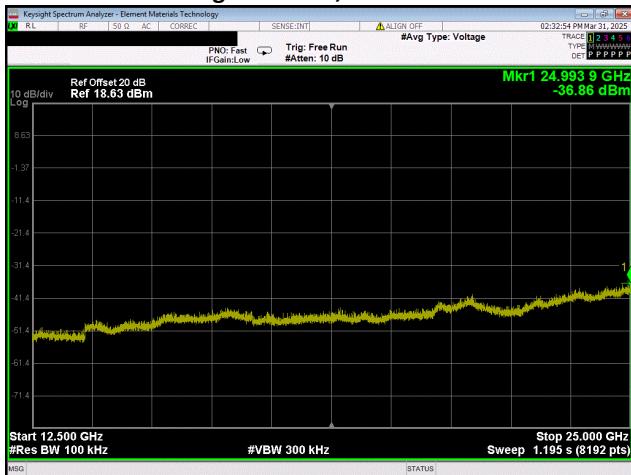


BLE/GFSK 1 Mbps
High Channel, 2480 MHz

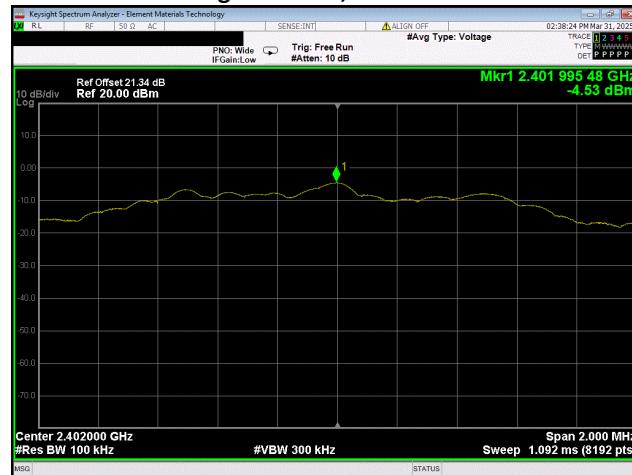

BLE/GFSK 1 Mbps
High Channel, 2480 MHz

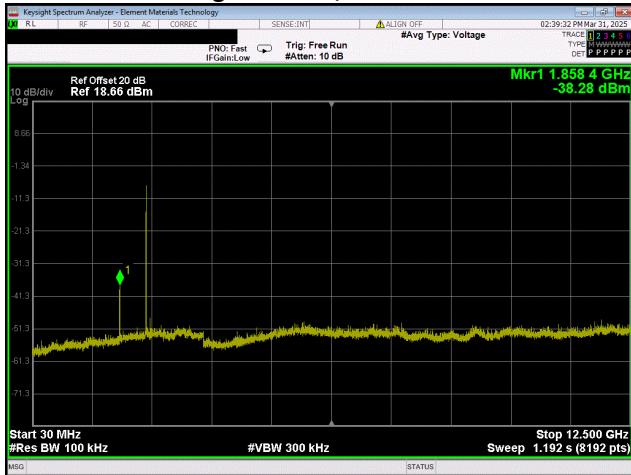

BLE/GFSK 2 Mbps
Low Channel, 2402 MHz

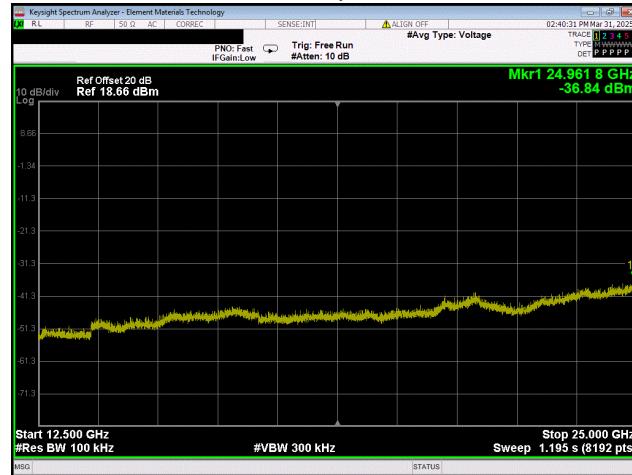


BLE/GFSK 2 Mbps
Low Channel, 2402 MHz

SPURIOUS CONDUCTED EMISSIONS




BLE/GFSK 2 Mbps
Mid Channel, 2442 MHz

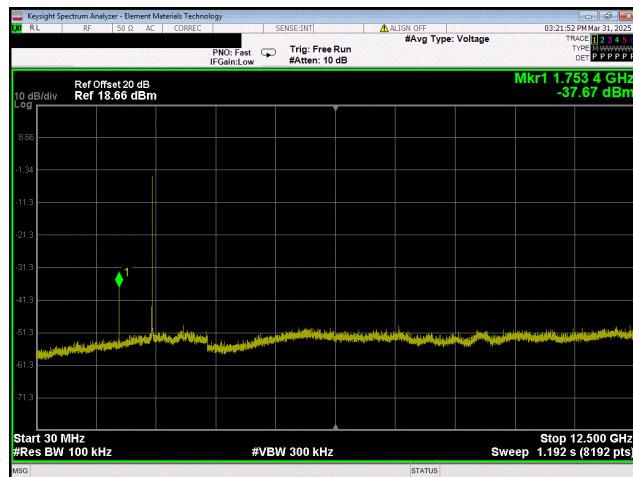

BLE/GFSK 2 Mbps
Mid Channel, 2442 MHz




BLE/GFSK 2 Mbps
Mid Channel, 2442 MHz

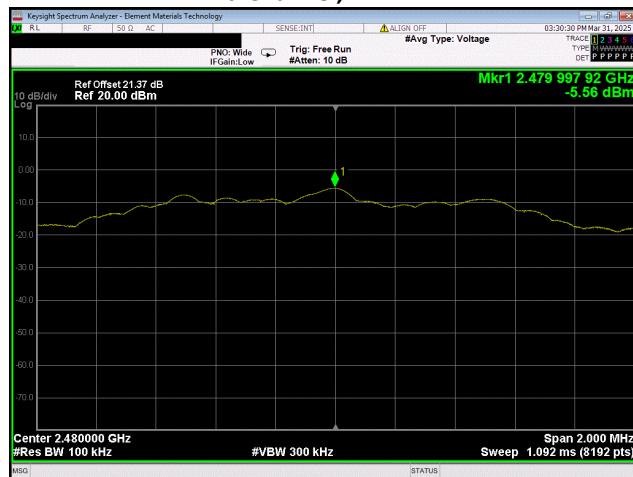


BLE/GFSK 2 Mbps
High Channel, 2480 MHz

SPURIOUS CONDUCTED EMISSIONS

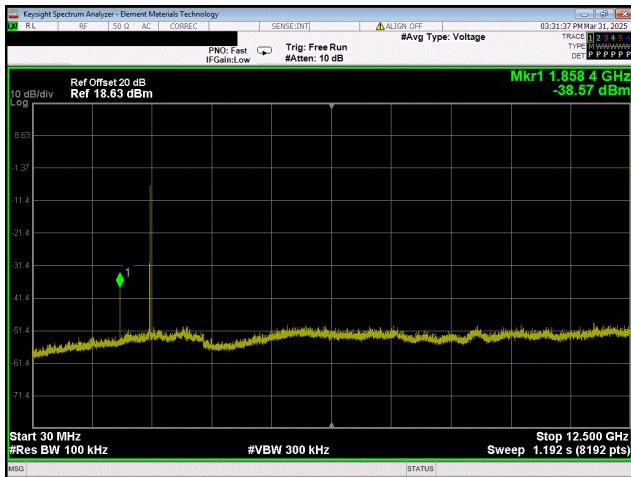

BLE/GFSK 2 Mbps
High Channel, 2480 MHz

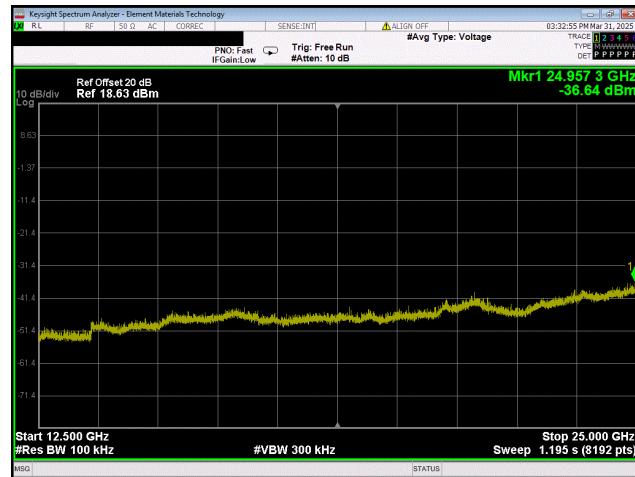

BLE/GFSK 2 Mbps
High Channel, 2480 MHz

RADIATED SPURIOUS EMISSIONS RESTRICTED BAND EDGE



TEST DESCRIPTION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer.

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as shown in the data sheets.

The emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axes if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and attenuation were used (if needed) for this test to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

PK = Peak Detector

AV = RMS Detector

Measurements within 2 MHz of the allowable band may have been taken using the integration method from ANSI C63.10 clause 11.13.3. This procedure uses the channel power feature of the spectrum analyzer to integrate the power of the emission within a 1 MHz bandwidth.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula $10 \times \log(1/dc)$.

RMS measurements taken for a FHSS radio also may have a duty cycle correction subtracted using the formula $10 \times \log(DC)$, where DC is the worst-case dwell time of the radio while in a hopping mode in a 100 ms period.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Antenna - Double Ridge	ETS Lindgren	3115	AIP	2024-08-02	2026-08-02
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	2024-11-26	2025-11-26
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	2025-01-08	2026-01-08
Attenuator	Fairview Microwave	SA18H-20	VAF	2024-08-25	2025-08-25
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAQ	2025-04-11	2026-04-11

RADIATED SPURIOUS EMISSIONS RESTRICTED BAND EDGE



EUT:	G Series RIC R hearing aid	Work Order:	STAK0362
Serial Number:	250579971	Date:	2025-05-06
Customer:	Starkey Laboratories, Inc.	Temperature:	22.7°C
Attendees:	John Quach	Relative Humidity:	40.8%
Customer Project:	None	Bar. Pressure (PMSL):	1015 mbar
Tested By:	Arnauld Dedy	Job Site:	MN05
Power:	Battery	Configuration:	STAK0362-1

COMMENTS

The duty cycle correction applied is explained in the Spurious Emissions section.

DEVIATIONS FROM TEST STANDARD

None

CONCLUSION





Pass

Tested By

TEST RESULTS

	Frequency (MHz)	PK (dBuV/m) AV (dBuV/m)	PK Lim (dBuV/m) AV Lim (dBuV/m)	Worst Margin (dB)	Pol. (H/V)	EUT Orientation	Results
BLE/GFSK 1 Mbps							
Low Channel, 2402 MHz	2388.692	58.3	74.0	-12.9	H	Horizontal	Pass
	2385.000	41.1	54.0		V	on Side	Pass
	2386.291	58.4	74.0	-12.9			
	2385.000	41.1	54.0				
High Channel, 2480 MHz	2486.624	59.2	74.0	-12.0	H	on Side	Pass
	2483.503	42.0	54.0		V	on Side	Pass
	2483.923	59.5	74.0	-11.9			
	2483.503	42.1	54.0				
	2483.893	60.3	74.0	-12.0	V	Vertical	Pass
	2483.508	42.0	54.0				
	2487.464	60.0	74.0	-12.0	H	Vertical	Pass
	2483.503	42.0	54.0				
	2484.863	60.5	74.0	-11.8	H	Horizontal	Pass
	2483.503	42.2	54.0				
BLE/GFSK 2 Mbps	2484.313	59.6	74.0	-12.0	V	Horizontal	Pass
	2483.503	42.0	54.0				
Low Channel, 2402 MHz	2387.626	58.8	74.0	-13.6	V	on Side	Pass
	2389.817	40.4	54.0				
	2385.780	58.5	74.0	-13.7	H	Horizontal	Pass
	2385.000	40.3	54.0				
High Channel, 2480 MHz	2485.198	59.9	74.0	-12.9	V	On Side	Pass
	2483.528	41.1	54.0				
	2485.764	59.5	74.0	-12.8	H	Horizontal	Pass
	2483.503	41.2	54.0				

RADIATED SPURIOUS EMISSIONS RESTRICTED BAND EDGE

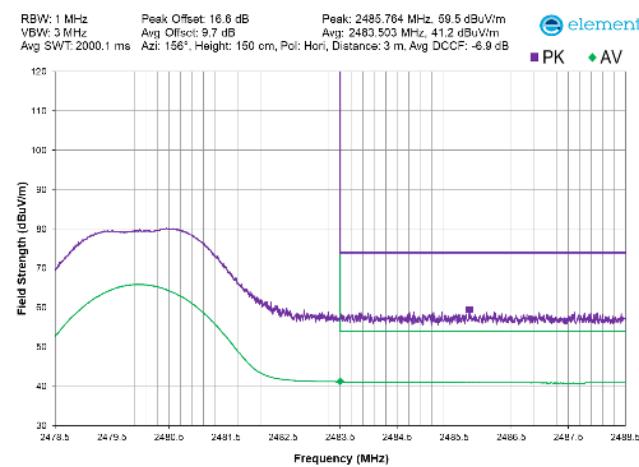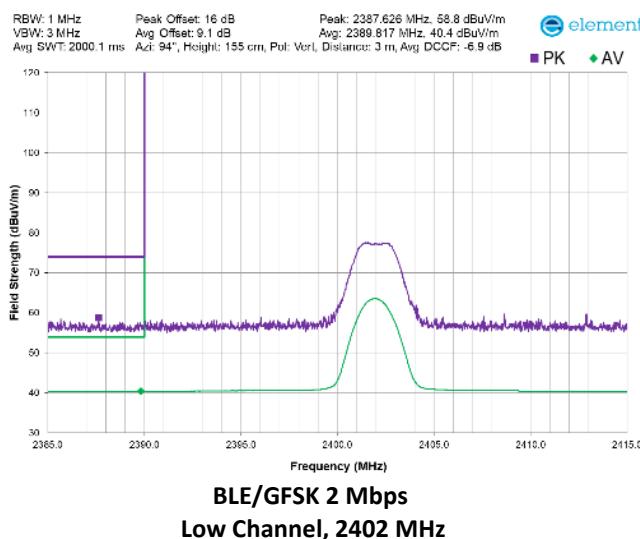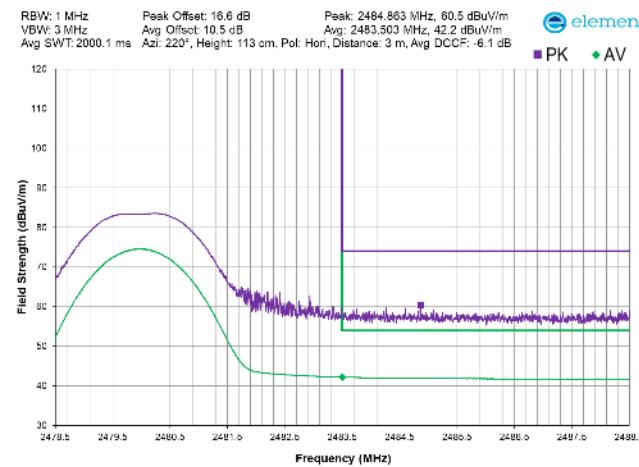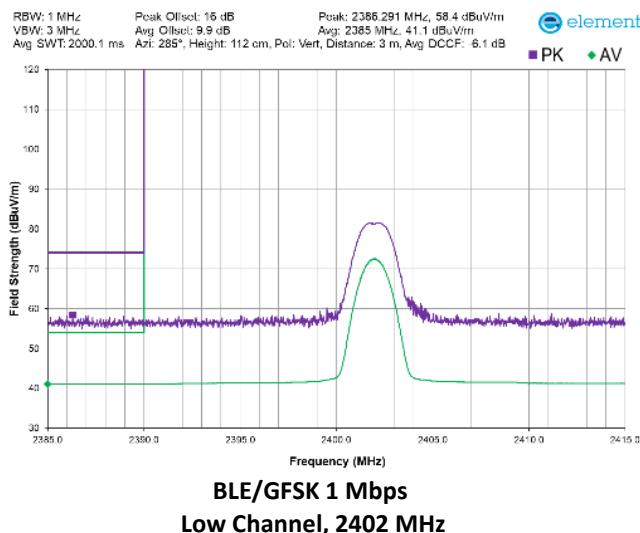

SPURIOUS RADIATED EMISSIONS



TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as shown in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. A reference preview scan (pre-scan) is included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axes if required, and adjusting the measurement antenna height and polarization (per ANSI C63.10). A preamp and high pass filter (and notch filter) were used for this test to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out-of-band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of $10^{\ast}\log(1/dc)$.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Antenna - Double Ridge	ETS Lindgren	3115	AIP	2024-08-02	2026-08-02
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	2024-11-26	2025-11-26
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	2025-01-08	2026-01-08
Attenuator	Fairview Microwave	SA18H-20	VAF	2024-08-25	2025-08-25
Filter - High Pass	Micro-Tronics	HPM50111	LFN	2024-08-25	2025-08-25
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	NCR
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	2024-11-26	2025-11-26
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	2025-01-08	2026-01-08
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	2025-02-04	2026-02-04
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	2025-01-08	2026-01-08
Antenna - Standard Gain	ETS Lindgren	3160-09	AHG	2025-02-04	2026-02-04
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNP	2024-09-05	2025-09-05
Amplifier - Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	2024-09-05	2025-09-05
Antenna - Loop	ETS Lindgren	6502	AOB	2023-06-12	2025-06-12
Cable	ESM Cable Corp.	Bilog Cables	MNH	2024-11-26	2025-11-26
Analyzer - Spectrum Analyzer	Agilent	E4446A	AAT	2025-01-08	2026-01-08
Antenna - Biconilog	Ametek	CBL 6141B	AYS	2025-04-29	2027-04-29
Amplifier - Pre-Amplifier	Miteq	AM-1064-9079 and SA18E-10	AOO	2025-01-30	2026-01-30

FREQUENCY RANGE INVESTIGATED

9 kHz TO 26000 MHz

POWER INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

STAK0362-1

MODES INVESTIGATED

BLE Transmitting Low, Mid, and High Chs (2402, 2442, and 2480 MHz), 1 and 2 Mbps, Power setting +4 dBm

SPURIOUS RADIATED EMISSIONS

EUT:	G Series AI RIC R	Work Order:	STAK0362
Serial Number:	250579971	Date:	2025-04-03
Customer:	Starkey Laboratories, Inc.	Temperature:	22.1°C
Attendees:	John Quach	Relative Humidity:	30.3%
Customer Project:	None	Bar. Pressure (PMSL):	1016 mb
Tested By:	Arnauld Dedry	Job Site:	MN05
Power:	Battery	Configuration:	STAK0362-1

TEST PARAMETERS

Run #:	11	Test Distance (m):	3	Ant. Height(s) (m):	1 to 4(m)
--------	----	--------------------	---	---------------------	-----------

COMMENTS


None

EUT OPERATING MODES

Transmitting Bluetooth Low Energy (BLE) on Low, Mid, and High Chs (2402, 2442, and 2480 MHz), 1 and 2 Mbps. Power setting +4 dBm. The test mode duty cycle is 65% (1 Mbps) and 35% (2 Mbps). The operational duty cycle is limited to 16%(1 Mbps) and 7% (2Mbps). A duty cycle correction factor was added using DCCF(1Mbps)=10*log(1/.65)+10*log(.16)=-6.1, and DCCF(2Mbps)=10*log(1/.35)+10*log(.07)=-6.9

DEVIATIONS FROM TEST STANDARD

None

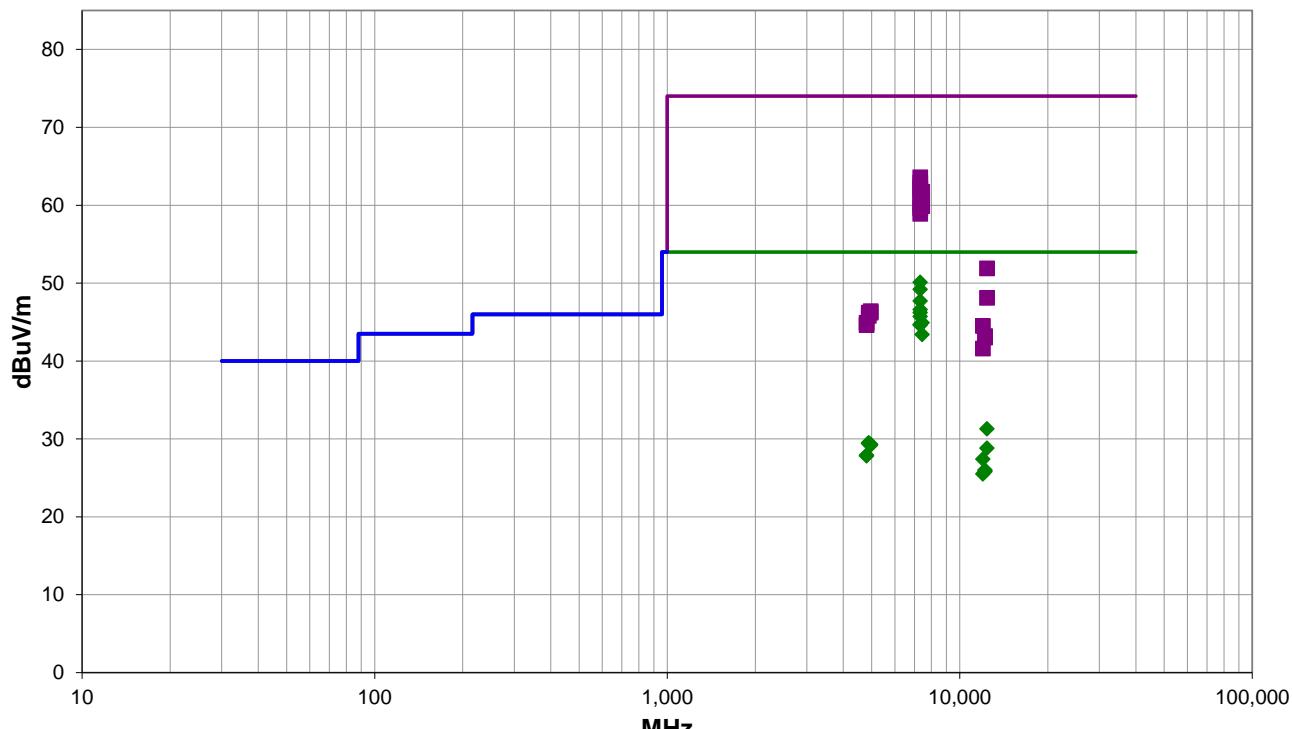

Run #: 11

PK AV QP

SPURIOUS RADIATED EMISSIONS

RESULTS - Run #11

Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor	External Attenuation (dB)	Polarity/ Transducer	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
7325.400	43.0	13.2	2.7	221.9	-6.1	0.0	Horz	AV	0.0	50.1	54.0	-3.9	Eut On Side, Mid Ch, 1 Mbps
7325.442	42.1	13.2	1.4	121.9	-6.1	0.0	Vert	AV	0.0	49.2	54.0	-4.8	Eut Vert, Mid Ch, 1 Mbps
7325.392	40.6	13.2	3.6	98.0	-6.1	0.0	Vert	AV	0.0	47.7	54.0	-6.3	Eut Horz, Mid Ch, 1 Mbps
7324.592	39.9	13.2	2.8	263.0	-6.9	0.0	Horz	AV	0.0	46.2	54.0	-7.8	Eut On Side, Mid Ch, 2 Mbps
7325.350	39.5	13.2	1.7	112.0	-6.1	0.0	Horz	AV	0.0	46.6	54.0	-7.4	Eut Horz, Mid Ch, 1 Mbps
7325.392	38.6	13.2	1.3	121.9	-6.1	0.0	Horz	AV	0.0	45.7	54.0	-8.3	Eut Vert, Mid Ch, 1 Mbps
7324.517	38.3	13.2	2.8	123.0	-6.9	0.0	Vert	AV	0.0	44.6	54.0	-9.4	Eut Vert, Mid Ch, 2 Mbps
7438.583	37.3	13.7	2.9	274.0	-6.1	0.0	Vert	AV	0.0	44.9	54.0	-9.1	Eut Vert, High Ch, 1 Mbps
7325.367	37.6	13.2	3.1	285.0	-6.1	0.0	Vert	AV	0.0	44.7	54.0	-9.3	Eut On Side, Mid Ch, 1 Mbps
7438.558	35.8	13.7	1.5	252.0	-6.1	0.0	Horz	AV	0.0	43.4	54.0	-10.6	Eut On Side, Low Ch, 1 Mbps
7327.550	50.4	13.2	2.8	263.0	0.0	0.0	Horz	PK	0.0	63.6	74.0	-10.4	Eut On Side, Mid Ch, 2 Mbps
7326.825	49.7	13.2	2.7	221.9	0.0	0.0	Horz	PK	0.0	62.9	74.0	-11.1	Eut On Side, Mid Ch, 1 Mbps
7326.400	49.0	13.2	1.4	121.9	0.0	0.0	Vert	PK	0.0	62.2	74.0	-11.8	Eut Vert, Mid Ch, 1 Mbps
7327.500	48.7	13.2	2.8	123.0	0.0	0.0	Vert	PK	0.0	61.9	74.0	-12.1	Eut Vert, Mid Ch, 2 Mbps
7438.592	48.0	13.7	2.9	274.0	0.0	0.0	Vert	PK	0.0	61.7	74.0	-12.3	Eut Vert, High Ch, 1 Mbps
7326.550	47.7	13.2	3.6	98.0	0.0	0.0	Vert	PK	0.0	60.9	74.0	-13.1	Eut Horz, Mid Ch, 1 Mbps
7326.867	46.9	13.2	1.7	112.0	0.0	0.0	Horz	PK	0.0	60.1	74.0	-13.9	Eut Horz, Mid Ch, 1 Mbps
7441.575	46.2	13.7	1.5	252.0	0.0	0.0	Horz	PK	0.0	59.9	74.0	-14.1	Eut On Side, Low Ch, 1 Mbps
7326.533	46.4	13.2	1.3	121.9	0.0	0.0	Horz	PK	0.0	59.6	74.0	-14.4	Eut Vert, Mid Ch, 1 Mbps
7326.425	45.7	13.2	3.1	285.0	0.0	0.0	Vert	PK	0.0	58.9	74.0	-15.1	Eut On Side, Mid Ch, 1 Mbps
12397.510	37.7	-0.3	2.1	285.0	-6.1	0.0	Horz	AV	0.0	31.3	54.0	-22.7	Eut On Side, High Ch, 1 Mbps
4886.142	30.2	5.4	1.5	59.0	-6.1	0.0	Horz	AV	0.0	29.5	54.0	-24.5	Eut On Side, Mid Ch, 1 Mbps
4881.608	30.1	5.4	1.6	148.0	-6.1	0.0	Vert	AV	0.0	29.4	54.0	-24.6	Eut Vert, Mid Ch, 1 Mbps
4958.925	29.5	5.9	1.5	38.9	-6.1	0.0	Horz	AV	0.0	29.3	54.0	-24.7	Eut On Side, Low Ch, 1 Mbps
4958.317	29.4	5.9	3.7	52.0	-6.1	0.0	Vert	AV	0.0	29.2	54.0	-24.8	Eut Vert, High Ch, 1 Mbps
12397.550	35.2	-0.3	2.5	153.0	-6.1	0.0	Vert	AV	0.0	28.8	54.0	-25.2	Eut Vert, High Ch, 1 Mbps
4802.975	29.3	4.7	1.5	23.9	-6.1	0.0	Horz	AV	0.0	27.9	54.0	-26.1	Eut On Side, Low Ch, 1 Mbps
4803.142	29.2	4.7	1.5	81.0	-6.1	0.0	Vert	AV	0.0	27.8	54.0	-26.2	Eut Vert, Low Ch, 1 Mbps
12008.730	35.9	-2.4	3.5	34.9	-6.1	0.0	Horz	AV	0.0	27.4	54.0	-26.6	Eut On Side, Low Ch, 1 Mbps
12208.890	33.2	-1.1	2.9	234.0	-6.1	0.0	Horz	AV	0.0	26.0	54.0	-28.0	Eut On Side, Mid Ch, 1 Mbps
12399.930	52.2	-0.3	2.1	285.0	0.0	0.0	Horz	PK	0.0	51.9	74.0	-22.1	Eut On Side, Mid Ch, 1 Mbps
12208.420	33.0	-1.1	3.4	210.9	-6.1	0.0	Vert	AV	0.0	25.8	54.0	-28.2	Eut Vert, Mid Ch, 1 Mbps
12008.680	34.0	-2.4	2.1	292.0	-6.1	0.0	Vert	AV	0.0	25.5	54.0	-28.5	Eut On Side, Low Ch, 1 Mbps
12399.910	48.4	-0.3	2.5	153.0	0.0	0.0	Vert	PK	0.0	48.1	74.0	-25.9	Eut Vert, High Ch, 1 Mbps
4959.342	40.5	5.9	1.5	38.9	0.0	0.0	Horz	PK	0.0	46.4	74.0	-27.6	Eut On Side, Low Ch, 1 Mbps
4883.467	40.8	5.4	1.6	148.0	0.0	0.0	Vert	PK	0.0	46.2	74.0	-27.8	Eut Vert, Mid Ch, 1 Mbps
4960.767	40.3	5.9	3.7	52.0	0.0	0.0	Vert	PK	0.0	46.2	74.0	-27.8	Eut Vert, High Ch, 1 Mbps
4885.342	40.4	5.4	1.5	59.0	0.0	0.0	Horz	PK	0.0	45.8	74.0	-28.2	Eut On Side, Mid Ch, 1 Mbps
4801.575	40.2	4.7	1.5	23.9	0.0	0.0	Horz	PK	0.0	44.9	74.0	-29.1	Eut On Side, Low Ch, 1 Mbps
4802.258	39.9	4.7	1.5	81.0	0.0	0.0	Vert	PK	0.0	44.6	74.0	-29.4	Eut Vert, Low Ch, 1 Mbps

SPURIOUS RADIATED EMISSIONS



Freq (MHz)	Amplitude (dBuV)	Factor (dB/m)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor	External Attenuation (dB)	Polarity/ Transducer	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
12009.740	46.9	-2.4	3.5	34.9	0.0	0.0	Horz	PK	0.0	44.5	74.0	-29.5	Eut On Side, Low Ch, 1 Mbps
12208.960	44.3	-1.1	2.9	234.0	0.0	0.0	Horz	PK	0.0	43.2	74.0	-30.8	Eut On Side, Mid Ch, 1 Mbps
12208.680	44.1	-1.1	3.4	210.9	0.0	0.0	Vert	PK	0.0	43.0	74.0	-31.0	Eut Vert, Mid Ch, 1 Mbps
12009.890	44.0	-2.4	2.1	292.0	0.0	0.0	Vert	PK	0.0	41.6	74.0	-32.4	Eut On Side, Low Ch, 1 Mbps

CONCLUSION


Pass

Tested By

SPURIOUS RADIATED EMISSIONS

PRESCAN DATA


Radiated spurious emissions from the EUT are initially reviewed with Pre-scans (Preview scans). Pre-scans are performed, with the EUT transmitting on the lowest applicable data rate, for both vertical and horizontal polarizations. The Pre-scan plots below are shown with a peak detector and RBW for the following frequency ranges: 9 kHz RBW (< 30 MHz); 120 kHz RBW (30 - 1000 MHz); 1 MHz RBW (> 1 GHz). In the case where unintentional emissions are observed, an ambient or idle pre-scan with the radio off, will be shown for comparison.

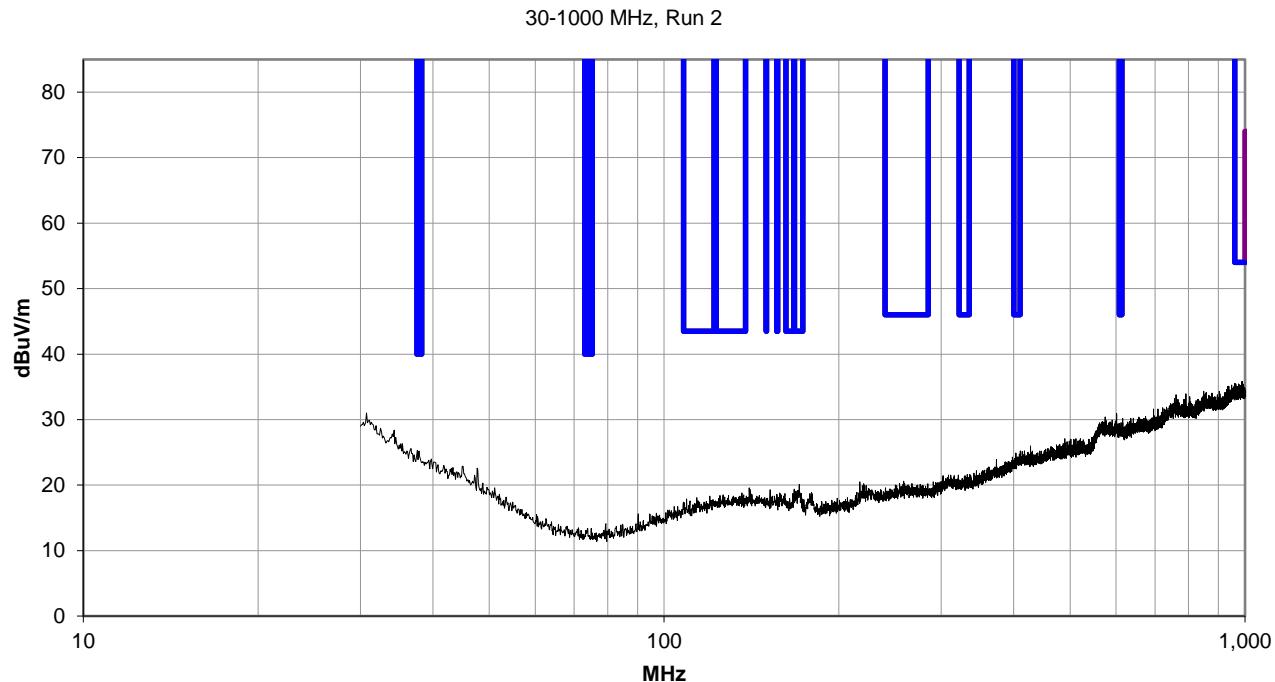


SPURIOUS RADIATED EMISSIONS



0.009-0.49 MHz, Run 21

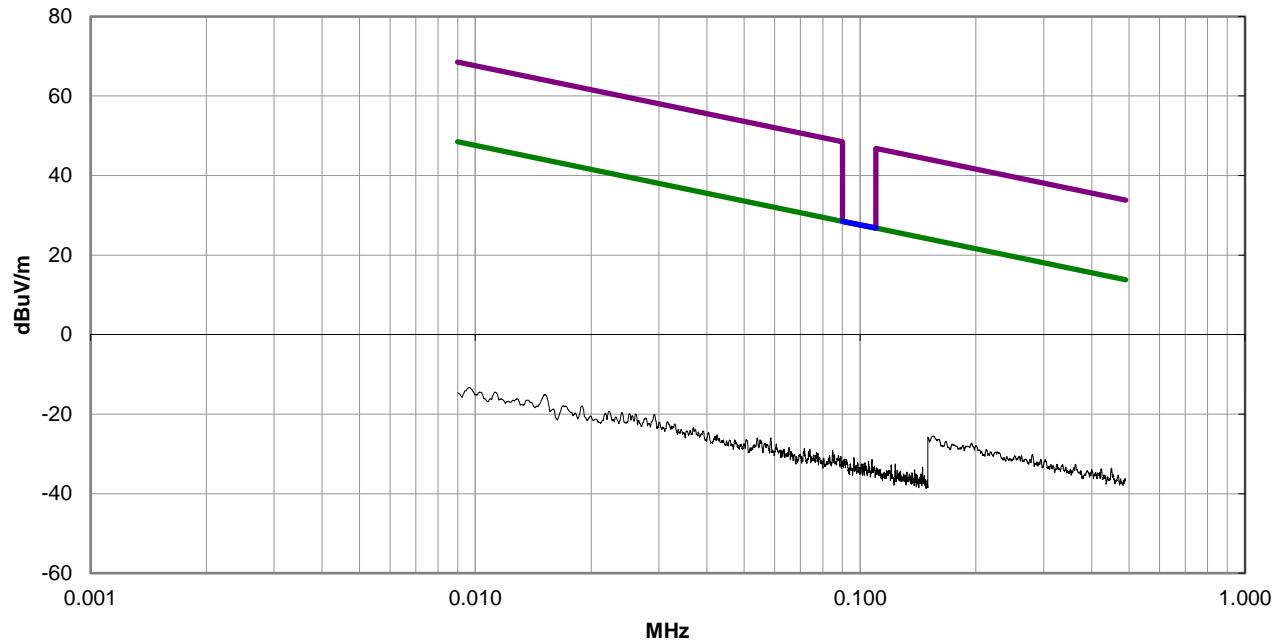


0.49-30 MHz, Run 22

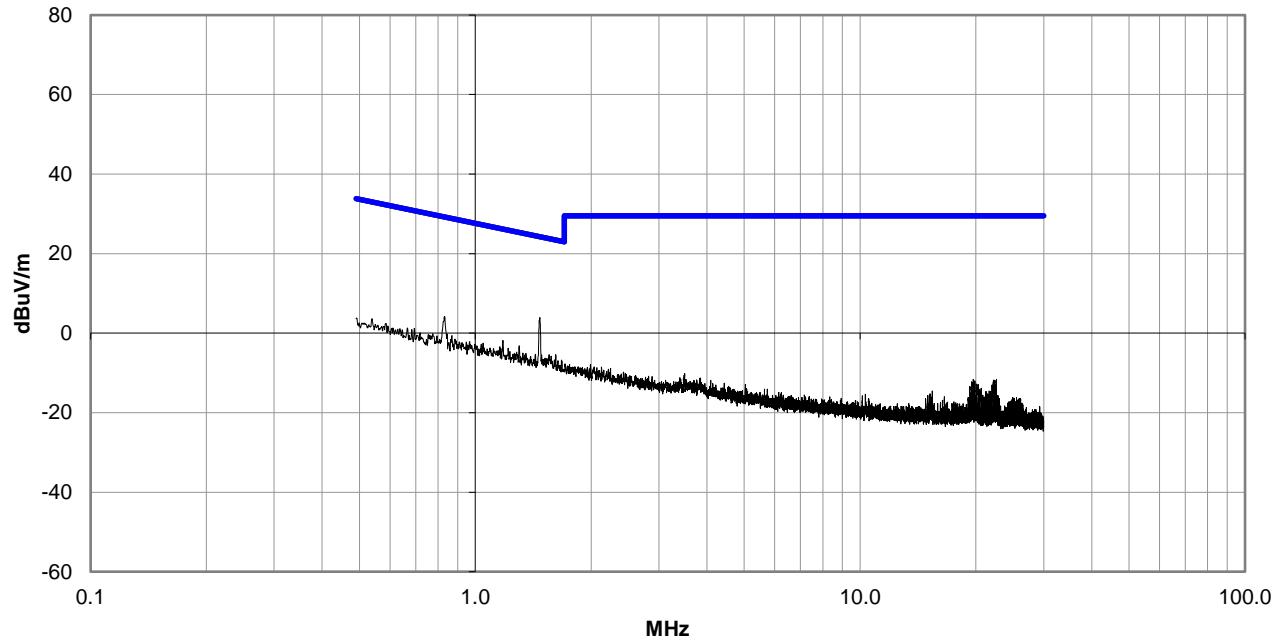


SPURIOUS RADIATED EMISSIONS


1000-3000 MHz, Run 2

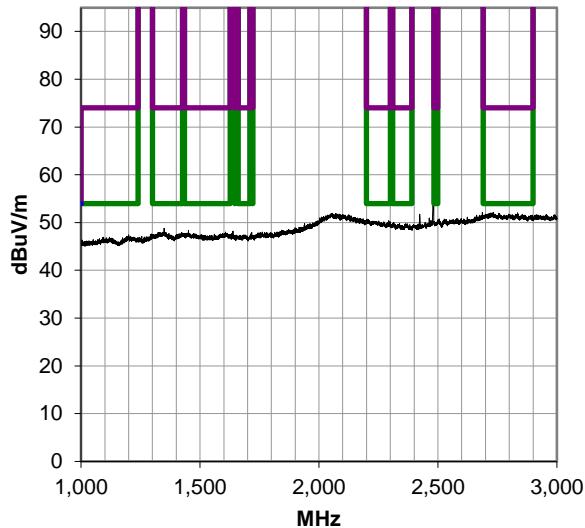


3000-8200 MHz, Run 3

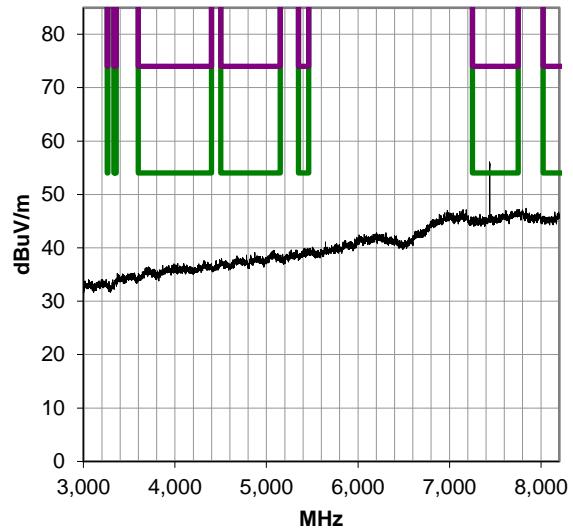

8200-12400 MHz, Run 4

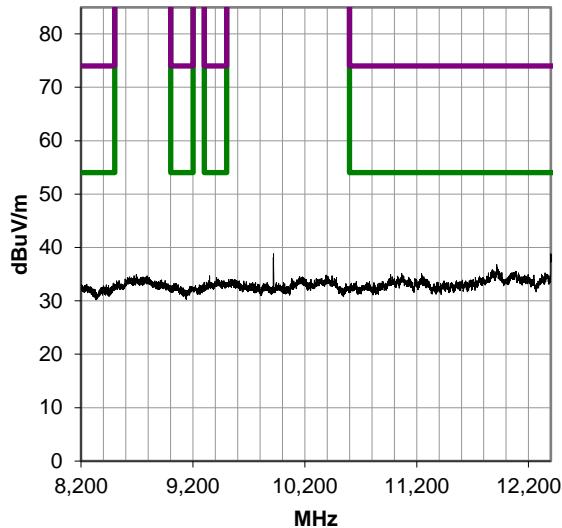


12400-18000 MHz, Run 5

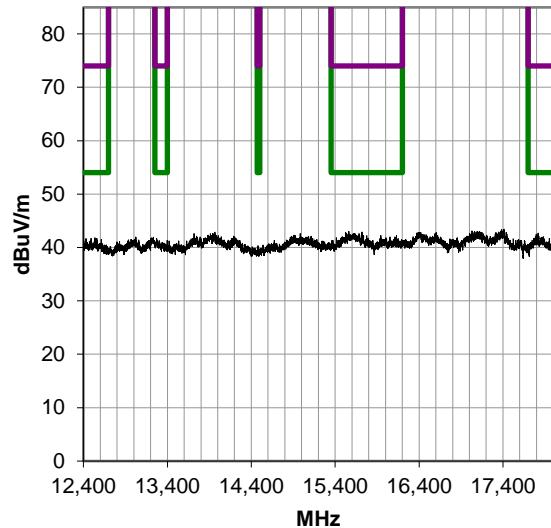

18000-26500 MHz, Run 14

SPURIOUS RADIATED EMISSIONS

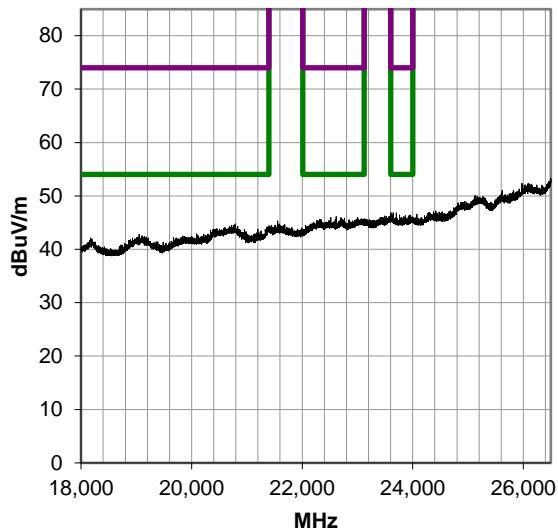

End of Test Report