



REPORT No.: SZ16110119W02

FCC RF TEST REPORT

APPLICANT : Starkey Laboratories, Inc.

PRODUCT NAME : The Dash

MODEL NAME : B1000-001

TRADE NAME : Starkey

BRAND NAME : Starkey

FCC ID : EOA-2AF5TB1001R

STANDARD(S) : 47 CFR Part 15 Subpart C

ISSUE DATE : 2016-12-20



SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
Block67, BaoAn District, ShenZhen , Guangdong Province, P. R. China

Tel: 86-755-36698555
Http://www.morlab.com

Fax: 86-755-36698525
E-mail: service@morlab.cn



DIRECTORY

TEST REPORT DECLARATION	4
1. TECHNICAL INFORMATION	5
1.1 APPLICANT INFORMATION	5
1.2 EQUIPMENT UNDER TEST (EUT) DESCRIPTION	5
1.2.1 IDENTIFICATION OF ALL USED EUTS	5
1.3 TEST STANDARDS AND RESULTS	6
1.3.1 TEST ENVIRONMENT CONDITIONS	6
2. 47 CFR PART 15C REQUIREMENTS	7
2.1 ANTENNA REQUIREMENT	7
2.1.1 APPLICABLE STANDARD	7
2.1.2 RESULT: COMPLIANT	7
2.2 NUMBER OF HOPPING FREQUENCY	7
2.2.1 REQUIREMENT	7
2.2.2 TEST DESCRIPTION	7
2.2.3 TEST PROCEDURE	8
2.2.4 TEST RESULT	8
2.3 PEAK OUTPUT POWER	12
2.3.1 REQUIREMENT	12
2.3.2 TEST DESCRIPTION	12
2.3.3 TEST RESULT	12
2.4 20DB BANDWIDTH	14
2.4.1 DEFINITION	14
2.4.2 TEST DESCRIPTION	14
2.4.3 TEST PROCEDURE	14
2.4.4 TEST RESULT	14
2.5 CARRIED FREQUENCY SEPARATION	24
2.5.1 DEFINITION	24
2.5.2 TEST DESCRIPTION	24
2.5.3 TEST PROCEDURE	24
2.5.4 TEST RESULT	25
2.6 TIME OF OCCUPANCY (DWELL TIME)	28



2.6.1	REQUIREMENT	28
2.6.2	TEST DESCRIPTION	28
2.6.3	TEST PROCEDURE	28
2.6.4	TEST RESULT	29
2.7	CONDUCTED SPURIOUS EMISSIONS	41
2.7.1	REQUIREMENT	41
2.7.2	TEST DESCRIPTION	41
2.7.3	TEST PROCEDURE	41
2.7.4	TEST RESULT	42
2.8	RESTRICTED FREQUENCY BANDS	54
2.8.1	REQUIREMENT	54
2.8.2	TEST DESCRIPTION	54
2.8.3	TEST PROCEDURE	55
2.8.4	TEST RESULT	55
2.9	CONDUCTED EMISSION	63
2.9.1	REQUIREMENT	63
2.9.2	TEST DESCRIPTION	63
2.9.3	TEST RESULT	64
2.10	RADIATED EMISSION	66
2.10.1	REQUIREMENT	66
2.10.2	TEST DESCRIPTION	67
2.10.3	TEST PROCEDURE	69
2.10.4	TEST RESULT	69
ANNEX A GENERAL INFORMATION		79

Change History		
Issue	Date	Reason for change
1.0	2016-12-20	First edition



REPORT No.: SZ16110119W02

TEST REPORT DECLARATION

Applicant	Starkey Laboratories, Inc.
Applicant Address	6600 Washington Avenue, South, Eden Prairie, MN 55344, USA
Manufacturer	Starkey Laboratories, Inc.
Manufacturer Address	6600 Washington Avenue, South, Eden Prairie, MN 55344, USA
Product Name	The Dash
Model Name	B1000-001
Brand Name	Starkey
HW Version	B1.2 for Beta3
SW Version	B3_RC2
Test Standards	47 CFR Part 15 Subpart C
Test Date	2016-08-17 to 2016-11-30
Test Result	PASS

Tested by : Li Jingzong
Li Jingzong

Reviewed by : Qiu Xiaojun
Qiu Xiaojun

Approved by : Peng Huarui
Peng Huarui



1. TECHNICAL INFORMATION

Note: Provide by applicant.

1.1 Applicant Information

Company:	Starkey Laboratories, Inc.
Address:	6600 Washington Avenue, South, Eden Prairie, MN 55344, USA

1.2 Equipment under Test (EUT) Description

Brand Name:	Starkey
Trade Name:	Starkey
Model Name:	B1000-001
Frequency Range:	The frequency range used is 2402MHz – 2480MHz (79 channels, at intervals of 1MHz); The frequency block is 2400MHz to 2483.5MHz.
Modulation Type:	Bluetooth: FHSS (GFSK(1Mbps), $\pi/4$ -DQPSK(EDR 2Mbps), 8-DPSK(EDR 3Mbps))
Bluetooth Version:	Bluetooth 2.1 + EDR
Antenna Type:	LDS Antenna
Antenna Gain:	-5.5 dBi

NOTE:

The EUT is a The Dash, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT into the test mode, and then use MT8852B base station to control the EUT continuous transmission.

For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
01	B1.2 for Beta3	B3_RC2



1.3 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section in CFR 47	Description	Test Date	Result
1	15.203	Antenna Requirement	N.A	<u>N.A</u>
2	15.247(a)	Number of Hopping Frequency	Nov 22, 2016	<u>PASS</u>
3	15.247(b)	Peak Output Power	Nov 22, 2016	<u>PASS</u>
4	15.247(a)	20dB Bandwidth	Nov 22, 2016	<u>PASS</u>
5	15.247(a)	Carrier Frequency Separation	Nov 22, 2016	<u>PASS</u>
6	15.247(a)	Time of Occupancy (Dwell time)	Nov 22, 2016	<u>PASS</u>
7	15.247(d)	Conducted Spurious Emission	Nov 22, 2016	<u>PASS</u>
8	15.247(d)	Restricted Frequency Bands	Nov 30, 2016	<u>PASS</u>
9	15.209 15.247(d)	Radiated Emission	Nov 30, 2016	<u>PASS</u>
10	15.207	Conducted Emission	Nov 30, 2016	<u>PASS</u>

NOTE: The tests were performed according to the method of measurements prescribed in ANSI C63.10-2013 and DA-00-705.

1.3.1 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS

2.1 Antenna requirement

2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.


2.2 Number of Hopping Frequency

2.2.1 Requirement

According to FCC §15.247(a)(1)(iii), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.2.2 Test Description

A. Test Setup:

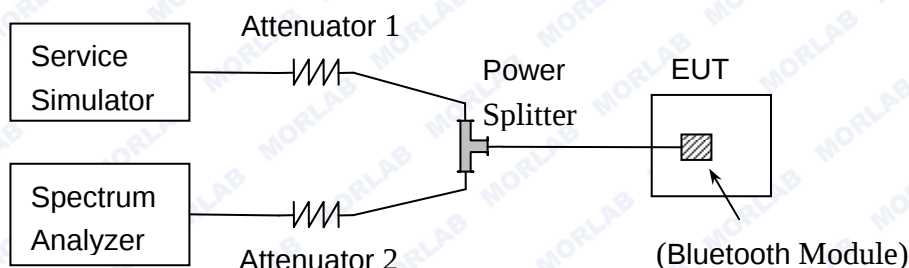

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).



2.2.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW $\geq$ 1% of the span

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize


2.2.4 Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.

A. Test Verdict:


Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS

B. Test Plots:

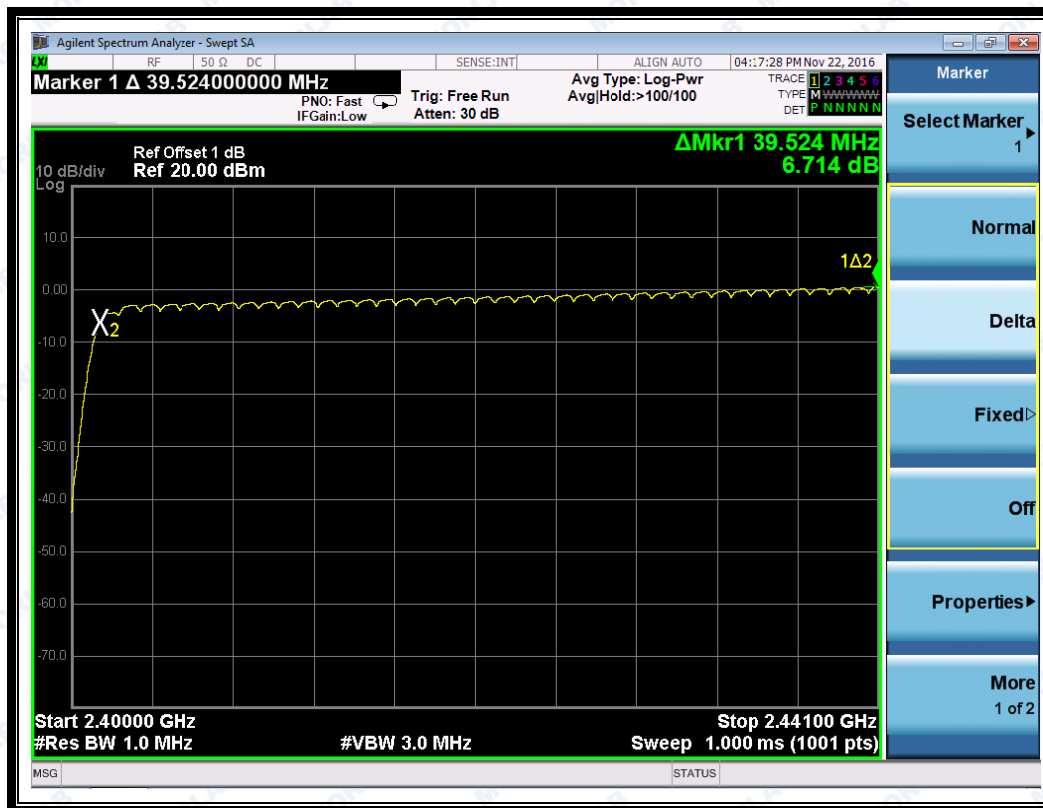



REPORT No.: SZ16110119W02

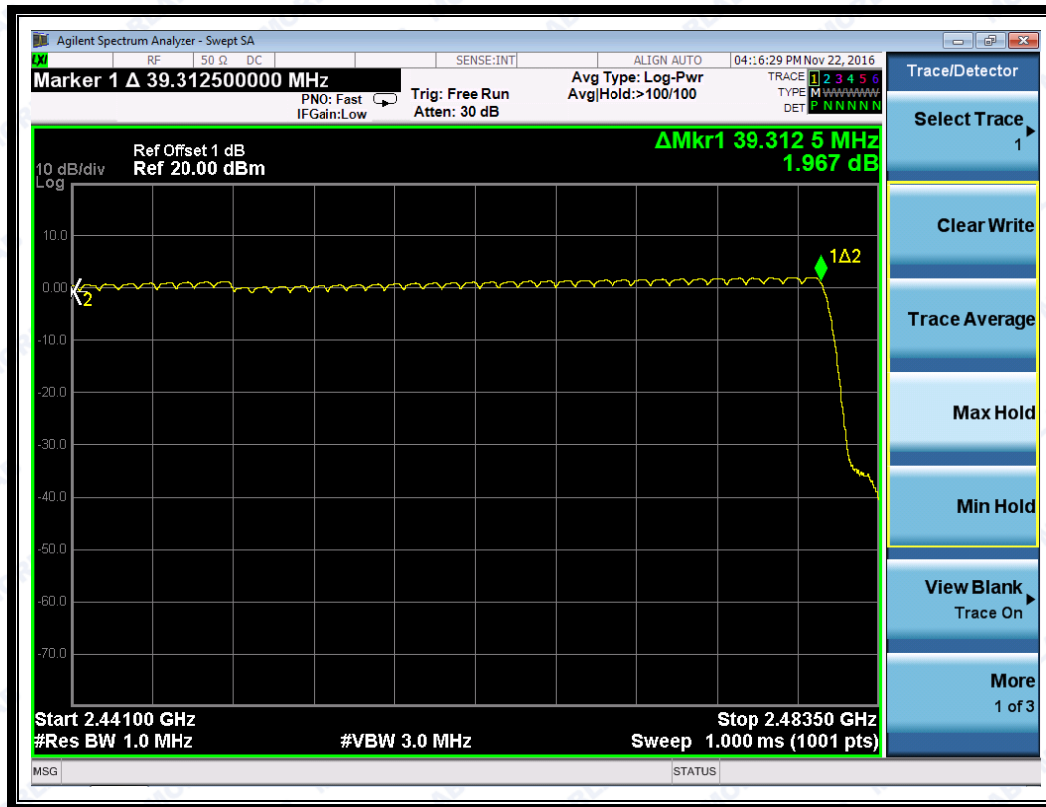

(Plot A: GFSK)

(Plot B: $\pi/4$ -DQPSK)



REPORT No.: SZ16110119W02



(Plot C: 8- DPSK)


2.3 Peak Output Power

2.3.1 Requirement

According to FCC §15.247(b)(1), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.3.2 Test Description

A. Test Setup:

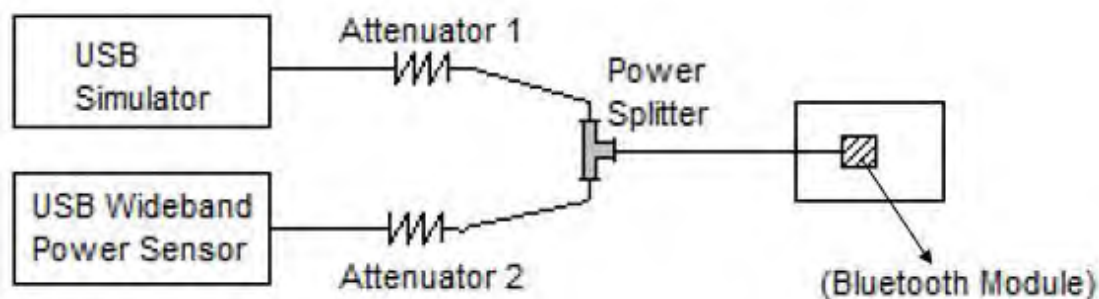

The Bluetooth Module of the EUT is coupled to the USB Wideband Power Sensor and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the module. The lowest, middle and highest channel were tested by USB Wideband Power Sensor.

**2.3.3.1 GFSK Mode****A. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-4.26	0.0004	20.97	0.125	PASS
39	2441	-0.32	0.0009			PASS
78	2480	1.97	0.0016			PASS

2.3.3.2 $\pi/4$ -DQPSK Mode**B. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-0.60	0.0009	20.97	0.125	PASS
39	2441	-0.60	0.0009			PASS
78	2480	2.02	0.0016			PASS

2.3.3.3 8-DPSK Mode**C. Test Verdict:**

Channel	Frequency (MHz)	Measured Output Peak Power		Limit		Verdict
		dBm	W	dBm	W	
0	2402	-5.53	0.0003	20.97	0.125	PASS
39	2441	-0.60	0.0009			PASS
78	2480	1.26	0.0013			PASS


2.4 20dB Bandwidth

2.4.1 Definition

According to FCC §15.247(a)(1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \times \log 1\% = 20\text{dB}$) taking the total RF output power.

2.4.2 Test Description

A. Test Setup:

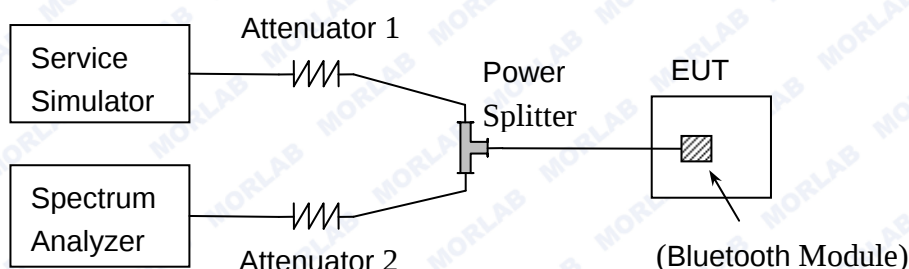

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.4.3 Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW $\geq$ 1% of the 20 dB bandwidth

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.4.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.




2.4.4.1 GFSK Mode

A. Test Verdict:

The maximum 20dB bandwidth measured is 0.9475MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	0.9475	Plot A
39	2441	0.9444	Plot B
78	2480	0.9441	Plot C


B. Test Plots:

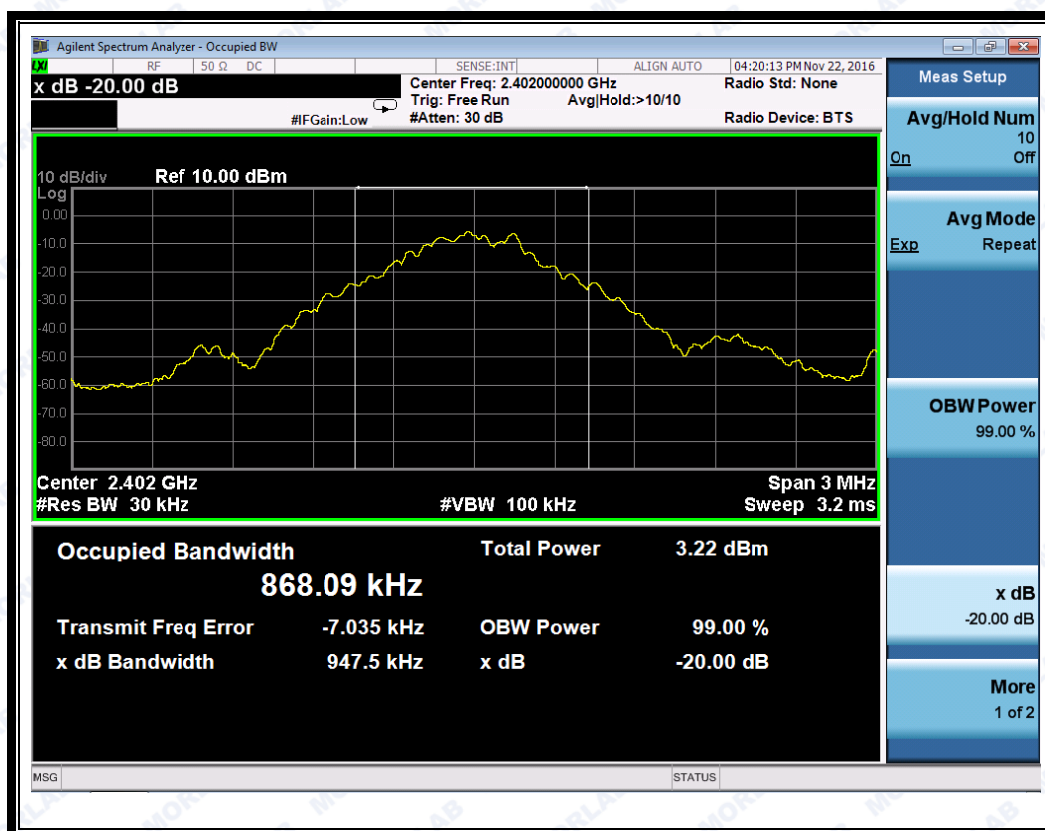


(Plot A: Channel = 2402 @ GFSK)



REPORT No.: SZ16110119W02

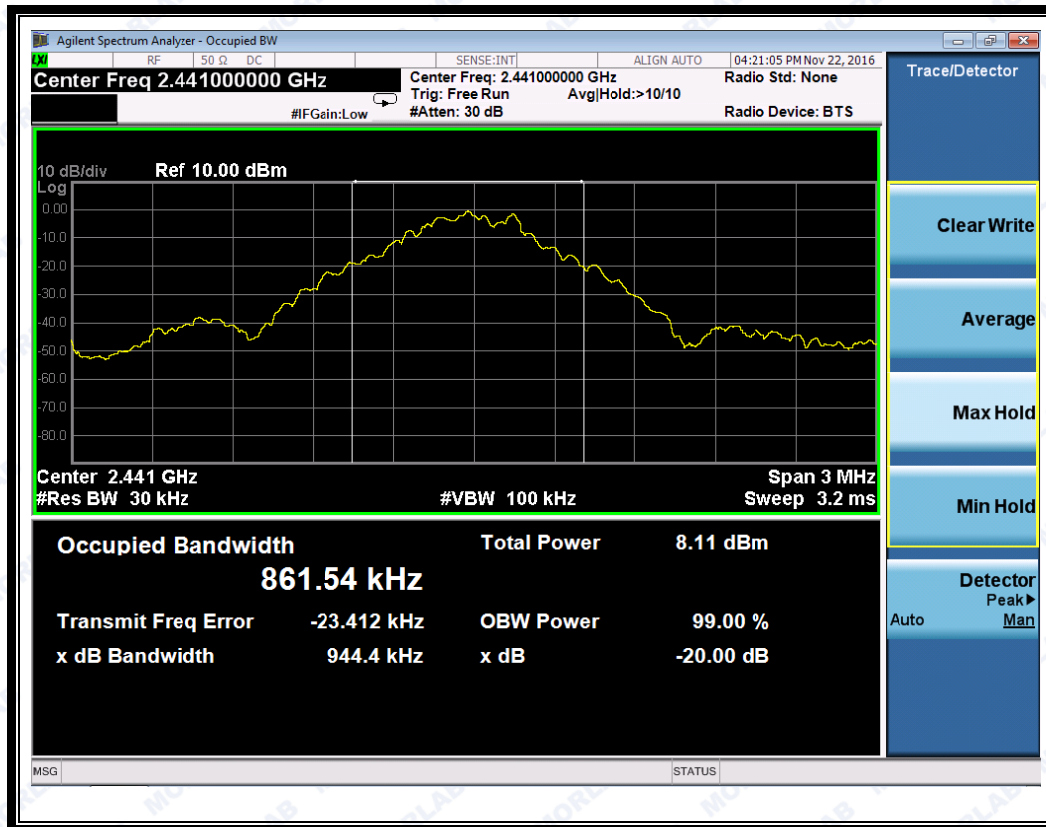

(Plot B: Channel = 2441 @ GFSK)

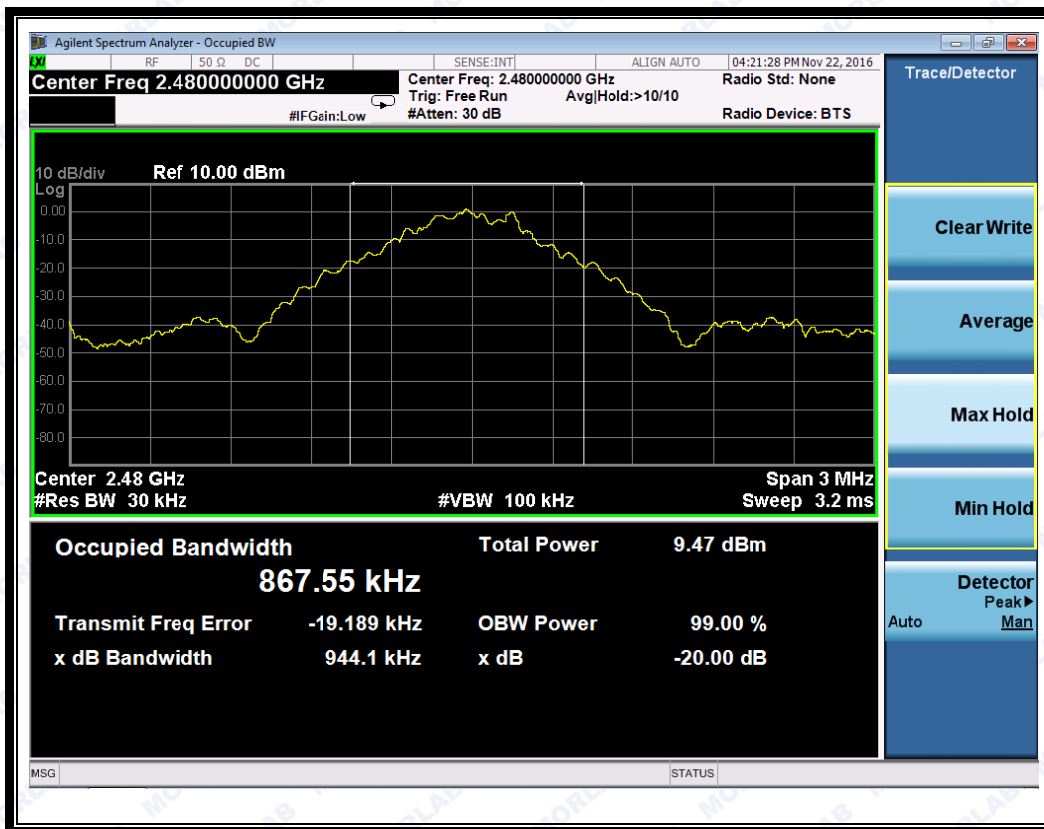

(Plot C: Channel = 2480 @ GFSK)

2.4.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.263MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.258	Plot D
39	2441	1.258	Plot E
78	2480	1.263	Plot F

B. Test Plots:




REPORT No.: SZ16110119W02

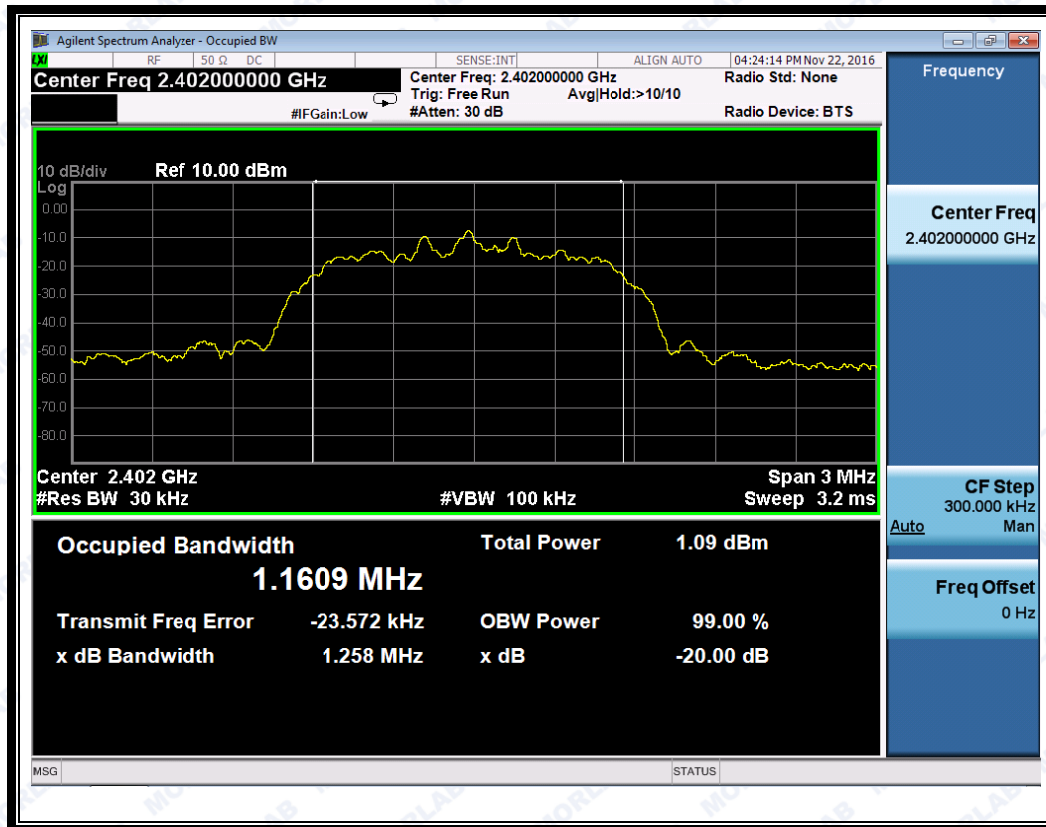


(Plot D: Channel = 2402 @ $\pi/4$ -DQPSK)



REPORT No.: SZ16110119W02

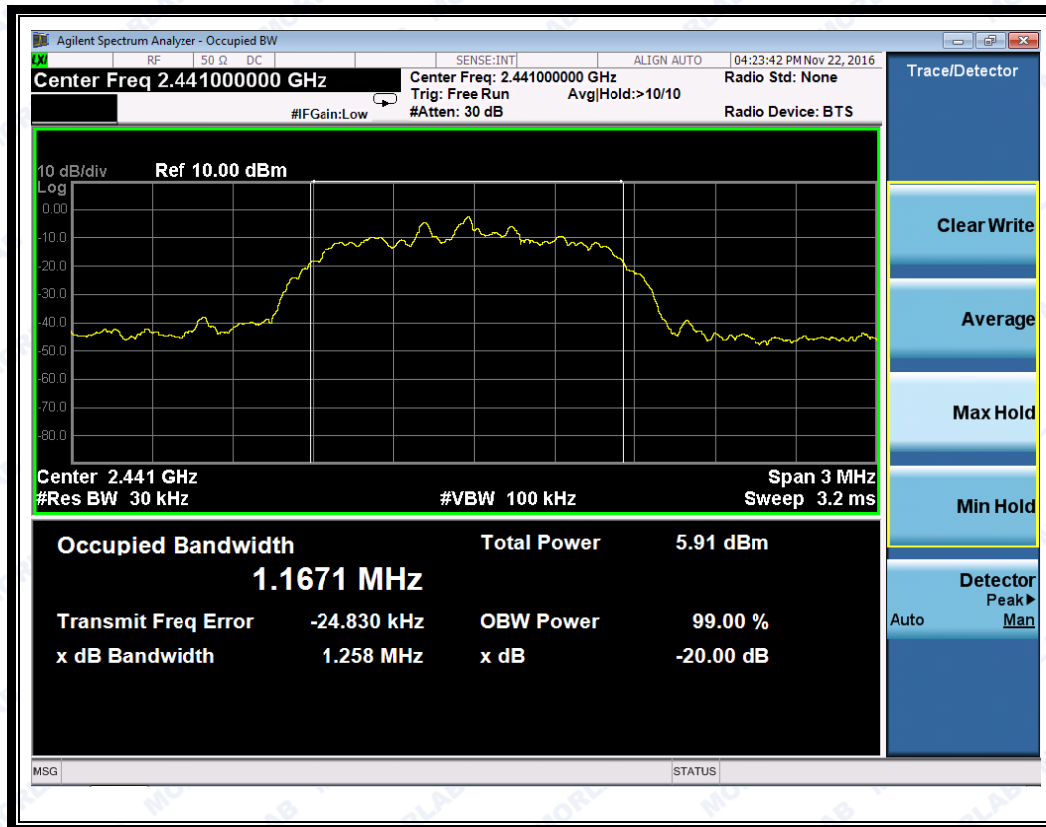

(Plot E: Channel = 2441 @ $\pi/4$ -DQPSK)

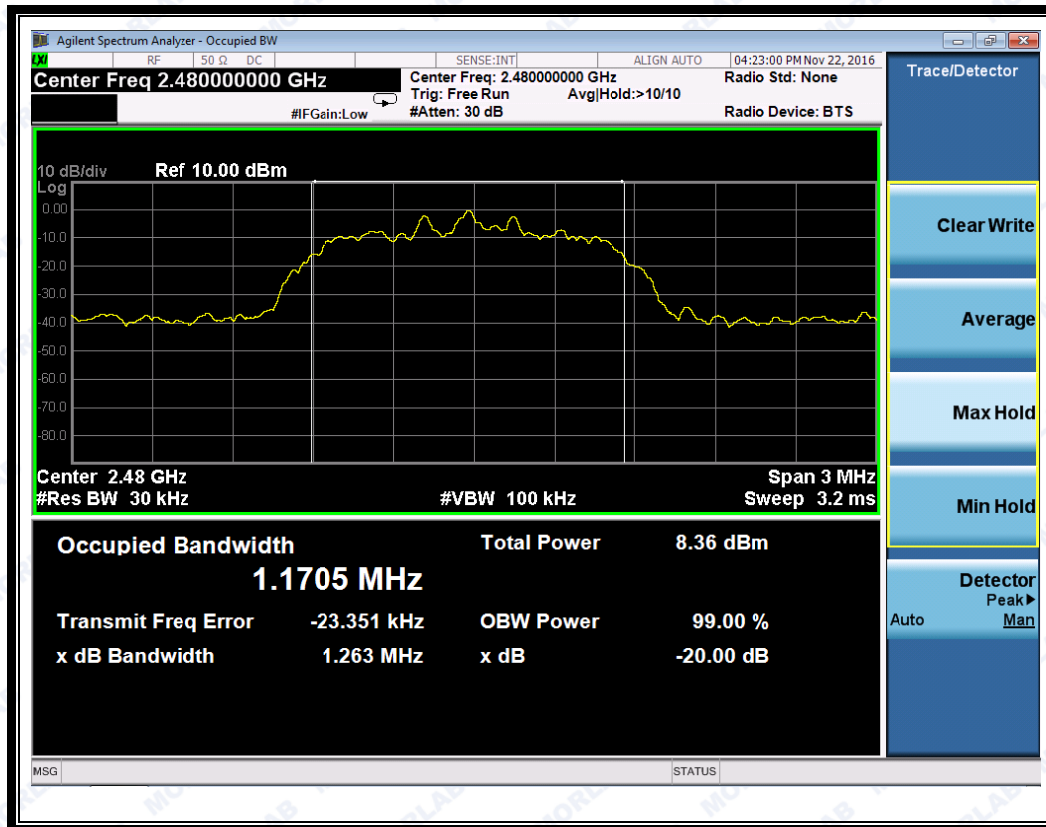(Plot F: Channel = 2480 @ $\pi/4$ -DQPSK)

2.4.4.3 8-DPSK Mode

A. Test Verdict:


The maximum 20dB bandwidth measured is 1.263MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.263	Plot G
39	2441	1.246	Plot H
78	2480	1.249	Plot I

B. Test Plots:




REPORT No.: SZ16110119W02

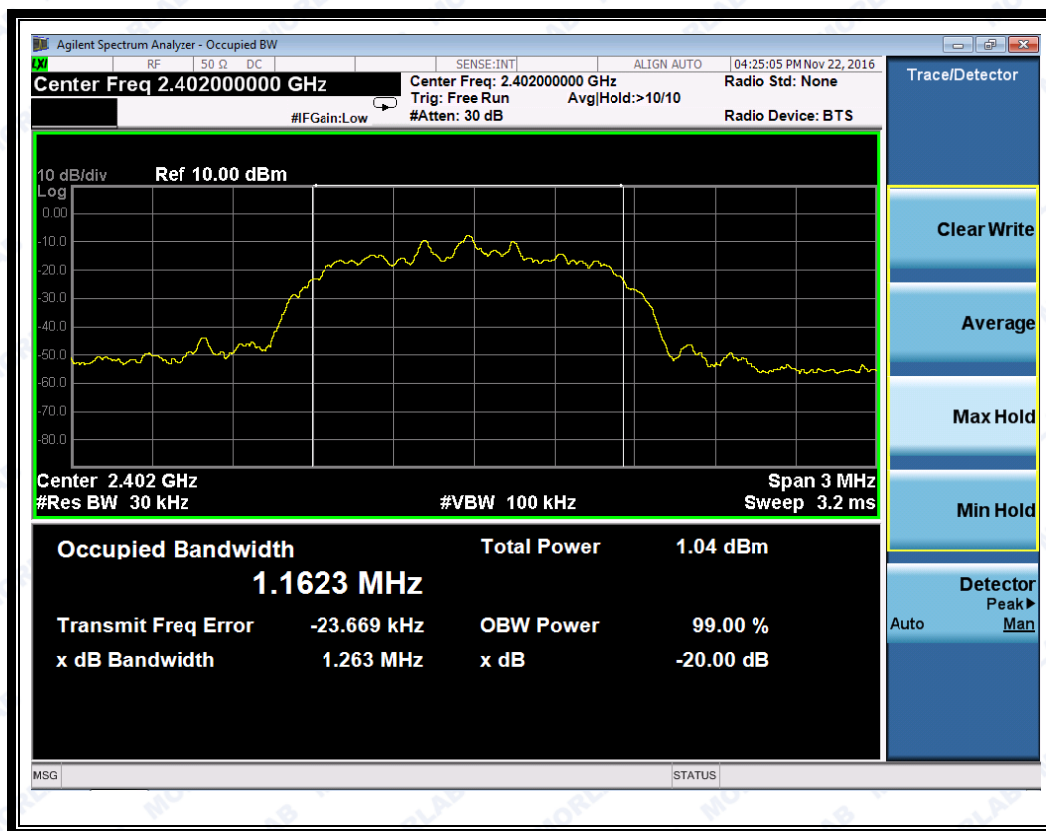

(Plot G: Channel = 2402 @ 8-DPSK)




REPORT No.: SZ16110119W02

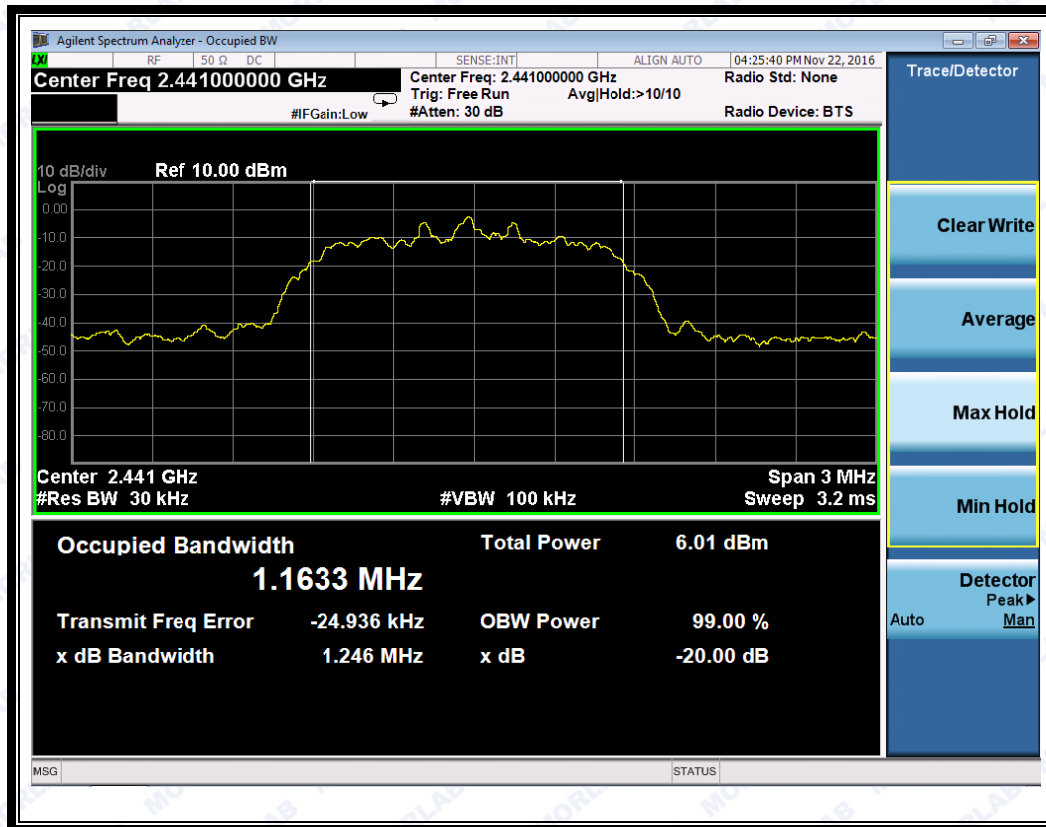

(Plot H: Channel = 2441 @ 8-DPSK)



REPORT No.: SZ16110119W02

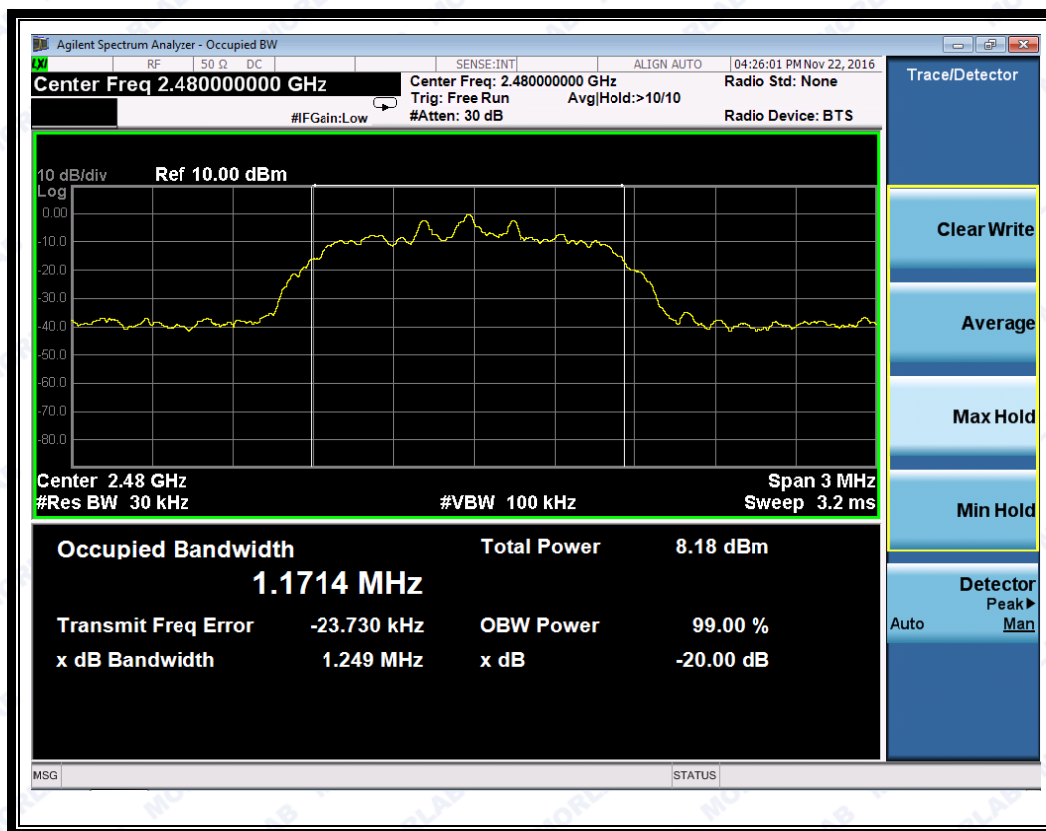

(Plot I: Channel = 2480 @ 8-DPSK)


2.5 Carried Frequency Separation

2.5.1 Definition

According to FCC §15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.

2.5.2 Test Description

A. Test Setup:

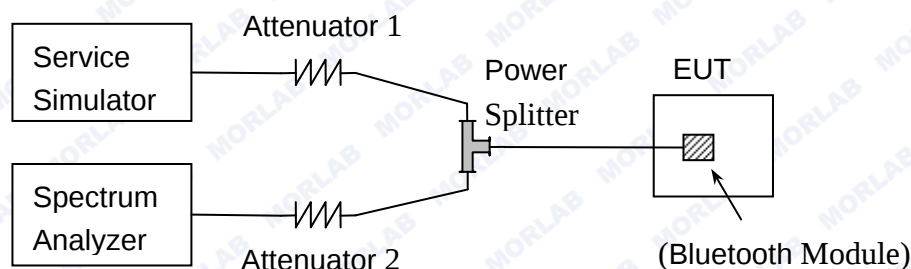

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.5.3 Test Procedure

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = wide enough to capture the peaks of two adjacent channels

Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span

Video (or Average) Bandwidth (VBW) $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.



2.5.4 Test Result


The Bluetooth Module operates at hopping-on test mode. For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (refer to section 0), whichever is greater. So, the verdict is PASSING

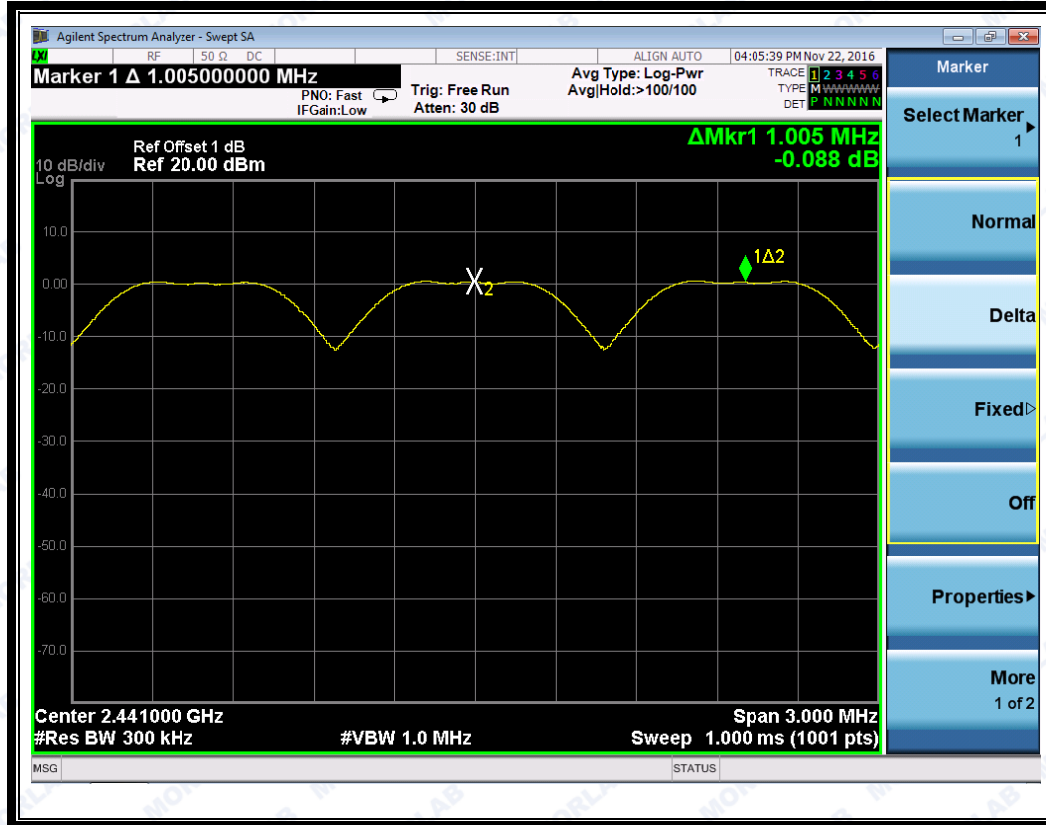

(Plot A: GFSK)




REPORT No.: SZ16110119W02

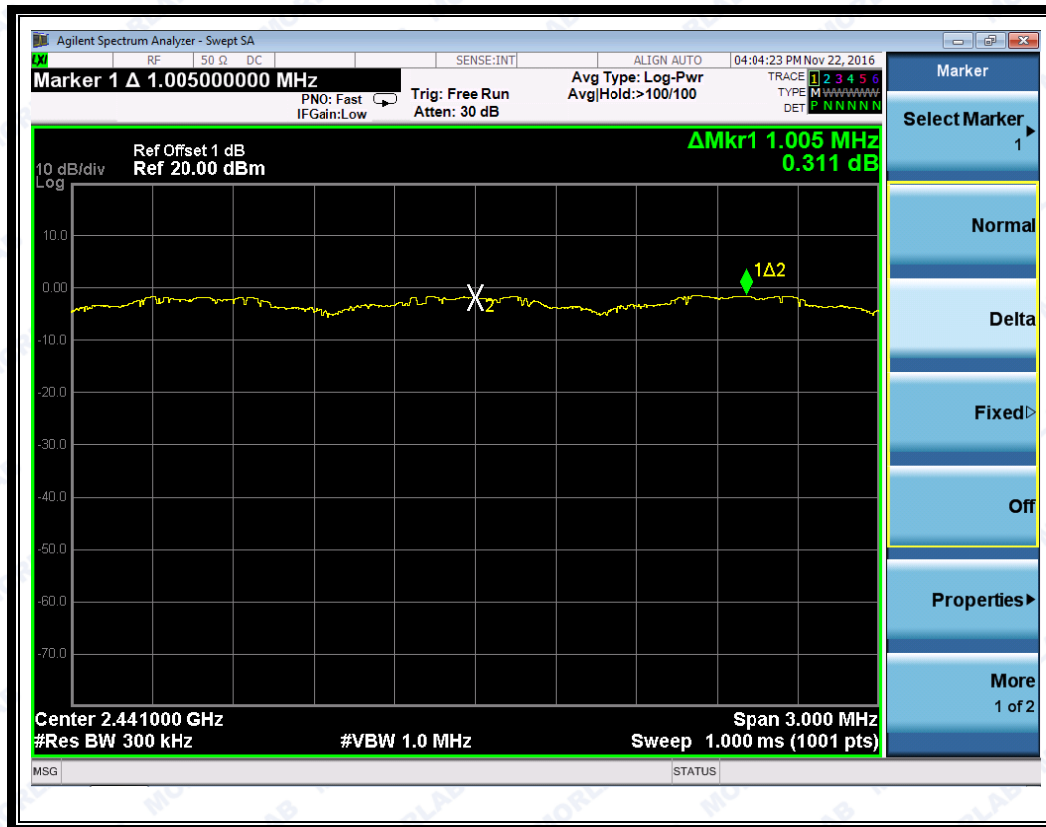

(Plot B: $\pi/4$ -DQPSK)



REPORT No.: SZ16110119W02

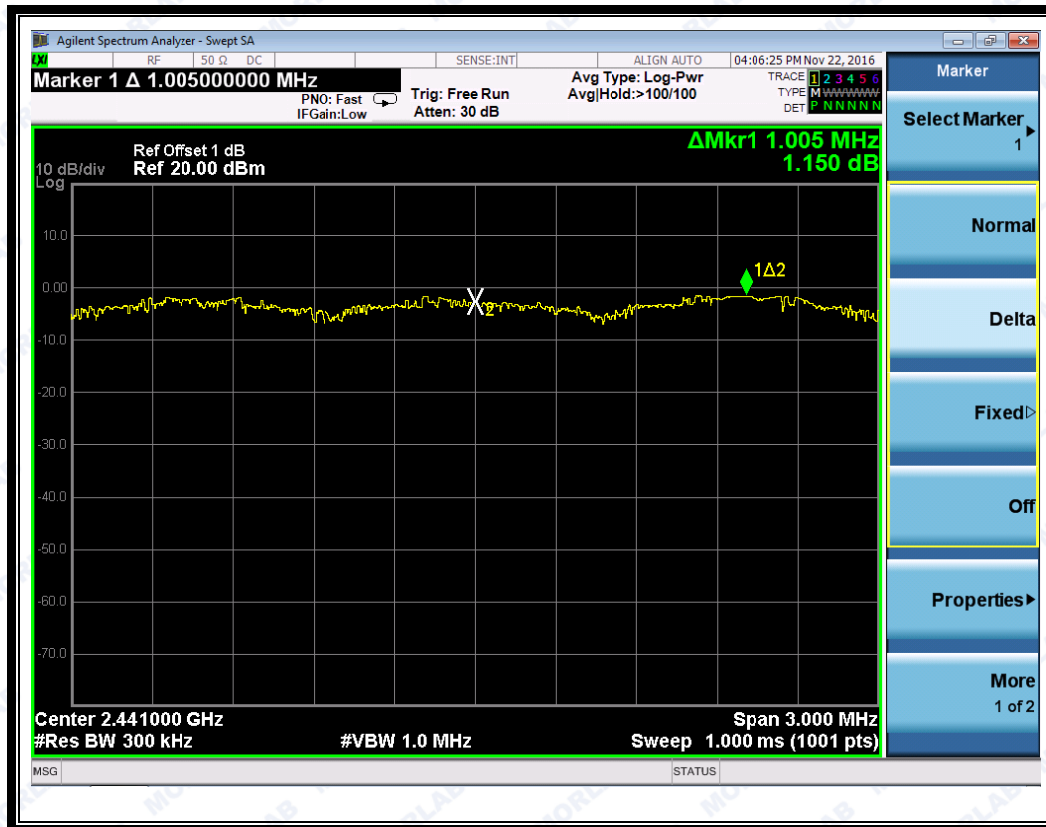

(Plot C: 8-DPSK)


2.6 Time of Occupancy (Dwell time)

2.6.1 Requirement

According to FCC §15.247(a) (1) (iii), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.6.2 Test Description

A. Test Setup:

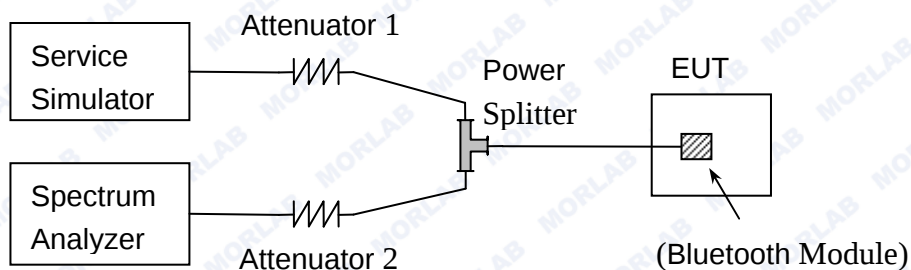

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.6.3 Test Procedure

The transmitter output is connected to a spectrum analyzer. The span is set to 0 Hz, centered on a single, selected hopping channel. The width of a single pulse is measured in a fast scan. The number of pulses is measured in a 3.16 second scan, to enable resolution of each occurrence.

The average time of occupancy in the specified 31.6 second period (79 channel * 0.4 s) is equal to $10 * (\# \text{ of pulses in 3.16 s}) * \text{pulse width}$.



REPORT No.: SZ16110119W02


2.6.4 Test Result


2.6.4.1 GFSK Mode

A. Test Verdict:

DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.4	31	0.0124	0.124	0.4	PASS
DH3	1.65	18	0.0297	0.297		PASS
DH5	2.9	11	0.0319	0.319		PASS


B. Test Plots:

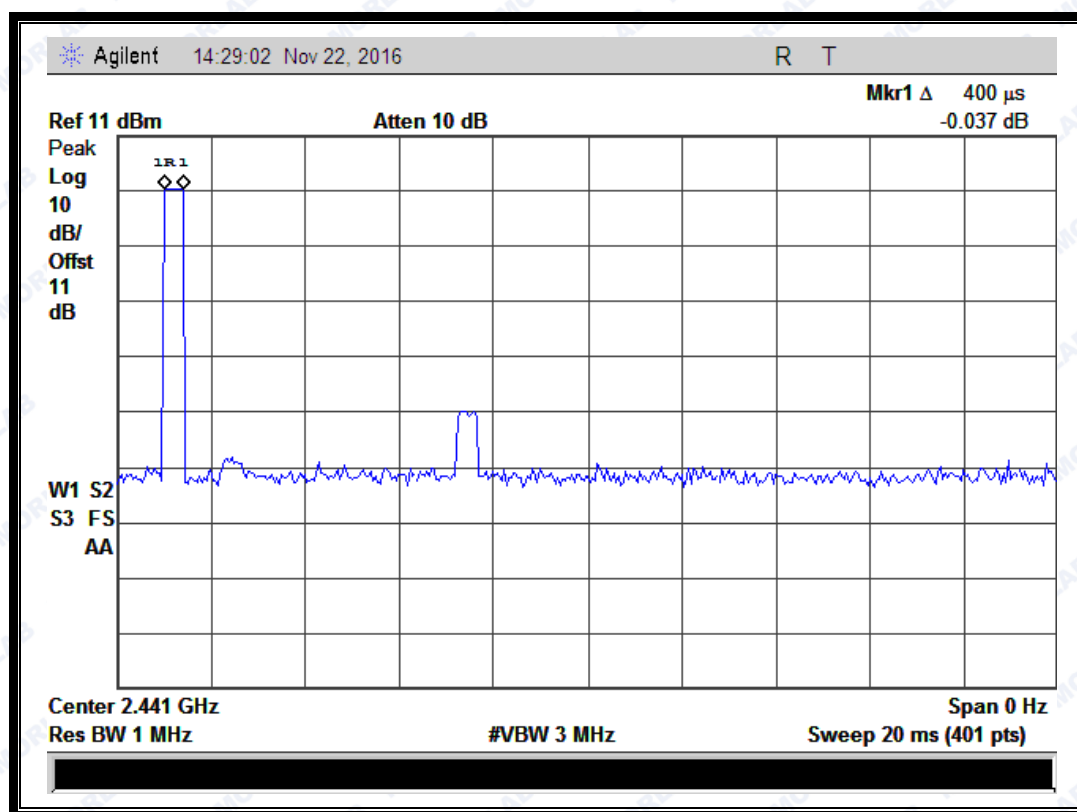






REPORT No.: SZ16110119W02

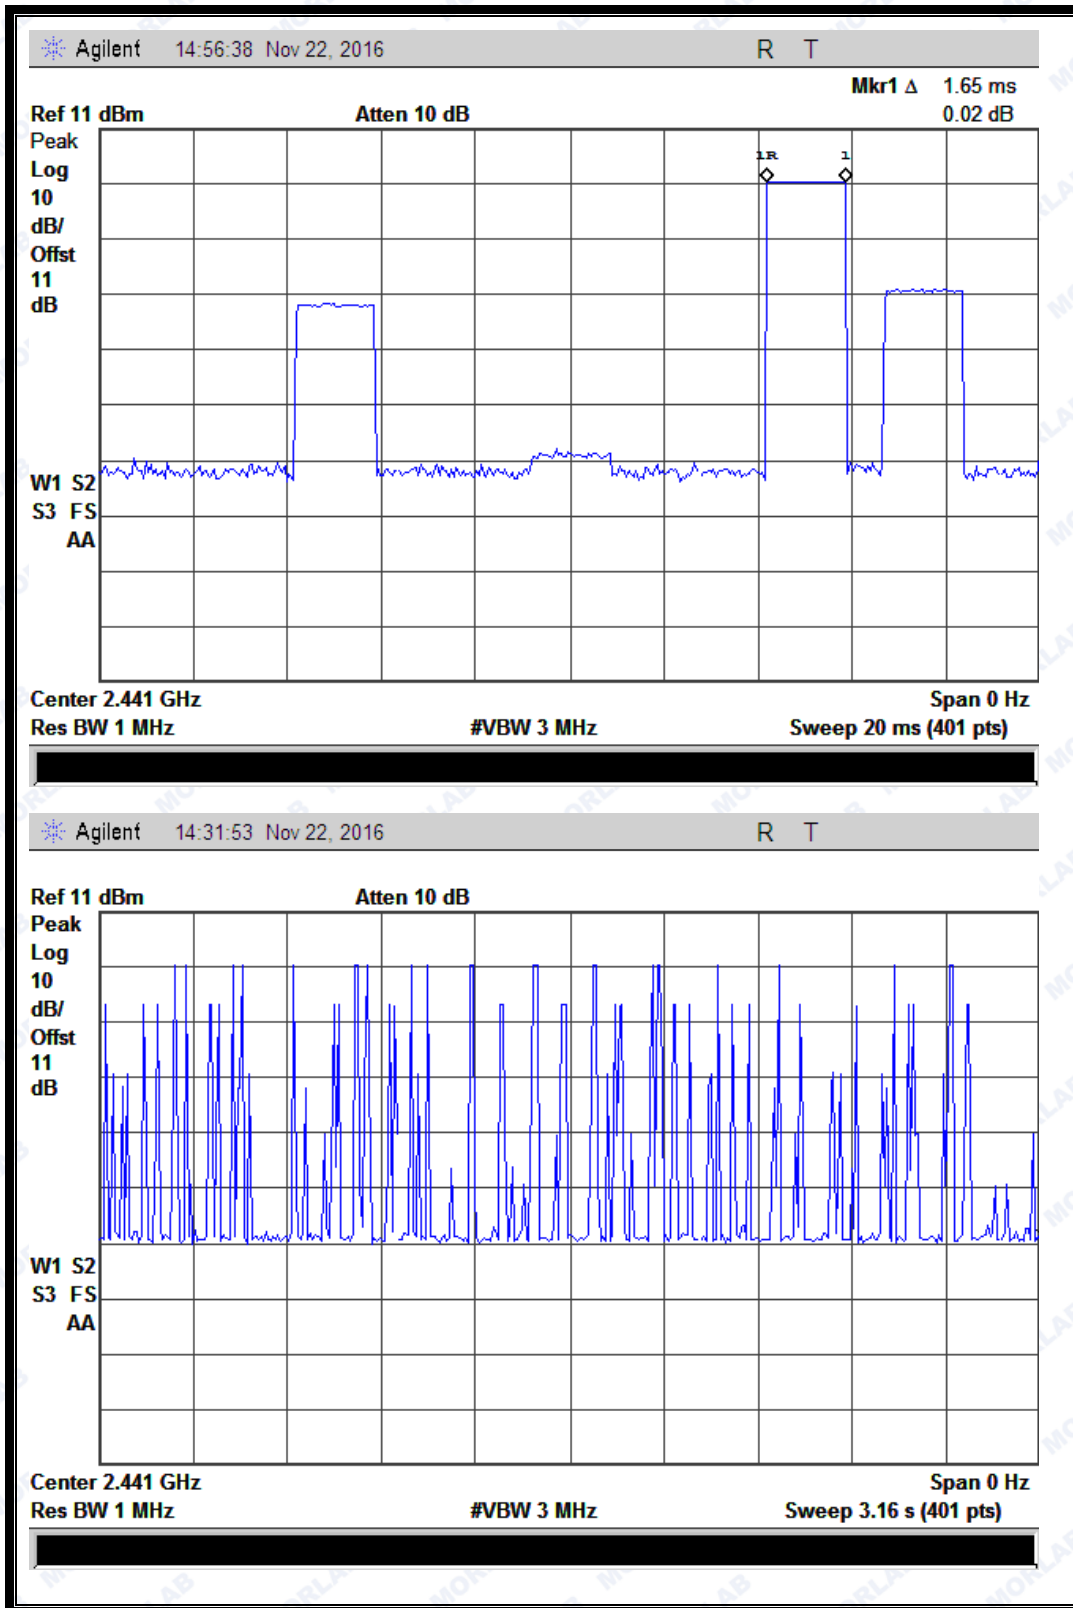

(Plot B: DH3 @ GFSK)



REPORT No.: SZ16110119W02

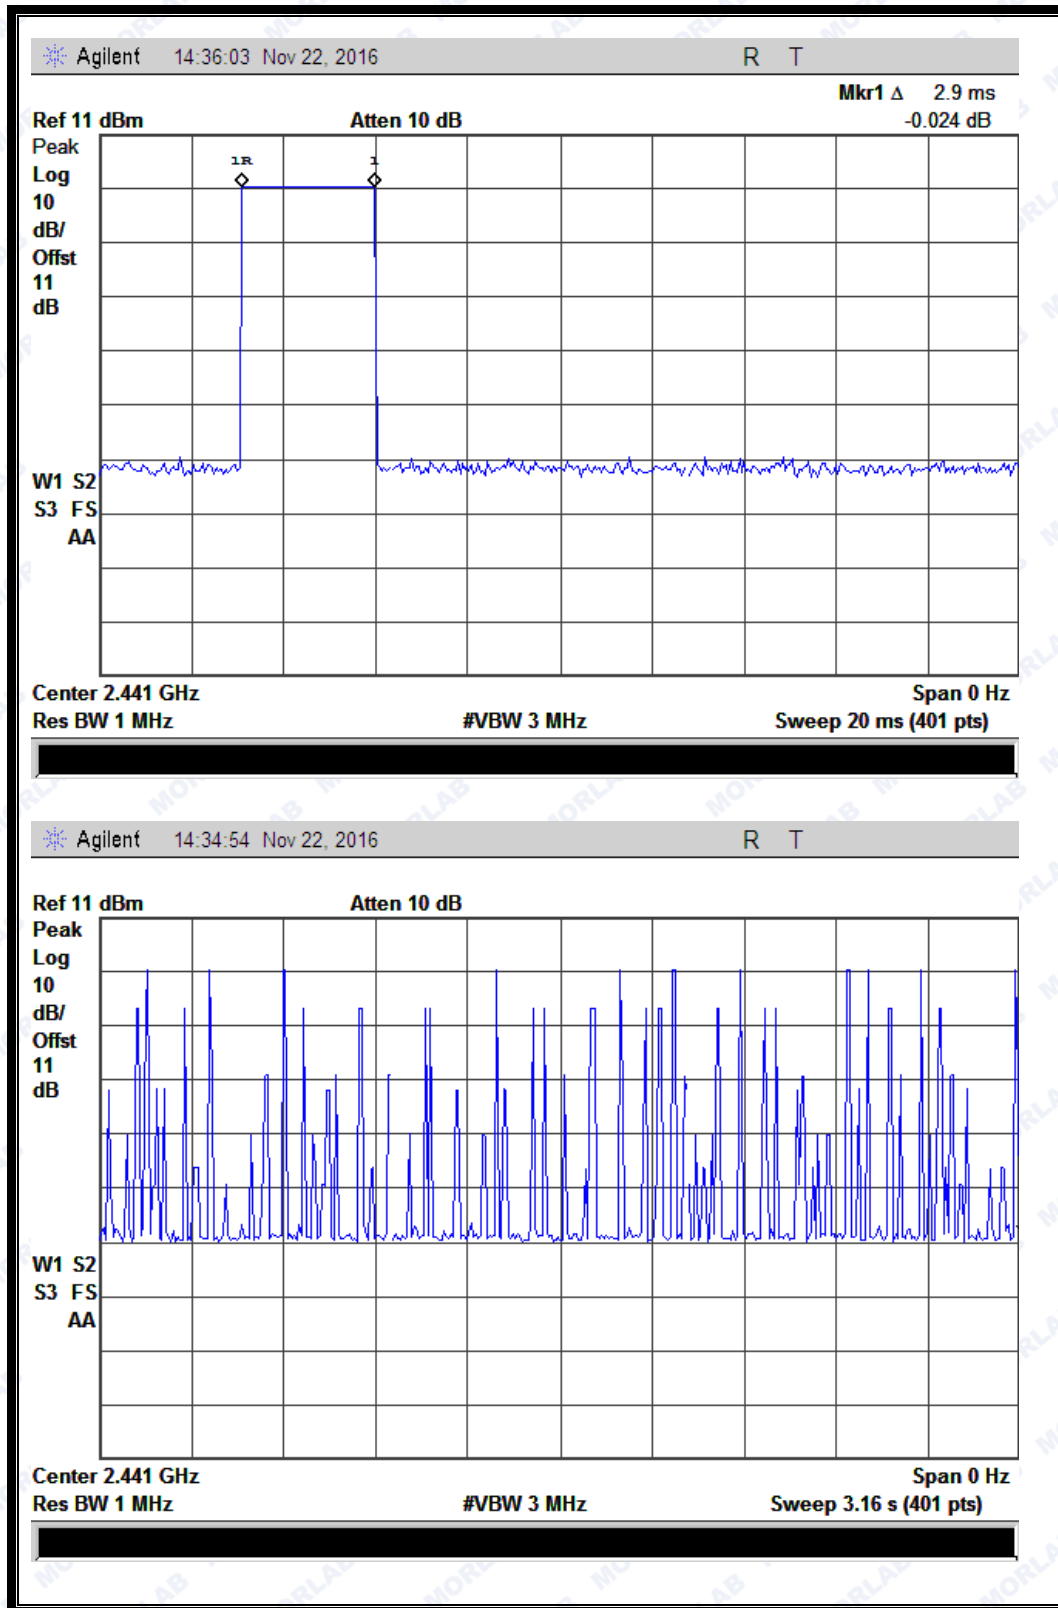


(Plot C: DH5 @ GFSK)

2.6.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.38	32	0.01216	0.1216	0.4	PASS
DH3	1.65	18	0.0297	0.2970		PASS
DH5	2.85	13	0.03705	0.3705		PASS

B. Test Plots:

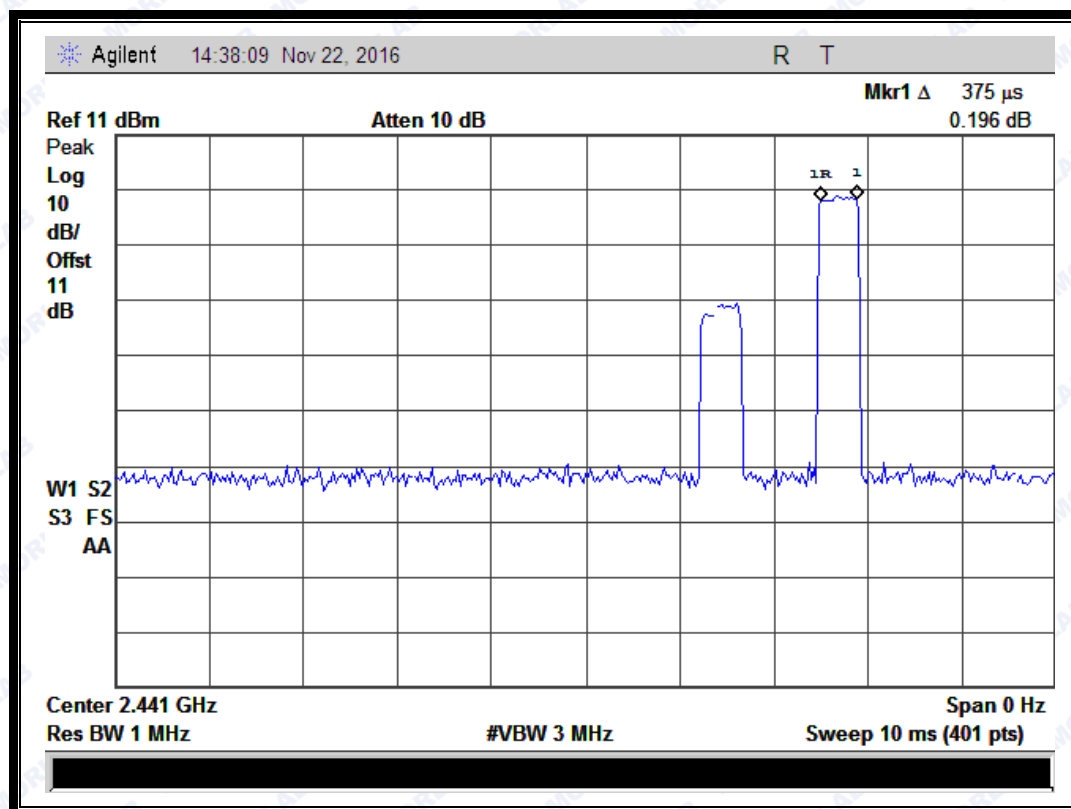




REPORT No.: SZ16110119W02

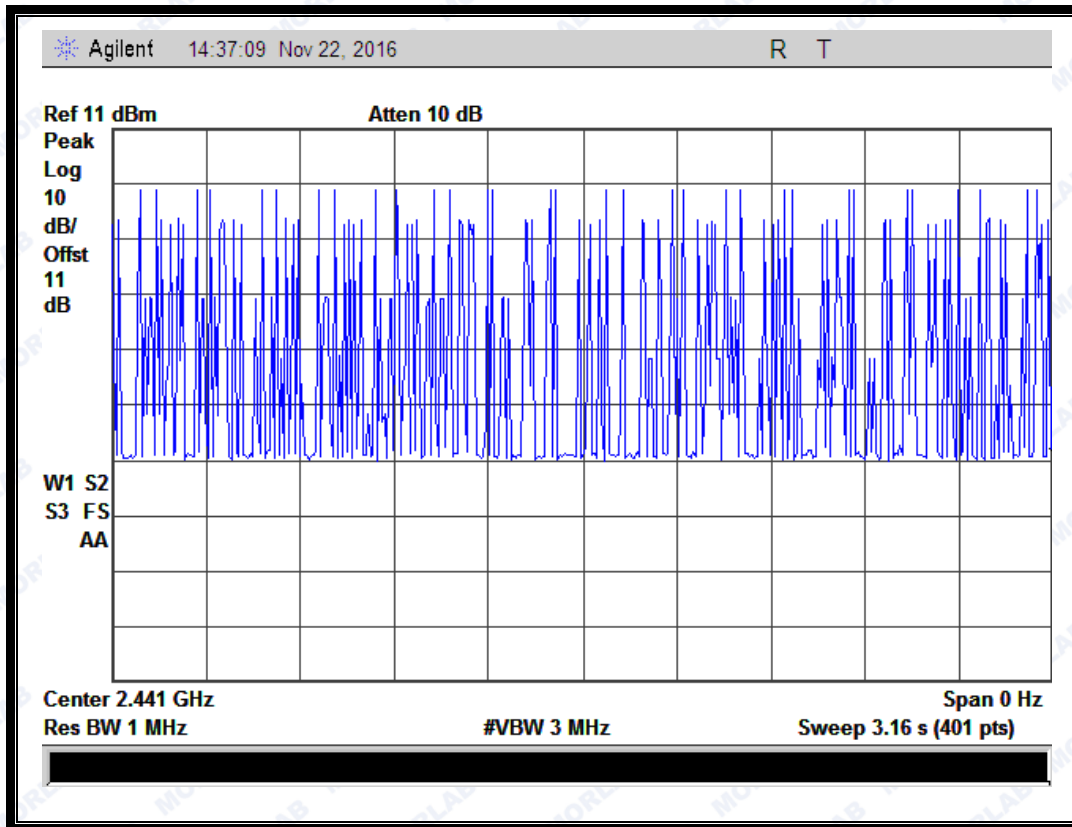

(Plot D: DH1 @ $\pi/4$ -DQPSK)




REPORT No.: SZ16110119W02

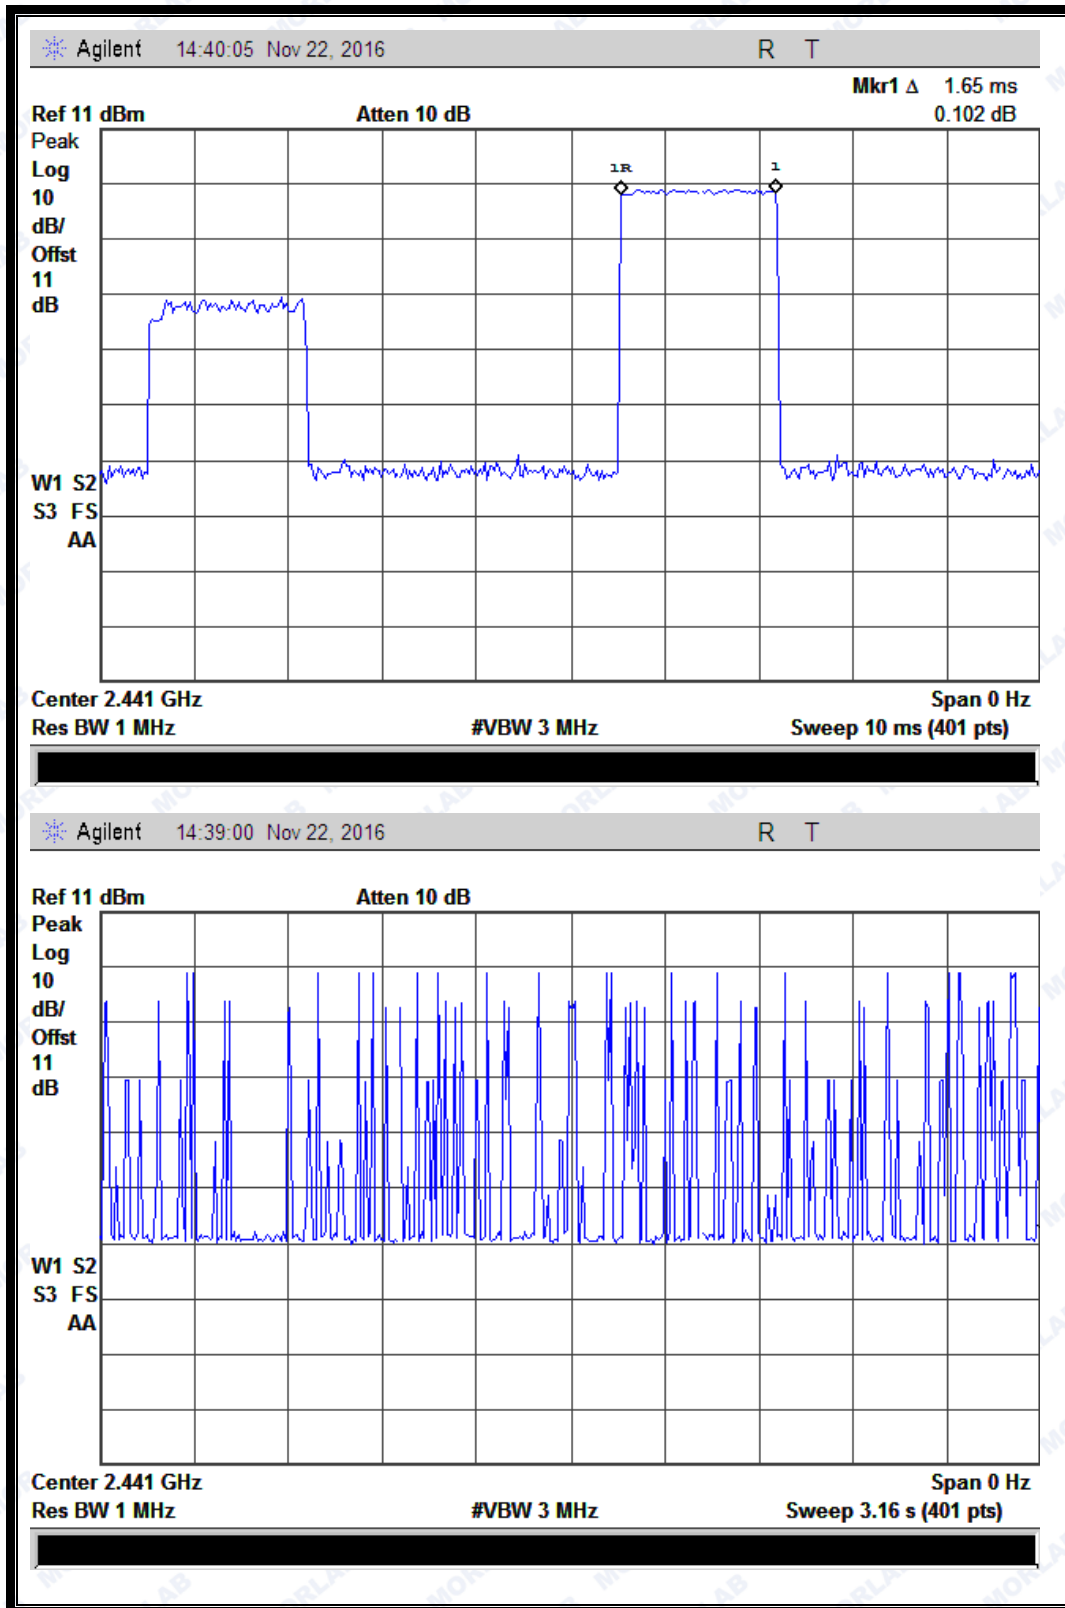

(Plot E: DH3 @ $\pi/4$ -DQPSK)



REPORT No.: SZ16110119W02

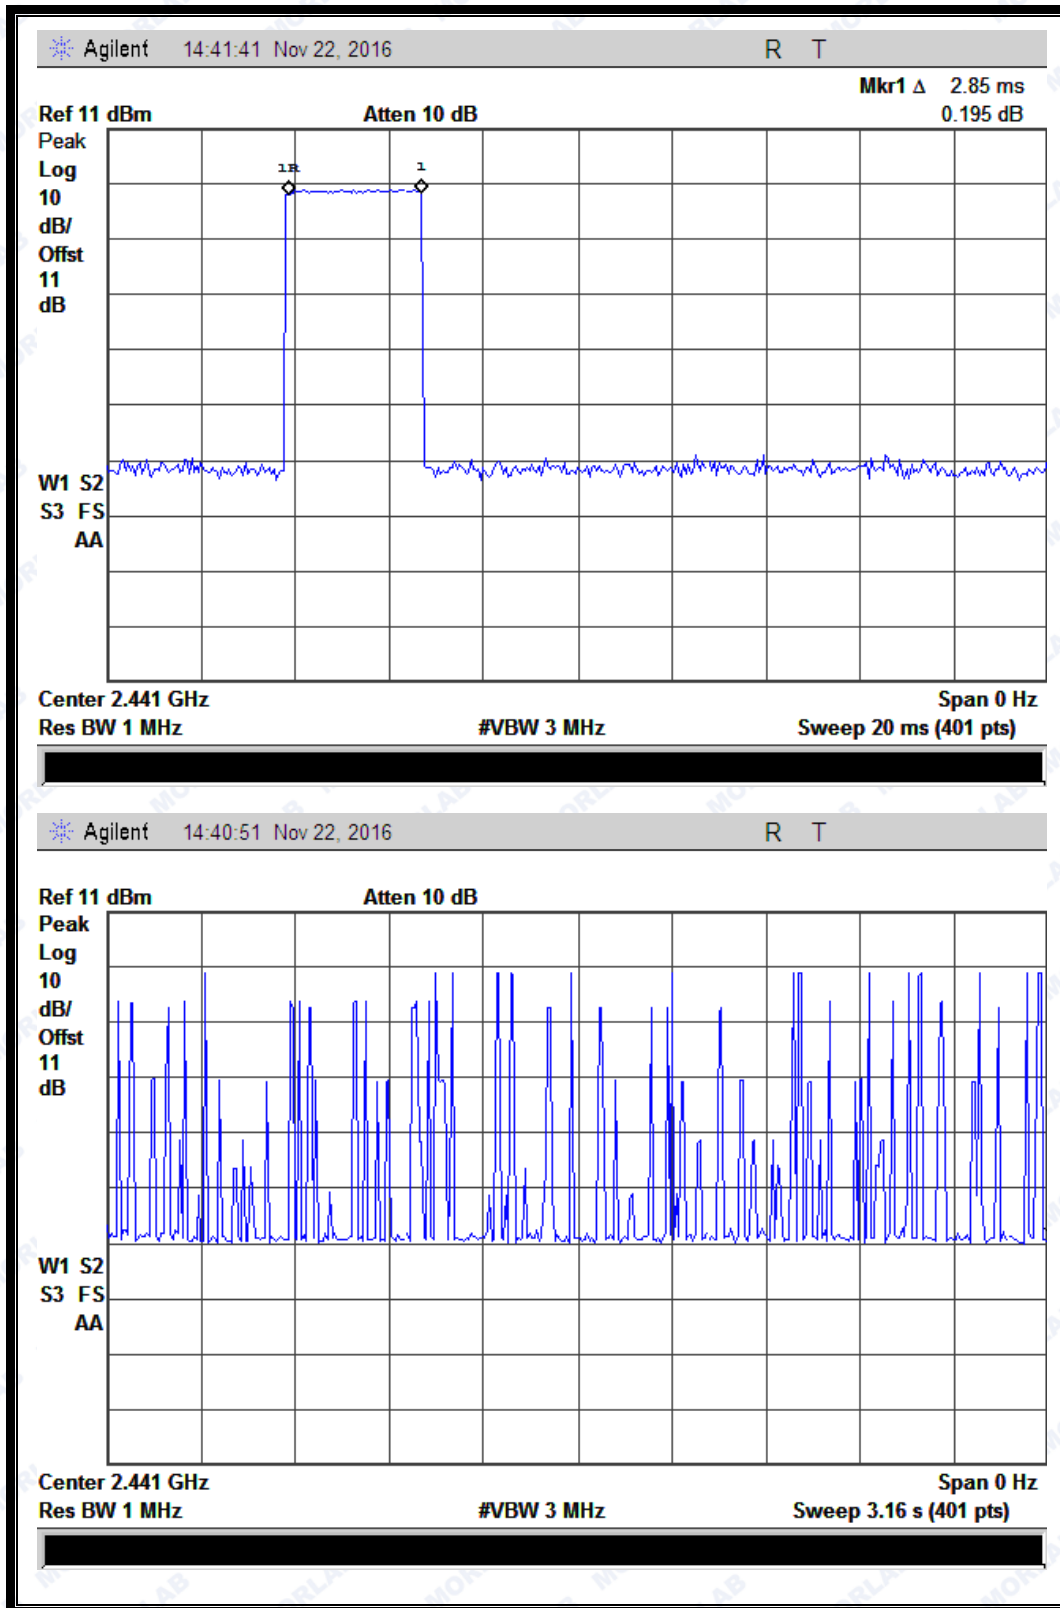

(Plot F: DH5 @ $\pi/4$ -DQPSK)




REPORT No.: SZ16110119W02

2.6.4.3 8-DPSK mode

A. Test Verdict:


DH Packet	Pulse Width (msec)	Number of pulse in 3.16 seconds	Average Time of Occupancy in 3.16 seconds (sec)	Average Time of Occupancy in 31.6 seconds (sec)	Limit (sec)	Verdict
DH1	0.38	31	0.01178	0.1178	0.4	PASS
DH3	1.65	11	0.01815	0.1815		PASS
DH5	2.9	7	0.02030	0.2030		PASS

B. Test Plots:

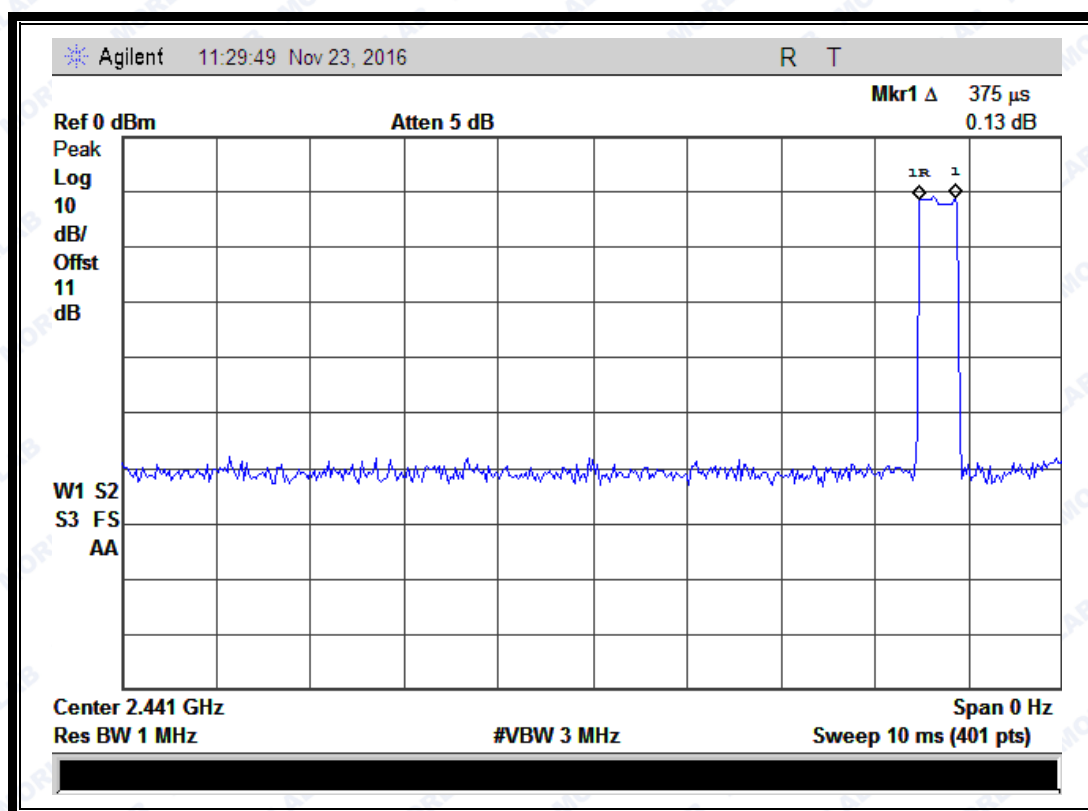




REPORT No.: SZ16110119W02

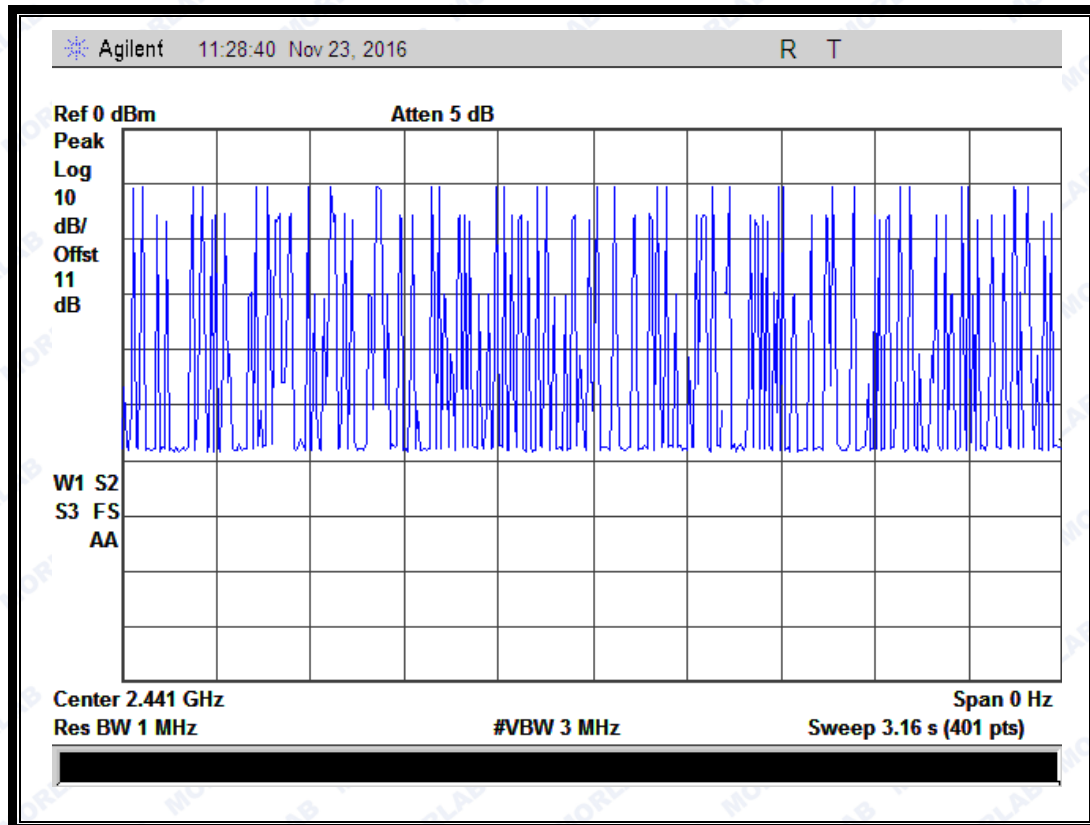

(Plot G: DH1 @ 8-DPSK)




REPORT No.: SZ16110119W02

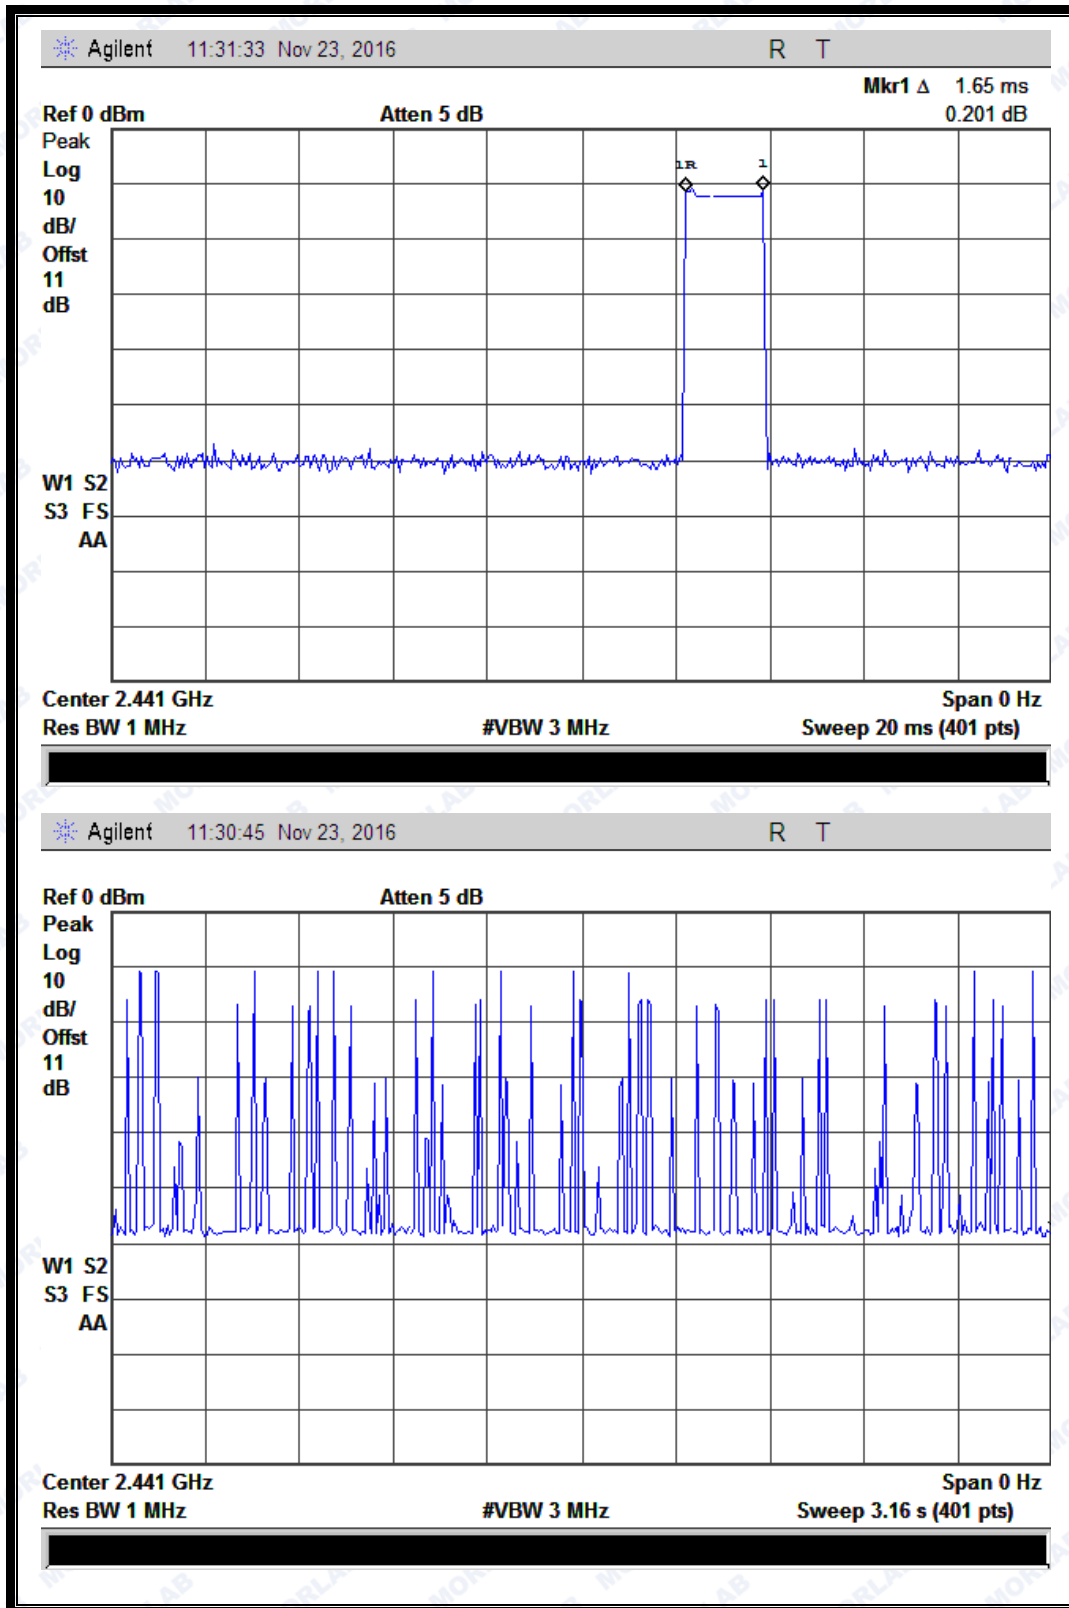

(Plot H: DH3 @ 8-DPSK)



REPORT No.: SZ16110119W02

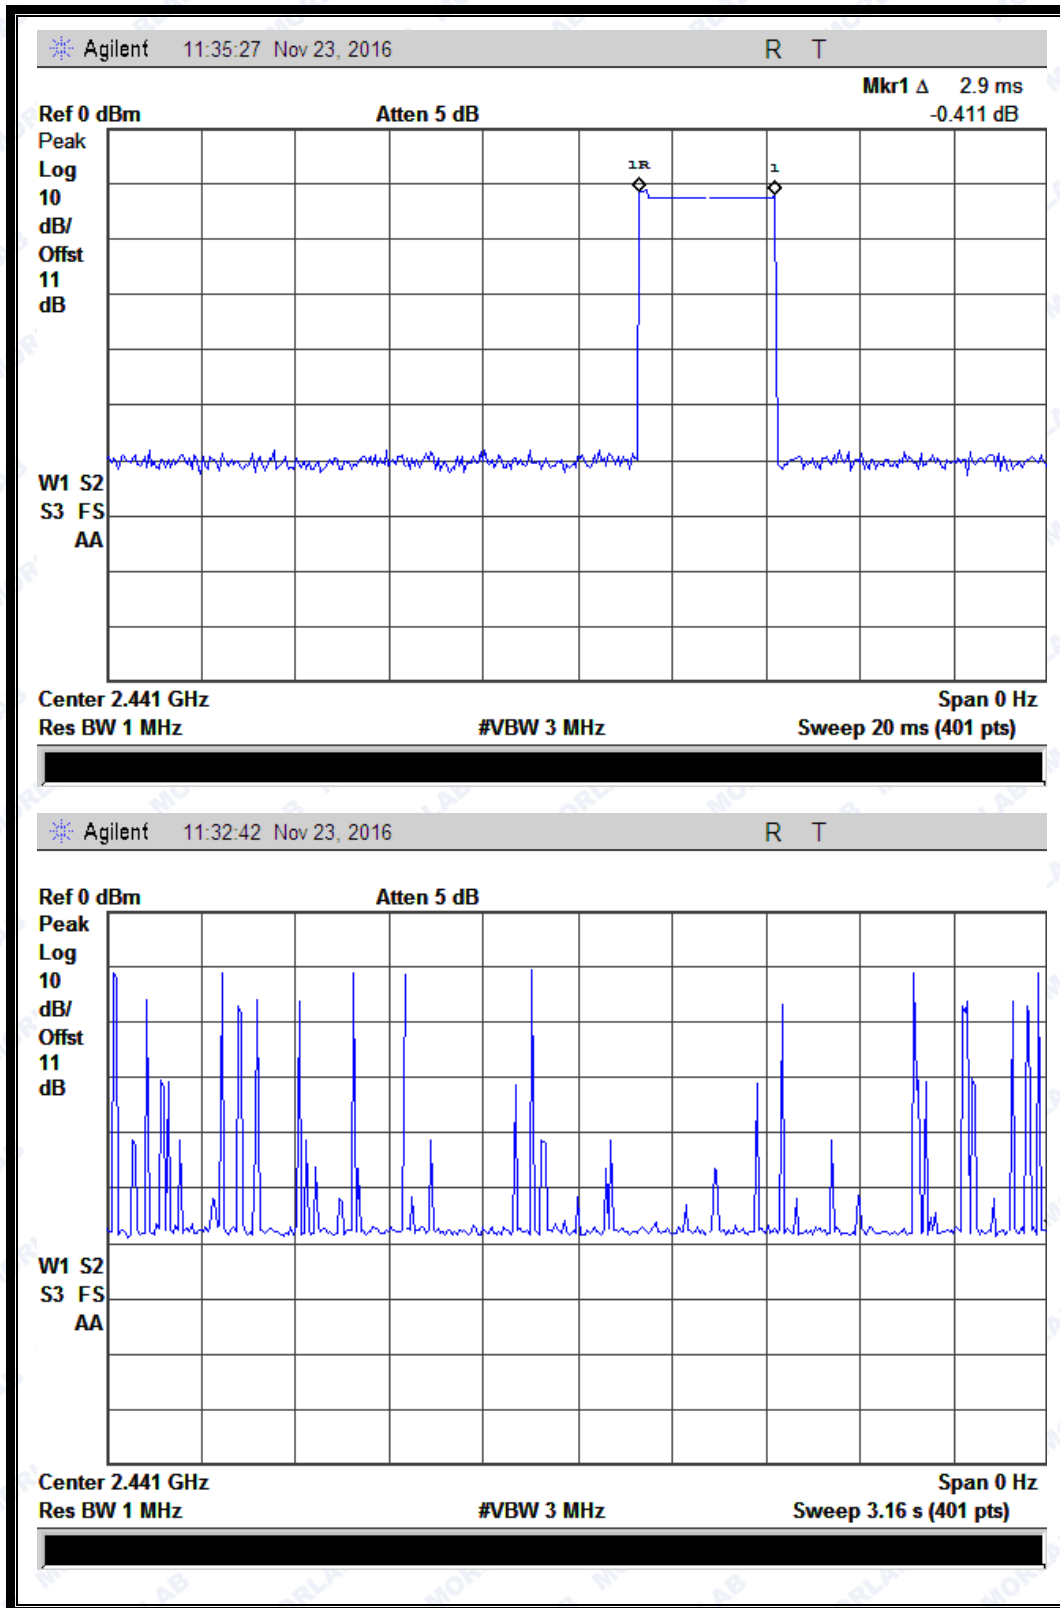

(Plot I: DH5 @ 8-DPSK)


2.7 Conducted Spurious Emissions

2.7.1 Requirement

According to FCC §15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:

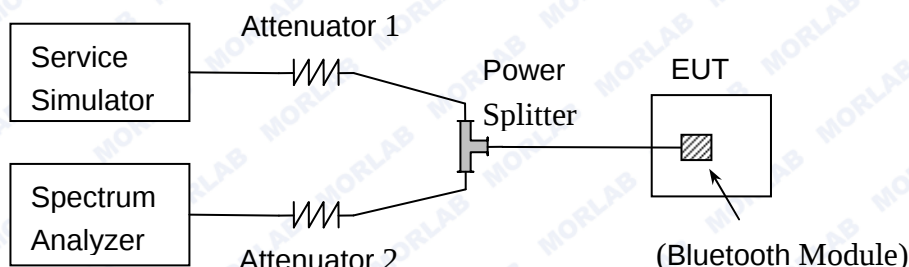

The Bluetooth Module of the EUT is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Please reference ANNEX A(1.5).

2.7.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.



2.7.4 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


2.7.4.1 GFSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-55.17	Plot A.1	-5.35	-25.35	PASS
39	2441	-46.57	Plot B.1	-0.09	-20.09	PASS
78	2480	-47.01	Plot C.1	1.21	-18.79	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

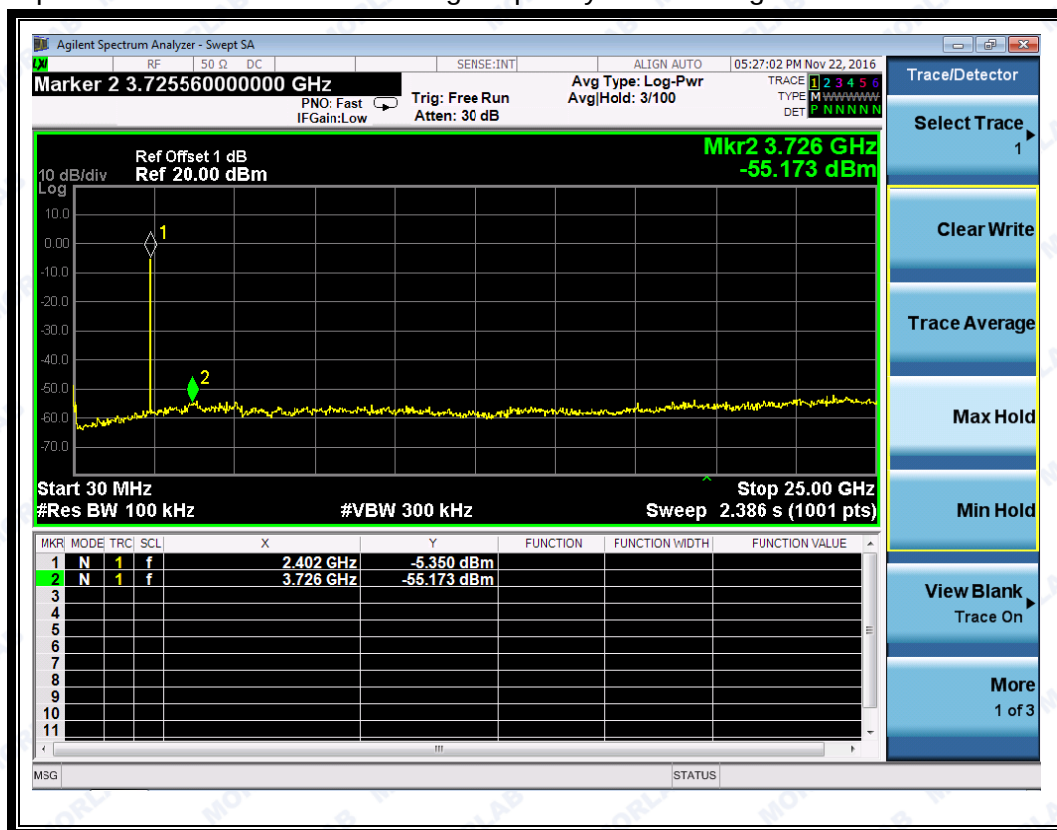


(Plot A.1: Channel = 0, 30MHz to 25GHz @ GFSK Mode)




REPORT No.: SZ16110119W02

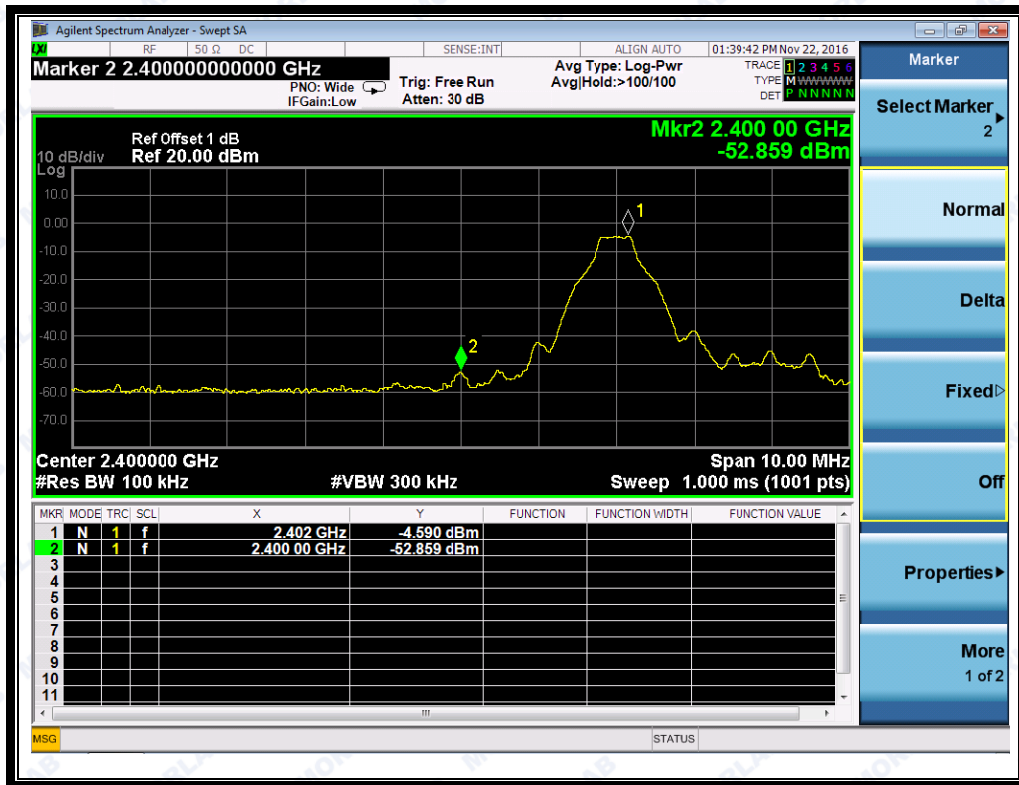


(Channel = 0, Band edge @ GFSK Mode)

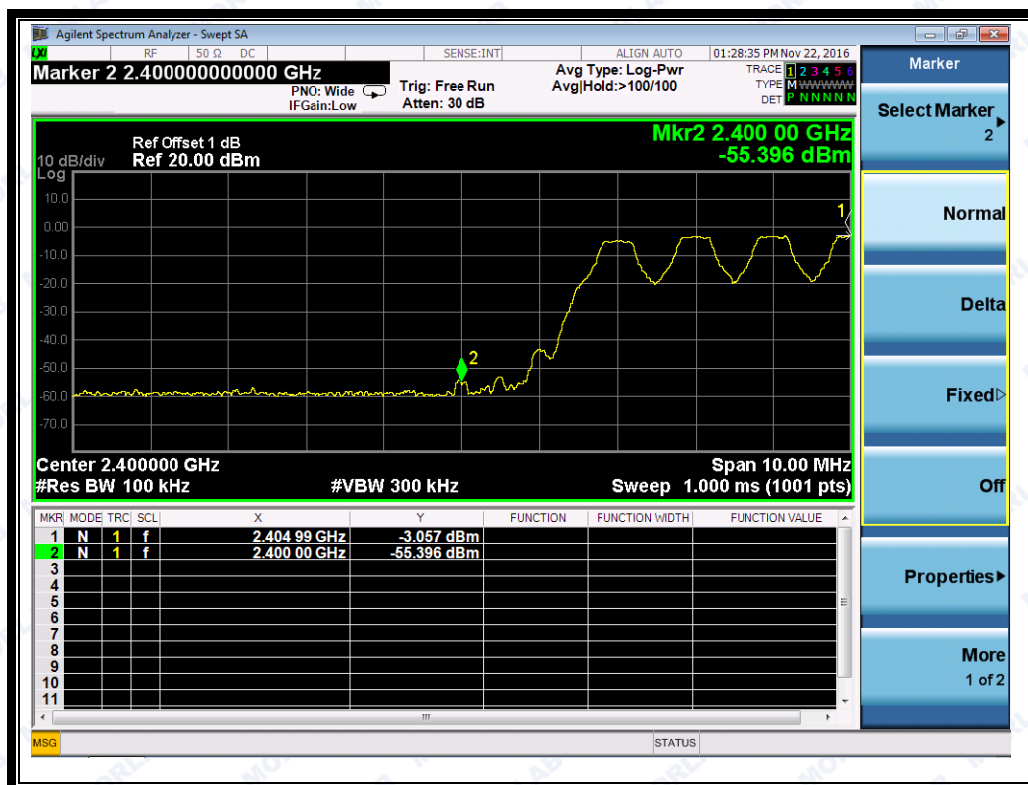


(Channel = 0, Band edge with hopping on @ GFSK Mode)

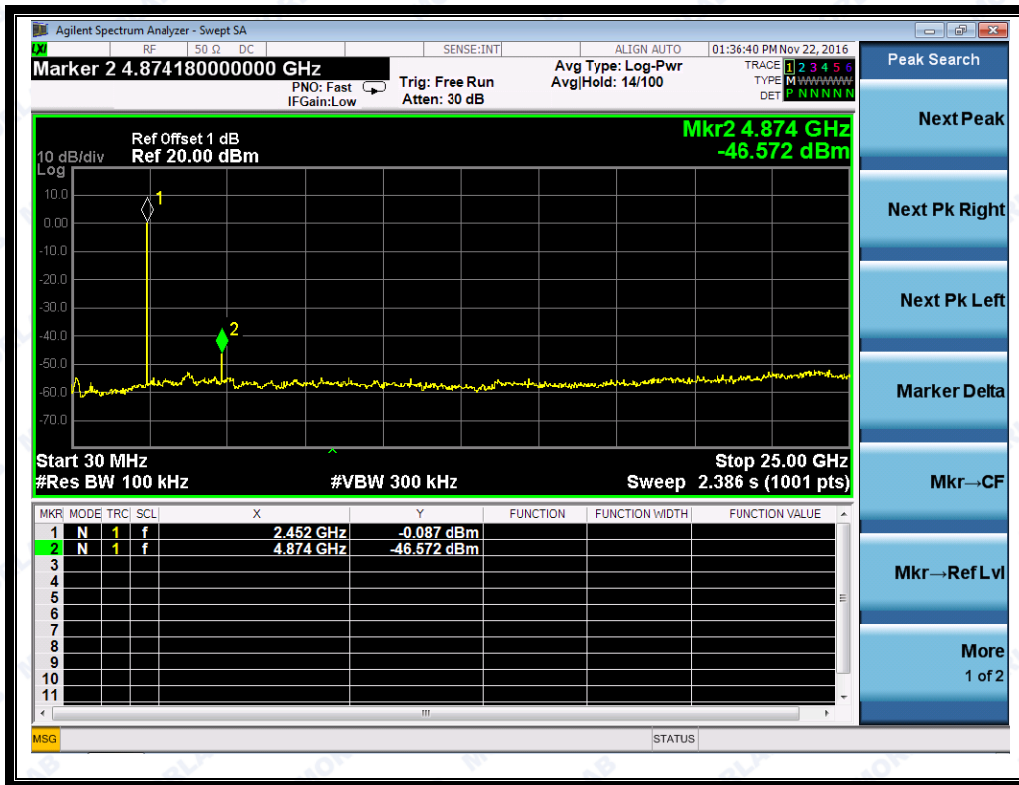


(Plot B.1: Channel = 39, 30MHz to 25GHz @ GFSK Mode)

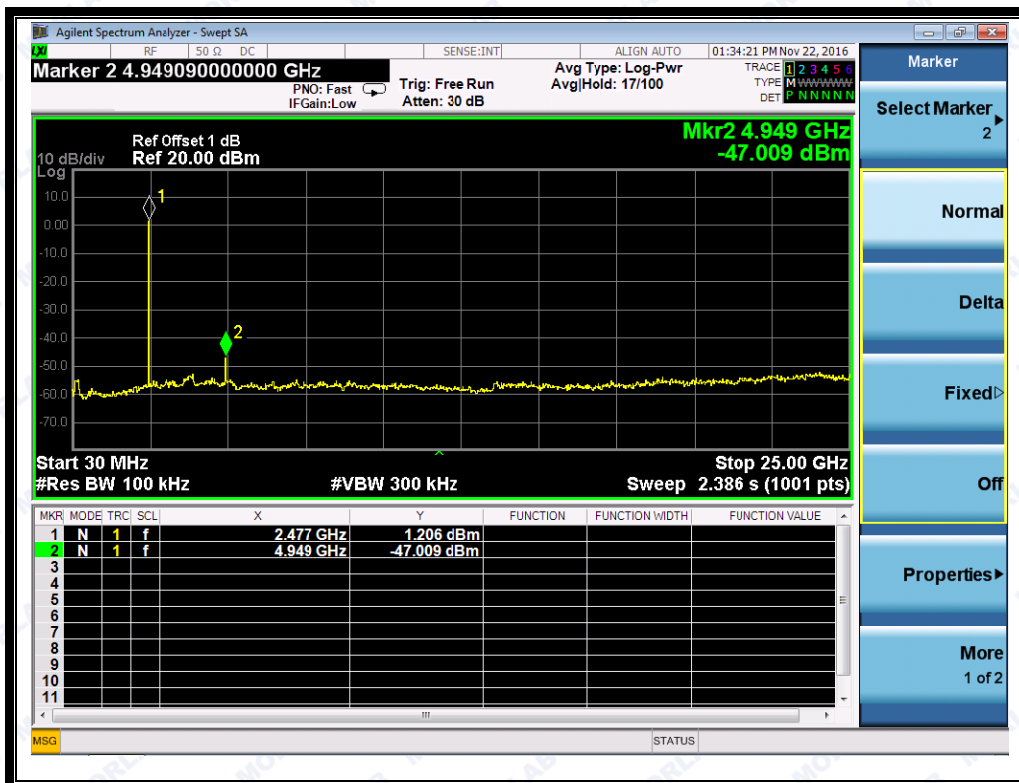

(Plot C.1: Channel = 78, 30MHz to 25GHz @ GFSK Mode)

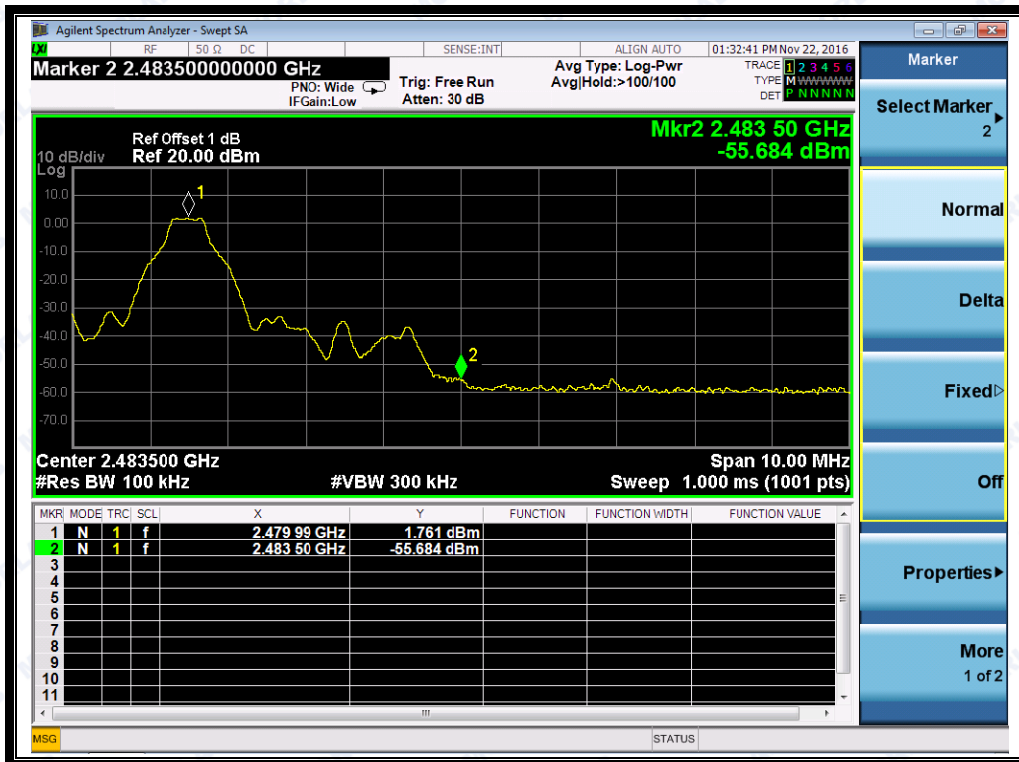

(Channel = 78, Band edge @ GFSK Mode)

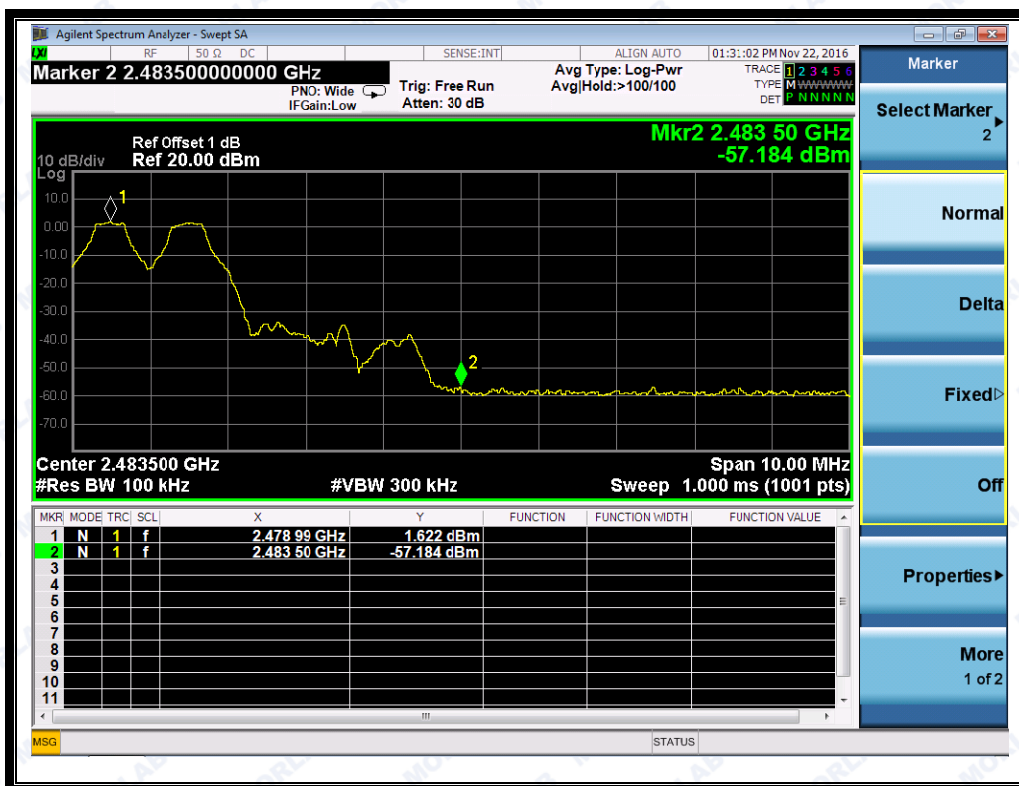

(Channel = 78, Band edge with hopping on @ GFSK Mode)




2.7.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-54.34	Plot D.1	-8.31	-28.31	PASS
39	2441	-48.35	Plot E.1	-5.55	-25.55	PASS
78	2480	-51.18	Plot F.1	-3.25	-23.25	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

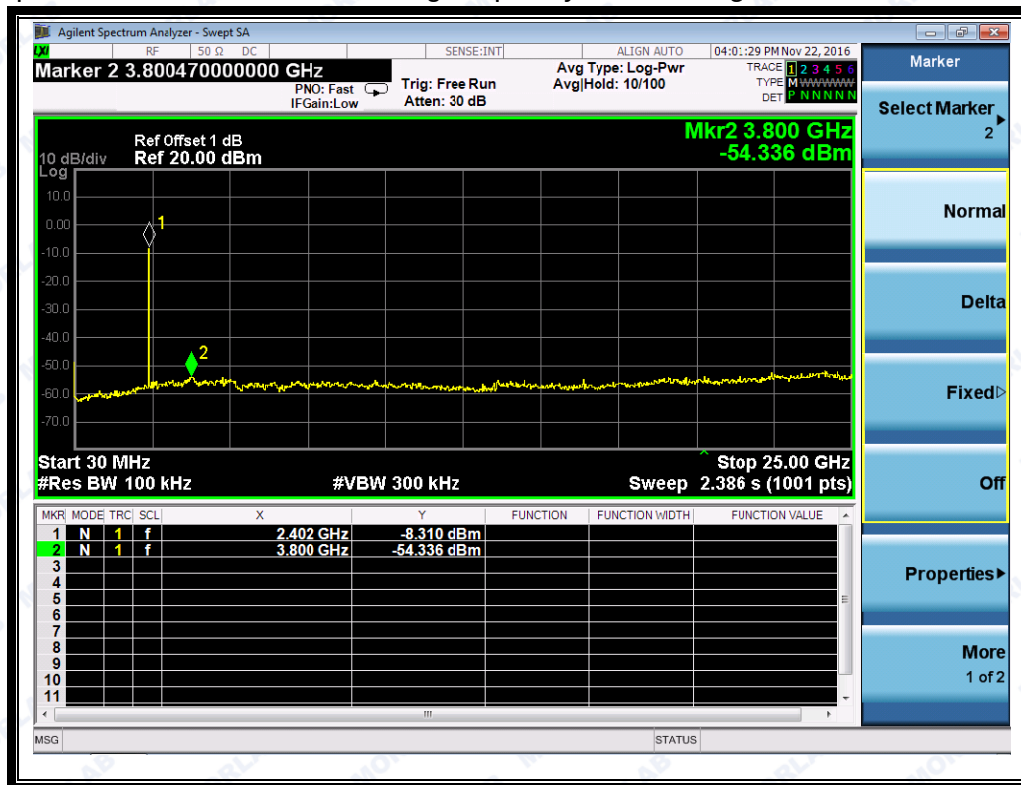


(Plot D.1: Channel = 0, 30MHz to 25GHz @ $\pi/4$ -DQPSK)





REPORT No.: SZ16110119W02

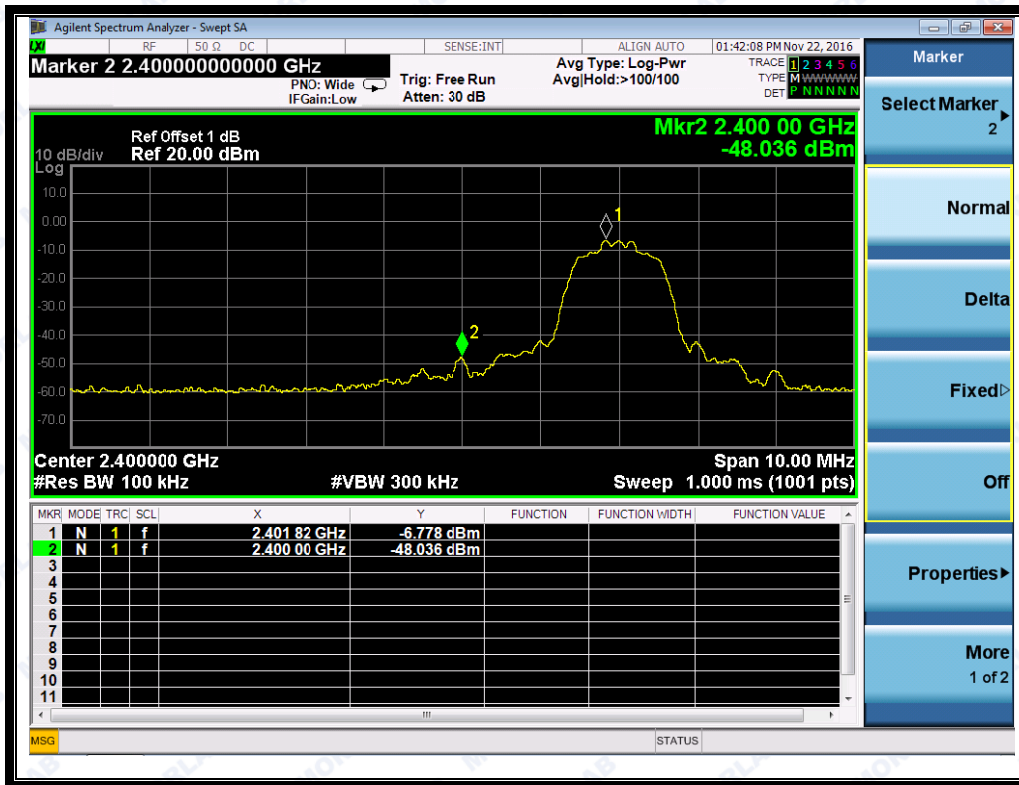


(Channel = 0, Band edge @ $\pi/4$ -DQPSK)

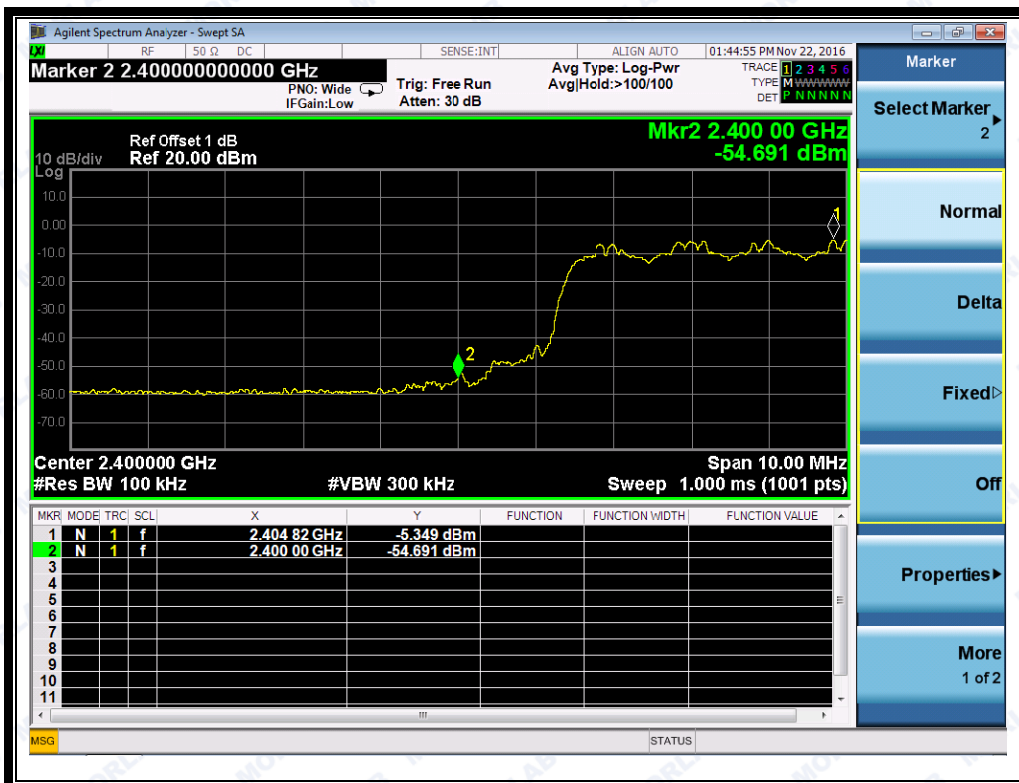

(Channel = 0, Band edge with hopping on @ $\pi/4$ -DQPSK)

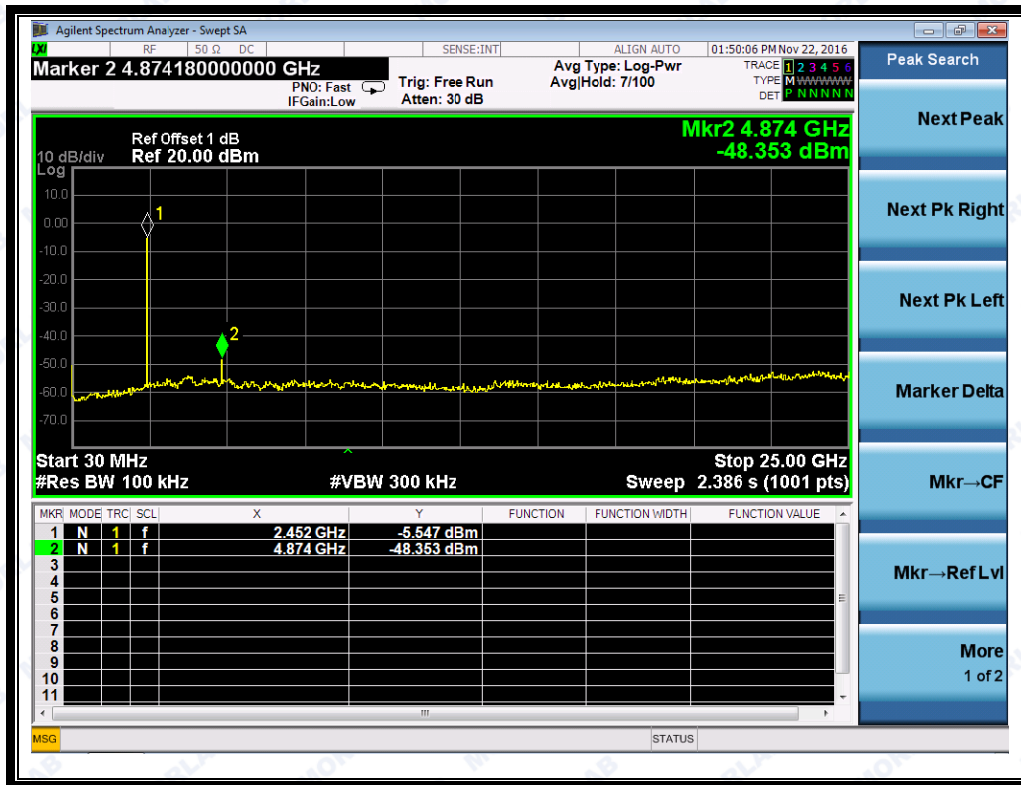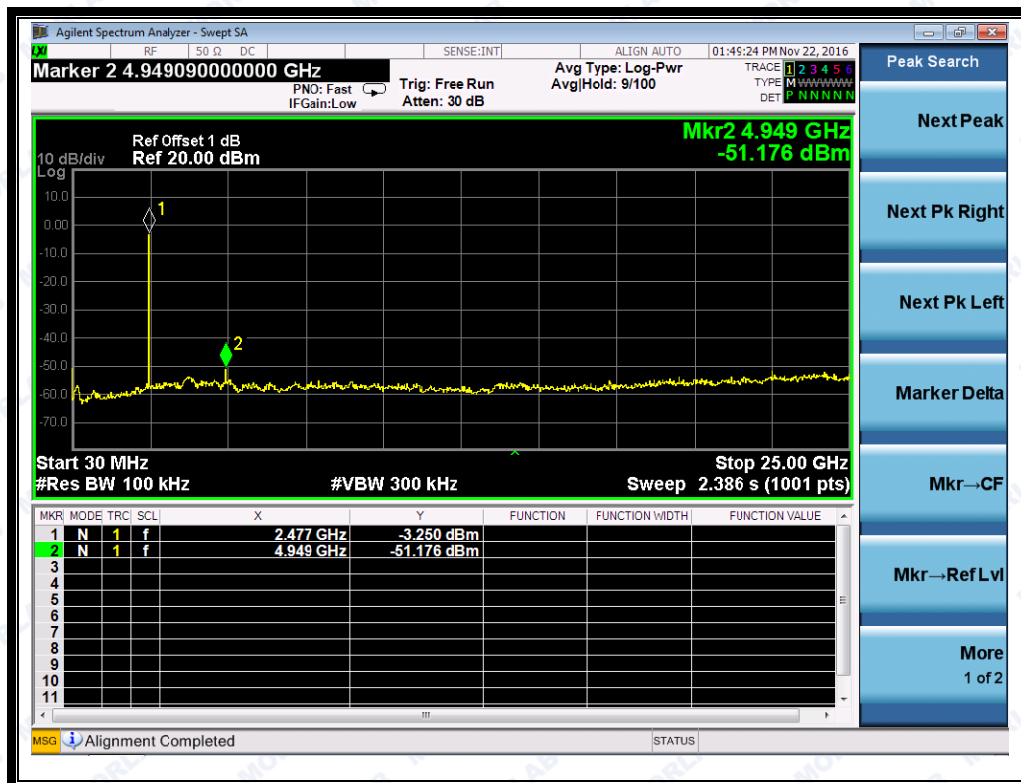(Plot E.1: Channel = 39, 30MHz to 25GHz @ $\pi/4$ -DQPSK)(Plot F.1: Channel = 78, 30MHz to 25GHz @ $\pi/4$ -DQPSK)

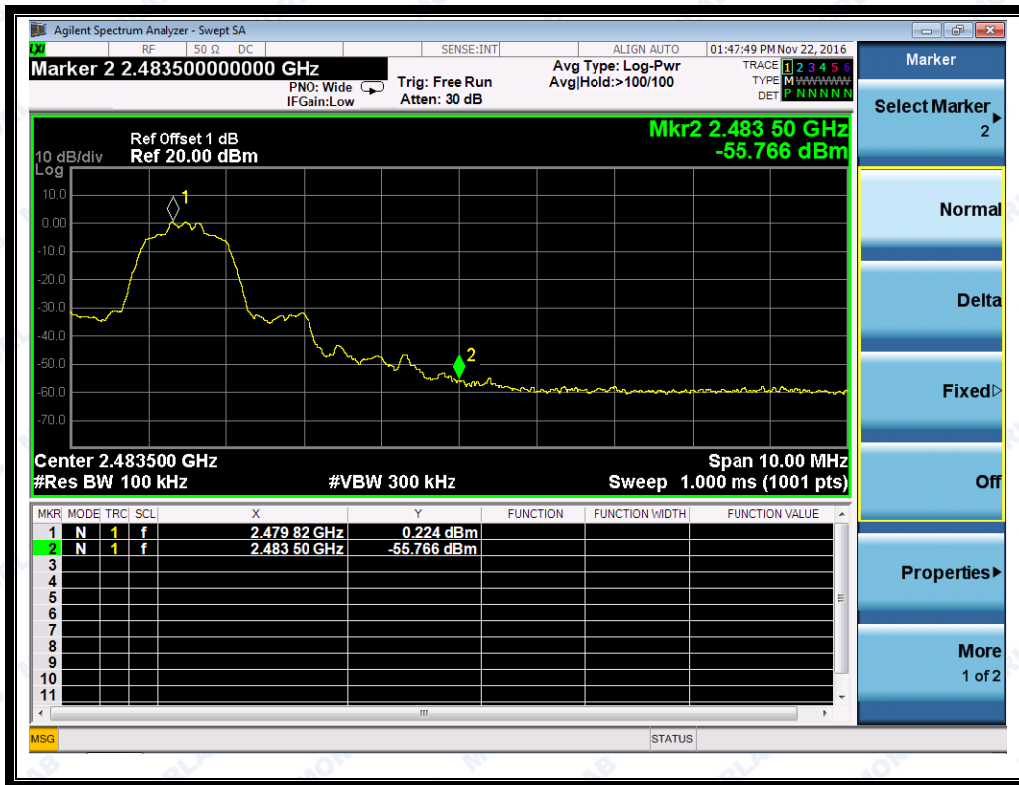(Channel = 78, Band edge @ $\pi/4$ -DQPSK)(Channel = 78, Band edge with hopping on @ $\pi/4$ -DQPSK)



REPORT No.: SZ16110119W02


2.7.4.3 8-DPSK Mode

A. Test Verdict:


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-54.18	Plot G.1	-6.78	-26.78	PASS
39	2441	-50.67	Plot H.1	-5.10	-25.10	PASS
78	2480	-50.66	Plot I.1	-3.40	-23.40	PASS

B. Test Plots:


Note: the power of the Module transmitting frequency should be ignored.

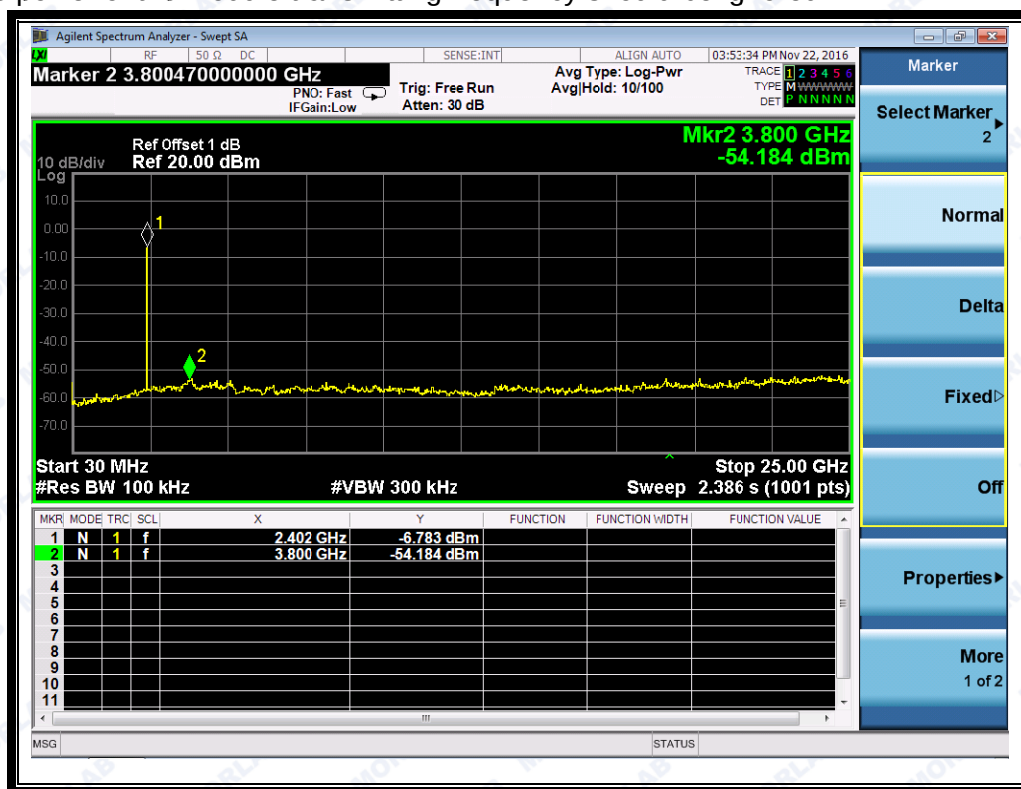


(Plot G.1: Channel = 0, 30MHz to 25GHz @ 8-DPSK)

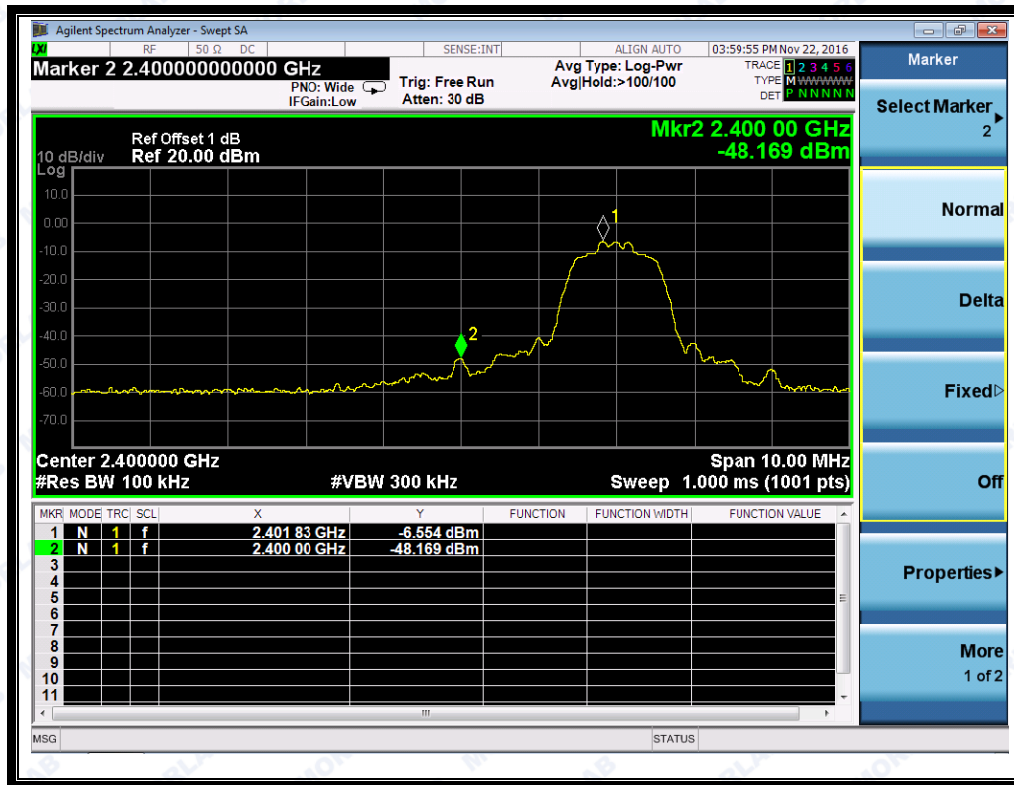


(Channel = 0, Band edge @ 8-DPSK)

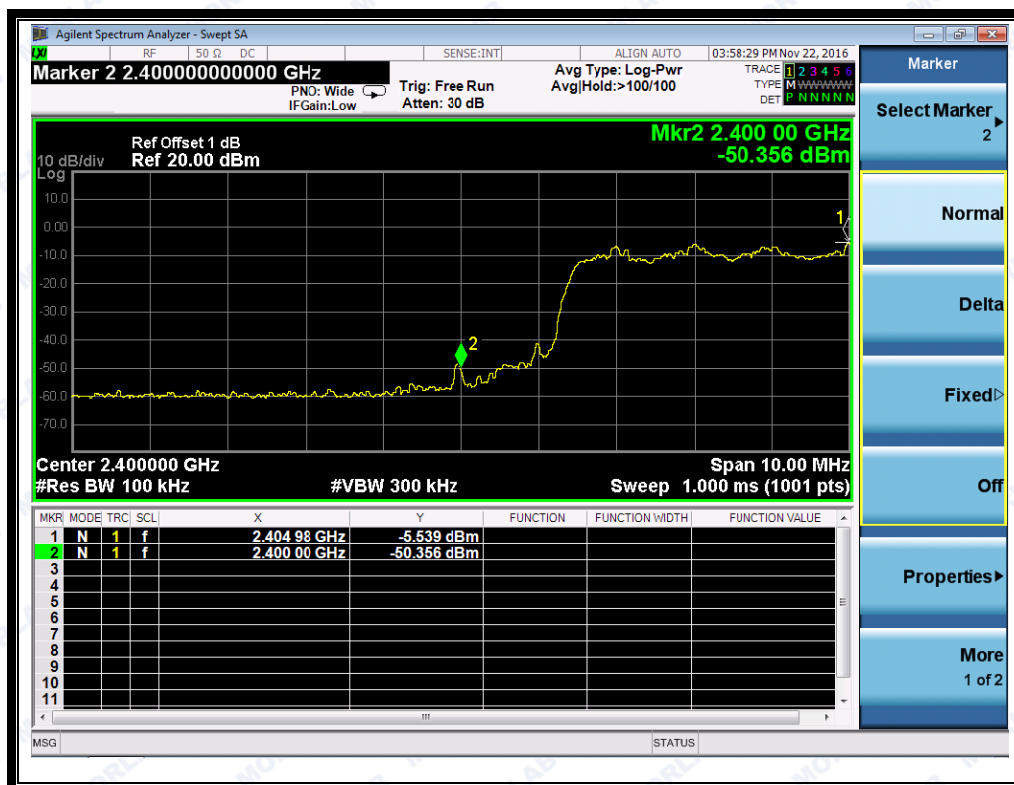


(Channel = 0, Band edge with hopping on @ 8-DPSK)

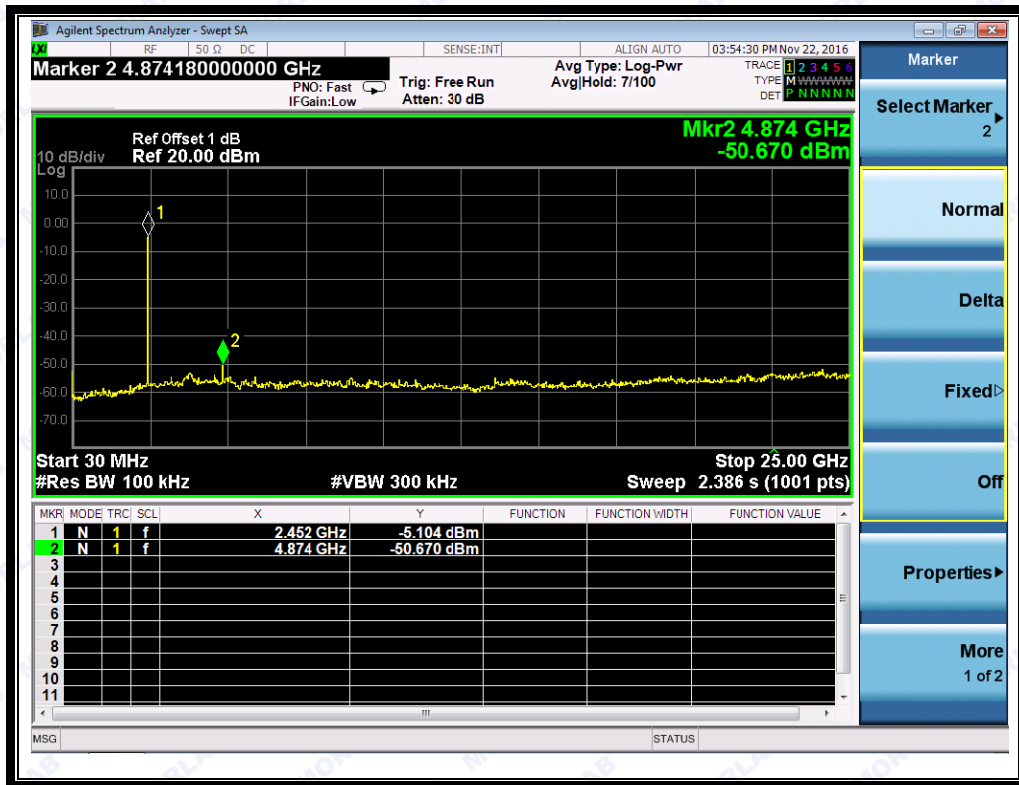


(Plot H.1: Channel = 39, 30MHz to 25GHz @ 8-DPSK)

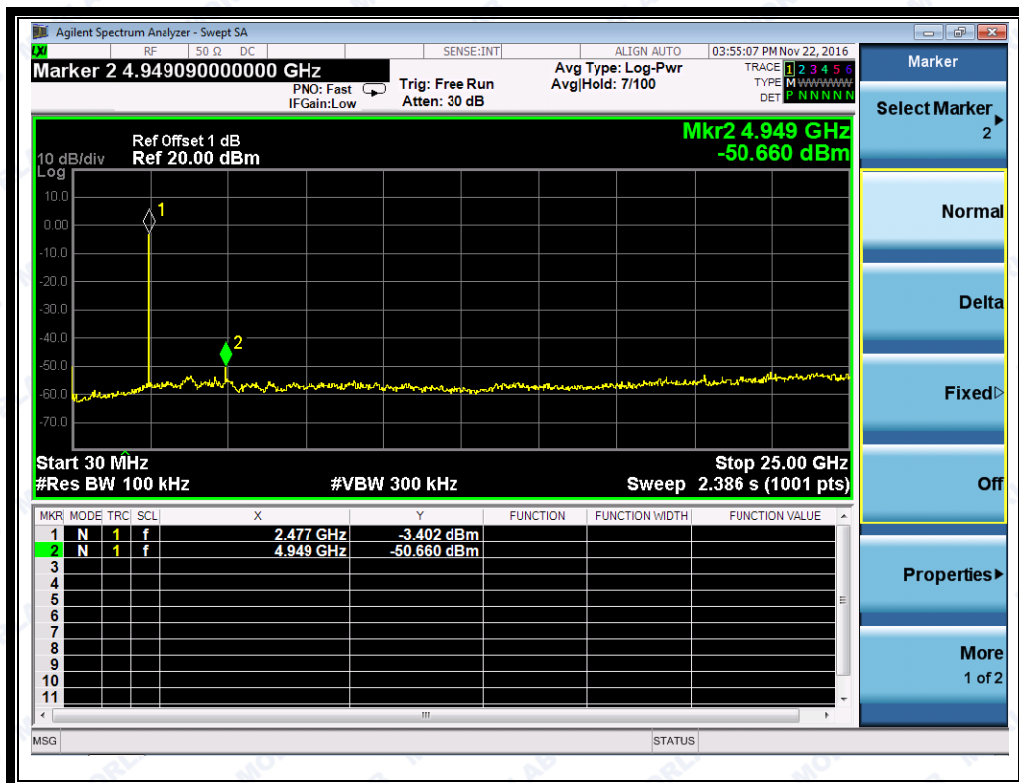

(Plot I.1: Channel = 78, 30MHz to 25GHz @ 8-DPSK)

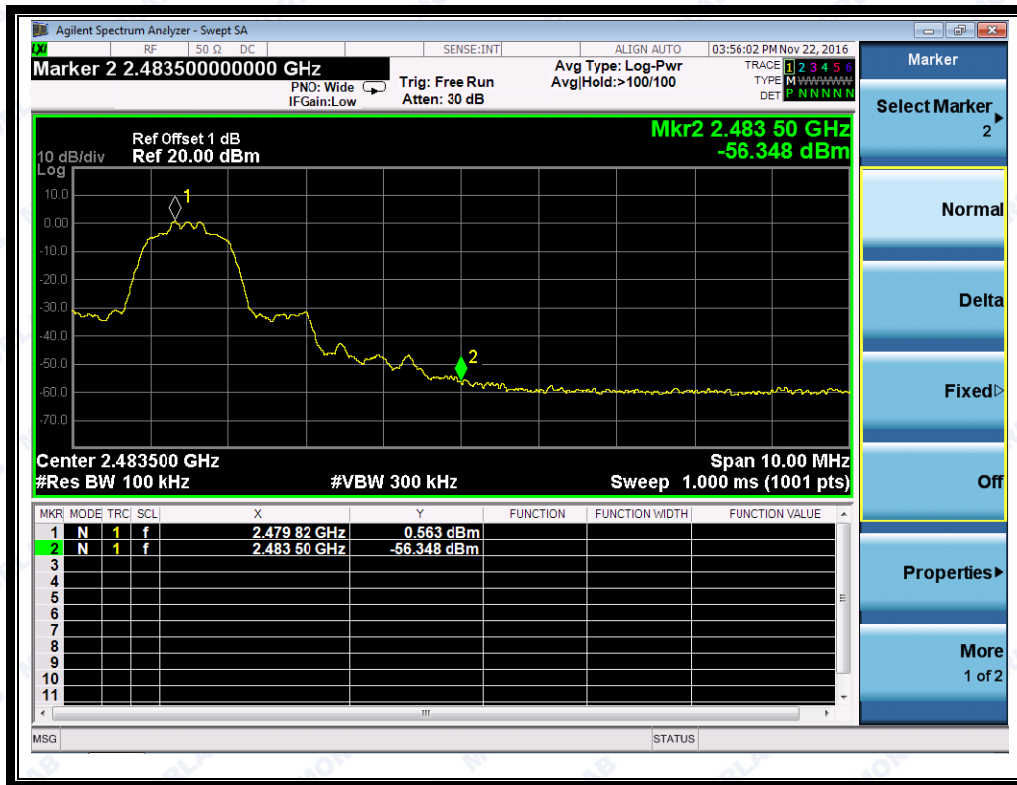

(Plot I.1: Channel = 78, Band edge @ 8-DPSK)

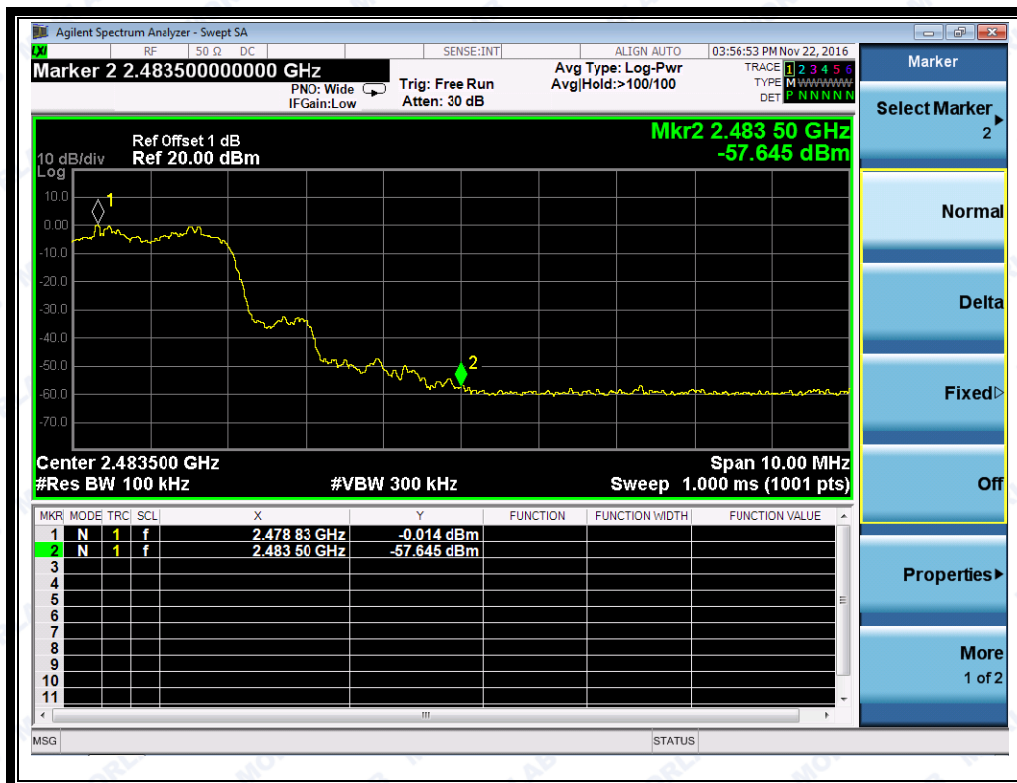

(Plot I.1: Channel = 78, Band edge with hopping on @ 8-DPSK)


2.8 Restricted Frequency Bands

2.8.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2 Test Description

A. Test Setup:

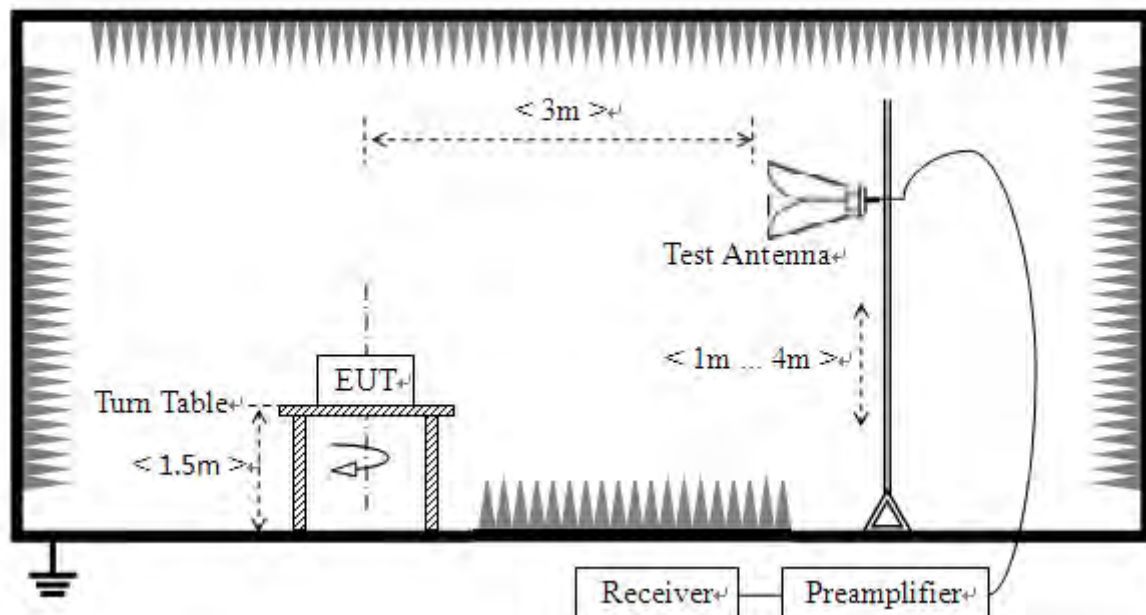

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under non hopping-on test mode transmitting 339 bytes DH5, 679 bytes 2DH5 and 1021 bytes 3DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

**B. Equipments List:**

Please reference ANNEX A(1.5).

2.8.3 Test Procedure

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1\text{GHz}$, 100 KHz for $f < 1\text{GHz}$

VBW = 3 MHz for peak and 10Hz for average

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize.

2.8.4 Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E [\text{dB}\mu\text{V/m}] = U_R + A_T + A_{\text{Factor}} [\text{dB}]; A_T = L_{\text{Cable loss}} [\text{dB}] - G_{\text{preamp}} [\text{dB}]$$

AT: Total correction Factor except Antenna

UR: Receiver Reading

Gpreamp: Preamplifier Gain

AFactor: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


2.8.4.1 GFSK Mode**A. Test Verdict:**

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dB μ V/m)	Limit (dB μ V/m)	Verdict
		PK/ AV						
0	2387.23	PK	45.46	-33.63	32.56	44.39	74	Pass
0	2374.75	AV	32.44	-33.63	32.56	31.37	54	Pass
78	2484.52	PK	52.10	-33.18	32.50	51.42	74	Pass
78	2485.69	AV	32.77	-33.18	32.50	32.09	54	Pass




REPORT No.: SZ16110119W02

B. Test Plots:

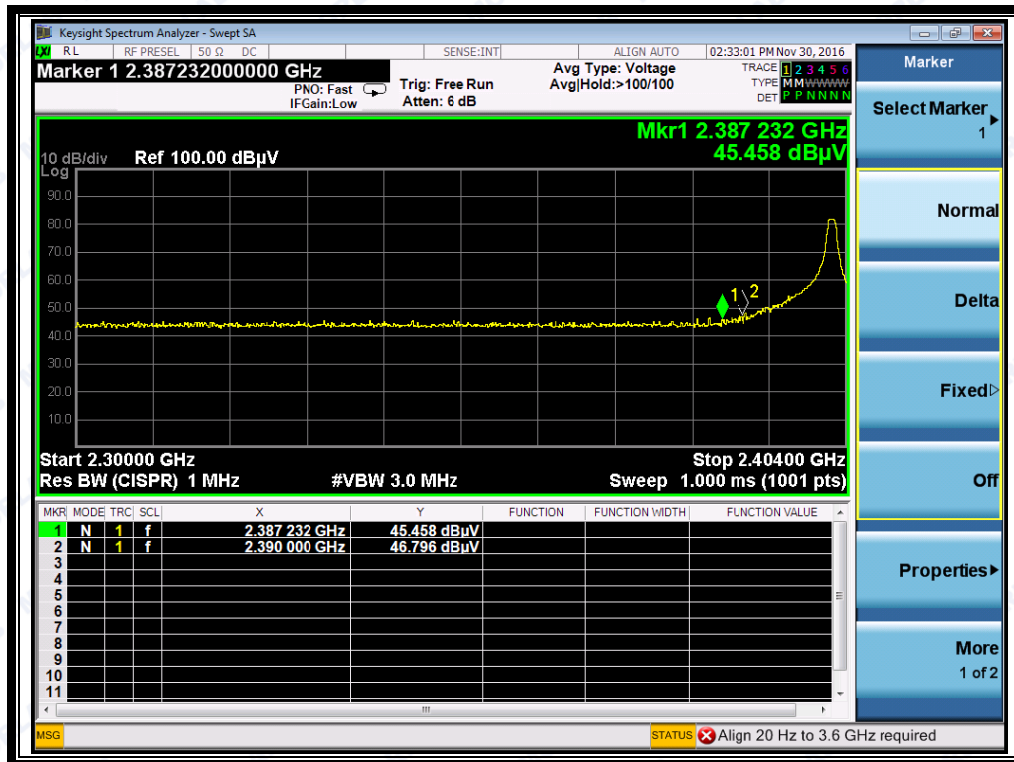

(Plot A1: Channel = 0 PEAK @ GFSK)

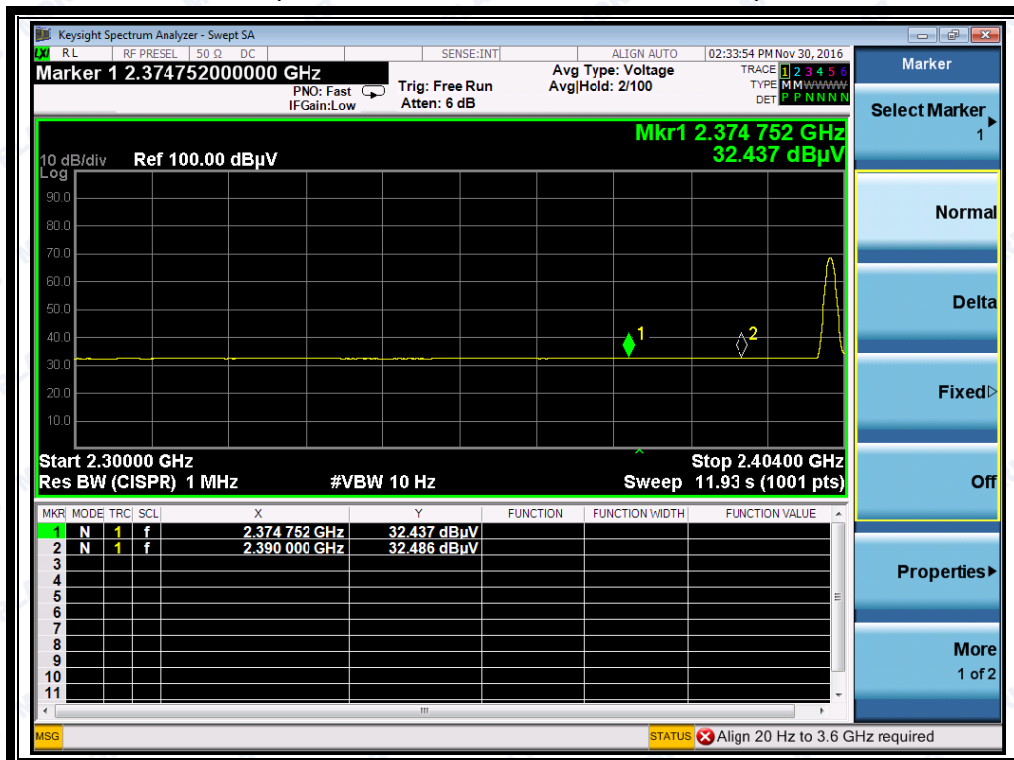

(Plot A2: Channel = 0 AVERAGE @ GFSK)



REPORT No.: SZ16110119W02



(Plot B1: Channel = 78 PEAK @ GFSK)



(Plot B2: Channel = 78 AVERAGE @ GFSK)




2.8.4.2 $\pi/4$ -DQPSK Mode

A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading U_R (dBuV)	A_T (dB)	A_{Factor} (dB@3m)	Max. Emission E (dBuV/m)	Limit (dBuV/m)	Verdict
		PK/ AV						
0	2388.06	PK	47.32	-33.63	32.56	46.25	74	Pass
0	2370.59	AV	32.40	-33.63	32.56	31.33	54	Pass
78	2484.00	PK	53.26	-33.18	32.5	52.58	74	Pass
78	2486.81	AV	32.65	-33.18	32.5	31.97	54	Pass


B. Test Plots:

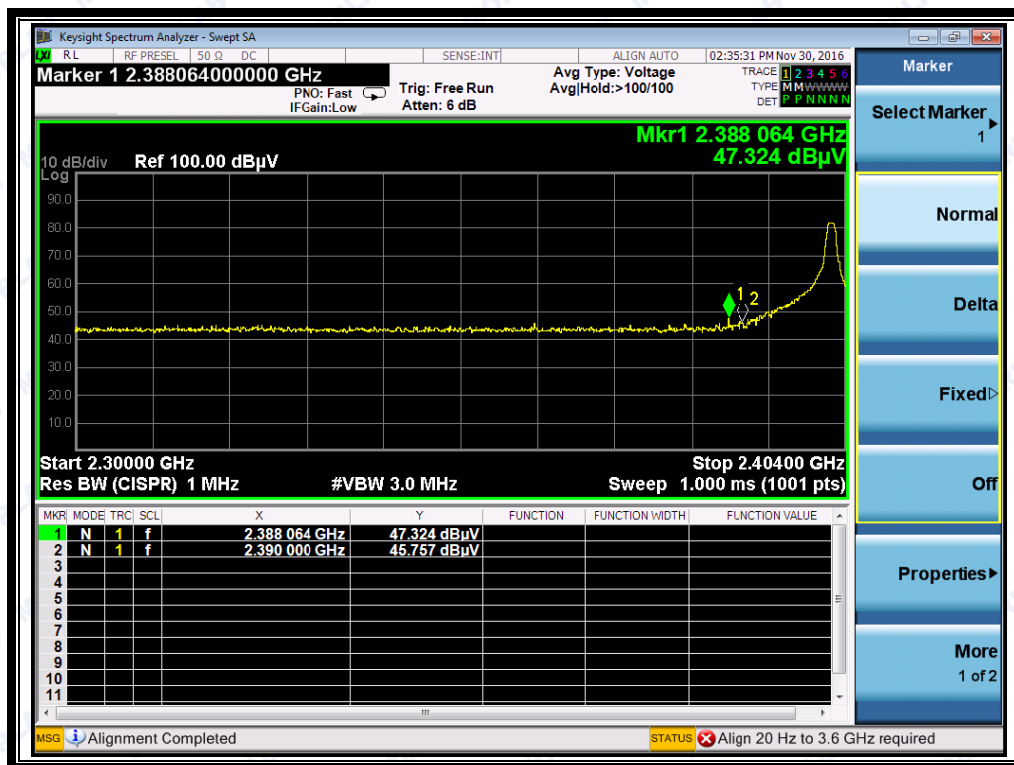

(Plot C1: Channel = 0 PEAK @ $\pi/4$ -DQPSK)




REPORT No.: SZ16110119W02

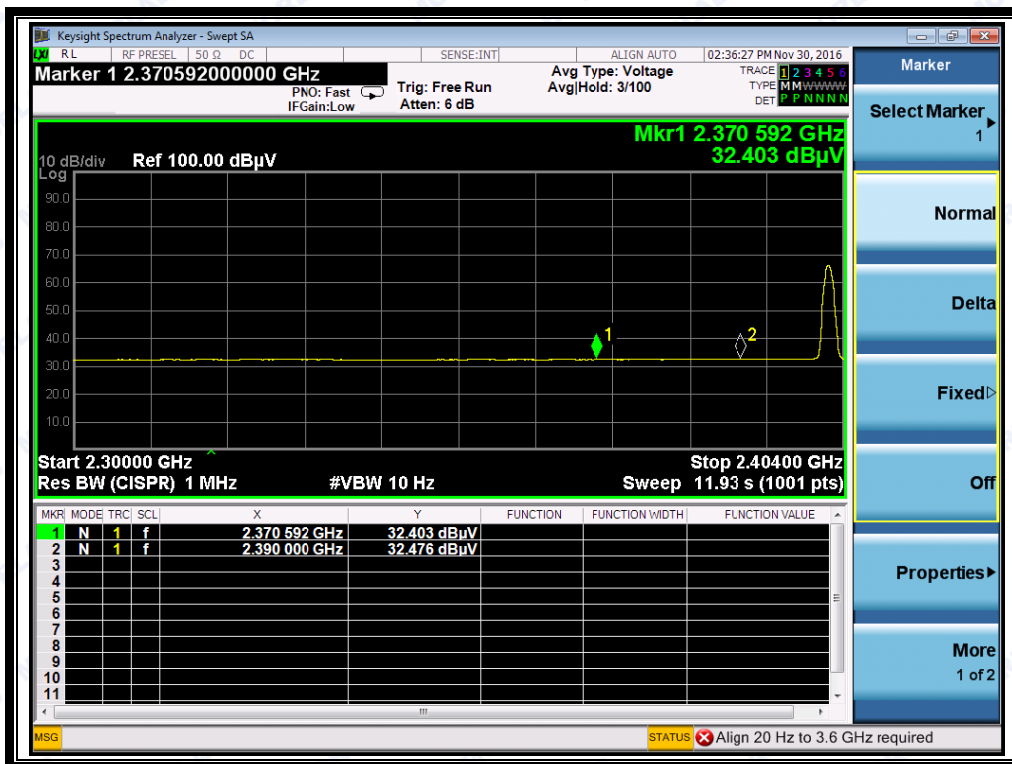

(Plot C2: Channel = 0 AVERAGE @ $\pi/4$ -DQPSK)



(Plot D1: Channel = 78 PEAK @ $\pi/4$ -DQPSK)

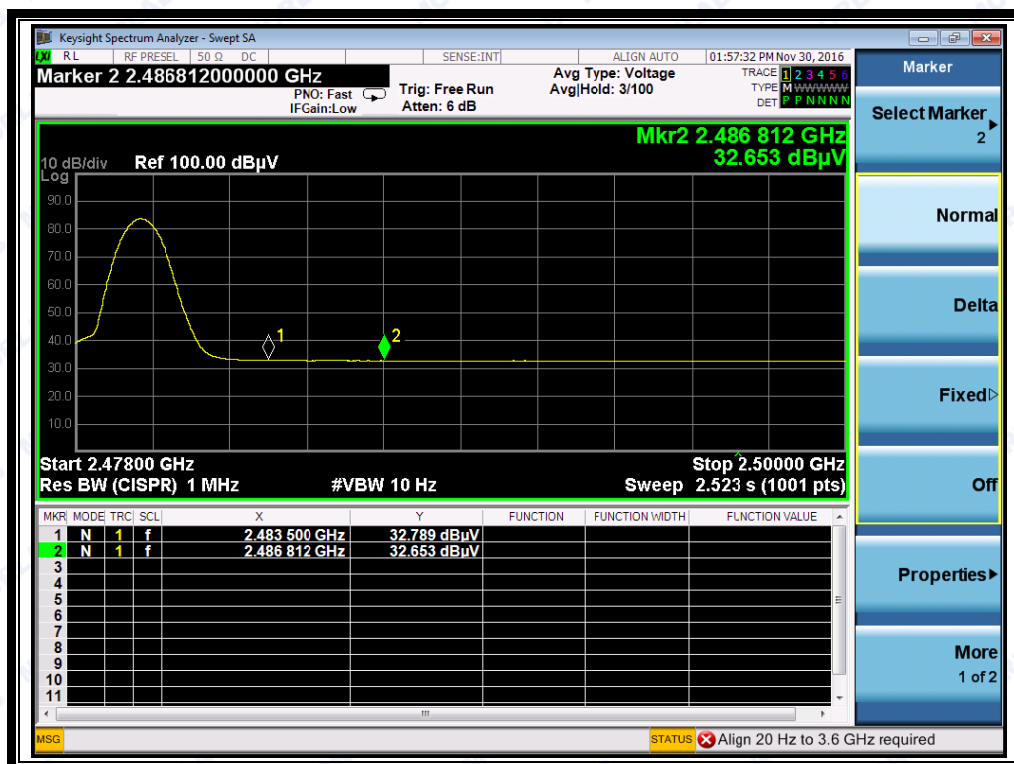

(Plot D2: Channel = 78 AVERAGE@ $\pi/4$ -DQPSK)

2.8.4.3 8-DPSK Mode


A. Test Verdict:

Channel	Frequency (MHz)	Detector	Receiver Reading	A _T (dB)	A _{Factor} (dB@3m)	Max. Emission E	Limit (dBμV/m)	Verdict
		PK/ AV	U _R (dBuV)			(dBμV/m)		
0	2383.59	PK	43.66	-33.63	32.56	42.59	74	Pass
0	2375.27	AV	32.53	-33.63	32.56	31.46	54	Pass
78	2484.15	PK	52.88	-33.18	32.5	52.20	74	Pass
78	2485.40	AV	32.73	-33.18	32.5	32.05	54	Pass


B. Test Plots:



REPORT No.: SZ16110119W02

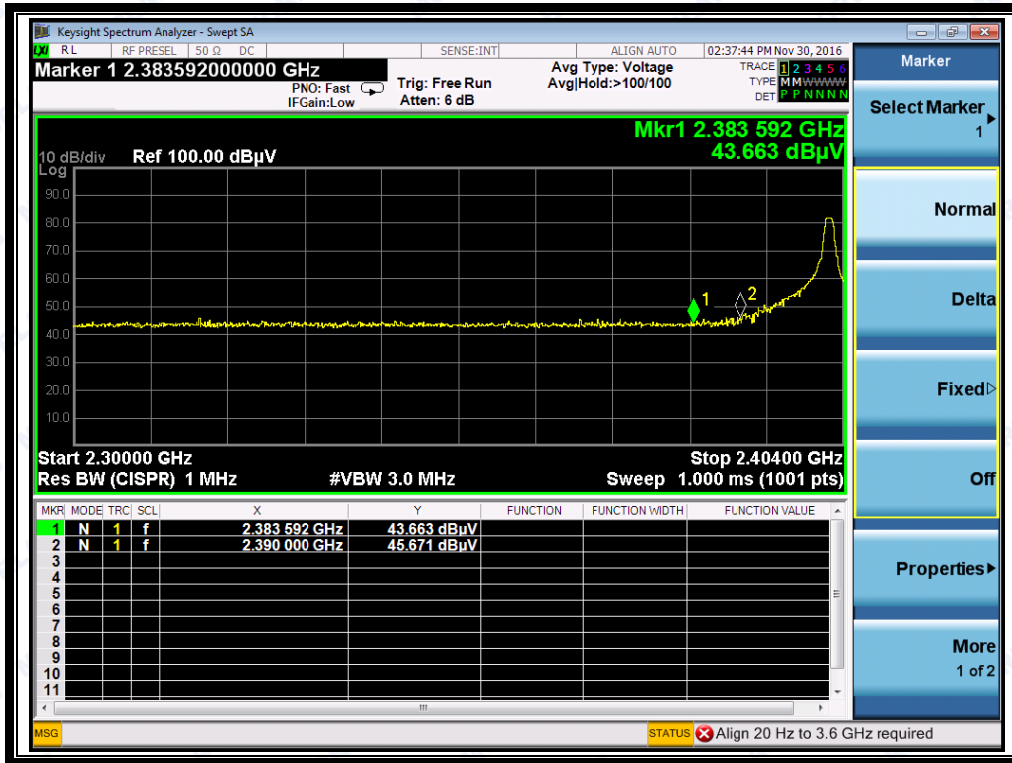

(Plot E1: Channel = 0 PEAK @ 8-DPSK Mode)

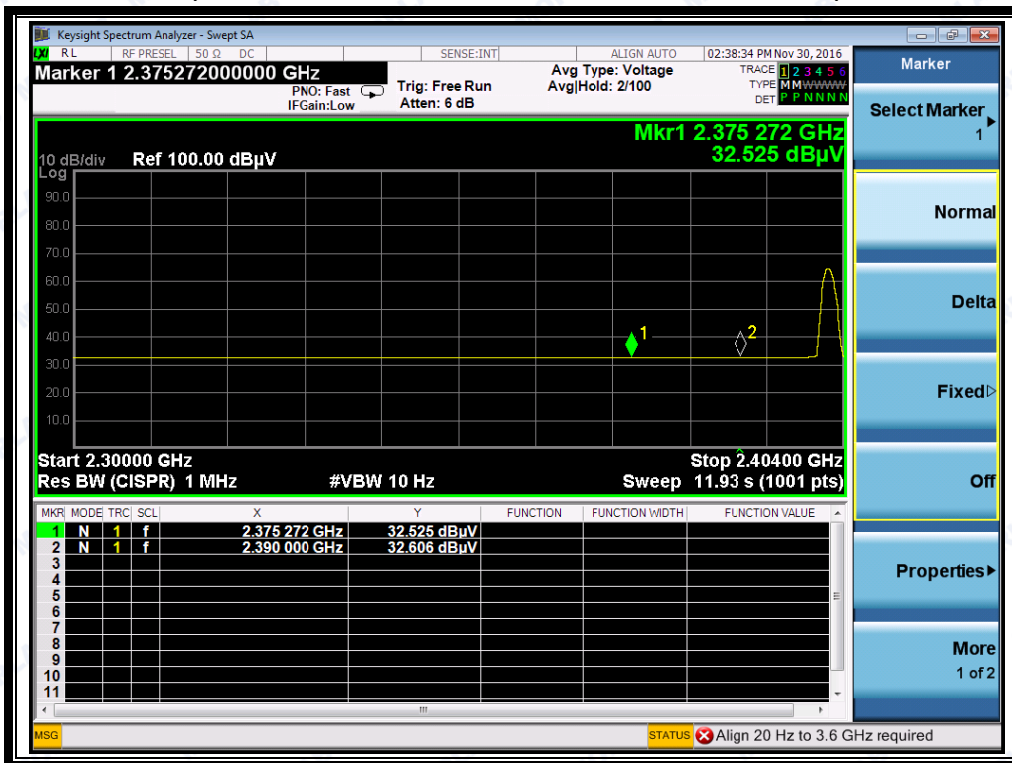

(Plot E2: Channel = 0 AVERAGE @ 8-DPSK Mode)



REPORT No.: SZ16110119W02



(Plot F1:Channel = 78 PEAK @ 8-DPSK Mode)



(Plot F2:Channel = 78 AVERAGE @ 8-DPSK Mode)

2.9 Conducted Emission

2.9.1 Requirement

According to RSS-GEN section 8.8, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


Frequency range (MHz)	Conducted Limit (dB μ V)	
	Quai-peak	Average
0.15 - 0.50	66 to 56	56 to 46
0.50 - 5	56	46
5- 30	60	50

NOTE:

- The lower limit shall apply at the band edges.
- The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.9.2 Test Description

A. Test Setup:

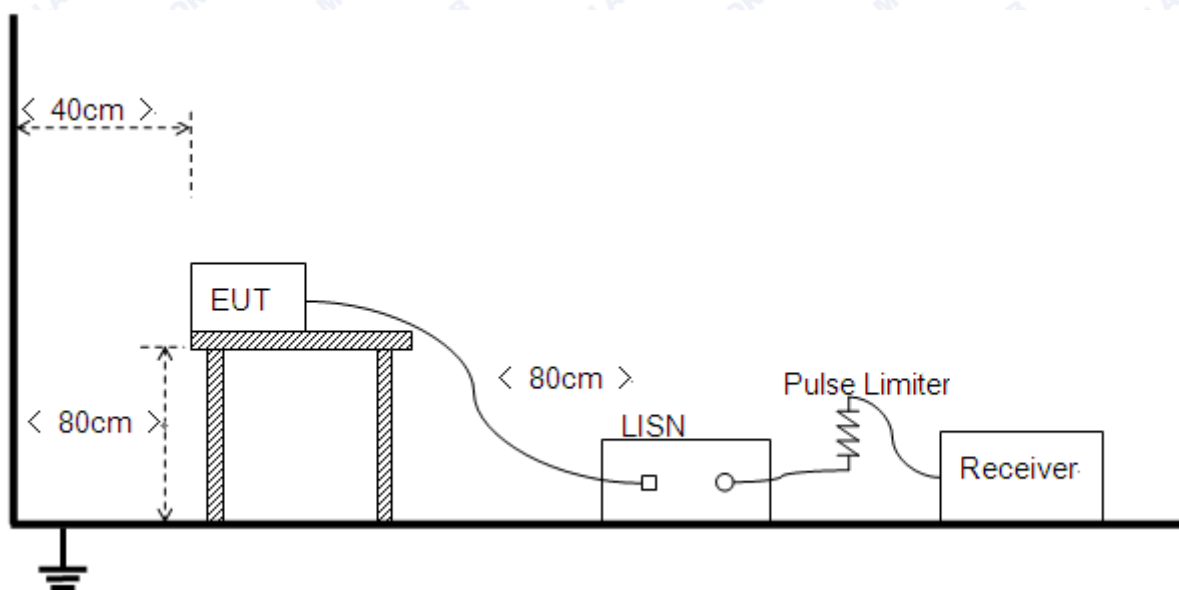

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

The factors of the site are calibrated to correct the reading. During the measurement, the Bluetooth EUT is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

**B. Equipments List:**

Please reference ANNEX A(1.5).


2.9.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

A. Test setup:


The EUT configuration of the emission tests is EUT + Link.

Note: The test voltage is AC 120V/60Hz.

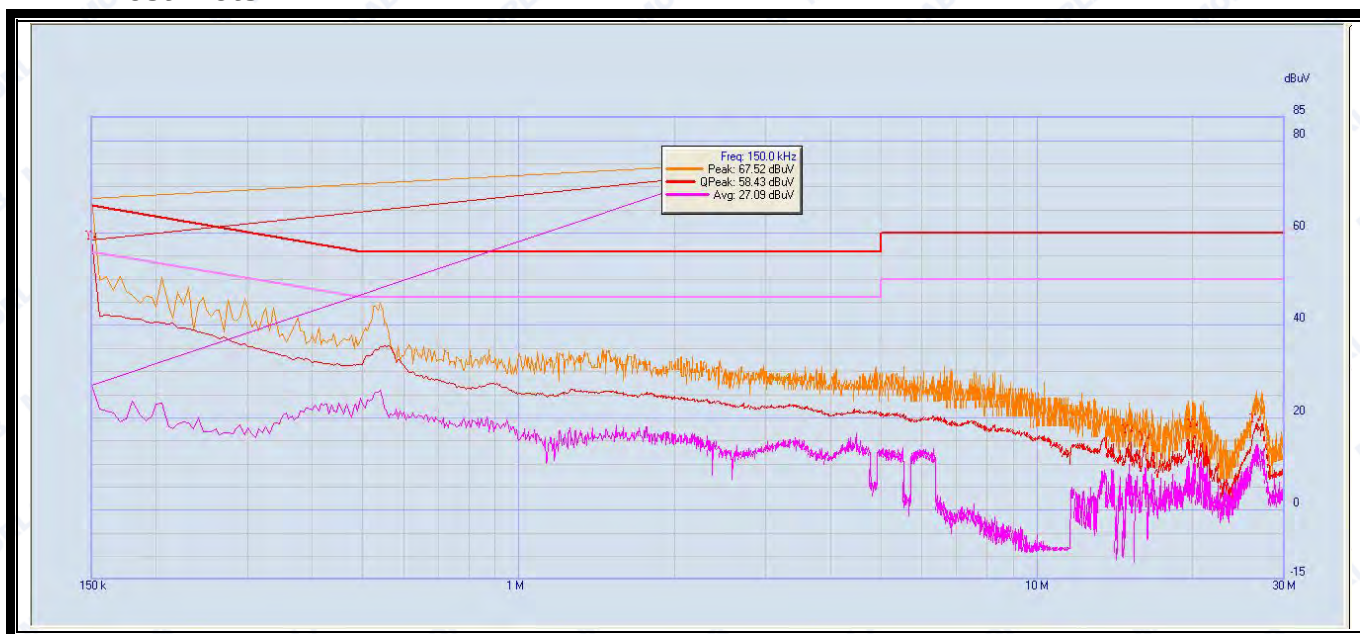B. Test Plots:

(Plot A: L Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power-line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	58.43	27.09	66	56	Line	PASS
2	1.76	25.14	18.06	56	46		PASS
3	15	15.61	9.73	60	50		PASS
4	16.155	14.46	8.81	60	50		PASS
5	20.005	17.64	10.02	60	50		PASS
6	26.415	18.24	13.50	60	50		PASS

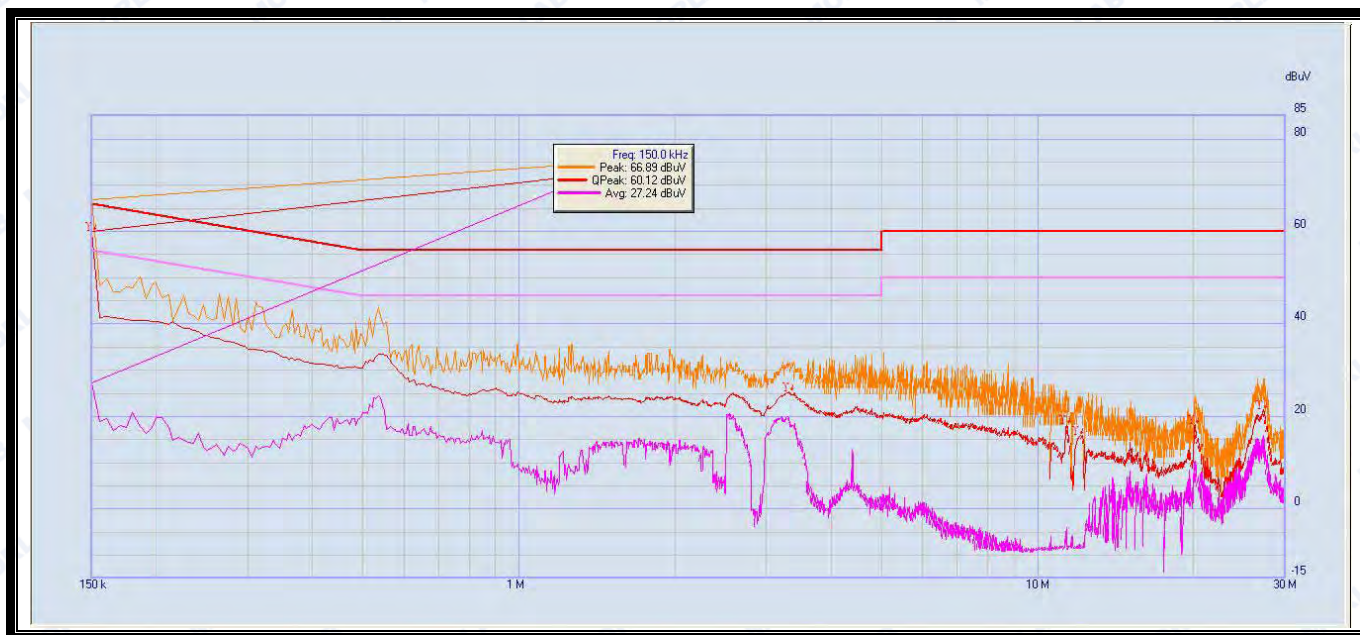

(Plot B: N Phase)

NO.	Fre. (MHz)	Emission Level (dBμV)		Limit (dBμV)		Power- line	Verdict
		Quai-peak	Average	Quai-peak	Average		
1	0.15	60.12	27.24	66	56	Line	PASS
2	3.31	25.09	18.87	56	46		PASS
3	11.29	17.63	-4.78	60	50		PASS
4	12.02	15.95	-8.60	60	50		PASS
5	20.075	16.53	10.31	60	50		PASS
6	27.135	20.96	13.37	60	50		PASS



2.10 Radiated Emission

2.10.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:


1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)


2.10.2 Test Description

A. Test Setup:


- 1) For radiated emissions from 9kHz to 30MHz

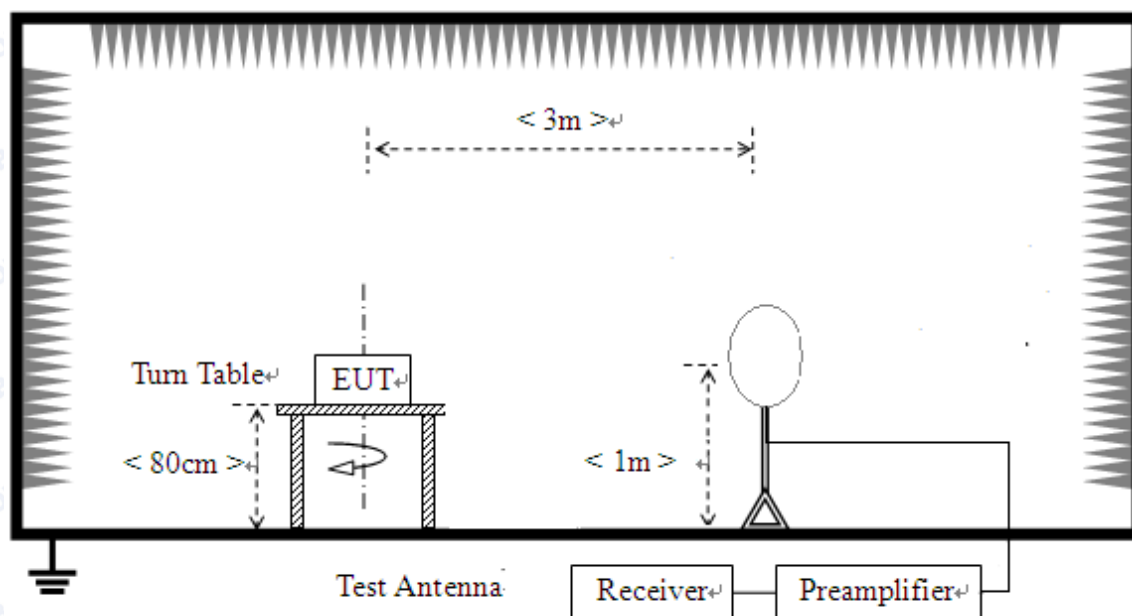

- 2) For radiated emissions from 30MHz to 1GHz

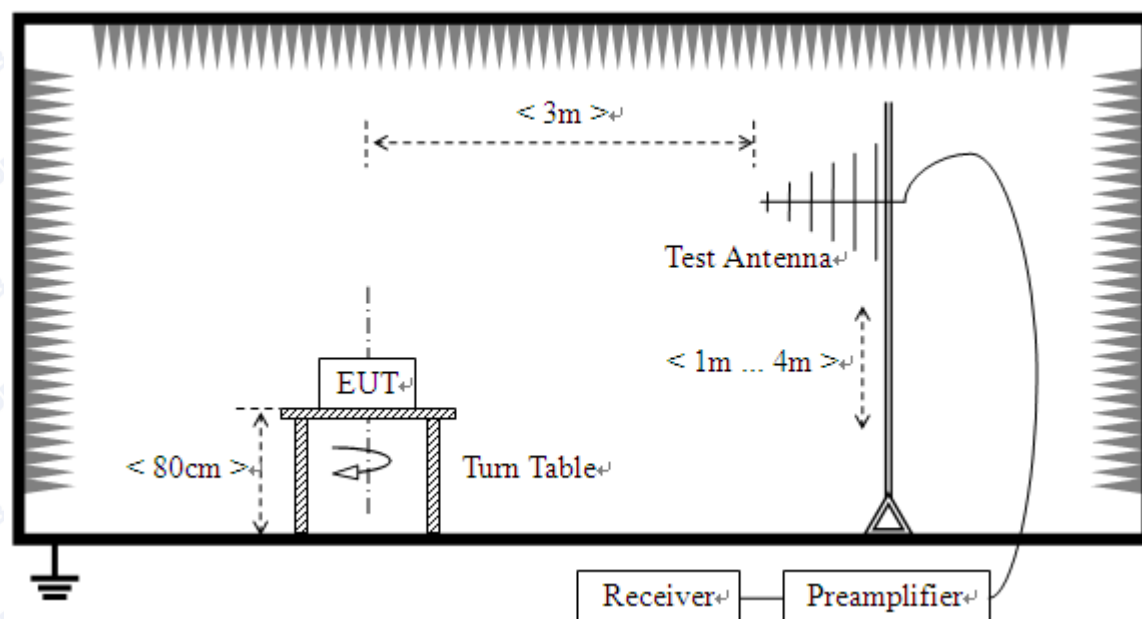

3) For radiated emissions above 1GHz

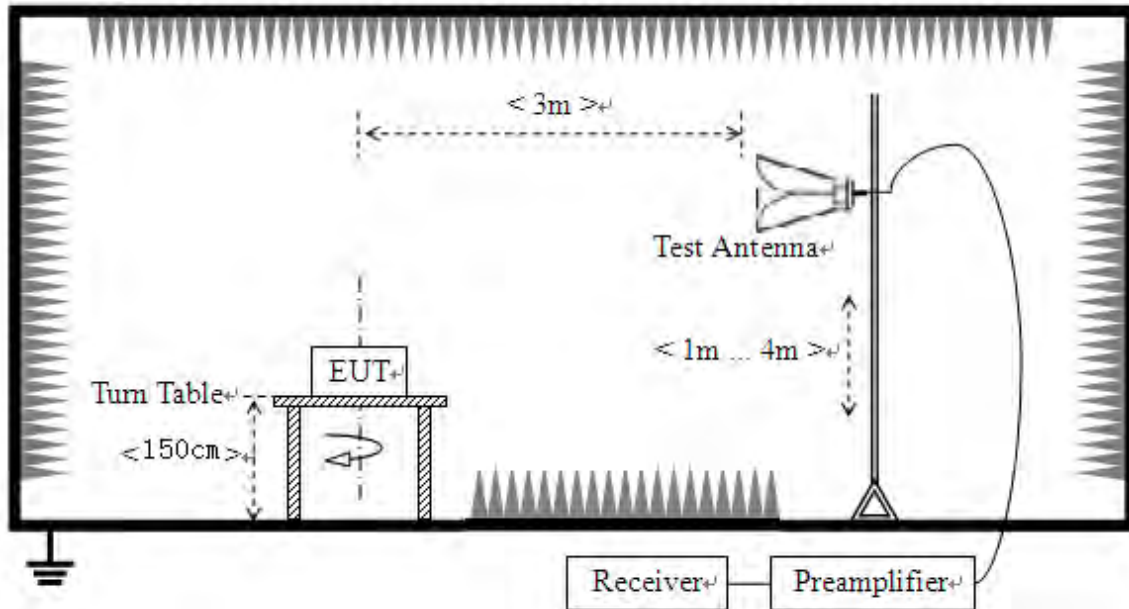

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10 (2013). For radiated emissions below or equal to 1GHz, the EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

- In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.
- In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

B. Equipments List:

Please reference ANNEX A(1.5).

2.10.3 Test Procedure

Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW $\geq$ RBW

Sweep = auto

Detector function = peak

Trace = max hold

2.10.4 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna

U_R : Receiver Reading


G_{preamp} : Preamplifier Gain

A_{Factor} : Antenna Factor at 3m

During the test, the total correction Factor A_T and A_{Factor} were built in test software.

Note: All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.

The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

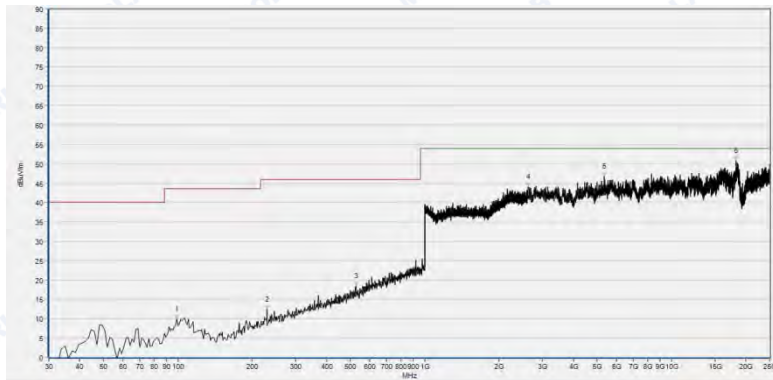**2.10.4.1 GFSK Mode:****A. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.199	9.88	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
229.099	12.38	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
526.533	18.36	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2620.367	44.13	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
5321.077	46.82	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
18254.337	50.76	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 0)




Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
101.627	10.78	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
250.951	11.82	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
573.880	19.55	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2345.178	44.65	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
5638.807	47.28	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
16070.958	50.07	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 0)



Plot for Channel = 39

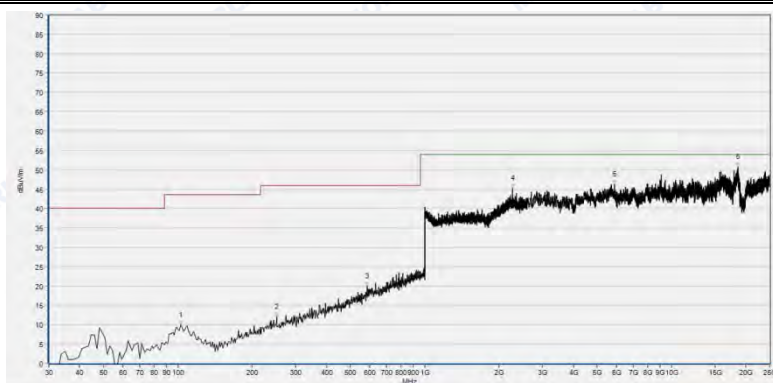

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.841	9.84	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
250.951	12.14	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
583.592	19.92	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2262.585	45.23	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
5862.848	46.31	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
18535.406	50.73	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 39)




Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
67.635	11.82	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
213.317	11.27	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
492.541	17.78	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2038.495	42.05	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
4457.501	44.84	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
12327.441	48.01	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 39)



Plot for Channel = 78

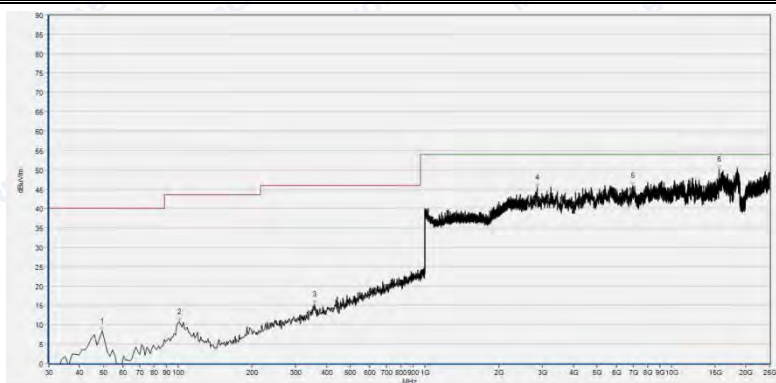

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	8.41	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
101.627	10.64	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
356.571	15.28	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2856.628	45.44	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
6962.684	45.87	58.37	33.58	74.0	N.A	54.00	Horizontal	PASS
15582.142	50.18	44.30	36.47	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ GFSK, channel 78)




Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.413	10.62	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
238.811	10.96	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
538.673	18.35	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
3015.494	45.36	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
7944.390	46.81	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
18551.700	51.51	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ GFSK, channel 78)

**2.10.4.2 $\pi/4$ -DQPSK Mode:****B. Test Plots for the Whole Measurement Frequency Range:**

Plots for Channel = 0

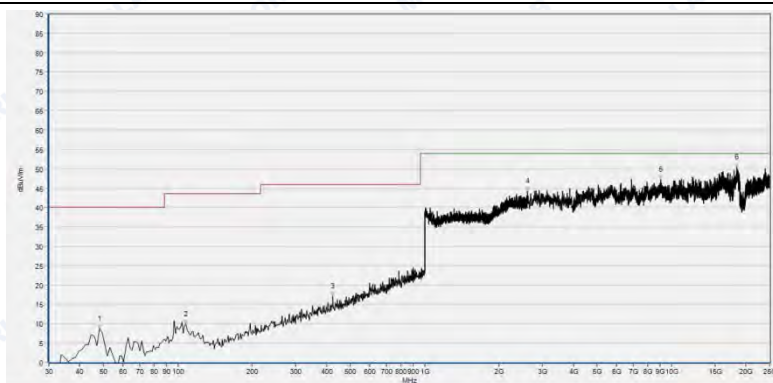

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
48.210	8.65	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
107.697	9.97	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
424.556	17.06	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2604.073	44.19	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
9023.859	47.18	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
18376.541	50.42	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 0)


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
67.635	7.27	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
100.413	11.96	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
388.135	15.27	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2999.200	44.30	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
7015.639	46.85	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
18282.851	51.01	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 0)




REPORT No.: SZ16110119W02

Plot for Channel = 39

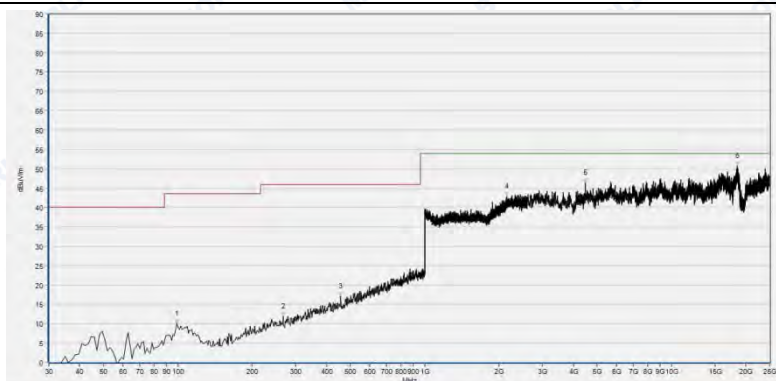

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
99.199	10.10	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
266.733	11.82	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
456.120	17.15	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2151.821	42.82	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
4486.016	46.39	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
18425.423	50.77	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 39)

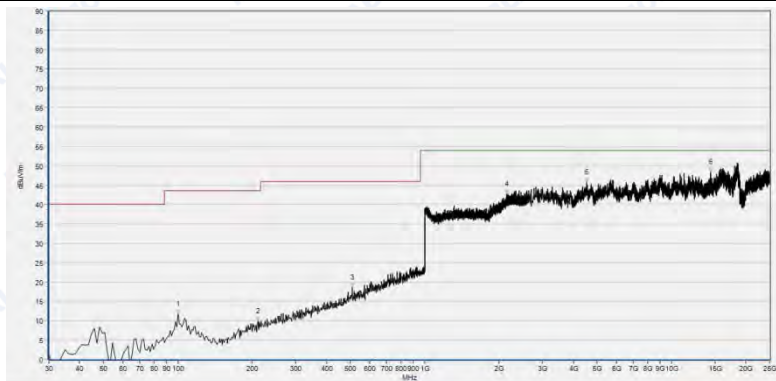


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
100.413	11.70	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
210.889	9.93	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
509.537	18.63	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2151.180	42.70	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
4526.750	45.73	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
14392.690	48.37	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 39)




REPORT No.: SZ16110119W02

Plot for Channel = 78

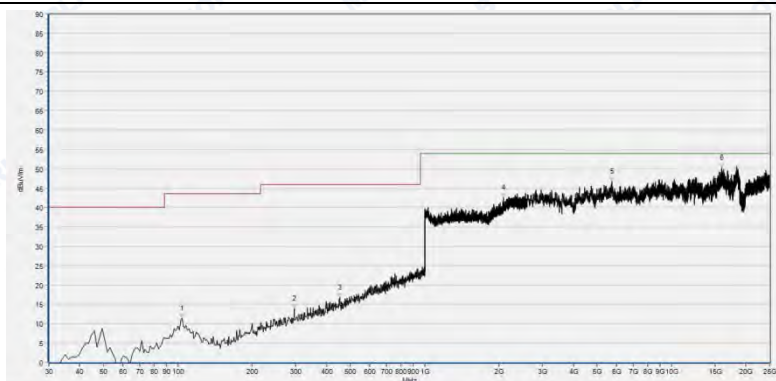


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
104.055	11.36	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
295.870	13.85	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
452.478	16.76	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2086.515	42.57	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
5732.497	46.83	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
15928.387	50.24	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @ $\pi/4$ -DQPSK, channel 78)

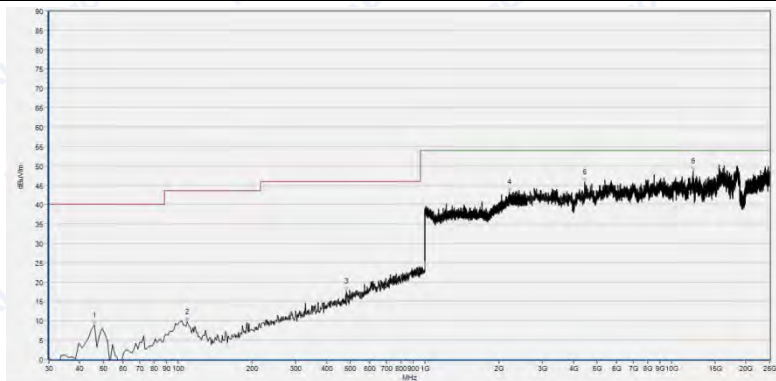


Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.782	8.81	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
108.911	9.77	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
481.615	17.54	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2200.480	43.22	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
4445.281	45.68	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
12205.237	48.54	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @ $\pi/4$ -DQPSK, channel 78)

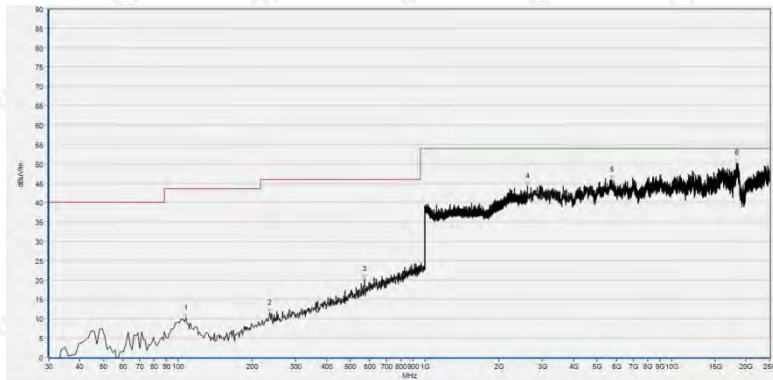**2.10.4.3 8-DPSK Mode:****C. Test Plots for the Whole Measurement Frequency Range:**Plots for Channel = 0

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
107.697	10.23	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
235.169	11.48	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
571.452	20.36	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2612.220	44.17	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
5740.644	45.99	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
18405.055	50.24	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 0)

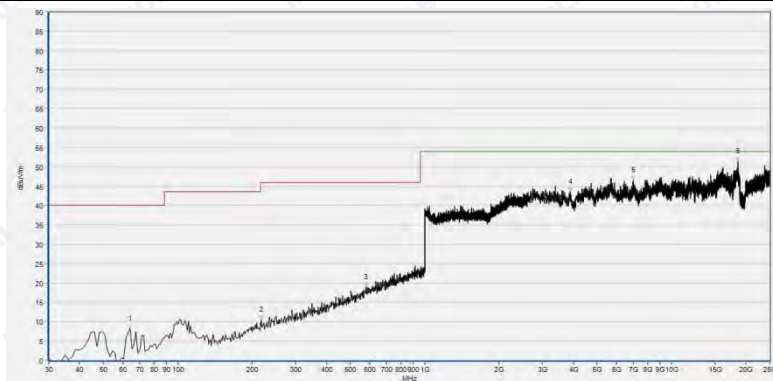

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
63.992	8.28	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
218.173	10.52	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
577.522	18.86	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
3883.142	43.64	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
7003.419	46.57	N.A	N.A	74.0	N.A	54.00	Vertical	PASS
18555.774	51.39	N.A	N.A	74.0	N.A	54.00	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 0)



Plot for Channel = 39



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
105.269	11.57	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
306.796	12.58	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
532.603	19.40	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
3003.273	44.95	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
5679.542	45.82	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS
11704.201	47.54	N.A	N.A	74.0	N.A	54.0	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 39)



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
102.841	9.74	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
282.516	12.80	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
621.227	20.80	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2799.600	45.49	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
8001.418	47.25	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
16828.623	49.73	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 39)




Plot for Channel = 78



Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
49.424	8.14	N.A	N.A	N.A	40.00	N.A	Horizontal	PASS
104.055	11.44	N.A	N.A	N.A	43.50	N.A	Horizontal	PASS
337.146	13.98	N.A	N.A	N.A	46.00	N.A	Horizontal	PASS
2624.441	44.61	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
4758.938	45.77	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS
10298.854	48.36	N.A	N.A	74.0	N.A	54.00	Horizontal	PASS

(30MHz to 25GHz, Antenna Horizontal @8-DPSK, channel 78)

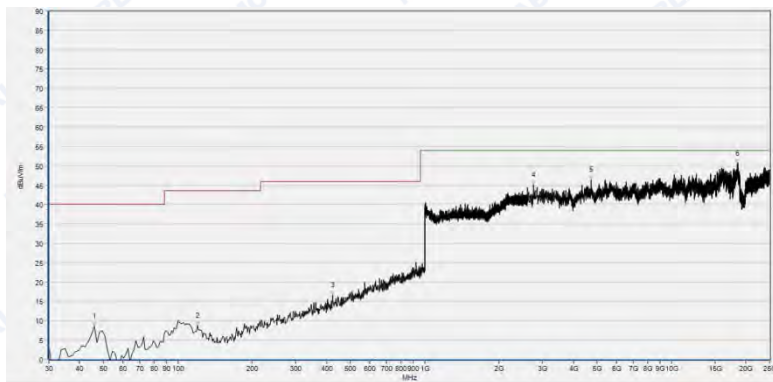

Fre. (MHz)	Pk (dBμV/m)	QP (dBμV/m)	AV (dBμV/m)	Limit-PK (dBμV/m)	Limit-QP (dBμV/m)	Limit-AV (dBμV/m)	Antenna	Verdict
45.782	8.48	N.A	N.A	N.A	40.00	N.A	Vertical	PASS
119.837	8.76	N.A	N.A	N.A	43.50	N.A	Vertical	PASS
423.342	16.60	N.A	N.A	N.A	46.00	N.A	Vertical	PASS
2762.939	45.01	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
4726.350	46.36	N.A	N.A	74.0	N.A	54.0	Vertical	PASS
18506.892	50.68	N.A	N.A	74.0	N.A	54.0	Vertical	PASS

(30MHz to 25GHz, Antenna Vertical @8-DPSK, channel 78)



ANNEX A GENERAL INFORMATION

1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

1.3 Facilities and Accreditations

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.1, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10 2013 and CISPR Publication 22; the FCC registration number is 695796.

1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Measurements	Frequency	Uncertainty
Conducted emissions	9KHz~30MHz	2.44dB
Radiated emissions	30MHz~200MHz	2.93
	200MHz~1000MHz	2.95
	1GHz~18GHz	2.26
	18GHz~40GHz	1.94

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2



REPORT No.: SZ16110119W02

1.5 Test Equipments Utilized**1.5.1 Conducted Test Equipments****Conducted Test Equipment**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2016.03.02	2017.03.01
2	USB Wideband Power Sensor	MY54210011	U2021XA	Agilent	2016.03.02	2017.03.01
3	EXA Signal Analyzer	MY53470836	N9010A	Agilent	2015.12.03	2016.12.02
4	RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
5	Attenuator	(n.a.)	10dB	Resnet	N/A	N/A
6	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
7	System Simulator	6K00006210	MT8852B	Anritsu	2016.03.02	2017.03.01

1.5.2 Conducted Emission Test Equipments**Conducted Emission Test Equipments**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
1	Receiver	595WX11007	PMM9010	Narda S.T.S/PMM	2016.03.02	2017.03.01
2	LISN	812744	NSLK 8127	Schwarzbeck	2016.03.02	2017.03.01
3	Pulse Limiter (20dB)	9391	VTSD 9561-D	Schwarzbeck	2016.03.02	2017.03.01
4	Coaxial cable(BNC) (30MHz-26GHz)	CB01	EMC01	Morlab	N/A	N/A

1.5.3 Auxiliary Test Equipment**Auxiliary Test Equipment**

No.	Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	T430i	Think Pad	Lenovo	N.A	N.A



REPORT No.: SZ16110119W02

1.5.4 Radiated Test Equipments**Radiated Test Equipments**

N o.	Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal.Due Date
1	System Simulator	GB45360846	8960-E5515C	Agilent	2016.03.02	2017.03.01
2	Receiver	MY54130016	N9038A	Agilent	2016.03.02	2017.03.01
3	Test Antenna - Bi-Log	N/A	VULB9163	Schwarzbeck	2016.03.02	2017.03.01
4	Test Antenna - Horn	9170C-531	BBHA9170	Schwarzbeck	2016.03.02	2017.03.01
5	Test Antenna - Loop	1519-022	FMZB1519	Schwarzbeck	2016.03.02	2017.03.01
6	Test Antenna - Horn	71688	BBHA 9120D	Schwarzbeck	2016.03.02	2017.03.01
7	Coaxial cable (N male) (9KHz-30MHz)	CB04	EMC04	Morlab	N/A	N/A
8	Coaxial cable(N male) (30MHz-26GHz)	CB02	EMC02	Morlab	N/A	N/A
9	Coaxial cable(N male) (30MHz-26GHz)	CB03	EMC03	Morlab	N/A	N/A
10	1-18GHz pre-Amplifier	MA02	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01
11	18-26.5GHz pre-Amplifier	MA03	TS-PR18	Rohde&Schwarz	2016.03.02	2017.03.01

1.5.5 Climate Chamber**Climate Chamber**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Climate Chamber	2004012	HL4003T	Yinhe	2016.03.02	2017.03.01

1.5.6 Vibration Table**Vibration Table**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Vibration Table	N/A	ACT2000-S015L	CMI-COM	2016.03.02	2017.03.01

1.5.7 Anechoic Chamber**Anechoic Chamber**

No.	Equipment Name	Serial No.	Type	Manufacturer	Cal.Date	Cal.Due Date
1	Anechoic Chamber	N/A	9m*6m*6m	Changning	2016.03.02	2017.03.01

***** END OF REPORT *****