

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com



Test Report

Product Name: VHF MARINE TRANSCEIVER

FCC ID: EP78TQMT-300

Applicant:

**PONY ELECTRIC CORPORATION
NO. 202, 6-28, AKASAKA 9-CHOME
MINATO-KU, TOKYO 107
JAPAN**

Date Receipt: 12/27/05

Date Tested: 12/28/05

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

COVER SHEET

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TABLE OF CONTENTS LIST

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

TEST REPORT:

PAGE 1.....	GENERAL INFORMATION & TECHNICAL DESCRIPTION
PAGE 2.....	TECHNICAL DESCRIPTION CONTINUED
	RF POWER OUTPUT
PAGE 3.....	TECHNICAL DATA
PAGE 4.....	VOICE MODULATION CHARACTERISITICS
	AUDIO FREQUENCY RESPONSE
PAGE 5.....	AUDIO LOW PASS FILTER
PAGE 6.....	MODULATION LIMITING
PAGE 7.....	OCCUPIED BANDWIDTH
PAGE 8.....	OCCUPIED BANDWIDTH PLOT
PAGE 9.....	SPURIOUS EMISSIONS AT ANTENNA TERMINALS
PAGE 10.....	METHOD OF MEASURING CONDUCTED SPURIOUS EMISS
PAGE 11-12.....	FIELD STRENGTH OF SPURIOUS EMISSIONS
PAGE 13.....	METHOD OF MEASURING RADIATED SPURIOUS EMISSIONS
PAGE 14.....	FREQUENCY STABILITY
PAGE 15-16.....	MPE CALCULATION
PAGE 17.....	LIST OF TEST EQUIPMENT

EXHIBITS INCLUDING:

BLOCK DIAGRAM
SCHEMATIC
USERS MANUAL
LABEL SAMPLE
LABEL LOCATION
EXTERNAL PHOTOGRAPHS
INTERNAL PHOTOGRAPHS
OPERATIONAL DESCRIPTION
TUNING PROCEDURE
TEST SET UP PHOTOGRAPHS

GENERAL INFORMATION

APPLICANT: PONY ELECTRIC CORPORATION
FCC ID: EP78TQMT-300
REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1033(c) PONY ELECTRIC CORPORATION will sell the FCC ID:
EP78TQMT-300 VHF
Marine transmitter in quantity, for use under FCC
RULES PART 80.

2.1033(c) **TECHNICAL DESCRIPTION**

(4) Type of Emission: 16K0G3E/16K0F3E

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 4.6\text{KHz (Peak Deviation)}$$

$$K = 1$$

$$B_n = 2(3.0K) + 2(4.6K)(1) = 6.0K + 9.2K = 15.2K$$

80.205 (a) ALLOWED AUTHORIZED BANDWIDTH = 20.00KHz.

2.1033(c)(6) Frequency Range: 156.025 - 157.425 MHz

2.1033(c)(7) Power Range and Controls: There is a user Power
switch for High/Low Power. Maximum Output Power
Rating: High 25 Watts, Low 1 Watt, into a 50 ohm
resistive load.

2.1033(c)(8) DC Voltages and Current into Final Amplifier:

POWER INPUT

FINAL AMPLIFIER ONLY

High

$$V_{ce} = 13.8 \text{ Volts}$$

$$I_{ce} = 4.23A$$

$$P_{in} = 58.37 \text{ Watts}$$

Low

$$V_{ce} = 13.8 \text{ VDC}$$

$$I_{ce} = 0.92A$$

$$P_{in} = 12.69 \text{ Watts}$$

Function of each electron tube or semiconductor
device or other active circuit device is included
in the parts list exhibit.

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

- 2.1033(c)(9) Complete Circuit Diagrams: The circuit diagrams and block diagrams are included.
- 2.1033(c)(10) Instruction book. The instruction manual is included.
- 2.1033(c)(11) Tune-up procedure. The tune-up procedure is included.

Description of all circuitry and devices provided for determining and stabilizing frequency is included in the circuit description

- 2.1033(c)(11) Digital modulation. This unit does NOT use digital modulation.

The data required by 2.1046 through 2.1055 is submitted below.

- 2.1046(a)
80.215 (e)(1)

RF_power_output.


RF power is measured by connecting a 50 ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage, and the transmitter properly adjusted the RF output measures:

OUTPUT POWER: HIGH: 25 W CONDUCTED
LOW: 1 W CONDUCTED

- 80.911 (d)(5) For primary supply voltages, measured in accordance with the procedures in this paragraph, greater than 11.5 volts, but less than 12.6 volts, the required transmitter output power shall be equal or greater than the value calculated below

$P = 4.375(v) - 35.313$ (For 12V this equals 17.2W)

METHOD OF MEASURING RF POWER OUTPUT

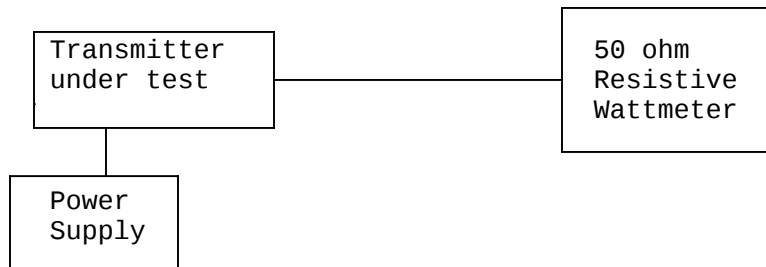

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

TECHNICAL DATA:

- 80.203 (b) **External Controls:** The transmitter is capable of changing frequency between 156.05 – 157.425 MHz by external control. The available channels are shown in the User Manual description Channel List. These channels are preprogrammed by the manufacturer and change of frequency is inaccessible to the station operator.
- 80.203 (c) Five minutes continuous transmission test. The antenna was connected to a dummy load and the radio was locked in a transmit PTT mode. An external timer digital clock was used to observe the duration of the un-modulated transmission. The transmitter turned off and the radio went to receive mode at 4 minutes, 58 seconds as displayed by the external digital clock.
- 80.203 (n) This radio complies with the requirement for DSC capability in the 156 – 162 MHz band and in accordance with 80.225.
- 80.873; 80.956 Transmitter G3E emission capability: The transmitter was connected to 50 ohm resistive wattmeter and the frequency was set to 156.300 and to 156.800 MHz. With normal modulation, the output power displayed was 25 Watts at the high power setting and 1 watt at low power setting, consistent with previous measurements.
- The transmitter has been demonstrated to be capable, with normal operating voltages applied, of delivering 25 watts of carrier power into a 50 ohm resistive load over the specified frequencies.
- 80.911 (a) 80.956 G3E Transmissions: This radio is capable of G3E emission on 156.300 and 156.800 MHz
- 80.911 (c) With 13.6 VDC applied and with the radio connected to a 50 ohm resistive wattmeter, the output power was measured at 156.300 and 156.800 MHz with a measured reading of 25 Watts under normal speech modulation.
- 80.911 (d)(2) 80.959 With the power supply set to 13.6 VDC, and the output of the transmitter terminated in a 50 ohm matching artificial load, the transmitter output power was monitored over a 10 minute continuous operational period while in full power. The output power varied from the nominal 25 Watts output power to 24.8 Watts output power

APPLICANT: PONY ELECTRIC CORPORATION
FCC ID: EP78TQMT-300
REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669


<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1047(a) Voice Modulation_characteristics:

(b) AUDIO_FREQUENCY_RESPONSE See the following plot.

Audio Frequency Response Plot

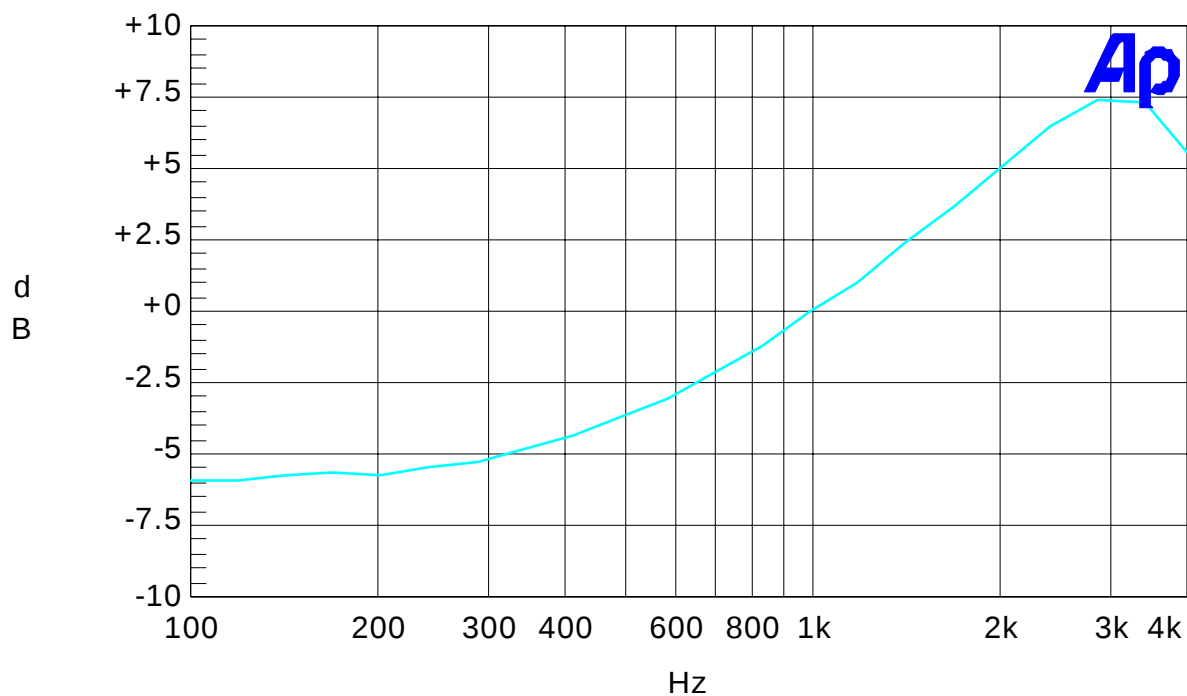

Color	Line Style	Thick	Data	Axis
Cyan	Solid	1	Anlr.Level A!Normalize	Left

MaxFreq.at1

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>


888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1047(a)

AUDIO_LOW_PASS_FILTER

The audio low pass filter shown in the following plot.

Audio Low Pass Filter

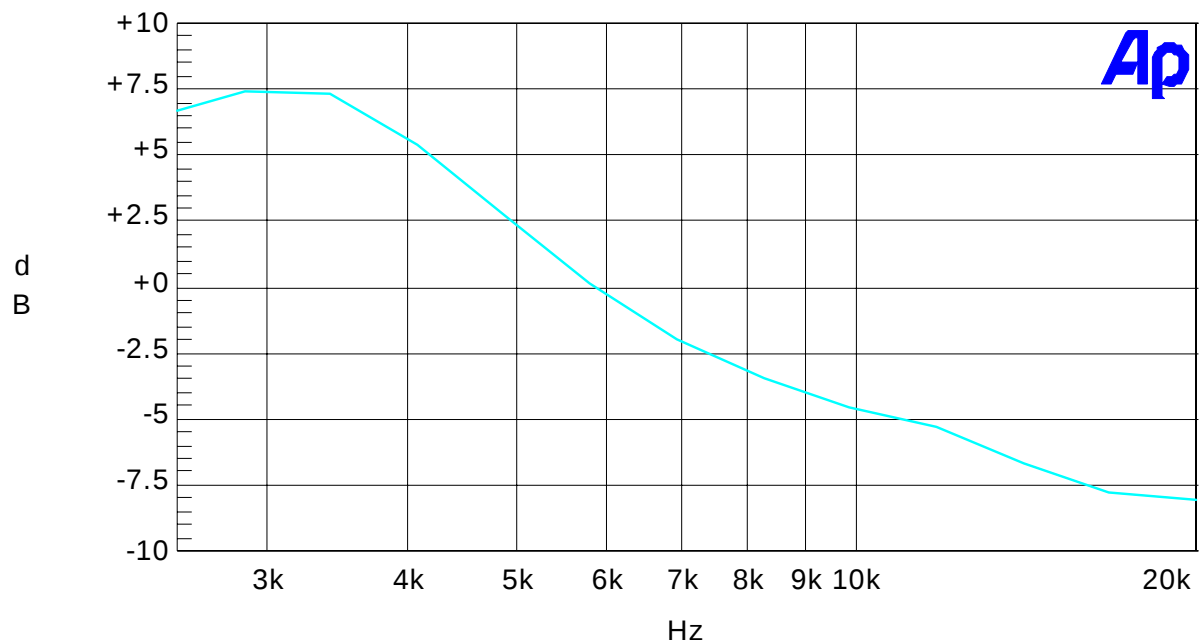

Color	Line Style	Thick	Data	Axis
Cyan	Solid	1	Anlr.Level A!Normalize	Left

MaxFreq.at1

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1047(b)


Audio_input_versus_modulation

80.213 (d)

A plot of the audio input versus deviation is shown in the following plots.

Modulation Limiting Plots:

3.0 KHz (Green), 1.0 KHz (Blue), and 300 Hz (Yellow)

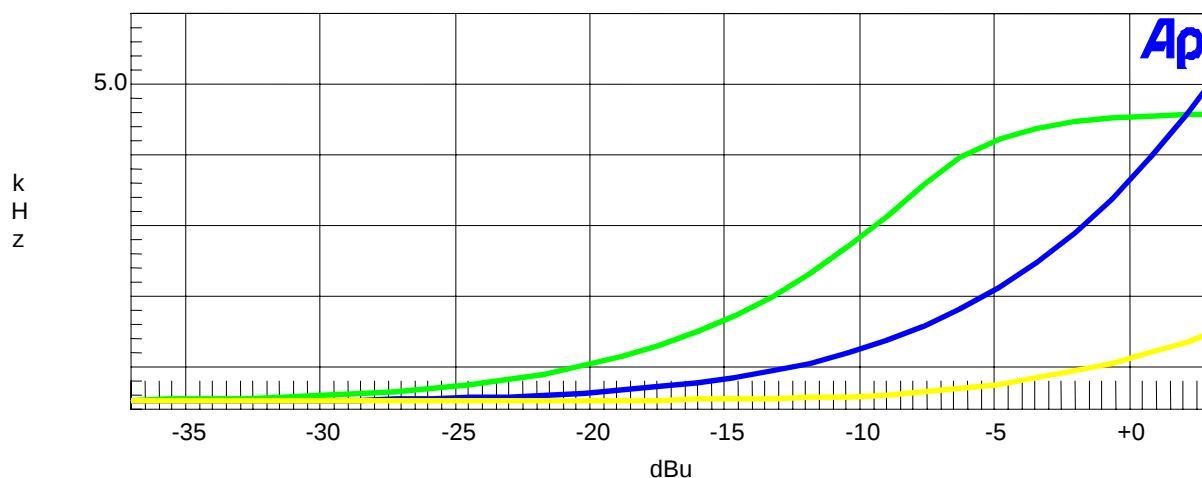

Color	Line Style	Thick	Data	Axis
Green	Solid	3	Anlr.Level A	Left
Blue	Solid	3	Anlr.Level A	Left
Yellow	Solid	3	Anlr.Level A	Left

modulation limiting.at1

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1049(c) **Occupied bandwidth:**

80.213 (b)


Data in the plots shows that on any frequency removed from the assigned frequency by more than 50%, but not more than 100%: At least 25dB. On any frequency removed from the assigned frequency by more than 100%, but not more than 250%: At least 35dB. On any frequency removed from the assigned frequency by more than 250%, of the authorized bandwidth:
At least $43 + \log(P)$ dB.

Radiotelephone transmitter with modulation limiter.

Test procedure: TIA/EIA-603 para 2.2.11, with the exception that various tones were used.

Test procedure diagram

OCCUPIED BANDWIDTH MEASUREMENT

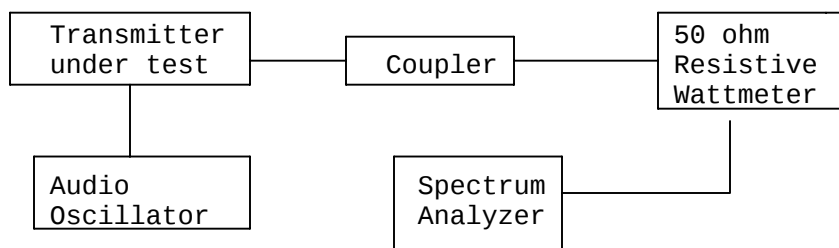

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc


TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

OCCUPIED BANDWIDTH PLOT

NOTES:

PONY ELECTRIC CORPORATION - FCC ID: EP78TQMT-300
OCCUPIED BANDWIDTH PLOT

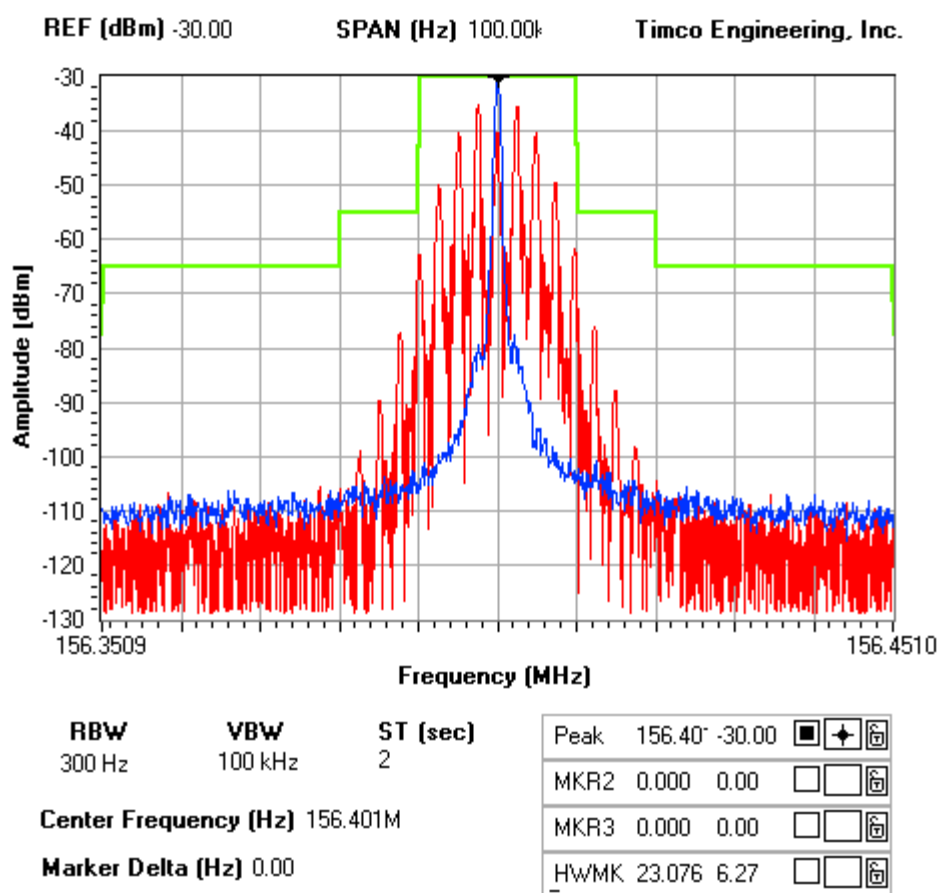

APPLICANT: PONY ELECTRIC CORPORATION
FCC ID: EP78TQMT-300
REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1051
80.211

Spurious emissions at antenna terminals(conducted):

The data on the following page shows the level of conducted spurious responses. The carrier was modulated 100% using a 2500Hz tone. The spectrum was scanned from 0.4 to at least the 10th harmonic of the fundamental. The measurements were made in accordance with standard TIA/EIA-603.

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

$$43 + 10\log(25) = 57$$

$$43 + 10\log(1) = 43$$

TF HIGH POWER	EF	dB below carrier	TF LOW POWER	EF	dB below carrier
156.4	156.40	0	156.4	156.40	0
	312.80	75.2		312.80	63.2
	469.20	83.4		469.20	90.1
	625.60	102.2		625.60	91.8
	782.00	94.5		782.00	98.4
	938.40	95		938.40	95.3
	1094.80	95.8		1094.80	91.7
	1251.20	93.8		1251.20	90.2
	1407.60	87.6		1407.60	88.3
	1564.00	90.9		1564.00	88.7

TF HIGH POWER	EF	dB below carrier	TF LOW POWER	EF	dB below carrier
157.43	157.43	0	157.43	157.43	0
	314.85	74.3		314.85	61.2
	472.28	76.5		472.28	74.9
	629.70	97.9		629.70	90.4
	787.13	89.3		787.13	96.2
	944.55	96.4		944.55	94.5
	1101.98	94.7		1101.98	91.7
	1259.40	93.5		1259.40	90.9
	1416.83	86.4		1416.83	87.9
	1574.25	89.7		1574.25	88.6

APPLICANT: PONY ELECTRIC CORPORATION
FCC ID: EP78TQMT-300
REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Method of Measuring Conducted Spurious Emissions



METHOD OF MEASUREMENT: The procedure used was TIA/EIA-603 STANDARD without any exceptions. The measurements were made using the shielded room located at TIMCO ENGINEERING INC. 849 STATE ROAD 45, NEWBERRY FLORIDA 32669.

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1053(a) Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

High Power - $43 + 10\log(25) = 56.98$

TEST DATA - HIGH POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
156.40		0
312.80	H	75.13
469.20	H	84.7
625.60	V	81.94
782.00	H	89.31
938.40	V	84.17
1094.80	H	87.08
1251.20	H	85.79
1407.60	H	92.29
1564.00	V	84

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
157.43		0
314.85	H	75.73
472.28	H	84.92
629.70	V	84.91
787.13	H	89.62
944.55	V	93.56
1101.98	H	89.94
1259.40	V	93.64
1416.83	V	83.84
1574.25	V	86.1

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1053(a)

Field strength of spurious emissions:

NAME OF TEST: RADIATED SPURIOUS EMISSIONS

REQUIREMENTS: Emissions must be $43 + 10\log(P_o)$ dB below the mean power output of the transmitter.

$$\text{Low Power} - 43 + 10\log(1) = 43.00$$

TEST DATA - LOW POWER

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
156.40		0
312.80	H	63.85
469.20	H	83.32
625.60	H	72.96
782.00	H	81.13
938.40	V	68.69
1094.80	H	82.5
1564.00	H	83.52

Emission Frequency MHz	Ant. Polarity	dB Below Carrier (dBc)
157.43		0
314.85	H	64.15
472.28	H	85.34
629.70	H	74.03
787.13	H	85.04
944.55	V	86.78
1101.98	V	90.06
1259.40	V	88.56
1574.25	H	83.42

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300


REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

2.1053(a) Continued Field_strength_of_spurious_emissions:

Method of Measuring Radiated Spurious Emissions

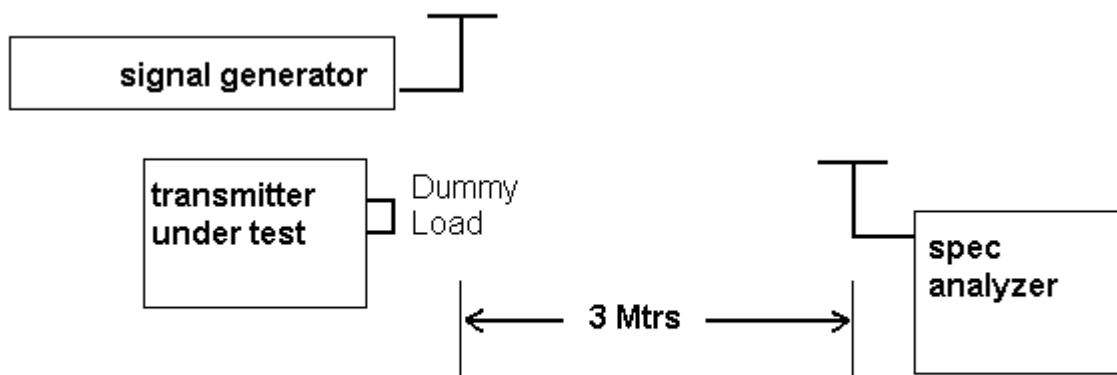

METHOD OF MEASUREMENT: The tabulated data shows the results of the radiated field strength emissions test. The spectrum was scanned from 30 to at least the tenth harmonic of the fundamental. This test was conducted per TIA/EIA STANDARD 603 using the substitution method. Measurements were made at the open field test site of TIMCO ENGINEERING, INC. located at 849 N.W. State Road 45, Newberry, FL 32669.

APPLICANT: PONY ELECTRIC CORPORATION
FCC ID: EP78TQMT-300
REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

Frequency stability:

2.1055(a)(2)

80.209 (a)

Temperature and voltage tests were performed to verify that the frequency remains within the .0010%, 10.0ppm specification limit, for 20kHz spacing. The test was conducted as follows: The transmitter was placed in the temperature chamber at 25° C and allowed to stabilize for one hour. The transmitter was keyed ON for one minute during which four frequency readings were recorded at 15 second intervals. The worse case number was taken for temperature plotting. The assigned channel frequency was considered to be the reference frequency. The temperature was then reduced to -30° C after which the transmitter was again allowed to stabilize for one hour. The transmitter was keyed ON for one minute, and again frequency readings were noted at 15 sec intervals. The worst-case number was recorded for temperature plotting. This procedure was repeated in 10-degree increments up to + 50° C.

Readings were also taken at minus 15% of the battery voltage, which we estimate to be the battery endpoint.

MEASUREMENT DATA:

Assigned Frequency (Ref. Frequency): 156.800 000MHz

TEMPERATURE_C	FREQUENCY_MHz	PPM
REFERENCE_____	156.800 000	00.0
-30_____	156.798 479	-9.70
-20_____	156.799 175	-5.26
-10_____	156.799 690	-1.98
0_____	156.800 023	0.15
+10_____	156.800 068	0.43
+20_____	156.799 898	-0.65
+30_____	156.799 689	-1.98
+40_____	156.799 541	-2.92
+50_____	156.799 559	-2.81

	<u>VOLTS</u>	<u>Batt. Data</u>	<u>Batt. PPM</u>
-15%	11.5	156.799 878	-0.77
+15%	15.0	156.799 903	-0.61

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45
Newberry, Florida 32669
<http://www.timcoengr.com>
888.472.2424 F 352.472.2030 email: sid@timcoengr.com

FCC RF Exposure Requirements

General information:

FCCID:

Device category: Mobile per Part 2.1091

Environment: Controlled (occupational) Exposure

Mobile devices that are authorized under part 80 of this chapter are subject to routine environmental evaluation for RF exposure prior to equipment authorization or use if they operate at frequencies of 1.5 GHz or below and their effective radiated power (ERP) is 1.5 watts or more. However, compliance with the power density limits of 1.1310 is required.

Antenna:

The manufacturer does not specify any antenna to be used with this device.

This device has provisions for operation in a boat.

Configuration	Antenna p/n	Type	Max. Gain (dBi)
Boat	Any	-	3.65 dBi (2 dBd)

Operating configuration and exposure conditions:

Part 2.1091 states that devices are excluded from routine evaluation if the EIRP is less than 2.46 Watts (or 1.5 WERP).

A 50% on time (15 minutes transmitting over a 30 minute period) is used to average over .

Boat Operation: Cable length = 22 ft exposed and 3 feet internal to radom = 25 ft. Total. 25 feet cable loss including connector insertion loss at 156 MHz is 1.5 dB. The maximum antenna gain that can be used is 3.65 dBi (2 dBd).

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

W := 25.0 power in Watts D := 1 Duty Factor in decimal % (1=100%)(FM)
E := 15 exposure time in minutes U := 30 (use 6 for controlled and 30 for uncontrolled)

$$W_{exp} := W \cdot D \cdot \left(\frac{E}{U} \right)$$

$$PC := \frac{E}{U}$$

PC = 0.5 percent on time

Wexp = 12.5 Watts

CL := 1.5 Coax loss in dB

Po := 12500 mWatts dBd := 2. antenna gain f := 158 Frequency in MHz

G := dBd + 2.15 - CL gain in dBi

G = 2.65

S := .2 uncontrolled below 300 MHz
mW per cm²

Gn := 10 ^{$\frac{G}{10}$} gain numeric

Gn = 1.841

$$R := \sqrt{\frac{(Po \cdot Gn)}{(4 \cdot \pi \cdot S)}}$$

$$R_{inches} := \frac{R}{2.54}$$

R = 95.683 distance in centimeters
required for compliance

Rinches = 37.67

Conclusion:

The device complies with the MPE requirements for a typical transceiver with 50 % transmit time by providing a safe separation distance of 95.7 cm between the antenna, including any radiating structure, and any persons when normally operated .

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc

TIMCO ENGINEERING INC.

849 NW State Road 45

Newberry, Florida 32669

<http://www.timcoengr.com>

888.472.2424 F 352.472.2030 email: sid@timcoengr.com

EMC Equipment List

Device	Manufacturer	Model	Serial Number	Cal/Char Date	Due Date
Biconnical Antenna	Eaton	94455-1	1096	CAL 8/17/04	8/17/06
Biconnical Antenna	Electro-Metrics	BIA-25	1171	CAL 4/29/05	4/29/07
Blue Tower Quasi-Peak Adapter	HP	85650A	2811A01279	CAL 4/13/05	4/13/07
Blue Tower RF Preselector	HP	85685A	2926A00983	CAL 9/5/05	9/5/07
Blue Tower Spectrum Analyzer	HP	8568B	2928A04729 2848A18049	CAL 4/13/05	4/13/07
Frequency Counter	HP	5352B	2632A00165	CAL 8/3/04	8/3/06
Frequency Counter	HP	5385A	2730A03025	CAL 4/15/05	4/15/07
Frequency Counter	HP	5385A	3242A07460	CAL 4/19/05	4/19/07
LISN	Electro-Metrics	ANS-25/2	2604	CAL 8/27/04	8/27/06
LISN	Electro-Metrics	EM-7820	2682	CAL 4/28/05	4/28/07
Log-Periodic Antenna	Electro-Metrics	LPA-25	1122	CAL 8/26/04	8/26/06

APPLICANT: PONY ELECTRIC CORPORATION

FCC ID: EP78TQMT-300

REPORT #: P\PONY_EP7\2204AUT5\2204AUT5TestReport.doc