



Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6875_full	-14.30	0.04	-14.27	6.86	-7.41	-1.00	Pass
26_Tones	-14.36	0.04	-14.32	6.86	-7.46	-1.00	Pass
52_Tones	-14.62	0.04	-14.58	6.86	-7.72	-1.00	Pass
106_Tones	-15.01	0.04	-14.97	6.86	-8.11	-1.00	Pass

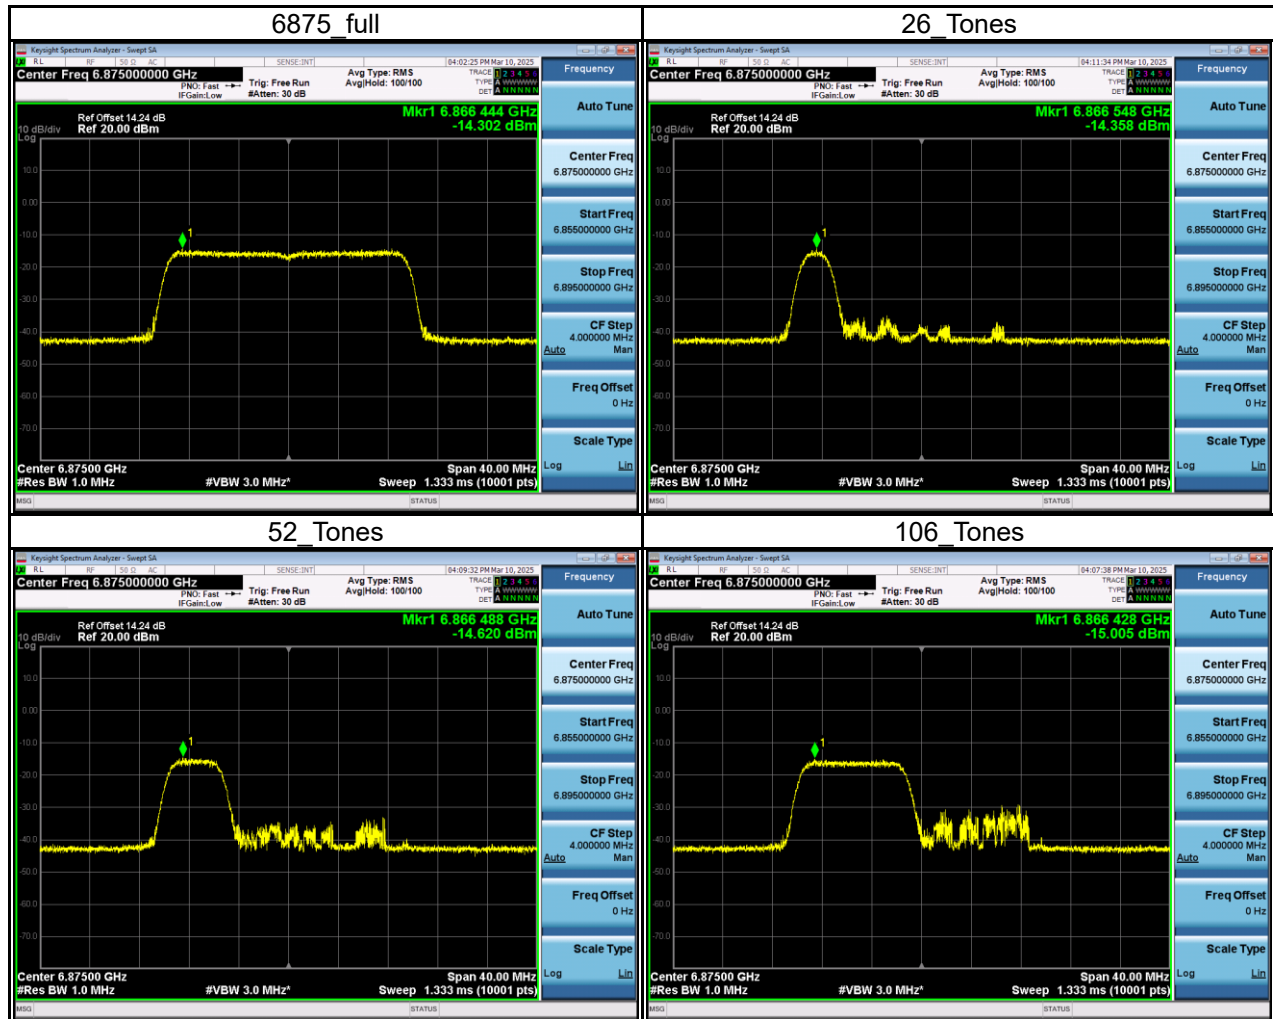


Test Mode	IEEE 802.11ax (HE20)_Aux
-----------	--------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5955_full	-11.62	0.04	-11.59	7.70	-3.89	-1.00	Pass
26_Tones	-12.04	0.04	-12.00	7.70	-4.30	-1.00	Pass
52_Tones	-12.05	0.04	-12.02	7.70	-4.32	-1.00	Pass
106_Tones	-11.81	0.04	-11.77	7.70	-4.07	-1.00	Pass

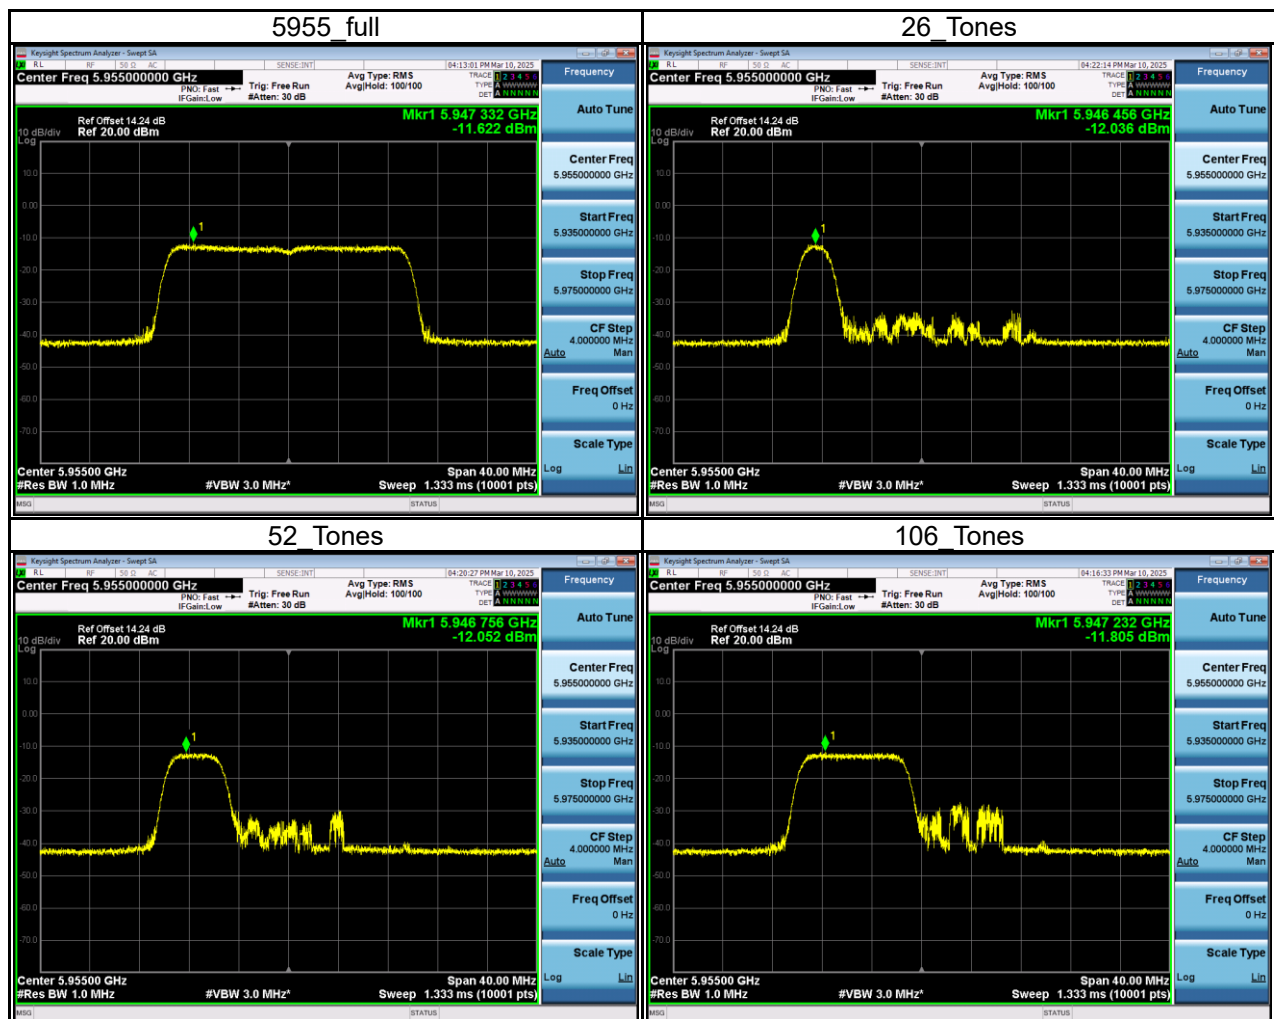


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6435_full	-11.66	0.04	-11.62	6.92	-4.70	-1.00	Pass
26_Tones	-11.40	0.04	-11.37	6.92	-4.45	-1.00	Pass
52_Tones	-11.28	0.04	-11.25	6.92	-4.33	-1.00	Pass
106_Tones	-11.15	0.04	-11.11	6.92	-4.19	-1.00	Pass

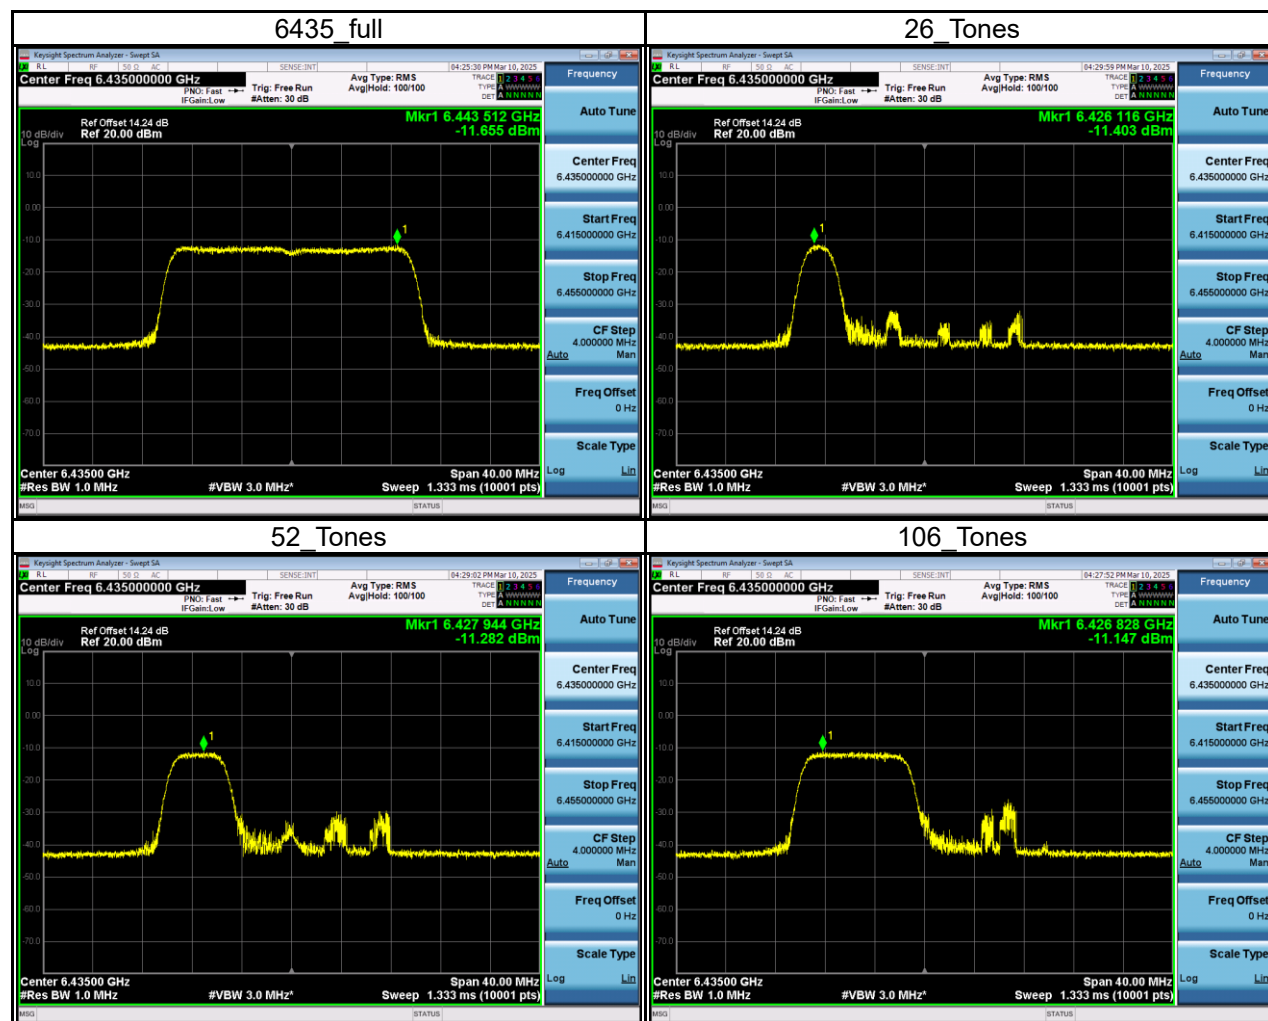

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6535_full	-13.40	0.04	-13.36	7.86	-5.50	-1.00	Pass
26_Tones	-14.01	0.04	-13.97	7.86	-6.11	-1.00	Pass
52_Tones	-13.83	0.04	-13.79	7.86	-5.93	-1.00	Pass
106_Tones	-13.74	0.04	-13.70	7.86	-5.84	-1.00	Pass

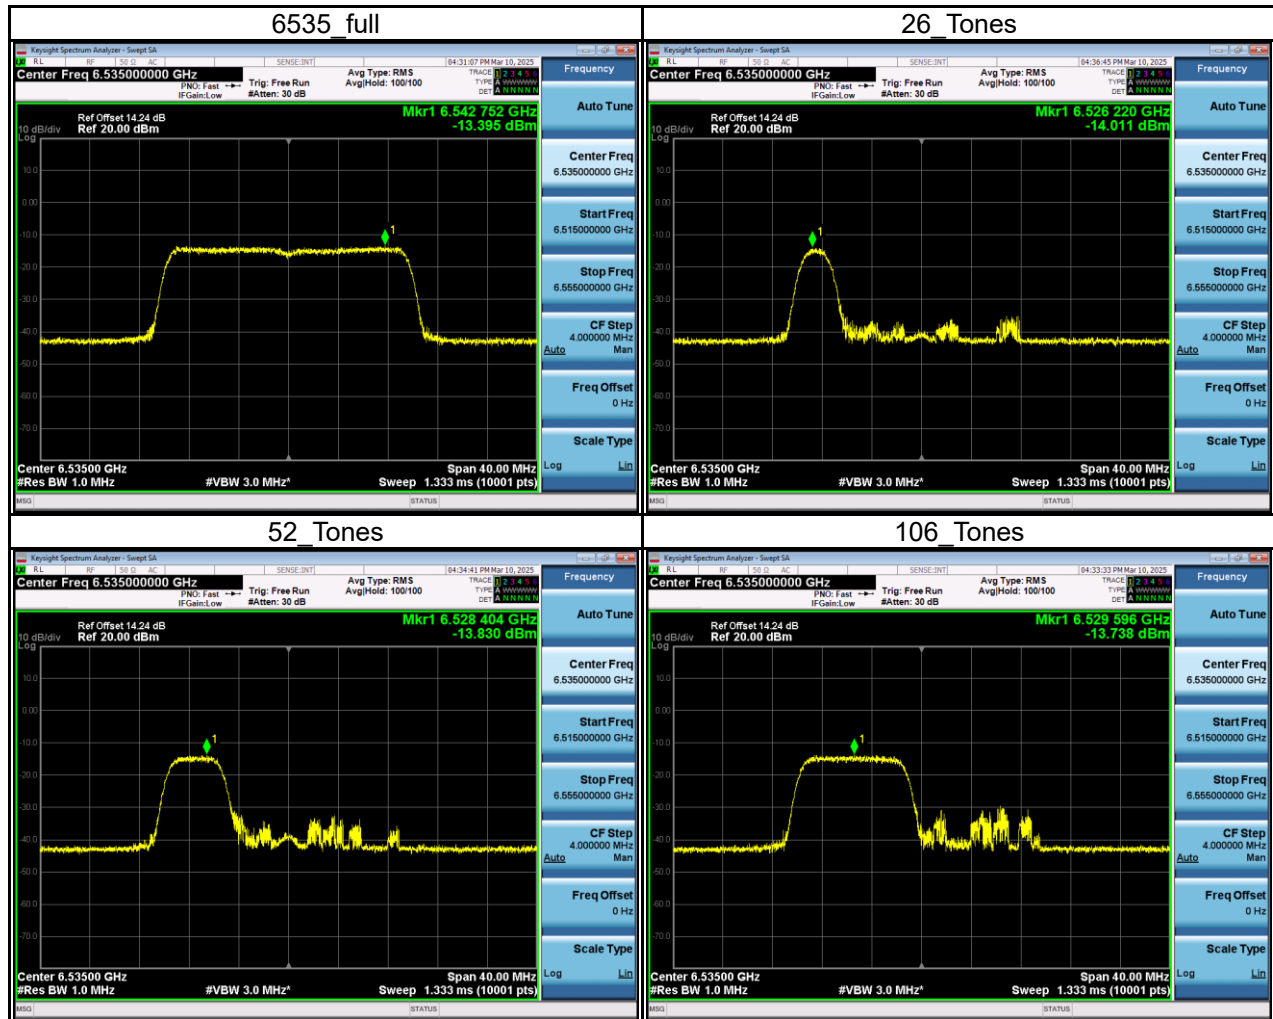

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6875_full	-13.13	0.04	-13.09	6.86	-6.23	-1.00	Pass
26_Tones	-13.33	0.04	-13.30	6.86	-6.44	-1.00	Pass
52_Tones	-13.02	0.04	-12.98	6.86	-6.12	-1.00	Pass
106_Tones	-13.16	0.04	-13.12	6.86	-6.26	-1.00	Pass

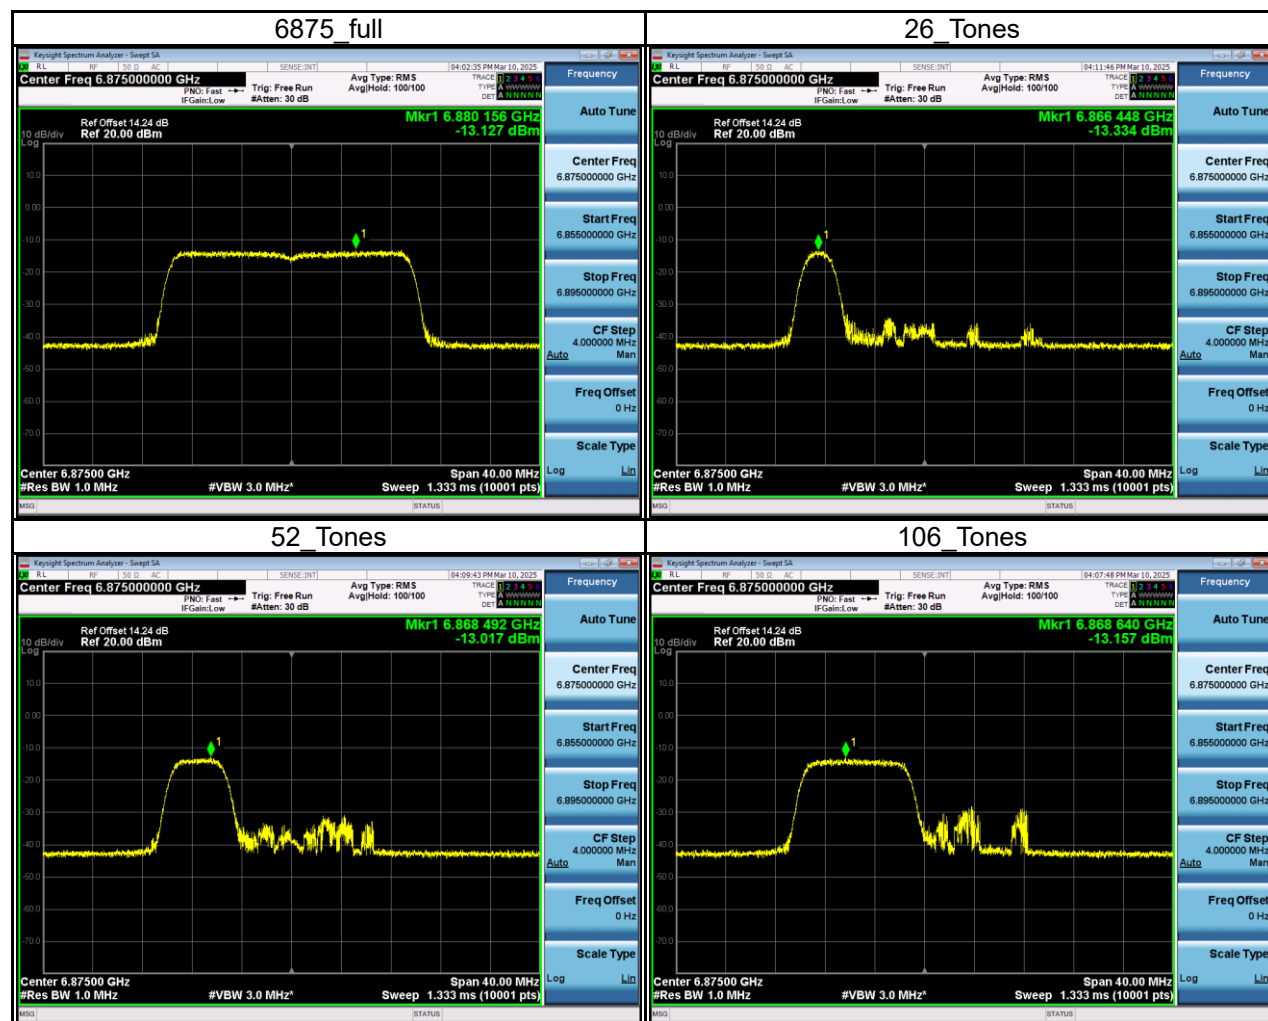


Test Mode	IEEE 802.11ax (HE20)_ Total
-----------	-----------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5955_full	-9.15	0.04	-9.12	7.70	-1.42	-1.00	Pass
26_Tones	-9.31	0.04	-9.28	7.70	-1.58	-1.00	Pass
52_Tones	-9.39	0.04	-9.36	7.70	-1.66	-1.00	Pass
106_Tones	-9.23	0.04	-9.20	7.70	-1.50	-1.00	Pass
6435_full	-7.96	0.04	-7.92	6.92	-1.00	-1.00	Pass
26_Tones	-8.41	0.04	-8.37	6.92	-1.45	-1.00	Pass
52_Tones	-8.40	0.04	-8.36	6.92	-1.44	-1.00	Pass
106_Tones	-8.12	0.04	-8.08	6.92	-1.16	-1.00	Pass
6535_full	-10.14	0.04	-10.10	7.86	-2.24	-1.00	Pass
26_Tones	-10.75	0.04	-10.72	7.86	-2.86	-1.00	Pass
52_Tones	-10.50	0.04	-10.47	7.86	-2.61	-1.00	Pass
106_Tones	-10.55	0.04	-10.51	7.86	-2.65	-1.00	Pass
6875_full	-10.66	0.04	-10.63	6.86	-3.77	-1.00	Pass
26_Tones	-10.81	0.04	-10.77	6.86	-3.91	-1.00	Pass
52_Tones	-10.73	0.04	-10.70	6.86	-3.84	-1.00	Pass
106_Tones	-10.97	0.04	-10.94	6.86	-4.08	-1.00	Pass

Test Mode	IEEE 802.11ax (HE40)_ Main
-----------	----------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5965_full	-12.55	0.04	-12.51	7.70	-4.81	-1.00	Pass
242_Tones	-12.79	0.04	-12.74	7.70	-5.04	-1.00	Pass

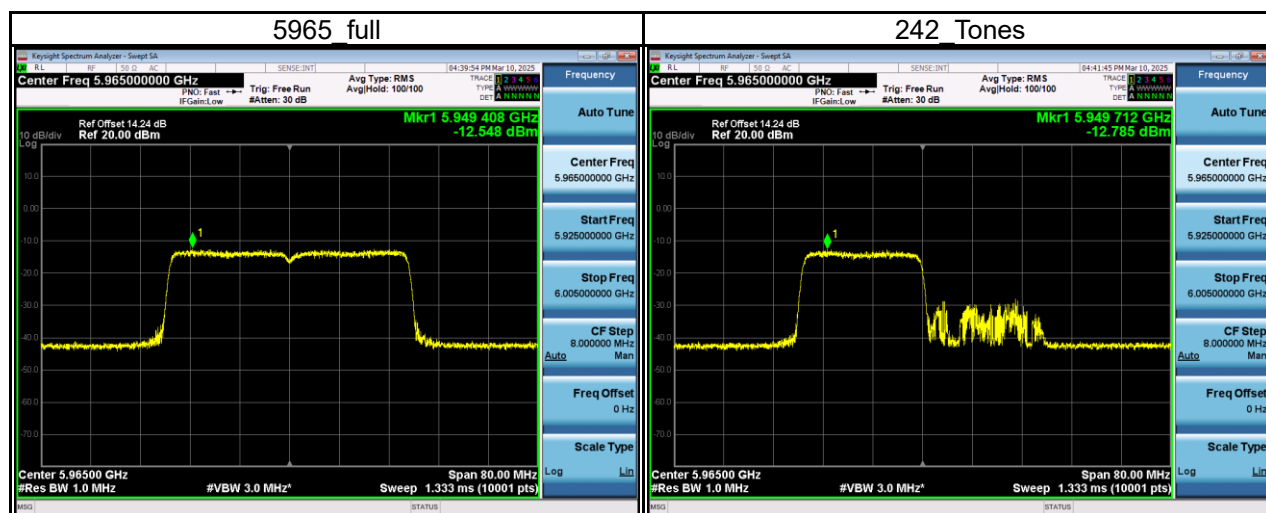


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6445_full	-11.40	0.04	-11.36	6.92	-4.44	-1.00	Pass
242_Tones	-11.87	0.04	-11.83	6.92	-4.91	-1.00	Pass

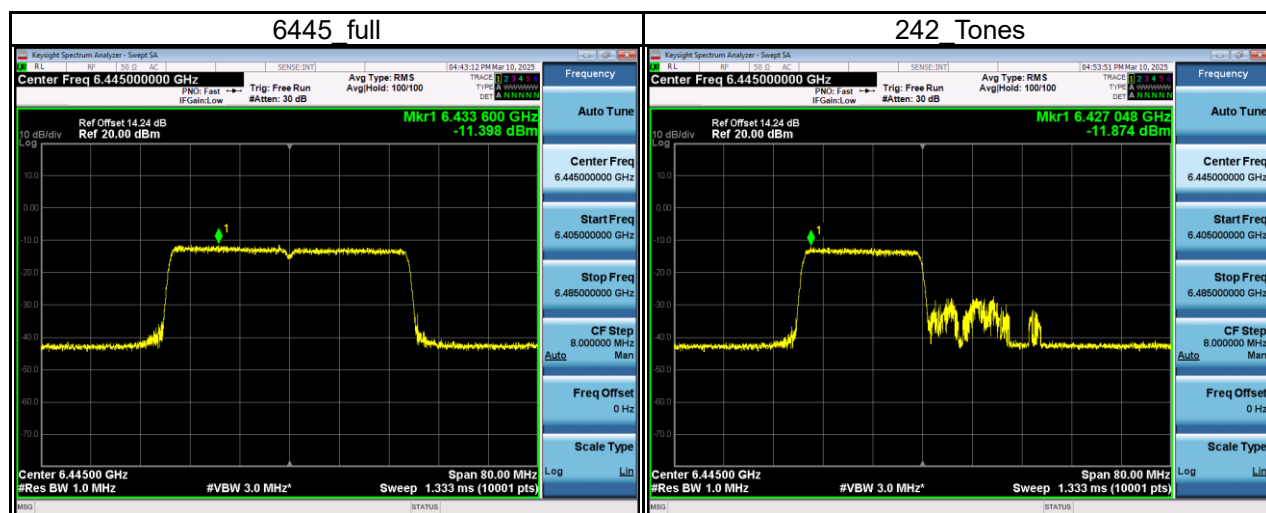

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6525_full	-12.39	0.04	-12.35	7.86	-4.49	-1.00	Pass
242_Tones	-12.99	0.04	-12.95	7.86	-5.09	-1.00	Pass

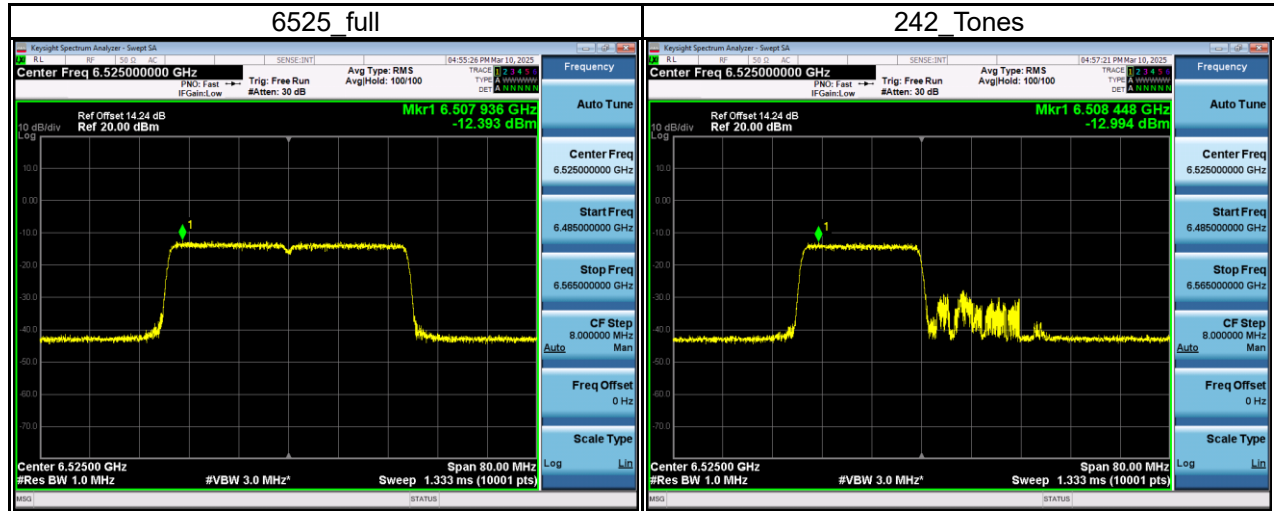


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6885_full	-12.38	0.04	-12.34	6.86	-5.48	-1.00	Pass
242_Tones	-14.16	0.04	-14.12	6.86	-7.26	-1.00	Pass

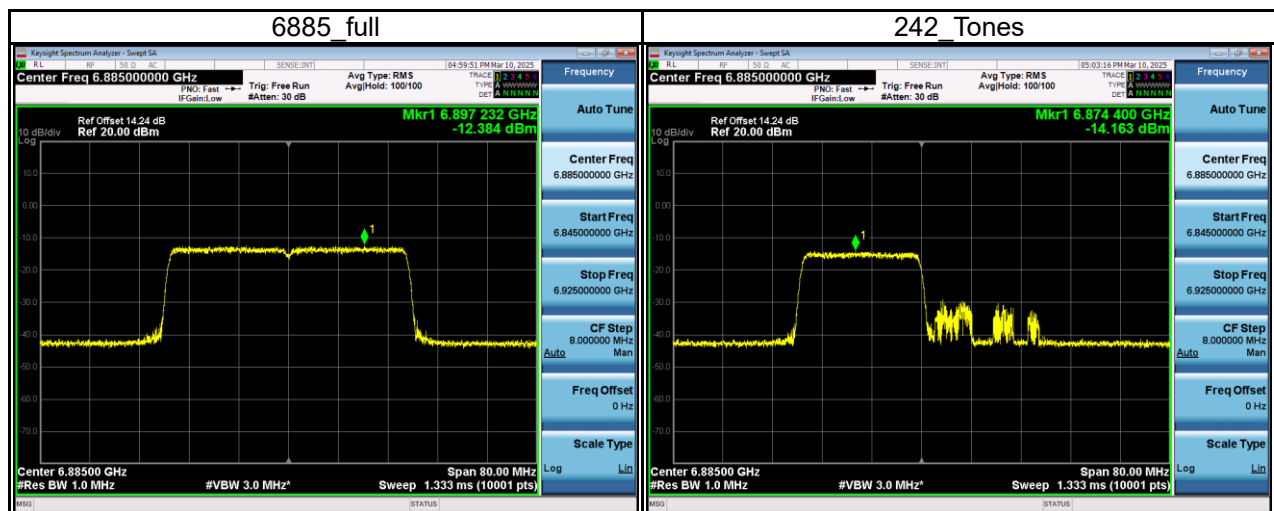


Test Mode	IEEE 802.11ax (HE40)_Aux
-----------	--------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5965_full	-11.55	0.04	-11.51	7.70	-3.81	-1.00	Pass
242_Tones	-12.10	0.04	-12.06	7.70	-4.36	-1.00	Pass

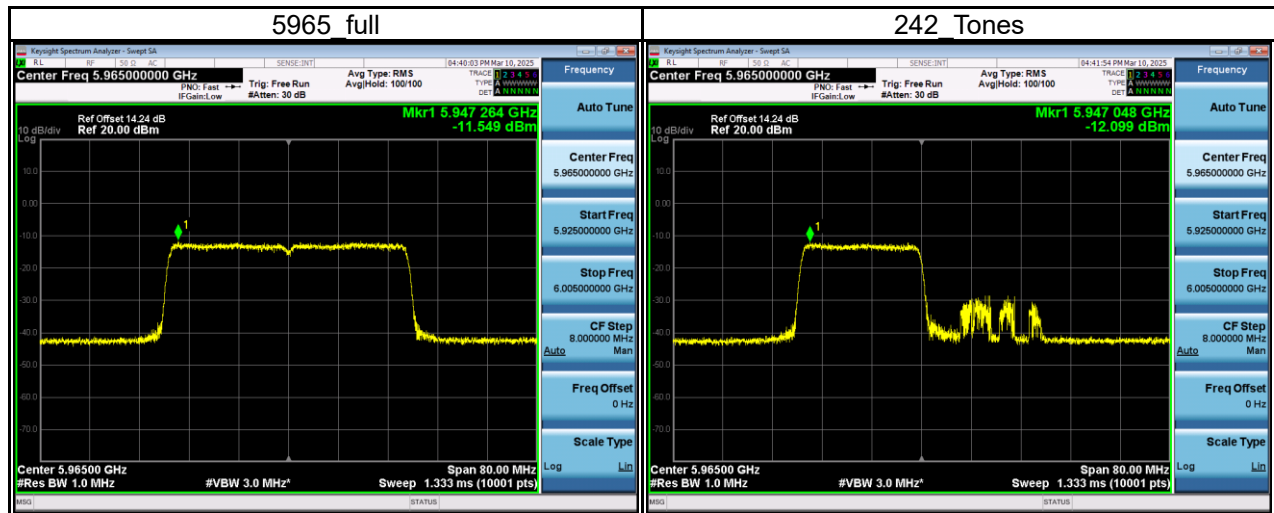


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6445_full	-11.26	0.04	-11.22	6.92	-4.30	-1.00	Pass
242_Tones	-12.35	0.04	-12.31	6.92	-5.39	-1.00	Pass

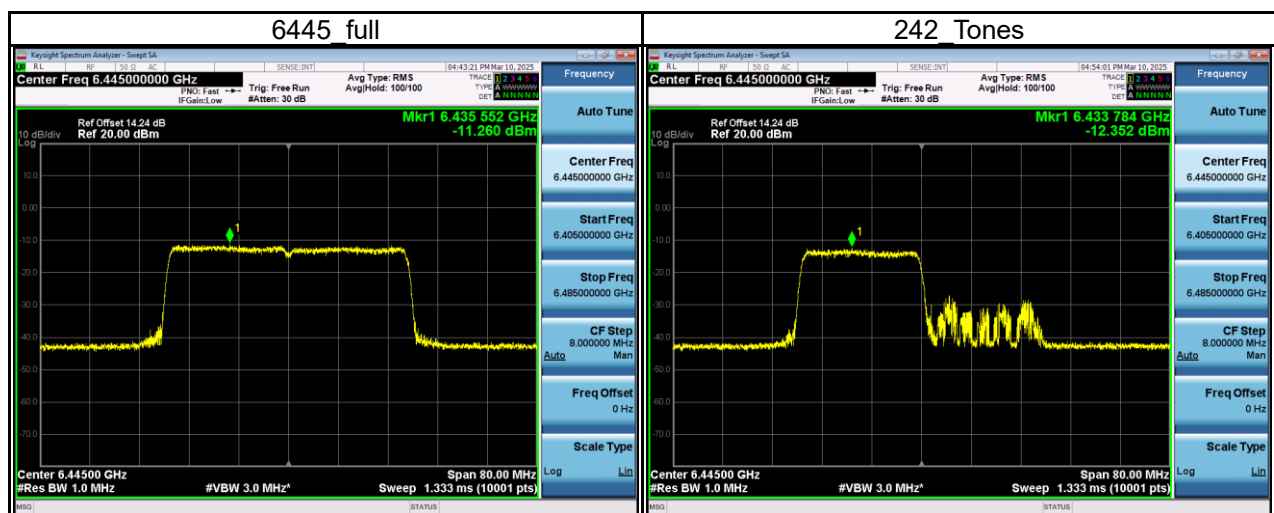

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6525_full	-12.22	0.04	-12.17	7.86	-4.31	-1.00	Pass
242_Tones	-13.06	0.04	-13.02	7.86	-5.16	-1.00	Pass

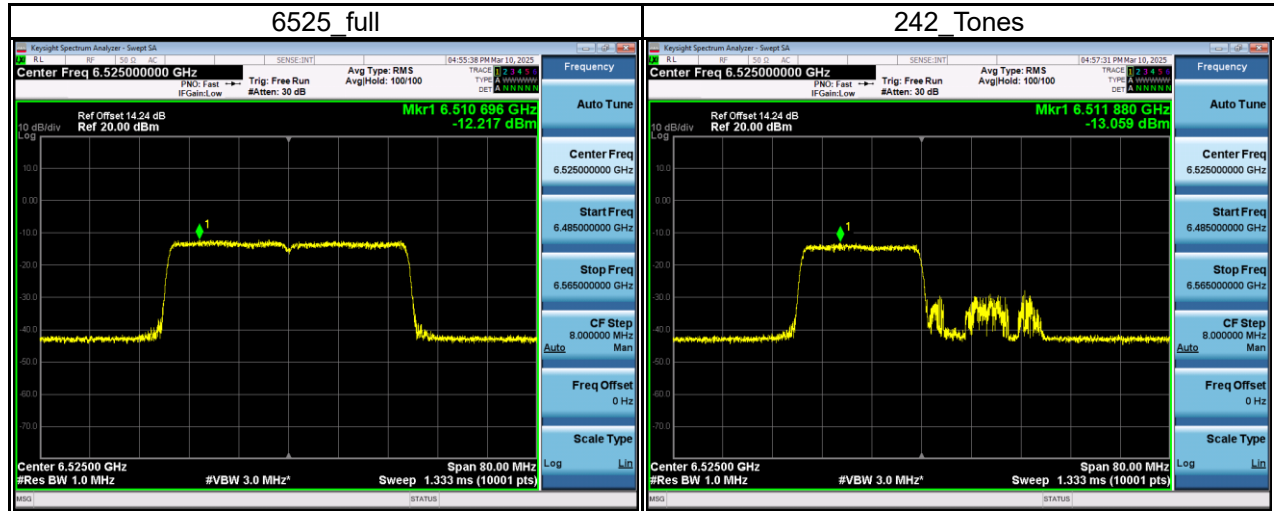

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6885_full	-10.29	0.04	-10.25	6.86	-3.39	-1.00	Pass
242_Tones	-12.54	0.04	-12.50	6.86	-5.64	-1.00	Pass

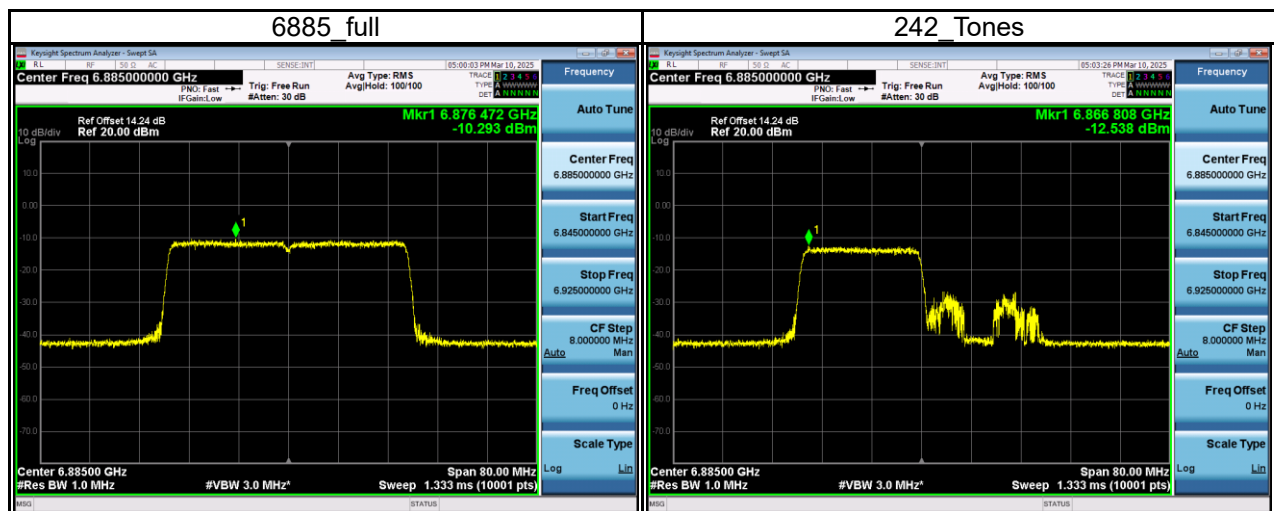


Test Mode	IEEE 802.11ax (HE40)_ Total
-----------	-----------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5965_full	-9.01	0.04	-8.97	7.70	-1.27	-1.00	Pass
242_Tones	-9.42	0.04	-9.38	7.70	-1.68	-1.00	Pass
6445_full	-8.32	0.04	-8.28	6.92	-1.36	-1.00	Pass
242_Tones	-9.10	0.04	-9.05	6.92	-2.13	-1.00	Pass
6525_full	-9.29	0.04	-9.25	7.86	-1.39	-1.00	Pass
242_Tones	-10.02	0.04	-9.97	7.86	-2.11	-1.00	Pass
6885_full	-8.20	0.04	-8.16	6.86	-1.30	-1.00	Pass
242_Tones	-10.26	0.04	-10.22	6.86	-3.36	-1.00	Pass

Test Mode	IEEE 802.11ax (HE80)_ Main
-----------	----------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5985_full	-12.55	0.05	-12.50	7.70	-4.80	-1.00	Pass
484_Tones	-12.81	0.05	-12.76	7.70	-5.06	-1.00	Pass

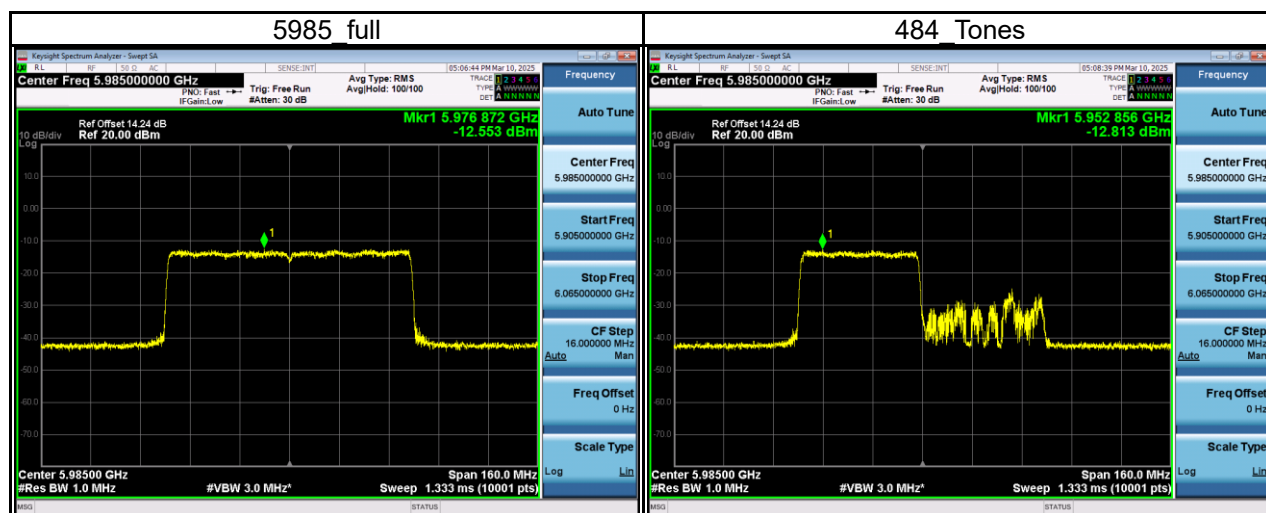


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6465_full	-11.44	0.05	-11.38	6.92	-4.46	-1.00	Pass
484_Tones	-12.04	0.05	-11.98	6.92	-5.06	-1.00	Pass

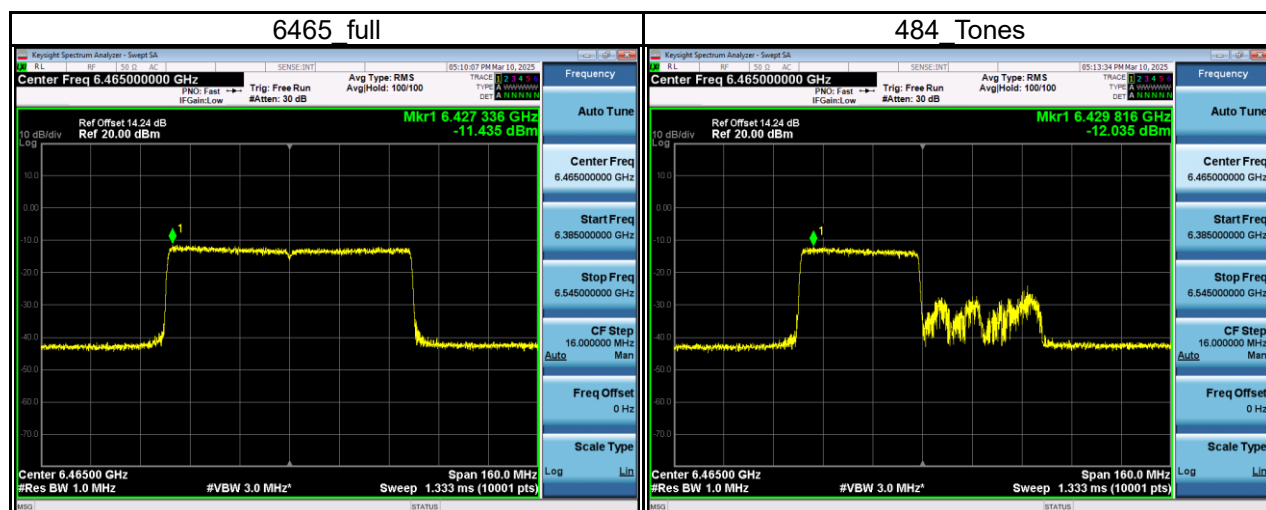

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6545_full	-12.25	0.05	-12.20	7.86	-4.34	-1.00	Pass
484_Tones	-12.80	0.05	-12.74	7.86	-4.88	-1.00	Pass

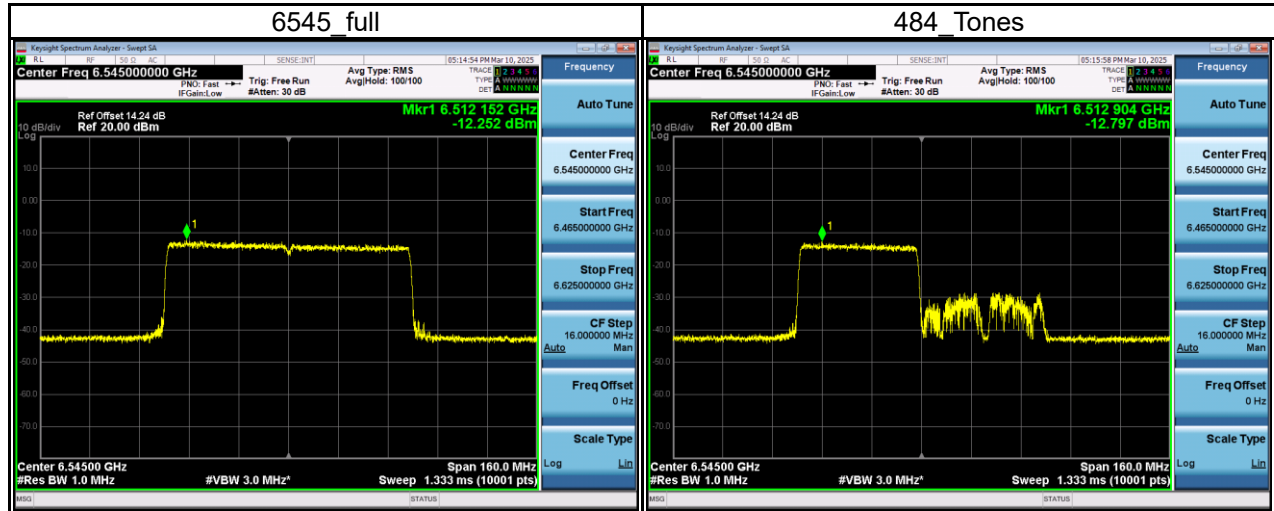


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6865_full	-12.22	0.05	-12.17	6.86	-5.31	-1.00	Pass
484_Tones	-12.47	0.05	-12.42	6.86	-5.56	-1.00	Pass

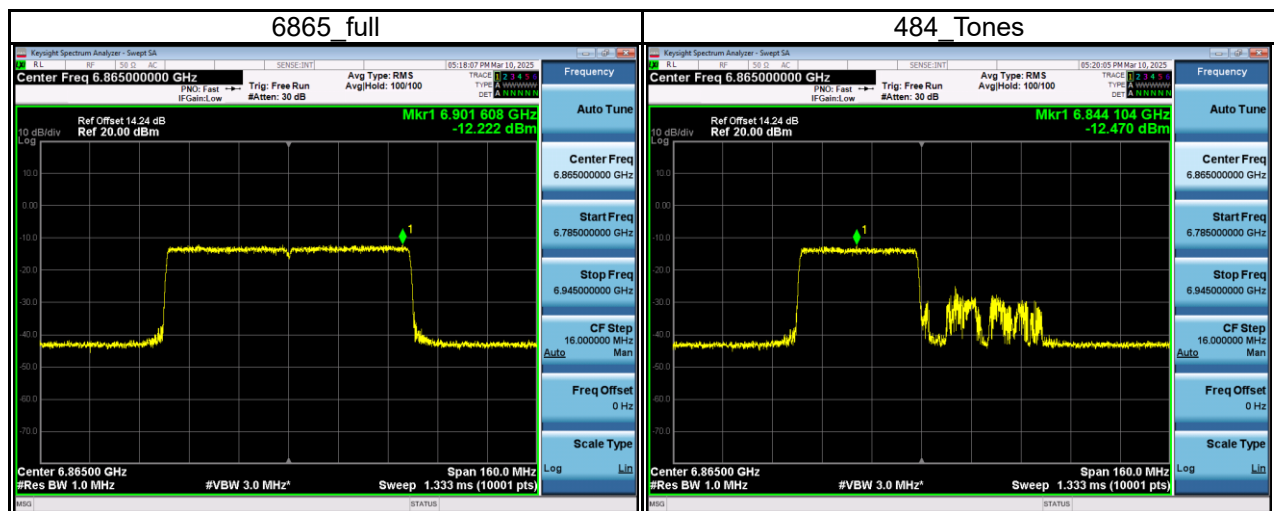


Test Mode	IEEE 802.11ax (HE80)_Aux
-----------	--------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5985_full	-11.55	0.05	-11.50	7.70	-3.80	-1.00	Pass
484_Tones	-11.86	0.05	-11.80	7.70	-4.10	-1.00	Pass

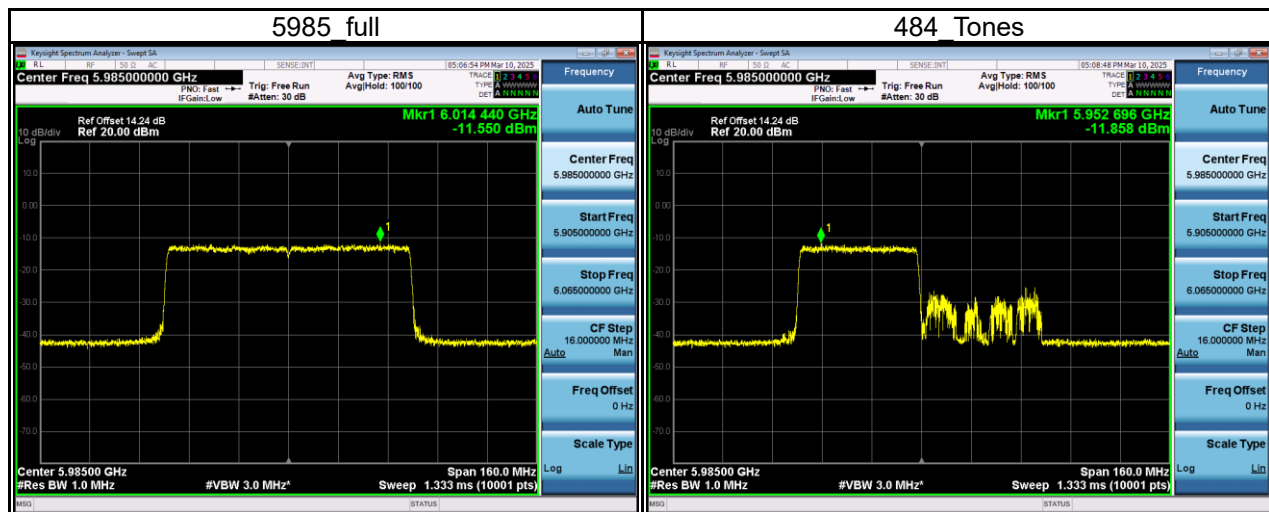


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6465_full	-11.63	0.05	-11.57	6.92	-4.65	-1.00	Pass
484_Tones	-11.71	0.05	-11.66	6.92	-4.74	-1.00	Pass

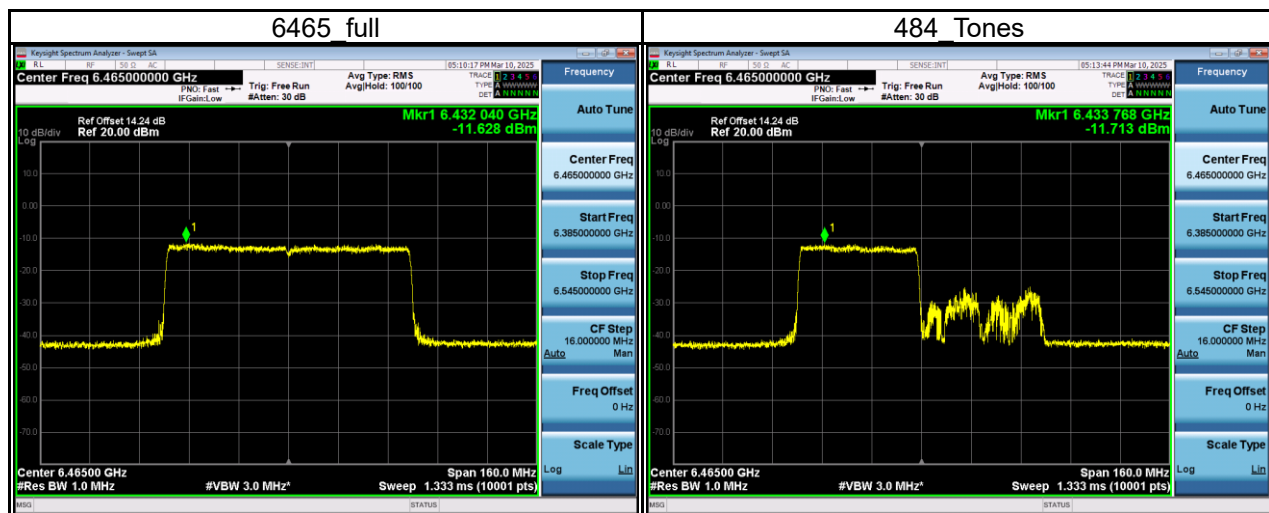

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6545_full	-12.02	0.05	-11.96	7.86	-4.10	-1.00	Pass
484_Tones	-12.48	0.05	-12.42	7.86	-4.56	-1.00	Pass

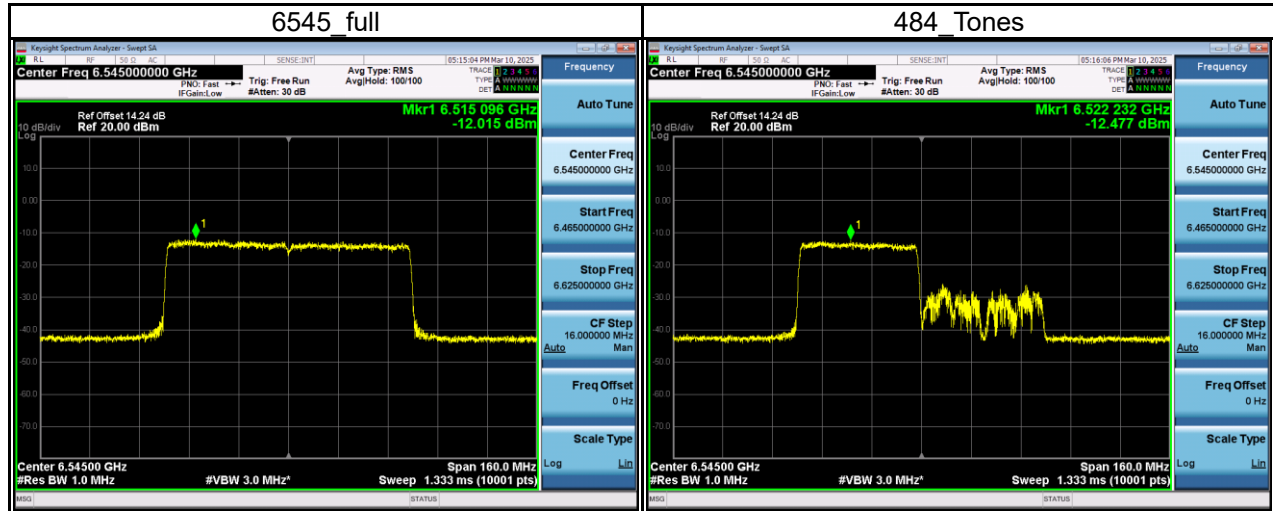

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6865_full	-10.59	0.05	-10.54	6.86	-3.68	-1.00	Pass
484_Tones	-10.77	0.05	-10.71	6.86	-3.85	-1.00	Pass

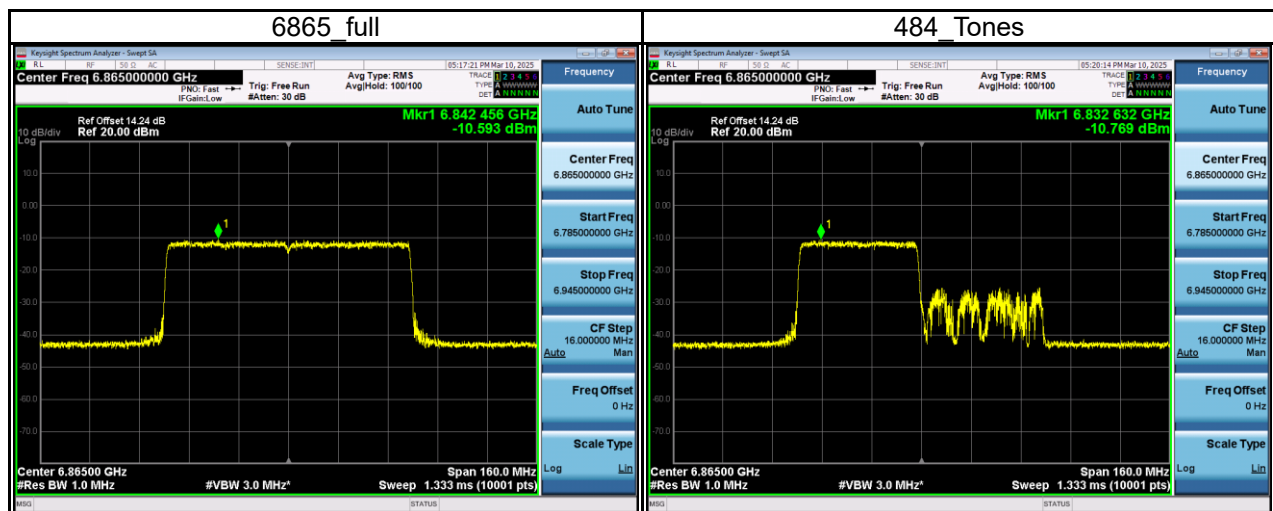


Test Mode	IEEE 802.11ax (HE80)_ Total
-----------	-----------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
5985_full	-9.01	0.05	-8.96	7.70	-1.26	-1.00	Pass
484_Tones	-9.30	0.05	-9.24	7.70	-1.54	-1.00	Pass
6465_full	-8.52	0.05	-8.47	6.92	-1.55	-1.00	Pass
484_Tones	-8.86	0.05	-8.81	6.92	-1.89	-1.00	Pass
6545_full	-9.12	0.05	-9.07	7.86	-1.21	-1.00	Pass
484_Tones	-9.62	0.05	-9.57	7.86	-1.71	-1.00	Pass
6865_full	-8.32	0.05	-8.27	6.86	-1.41	-1.00	Pass
484_Tones	-8.53	0.05	-8.47	6.86	-1.61	-1.00	Pass

Test Mode	IEEE 802.11ax (HE160)_ Main
-----------	-----------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6025_full	-12.44	0.02	-12.42	7.70	-4.72	-1.00	Pass
996_Tones	-12.84	0.02	-12.82	7.70	-5.12	-1.00	Pass

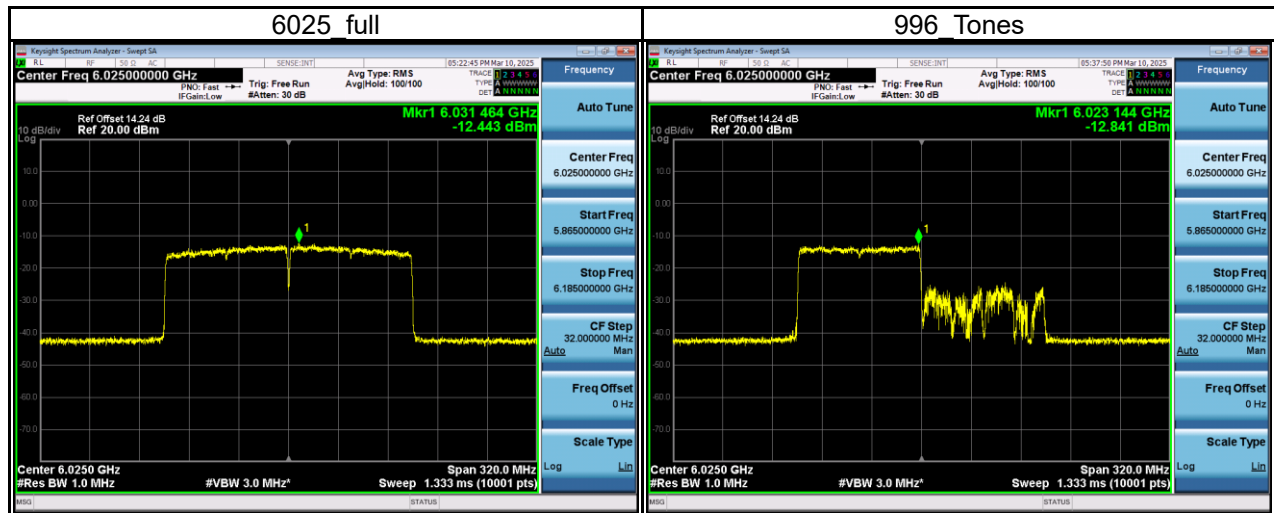

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6505_full	-11.55	0.02	-11.53	6.92	-4.61	-1.00	Pass
996_Tones	-11.93	0.02	-11.91	6.92	-4.99	-1.00	Pass

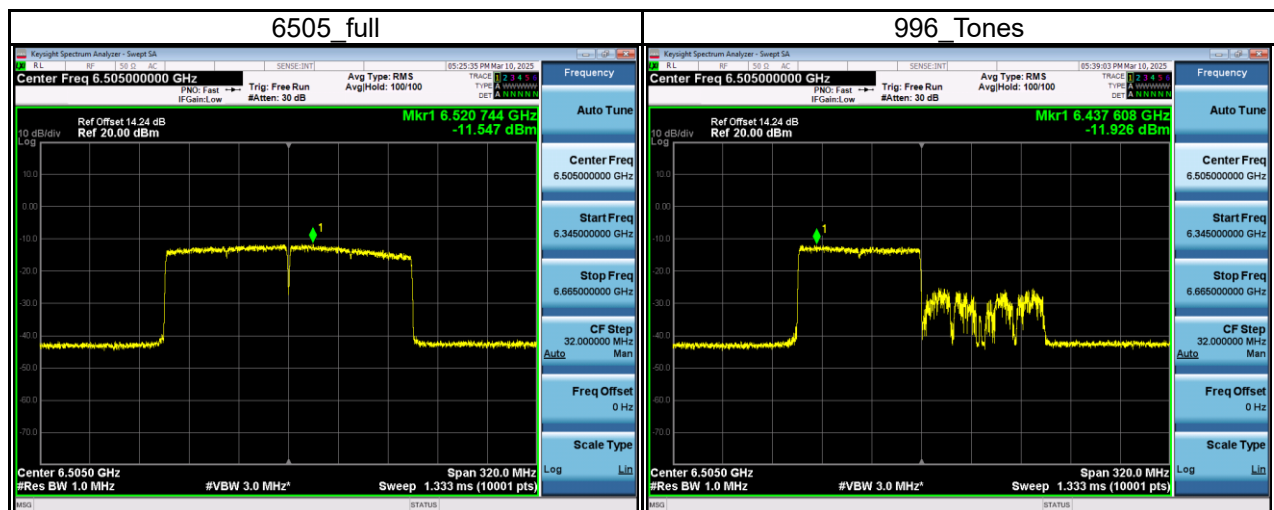

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6665_full	-12.41	0.02	-12.39	7.86	-4.53	-1.00	Pass
996_Tones	-12.94	0.02	-12.92	7.86	-5.06	-1.00	Pass

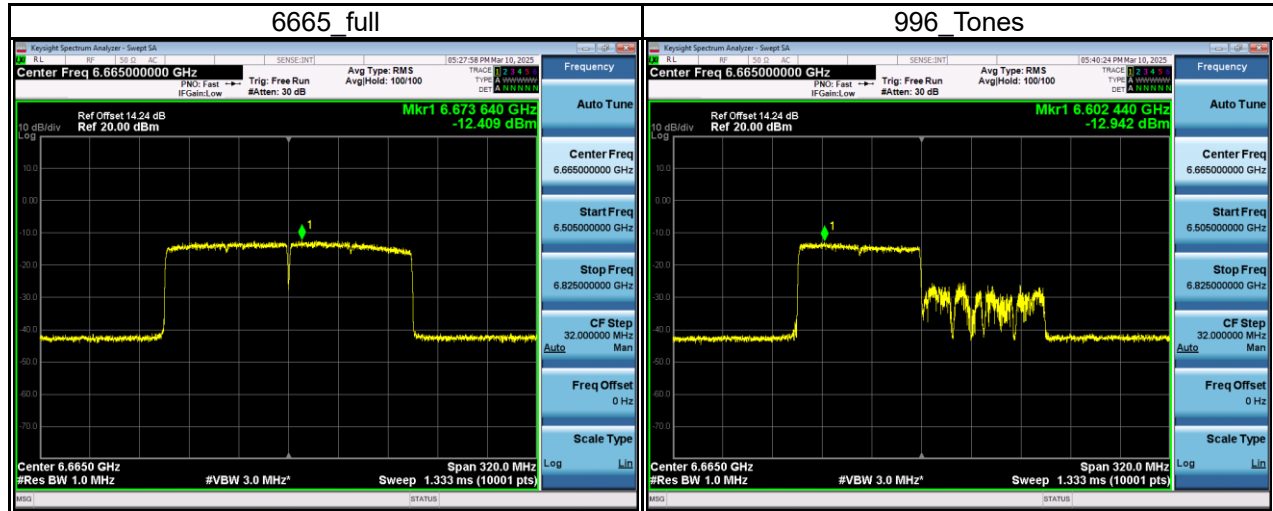

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6985_full	-11.88	0.02	-11.86	6.86	-5.00	-1.00	Pass
996_Tones	-12.40	0.02	-12.39	6.86	-5.53	-1.00	Pass

