



Test Mode	IEEE 802.11ax (HE160)_Aux
-----------	---------------------------


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6025_full	-11.95	0.02	-11.94	7.70	-4.24	-1.00	Pass
996_Tones	-12.41	0.02	-12.39	7.70	-4.69	-1.00	Pass

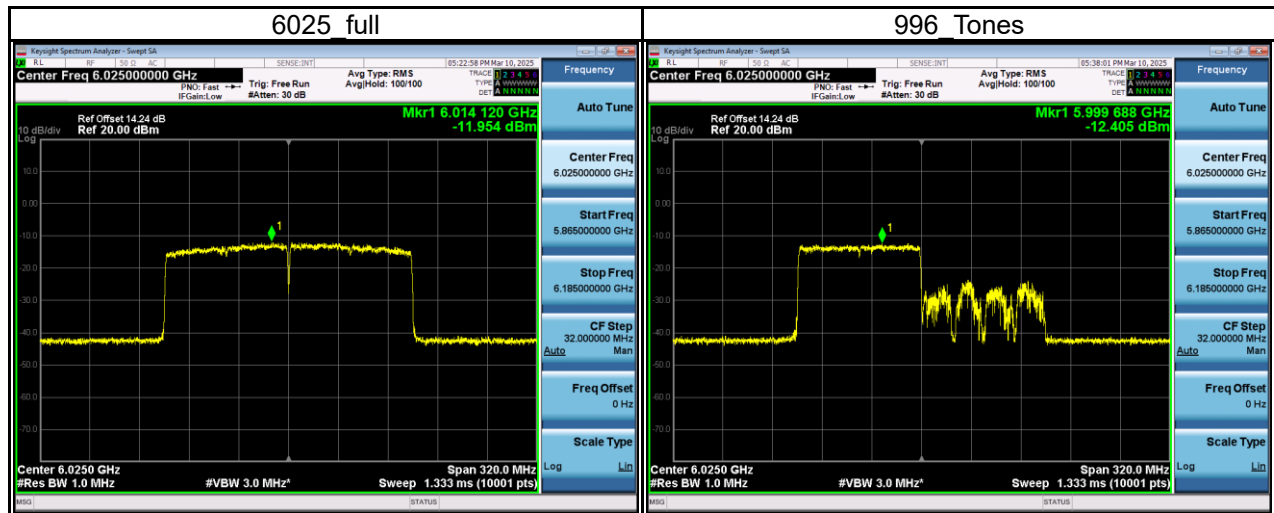


Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6505_full	-11.10	0.02	-11.08	6.92	-4.16	-1.00	Pass
996_Tones	-11.64	0.02	-11.62	6.92	-4.70	-1.00	Pass

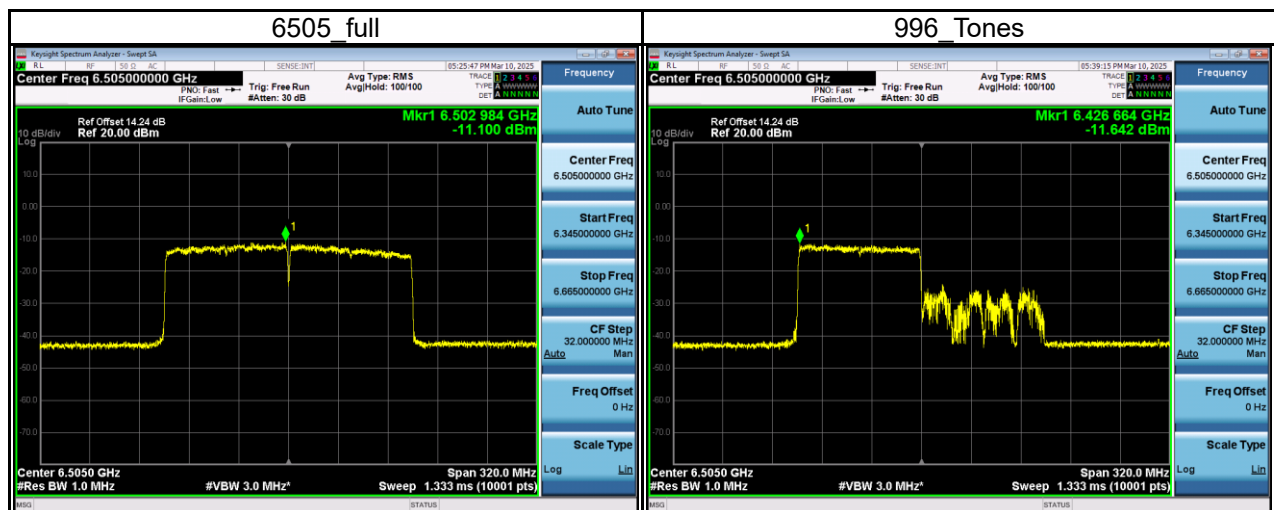

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6665_full	-11.75	0.02	-11.74	7.86	-3.88	-1.00	Pass
996_Tones	-11.95	0.02	-11.93	7.86	-4.07	-1.00	Pass

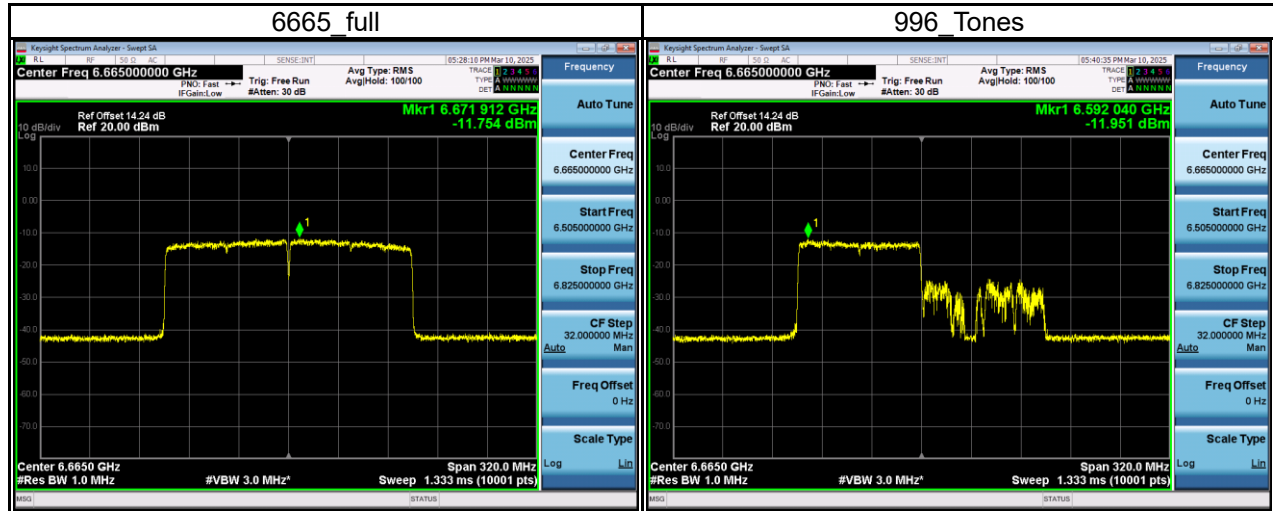

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6985_full	-10.89	0.02	-10.88	6.86	-4.02	-1.00	Pass
996_Tones	-11.22	0.02	-11.20	6.86	-4.34	-1.00	Pass

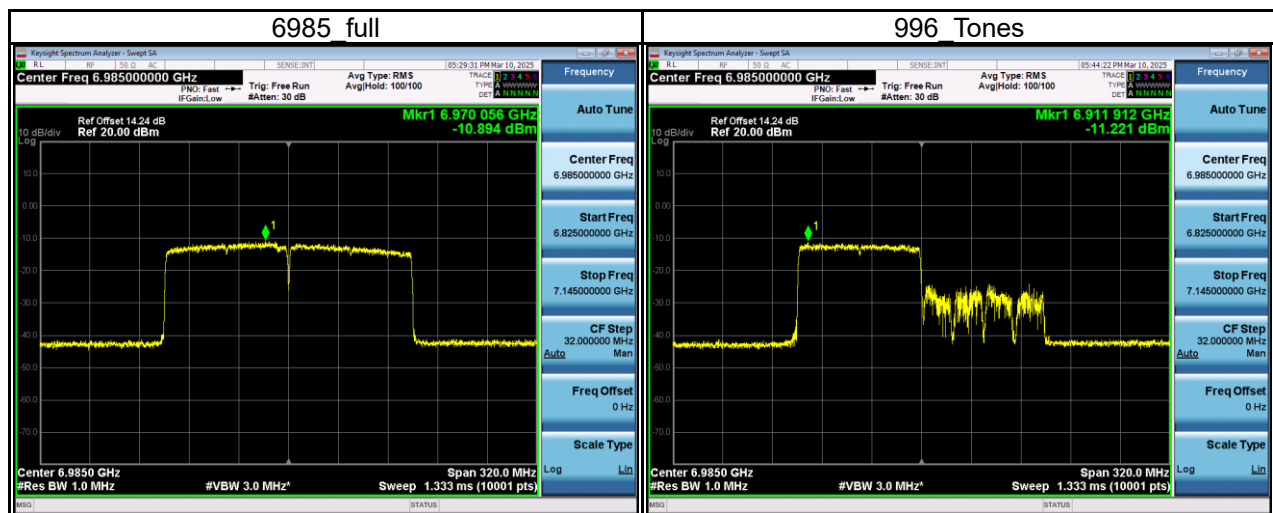


Test Mode	IEEE 802.11ax (HE160)_ Total
-----------	------------------------------

Frequency	Power Density (dBm/MHz)	Duty Factor (dB)	Calculated Power Density (dBm/MHz)	Directional Gain (dBi)	Calculated e.i.r.p. Spectral Density (dBm/MHz)	e.i.r.p. Power Spectral Density Limit (dBm/MHz)	Result
6025_full	-9.18	0.02	-9.16	7.70	-1.46	-1.00	Pass
996_Tones	-9.61	0.02	-9.59	7.70	-1.89	-1.00	Pass
6505_full	-8.31	0.02	-8.29	6.92	-1.37	-1.00	Pass
996_Tones	-8.77	0.02	-8.75	6.92	-1.83	-1.00	Pass
6665_full	-9.06	0.02	-9.04	7.86	-1.18	-1.00	Pass
996_Tones	-9.41	0.02	-9.39	7.86	-1.53	-1.00	Pass
6985_full	-8.35	0.02	-8.33	6.86	-1.47	-1.00	Pass
996_Tones	-8.76	0.02	-8.74	6.86	-1.88	-1.00	Pass

APPENDIX D UNDESIRABLE EMISSIONS - 9 KHZ TO 30 MHZ

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/31
Test Frequency	5955MHz	Polarization	Vertical
Temp	21°C	Hum.	60%

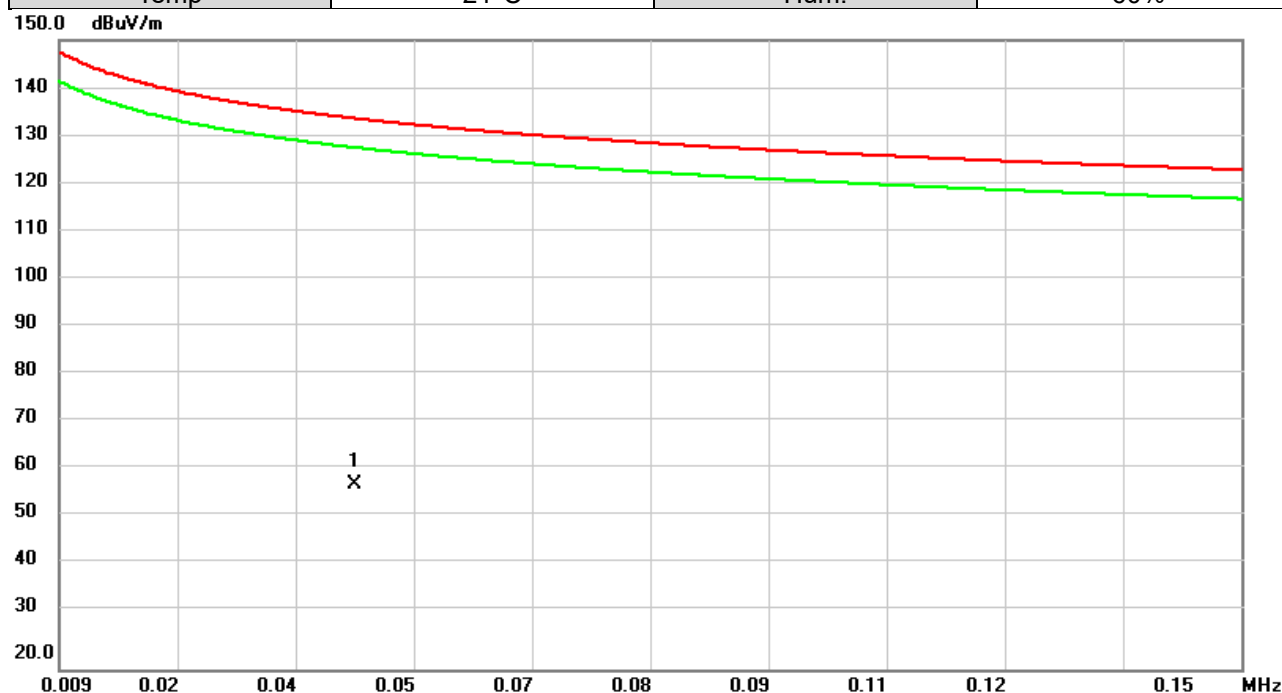


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0442	33.42	24.75	58.17	133.78	-75.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/31
Test Frequency	5955MHz	Polarization	Vertical
Temp	21°C	Hum.	60%

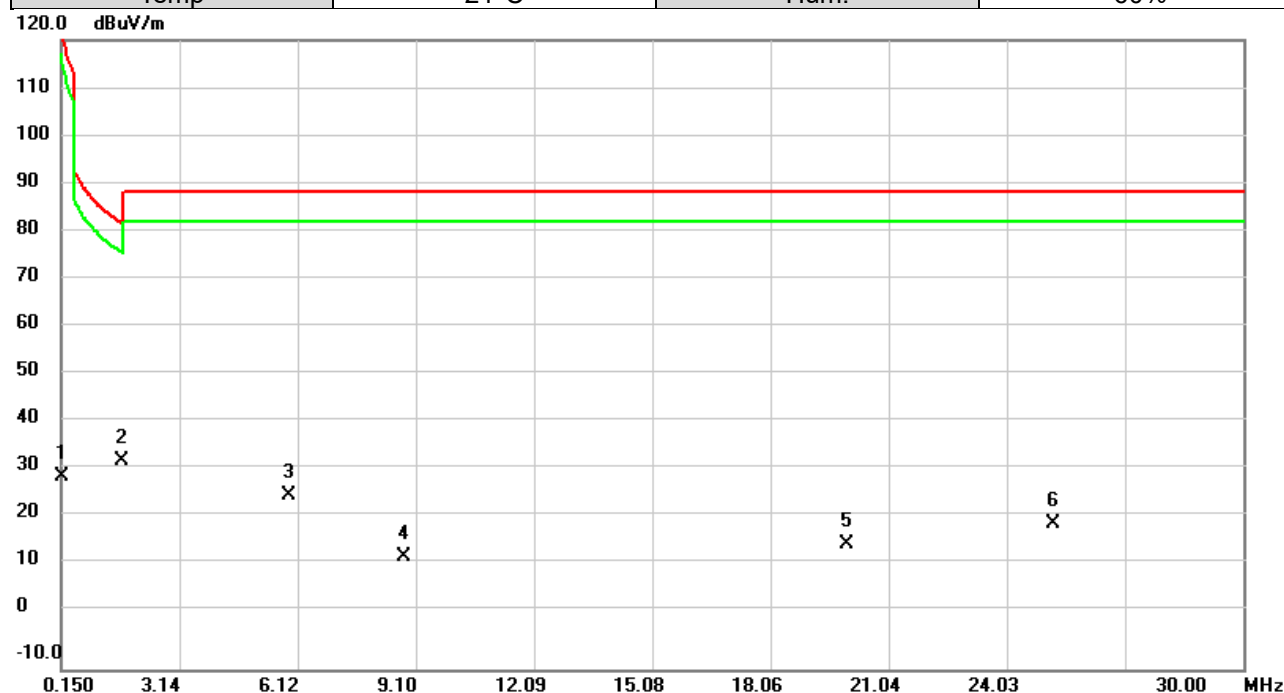


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.1500	15.87	13.97	29.84	123.16	-93.32	AVG	
2	*	1.6882	34.29	-1.14	33.15	82.13	-48.98	QP	
3		5.9140	30.06	-4.13	25.93	88.62	-62.69	QP	
4		8.8124	16.49	-3.31	13.18	88.62	-75.44	QP	
5		19.9803	19.71	-3.93	15.78	88.62	-72.84	QP	
6		25.1861	23.04	-2.91	20.13	88.62	-68.49	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/31
Test Frequency	5955MHz	Polarization	Horizontal
Temp	21°C	Hum.	60%

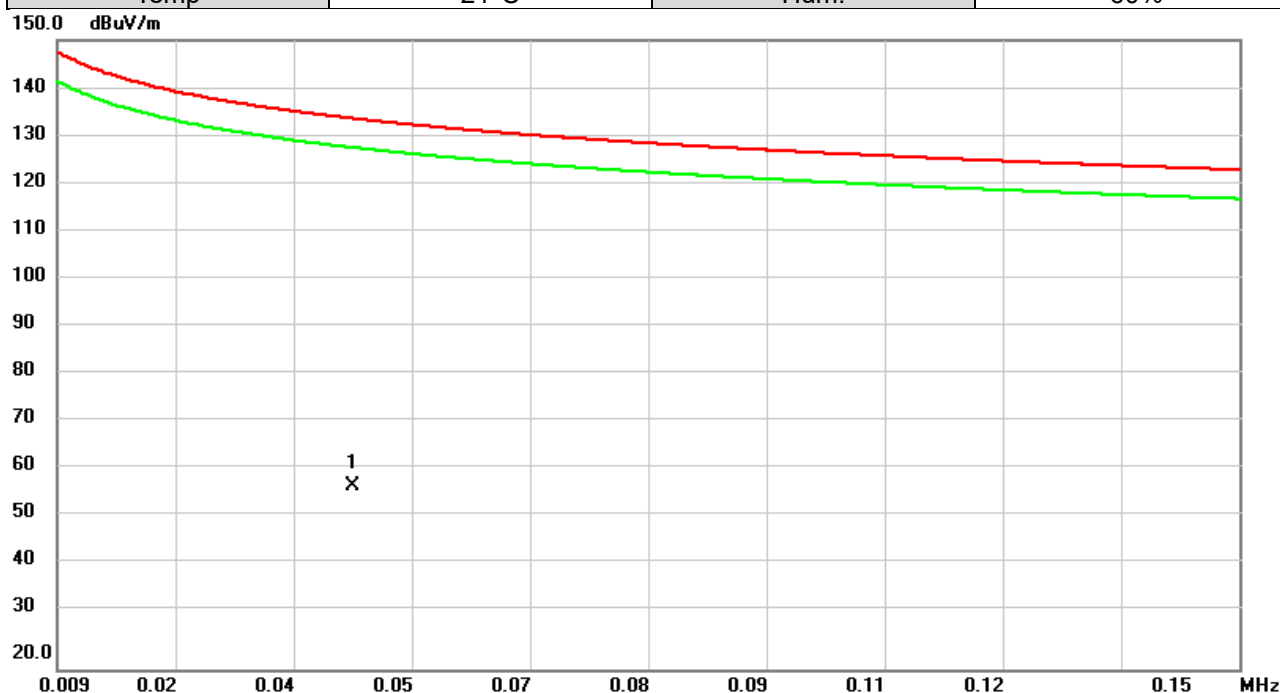


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	0.0442	33.16	24.75	57.91	133.78	-75.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/31
Test Frequency	5955MHz	Polarization	Horizontal
Temp	21°C	Hum.	60%

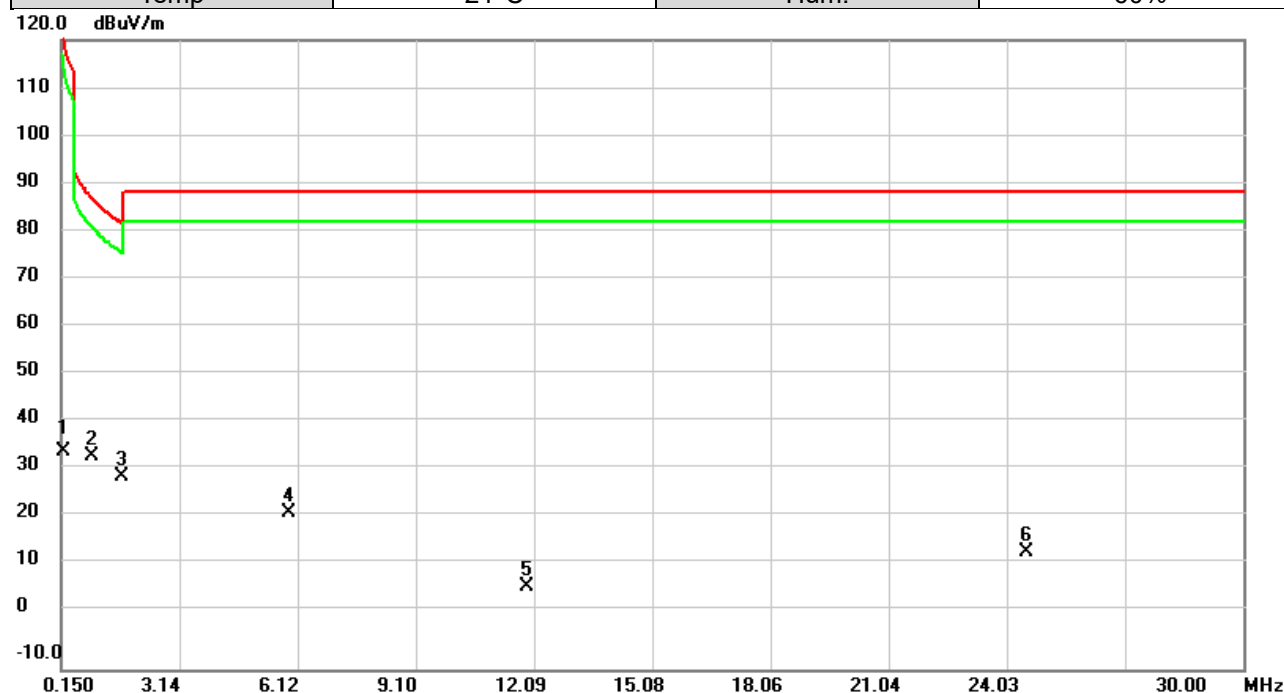

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		0.2077	23.80	11.35	35.15	120.34	-85.19	QP	
2		0.9191	33.22	0.85	34.07	87.41	-53.34	peak	
3	*	1.6902	31.03	-1.14	29.89	82.12	-52.23	peak	
4		5.9150	26.52	-4.13	22.39	88.62	-66.23	peak	
5		11.9237	10.06	-3.16	6.90	88.62	-81.72	peak	
6		24.5145	17.17	-3.04	14.13	88.62	-74.49	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E UNDESIRABLE EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/31
Test Frequency	5955MHz	Polarization	Vertical
Temp	21°C	Hum.	60%

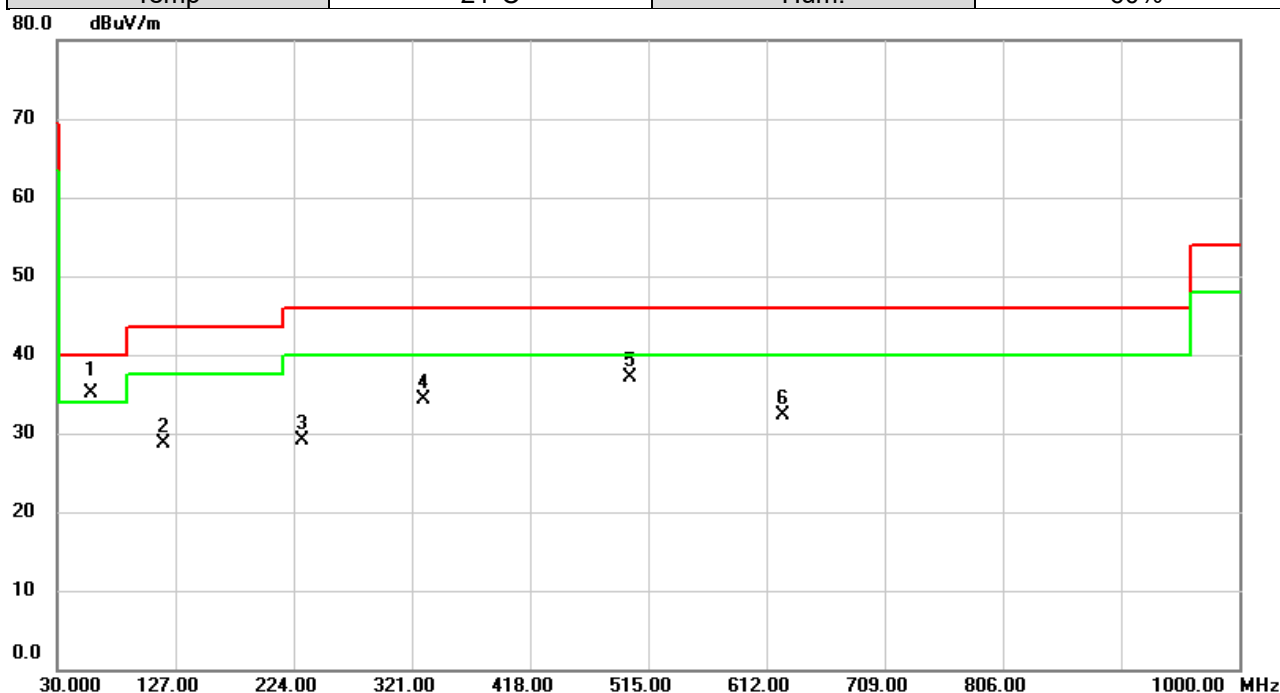


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	58.2916	47.31	-12.27	35.04	40.00	-4.96	QP	
2		117.6880	43.24	-14.48	28.76	43.50	-14.74	peak	
3		230.8223	43.64	-14.52	29.12	46.00	-16.88	peak	
4		330.1180	44.93	-10.62	34.31	46.00	-11.69	peak	
5		499.9973	43.67	-6.55	37.12	46.00	-8.88	peak	
6		624.9980	36.03	-3.80	32.23	46.00	-13.77	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/31
Test Frequency	5955MHz	Polarization	Horizontal
Temp	21°C	Hum.	60%

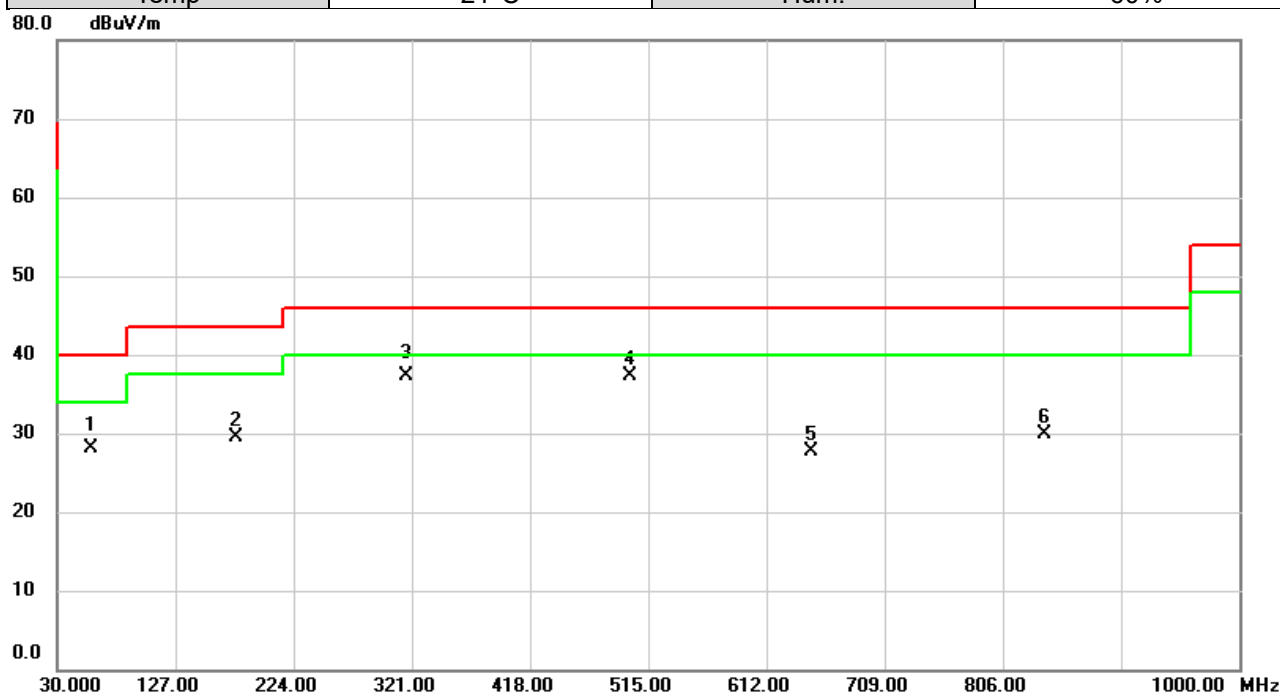

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		58.2916	40.42	-12.27	28.15	40.00	-11.85	QP	
2		176.4376	42.51	-13.04	29.47	43.50	-14.03	peak	
3	*	316.1500	48.23	-10.86	37.37	46.00	-8.63	QP	
4		499.9973	43.89	-6.55	37.34	46.00	-8.66	peak	
5		649.4743	31.01	-3.31	27.70	46.00	-18.30	peak	
6		839.9176	30.54	-0.64	29.90	46.00	-16.10	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX F UNDESIRABLE EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	5955MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

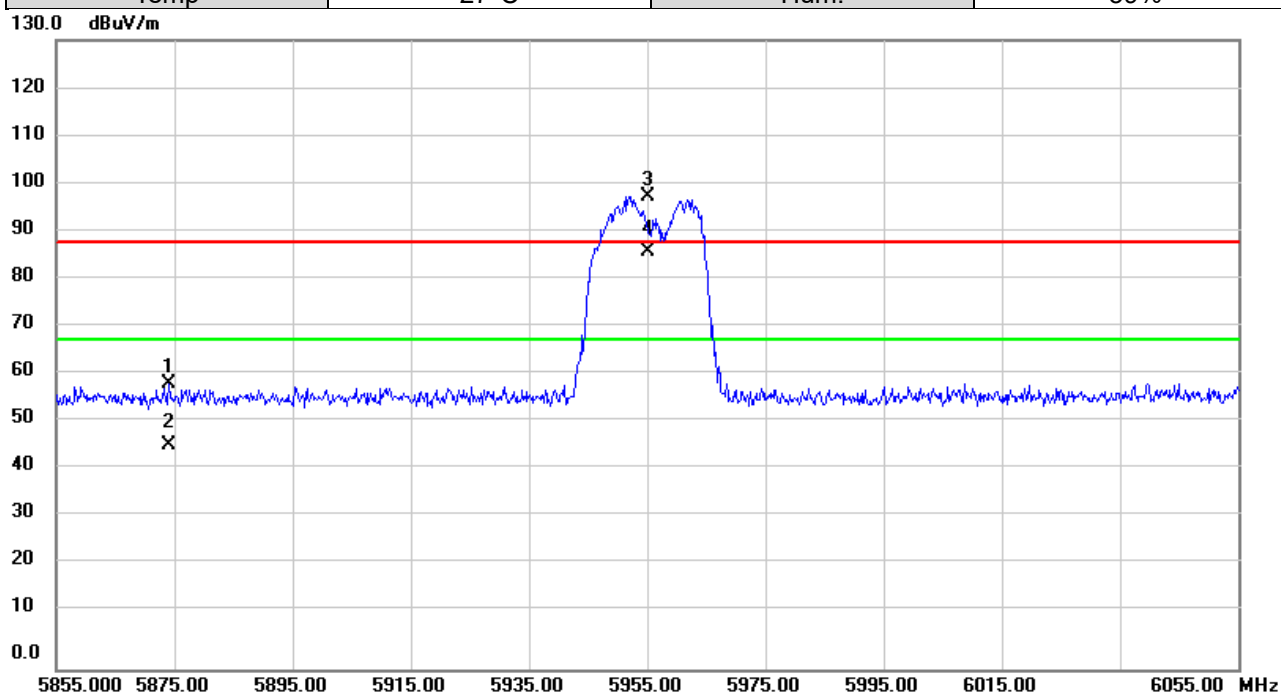


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5874.060	55.20	3.69	58.89	88.20	-29.31	peak	
2		5874.060	42.66	3.69	46.35	68.20	-21.85	AVG	
3	X	5955.000	93.77	3.91	97.68	88.20	9.48	peak	No Limit
4	*	5955.000	82.37	3.91	86.28	68.20	18.08	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6415MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

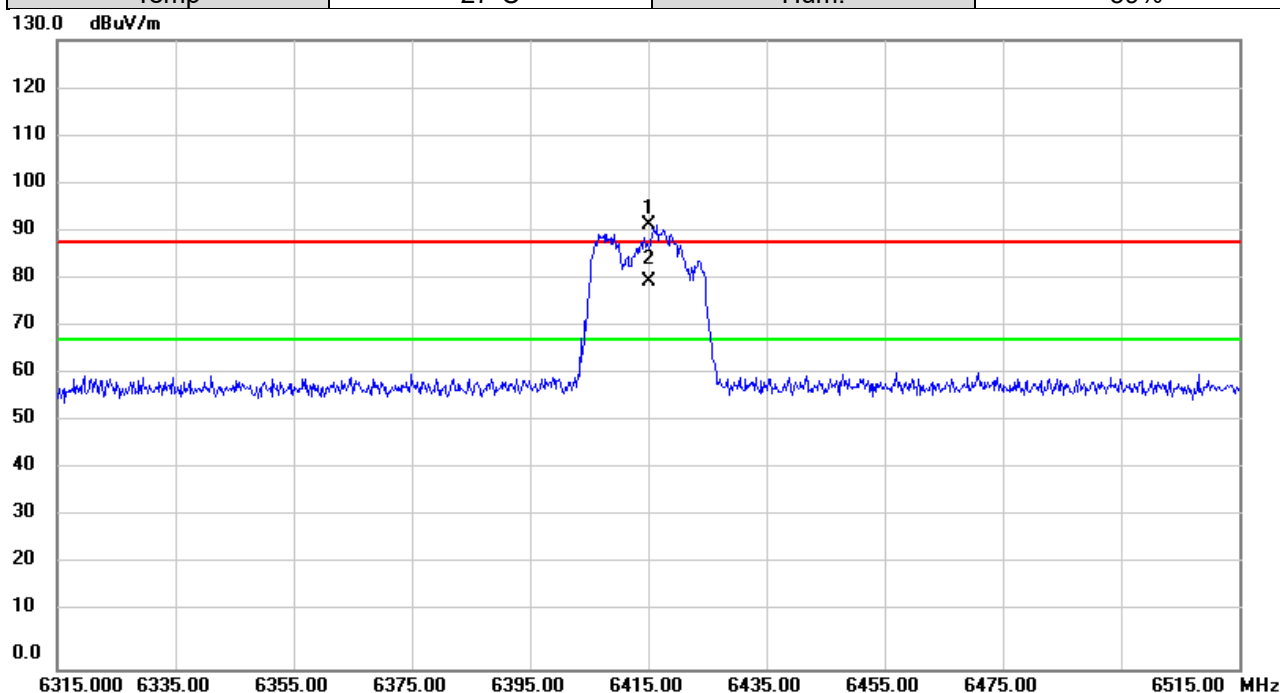


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6415.000	85.63	6.20	91.83	88.20	3.63	peak	No Limit
2	*	6415.000	73.79	6.20	79.99	68.20	11.79	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6435MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

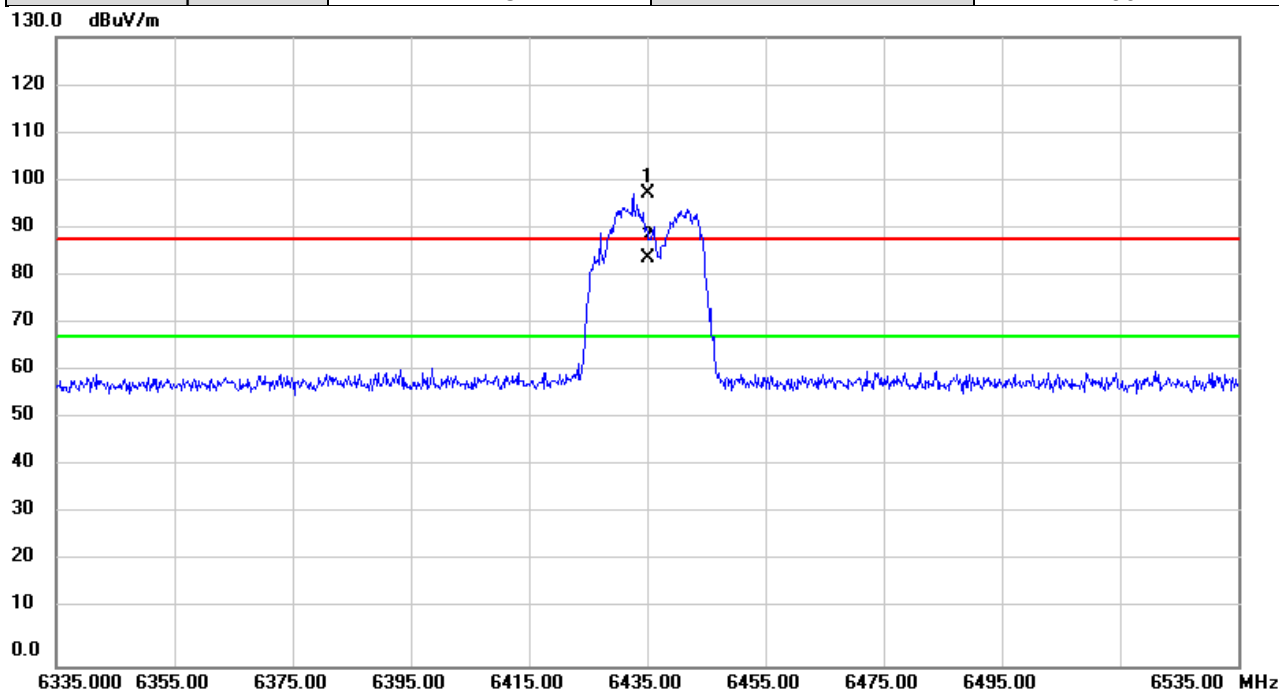


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6435.000	91.24	6.31	97.55	88.20	9.35	peak	No Limit
2	*	6435.000	78.05	6.31	84.36	68.20	16.16	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6515MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

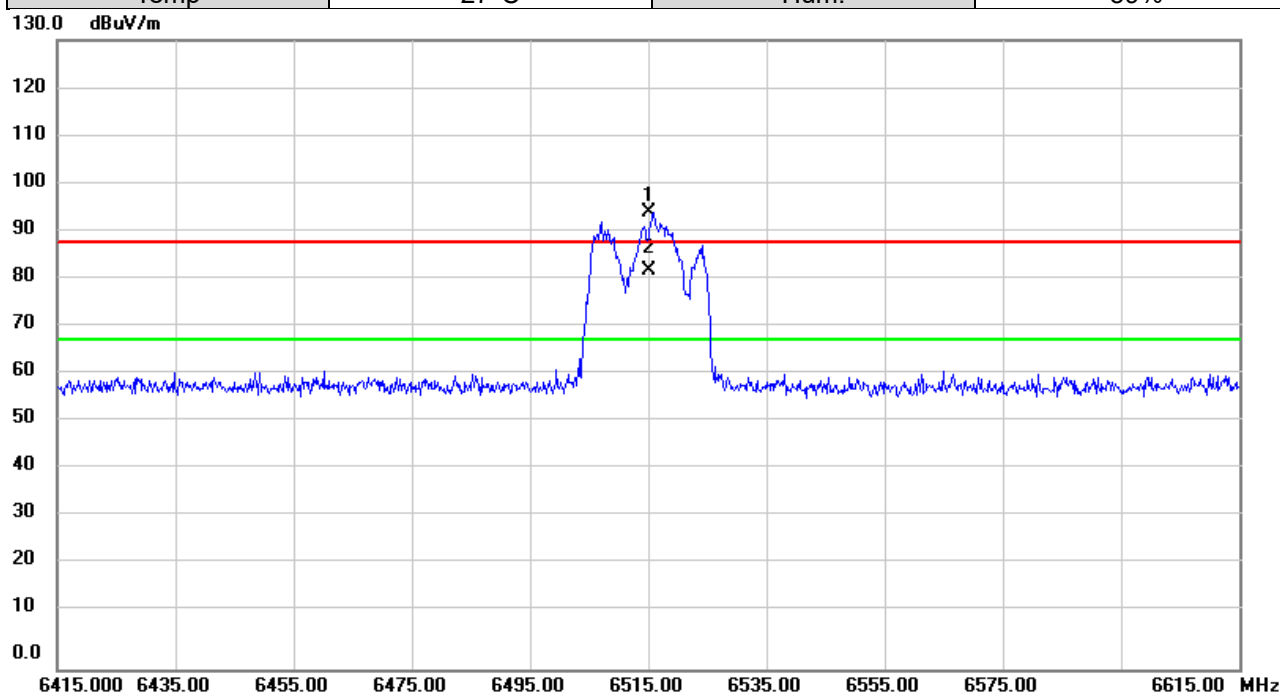


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6515.000	87.69	6.67	94.36	88.20	6.16	peak	No Limit
2	*	6515.000	75.75	6.67	82.42	68.20	14.22	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6535MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

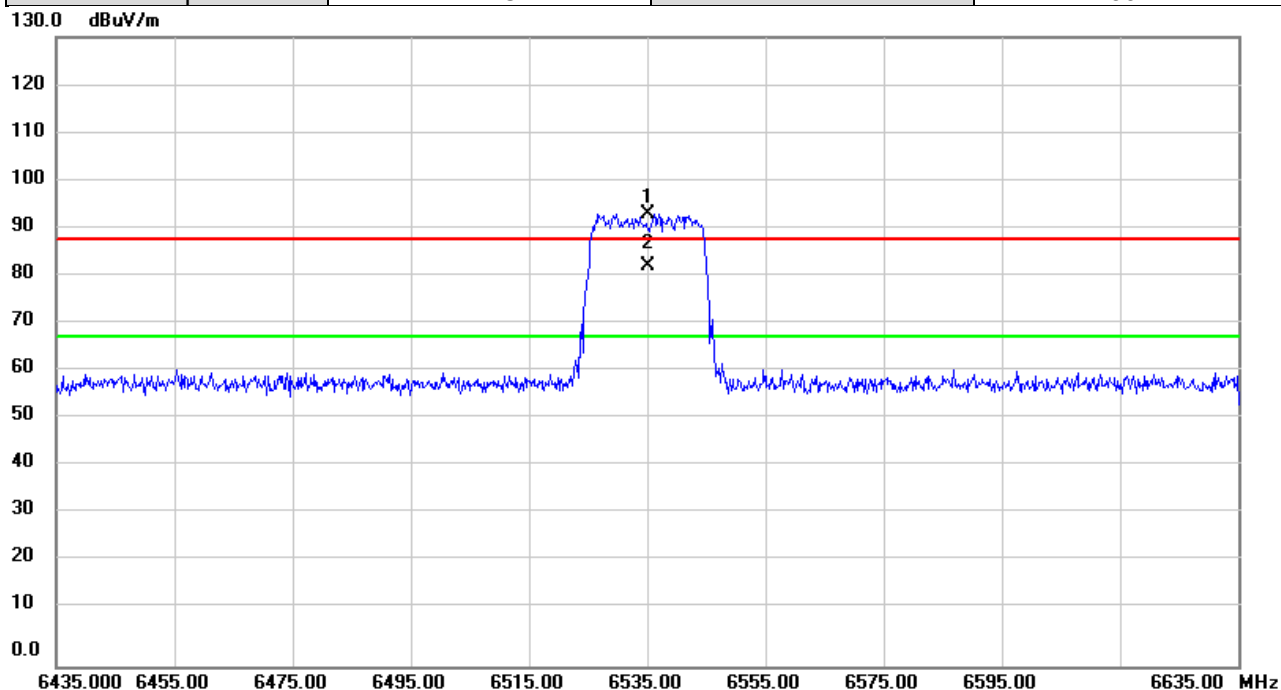


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6535.000	86.83	6.71	93.54	88.20	5.34	peak	No Limit
2	*	6535.000	75.92	6.71	82.63	68.20	14.43	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6855MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

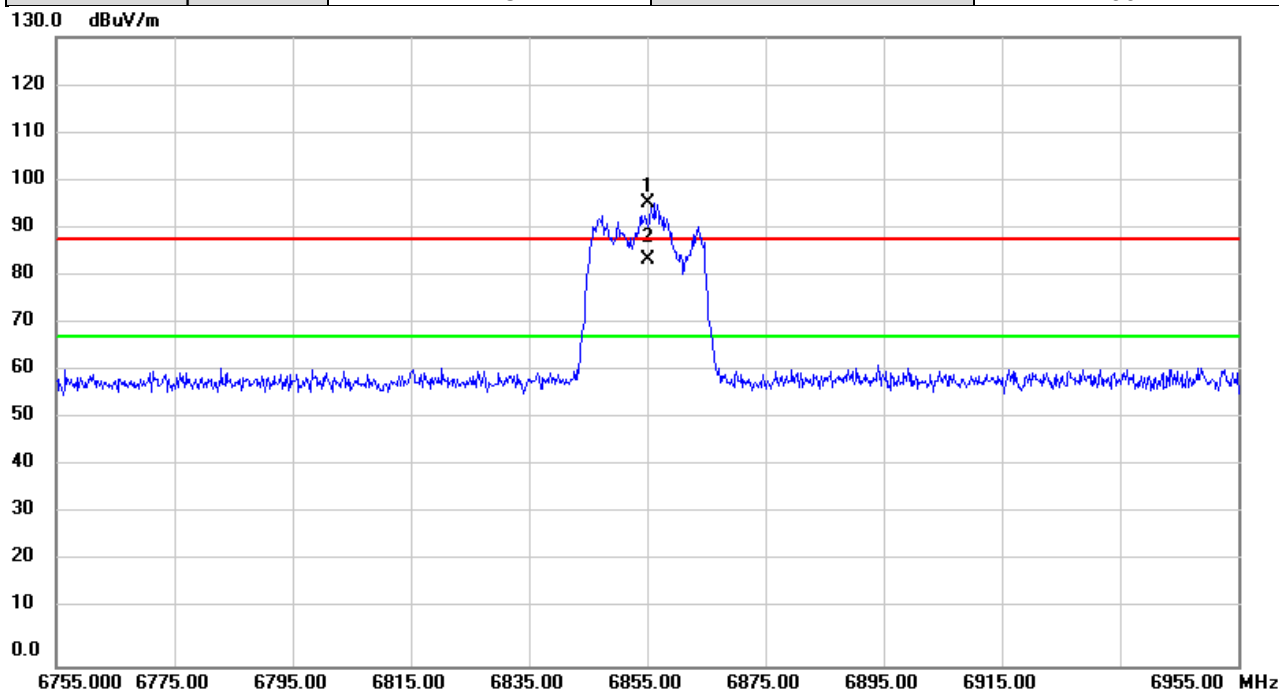


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6855.000	88.43	7.24	95.67	88.20	7.47	peak	No Limit
2	*	6855.000	76.84	7.24	84.08	68.20	15.88	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6875MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

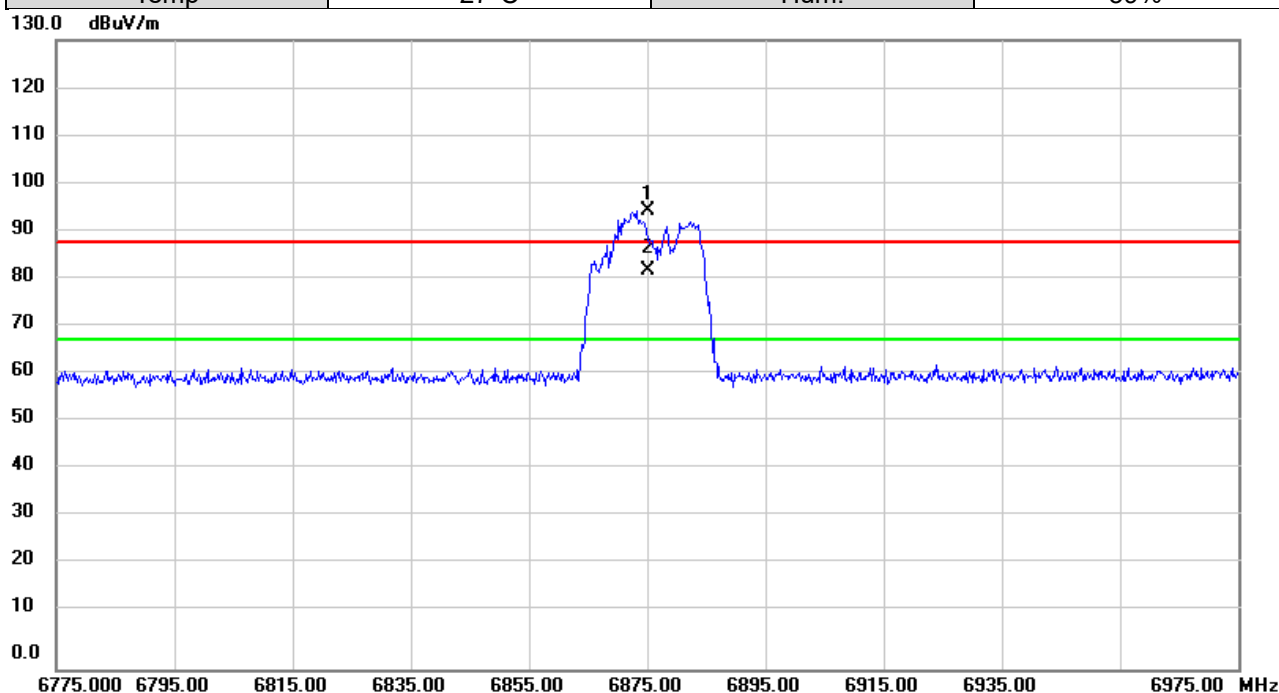


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6875.000	87.42	7.26	94.68	88.20	6.48	peak	No Limit
2	*	6875.000	75.10	7.26	82.36	68.20	14.16	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	7115MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

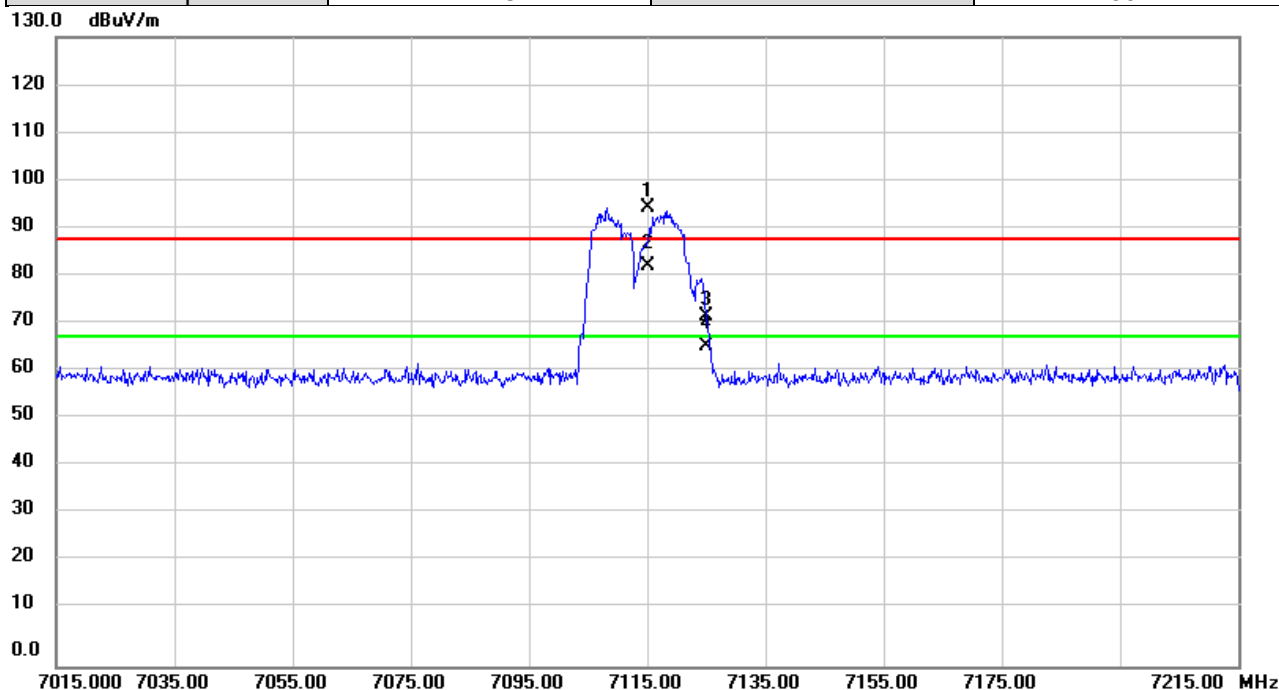


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	7115.000	87.37	7.49	94.86	88.20	6.66	peak	No Limit
2	*	7115.000	75.31	7.49	82.80	68.20	14.60	AVG	No Limit
3		7125.000	64.96	7.49	72.45	88.20	-15.75	peak	
4		7125.000	58.61	7.49	66.10	68.20	-2.10	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	5965MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

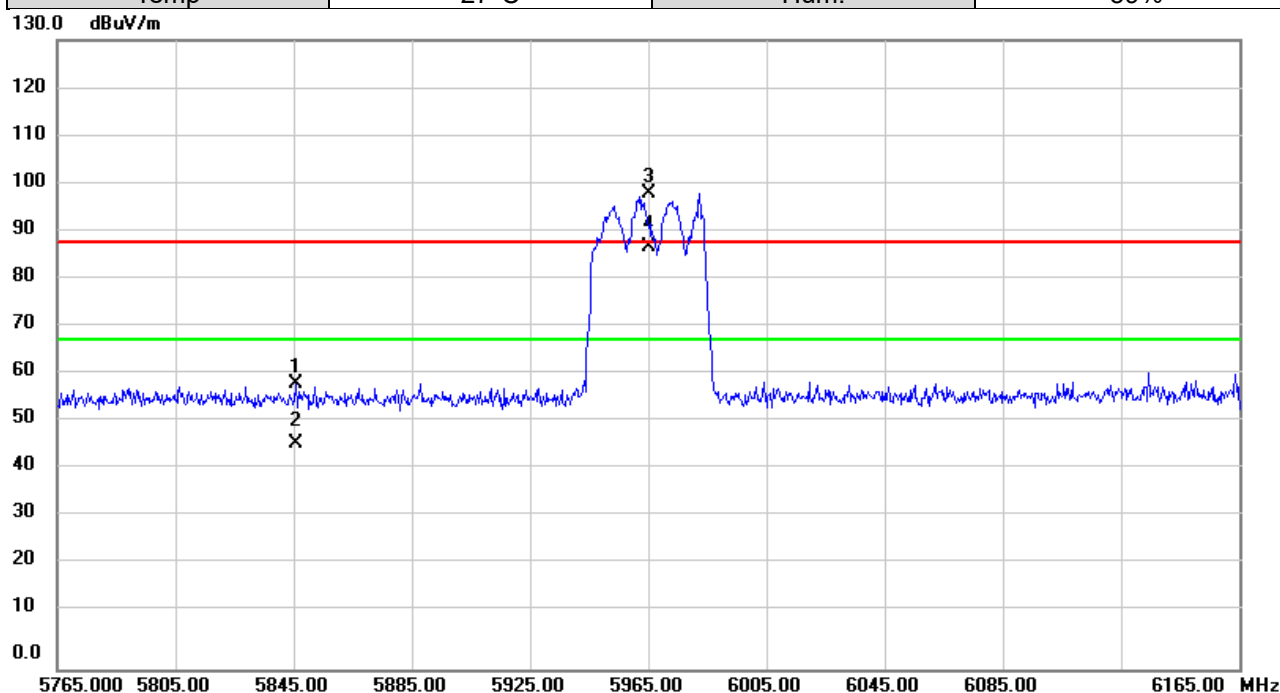


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5845.800	55.44	3.61	59.05	88.20	-29.15	peak	
2		5845.800	42.91	3.61	46.52	68.20	-21.68	AVG	
3	X	5965.000	94.40	3.93	98.33	88.20	10.13	peak	No Limit
4	*	5965.000	83.45	3.93	87.38	68.20	19.18	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6405MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

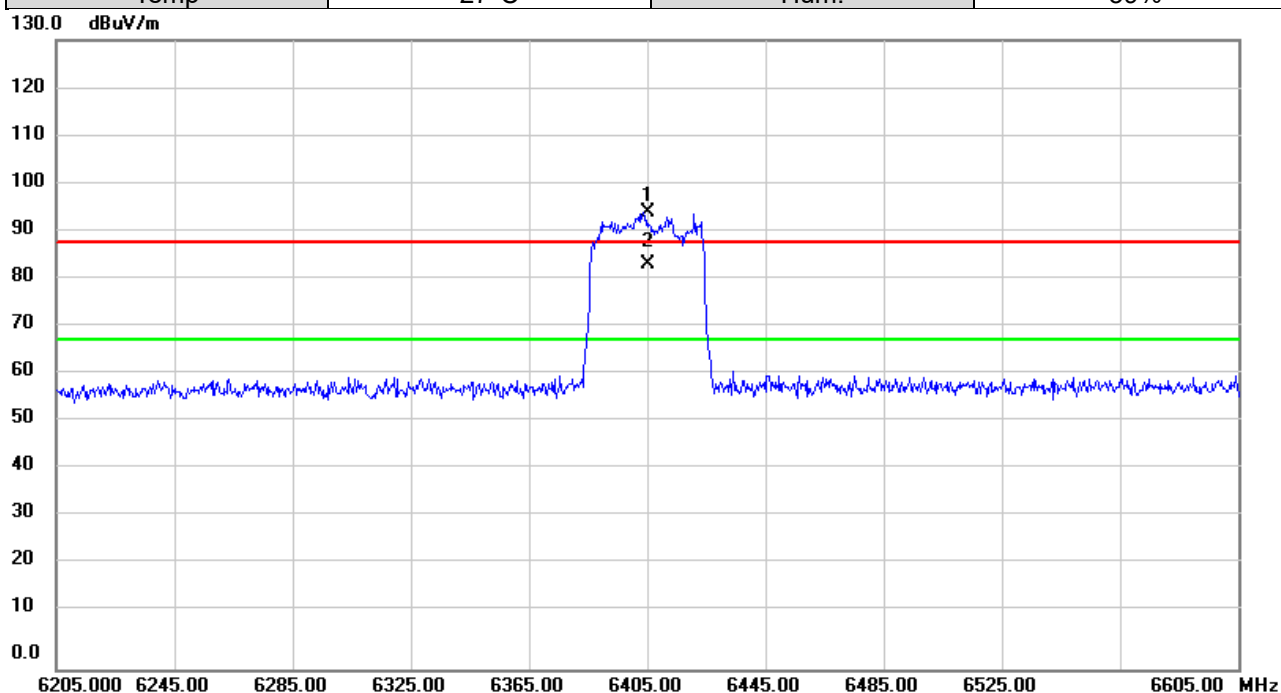


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6405.000	88.17	6.15	94.32	88.20	6.12	peak	No Limit
2	*	6405.000	77.42	6.15	83.57	68.20	15.37	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6445MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

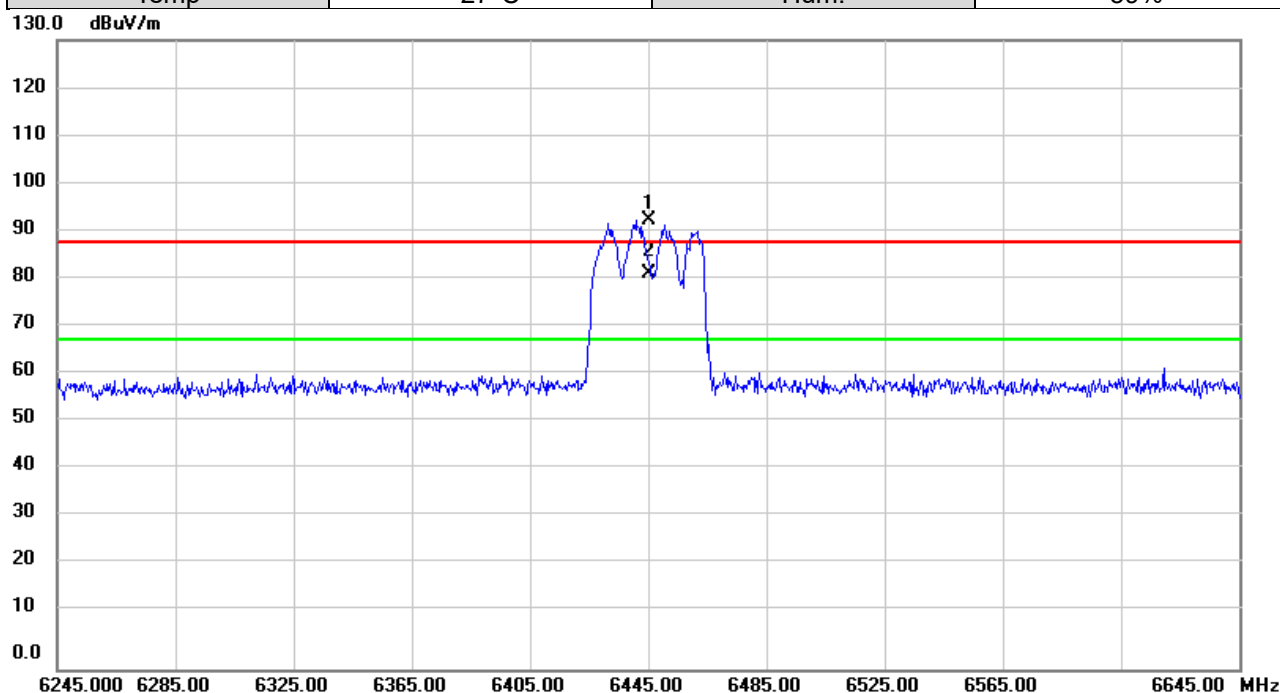


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6445.000	86.29	6.36	92.65	88.20	4.45	peak	No Limit
2	*	6445.000	75.50	6.36	81.86	68.20	13.66	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6485MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

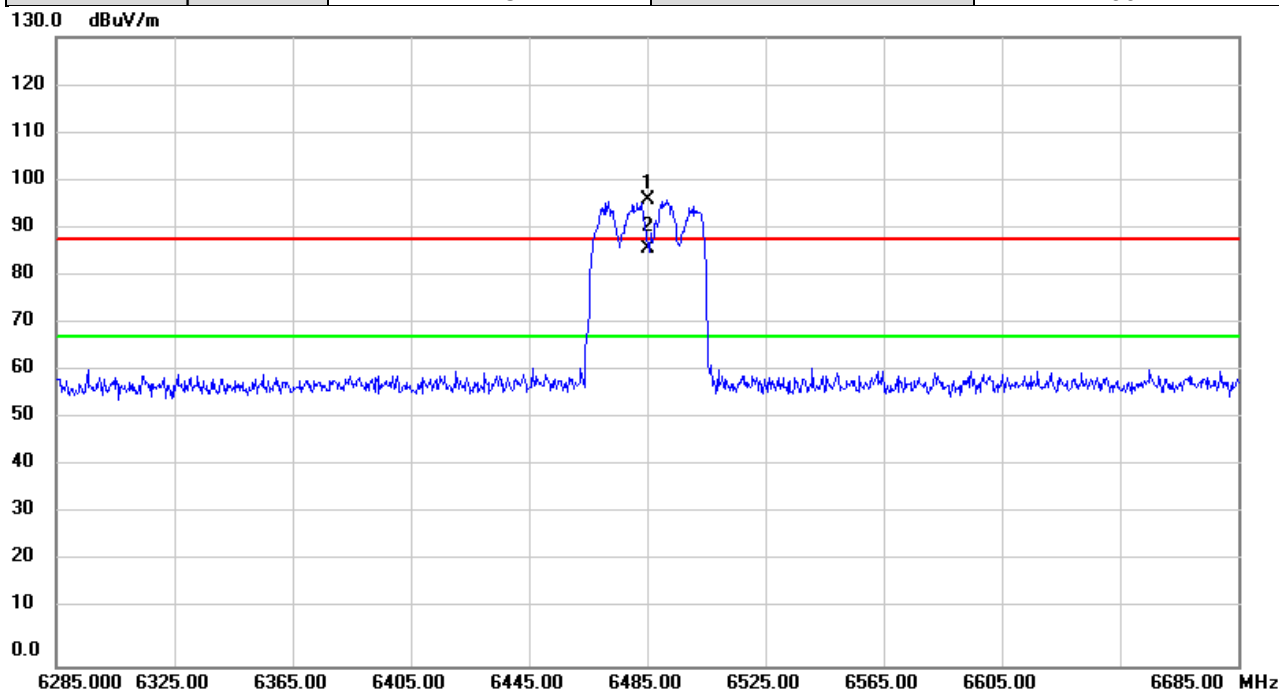


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6485.000	89.82	6.57	96.39	88.20	8.19	peak	No Limit
2	*	6485.000	79.61	6.57	86.18	68.20	17.98	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6525MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

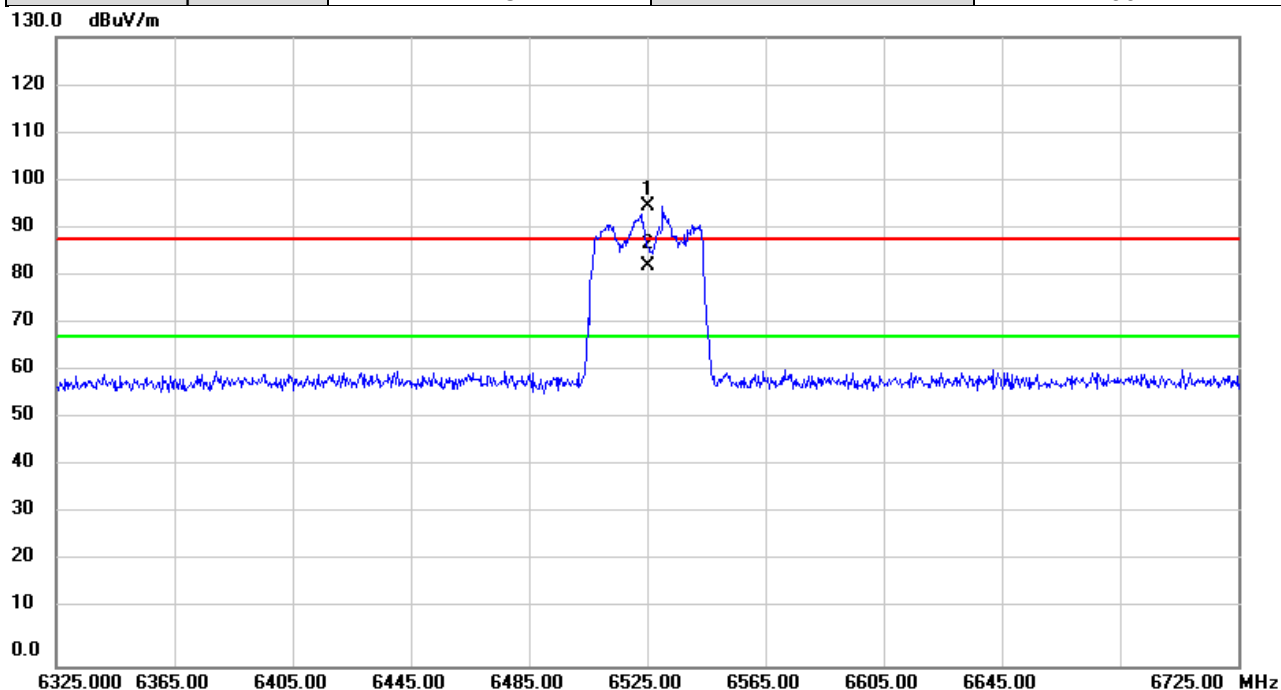


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6525.000	88.35	6.70	95.05	88.20	6.85	peak	No Limit
2	*	6525.000	75.95	6.70	82.65	68.20	14.45	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6845MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

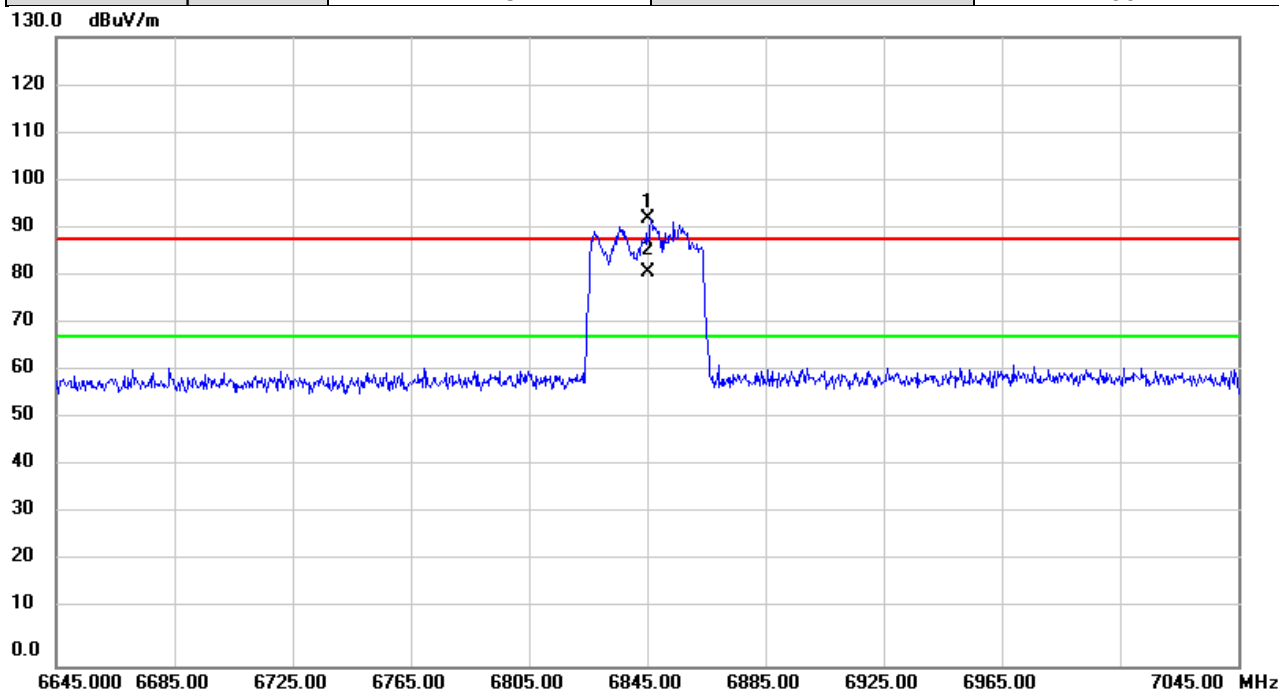


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6845.000	85.15	7.21	92.36	88.20	4.16	peak	No Limit
2	*	6845.000	74.09	7.21	81.30	68.20	13.10	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6885MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

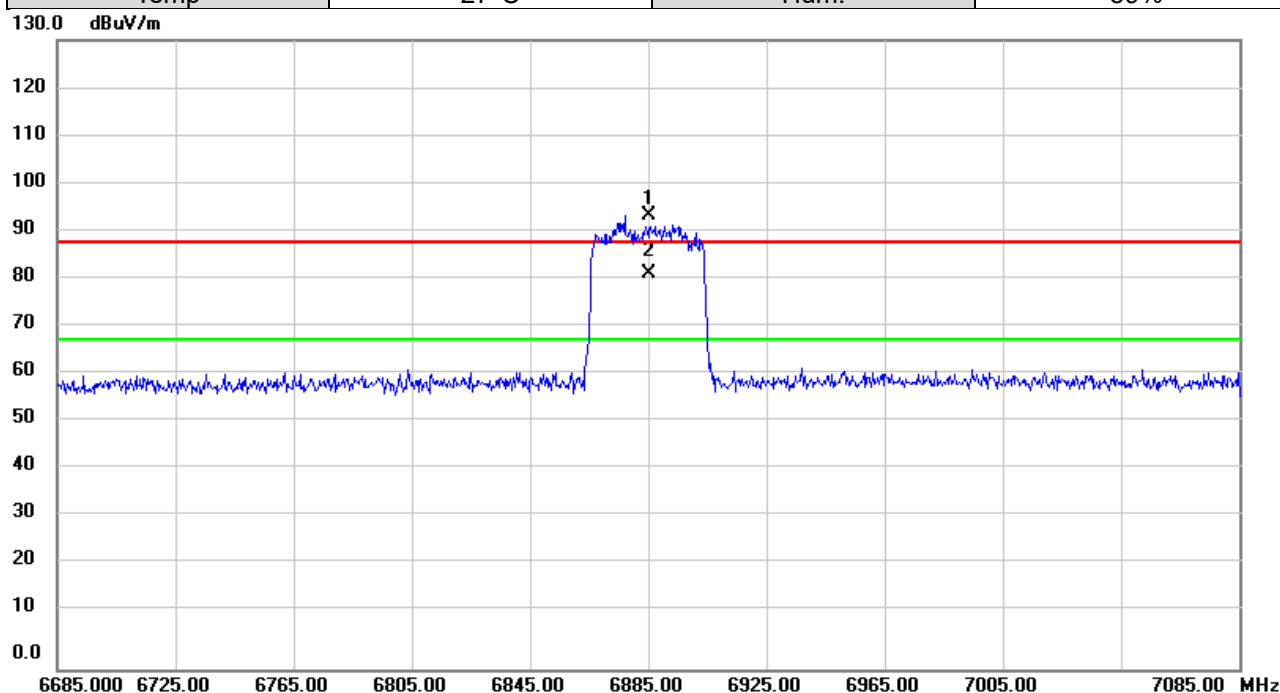


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6885.000	86.38	7.28	93.66	88.20	5.46	peak	No Limit
2	*	6885.000	74.33	7.28	81.61	68.20	13.41	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	7085MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

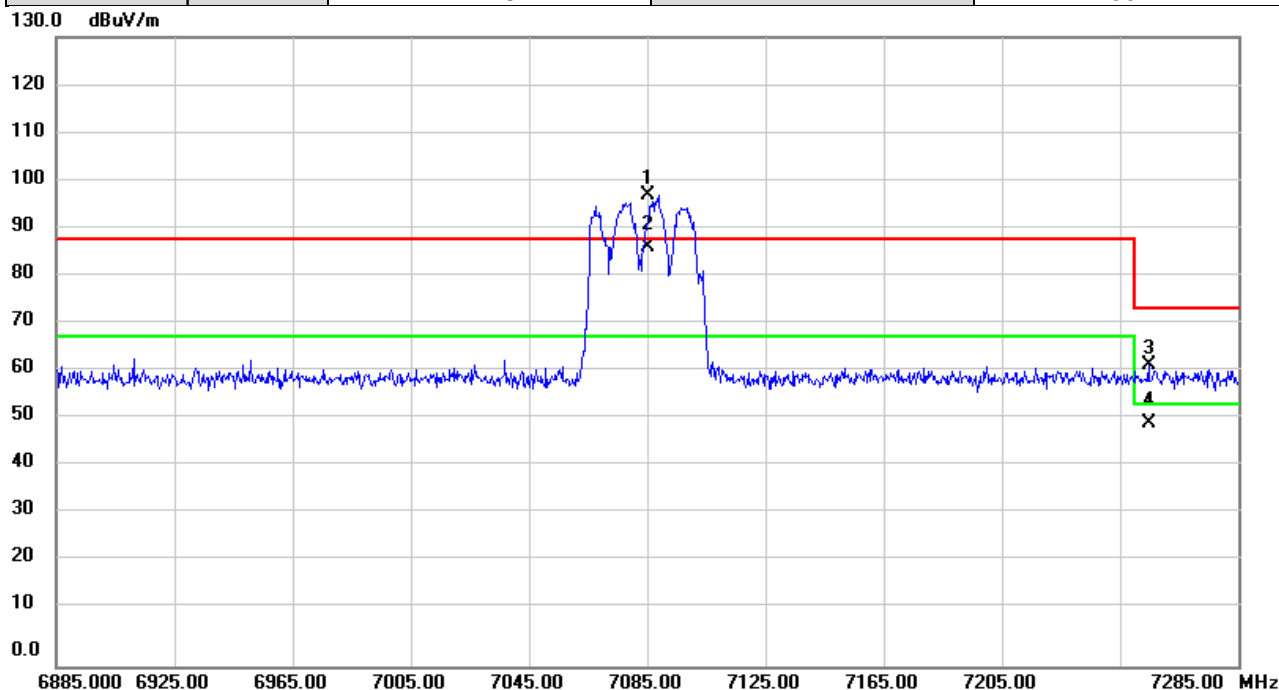


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	7085.000	89.71	7.48	97.19	88.20	8.99	peak	No Limit
2	*	7085.000	79.16	7.48	86.64	68.20	18.44	AVG	No Limit
3		7254.787	54.60	7.51	62.11	74.00	-11.89	peak	
4		7254.787	42.84	7.51	50.35	54.00	-3.65	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	5985MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

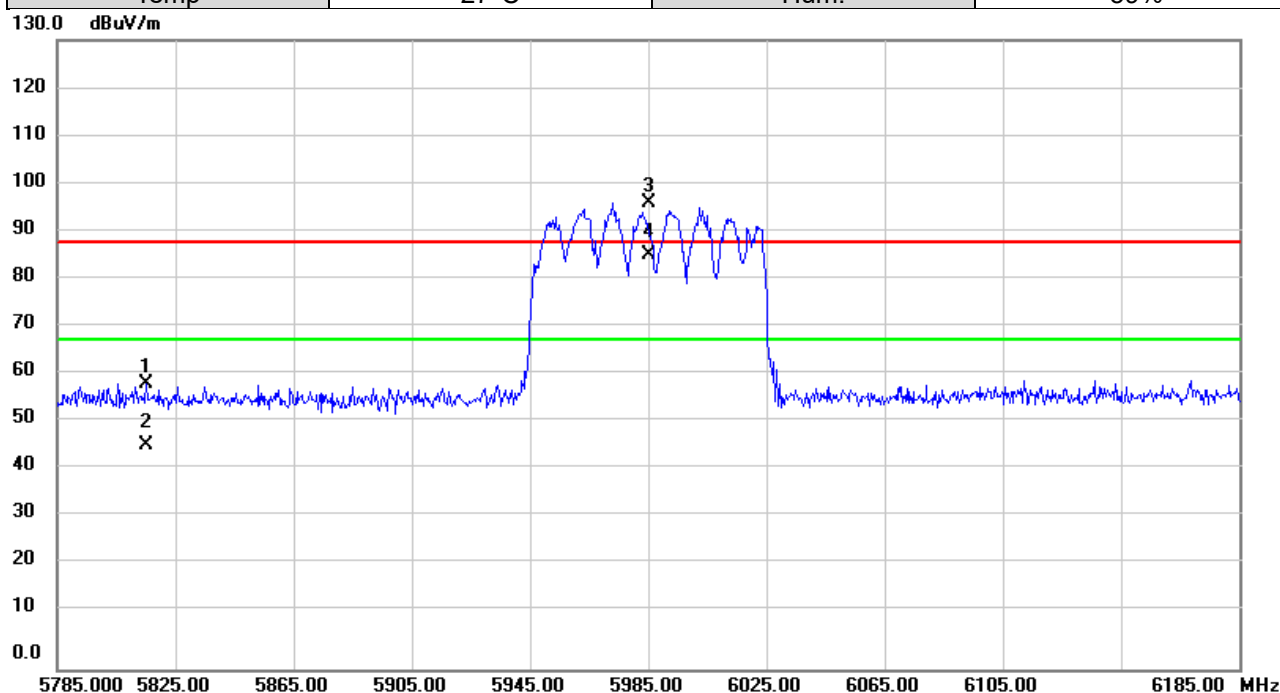


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5815.240	55.56	3.53	59.09	88.20	-29.11	peak	
2		5815.240	42.91	3.53	46.44	68.20	-21.76	AVG	
3	X	5985.000	92.32	4.00	96.32	88.20	8.12	peak	No Limit
4	*	5985.000	81.74	4.00	85.74	68.20	17.54	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6385MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

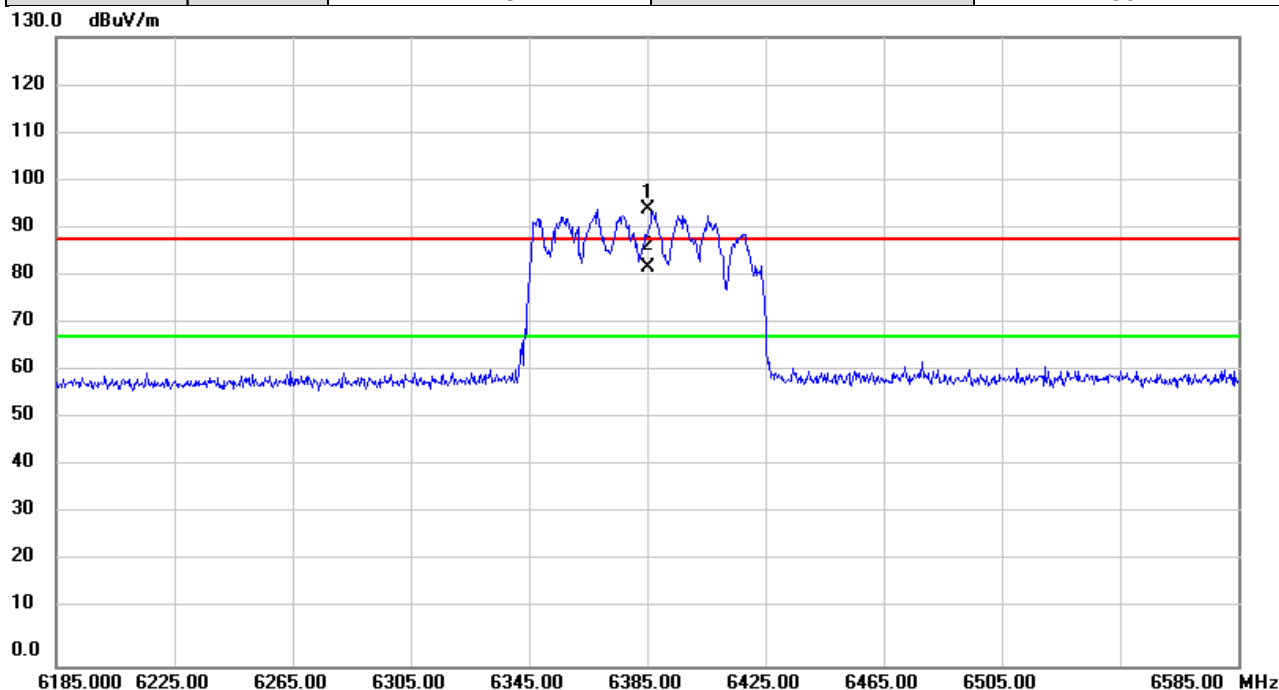


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6385.000	88.47	6.05	94.52	88.20	6.32	peak	No Limit
2	*	6385.000	76.37	6.05	82.42	68.20	14.22	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6465MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

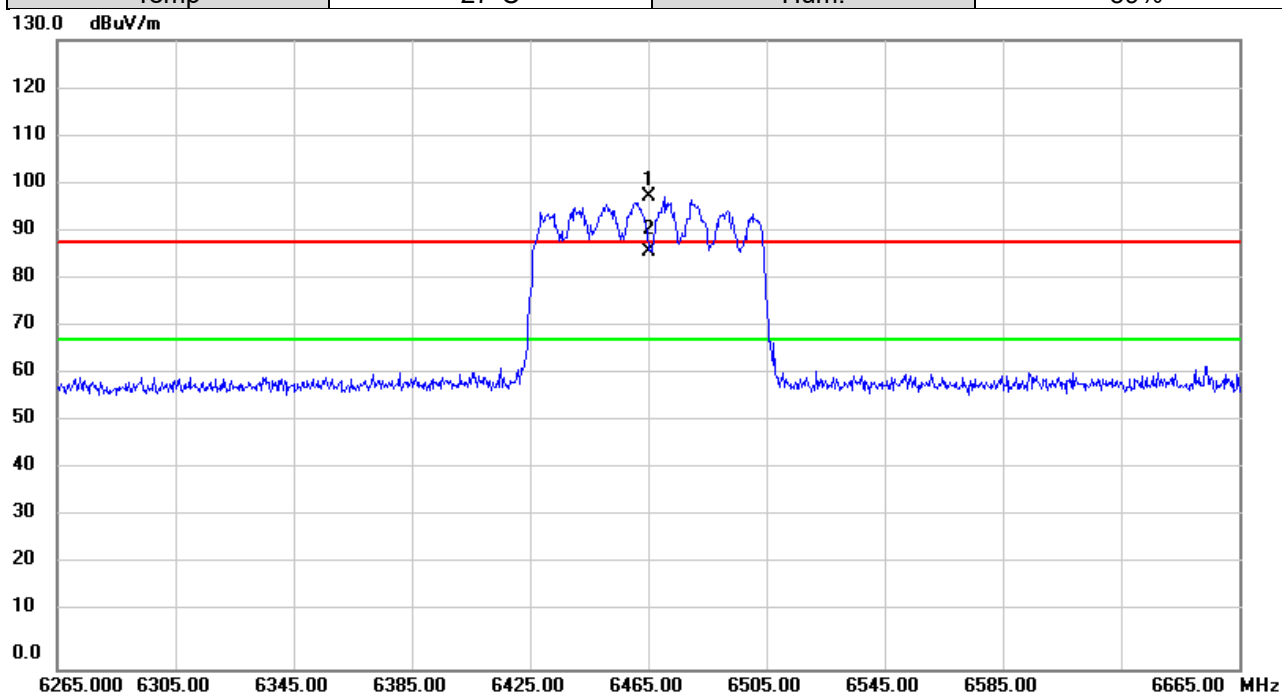


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6465.000	91.12	6.47	97.59	88.20	9.39	peak	No Limit
2	*	6465.000	79.69	6.47	86.16	68.20	17.96	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6545MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

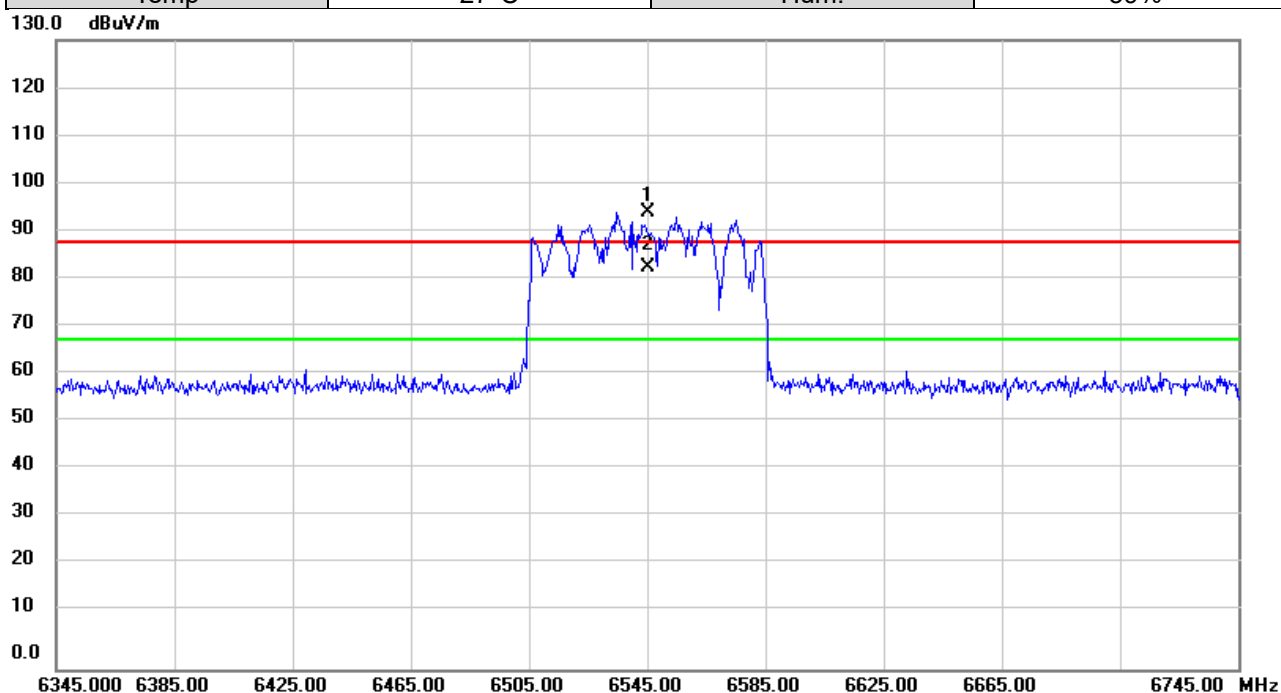


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6545.000	87.63	6.72	94.35	88.20	6.15	peak	No Limit
2	*	6545.000	76.16	6.72	82.88	68.20	14.68	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6625MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

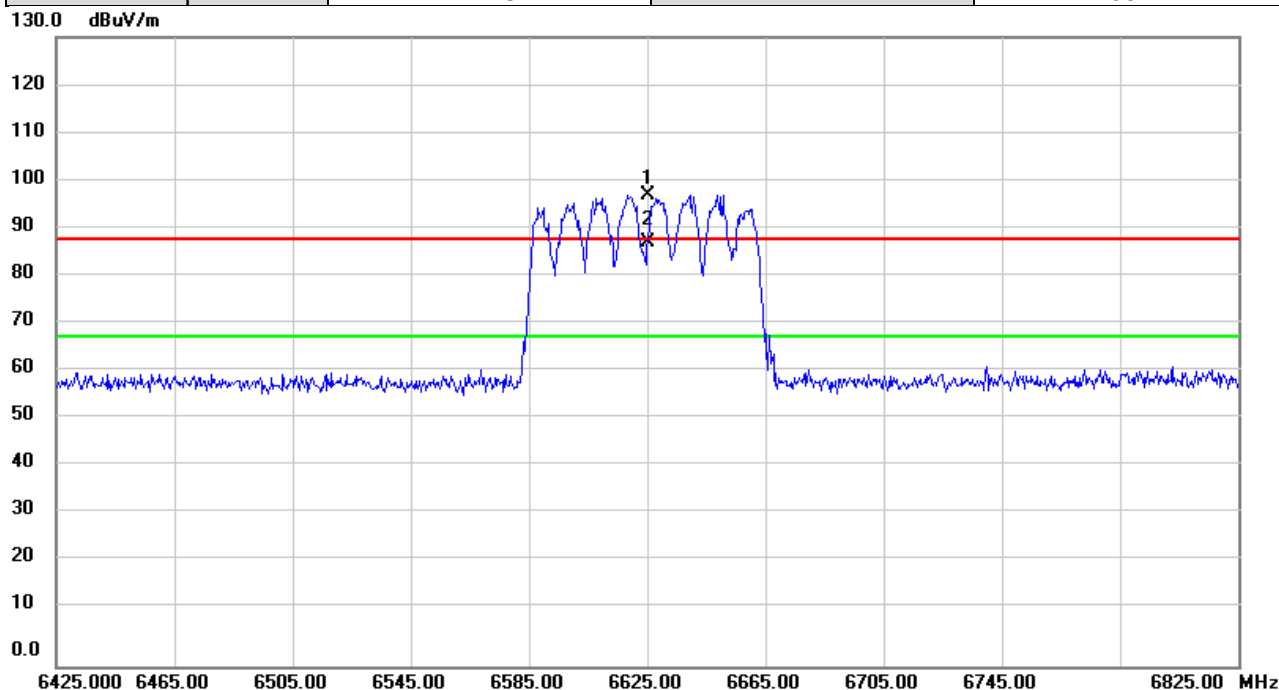


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6625.000	90.48	6.86	97.34	88.20	9.14	peak	No Limit
2	*	6625.000	80.62	6.86	87.48	68.20	19.28	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6785MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

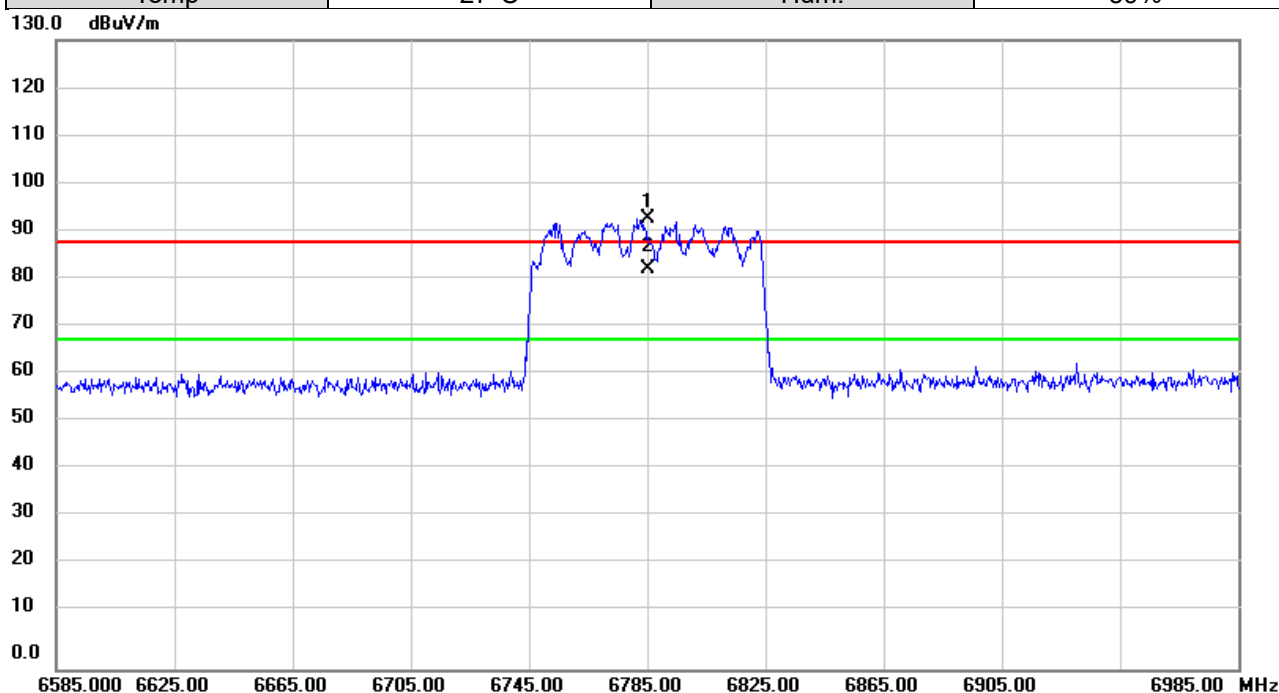


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6785.000	86.13	7.12	93.25	88.20	5.05	peak	No Limit
2	*	6785.000	75.55	7.12	82.67	68.20	14.47	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6865MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

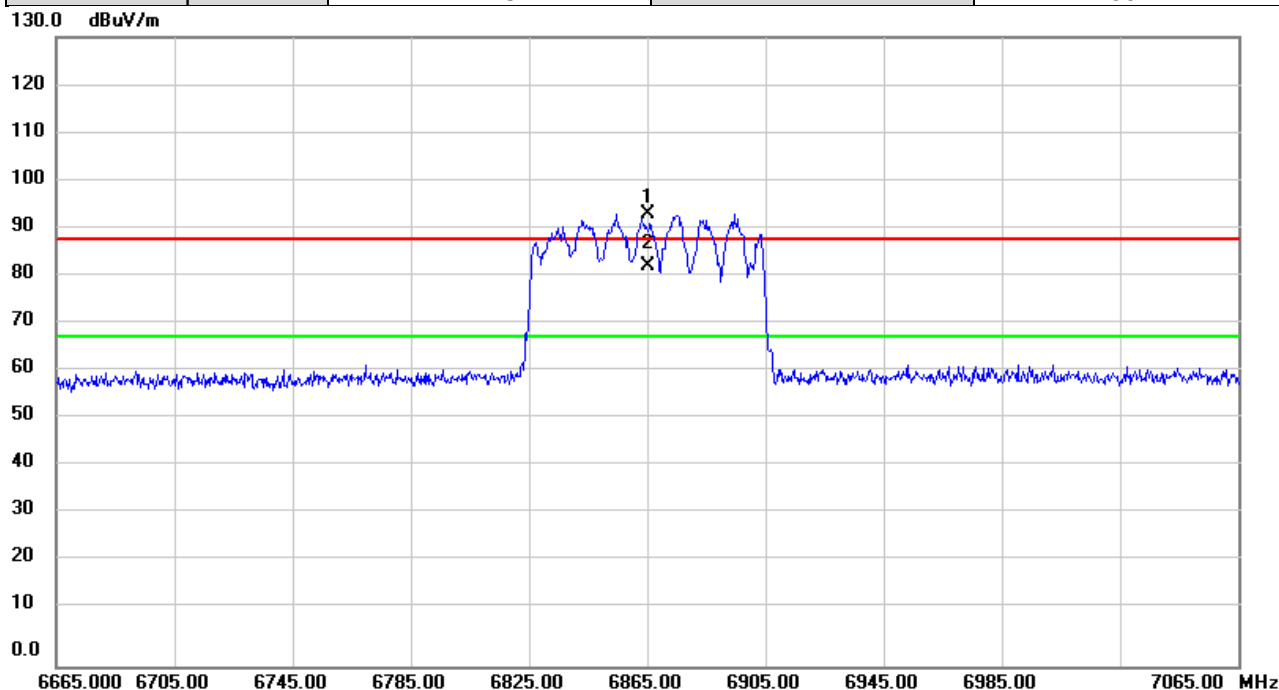


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6865.000	86.18	7.25	93.43	88.20	5.23	peak	No Limit
2	*	6865.000	75.31	7.25	82.56	68.20	14.36	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	7025MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

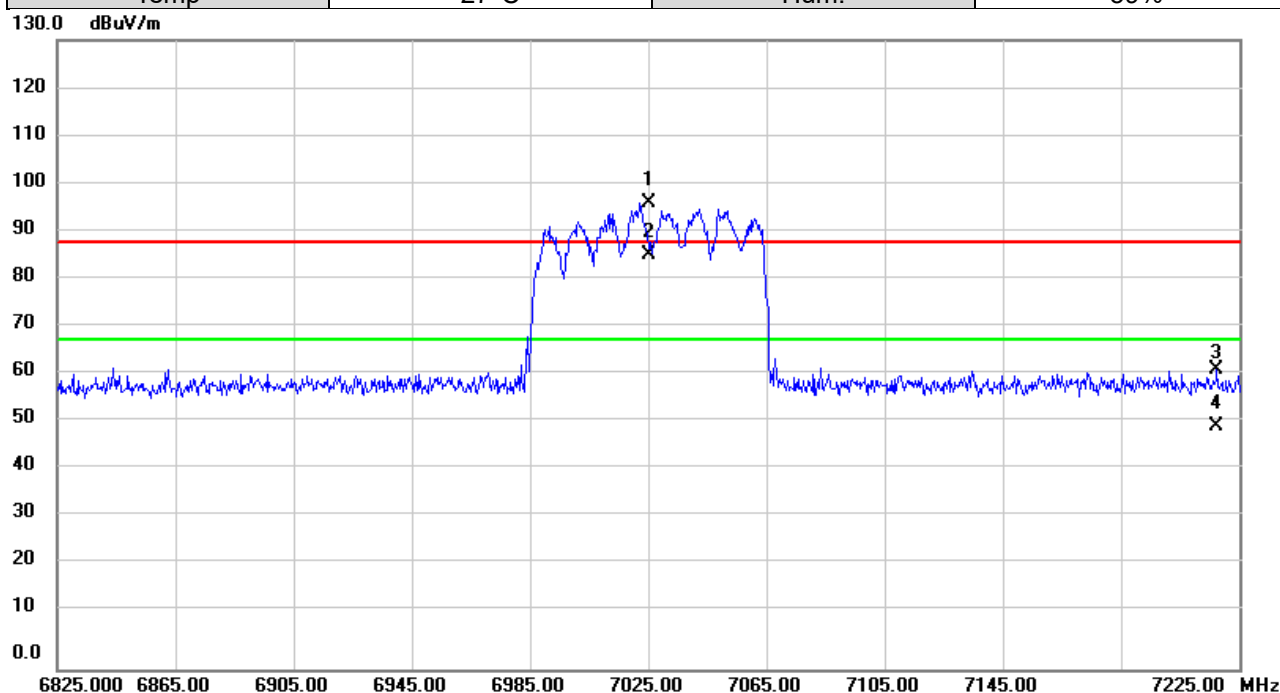


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	7025.000	88.75	7.47	96.22	68.20	28.02	AVG	No Limit
2	X	7025.000	78.24	7.47	85.71	68.20	17.51	AVG	No Limit
3		7217.453	54.44	7.51	61.95	88.20	-26.25	peak	
4		7217.453	42.70	7.51	50.21	68.20	-17.99	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6025MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

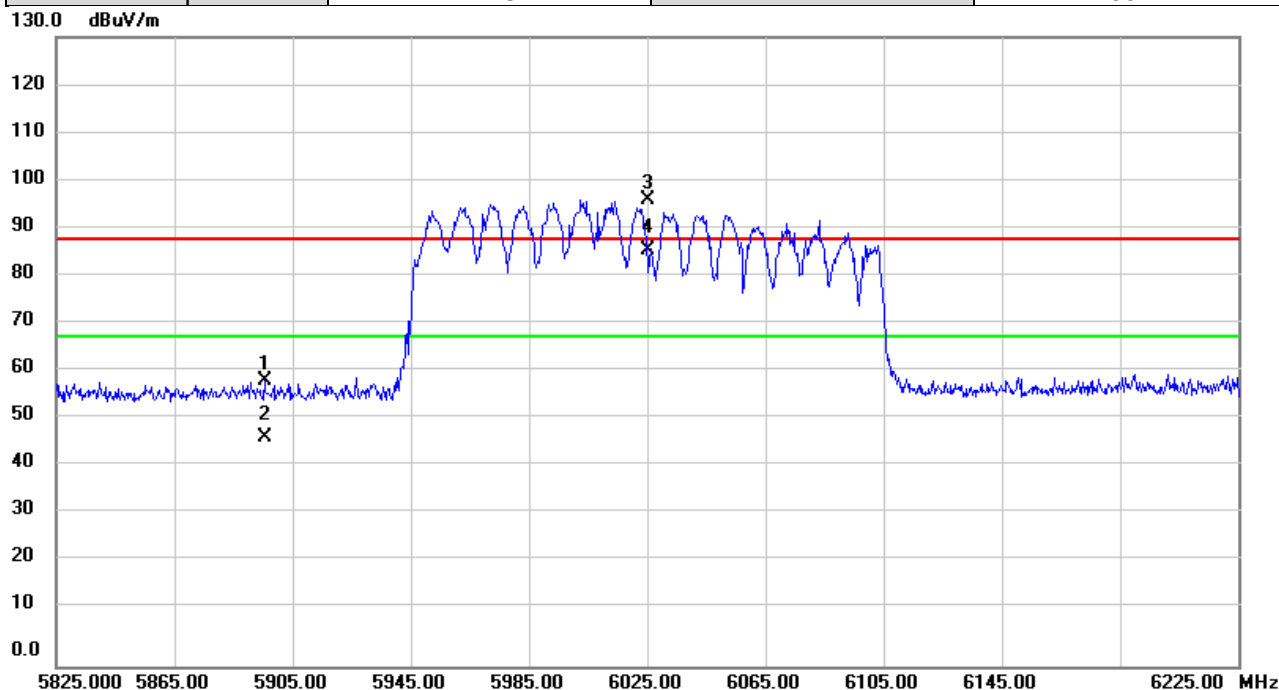


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		5895.520	55.22	3.75	58.97	88.20	-29.23	peak	
2		5895.520	43.52	3.75	47.27	68.20	-20.93	AVG	
3	X	6025.000	92.20	4.16	96.36	88.20	8.16	peak	No Limit
4	*	6025.000	81.70	4.16	85.86	68.20	17.66	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6345MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

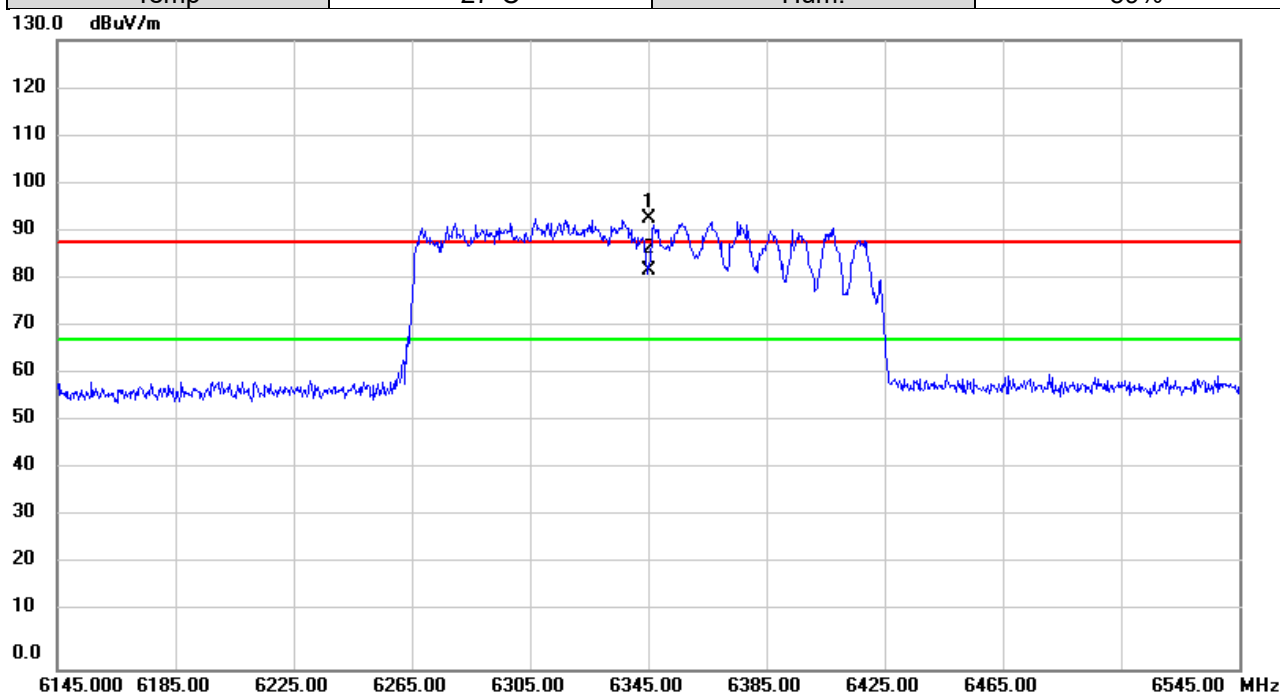


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6345.000	87.43	5.84	93.27	88.20	5.07	peak	No Limit
2	*	6345.000	76.44	5.84	82.28	68.20	14.08	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6505MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

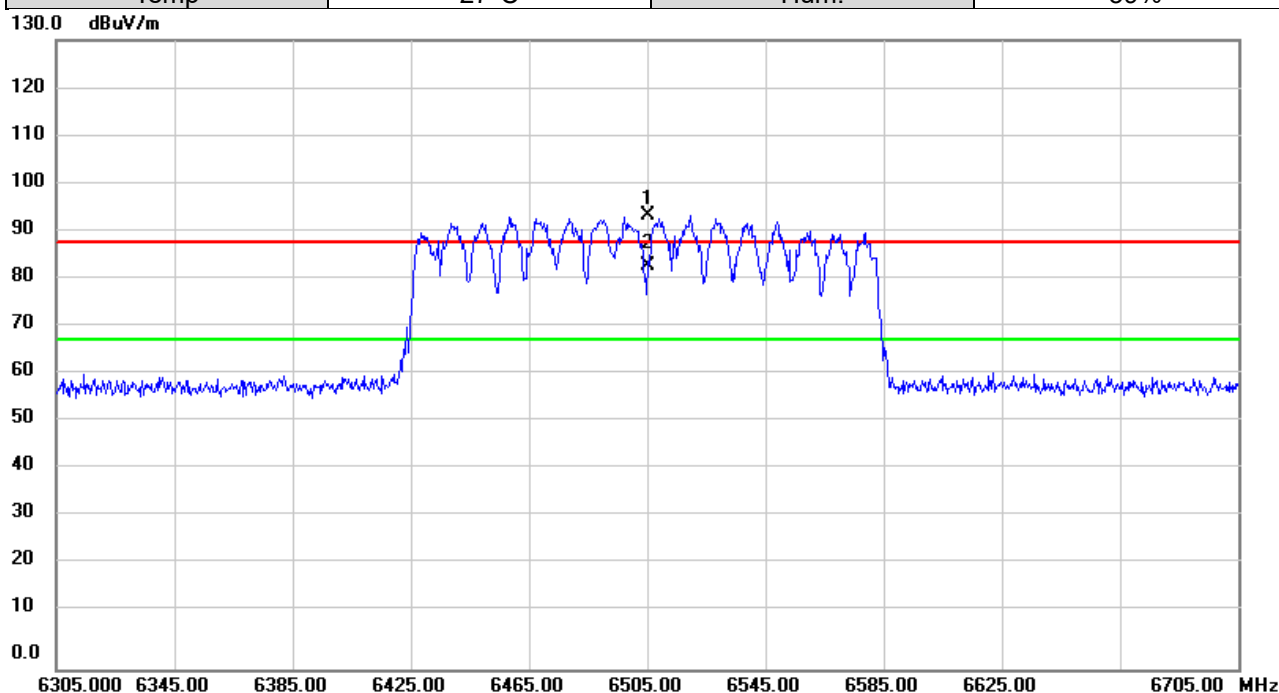


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6505.000	87.07	6.66	93.73	88.20	5.53	peak	No Limit
2	*	6505.000	76.63	6.66	83.29	68.20	15.09	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6665MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

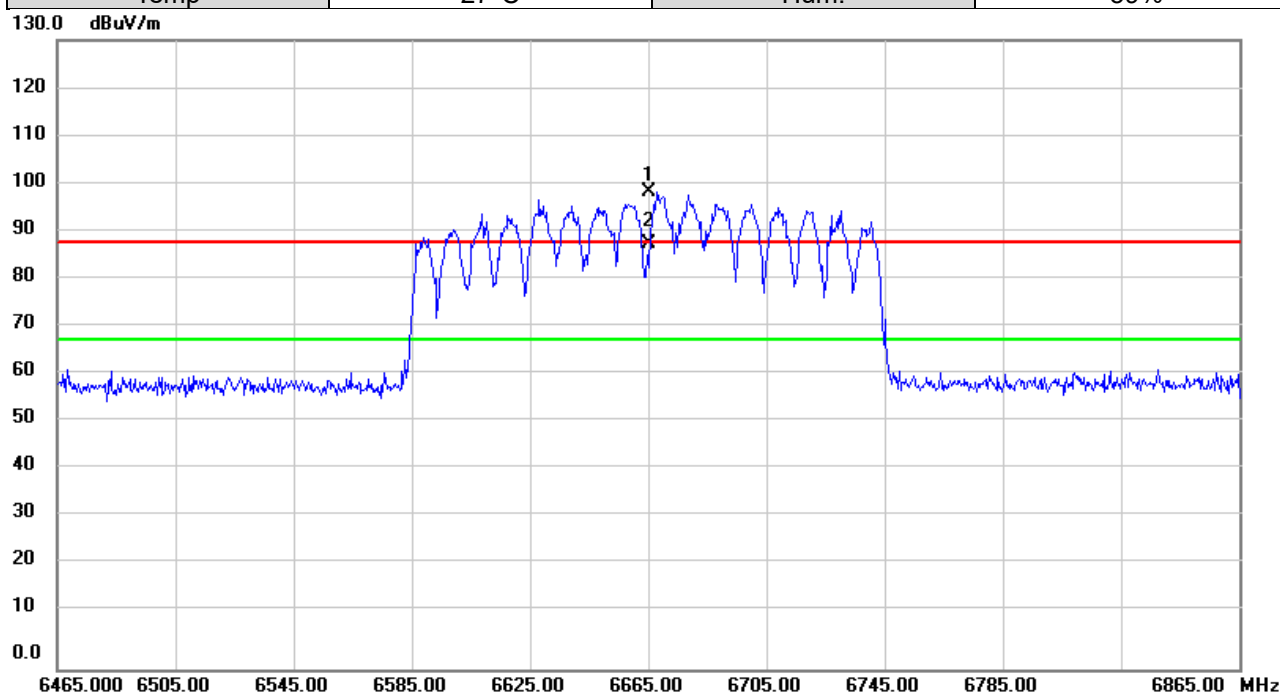


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6665.000	91.58	6.92	98.50	88.20	10.30	peak	No Limit
2	*	6665.000	81.02	6.92	87.94	68.20	19.74	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6665MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

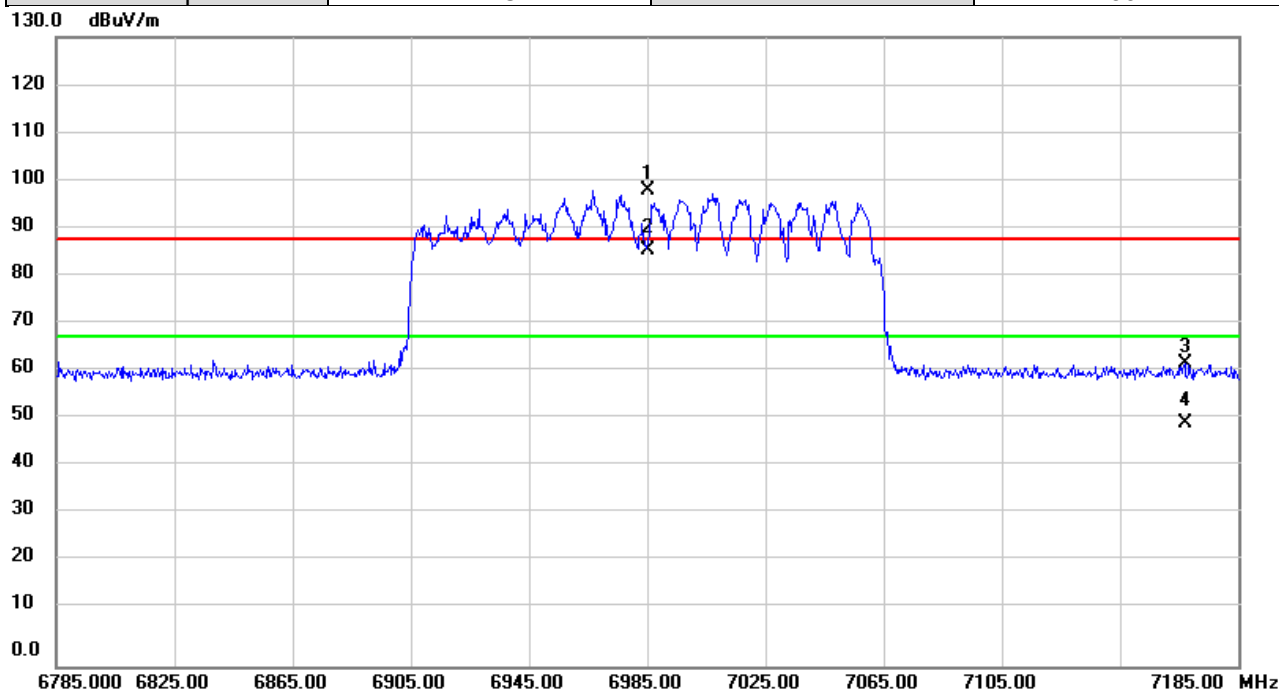


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	X	6985.000	90.84	7.45	98.29	88.20	10.09	peak	No Limit
2	*	6985.000	78.65	7.45	86.10	68.20	17.90	AVG	No Limit
3		7166.893	55.19	7.50	62.69	88.20	-25.51	peak	
4		7166.893	42.76	7.50	50.26	68.20	-17.94	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	5955MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

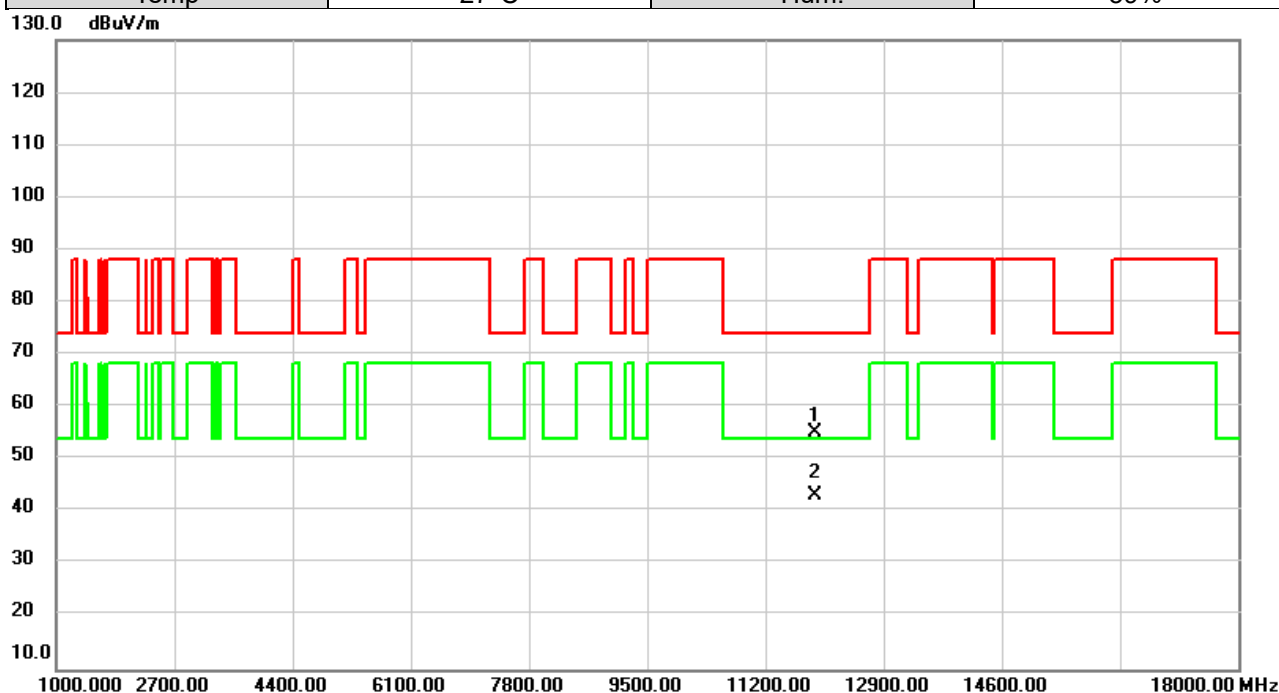


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11910.00	47.09	8.12	55.21	74.00	-18.79	peak	
2	*	11910.00	35.01	8.12	43.13	54.00	-10.87	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	5955MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

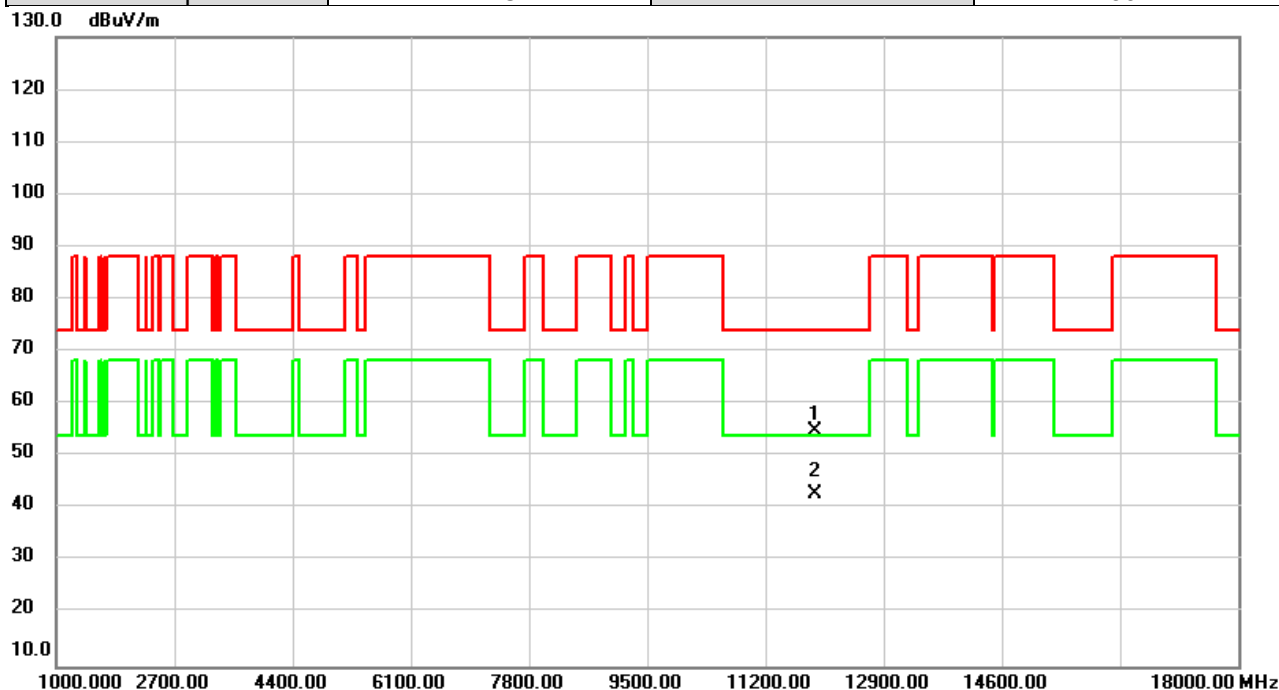


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11910.00	46.65	8.12	54.77	74.00	-19.23	peak	
2	*	11910.00	34.87	8.12	42.99	54.00	-11.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6175MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

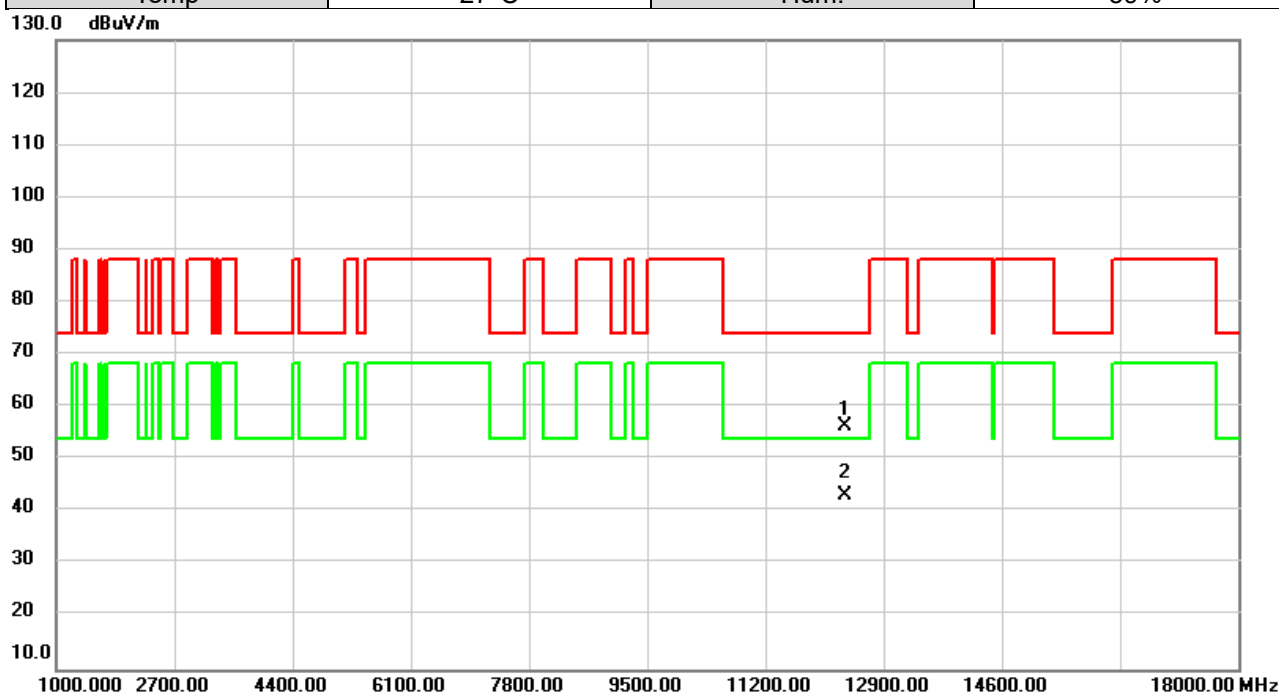


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12350.00	47.56	8.87	56.43	74.00	-17.57	peak	
2	*	12350.00	34.24	8.87	43.11	54.00	-10.89	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6175MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

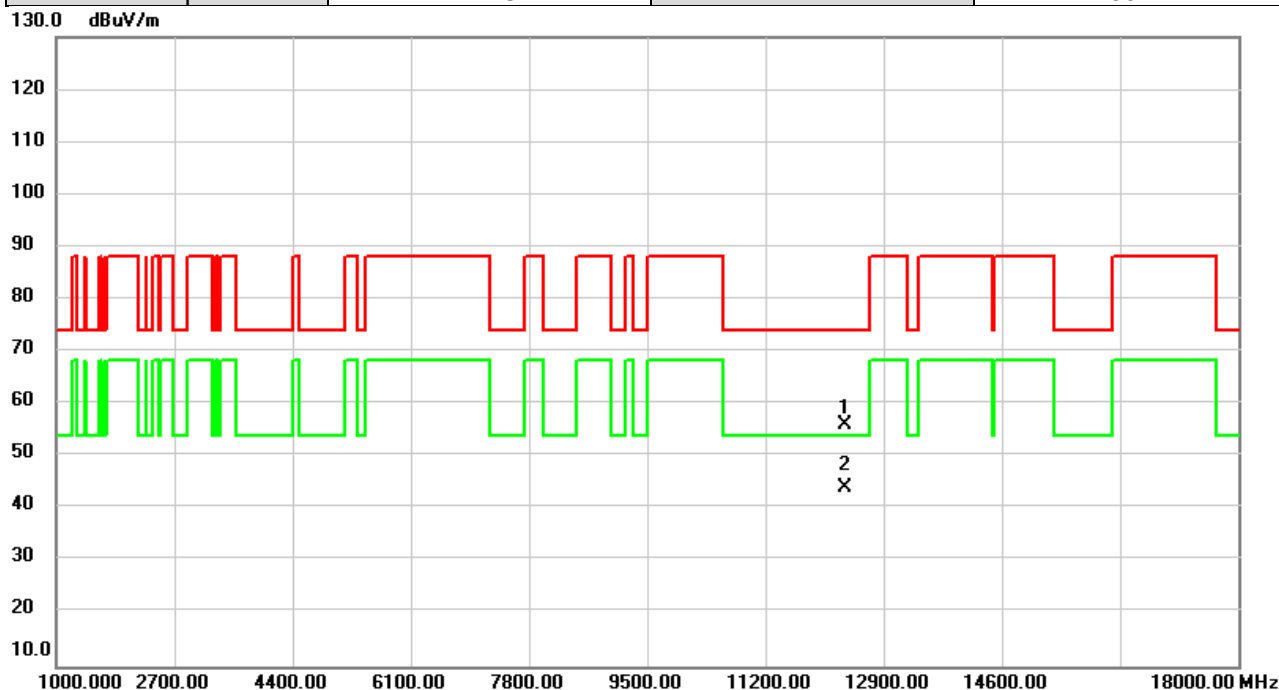


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12350.00	47.27	8.87	56.14	74.00	-17.86	peak	
2	*	12350.00	35.31	8.87	44.18	54.00	-9.82	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6415MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

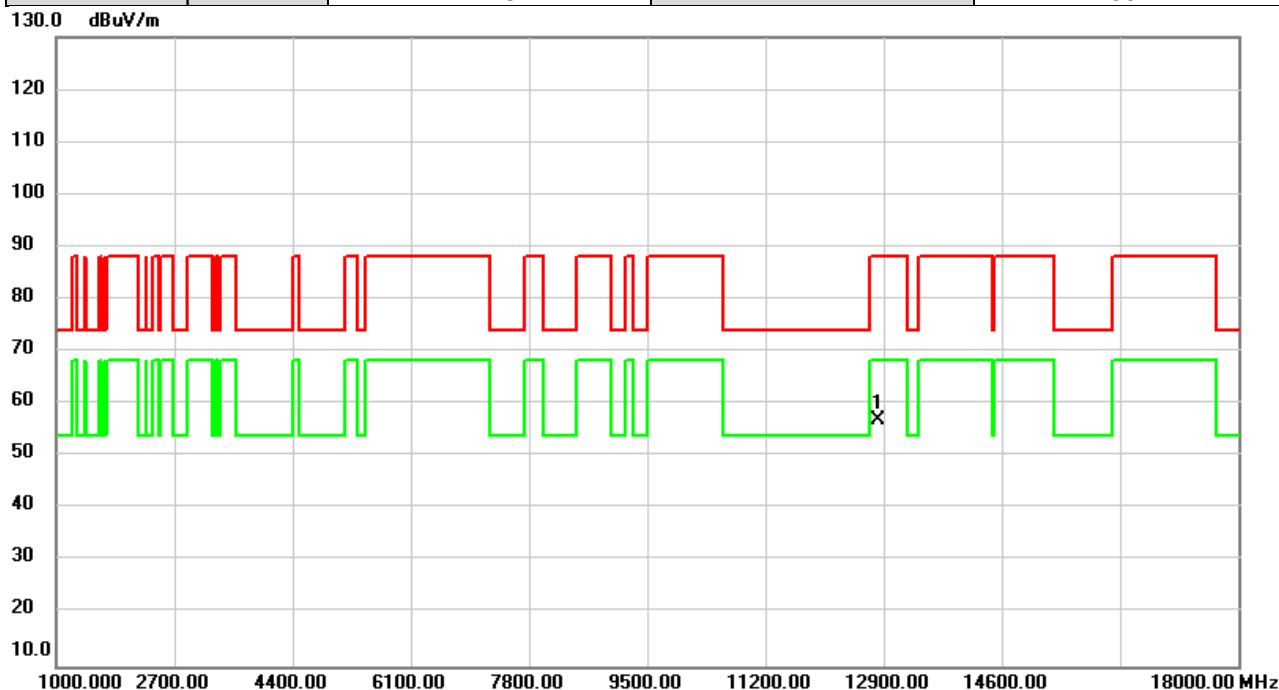


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12830.00	47.85	8.99	56.84	88.20	-31.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6415MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

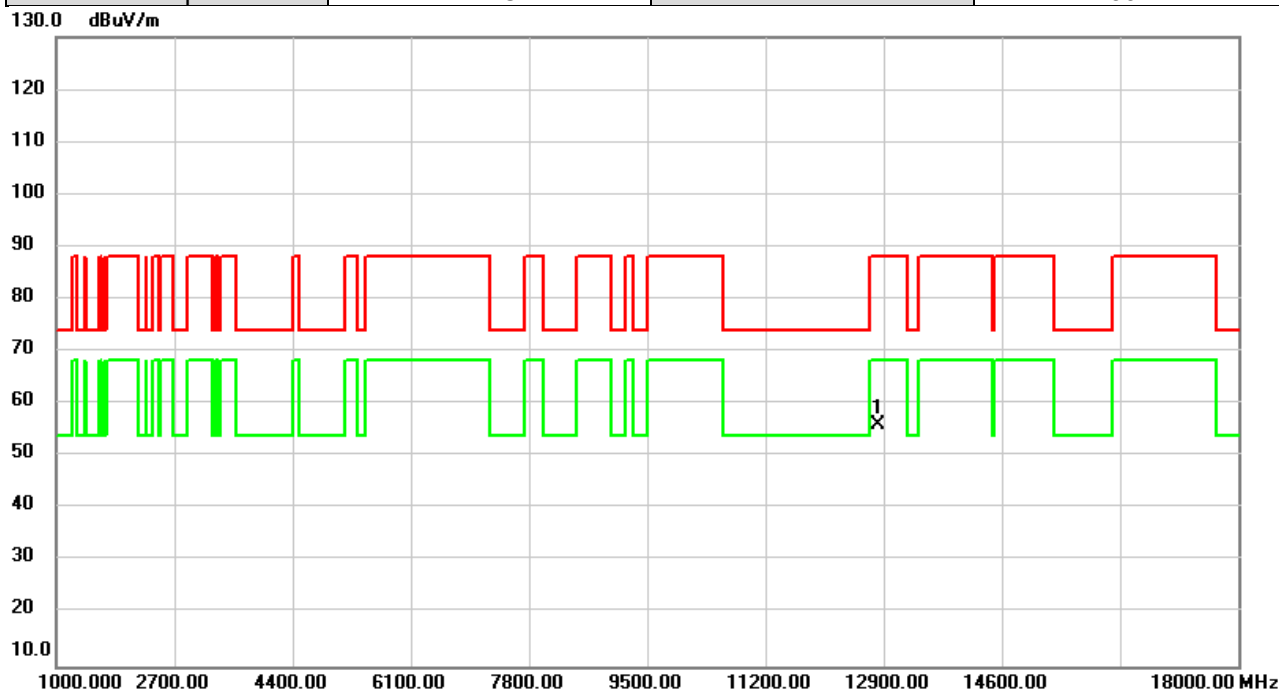


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12830.00	47.04	8.99	56.03	88.20	-32.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6435MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

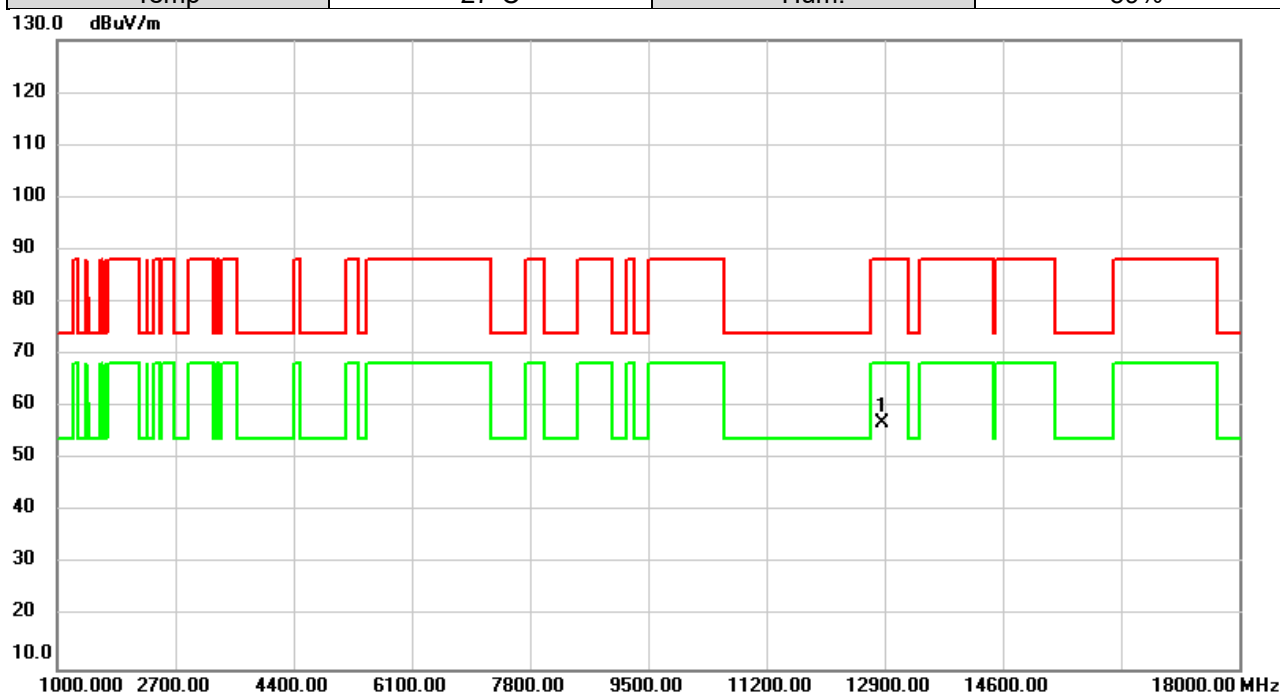


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12870.00	47.84	8.97	56.81	88.20	-31.39	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6435MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

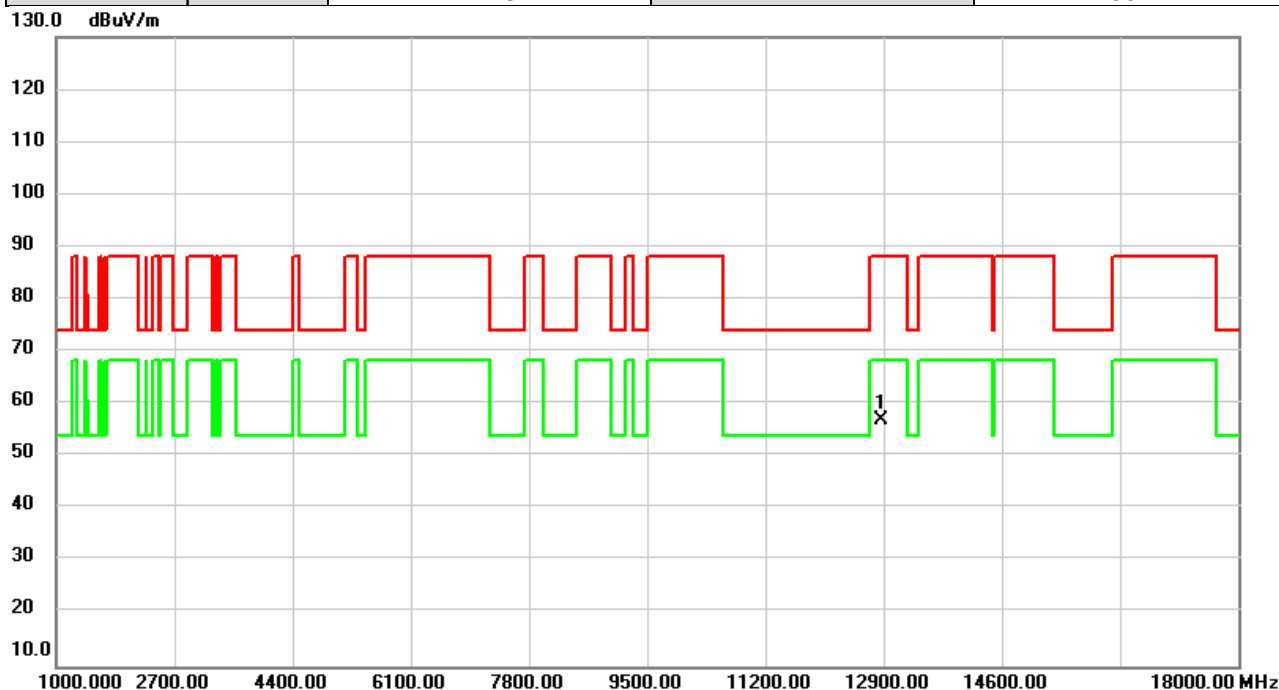


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12870.00	47.89	8.97	56.86	88.20	-31.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6475MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

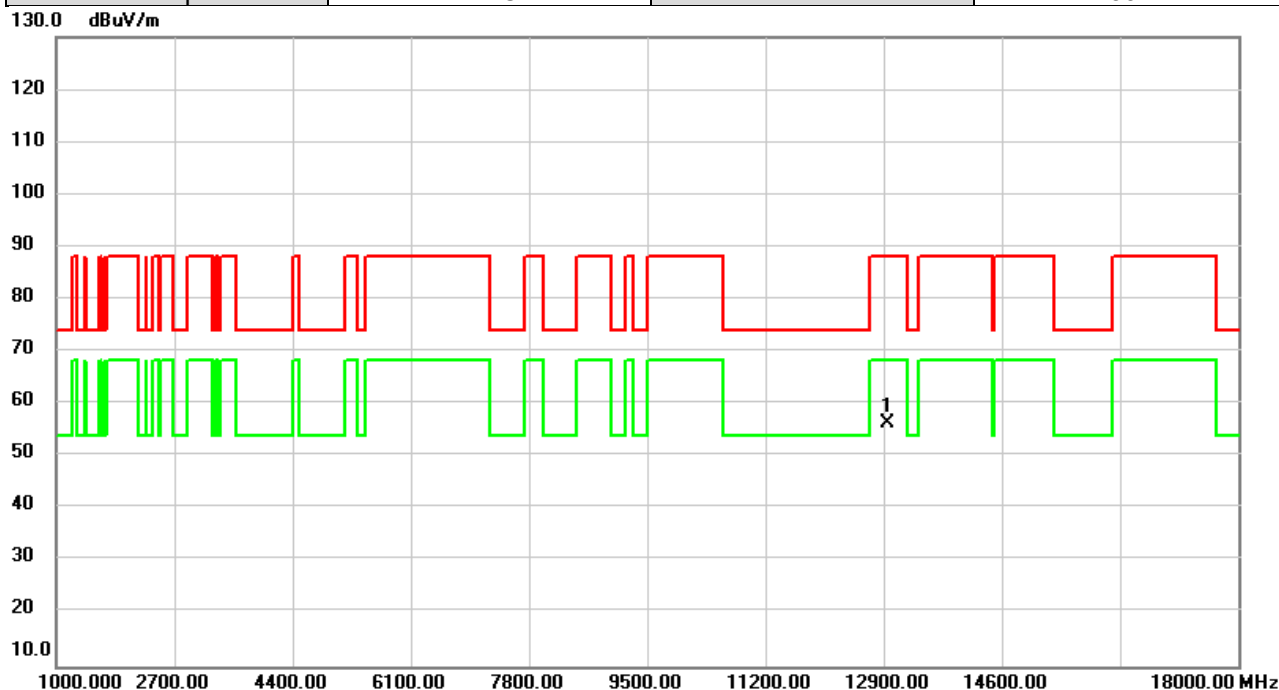


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12950.00	47.56	8.92	56.48	88.20	-31.72	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6475MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

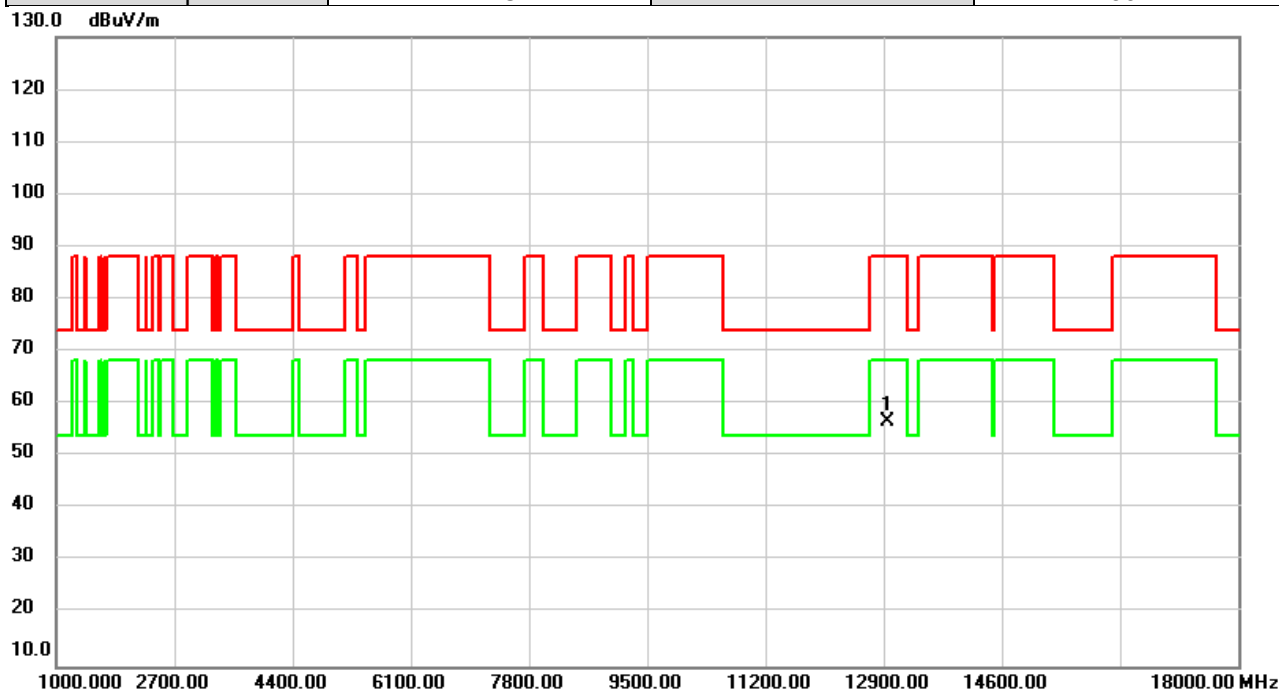


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12950.00	47.65	8.92	56.57	88.20	-31.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6515MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

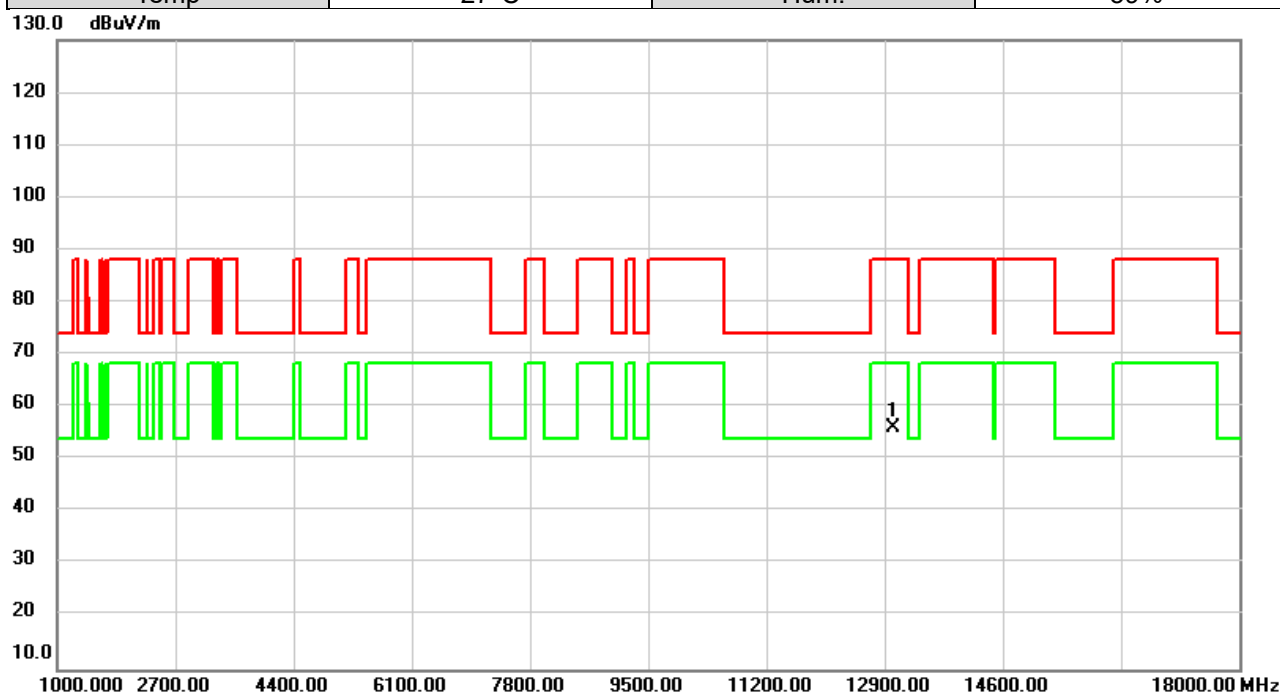


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13030.00	47.25	8.89	56.14	88.20	-32.06	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6515MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

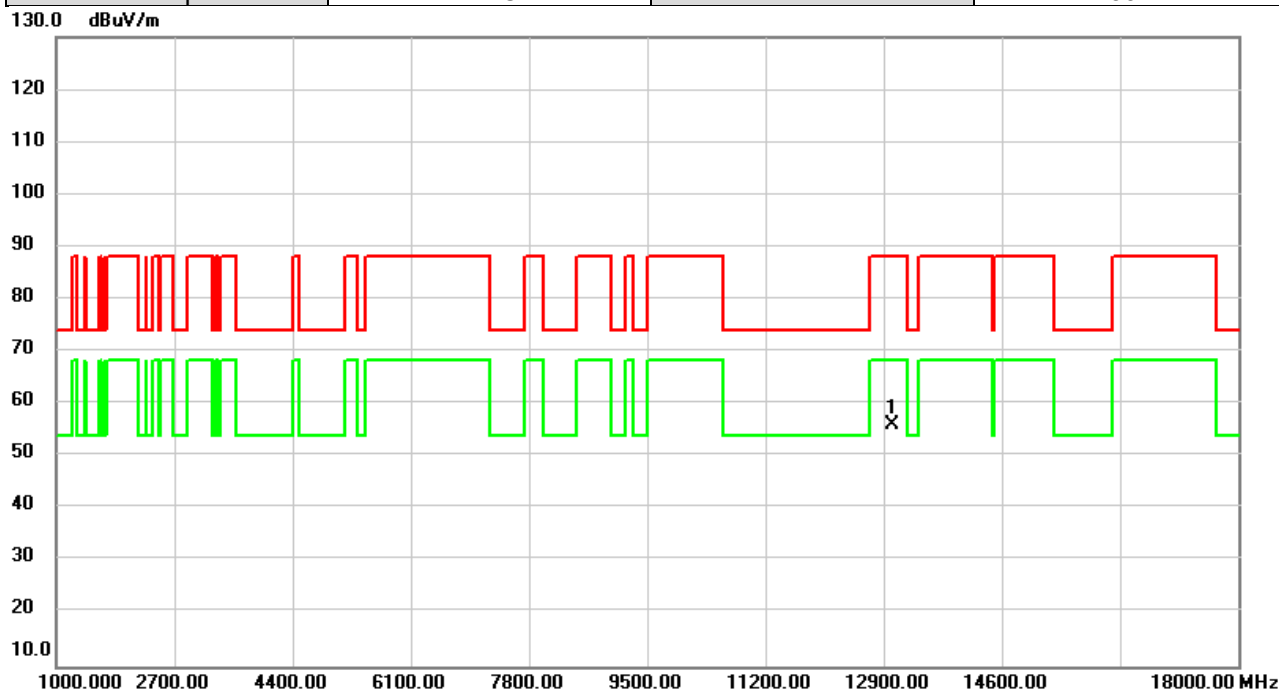


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13030.00	47.19	8.89	56.08	88.20	-32.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6535MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

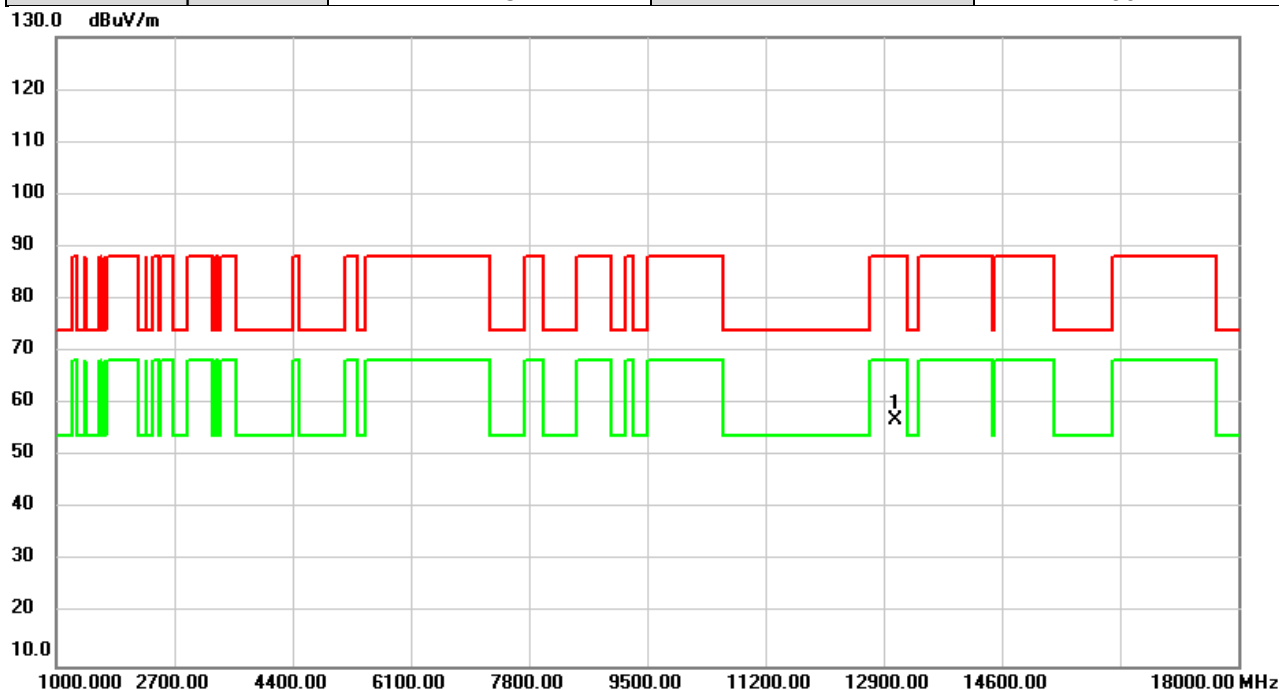


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13070.00	48.08	8.87	56.95	88.20	-31.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6535MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

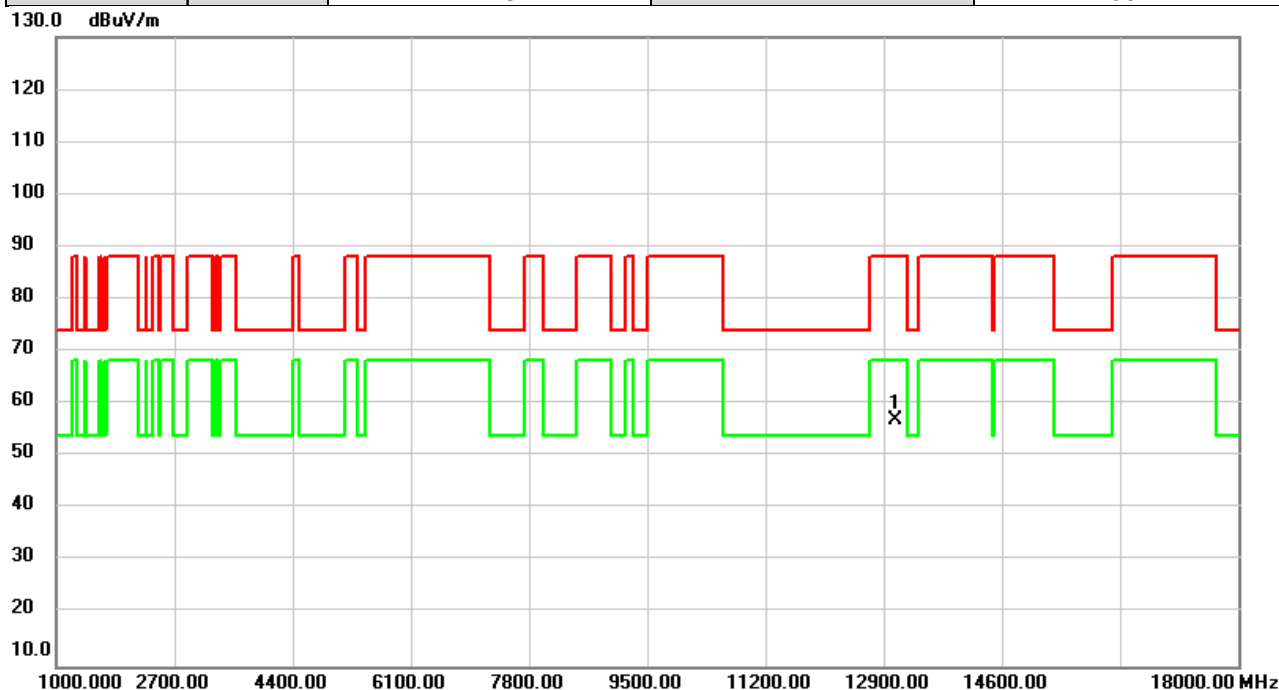


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13070.00	48.17	8.87	57.04	88.20	-31.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6695MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

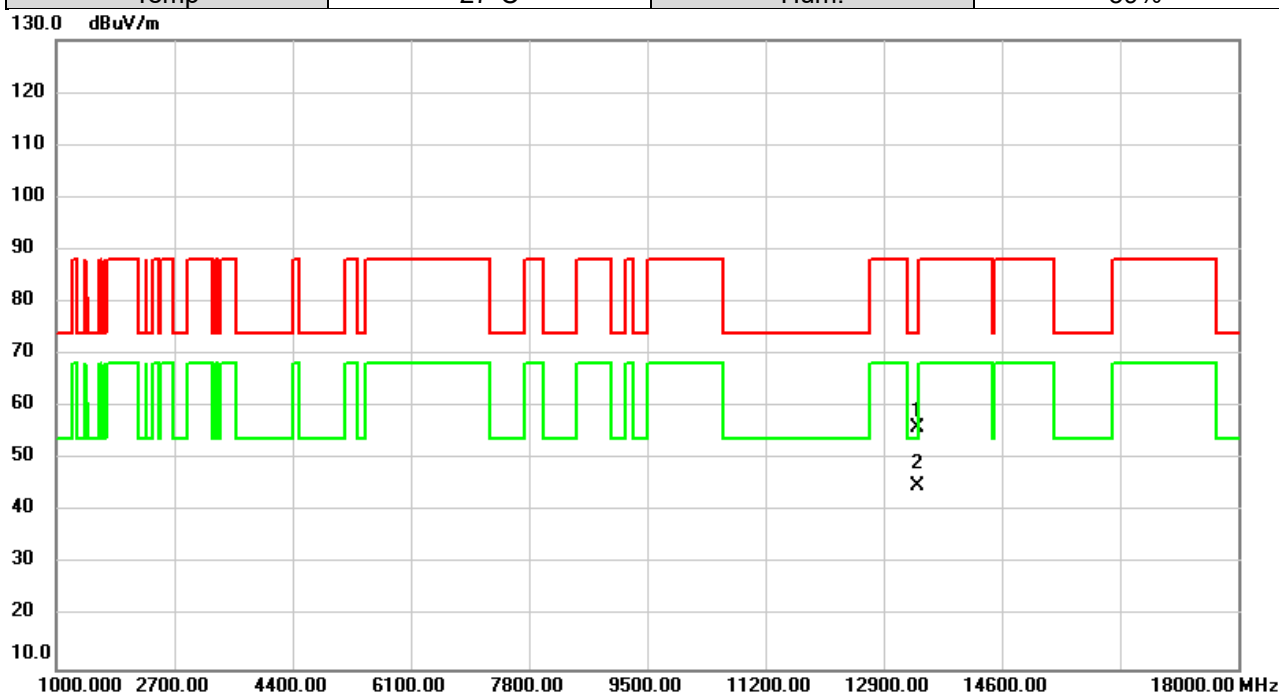


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13390.00	47.43	8.75	56.18	74.00	-17.82	peak	
2	*	13390.00	36.17	8.75	44.92	54.00	-9.08	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6695MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

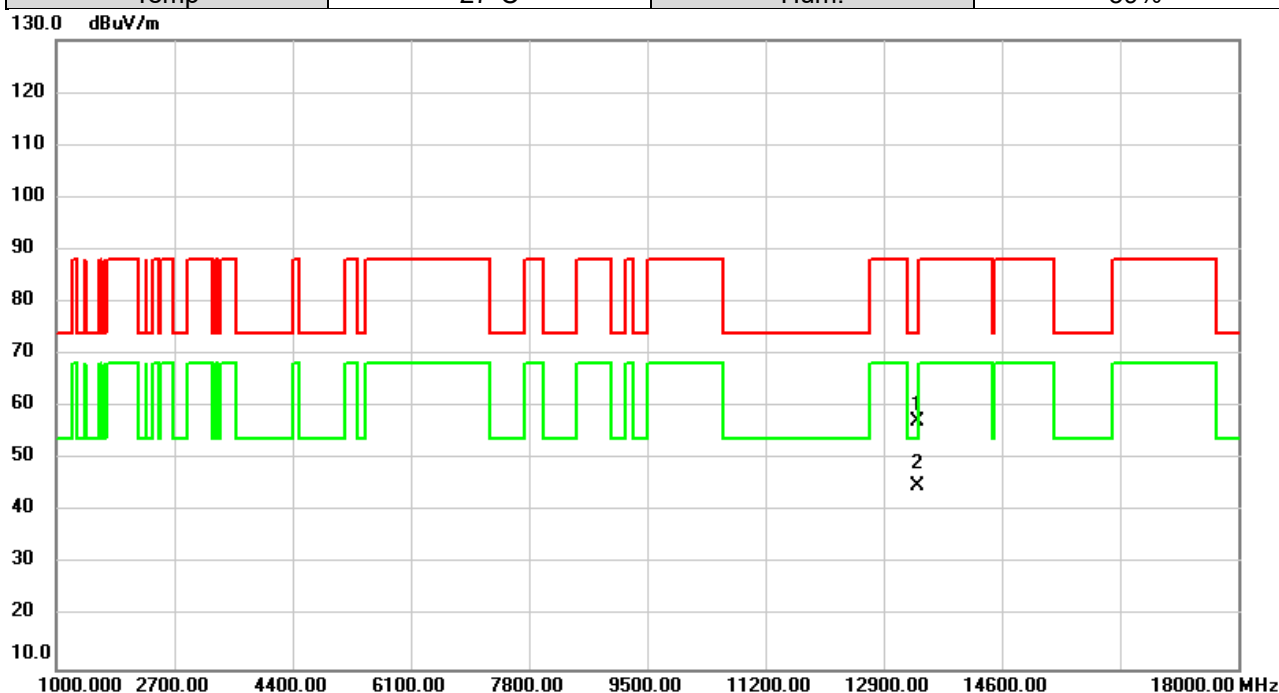


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13390.00	48.43	8.75	57.18	74.00	-16.82	peak	
2	*	13390.00	36.06	8.75	44.81	54.00	-9.19	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6855MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

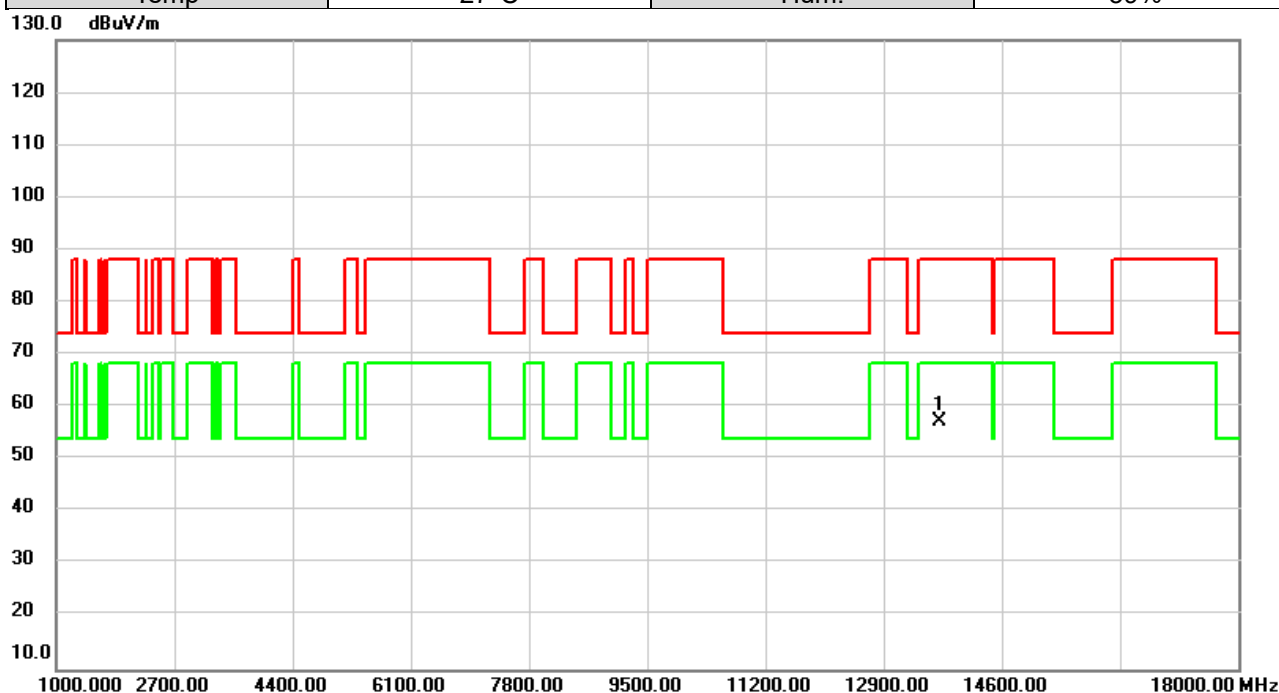


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13710.00	48.44	8.75	57.19	88.20	-31.01	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6855MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

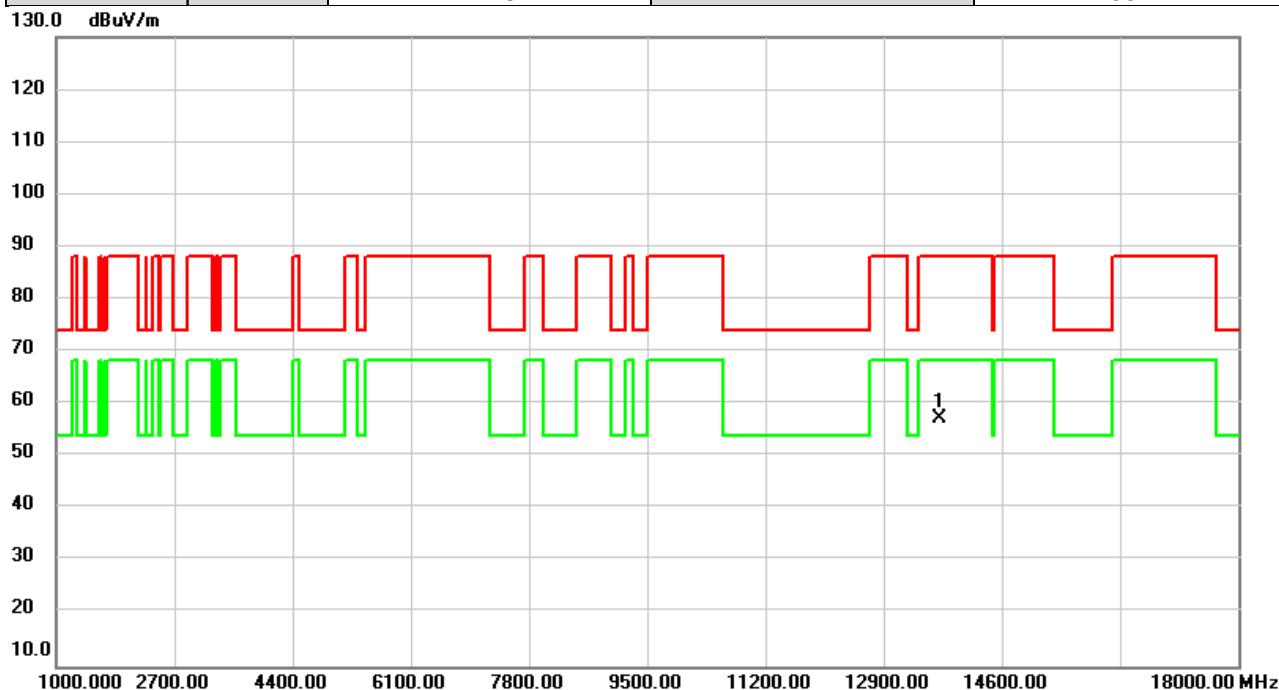


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13710.00	48.48	8.75	57.23	88.20	-30.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6875MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

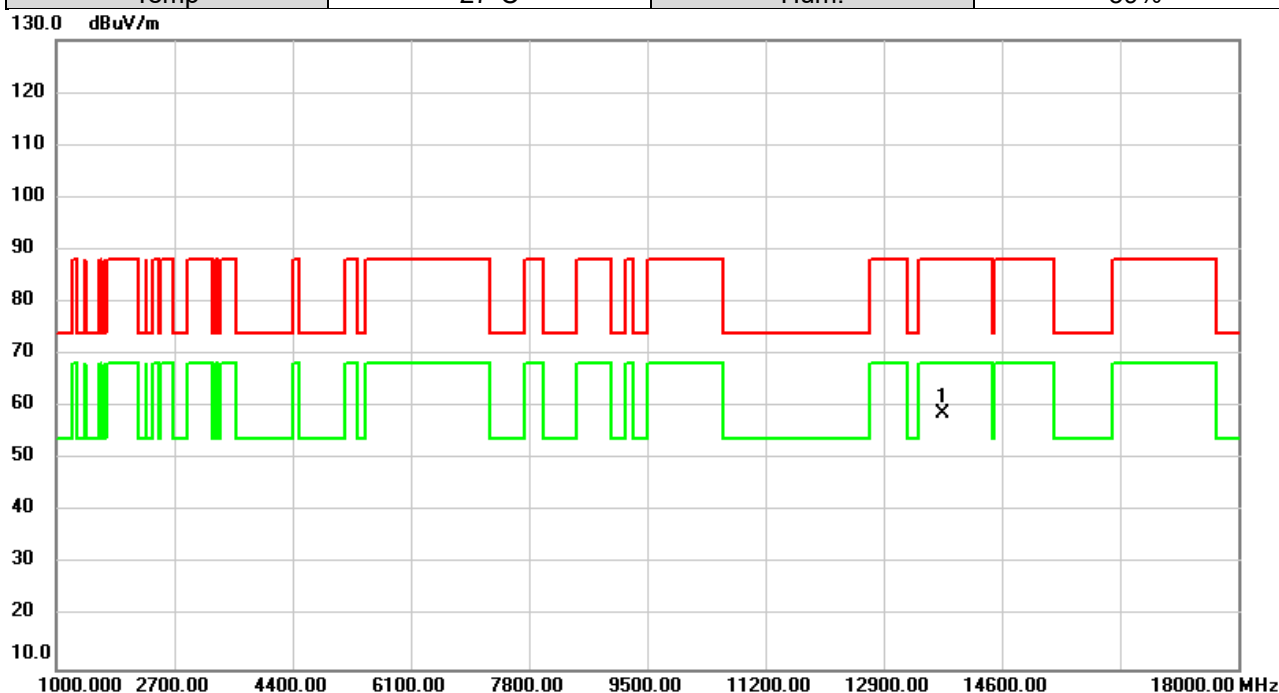


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13750.00	50.00	8.75	58.75	88.20	-29.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6875MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

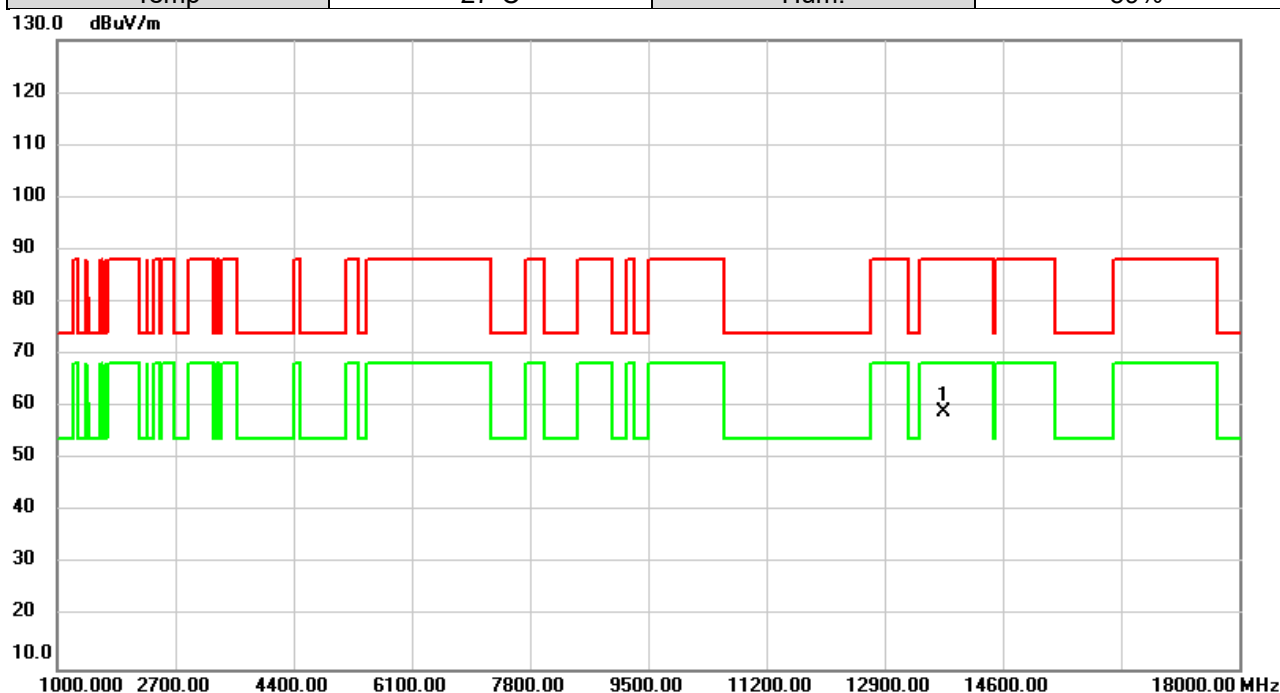


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13750.00	50.19	8.75	58.94	88.20	-29.26	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6995MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

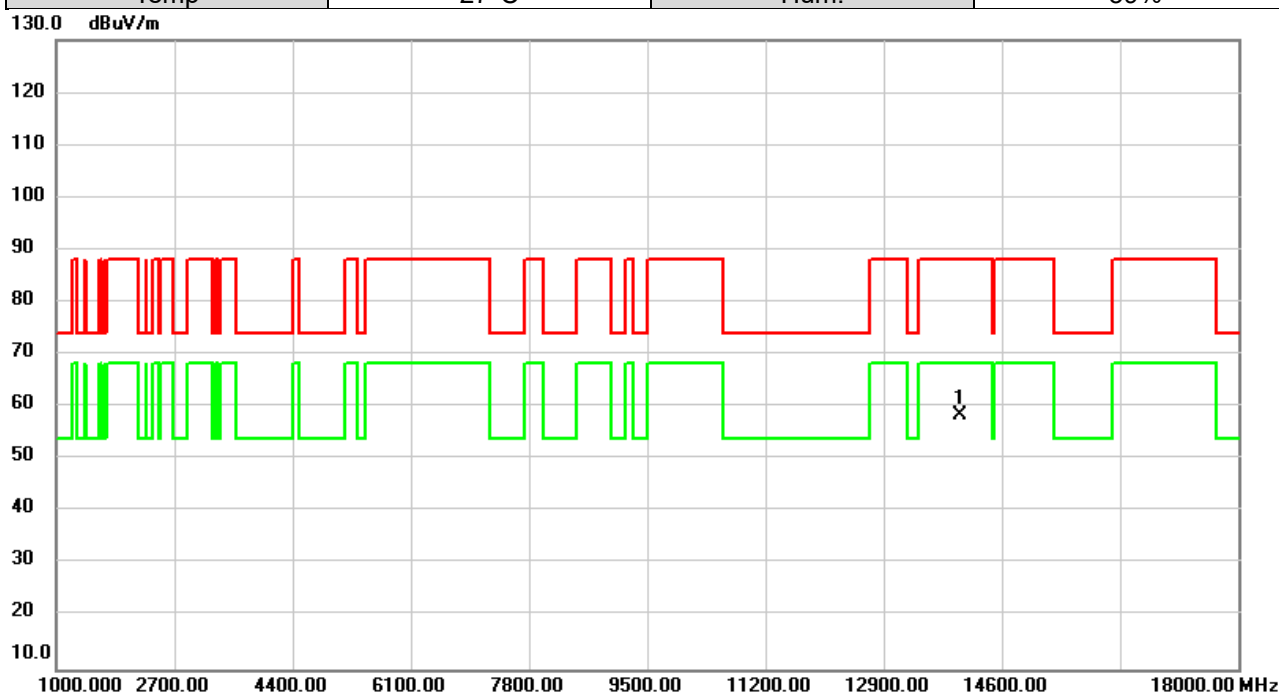


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13990.00	49.58	8.80	58.38	88.20	-29.82	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6995MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

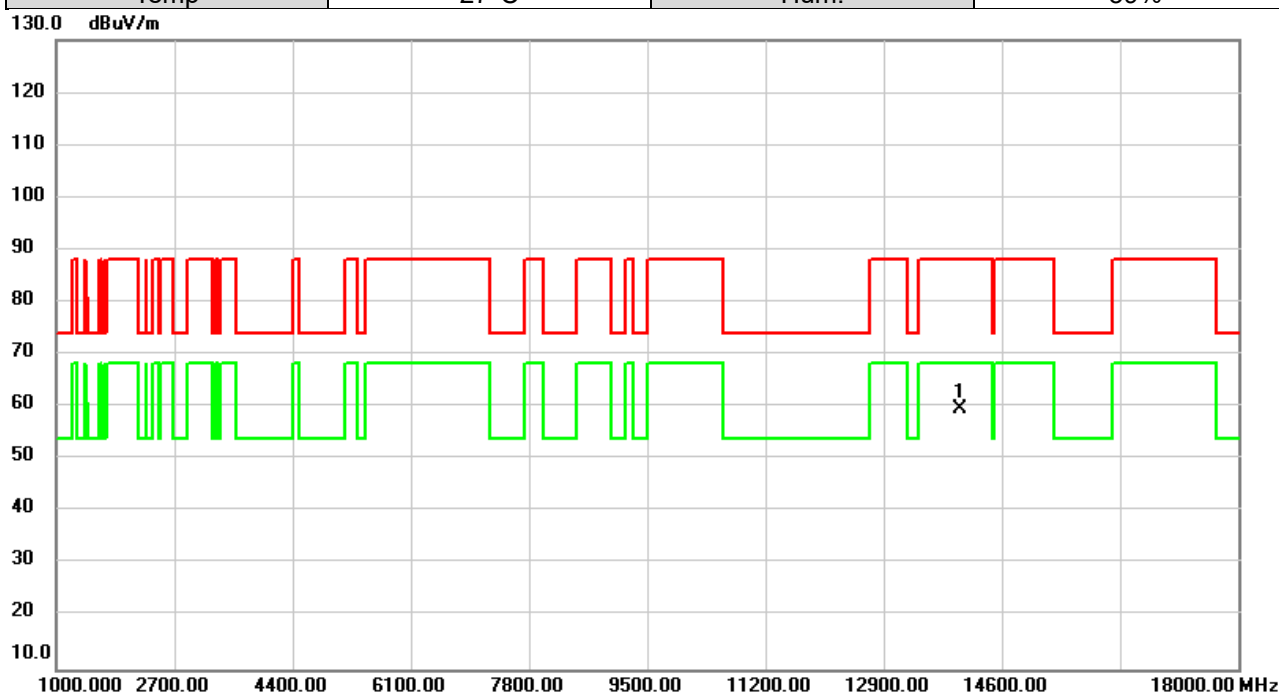


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13990.00	50.71	8.80	59.51	88.20	-28.69	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	7115MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

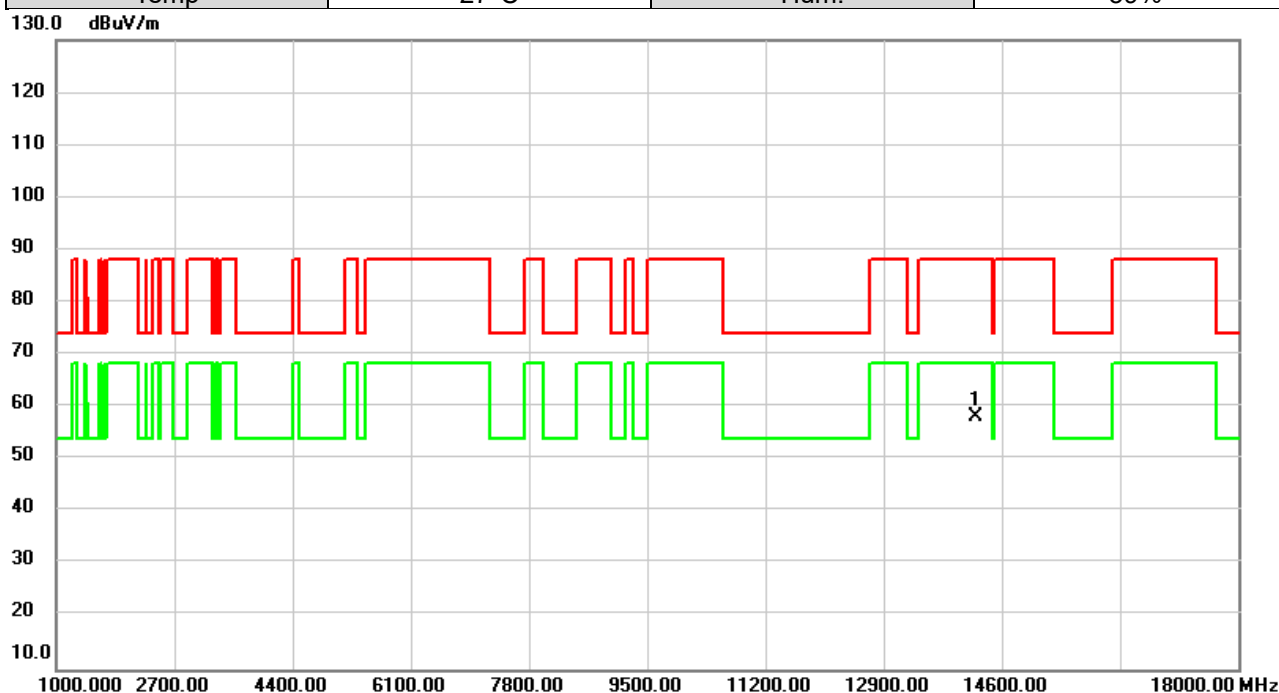


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14230.00	49.64	8.51	58.15	88.20	-30.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	7115MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

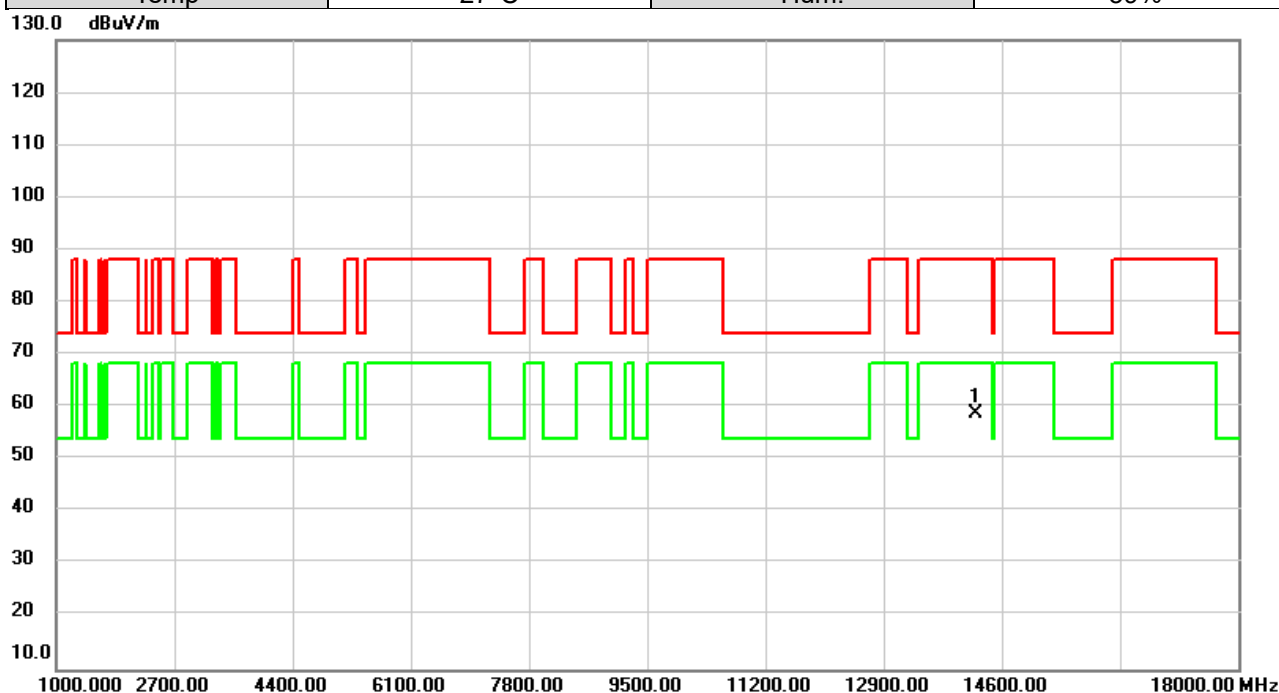


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14230.00	50.32	8.51	58.83	88.20	-29.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	5965MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

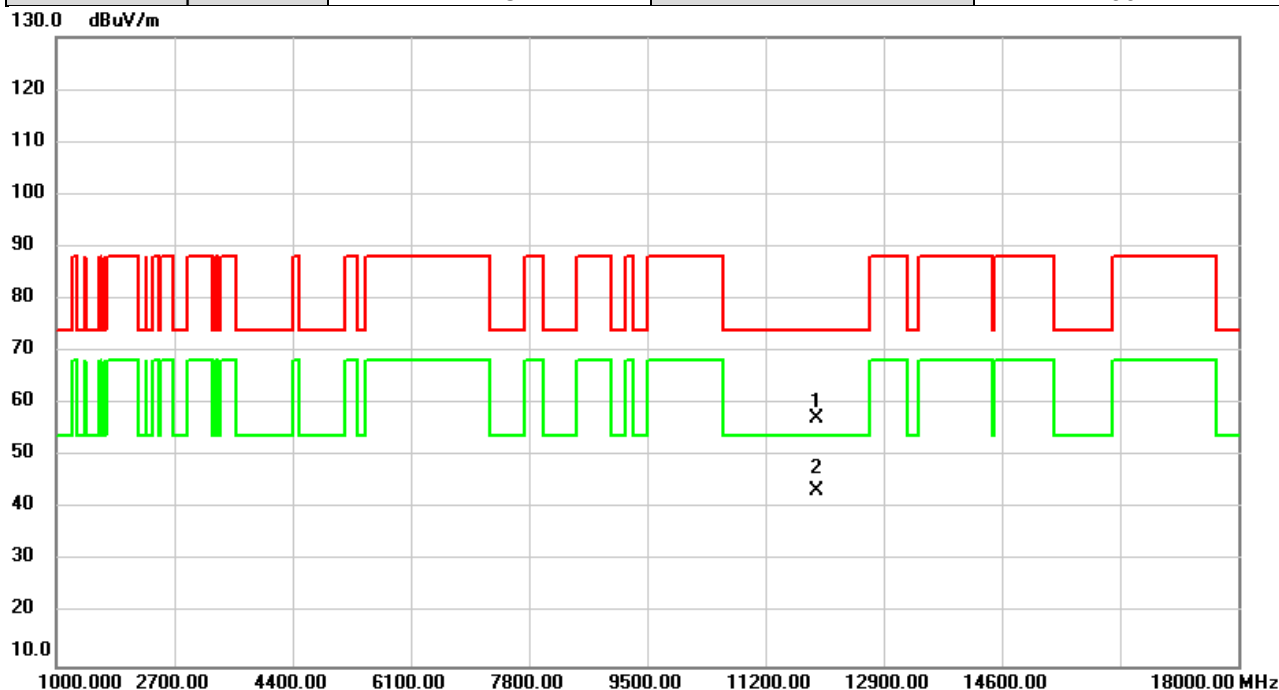


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11930.00	49.23	8.14	57.37	74.00	-16.63	peak	
2	*	11930.00	35.21	8.14	43.35	54.00	-10.65	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	5965MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

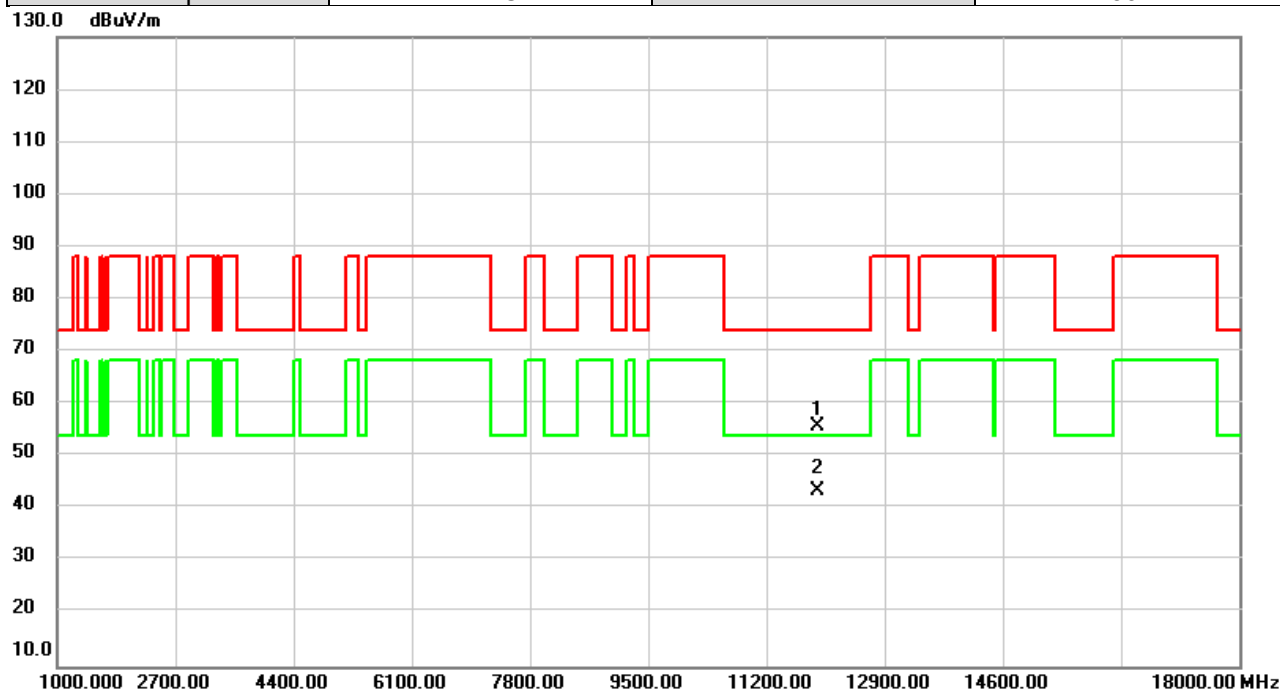


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11930.00	47.48	8.14	55.62	74.00	-18.38	peak	
2	*	11930.00	35.23	8.14	43.37	54.00	-10.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6165MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

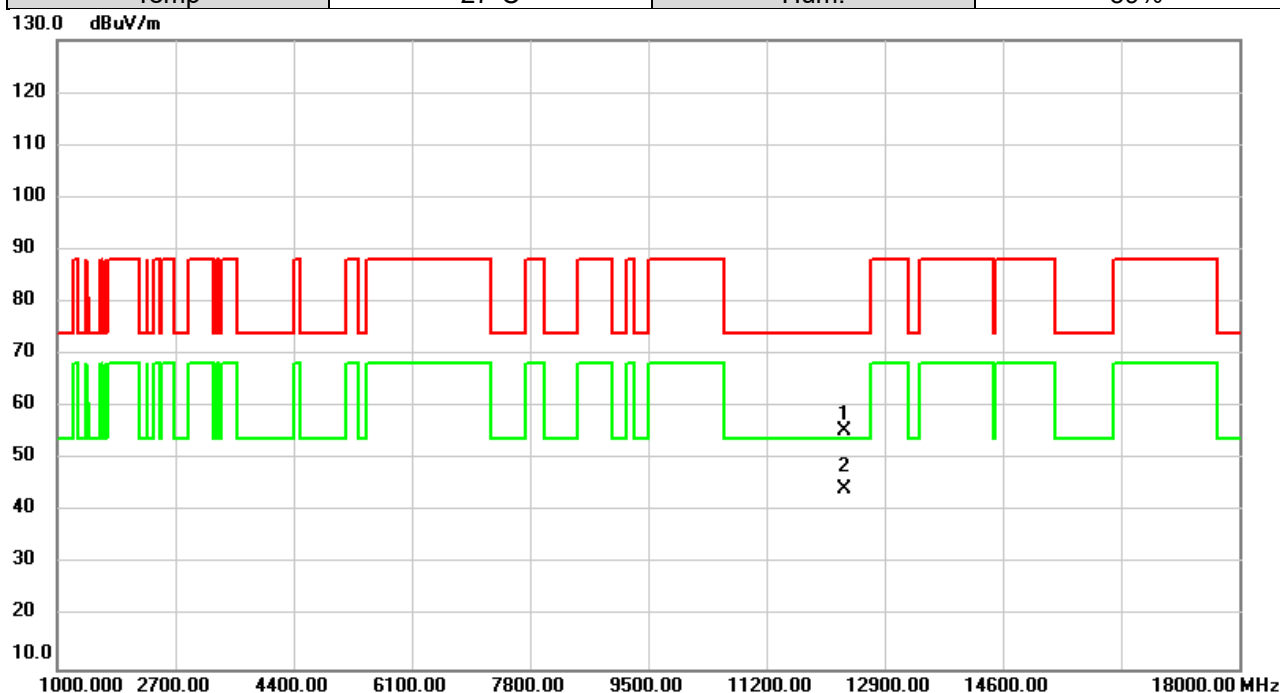


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12330.00	46.59	8.83	55.42	74.00	-18.58	peak	
2	*	12330.00	35.43	8.83	44.26	54.00	-9.74	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/3/26
Test Frequency	6165MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

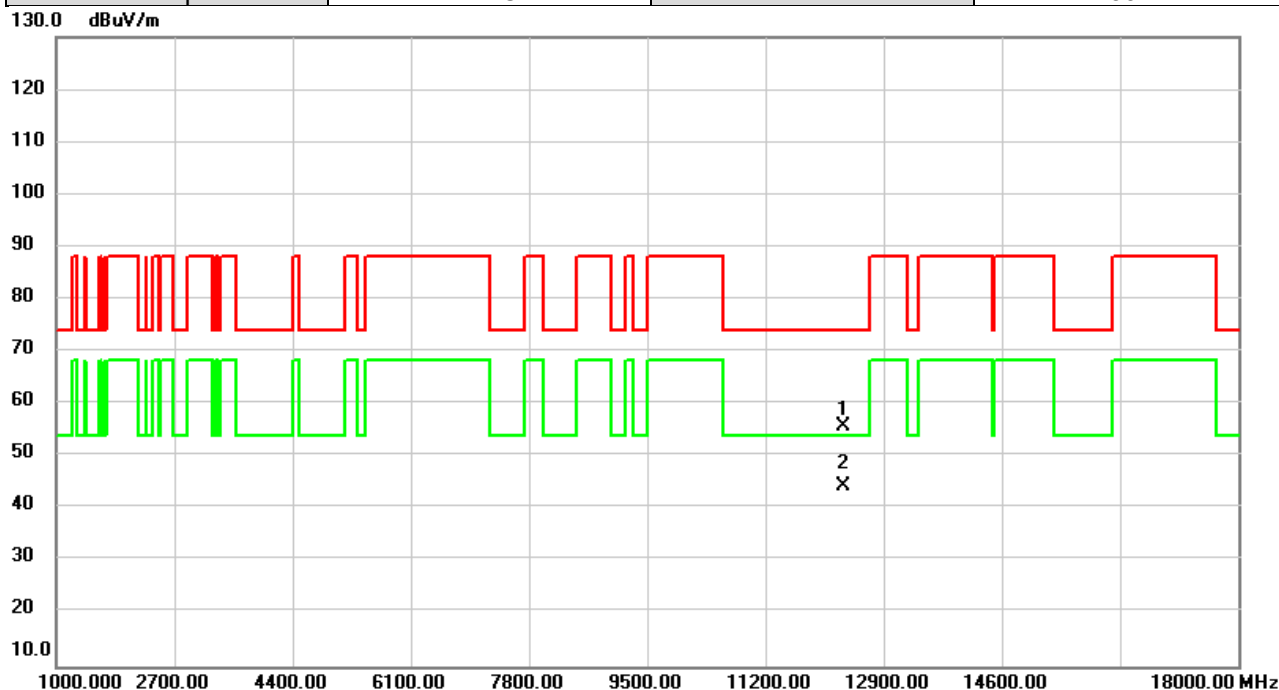


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12330.00	47.01	8.83	55.84	74.00	-18.16	peak	
2	*	12330.00	35.49	8.83	44.32	54.00	-9.68	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6405MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

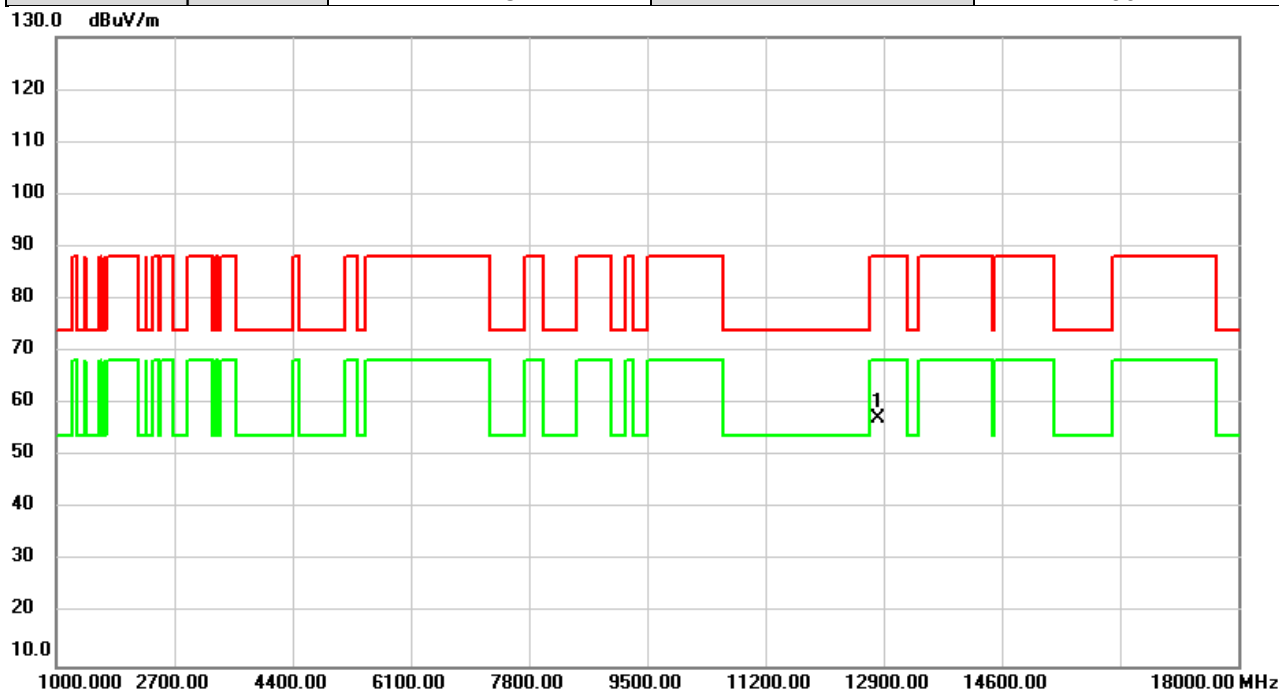


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12810.00	48.22	8.99	57.21	88.20	-30.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6405MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

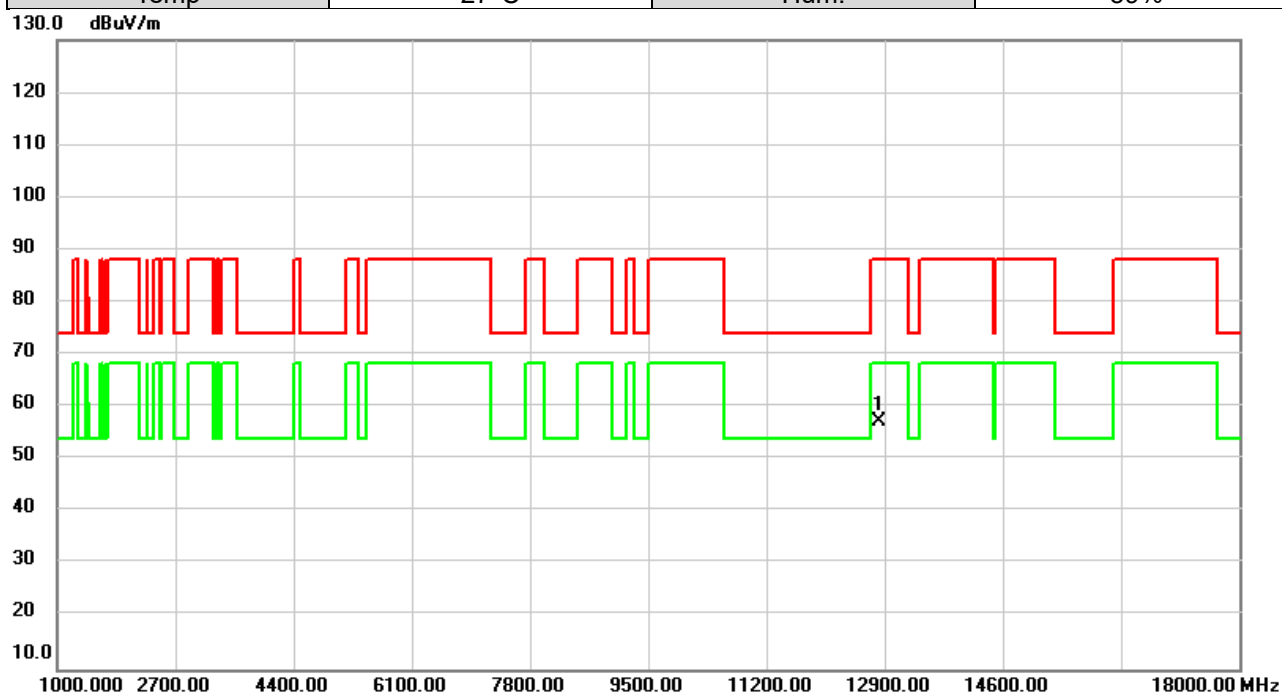


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12810.00	48.24	8.99	57.23	88.20	-30.97	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6445MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

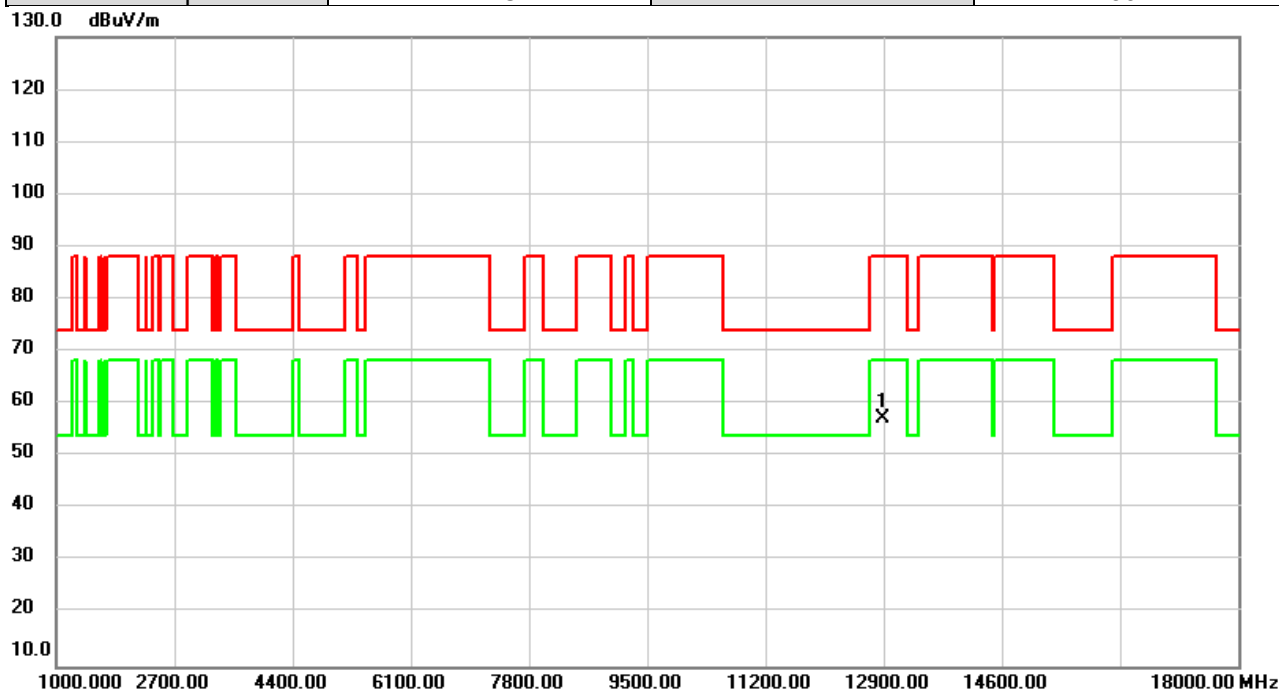


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12890.00	48.25	8.96	57.21	88.20	-30.99	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6445MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

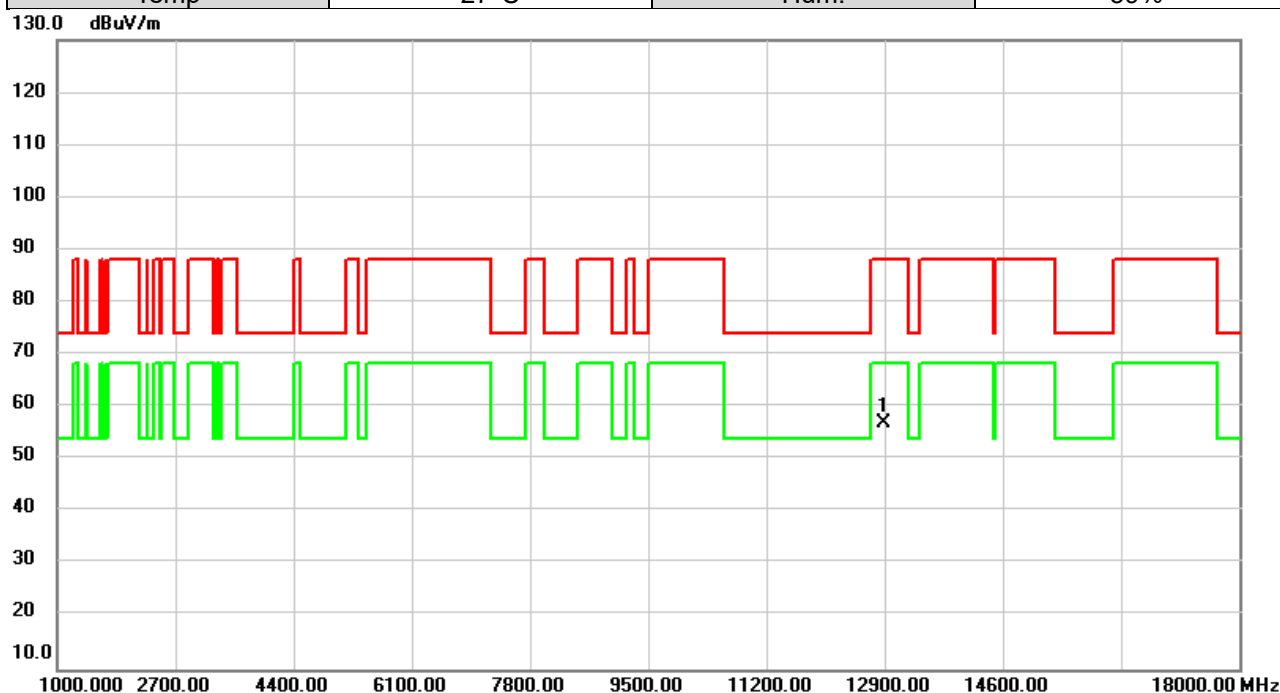


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12890.00	47.87	8.96	56.83	88.20	-31.37	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6485MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

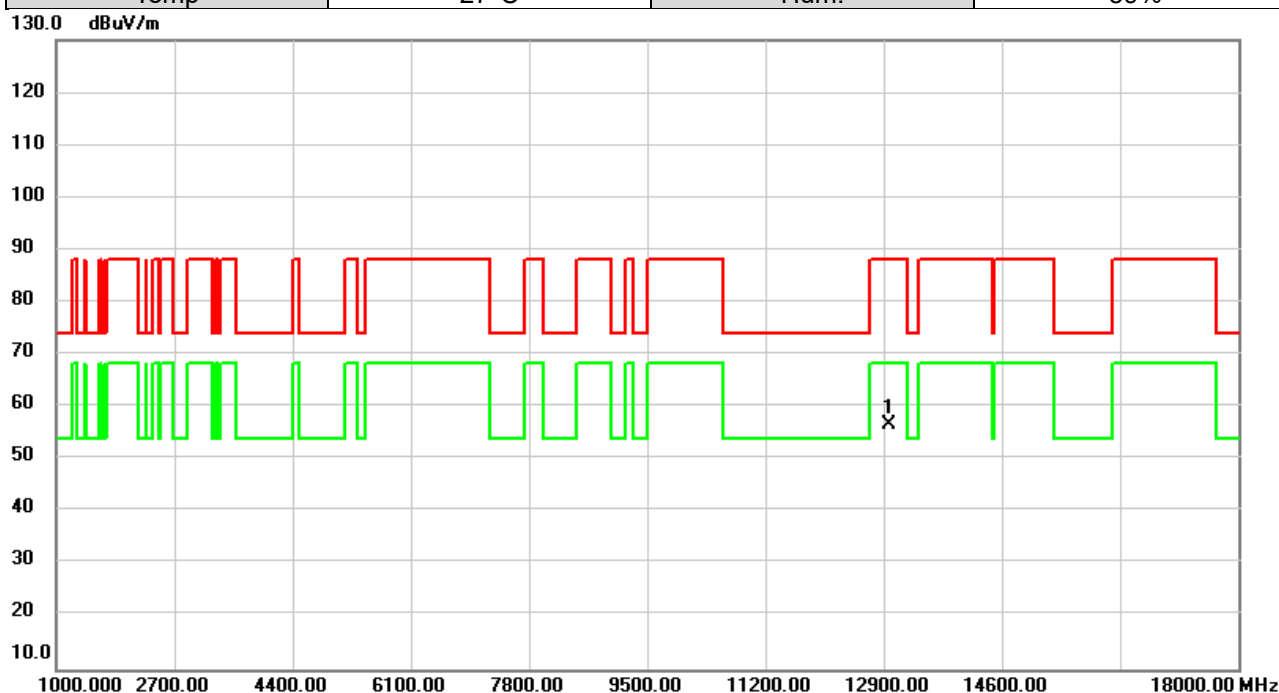


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12970.00	47.76	8.91	56.67	88.20	-31.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6485MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

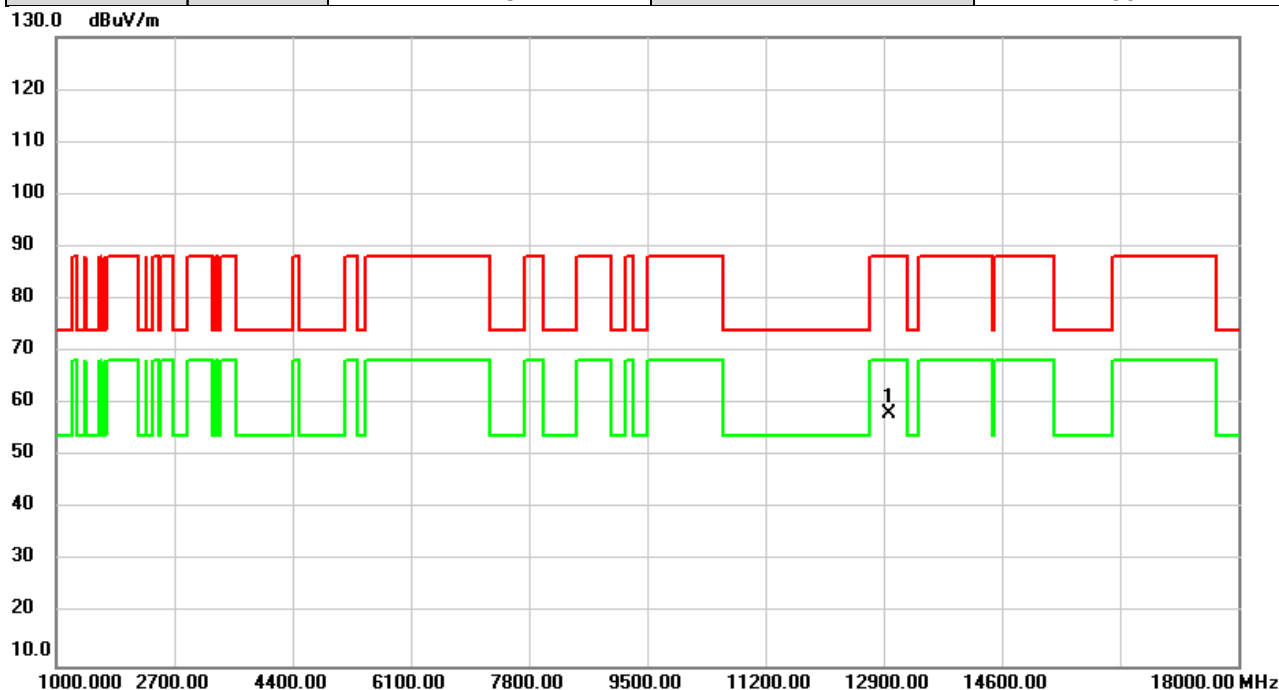


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12970.00	49.15	8.91	58.06	88.20	-30.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6525MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

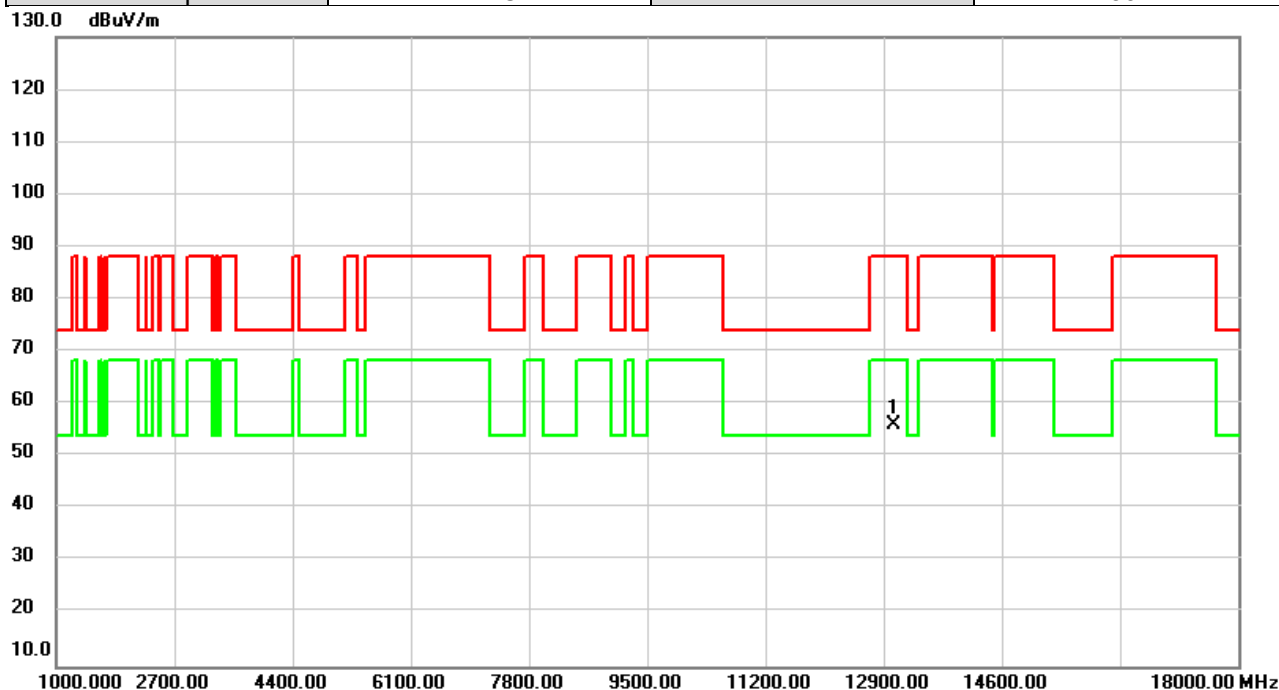


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13050.00	47.17	8.88	56.05	88.20	-32.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6525MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

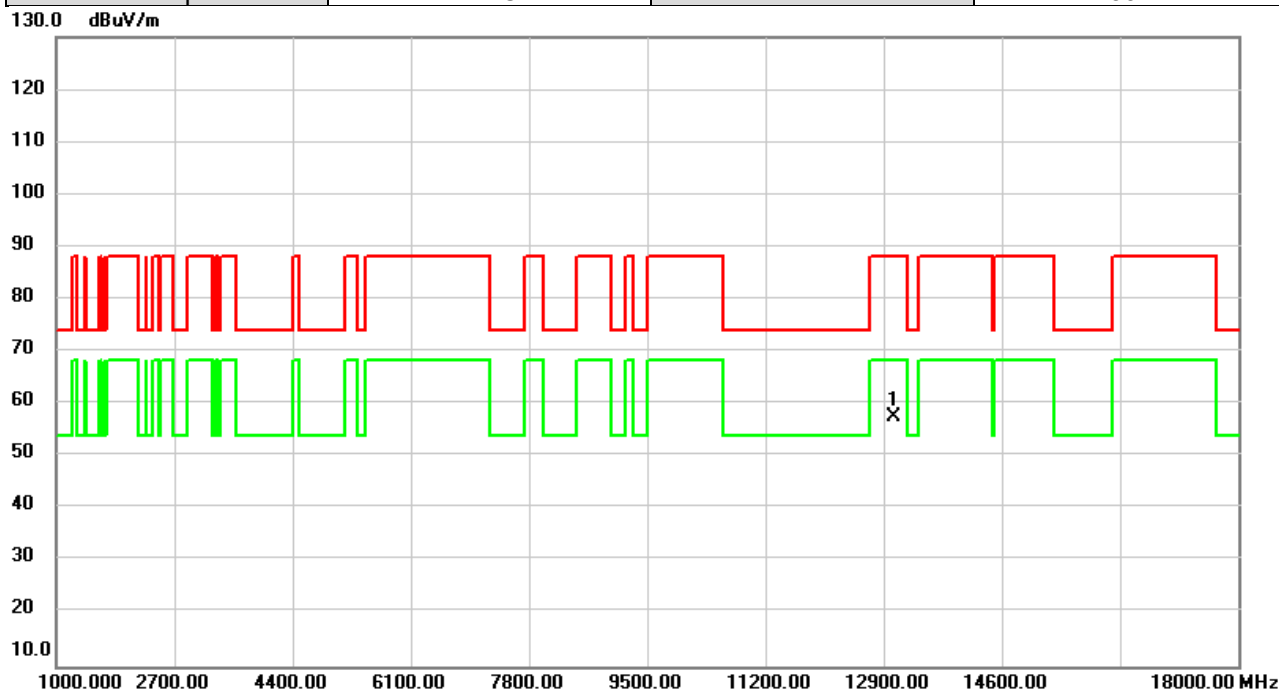


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13050.00	48.65	8.88	57.53	88.20	-30.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6685MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

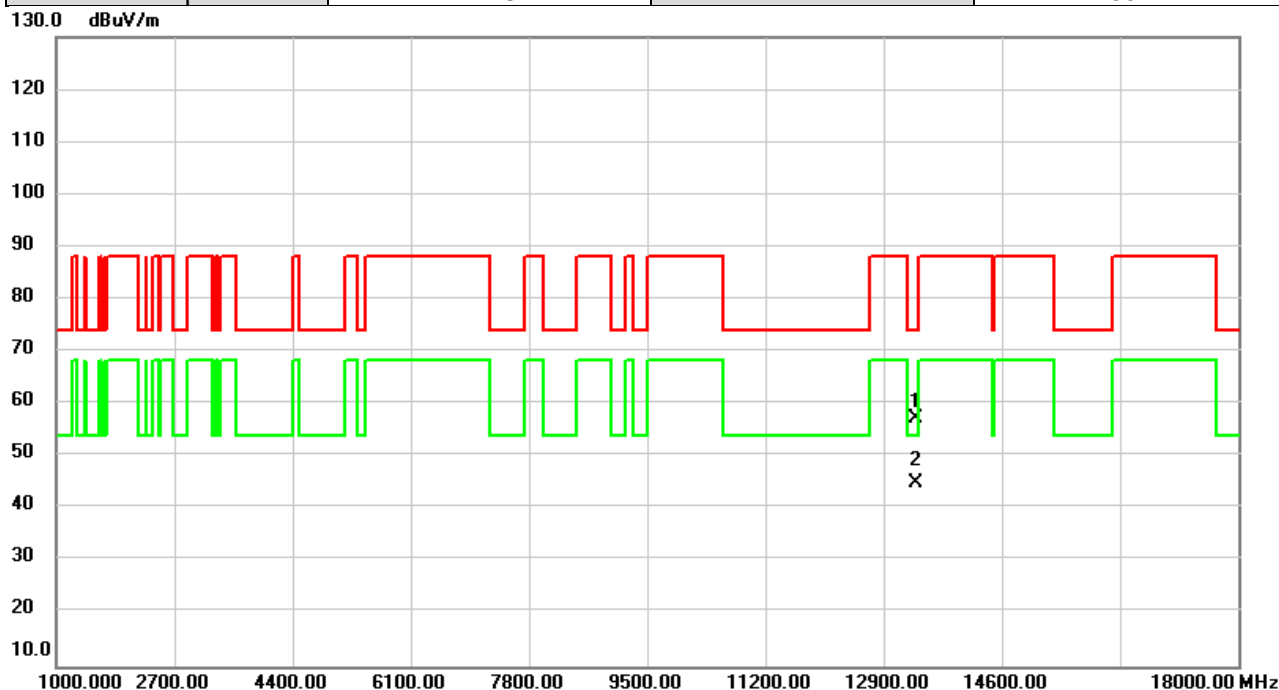


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13370.00	48.54	8.75	57.29	74.00	-16.71	peak	
2	*	13370.00	36.24	8.75	44.99	54.00	-9.01	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6685MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

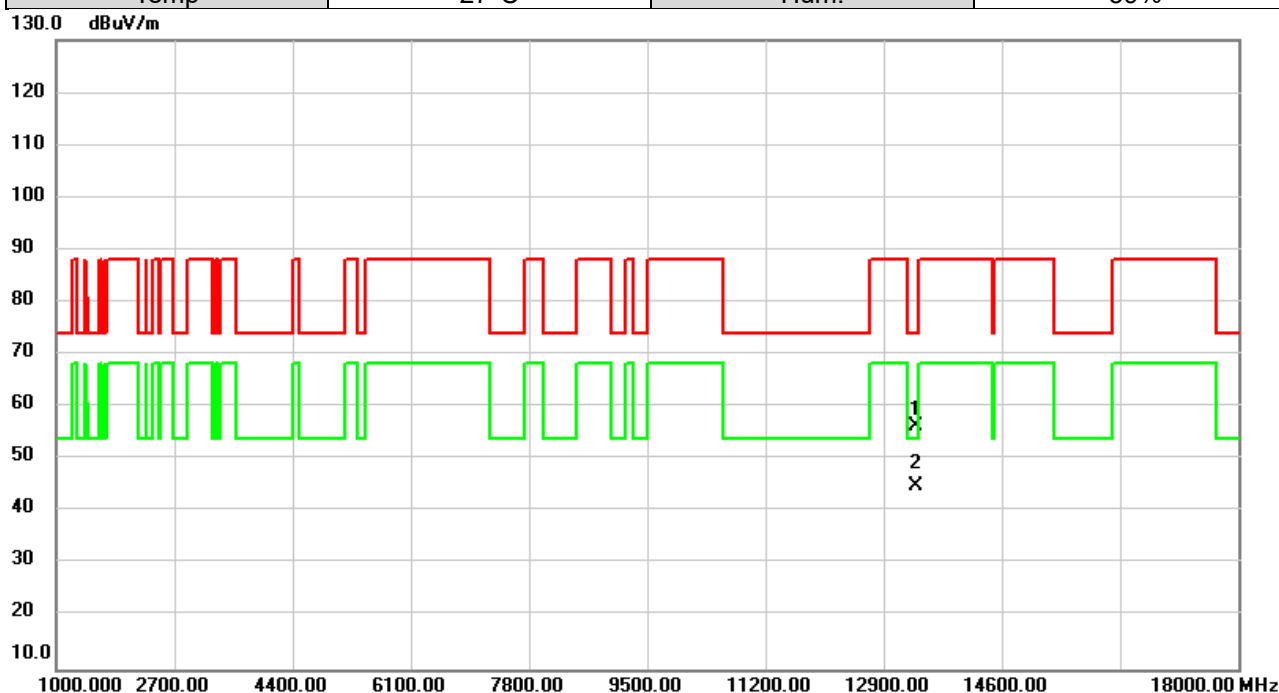


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13370.00	47.73	8.75	56.48	74.00	-17.52	peak	
2	*	13370.00	36.22	8.75	44.97	54.00	-9.03	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6845MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

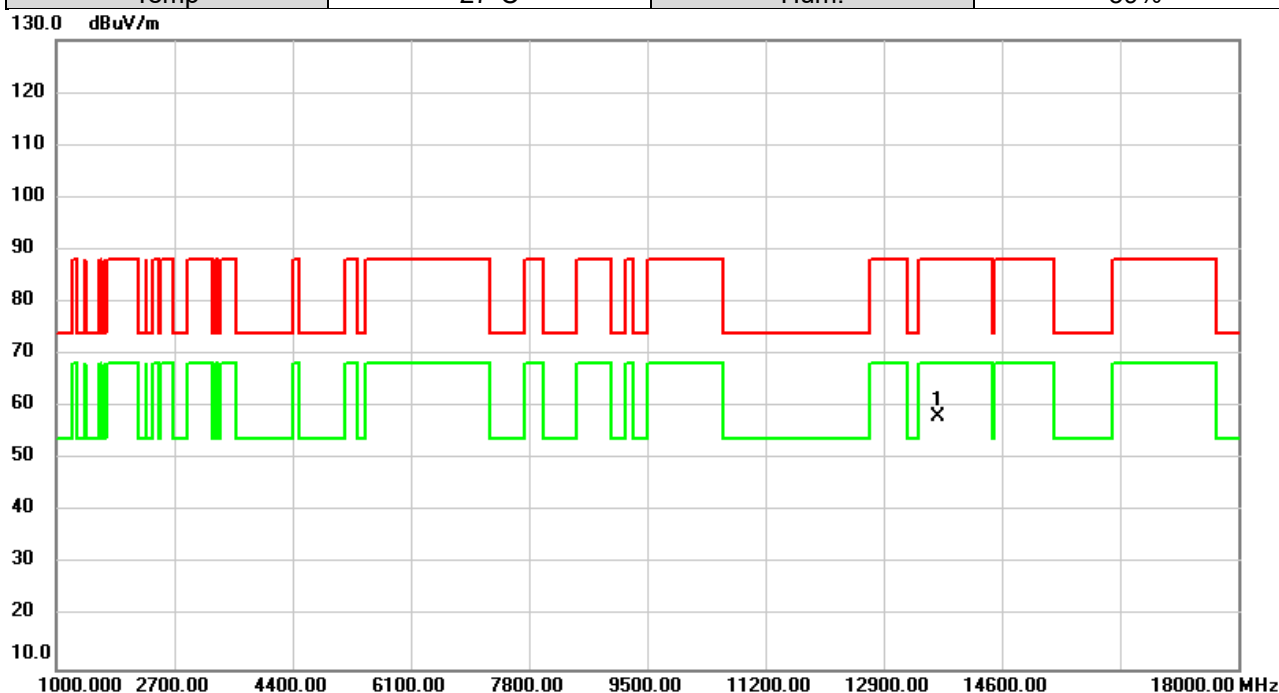


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13690.00	49.32	8.74	58.06	88.20	-30.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6845MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

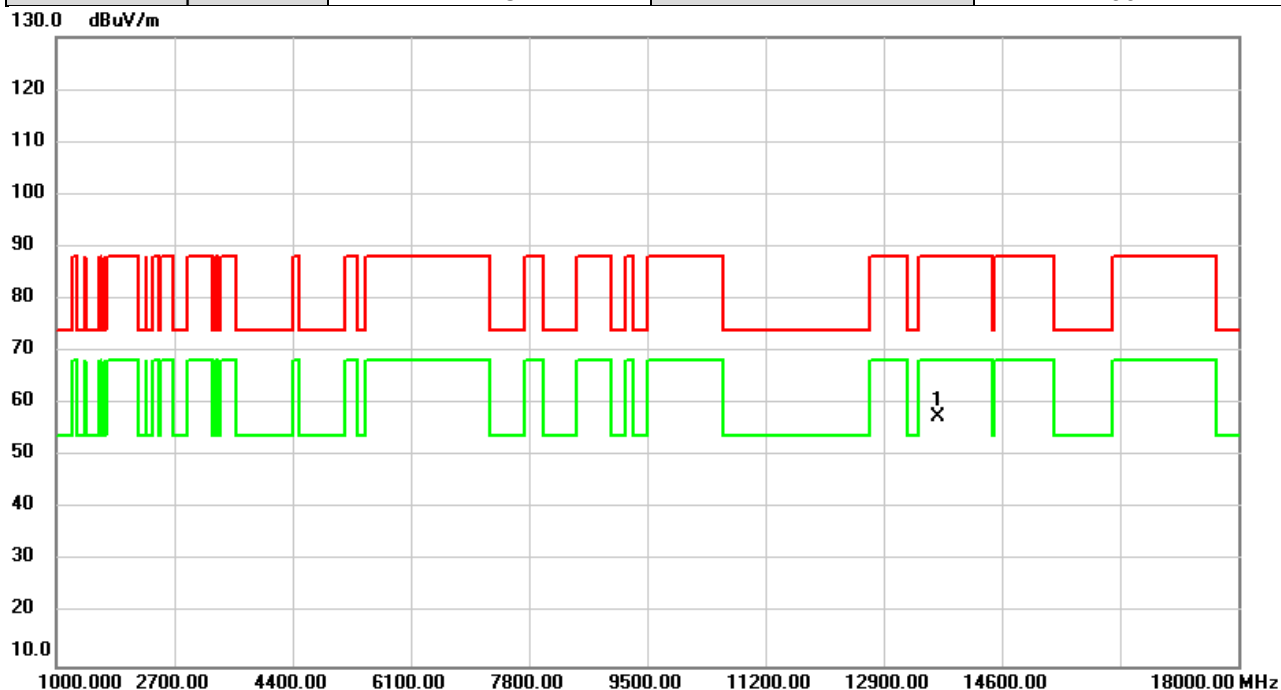


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13690.00	48.80	8.74	57.54	88.20	-30.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6885MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

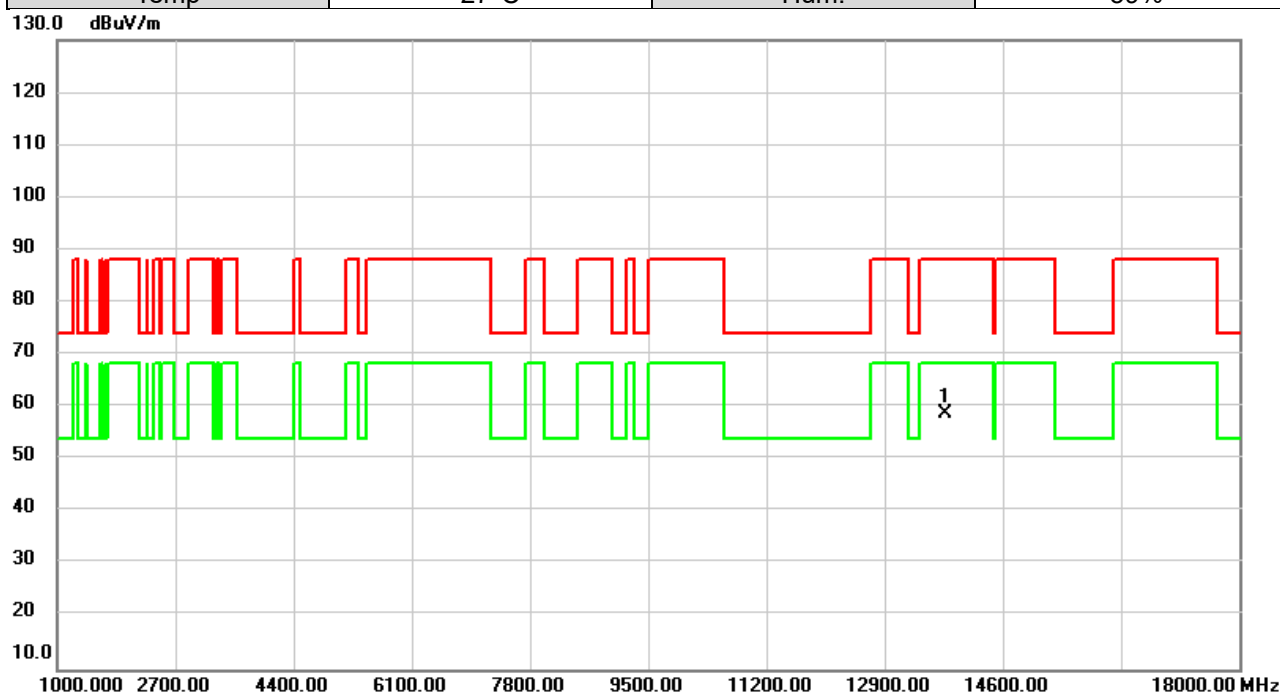


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13770.00	49.90	8.76	58.66	88.20	-29.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6885MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

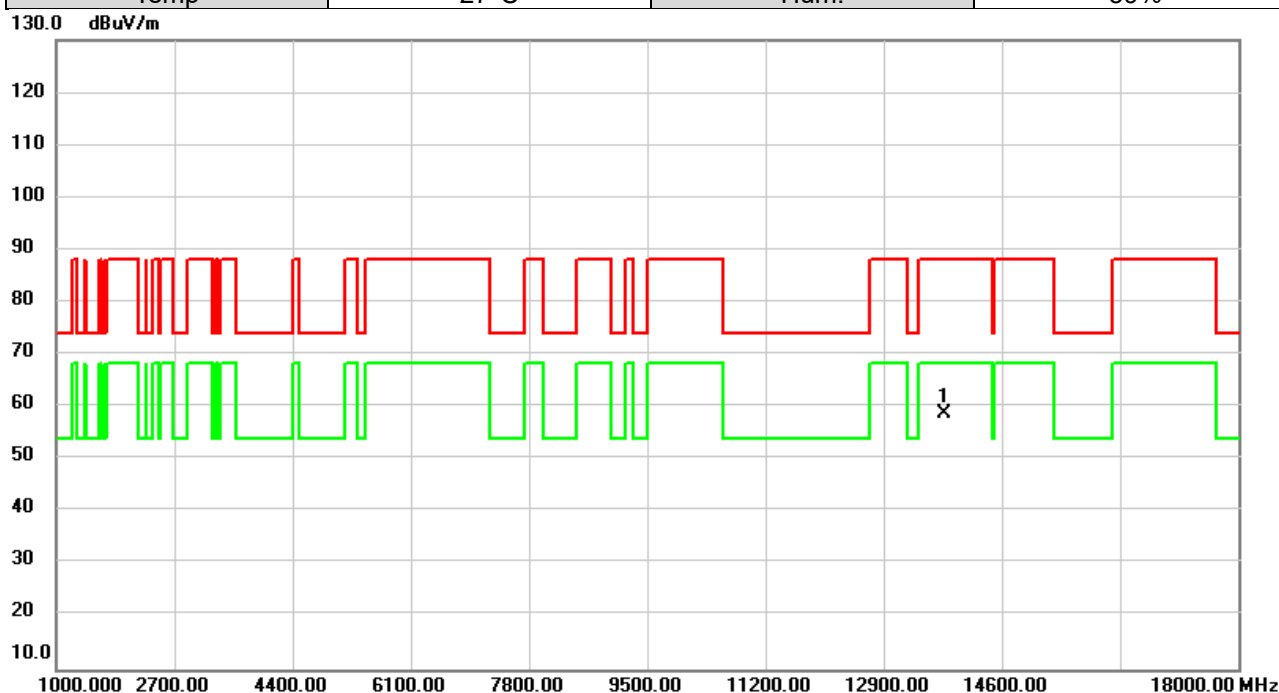


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13770.00	49.94	8.76	58.70	88.20	-29.50	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6965MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

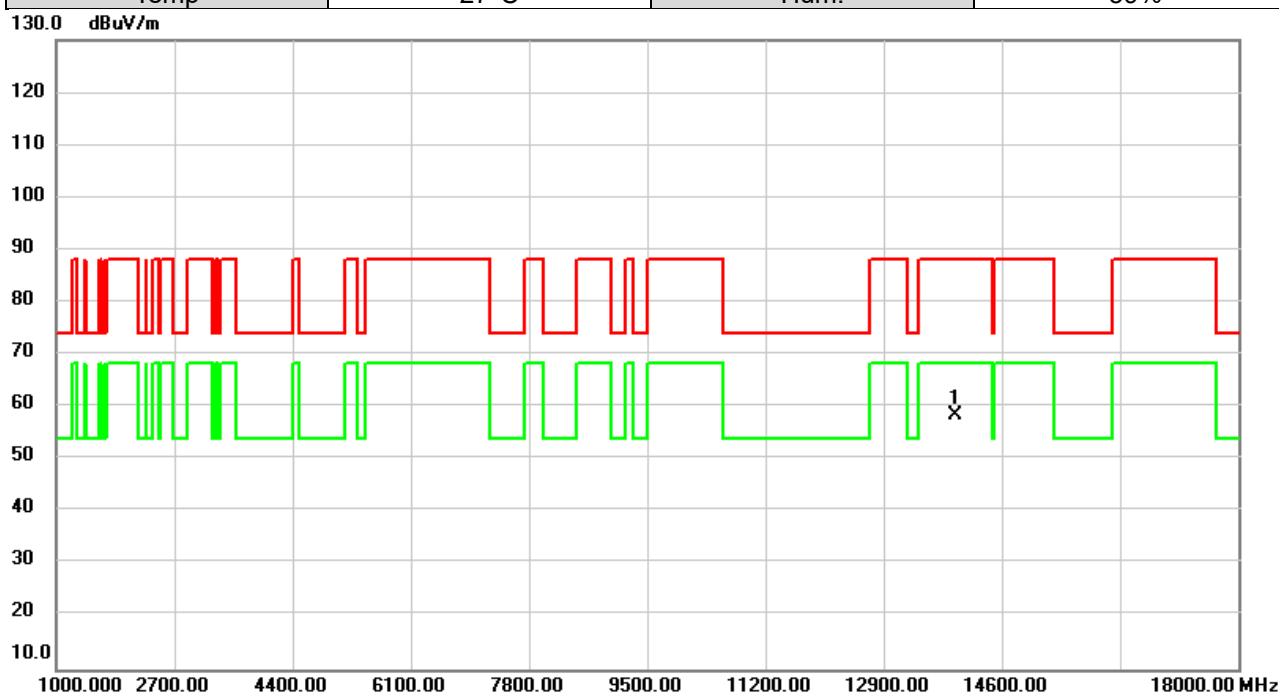


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13930.00	49.75	8.79	58.54	88.20	-29.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	6965MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

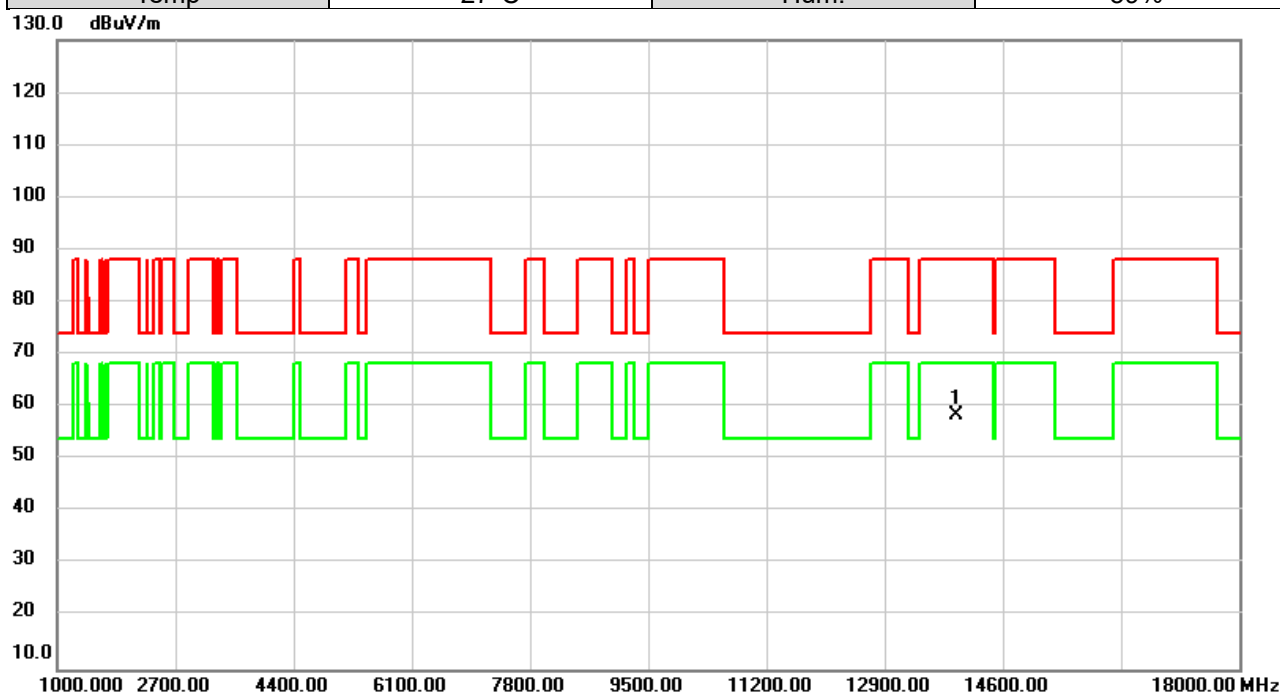


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13930.00	49.74	8.79	58.53	88.20	-29.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	7085MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

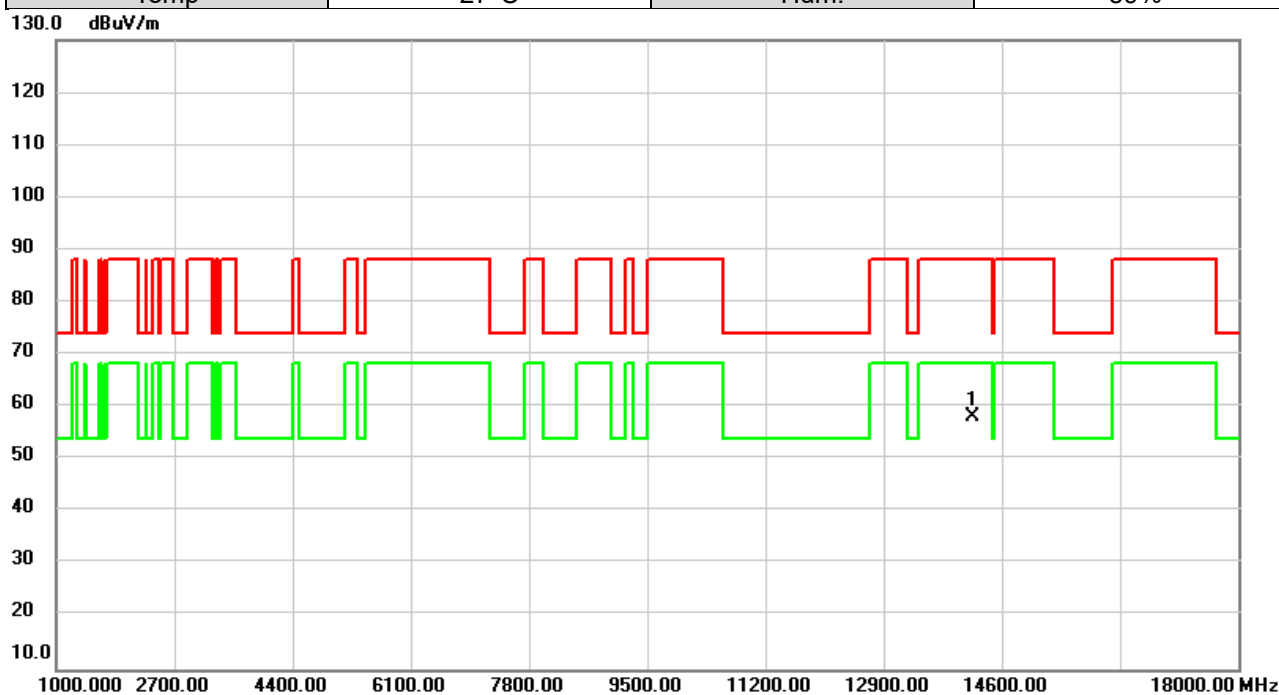


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14170.00	49.62	8.60	58.22	88.20	-29.98	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/3/26
Test Frequency	7085MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

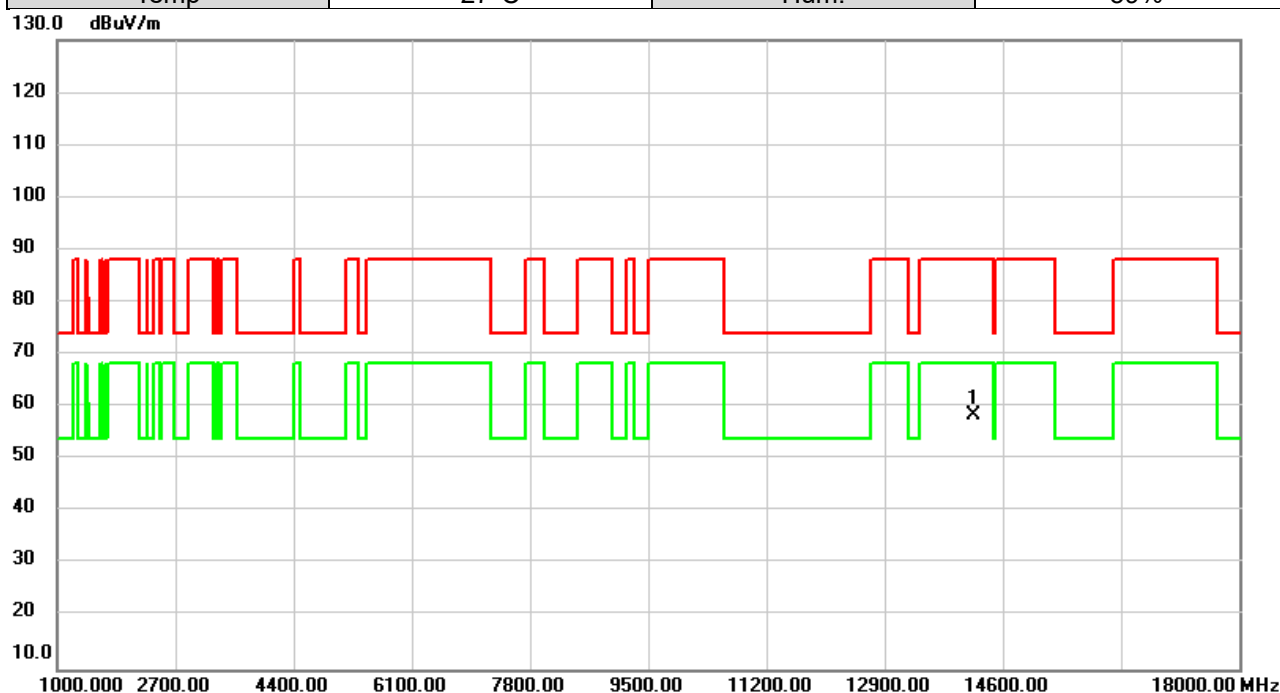


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14170.00	50.00	8.60	58.60	88.20	-29.60	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	5985MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

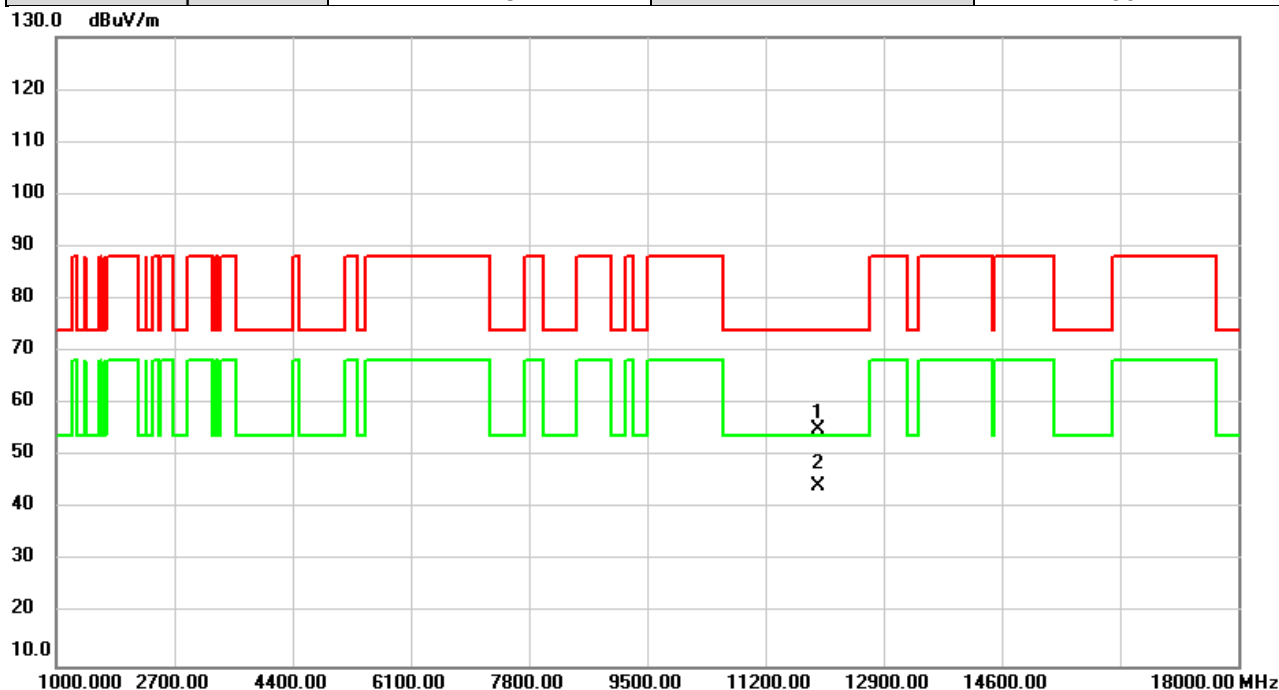


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11970.00	47.00	8.17	55.17	74.00	-18.83	peak	
2	*	11970.00	36.20	8.17	44.37	54.00	-9.63	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	5985MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

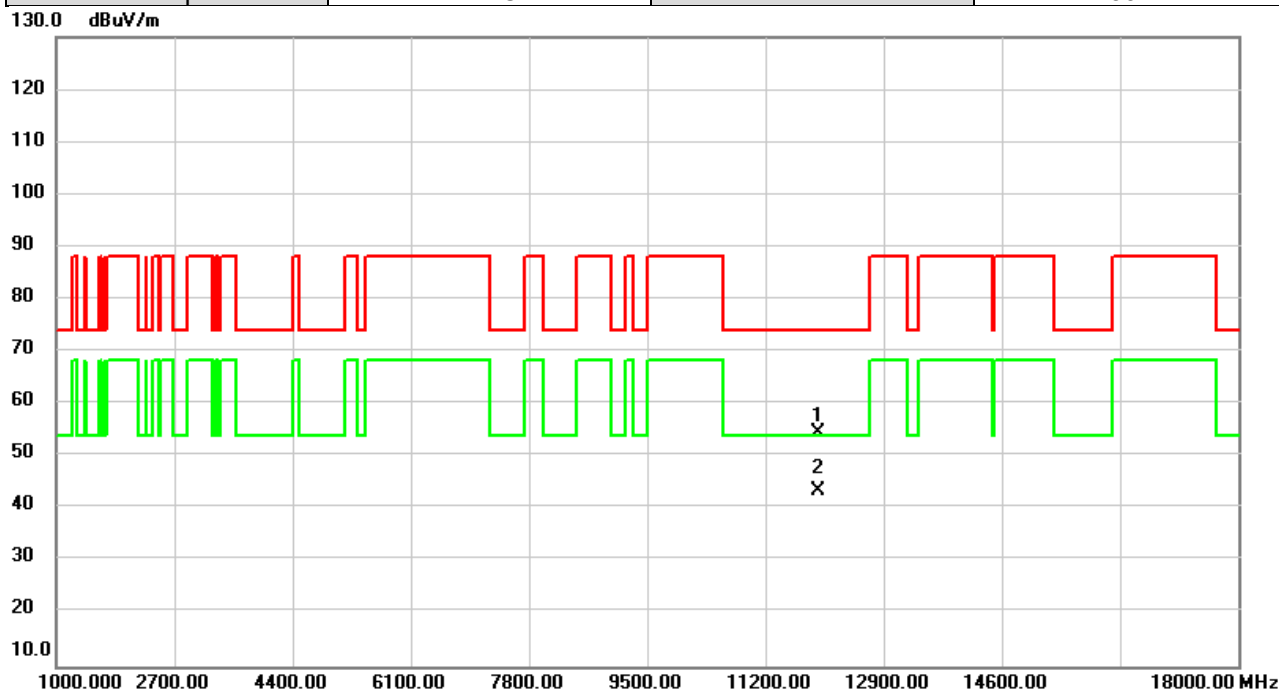


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11970.00	46.30	8.17	54.47	74.00	-19.53	peak	
2	*	11970.00	35.39	8.17	43.56	54.00	-10.44	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6145MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

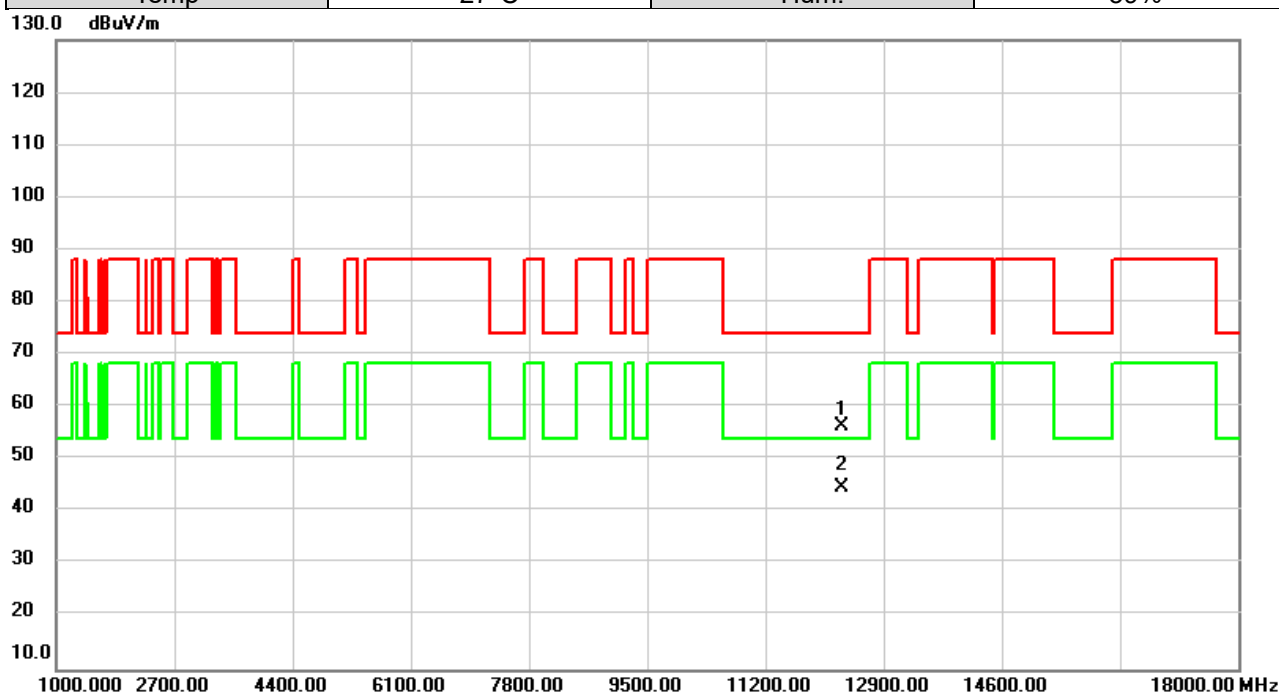


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12290.00	47.63	8.76	56.39	74.00	-17.61	peak	
2	*	12290.00	35.83	8.76	44.59	54.00	-9.41	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6145MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

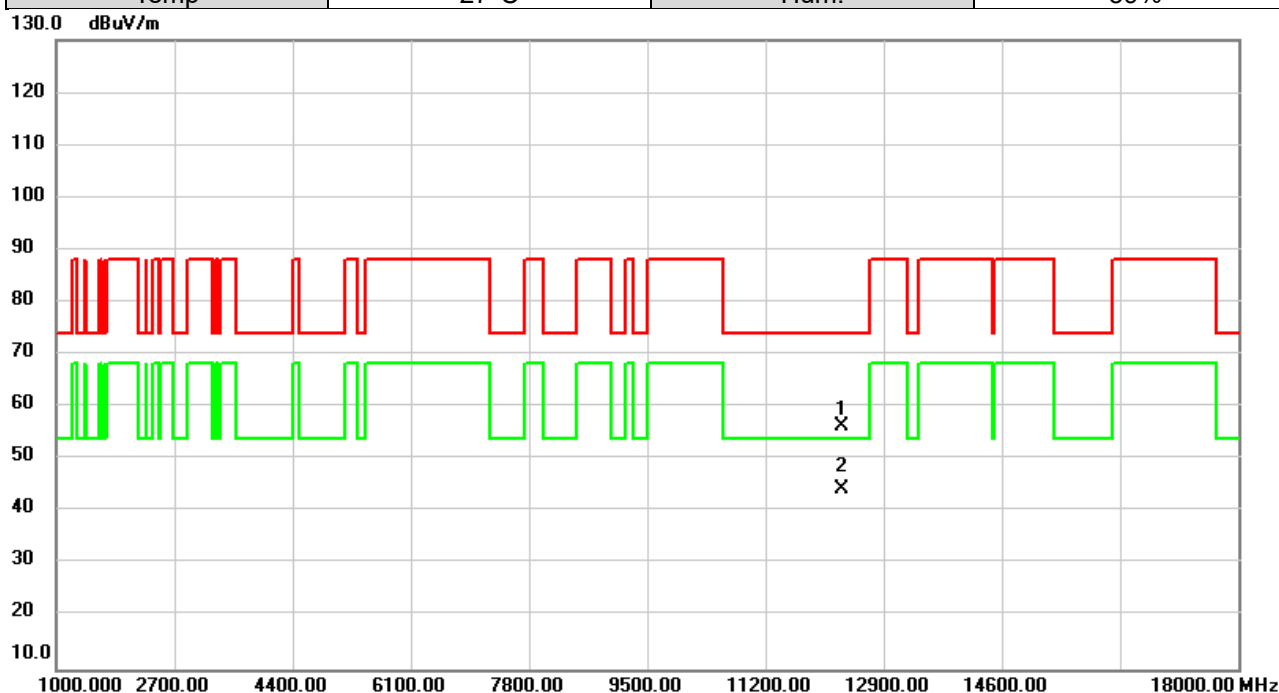


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12290.00	47.57	8.76	56.33	74.00	-17.67	peak	
2	*	12290.00	35.73	8.76	44.49	54.00	-9.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6385MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

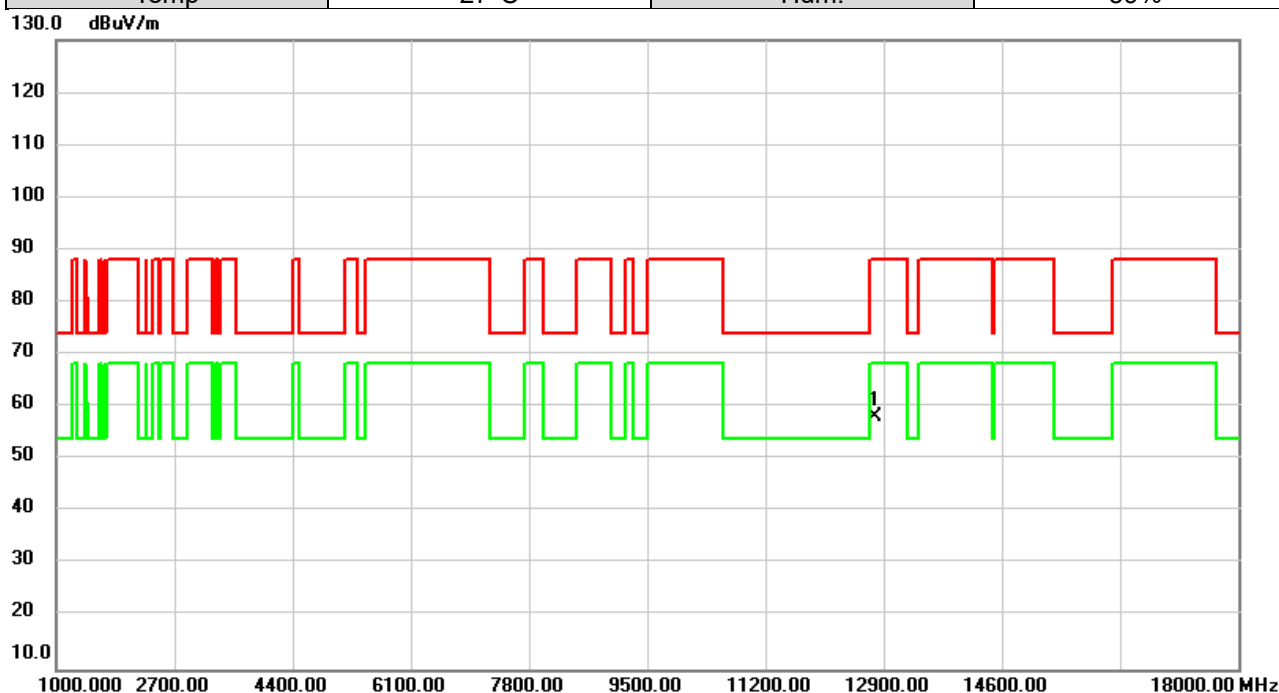


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12770.00	49.11	9.01	58.12	88.20	-30.08	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6385MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

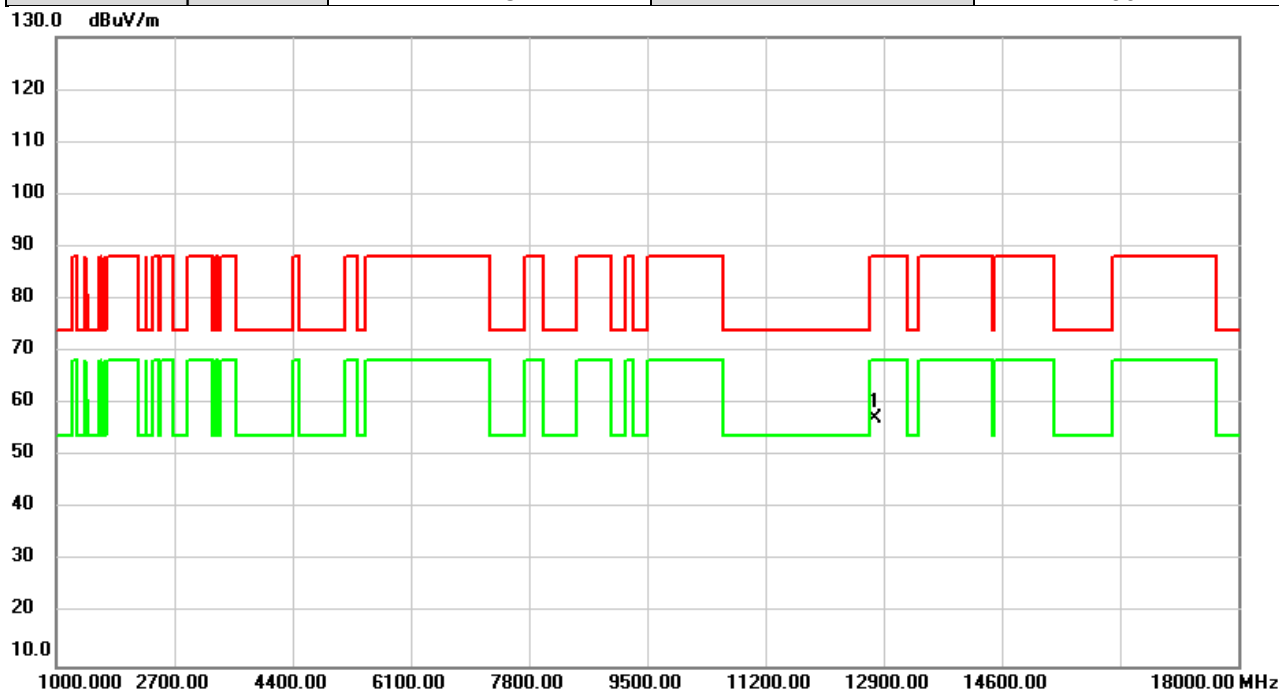


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12770.00	48.12	9.01	57.13	88.20	-31.07	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6465MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

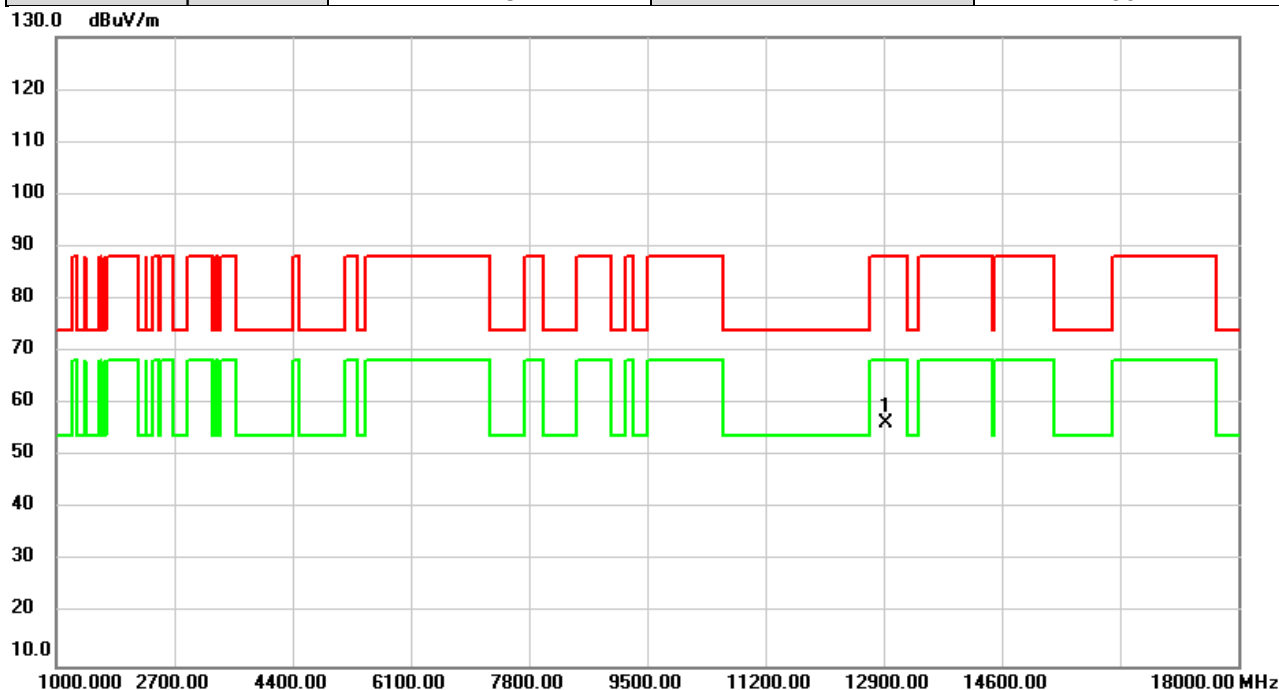


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12930.00	47.55	8.94	56.49	88.20	-31.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6465MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

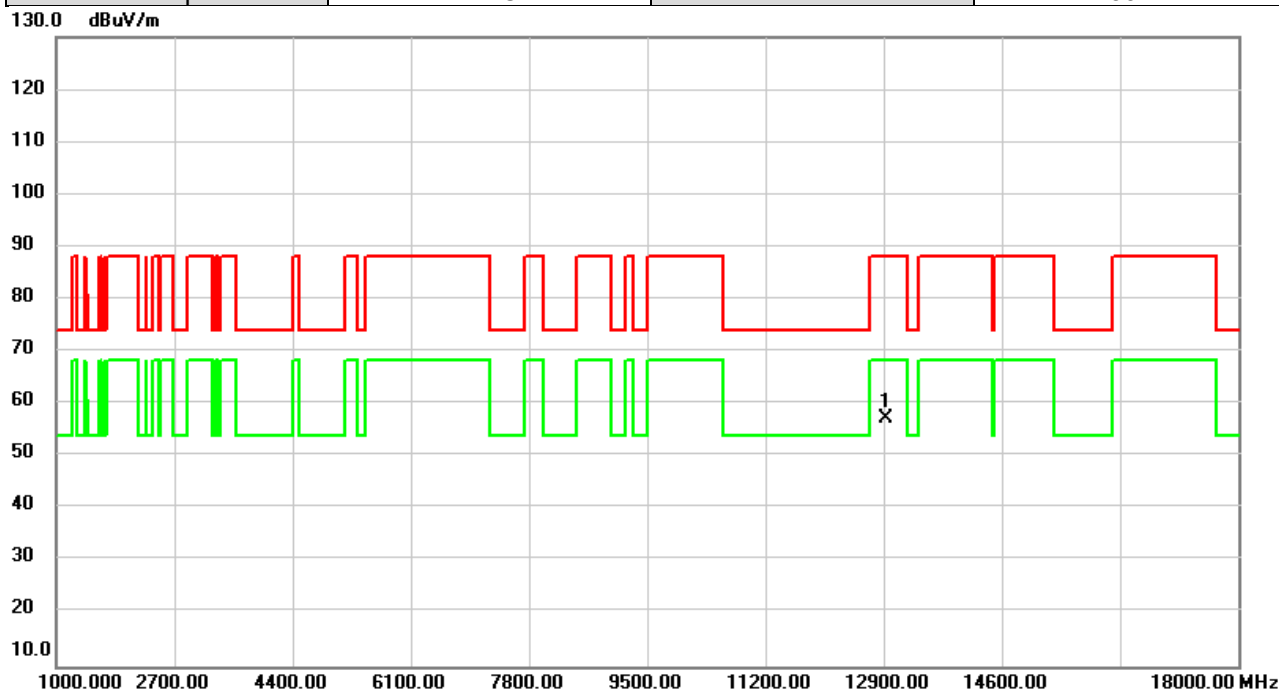


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	12930.00	48.35	8.94	57.29	88.20	-30.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6545MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

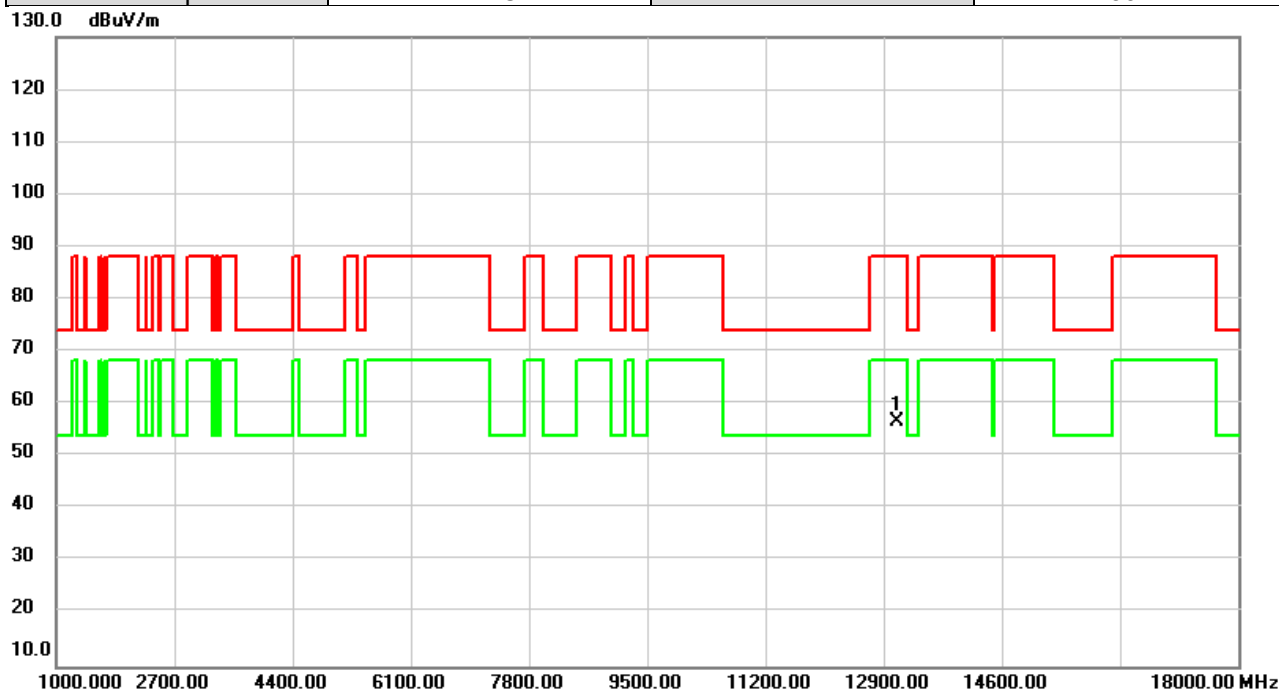


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13090.00	47.67	8.86	56.53	88.20	-31.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6545MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

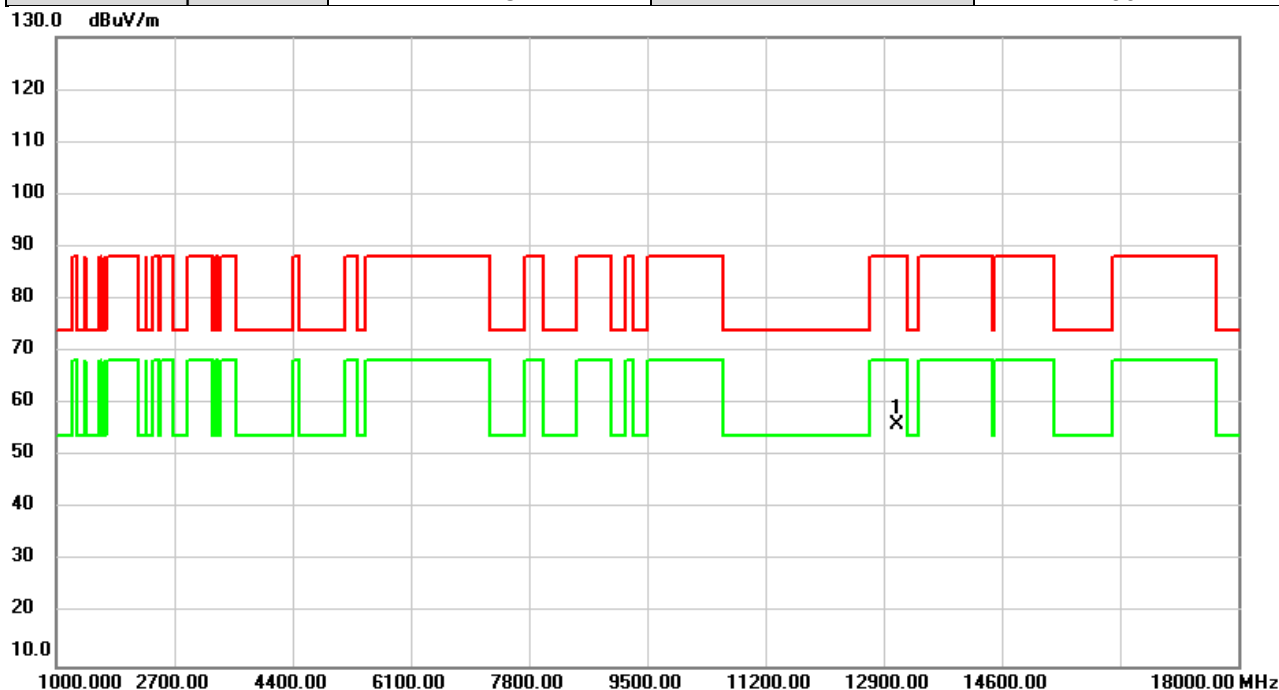


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13090.00	47.20	8.86	56.06	88.20	-32.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6625MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

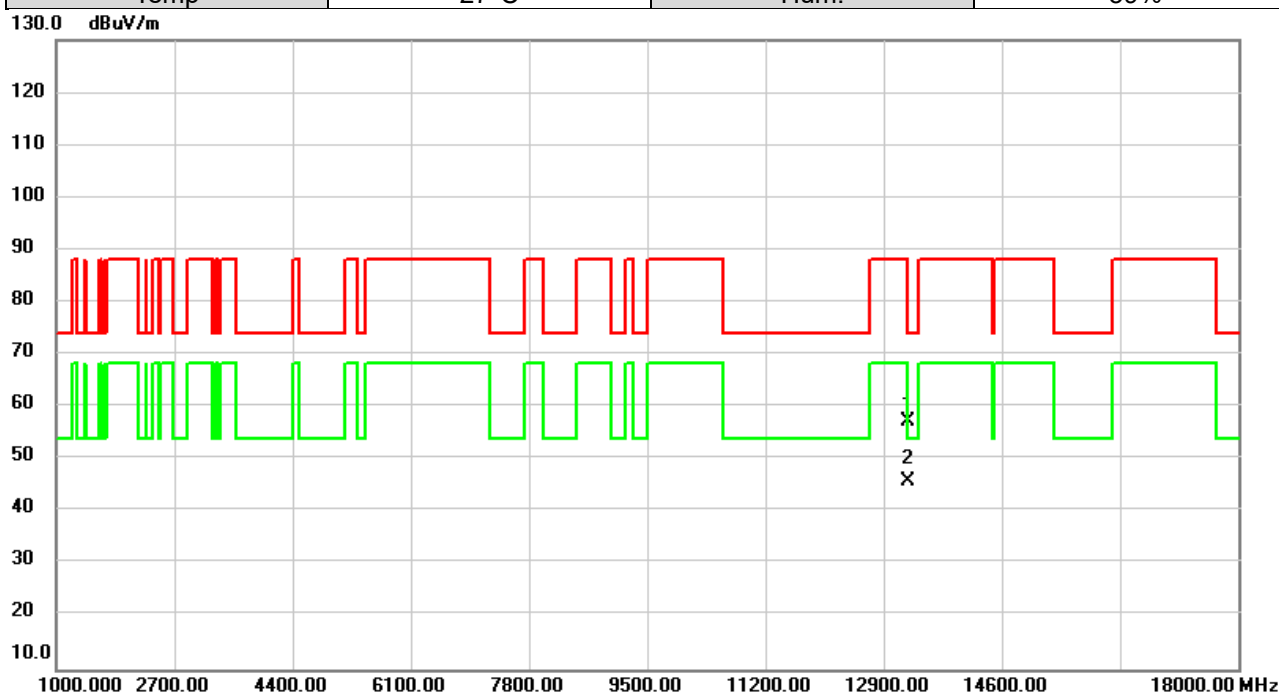


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13250.00	48.44	8.80	57.24	74.00	-16.76	peak	
2	*	13250.00	36.94	8.80	45.74	54.00	-8.26	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6625MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

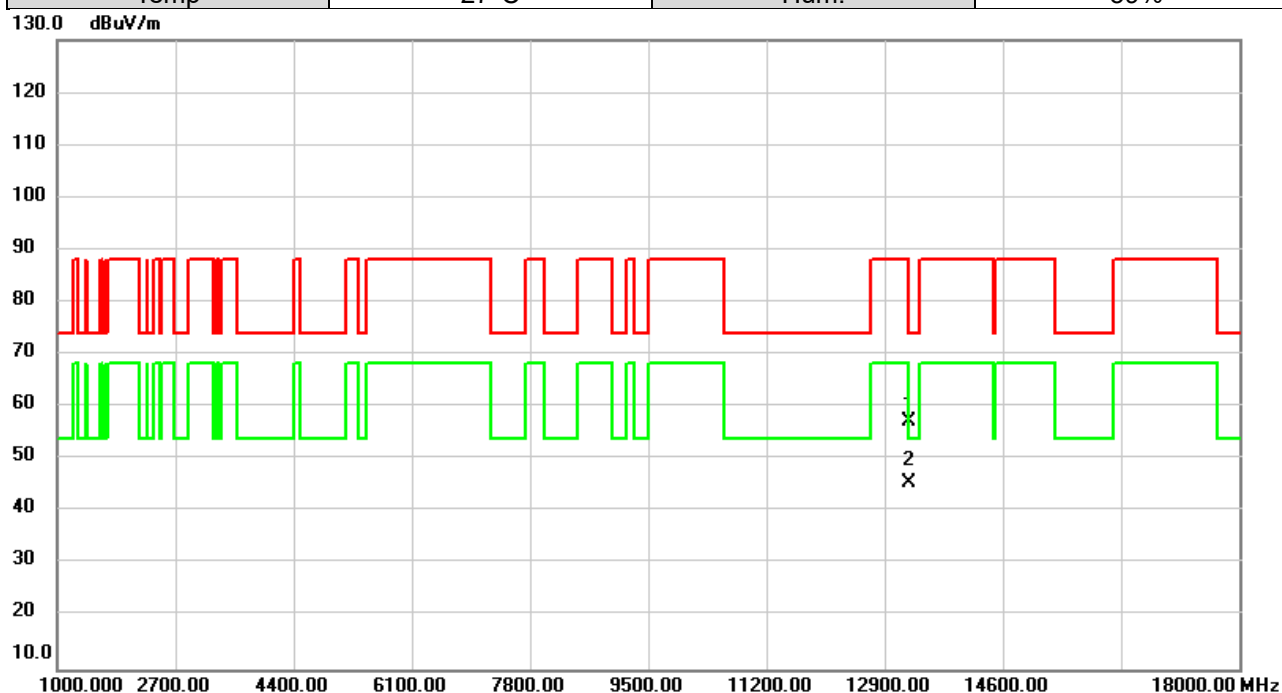


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13250.00	48.37	8.80	57.17	74.00	-16.83	peak	
2	*	13250.00	36.86	8.80	45.66	54.00	-8.34	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6785MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

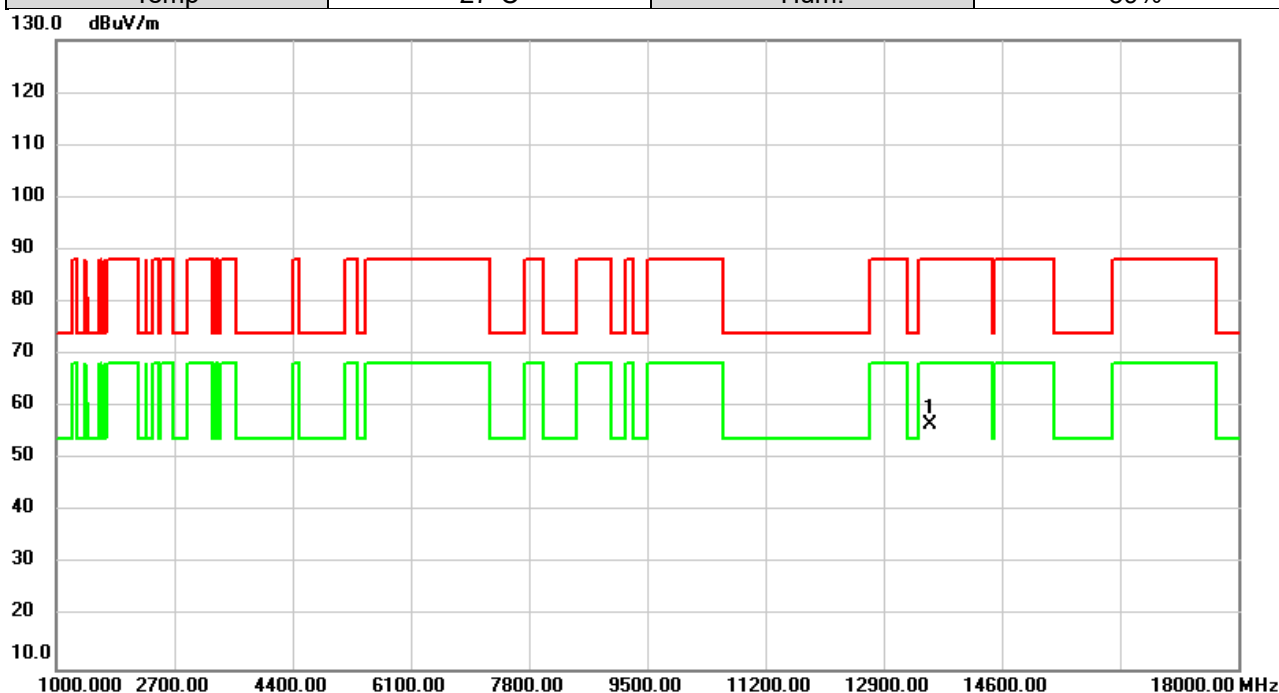


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13570.00	47.94	8.72	56.66	88.20	-31.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6785MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

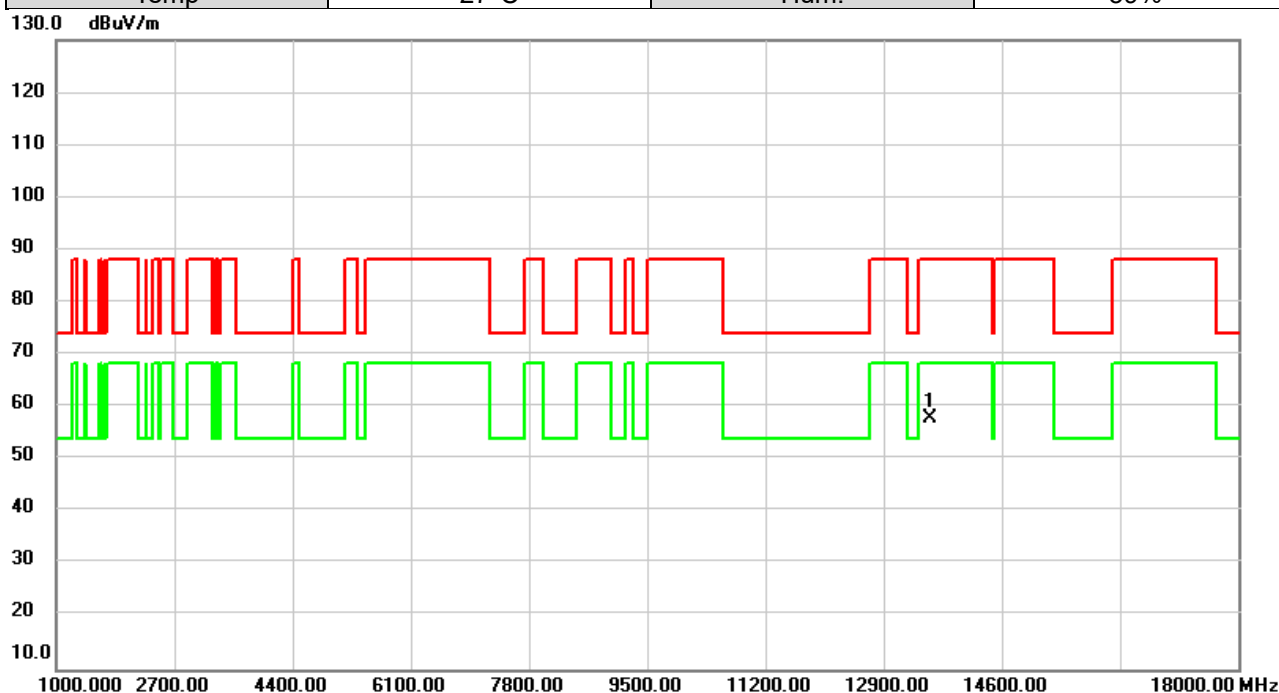


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13570.00	49.21	8.72	57.93	88.20	-30.27	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6865MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

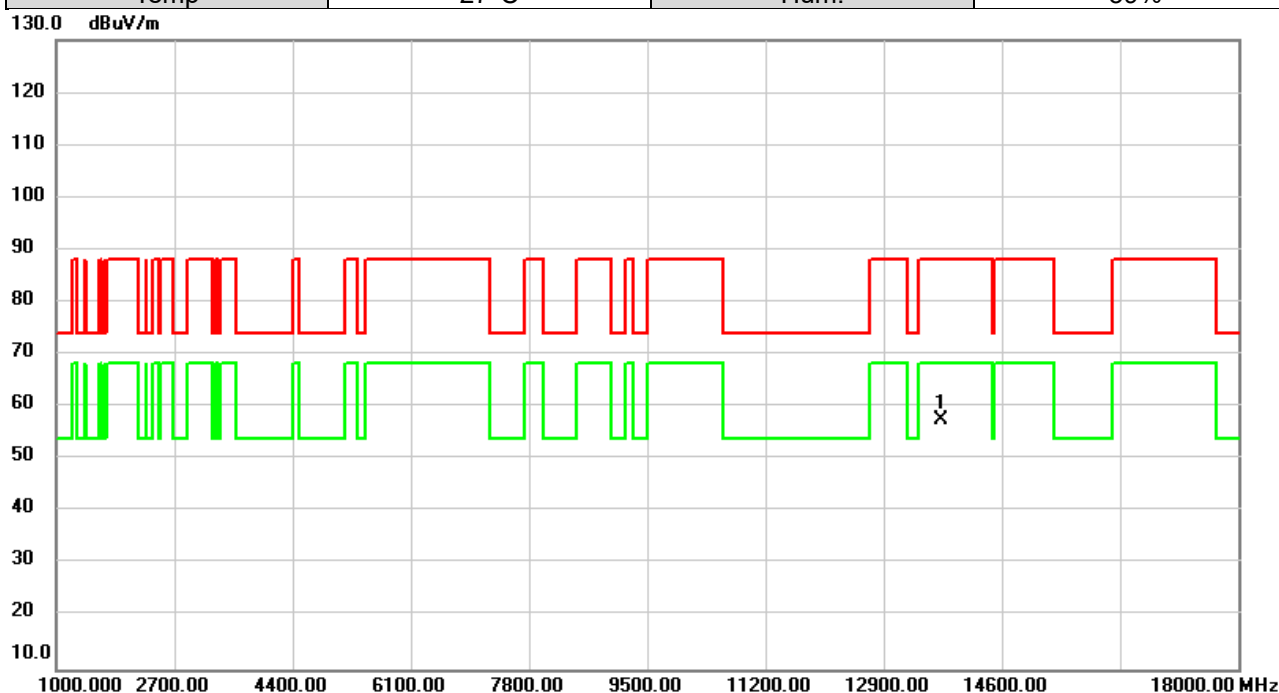


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13730.00	48.94	8.75	57.69	88.20	-30.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6865MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

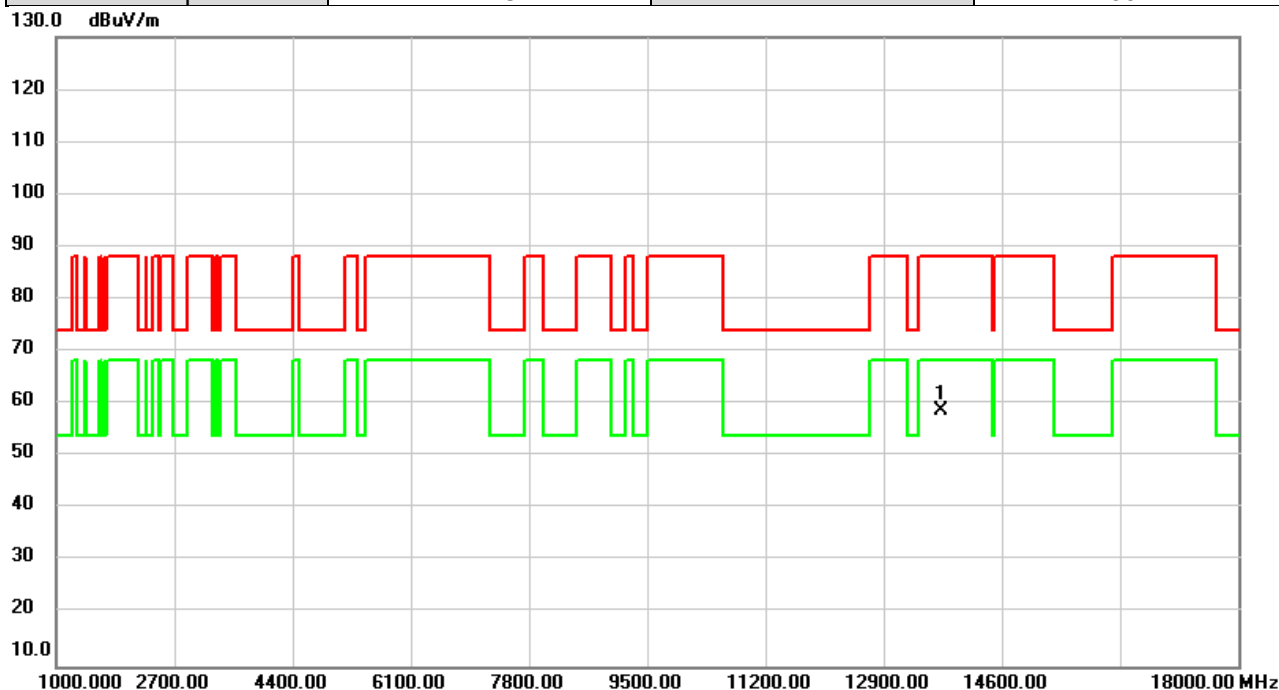


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13730.00	49.88	8.75	58.63	88.20	-29.57	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6945MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

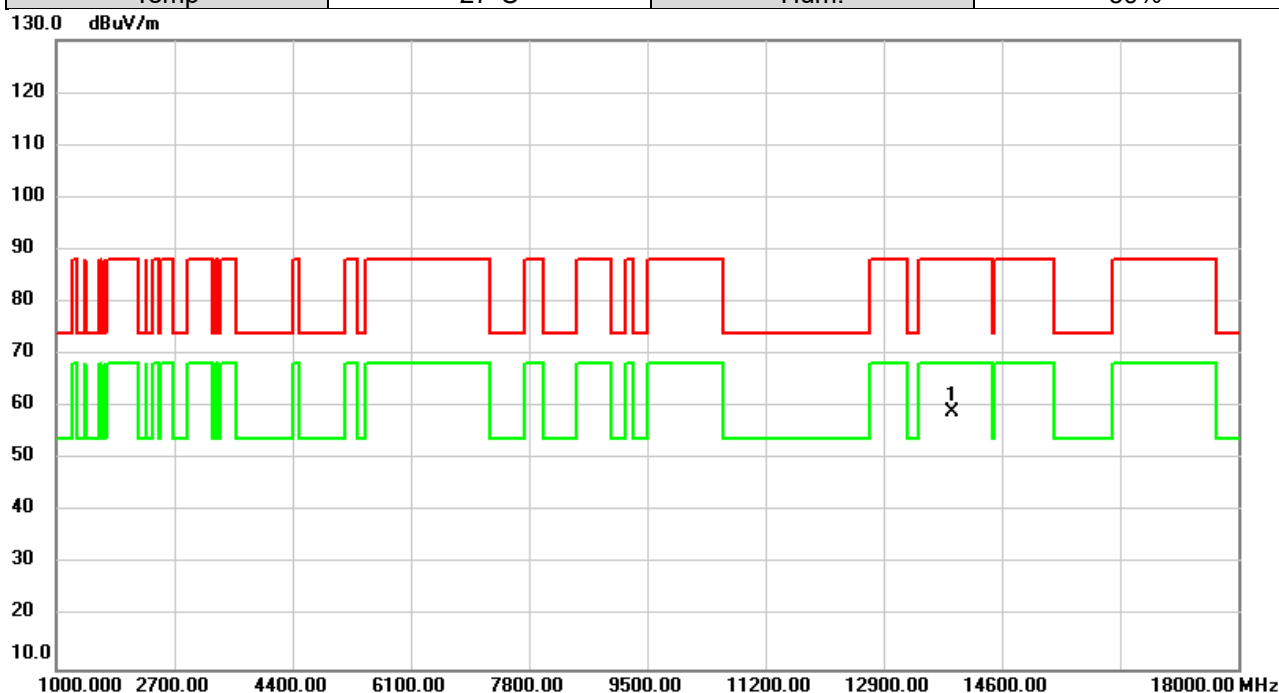


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13890.00	50.19	8.78	58.97	88.20	-29.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	6945MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

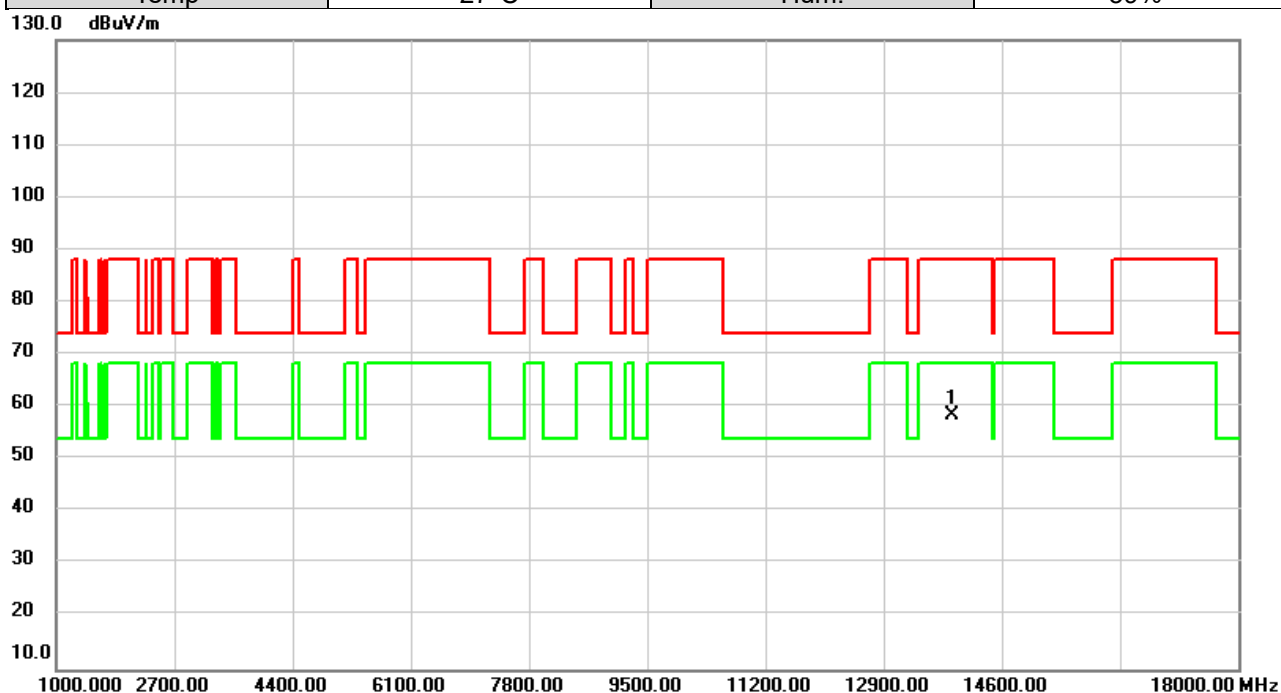


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13890.00	49.56	8.78	58.34	88.20	-29.86	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	7025MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

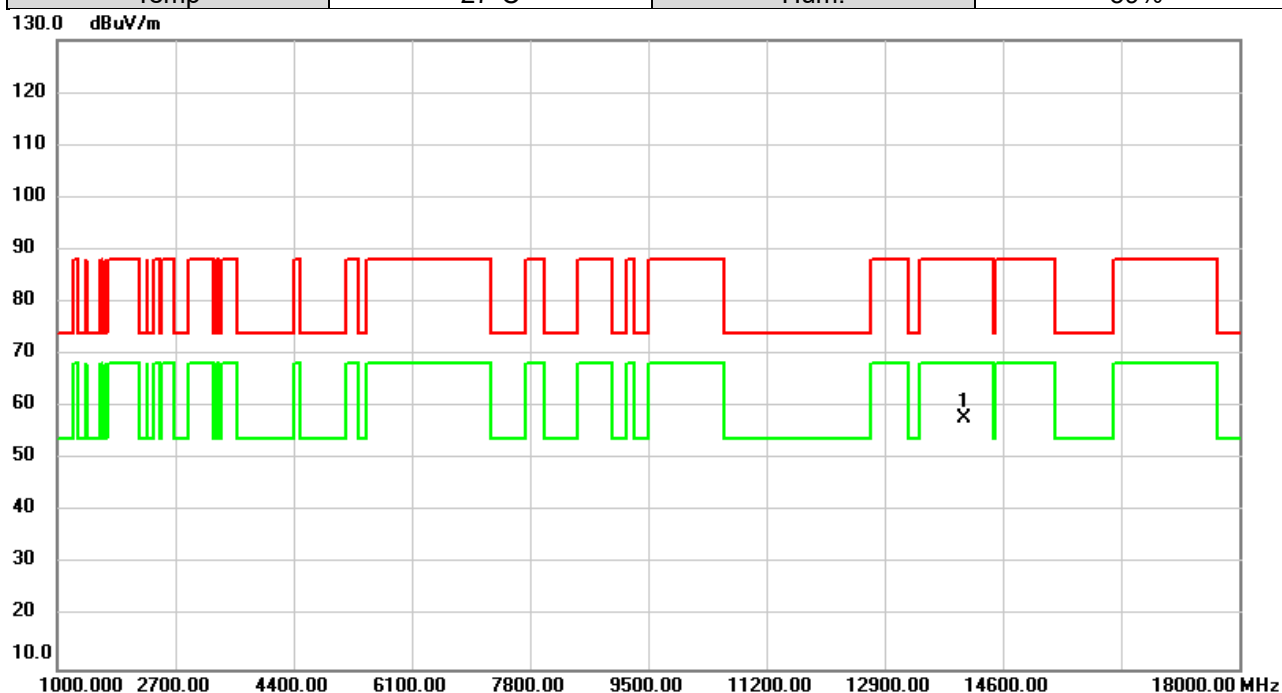


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14050.00	49.09	8.75	57.84	88.20	-30.36	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/3/26
Test Frequency	7025MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

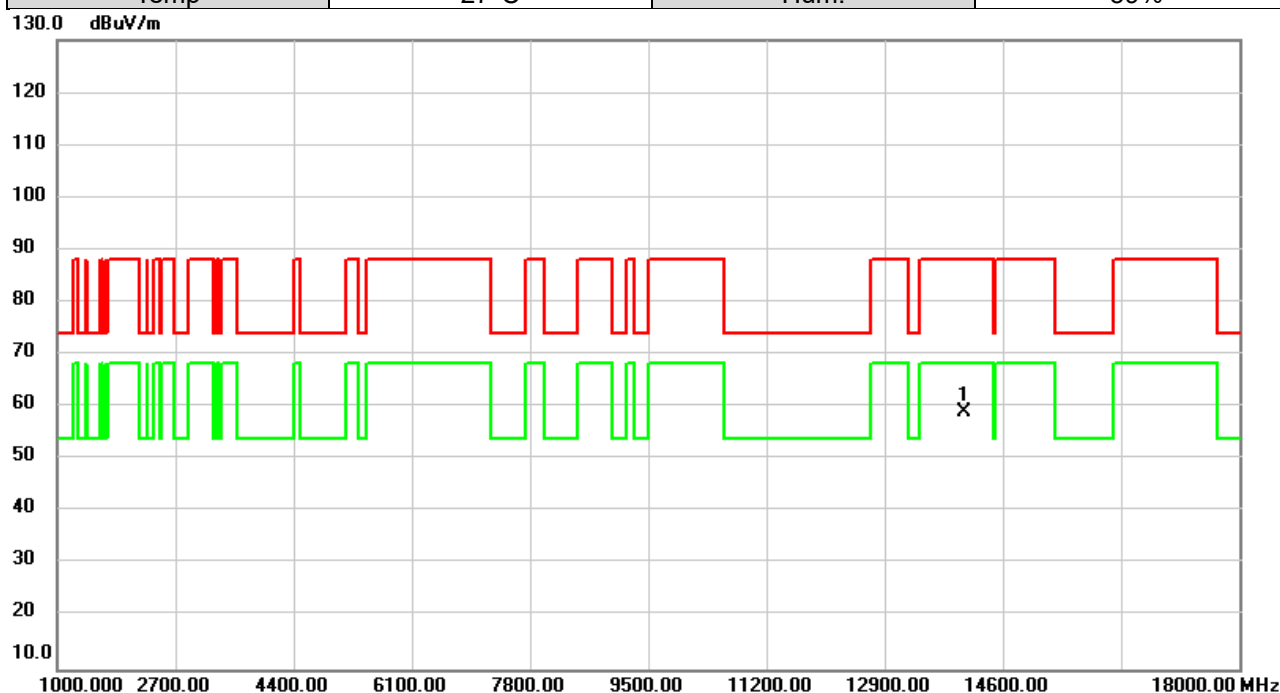


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	14050.00	50.23	8.75	58.98	88.20	-29.22	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6025MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

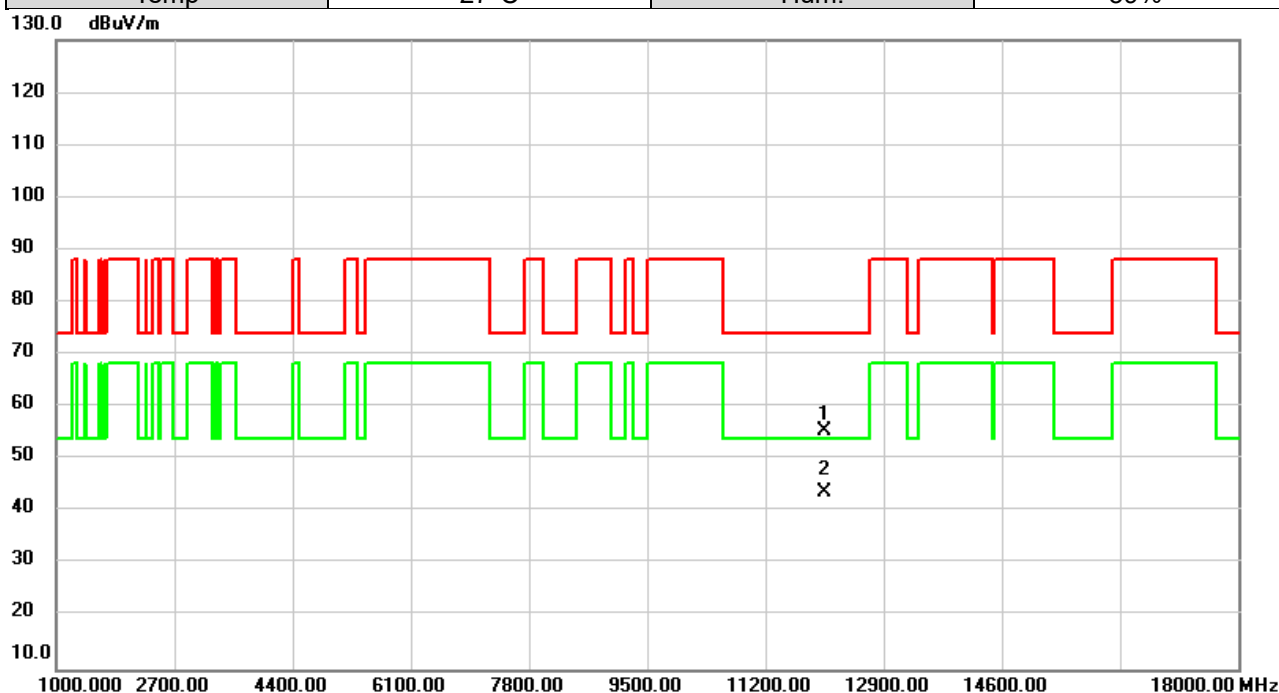


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12050.00	47.26	8.29	55.55	74.00	-18.45	peak	
2	*	12050.00	35.34	8.29	43.63	54.00	-10.37	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6025MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

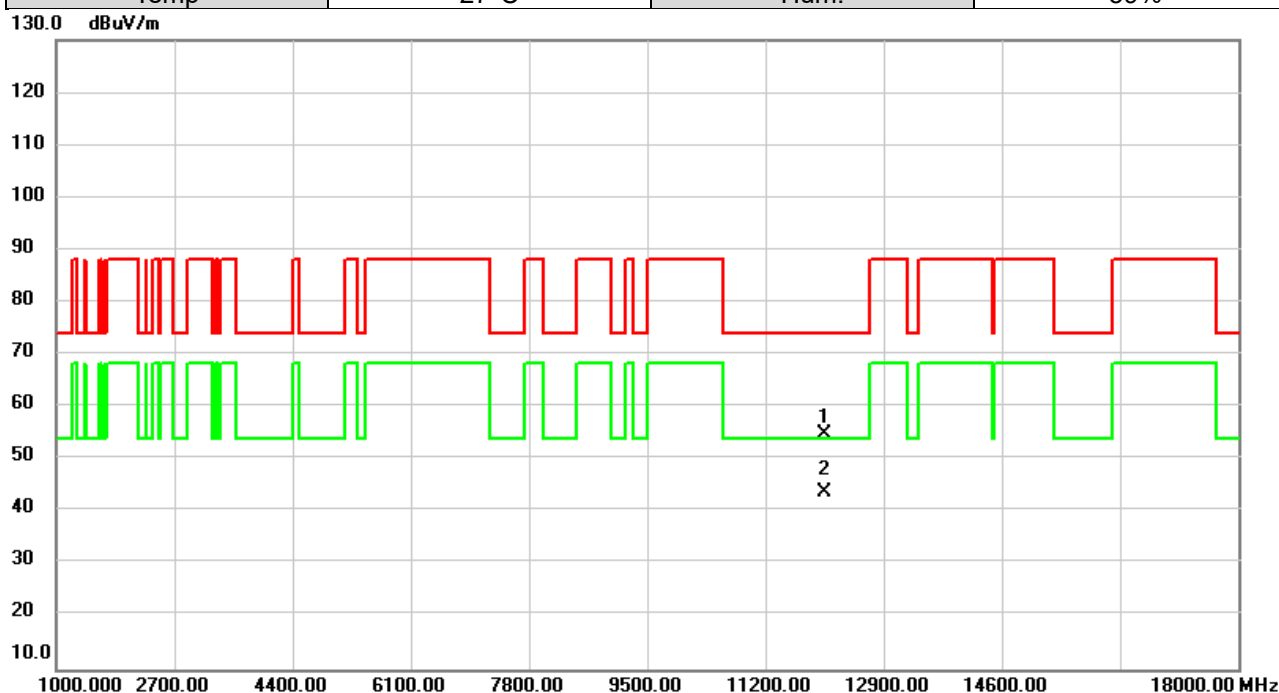


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12050.00	46.70	8.29	54.99	74.00	-19.01	peak	
2	*	12050.00	35.53	8.29	43.82	54.00	-10.18	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6345MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

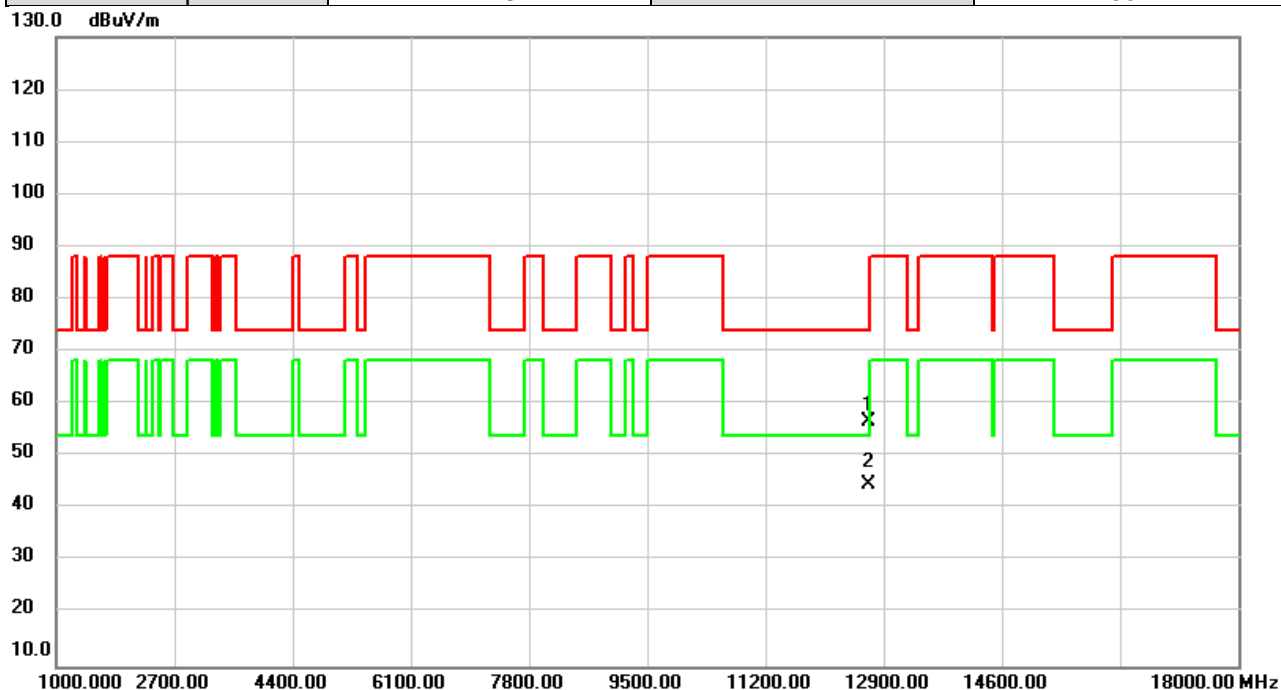


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12690.00	47.47	9.07	56.54	74.00	-17.46	peak	
2	*	12690.00	35.56	9.07	44.63	54.00	-9.37	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6345MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

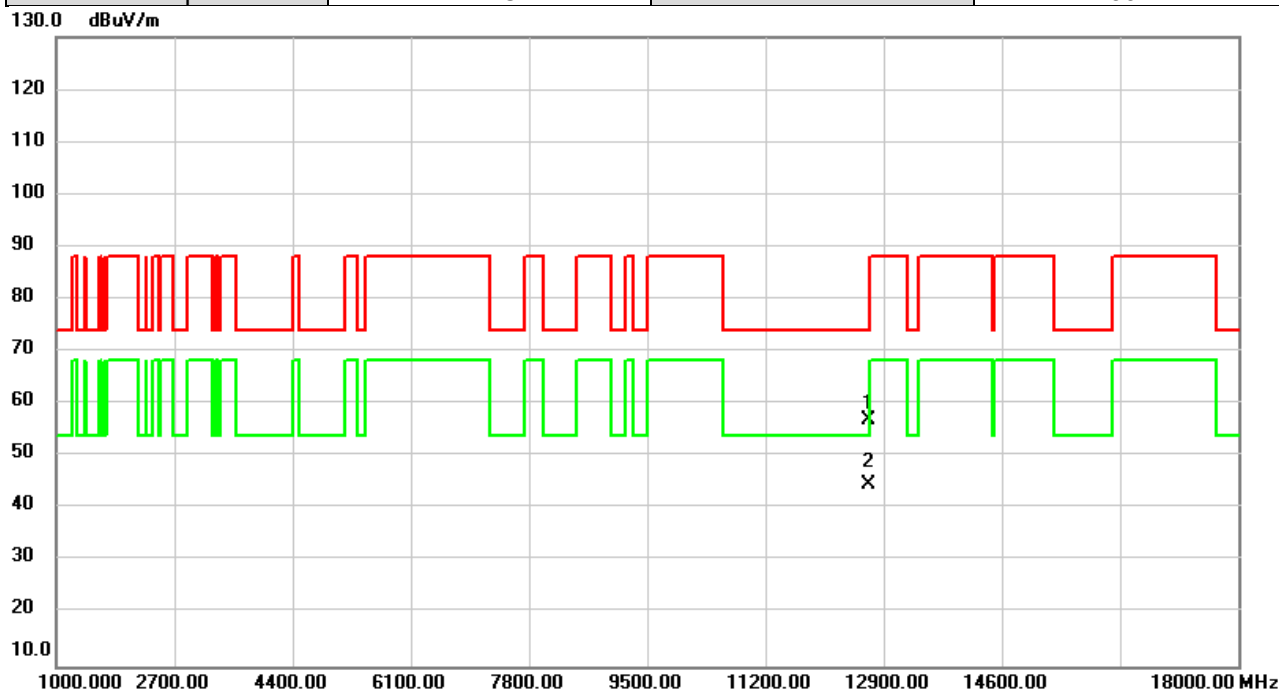


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		12690.00	47.74	9.07	56.81	74.00	-17.19	peak	
2	*	12690.00	35.44	9.07	44.51	54.00	-9.49	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6505MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

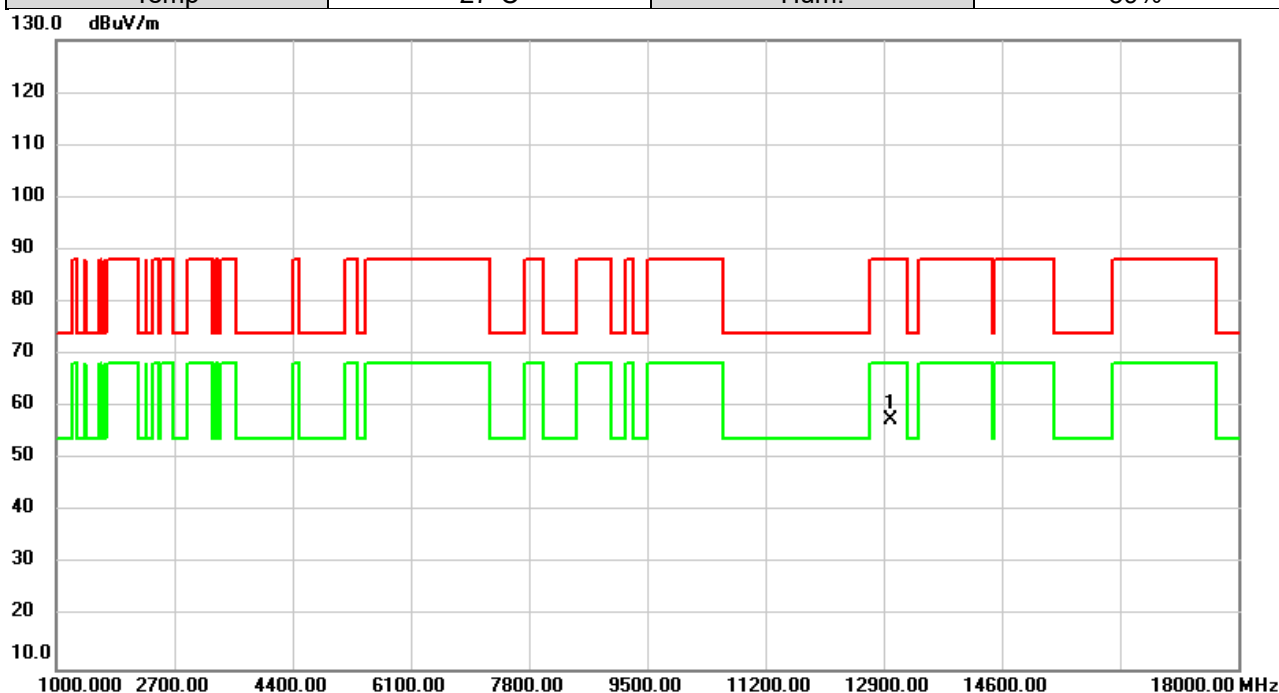


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13010.00	48.79	8.90	57.69	88.20	-30.51	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6505MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

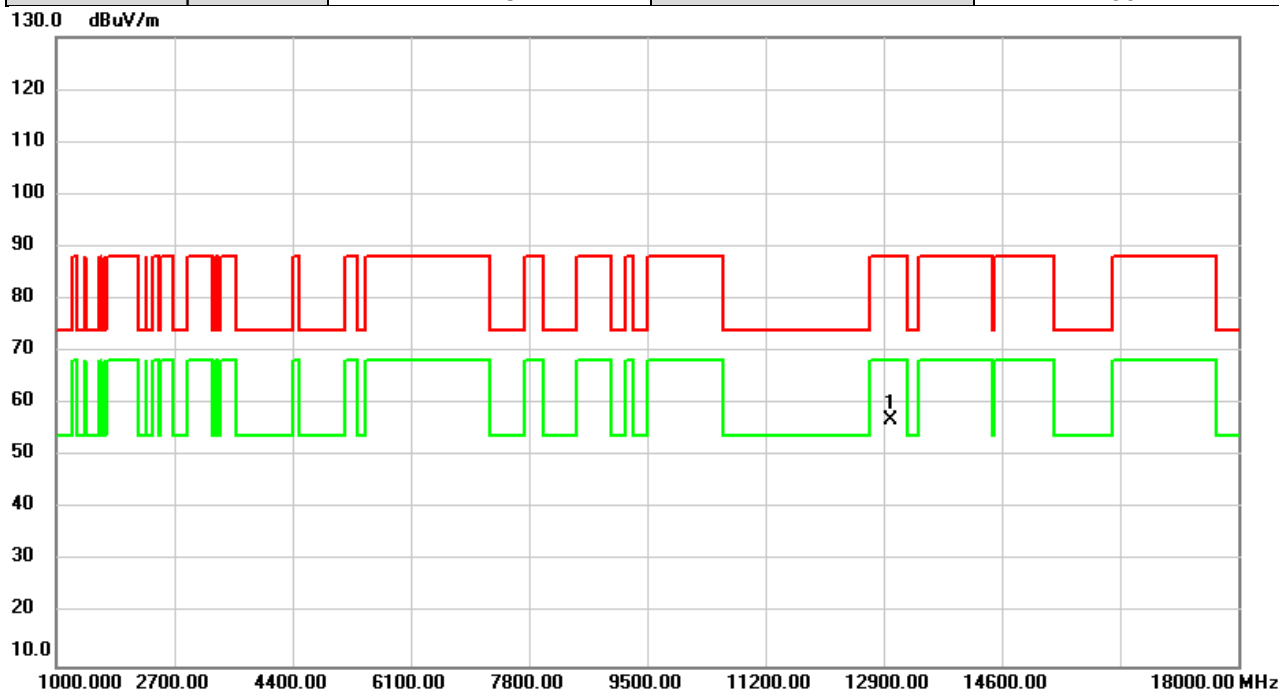


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13010.00	48.15	8.90	57.05	88.20	-31.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6665MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

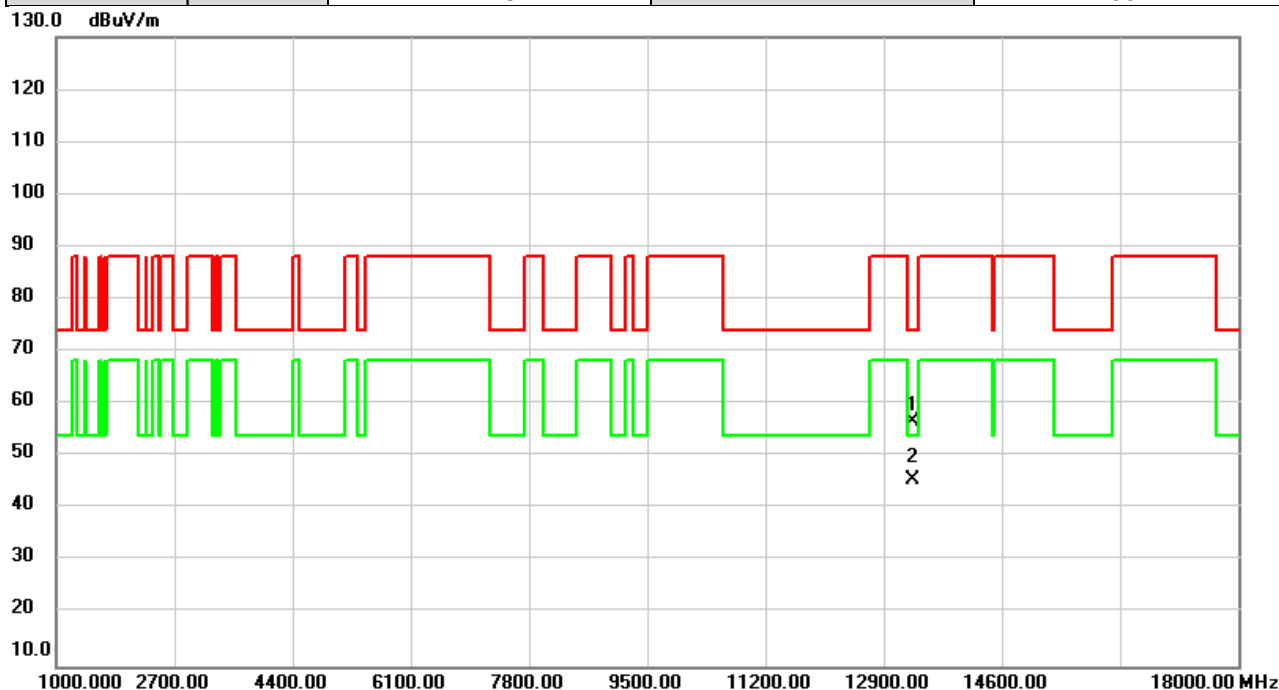


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13330.00	47.84	8.77	56.61	74.00	-17.39	peak	
2	*	13330.00	36.71	8.77	45.48	54.00	-8.52	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6665MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

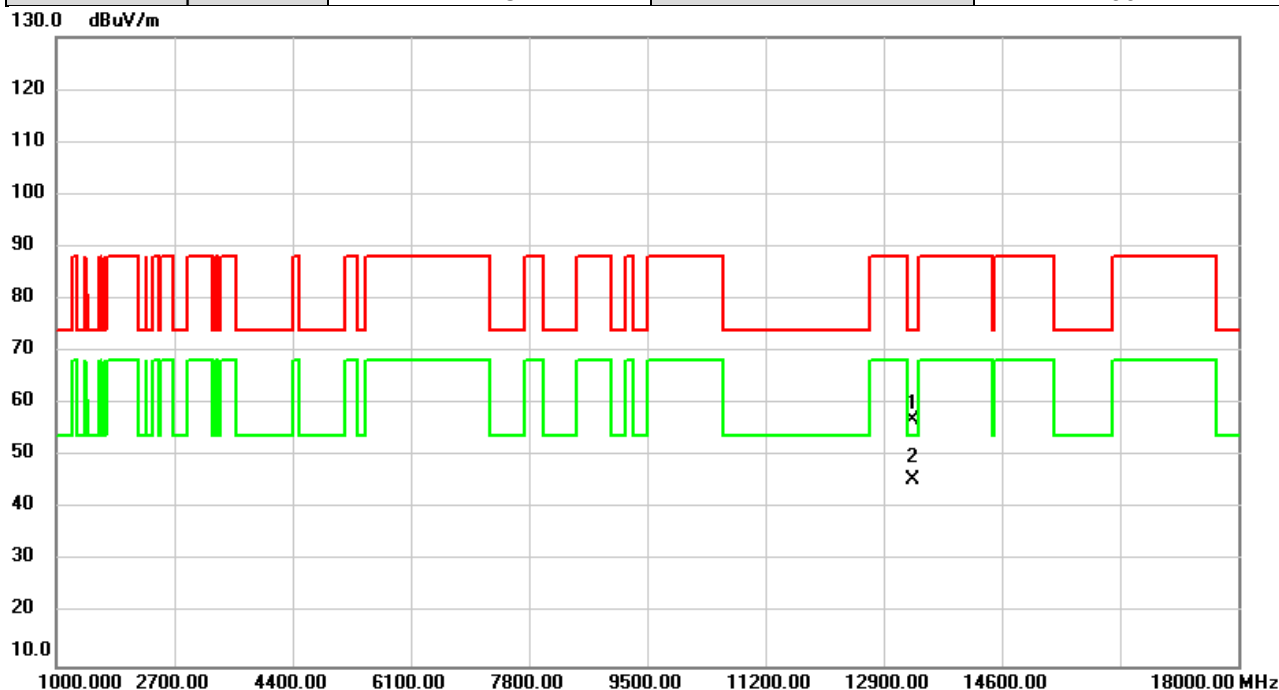


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		13330.00	48.20	8.77	56.97	74.00	-17.03	peak	
2	*	13330.00	36.77	8.77	45.54	54.00	-8.46	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6985MHz	Polarization	Vertical
Temp	27°C	Hum.	59%

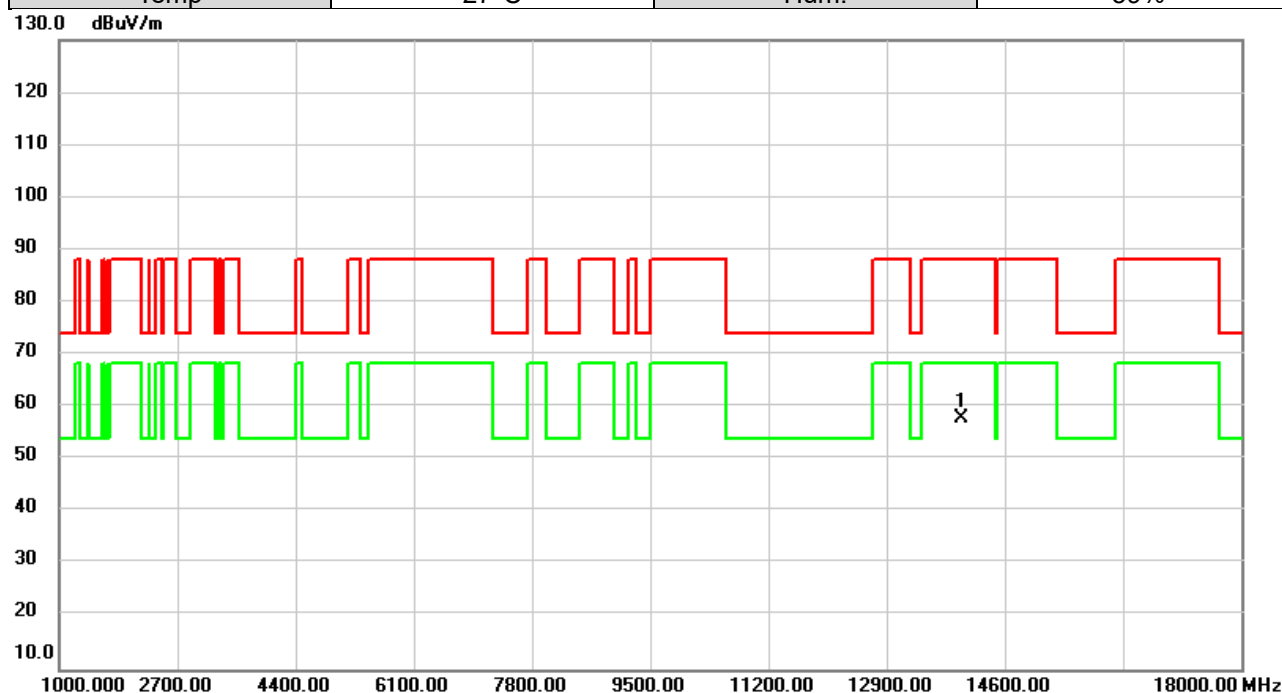


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13970.00	48.92	8.81	57.73	88.20	-30.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/3/26
Test Frequency	6985MHz	Polarization	Horizontal
Temp	27°C	Hum.	59%

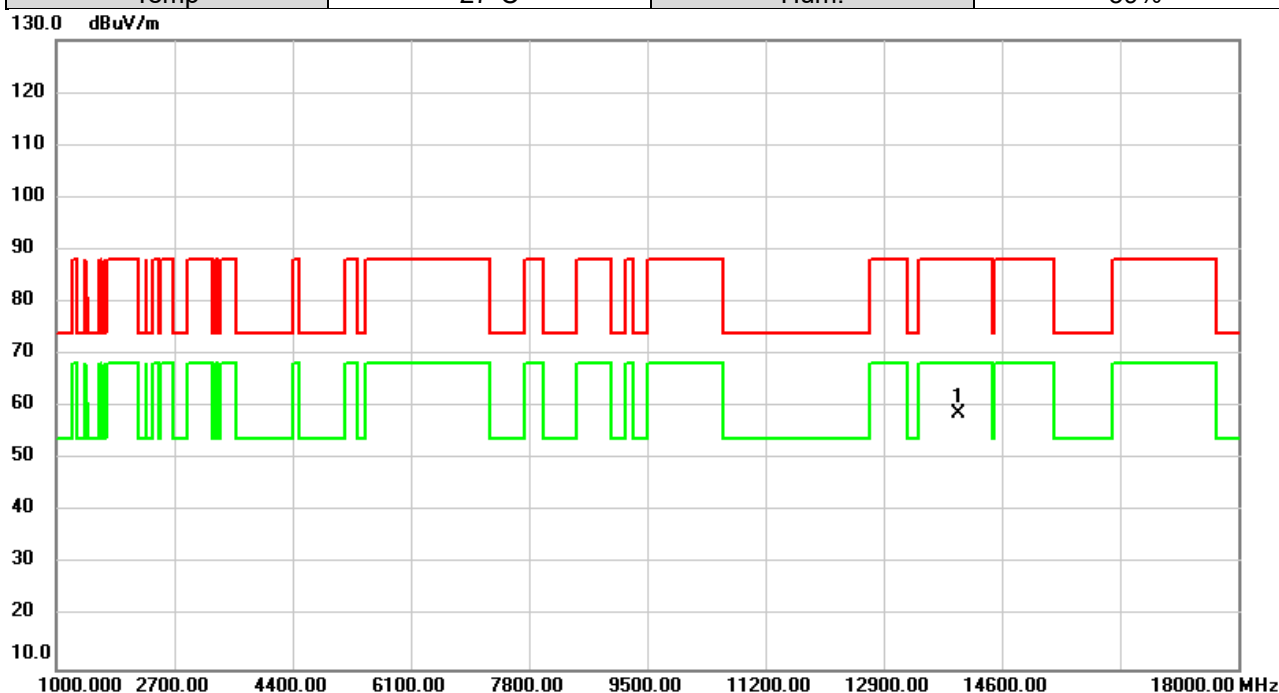


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	13970.00	49.98	8.81	58.79	88.20	-29.41	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/4/1
Test Frequency	5955MHz	Polarization	Vertical
Temp	20°C	Hum.	66%

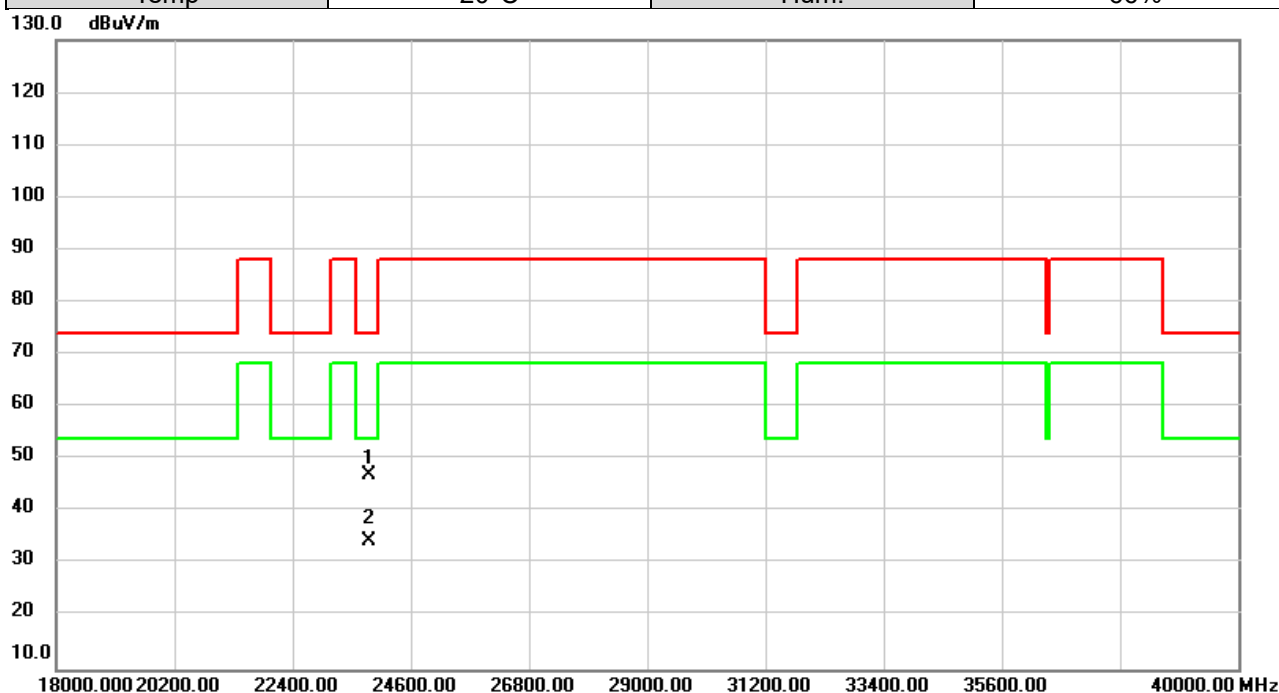


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		23820.00	49.63	-2.62	47.01	74.00	-26.99	peak	
2	*	23820.00	36.95	-2.62	34.33	54.00	-19.67	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/4/1
Test Frequency	5955MHz	Polarization	Horizontal
Temp	20°C	Hum.	66%

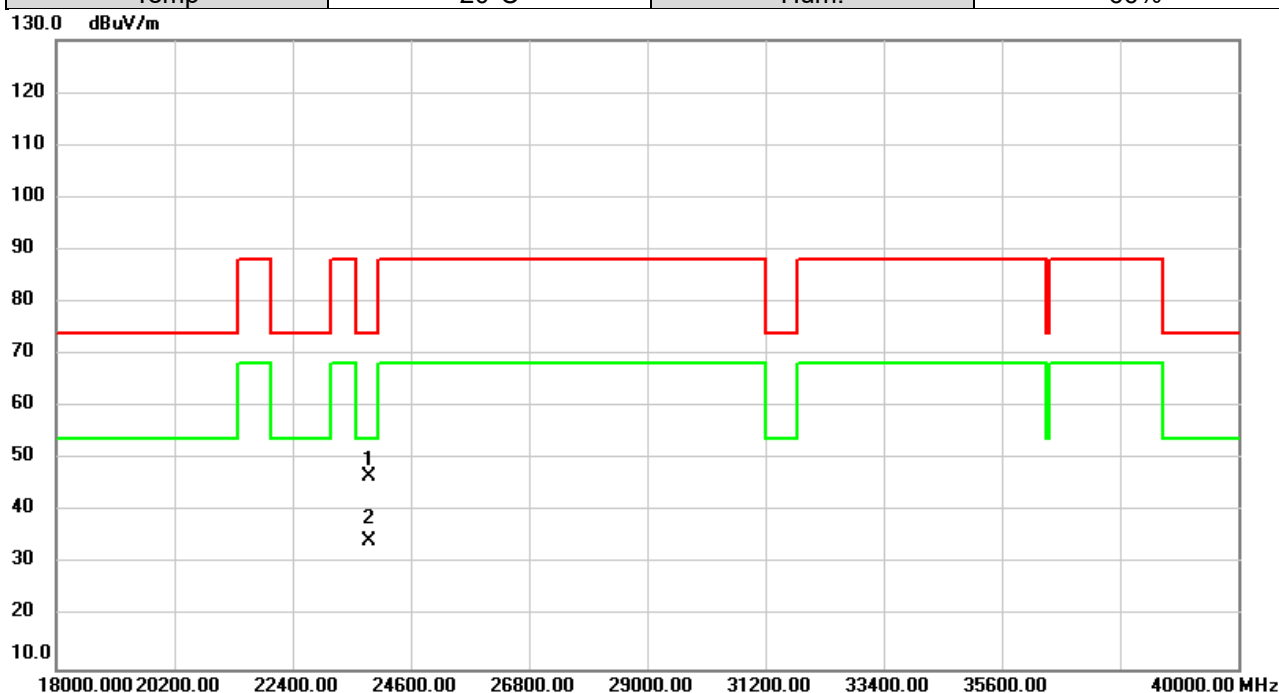

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		23820.00	49.24	-2.62	46.62	74.00	-27.38	peak	
2	*	23820.00	36.98	-2.62	34.36	54.00	-19.64	AVG	


REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.


APPENDIX G IN-BAND EMISSION (MASK)

Test Mode IEEE 802.11ax (HE20)_ Main Antenna

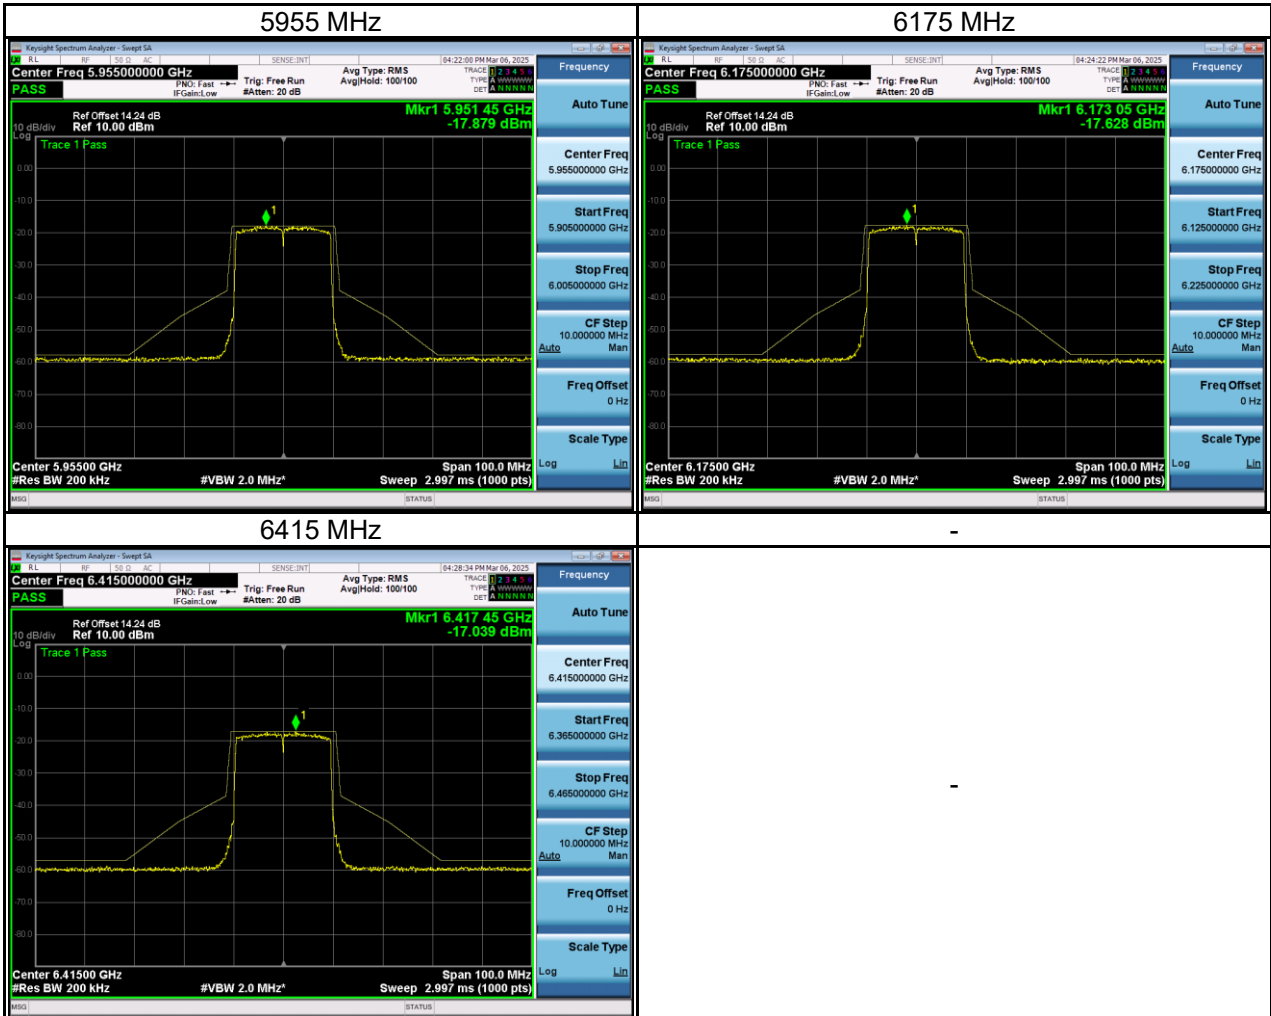


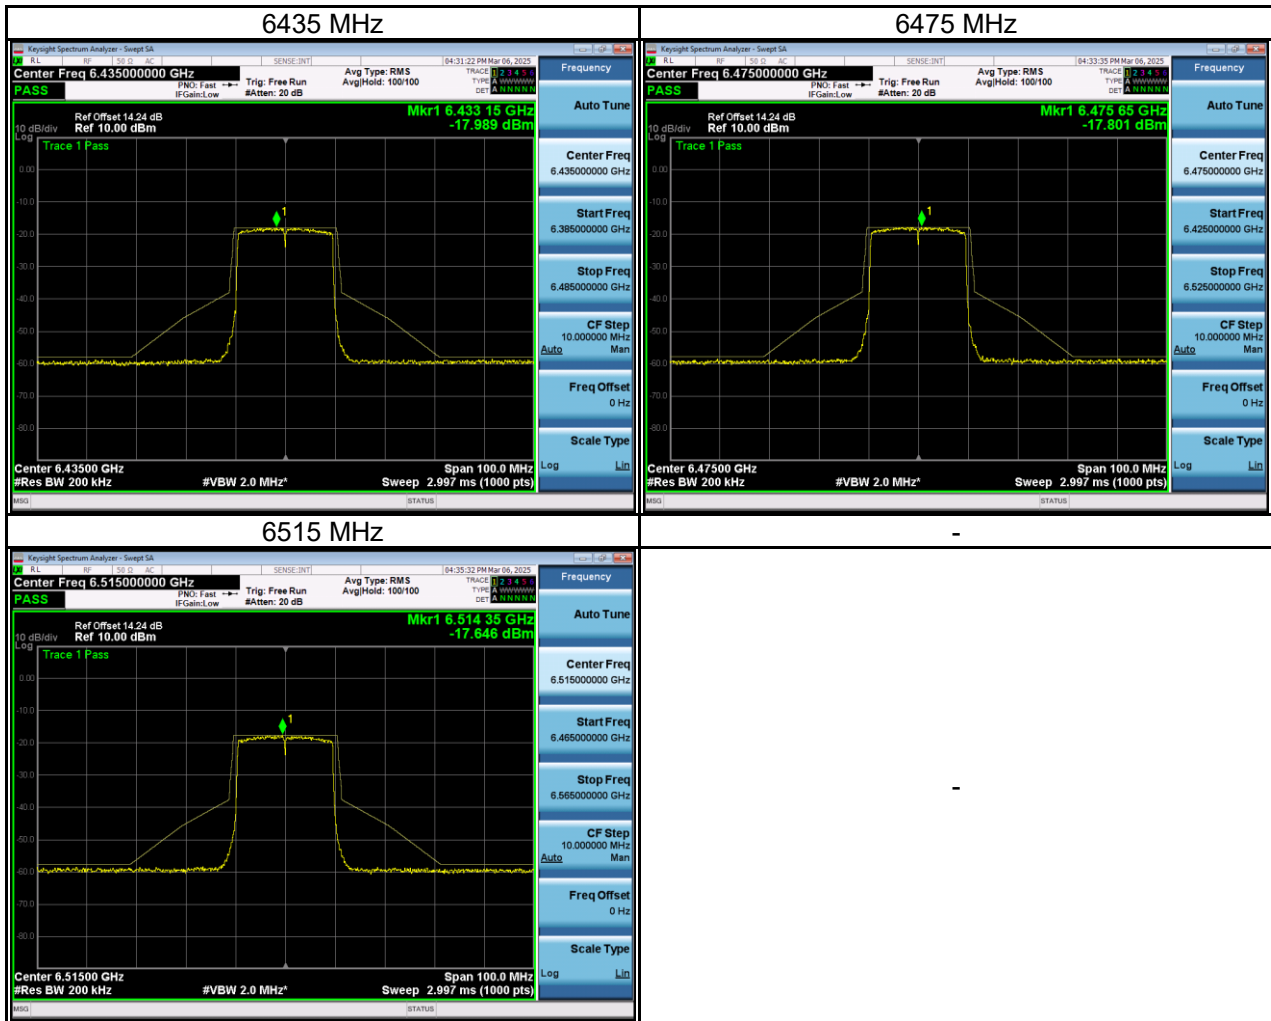


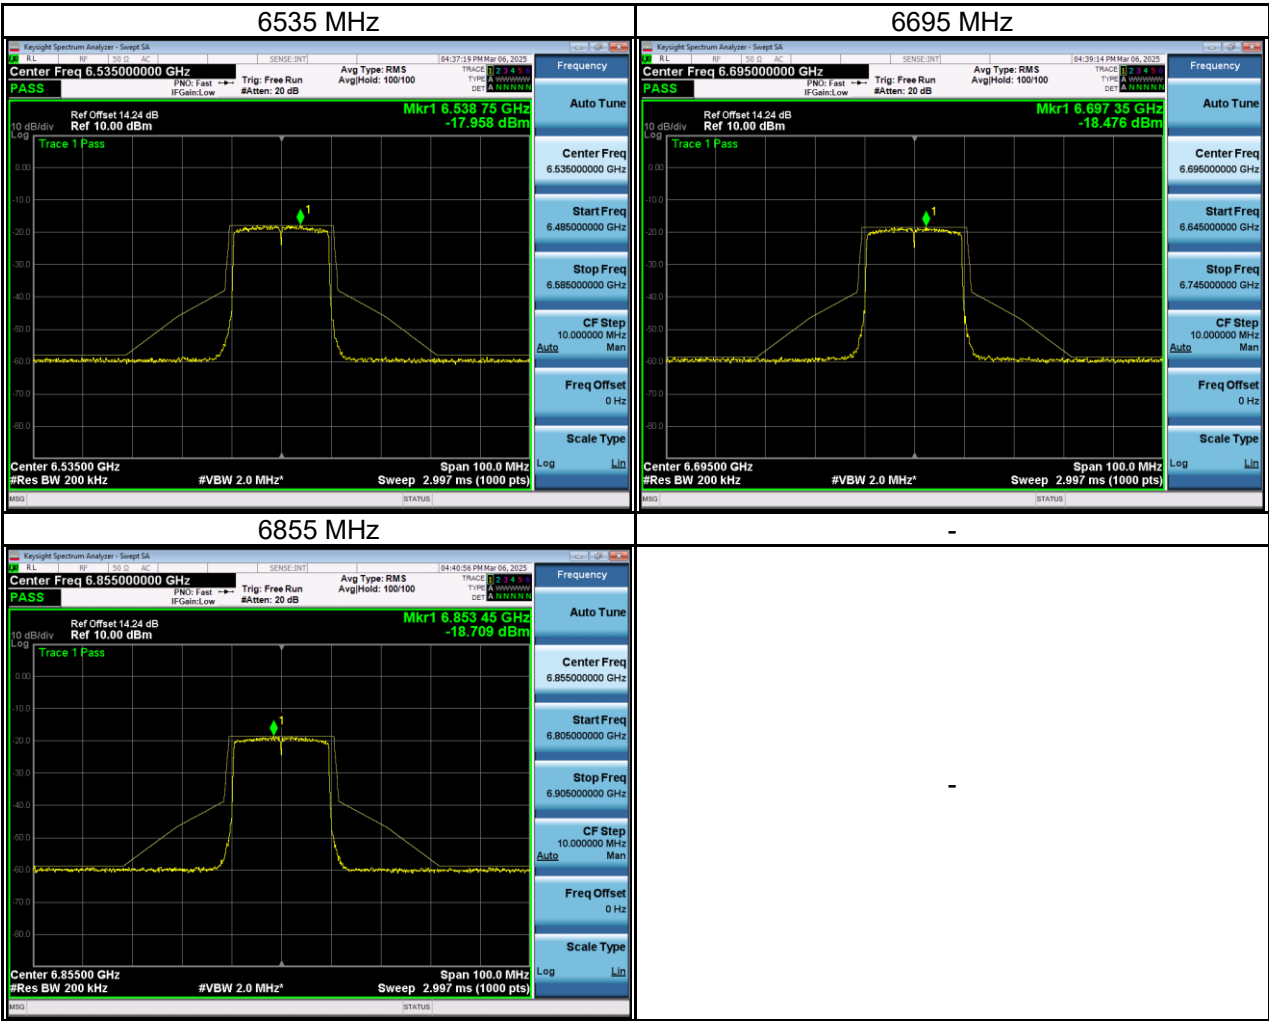


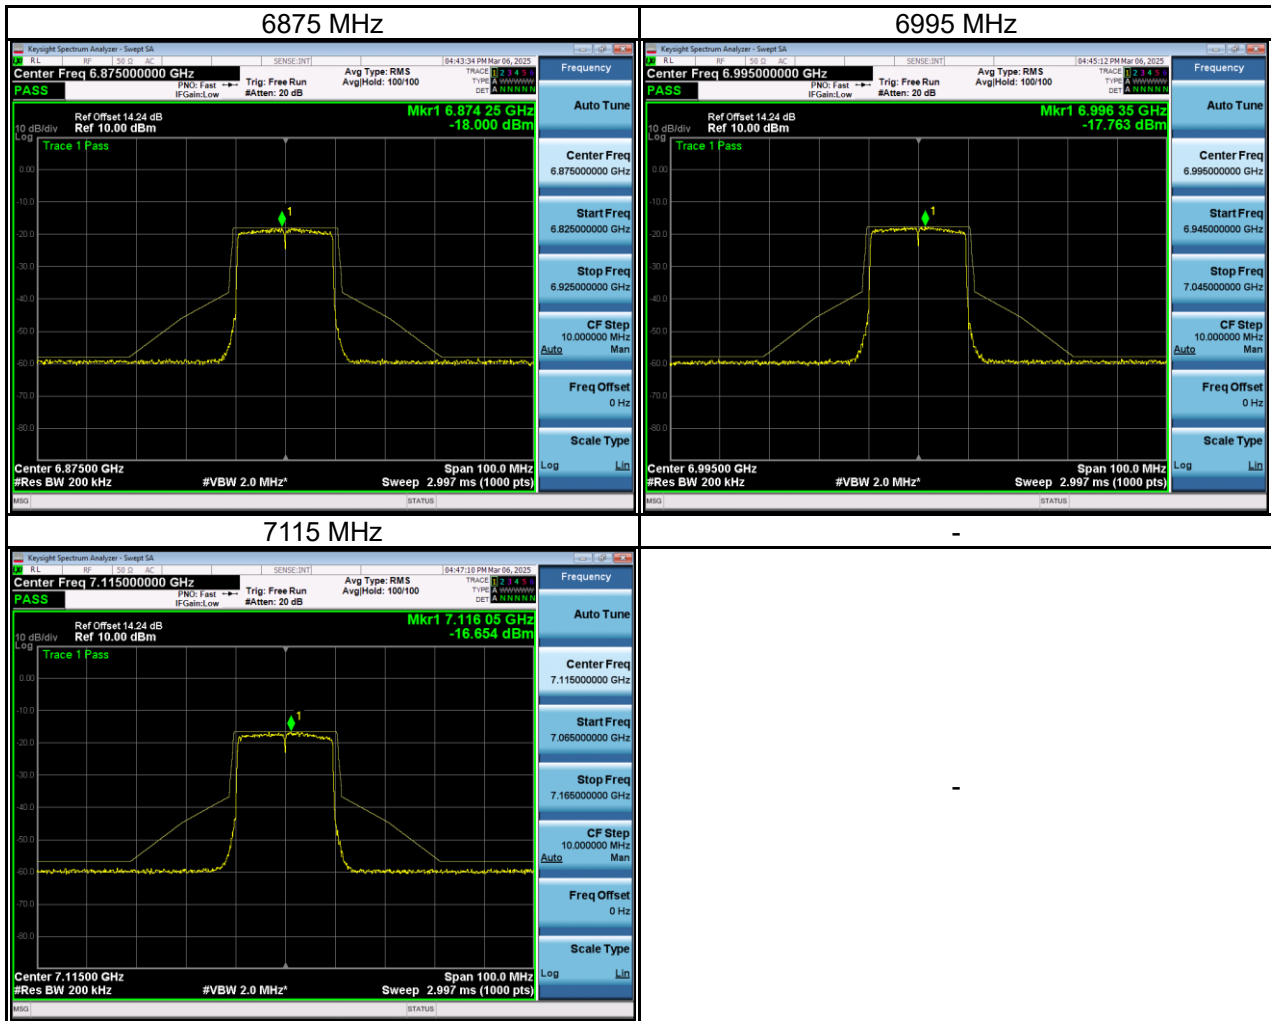


Test Mode IEEE 802.11ax (HE20)_ Aux Antenna

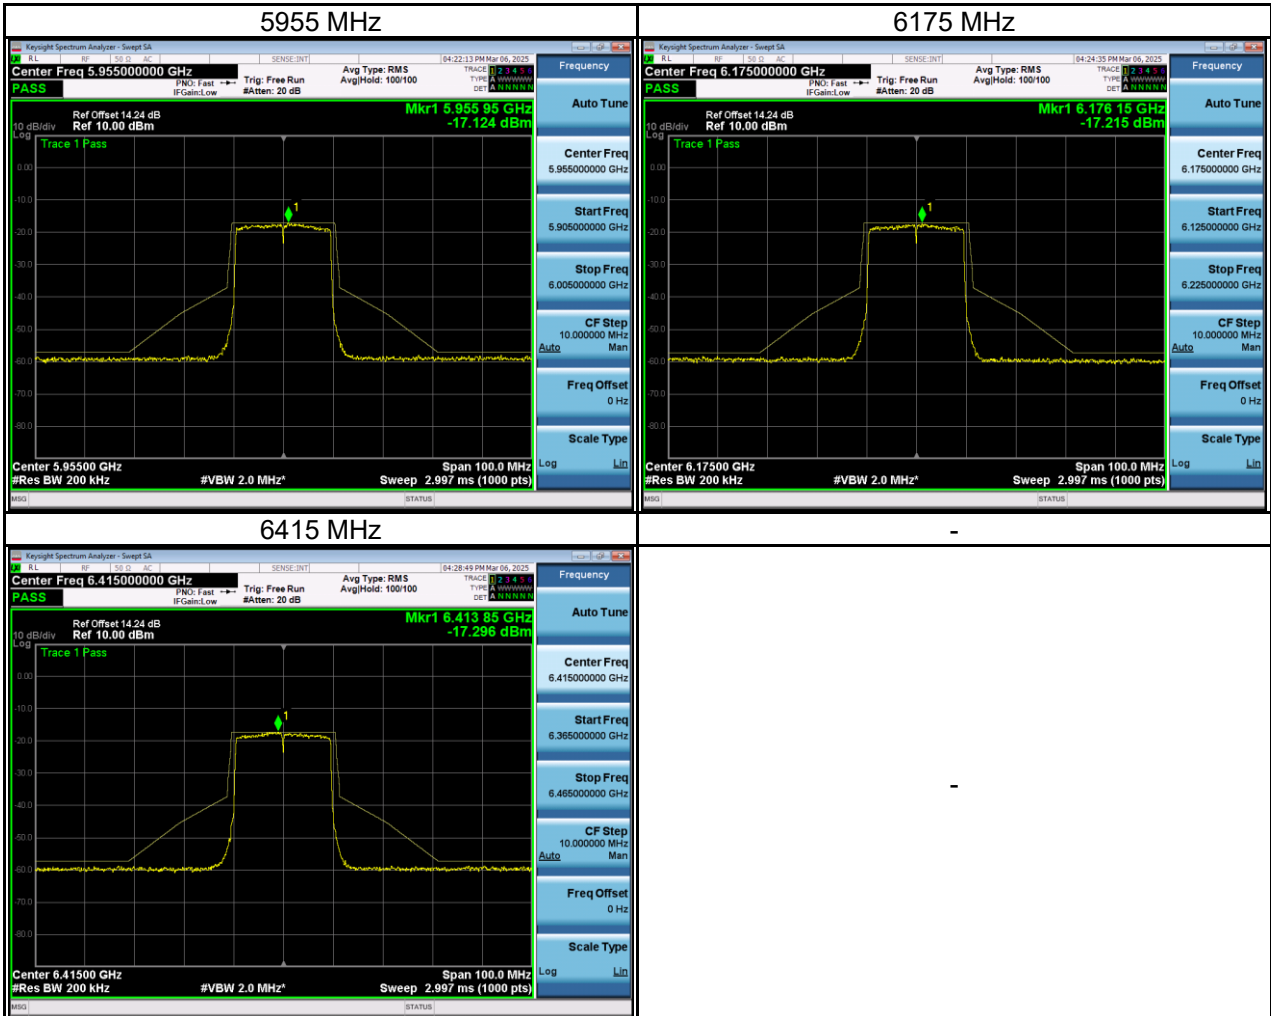

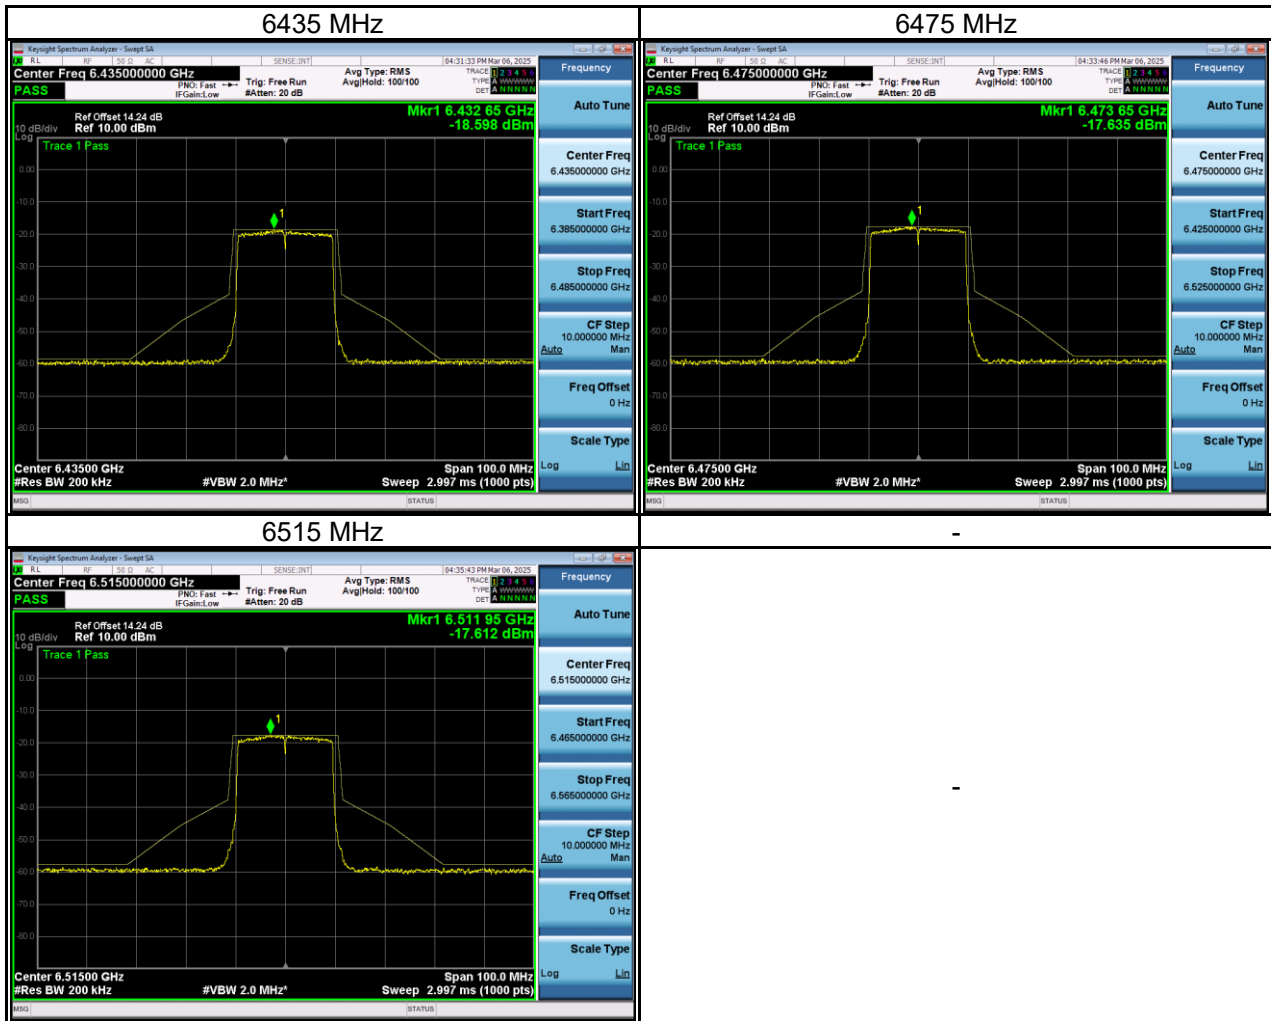

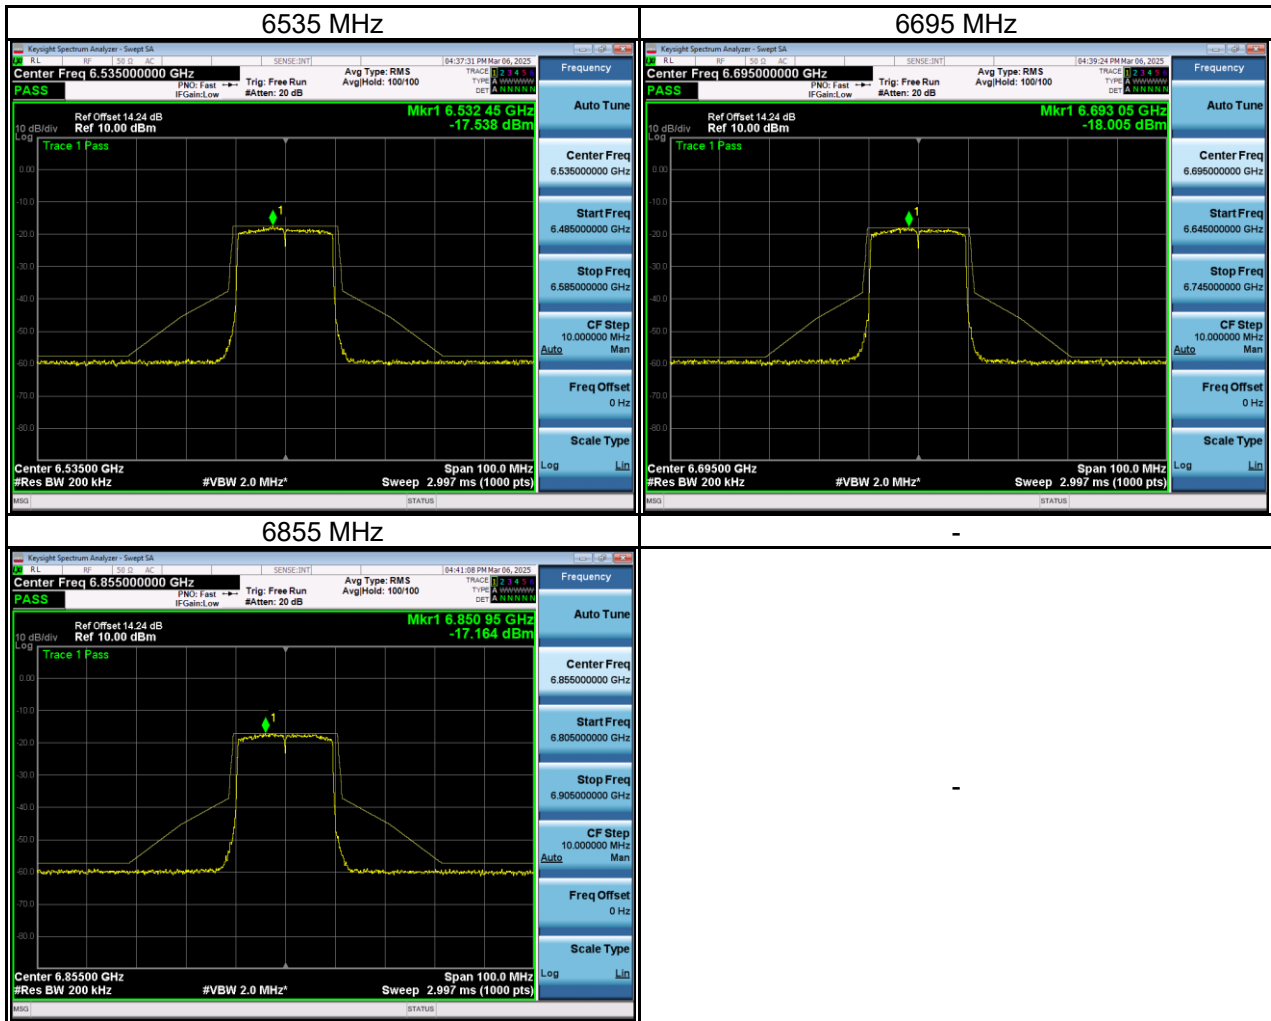

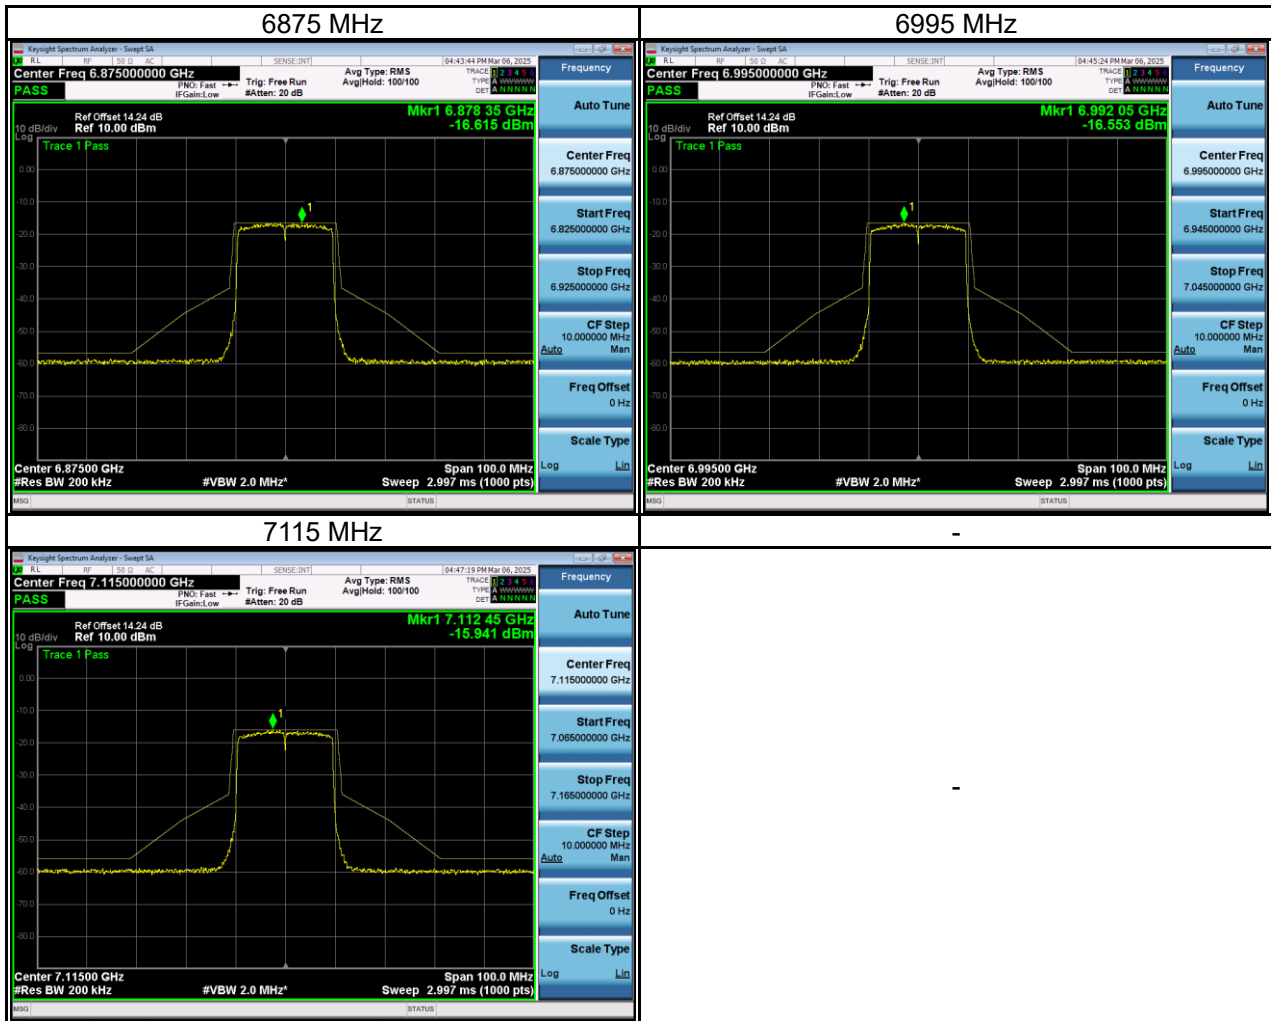

Test Mode IEEE 802.11ax (HE40)_ Main Antenna

