

FCC PART 15B, CLASS B

MEASUREMENT AND TEST REPORT

For
Crestron Electronics Inc

15 Volvo Drive, Rockleigh, New Jersey, 07647, USA

FCC ID: EROUC-P8

Report Type: Original Report	Product Type: PERSONAL COMMUNICATION DEVICE
Test Engineer:	Haiguo Li Holland Yang <i>Haiguo Li Holland Yang</i>
Report Number:	RSZ201030001-EM-00A
Report Date:	2020-11-25
Reviewed By:	Jacob Kong RF Engineer <i>Jacob Kong</i>
Prepared By:	Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC §15.107 – AC LINE CONDUCTED EMISSIONS	9
APPLICABLE STANDARD	9
EUT SETUP	9
EMI TEST RECEIVER SETUP	9
TEST PROCEDURE	10
CORRECTED FACTOR & MARGIN CALCULATION	10
TEST DATA	10
FCC §15.109 - RADIATED SPURIOUS EMISSIONS	13
APPLICABLE STANDARD	13
EUT SETUP	13
EMI TEST RECEIVER SETUP	14
TEST PROCEDURE	14
CORRECTED AMPLITUDE & MARGIN CALCULATION	14
TEST DATA	14

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	PERSONAL COMMUNICATION DEVICE
Tested Model	M202029002
Voltage Range	DC 44~57V from POE
Highest operating frequency	5825MHz
Date of Test	2020-11-05 to 2020-11-06
Sample number	RSZ201030001-EM-S1(Assigned by BACL, Shenzhen)
Received date	2020-10-30
Sample/EUT Status	Good condition

Model	SKU Code	Description
M202029002	UC-P8-T-C-HS	8in Teams Video Phone with Handset and Camera
	UC-P8-T-C-HS-I	8in Teams Video Phone with Handset and Camera (International)
	UC-P8-T-C	8in Teams Video Phone with Camera, No handset
	UC-P8-T-C-I	8in Teams Video Phone with Camera, No handset (International)
	UC-P8-T-HS	8in Teams Phone with Handset, No Camera
	UC-P8-T-HS-I	8in Teams Phone with Handset, No Camera (International)
	UC-P8-T	8in Teams Phone No Handset, No Camera
	UC-P8-T-I	8in Teams Phone No Handset, No Camera (international)
Note: "International" is for world, without "International" is for US, with Sales Purpose		

Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A, B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will be taken into consideration for the test data recorded in the report

Parameter		uncertainty
Conducted Emissions		$\pm 1.95\text{dB}$
Radiated Emissions	Below 1GHz	$\pm 4.75\text{dB}$
	Above 1GHz	$\pm 4.88\text{dB}$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT Exercise Software

No exercise software was used.

Equipment Modifications

No modification was made to the EUT tested.


Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
GOSPELL	POE	G0720-480-050	G0720-480-050
Dell	Laptop	Latitude E5430	11429208685
HIKVISION	Router	DS-3WR03-E	10021642429
TECLAST	USB disk	8GB	8GB
GOSPELL	POE	G0720-480-050	G0720-480-050
Crestron	IP Phone	M202029002	M202029002

External I/O Cable

Cable Description	Length (m)	From/Port	To
Unshielded detachable AC cable	1.0	LISN	POE
Unshielded detachable RJ45 cable	1.0	POE	EUT
Unshielded detachable RJ45 cable	1.0	EUT	Laptop
Unshielded detachable RJ45 cable	5.0	POE	Router
Unshielded detachable RJ45 cable	1.0	POE	IP Phone
Unshielded detachable RJ45 cable	1.0	POE	Router

Block Diagram of Test Setup

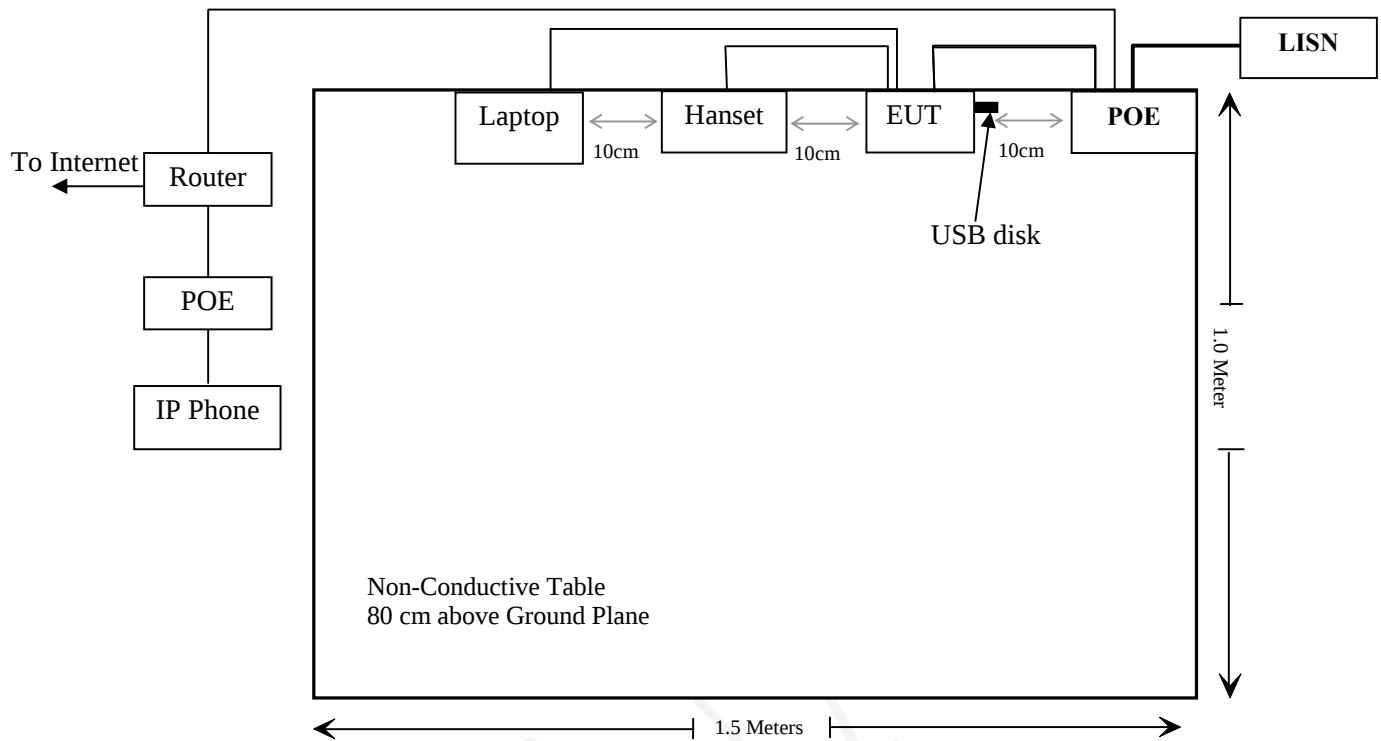

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 4	EC-007	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28
Ducommun Technologies	Horn antenna	ARH-4223-02	1007726-02 1304	2017/12/06	2020/12/05
Ducommun Technologies	Horn antenna	ARH-2823-02	1007726-02 1302	2017/12/06	2020/12/05


* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.107

EUT Setup

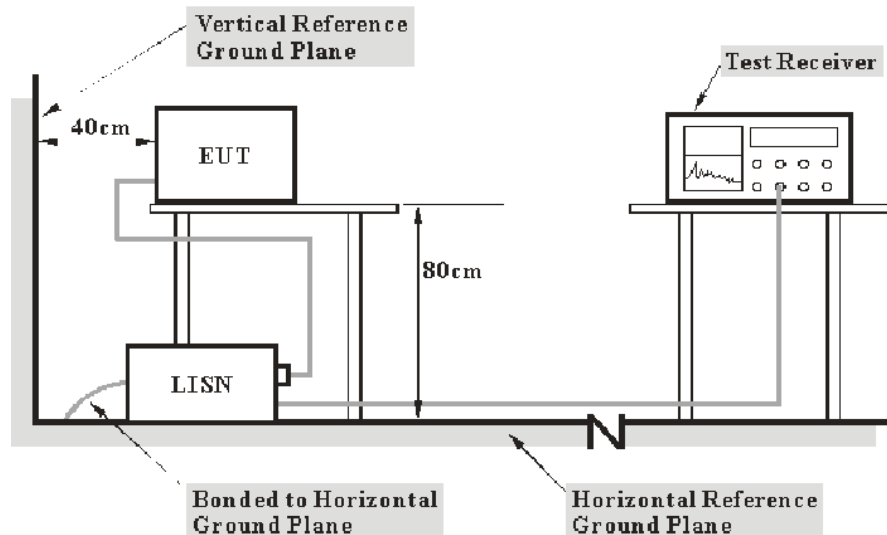

Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2014. The related limit was specified in FCC Part 15.107.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the device was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2020-11-05.

EUT Operation Mode: Talking and ping data


Note: worst case test on Combination Mode: M202029002 (UC-P8-T-HS)

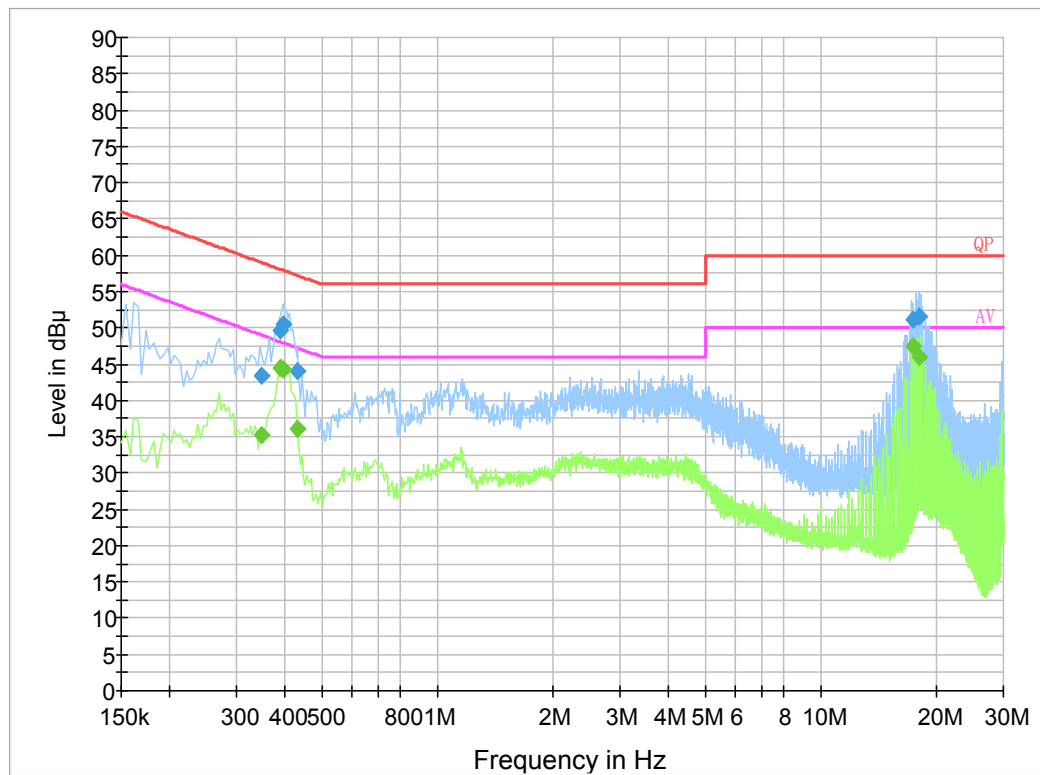AC 120V/60 Hz, Line**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.348810	43.3	9.000	L1	19.9	15.7	59.0
0.388210	49.6	9.000	L1	19.9	8.5	58.1
0.396030	50.4	9.000	L1	19.9	7.5	57.9
0.431490	44.1	9.000	L1	19.8	13.1	57.2
17.474950	51.2	9.000	L1	20.3	8.8	60.0
18.094590	51.6	9.000	L1	20.3	8.4	60.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.348810	35.2	9.000	L1	19.9	13.8	49.0
0.388210	44.5	9.000	L1	19.9	3.6	48.1
0.396030	44.3	9.000	L1	19.9	3.6	47.9
0.431490	36.0	9.000	L1	19.8	10.2	47.2
17.474950	47.6	9.000	L1	20.3	2.4	50.0
18.094590	46.0	9.000	L1	20.3	4.0	50.0

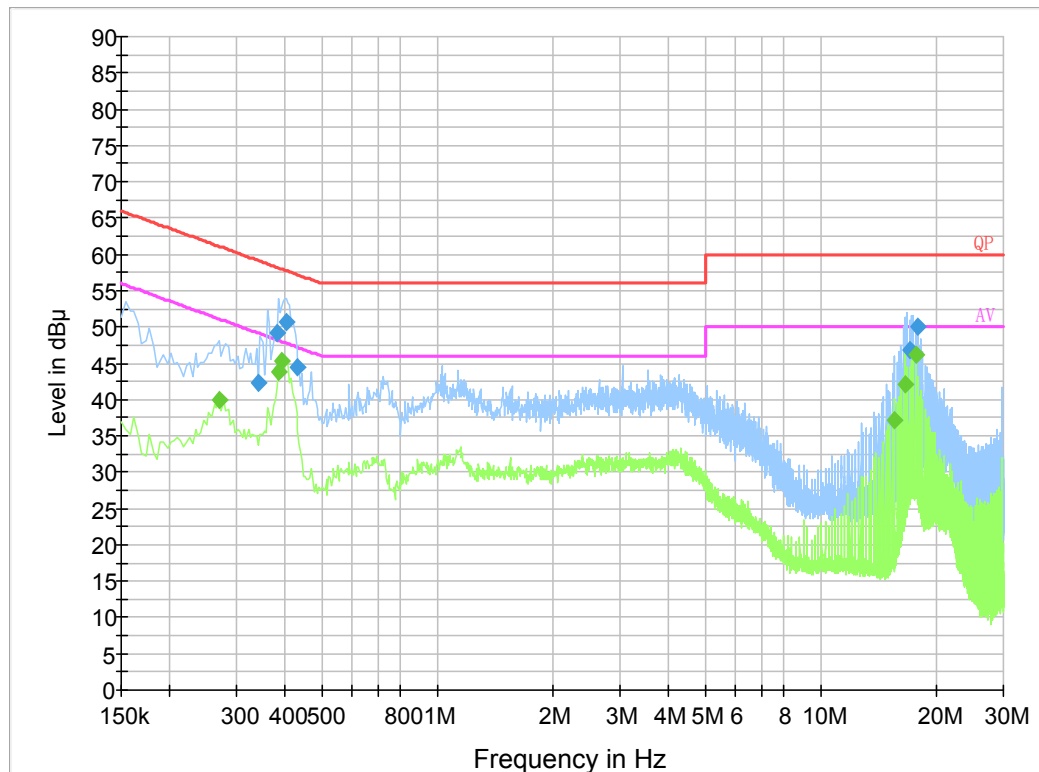AC 120V/60 Hz, Neutral:**Final Result 1**

Frequency (MHz)	QuasiPeak (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.340810	42.2	9.000	N	19.8	17.0	59.2
0.384210	49.2	9.000	N	19.8	9.0	58.2
0.403910	50.7	9.000	N	19.8	7.1	57.8
0.431490	44.4	9.000	N	19.8	12.8	57.2
17.065130	46.9	9.000	N	20.1	13.1	60.0
17.888770	50.0	9.000	N	20.2	10.0	60.0

Final Result 2

Frequency (MHz)	Average (dB μ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB μ V)
0.270000	40.0	9.000	N	19.7	11.1	51.1
0.386000	43.9	9.000	N	19.8	4.2	48.1
0.394000	45.4	9.000	N	19.8	2.6	48.0
15.626000	37.2	9.000	N	20.0	12.8	50.0
16.654000	42.2	9.000	N	20.1	7.8	50.0
17.682000	46.2	9.000	N	20.2	3.8	50.0


FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Applicable Standard


FCC §15.109

EUT Setup

Below 1GHz:

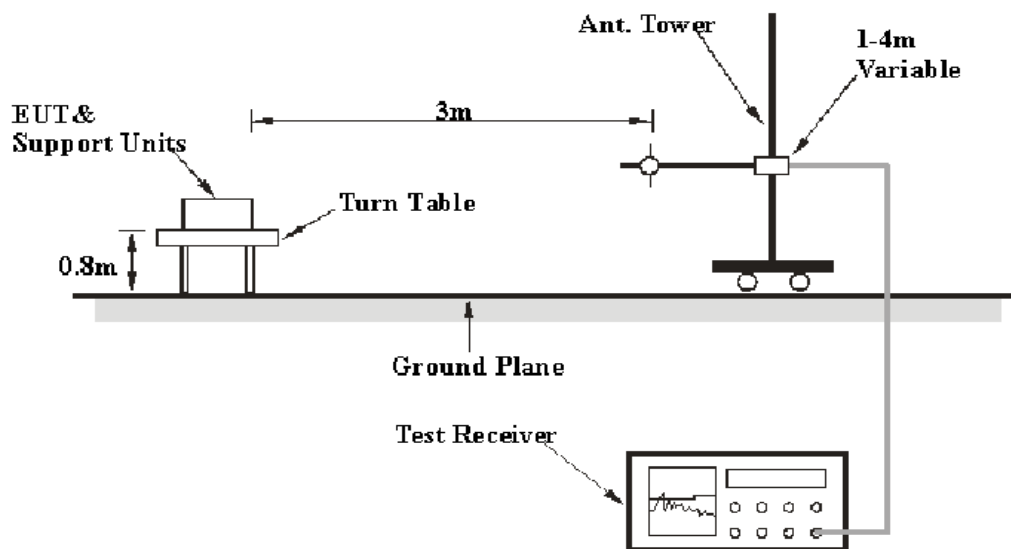

Above 1GHz:

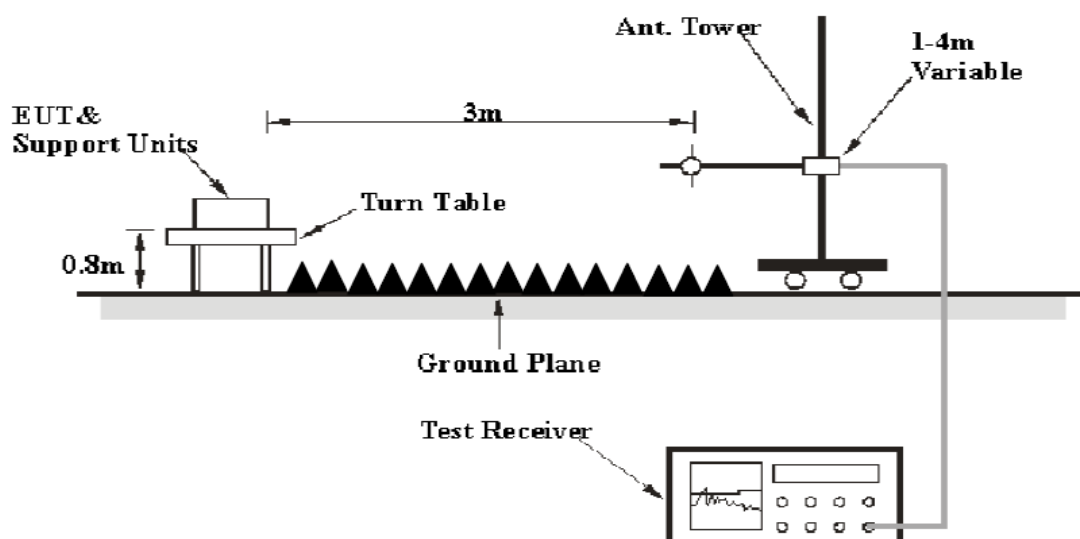

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

Test Data


Environmental Conditions

Temperature:	25~29.3 °C
Relative Humidity:	49~60 %
ATM Pressure:	101.0 kPa

The testing was performed by Holland Yang on 2020-11-05 for below 1GHz and on 2020-11-06 for above 1GHz.

EUT Operation Mode: Talking and ping data


Test Combination Mode 1: M202029002 (UC-P8-T-HS)

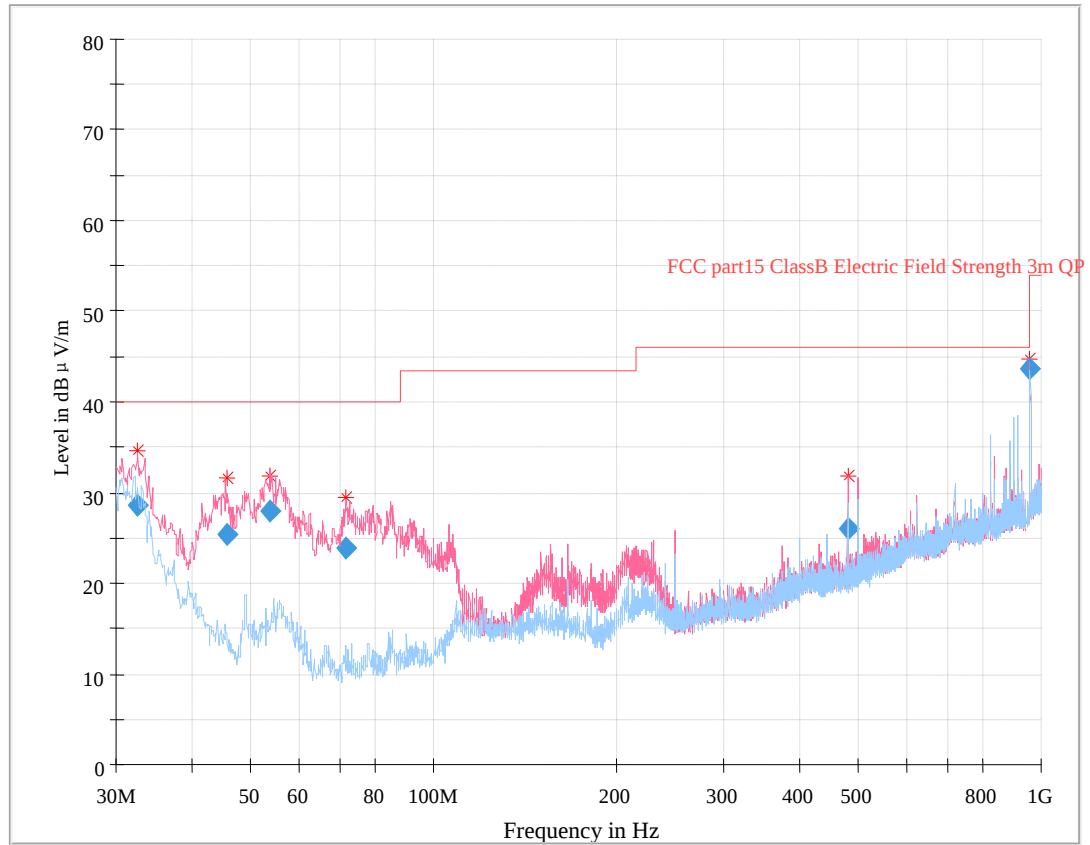30 MHz – 1 GHz:

Final_Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
32.587375	28.69	40.00	11.31	120.0	V	44.0	-6.0
45.641375	25.45	40.00	14.55	181.0	V	94.0	-14.4
53.853375	28.02	40.00	11.98	110.0	V	67.0	-16.7
71.645875	23.92	40.00	16.08	103.0	V	322.0	-17.4
480.060500	26.04	46.00	19.96	102.0	V	355.0	-5.3
959.909000	43.67	46.00	2.33	104.0	V	20.0	2.4

Test Combination Mode 2: M202029002 (UC-P8-T-C-HS)

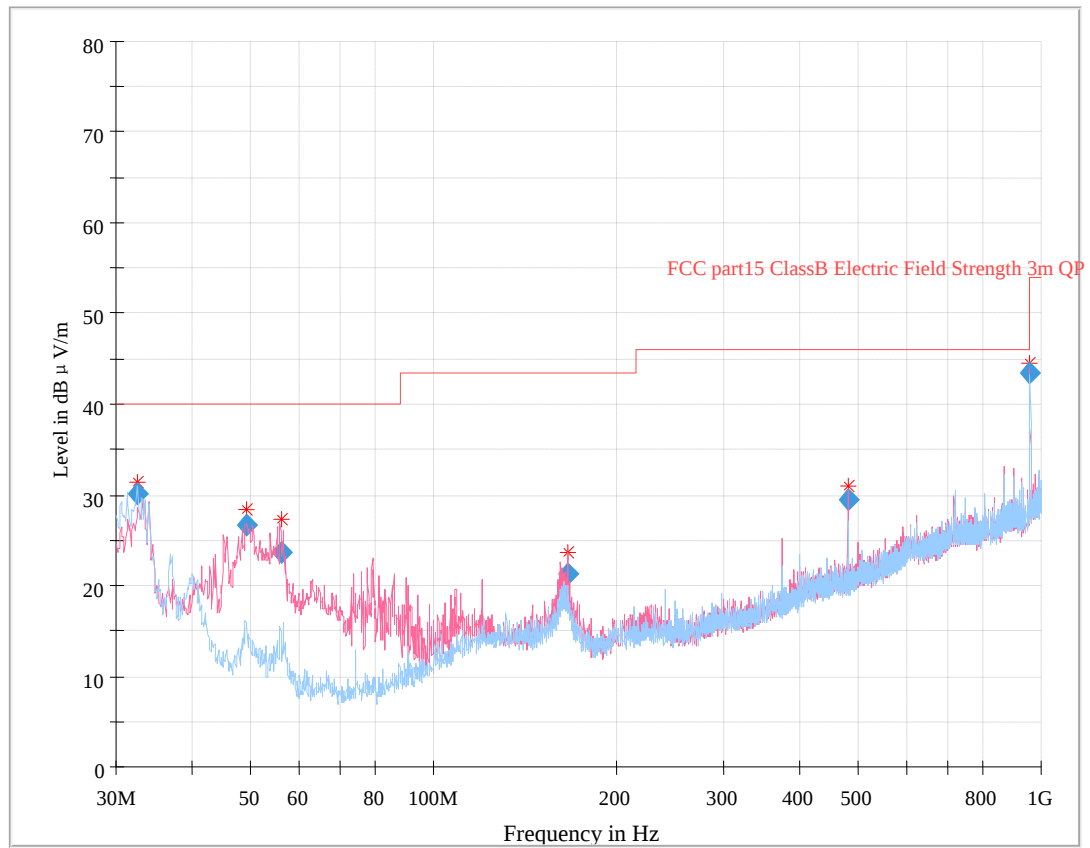30 MHz – 1 GHz:

Final Result

Frequency (MHz)	QuasiPeak (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
32.563625	30.01	40.00	9.99	212.0	H	349.0	-6.0
49.027625	26.57	40.00	13.43	110.0	V	260.0	-16.0
55.984875	23.66	40.00	16.34	157.0	V	108.0	-16.9
166.491875	21.24	43.50	22.26	102.0	V	208.0	-11.5
480.005250	29.36	46.00	16.64	109.0	V	357.0	-5.3
959.998625	43.53	46.00	2.47	102.0	V	23.0	2.4

1-29.5GHz: (worst case test on model Combination Mode: M202029002 (UC-P8-T-HS))

Frequency (MHz)	Measurement		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15B	
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H / V)			Limit (dB μ V/m)	Margin (dB)
2293.62	53.93	PK	109	1.5	H	-1.15	52.78	74	21.22
2293.62	31.27	Ave.	109	1.5	H	-1.15	30.12	54	23.88
2293.62	60.05	PK	85	1.3	V	-1.15	58.90	74	15.10
2293.62	31.41	Ave.	85	1.3	V	-1.15	30.26	54	23.74
2548.63	48.36	PK	223	2.4	H	-0.05	48.31	74	25.69
2548.63	30.16	Ave.	223	2.4	H	-0.05	30.11	54	23.89
2548.63	55.31	PK	331	2.2	V	-0.05	55.26	74	18.74
2548.63	31.58	Ave.	331	2.2	V	-0.05	31.53	54	22.47

***** END OF REPORT *****