

TEST REPORT

Product Name : Party Speaker
Model Number : Party Rocker One, HP100
FCC ID : ESXHP100

Prepared for : Guangzhou Panyu Juda Car Audio Equipment Co.,Ltd.
Address : NO.5 Building ,No.139,Zhouxing Street, Dongchong
Town,Nansha District, Guangzhou, Guangdong, China

Prepared by : EMTEK (SHENZHEN) CO., LTD.
Address : Building 69, Majialong Industry Zone, Nanshan District,
Shenzhen, Guangdong, China

Tel: (0755) 26954280
Fax: (0755) 26954282

Report Number : ENS2203300222W00609R
Date(s) of Tests : March 30, 2022 to June 16, 2022
Date of issue : June 16, 2022

\$二维码\$

Table of Contents

1	EUT TECHNICAL DESCRIPTION	4
2	SUMMARY OF TEST RESULT	5
3	TEST METHODOLOGY	6
3.1	GENERAL DESCRIPTION OF APPLIED STANDARDS	6
3.2	MEASUREMENT EQUIPMENT USED	6
3.3	DESCRIPTION OF TEST MODES	7
3.4	INDEPENDENT OPERATION MODES	7
3.5	TEST MANNER	7
4	FACILITIES AND ACCREDITATIONS	8
4.1	FACILITIES	8
4.2	LABORATORY ACCREDITATIONS AND LISTINGS	8
5	TEST SYSTEM UNCERTAINTY	9
6	SETUP OF EQUIPMENT UNDER TEST	10
6.1	RADIO FREQUENCY TEST SETUP 1	10
6.2	RADIO FREQUENCY TEST SETUP 2	10
6.3	CONDUCTED EMISSION TEST SETUP	11
6.4	BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM	12
6.5	SUPPORT EQUIPMENT	12
7	TEST REQUIREMENTS	13
7.1	OCCUPIED BANDWIDTH	13
7.2	RADIATED SPURIOUS EMISSION	15
7.3	CONDUCTED EMISSION TEST	25
8	ANTENNA APPLICATION	28

TEST RESULT CERTIFICATION

Applicant : Guangzhou Panyu Juda Car Audio Equipment Co.,Ltd.
Address : NO.5 Building ,No.139,Zhouxing Street, Dongchong Town,Nansha District, Guangzhou, Guangdong, China
Manufacturer : Guangzhou Panyu Juda Car Audio Equipment Co.,Ltd.
Address : NO.5 Building ,No.139,Zhouxing Street, Dongchong Town,Nansha District, Guangzhou, Guangdong, China
EUT : Party Speaker
Model Name : Party Rocker One, HP100
Trademark : Hisense


Measurement Procedure Used:


APPLICABLE STANDARDS	
STANDARD	TEST RESULT
FCC 47 CFR Part 2, Subpart J FCC 47 CFR Part 15, Subpart C	PASS

The above equipment was tested by EMTEK(SHENZHEN) CO., LTD. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10 (2013) and the energy emitted by the sample EUT tested as described in this report is in compliance with the requirements of FCC Rules Part 15.207&15.209.

The test results of this report relate only to the tested sample identified in this report.

Date of Test : March 30, 2022 to June 16, 2022

Prepared by : 
Luo peiye /Editor

Reviewer : 
Joe Xia/Editor

Approve & Authorized Signer : 
Lisa Wang/Manager



1 EUT TECHNICAL DESCRIPTION

Product:	Party Speaker
Model Number:	Party Rocker One, HP100 Note: Only the model name is different.
Power Supply	AC100-240V~ 50/60Hz, DC 12V from DC Port, DC 7.4V from Battery
Operating Frequency	110-205KHz
Modulation	FSK
Antenna Type	Induction coil antenna
Temperature Range	0°C ~ +45°C

Note: for more details, please refer to the User's manual of the EUT.



2 SUMMARY OF TEST RESULT

FCC Part Clause	Test Parameter	Verdict	Remark
2.1049	Occupied Bandwidth	PASS	
15.209	Radiated Spurious Emissions	PASS	
15.207	Conducted Emission	PASS	
NOTE1: N/A (Not Applicable)			

RELATED SUBMITTAL(S) / GRANT(S):

This submittal(s) (test report) is intended for FCC ID: ESXHP100 filing to comply with Section 15.225 of the FCC Part 15, Subpart C Rules.



3 TEST METHODOLOGY

3.1 GENERAL DESCRIPTION OF APPLIED STANDARDS

According to its specifications, the EUT must comply with the requirements of the following standards:

FCC 47 CFR Part 2, Subpart J

FCC 47 CFR Part 15, Subpart C

3.2 MEASUREMENT EQUIPMENT USED

Conducted Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Test Receiver	Rohde & Schwarz	ESCI	101384	May 14, 2022	1 Year
L.I.S.N.	Rohde & Schwarz	ENV216	5	May 14, 2022	1 Year
L.I.S.N.	Kyoritsu	KNW-407	8-1492-9	May 15, 2022	1 Year

Radiated Emission Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
EMI Test Receiver	Rohde & Schwarz	ESU 26	100154	May 14, 2022	1 Year
Pre-Amplifier	Lunar EM	LNA30M3G-25	J10100000070	May 14, 2022	1 Year
Bilog Antenna	Schwarzbeck	VULB9163	661	Aug. 22, 2021	2 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1177	Jul. 04, 2020	2 Year
Pre-Amplifier	SKET	LNPA_0118G-45	SK2019051801	May 14, 2022	1 Year
Loop Antenna	Schwarzbeck	FMZB1519	1519-012	Jun. 12, 2021	2 Year
Spectrum Analyzer	Rohde & Schwarz	FSV40	100967	May 14, 2022	1 Year
Horn antenna	Schwarzbeck	BBHA9120D	9120D-1178	Jul. 04, 2020	2 Year
Band reject Filter(50dB)	WI/DE	WRCGV-2400(2400-2485MHz)	2	May 14, 2022	1 Year

Radio Frequency Test Equipment

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
Wireless Connectivity Tester	R&S	CMW270	102543	Aug. 27, 2021	1Year
Automatic Control Unit	Tonscend	JS0806-2	2118060480	Nov. 18, 2021	1Year
Signal Analyzer	KEYSIGHT	N9010B	MY60242456	Jan. 21, 2022	1Year
Analog Signal Generator	KEYSIGHT	N5173B	MY61252625	Oct. 29, 2021	1Year
UP/DOWN-Converter	R&S	CMW-Z800A	100274	Sep. 14, 2021	1Year
Vector Signal Generator	KEYSIGHT	N5182B	MY61252674	Oct. 28, 2021	1Year
Frequency Extender	KEYSIGHT	N5182BX07	MY59362541	Nov. 23, 2021	1Year
Temperature&Humidity test chamber	ESPEC	EL-02KA	12107166	Jul. 03, 2021	1 Year

3.3 DESCRIPTION OF TEST MODES

The EUT has been tested under its charging mode condition.

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

The Transmitter was operated in the normal operating mode. The TX frequency was fixed which was for the purpose of the measurements.

Pre-defined engineering program for regulatory testing used to control the EUT for staying in continuous transmitting mode is programmed.

3.4 INDEPENDENT OPERATION MODES

Test ModeA	Description	Remark
Mode A Charging(5W)	100% Load	With dummy load
	50% Load	With dummy load
	10% Load	With dummy load

3.5 TEST MANNER

Test Items	Test Voltage	Operation Modes	Worst case
Occupied Bandwidth	AC120V/60Hz, DC 12V from DC Port, DC 7.4V from Battery	Mode A,	Mode A(100% Load)
Radiated Spurious Emissions	AC120V/60Hz, DC 12V from DC Port, DC 7.4V from Battery	Mode A,	Mode A(100% Load)
Conducted Emission	AC120V/60Hz, DC 12V from DC Port, DC 7.4V from Battery	Mode A,	Mode A(100% Load)

Notes: The EUT supports charging the load while charging itself.

All wireless charging modes have been tested, and the worst mode is shown below.

4 FACILITIES AND ACCREDITATIONS

4.1 FACILITIES

All measurement facilities used to collect the measurement data are located at

Building 69, Majialong Industry Zone District, Nanshan District, Shenzhen, China

The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.10 and CISPR Publication 22.

4.2 LABORATORY ACCREDITATIONS AND LISTINGS

Site Description

EMC Lab.

: **Accredited by CNAS**

The Certificate Registration Number is L2291.

The Laboratory has been assessed and proved to be in compliance with CNAS-CL01 (identical to ISO/IEC 17025:2017)

Accredited by FCC

Designation Number: CN1204

Test Firm Registration Number: 882943

Accredited by A2LA

The Certificate Number is 4321.01.

Accredited by Industry Canada

The Conformity Assessment Body Identifier is CN0008

Name of Firm

: EMTEK (SHENZHEN) CO., LTD.

Site Location

: Building 69, Majialong Industry Zone,
Nanshan District, Shenzhen, Guangdong, China

5 TEST SYSTEM UNCERTAINTY

The following measurement uncertainty levels have been estimated for tests performed on the apparatus:

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-5}$
Conducted Emissions Test	$\pm 2.0\text{dB}$
Radiated Emission Test	$\pm 2.0\text{dB}$
Occupied Bandwidth Test	$\pm 1.0\text{dB}$
All emission, radiated	$\pm 3\text{dB}$
Temperature	$\pm 0.5^\circ\text{C}$
Humidity	$\pm 3\%$


Measurement Uncertainty for a level of Confidence of 95%



6 SETUP OF EQUIPMENT UNDER TEST

6.1 RADIO FREQUENCY TEST SETUP 1

The component's antenna ports(s) of the EUT are connected to the measurement instrument per an appropriate attenuator. The EUT is controlled by PC/software to emit the specified signals for the purpose of measurements.



6.2 RADIO FREQUENCY TEST SETUP 2

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4 dB according to the standards: ANSI C63.10. The test distance is 3m. The setup is according to the requirements in Section 13.1.4.1 of ANSI C63.10-2013 and CAN/CSA-CEI/IEC CISPR 22.


Below 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna (loop antenna). The Antenna should be positioned with its plane vertical at the specified distance from the EUT and rotated about its vertical axis for maximum response at each azimuth about the EUT. The center of the loop shall be 1 m above the ground. For certain applications, the loop antenna plane may also need to be positioned horizontally at the specified distance from the EUT.


Above 30MHz:

The EUT is placed on a turntable 0.8 meters above the ground in the chamber, 3 meter away from the antenna. The maximal emission value is acquired by adjusting the antenna height, polarisation and turntable azimuth. Normally, the height range of antenna is 1 m to 4 m, the azimuth range of turntable is 0° to 360°, and the receive antenna has two polarizations Vertical (V) and Horizontal (H).

(a) Radiated Emission Test Set-Up, Frequency Below 30MHz

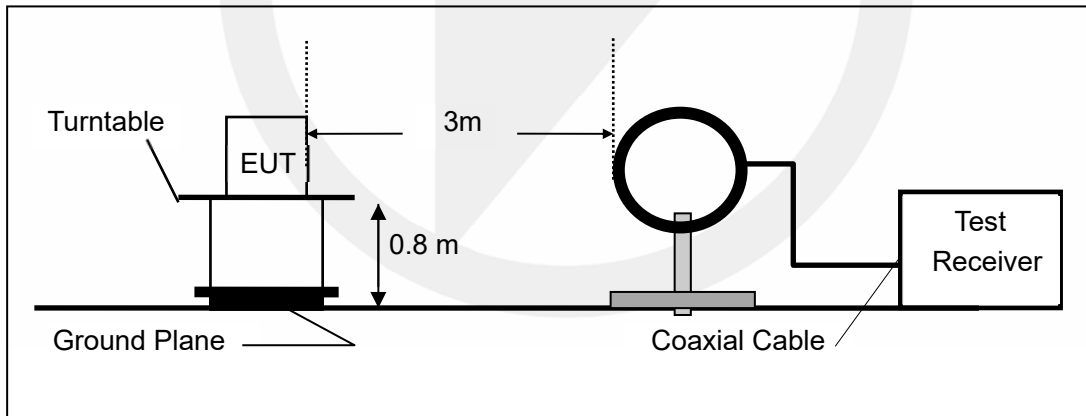

(b) Radiated Emission Test Set-Up, Frequency Below 1000MHz

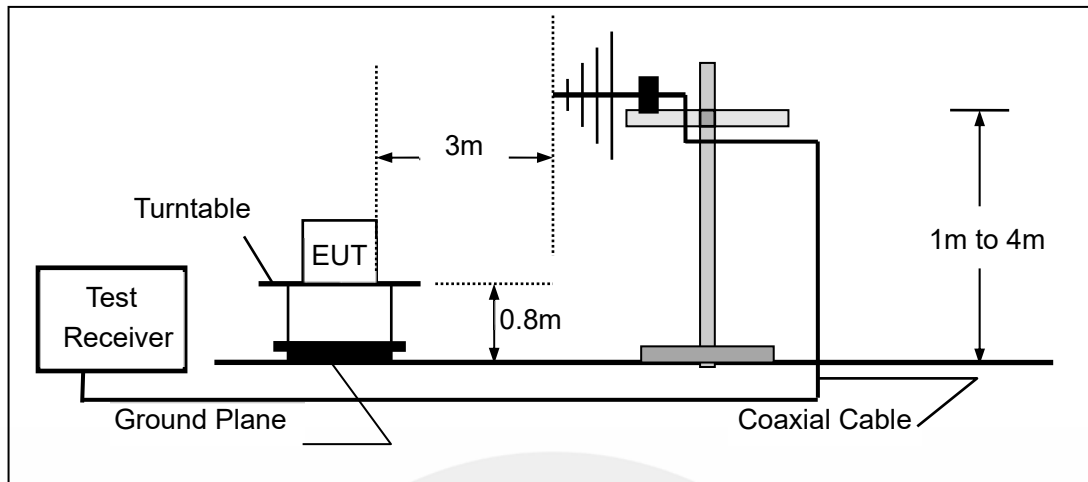


6.3 CONDUCTED EMISSION TEST SETUP


The mains cable of the EUT (maybe per AC/DC Adapter) must be connected to LISN. The LISN shall be placed 0.8 m from the boundary of EUT and bonded to a ground reference plane for LISN mounted on top of the ground reference plane. This distance is between the closest points of the LISN and the EUT. All other units of the EUT and associated equipment shall be at least 0.8m from the LISN.

Ground connections, where required for safety purposes, shall be connected to the reference ground point of the LISN and, where not otherwise provided or specified by the manufacturer, shall be of same length as the mains cable and run parallel to the mains connection at a separation distance of not more than 0.1 m.

According to the requirements in ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30 MHz using CISPR Quasi-Peak and average detector mode.

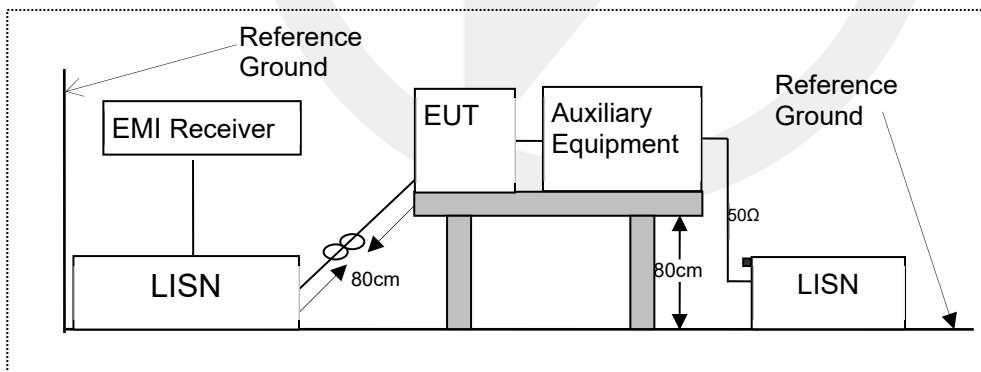

6.4 BLOCK DIAGRAM CONFIGURATION OF TEST SYSTEM

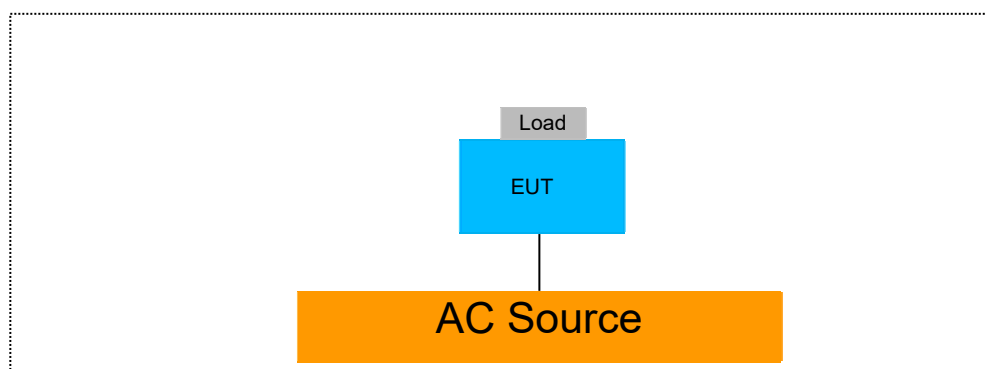

6.5 SUPPORT EQUIPMENT

EUT Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Cable List and Details			
Cable Description	Length (m)	Shielded/Unshielded	With / Without Ferrite
/	/	/	/

Auxiliary Equipment List and Details			
Description	Manufacturer	Model	Serial Number
Dummy Load	/	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. Unless otherwise denoted as EUT in 『Remark』 column, device(s) used in tested system is a support equipment

7 TEST REQUIREMENTS

7.1 OCCUPIED BANDWIDTH

7.1.1 Applicable Standard

According to FCC Part 2.1049

7.1.2 Conformance Limit

No limit requirement.

7.1.3 Test Configuration

Test according to clause 6.1 radio frequency test setup 1

7.1.4 Test Procedure

The EUT was operating in transmit mode and controlled its channel. Printed out the test result from the spectrum by hard copy function.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set to the maximum power setting and enable the EUT transmit continuously

Set RBW = 1% occupied bandwidth (30Hz).

Set the video bandwidth (VBW) = 3 times RBW .

Set Span= approximately 2 to 3 times the occupied bandwidth

Set Detector = Peak.

Set Trace mode = max hold.

Set Sweep = auto couple.

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 99% down one side of the emission. Reset the markerdelta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 99% bandwidth of the emission.

If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Measure and record the results in the test report.

7.1.5 Test Results

Temperature :	25°C	Test Date :	June 05, 2022
Humidity :	65 %	Test By:	XXH


Modulation Mode	Channel Number	Channel Frequency (KHz)	-20dB Measurement Bandwidth (kHz)	Limit (kHz)	Verdict
FSK	/	118KHz	0.301	N/A	PASS
Note: N/A (Not Applicable)					

Test Model

-20dB Bandwidth

Frequency: 116KHz

FSK Modulation

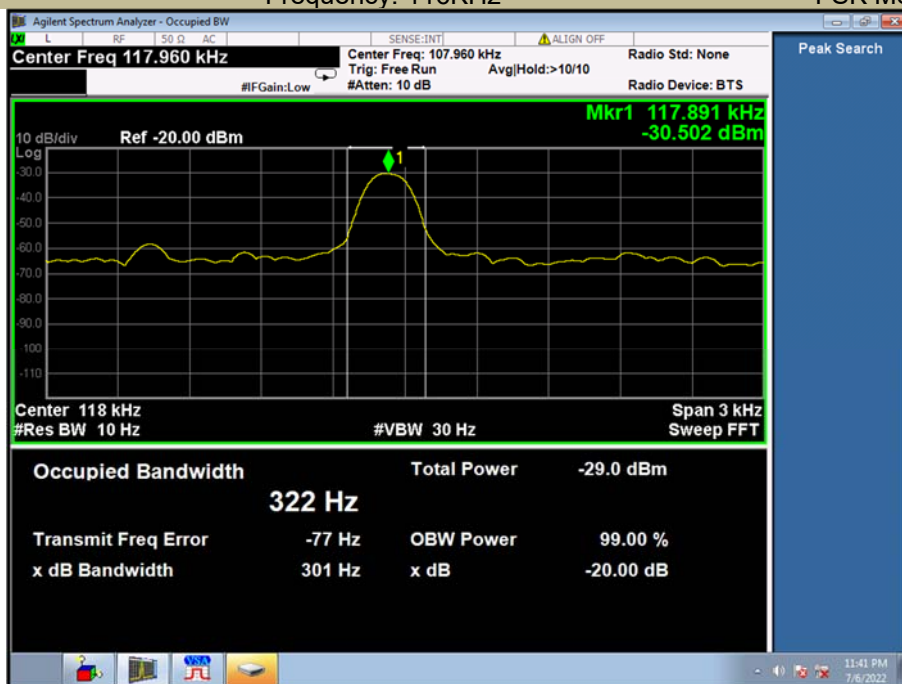

7.2 RADIATED SPURIOUS EMISSION

7.2.1 Applicable Standard

According to FCC Part 15.209

7.2.2 Conformance Limit

FCC Part 15.209				
Frequency (MHz)	Field Strength Limitation		Field Strength Limitation Frequency tion at 3m Measurement Dist	
	(uV/m)	Dist	(uV/m)	(dBuV/m)
0.009 – 0.490	2400 / F(KHz)	300m	10000 * 2400/F(KHz)	20log 2400/F(KHz) + 80
0.490 – 1.705	24000 / F(KHz)	30m	100 * 24000/F(KHz)	20log 24000/F(KHz) + 40
1.705 – 30.00	30	30m	100* 30	20log 30 + 40
30.0 – 88.0	100	3m	100	20log 100
88.0 – 216.0	150	3m	150	20log 150
216.0 – 960.0	200	3m	200	20log 200
Above 960.0	500	3m	500	20log 500

According to FCC Part15.205, Restricted bands

MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Remark: 1. Emission level in dBuV/m=20 log (uV/m)
 2. Measurement was performed at an antenna to the closed point of EUT distance of meters.
 3. Only spurious frequency is permitted to locate within the Restricted Bands specified in provision of 15.205, and the emissions located in restricted bands also comply with 15.209 limit.

7.2.3 Test Configuration

Test according to clause 6.2 radio frequency test setup 2

7.2.4 Test Procedure

This test is required for any spurious emission that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

The EUT was placed on a turn table which is 0.8m above ground plane.

Maximum procedure was performed on the highest emissions to ensure EUT compliance.

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz for $f < 1$ GHz (30MHz to 1GHz), 200Hz for $f < 150$ KHz (9KHz to 150KHz), 9KHz for $f < 30$ MHz (150KHz to 30KHz)

VBW $\geq$ RBW

Sweep = auto

Detector function = peak


Trace = max hold

Follow the guidelines in ANSI C63.10-2013 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Repeat above procedures until all frequency measured was complete.

7.2.5 Test Results

■ Spurious Emission below 150kHz (9KHz to 150kHz)

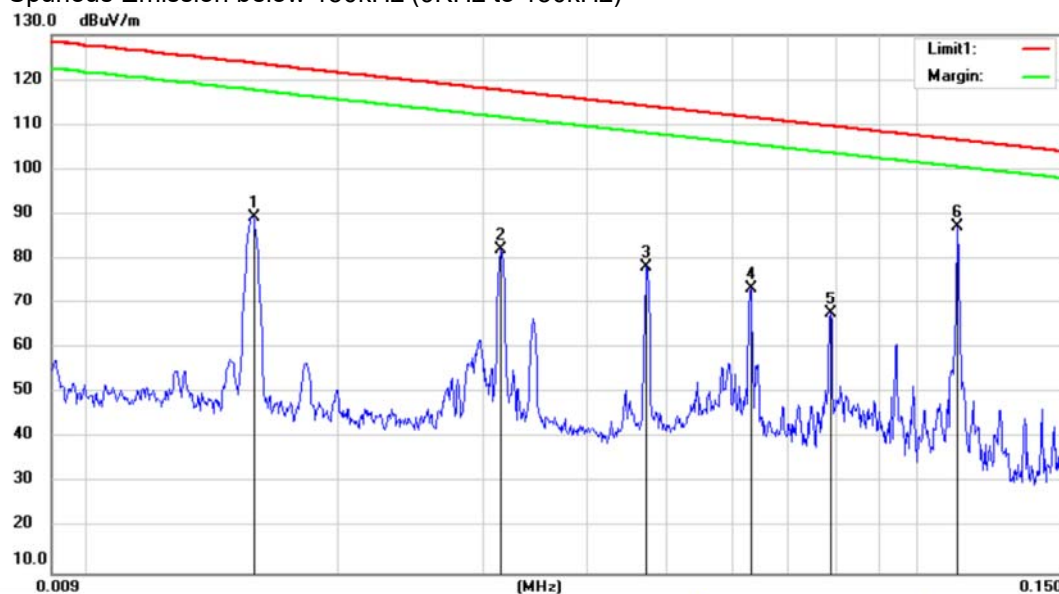

Site 3m Chamber #1

Limit: (RE)FCC PART 15.209(9K-30M)

Mode:WPT 100%Load

Note:


Polarization: X

Power: AC 120V/60Hz

Temperature: 28.1 C

Humidity: 43 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Table	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0156	68.85	20.59	89.44	123.72	-34.28	peak		
2		0.0313	61.51	20.61	82.12	117.68	-35.56	peak		
3		0.0471	57.28	20.85	78.13	114.13	-36.00	peak		
4		0.0630	52.57	20.76	73.33	111.61	-38.28	peak		
5		0.0786	47.15	20.73	67.88	109.69	-41.81	peak		
6	*	0.1121	66.55	20.56	87.11	106.60	-19.49	peak		

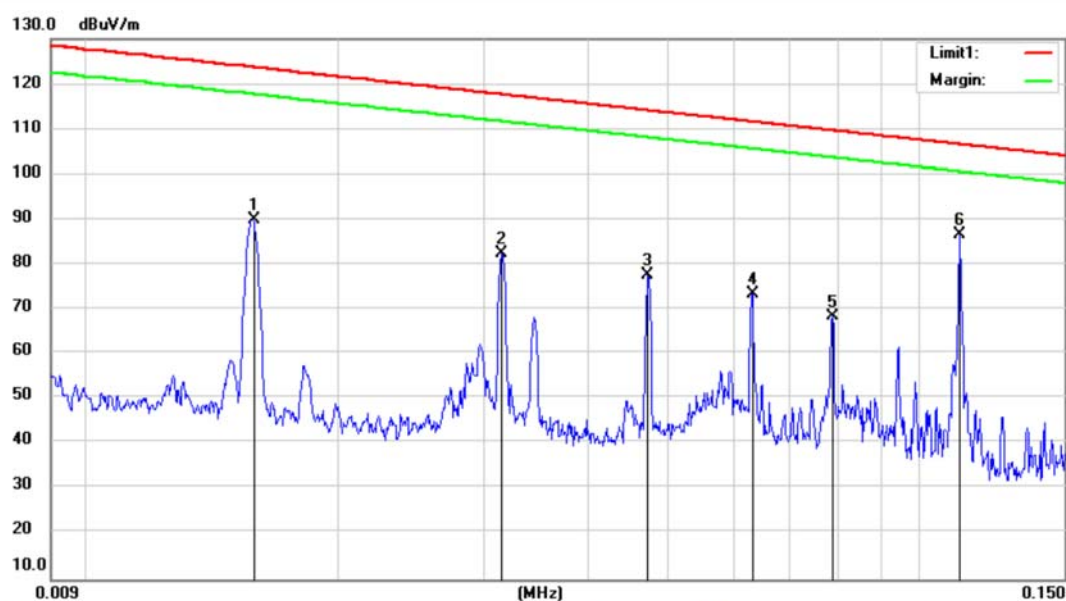

Site 3m Chamber #1

Limit: (RE)FCC PART 15.209(9K-30M)

Mode:WPT 100%Load

Note:


Polarization: Y

Power: AC 120V/60Hz

Temperature: 28.1 C

Humidity: 43 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0156	69.32	20.59	89.91	123.72	-33.81	peak		
2		0.0313	61.94	20.61	82.55	117.68	-35.13	peak		
3		0.0471	56.86	20.85	77.71	114.13	-36.42	peak		
4		0.0630	52.83	20.76	73.59	111.61	-38.02	peak		
5		0.0786	47.52	20.73	68.25	109.69	-41.44	peak		
6	*	0.1121	66.00	20.56	86.56	106.60	-20.04	peak		

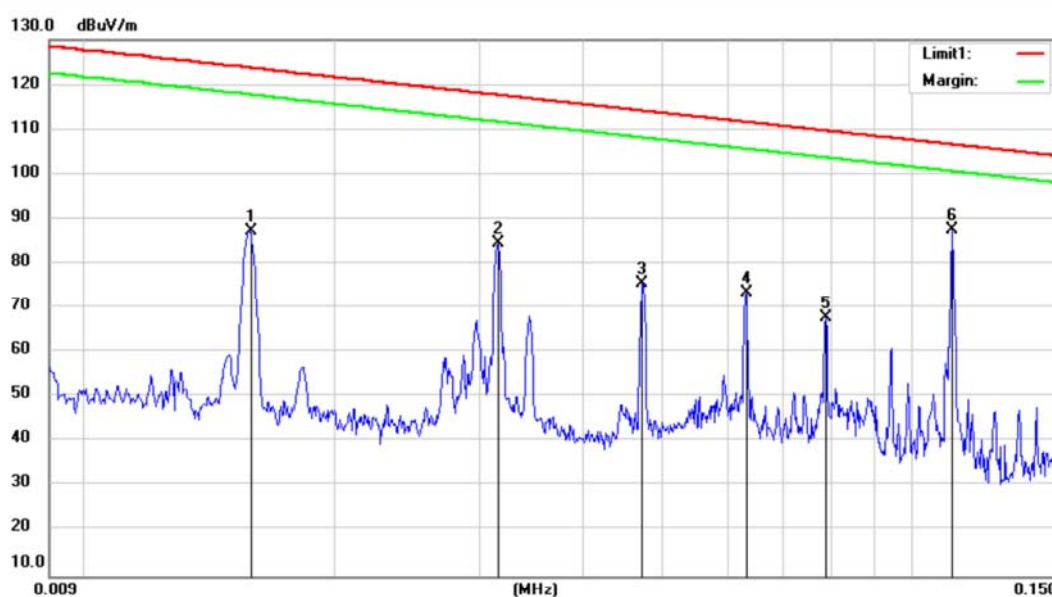

Site 3m Chamber #1

Limit: (RE)FCC PART 15.209(9K-30M)

Mode: WPT 100%Load

Note:


Polarization: Z

Power: AC 120V/60Hz

Temperature: 28.1 C

Humidity: 43 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.0156	66.79	20.59	87.38	123.72	-36.34	peak		
2		0.0314	63.97	20.61	84.58	117.65	-33.07	peak		
3		0.0471	54.81	20.85	75.66	114.13	-38.47	peak		
4		0.0630	52.68	20.76	73.44	111.61	-38.17	peak		
5		0.0786	46.96	20.73	67.69	109.69	-42.00	peak		
6	*	0.1120	66.99	20.56	87.55	106.61	-19.06	peak		

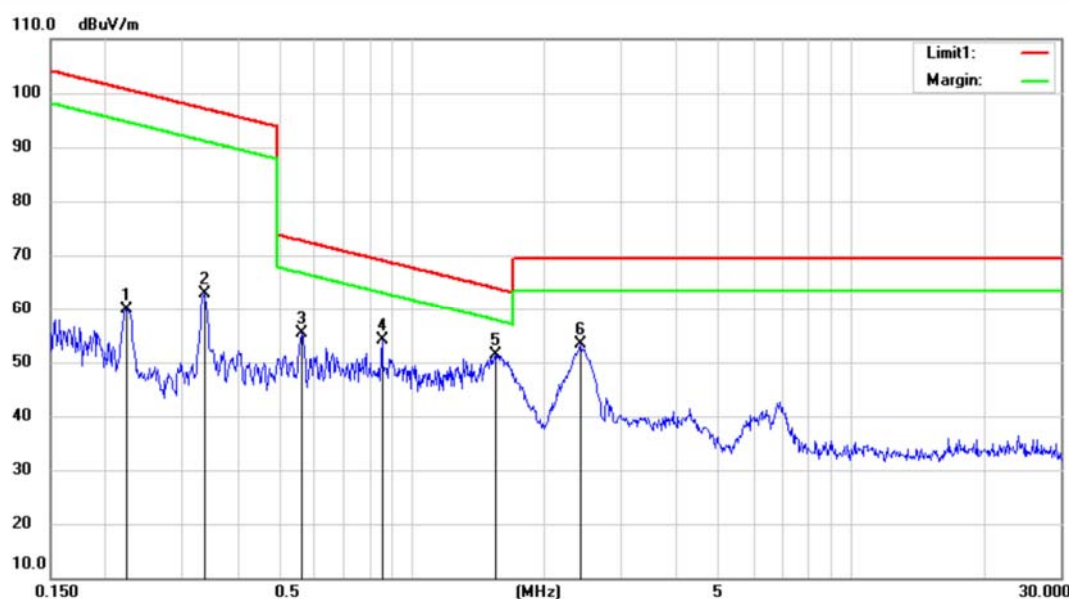

Site 3m Chamber #1

Limit: (RE)FCC PART 15.209(9K-30M)

Mode: WPT 100%Load

Note:


Polarization: X

Power: AC 120V/60Hz

Temperature: 28.1 C

Humidity: 43 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.2230	39.45	20.44	59.89	100.63	-40.74	peak		
2		0.3356	42.19	20.66	62.85	97.09	-34.24	peak		
3		0.5611	34.43	21.00	55.43	72.63	-17.20	peak		
4		0.8527	33.02	21.00	54.02	69.00	-14.98	peak		
5	*	1.5436	30.37	20.90	51.27	63.86	-12.59	peak		
6		2.4090	32.56	20.74	53.30	69.50	-16.20	peak		

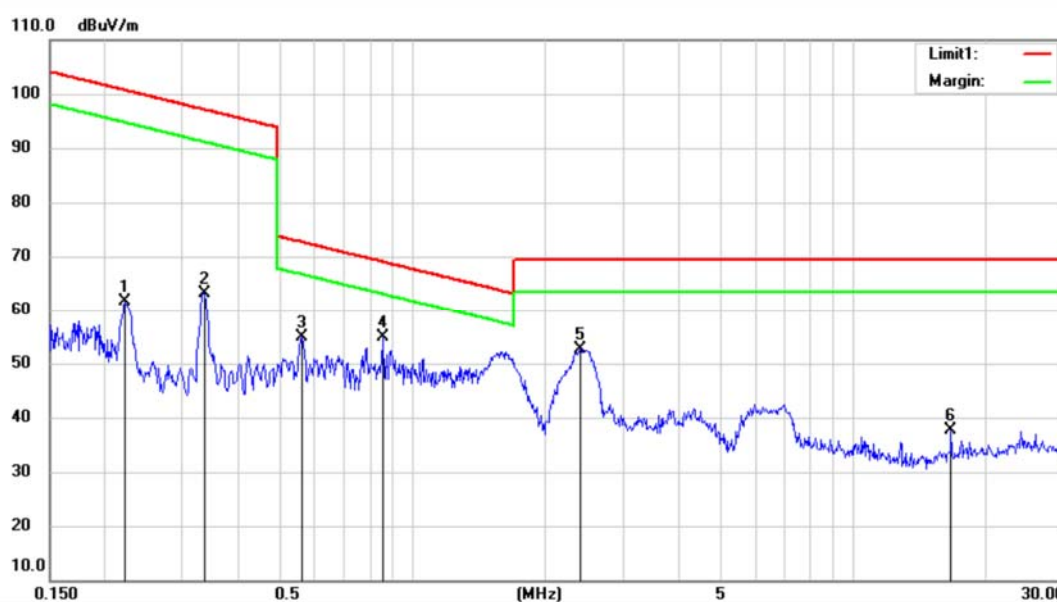

Site 3m Chamber #1

Limit: (RE)FCC PART 15.209(9K-30M)

Mode: WPT 100%Load

Note:

Polarization: **Y**

Power: AC 120V/60Hz

Temperature: 28.1 C

Humidity: 43 %

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		0.2220	41.14	20.43	61.57	100.67	-39.10	peak		
2		0.3356	42.59	20.66	63.25	97.09	-33.84	peak		
3		0.5581	33.84	21.00	54.84	72.67	-17.83	peak		
4	*	0.8571	33.88	21.00	54.88	68.96	-14.08	peak		
5		2.3961	31.99	20.74	52.73	69.50	-16.77	peak		
6		16.6612	17.49	20.23	37.72	69.50	-31.78	peak		



Site 3m Chamber #1

Limit: (RE)FCC PART 15.209(9K-30M)

Mode:WPT 100%Load

Note:

Polarization: **Z**


Power: AC 120V/60Hz

Temperature: 28.1 C

Humidity: 43 %

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		0.2220	39.64	20.43	60.07	100.67	-40.60	peak		
2		0.3356	42.09	20.66	62.75	97.09	-34.34	peak		
3	*	0.8570	32.88	21.00	53.88	68.96	-15.08	peak		
4		2.4216	31.36	20.74	52.10	69.50	-17.40	peak		
5		6.9141	23.52	20.68	44.20	69.50	-25.30	peak		
6		16.6612	19.49	20.23	39.72	69.50	-29.78	peak		

■ Spurious Emission Above 30MHz (30MHz to 1GHz)

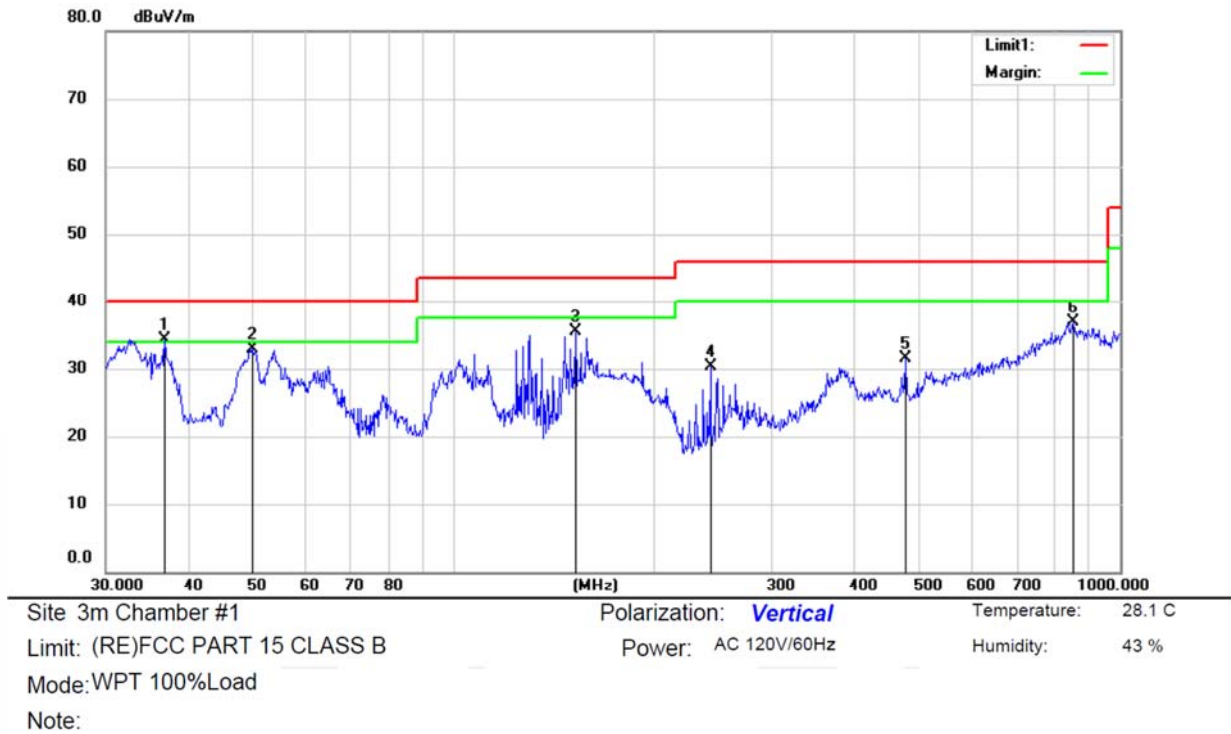

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree	Detector	Comment
1	*	36.8468	43.19	-8.85	34.34	40.00	-5.66			QP	
2		49.8376	40.55	-7.55	33.00	40.00	-7.00			QP	
3		152.5302	45.29	-9.71	35.58	43.50	-7.92			QP	
4		242.8443	38.23	-7.88	30.35	46.00	-15.65			QP	
5		476.9601	33.35	-1.79	31.56	46.00	-14.44			QP	
6		851.0353	30.35	6.65	37.00	46.00	-9.00			QP	



Site 3m Chamber #1

Polarization: **Horizontal**

Temperature: 28.1 C

Limit: (RE)FCC PART 15 CLASS B

Power: AC 120V/60Hz

Humidity: 43 %

Mode: WPT 100%Load

Note:

No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table
		MHz	Level	Factor	ment			Height	Degree
			dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree
1	*	36.9113	43.31	-8.84	34.47	40.00	-5.53	QP	
2		72.1791	30.40	-9.15	21.25	40.00	-18.75	QP	
3		112.9196	34.87	-10.05	24.82	43.50	-18.68	QP	
4		180.7280	45.24	-9.81	35.43	43.50	-8.07	QP	
5		242.8443	44.70	-7.88	36.82	46.00	-9.18	QP	
6		864.1917	30.44	6.11	36.55	46.00	-9.45	QP	

7.3 CONDUCTED EMISSION TEST

7.3.1 Applicable Standard

According to FCC Part 15.207(a)

7.3.2 Conformance Limit

Conducted Emission Limit		
Frequency(MHz)	Quasi-peak	Average
0.15-0.5	66-56	56-46
0.5-5.0	56	46
5.0-30.0	60	50
Note: 1. The lower limit shall apply at the transition frequencies 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.		

7.3.3 Test Configuration

Test according to clause 7.3 conducted emission test setup


7.3.4 Test Procedure

The EUT was placed on a table which is 0.8m above ground plane.
Maximum procedure was performed on the highest emissions to ensure EUT compliance.
Repeat above procedures until all frequency measured were complete.

7.3.5 Test Results

Pass

The AC120V &240V voltage have been tested, and the worst result recorded was report as below:

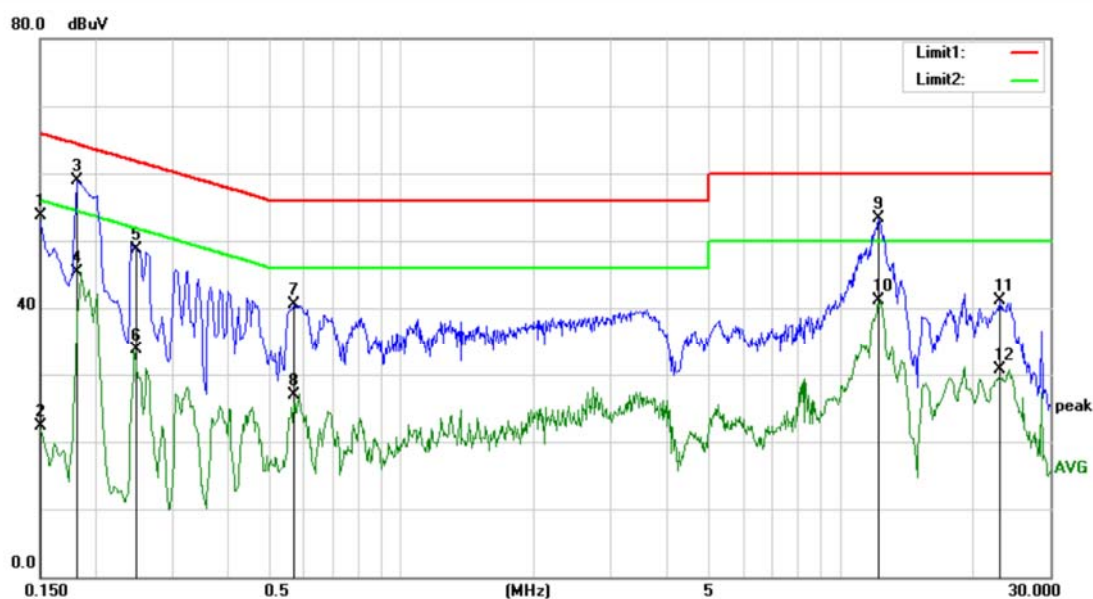

Site Conduction #2

Phase: **L1**

Temperature: 25.1

Limit: (CE)FCC PART 15 class B_QP


Power: AC 120V/60Hz

Humidity: 45 %

Mode: WPT 100%Load

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	43.19	10.48	53.67	65.91	-12.24	QP	
2		0.1500	11.90	10.48	22.38	56.00	-33.62	AVG	
3	*	0.1820	48.47	10.45	58.92	64.32	-5.40	QP	
4		0.1820	34.80	10.45	45.25	54.39	-9.14	AVG	
5		0.2481	38.32	10.42	48.74	61.77	-13.03	QP	
6		0.2481	23.28	10.42	33.70	51.82	-18.12	AVG	
7		0.5700	30.12	10.35	40.47	56.00	-15.53	QP	
8		0.5700	16.65	10.35	27.00	46.00	-19.00	AVG	
9		12.2100	42.58	10.75	53.33	60.00	-6.67	QP	
10		12.2100	30.41	10.75	41.16	50.00	-8.84	AVG	
11		23.1340	30.27	10.83	41.10	60.00	-18.90	QP	
12		23.1340	19.88	10.83	30.71	50.00	-19.29	AVG	

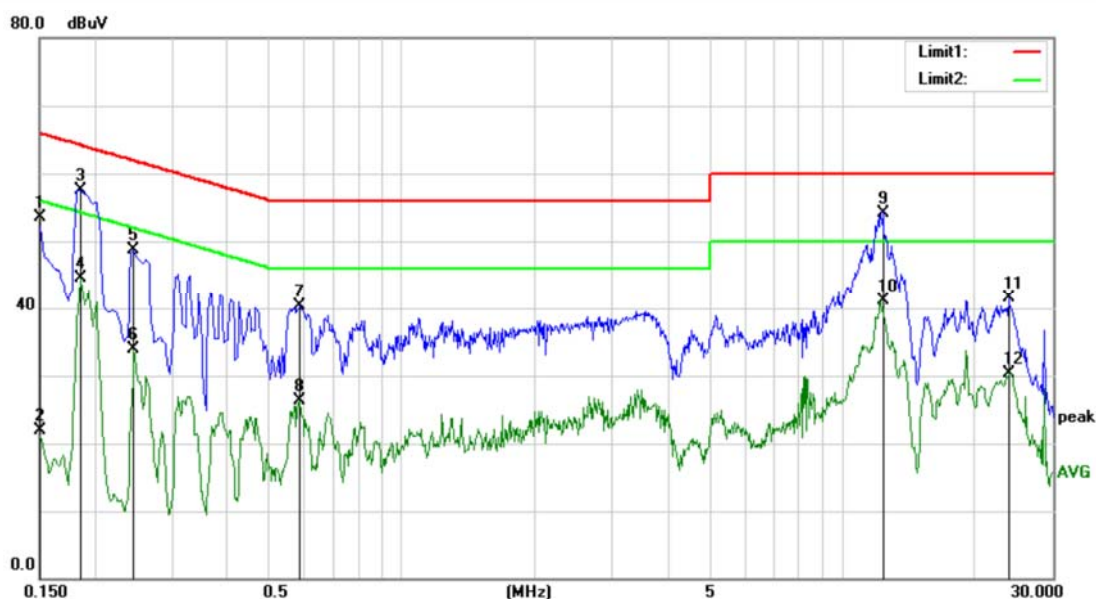

Site Conduction #2

Phase: **N**

Temperature: 25.1

Limit: (CE)FCC PART 15 class B_QP

Power: AC 120V/60Hz

Humidity: 45 %

Mode: WPT 100%Load

Note:

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector	Comment
1		0.1500	42.98	10.48	53.46	65.91	-12.45	QP	
2		0.1500	11.49	10.48	21.97	56.00	-34.03	AVG	
3		0.1860	47.08	10.45	57.53	64.14	-6.61	QP	
4		0.1860	34.06	10.45	44.51	54.21	-9.70	AVG	
5		0.2460	38.29	10.42	48.71	61.84	-13.13	QP	
6		0.2460	23.44	10.42	33.86	51.89	-18.03	AVG	
7		0.5860	29.88	10.35	40.23	56.00	-15.77	QP	
8		0.5860	15.86	10.35	26.21	46.00	-19.79	AVG	
9	*	12.3340	43.44	10.76	54.20	60.00	-5.80	QP	
10		12.3340	30.40	10.76	41.16	50.00	-8.84	AVG	
11		23.7780	30.61	10.84	41.45	60.00	-18.55	QP	
12		23.7780	19.48	10.84	30.32	50.00	-19.68	AVG	

8 ANTENNA APPLICATION

8.1.1 Antenna Requirement

Standard	Requirement
FCC CRF Part 15.203	An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §15.211, §15.213, §15.217, §15.219, or §15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

8.1.2 Result

PASS.

- Note:
- ☒ Antenna use a permanently attached antenna which is not replaceable.
 - ☐ Not using a standard antenna jack or electrical connector for antenna replacement
 - ☐ The antenna has to be professionally installed (please provide method of installation)

Please refer to the attached document Internal Photos to show the antenna connector.

*** End of Report ***