

RADIO TEST REPORT

FCC 47 CFR PART 15 SUBPART C

Test Standard	FCC Part 15.247
FCC ID	EUN-GATEWAY-MF230
Brand Name	FIC
Product name	MF0230
Model No.	MF0230
Test Result	Pass

The test Result was tested by Compliance Certification Services Inc. The test data, data evaluation, test procedures, and equipment configurations shown in this report were given in ANSI C63.10: 2013 and compliance standards.

The test results of this report relate only to the tested sample (EUT) identified in this report.

The test Report of full or partial shall not copy. Without written approval of Compliance Certification Services Inc. (Wugu Laboratory)



Approved by:

A handwritten signature in black ink, appearing to read "Sam Chuang".

Sam Chuang
Manager

Reviewed by:

A handwritten signature in black ink, appearing to read "Jerry Chuang".

Jerry Chuang
Engineer

Revision History

Rev.	Issue Date	Revisions	Revised By
00	March 13, 2018	Initial Issue	Becca Chen
01	April 10, 2018	1. Modify antenna gain in page 5. 2. Remove KDB 558074 in page 16.	Becca Chen
02	April 18, 2018	1. Added Loop Ant. in instrument calibration for 3M 966 Chamber Test site in page 7.	Becca Chen

Table of contents

1. GENERAL INFORMATION	4
1.1 EUT INFORMATION	4
1.2 EUT CHANNEL INFORMATION	5
1.3 ANTENNA INFORMATION	5
1.4 MEASUREMENT UNCERTAINTY.....	6
1.5 FACILITIES AND TEST LOCATION.....	7
1.6 INSTRUMENT CALIBRATION	7
1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT	8
1.8 TEST METHODOLOGY AND APPLIED STANDARDS	8
2. TEST SUMMERY	9
3. DESCRIPTION OF TEST MODES	10
3.1 THE WORST MODE OF OPERATING CONDITION	10
3.2 THE WORST MODE OF MEASUREMENT	11
4. EUT DUTY CYCLE	12
5. TEST RESULT	13
5.1 AC POWER LINE CONDUCTED EMISSION	13
5.2 20DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)	16
5.3 OUTPUT POWER MEASUREMENT	21
5.4 FREQUENCY SEPARATION	23
5.5 NUMBER OF HOPPING.....	26
5.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION.....	28
5.7 TIME OF OCCUPANCY (DWELL TIME)	33
5.8 RADIATION BANDEDGE AND SPURIOUS EMISSION.....	35
APPENDIX 1 - PHOTOGRAPHS OF EUT	

1. GENERAL INFORMATION

1.1 EUT INFORMATION

Applicant	First International Computer Inc 8F, No.300, Yang Guang St., NeiHu, Taipei, Taiwan 114
Manufacturer	First International Computer Inc 8F, No.300, Yang Guang St., NeiHu, Taipei, Taiwan 114
Equipment	MF0230
Model No.	MF0230
Model Discrepancy	N/A
Trade Name	FIC
Received Date	January 31, 2018
Date of Test	March 5 ~ 7, 2018
Output Power (W)	GFSK : 0.0098 8DPSK : 0.0052
Power Supply	Powered from Adapter : Billon / BA024-120200GXX I/P: 100-240Vac, 0.7A, 50/60Hz O/P: 12Vdc, 2.0A

1.2 EUT CHANNEL INFORMATION

Frequency Range	2402MHz-2480MHz
Modulation Type	1. GFSK for BDR-1Mbps 2. $\pi/4$ -DQPSK for EDR-2Mbps 3. 8DPSK for EDR-3Mbps
Number of channel	79 Channels

Remark:

Refer as ANSI 63.10:2013 clause 5.6.1 Table 4 and RSS-GEN Table A1 for test channels

Number of frequencies to be tested		
Frequency range in which device operates	Number of frequencies	Location in frequency range of operation
☐ 1 MHz or less	1	Middle
☐ 1 MHz to 10 MHz	2	1 near top and 1 near bottom
☒ More than 10 MHz	3	1 near top, 1 near middle, and 1 near bottom

1.3 ANTENNA INFORMATION

Antenna Type	☐ PIFA ☐ PCB ☒ Dipole ☐ Coils
Antenna Gain	Gain: 2.28dBi

1.4 MEASUREMENT UNCERTAINTY

PARAMETER	UNCERTAINTY
AC Powerline Conducted Emission	+/- 1.2575
Emission bandwidth, 20dB bandwidth	+/- 1.4003
RF output power, conducted	+/- 1.1372
Power density, conducted	+/- 1.4003
3M Semi Anechoic Chamber / 30M~200M	+/- 4.0138
3M Semi Anechoic Chamber / 200M~1000M	+/- 3.9483
3M Semi Anechoic Chamber / 1G~8G	+/- 2.5975
3M Semi Anechoic Chamber / 8G~18G	+/- 2.6112
3M Semi Anechoic Chamber / 18G~26G	+/- 2.7389
3M Semi Anechoic Chamber / 26G~40G	+/- 2.9683
3M Semi Anechoic Chamber / 40G~60G	+/- 1.8509
3M Semi Anechoic Chamber / 60G~75G	+/- 1.9869
3M Semi Anechoic Chamber / 75G~110G	+/- 2.9651
3M Semi Anechoic Chamber / 110G~170G	+/- 2.7807
3M Semi Anechoic Chamber / 170G~220G	+/- 3.6437
3M Semi Anechoic Chamber / 220G~325G	+/- 4.2982

Remark:

1. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$
2. ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report.

1.5 FACILITIES AND TEST LOCATION

All measurement facilities used to collect the measurement data are located at
No.11, Wugong 6th Rd., Wugu Dist., New Taipei City 24891, Taiwan. (R.O.C.)

Test site	Test Engineer	Remark
AC Conduction Room	Eric Lee	-
Radiation	Jerry Chuang	-
RF Conducted	Eric Lee	-

Remark: The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

1.6 INSTRUMENT CALIBRATION

RF Conducted Test Site					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Power Meter	Anritsu	ML2495A	1033009	04/11/2017	04/10/2018
Power Sensor	Anritsu	MA2411B	917072	07/03/2017	07/02/2018
Spectrum Analyzer	R&S	FSV 40	101073	10/02/2017	10/01/2018
Directional Coupler	Agilent	87301D	MY44350252	07/25/2017	07/24/2018
SUCOFLEX Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Divider	Solvang Technology	2-18GHz 4Way	STI08-0015	07/26/2017	07/25/2018

3M 966 Chamber Test Site					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
Bilog Antenna	Sunol Sciences	JB3	A030105	06/20/2017	06/19/2018
Horn Antenna	ETC	MCTD 1209	DRH13M02003	08/25/2017	08/24/2018
Pre-Amplifier	EMEC	EM330	60609	06/07/2017	06/06/2018
Spectrum Analyzer	Agilent	E4446A	US42510252	11/27/2017	11/26/2018
Antenna Tower	CCS	CC-A-1F	N/A	N.C.R	N.C.R
Controller	CCS	CC-C-1F	N/A	N.C.R	N.C.R
Turn Table	CCS	CC-T-1F	N/A	N.C.R	N.C.R
Pre-Amplifier	HP	8449B	3008A00965	06/27/2017	06/26/2018
Filter	N/A	2400-2500	N/A	N/A	N/A
Cable	HUBER SUHNER	SUCOFLEX 104PEA	25157	07/31/2017	07/30/2018
Cable	HUBER SUHNER	SUCOFLEX 104PEA	20995	07/31/2017	07/30/2018
Loop Ant	COM-POWER	AL-130	121051	03/21/2018	03/20/2019

AC Conducted Emissions Test Site					
Equipment	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due
LISN	R&S	ENV216	101054	05/18/2017	05/17/2018
LISN	SCHWARZBECK	NSLK 8127	8127-541	02/14/2018	02/13/2019
EMI Test Receiver	R&S	ESCI	100064	05/17/2017	05/16/2018

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. N.C.R. = No Calibration Required.

1.7 SUPPORT AND EUT ACCESSORIES EQUIPMENT

EUT Accessories Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
	N/A				

Support Equipment					
No.	Equipment	Brand	Model	Series No.	FCC ID
1	Monitor	DELL	U2410F	N/A	DoC
2	Keyboard	DELL	SK-8115	T3A002	DoC
3	Mouse	DELL	M-UAL-96	R41105	DoC

1.8 TEST METHODOLOGY AND APPLIED STANDARDS

The test methodology, setups and results comply with all requirements in accordance with ANSI C63.10:2013, FCC Part 2, FCC Part 15.247.

2. TEST SUMMERY

FCC Standard Section	Report Section	Test Item	Result
15.203	1.2	Antenna Requirement	Pass
15.207(a)	5.1	AC Conducted Emission	-
15.247(a)(1)	5.2	20 dB Bandwidth	Pass
-	5.2	Occupied Bandwidth (99%)	Pass
15.247(b)(1)	5.3	Output Power Measurement	Pass
15.247(a)(1)	5.4	Frequency Separation	Pass
15.247(a)(1)(iii)	5.5	Number of Hopping	Pass
15.247(d)	5.6	Conducted Band Edge	Pass
15.247(d)	5.6	Conducted Emission	Pass
15.247(a)(1)(iii)	5.7	Time of Occupancy	Pass
15.247(d)	5.8	Radiation Band Edge	Pass
15.247(d)	5.8	Radiation Spurious Emission	Pass

3. DESCRIPTION OF TEST MODES

3.1 THE WORST MODE OF OPERATING CONDITION

Operation mode	GFSK for BDR-1Mbps (DH5) 8DPSK for EDR-3Mbps (DH5)
Test Channel Frequencies	GFSK for BDR-1Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz 8DPSK for EDR-3Mbps: 1.Lowest Channel : 2402MHz 2.Middle Channel : 2441MHz 3.Highest Channel : 2480MHz

Remark:

1. EUT pre-scanned data rate of output power for each mode, the worst data rate were recorded in this report.

3.2 THE WORST MODE OF MEASUREMENT

AC Power Line Conducted Emission	
Test Condition	AC Power line conducted emission for line and neutral
Voltage/Hz	120V/60Hz
Test Mode	Mode 1: EUT power by AC adapter via power cable.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Radiated Emission Measurement Above 1G	
Test Condition	Band edge, Emission for Unwanted and Fundamental
Voltage/Hz	120V/60Hz
Test Mode	Mode 1: EUT power by AC adapter via power cable.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4
Worst Position	☐ Placed in fixed position. ☐ Placed in fixed position at X-Plane (E2-Plane) ☒ Placed in fixed position at Y-Plane (E1-Plane) ☐ Placed in fixed position at Z-Plane (H-Plane)
Worst Polarity	☐ Horizontal ☒ Vertical


Radiated Emission Measurement Below 1G	
Test Condition	Radiated Emission Below 1G
Voltage/Hz	120V/60Hz
Test Mode	Mode 1: EUT power by AC adapter via power cable.
Worst Mode	☒ Mode 1 ☐ Mode 2 ☐ Mode 3 ☐ Mode 4

Remark:

1. The worst mode was record in this test report.
2. EUT pre-scanned in three axis, X, Y, Z and two polarity, Horizontal and Vertical for radiated measurement. The worst case (Z-Plane and Horizontal) were recorded in this report
3. For below 1G, radiation emission were performed the EUT transmit at the highest output power channel as worse case.

4. EUT DUTY CYCLE

Duty Cycle				
Configuration	TX ON (ms)	TX ALL (ms)	Duty Cycle (%)	Duty Factor(dB)
BDR-1Mbps	2.9200	3.7550	77.76%	1.09
EDR-3Mbps	2.9500	3.7700	78.25%	1.07

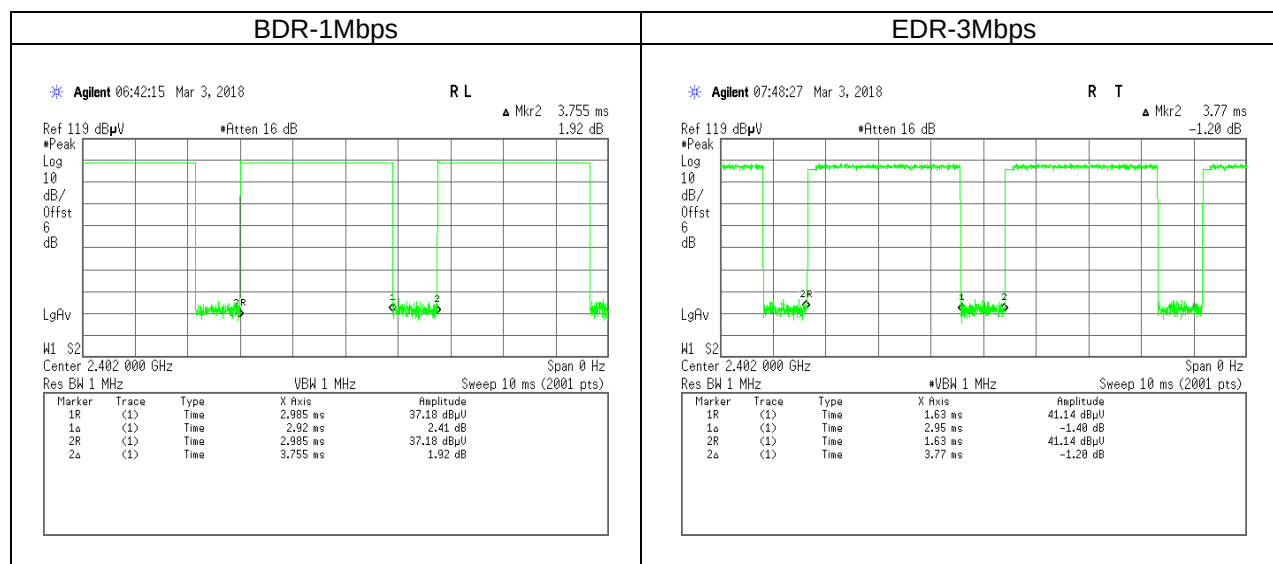

5. TEST RESULT

5.1 AC POWER LINE CONDUCTED EMISSION

5.1.1 Test Limit

According to §15.207(a),

Frequency Range (MHz)	Limits(dBμV)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56*	56 to 46*
0.50 to 5	56	46
5 to 30	60	50


* Decreases with the logarithm of the frequency.

5.1.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 6.2,

1. The EUT was placed on a non-conducted table, which is 0.8m above horizontal ground plane and 0.4m above vertical ground plane.
2. EUT connected to the line impedance stabilization network (LISN)
3. Receiver set RBW of 9kHz and Detector Peak, and note as quasi-peak and average.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. Recorded Line for Neutral and Line.

5.1.3 Test Setup

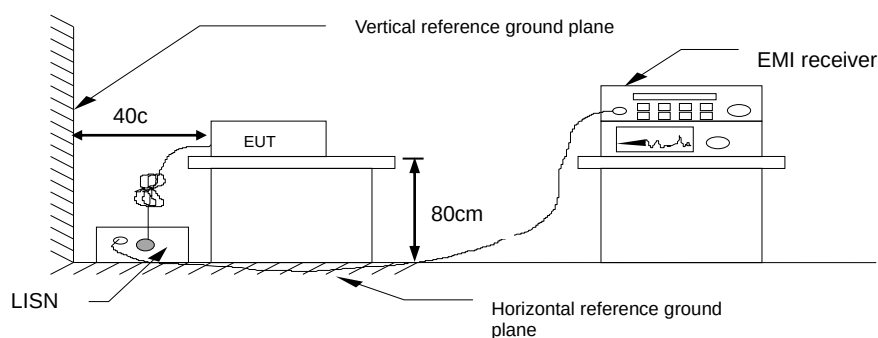


5.1.4 Test Result

Pass.


Test Data

Test Mode:	Mode 1	Temp/Hum	24(°C) / 50%RH
Test Voltage:	AC 120V	Test Date	2018/3/6
Phase:	Line	Test Engineer	Eric Lee

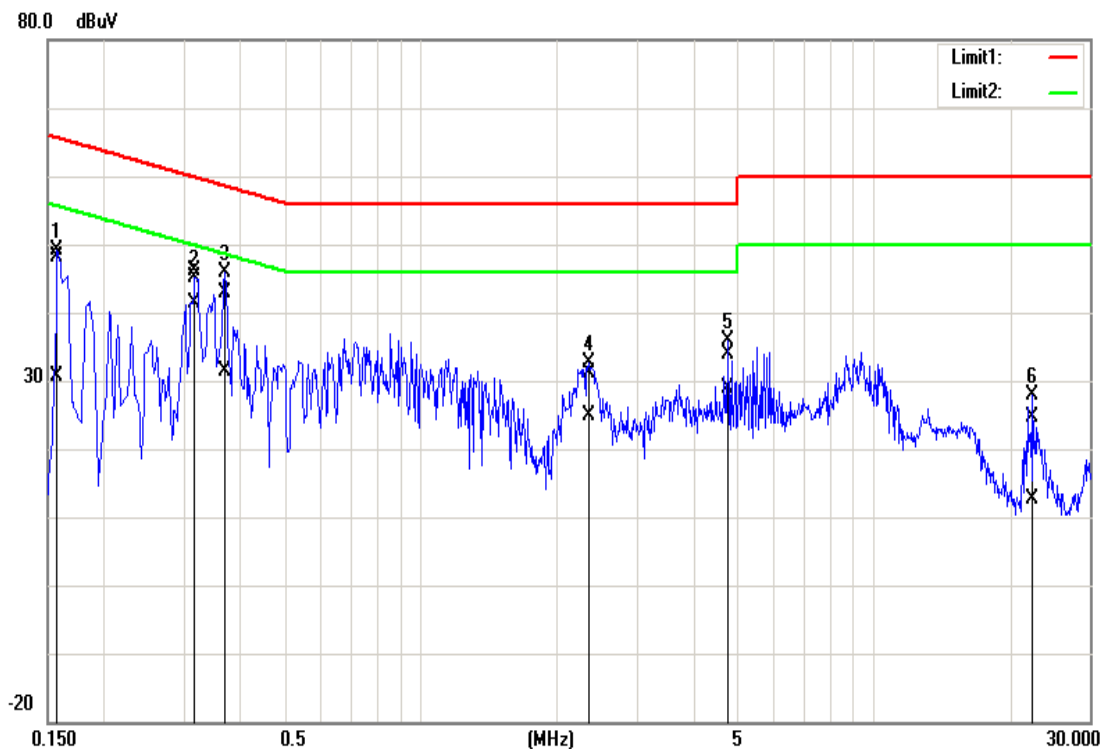

No.	Frequency (MHz)	QuasiPeak reading (dBuV)	Average reading (dBuV)	Correction factor (dB)	QuasiPeak result (dBuV)	Average result (dBuV)	QuasiPeak limit (dBuV)	Average limit (dBuV)	QuasiPeak margin (dB)	Average margin (dB)	Remark
1	0.1580	48.12	30.46	0.11	48.23	30.57	65.56	55.57	-17.33	-25.00	Pass
2*	0.3180	46.07	41.30	0.12	46.19	41.42	59.76	49.76	-13.57	-8.34	Pass
3	0.3700	42.69	31.30	0.12	42.81	31.42	58.50	48.50	-15.69	-17.08	Pass
4	2.3540	30.95	24.63	0.16	31.11	24.79	56.00	46.00	-24.89	-21.21	Pass
5	4.7740	33.74	28.68	0.20	33.94	28.88	56.00	46.00	-22.06	-17.12	Pass
6	22.5100	24.06	12.03	0.50	24.56	12.53	60.00	50.00	-35.44	-37.47	Pass

Test Mode:	Mode 1	Temp/Hum	24(°C) / 50%RH
Test Voltage:	AC 120V	Test Date	2018/3/6
Phase:	Neutral	Test Engineer	Eric Lee

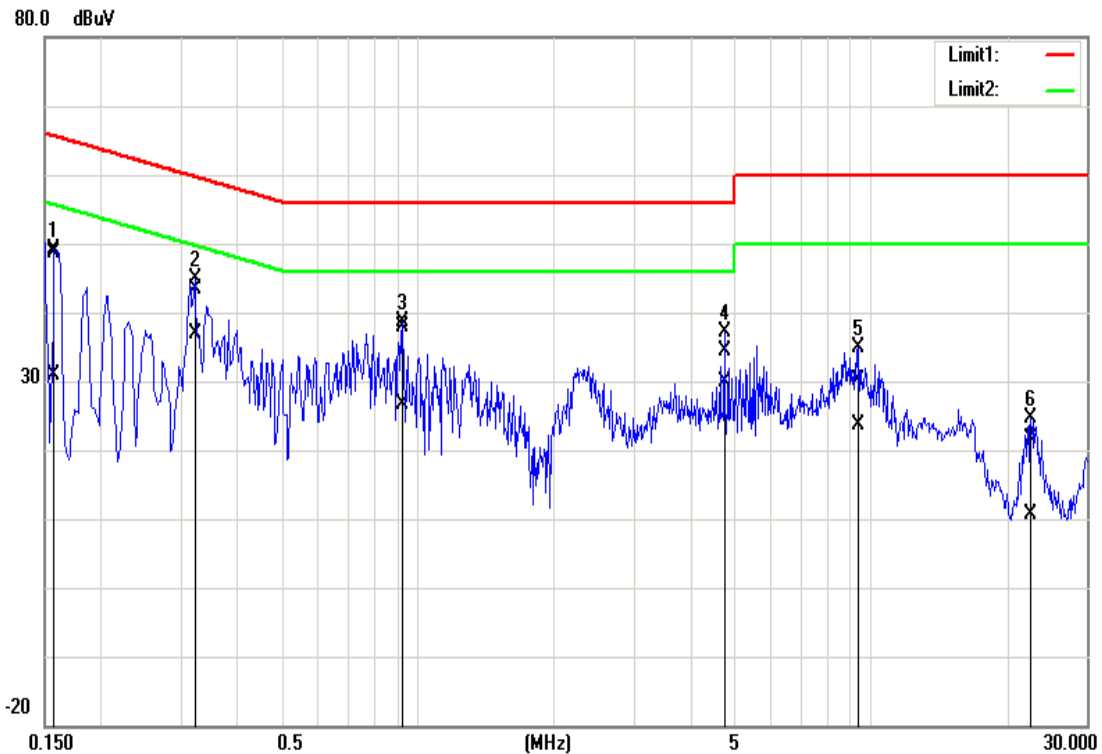

No.	Frequency	QuasiPeak reading	Average reading	Correction factor	QuasiPeak result	Average result	QuasiPeak limit	Average limit	QuasiPeak margin	Average margin	Remark
	(MHz)	(dBuV)	(dBuV)	(dB)	(dBuV)	(dBuV)	(dBuV)	(dBuV)	(dB)	(dB)	
1	0.1580	48.52	30.79	0.14	48.66	30.93	65.57	55.57	-16.91	-24.64	Pass
2*	0.3220	43.32	36.69	0.13	43.45	36.82	59.66	49.66	-16.21	-12.84	Pass
3	0.9260	37.65	26.60	0.14	37.79	26.74	56.00	46.00	-18.21	-19.26	Pass
4	4.7660	34.16	29.75	0.21	34.37	29.96	56.00	46.00	-21.63	-16.04	Pass
5	9.4300	29.81	23.29	0.29	30.10	23.58	60.00	50.00	-29.90	-26.42	Pass
6	22.6020	21.09	10.13	0.51	21.60	10.64	60.00	50.00	-38.40	-39.36	Pass

5.2 20DB BANDWIDTH AND OCCUPIED BANDWIDTH (99%)

5.2.1 Test Limit

According to §15.247(a) (1),

20 dB Bandwidth : For reporting purposes only.


Occupied Bandwidth(99%) : For reporting purposes only.

5.2.2 Test Procedure

Test method Refer as Section 8.1 and ANSI 63.10:2013 clause 6.9.2,

1. The EUT RF output connected to the spectrum analyzer by RF cable.
2. Setting maximum power transmit of EUT
3. SA set RBW =100KHz, VBW = 300KHz and Detector = Peak, to measurement 6dB Bandwidth.
4. SA set RBW = 1% ~ 5% OBW, VBW = three times the RBW and Detector = Peak, to measurement 99% Bandwidth.
5. Measure and record the result of 6 dB Bandwidth and 99% Bandwidth. in the test report.

5.2.3 Test Setup

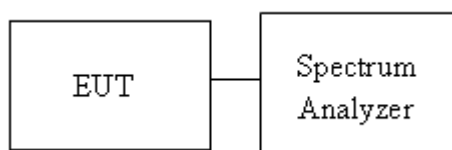

5.2.4 Test Result


Test mode: GFSK_BDR-1Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (kHz)	20dB BW (MHz)
Low	2402	898.6975	1.0306
Mid	2441	894.3560	1.0298
High	2480	894.3560	1.0349

Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz			
Channel	Frequency (MHz)	OBW(99%) (MHz)	20dB BW (MHz)
Low	2402	1.1982	1.3305
Mid	2441	1.2026	1.3305
High	2480	1.2026	1.3349


6dB BW Test Data

GFSK_BDR-1Mbps mode


Low CH

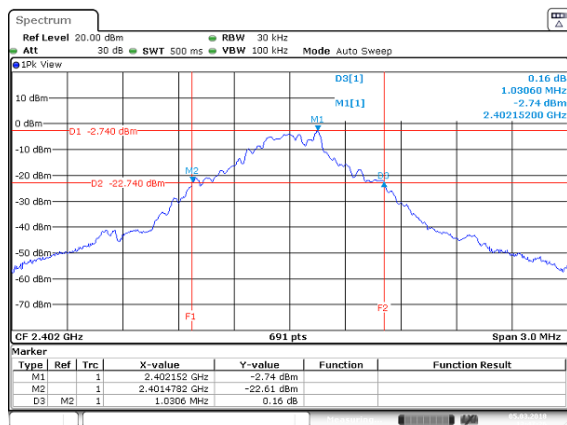

Mid CH

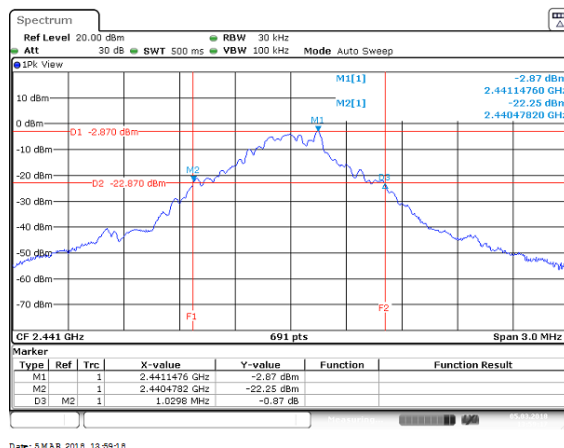


High CH

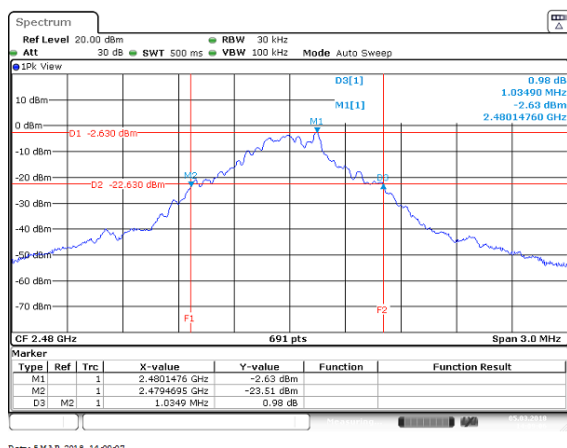


8DPSK_EDR-3Mbps mode


Low CH

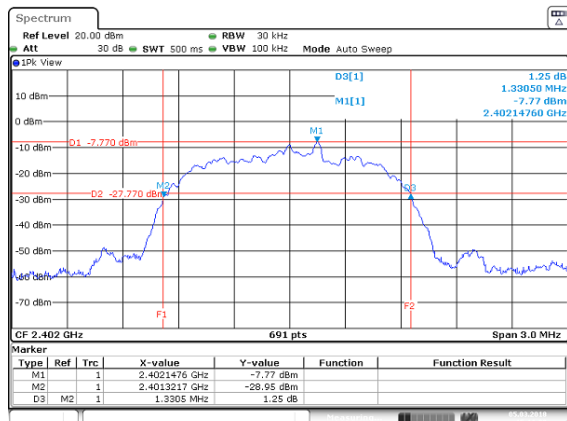


Mid CH

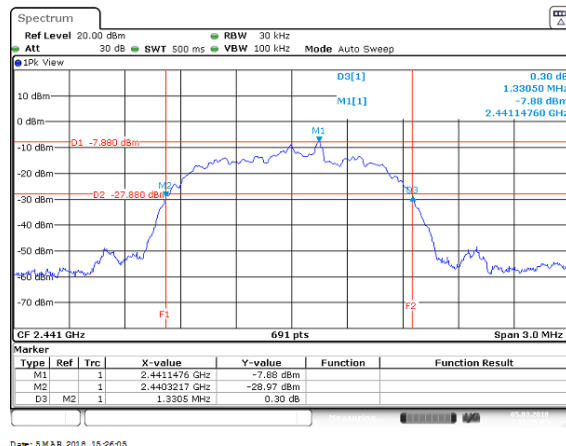


High CH

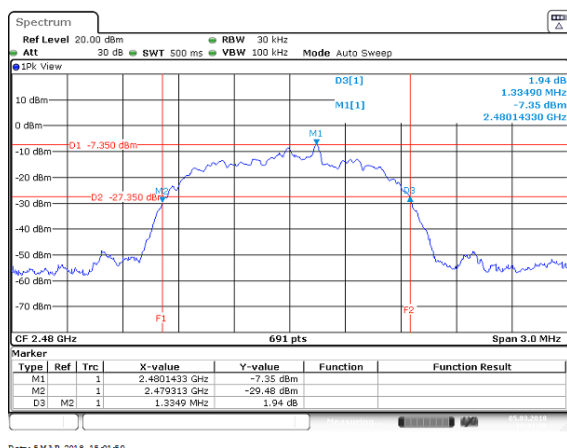

OBW(99%) Test Data

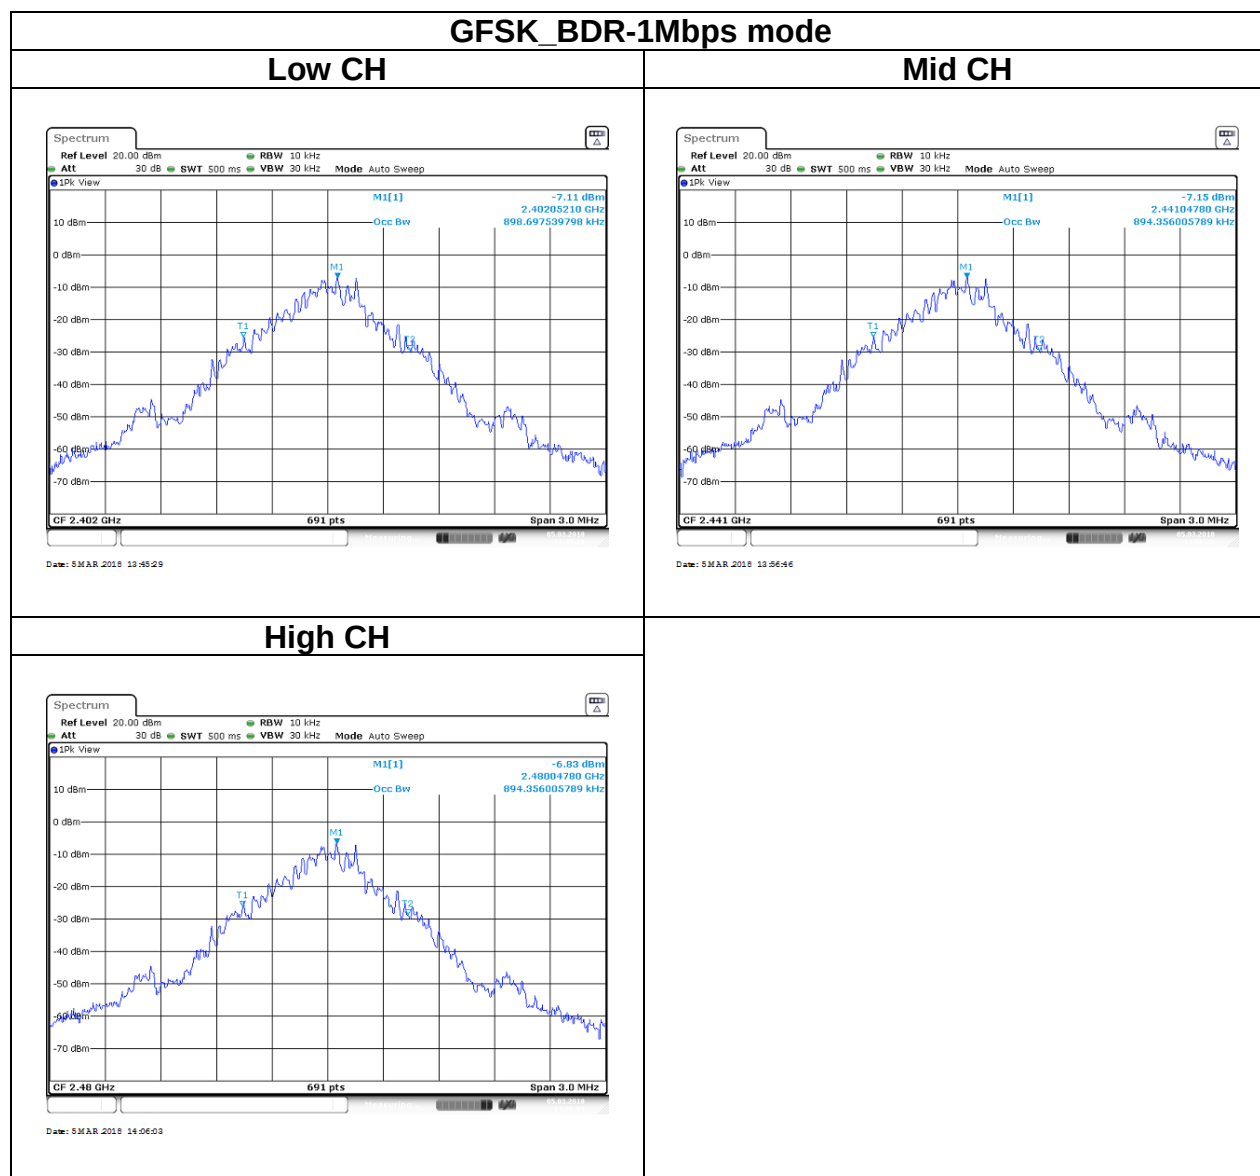

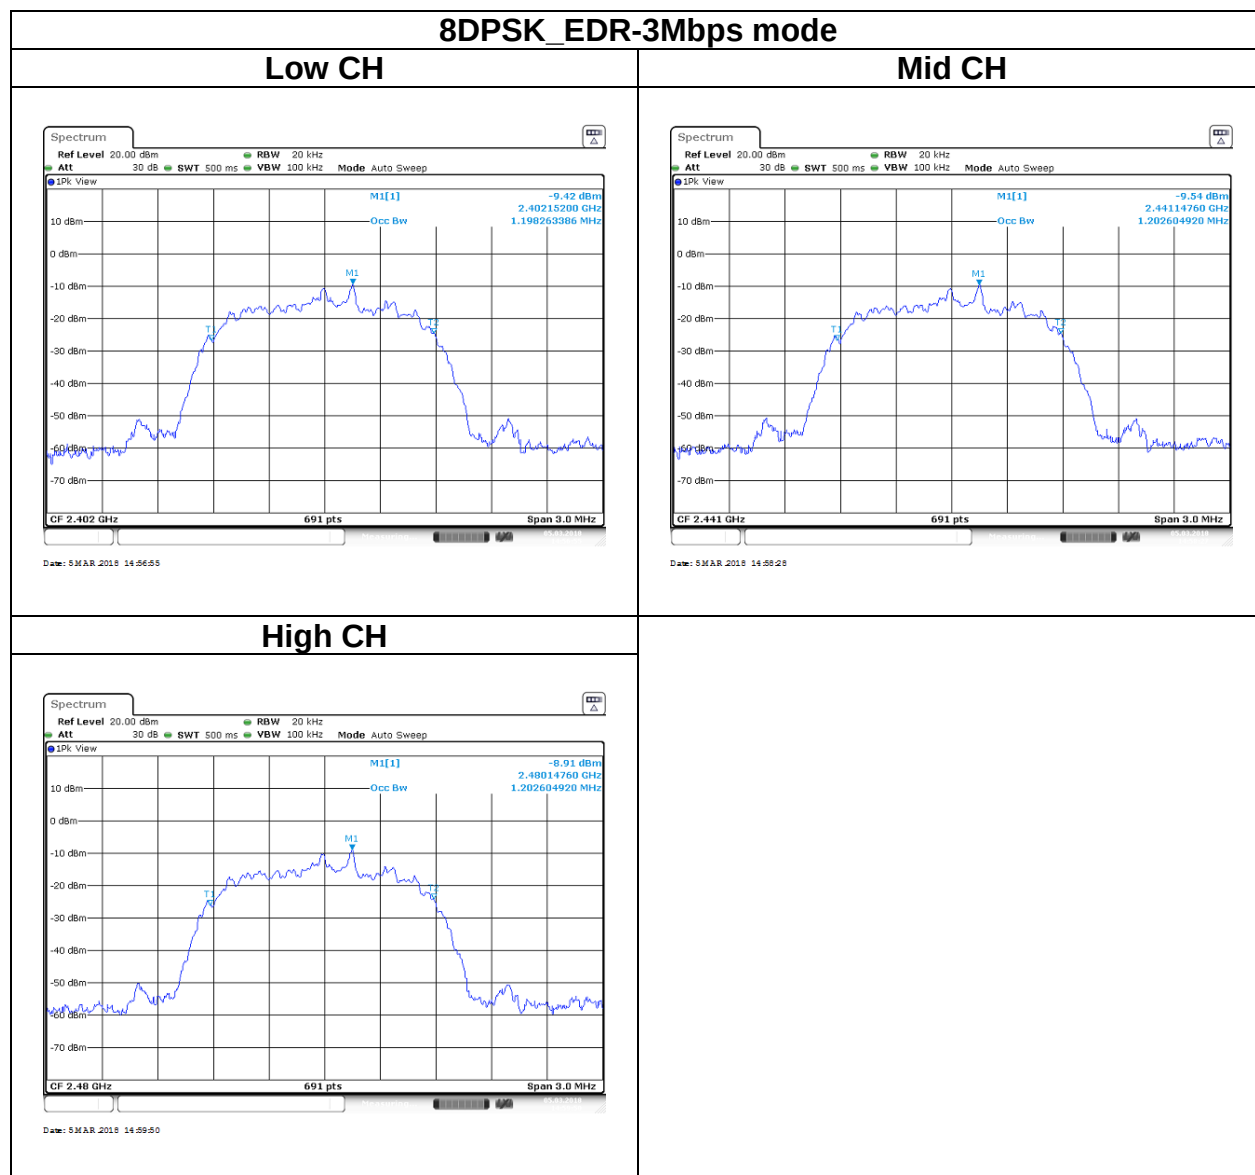

5.3 OUTPUT POWER MEASUREMENT

5.3.1 Test Limit

According to §15.247(a)(1).

Peak output power :

FCC

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.


Limit	☒ Antenna not exceed 6 dBi : 21dBm ☐ Antenna with DG greater than 6 dBi : 21dBm [Limit = 30 – (DG – 6)]
-------	---

Average output power : For reporting purposes only.

5.3.2 Test Procedure

1. The EUT RF output connected to the power meter by RF cable.
2. Setting maximum power transmit of EUT.
3. The path loss was compensated to the results for each measurement.
4. Measure and record the result of Peak output power and Average output power. in the test report.

5.3.3 Test Setup



5.3.4 Test Result

Peak output power :

For GFSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	9.56	0.0090	0.125	PASS
Mid	2441	9.57	0.0091		PASS
High	2480	9.92	0.0098		PASS

For 8DPSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)	Limit (W)	Result
Low	2402	6.61	0.0046	0.125	PASS
Mid	2441	6.74	0.0047		PASS
High	2480	7.13	0.0052		PASS

Average output power :

For GFSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	8.65	0.0073
Mid	2441	8.56	0.0072
High	2480	8.81	0.0076

For 8DPSK / DH5

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (W)
Low	2402	3.67	0.0023
Mid	2441	3.83	0.0024
High	2480	4.23	0.0026

5.4 FREQUENCY SEPARATION

5.4.1 Test Limit

According to §15.247(a)(1),


Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

Limit	> two-thirds of the 20 dB bandwidth
-------	-------------------------------------

5.4.2 Test Procedure

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set the spectrum analyzer as RBW = 100kHz, VBW = 300kHz, Sweep = auto.
Max hold, mark 3 peaks of hopping channel and record the 3 peaks frequency

5.4.3 Test Setup




5.4.4 Test Result


Test mode: GFSK_BDR-1Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	1.0029	0.687	PASS
Mid	2441	1.0029	0.687	PASS
High	2480	1.0029	0.690	PASS

Test mode: 8DPSK_EDR-3Mbps mode / 2402-2480 MHz				
Channel	Frequency (MHz)	Channel Separation (MHz)	Channel Separation Limits (MHz)	Result
Low	2402	0.9986	0.887	PASS
Mid	2441	0.9986	0.887	PASS
High	2480	0.9986	0.890	PASS

Test Data

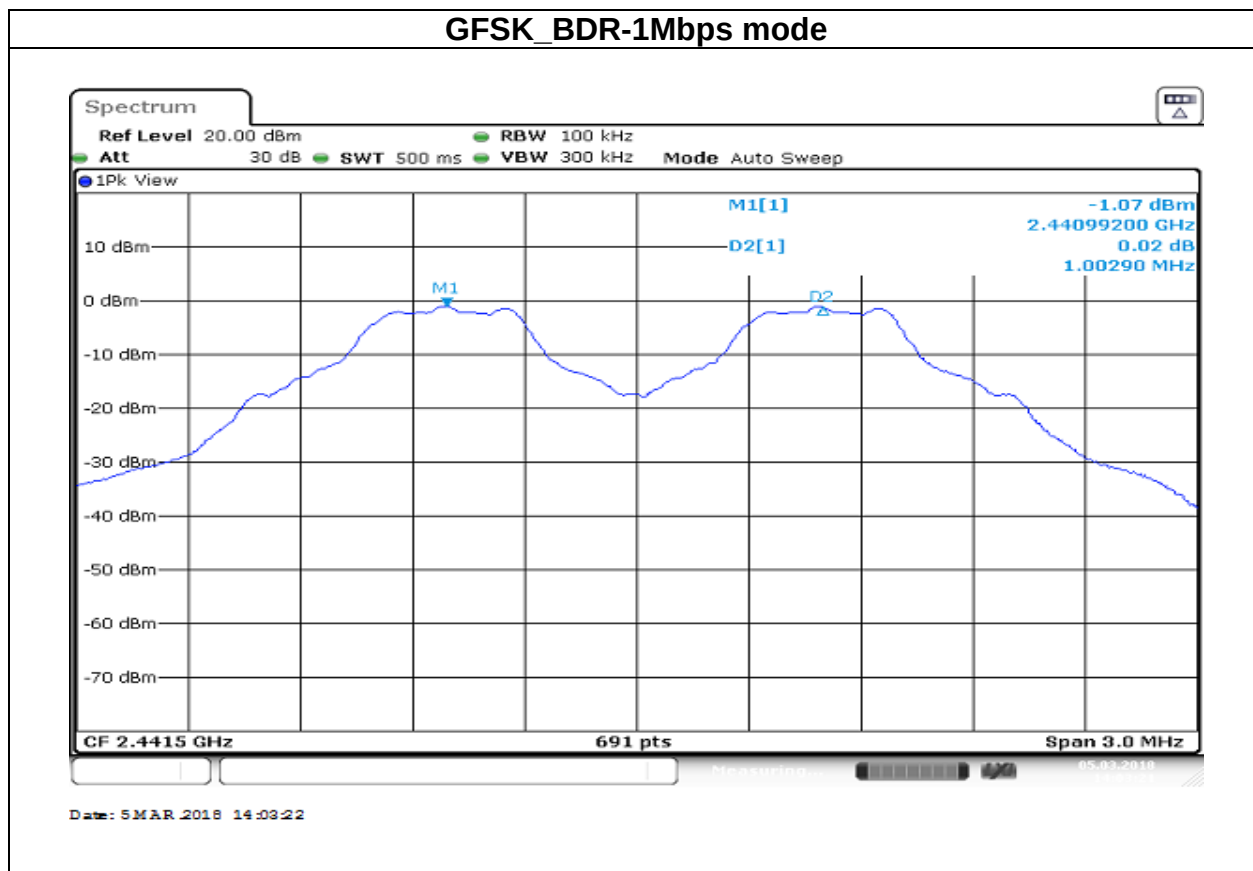

8DPSK EDR-3Mbps mode

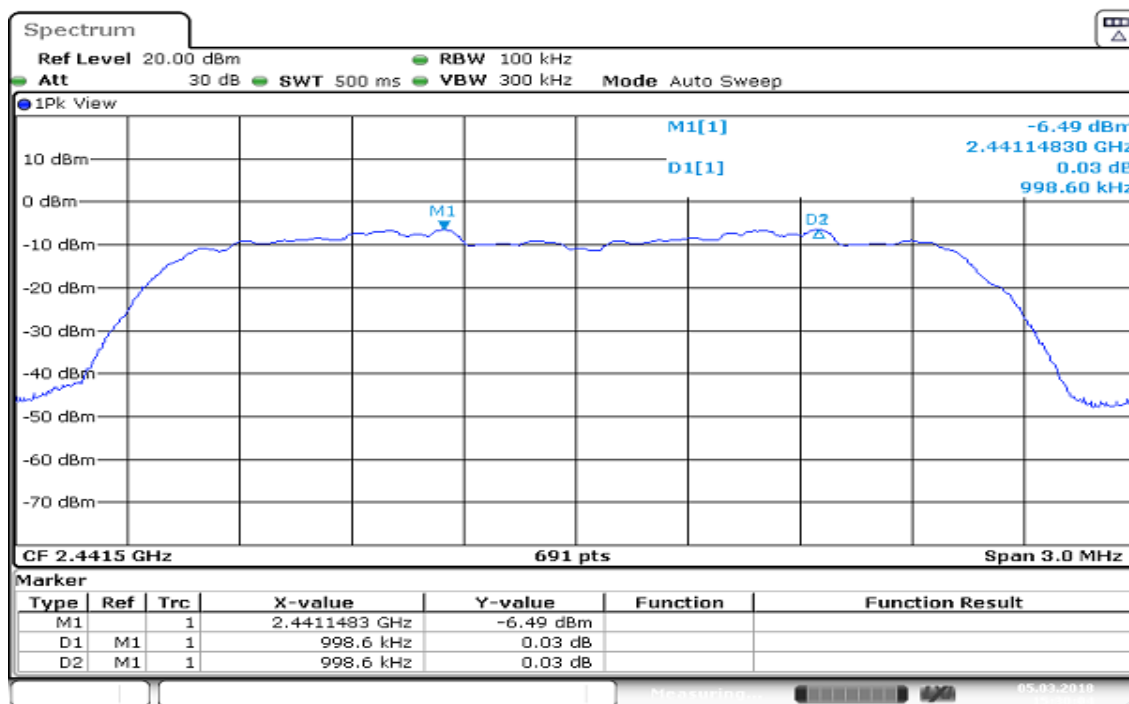

Date: 5 MAR 2018 15:20:05

5.5 NUMBER OF HOPPING

5.5.1 Test Limit

According to §15.247(a)(1)(iii) and RSS-247 section 5.1(d)


Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.

5.5.2 Test Procedure

Test method Refer as ANSI 63.10:2013 clause 7.8.3

1. Place the EUT on the table and set it in transmitting mode.
2. EUT RF output port connected to the SA by RF cable.
3. Set spectrum analyzer Start Freq. = 2400 MHz, Stop Freq. = 2483.5 MHz, RBW = 100KHz, VBW = 300KHz.
4. Max hold, view and count how many channel in the band.

5.5.3 Test Setup




5.5.4 Test Result

Number of Hopping				
Mode	Frequency (MHz)	Hopping Channel Number	Hopping Channel Number Limits	Result
BDR-1Mbps	2402-2480	79	15	Pass
EDR-3Mbps	2402-2480	79	15	

REMARK:

The frequency spectrum was broken up in to two sub-range to clearly show all of the hopping frequencies. In the AFH mode, this device operation was using 20 channels, so the requirement for minimum number of hopping channels is satisfied

Test Data

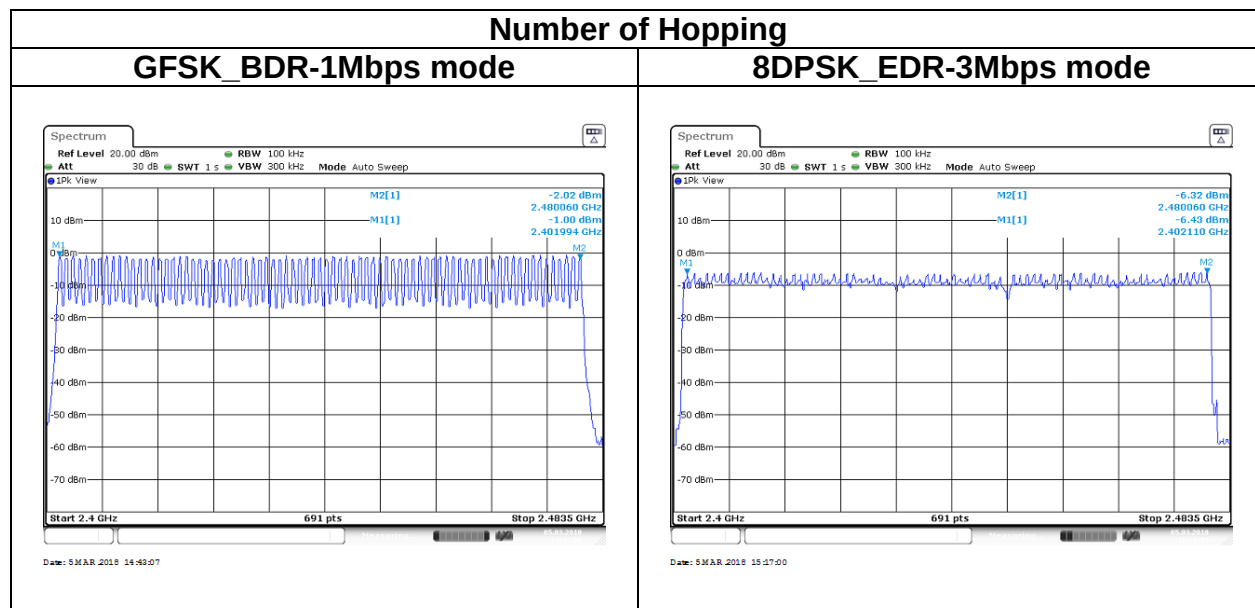

5.6 CONDUCTED BANDEDGE AND SPURIOUS EMISSION

5.6.1 Test Limit


According to §15.247(d),

Limit	-20 dBc
-------	---------

5.6.2 Test Procedure



1. EUT RF output port connected to the SA by RF cable, and the path loss was compensated to result.
2. SA setting, RBW=100kHz, VBW=300kHz, Detector=Peak, Trace mode = max hold, SWT = Auto.
3. The Band Edge at 2.4GHz and 2.4835GHz are investigated with normal hopping mode.



5.6.3 Test Setup







5.6.4 Test Result

Test Data

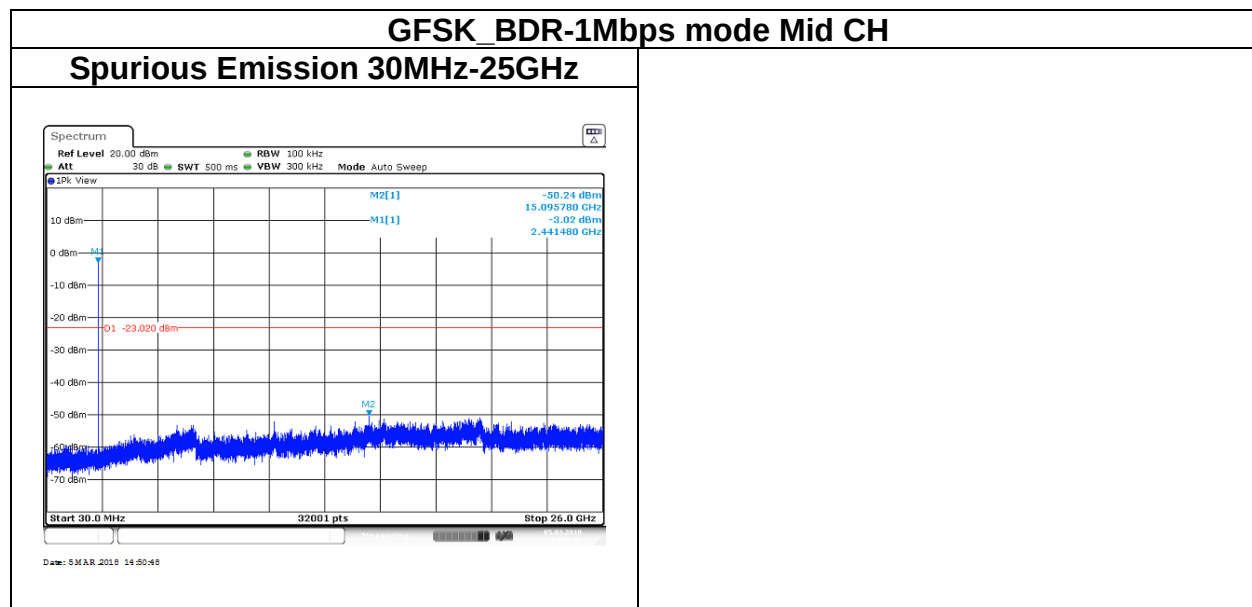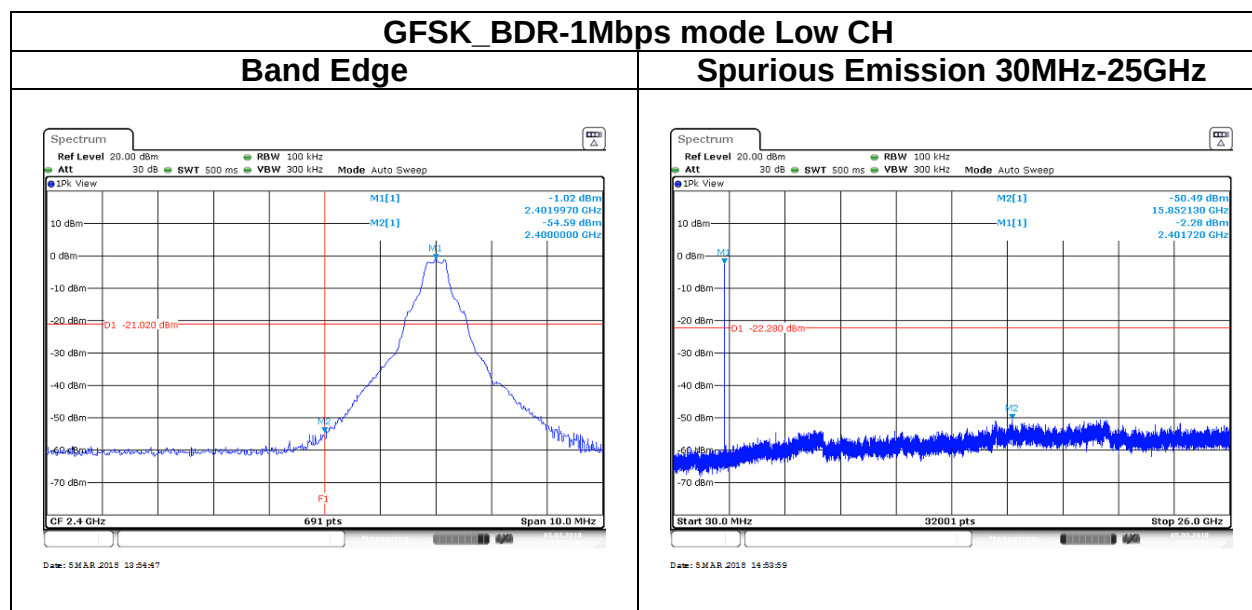

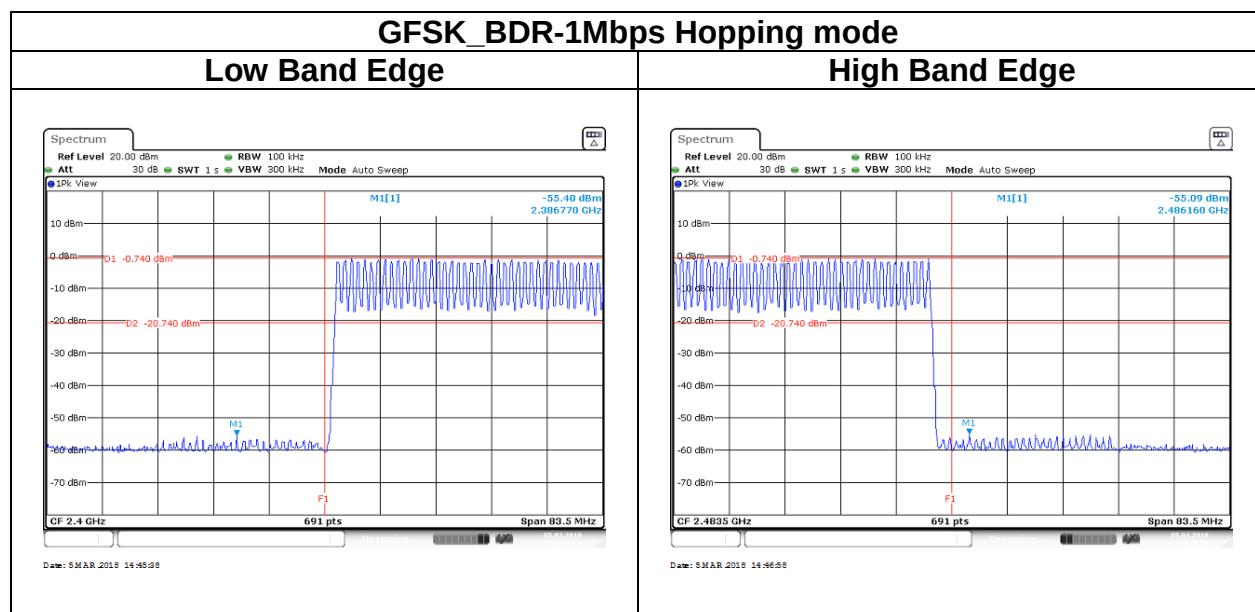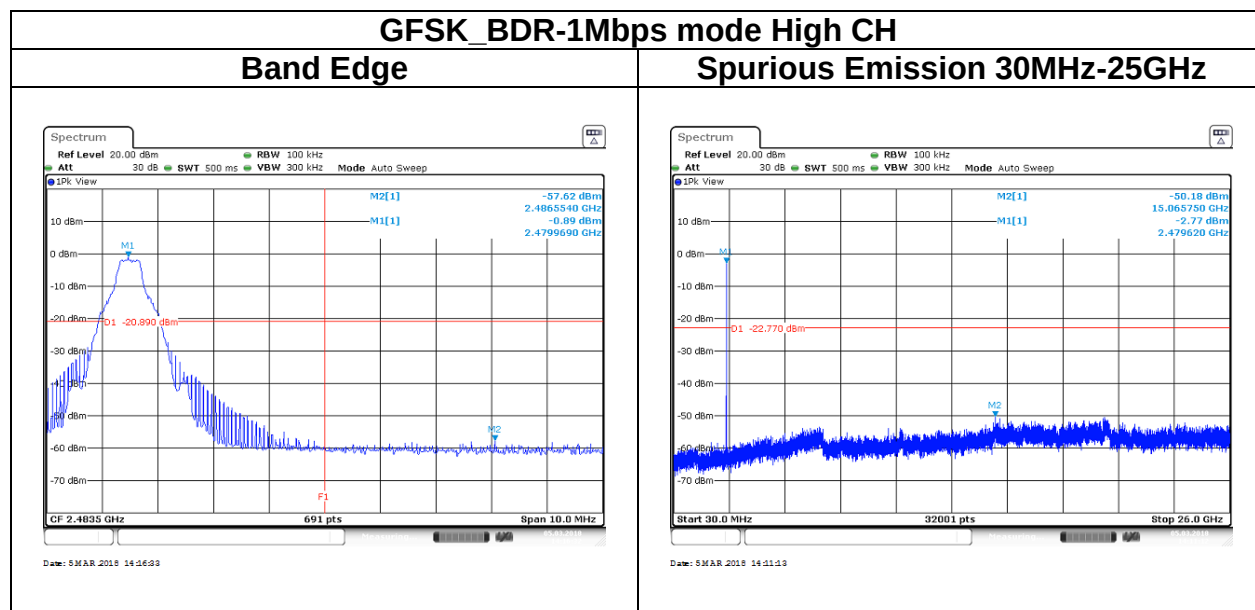

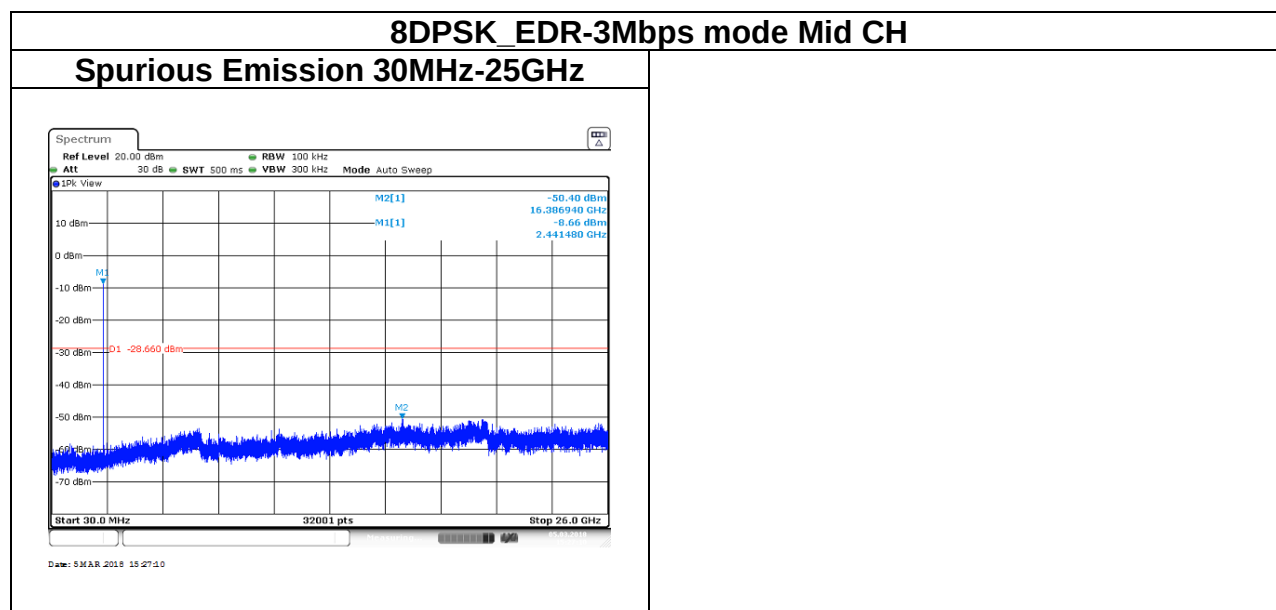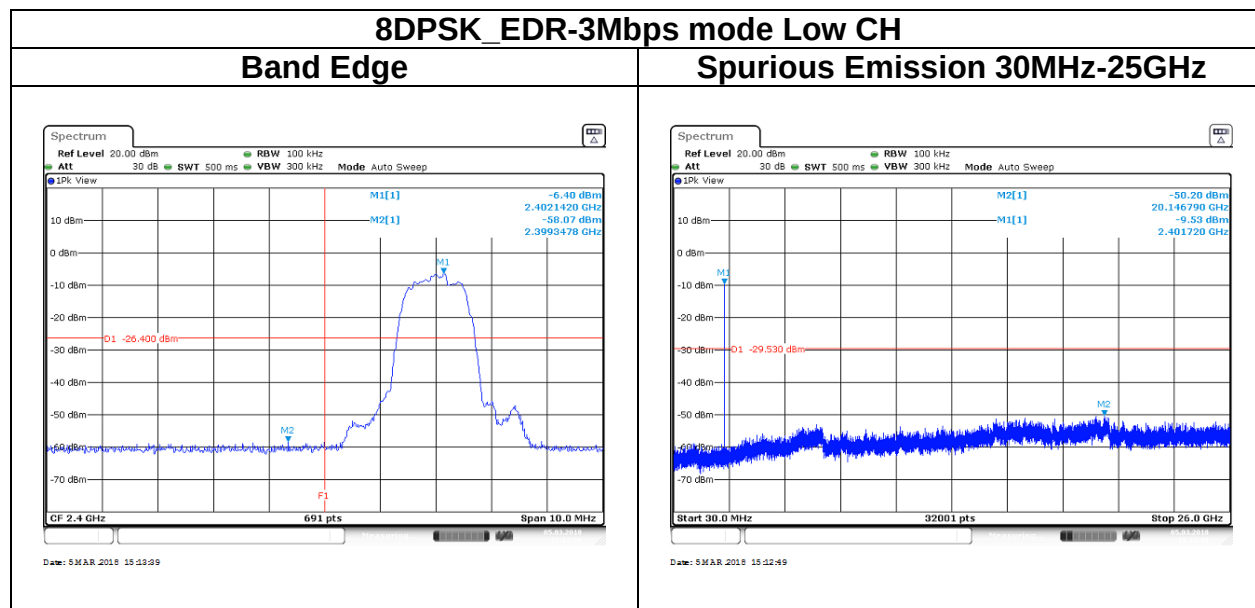

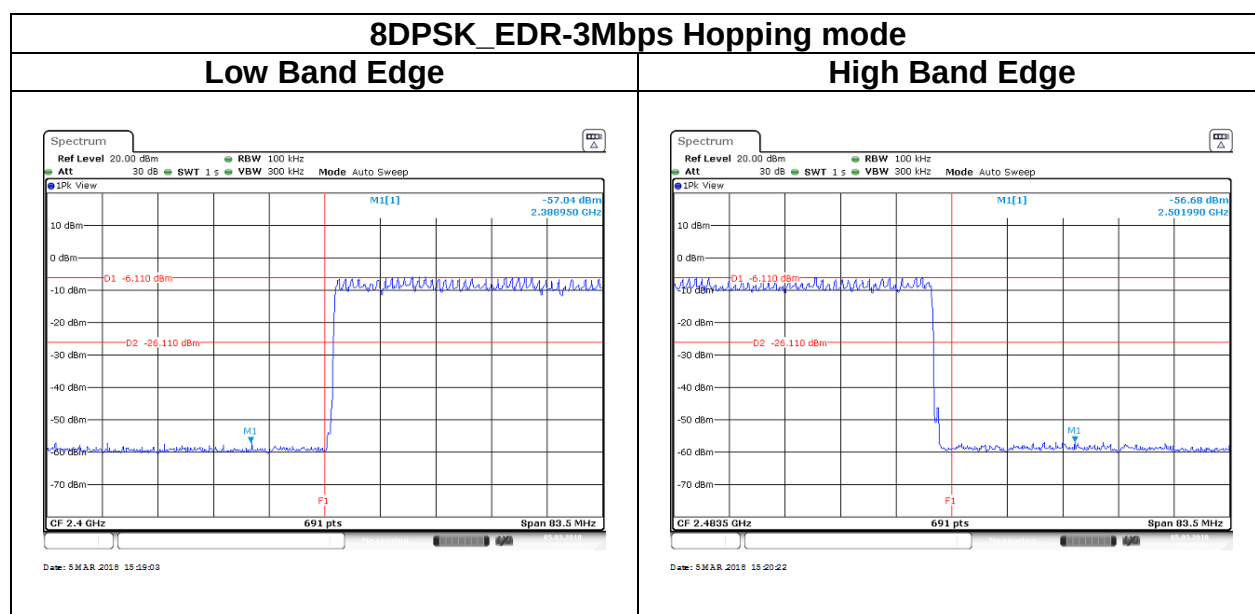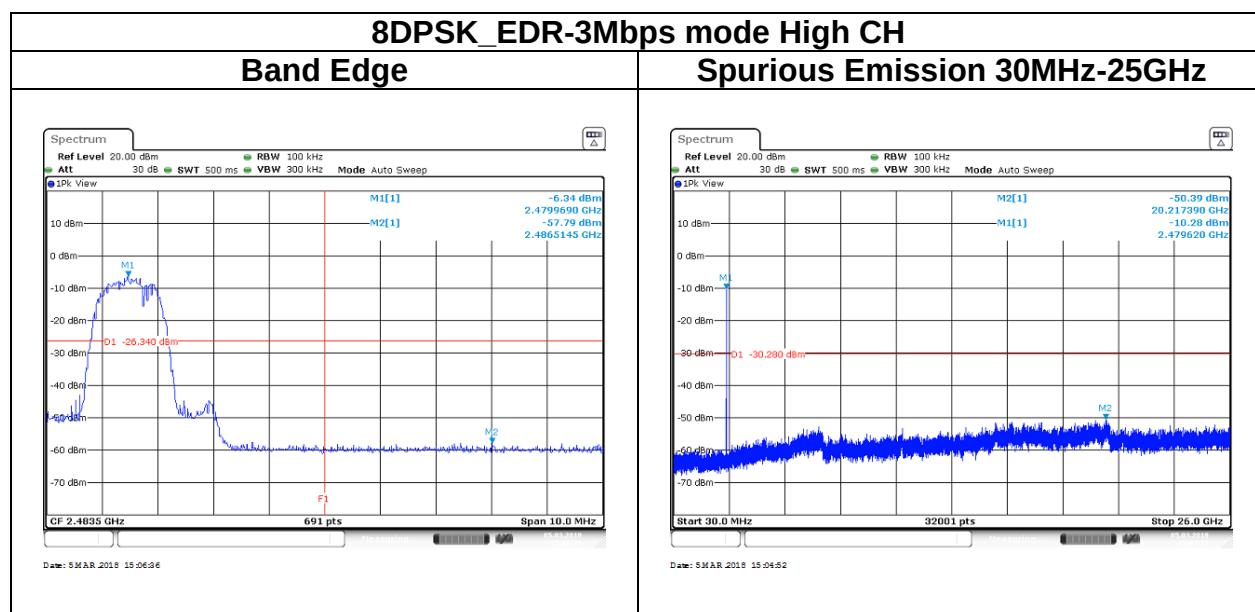

5.7 TIME OF OCCUPANCY (DWEELL TIME)

5.7.1 Test Limit


According to §15.247(a)(1)(iii),

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

5.7.2 Test Procedure

1. EUT RF output port connected to the SA by RF cable.
2. Set center frequency of spectrum analyzer = operating frequency.
3. Set the spectrum analyzer as RBW, VBW=1MHz, Sweep = 1 ms


5.7.3 Test Setup

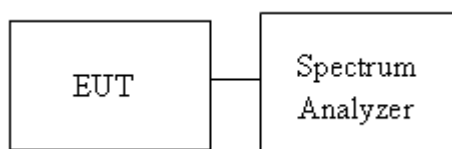

5.7.4 Test Result

Time of Occupancy (Dwell Time)							
Mode	Frequency (MHz)	Pulse Time Per Hopping (ms)	Minimum Number of Hopping Freq.	Number of pulse in	Dwell Time IN	Dwell Time Limits (s)	Result
				(0.4 * N sec)	(0.4 * N sec)		
BDR-1Mbps	2441	2.9565	79	106.67	0.3154	0.4	Pass
EDR-3Mbps	2441	2.971	79	106.67	0.3169	0.4	
Non-AFH: DH5 Packet permit maximum 1600/ 79 / 6 = 3.37 hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times 3.37 * 0.4 *79 = 106.6							
AFH: DH5 Packet permit maximum 800/ 20 / 6 = 6.666 hops per second in each channel (5 time slots RX, 1 time slot TX). So, the dwell time is the time duration of the pulse times 6.666*0.4*20 = 53.33							

Test Data

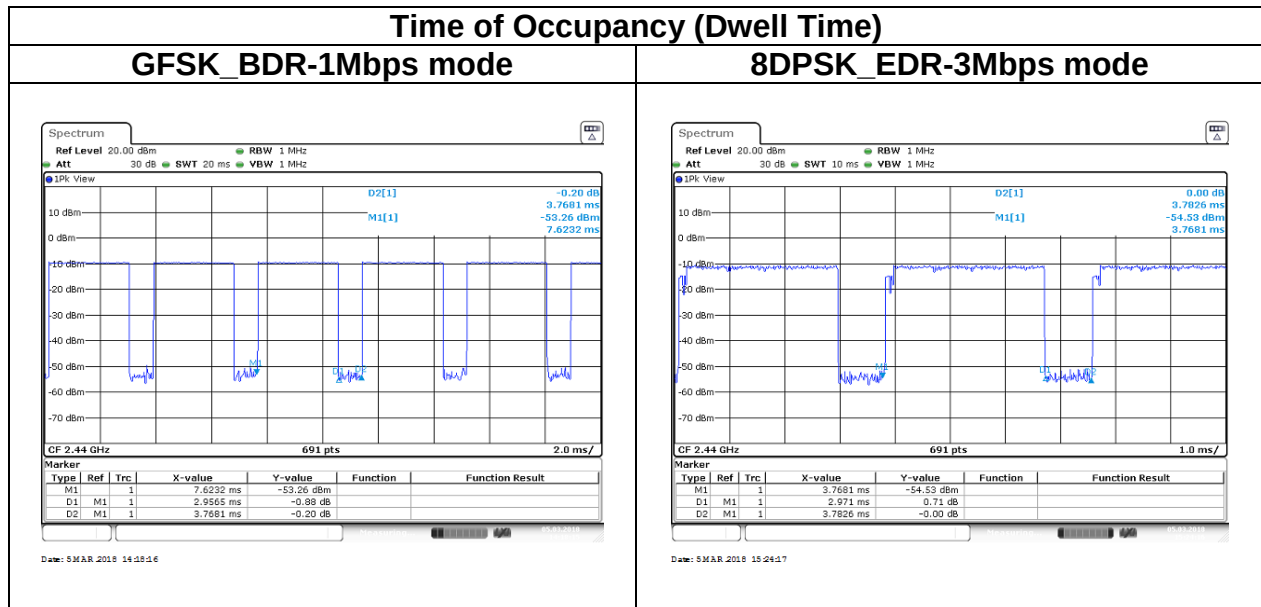

5.8 RADIATION BANDEDGE AND SPURIOUS EMISSION

5.8.1 Test Limit

FCC according to §15.247(d), §15.209 and §15.205,

In any 100 kHz bandwidth outside the authorized frequency band, all harmonic and spurious must be least 20 dB below the highest emission level with the authorized frequency band. Radiation emission which fall in the restricted bands must also follow the FCC section 15.209 as below limit in table.

Below 30 MHz

Frequency	Field Strength (microvolts/m)	Magnetic H-Field (microamperes/m)	Measurement Distance (metres)
9-490 kHz	2,400/F (F in kHz)	2,400/F (F in kHz)	300
490-1,705 kHz	24,000/F (F in kHz)	24,000/F (F in kHz)	30
1.705-30 MHz	30	N/A	30

Above 30 MHz

Frequency (MHz)	Field Strength microvolts/m at 3 metres (watts, e.i.r.p.)	
	Transmitters	Receivers
30-88	100 (3 nW)	100 (3 nW)
88-216	150 (6.8 nW)	150 (6.8 nW)
216-960	200 (12 nW)	200 (12 nW)
Above 960	500 (75 nW)	500 (75 nW)

Remark:

Although these tests were performed other than open area test site, adequate comparison measurements were confirmed against 30 m open area test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 937606.

5.8.2 Test Procedure

1. The EUT is placed on a turntable, Above 1 GHz is 1.5m and below 1 GHz is 0.8m above ground plane. The EUT Configured un accordance with ANSI C63.10, and the EUT set in a continuous mode.

2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. And EUT is set 3m away from the receiving antenna, which is scanned from 1m to 4m above the ground plane to find out the highest emissions. Measurement are made polarized in both the vertical and the horizontal positions with antenna.

3. Span shall wide enough to full capture the emission measured. The SA from 9kHz to 26.5GHz set to the low, Mid and High channels with the EUT transmit.

Note: No emission found between lowest internal used/generated frequency to 30MHz(9KHz~30MHz)

4. For harmonic, the worst case of output power was BDR-1Mbps. Therefore only BDR-1Mbps record in the report.

5. The SA setting following :

(1) Below 1G : RBW = 100kHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(2) Above 1G :

(2.1) For Peak measurement : RBW = 1MHz, VBW $\geq$ 3 RBW, Sweep = Auto, Detector = Peak, Trace = Max hold.

(2.2) For Average measurement : RBW = 1MHz, VBW


·If Duty Cycle $\geq$ 98%, VBW=10Hz.

·If Duty Cycle < 98%, VBW $\geq$ 1/T.


Configuration	Duty Cycle (%)	T(ms)	1/T (Hz)	VBW setting
GFSK_BDR-1Mbps	78%	2.9200	0.342	360Hz
8DPSK_EDR-3Mbps	78%	2.9500	0.339	360Hz

5.8.3 Test Setup


9kHz ~ 30MHz

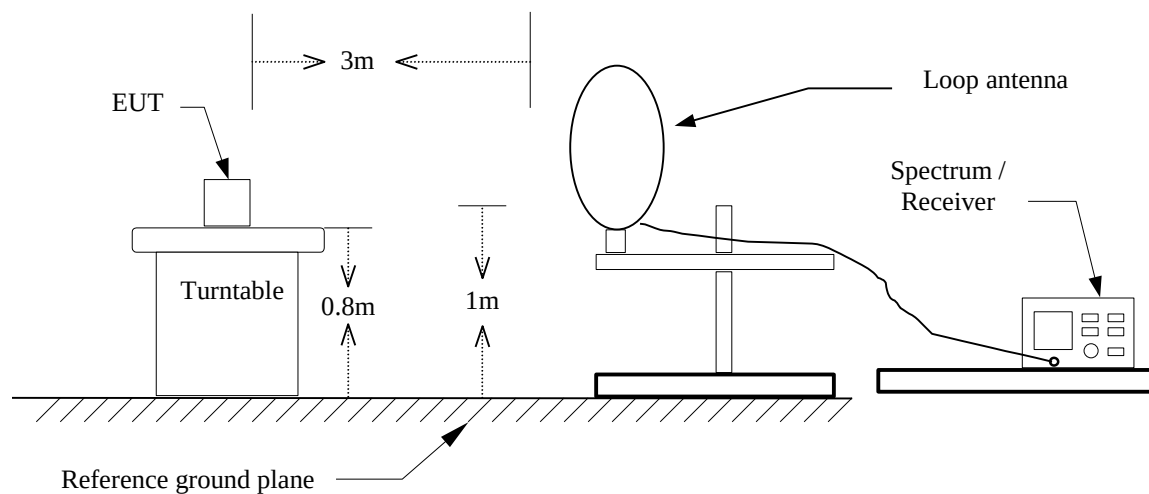

30MHz ~ 1GHz

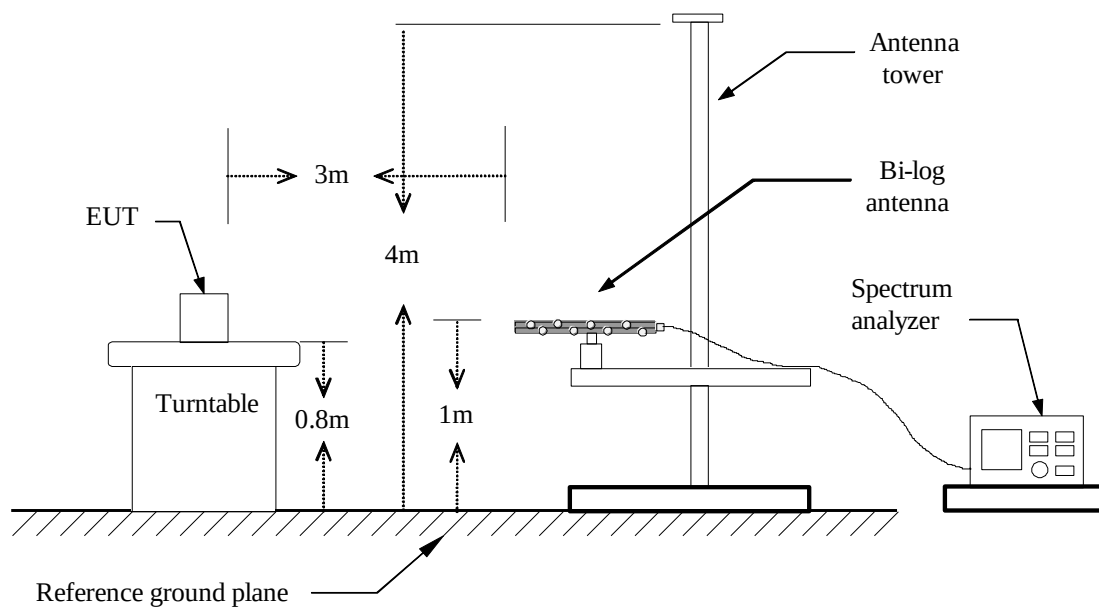


Above 1 GHz

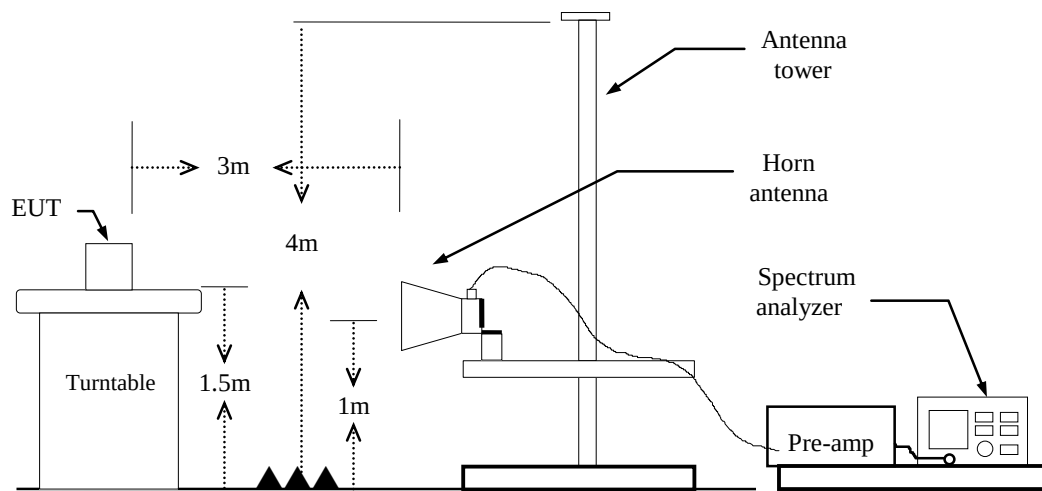

5.8.4 Test Result


Band Edge Test Data

Test Mode:	GFSK_BDR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	March 6, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

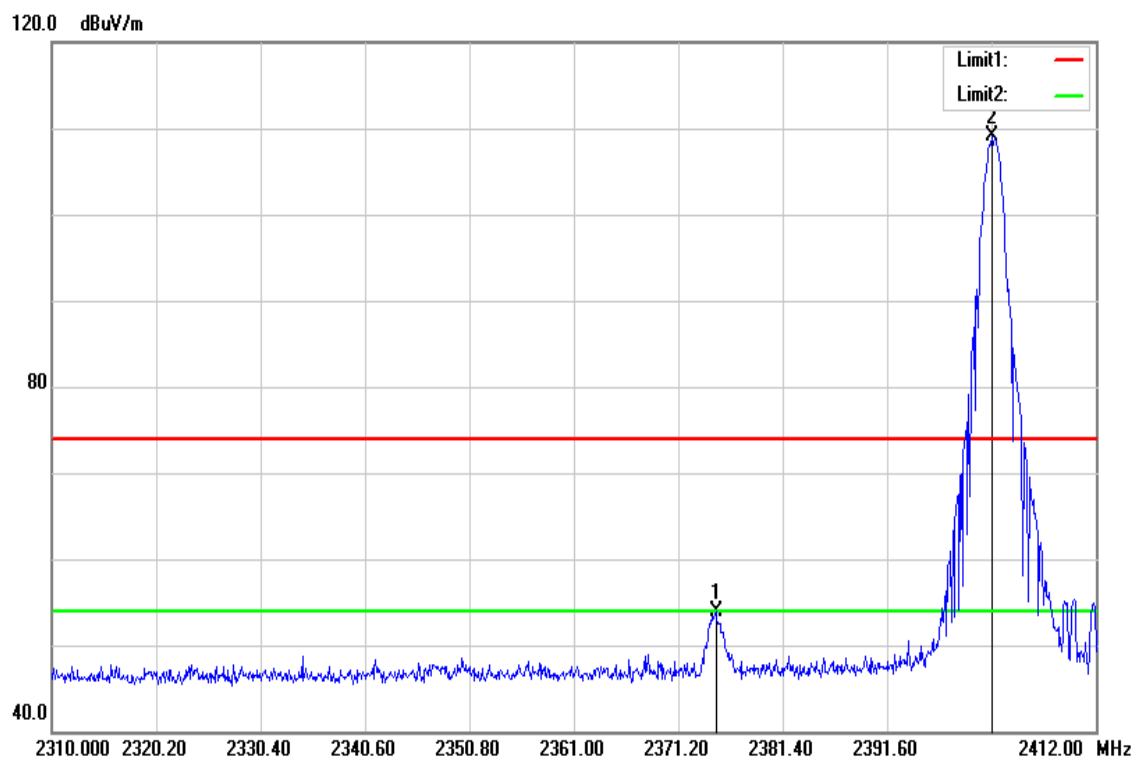


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.872	57.02	-3.04	53.98	74.00	-20.02	peak
2	2401.902	111.99	-2.95	109.04	--.00	--	peak

Test Mode:	GFSK_BDR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	March 6, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	AC 120V

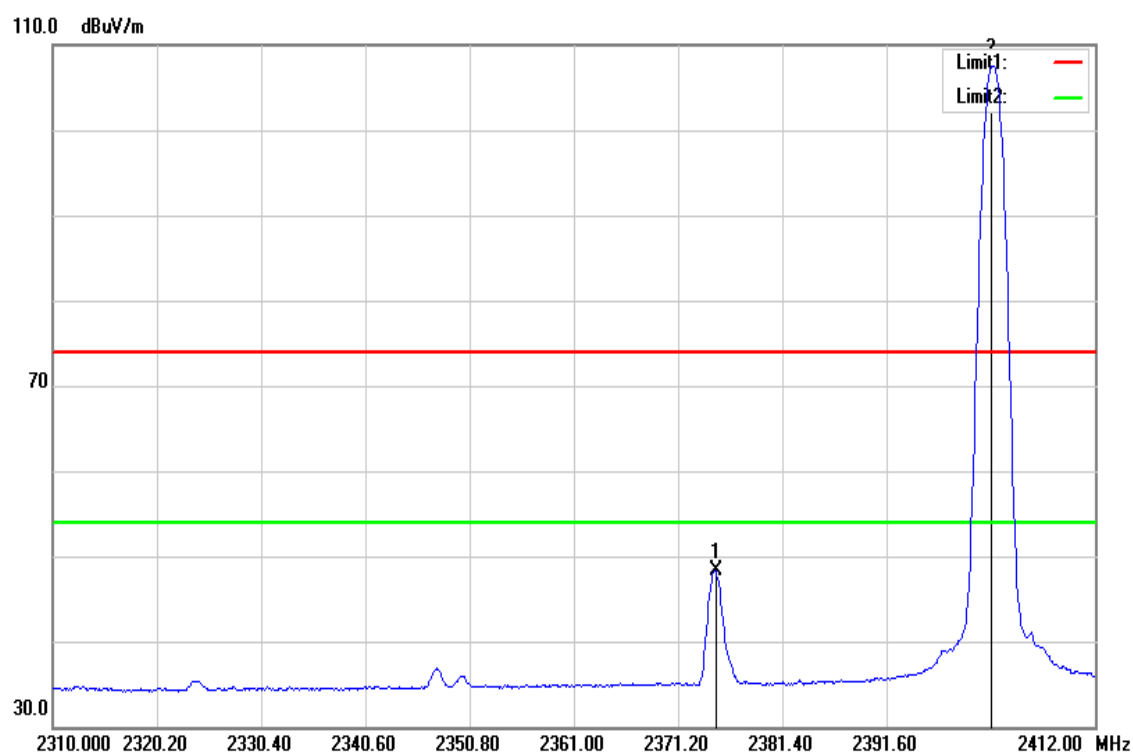


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2374.872	51.37	-3.04	48.33	54.00	-5.67	AVG
2	2401.902	110.46	-2.95	107.51	--	--	AVG

Test Mode:	GFSK_BDR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

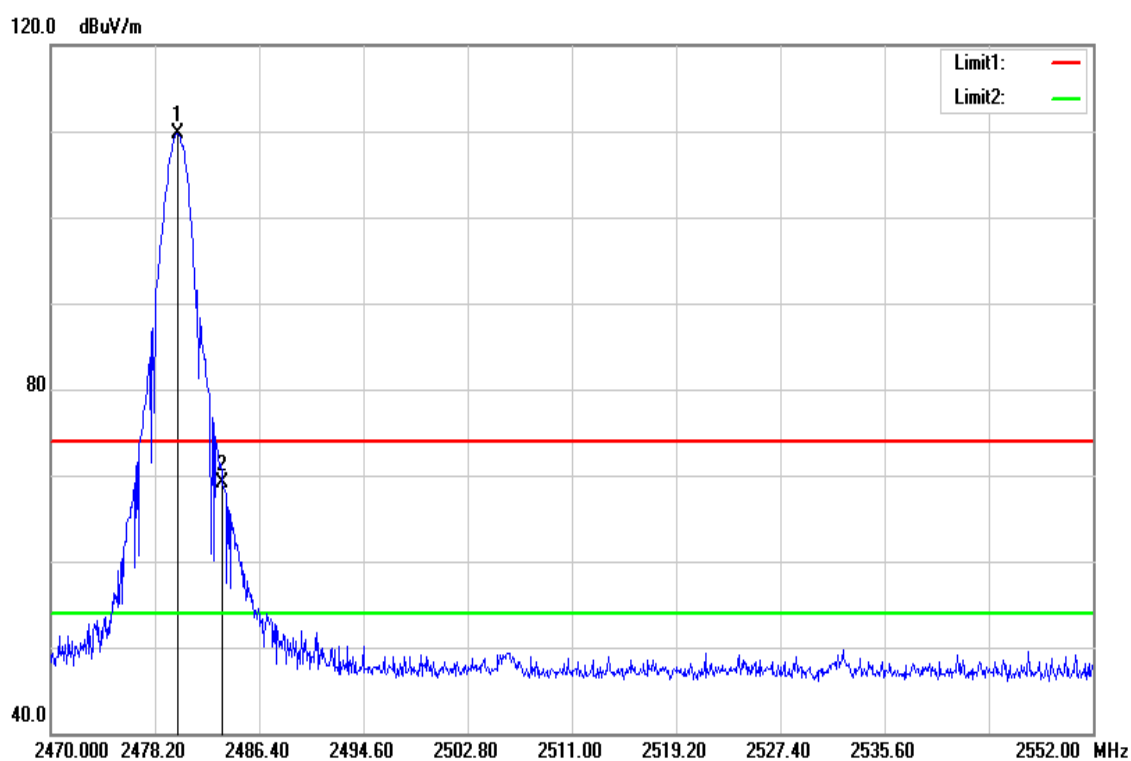


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.045	112.36	-2.70	109.66	--	--	peak
2	2483.571	71.83	-2.69	69.14	74.00	-4.86	peak

Test Mode:	GFSK_BDR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	AC 120V

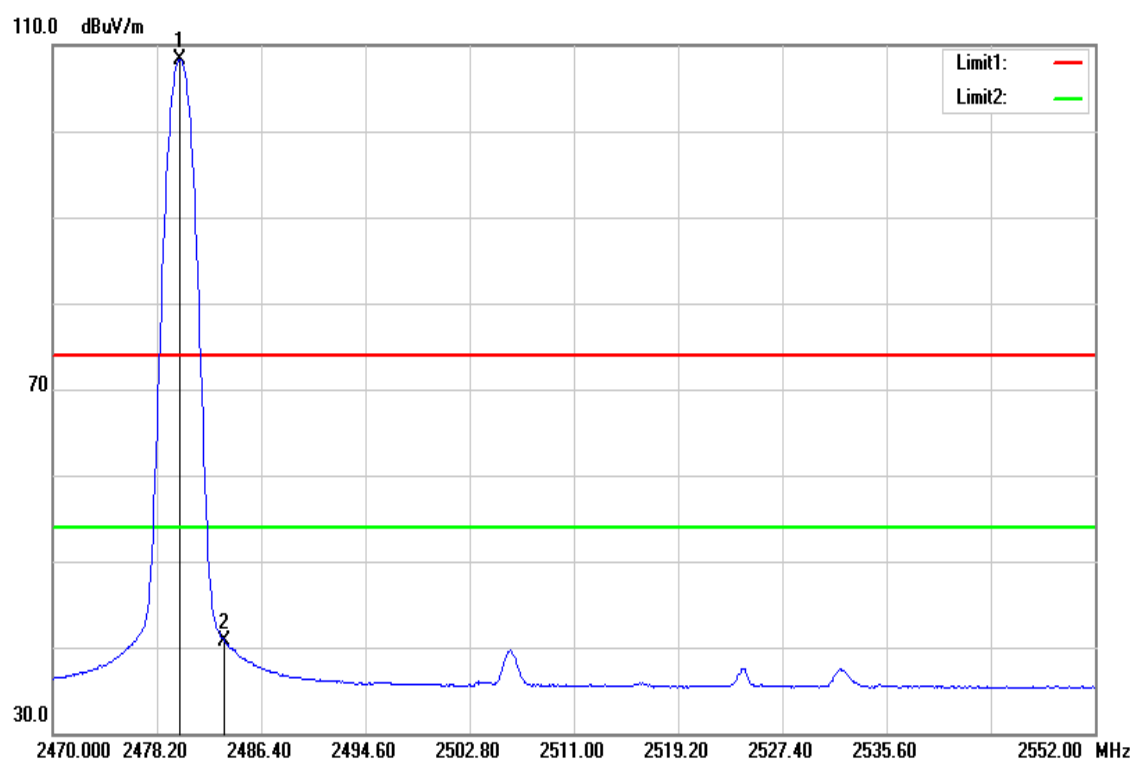


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.004	111.04	-2.70	108.34	--	--	AVG
2	2483.500	43.42	-2.69	40.73	54.00	-13.27	AVG

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

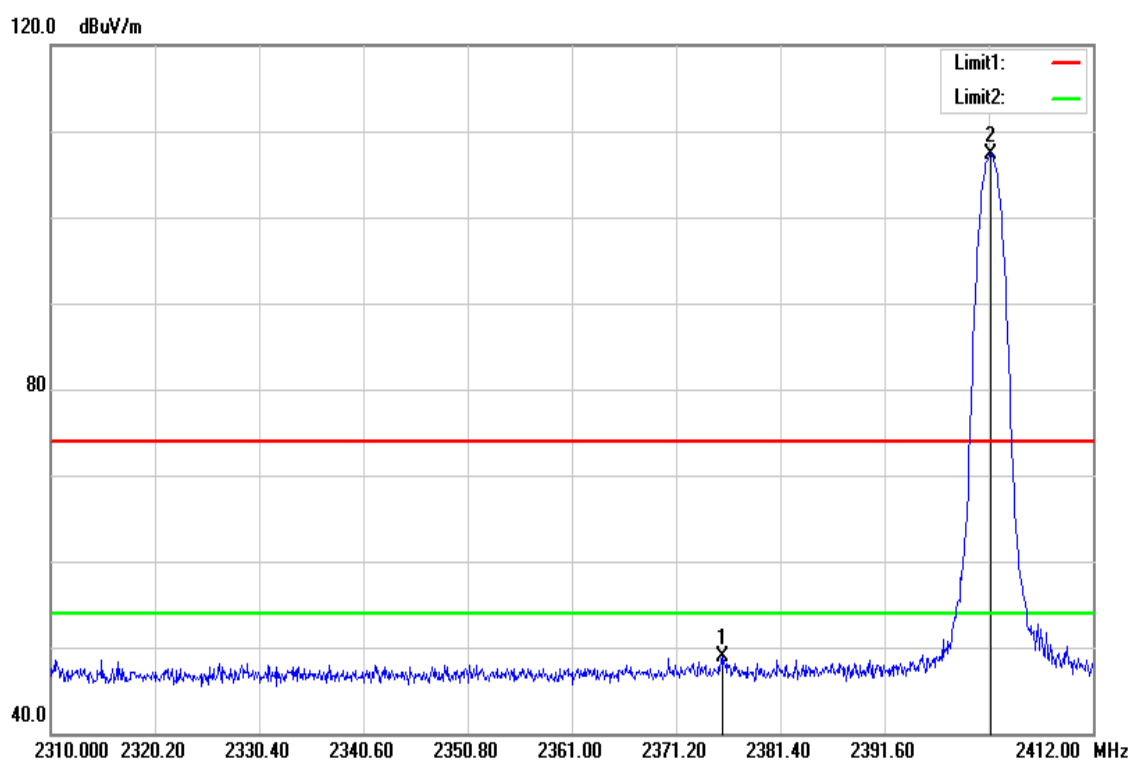


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.688	51.85	-3.02	48.83	74.00	-25.17	peak
2	2402.004	110.27	-2.95	107.32	--	--	peak

Test Mode:	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	AC 120V

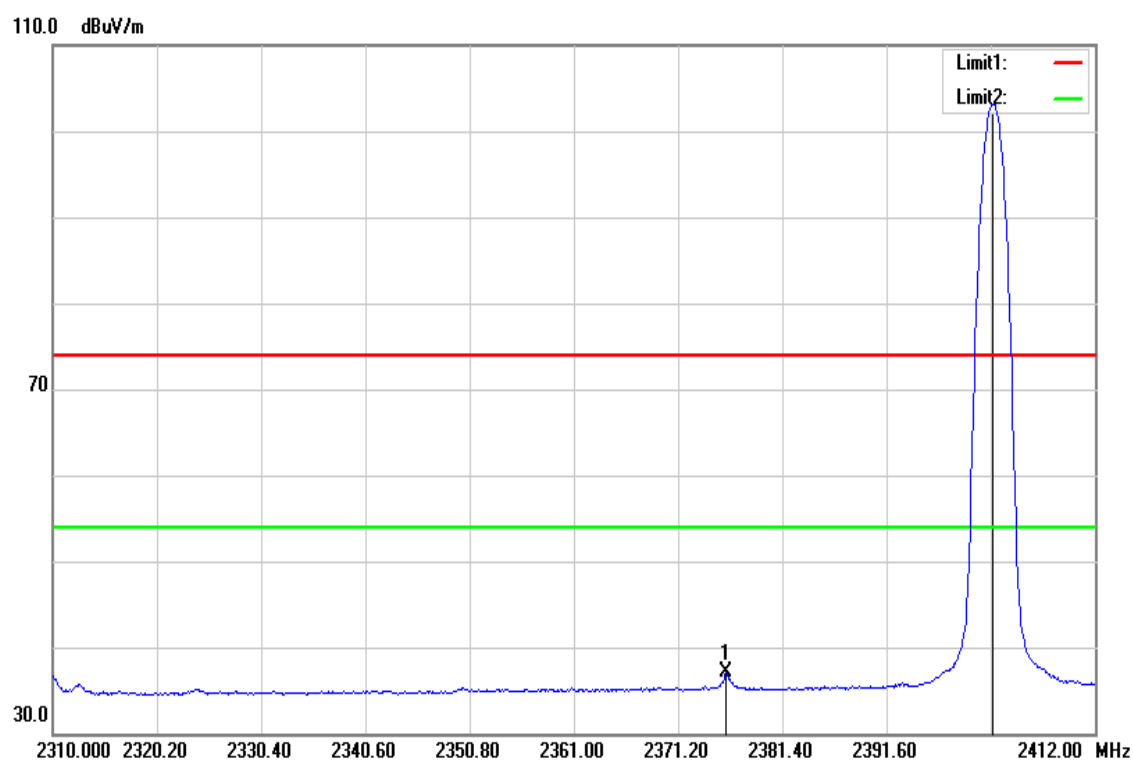


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2375.943	40.12	-3.02	37.10	54.00	-16.90	AVG
2	2402.055	106.14	-2.95	103.19	--	--	AVG

Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

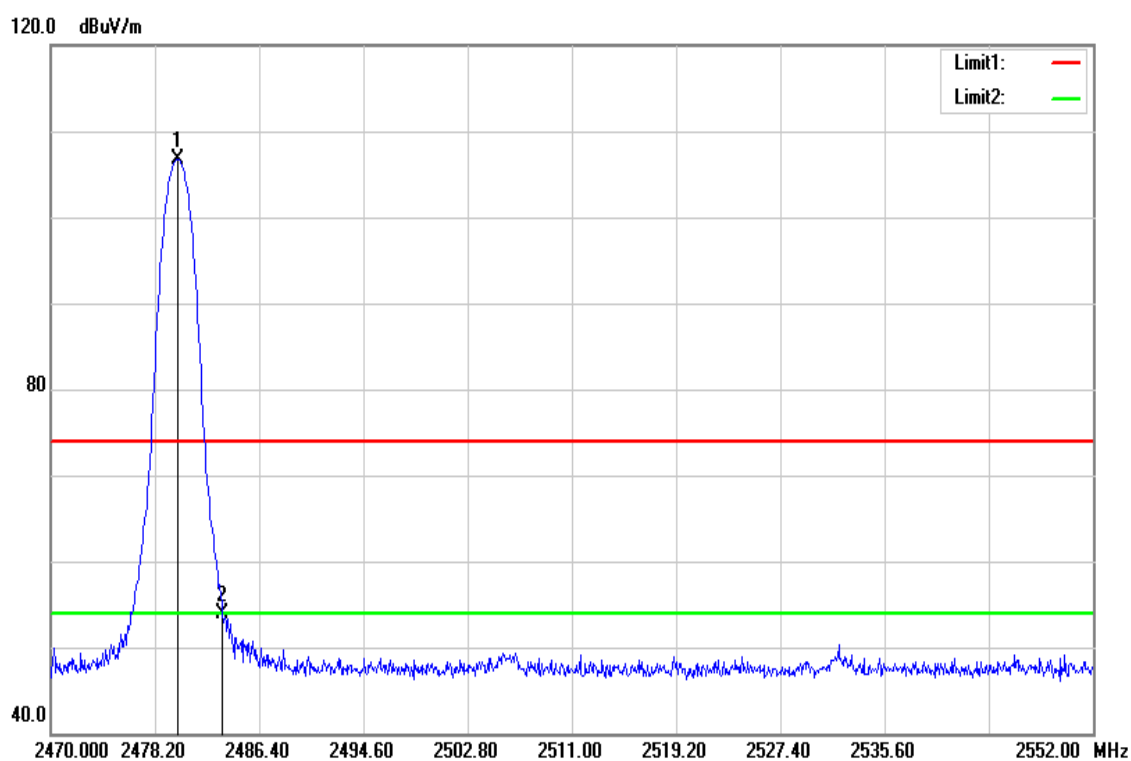

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.004	109.41	-2.70	106.71	--	--	peak
2	2483.500	56.62	-2.69	53.93	74.00	-20.07	peak


Test Mode:	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Band Edge	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Average	Test Voltage	AC 120V

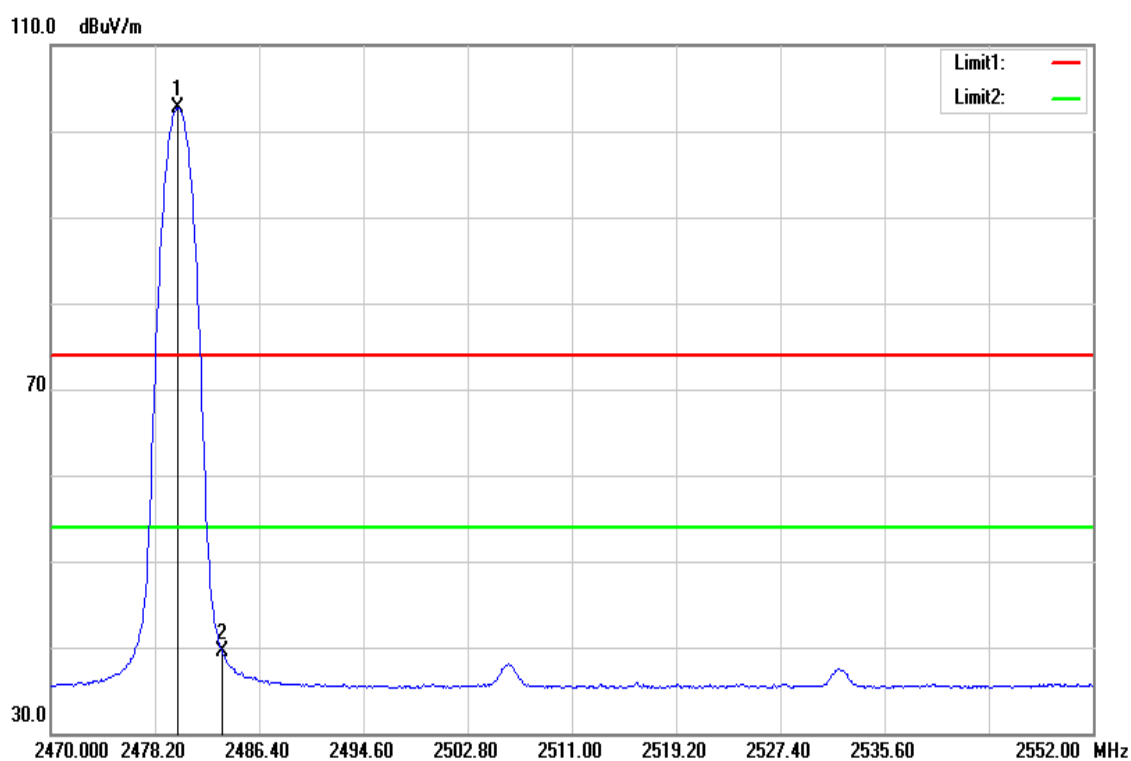

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	2480.004	105.47	-2.70	102.77	--	--	AVG
2	2483.500	42.16	-2.69	39.47	54.00	-14.53	AVG


Below 1G Test Data

Test Mode:	BT Mode	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	March 5, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

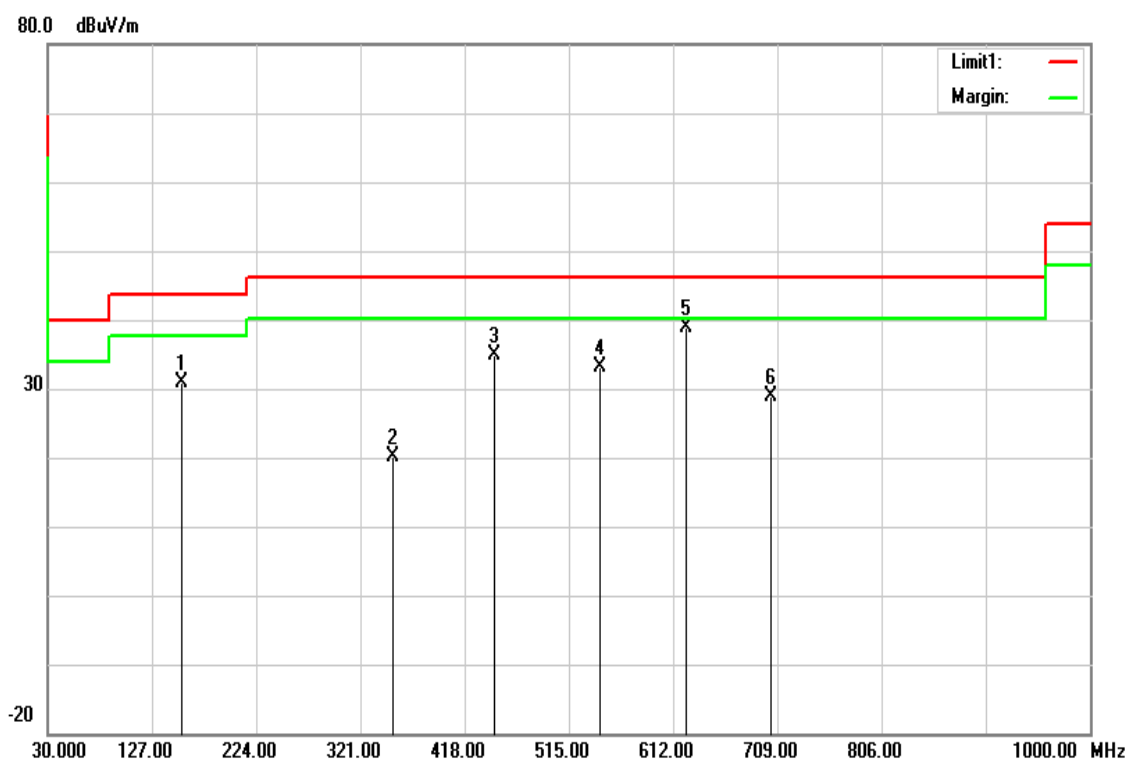

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	155.1300	46.72	-15.85	30.87	43.52	-12.65	peak
2	351.0700	33.01	-12.95	20.06	46.02	-25.96	peak
3	445.1600	44.65	-9.78	34.87	46.02	-11.15	peak
4	544.1000	40.75	-7.66	33.09	46.02	-12.93	peak
5	624.6100	45.13	-6.25	38.88	46.02	-7.14	peak
6	703.1800	33.65	-4.85	28.80	46.02	-17.22	peak


Test Mode:	BT Mode	Temp/Hum	22(°C)/ 34%RH
Test Item	30MHz-1GHz	Test Date	March 5, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

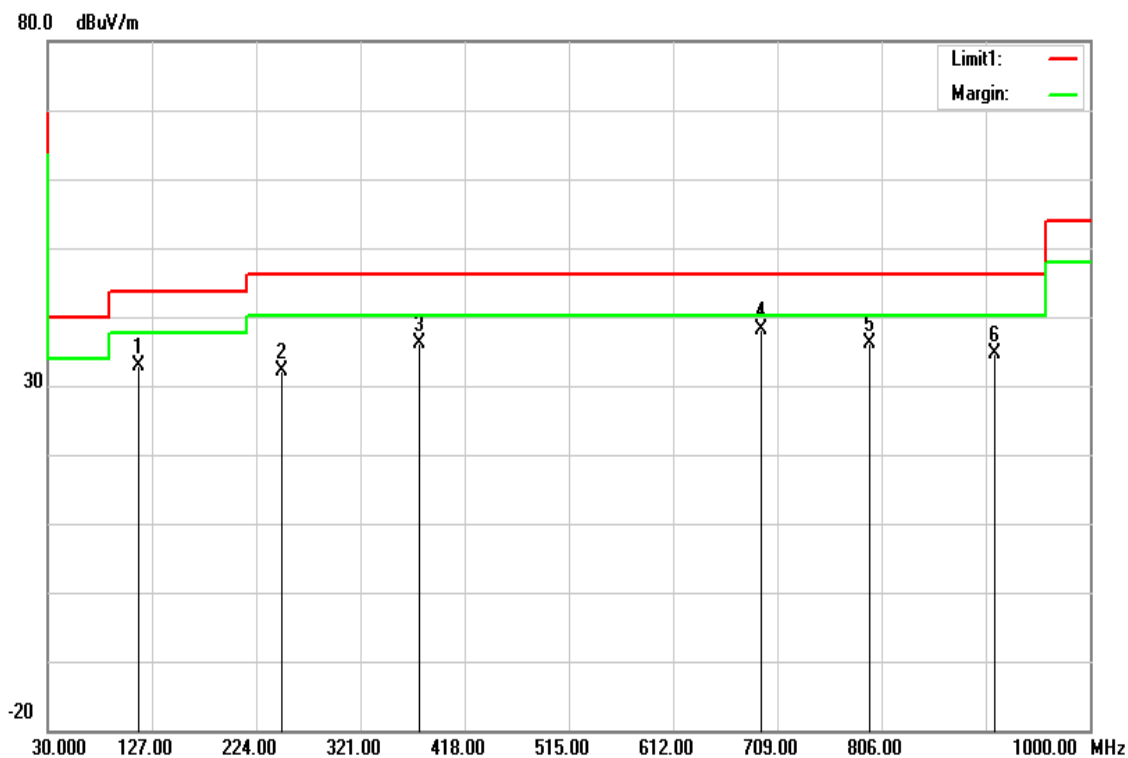

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	114.3900	48.76	-16.00	32.76	43.52	-10.76	peak
2	248.2500	47.91	-15.88	32.03	46.02	-13.99	peak
3	375.3200	48.36	-12.17	36.19	46.02	-9.83	peak
4	693.4800	42.98	-4.97	38.01	46.02	-8.01	peak
5	794.3600	39.58	-3.49	36.09	46.02	-9.93	peak
6	910.7600	36.36	-1.83	34.53	46.02	-11.49	peak

Above 1G Test Data

Test Mode:	GFSK_BDR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

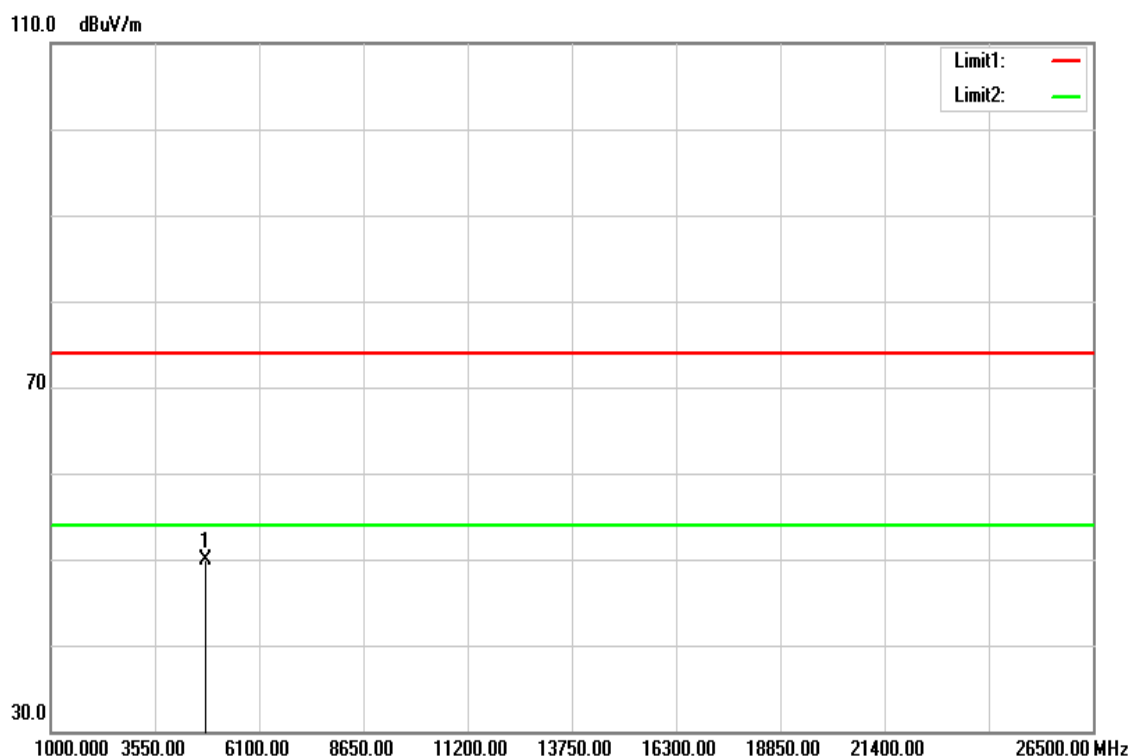


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4802.500	45.58	4.33	49.91	74.00	-24.09	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BDR-1Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

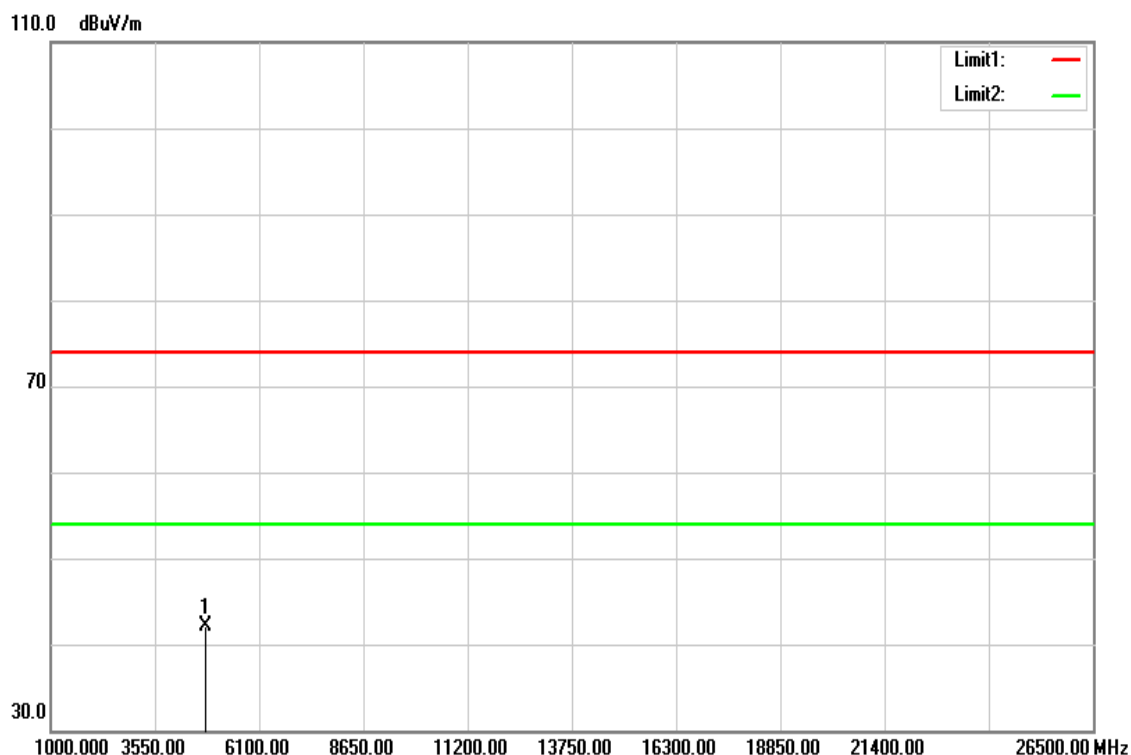


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	37.85	4.34	42.19	74.00	-31.81	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BDR-1Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

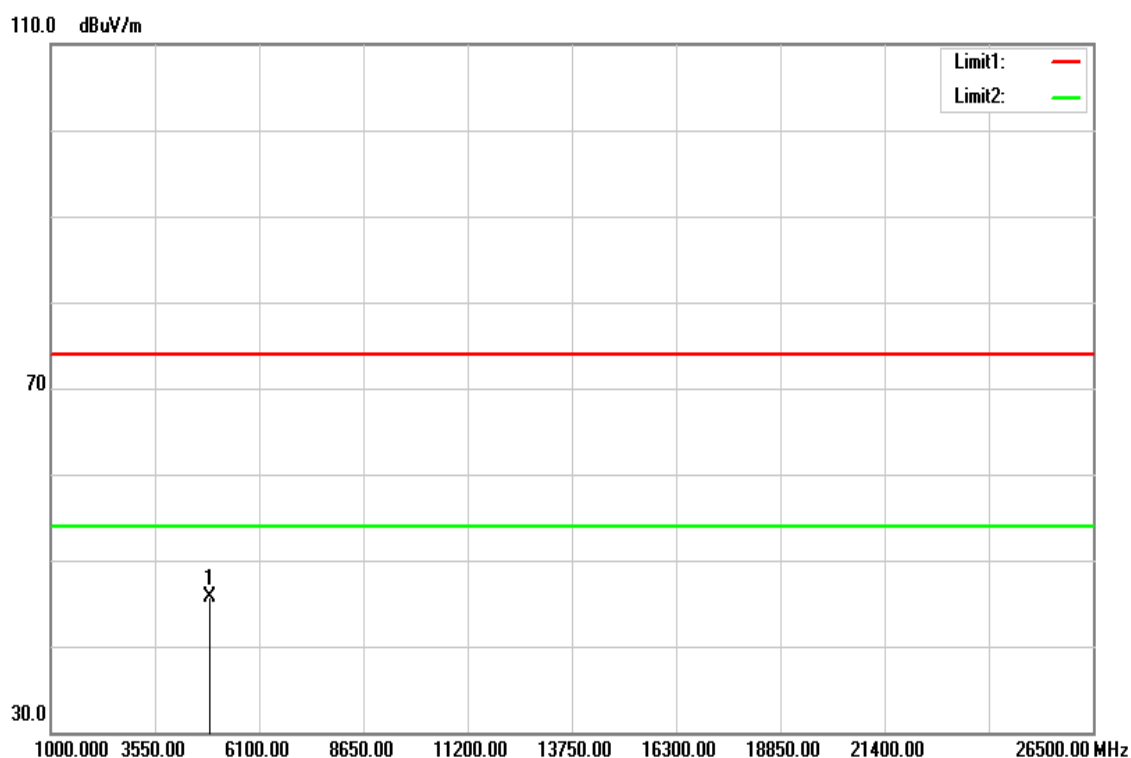


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	41.19	4.49	45.68	74.00	-28.32	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BDR-1Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

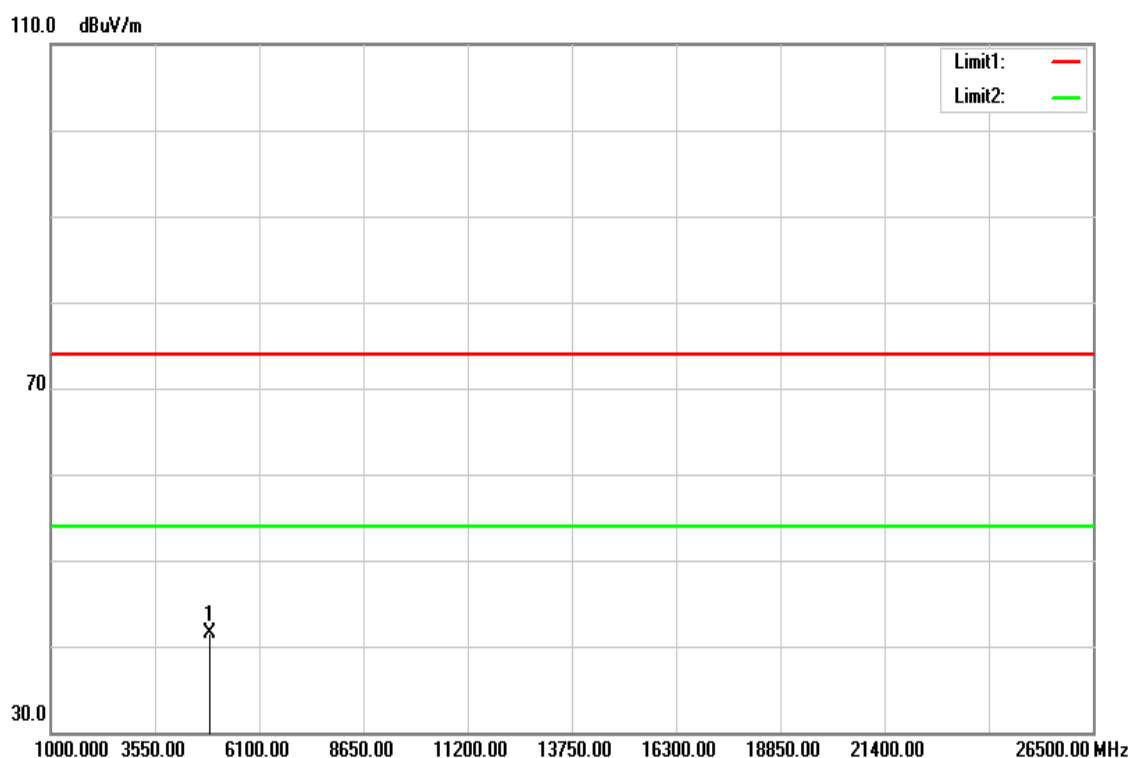


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	37.01	4.49	41.50	74.00	-32.50	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BDR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

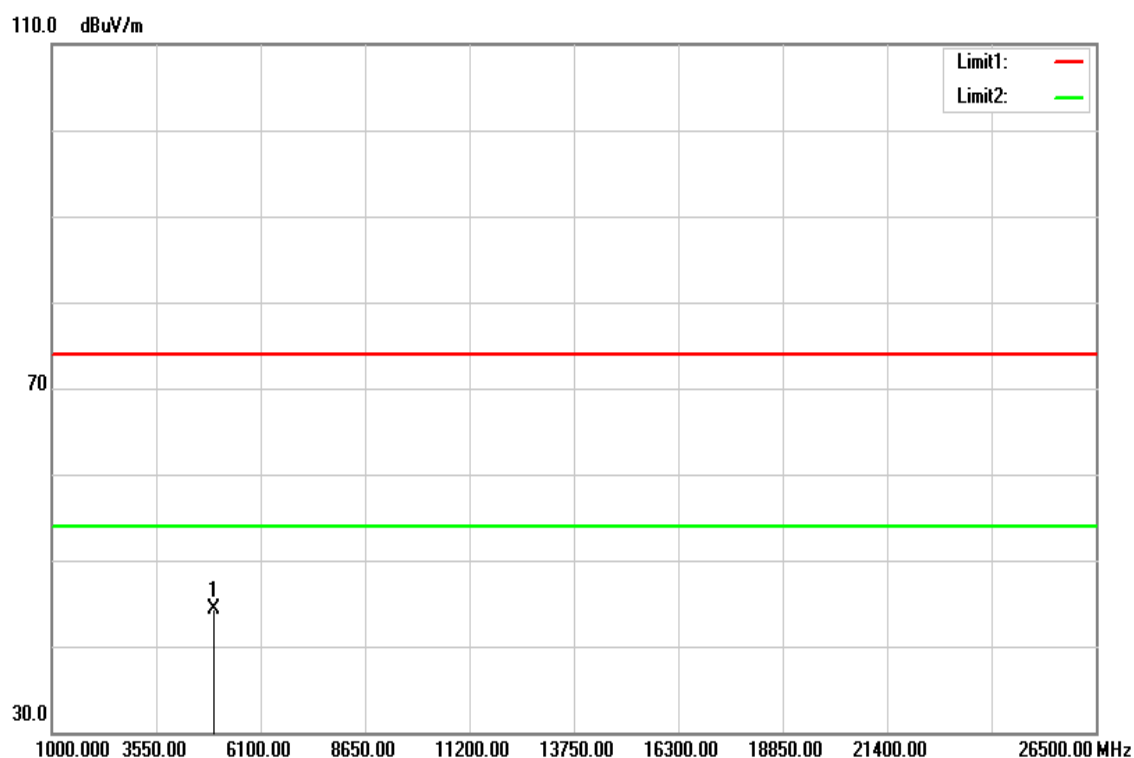


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	39.72	4.61	44.33	74.00	-29.67	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode:	GFSK_BDR-1Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

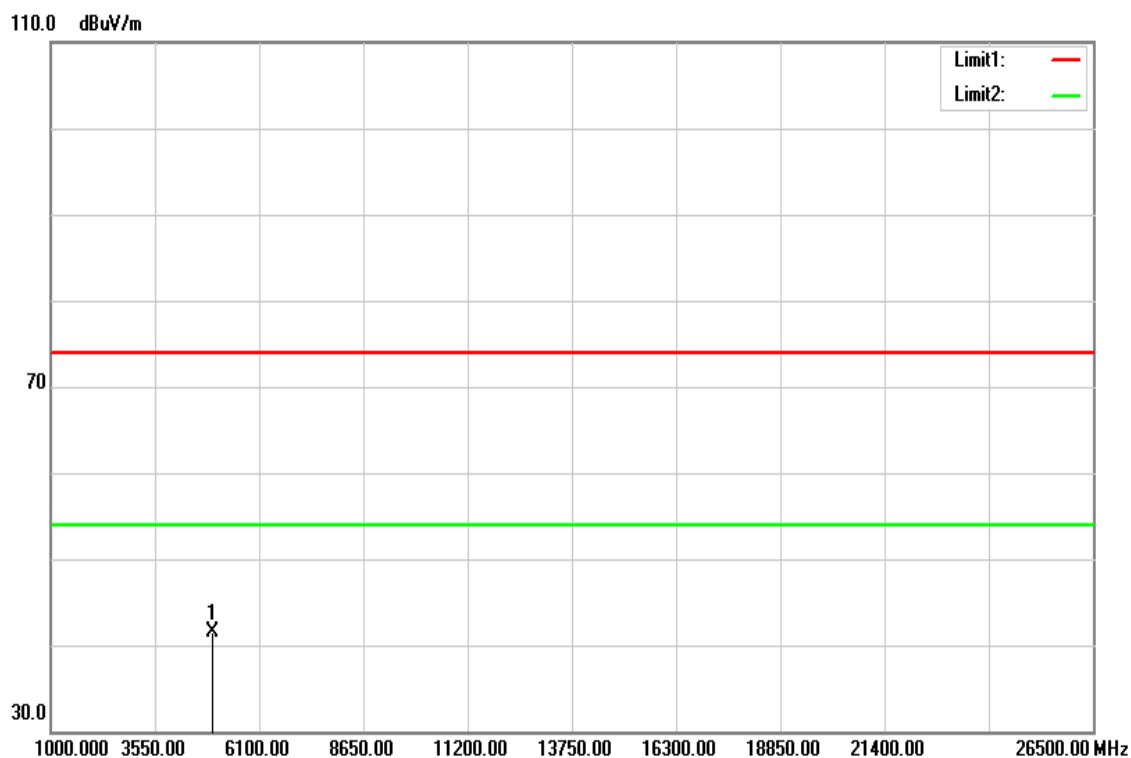


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	36.89	4.61	41.50	74.00	-32.50	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

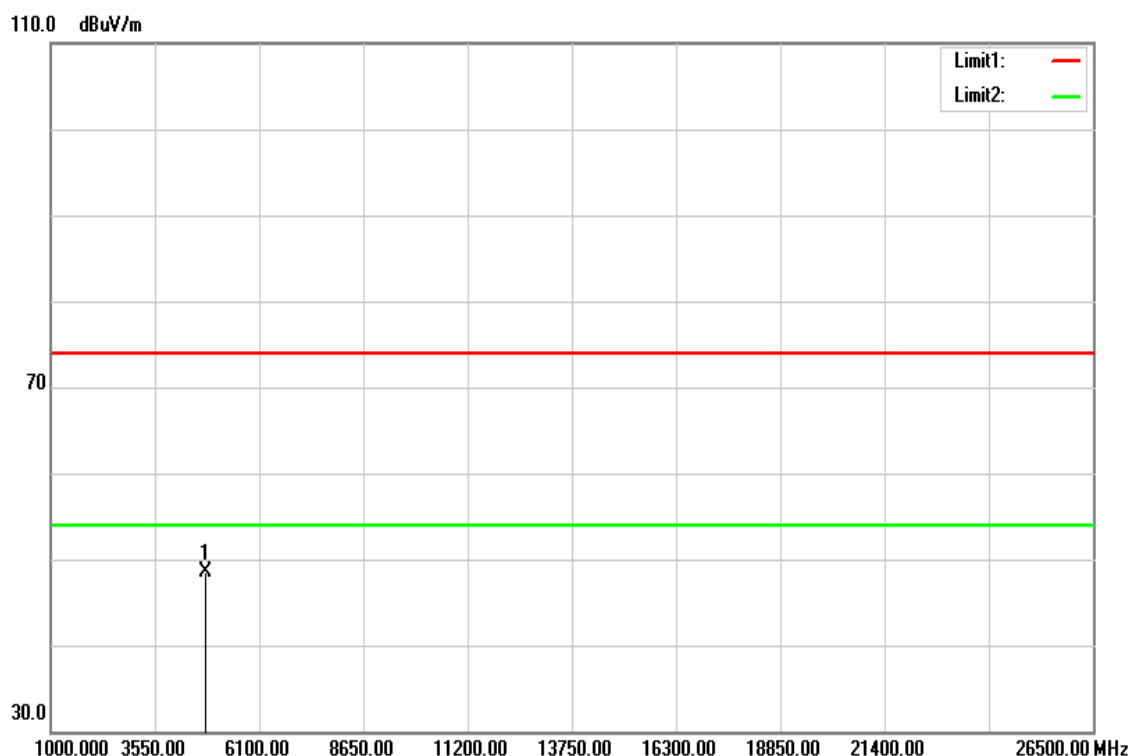


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	44.24	4.34	48.58	74.00	-25.42	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Low CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

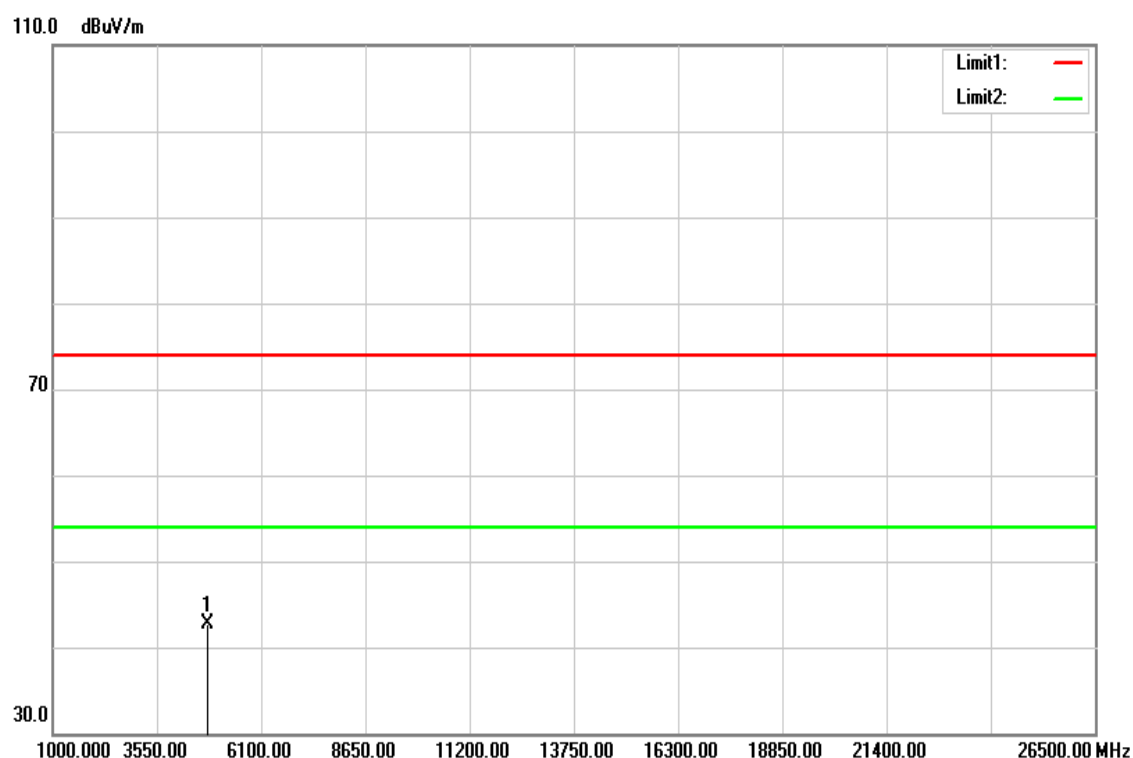


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4804.000	38.28	4.34	42.62	74.00	-31.38	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

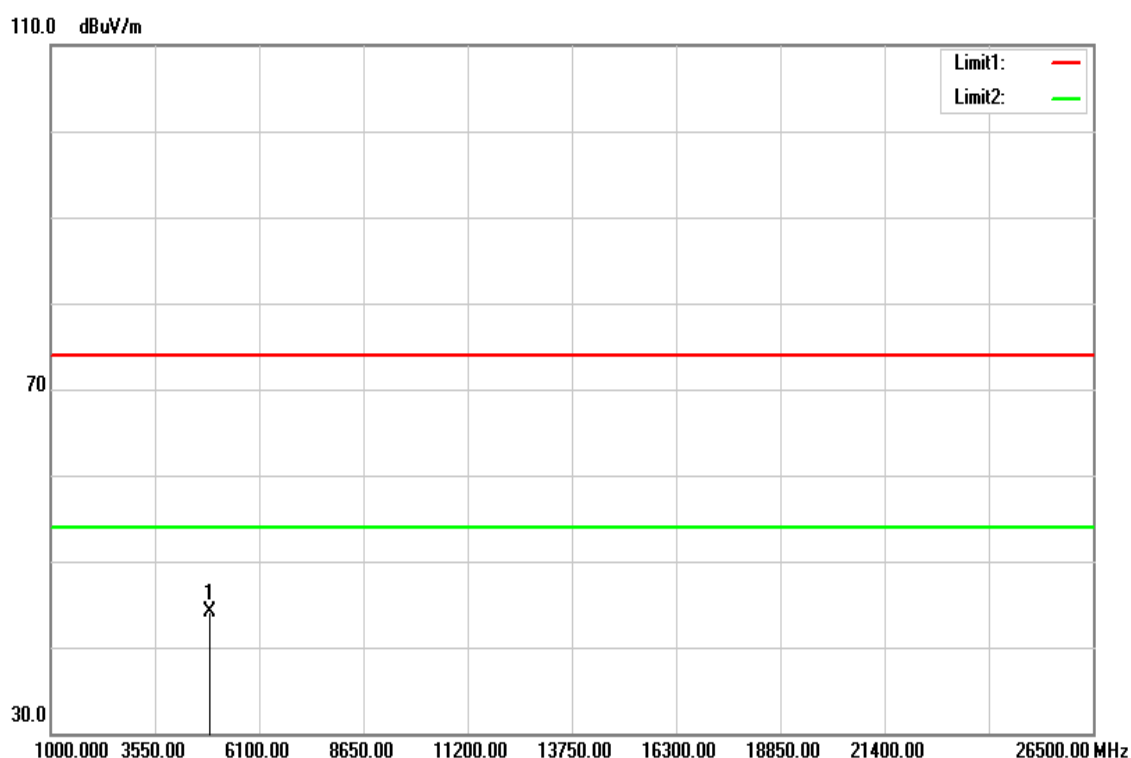


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	39.59	4.49	44.08	74.00	-29.92	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps Mid CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

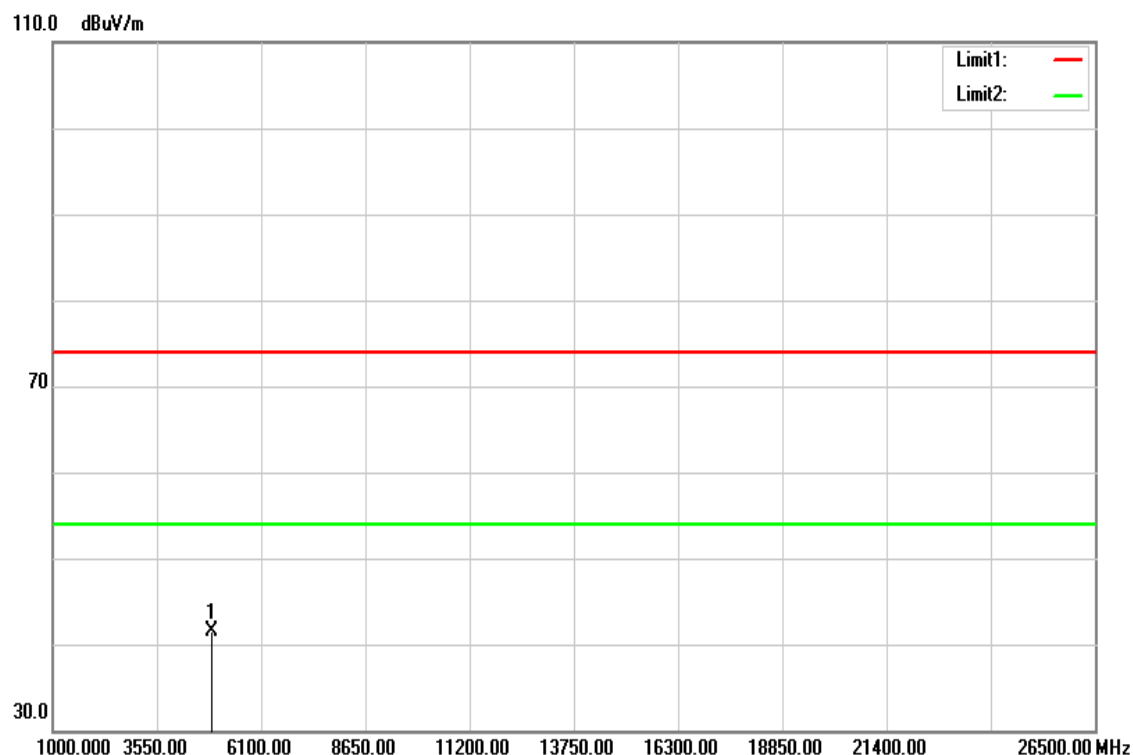


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4882.000	36.99	4.49	41.48	74.00	-32.52	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Vertical	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

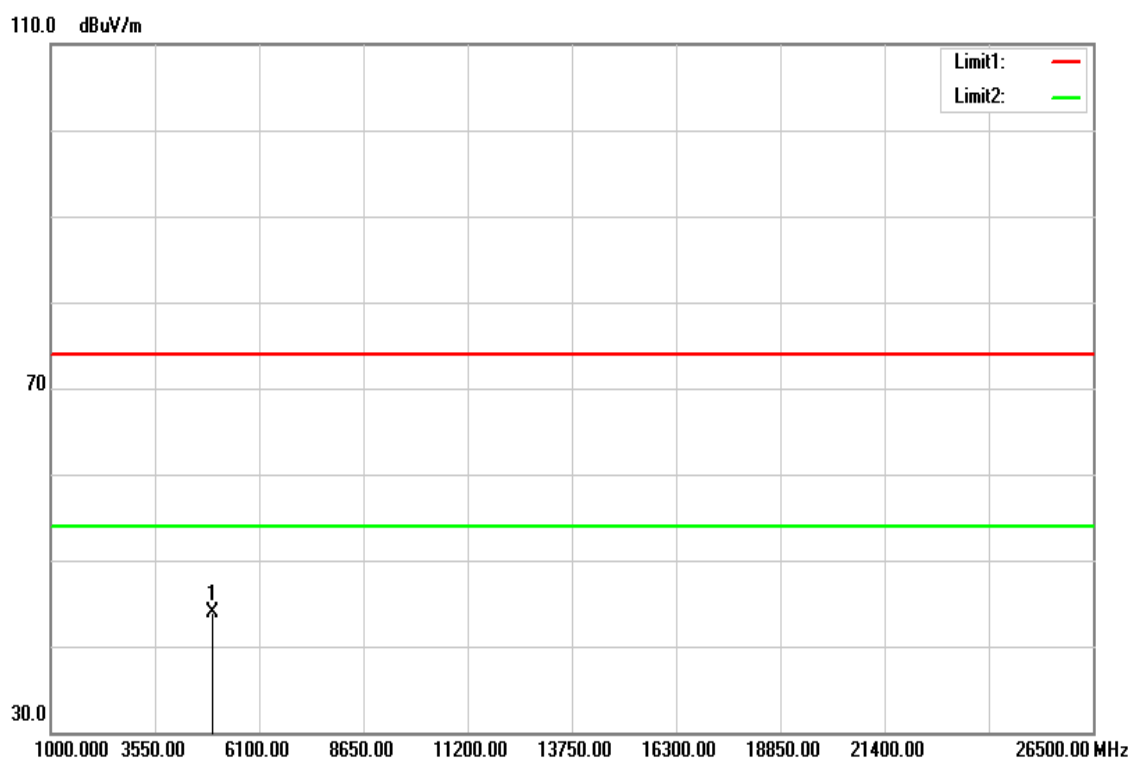


No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	39.23	4.61	43.84	74.00	-30.16	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit

Test Mode	8DPSK_EDR-3Mbps High CH	Temp/Hum	22(°C)/ 34%RH
Test Item	Harmonic	Test Date	March 7, 2018
Polarize	Horizontal	Test Engineer	Jerry Chuang
Detector	Peak	Test Voltage	AC 120V

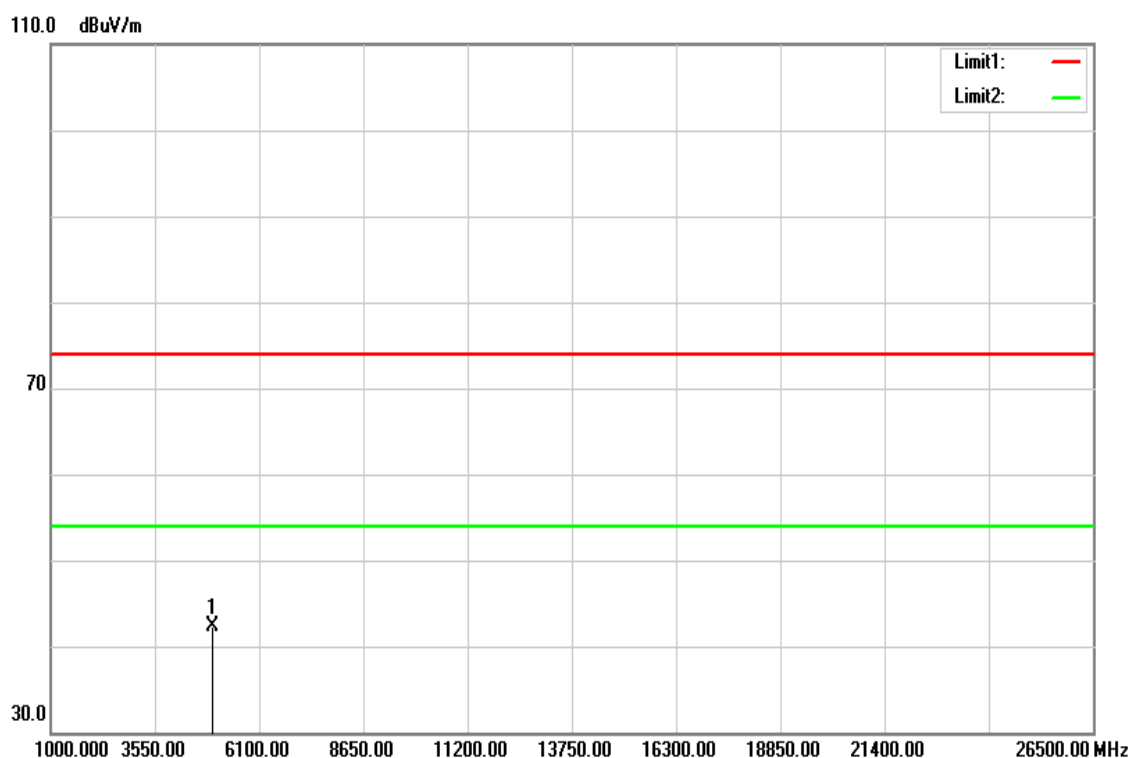

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	4960.000	37.66	4.61	42.27	74.00	-31.73	peak

Remark:

1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
2. For above 1GHz, the EUT peak value was under average limit, therefore the Average value compliance with the average limit