



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8
CLASS II PERMISSIVE CHANGE**

CERTIFICATION TEST REPORT

FOR

WIRELESS LAN MODULE

MODEL NUMBER: DWM-W024

**FCC ID: EW4DWMW024
IC: 4250A-DWMW024**

REPORT NUMBER: 10J13513-1

ISSUE DATE: DECEMBER 22, 2010

Prepared for
**MITSUMI ELECTRIC CO., LTD.
1601, SAKAI ATSUGI-SHI
KAN, 243-8533, JAPAN**

Prepared by
**COMPLIANCE CERTIFICATION SERVICES (UL CCS)
47173 BENICIA STREET
FREMONT, CA 94538, U.S.A.
TEL: (510) 771-1000
FAX: (510) 661-0888**



NVLAP LAB CODE 200065-0

Revision History

Rev.	Issue Date	Revisions	Revised By
--	12/22/10	Initial Issue	T. Chan

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY.....	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION.....	5
4.2. SAMPLE CALCULATION.....	5
4.3. MEASUREMENT UNCERTAINTY.....	5
5. EQUIPMENT UNDER TEST.....	6
5.1. DESCRIPTION OF EUT.....	6
5.2. MAXIMUM CONDUCTED OUTPUT POWER	6
5.3. DESCRIPTION OF CLASS II PERMISSIVE CHANGE	6
5.4. DESCRIPTION OF AVAILABLE ANTENNAS.....	6
5.5. SOFTWARE AND FIRMWARE.....	6
5.6. WORST-CASE CONFIGURATION AND MODE	6
5.7. DESCRIPTION OF TEST SETUP.....	7
6. TEST AND MEASUREMENT EQUIPMENT	9
7. RADIATED TEST RESULTS.....	10
7.1. LIMITS AND PROCEDURE	10
7.2. TRANSMITTER ABOVE 1 GHz IN THE 2.4GHZ BAND	11
7.2.1. TX 802.11 MODE.....	11
7.2.2. TX 802.11b MODE.....	20
7.2.3. TX 802.11g MODE.....	29
7.3. TX SPURIOUS EMISSION BELOW 1GHZ.....	38
7.3.1. TX 802.11 MODE.....	38
7.3.2. TX 802.11b MODE.....	41
7.3.3. TX 802.11g MODE.....	44
7.4. RECEIVER ABOVE 1 GHz.....	47
8. AC POWER LINE CONDUCTED EMISSIONS.....	48
9. SETUP PHOTOS	52

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: MITSUMI ELECTRIC CO., LTD.
1601, SAKAI
ATSUGI-SHI, KAN 243-8533, JAPAN

EUT DESCRIPTION: WIRELESS LAN MODULE

MODEL: DWM-W024

SERIAL NUMBER: NDP100001488

DATE TESTED: NOVEMBER 29 TO DECEMBER 02, 2010

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

Compliance Certification Services, Inc. (UL CCS) tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL CCS based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL CCS and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL CCS will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For CCS By:

Tested By:



THU CHAN
ENGINEERING MANAGER
UL CCS



THANH NGUYEN
EMC ENGINEER
UL CCS

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4-2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 47173 Benicia Street, Fremont, California, USA.

UL CCS is accredited by NVLAP, Laboratory Code 200065-0. The full scope of accreditation can be viewed at <http://www.ccsemc.com>.

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the apparatus:

PARAMETER	UNCERTAINTY
Conducted Disturbance, 0.15 to 30 MHz	3.52 dB
Radiated Disturbance, 30 to 1000 MHz	4.94 dB

Uncertainty figures are valid to a confidence level of 95%.

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is a WIRELESS LAN MODULE (802.11 + 802.11b/g) manufactured by Mitsumi Electric Co., Ltd.

5.2. MAXIMUM CONDUCTED OUTPUT POWER

The test measurement passed within $\pm 0.5\text{dBm}$ of the original output power.

5.3. DESCRIPTION OF CLASS II PERMISSIVE CHANGE

The major change filed under this application is adding a new host.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes one type of antenna, with a gain of -3.2dBi for Gemtek antenna (Dipole).

5.5. SOFTWARE AND FIRMWARE

The EUT test utility software installed in the host computer during testing was Atheros Radio Test (ART) 6013, ART for TWL, ART_Remote.

5.6. WORST-CASE CONFIGURATION AND MODE

The worst-case data rate for each mode is determined to be as follows, based on preliminary tests of the chipset utilized in this radio.

All final tests in the 802.11 mode were made at 2 Mb/s.
All final tests in the 802.11b mode were made at 1 Mb/s.
All final tests in the 802.11g mode were made at 6 Mb/s.

The worst-position was the EUT with highest emissions. To determine the worst-case, the EUT was investigated for X, Y, and Z-Positions, and the worst position among X, Y, and Z with AC/DC adapter. After the investigations, the worst-position was turned out to be a X-position with Mitsumi AC/DC adapter.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

PERIPHERAL SUPPORT EQUIPMENT LIST				
Description	Manufacturer	Model	Serial Number	FCC ID
Notebook PC	HP	Compaq 6710b	CNU80800TB	DoC
AC Adapter	HP	PPP014L-SA	W97950ELLVIOVM	DoC
EUT AC Adapter	Mitsumi	WAP-002 (USA)	M1	DoC
USB Adapter Board	NINTENDO	4G	E203088	NA


I/O CABLES

I/O CABLE LIST						
Cable No.	Port	# of Identical Ports	Connector Type	Cable Type	Cable Length	Remarks
1	AC Input	2	US 115V	Un-Shielded	2m	N
2	DC Input	2	DC	Un-Shielded	1m	N
3	Audio	1	Earphone	Un-Shielded	1m	N
4	USB	1	USB	Un-Shielded	0.5m	Y

TEST SETUP

The EUT is a stand-alone unit, but connected to the laptop to the support laptop for the setup purpose only. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS WITH AC ADAPTER

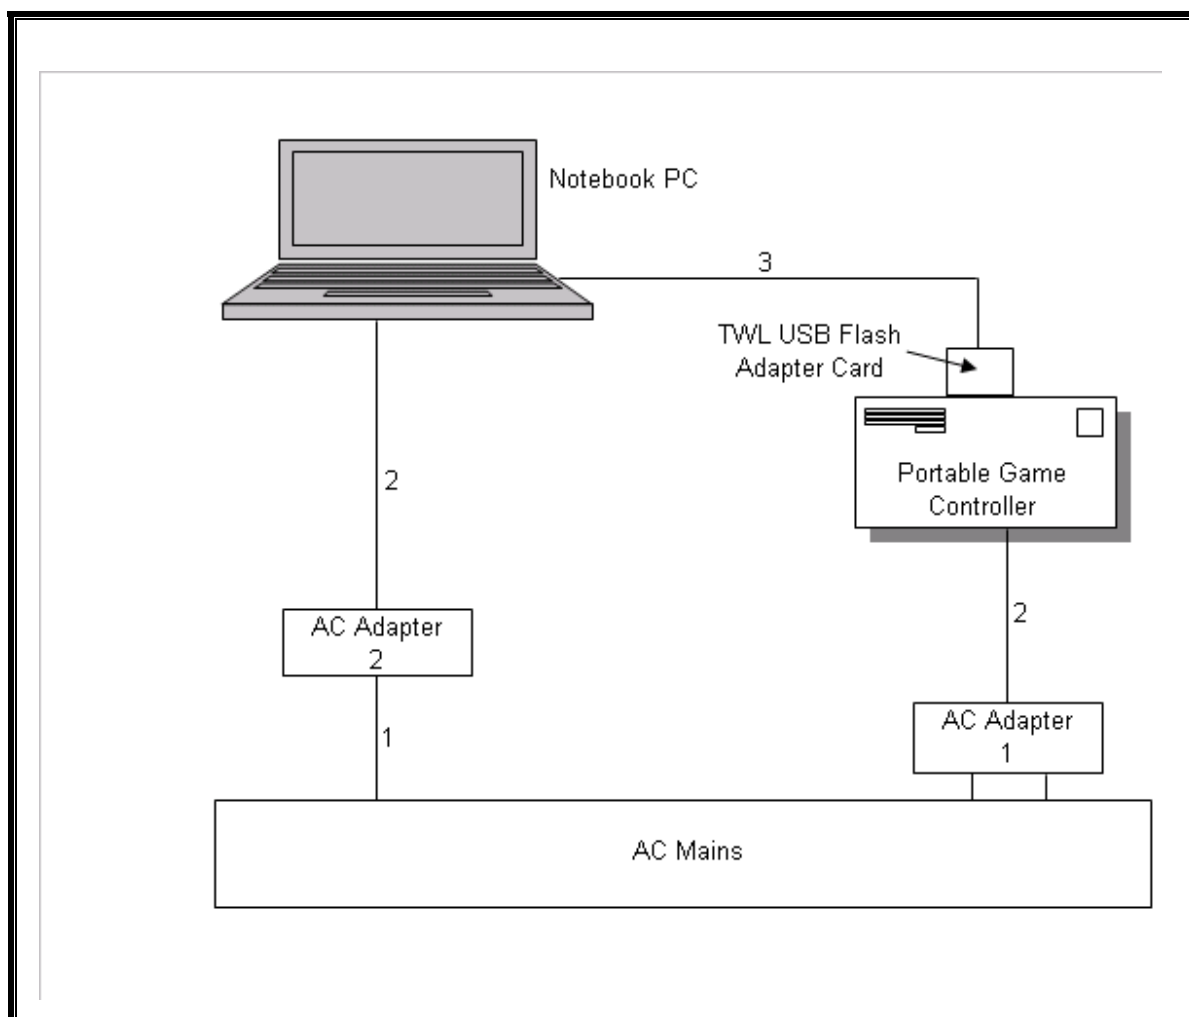

6. TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

TEST EQUIPMENT LIST				
Description	Manufacturer	Model	Asset	Cal Due
Spectrum Analyzer, 44 GHz	Agilent / HP	E4446A	C01069	01/05/11
Antenna, Bilog, 2 GHz	Sunol Sciences	JB1	C01011	01/14/11
Preamplifier, 1300 MHz	Agilent / HP	8447D	C00885	12/16/10
Antenna, Horn, 18 GHz	EMCO	3115	C00783	01/29/11
Preamplifier, 26.5 GHz	Agilent / HP	8449B	C01063	02/04/11
LISN, 30 MHz	FCC	LISN-50/250-25-2	N02625	10/29/11
LISN, 10 kHz ~ 30 MHz	Solar	8012-50-R-24-	N02481	10/29/11
EM Test Receiver, 30 MHz	R & S	ESHS 20	N02396	08/06/11

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

IC RSS-GEN Clause 6 (Receiver)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 1 MHz for peak measurements and 10 Hz for average measurements.

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.


The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.


The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

7.2. TRANSMITTER ABOVE 1 GHz IN THE 2.4GHz BAND


7.2.1. TX 802.11 MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

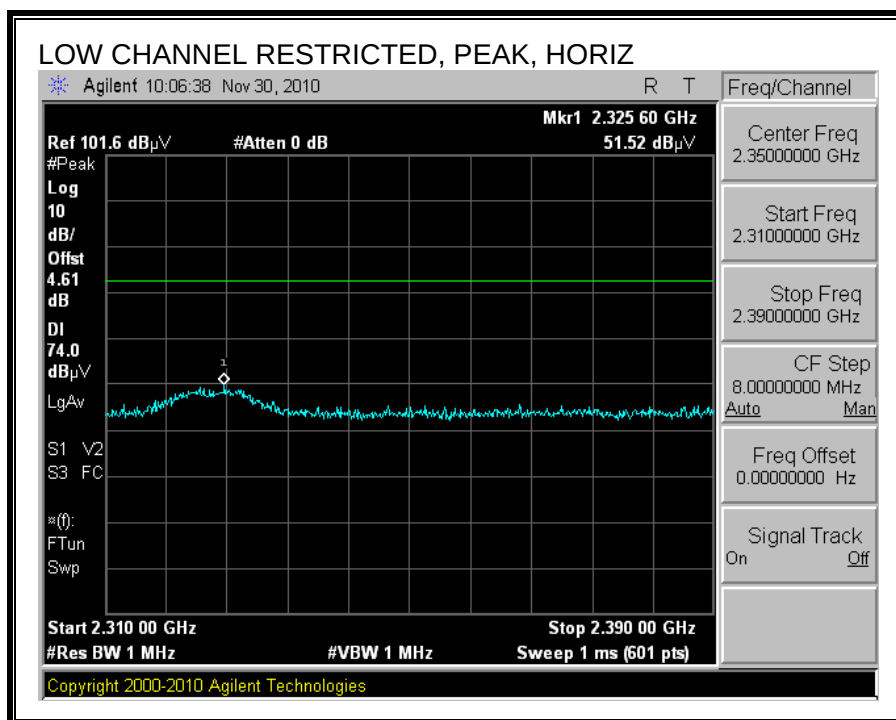

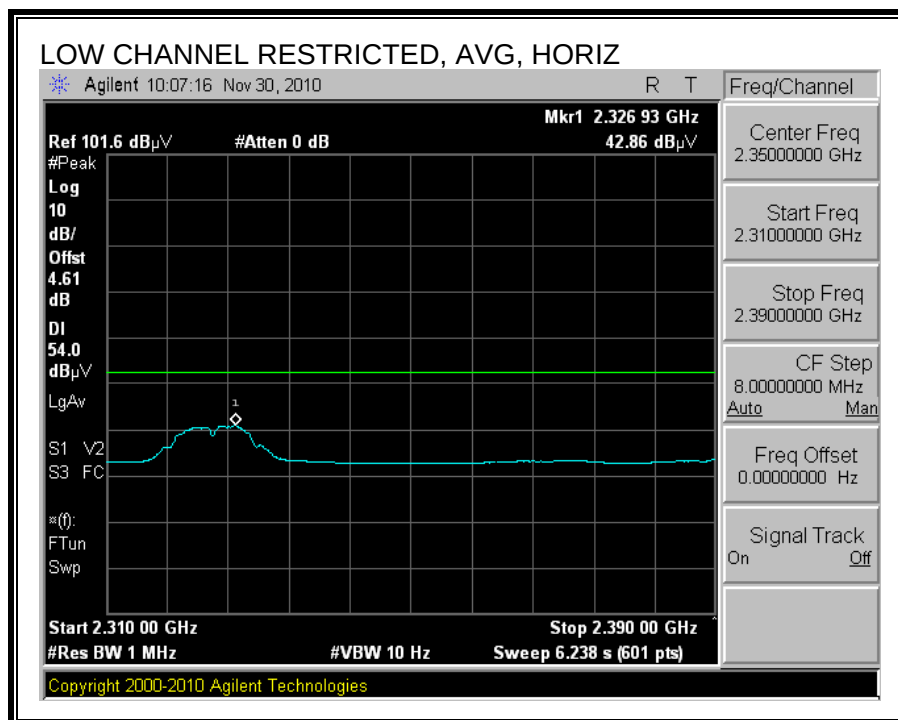



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

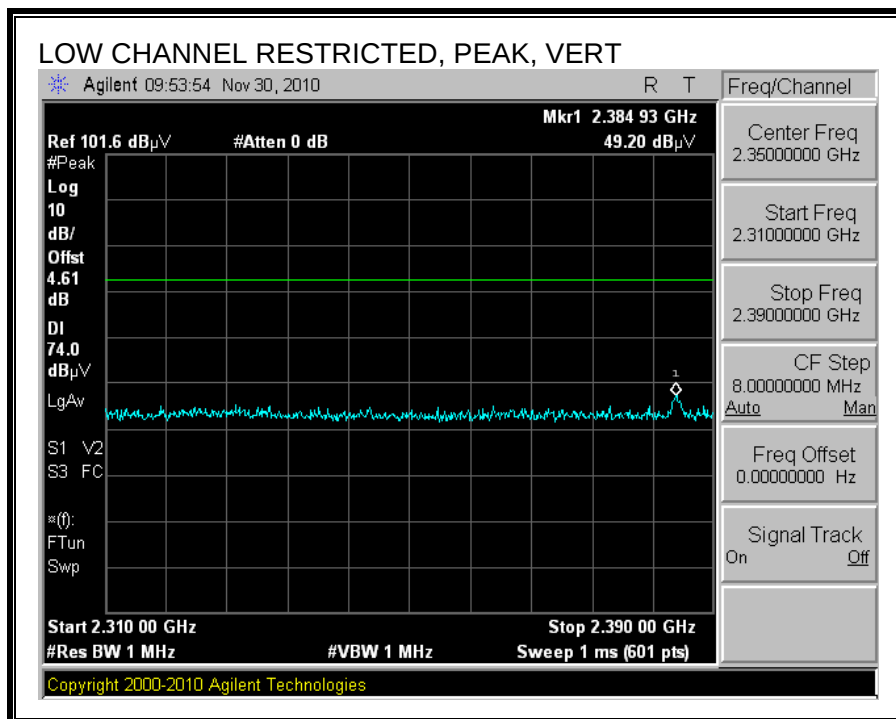

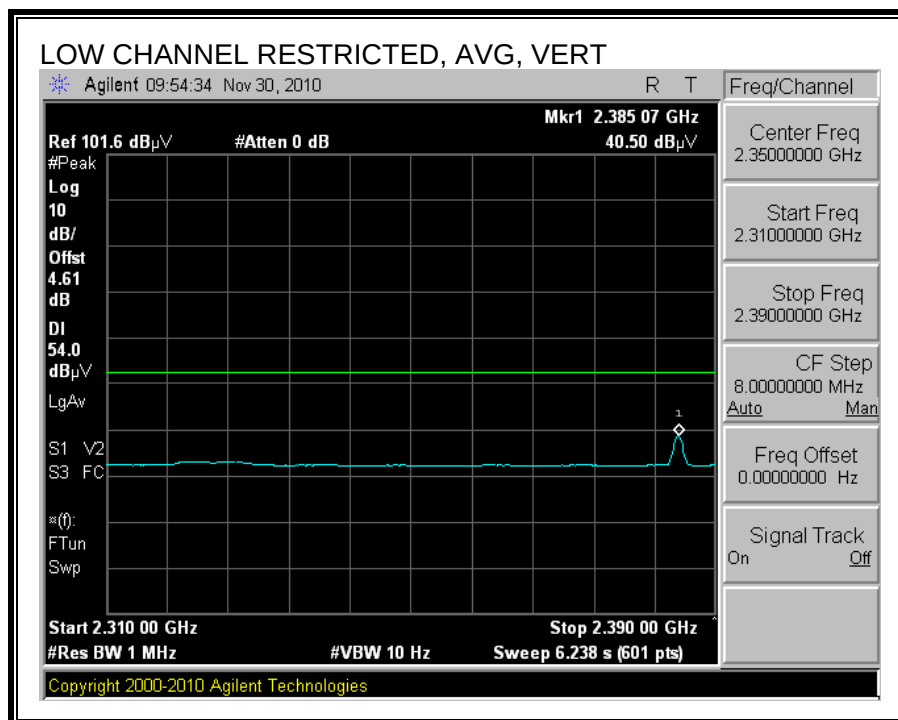



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

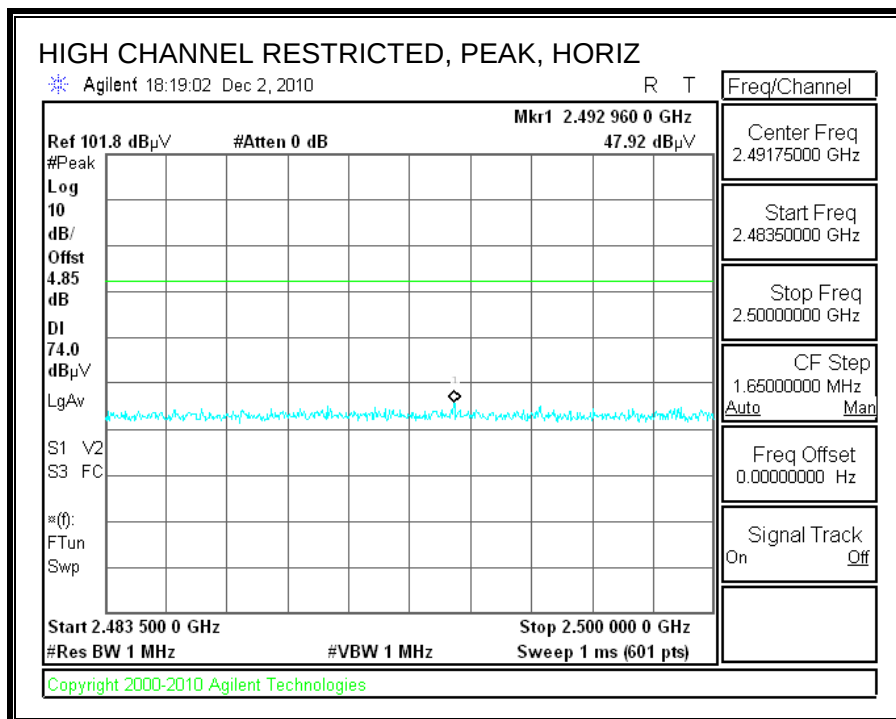

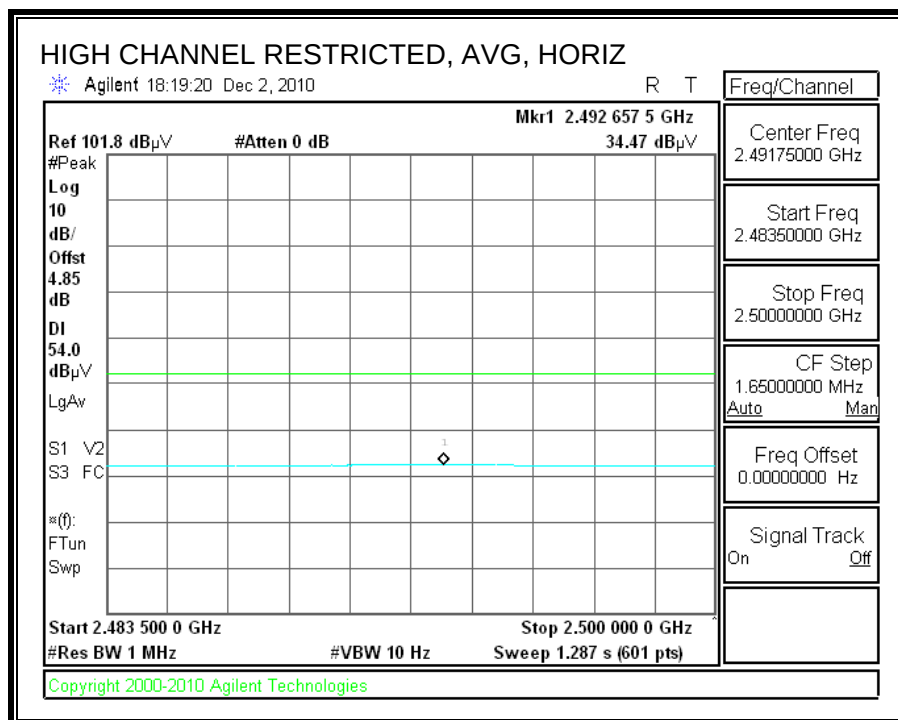

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

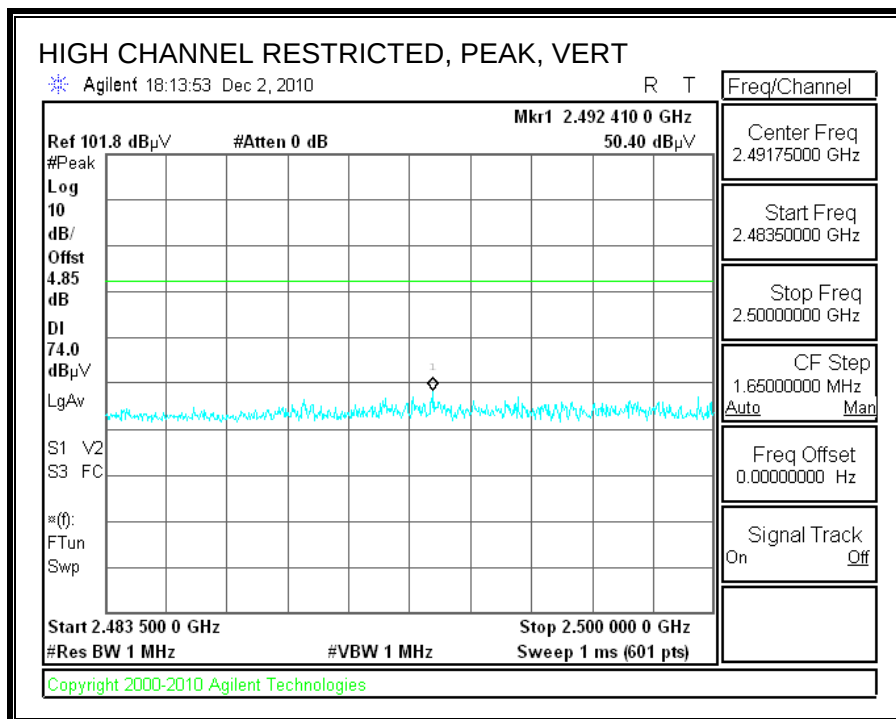

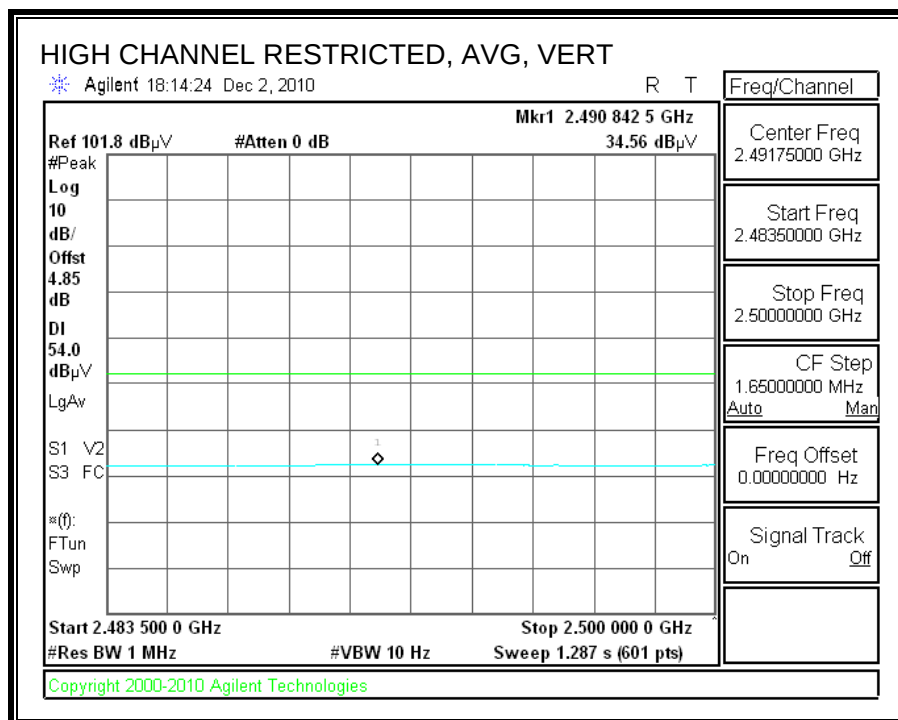



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber																	
Company:		Nintendo															
Project #:		10J13513															
Date:		12/2/2010															
Test Engineer:		Thanh Nguyen															
Configuration:		EUT with AC/DC Adapter and Support laptop															
Mode:		Transmit 802.11															
Test Equipment:																	
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit	
T73; S/N: 6717 @3m				T144 Miteq 3008A00931												FCC 15.209	
Hi Frequency Cables																	
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF				Reject Filter	
3' cable 22807700				12' cable 22807600				20' cable 22807500								R_001	
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz, VBW=10Hz																	
f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	Filt	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes		
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)		
Harmonics spurious																	
Low ch																	
4.824	3.0	40.2	28.5	33.0	5.8	-36.5	0.0	0.0	42.5	30.9	74	54	-31.5	-23.1	V		
7.236	3.0	38.1	27.4	35.2	7.2	-36.2	0.0	0.0	44.3	33.5	74	54	-29.7	-20.5	Noise floor		
4.824	3.0	40.0	28.7	33.0	5.8	-36.5	0.0	0.0	42.4	31.1	74	54	-31.6	-22.9	H		
7.236	3.0	36.9	27.3	35.2	7.2	-36.2	0.0	0.0	43.1	33.5	74	54	-30.9	-20.5	Noise floor		
Mid Ch																	
4.874	3.0	39.1	28.7	33.1	5.8	-36.5	0.0	0.0	41.6	31.2	74	54	-32.4	-22.8	V		
7.311	3.0	38.3	27.8	35.3	7.3	-36.2	0.0	0.0	44.6	34.1	74	54	-29.4	-19.9	Noise floor		
4.874	3.0	38.4	28.0	33.1	5.8	-36.5	0.0	0.0	40.9	30.5	74	54	-33.1	-23.5	V		
7.311	3.0	38.0	27.8	35.3	7.3	-36.2	0.0	0.0	44.3	34.1	74	54	-29.7	-19.9	Noise floor		
High Ch																	
4.944	3.0	40.3	32.2	33.2	5.9	-36.5	0.0	0.0	42.8	34.7	74	54	-31.2	-19.3	V		
7.416	3.0	38.1	25.0	35.5	7.3	-36.2	0.0	0.0	44.6	31.5	74	54	-29.4	-22.5	Noise floor		
4.944	3.0	39.9	29.3	33.2	5.9	-36.5	0.0	0.0	42.4	31.9	74	54	-31.6	-22.1	H		
7.416	3.0	38.2	25.0	35.5	7.3	-36.2	0.0	0.0	44.7	31.5	74	54	-29.3	-22.5	Noise floor		
Rev. 07.22.09																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										


7.2.2. TX 802.11b MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

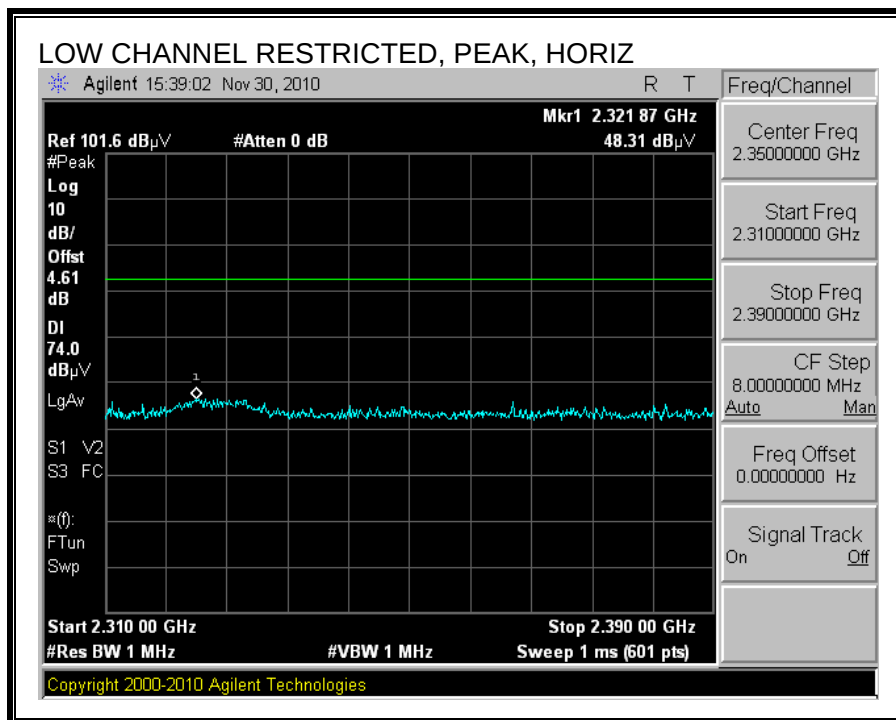

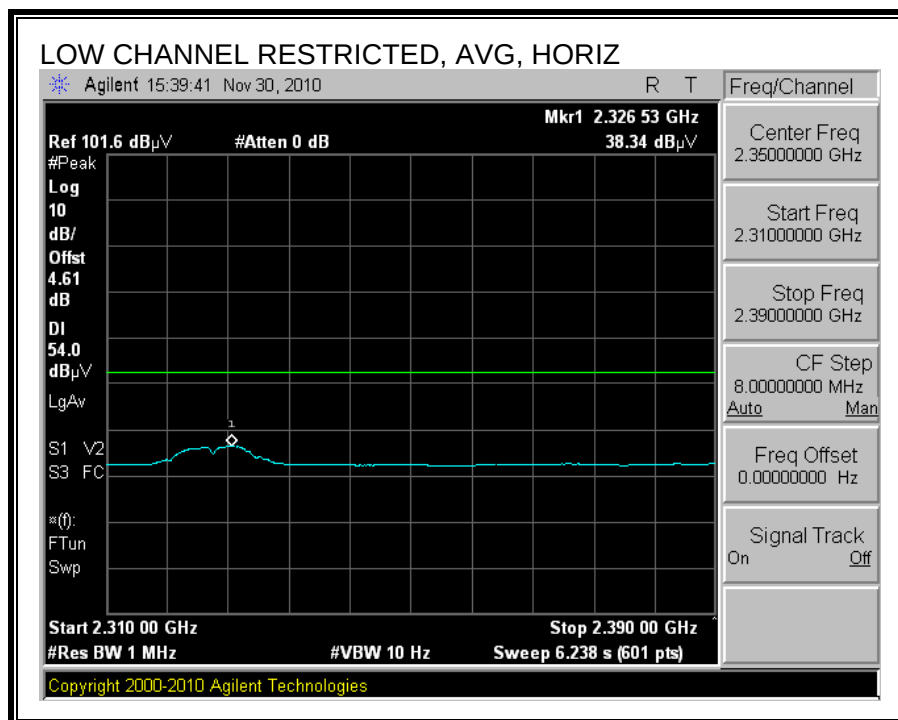



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

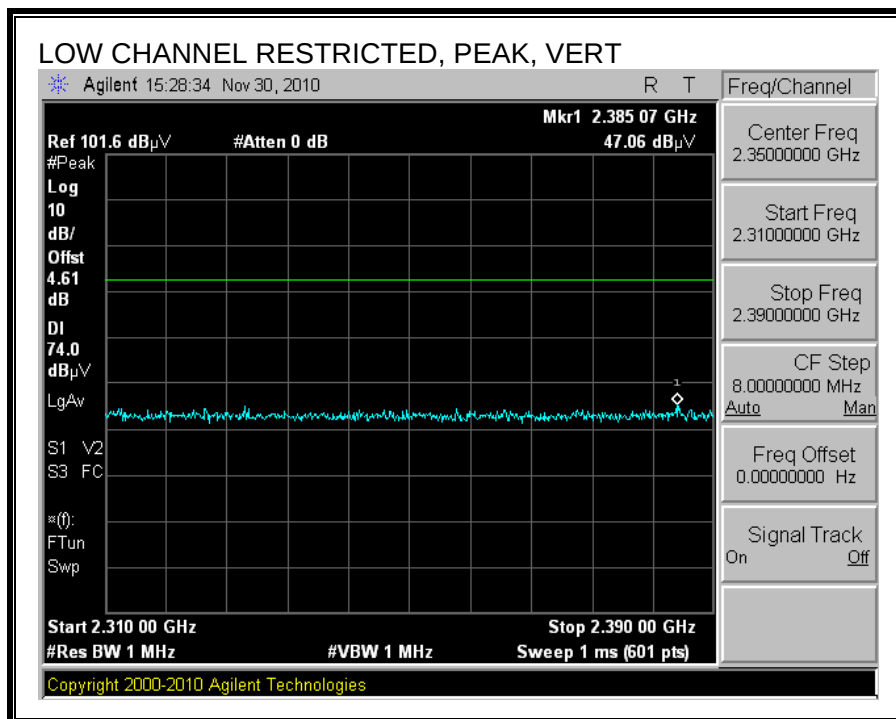

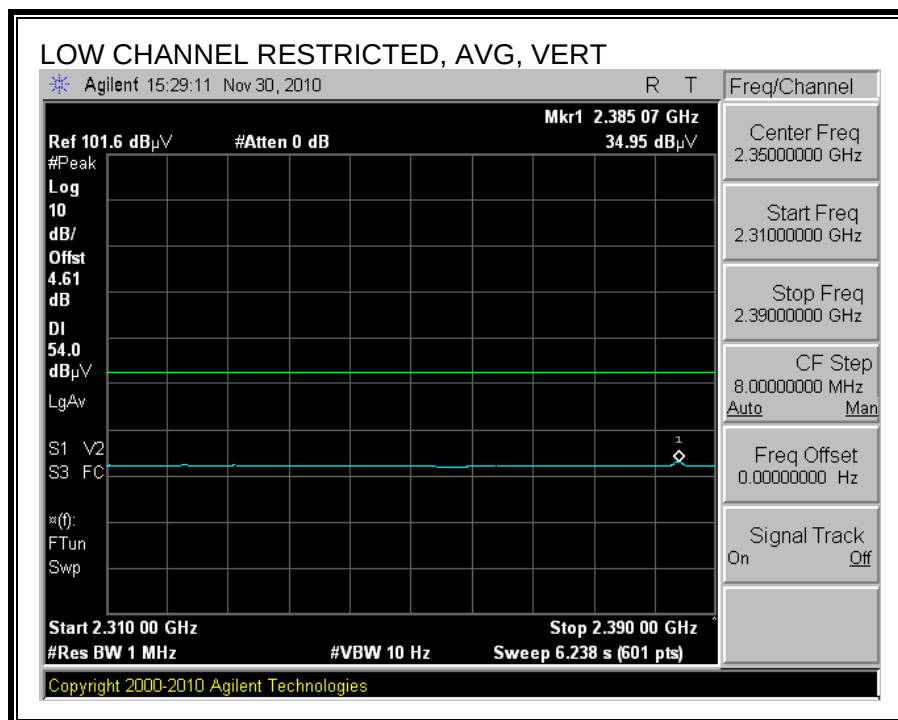



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

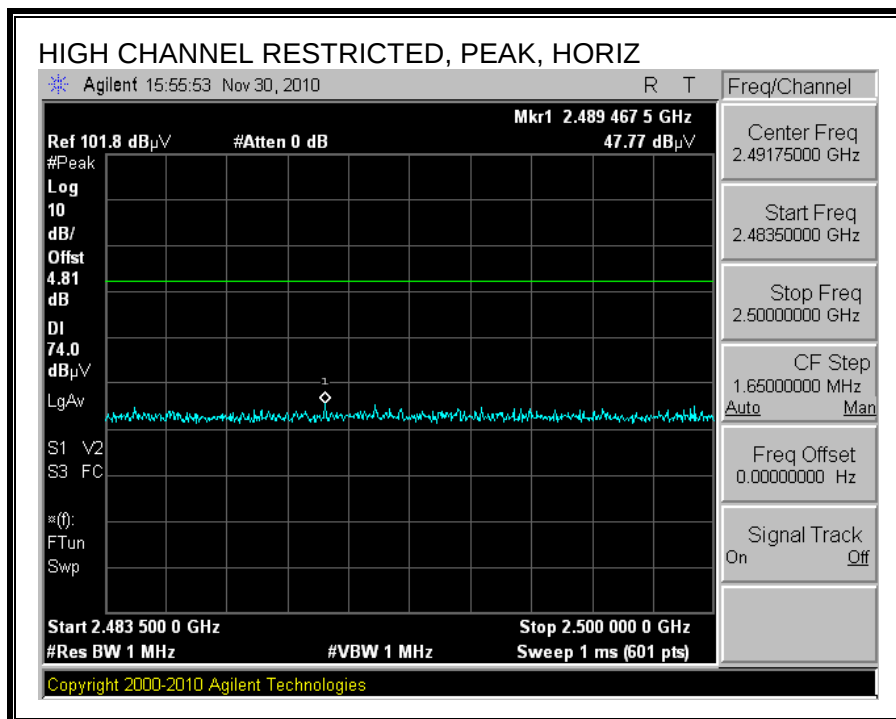

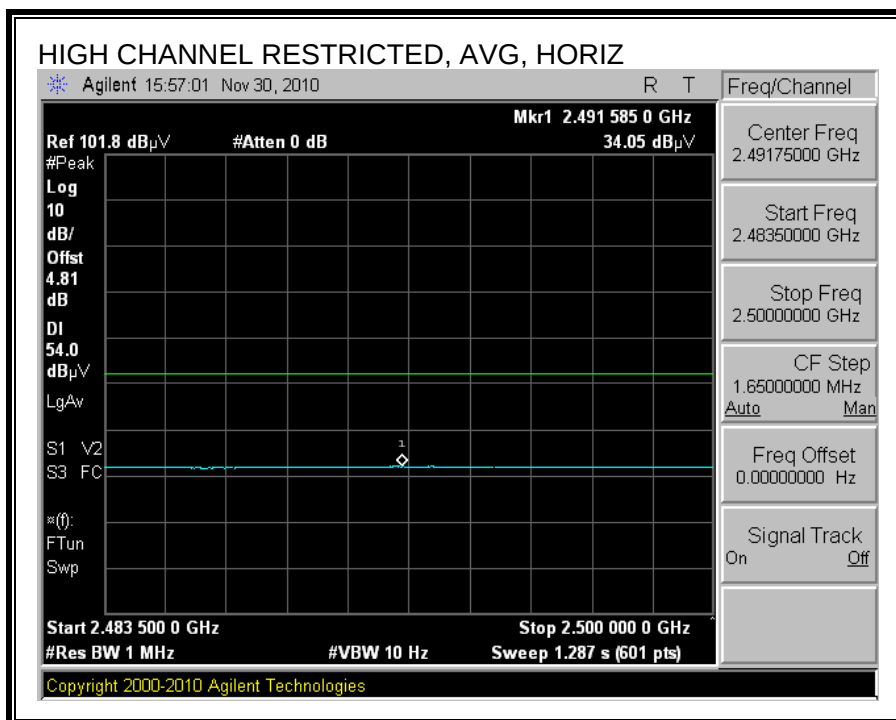

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

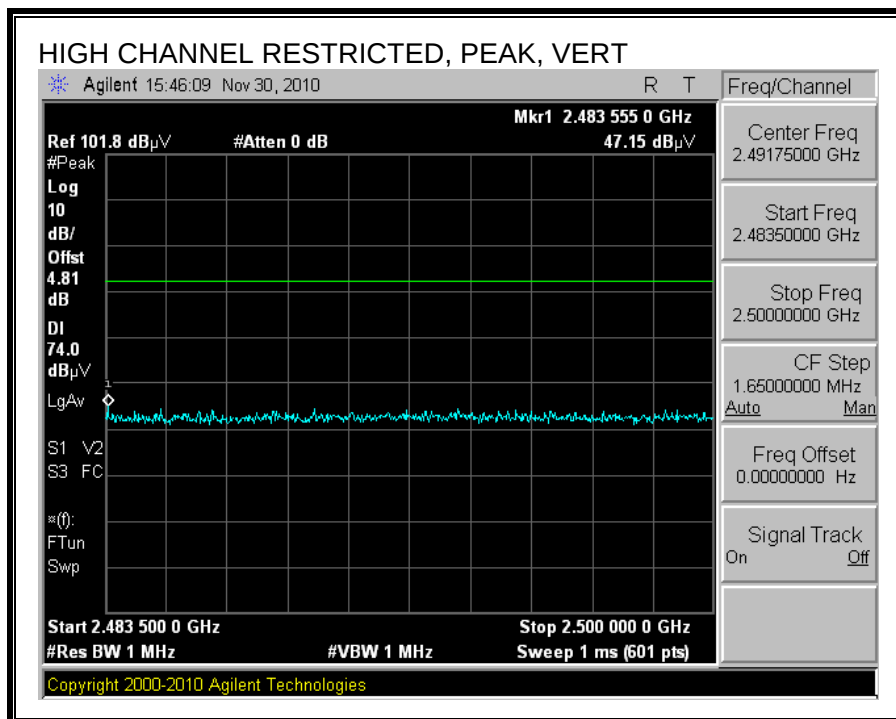

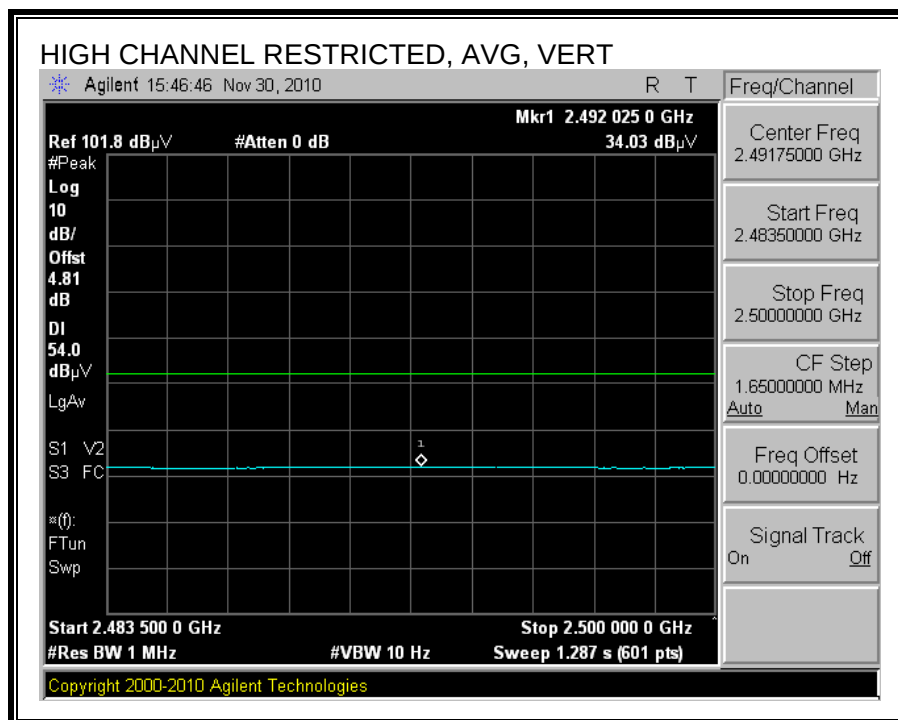



HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber																	
Company:		Nintendo															
Project #:		10J13513															
Date:		11/30/2010															
Test Engineer:		Thanh Nguyen															
Configuration:		EUT with AC/DC Adapter and Support laptop															
Mode:		Transmit 802.11b															
Test Equipment:																	
Horn 1-18GHz				Pre-amplifier 1-26GHz				Pre-amplifier 26-40GHz				Horn > 18GHz				Limit	
T73; S/N: 6717 @3m				T144 Miteq 3008A00931												FCC 15.209	
Hi Frequency Cables																	
3' cable 22807700				12' cable 22807600				20' cable 22807500				HPF				Reject Filter	
3' cable 22807700				12' cable 22807600				20' cable 22807500									
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz																	
f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	Filt	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes		
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)		
Harmonics spurious																	
Low ch																	
4.824	3.0	40.4	28.4	33.0	5.8	-36.5	0.0	0.0	42.7	30.7	74	54	-31.3	-23.3	V		
7.236	3.0	38.4	27.4	35.2	7.2	-36.2	0.0	0.0	44.5	33.5	74	54	-29.5	-20.5	Noise floor		
4.824	3.0	40.6	28.5	33.0	5.8	-36.5	0.0	0.0	42.9	30.9	74	54	-31.1	-23.1	H		
7.236	3.0	37.3	27.7	35.2	7.2	-36.2	0.0	0.0	43.4	33.8	74	54	-30.6	-20.2	Noise floor		
Mid Ch																	
4.874	3.0	39.4	29.0	33.1	5.8	-36.5	0.0	0.0	41.8	31.5	74	54	-32.2	-22.5	V		
7.311	3.0	38.2	27.4	35.3	7.3	-36.2	0.0	0.0	44.6	33.7	74	54	-29.4	-20.3	Noise floor		
4.874	3.0	38.6	28.3	33.1	5.8	-36.5	0.0	0.0	41.1	30.8	74	54	-32.9	-23.2	V		
7.311	3.0	38.1	28.0	35.3	7.3	-36.2	0.0	0.0	44.5	34.4	74	54	-29.5	-19.6	Noise floor		
High Ch																	
4.924	3.0	40.0	29.5	33.1	5.9	-36.5	0.0	0.0	42.5	32.1	74	54	-31.5	-21.9	V		
7.386	3.0	38.8	27.5	35.4	7.3	-36.2	0.0	0.0	45.3	34.0	74	54	-28.7	-20.0	Noise floor		
4.924	3.0	39.2	28.1	33.1	5.9	-36.5	0.0	0.0	41.8	30.7	74	54	-32.2	-23.3	H		
7.386	3.0	37.3	27.5	35.4	7.3	-36.2	0.0	0.0	43.8	34.0	74	54	-30.2	-20.0	Noise floor		
Rev. 07.22.09																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										


7.2.3. TX 802.11g MODE


RESTRICTED BANDEDGE (LOW CHANNEL, HORIZONTAL)

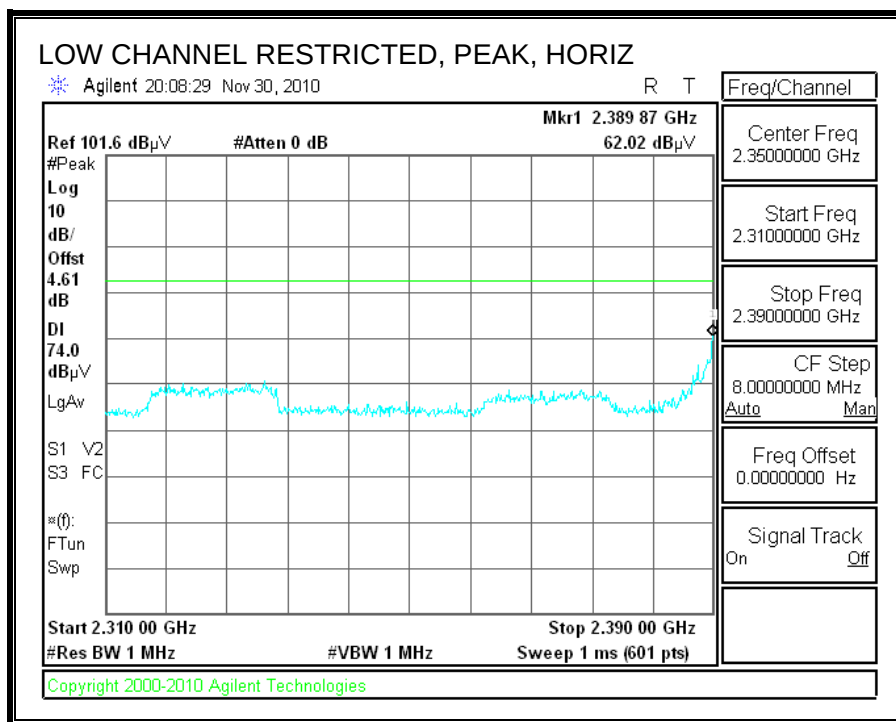

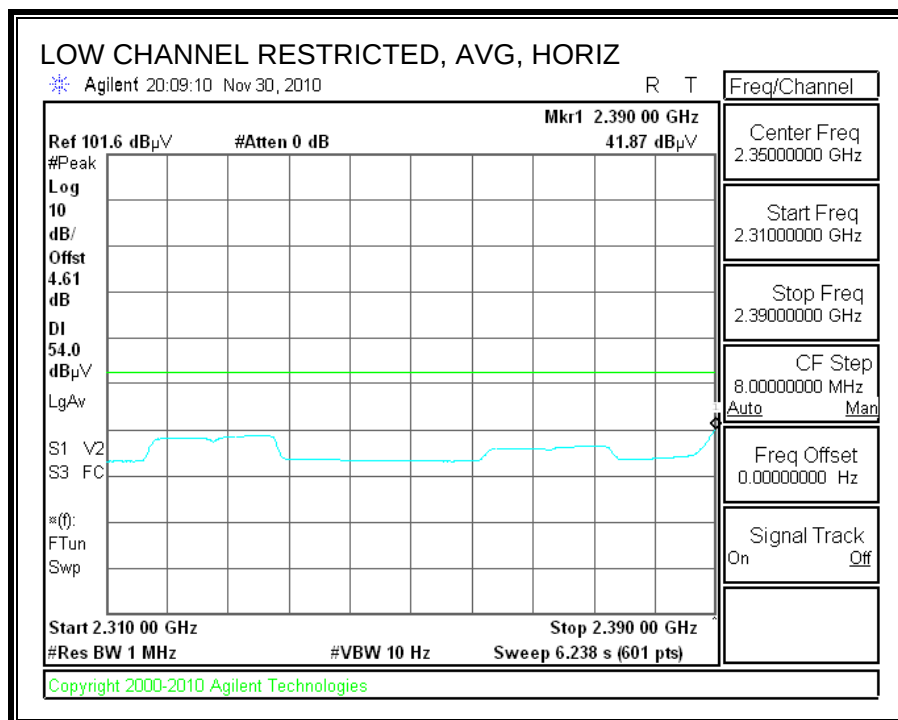



RESTRICTED BANDEDGE (LOW CHANNEL, VERTICAL)

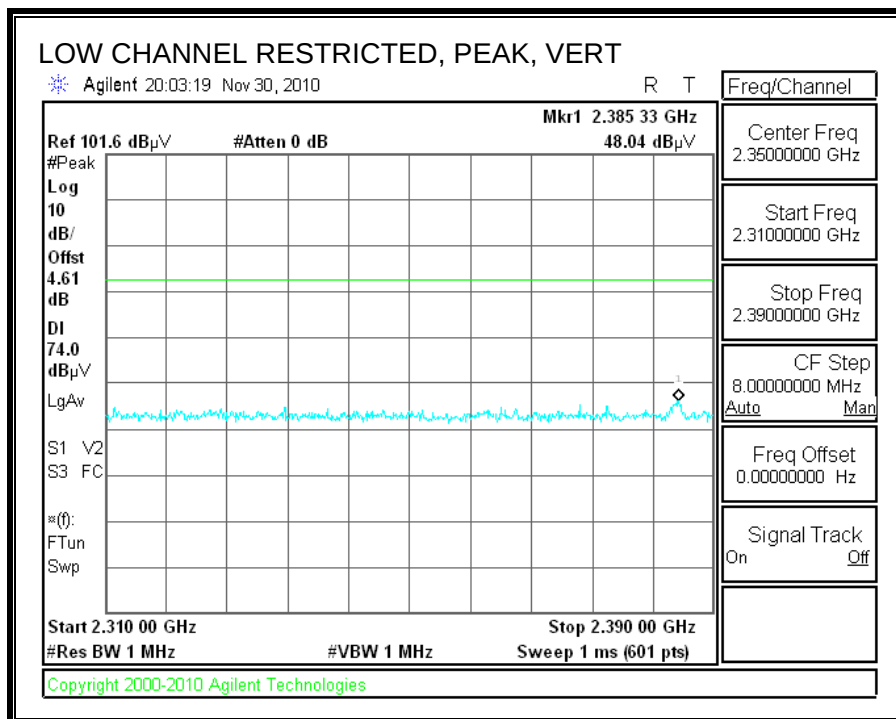

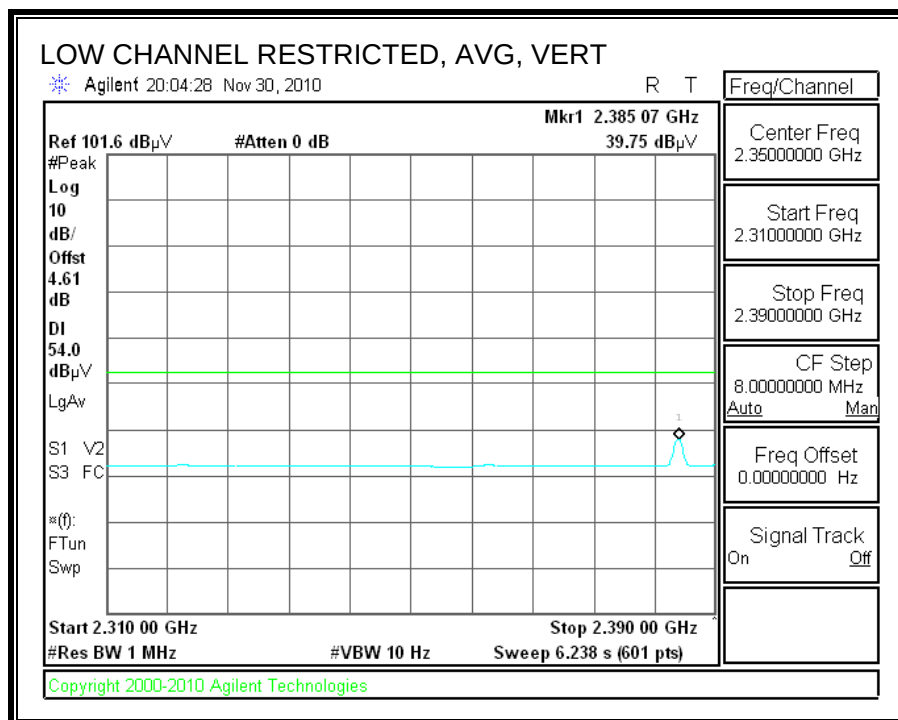



RESTRICTED BANDEDGE (HIGH CHANNEL, HORIZONTAL)

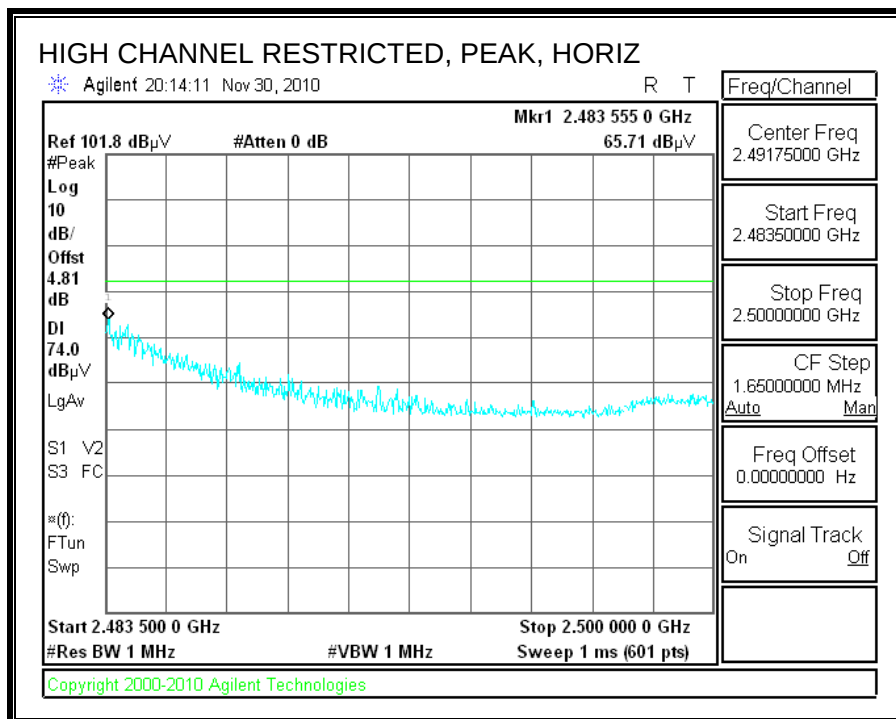

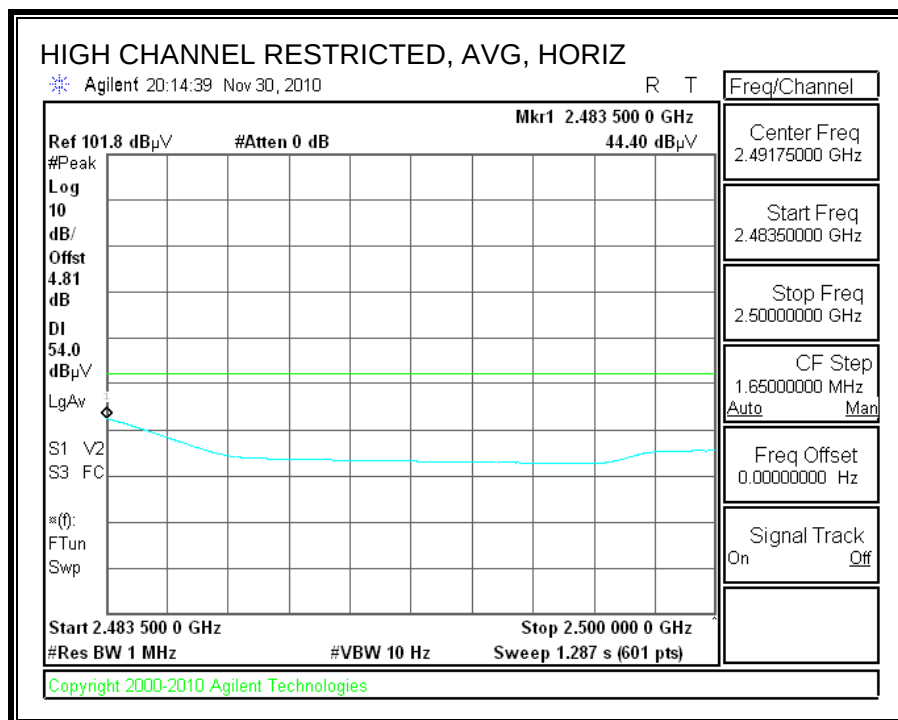

RESTRICTED BANDEDGE (HIGH CHANNEL, VERTICAL)

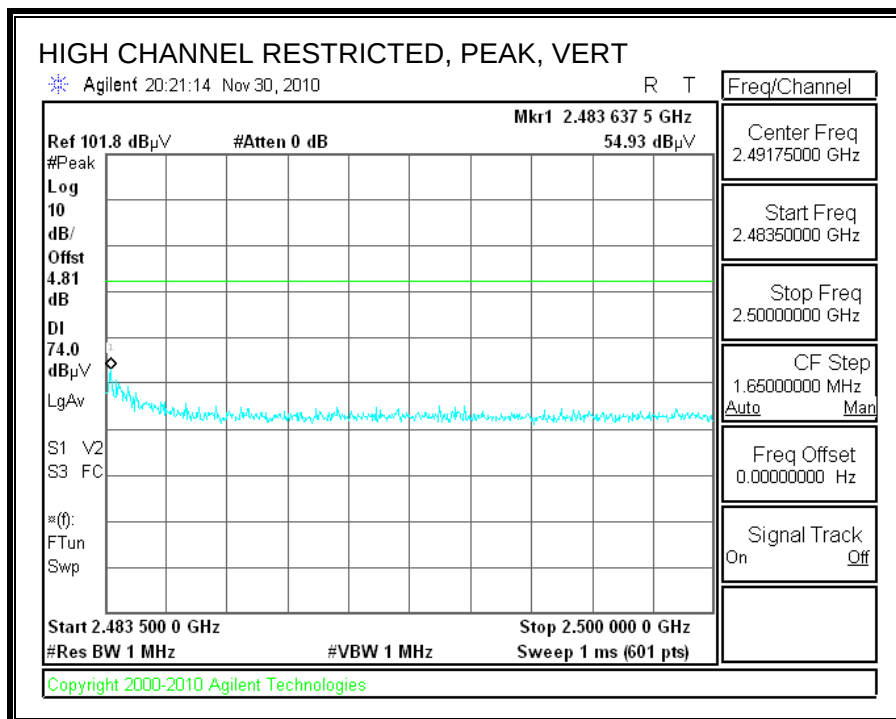

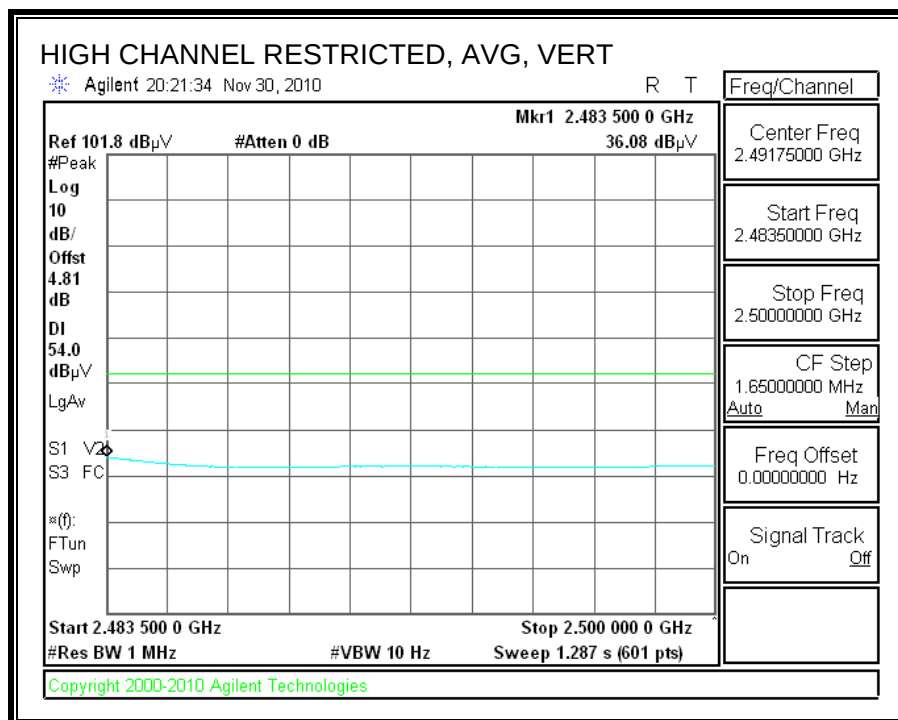


HARMONICS AND SPURIOUS EMISSIONS

High Frequency Measurement															
Compliance Certification Services, Fremont 5m Chamber															
Company:		Nintendo													
Project #:		10J13513													
Date:		11/30/2010													
Test Engineer:		Thanh Nguyen													
Configuration:		EUT with AC/DC Adapter and Support laptop													
Mode:		Transmit 802.11g													
Test Equipment:															
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit			
T73; S/N: 6717 @3m			T144 Miteq 3008A00931									FCC 15.209			
Hi Frequency Cables															
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			
3' cable 22807700			12' cable 22807600			20' cable 22807500						R_001			
Peak Measurements RBW=VBW=1MHz Average Measurements RBW=1MHz ; VBW=10Hz															
f	Dist	Read Pk	Read Avg	AF	CL	Amp	D Corr	Filtr	Peak	Avg	Pk Lim	Avg Lim	Pk Mar	Avg Mar	Notes
GHz	(m)	dBuV	dBuV	dB/m	dB	dB	dB	dB	dBuV/m	dBuV/m	dBuV/m	dBuV/m	dB	dB	(V/H)
Harmonics spurious															
Low ch															
4.824	3.0	40.6	28.6	33.0	5.8	-36.5	0.0	0.0	43.0	31.0	74	54	-31.0	-23.0	V
7.236	3.0	38.2	27.7	35.2	7.2	-36.2	0.0	0.0	44.4	33.8	74	54	-29.6	-20.2	Noise floor
4.824	3.0	41.1	29.2	33.0	5.8	-36.5	0.0	0.0	43.5	31.6	74	54	-30.5	-22.4	H
7.236	3.0	36.9	26.1	35.2	7.2	-36.2	0.0	0.0	43.1	32.3	74	54	-30.9	-21.7	Noise floor
Mid Ch															
4.874	3.0	39.7	29.2	33.1	5.8	-36.5	0.0	0.0	42.1	31.7	74	54	-31.9	-22.3	V
7.311	3.0	38.6	28.2	35.3	7.3	-36.2	0.0	0.0	44.9	34.6	74	54	-29.1	-19.4	Noise floor
4.874	3.0	39.4	28.5	33.1	5.8	-36.5	0.0	0.0	41.8	31.0	74	54	-32.2	-23.0	V
7.311	3.0	38.5	27.9	35.3	7.3	-36.2	0.0	0.0	44.9	34.3	74	54	-29.1	-19.7	Noise floor
High Ch															
4.924	3.0	39.6	28.8	33.1	5.9	-36.5	0.0	0.0	42.2	31.3	74	54	-31.8	-22.7	V
7.386	3.0	37.2	27.2	35.4	7.3	-36.2	0.0	0.0	43.7	33.7	74	54	-30.3	-20.3	Noise floor
4.924	3.0	38.2	25.7	33.1	5.9	-36.5	0.0	0.0	40.8	28.3	74	54	-33.2	-25.7	H
7.386	3.0	37.6	25.0	35.4	7.3	-36.2	0.0	0.0	44.1	31.5	74	54	-29.9	-22.5	Noise floor
Rev. 07.22.09															
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit		
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit		
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit		
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit		
CL	Cable Loss					HPF	High Pass Filter								


7.3. TX SPURIOUS EMISSION BELOW 1GHZ

7.3.1. TX 802.11 MODE

RADIATED EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

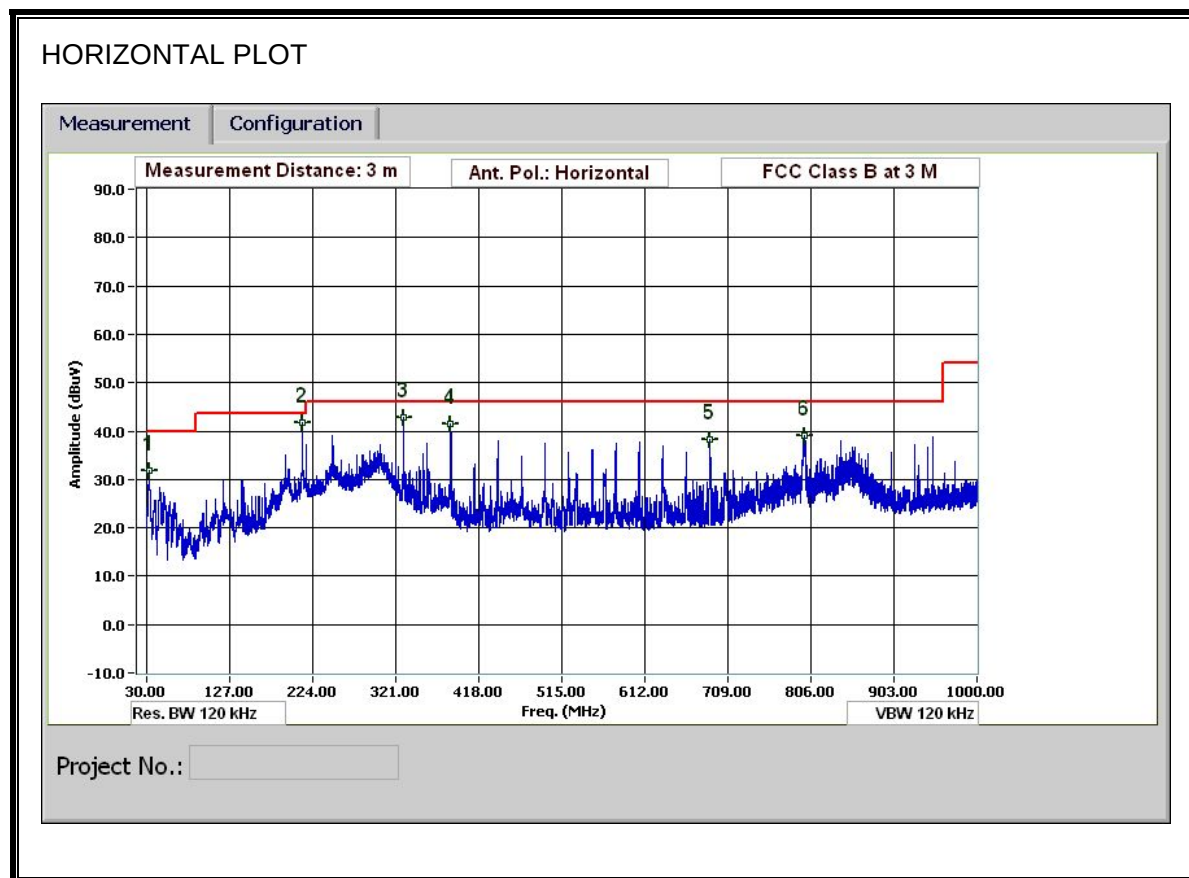

VERTICAL PLOT

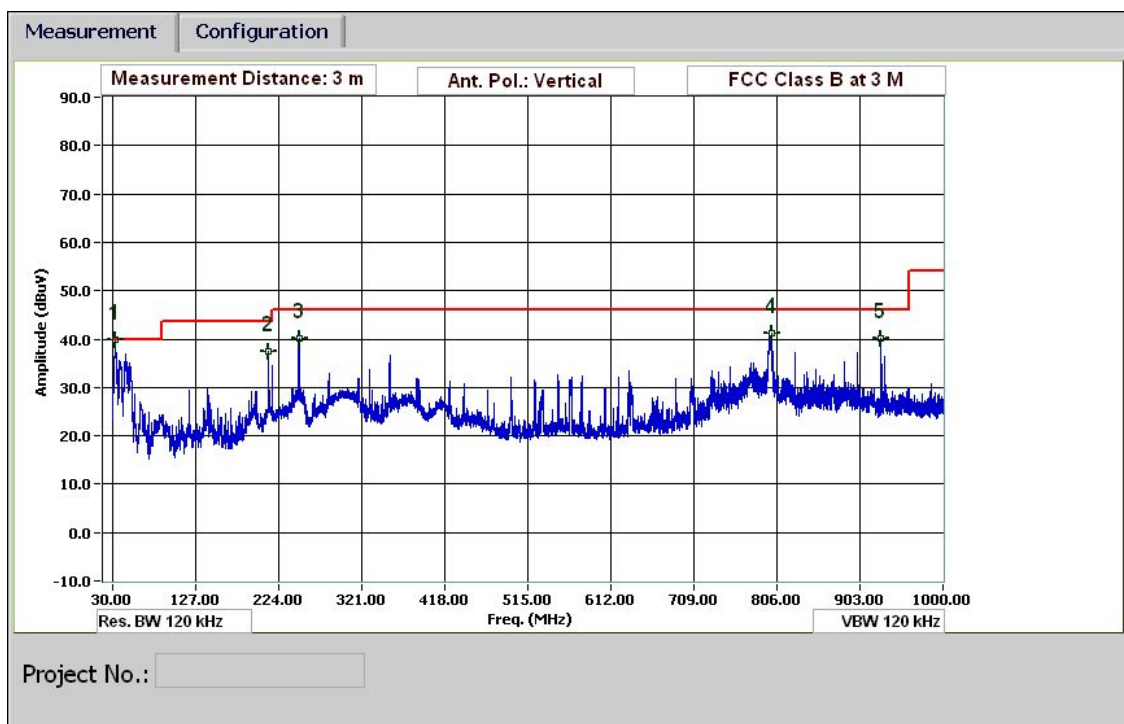

TABULATED DATA

30-1000MHz Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Thanh Nguyen
Date: 11/30/10
Project #: 10J13513
Company: Nintendo
Test Target: FCC Class B
Mode Oper: Transmit 802.11 Mode, worst case

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters
Read Analyzer Reading Filter Filter Insert Loss
AF Antenna Factor Corr. Calculated Field Strength
CL Cable Loss Limit Field Strength Limit


f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Pad dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant. High cm	Table Angle Degree	Notes
33.24	3.0	47.3	18.7	0.5	28.4	0.0	0.0	38.1	40.0	-1.9	V	QP	100.0	0 - 360	
211.687	3.0	52.5	12.0	1.3	28.2	0.0	0.0	37.5	43.5	-6.0	V	P	100.0	0 - 360	
247.809	3.0	55.1	11.8	1.4	28.2	0.0	0.0	40.0	46.0	-6.0	V	P	100.0	0 - 360	
799.472	3.0	38.4	21.0	2.6	27.4	0.0	0.0	34.5	46.0	-11.5	V	QP	100.0	0 - 360	
927.517	3.0	43.0	22.0	2.9	27.8	0.0	0.0	40.1	46.0	-5.9	V	P	100.0	0 - 360	
33.24	3.0	41.0	18.7	0.5	28.4	0.0	0.0	31.8	40.0	-8.2	H	P	100.0	0 - 360	
212.288	3.0	46.2	11.9	1.3	28.2	0.0	0.0	31.2	43.5	-12.3	H	QP	100.0	0 - 360	
330.252	3.0	49.2	13.9	1.6	28.1	0.0	0.0	36.6	46.0	-9.4	H	QP	100.0	0 - 360	
385.335	3.0	46.8	14.7	1.8	28.1	0.0	0.0	35.2	46.0	-10.8	H	QP	100.0	0 - 360	
687.987	3.0	43.7	19.4	2.4	27.2	0.0	0.0	38.4	46.0	-7.6	H	P	100.0	0 - 360	
799.112	3.0	42.8	20.9	2.6	27.4	0.0	0.0	39.0	46.0	-7.0	H	P	100.0	0 - 360	

Rev. 1.27.09


Note: No other emissions were detected above the system noise floor.

7.3.2. TX 802.11b MODE

RADIATED EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

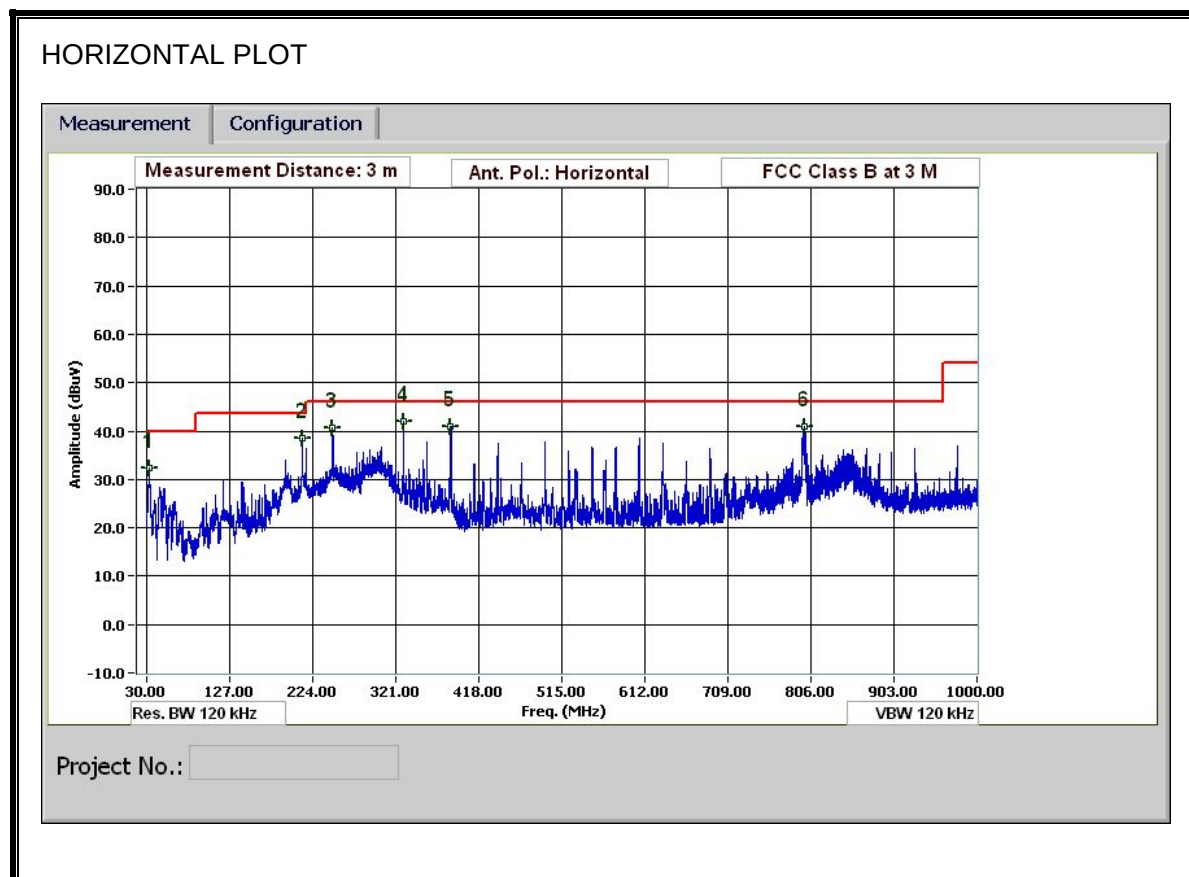

VERTICAL PLOT

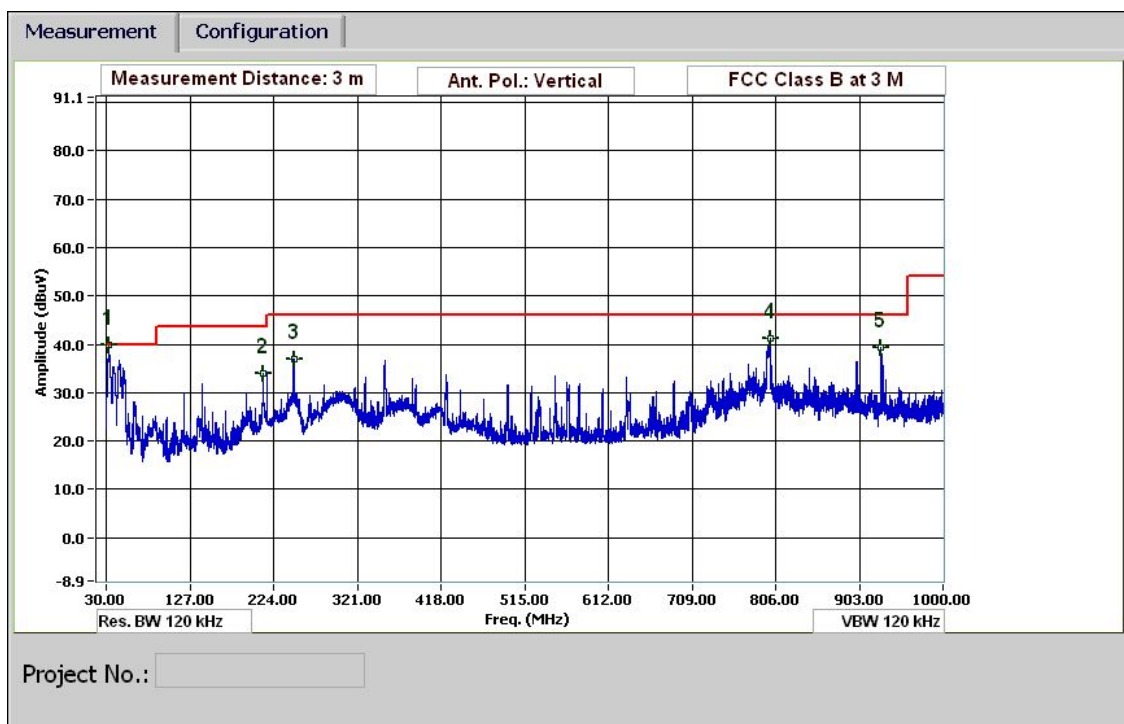

TABULATED DATA

30-1000MHz Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Thanh Nguyen
Date: 11/30/10
Project #: 10J13513
Company: Nintendo
Test Target: FCC Class B
Mode Oper: Transmit 802.11 b Mode, worst Case

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters
Read Analyzer Reading Filter Filter Insert Loss
AF Antenna Factor Corr. Calculated Field Strength
CL Cable Loss Limit Field Strength Limit


f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Pad dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant. High cm	Table Angle Degree	Notes
33.24	3.0	47.7	18.7	0.5	28.4	0.0	0.0	38.6	40.0	-1.4	V	QP	100.0	0 - 360	
212.048	3.0	49.0	11.9	1.3	28.2	0.0	0.0	34.1	43.5	-9.4	V	P	100.0	0 - 360	
247.329	3.0	52.0	11.8	1.4	28.2	0.0	0.0	37.0	46.0	-9.0	V	P	100.0	0 - 360	
799.592	3.0	38.9	21.0	2.6	27.4	0.0	0.0	35.0	46.0	-11.0	V	QP	100.0	0 - 360	
927.517	3.0	42.3	22.0	2.9	27.8	0.0	0.0	39.4	46.0	-6.6	V	P	100.0	0 - 360	
33.24	3.0	41.5	18.7	0.5	28.4	0.0	0.0	32.3	40.0	-7.7	H	P	100.0	0 - 360	
211.687	3.0	46.6	12.0	1.3	28.2	0.0	0.0	31.6	43.5	-11.9	H	QP	100.0	0 - 360	
246.969	3.0	50.2	11.8	1.4	28.2	0.0	0.0	35.2	46.0	-10.8	H	QP	100.0	0 - 360	
330.252	3.0	49.7	13.9	1.6	28.1	0.0	0.0	37.0	46.0	-9.0	H	QP	100.0	0 - 360	
385.335	3.0	46.4	14.7	1.8	28.1	0.0	0.0	34.7	46.0	-11.3	H	QP	100.0	0 - 360	
798.632	3.0	40.3	20.9	2.6	27.4	0.0	0.0	36.4	46.0	-9.6	H	QP	100.0	0 - 360	

Rev. 1.27.09


Note: No other emissions were detected above the system noise floor.

7.3.3. TX 802.11g MODE

RADIATED EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

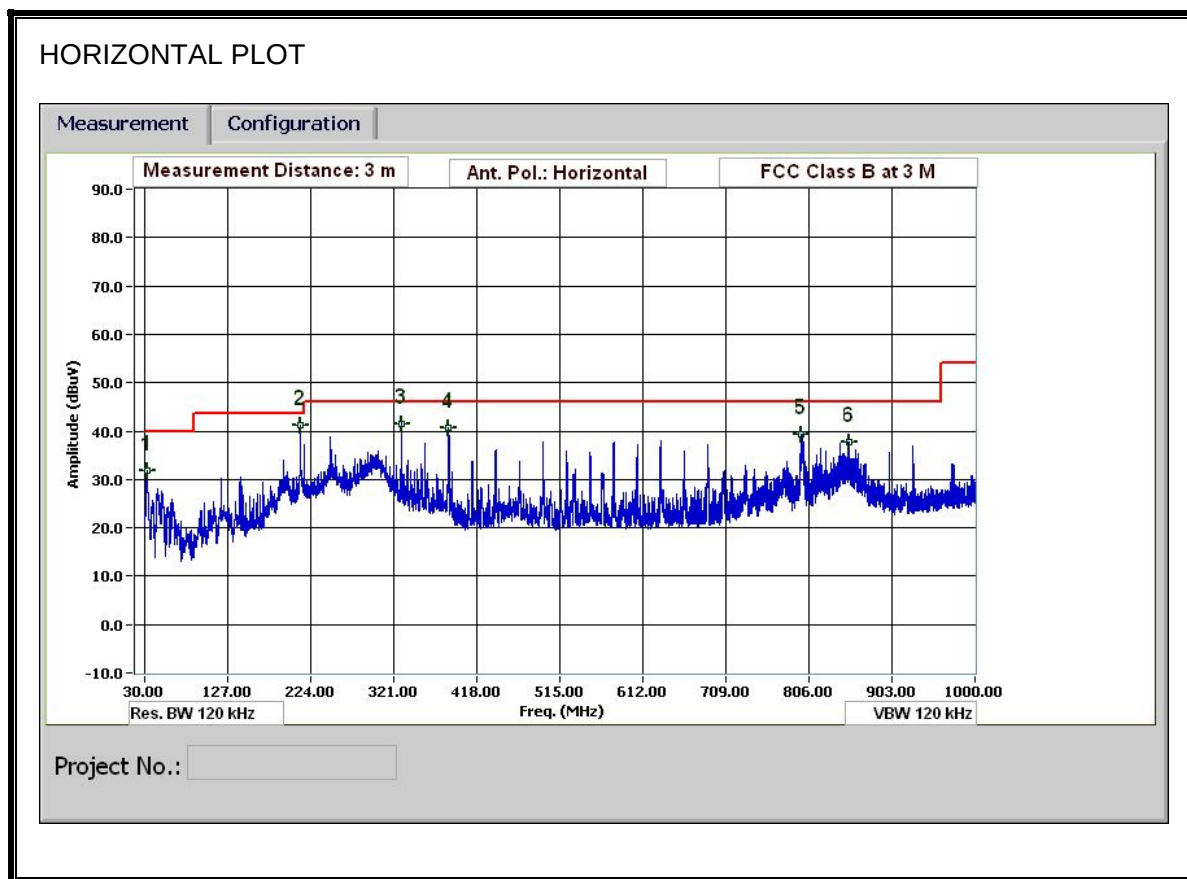

VERTICAL PLOT

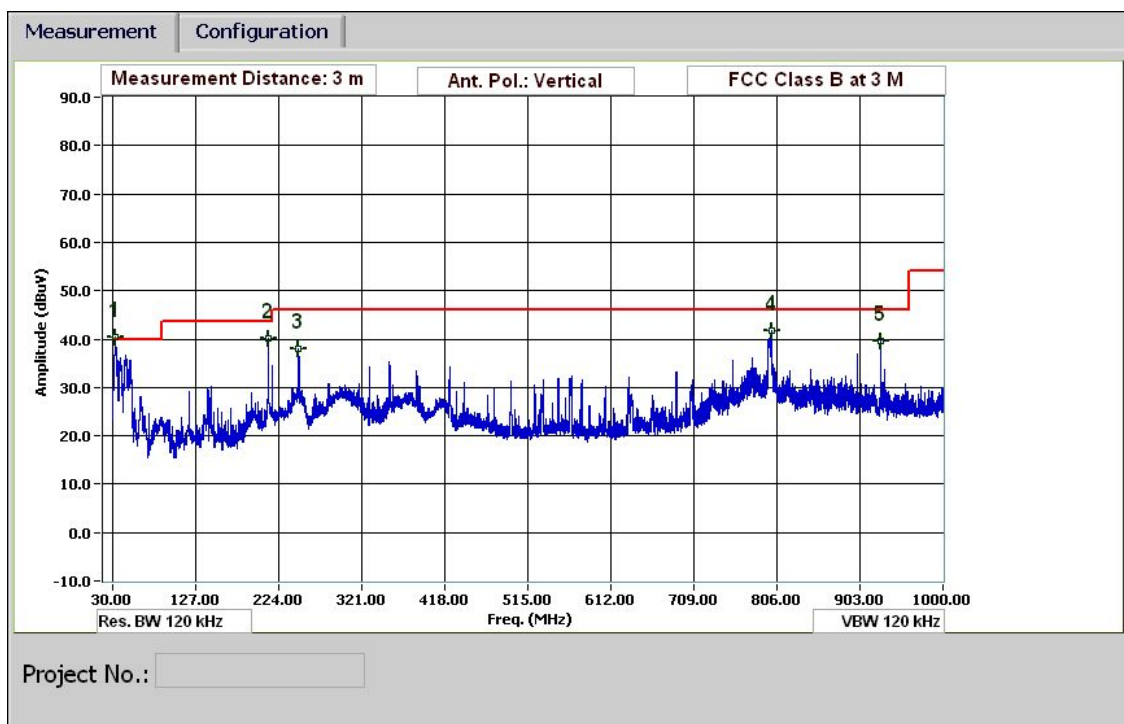

TABULATED DATA

30-1000MHz Frequency Measurement

Compliance Certification Services, Fremont 5m Chamber

Test Engr: Thanh Nguyen
Date: 11/30/10
Project #: 10J13513
Company: Nintendo
Test Target: FCC Class B
Mode Oper: Transmit 802.11 g Mode, worst Case

f Measurement Frequency Amp Preamp Gain Margin Margin vs. Limit
Dist Distance to Antenna D Corr Distance Correct to 3 meters
Read Analyzer Reading Filter Filter Insert Loss
AF Antenna Factor Corr. Calculated Field Strength
CL Cable Loss Limit Field Strength Limit

f MHz	Dist (m)	Read dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Pad dB	Corr. dBuV/m	Limit dBuV/m	Margin dB	Ant. Pol. V/H	Det. P/A/QP	Ant. High cm	Table Angle Degree	Notes
33.24	3.0	47.4	18.7	0.5	28.4	0.0	0.0	38.2	40.0	-1.8	V	QP	100.0	0 - 360	
246.849	3.0	53.1	11.8	1.4	28.2	0.0	0.0	38.0	46.0	-8.0	V	P	100.0	0 - 360	
799.712	3.0	40.6	21.0	2.6	27.4	0.0	0.0	36.7	46.0	-9.3	V	QP	100.0	0 - 360	
927.517	3.0	42.5	22.0	2.9	27.8	0.0	0.0	39.6	46.0	-6.4	V	P	100.0	0 - 360	
33.24	3.0	41.1	18.7	0.5	28.4	0.0	0.0	31.9	40.0	-8.1	H	P	100.0	0 - 360	
211.928	3.0	49.6	12.0	1.3	28.2	0.0	0.0	34.6	43.5	-8.9	H	QP	100.0	0 - 360	
330.132	3.0	49.6	13.9	1.6	28.1	0.0	0.0	36.9	46.0	-9.1	H	QP	100.0	0 - 360	
385.335	3.0	46.2	14.7	1.8	28.1	0.0	0.0	34.6	46.0	-11.4	H	QP	100.0	0 - 360	
796.952	3.0	43.2	20.9	2.6	27.4	0.0	0.0	39.3	46.0	-6.7	H	P	100.0	0 - 360	
852.274	3.0	41.1	21.4	2.7	27.6	0.0	0.0	37.7	46.0	-8.3	H	P	100.0	0 - 360	

Rev. 1.27.09

Note: No other emissions were detected above the system noise floor.

7.4. RECEIVER ABOVE 1 GHz

High Frequency Measurement																	
Compliance Certification Services, Fremont 5m Chamber																	
Company:		Nintendo															
Project #:		10J13513															
Date:		12/2/2010															
Test Engineer:		Thanh Nguyen															
Configuration:		EUT with AC/DC Adapter and Support laptop															
Mode:		Receive mode															
Test Equipment:																	
Horn 1-18GHz			Pre-amplifier 1-26GHz			Pre-amplifier 26-40GHz			Horn > 18GHz			Limit					
T73; S/N: 6717 @3m			T144 Miteq 3008A00931									RX RSS 210					
Hi Frequency Cables																	
3' cable 22807700			12' cable 22807600			20' cable 22807500			HPF			Reject Filter			Peak Measurements RBW=VBW=1MHz		
3' cable 22807700			12' cable 22807600			20' cable 22807500									Average Measurements RBW=1MHz, VBW=10Hz		
f GHz	Dist (m)	Read Pk dBuV	Read Avg. dBuV	AF dB/m	CL dB	Amp dB	D Corr dB	Filt dB	Peak dBuV/m	Avg dBuV/m	Pk Lim dBuV/m	Avg Lim dBuV/m	Pk Mar dB	Avg Mar dB	Notes (V/H)		
1.066	3.0	63.0	42.1	24.1	2.4	-39.4	0.0	0.0	50.2	29.3	74	54	-23.8	-24.7	V		
1.211	3.0	62.1	41.4	24.6	2.6	-39.2	0.0	0.0	50.1	29.3	74	54	-23.9	-24.7	V		
1.329	3.0	60.3	41.4	25.0	2.7	-39.0	0.0	0.0	49.0	30.0	74	54	-25.0	-24.0	V		
1.501	3.0	54.1	36.5	25.5	2.9	-38.8	0.0	0.0	43.8	26.2	74	54	-30.2	-27.8	V		
1.599	3.0	54.8	36.3	25.9	3.0	-38.6	0.0	0.0	45.1	26.5	74	54	-28.9	-27.5	V		
1.863	3.0	50.6	34.2	26.8	3.3	-38.3	0.0	0.0	42.4	26.0	74	54	-31.6	-28.0	V		
2.126	3.0	49.4	34.6	27.5	3.6	-37.9	0.0	0.0	42.7	27.8	74	54	-31.3	-26.2	V		
1.063	3.0	65.6	45.4	24.1	2.4	-39.4	0.0	0.0	52.7	32.5	74	54	-21.3	-21.5	H		
1.330	3.0	59.2	42.1	25.0	2.7	-39.0	0.0	0.0	47.9	30.8	74	54	-26.1	-23.2	H		
1.860	3.0	53.3	37.3	26.7	3.3	-38.3	0.0	0.0	45.1	29.0	74	54	-28.9	-25.0	H		
Rev. 07.22.09																	
f	Measurement Frequency					Amp	Preamp Gain					Avg Lim	Average Field Strength Limit				
Dist	Distance to Antenna					D Corr	Distance Correct to 3 meters					Pk Lim	Peak Field Strength Limit				
Read	Analyzer Reading					Avg	Average Field Strength @ 3 m					Avg Mar	Margin vs. Average Limit				
AF	Antenna Factor					Peak	Calculated Peak Field Strength					Pk Mar	Margin vs. Peak Limit				
CL	Cable Loss					HPF	High Pass Filter										

8. AC POWER LINE CONDUCTED EMISSIONS

LIMITS

FCC §15.207 (a)

RSS-Gen 7.2.2

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.

TEST PROCEDURE

ANSI C63.4


RESULTS

MITSUMI AC/DC ADAPTER:

6 WORST EMISSIONS

CONDUCTED EMISSIONS DATA (115VAC 60Hz)									
Freq.	Reading			Closs	Limit	EN B	Margin		Remark
(MHz)	PK (dBuV)	QP (dBuV)	AV (dBuV)	(dB)	QP	AV	QP (dB)	AV (dB)	L1 / L2
0.27	50.13	--	34.51	0.00	61.06	51.06	-10.93	-16.55	L1
0.55	44.00	--	30.44	0.00	56.00	46.00	-12.00	-15.56	L1
2.42	42.88	--	27.72	0.00	56.00	46.00	-13.12	-18.28	L1
0.27	47.32	--	39.57	0.00	61.00	51.00	-13.68	-11.43	L2
1.08	41.20	--	21.03	0.00	56.00	46.00	-14.80	-24.97	L2
2.42	42.82	--	31.07	0.00	56.00	46.00	-13.18	-14.93	L2
6 Worst Data									

LINE 1 RESULTS

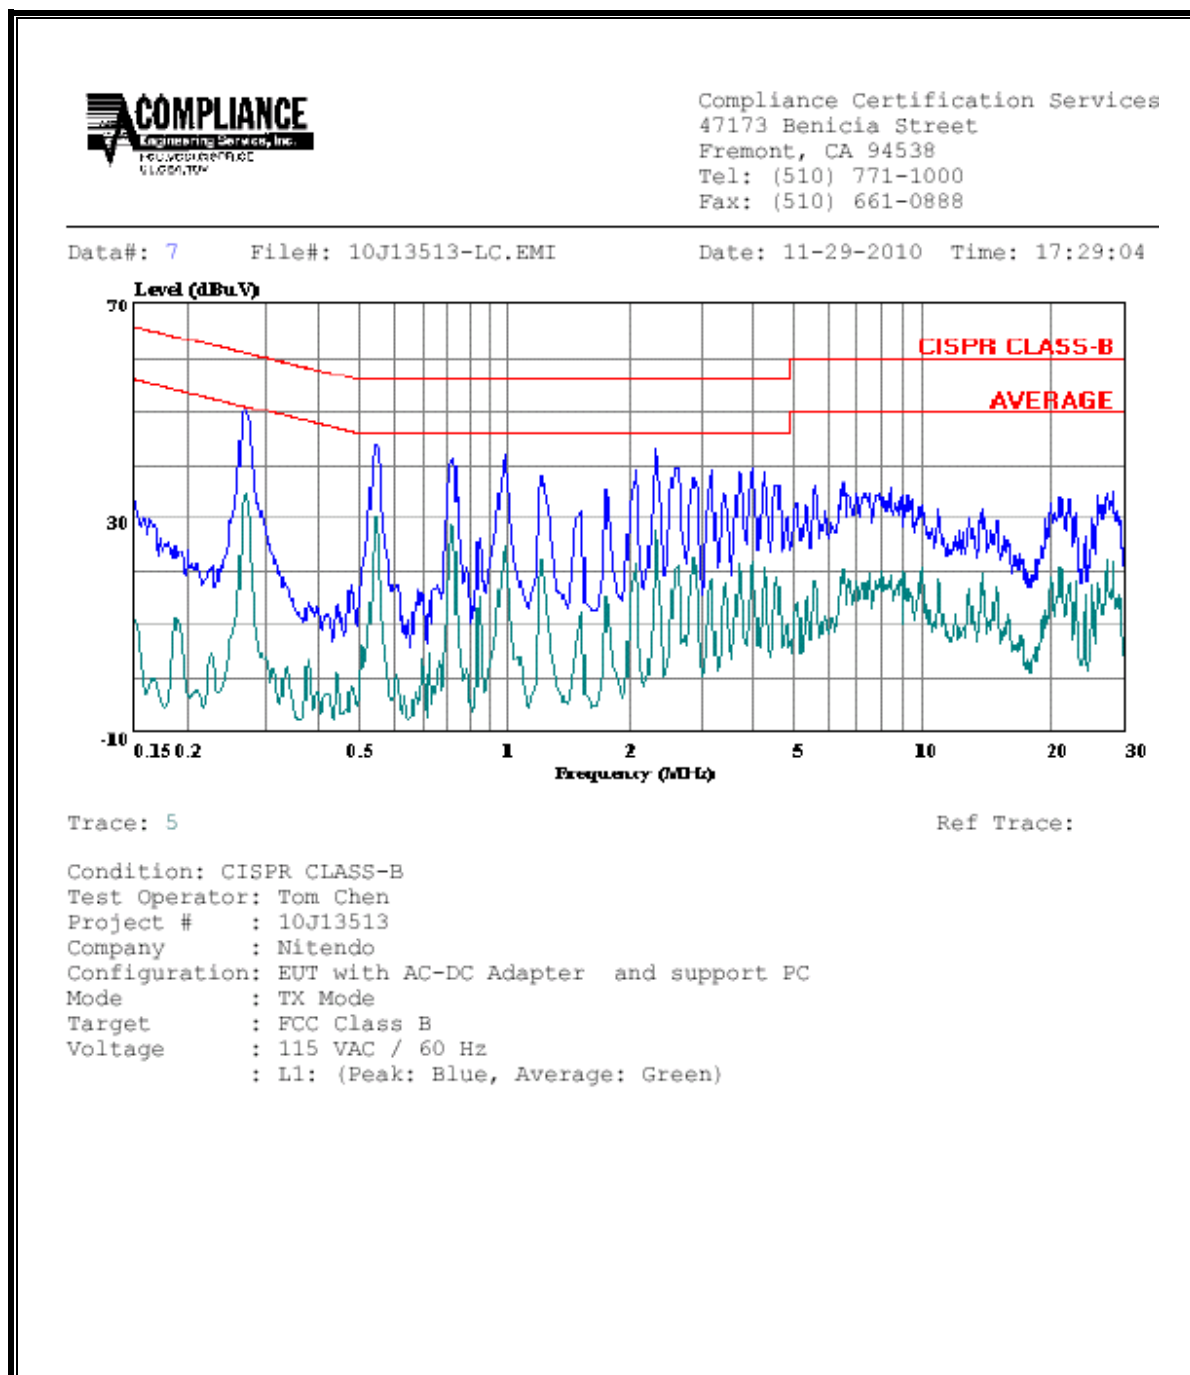

LINE 2 RESULTS

