



**FCC CFR47 PART 15 SUBPART C
INDUSTRY CANADA RSS-210 ISSUE 8
(Permissive Change Class II Application)**

CERTIFICATION TEST REPORT

FOR

WIFI MODULE

MODEL NUMBER: DWM-W052

**FCC ID: EW4DWMW052
IC: 4250A-DWMW052**

REPORT NUMBER: 33LE0037-HO-A

ISSUE DATE: August 26, 2013

Prepared for
**MITSUMI ELECTRIC CO., LTD.
1601, SAKAI, ATSUGI-SHI,
KANAGAWA, 243-8533 JAPAN**

Prepared by
**UL Japan, Inc.
Head Office EMC Lab.
4383-326 Asama-cho, Ise-shi
Mie-ken 516-0021 JAPAN
TEL: +81 596 24 8116
FAX: +81 596 24 8124**



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

Revision History

Rev.	Issue Date	Revisions	Revised By
--	08/26/13	Initial Issue	T. Hatakeda

TABLE OF CONTENTS

1. ATTESTATION OF TEST RESULTS.....	4
2. TEST METHODOLOGY.....	5
3. FACILITIES AND ACCREDITATION.....	5
4. CALIBRATION AND UNCERTAINTY.....	5
4.1. MEASURING INSTRUMENT CALIBRATION	5
4.2. SAMPLE CALCULATION	5
4.3. MEASUREMENT UNCERTAINTY	6
5. EQUIPMENT UNDER TEST	7
5.1. DESCRIPTION OF EUT	7
5.2. DESCRIPTION OF CHANGE	7
5.3. MAXIMUM OUTPUT POWER	7
5.4. DESCRIPTION OF AVAILABLE ANTENNAS.....	7
5.5. SOFTWARE AND FIRMWARE	8
5.6. WORST-CASE CONFIGURATION AND MODE	8
5.7. DESCRIPTION OF TEST SETUP.....	9
6. ANTENNA PORT TEST RESULTS.....	13
6.1. 802.11n HT20 SISO MODE IN THE 5.8 GHz BAND	13
6.1.1. AVERAGE POWER.....	13
6.1.2. CONDUCTED SPURIOUS EMISSIONS.....	14
6.2. 802.11n HT20 MIMO MODE IN THE 5.8 GHz BAND.....	34
6.2.1. AVERAGE POWER.....	34
6.2.2. CONDUCTED SPURIOUS EMISSIONS.....	35
7. RADIATED TEST RESULTS.....	55
7.1. LIMITS AND PROCEDURE.....	55
7.2. TRANSMITTER ABOVE 1 GHz.....	56
7.2.1. TX ABOVE 1 GHz FOR 802.11n HT20 SISO MODE IN THE 5.8 GHz BAND	56
7.2.2. TX ABOVE 1 GHz FOR 802.11n HT20 MIMO MODE IN THE 5.8 GHz BAND	62
7.2.3. DUTY CYCLE PLOTS	65
7.2.4. WORST-CASE BELOW 1 GHz	66
8. SETUP PHOTOS	67

1. ATTESTATION OF TEST RESULTS

COMPANY NAME: MITSUMI ELECTRIC CO., LTD.
1601, SAKAI, ATSUGI-SHI,
KANAGAWA, 243-8533 JAPAN

EUT DESCRIPTION: WIFI MODULE

MODEL: DWM-W052

SERIAL NUMBER: 9CE635BB6451

DATE TESTED: August 6 to 8, 2013

APPLICABLE STANDARDS	
STANDARD	TEST RESULTS
CFR 47 Part 15 Subpart C	Pass
INDUSTRY CANADA RSS-210 Issue 8 Annex 8	Pass
INDUSTRY CANADA RSS-GEN Issue 3	Pass

UL Japan, Inc. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by UL Japan, Inc. based on interpretations and/or observations of test results. Measurement Uncertainties were not taken into account and are published for informational purposes only. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Note: The results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. This document may not be altered or revised in any way unless done so by UL Japan, Inc. and all revisions are duly noted in the revisions section. Any alteration of this document not carried out by UL Japan, Inc. will constitute fraud and shall nullify the document. This report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, any agency of the Federal Government, or any agency of any government.

Approved & Released For UL Japan, Inc. By:

Tested By:


Takahiro Hatakeda
Leader of WiSE Japan
UL Verification Services
UL Japan, Inc.


Takumi Shimada
Engineer of WiSE Japan
UL Verification Services
UL Japan, Inc.

2. TEST METHODOLOGY

The tests documented in this report were performed in accordance with ANSI C63.4:2003, FCC CFR 47 Part 2, FCC CFR 47 Part 15, RSS-GEN Issue 3, and RSS-210 Issue 8.

3. FACILITIES AND ACCREDITATION

The test sites and measurement facilities used to collect data are located at 4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN.

UL Japan, Inc. is accredited by NVLAP, Laboratory Code 200572-0

The full scope of accreditation can be viewed at

<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

4. CALIBRATION AND UNCERTAINTY

4.1. MEASURING INSTRUMENT CALIBRATION

The measuring equipment utilized to perform the tests documented in this report has been calibrated in accordance with the manufacturer's recommendations, and is traceable to recognized national standards.

4.2. SAMPLE CALCULATION

Where relevant, the following sample calculation is provided:

$$\begin{aligned} \text{Field Strength (dBuV/m)} &= \text{Measured Voltage (dBuV)} + \text{Antenna Factor (dB/m)} + \\ &\text{Cable Loss (dB)} - \text{Preamplifier Gain (dB)} \\ 36.5 \text{ dBuV} + 18.7 \text{ dB/m} + 0.6 \text{ dB} - 26.9 \text{ dB} &= 28.9 \text{ dBuV/m} \end{aligned}$$

4.3. MEASUREMENT UNCERTAINTY

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Radiated emission (10m*)(±dB)		
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz
No.1	4.2dB	5.0dB	4.8dB
No.2	-	-	-
No.3	-	-	-
No.4	-	-	-

*10m = Measurement distance

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(±dB)				(1m*)(±dB)		(0.5m*)(±dB)
	9kHz -30MHz	30MHz - 300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	4.3dB	5.0dB	5.1dB	4.9dB	5.8dB	4.4dB	4.3dB
No.2	4.3dB	5.2dB	5.1dB	5.0dB	5.7dB	4.3dB	4.2dB
No.3	4.6dB	5.0dB	5.1dB	5.0dB	5.7dB	4.5dB	4.2dB
No.4	4.8dB	5.2dB	5.0dB	5.0dB	5.7dB	5.2dB	4.2dB

*3m/1m/0.5m = Measurement distance

Power meter (±dB)	
Below 1GHz	Above 1GHz
1.0dB	1.0dB

Antenna terminal conducted emission and Power density (±dB)			Antenna terminal conducted emission (±dB)		Channel power (±dB)
Below 1GHz	1GHz-3GHz	3GHz-18GHz	18GHz-26.5GHz	26.5GHz-40GHz	
1.0dB	1.1dB	2.7dB	3.2dB	3.3dB	1.5dB

5. EQUIPMENT UNDER TEST

5.1. DESCRIPTION OF EUT

The EUT is an 802.11n (HT20) transceiver module.

5.2. DESCRIPTION OF CHANGE

The major changes filed under this application are noted in the following table:

Parts of change	Previous specification	Changed new specification
Capacitor (C43)	33pF	12pF
Capacitor (C44)	33pF	12pF
Resistor (R2)	1.5K Ohm	422 Ohm
X'tal (Y1)	Model: 8Z20070005	Model: 8Z20070013

5.3. MAXIMUM OUTPUT POWER

The transmitter has a maximum average conducted output power as follows. All power measurements are within +/-0.5dB of the output power measurements from the original report. Reference Document no. 33BE0378-HO-A.

Frequency Range (MHz)	Mode	Output Power (dBm)	Output Power (mW)	Output Power (dBm) - Doc no. 33BE0378-HO-	Output Power (mW) - Doc no. 33BE0378-HO-A
5745 - 5825	802.11n SISO HT20	12.84	19.23	13.28	21.28
5745 - 5825	802.11n MIMO HT20	15.74	37.50	15.73	37.41

*Output power was set using the test utility to be within 0.5dB of the original application for the purposes of evaluating compliance of this device with the proposed changes installed. The proposed changes will not modify the output power from that reported in the original filing.

5.4. DESCRIPTION OF AVAILABLE ANTENNAS

The radio utilizes a PIFA antenna, with a maximum gain of 1.23 dBi (Ant 0/ Ant 1).

5.5. SOFTWARE AND FIRMWARE

The software/firmware version is BCM43237_5_91_100_35_XP.

5.6. WORST-CASE CONFIGURATION AND MODE

The worst-case data rate for each mode is determined to be as follows, based on preliminary tests of the chipset utilized in this radio.

All final tests in the 802.11n 20MHz mode were made at MCS1 for SISO and MCS8 for MIMO.

For radiated emissions below 1 GHz the worst-case configuration is determined to be the mode and channel with the highest output power.

The fundamental of the EUT was investigated in three orthogonal orientations X, Y and Z, it was determined that the following orientation was worst-case; therefore, all final radiated testing was performed with the following orientation:

- Module: Horizontal X-orientation, Vertical X-orientation
- Antenna: Horizontal Z-orientation, Vertical X-orientation

The report number of original model is 33BE0378-HO-A.

Only Average Power, Band Edge Compliance, and Spurious Emission (Conducted / Radiated) test were performed in this report.

For other tests, please see the test report number 33BE0378-HO-A issued by UL Japan, Inc.

5.7. DESCRIPTION OF TEST SETUP

SUPPORT EQUIPMENT

Support Equipment List				
Description	Manufacture	Model	Serial Number	FCC ID
Laptop	TOSHIBA	PQF32N-01F015	47076597H	DoC
AC Adapter	TOSHIBA	PA3237U-3ACA	7209274	DoC
Test Jig	Mitsumi	N/A	N/A	N/A


I/O CABLES

I/O Cable List						
Cable No	Port	# of identical	Connector Type	Cable Type	Cable Length (m)	Remarks
1	AC	1	2 Pong	Un-Shielded	2.0m	N/A
2	DC	1	DC	Un-Shielded	1.8m	N/A
3	DC	1	DC	Un-Shielded	2.0m	N/A
4	Data	1	20 Pins	Un-Shielded	0.5m	Ribbon Cable

TEST SETUP

The EUT is attached to a host laptop computer via ribbon cable during the tests. Test software exercised the radio card.

SETUP DIAGRAM FOR TESTS

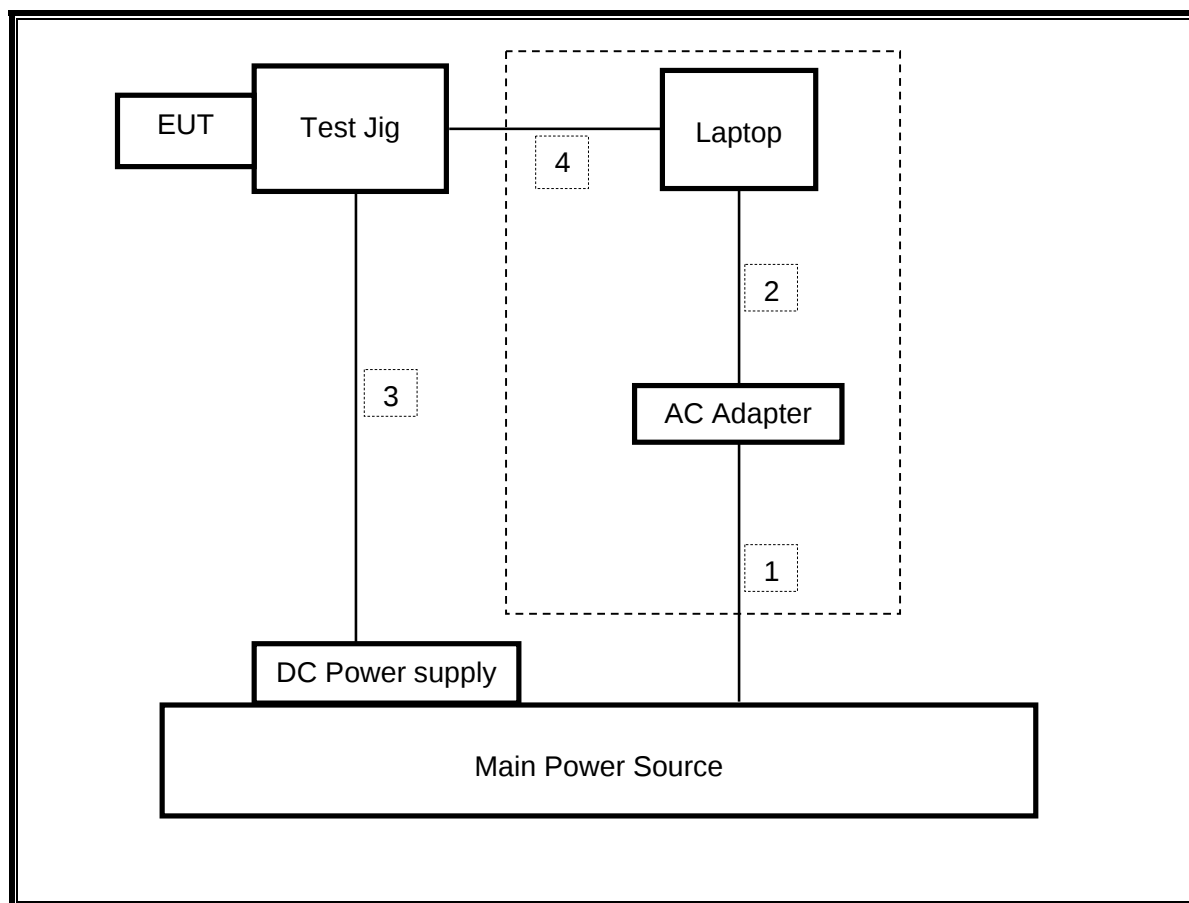

 = These were connected only when the EUT was activated.

TEST AND MEASUREMENT EQUIPMENT

The following test and measurement equipment was utilized for the tests documented in this report:

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2013/02/28 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	-	RE	2013/02/26 * 12
MJM-16	Measure	KOMELON	KMC-36	-	RE	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE	-
MSA-10	Spectrum Analyzer	Agilent	E4448A	MY46180655	RE	2013/02/22 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2013/05/17 * 12
MCC-133	Microwave Cable	HUBER+SUHNER	SUCOFLEX104	336164/4(1m) / 340640(5m)	RE	2012/09/05 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2013/03/12 * 12
MAEC-04	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE	2013/02/28 * 12
MOS-15	Thermo-Hygrometer	Custom	CTH-180	-	RE	2013/02/26 * 12
MJM-09	Measure	KDS	E19-55	-	RE	-
MHA-21	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	9120D-557	RE	2012/08/17 * 12
MCC-141	Microwave Cable	Junkosha	MWX221	1305S002R(1m) / 1204S062(5m)	RE	2013/05/28 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	MY39500780	RE	2013/03/19 * 12
MHF-23	High Pass Filter 7-20GHz	TOKIMEC	TF37NCCC	603	RE	2013/01/10 * 12
MCC-79	Microwave Cable 1G-26.5GHz	Suhner	SUCOFLEX104	278923/4	RE	2012/12/24 * 12
MHA-16	Horn Antenna 15-40GHz	Schwarzbeck	BBHA9170	BBHA9170306	RE	2013/05/17 * 12
MPA-03	Microwave System Power Amplifier	Agilent	83050A	3950M00205	RE	2013/06/20 * 12
MCC-54	Microwave Cable	Suhner	SUCOFLEX101	2873(1m) / 2876(5m)	RE	2013/03/19 * 12
MOS-19	Thermo-Hygrometer	Custom	CTH-201	0001	AT	2012/12/25 * 12
MPM-12	Power Meter	Anritsu	ML2495A	0825002	AT	2013/06/12 * 12
MPSE-17	Power sensor	Anritsu	MA2411B	0738285	AT	2013/06/12 * 12
MSA-04	Spectrum Analyzer	Agilent	E4448A	US44300523	AT	2013/04/03 * 12
MAT-23	Attenuator(10dB) 1-18GHz	Orient Microwave	BX10-0476-00	-	AT	2013/03/21 * 12
MCC-105	Microwave Cable	Hirose Electric	U.FL-2LP-066J1-A(200)	-	AT	2013/06/25 * 12
MCC-35	Microwave Cable	Hirose Electric	U.FL-2LP-066-A-(200)	-	AT	2012/09/05 * 12

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MTR-08	Test Receiver	Rohde & Schwarz	ESCI	100767	RE	2012/08/23 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1915	RE	2012/10/08 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	174	RE	2012/10/08 * 12
MCC-51	Coaxial cable	UL Japan	-	-	RE	2013/07/23 * 12
MAT-70	Attenuator(6dB)	Agilent	8491A-006	MY52460153	RE	2013/04/05 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE	2013/03/12 * 12

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test Item:

RE: Radiated emission

AT: Antenna terminal conducted test

6. ANTENNA PORT TEST RESULTS

6.1. 802.11n HT20 SISO MODE IN THE 5.8 GHz BAND

6.1.1. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)
Low	5745	12.83	12.84
Middle	5785	12.57	12.61
High	5825	12.49	12.52

6.1.2. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth and video bandwidth is set as below table.


The spectrum from 9 kHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

Span	RVW	VBW
9kHz to 150kHz	200Hz	620Hz
150kHz to 30MHz	9.1kHz	27kHz
Above 30MHz	100kHz	300kHz

RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(SISO) Tx Antenna0 5745MHz

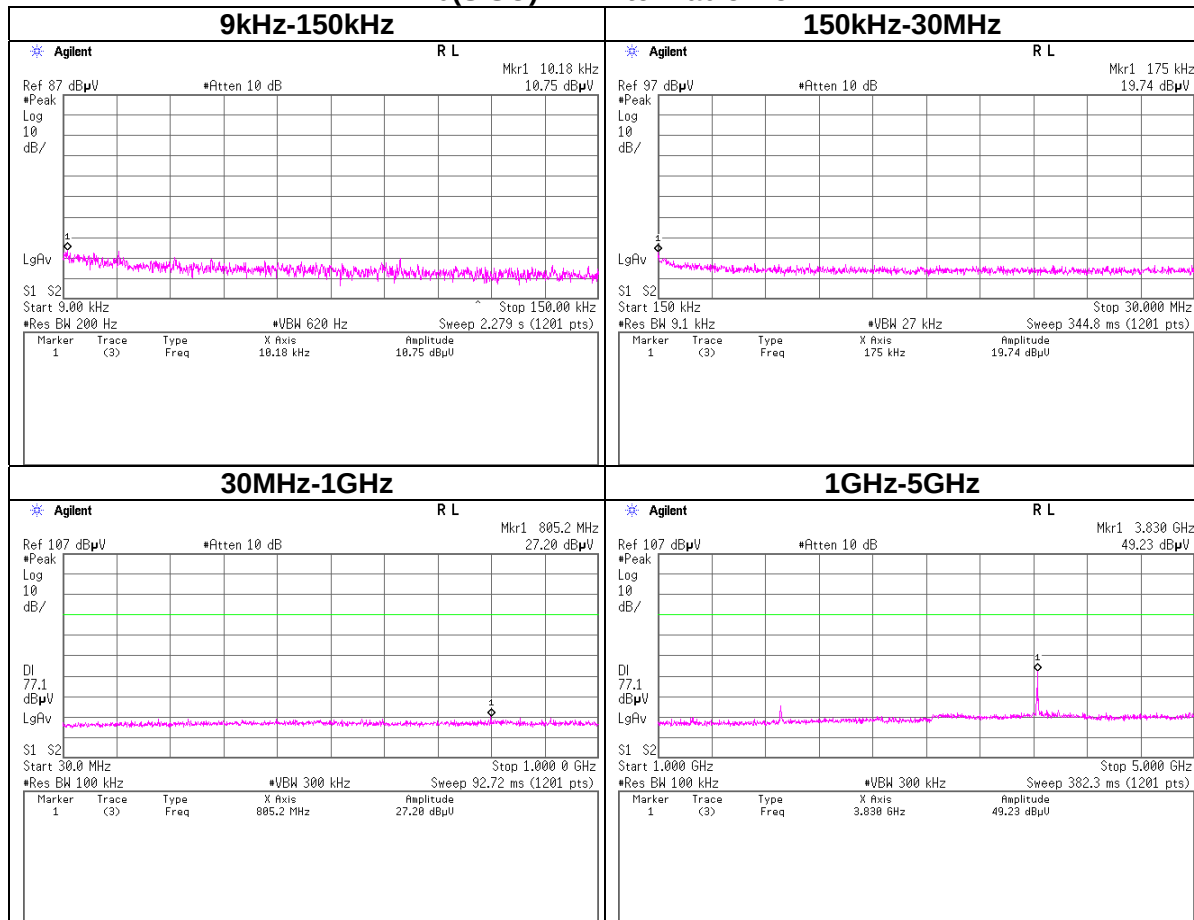


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(SISO) Tx Antenna0 5745MHz

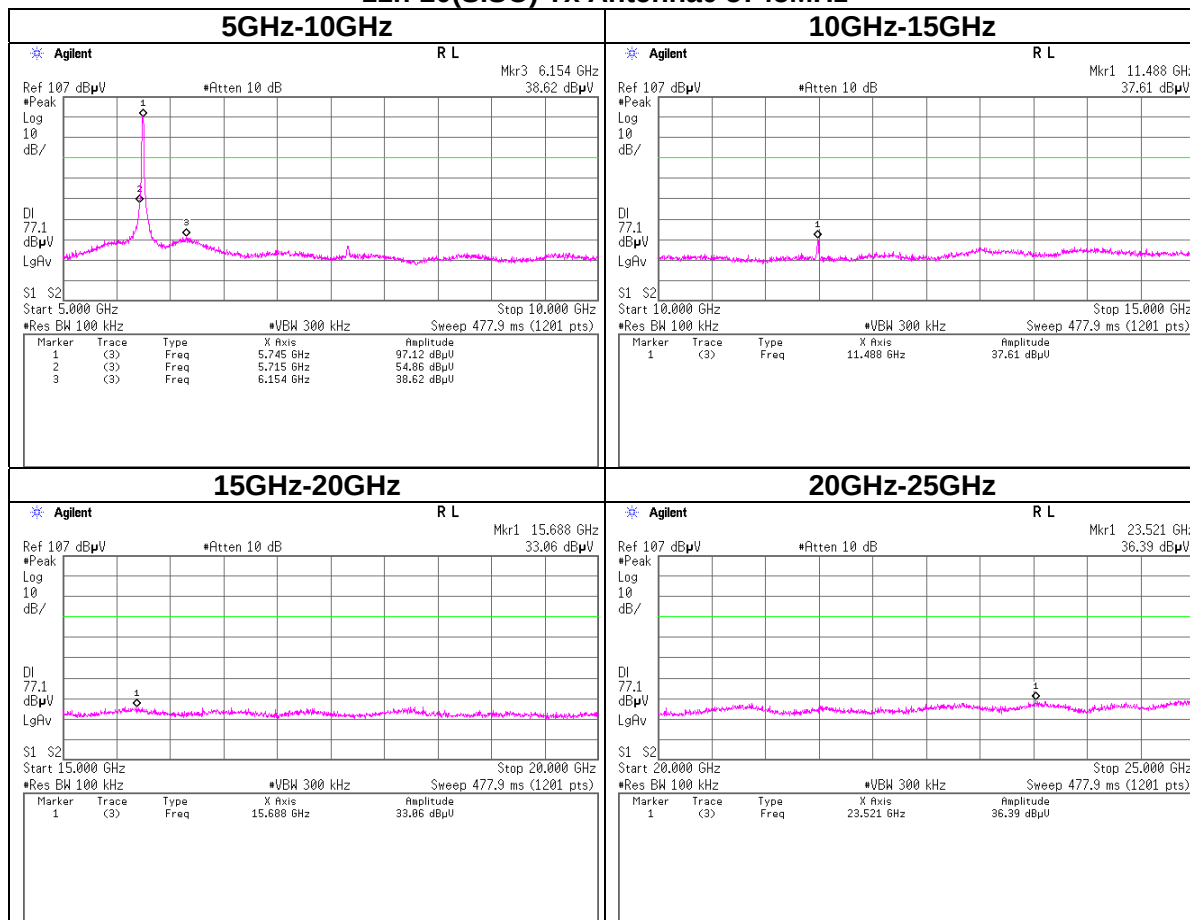


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(SISO) Tx Antenna0 5745MHz

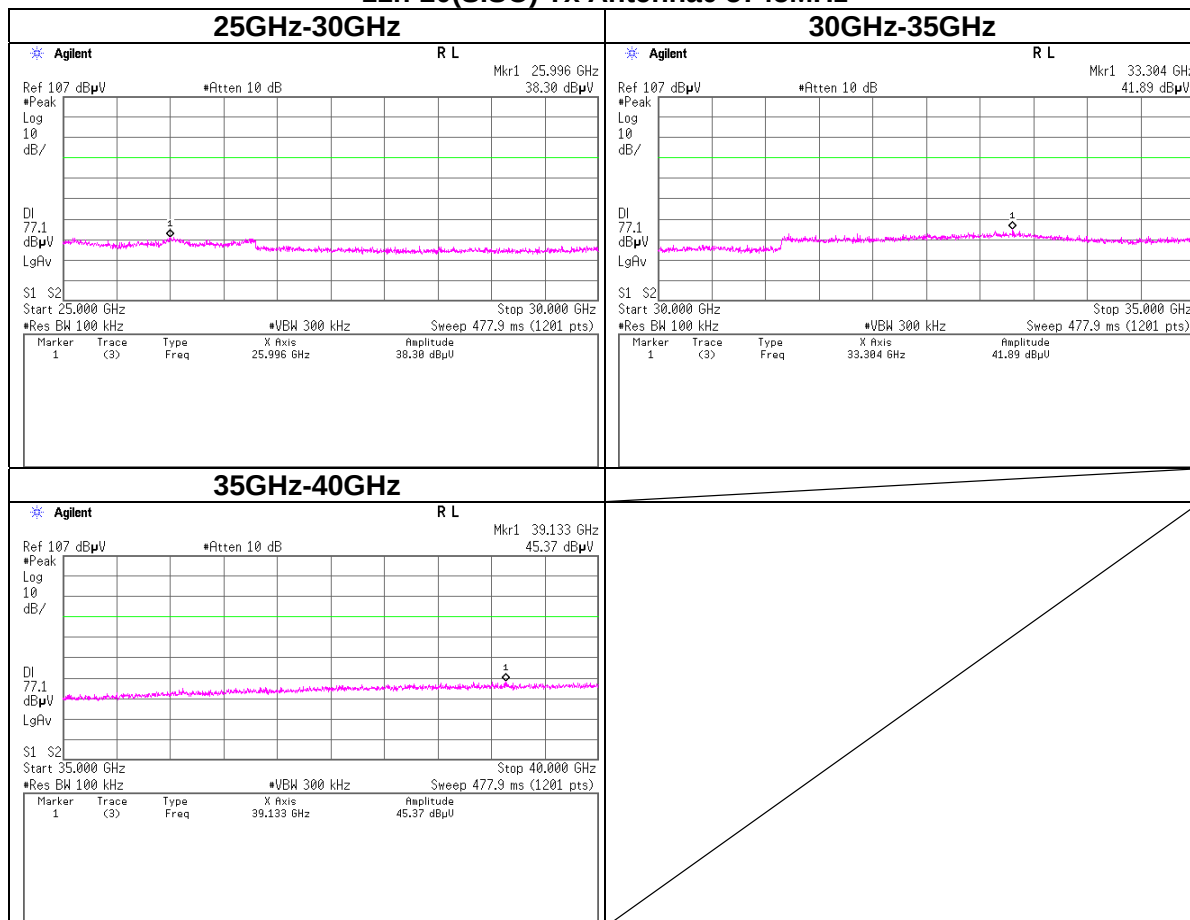


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(SISO) Tx Antenna0 5785MHz

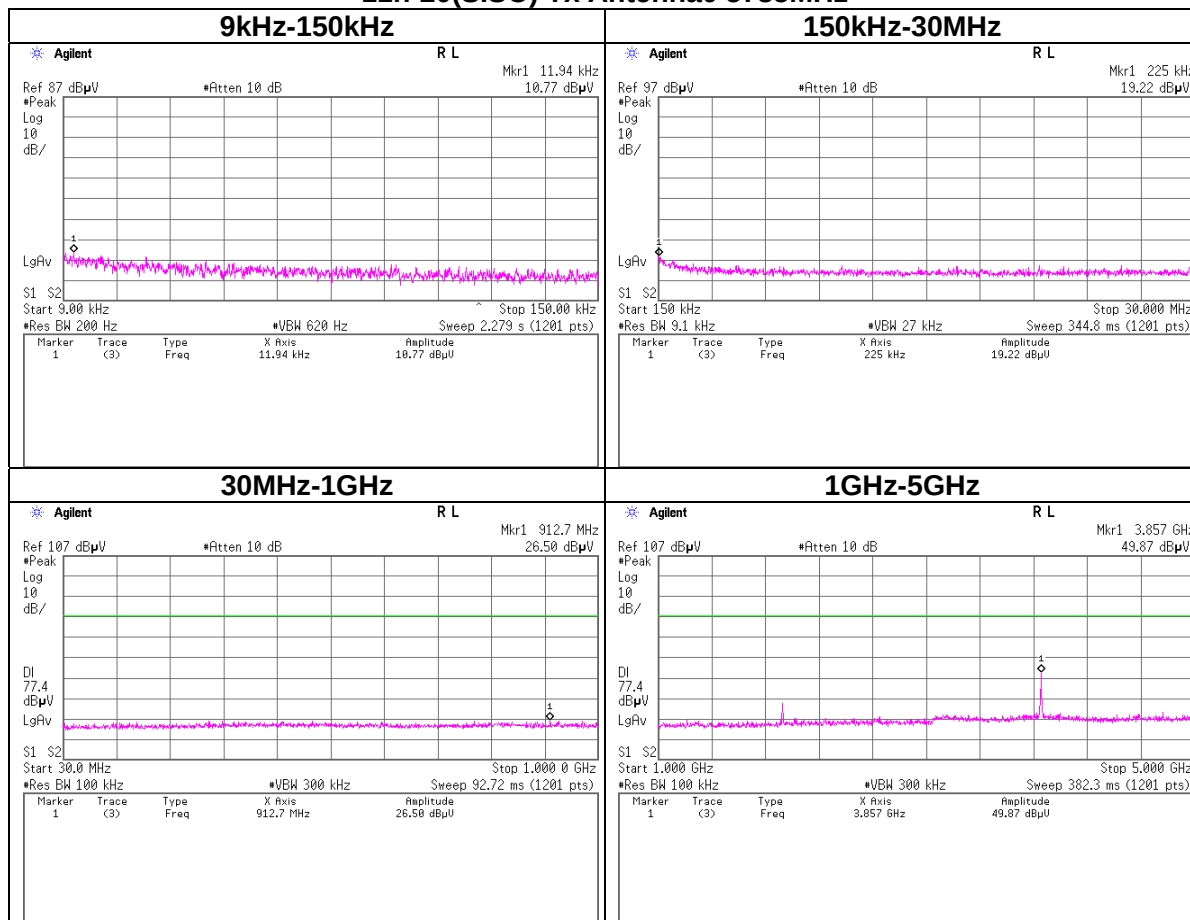


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(SISO) Tx Antenna0 5785MHz

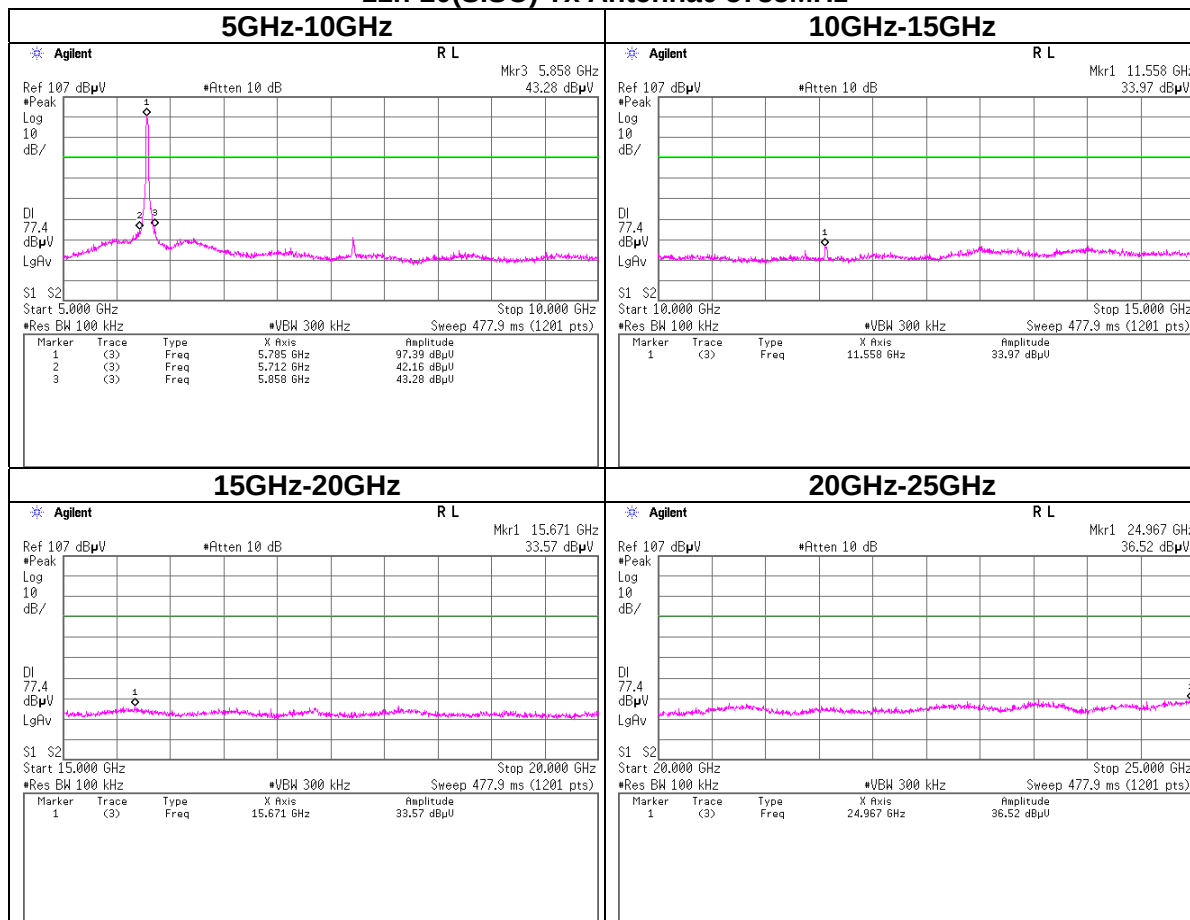


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(SISO) Tx Antenna0 5785MHz

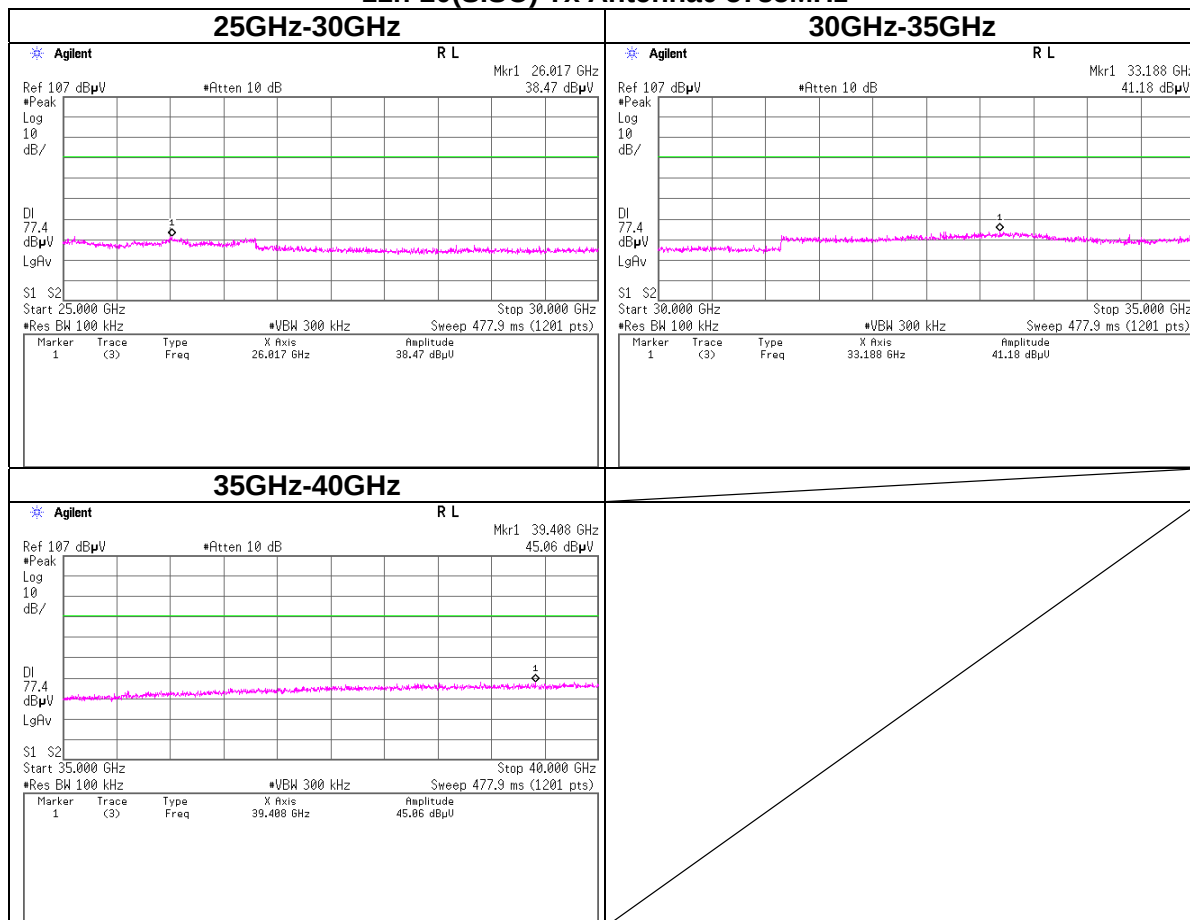


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(SISO) Tx Antenna0 5825MHz

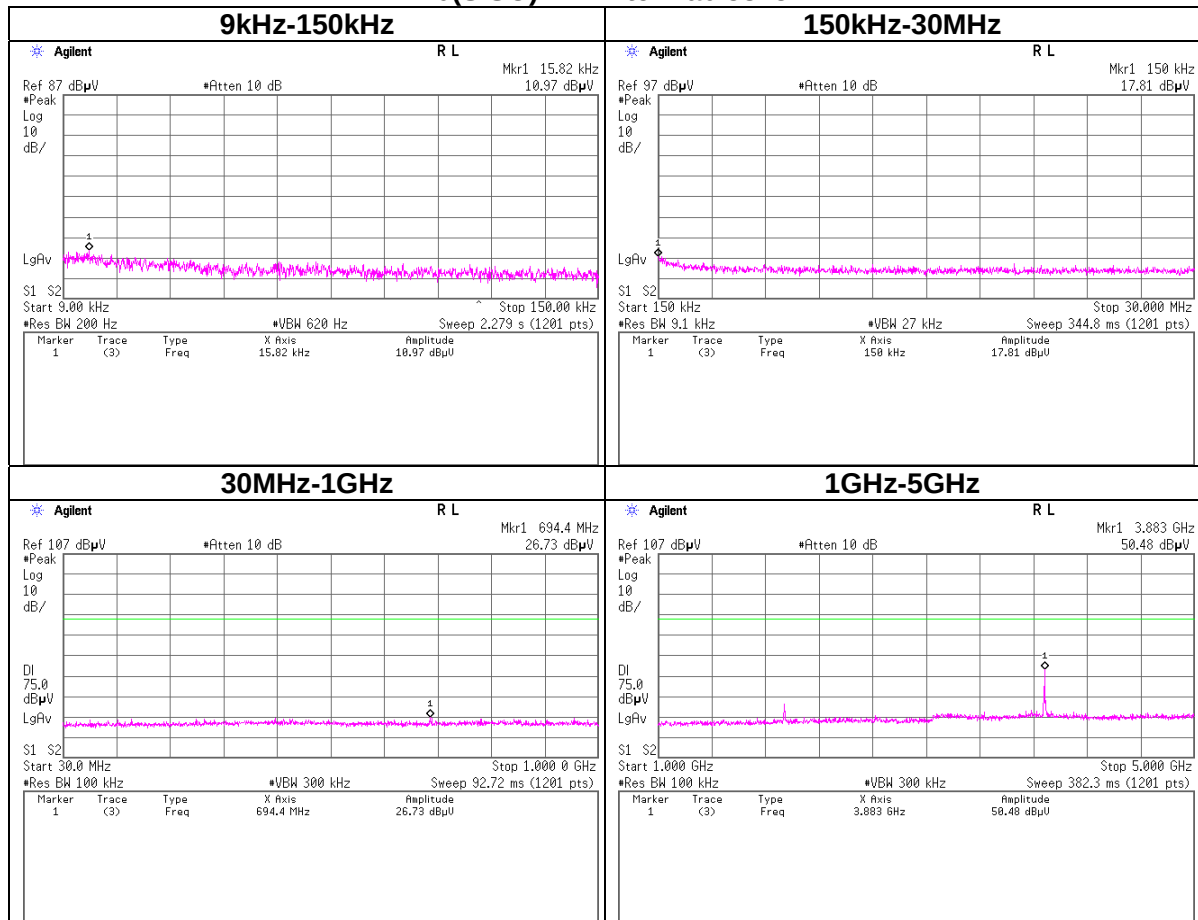


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(SISO) Tx Antenna0 5825MHz

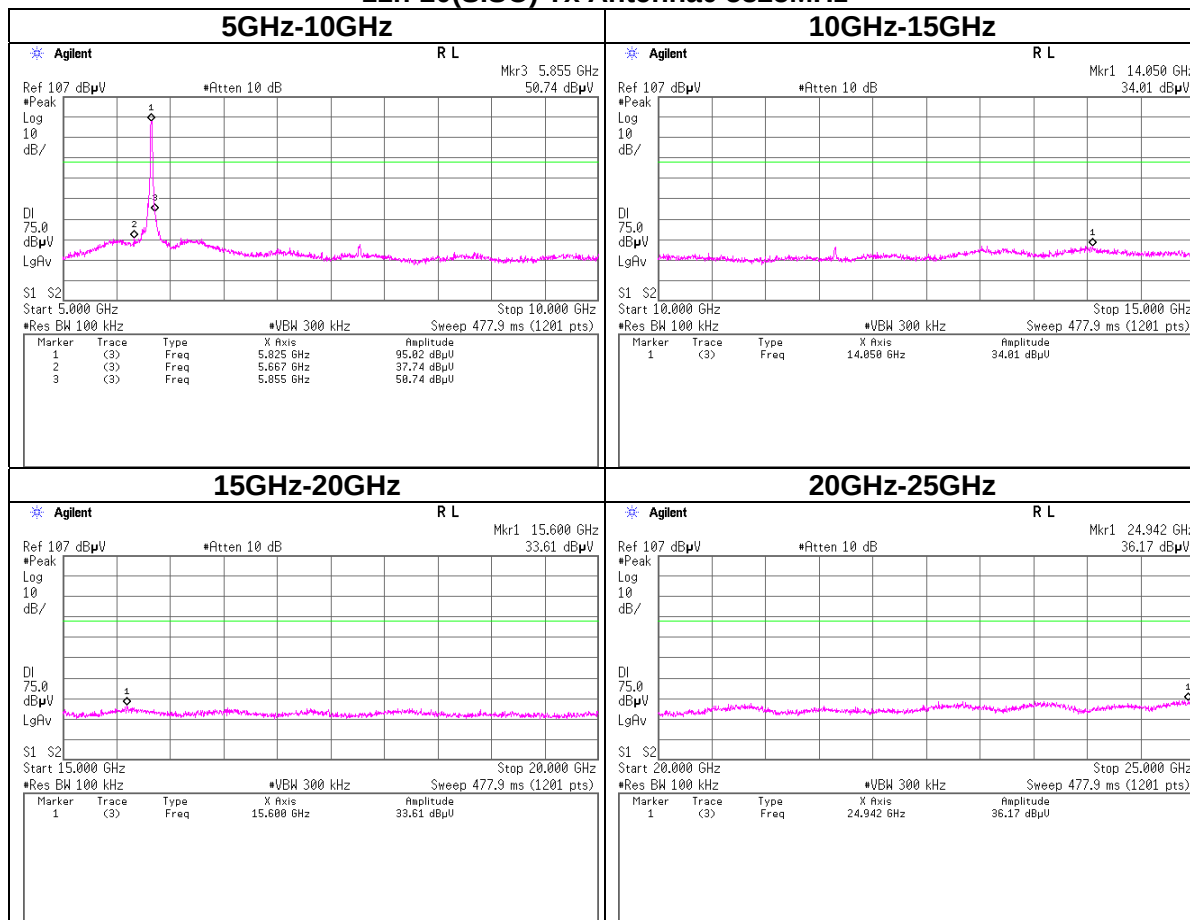


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(SISO) Tx Antenna0 5825MHz

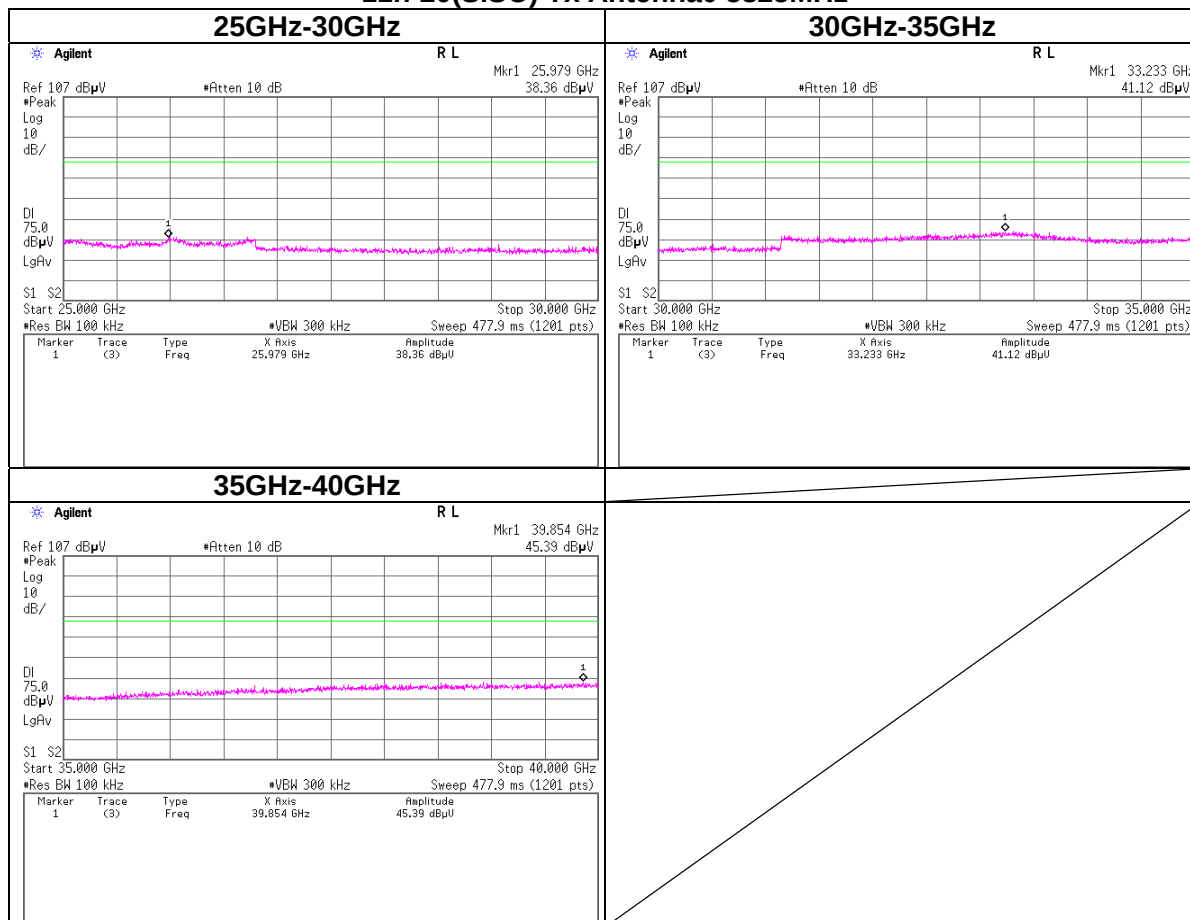


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(SISO) Tx Antenna1 5745MHz

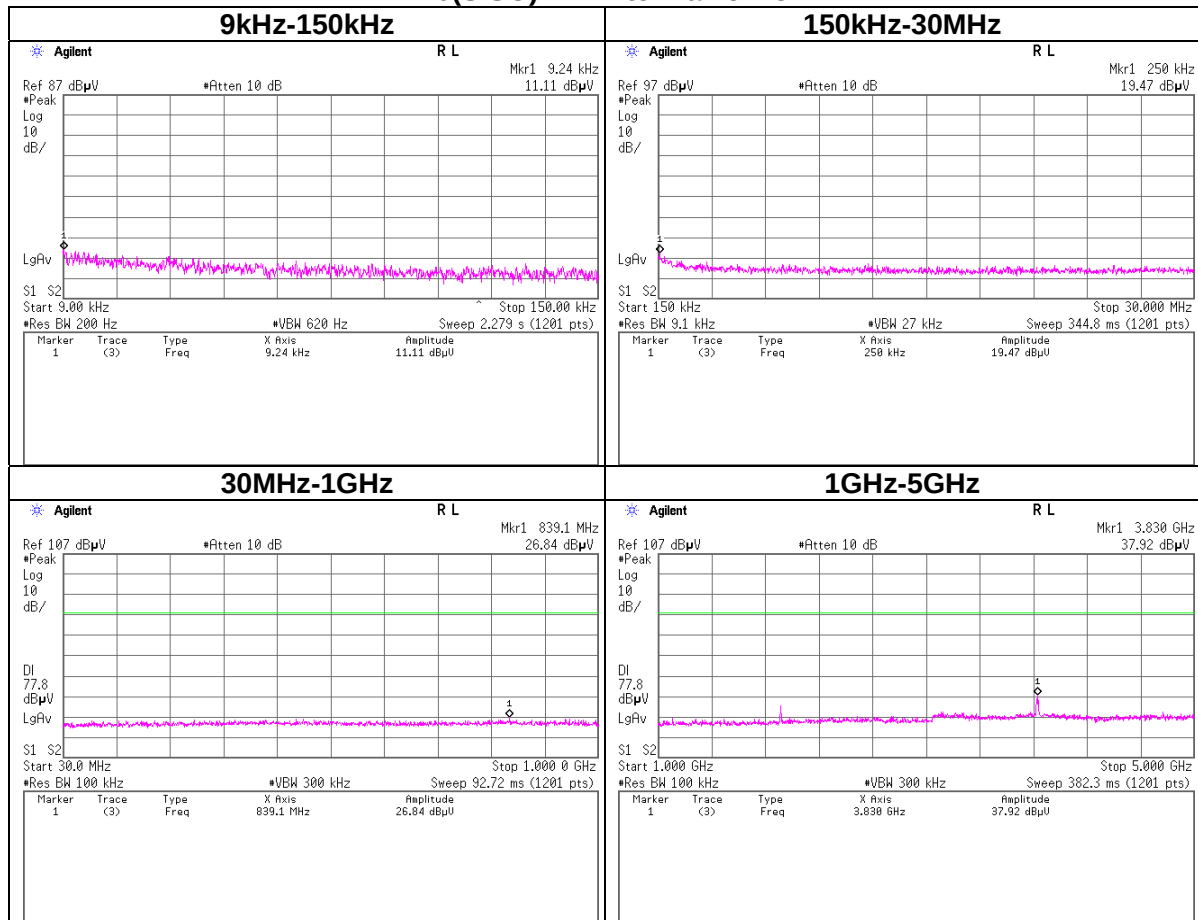


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(SISO) Tx Antenna1 5745MHz

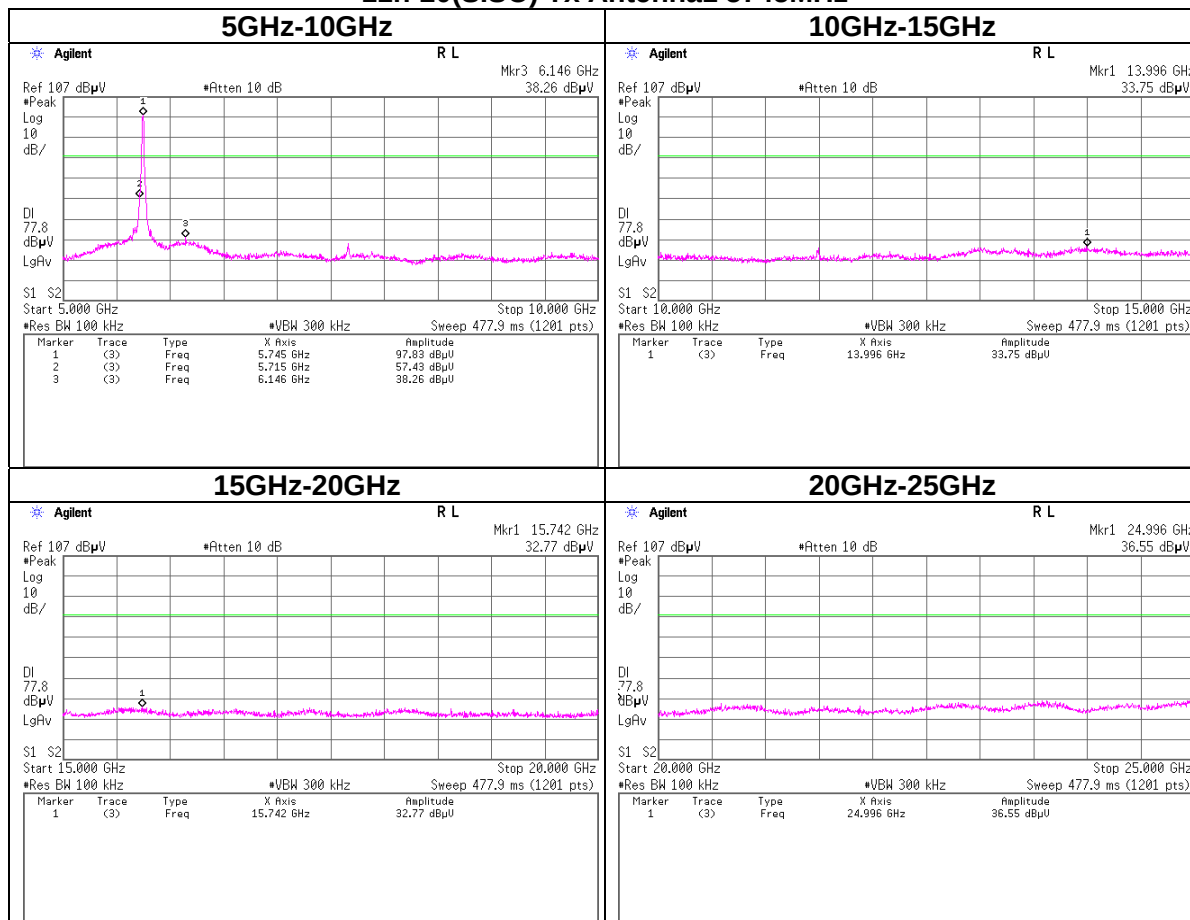


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(SISO) Tx Antenna1 5745MHz

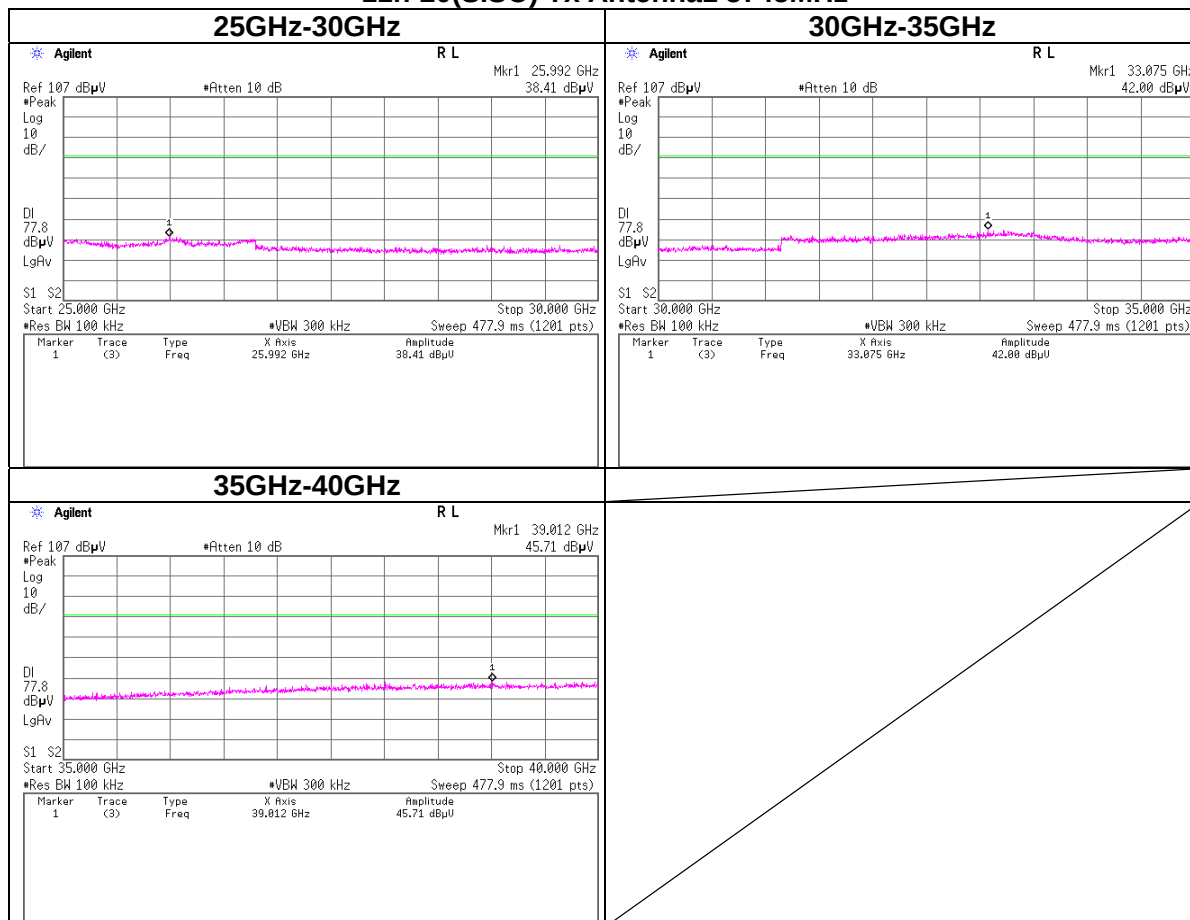


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(SISO) Tx Antenna1 5785MHz

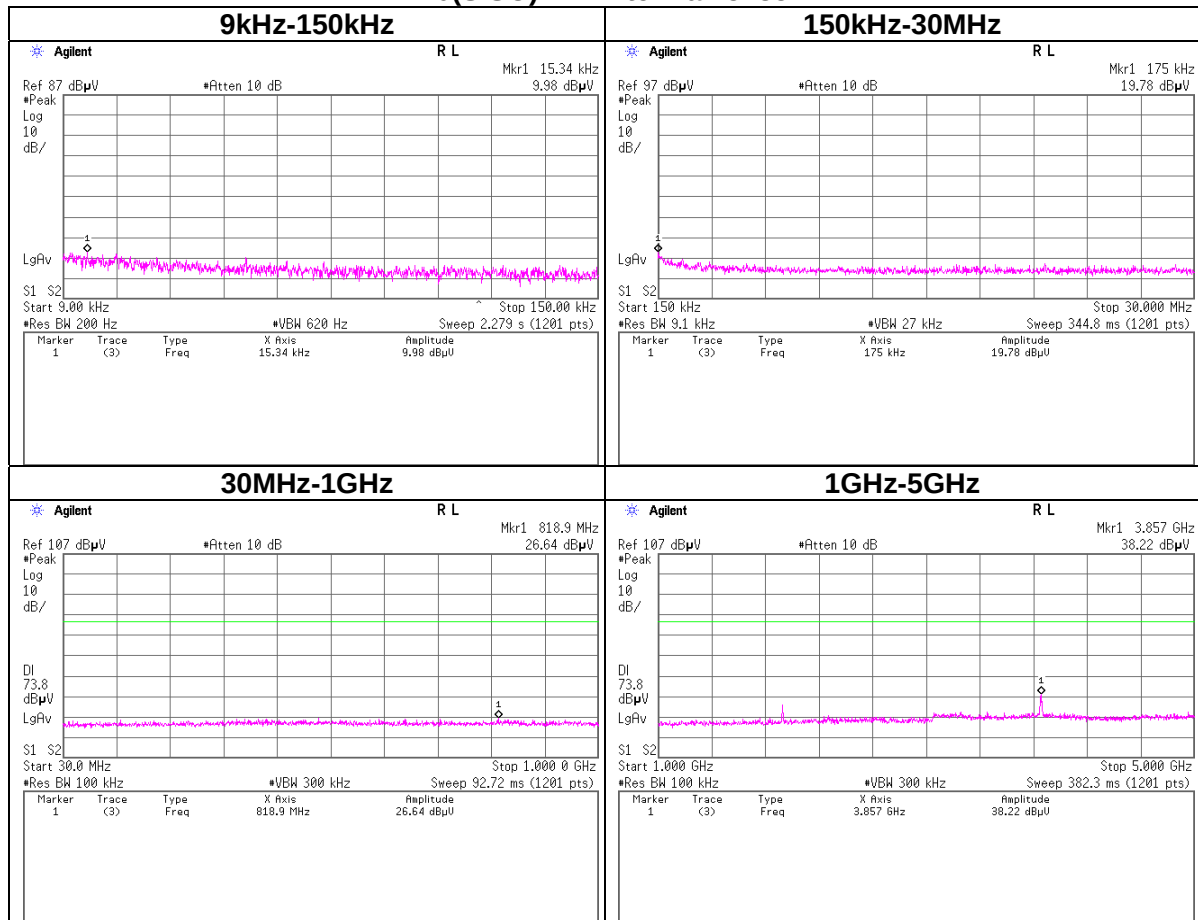


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(SISO) Tx Antenna1 5785MHz

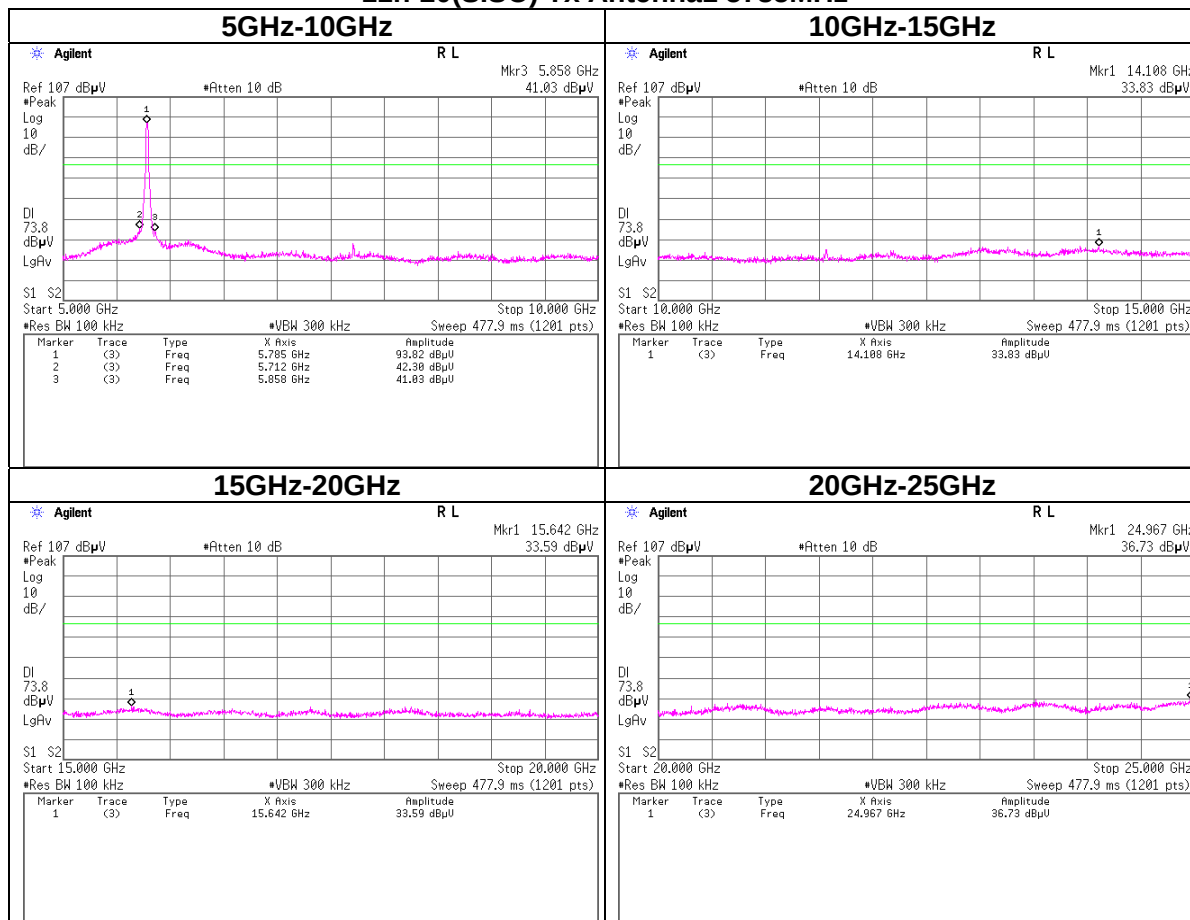


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(SISO) Tx Antenna1 5785MHz

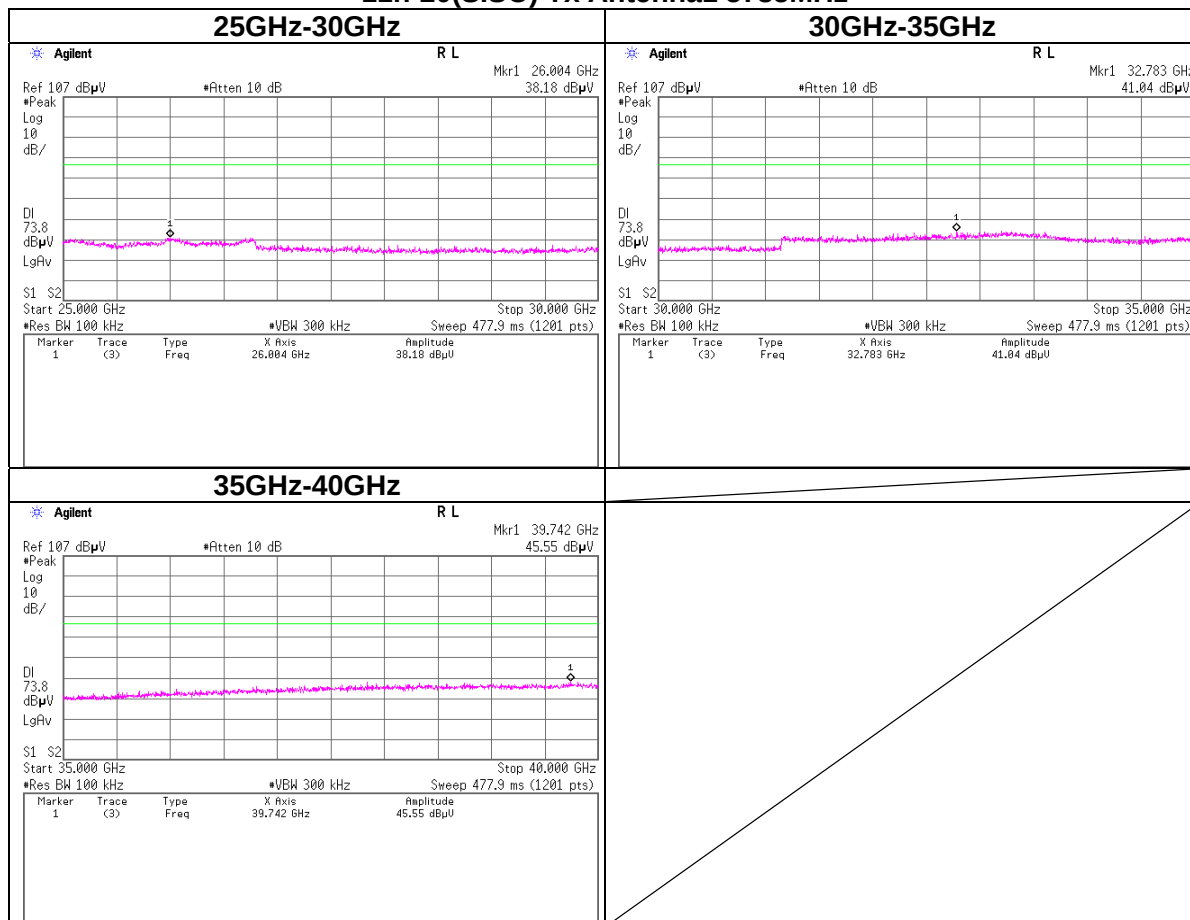


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(SISO) Tx Antenna1 5825MHz

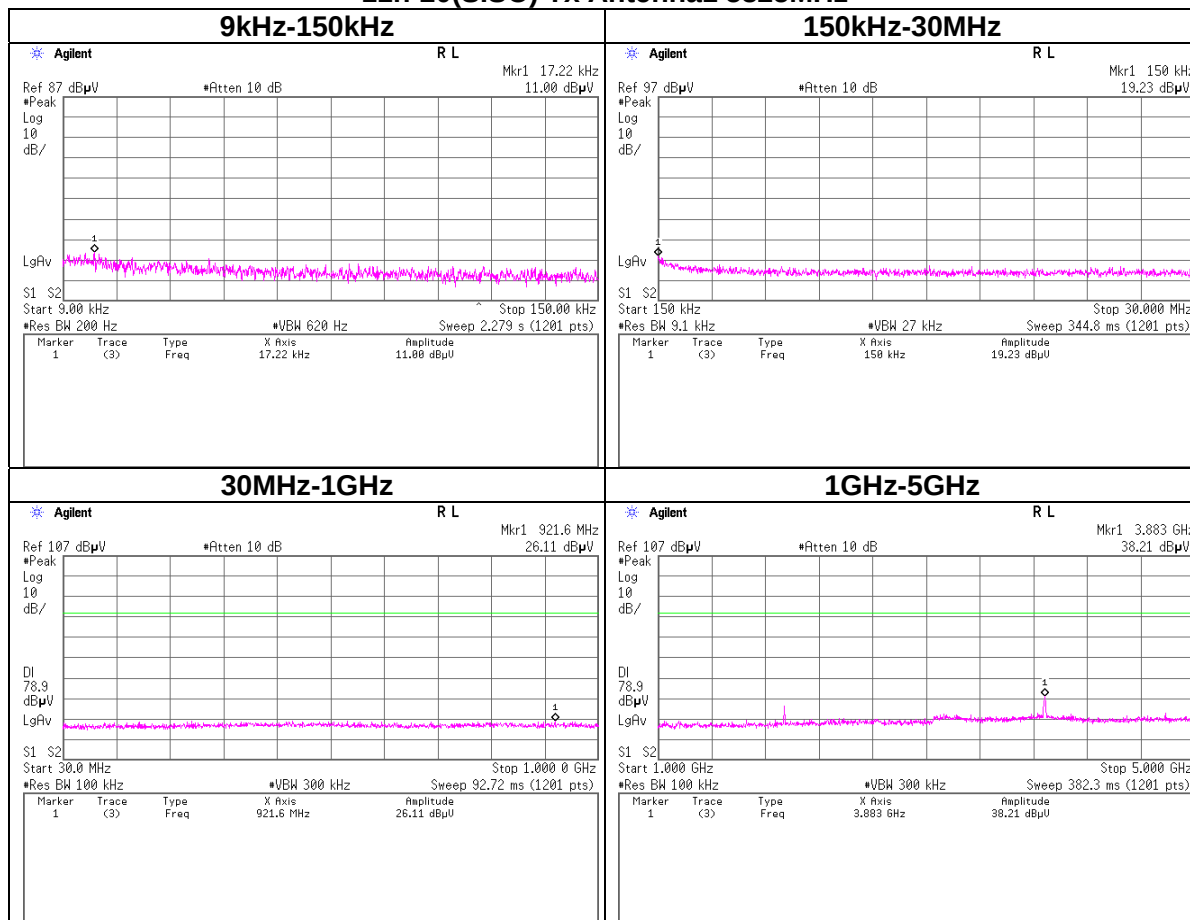


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(SISO) Tx Antenna1 5825MHz

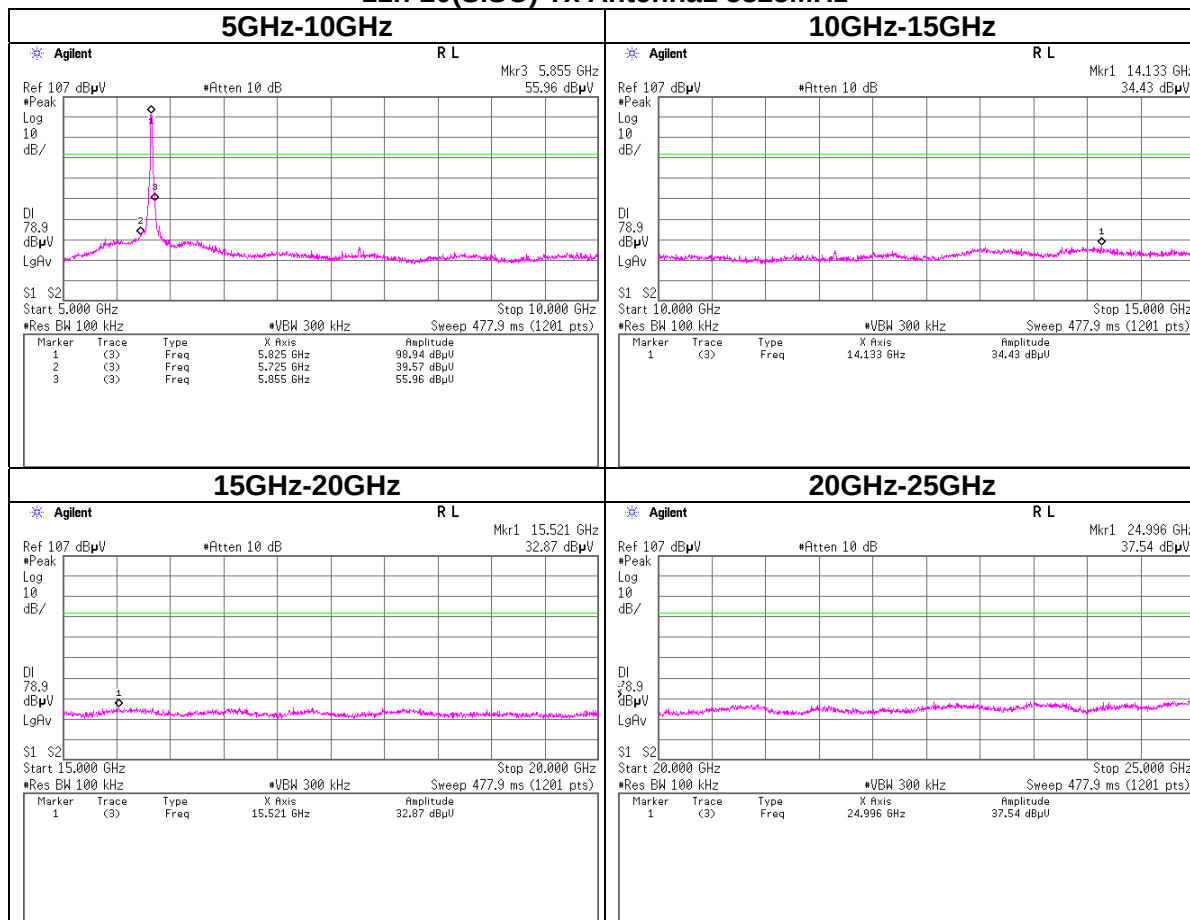


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(SISO) Tx Antenna1 5825MHz

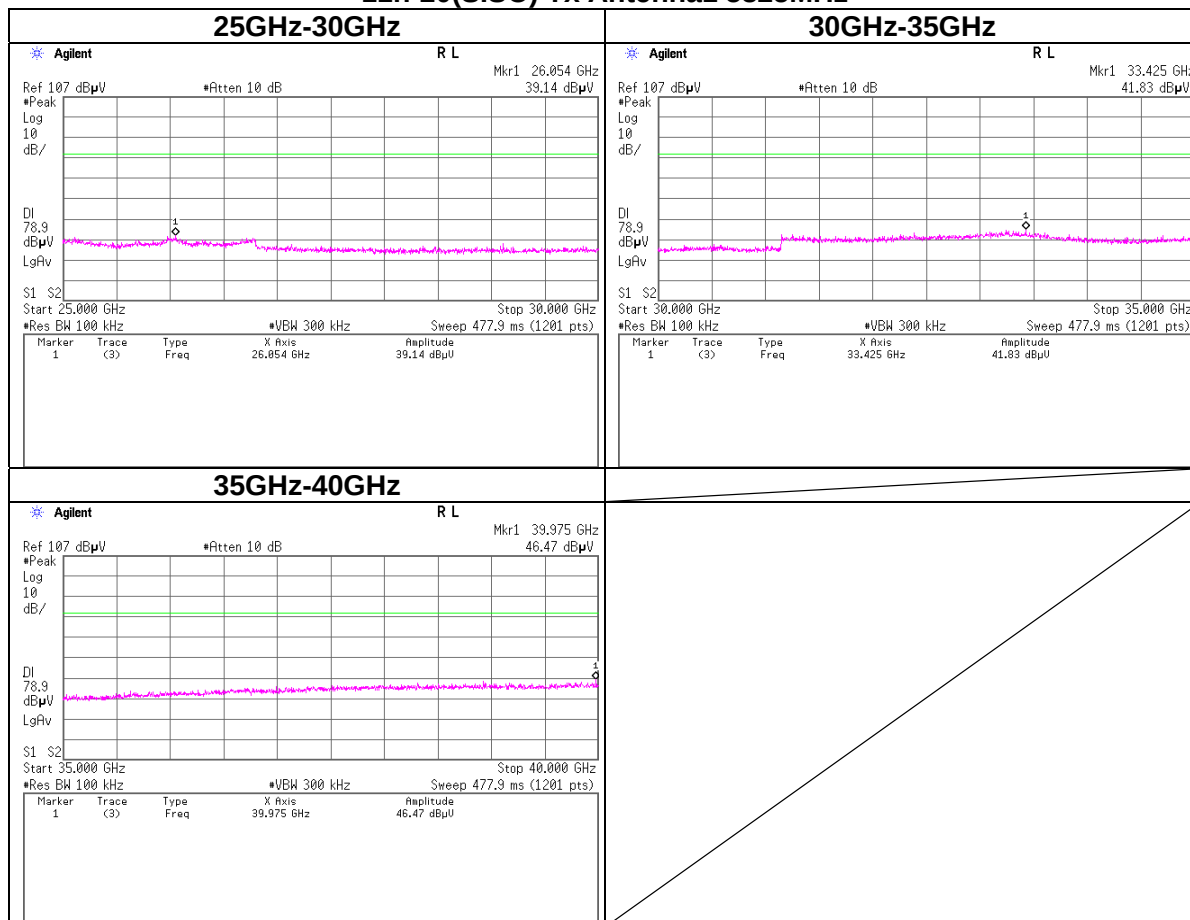


Conducted Emission Band Edge compliance

11-20(SISO) Tx Antenna0

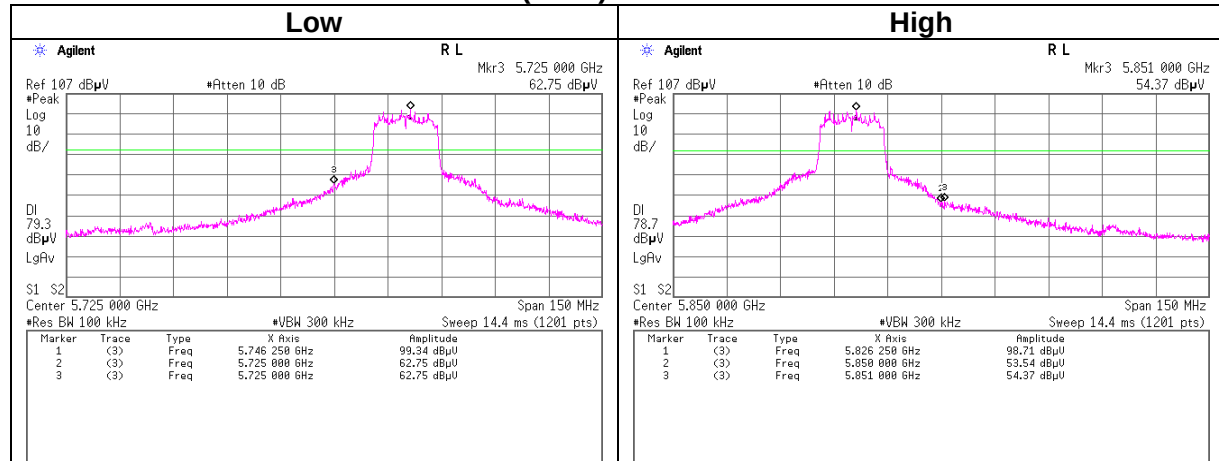

11-20(SISO) Tx Antenna1

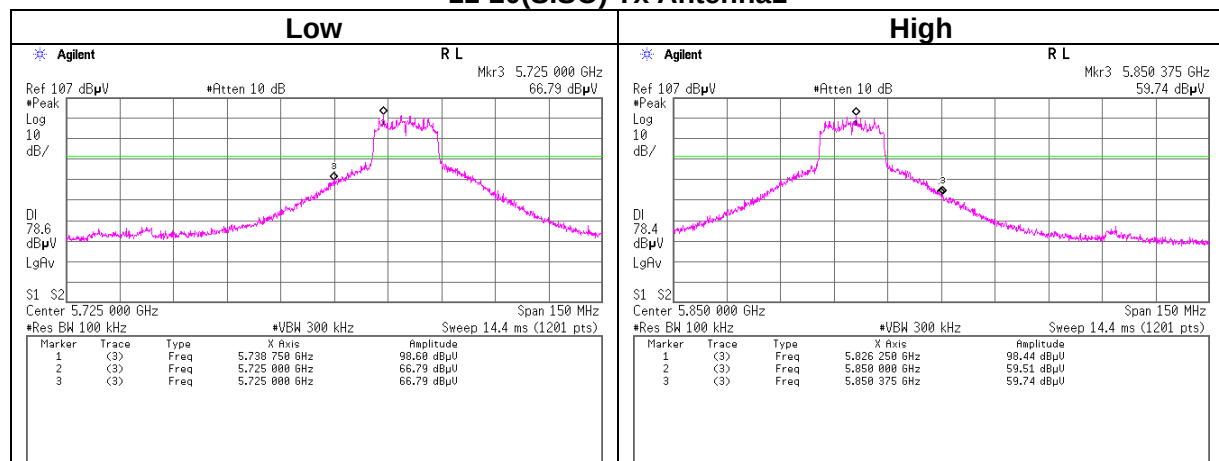

6.2. 802.11n HT20 MIMO MODE IN THE 5.8 GHz BAND

6.2.1. AVERAGE POWER

LIMITS

None; for reporting purposes only.

TEST PROCEDURE

The transmitter output is connected to a power meter.

RESULTS

Channel	Frequency (MHz)	Chain 1 Power (dBm)	Chain 2 Power (dBm)	Total Power (dBm)
Low	5745	13.10	12.33	15.74
Middle	5785	12.79	12.21	15.52
High	5825	12.74	12.17	15.47

6.2.2. CONDUCTED SPURIOUS EMISSIONS

LIMITS

FCC §15.247 (d)

IC RSS-210 A8.5

Output power was measured based on the use of a peak measurement, therefore the required attenuation is 20 dB.

TEST PROCEDURE

The transmitter output is connected to a spectrum analyzer. The resolution bandwidth and video bandwidth is set as below table.


The spectrum from 9 kHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels.

Span	RVW	VBW
9kHz to 150kHz	200Hz	620Hz
150kHz to 30MHz	9.1kHz	27kHz
Above 30MHz	100kHz	300kHz

RESULTS


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(MIMO) Tx Antenna0 5745MHz

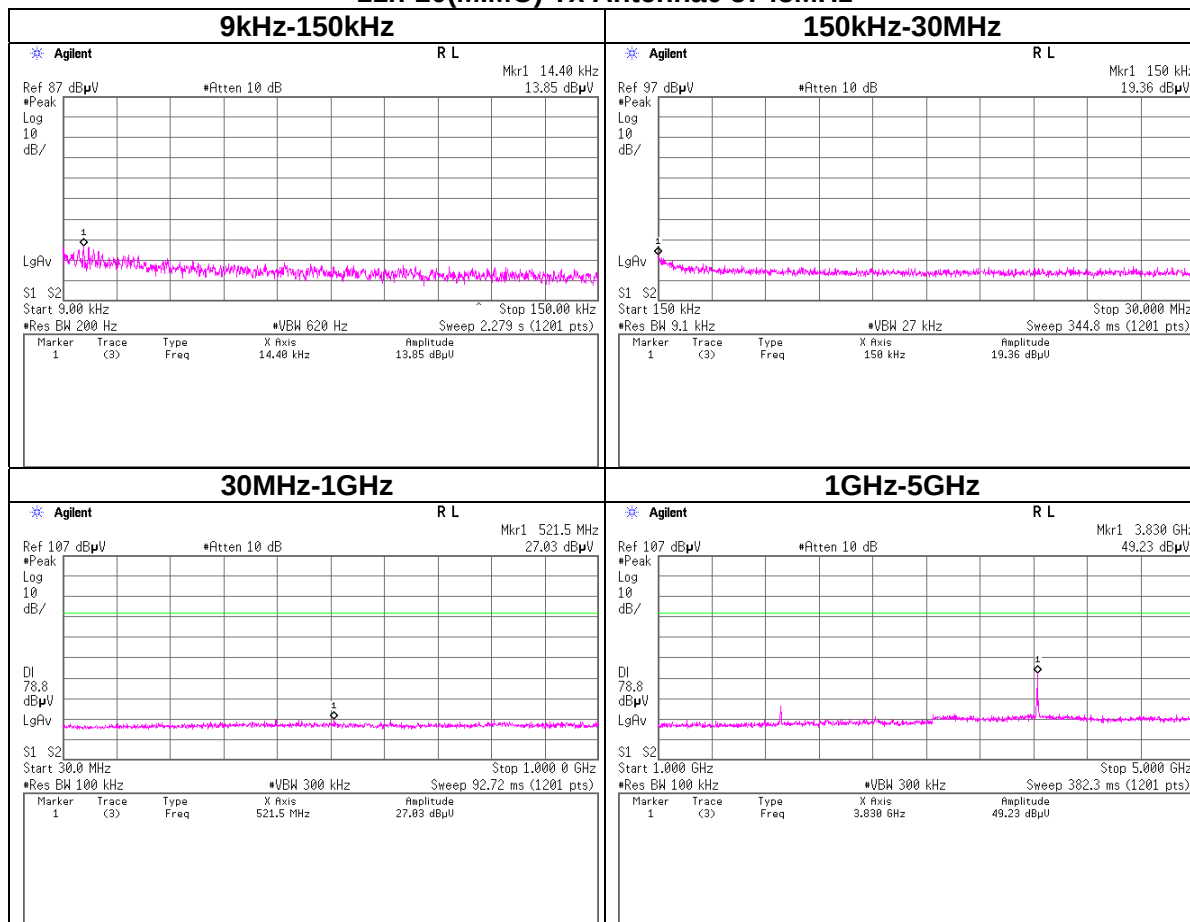


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(MIMO) Tx Antenna0 5745MHz

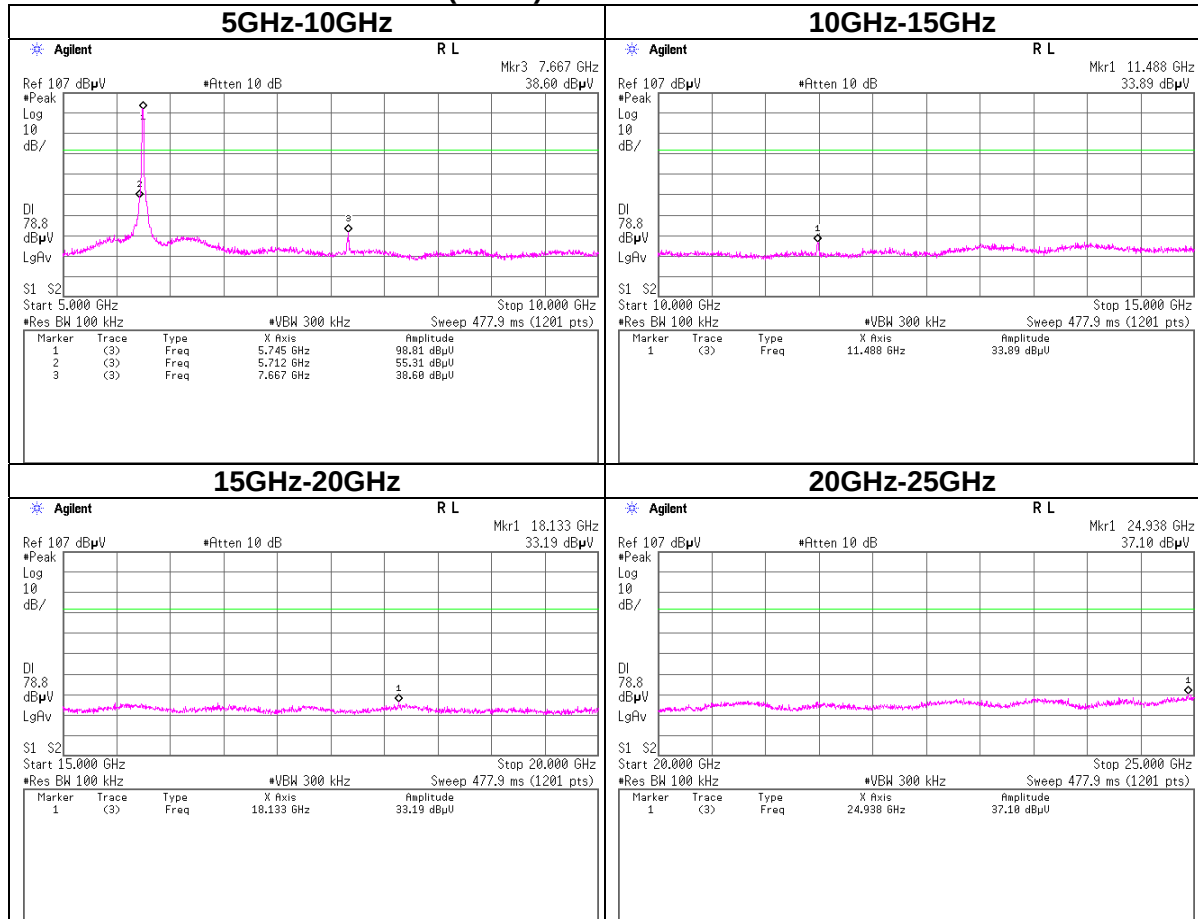


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(MIMO) Tx Antenna0 5745MHz

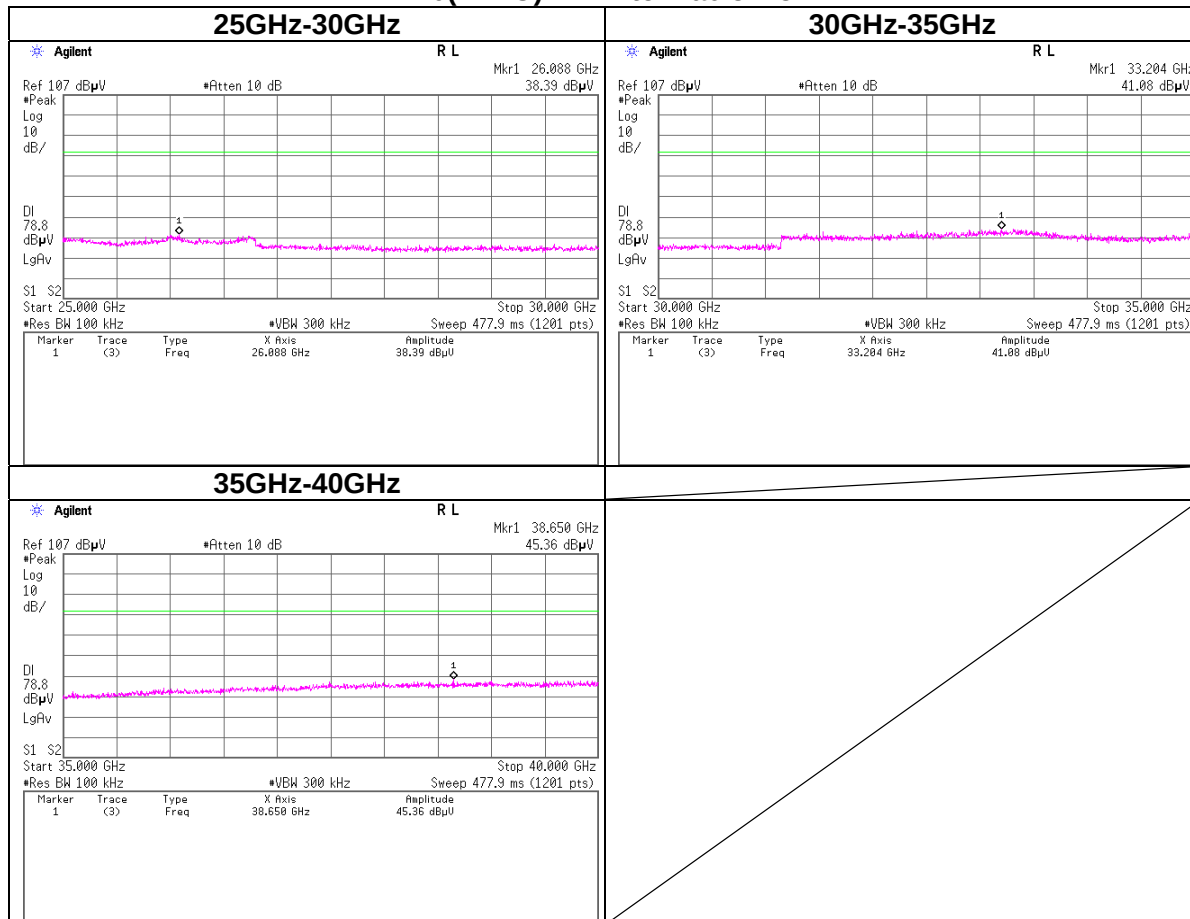


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(MIMO) Tx Antenna0 5785MHz

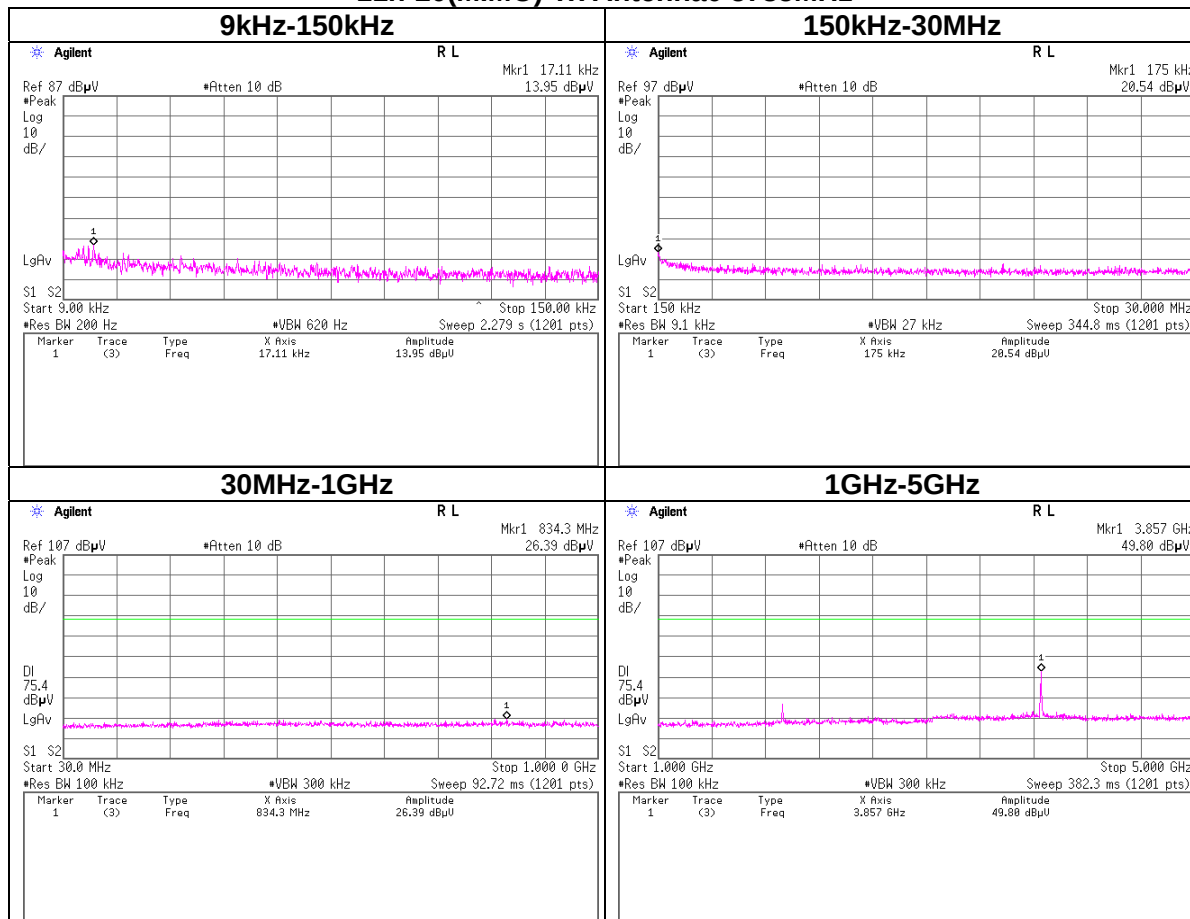


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(MIMO) Tx Antenna0 5785MHz

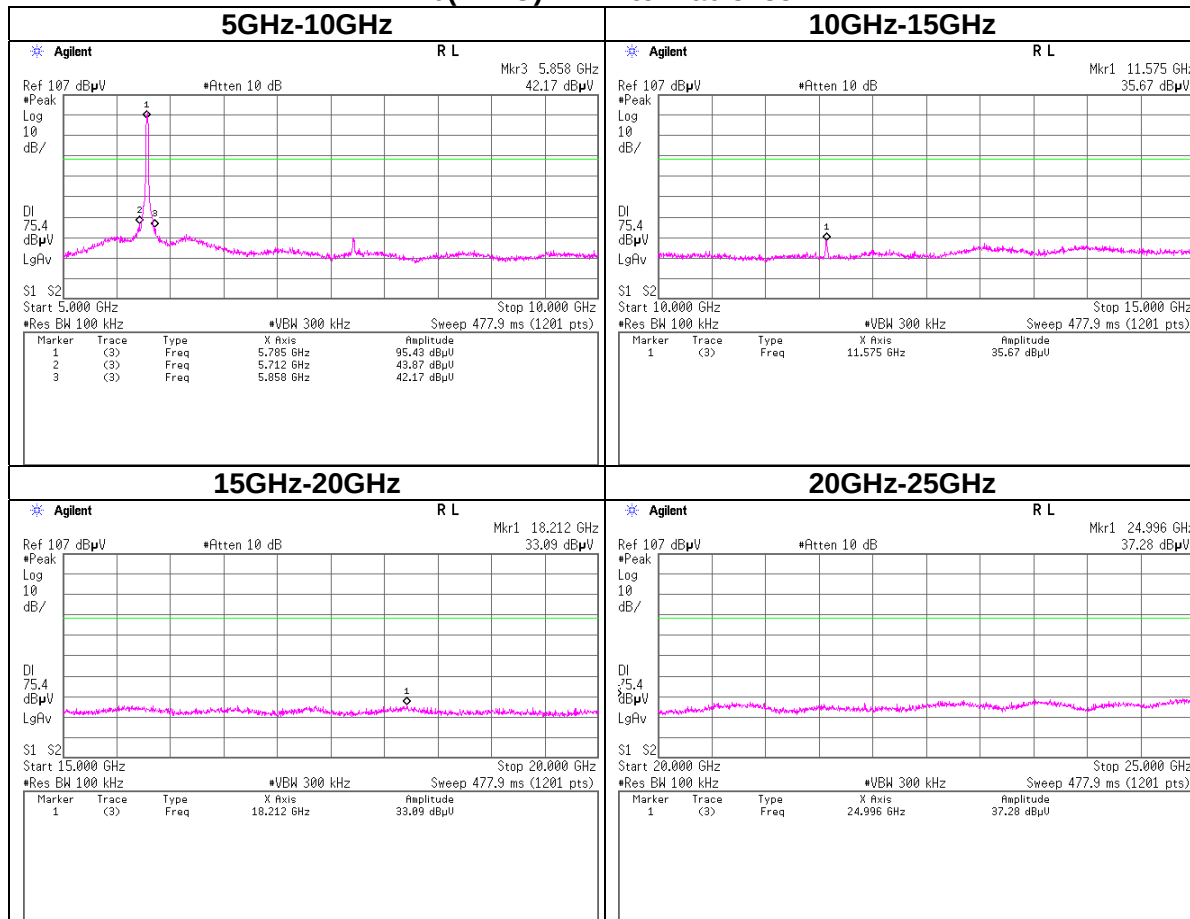


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(MIMO) Tx Antenna0 5785MHz

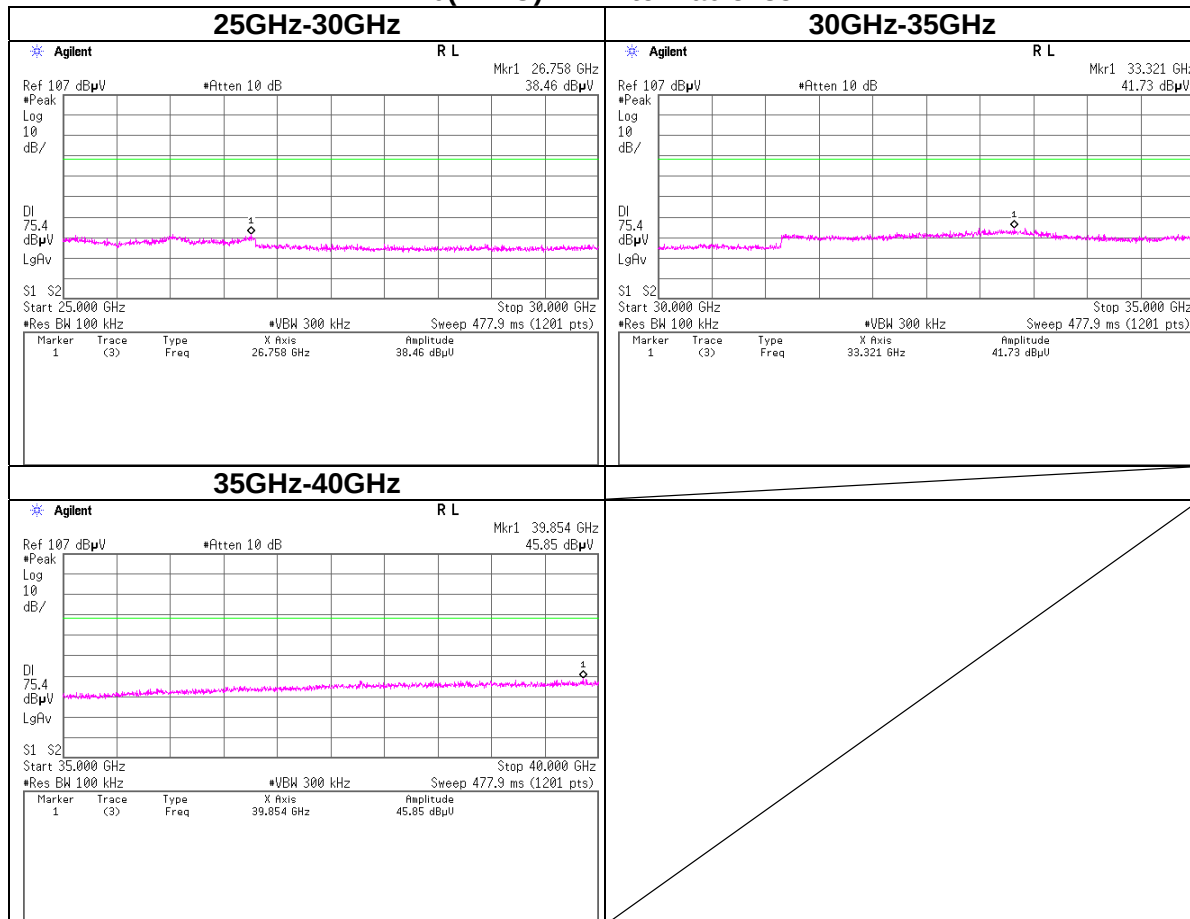


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(MIMO) Tx Antenna0 5825MHz

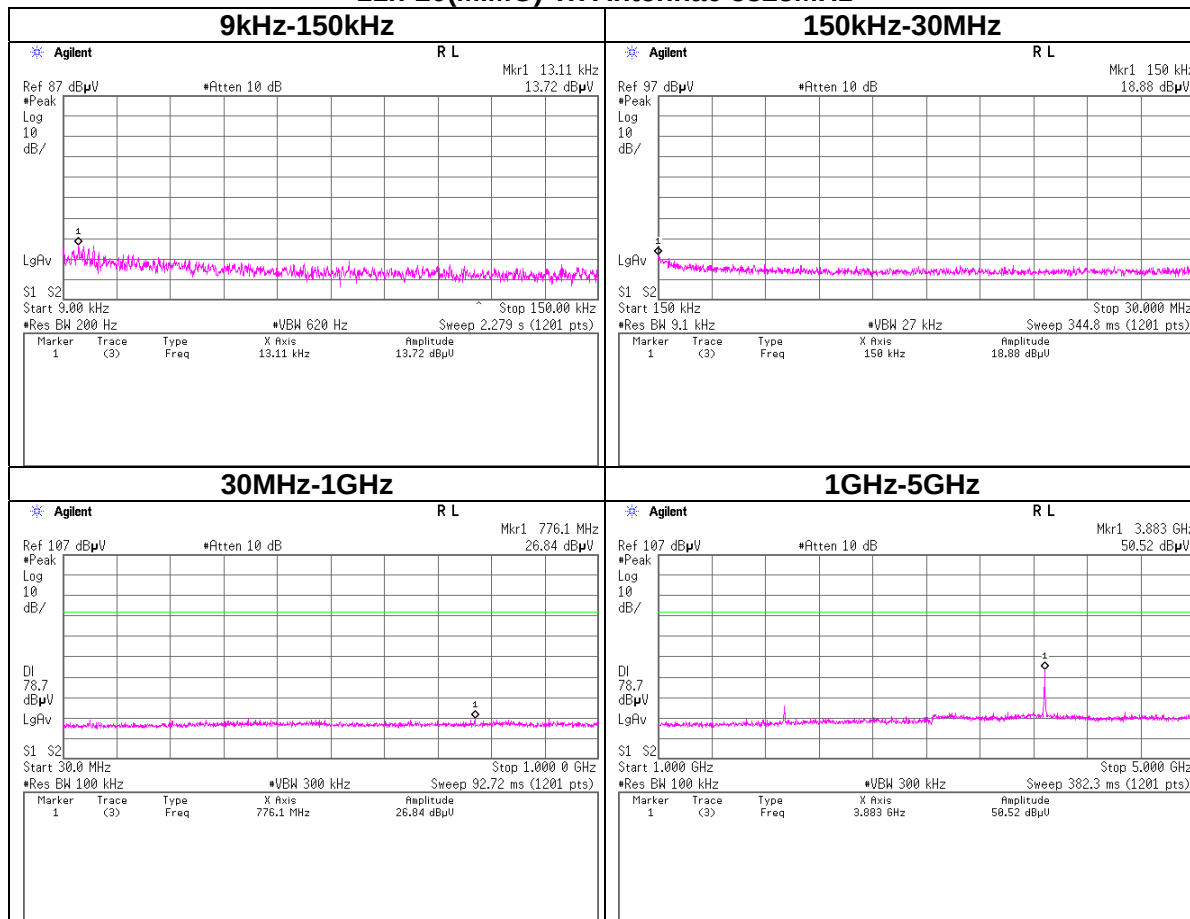


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(MIMO) Tx Antenna0 5825MHz

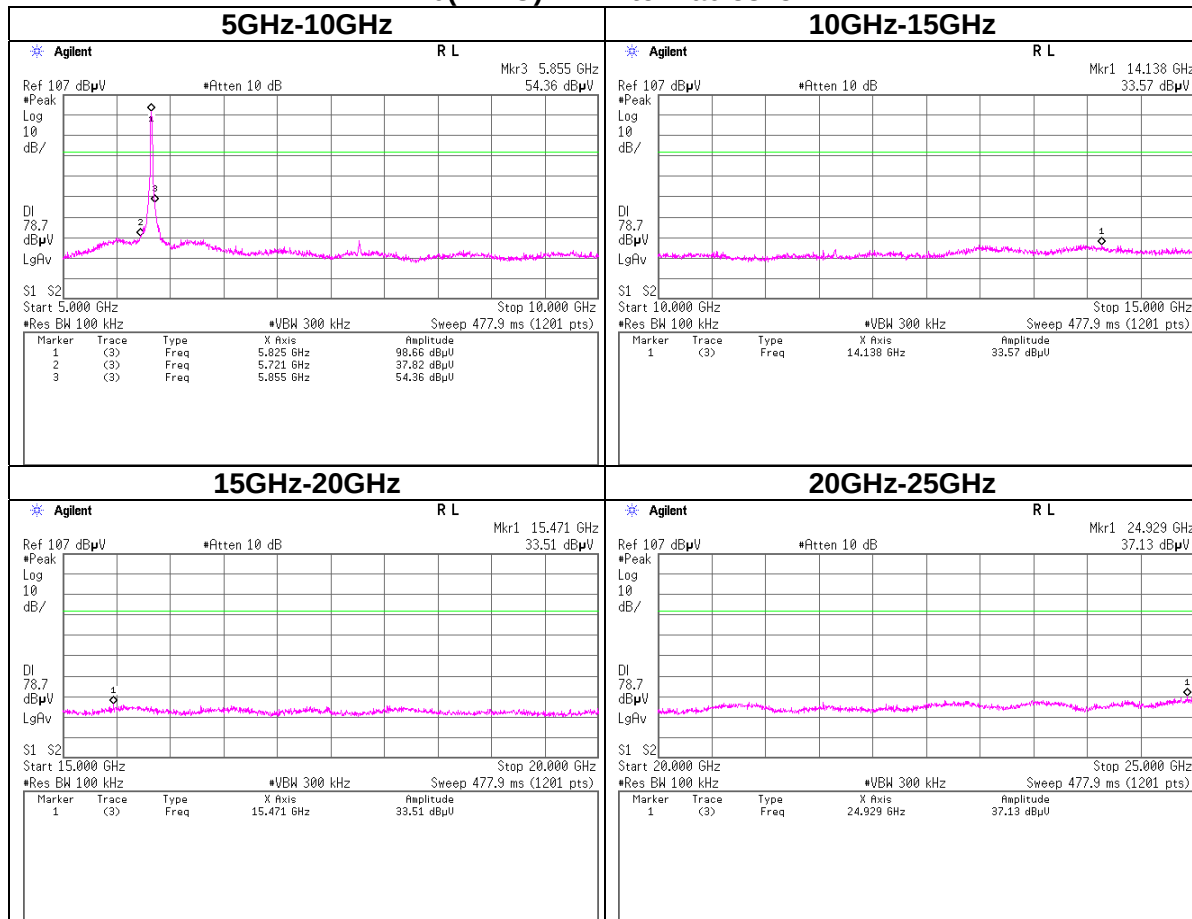


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(MIMO) Tx Antenna0 5825MHz

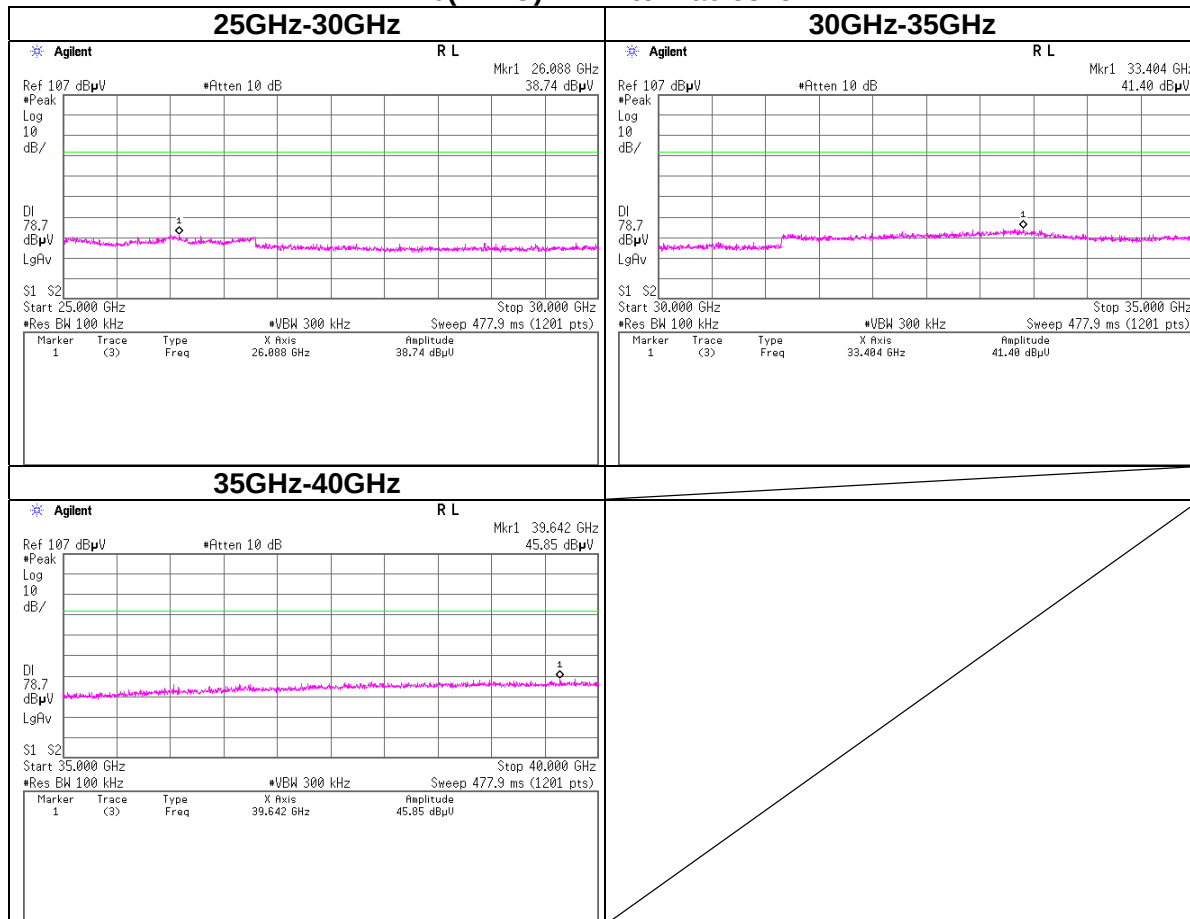


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(MIMO) Tx Antenna1 5745MHz

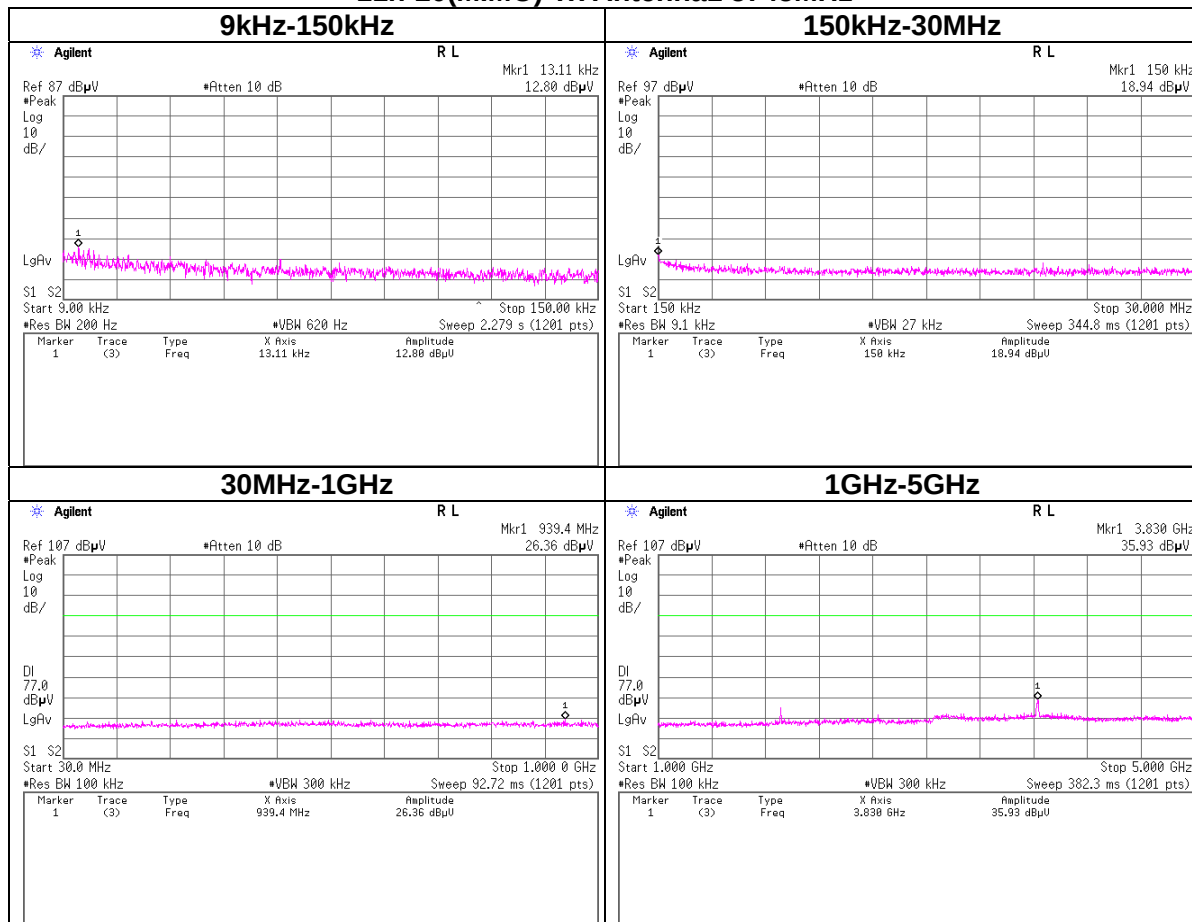


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(MIMO) Tx Antenna1 5745MHz

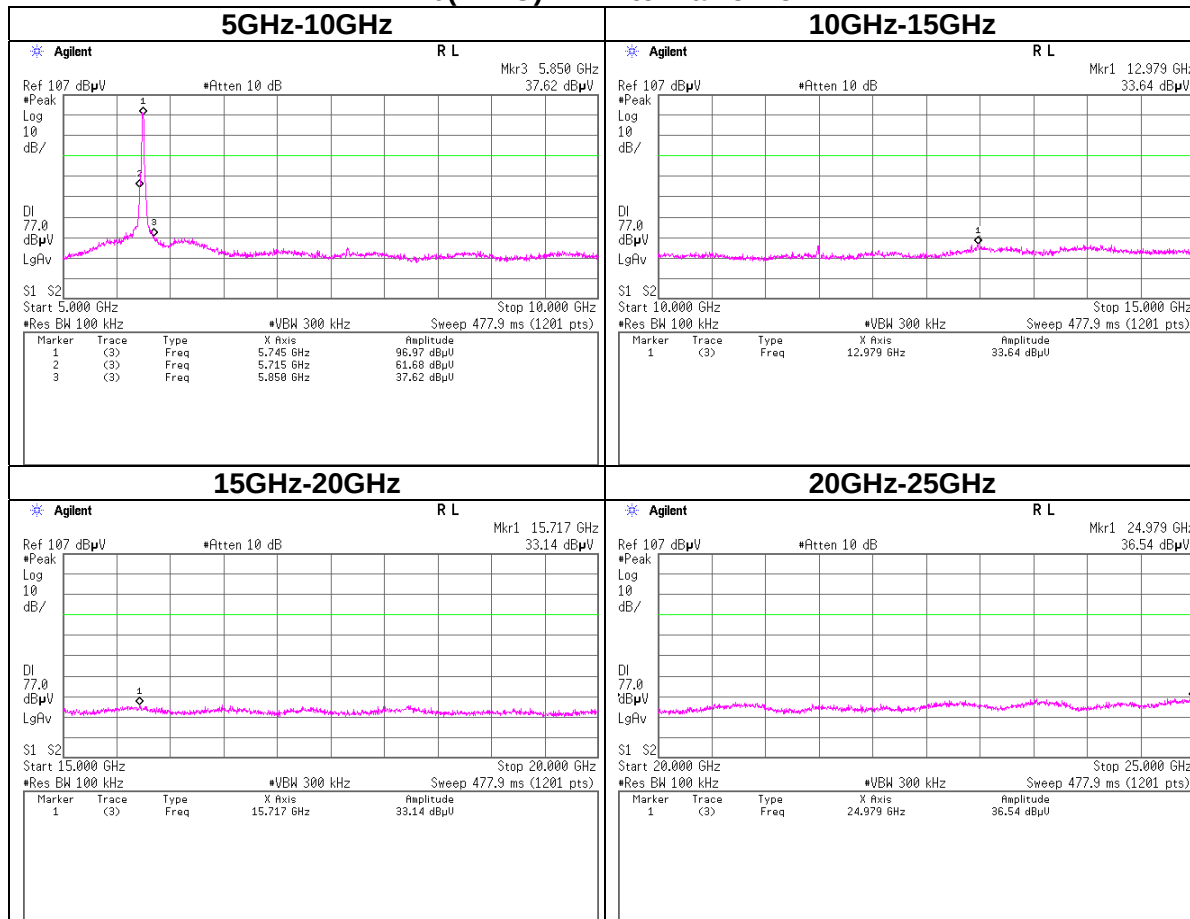


SPURIOUS EMISSIONS, LOW CHANNEL

11n-20(MIMO) Tx Antenna1 5745MHz

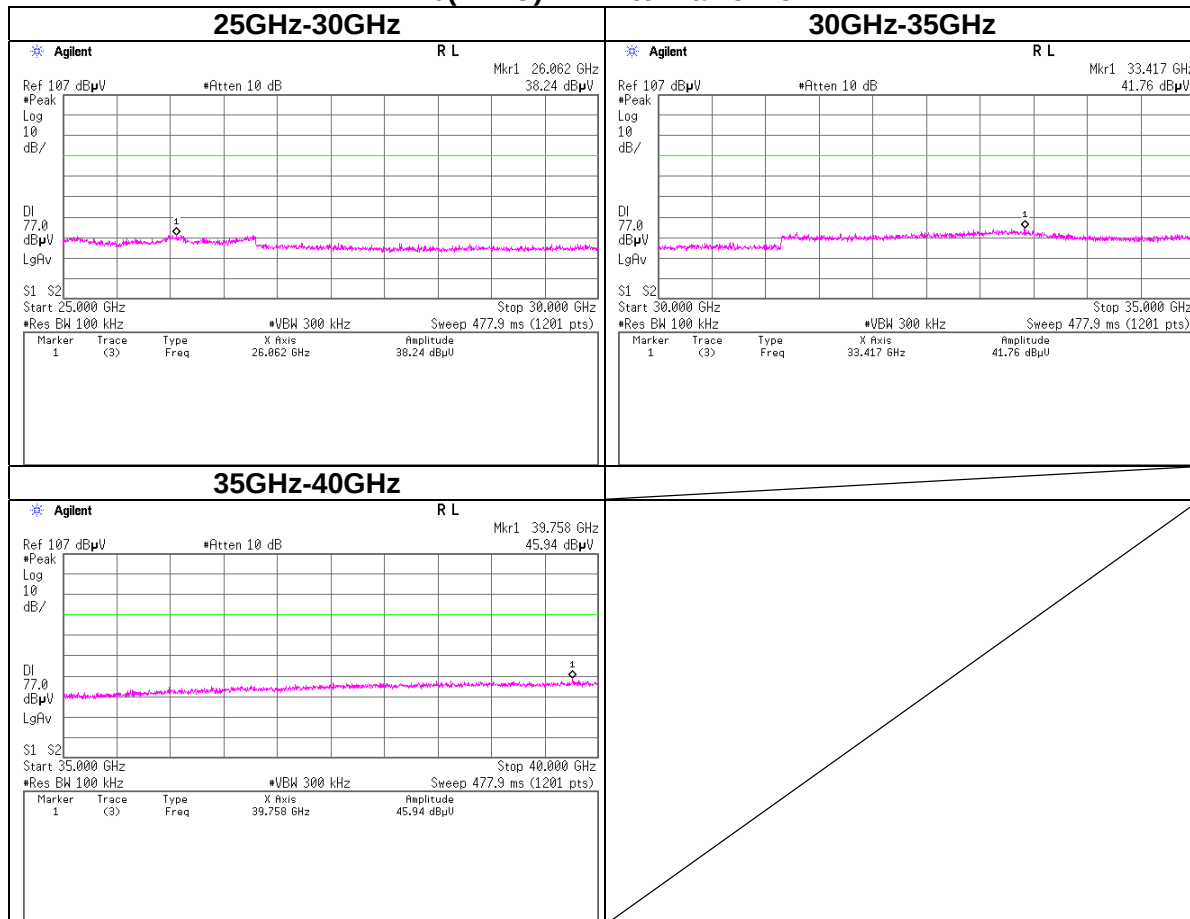


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(MIMO) Tx Antenna1 5785MHz

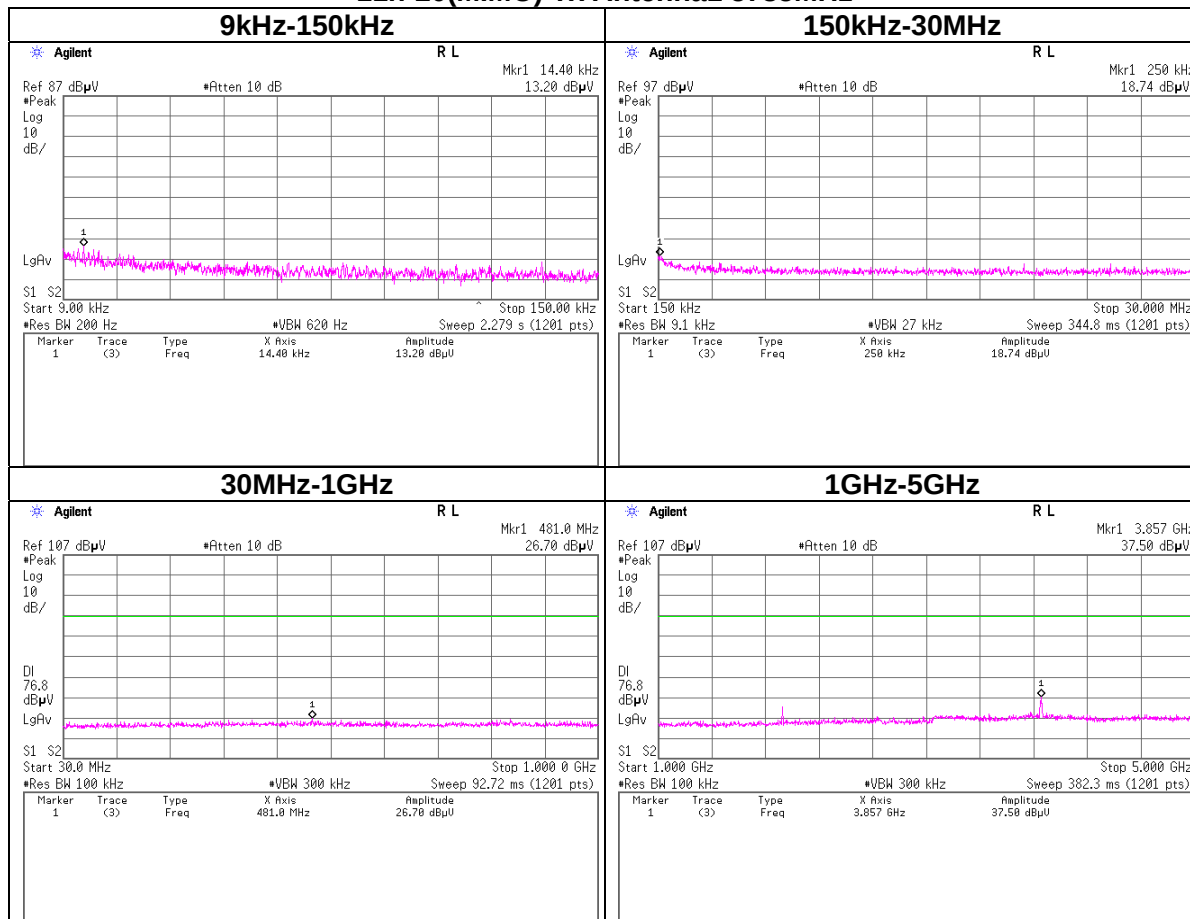


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(MIMO) Tx Antenna1 5785MHz

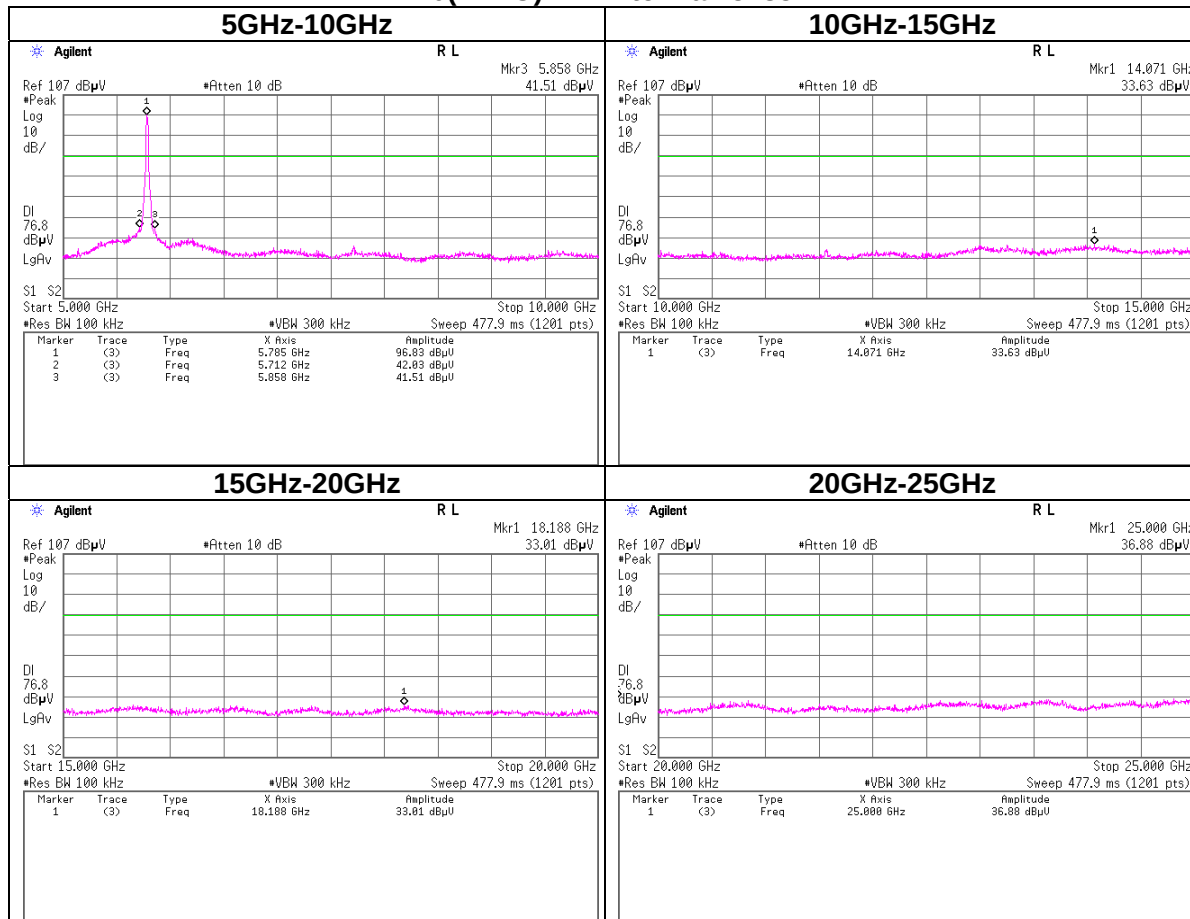


SPURIOUS EMISSIONS, MID CHANNEL

11n-20(MIMO) Tx Antenna1 5785MHz

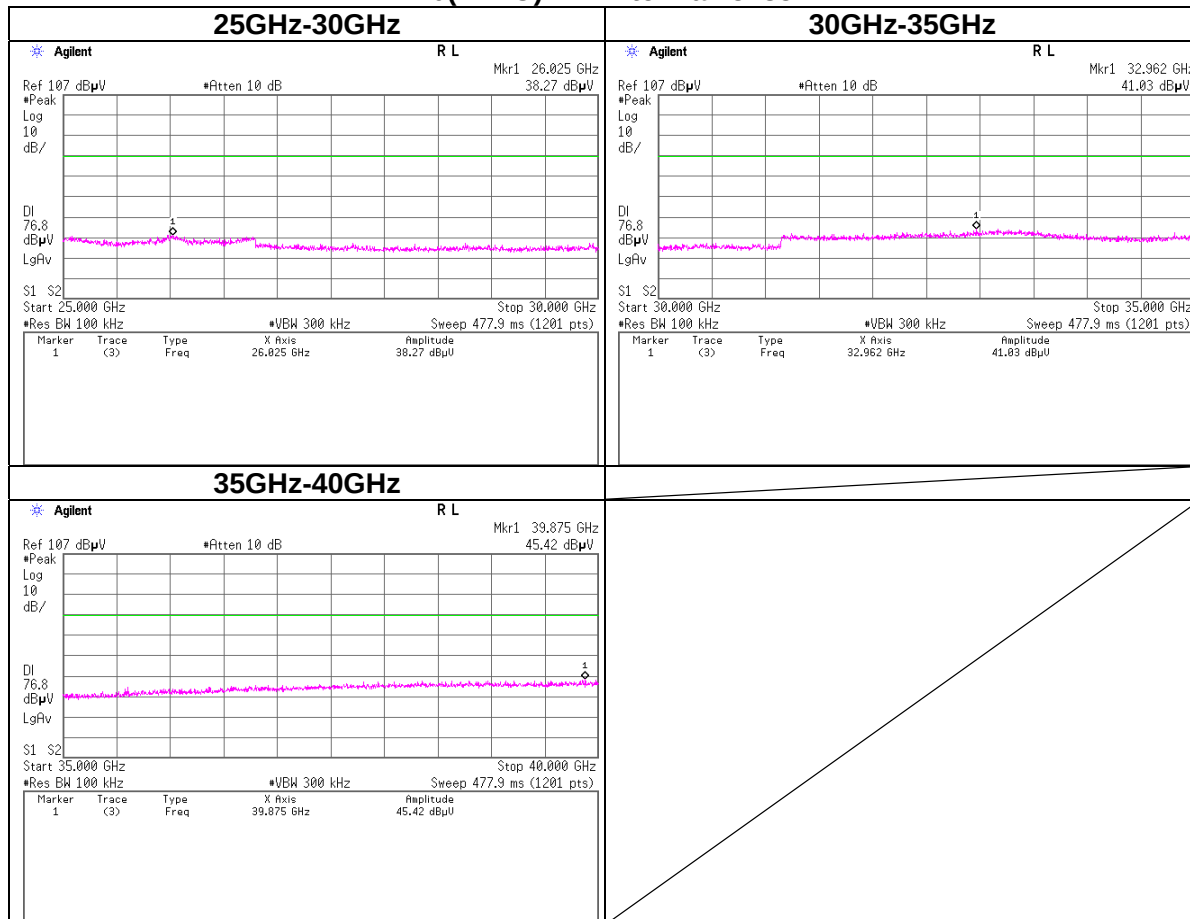


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(MIMO) Tx Antenna1 5825MHz

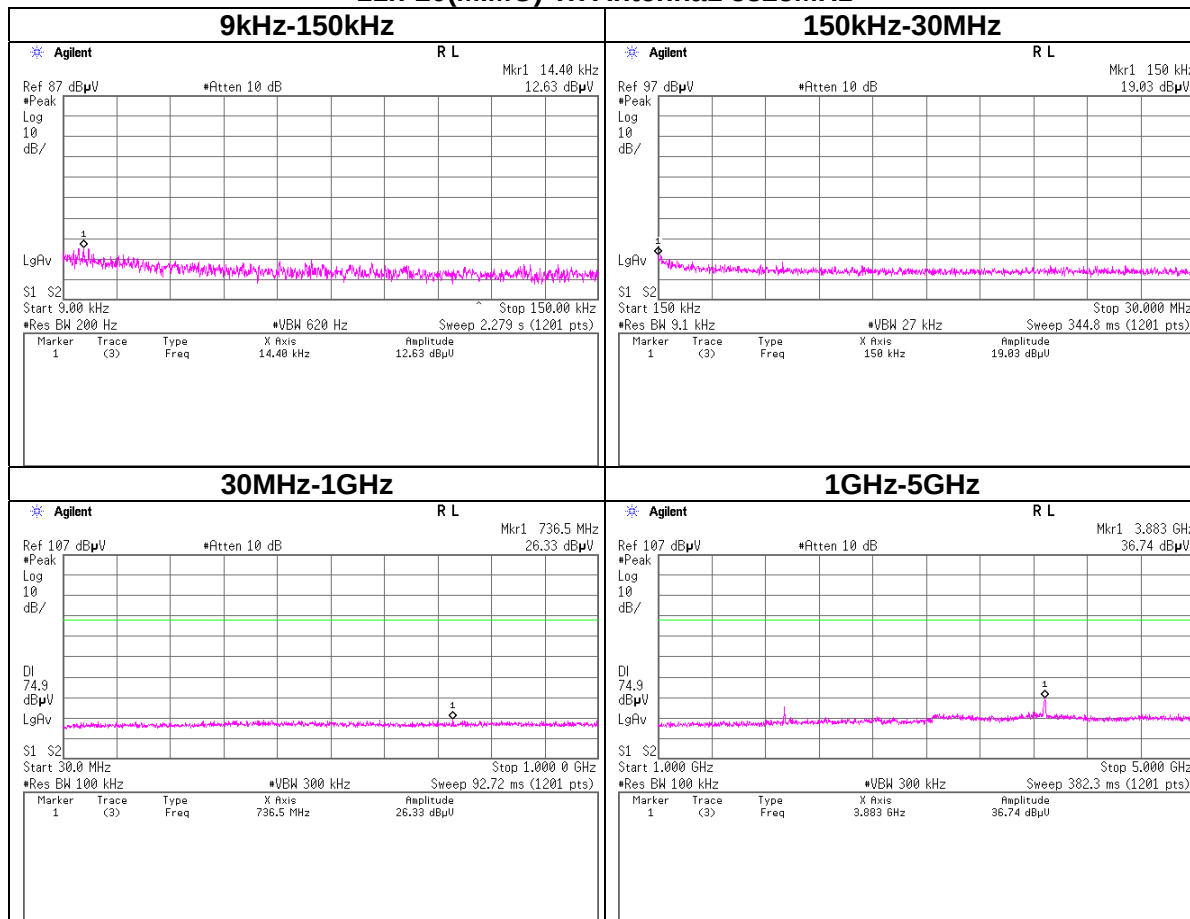


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(MIMO) Tx Antenna1 5825MHz

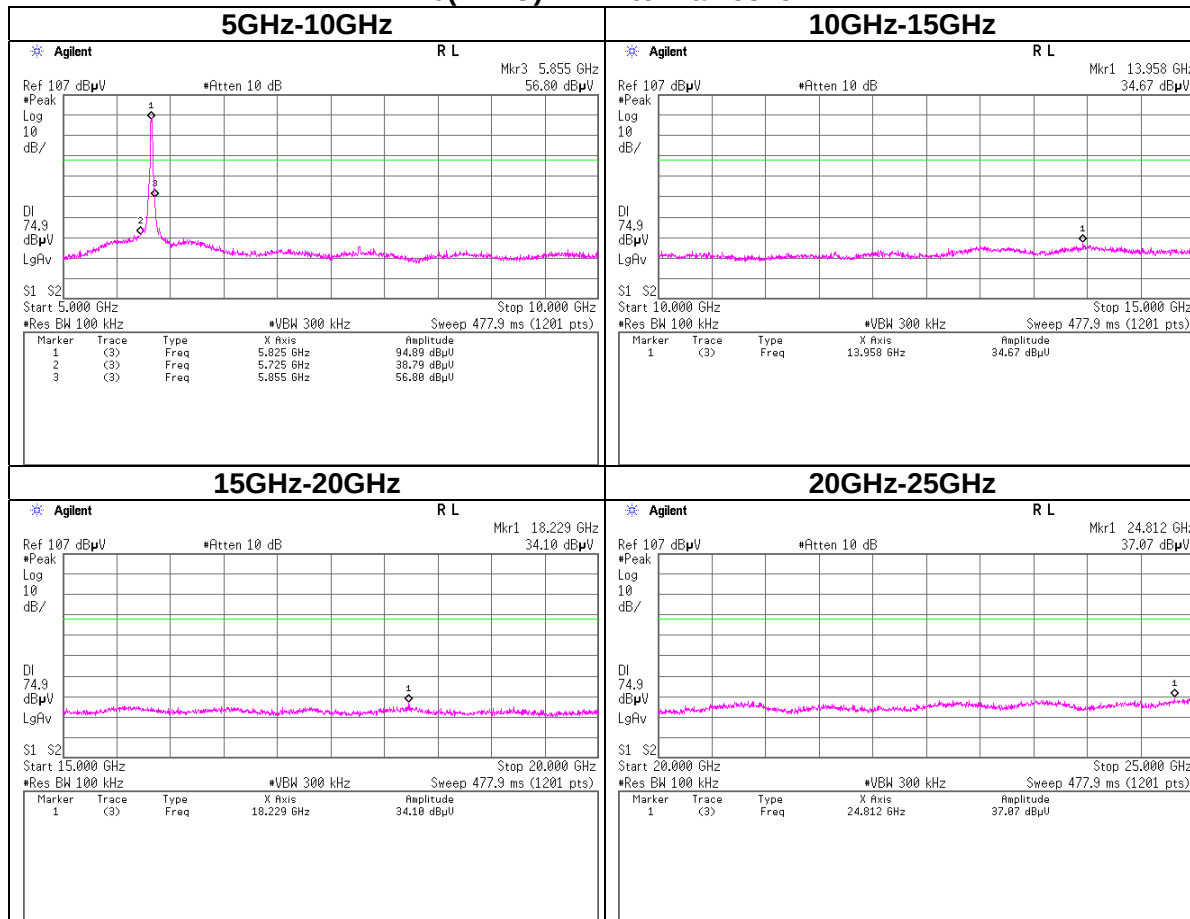


SPURIOUS EMISSIONS, HIGH CHANNEL

11n-20(MIMO) Tx Antenna1 5825MHz

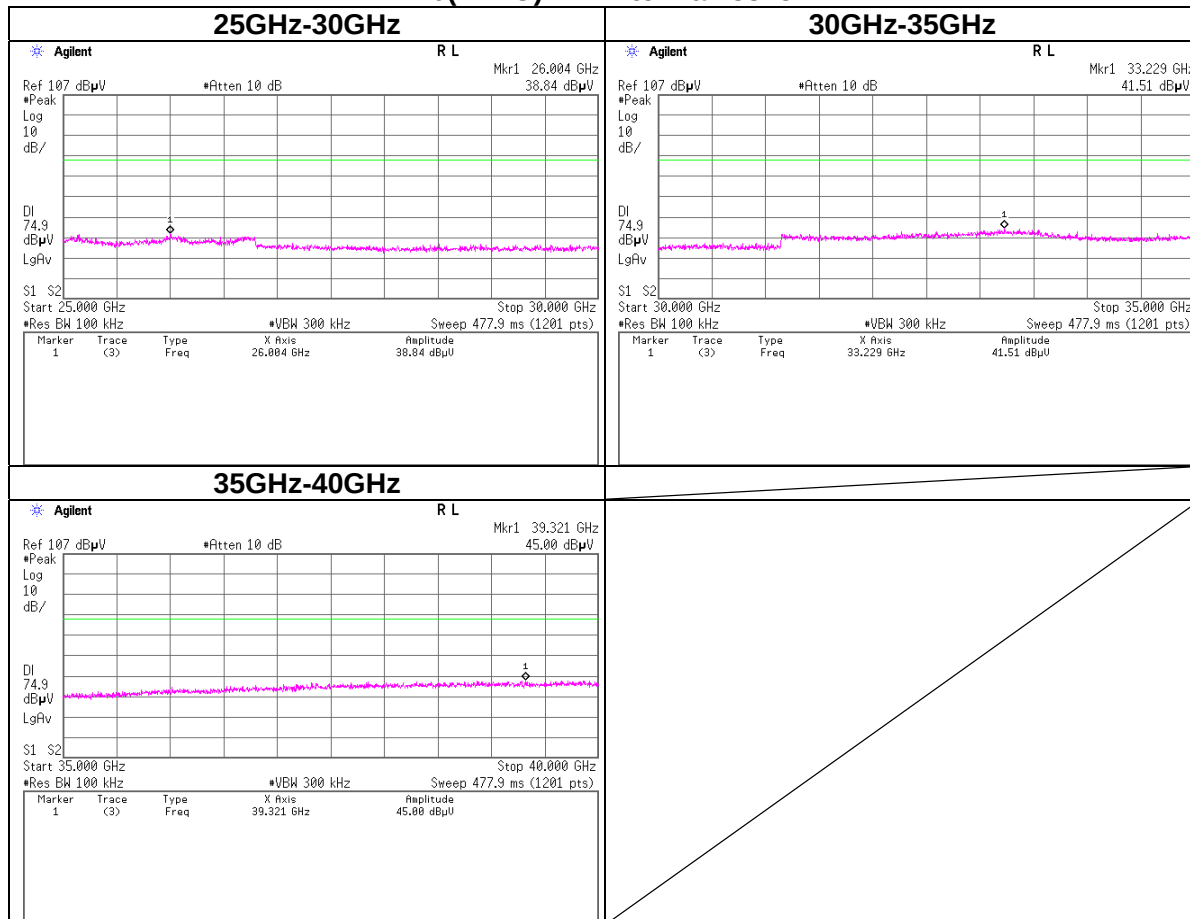


Conducted Emission Band Edge compliance

11-20(MIMO) Tx Antenna0

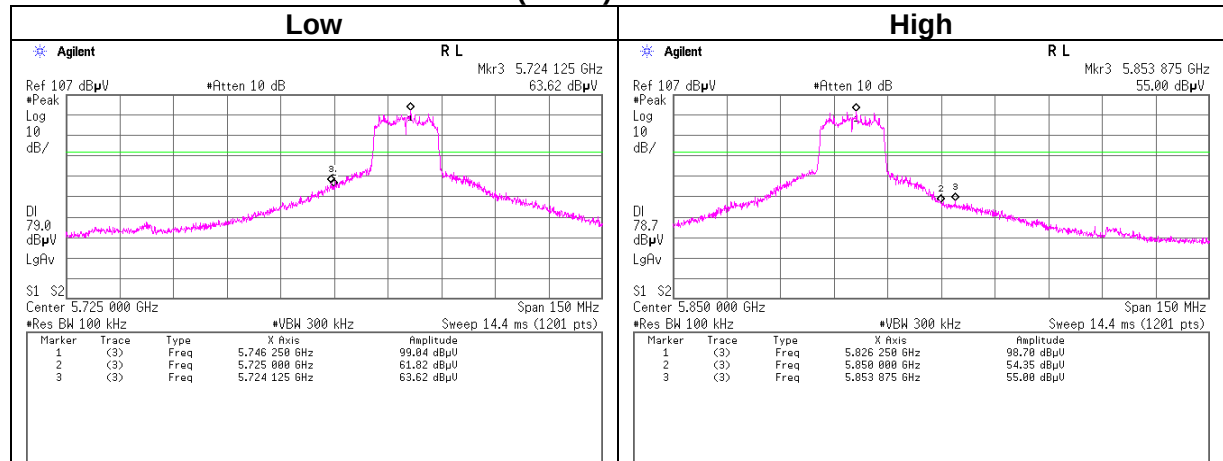

11-20(MIMO) Tx Antenna1

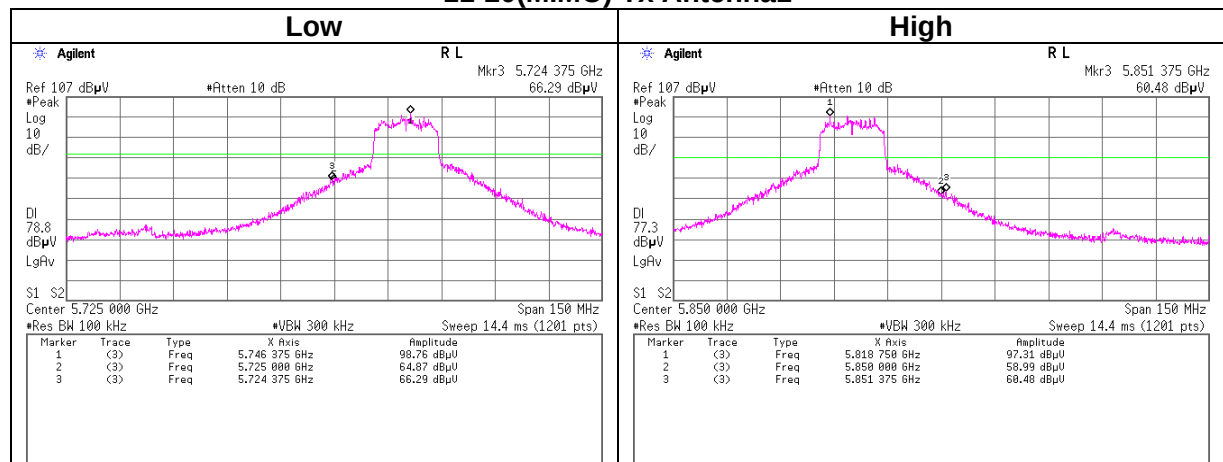

7. RADIATED TEST RESULTS

7.1. LIMITS AND PROCEDURE

LIMITS

FCC §15.205 and §15.209

IC RSS-210 Clause 2.6 (Transmitter)

Frequency Range (MHz)	Field Strength Limit (uV/m) at 3 m	Field Strength Limit (dBuV/m) at 3 m
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

TEST PROCEDURE

The EUT is placed on a non-conducting table 80 cm above the ground plane. The antenna to EUT distance is 3 meters. The EUT is configured in accordance with ANSI C63.4. The EUT is set to transmit in a continuous mode.

For measurements below 1 GHz the resolution bandwidth is set to 100 kHz for peak detection measurements or 120 kHz for quasi-peak detection measurements. Peak detection is used unless otherwise noted as quasi-peak.

For measurements above 1 GHz the resolution bandwidth is set to 1 MHz, then the video bandwidth is set to 3 MHz for peak and average measurements. It was measured based on "Guidance for Performing Compliance Measurements on Digital Transmission Systems (DTS) Operating Under §15.247 (Issued on April 9, 2013)".

The spectrum from 30 MHz to 26 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in the 2.4 GHz band.

The spectrum from 30 MHz to 40 GHz is investigated with the transmitter set to the lowest, middle, and highest channels in each applicable band.

The frequency range of interest is monitored at a fixed antenna height and EUT azimuth. The EUT is rotated through 360 degrees to maximize emissions received. The antenna is scanned from 1 to 4 meters above the ground plane to further maximize the emission. Measurements are made with the antenna polarized in both the vertical and the horizontal positions.

7.2. TRANSMITTER ABOVE 1 GHz

7.2.1. TX ABOVE 1 GHz FOR 802.11n HT20 SISO MODE IN THE 5.8 GHz BAND

Report No. 33LE0037-HO
Semi Anechoic Chamber No.4 No.3
Date 08/06/2013 08/07/2013
Temperature/ Humidity 23deg.C / 56 % RH 23deg.C / 58 % RH
Engineer Takumi Shimada Takumi Shimada
(1-18GHz) (18-40GHz)
Mode 11n-20 Tx 5745MHz Antenna 0

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3829.971	PK	51.6	29.6	3.3	31.8	-	52.7	73.9	21.2	
Hori	11490.000	PK	42.9	39.9	-2.0	33.5	-	47.3	73.9	26.6	
Hori	17235.000	PK	44.1	41.1	-0.3	32.6	-	52.3	73.9	21.6	
Hori	3829.971	AV	47.8	29.6	3.3	31.8	0.5	49.4	53.9	4.5	
Hori	11490.000	AV	34.2	39.9	-2.0	33.5	0.5	39.1	53.9	14.8	
Hori	17235.000	AV	34.4	41.1	-0.3	32.6	0.5	43.1	53.9	10.8	
Vert	3829.971	PK	50.2	29.6	3.3	31.8	-	51.3	73.9	22.6	
Vert	11490.000	PK	42.2	39.9	-2.0	33.5	-	46.6	73.9	27.3	
Vert	17235.000	PK	42.7	41.1	-0.3	32.6	-	50.9	73.9	23.0	
Vert	3829.971	AV	46.1	29.6	3.3	31.8	0.5	47.7	53.9	6.2	
Vert	11490.000	AV	34.3	39.9	-2.0	33.5	0.5	39.2	53.9	14.7	
Vert	17235.000	AV	34.9	41.1	-0.3	32.6	0.5	43.6	53.9	10.3	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$

26.5GHz-40GHz $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5745.000	PK	92.8	32.6	4.1	31.7	97.8	-	-	Carrier
Hori	5725.000	PK	55.5	32.6	4.1	31.7	60.5	77.8	17.3	
Vert	5745.000	PK	90.7	32.6	4.1	31.7	95.7	-	-	Carrier
Vert	5725.000	PK	51.8	32.6	4.1	31.7	56.8	75.7	18.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

Report No. 33LE0037-HO
Semi Anechoic Chamber No.4 No.3
Date 08/06/2013 08/07/2013
Temperature/ Humidity 23deg.C / 56 % RH 23deg.C / 58 % RH
Engineer Takumi Shimada Takumi Shimada
(1-18GHz) (18-40GHz)
Mode 11n-20 Tx 5785MHz Antenna 0

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3856.642	PK	52.4	29.7	3.3	31.8	-	53.6	73.9	20.3	
Hori	11570.000	PK	43.4	39.9	-1.9	33.5	-	47.9	73.9	26.0	
Hori	17355.000	PK	44.3	41.7	-0.3	32.5	-	53.2	73.9	20.7	
Hori	3856.642	AV	47.9	29.7	3.3	31.8	0.5	49.6	53.9	4.3	
Hori	11570.000	AV	34.4	39.9	-1.9	33.5	0.5	39.4	53.9	14.5	
Hori	17355.000	AV	35.1	41.7	-0.3	32.5	0.5	44.5	53.9	9.4	
Vert	3856.642	PK	48.2	29.7	3.3	31.8	-	49.4	73.9	24.5	
Vert	11570.000	PK	43.5	39.9	-1.9	33.5	-	48.0	73.9	25.9	
Vert	17355.000	PK	44.2	41.7	-0.3	32.5	-	53.1	73.9	20.8	
Vert	3856.642	AV	42.5	29.7	3.3	31.8	0.5	44.2	53.9	9.7	
Vert	11570.000	AV	34.7	39.9	-1.9	33.5	0.5	39.7	53.9	14.2	
Vert	17355.000	AV	35.0	41.7	-0.3	32.5	0.5	44.4	53.9	9.5	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$
26.5GHz-40GHz $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

Report No. 33LE0037-HO
Semi Anechoic Chamber No.4 No.3
Date 08/06/2013 08/07/2013
Temperature/ Humidity 23deg.C / 56 % RH 23deg.C / 58 % RH
Engineer Takumi Shimada Takumi Shimada
(1-18GHz) (18-40GHz)
Mode 11n-20 Tx 5825MHz Antenna 0

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3883.317	PK	47.9	29.7	3.3	31.8	-	49.1	73.9	24.8	
Hori	11650.000	PK	44.2	39.9	-1.9	33.5	-	48.7	73.9	25.2	
Hori	17475.000	PK	44.4	42.3	-0.4	32.5	-	53.8	73.9	20.1	
Hori	3883.317	AV	42.1	29.7	3.3	31.8	0.5	43.8	53.9	10.1	
Hori	11650.000	AV	34.8	39.9	-1.9	33.5	0.5	39.8	53.9	14.1	
Hori	17475.000	AV	35.2	42.3	-0.4	32.5	0.5	45.1	53.9	8.8	
Vert	3883.317	PK	46.5	29.7	3.3	31.8	-	47.7	73.9	26.2	
Vert	11650.000	PK	44.1	39.9	-1.9	33.5	-	48.6	73.9	25.3	
Vert	17475.000	PK	44.3	42.3	-0.4	32.5	-	53.7	73.9	20.2	
Vert	3883.317	AV	39.5	29.7	3.3	31.8	0.5	41.2	53.9	12.7	
Vert	11650.000	AV	34.9	39.9	-1.9	33.5	0.5	39.9	53.9	14.0	
Vert	17475.000	AV	35.2	42.3	-0.4	32.5	0.5	45.1	53.9	8.8	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz $20\log(3.0m/1.0m)= 9.5dB$

26.5GHz-40GHz $20\log(3.0m/0.5m)=15.6dB$

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5825.000	PK	97.0	32.8	4.1	31.8	102.1	-	-	Carrier
Hori	5850.000	PK	54.7	32.8	4.1	31.8	59.8	82.1	22.3	
Vert	5825.000	PK	92.1	32.8	4.1	31.8	97.2	-	-	Carrier
Vert	5850.000	PK	50.2	32.8	4.1	31.8	55.3	77.2	21.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

Report No. 33LE0037-HO
Semi Anechoic Chamber No.4 No.3
Date 08/06/2013 08/07/2013
Temperature/ Humidity 23deg.C / 56 % RH 23deg.C / 58 % RH
Engineer Takumi Shimada Takumi Shimada
(1-18GHz) (18-40GHz)
Mode 11n-20 Tx 5745MHz Antenna 1

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3829.982	PK	45.6	29.6	3.3	31.8	-	46.7	73.9	27.2	
Hori	11490.000	PK	43.1	39.9	-2.0	33.5	-	47.5	73.9	26.4	
Hori	17235.000	PK	44.1	41.1	-0.3	32.6	-	52.3	73.9	21.6	
Hori	3829.982	AV	37.4	29.6	3.3	31.8	0.5	39.0	53.9	14.9	
Hori	11490.000	AV	34.4	39.9	-2.0	33.5	0.5	39.3	53.9	14.6	
Hori	17235.000	AV	34.7	41.1	-0.3	32.6	0.5	43.4	53.9	10.5	
Vert	3829.982	PK	43.7	29.6	3.3	31.8	-	44.8	73.9	29.1	
Vert	11490.000	PK	42.8	39.9	-2.0	33.5	-	47.2	73.9	26.7	
Vert	17235.000	PK	43.1	41.1	-0.3	32.6	-	51.3	73.9	22.6	
Vert	3829.982	AV	36.6	29.6	3.3	31.8	0.5	38.2	53.9	15.7	
Vert	11490.000	AV	34.5	39.9	-2.0	33.5	0.5	39.4	53.9	14.5	
Vert	17235.000	AV	35.2	41.1	-0.3	32.6	0.5	43.9	53.9	10.0	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz 20log(3.0m/1.0m)= 9.5dB
26.5GHz-40GHz 20log(3.0m/0.5m)=15.6dB

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5745.000	PK	85.6	32.6	4.1	31.7	90.6	-	-	Carrier
Hori	5725.000	PK	55.3	32.6	4.1	31.7	60.3	70.6	10.3	
Vert	5745.000	PK	87.1	32.6	4.1	31.7	92.1	-	-	Carrier
Vert	5725.000	PK	55.6	32.6	4.1	31.7	60.6	72.1	11.5	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Ampriplier)

Report No.	33LE0037-HO	
Semi Anechoic Chamber	No.4	No.3
Date	08/06/2013	08/07/2013
Temperature/ Humidity	23deg.C / 56 % RH	23deg.C / 58 % RH
Engineer	Takumi Shimada	Takumi Shimada
	(1-18GHz)	(18-40GHz)
Mode	11n-20 Tx 5785MHz Antenna 1	

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3856.646	PK	45.3	29.7	3.3	31.8	-	46.5	73.9	27.4	
Hori	11570.000	PK	43.3	39.9	-1.9	33.5	-	47.8	73.9	26.1	
Hori	17355.000	PK	44.2	41.7	-0.3	32.5	-	53.1	73.9	20.8	
Hori	3856.646	AV	37.5	29.7	3.3	31.8	0.5	39.2	53.9	14.7	
Hori	11570.000	AV	34.4	39.9	-1.9	33.5	0.5	39.4	53.9	14.5	
Hori	17355.000	AV	35.1	41.7	-0.3	32.5	0.5	44.5	53.9	9.4	
Vert	3856.646	PK	44.4	29.7	3.3	31.8	-	45.6	73.9	28.3	
Vert	11570.000	PK	43.5	39.9	-1.9	33.5	-	48.0	73.9	25.9	
Vert	17355.000	PK	44.1	41.7	-0.3	32.5	-	53.0	73.9	20.9	
Vert	3856.646	AV	36.5	29.7	3.3	31.8	0.5	38.2	53.9	15.7	
Vert	11570.000	AV	34.5	39.9	-1.9	33.5	0.5	39.5	53.9	14.4	
Vert	17355.000	AV	35.2	41.7	-0.3	32.5	0.5	44.6	53.9	9.3	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$
 26.5GHz-40GHz $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

Report No. 33LE0037-HO
Semi Anechoic Chamber No.4 No.3
Date 08/06/2013 08/07/2013
Temperature/ Humidity 23deg.C / 56 % RH 23deg.C / 58 % RH
Engineer Takumi Shimada Takumi Shimada
(1-18GHz) (18-40GHz)
Mode 11n-20 Tx 5825MHz Antenna 1

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3883.315	PK	43.7	29.7	3.3	31.8	-	44.9	73.9	29.0	
Hori	11650.000	PK	44.1	39.9	-1.9	33.5	-	48.6	73.9	25.3	
Hori	17475.000	PK	44.3	42.3	-0.4	32.5	-	53.7	73.9	20.2	
Hori	3883.315	AV	34.8	29.7	3.3	31.8	0.5	36.5	53.9	17.4	
Hori	11650.000	AV	34.7	39.9	-1.9	33.5	0.5	39.7	53.9	14.2	
Hori	17475.000	AV	35.2	42.3	-0.4	32.5	0.5	45.1	53.9	8.8	
Vert	3883.315	PK	44.0	29.7	3.3	31.8	-	45.2	73.9	28.7	
Vert	11650.000	PK	44.3	39.9	-1.9	33.5	-	48.8	73.9	25.1	
Vert	17475.000	PK	44.1	42.3	-0.4	32.5	-	53.5	73.9	20.4	
Vert	3883.315	AV	36.1	29.7	3.3	31.8	0.5	37.8	53.9	16.1	
Vert	11650.000	AV	35.0	39.9	-1.9	33.5	0.5	40.0	53.9	13.9	
Vert	17475.000	AV	35.1	42.3	-0.4	32.5	0.5	45.0	53.9	8.9	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$
26.5GHz-40GHz $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5825.000	PK	87.4	32.8	4.1	31.8	92.5	-	-	Carrier
Hori	5850.000	PK	51.6	32.8	4.1	31.8	56.7	72.5	15.8	
Vert	5825.000	PK	85.9	32.8	4.1	31.8	91.0	-	-	Carrier
Vert	5850.000	PK	50.1	32.8	4.1	31.8	55.2	71.0	15.8	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

7.2.2. TX ABOVE 1 GHz FOR 802.11n HT20 MIMO MODE IN THE 5.8 GHz BAND

Report No. 33LE0037-HO
Semi Anechoic Chamber No.4
Date 08/06/2013
Temperature/ Humidity 23deg.C / 56 % RH
Engineer Takumi Shimada
Mode 11n-20 Tx 5745MHz Antenna 0+1

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3830.030	PK	51.4	29.4	2.9	31.7	-	52.0	73.9	21.9	
Hori	11490.000	PK	43.2	39.9	-2.0	33.5	-	47.6	73.9	26.3	
Hori	17235.000	PK	44.0	41.1	-0.3	32.6	-	52.2	73.9	21.7	
Hori	3830.030	AV	46.9	29.4	2.9	31.7	0.5	48.0	53.9	5.9	
Hori	11490.000	AV	34.5	39.9	-2.0	33.5	0.5	39.4	53.9	14.5	
Hori	17235.000	AV	34.9	41.1	-0.3	32.6	0.5	43.6	53.9	10.3	
Vert	3830.030	PK	50.1	29.4	2.9	31.7	-	50.7	73.9	23.2	
Vert	11490.000	PK	43.1	39.9	-2.0	33.5	-	47.5	73.9	26.4	
Vert	17235.000	PK	43.3	41.1	-0.3	32.6	-	51.5	73.9	22.4	
Vert	3830.030	AV	44.6	29.4	2.9	31.7	0.5	45.7	53.9	8.2	
Vert	11490.000	AV	34.4	39.9	-2.0	33.5	0.5	39.3	53.9	14.6	
Vert	17235.000	AV	35.1	41.1	-0.3	32.6	0.5	43.8	53.9	10.1	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$

26.5GHz-40GHz $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5745.000	PK	96.9	31.3	3.6	31.5	100.3	-	-	Carrier
Hori	5725.000	PK	59.3	31.4	3.6	31.5	62.8	80.3	17.5	
Vert	5745.000	PK	94.3	31.3	3.6	31.5	97.7	-	-	Carrier
Vert	5725.000	PK	59.0	31.4	3.6	31.5	62.5	77.7	15.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

Report No. 33LE0037-HO
Semi Anechoic Chamber No.4 No.3
Date 08/06/2013 08/07/2013
Temperature/ Humidity 23deg.C / 56 % RH 23deg.C / 58 % RH
Engineer Takumi Shimada Takumi Shimada
(1-18GHz) (18-40GHz)
Mode 11n-20 Tx 5785MHz Antenna 0+1

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3856.682	PK	49.8	29.4	2.9	31.7	-	50.4	73.9	23.5	
Hori	11570.000	PK	43.3	39.9	-1.9	33.5	-	47.8	73.9	26.1	
Hori	17355.000	PK	44.1	41.7	-0.3	32.5	-	53.0	73.9	20.9	
Hori	3856.682	AV	43.8	29.4	2.9	31.7	0.5	44.9	53.9	9.0	
Hori	11570.000	AV	34.4	39.9	-1.9	33.5	0.5	39.4	53.9	14.5	
Hori	17355.000	AV	35.2	41.7	-0.3	32.5	0.5	44.6	53.9	9.3	
Vert	3856.682	PK	47.6	29.4	2.9	31.7	-	48.2	73.9	25.7	
Vert	11570.000	PK	43.4	39.9	-1.9	33.5	-	47.9	73.9	26.0	
Vert	17355.000	PK	44.3	41.7	-0.3	32.5	-	53.2	73.9	20.7	
Vert	3856.682	AV	42.3	29.4	2.9	31.7	0.5	43.4	53.9	10.5	
Vert	11570.000	AV	34.4	39.9	-1.9	33.5	0.5	39.4	53.9	14.5	
Vert	17355.000	AV	35.3	41.7	-0.3	32.5	0.5	44.7	53.9	9.2	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz $20\log(3.0\text{m}/1.0\text{m})= 9.5\text{dB}$
26.5GHz-40GHz $20\log(3.0\text{m}/0.5\text{m})=15.6\text{dB}$

Report No. 33LE0037-HO
Semi Anechoic Chamber No.4 No.3
Date 08/06/2013 08/07/2013
Temperature/ Humidity 23deg.C / 56 % RH 23deg.C / 58 % RH
Engineer Takumi Shimada Takumi Shimada
(1-18GHz) (18-40GHz)
Mode 11n-20 Tx 5825MHz Antenna 0+1

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	3883.443	PK	49.0	29.5	2.9	31.7	-	49.7	73.9	24.2	
Hori	11650.000	PK	44.3	39.9	-1.9	33.5	-	48.8	73.9	25.1	
Hori	17475.000	PK	44.3	42.3	-0.4	32.5	-	53.7	73.9	20.2	
Hori	3883.443	AV	42.9	29.5	2.9	31.7	0.5	44.1	53.9	9.8	
Hori	11650.000	AV	34.5	39.9	-1.9	33.5	0.5	39.5	53.9	14.4	
Hori	17475.000	AV	35.1	42.3	-0.4	32.5	0.5	45.0	53.9	8.9	
Vert	3883.443	PK	46.3	29.5	2.9	31.7	-	47.0	73.9	26.9	
Vert	11650.000	PK	44.4	39.9	-1.9	33.5	-	48.9	73.9	25.0	
Vert	17475.000	PK	44.2	42.3	-0.4	32.5	-	53.6	73.9	20.3	
Vert	3883.443	AV	39.4	29.5	2.9	31.7	0.5	40.6	53.9	13.3	
Vert	11650.000	AV	34.8	39.9	-1.9	33.5	0.5	39.8	53.9	14.1	
Vert	17475.000	AV	35.3	42.3	-0.4	32.5	0.5	45.2	53.9	8.7	

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

*Other frequency noises omitted in this report were not seen or had enough margin (more than 20dB).

*The 10th harmonic was not seen so the result was its base noise level.

Distance factor: 10GHz-26.5GHz $20\log(3.0m/1.0m)= 9.5dB$
26.5GHz-40GHz $20\log(3.0m/0.5m)=15.6dB$


20dBc Data Sheet

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	5825.000	PK	97.4	31.2	3.7	31.5	100.8	-	-	Carrier
Hori	5850.000	PK	54.1	31.1	3.7	31.5	57.4	80.8	23.4	
Vert	5825.000	PK	95.7	31.2	3.7	31.5	99.1	-	-	Carrier
Vert	5850.000	PK	51.7	31.1	3.7	31.5	55.0	79.1	24.1	


Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter-Distance factor(above 10GHz)) - Gain(Amplifier)

7.2.3. DUTY CYCLE PLOTS

11n-20(SISO) , MCS 1
Duty Cycle = $0.6767/0.76 = 89.0\%$
Duty factor: $10\log(1/x)=0.5$
x:Tx on/(Tx on+Tx off)=0.6767/0.76

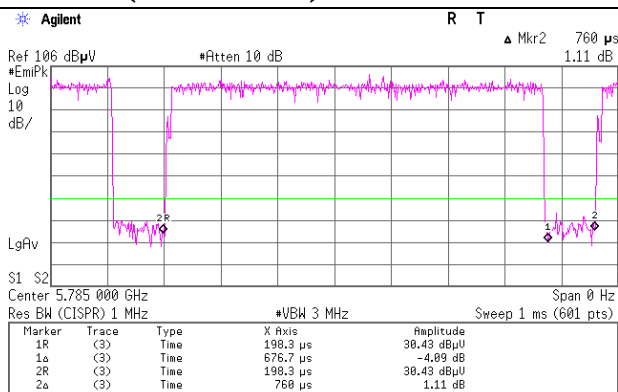

11n-20(MIMO) , MCS 8
Duty Cycle = $0.6733/0.7633 = 88.2\%$
Duty factor: $10\log(1/x)=0.54$
x:Tx on/(Tx on+Tx off)=0.6733/0.7633

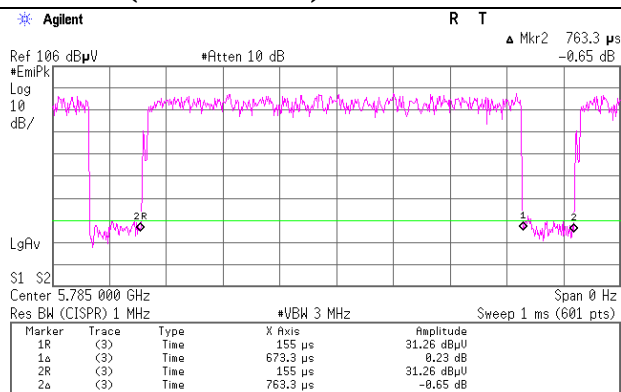

7.2.4 WORST-CASE BELOW 1 GHz

SPURIOUS EMISSIONS 30 TO 1000 MHz (WORST-CASE CONFIGURATION, HORIZONTAL)

Report No. 33LE0037-HO
Semi Anechoic Chamber No.3
Date 08/08/2013
Temperature/ Humidity 24deg.C / 56 % RH
Engineer Takumi Shimada
(30-1000MHz)

HORIZONTAL AND VERTICAL DATA

SISO Antenna0

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	160.000	QP	33.9	15.4	8.7	32.1	25.9	43.5	17.6	
Hori	174.362	QP	32.1	15.9	8.8	32.1	24.7	43.5	18.8	
Vert	166.267	QP	27.0	15.6	8.8	32.1	19.3	43.5	24.2	
Vert	174.362	QP	27.0	15.9	8.8	32.1	19.6	43.5	23.9	

SISO Antenna1

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	160.000	QP	33.7	15.4	8.7	32.1	25.7	43.5	17.8	
Hori	174.366	QP	32.3	15.9	8.8	32.1	24.9	43.5	18.6	
Vert	166.268	QP	26.9	15.6	8.8	32.1	19.2	43.5	24.3	
Vert	174.366	QP	27.2	15.9	8.8	32.1	19.8	43.5	23.7	

MIMO Antenna0+1

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori	160.000	QP	33.4	15.4	8.7	32.1	25.4	43.5	18.1	
Hori	174.373	QP	32.2	15.9	8.8	32.1	24.8	43.5	18.7	
Vert	166.268	QP	27.1	15.6	8.8	32.1	19.4	43.5	24.1	
Vert	174.373	QP	26.5	15.9	8.8	32.1	19.1	43.5	24.4	