



Valued Quality. Delivered.

TEST REPORT

Report Number: 16062020HKG-002

Application
for
Original Grant of 47 CFR Part 15 Certification

AC1600 WiFi Router

FCC ID: EW780-0551-00

This report contains the data of Computer Peripherals only.

Prepared and Checked by:

Approved by:

Signed on File

Josie Yao
Engineer

Koo Wai Ip
Assistant Supervisor
September 26, 2016

- Intertek's standard Terms and Conditions can be obtained at our website: <http://www.intertek.com/terms/>.
- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
- © 2016 Intertek

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

INTERTEK TESTING SERVICES

GENERAL INFORMATION

Applicant Name:	VTech Telecommunications Ltd.
Applicant Address:	23/F., Tai Ping Industrial Centre, Block 1, 57 Ting Kok Road, Tai Po, Hong Kong.
FCC Specification Standard:	FCC Part 15, October 1, 2014 Edition
FCC ID:	EW780-0551-00
FCC Model(s):	VNT846
Type of EUT:	Class B Personal Computers and Peripherals
Description of EUT:	AC1600 WiFi Router
Serial Number:	N/A
Sample Receipt Date:	June 20, 2016
Date of Test:	August 08, 2016
Report Date:	September 26, 2016
Environmental Conditions:	Temperature: +10 to 40°C Humidity: 10 to 90%

INTERTEK TESTING SERVICES

Table of Contents

1.0 Test Results Summary & Statement of Compliance	4
1.1 Summary of Test Results	4
1.2 Statement of Compliance	4
2.0 General Description	6
2.1 Product Description	6
2.2 Test Methodology	7
2.3 Test Facility	7
3.0 System Test Configuration	9
3.1 Justification	9
3.2 EUT Exercising Software	10
3.3 Details of EUT and Description of Accessories	11
3.4 Measurement Uncertainty	11
4.0 Test Results	13
4.1 Field Strength Calculation	13
4.2 Radiated Emissions	14
4.2.1 Radiated Emission Configuration Photograph	14
4.2.2 Radiated Emission Data	14
4.3 AC Power Line Conducted Emission	16
4.3.1 AC Power Line Conducted Emission Configuration Photograph	16
4.3.2 AC Power Line Conducted Emission Data	16
5.0 Equipment List	22

INTERTEK TESTING SERVICES

**EXHIBIT 1
TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE**

INTERTEK TESTING SERVICES

1.0 Test Results Summary & Statement of Compliance

1.1 Summary of Test Results

Test Items	FCC Part 15 Section	Results	Details see section
Radiated Emission from Class B Personal Computers and Peripherals	15.109	Pass	4.2
AC Power Line Conducted Emission	15.107	Pass	4.3

1.2 Statement of Compliance

The equipment under test is found to be complying with the following standard:

FCC Part 15, October 1, 2014 Edition

INTERTEK TESTING SERVICES

**EXHIBIT 2
GENERAL DESCRIPTION**

INTERTEK TESTING SERVICES

2.0 General Description

2.1 Product Description

The VNT846 is a AC1600 WiFi Router.

For 2.400-2.4835GHz:

The Equipment Under Test (EUT) operates at frequency range of 2412MHz to 2462MHz with 11 channels.

For 802.11b mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Direct-sequence spread spectrum (DSSS) modulation. Maximum bit rate can be up to 11Mbps.

For 802.11g mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 2412.000MHz to 2462.000MHz with 11 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 2422.000MHz to 2452.000MHz with 7 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 65Mbps.

For 5.15-5.25GHz:

The Equipment Under Test (EUT) operates at frequency range of 5180MHz to 5240MHz with 4 channels.

For 802.11a mode, it operates at frequency range of 5180.00MHz to 5250.000MHz with 4 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can be up to 54Mbps.

For 802.11n (with 20MHz bandwidth) mode, it operates at frequency range of 5180.00MHz to 5250.000MHz with 4 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 216.6Mbps.

For 802.11n (with 40MHz bandwidth) mode, it operates at frequency range of 5190.00MHz to 5230.000MHz with 2 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 450Mbps.

For 802.11ac (with 20MHz bandwidth) mode, it operates at frequency range of 5180.00MHz to 5250.000MHz with 4 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 260Mbps.

For 802.11ac (with 40MHz bandwidth) mode, it operates at frequency range of 5190.00MHz to 5230.000MHz with 2 channels. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 600Mbps.

For 802.11ac (with 80MHz bandwidth) mode, it operates at frequency 5210MHz. It transmits via Orthogonal Frequency Division Multiplexing (OFDM) modulation. Maximum bit rate can support up to 1300Mbps.

INTERTEK TESTING SERVICES

It operates at frequency range of The EUT is power by a 100-240VAC to 12VDC 0.8A adaptor.

The antenna(s) used in the EUT is integral, and the test sample is a prototype. The circuit description is saved with filename: descri.pdf.

2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2014). Preliminary radiated scans and all radiated measurements were performed in radiated emission test site. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

2.3 Test Facility

The radiated emission test site and AC power line conducted measurement facility used to collect the radiated data and AC Power Line conducted data are at Intertek Testing Services Hong Kong Ltd., which is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been fully placed on file with FCC.

INTERTEK TESTING SERVICES

**EXHIBIT 3
SYSTEM TEST CONFIGURATION**

INTERTEK TESTING SERVICES

3.0 System Test Configuration

3.1 Justification

For radiated emissions testing, the equipment under test (EUT) was setup normal mode to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a 100-240VAC to 12VDC 0.8A adaptor.

As the Base unit can be powered by 2 different configurations (AC adaptor and PoE injector), all configurations have been checked. The data in this report represented the worst-case.

The EUT can support transmission of full slot and long slot. Both types of transmission were checked. The data in this report represented the worst-case.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational to simulate typical use.

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz.

Radiated emission measurement was performed from the frequency 30MHz to 1GHz.

Detector function for radiated emissions is in peak mode.

INTERTEK TESTING SERVICES

3.1 Justification - Cont'd

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

All relevant operation modes have been tested, and the worst case data was included in this report.

3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

INTERTEK TESTING SERVICES

3.3 Details of EUT and Description of Accessories

Details of EUT:

An AC adaptor (provided with the unit) was used to power the device. Their description are listed below.

- (1) An AC adaptor (100-240VAC to 12VDC 0.8A, Model: CS24F120200FUF)
(Supplied by Client)

Description of Accessories:

- (1) 5 X LAN cable of 1m in length (Supplied by Intertek)
- (2) Notebook (HP Probook 430) (Provided by Intertek)
- (3) 1 X 4GB USB flash drive (Provided by Intertek)

3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test at a level of confidence of 95% has been considered. The values of the Measurement uncertainty for radiated emission test and RF conducted measurement test are $\pm 5.3\text{dB}$ and $\pm 0.99\text{dB}$ respectively. The value of the Measurement uncertainty for conducted emission test is $\pm 4.2\text{dB}$.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

INTERTEK TESTING SERVICES

**EXHIBIT 4
TEST RESULTS**

INTERTEK TESTING SERVICES

4.0 Test Results

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

4.1 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB μ V/m
- RA = Receiver Amplitude (including preamplifier) in dB μ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB μ V/m. This value in dB μ V/m was converted to its corresponding level in μ V/m.

$$RA = 62.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$AG = 29 \text{ dB}$$

$$PD = 0 \text{ dB}$$

$$AV = -10 \text{ dB}$$

$$FS = 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

4.2 Radiated Emissions

4.2.1 Radiated Emission Configuration Photograph

Worst Case Radiated Emission
at

959.975 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

4.2.2 Radiated Emission Data

The data in tables 1-2 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 0.3 dB margin

INTERTEK TESTING SERVICES

Mode: LAN Connected & USB Data Transfer

Table 1

**Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.109
Emissions Requirements**

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
V	36.790	43.7	16	10.0	37.7	40.0	-2.3
V	42.003	43.5	16	10.0	37.5	40.0	-2.5
V	56.017	43.7	16	11.0	38.7	40.0	-1.3
V	374.956	30.5	16	24.0	38.5	46.0	-7.5
H	624.973	27.9	16	29.0	40.9	46.0	-5.1
V	679.998	31.8	16	29.0	44.8	46.0	-1.2
V	874.991	24.1	16	32.0	40.1	46.0	-5.9
V	959.975	28.7	16	33.0	45.7	46.0	-0.3

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.
4. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

INTERTEK TESTING SERVICES

4.3 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

4.3.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration
at

492 kHz

The worst case line conducted configuration photographs are saved with filename: config photos.pdf


4.3.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance

Passed by 5.82 dB margin compare with CISPR average limit

INTERTEK TESTING SERVICES

Worst Case: LAN Cable Connect Only

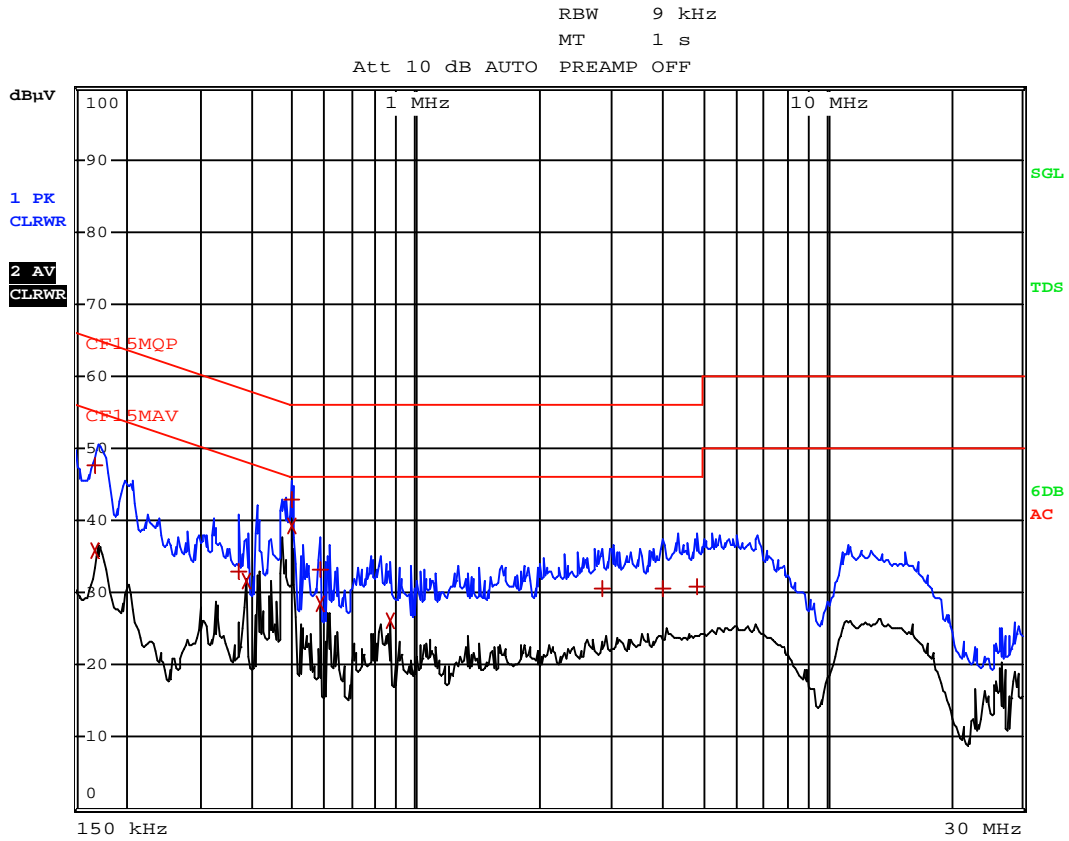

INTERTEK TESTING SERVICES

Worst Case: LAN Cable Connect Only

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP


Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL	dB μ V		DELTA LIMIT	dB
1	Quasi Peak	168 kHz	47.71	N		-17.34	
2	CISPR Average	168 kHz	35.95	N		-19.10	
1	Quasi Peak	370.5 kHz	32.98	L1		-25.50	
2	CISPR Average	384 kHz	31.66	L1		-16.52	
1	Quasi Peak	496.5 kHz	42.98	N		-13.07	
2	CISPR Average	496.5 kHz	39.26	L1		-6.79	
2	CISPR Average	582 kHz	28.41	N		-17.58	
1	Quasi Peak	586.5 kHz	33.12	L1		-22.87	
2	CISPR Average	865.5 kHz	26.13	L1		-19.86	
1	Quasi Peak	2.841 MHz	30.60	L1		-25.39	
1	Quasi Peak	4.0065 MHz	30.55	N		-25.44	
1	Quasi Peak	4.821 MHz	30.90	L1		-25.09	

INTERTEK TESTING SERVICES

Worst Case: LAN Connected & USB Data Transfer

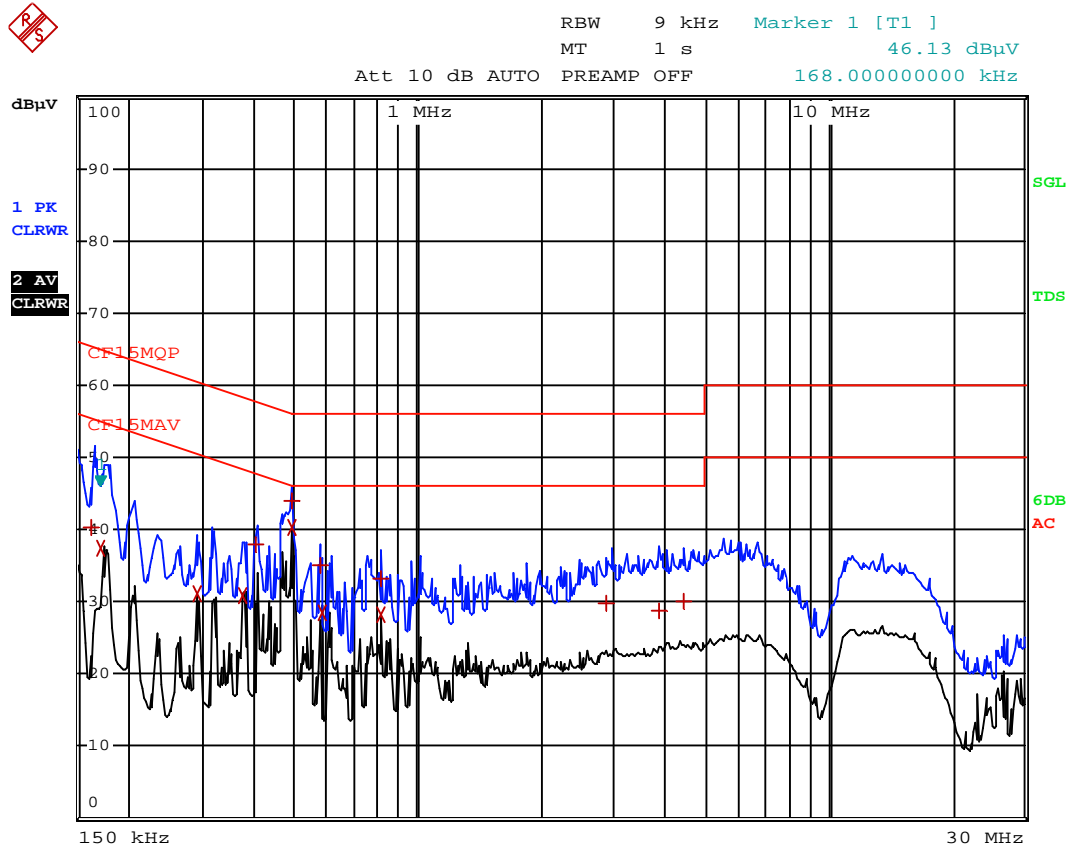

INTERTEK TESTING SERVICES

Worst Case: LAN Connected & USB Data Transfer

EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

	TRACE	FREQUENCY	LEVEL	dB μ V	DELTA	LIMIT	dB
1	Quasi Peak	163.5 kHz	40.19	L1	-25.08		
2	CISPR Average	172.5 kHz	37.31	N	-17.52		
2	CISPR Average	289.5 kHz	30.98	L1	-19.55		
2	CISPR Average	379.5 kHz	30.85	L1	-17.44		
1	Quasi Peak	402 kHz	37.82	L1	-19.98		
1	Quasi Peak	492 kHz	43.88	N	-12.25		
2	CISPR Average	492 kHz	40.31	L1	-5.82		
1	Quasi Peak	577.5 kHz	35.12	L1	-20.88		
2	CISPR Average	582 kHz	28.50	L1	-17.49		
1	Quasi Peak	811.5 kHz	33.22	N	-22.77		
2	CISPR Average	811.5 kHz	28.21	N	-17.78		
1	Quasi Peak	2.8905 MHz	29.72	L1	-26.27		
1	Quasi Peak	3.8625 MHz	28.79	N	-27.20		
1	Quasi Peak	4.443 MHz	30.12	L1	-25.87		

INTERTEK TESTING SERVICES

**EXHIBIT 5
EQUIPMENT LIST**

INTERTEK TESTING SERVICES

5.0 Equipment List

1) Radiated Emissions Test

Equipment	EMI Test Receiver	Spectrum Analyzer
Registration No.	EW-3156	EW-2466
Manufacturer	R&S	R&S
Model No.	ESR26	FSP30
Calibration Date	Nov. 03, 2015	Sep. 16, 2015
Calibration Due Date	Nov. 03, 2016	Aug. 20, 2016

Equipment	Biconical Antenna	Log Periodic Antenna	Double Ridged Guide Antenna
Registration No.	EW-0571	EW-0447	EW-1133
Manufacturer	EMCO	EMCO	EMCO
Model No.	3104C	3146	3115
Calibration Date	Jun. 23, 2015	Mar. 16, 2015	Nov. 05, 2015
Calibration Due Date	Dec. 23, 2016	Sep. 16, 2016	May 05, 2017

2) Conducted Emissions Test

Equipment	EMI Test Receiver	LISN
Registration No.	EW-2500	EW-2501
Manufacturer	R&S	R&S
Model No.	ESCI	ENV-216
Calibration Date	Jan. 28, 2016	Jan. 28, 2016
Calibration Due Date	Jan. 28, 2017	Jan. 28, 2017

END OF TEST REPORT