



# Nemko

**Test Report:** 3W06867


**Applicant:** VTech Engineering Canada Ltd.  
Suite 200 – 7671 Alderbridge Way  
Richmond, B.C., Canada  
V6X 1Z9

**Equipment Under Test:  
(EUT)** VTECH 5825 & VTECH 5850, 5.8/2.4GHz FHSS  
Cordless Telephones

**Handset FCC ID:** EW780-5348-01  
**Base Station FCC ID:** EW780-5348-00

**In Accordance With:** **FCC Part 15, Subpart C**  
Frequency Hopping Transmitters

**Tested By:** Nemko Canada Inc.  
303 River Road, R.R. 5  
Ottawa, Ontario K1V 1H2

**Authorized By:**   
Glen Westwell, Wireless Technologist

**Date:** 13 May 2003

**Total Number of Pages:** 49

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

**Table of Contents**

**Section 1. Summary of Test Results .....3**

**Section 2. General Equipment Specification.....5**

**Section 3. Powerline Conducted Emissions.....6**

**Section 4. Channel Separation .....12**

**Section 5. Number of Hopping Channels .....14**

**Section 6. Time of Occupancy .....20**

**Section 7. Occupied Bandwidth .....25**

**Section 8. Peak Power Output.....32**

**Section 9. Spurious Emissions (Radiated).....34**

**Section 10. Block Diagrams .....48**

**Section 11. Test Equipment List .....49**

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

## **Section 1. Summary of Test Results**

### **General**

**All measurements are traceable to national standards.**

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15, Subpart C, Paragraph 15.247 for Frequency Hopping Spread Spectrum devices. Radiated tests were conducted in accordance with ANSI C63.4-1992. Radiated emissions are made on an open area test site. A description of the test facility is on file with the FCC.

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE  
TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



TESTED BY: \_\_\_\_\_ DATE: 12 May 2003  
Kevin Carr, EMC Specialist

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

*EQUIPMENT:* VTECH 5825 & VTECH 5850 5.8/2.4 GHz  
FHSS Cordless Telephones

---

**Summary Of Test Data**

<b>Name Of Test</b>	<b>Para. No.</b>	<b>Result</b>
Powerline Conducted Emissions	15.207(a)	Complied
Channel Separation	15.247(a)(1)	Complied
Time of Occupancy	15.247(a)(1)(iii)	Complied
20 dB Occupied Bandwidth	15.247(a)(1)	Complied
Number of Hopping Channels	15.247(a)(1)(iii)	Complied
Peak Power Output	15.247(b)(1)	Complied
Spurious Emissions (Antenna Conducted)	15.247(c)	N/A
Spurious Emissions (Radiated)	15.247(c)	Complied

**Footnotes For N/A:** No Access Port

**Test Conditions:**

**Indoor** Temperature: 21°C  
Humidity: 15%

**Outdoor** Temperature: 9°C  
Humidity: 43%

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

## **Section 2.        General Equipment Specification**

**Manufacturer:** VTech (Dongguan) Electronics and Communications Ltd.  
Xia Ling Bei Management Zone,  
Liaobu, Dongguan, guangdong,  
China 523411

**Model No.:** 5825 & 5850

**Serial No.:** None

**Date Received In Laboratory:** 21 March 2003

**Nemko Identification No.:** 1, 5, 6, 7, 13 and 14

**Frequency Range:**

BS TX	5744.736 - 5825.952 MHz
HS TX	2401.056 - 2482.272 MHz
HS RX	5744.736 - 5825.952 MHz
BS RX	2401.056 - 2482.272 MHz

**Modulation:** GFSK

**Tunable Bands:** 1

**Number of Channels:** 2.4GHz Link (HS - BS) is a 17 channel system  
5.8GHz Link (BS - HS) is a 85 channel system

**Channel Spacing:**

<b>Handset</b>	870 kHz
<b>Base Station</b>	840 kHz

**Emissions Designator:**

<b>Base Station</b>	683KF1D
<b>Handset</b>	675KF1D

**User Frequency Adjustment:** None

**Measured Output Power:**

BS	29.4dBm (0.871W)
HS	20.3dBm (0.107W)

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

**Section 3. Powerline Conducted Emissions**

**Para. No.: 15.207 (a)**

<b>Test Performed By: Kevin Carr</b>	<b>Date of Test: 3 April 2003</b>
--------------------------------------	-----------------------------------

**Test Results:** Complied

**Measurement Data:** See attached graph(s).


*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
 FHSS Cordless Telephone

**Conducted Disturbance at Mains Port Test Data:**



Test Date: 3 April 2003					
Engineer's Name: Kevin Carr					
Temperature (C°):21			Humidity %: 15		
Tested as per (Table Top/Floor Standing): Table Top					
Spectrum plots for each frequency band can be found at the back of this section. Any Emissions that were above or within 5 dB of the average limits were remeasured with a receiver and recorded. . *All plots were generated with a peak detector.					
Port under test: AC Input			Test Voltage: 120VAC, 60Hz		
Receiver Results (if applicable) :					
Conductor	Frequency (MHz)	Detector	Level dB(μV)	Limit dB(μV)	Margin dB
Phase	0.15	Quasi-Peak	43.7	66.0	22.3
Phase	0.15	Average	2.1	56.0	53.9
Phase	0.325	Quasi-Peak	38	59.6	21.6
Phase	0.325	Average	3.5	49.6	46.1
Phase	0.5	Quasi-Peak	34.4	56.0	21.6
Phase	0.5	Average	-0.1	46.0	46.1
Neut.	0.15	Quasi-Peak	6.8	66.0	59.2
Neut.	0.15	Average	-2.5	56.0	58.5
Neut.	0.325	Quasi-Peak	1.9	59.6	57.7
Neut.	0.325	Average	-2.9	49.6	52.5
Neut.	0.5	Quasi-Peak	2.2	56.0	53.8
Neut.	0.5	Average	-2	46.0	48.0
Notes:					

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone



Powerline Conducted Emission Plots

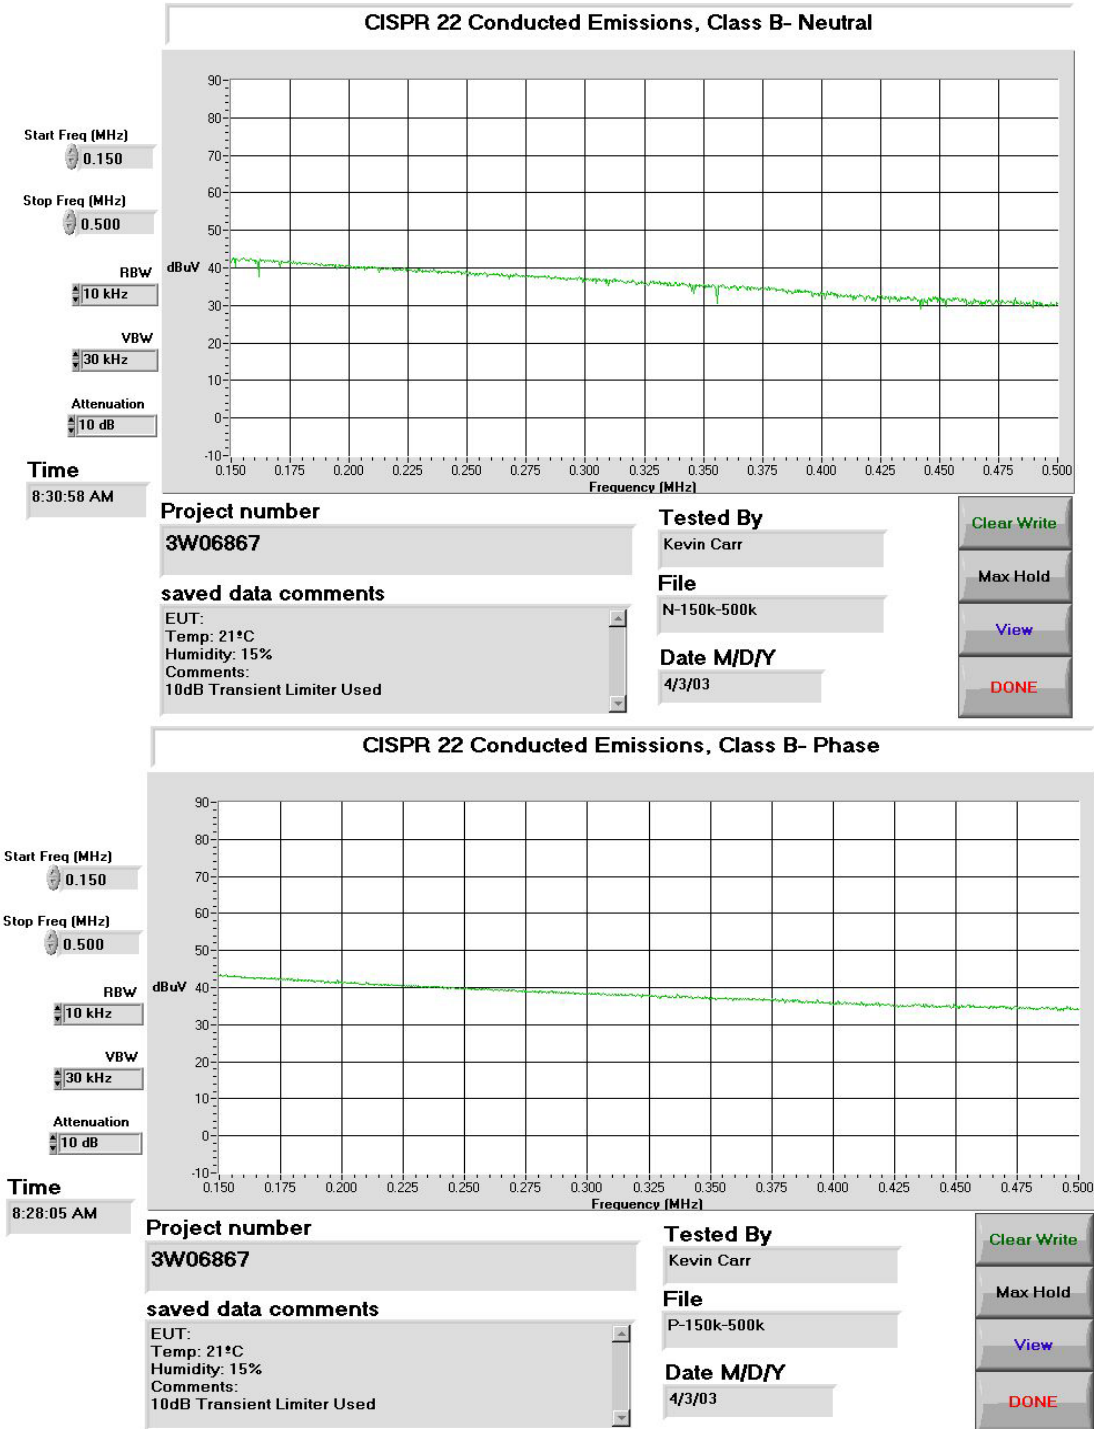

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
 FHSS Cordless Telephone

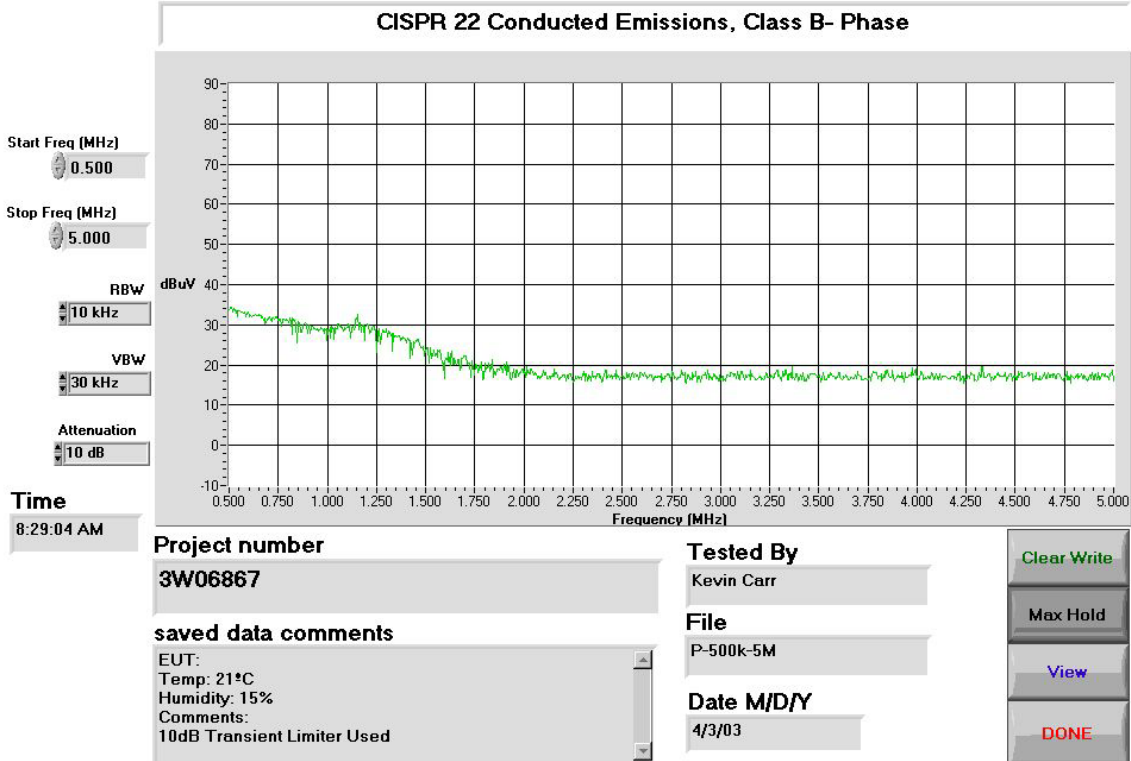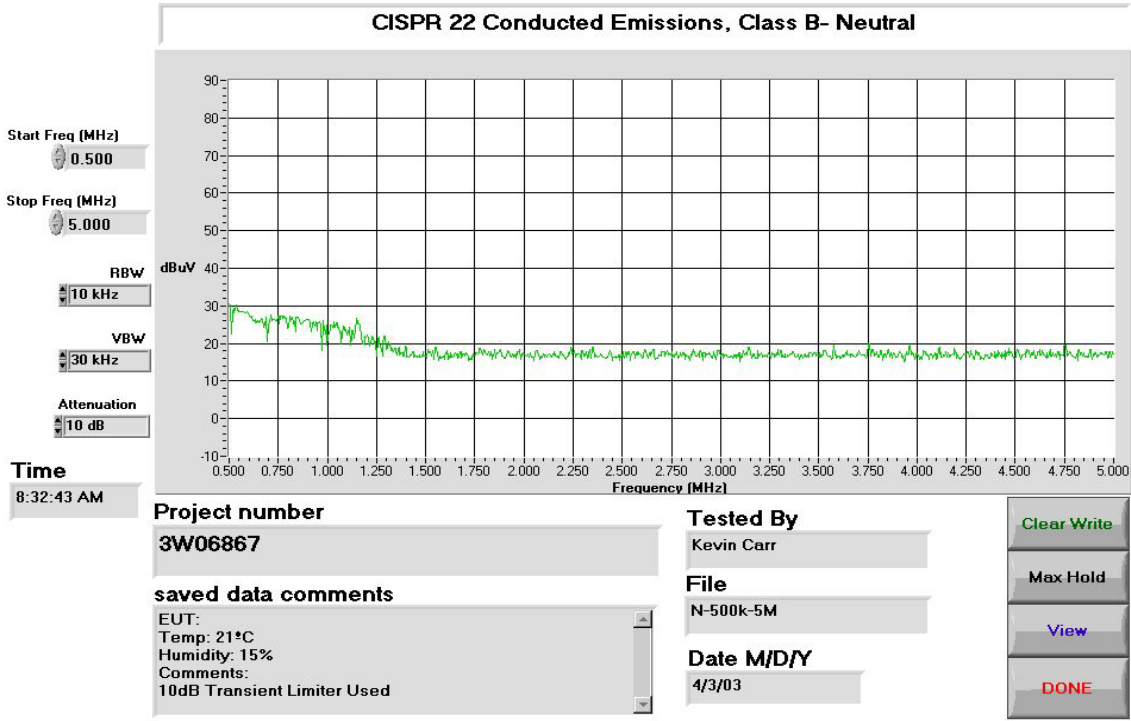



EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

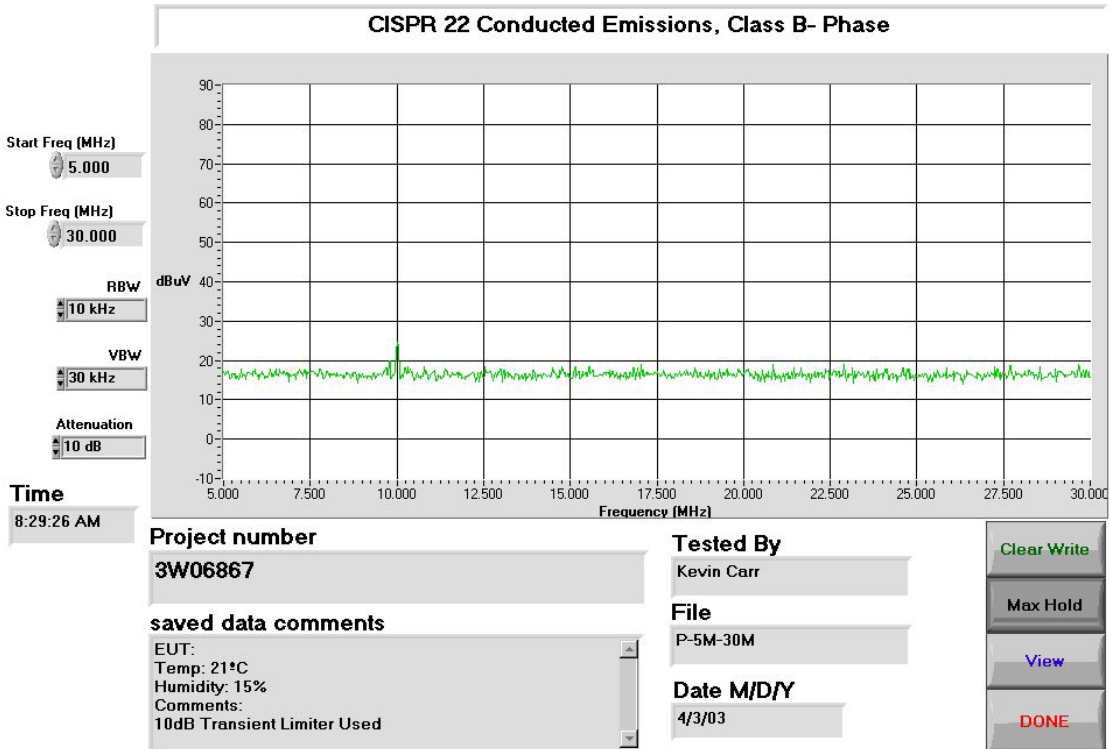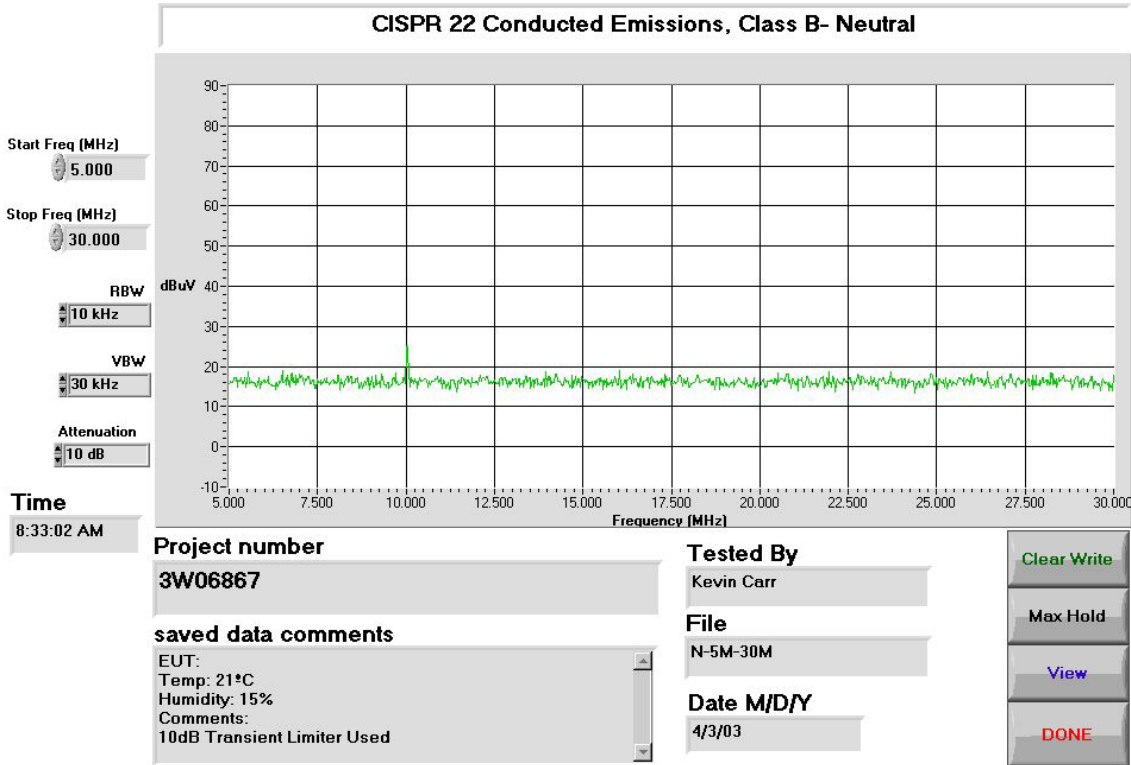

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

**Set-up Photo:**

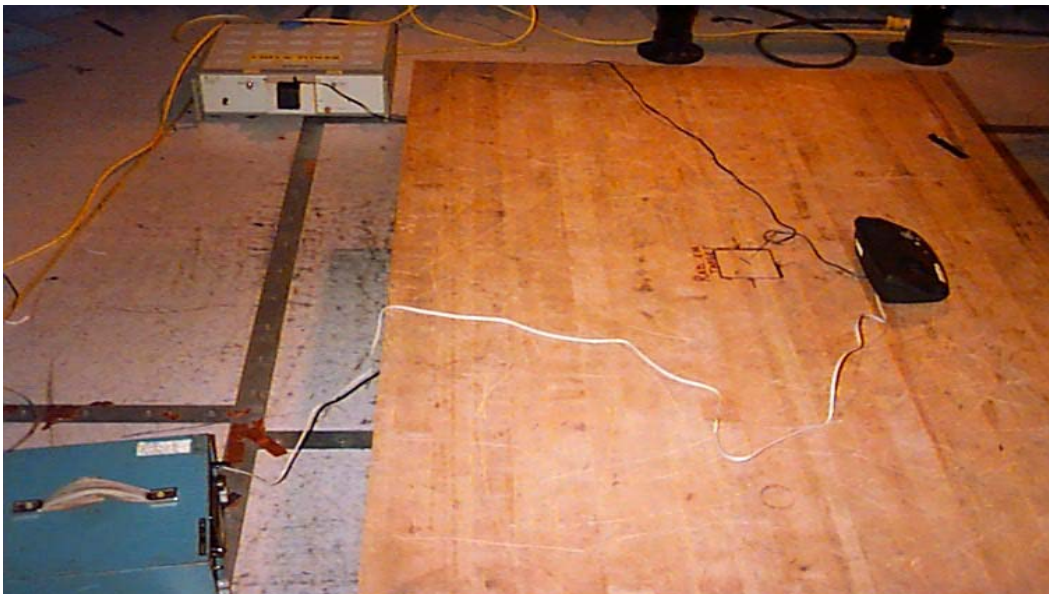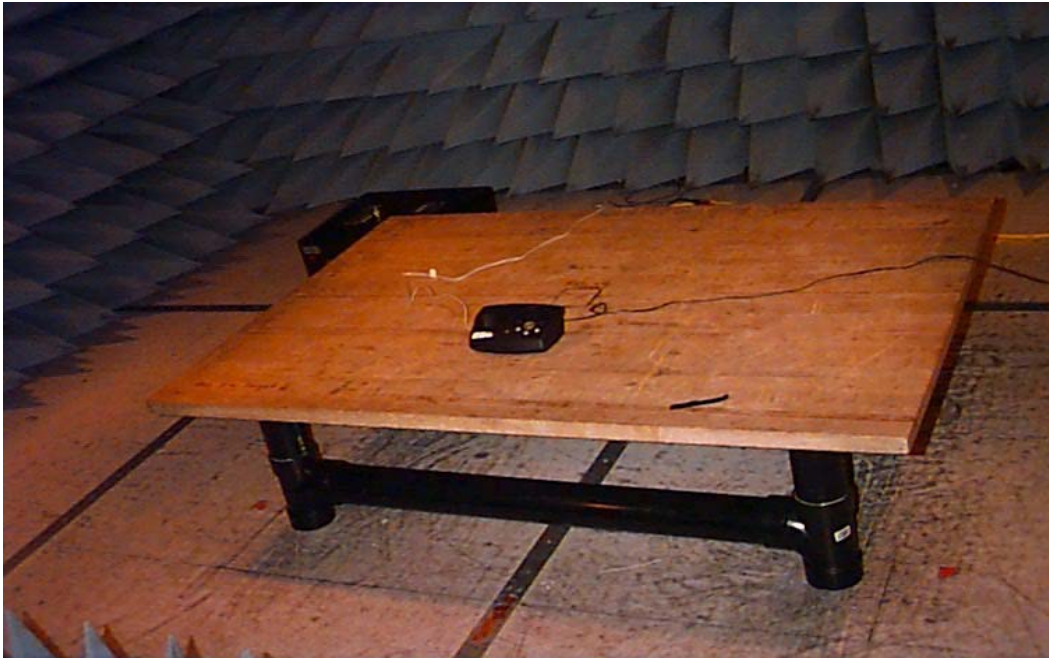

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

**Section 4. Channel Separation**

**Para. No.: 15.247 (a)(1)**

<b>Test Performed By: Kevin Carr</b>	<b>Date of Test: 29 April 2003</b>
--------------------------------------	------------------------------------


**Test Results:** Complied

**Measurement Data:**  
Channel Separation:  
Base: 840kHz  
Handset: 870 kHz


EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

**Channel Separation Plots:**

Base

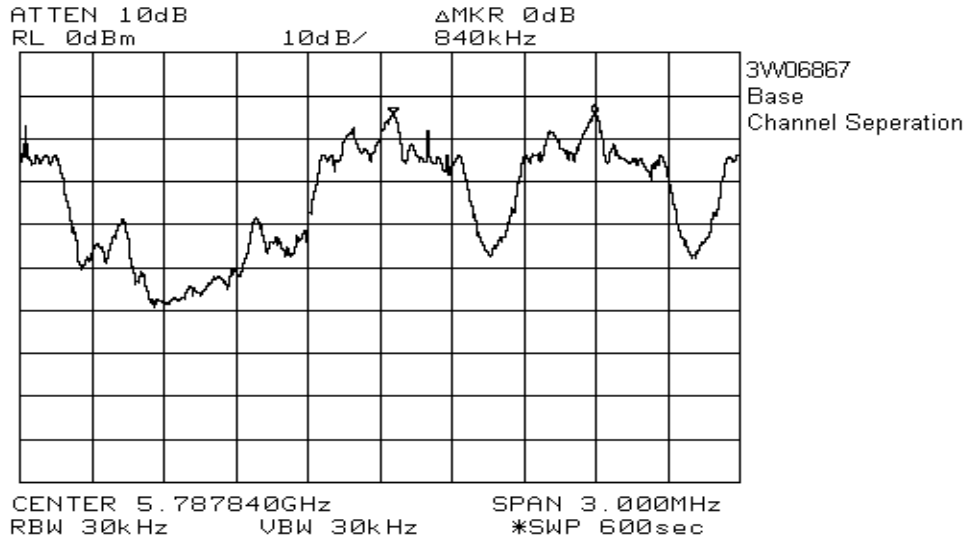

Handset

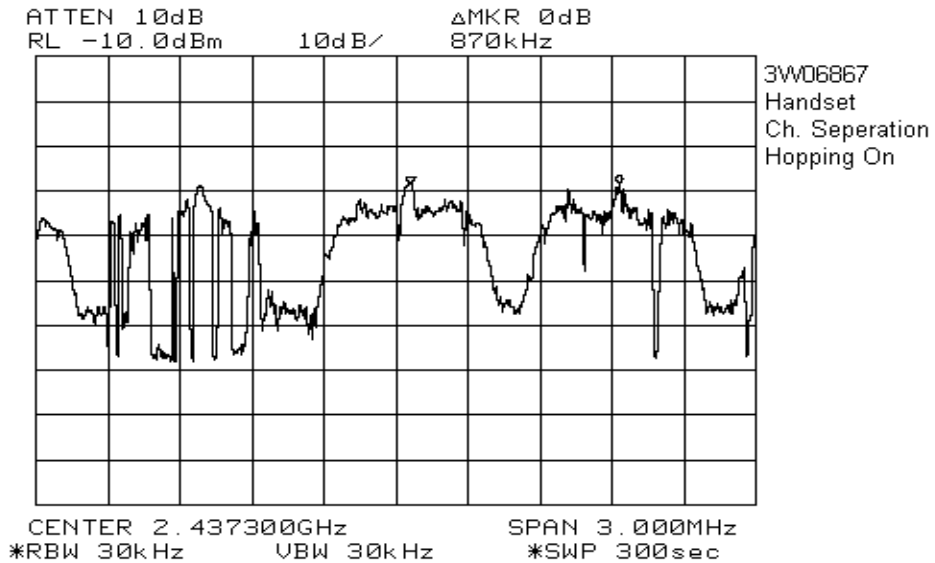

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

**Section 5.           Number of Hopping Channels**

**Para. No.: 15.247(a)(1)(ii)(iii)**

<b>Test Performed By: VTech supplied Data</b>	<b>Date of Test: 9 May 2003</b>
---	---------------------------------

**Test Results:**                   Complied

**Measurement Data:**


Base  
Number of Hopping Frequencies:   85

Handset  
Number of Hopping Frequencies:   17


EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

**Number of Hopping Channel Plots:**

Base Station  
Base Station

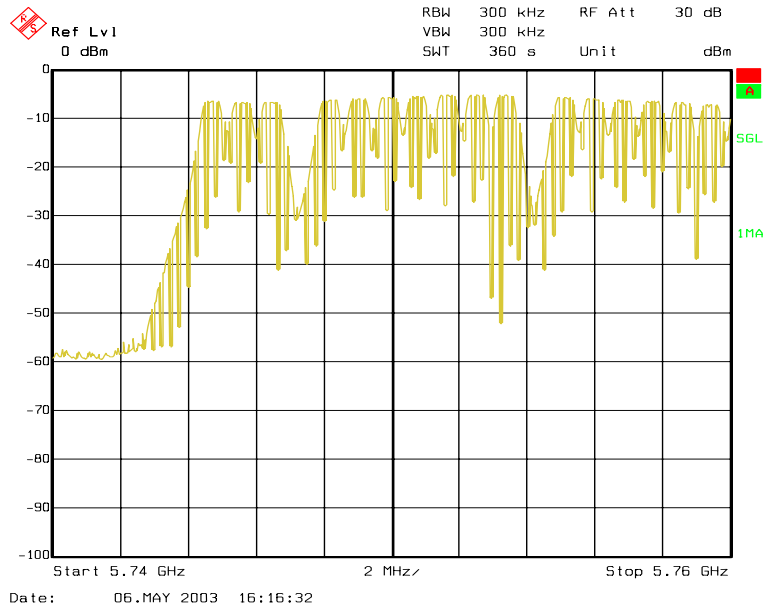


Band 1 showing 16 Channels

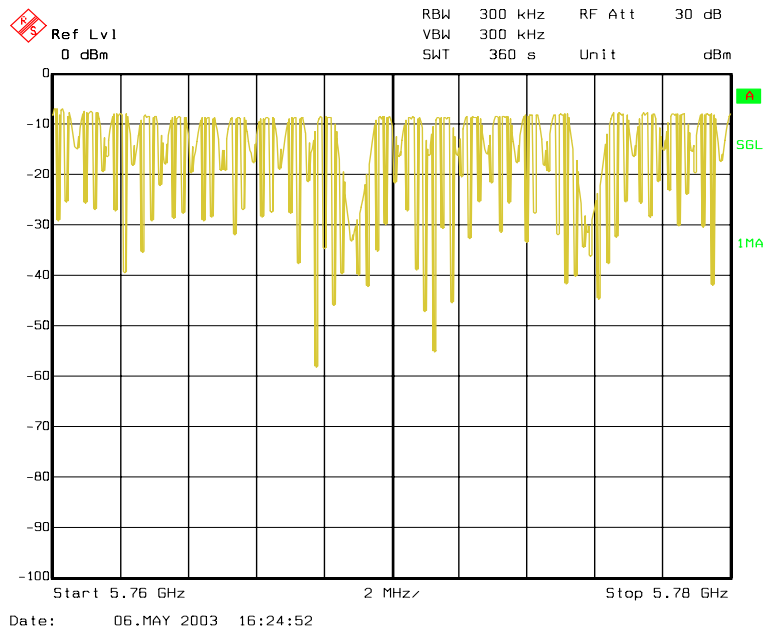


Band 2 Showing 21 Channels

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

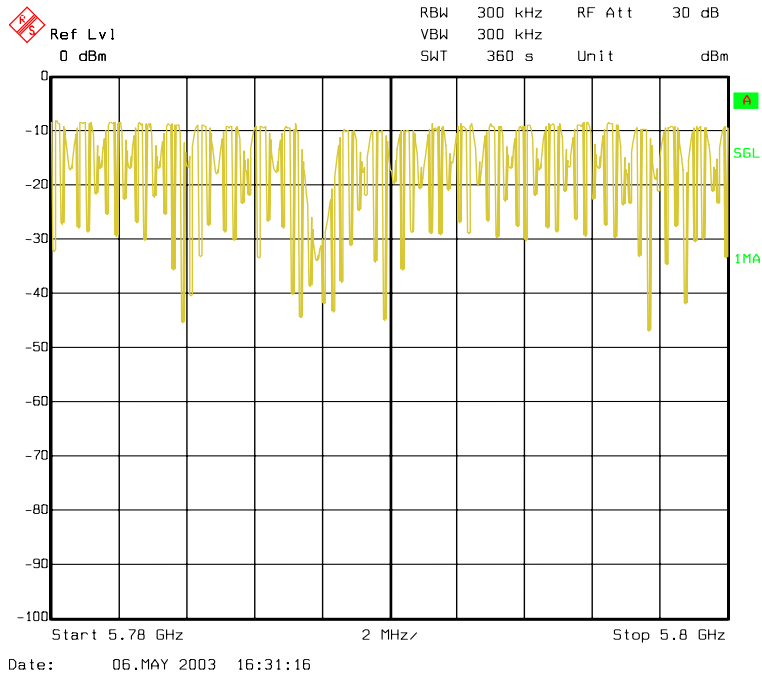


Band 3 Showing 23 Channels

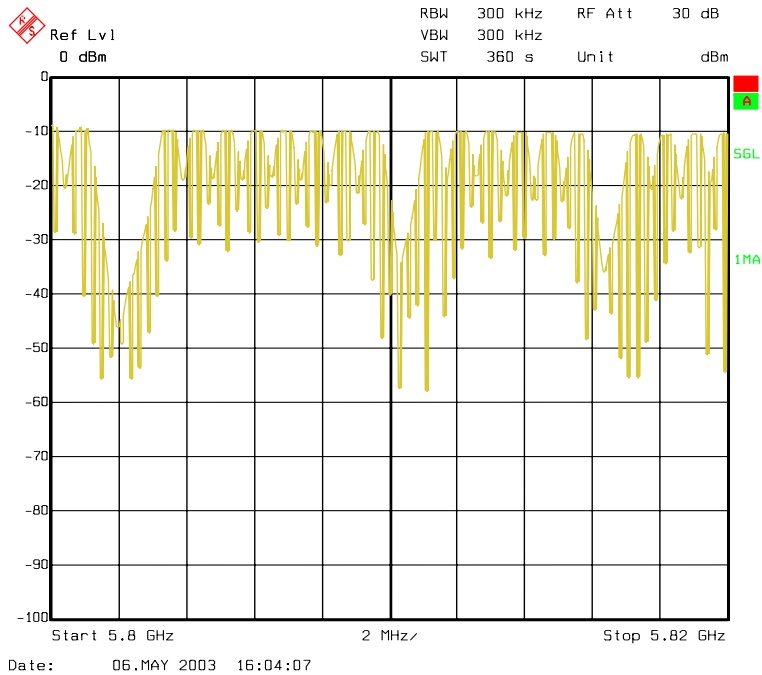

Band 4 Showing 19 Channels

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

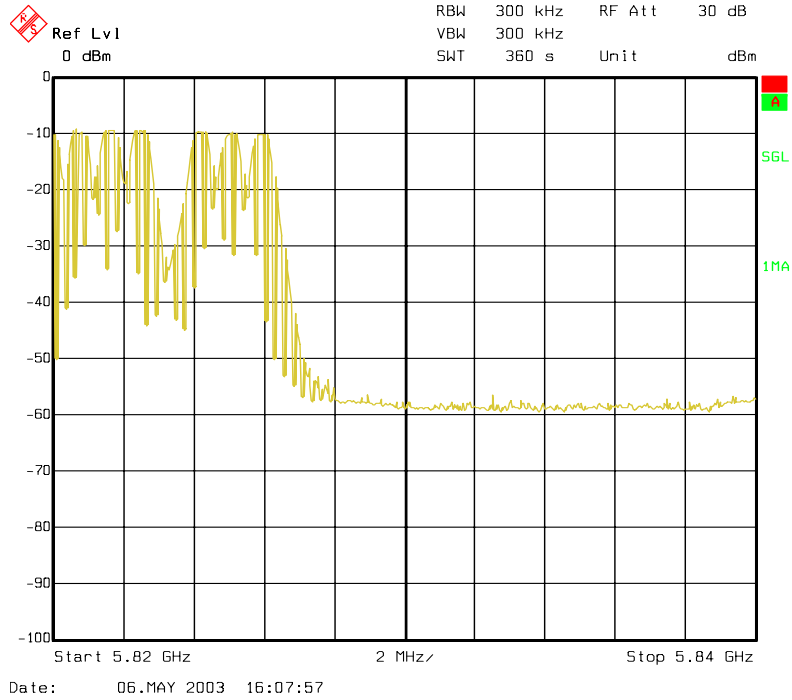


Band 5 Showing 6 Channels


85 channels total

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

Handset

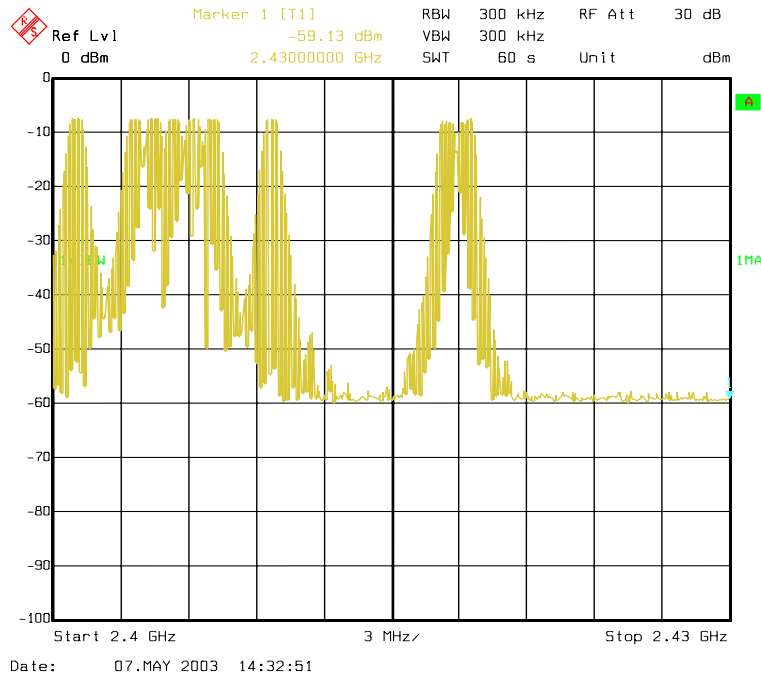


Lower band showing 9 Channels

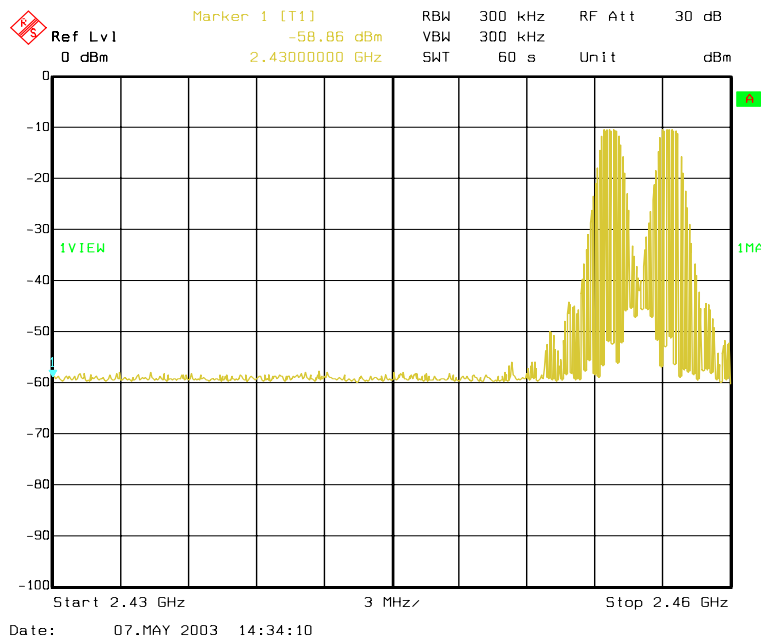

Middle band showing 2 Channels

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

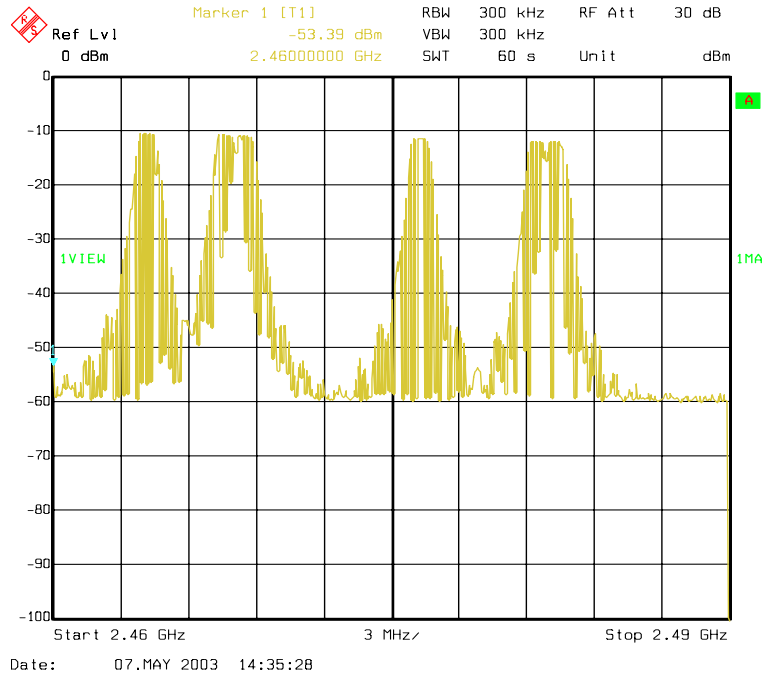

Middle band showing 6 Channels

9 + 2 + 6 = 17 channels total

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

**Section 6. Time of Occupancy**

**Para. No.: 15.247 (a)(1)(ii)(iii)**

<b>Test Performed By: VTech supplied Data</b>	<b>Date of Test: 9 May 2003</b>
---	---------------------------------

**Test Results:** Complied


**Measurement Data:** Maximum Dwell Time On Any Channel:  
See Plots.

Base: 28.74mS  
Handset: 148.14mS

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone


**Time Of Occupancy Plots.**

Base

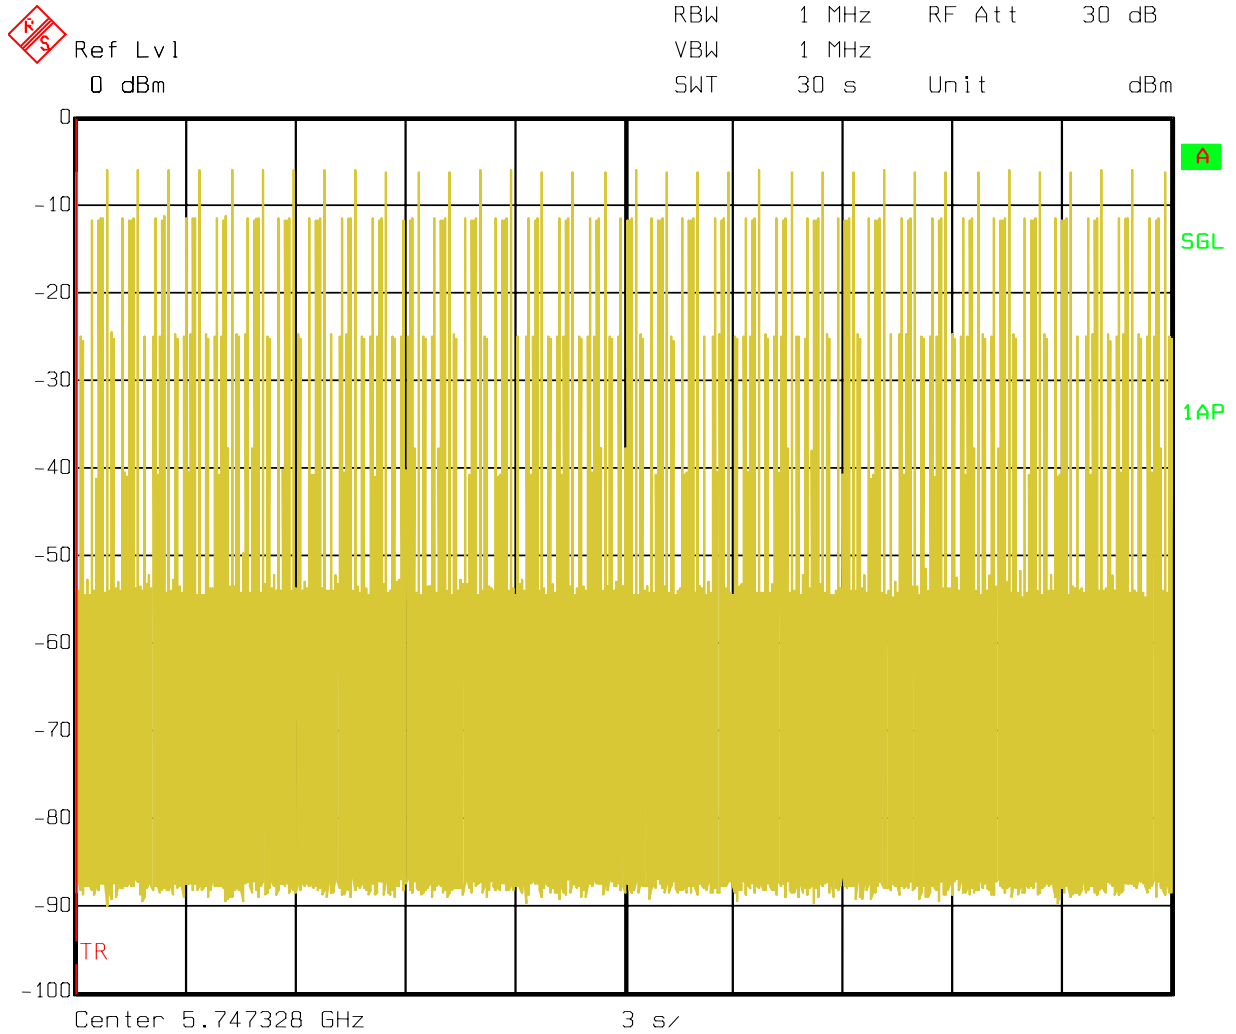

Date: 06.MAY 2003 15:14:40

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

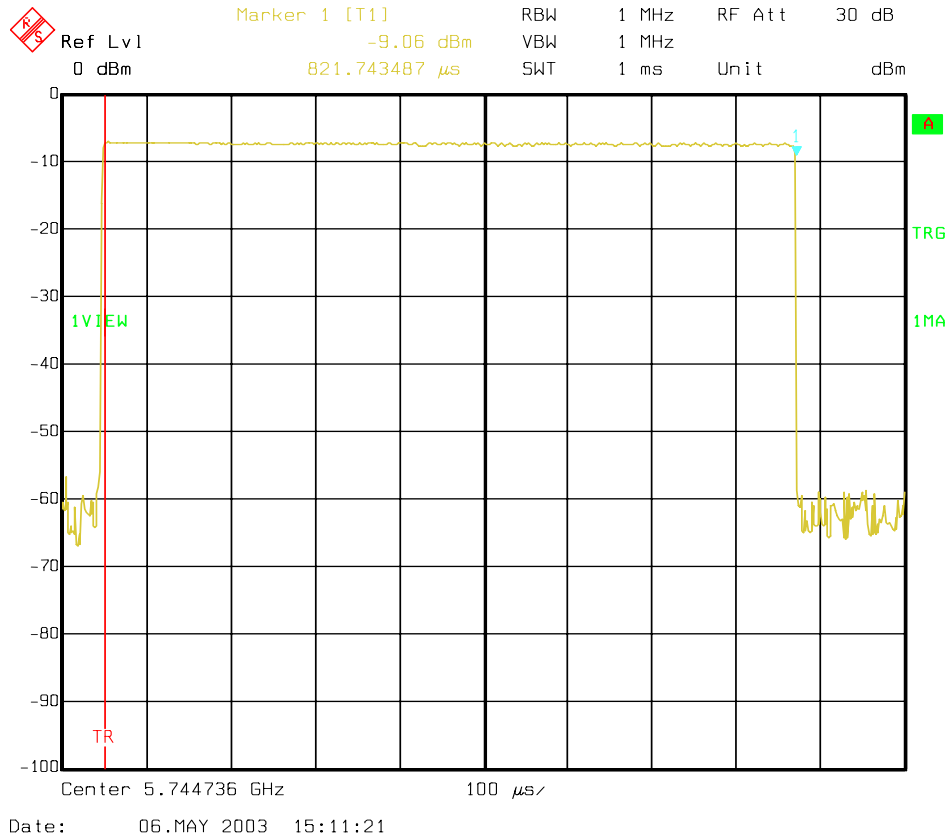


Active Slot showing 821us On-Time

Time of Occupancy showing 35 hits per 30sec

$$35 * 0.821 = 28.735\text{ms}$$


EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

Handset

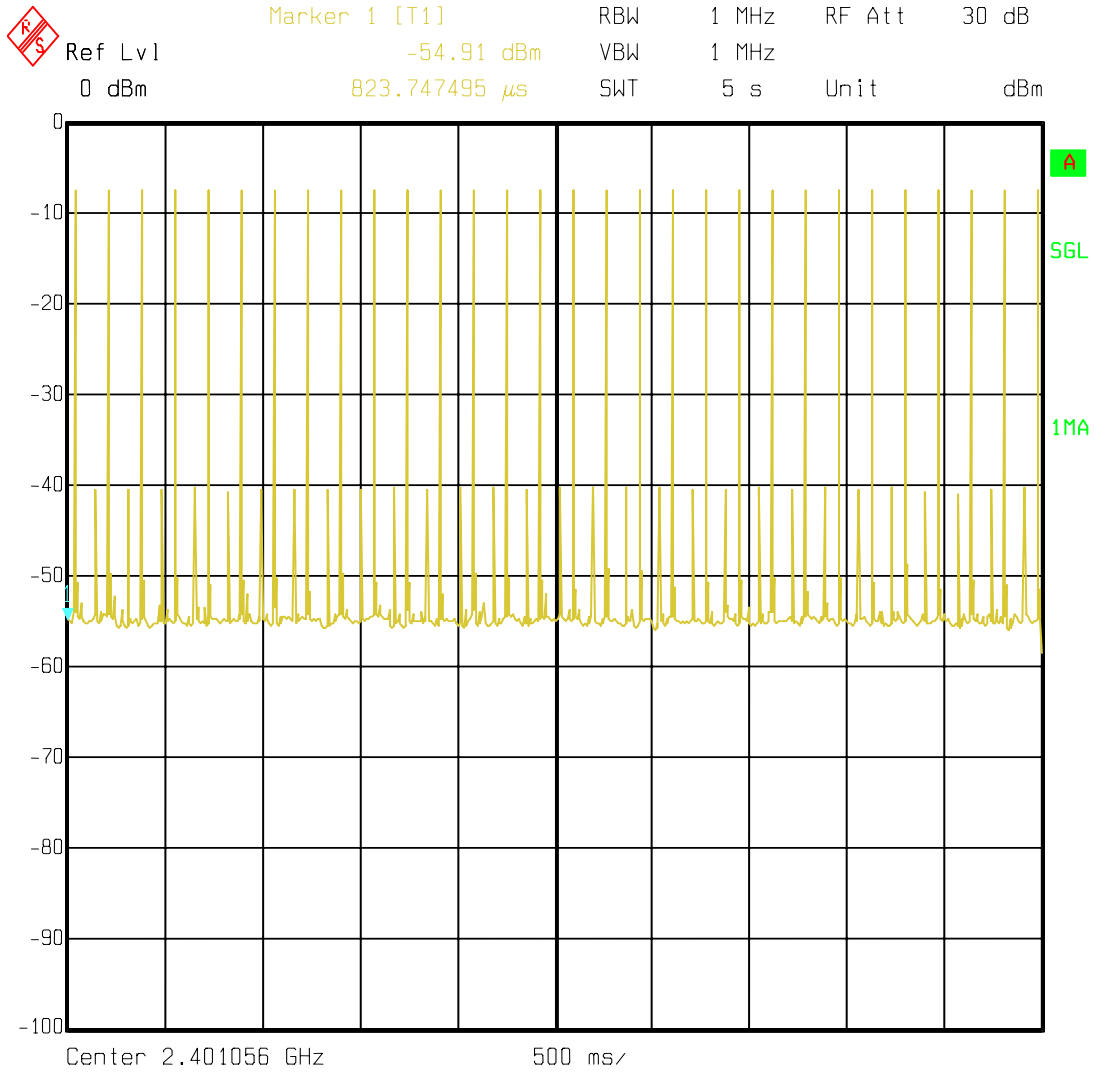

Date: 07.MAY 2003 15:13:17

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

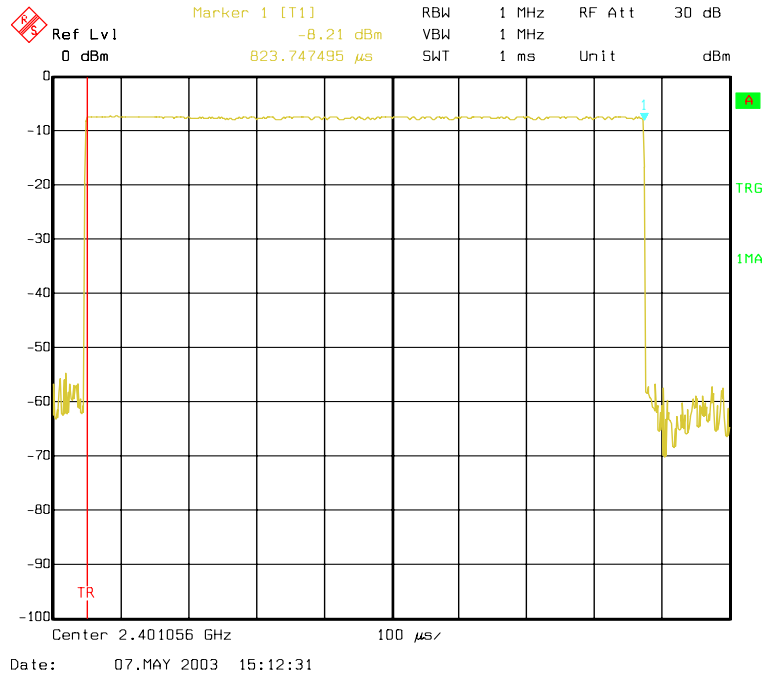

Active Slot showing 823us On-Time

Time of Occupancy Showing 30 hit per 5 sec

$$(30 * 6) * 0.823 = 148.14ms$$

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

**Section 7. Occupied Bandwidth**

**Para. No.: 15.247 (a)(1)(ii)**

<b>Test Performed By: Kevin Carr</b>	<b>Date of Test: 2 April 2003</b>
--------------------------------------	-----------------------------------

**Test Results:** Complied

**Measurement Data:** See Plots



Base:  
99%: 683kHz  
20 dB: 683kHz

Handset  
99%: 675kHz  
20 dB: 692kHz

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone



**Occupied Bandwidth Plots:**

Base, Low Channel

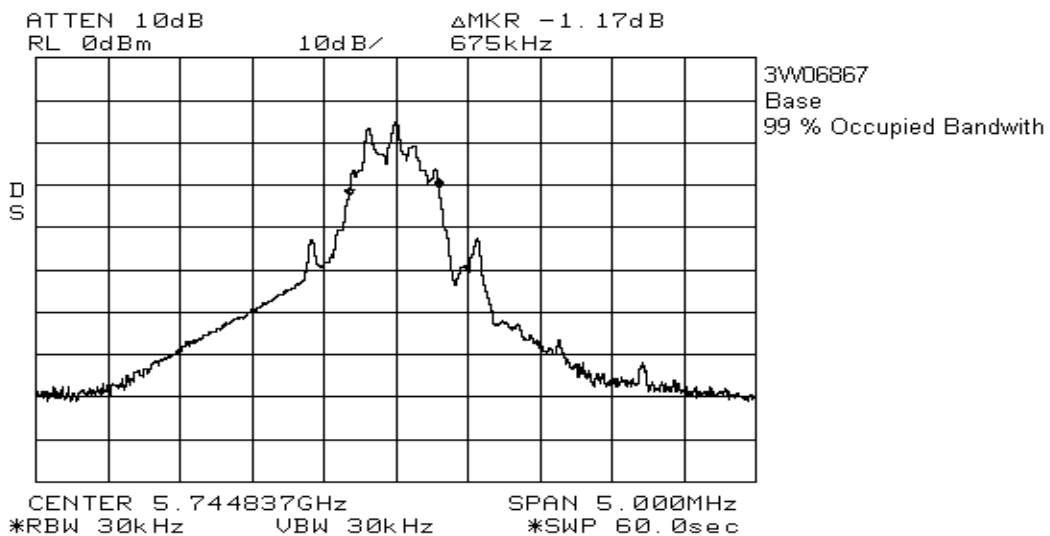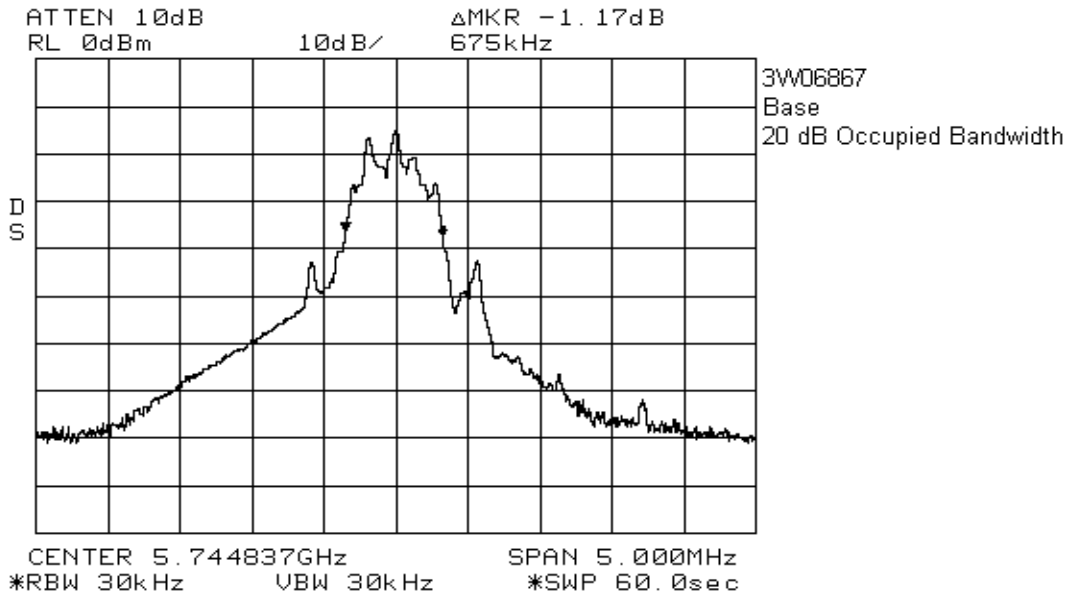



EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

Mid. Channel

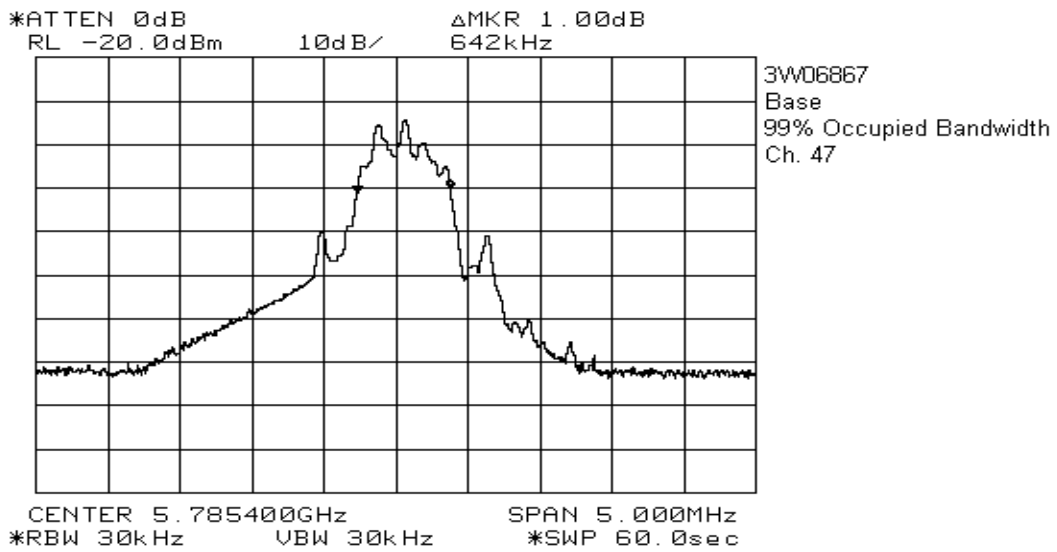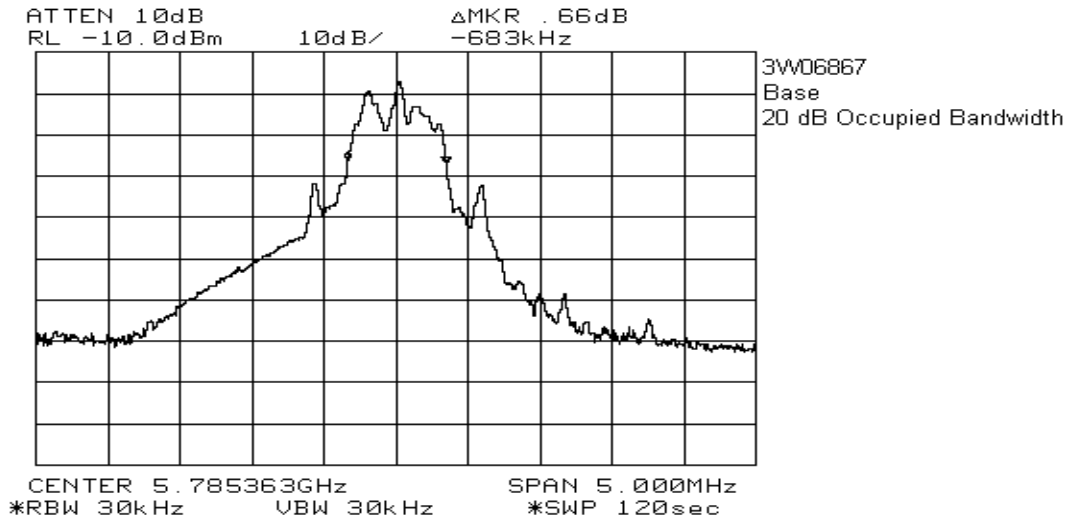

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone



High Ch.

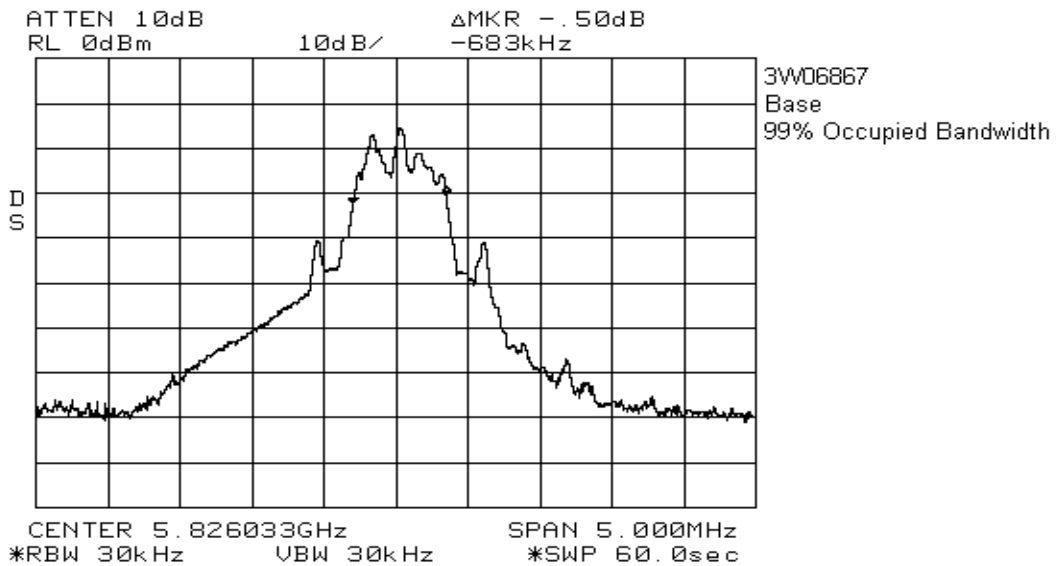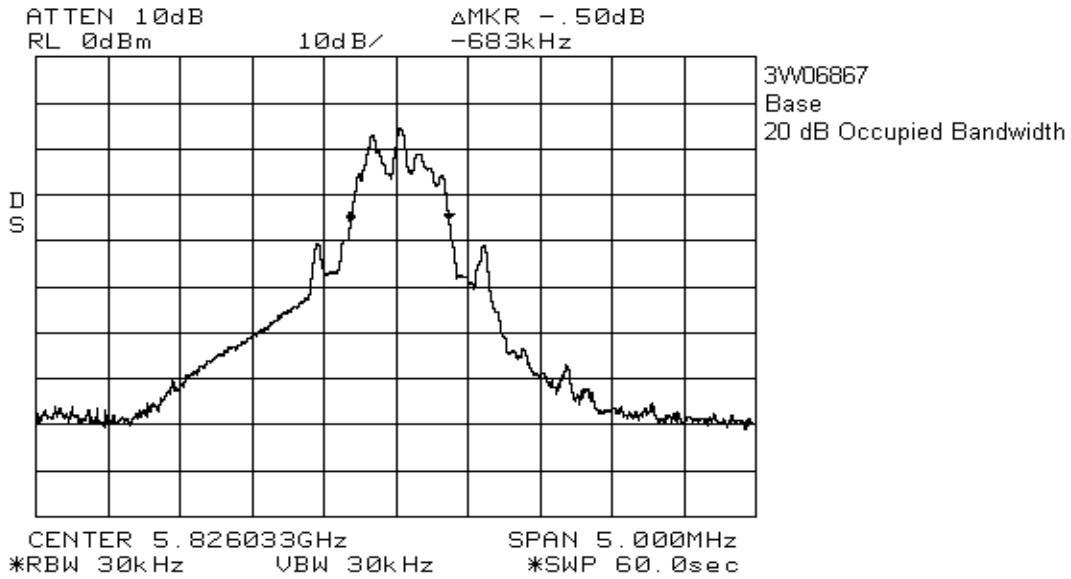





EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

Mid. Ch.

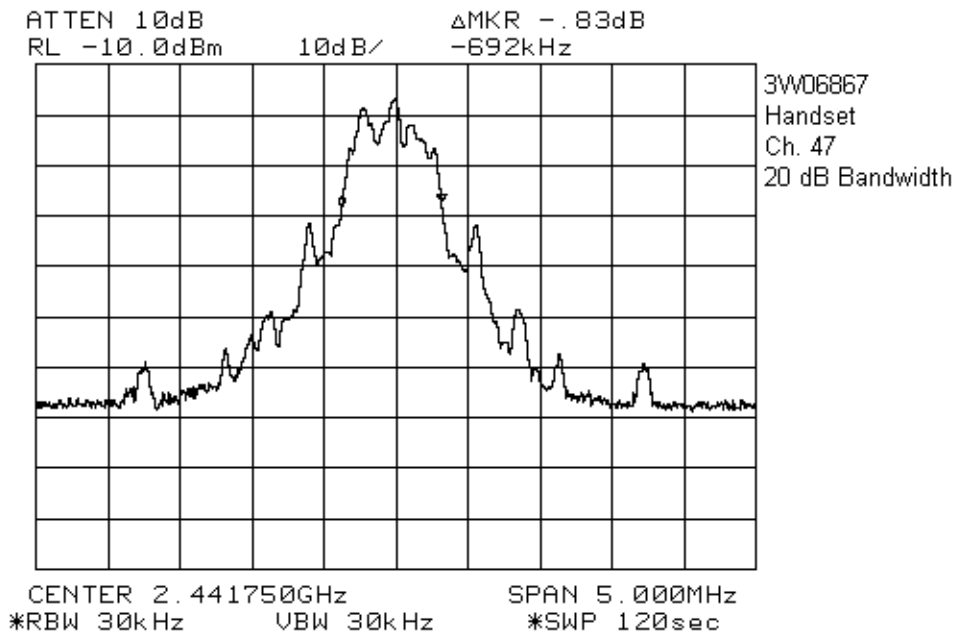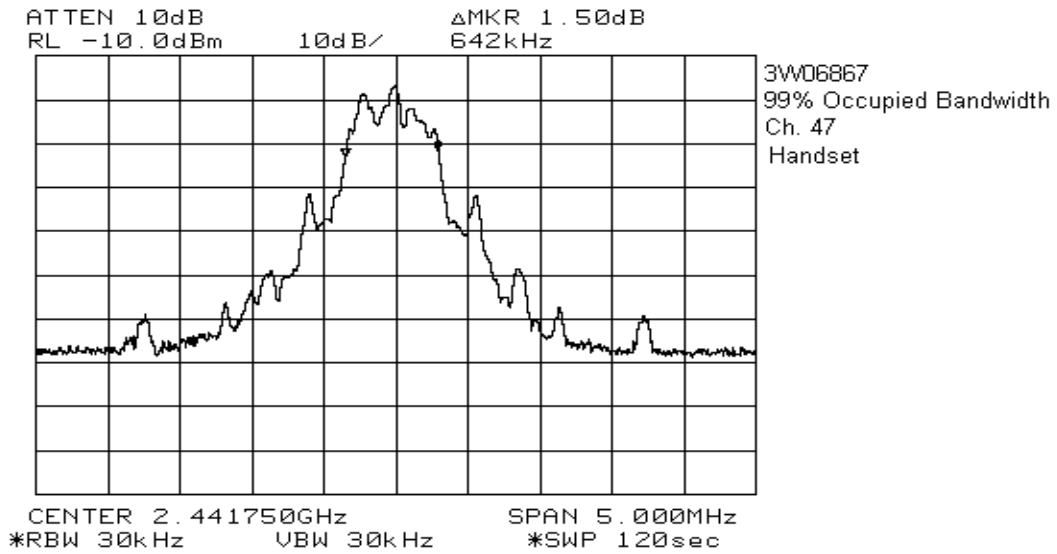

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

High Ch.

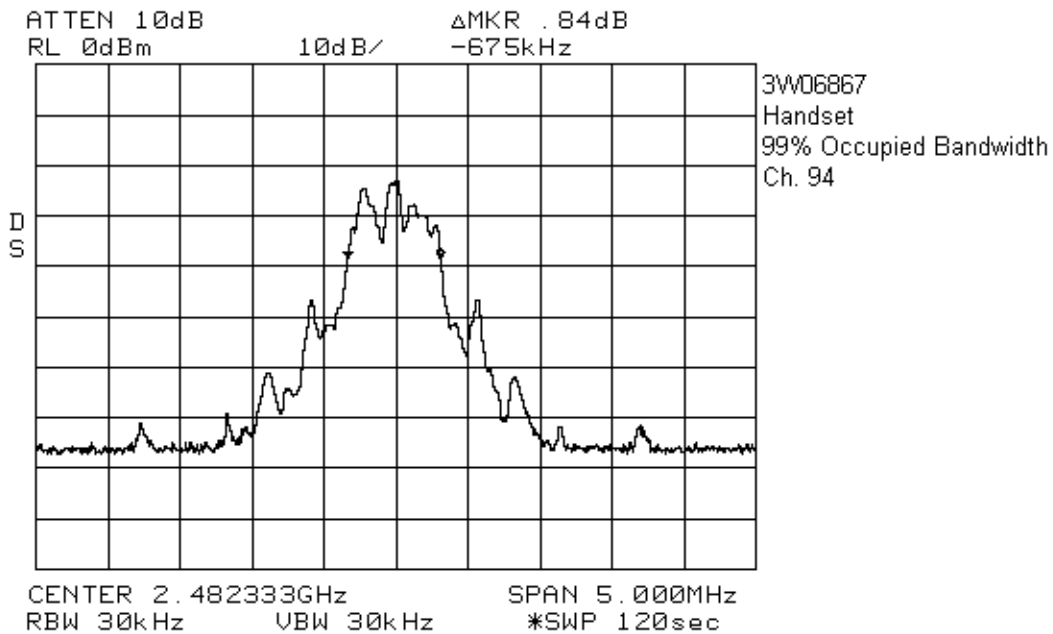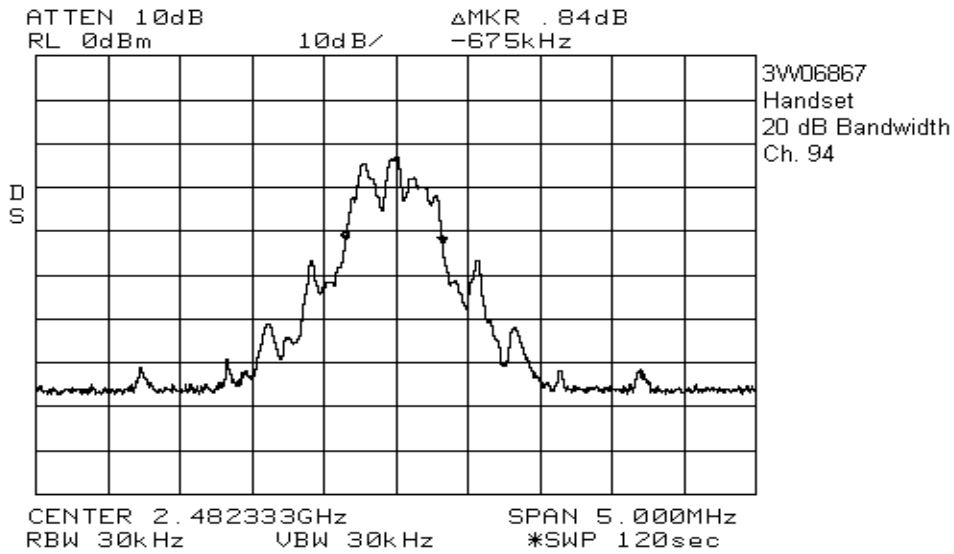

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

**Section 8. Peak Power Output**

Para. No.: 15.247 (b)(1)

Test Performed By: Kevin Carr	Date of Test: 3 & 28 April 2003
-------------------------------	---------------------------------

**Test Results:** Complies. The maximum peak power output of the transmitter is

Base = 0.871W, 29.4dBm  
Handset = 0.107W, 20.3dBm

The Base Station was tested at +/- 15% of AC line voltage. The received level did not change  
The Handset was tested with a fresh battey.

This EUT was searched in 3 orthogonal axis to determine worst case emissions.

**Measurement Data:** Detachable antenna?  Yes  No

Directional Gain of Antenna:  
Base and Handset: 1.0 dBi or 1.26 Numeric.

Base (worst Case)  
Field Strength: 125.6 dBµV/m @ 3m or 1.91 V/m @ 3m.

Handset (worst Case)  
Field Strength: 116.5 dBµV/m @ 3m or 0.668 V/m @ 3m.

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
 FHSS Cordless Telephone

**Radiated Disturbance Test Data: Digital Emissions**

Test Date: 3 April 2003							
Engineer's Name: Kevin Carr							
<b>Base Station</b>							
<b>Tested as per (Table Top/Floor Standing): Table Top</b>							
Test Distance (meters): 3					Range: 1		
Freq. (MHz)	Ant.	Pol. V/H	RCVD Signal (dBµV)	Ant. Factor (dB)	Amp. Gain (dB)	Cable Loss (dB)	Field Strength (dBµV/m)
5744.8210	Horn1	V	80.0	34.7	N/A	9.8	124.5
5744.8280	Horn1	H	77.0	34.5	N/A	9.8	121.3
5826.1900	Horn1	V	78.3	34.7	N/A	10.3	123.4
5826.1900	Horn1	H	76.7	34.6	N/A	10.3	121.6
5785.4900	Horn1	V	80.8	34.7	N/A	10.1	125.6
5785.4900	Horn1	H	76.6	34.6	N/A	10.1	121.2
Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole							
Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Average = 1.0 MHz RBW							
Notes:		Measurement Receiver = H.P.8565E, RBW = 1MHz					

Test Date: 28 April 2003							
Engineer's Name: Kevin Carr							
<b>Handset</b>							
<b>Tested as per (Table Top/Floor Standing): Table Top</b>							
Test Distance (meters): 3					Range: 1		
Freq. (MHz)	Ant.	Pol. V/H	RCVD Signal (dBµV)	Ant. Factor (dB)	Amp. Gain (dB)	Cable Loss (dB)	Field Strength (dBµV/m)
2441.5800	Horn1	V	76.2	29.1	N/A	5.3	110.6
2441.6600	Horn1	H	82.1	29.1	N/A	5.3	116.5
2400.9400	Horn1	V	72.9	29.0	N/A	4.8	106.7
2400.9100	Horn1	H	78.9	29.0	N/A	4.8	112.7
2482.4200	Horn1	V	79.8	29.2	N/A	5.9	114.9
2482.5900	Horn1	H	79.4	29.2	N/A	5.9	114.5
Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole							
Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Average = 1.0 MHz RBW							
Notes:		Measurement Receiver = H.P.8565E, RBW = 1MHz					

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

## **Section 9. Spurious Emissions (Radiated)**

**Para. No.: 15.247 (c)**

<b>Test Performed By: Kevin Carr</b>	<b>Date of Test: 31 April 2003</b>
--------------------------------------	------------------------------------

**Test Results:** Complied.

The worst case emission level is 53.6 dB $\mu$ V/m @ m at 11489.47MHz. This is 0.4 dB below the specification limit.

**Measurement Data:** See attached table.

This EUT was searched in 3 orthogonal axis to determine worst case emissions.

**Duty Cycle Calculation:**

Base:  $20\text{Log}\{(10 \times 0.820\text{mS})/100\} = 21.7\text{dB}$ , max. allowed 20.0dB  
Handset:  $20\text{Log}\{(10 \times 0.917)/100\} = 20.8\text{dB}$ , max. allowed 20.0dB

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
 FHSS Cordless Telephone

**Radiated Disturbance Test Data: Digital Emissions**

Test Date: 3 April 2003											
Engineer's Name: Kevin Carr											
<b>Tested as per (Table Top/Floor Standing): Table Top</b>											
Test Distance (meters): 3							Range: Dome 1				
Freq. (MHz)	Ant.	Pol. V/H	RCVD Signal (dBµV)	Ant. Factor (dB)	Amp. Gain (dB)	Cable Loss (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Detector	Amp.
311.0410	LP1	V	16.3	15.4	N/A	2.3	34.0	46.0	12.0	Q-Peak	None
311.0410	LP1	H	18.3	15.7	N/A	2.3	36.3	46.0	9.7	Q-Peak	None
331.7770	LP1	V	15.5	14.9	N/A	2.3	32.7	46.0	13.3	Q-Peak	None
331.7770	LP1	H	18.3	15.2	N/A	2.3	35.8	46.0	10.2	Q-Peak	None
352.5140	LP1	V	12.4	15.0	N/A	2.4	29.8	46.0	16.3	Q-Peak	None
352.5140	LP1	H	21.9	15.3	N/A	2.4	39.6	46.0	6.4	Q-Peak	None
518.4030	LP1	V	10.2	18.8	N/A	2.9	31.9	46.0	14.1	Q-Peak	None
518.4030	LP1	H	12.8	19.3	N/A	2.9	35.0	46.0	11.1	Q-Peak	None
393.9850	LP1	V	11.3	16.1	N/A	2.6	30.0	46.0	16.1	Q-Peak	None
393.9850	LP1	H	13.5	16.1	N/A	2.6	32.2	46.0	13.8	Q-Peak	None
342.1420	LP1	V	10.0	14.9	N/A	2.4	27.3	46.0	18.7	Q-Peak	None
342.1420	LP1	H	13.9	15.2	N/A	2.4	31.5	46.0	14.5	Q-Peak	None
1044.0000	Horn1	V	54.7	25.0	47.6	3.0	35.1	54.0	18.8	Peak	1-2GHz
1044.0000	Horn1	H	54.0	24.9	47.6	3.0	34.3	54.0	19.7	Peak	1-2GHz
1218.0000	Horn1	V	56.0	25.6	48.2	3.2	36.6	54.0	17.4	Peak	1-2GHz
1218.0000	Horn1	H	55.8	25.5	48.2	3.2	36.3	54.0	17.7	Peak	1-2GHz
1146.6980	Horn1	V	59.0	25.4	48.1	3.1	39.4	54.0	14.5	Peak	1-2GHz
1146.0000	Horn1	H	55.3	25.3	48.1	3.1	35.6	54.0	18.4	Peak	1-2GHz
Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole											
Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Peak = 1.0 MHz RBW											
Notes:											

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
 FHSS Cordless Telephone

**Radiated Disturbance Test Data: Handset Harmonics, Average**

Test Date: 3 & 28 April 2003											
Engineer's Name: Kevin Carr											
<b>Tested as per (Table Top/Floor Standing):</b>											
Test Distance (meters): 3							Range: 1				
Freq. (MHz)	Ant.	Pol. V/H	RCVD Signal (dBµV)	Ant. Factor (dB)	Amp. Gain (-dB)	Duty Cycle Corr. Factor (-dB)	Cable Loss (dB)	Field Strength (dBµV/m)	Limit (dBµV/m)	Margin (dB)	Amp.
Ch. 00											
4802.1400	Horn1	V	75.2	33.8	55.2	20	8.0	41.8	54.0	12.2	4-8GHz
4805.0600	Horn1	H	71.4	33.7	55.2	20	8.1	37.9	54.0	16.1	4-8GHz
7203.8500	Horn1	V	67.3	36.7	56.0	20	11.2	39.3	54.0	14.7	4-8GHz
7203.6800	Horn1	H	70.8	36.7	56.0	20	11.3	42.7	54.0	11.3	4-8GHz
Ch. 47											
4883.1100	Horn1	V	67.0	34.0	54.9	20	8.4	34.5	54.0	19.5	4-8GHz
4883.1900	Horn1	H	71.5	33.9	54.9	20	8.4	38.8	54.0	15.2	4-8GHz
7325.5100	Horn1	V	70.3	36.6	56.0	20	10.3	41.3	54.0	12.7	4-8GHz
7324.5700	Horn1	H	72.6	36.6	56.0	20	10.3	43.5	54.0	10.5	4-8GHz
Ch. 94											
4964.3000	Horn1	V	72.5	34.3	54.6	20	9.5	41.6	54.0	12.4	4-8GHz
4964.3000	Horn1	H	78.8	34.1	54.6	20	9.5	47.7	54.0	6.3	4-8GHz
7446.2000	Horn1	V	80.2	36.5	56.0	20	11.1	51.9	54.0	2.1	4-8GHz
7446.4000	Horn1	H	79.6	36.5	56.0	20	11.1	51.3	54.0	2.7	4-8GHz
Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole											
Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Average = 1.0 MHz RBW											
Notes:		Measurement Receiver = H.P.8565E, RBW = 1MHz									

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
 FHSS Cordless Telephone

**Radiated Disturbance Test Data: Base Station, Harmonics, Average**

Test Date: 8 April 2003											
Engineer's Name: Kevin Carr											
<b>Tested as per (Table Top/Floor Standing): Table Top</b>											
Test Distance (meters): 1						Range: 1					
Freq. (MHz)	Ant.	Pol. V/H	RCVD Signal (dBµV)	Ant. Factor (dB)	Amp. Gain (-dB)	Passband filter Loss (dB)	Duty Cycle Corr. (-dB)	Dist Corr. (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)
<b>Low Ch.</b>											
11489.47	Hrn 1	V	78.3	40.9	38.8	2.7	20	9.5	53.6	54	0.4
11489.47	Hrn 1	H	75	40.9	38.8	2.7	20	9.5	50.3	54	3.7
17234.21	Hrn 1	V	67	43.5	38.5	2.2	20	9.5	44.7	54	9.3
17234.21	Hrn 1	H	72.8	43.5	38.5	2.2	20	9.5	50.5	54	3.5
22978.94	Hrn 5	V	64.3	45.7	39.3	0	20	9.5	41.2	54	12.8
22978.94	Hrn 5	H	61	45.7	39.3	0	20	9.5	37.9	54	16.1
28723.68	Hrn 5	V	45.3	46.5	29.8	0	20	9.5	32.5	54	21.5
28723.68	Hrn 5	H	42.5	46.5	29.8	0	20	9.5	29.7	54	24.3
34468.42	Hrn 5	V	44	49.2	29.6	0	20	9.5	34.1	54	19.9
34468.42	Hrn 5	H	45.3	49.2	29.6	0	20	9.5	35.4	54	18.6
<b>Mid Ch.</b>											
11570.69	Hrn 1	V	78	40.9	38.8	2.7	20	9.5	53.3	54	0.7
11570.69	Hrn 1	H	72	40.9	38.8	2.7	20	9.5	47.3	54	6.7
17356.03	Hrn 1	V	64.2	43.5	38.5	2.2	20	9.5	41.9	54	12.1
17356.03	Hrn 1	H	70	43.5	38.5	2.2	20	9.5	47.7	54	6.3
23141.38	Hrn 5	V	64.5	45.7	39.3	0	20	9.5	41.4	54	12.6
23141.38	Hrn 5	H	60	45.7	39.3	0	20	9.5	36.9	54	17.1
28926.72	Hrn 5	V	52.2	46.5	29.8	0	20	9.5	39.4	54	14.6
28926.72	Hrn 5	H	41.5	46.5	29.8	0	20	9.5	28.7	54	25.3
34712.06	Hrn 5	V	39.5	49.2	29.6	0	20	9.5	29.6	54	24.4
34712.06	Hrn 5	H	42	49.2	29.6	0	20	9.5	32.1	54	21.9
Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole											
Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Average = 1.0 MHz RBW											
Notes:		Measurement Receiver = H.P.8565E, RBW = 1MHz									



*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
 FHSS Cordless Telephone

Test Date: 8 April 2003											
Engineer's Name: Kevin Carr											
<b>Tested as per (Table Top/Floor Standing): Table Top</b>											
Test Distance (meters): 1						Range: 1					
Freq. (MHz)	Ant.	Pol. V/H	RCVD Signal (dBμV)	Ant. Factor (dB)	Amp. Gain (-dB)	Passband filter Loss (dB)	Duty Cycle Corr. (-dB)	Dist Corr. (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)
<b>High Ch.</b>											
11651.9	Hrn 1	V	74	40.9	38.8	2.7	20	9.5	49.3	54	4.7
11651.9	Hrn 1	H	69.7	40.9	38.8	2.7	20	9.5	45	54	9
17477.86	Hrn 1	V	60.2	43.5	38.5	2.2	20	9.5	37.9	54	16.1
17477.86	Hrn 1	H	65.5	43.5	38.5	2.2	20	9.5	43.2	54	10.8
23303.81	Hrn 5	V	63.2	45.7	39.3	0	20	9.5	40.1	54	13.9
23303.81	Hrn 5	H	61.3	45.7	39.3	0	20	9.5	38.2	54	15.8
29129.76	Hrn 5	V	42.5	46.5	29.8	0	20	9.5	29.7	54	24.3
29129.76	Hrn 5	H	44.8	46.5	29.8	0	20	9.5	32	54	22
34955.71	Hrn 5	V	39.5	49.2	29.6	0	20	9.5	29.6	54	24.4
34955.71	Hrn 5	H	44.2	49.2	29.6	0	20	9.5	34.3	54	19.7
Note 1: Antenna Legend: BC = Biconical, BL = Bilog, LP = Log-Periodic, Horn = Horn, ED = EMCO Dipole											
Note 2: Detector Legend: Q-Peak = 120 kHz RBW, Average = 1.0 MHz RBW											
Notes:		Measurement Receiver = H.P.8565E, RBW = 1MHz									

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone



Duty Cycle Plots

Base

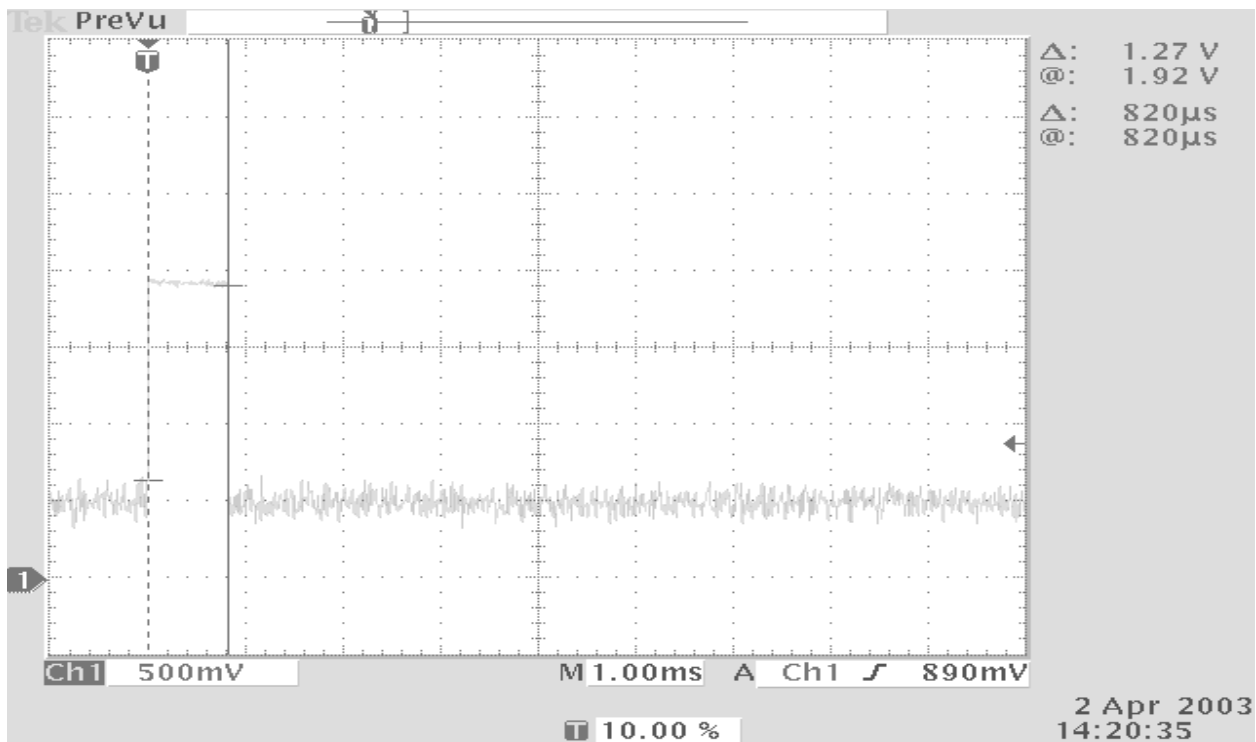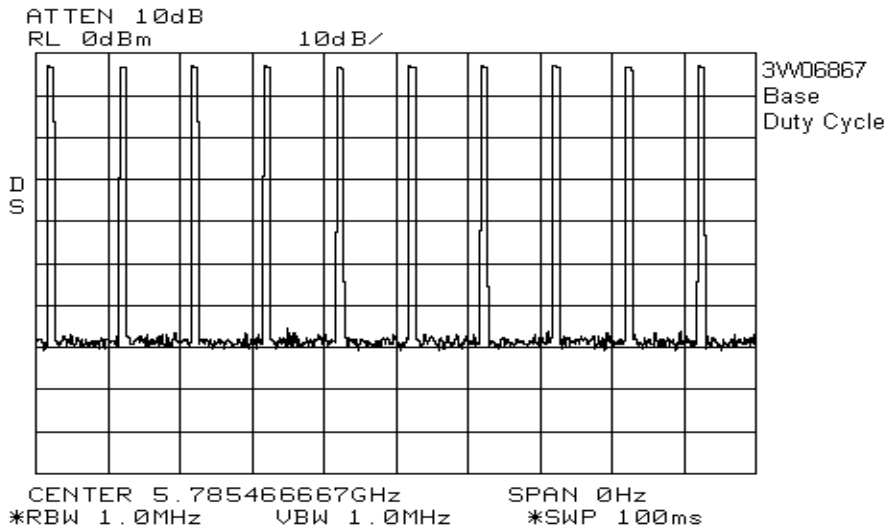



EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

Handset

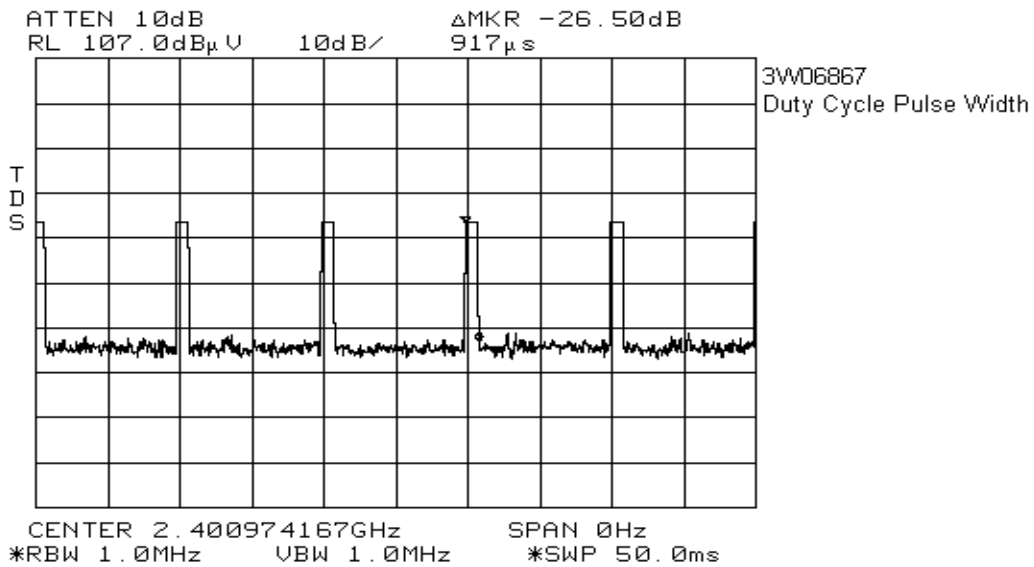
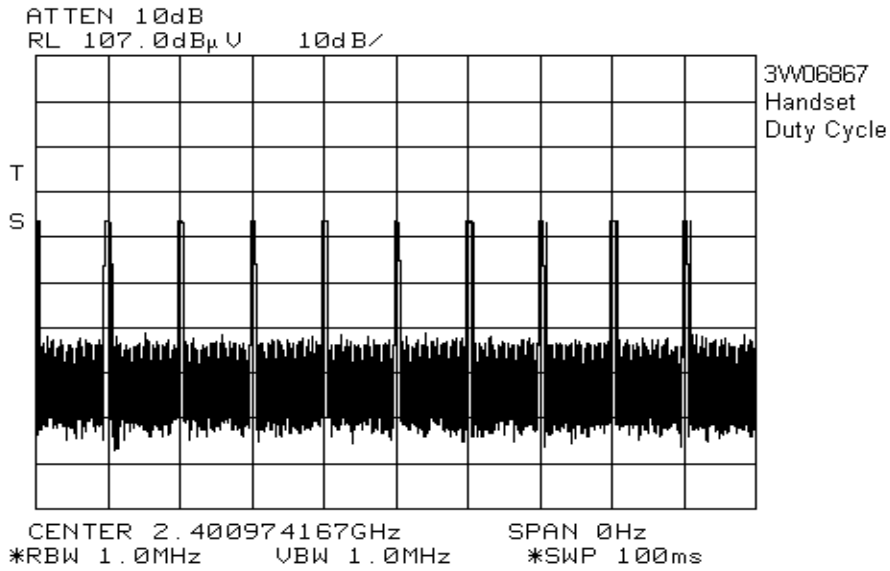


EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

**20 dB Band Edge**  
Handset

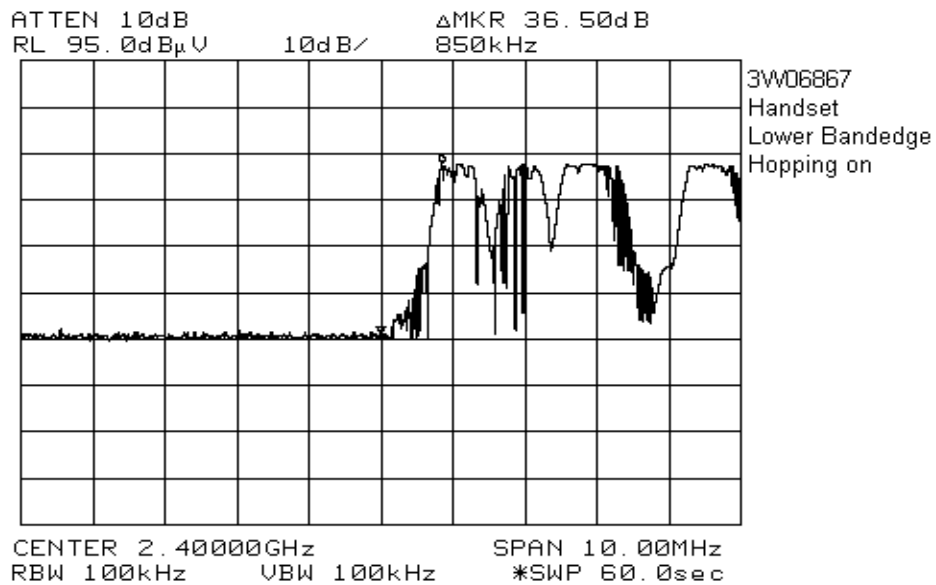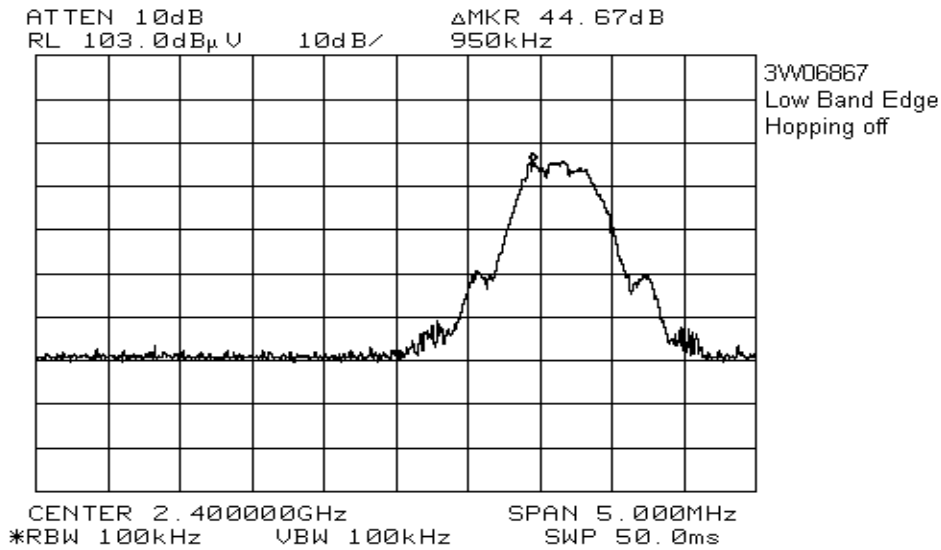


EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
 FHSS Cordless Telephone

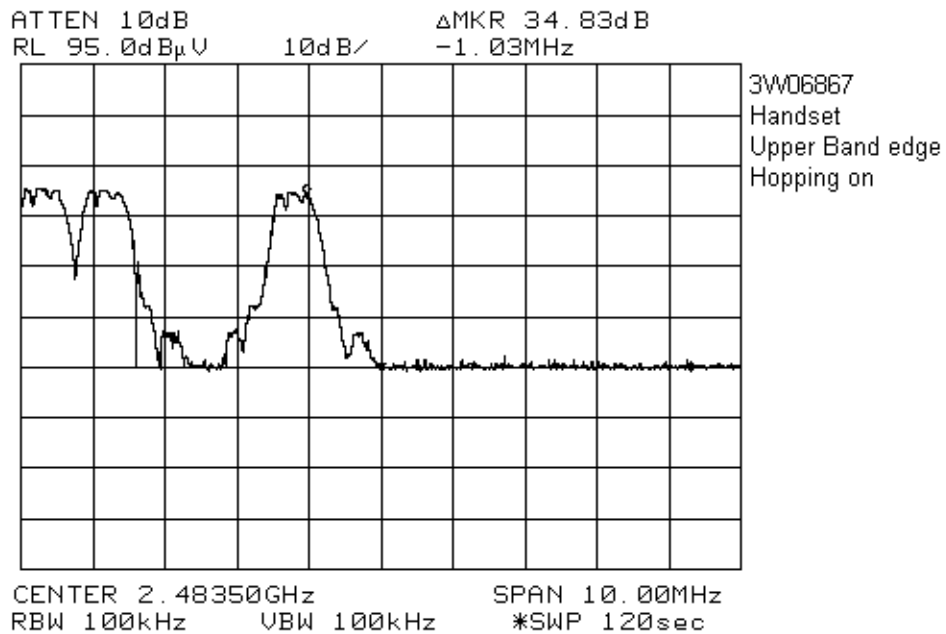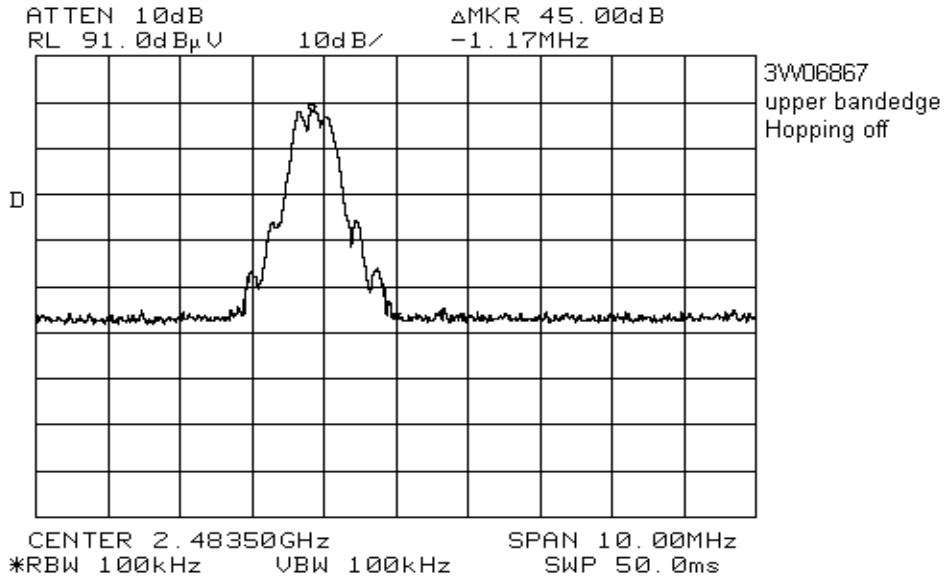

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---



**Band Edge (Restricted Band)  
Marker Delta Method**

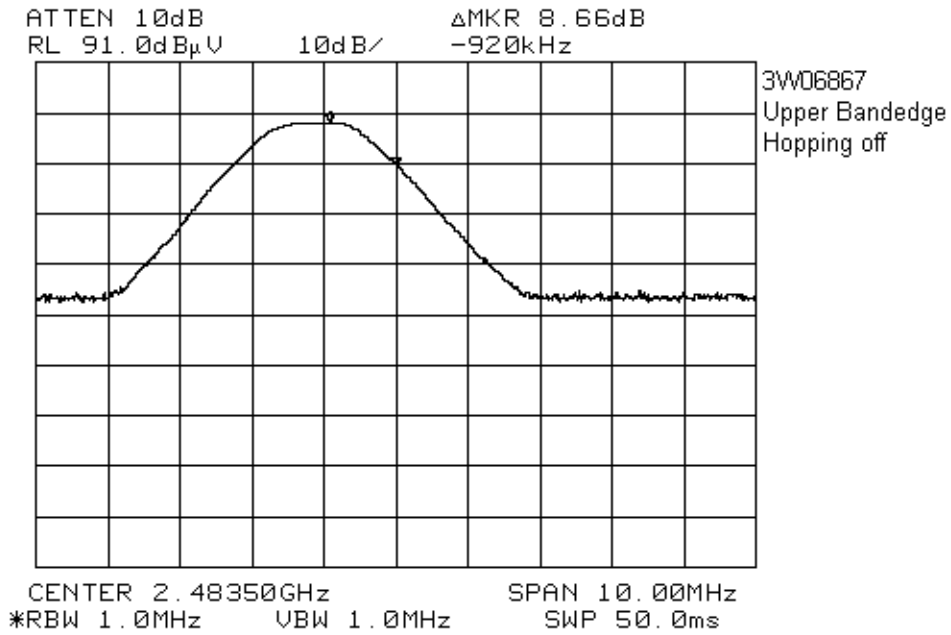



**Peak Level, Band Edge = 79.8dBuV + 35.1dB – 8.7dB = 106.2dBuV @ 3m.**  
**Peak Band Edge Level (Marker Delta): = 106.2 – 45 = 61.2dBuV/m at 3 m.**  
**Average = 61.2 – 20 = 41.2dBuV/m @ 3m.**

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

20dB Band Edge, Base

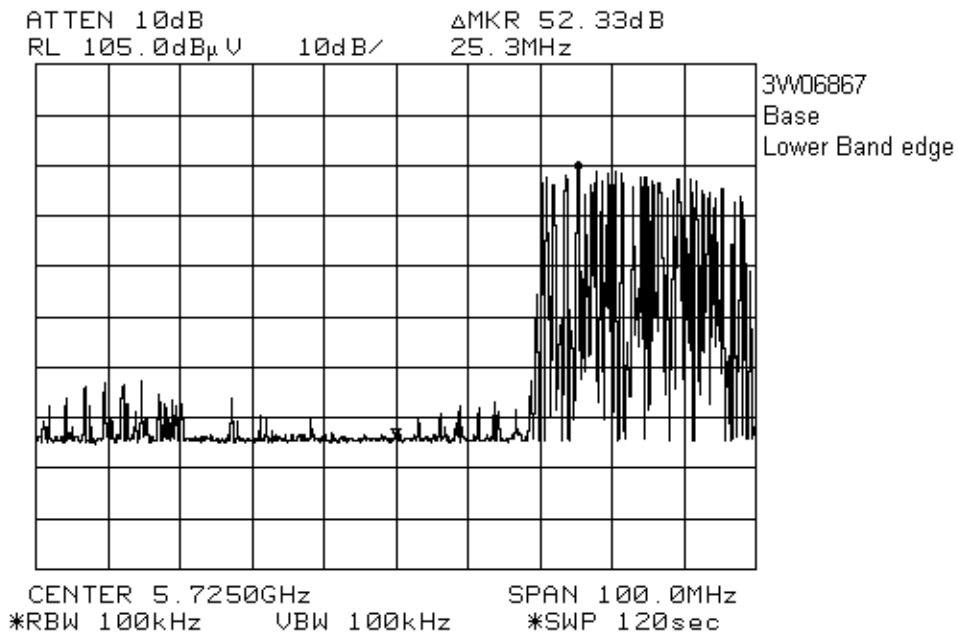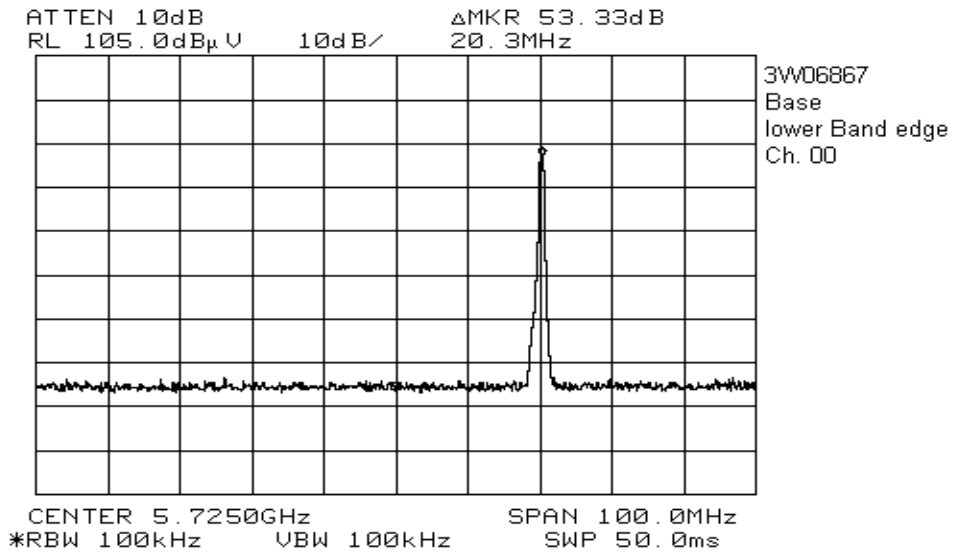

EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

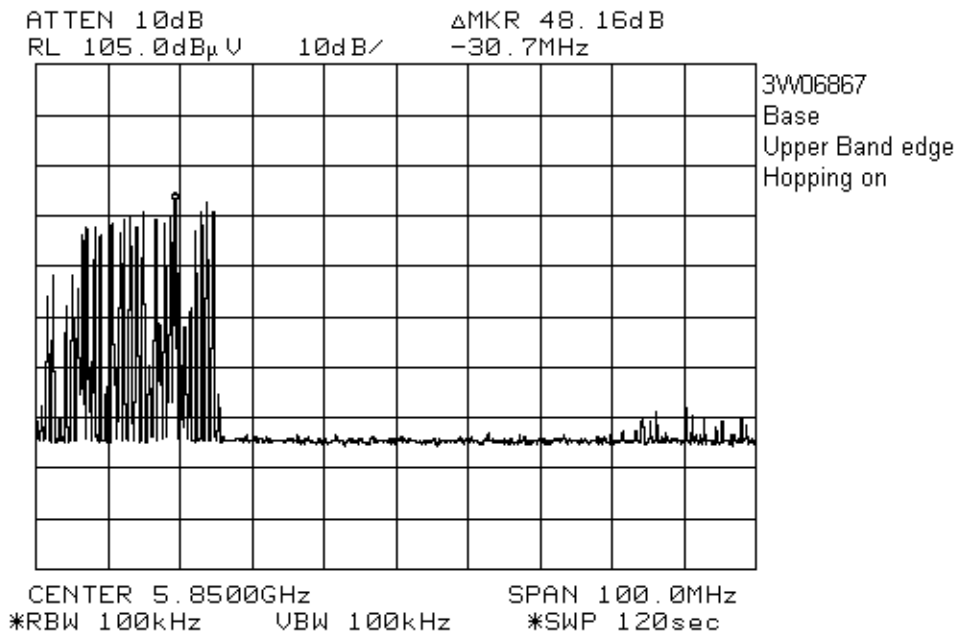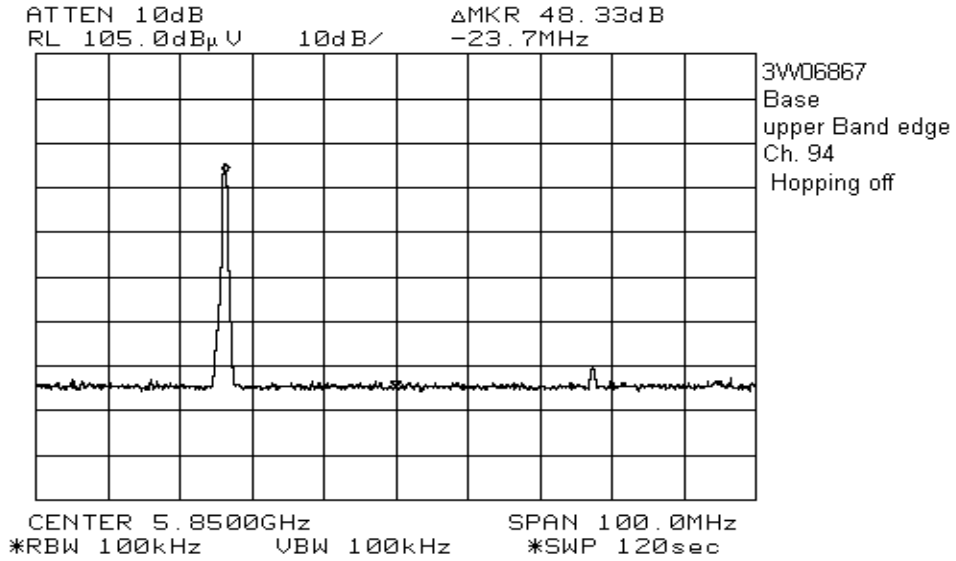


*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---

**Set-up Photo:**

Base

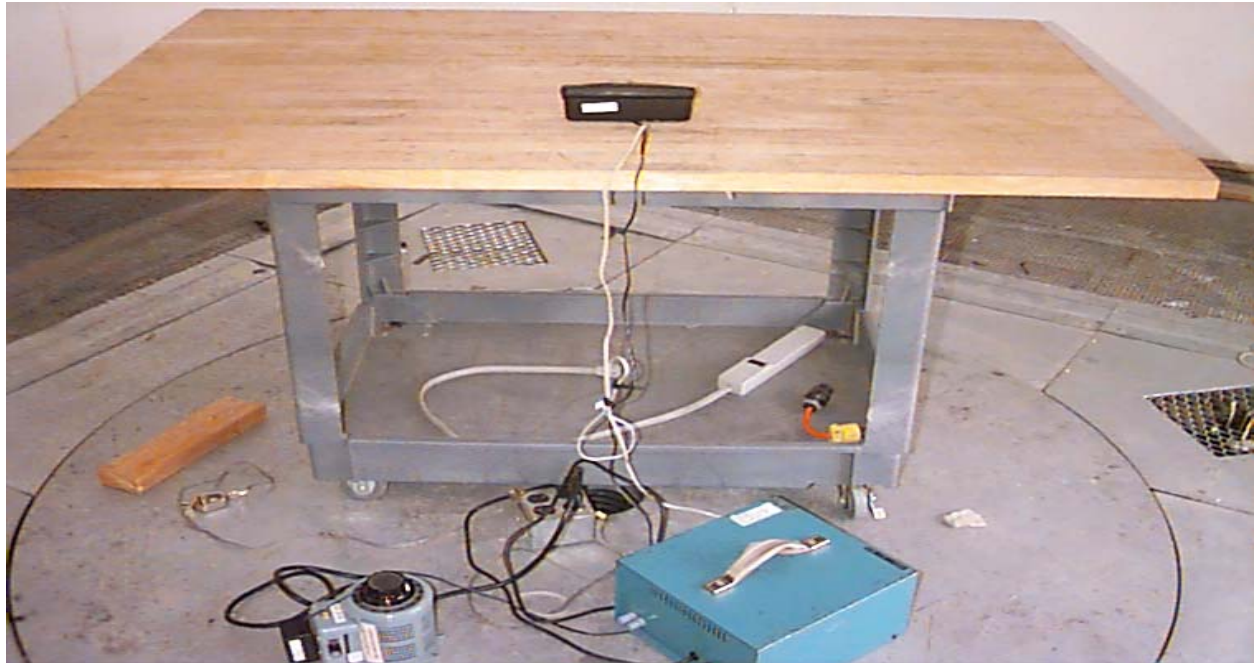

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

---


Handset




EQUIPMENT: VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
FHSS Cordless Telephone

## Section 10. Block Diagrams

### Test Site For Radiated Emissions

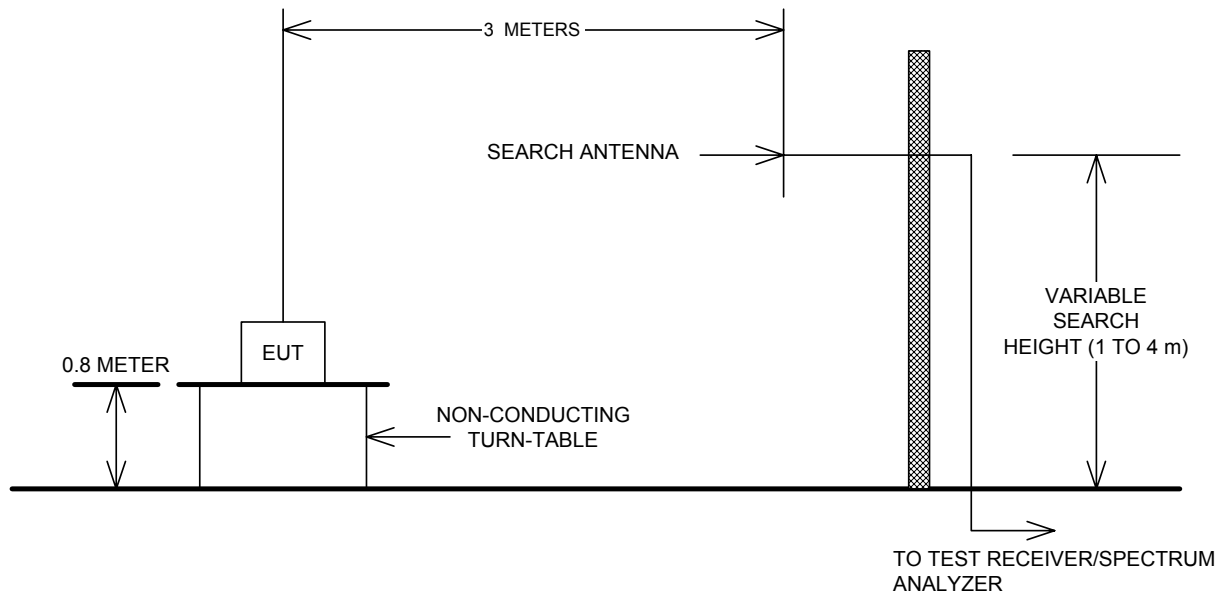

### Conducted Emissions

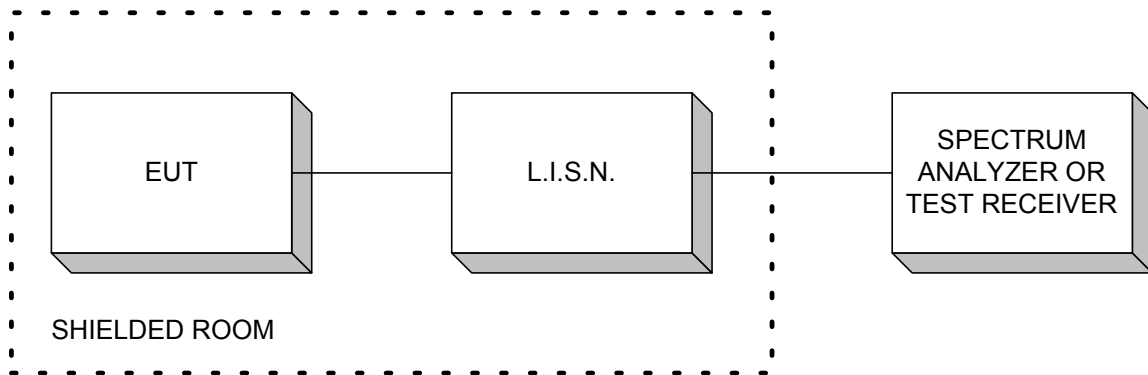

*EQUIPMENT:* VTECH 5825 & VTECH 5850, 5.8/2.4 GHz  
 FHSS Cordless Telephone

**Section 11. Test Equipment List**

Conducted Disturbance at Mains Test Equipment Used:

CAL Cycle	Equipment	Manufacturer	Model No.	Asset/Serial No.	Last Cal.	Next Cal.
1 Year	LISN	EMCO	4825/2	FA001545	Oct. 25/02	Oct. 25/03
1 Year	Receiver	Rohde & Schwarz	ESH3	FA000872	Oct. 09/02	Oct. 09/03
Extended	Spectrum Analyzer	Hewlett-Packard	8566B	FA001309	Nov. 27/01	May. 27/03
Extended	Spectrum Analyzer Display	Hewlett-Packard	85662A	FA001309	Nov. 27/01	May. 27/03
1 Year	Transient Limiter	Hewlett-Packard	1194 7A	FA000975	Aug. 30/02	Aug. 30/03

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use, OUT = Out For CAL/Repair

**Equipment List - Radiated Emissions**

CAL Cycle	Equipment	Manufacturer	Model No.	Asset/Serial No.	Last Cal.	Next Cal.
1 Year	Receiver	Rohde & Schwarz	ESVS-30	FA001437	July. 04/02	July. 04/03
1 Year	Spectrum Analyzer	Hewlett-Packard	8565E	FA000981	July. 15/02	July. 15/03
1 Year	Biconical (1) Antenna	EMCO	3109	FA000805	Aug. 22/02	Aug. 22/03
1 Year	Horn Antenna #1	EMCO	3115	FA000649	Dec. 23/02	Dec. 23/03
1 Year	Log Periodic Antenna #1	EMCO	LPA-25	FA000477	Aug. 23/02	Aug. 23/03
1 Year	1.0 – 2.0 GHz Amplifier	JCA	12-400	FA001498	June. 04/02	June. 04/03
1 Year	2.0 – 4.0 GHz Amplifier	JCA	24-600	FA001496	June. 04/02	June. 04/03
1 Year	4.0 – 8.0 GHz Amplifier	JCA	48-600	FA001497	June. 04/02	June. 04/03
1 Year	18-40 GHz Horn Antenna #5	ETS	3116	FA001847	13 Feb. 2003	13 Feb. 2004
COU	8.2 – 12 GHz Passband Filter	Dorado	WA-90-S	-----	COU	COU
COU	12 – 18 GHz Passband Filter	Dorado	62-SMA	-----	COU	COU
COU	5.0 – 18.0 GHz Amplifier	NARDA	DWT-186N23U40	FA001409	COU	COU
COU	18.0 – 26.0 GHz Amplifier	NARDA	BBS-1826N612	FA001550	COU	COU
COU	26 – 40.0 GHz Amplifier	NARDA	DBL-2640N610	FA001556	COU	COU

Note: N/A = Not Applicable, NCR = No Cal Required, COU = CAL On Use, OUT = Out For CAL/Repair