




Appendix B

Peak Output Power




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
30 dBm	22.78 dBm	VBW	1 MHz		
	2.40110510 GHz	SWT	5 ms	Unit	dBm

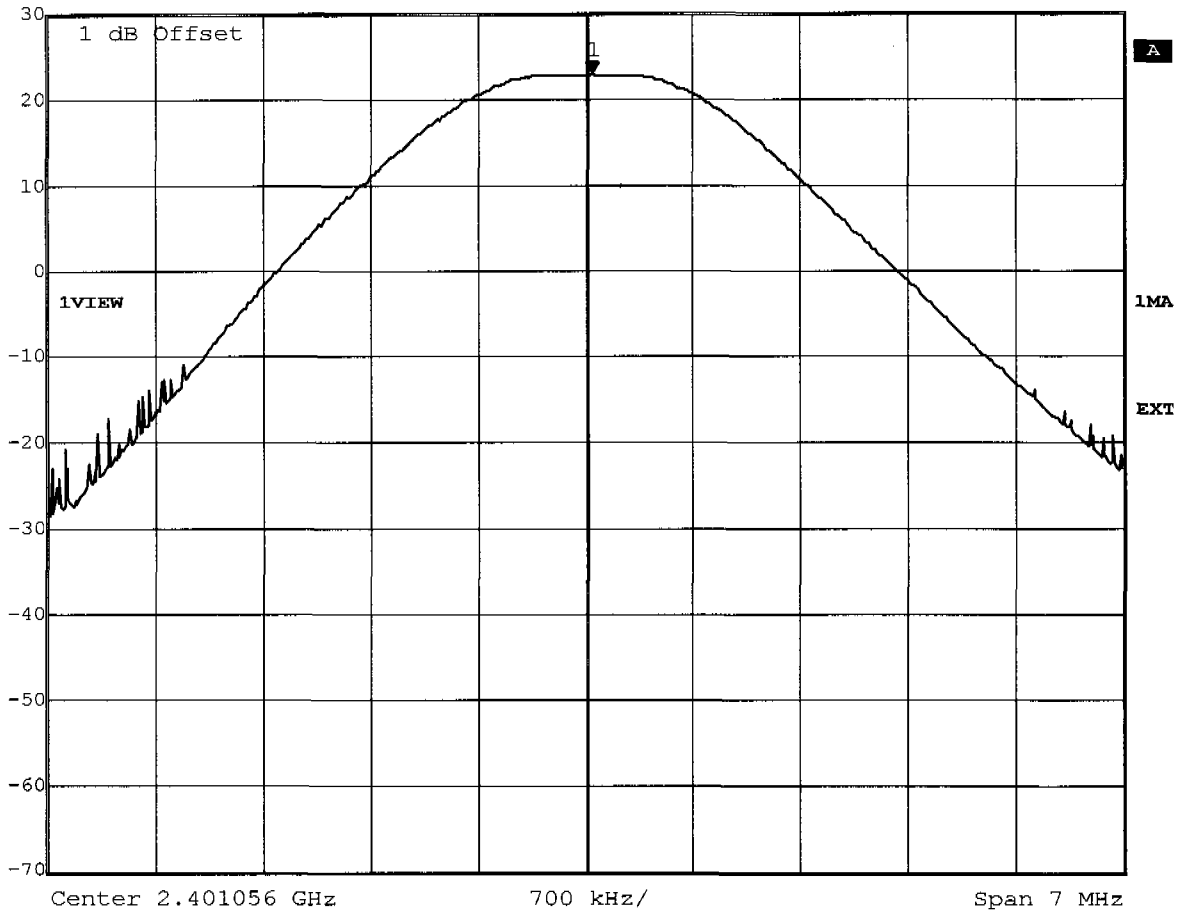

Title: Peak Output Power conducted Ch.: 0 100% Voltage
Comment A: USB7100 / 7200 Base
Date: 14.JUL.2005 13:57:12




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
30 dBm	22.57 dBm	VBW	1 MHz		
	2.44162893 GHz	SWT	5 ms	Unit	dBm

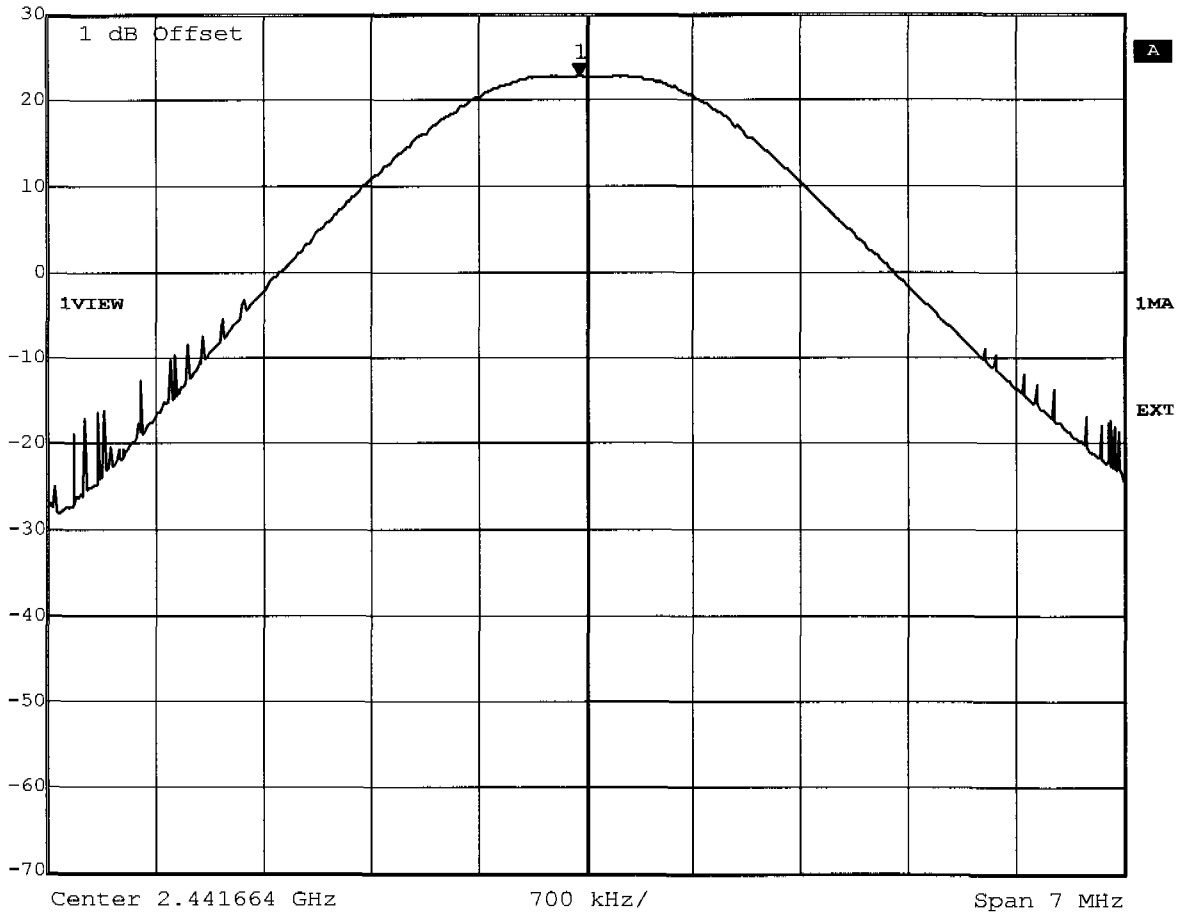

Title: Peak Output Power conducted Ch.: 47 100% Voltage
Comment A: USB7100 / 7200 Base
Date: 14.JUL.2005 13:56:26




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
30 dBm	22.49 dBm	VBW	1 MHz		
	2.48226499 GHz	SWT	5 ms	Unit	dBm

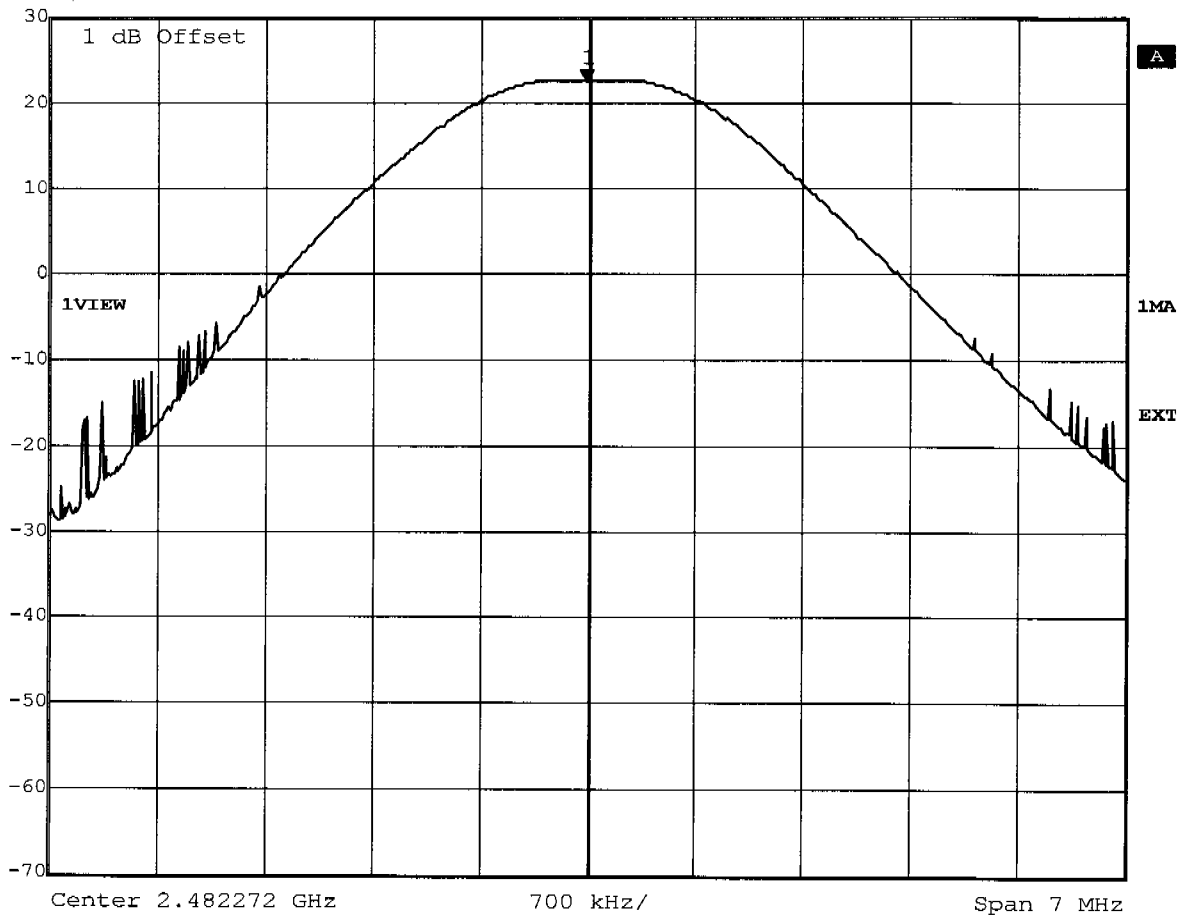

Title: Peak Output Power conducted Ch.: 94 100% Voltage
Comment A: USB7100 / 7200 Base
Date: 14.JUL.2005 13:55:37




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
30 dBm	22.78 dBm	VBW	1 MHz		
	2.40107704 GHz	SWT	5 ms	Unit	dBm

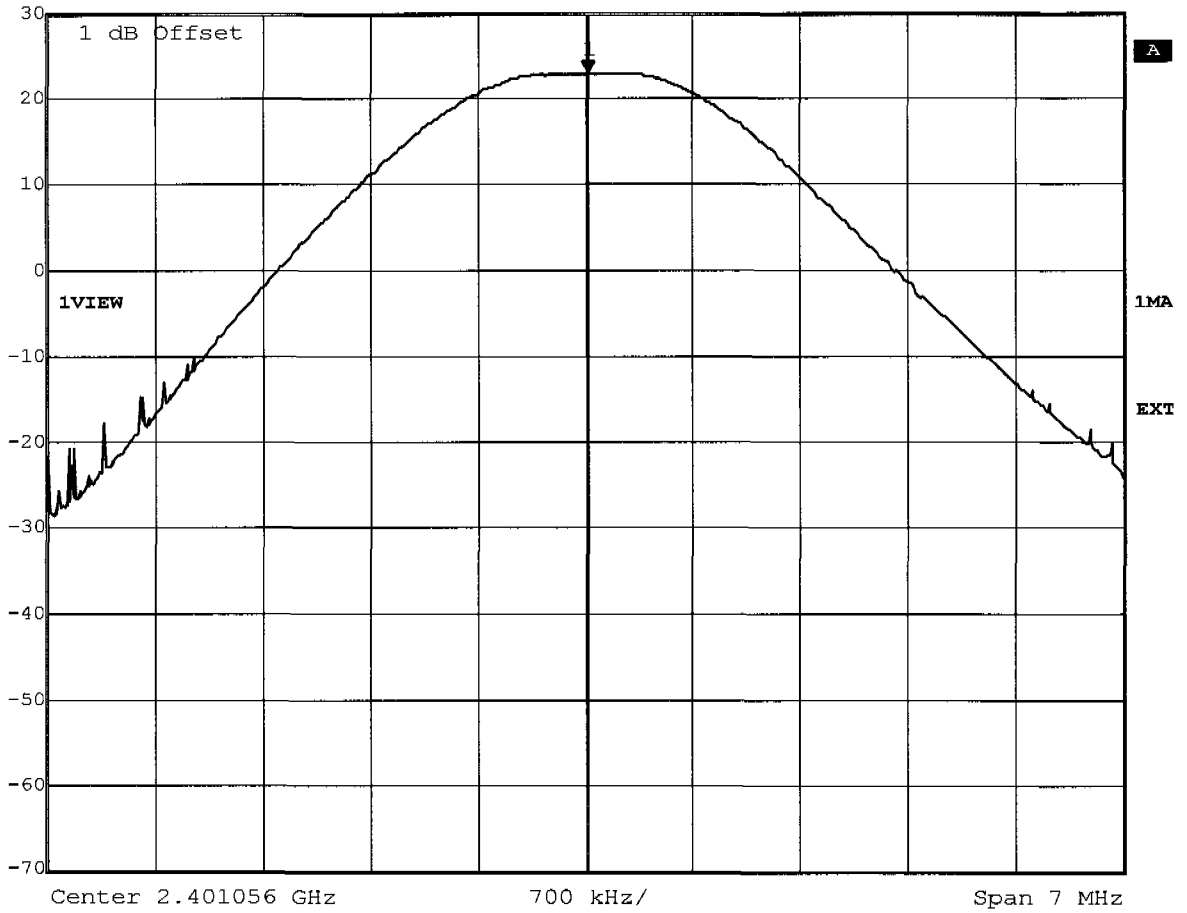

Title: Peak Output Power conducted Ch.: 0 85% Voltage
Comment A: USB7100 / 7200 Base
Date: 14.JUL.2005 13:59:13




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	22.65 dBm	VBW	1 MHz	
30 dBm	2.44169907 GHz	SWT	5 ms	Unit dBm

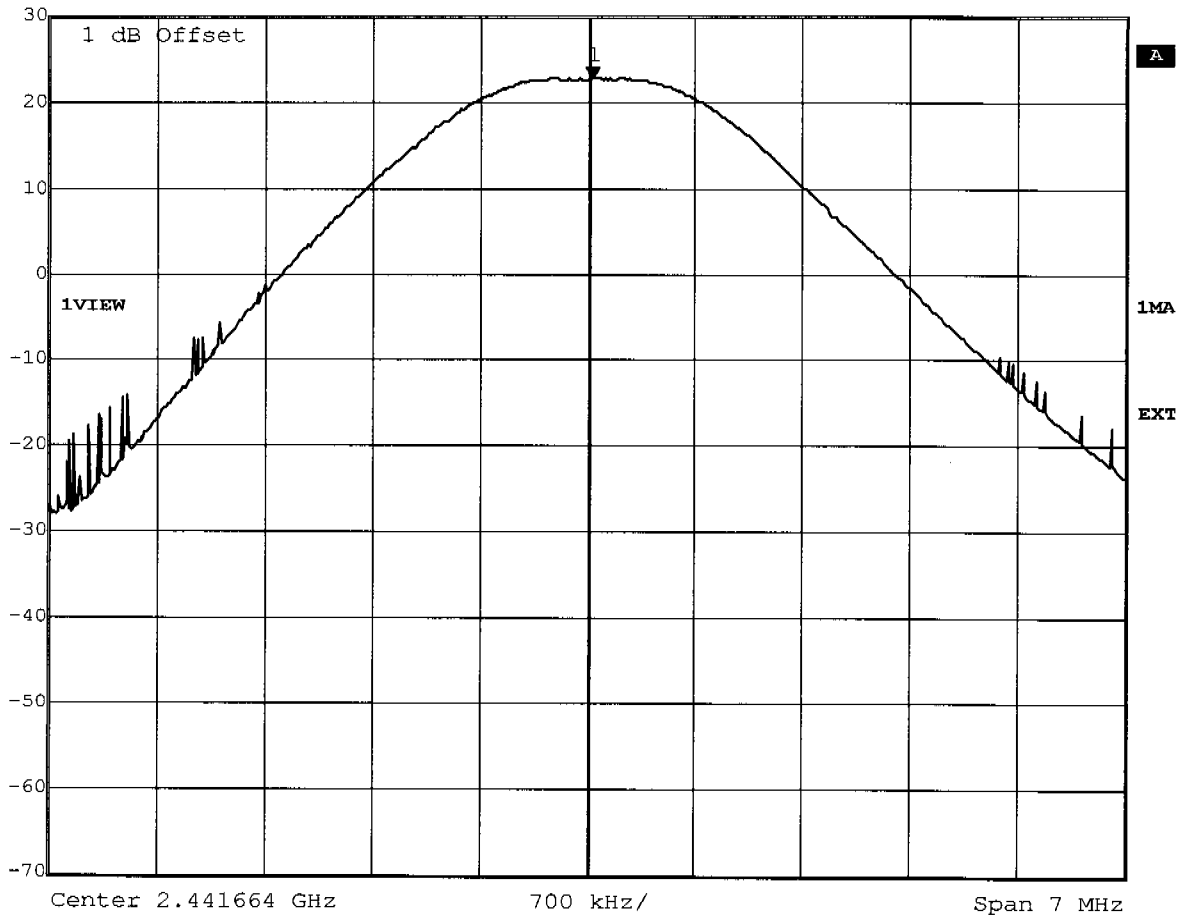

Title: Peak Output Power conducted Ch.: 47 85% Voltage
Comment A: USB7100 / 7200 Base
Date: 14.JUL.2005 14:00:17




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	22.55 dBm	VBW	1 MHz	
30 dBm	2.48234915 GHz	SWT	5 ms	Unit dBm

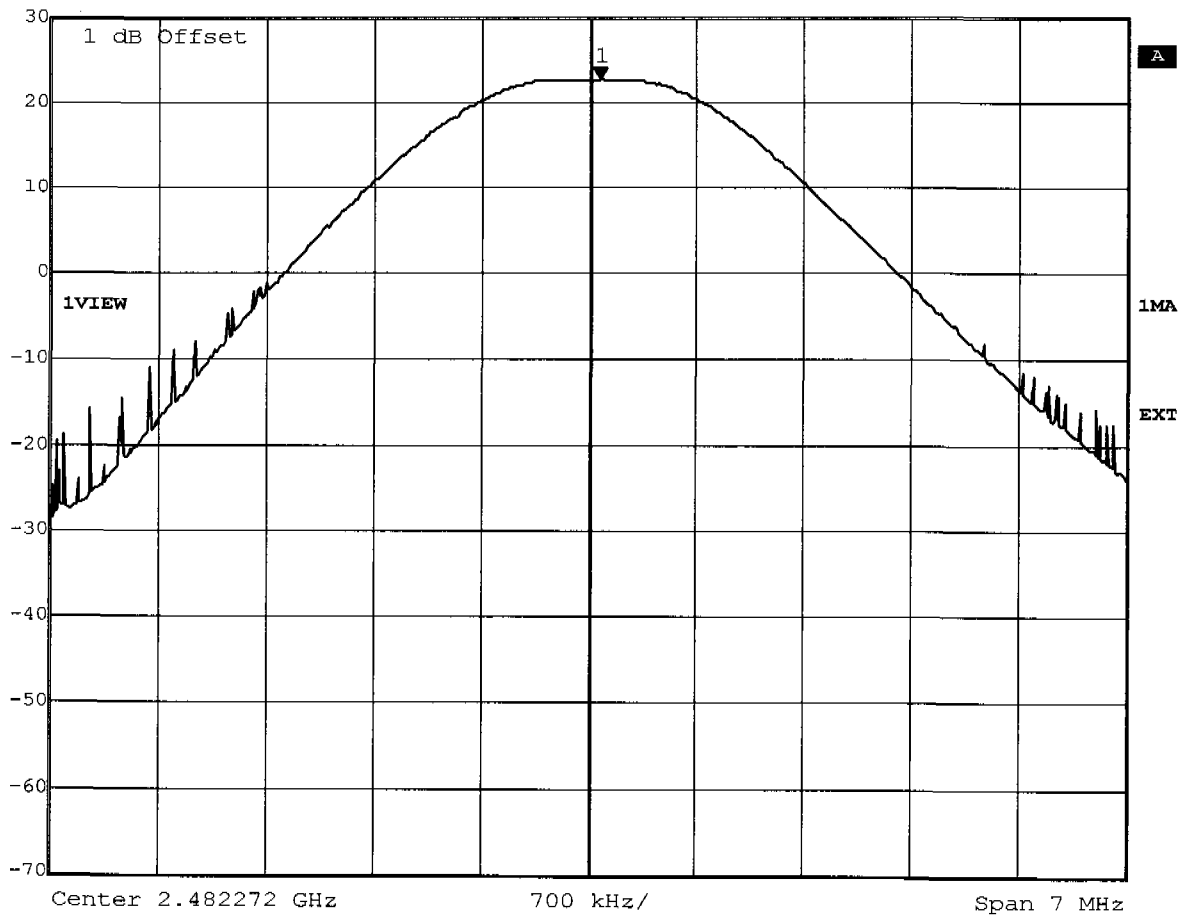

Title: Peak Output Power conducted Ch.: 94 85% Voltage
Comment A: USB7100 / 7200 Base
Date: 14.JUL.2005 14:01:10




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
30 dBm	22.85 dBm	VBW	1 MHz		
	2.40113315 GHz	SWT	5 ms	Unit	dBm

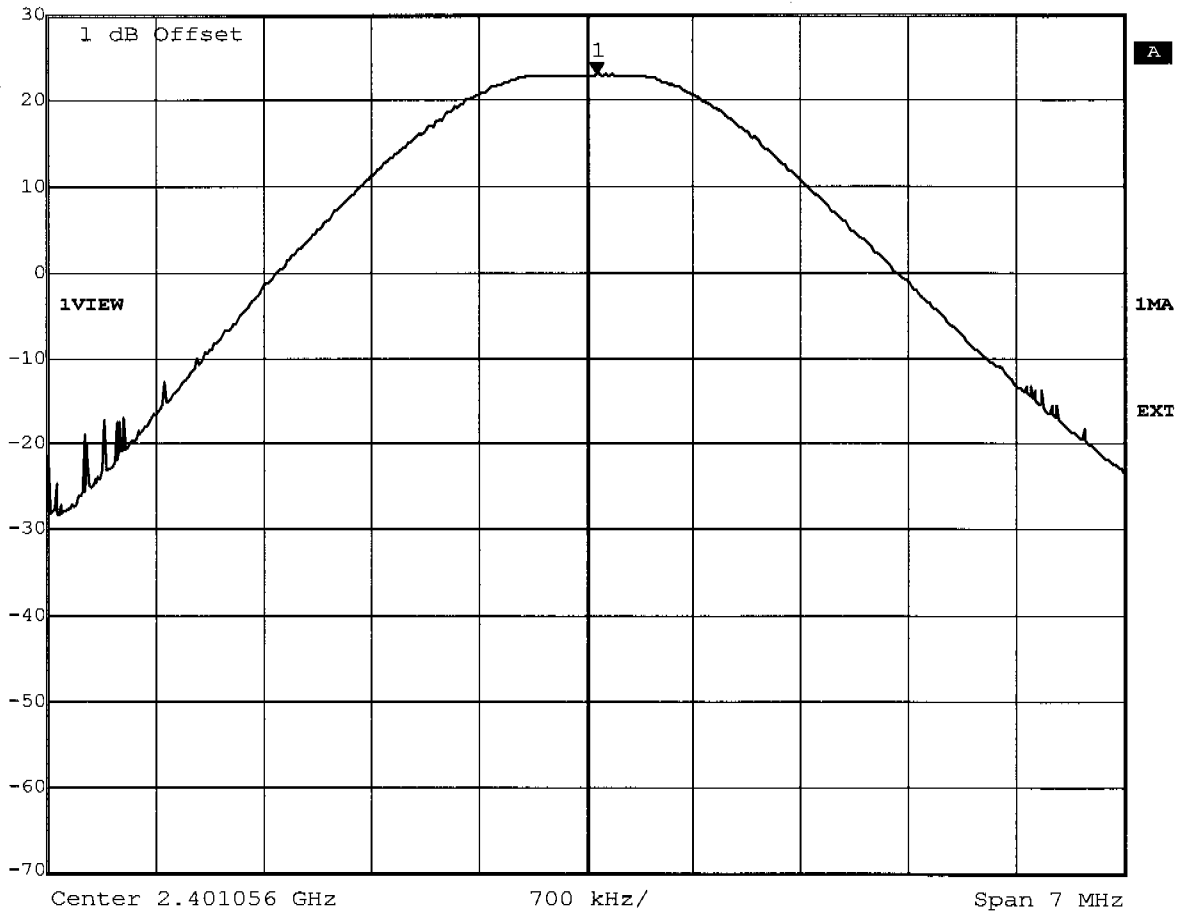

Title: Peak Output Power conducted Ch.: 0 115% Voltage
Comment A: USB7100 / 7200 Base
Date: 14.JUL.2005 14:05:38




Ref Lvl	Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
30 dBm	22.59 dBm	VBW	1 MHz		
	2.44181129 GHz	SWT	5 ms	Unit	dBm

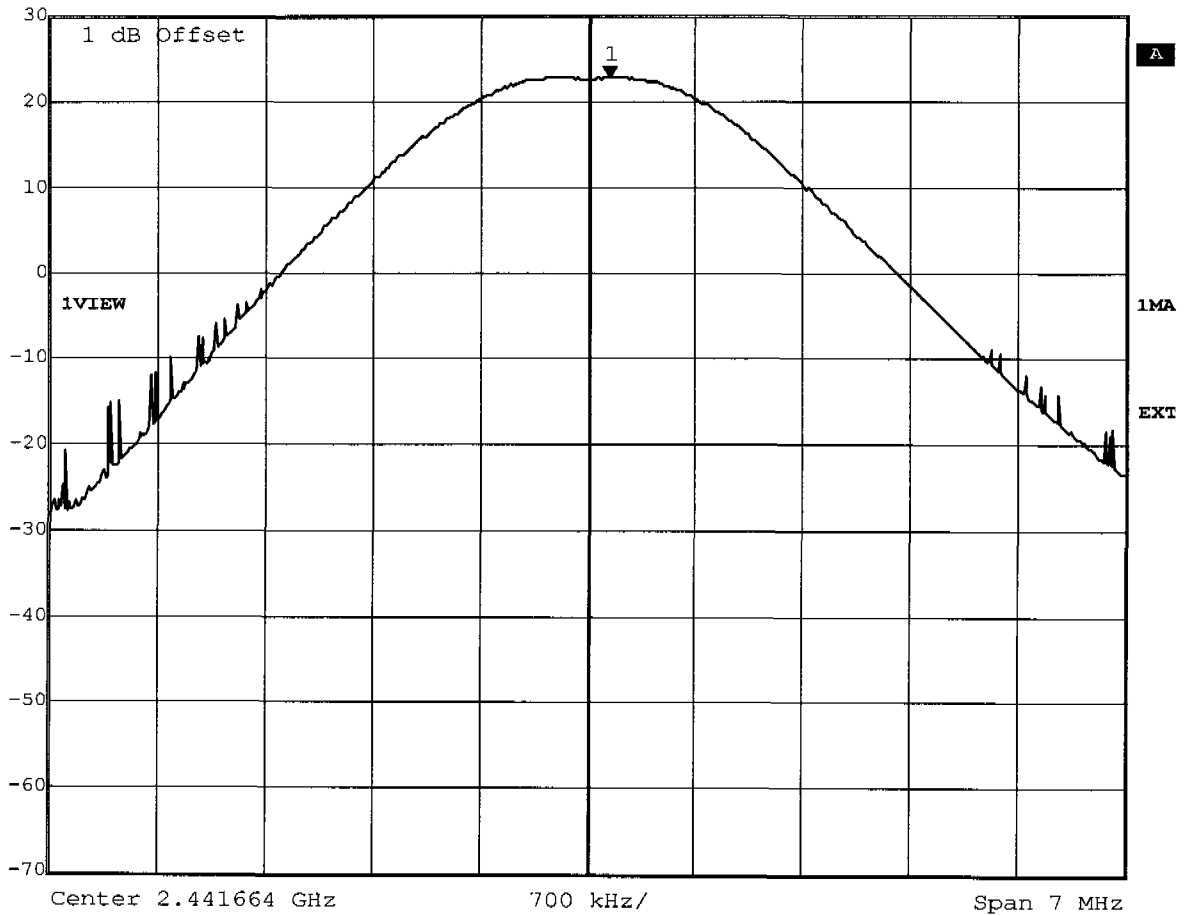

Title: Peak Output Power conducted Ch.: 47 115% Voltage
Comment A: USB7100 / 7200 Base
Date: 14.JUL.2005 14:04:48



Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	22.61 dBm	VBW	1 MHz	
30 dBm	2.48233513 GHz	SWT	5 ms	Unit dBm

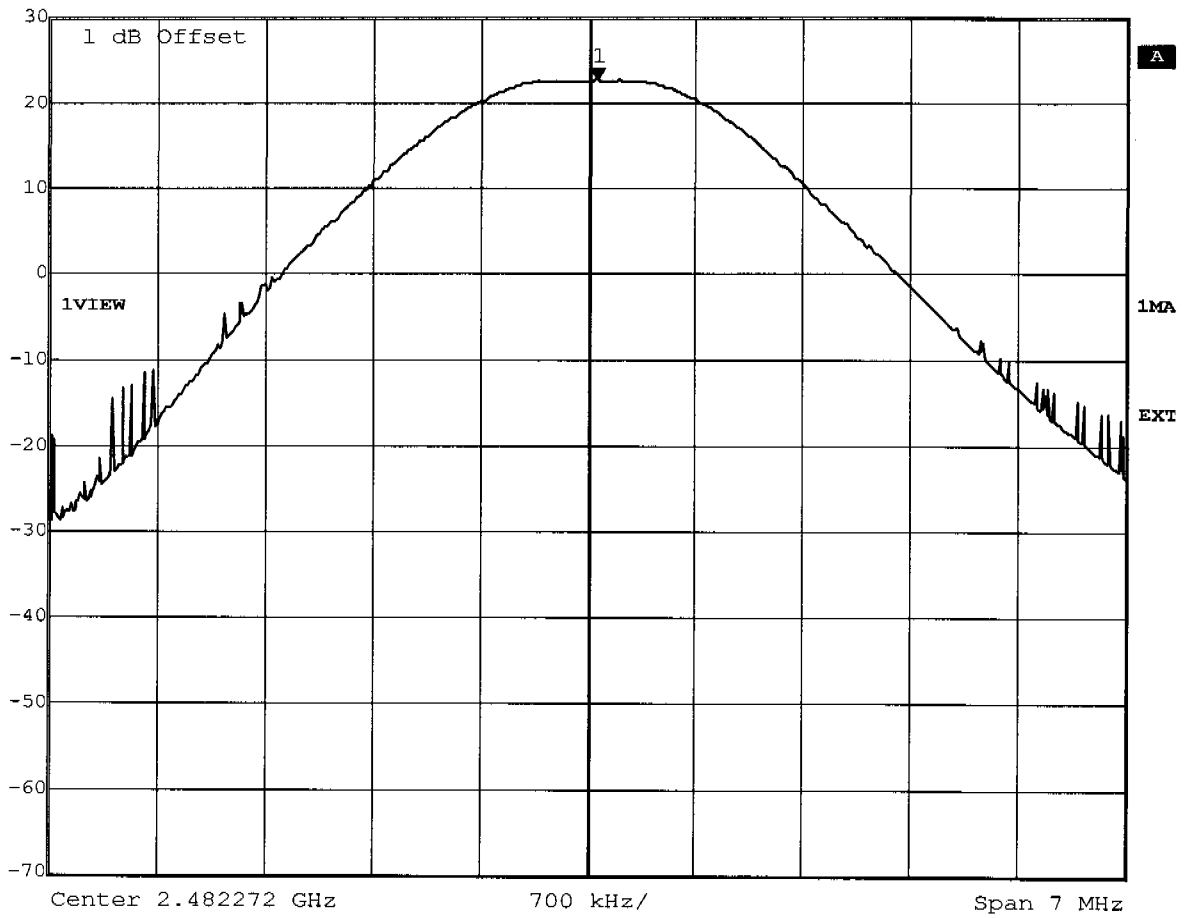


Title: Peak Output Power conducted Ch.: 94 115% Voltage
Comment A: USB7100 / 7200 Base
Date: 14.JUL.2005 14:03:18

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 20.75dBm, RBW: 5MHz

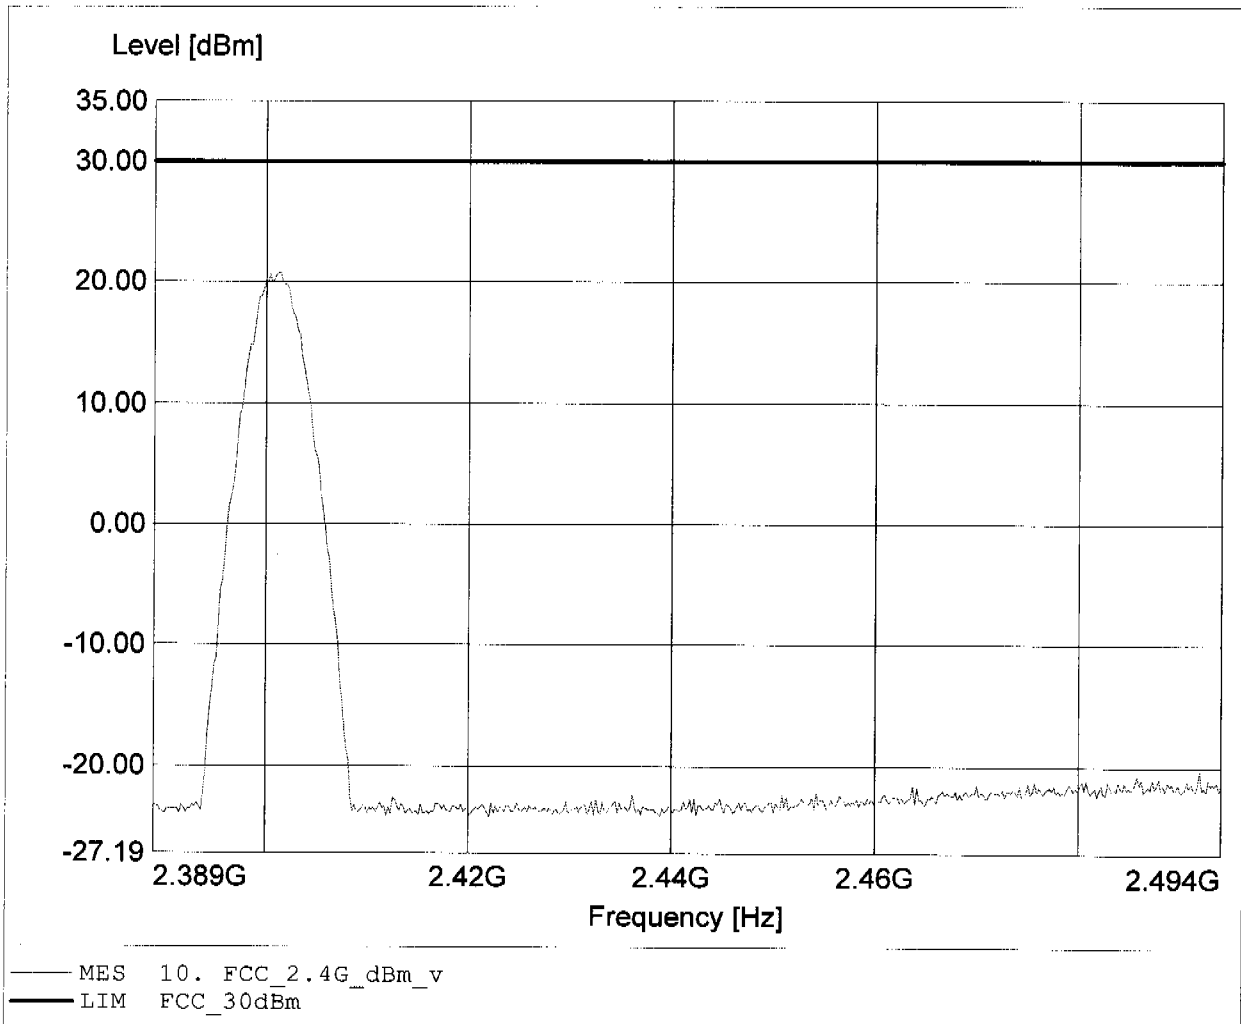

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 22.61dBm, RBW: 5MHz

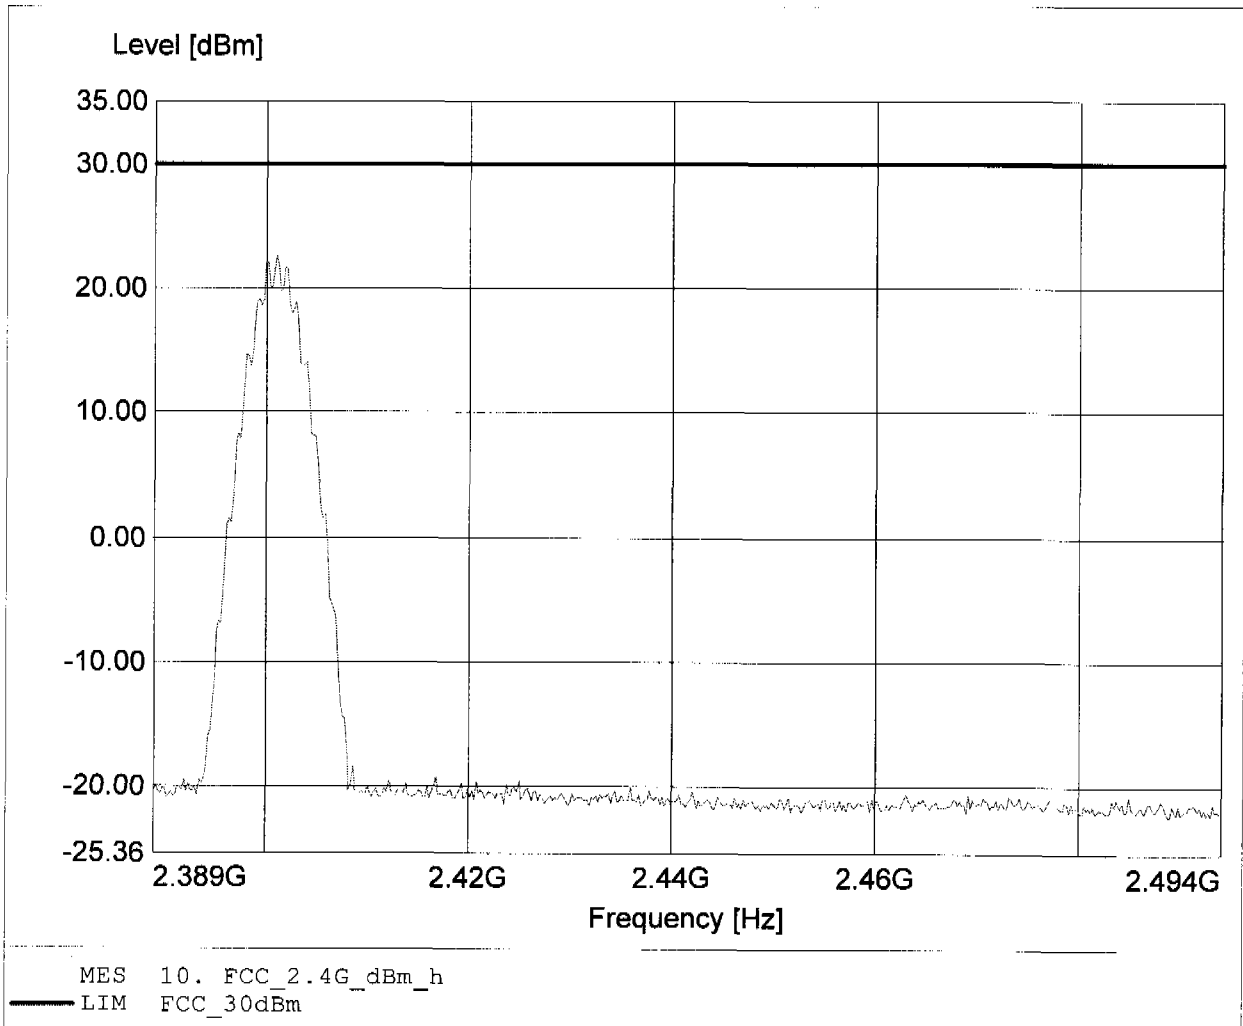

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 20.64dBm, RBW: 5MHz

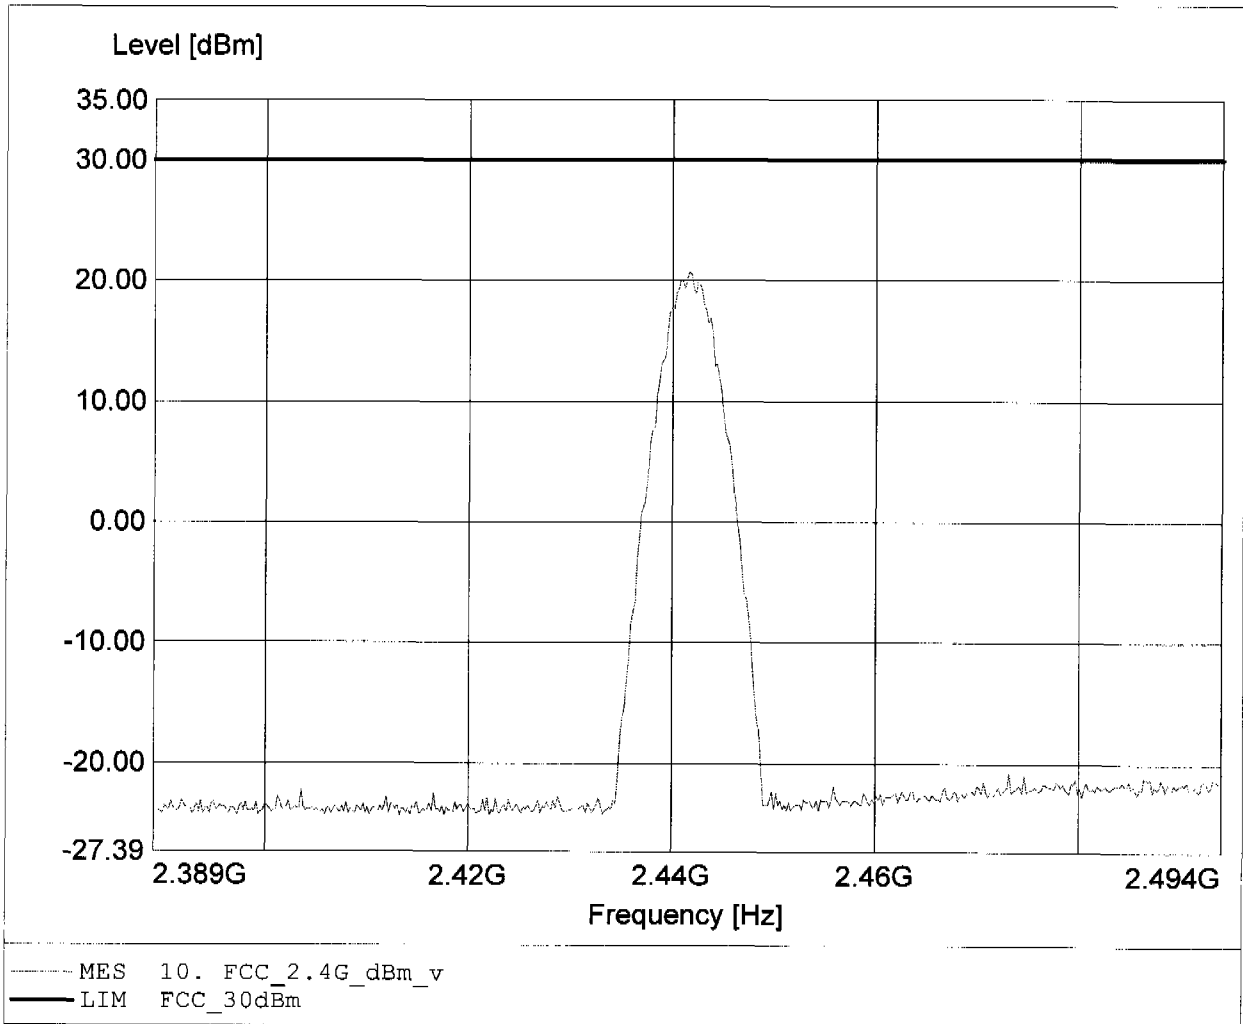

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 21.33dBm, RBW: 5MHz

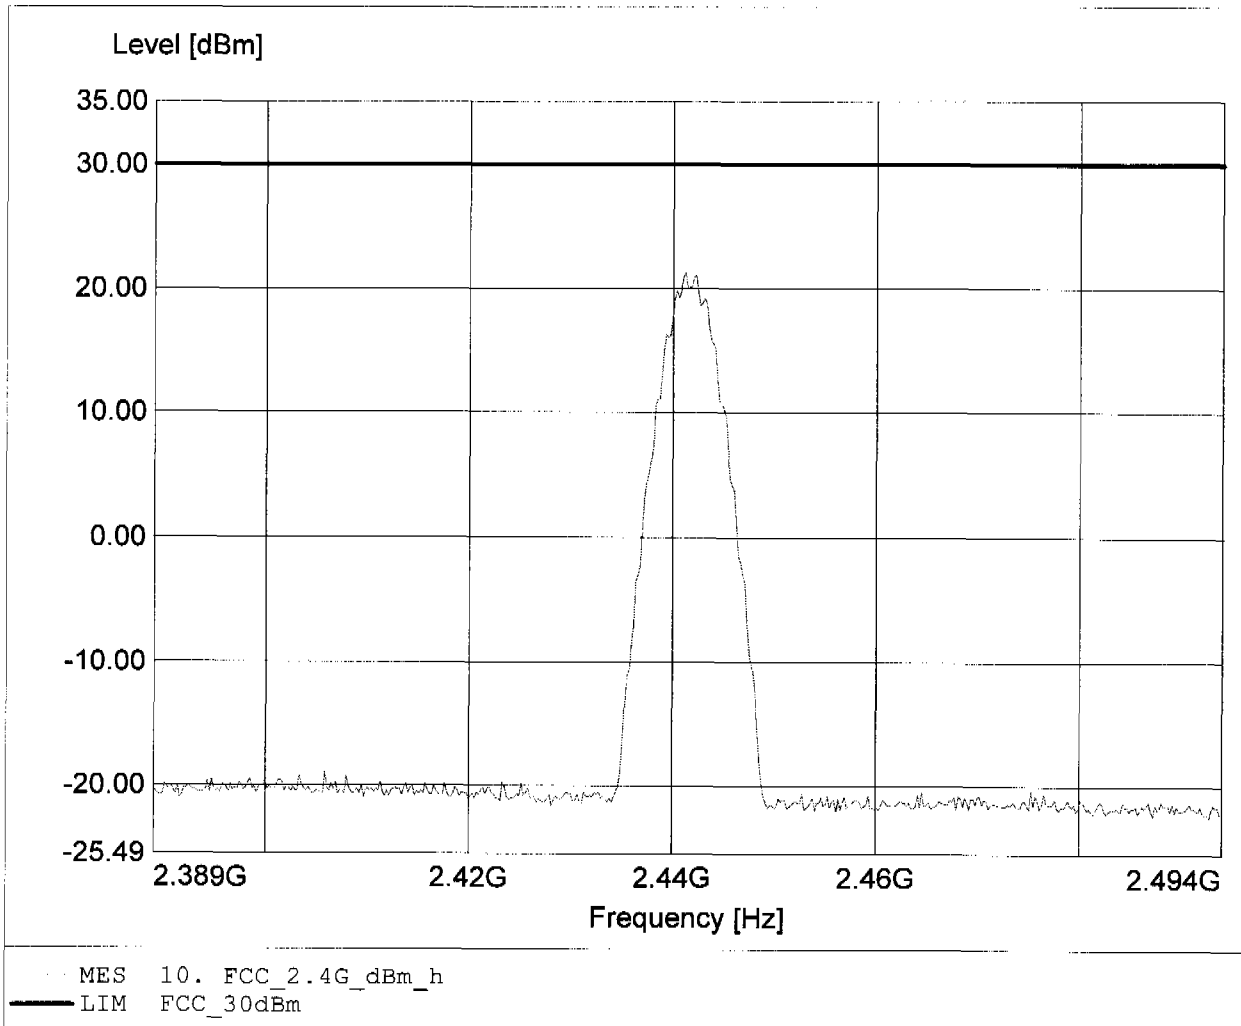

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 22.77dBm, RBW: 5MHz

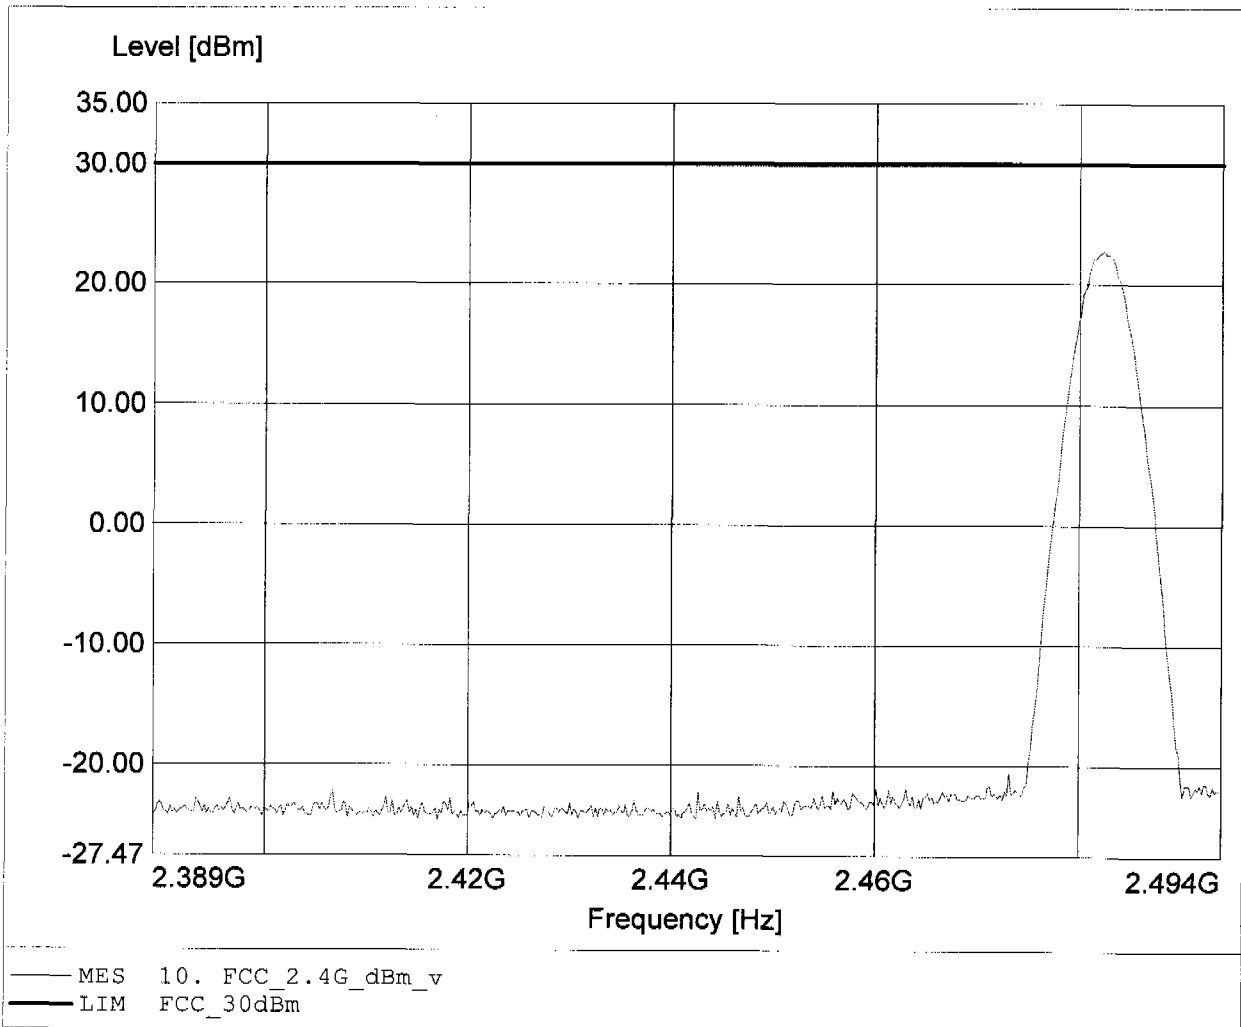

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 21.51dBm, RBW: 5MHz

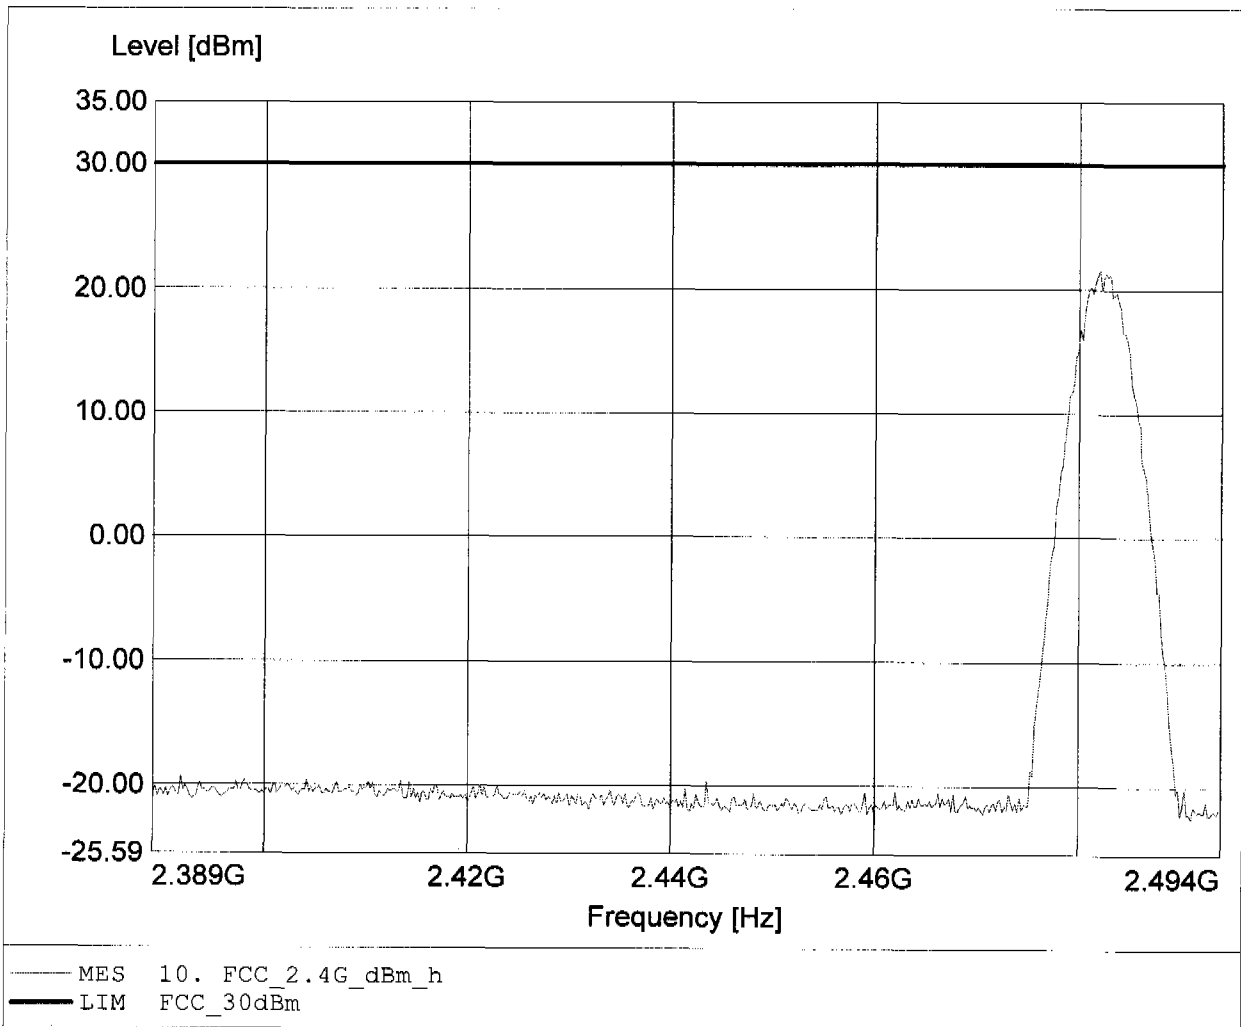

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 2 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 13.56dBm, RBW: 5MHz

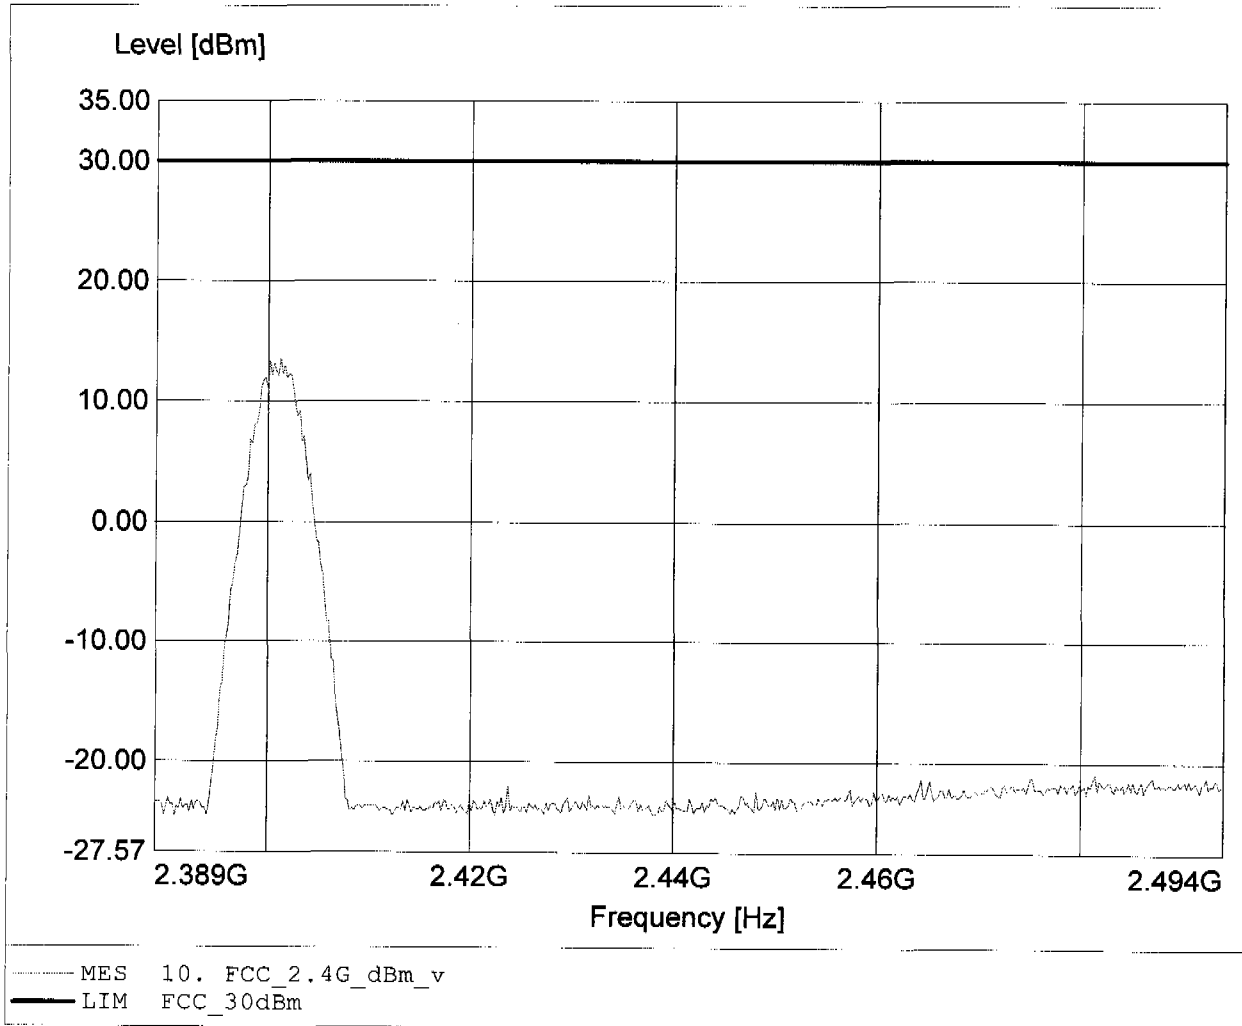

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 2 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 26.62dBm, RBW: 5MHz

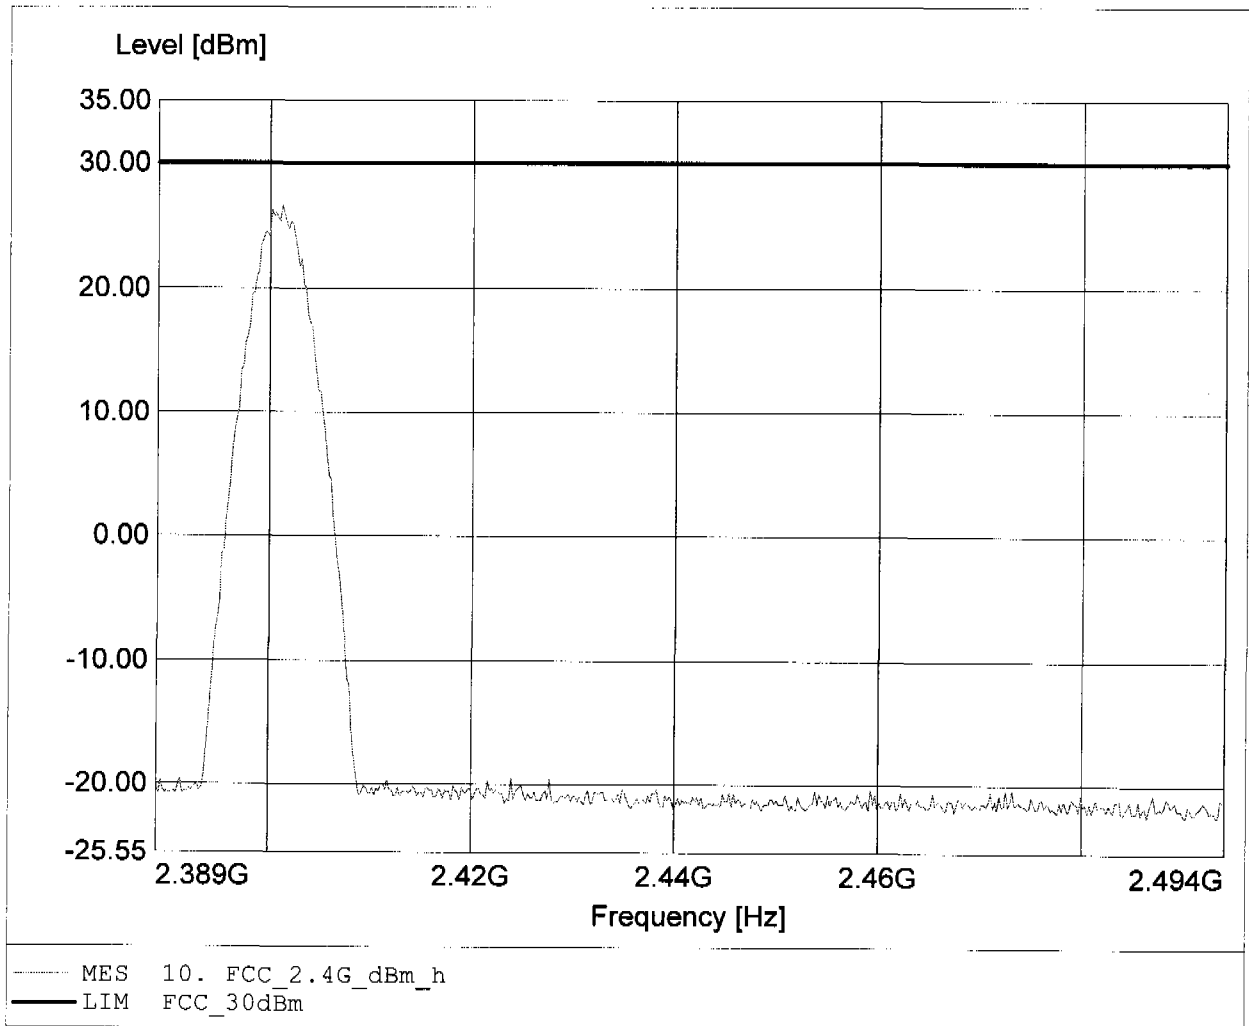

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 2 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 15.65dBm, RBW: 5MHz

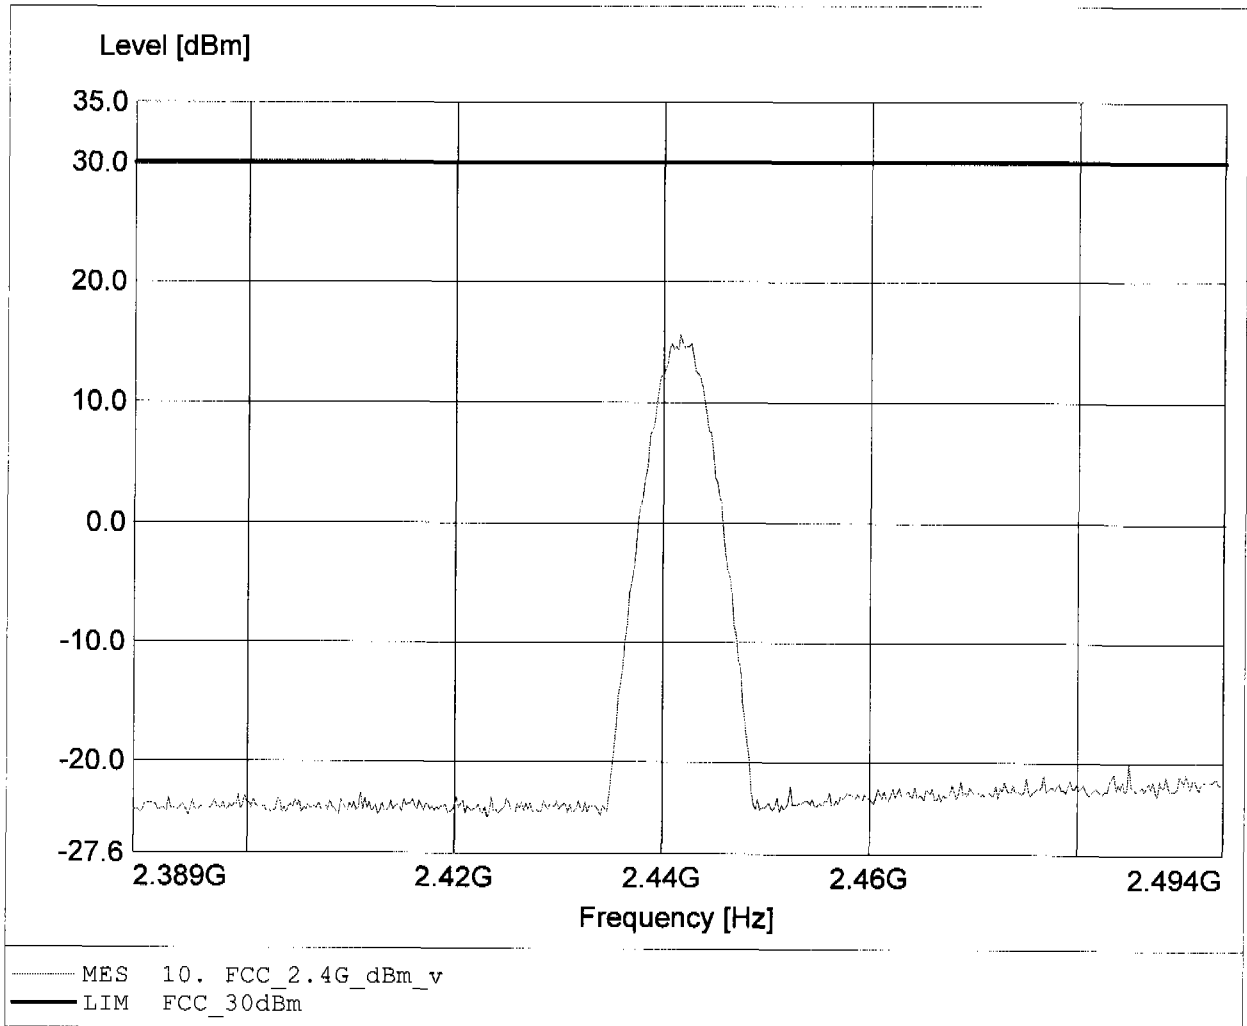

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 2 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 25.86dBm, RBW: 5MHz

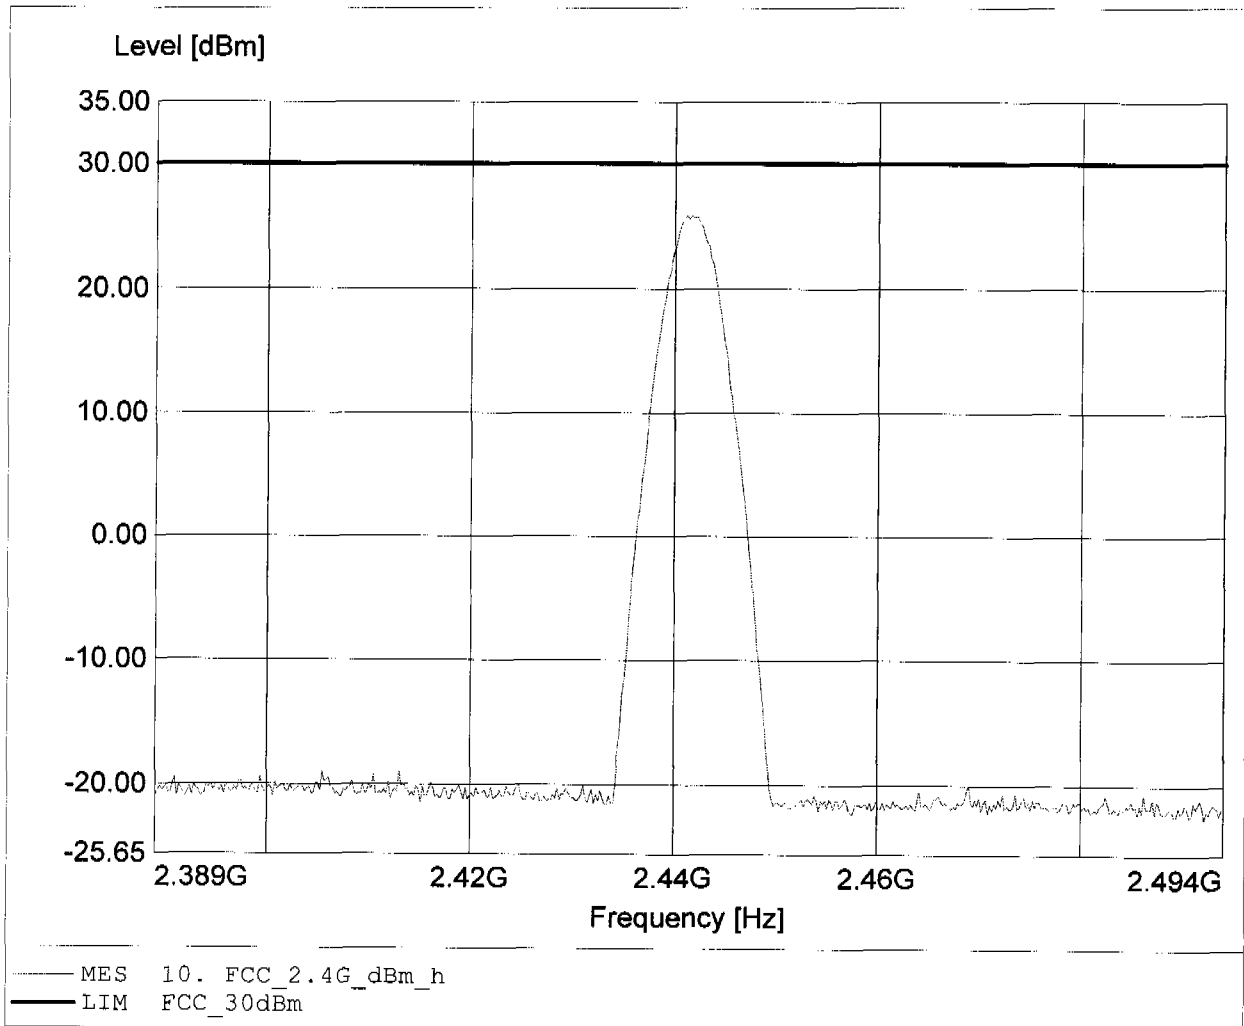

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 2 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 19.30dBm, RBW: 5MHz

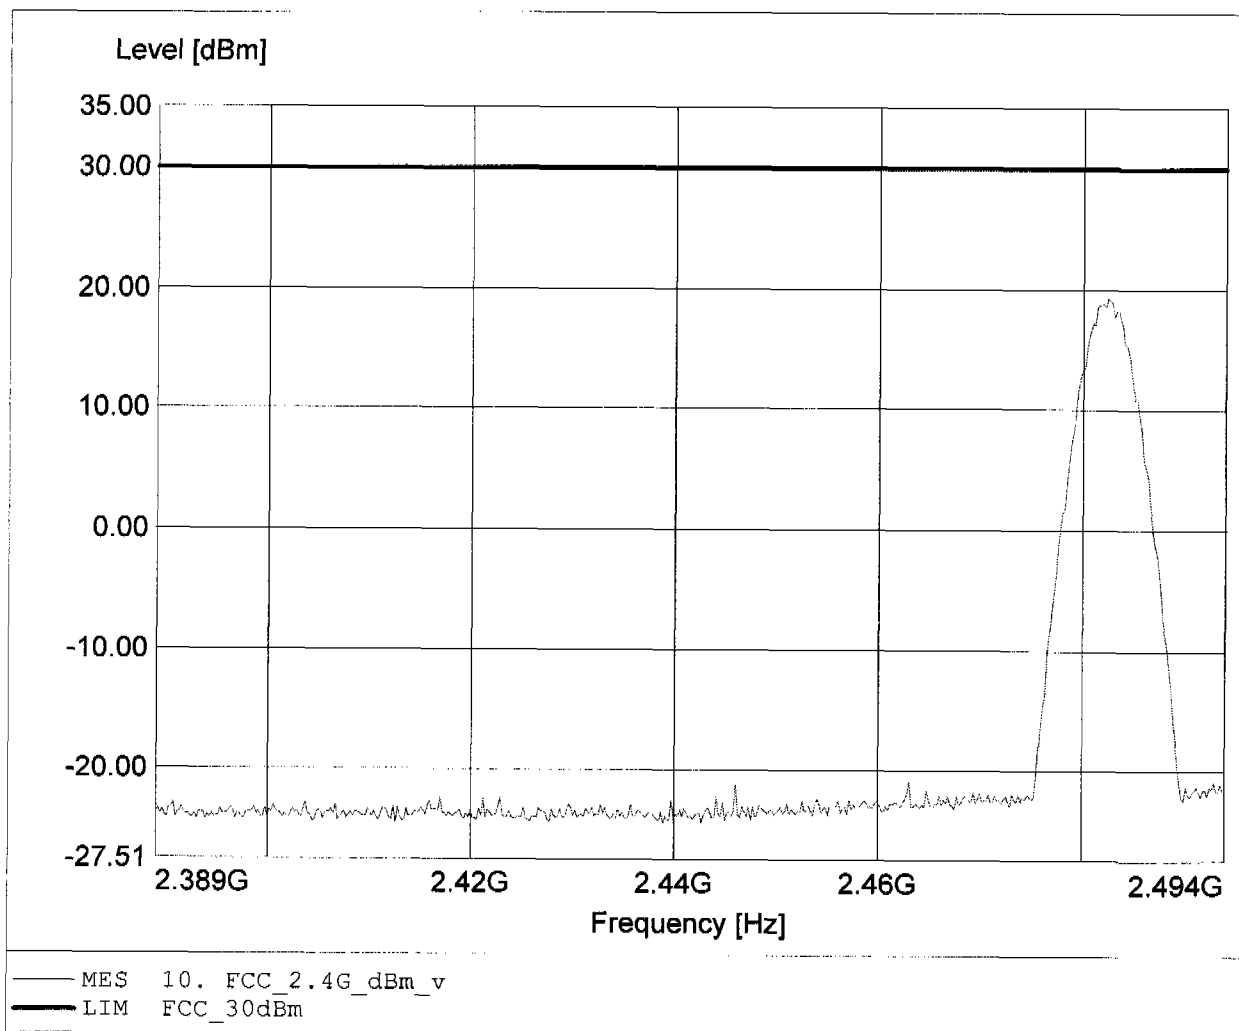

Carrier power (dBm)

FCC RULES PART 15, SUBPART C

Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 2 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 25.39dBm, RBW: 5MHz

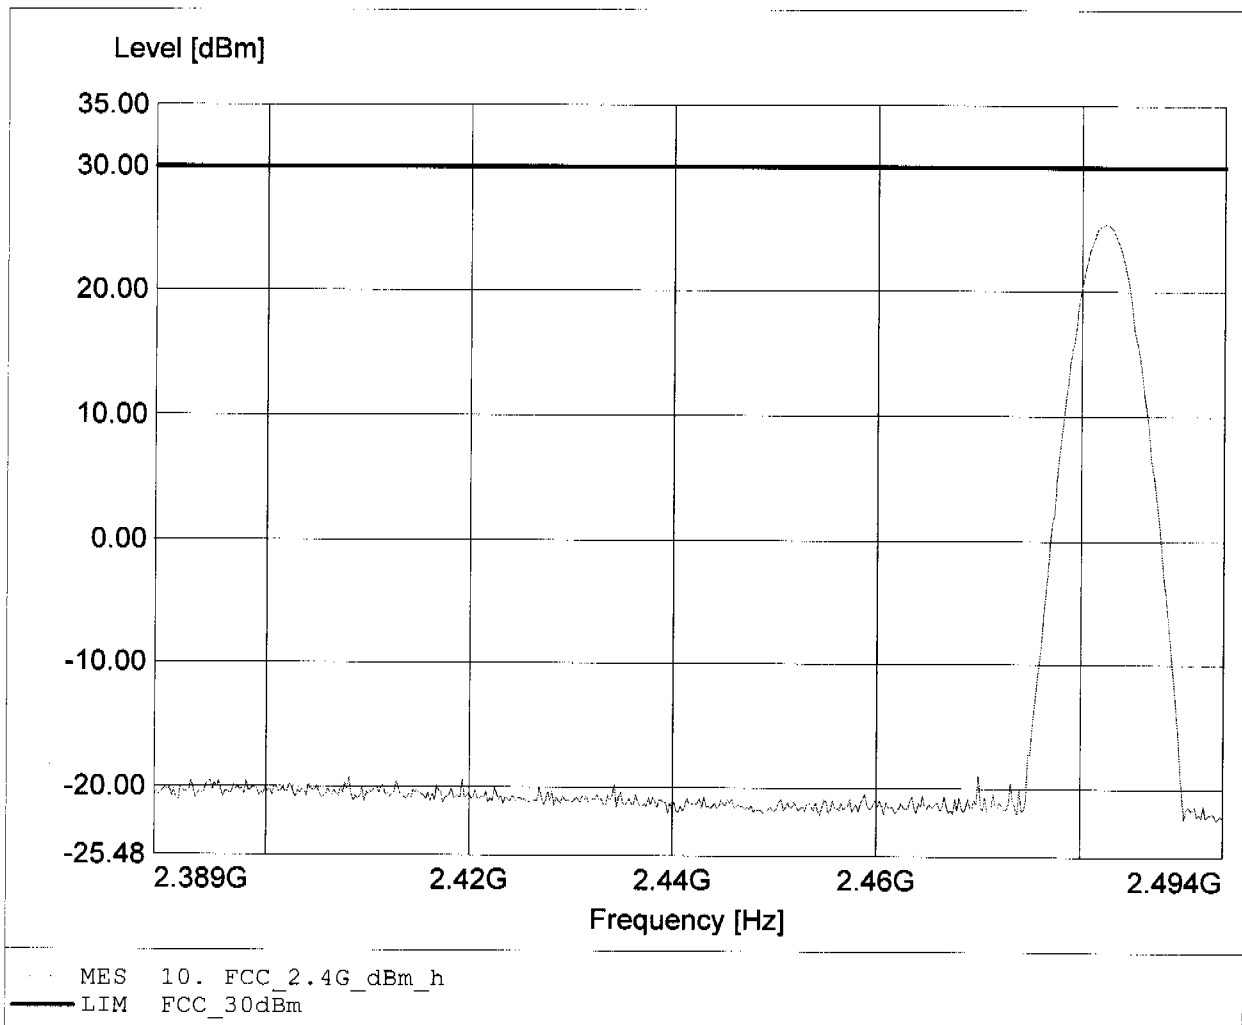




Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Emax: 114.27dBµV/m, RBW: 100kHz

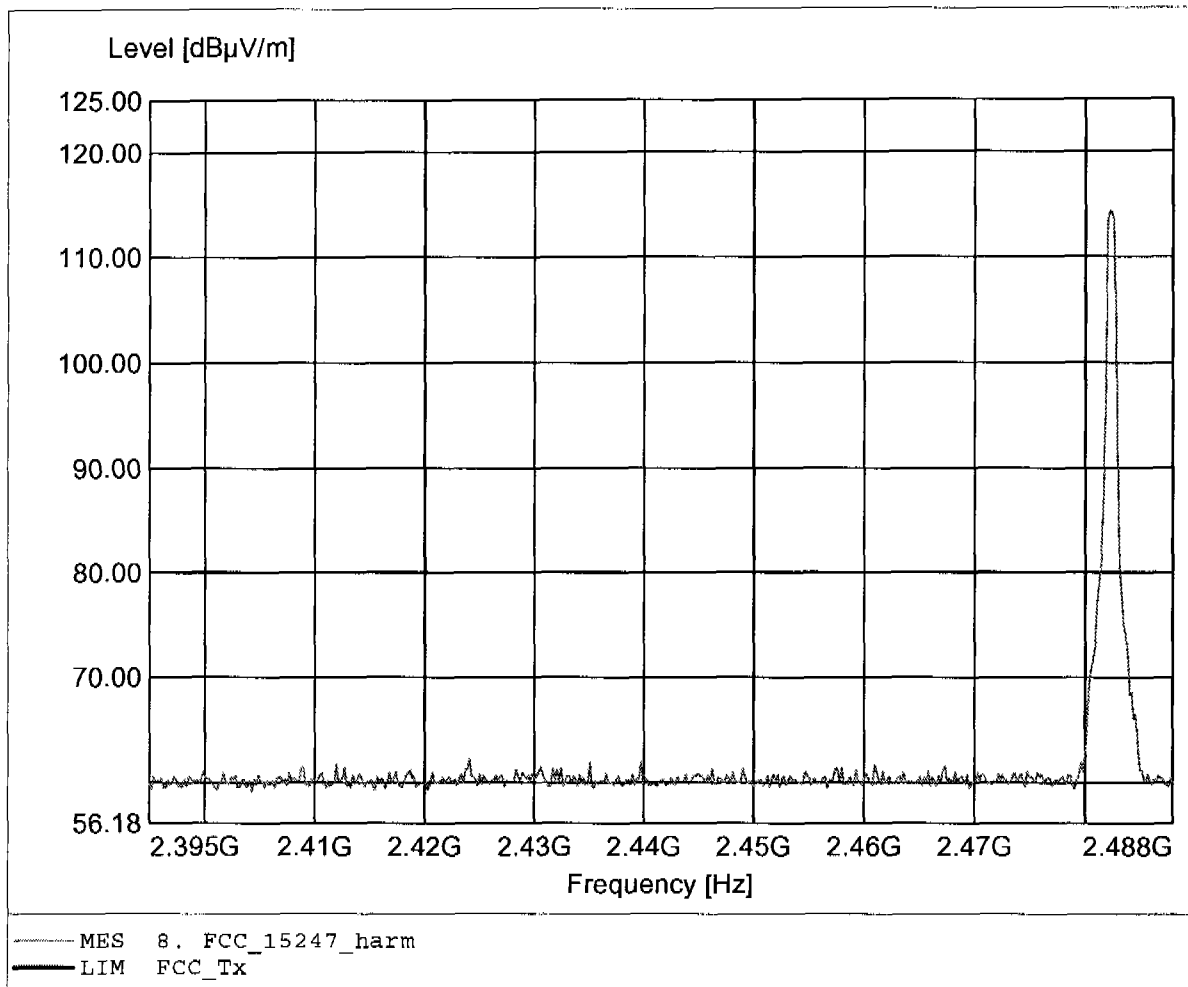

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 165.932MHz, Emax: 34.68dBµV/m, RBW: 100kHz

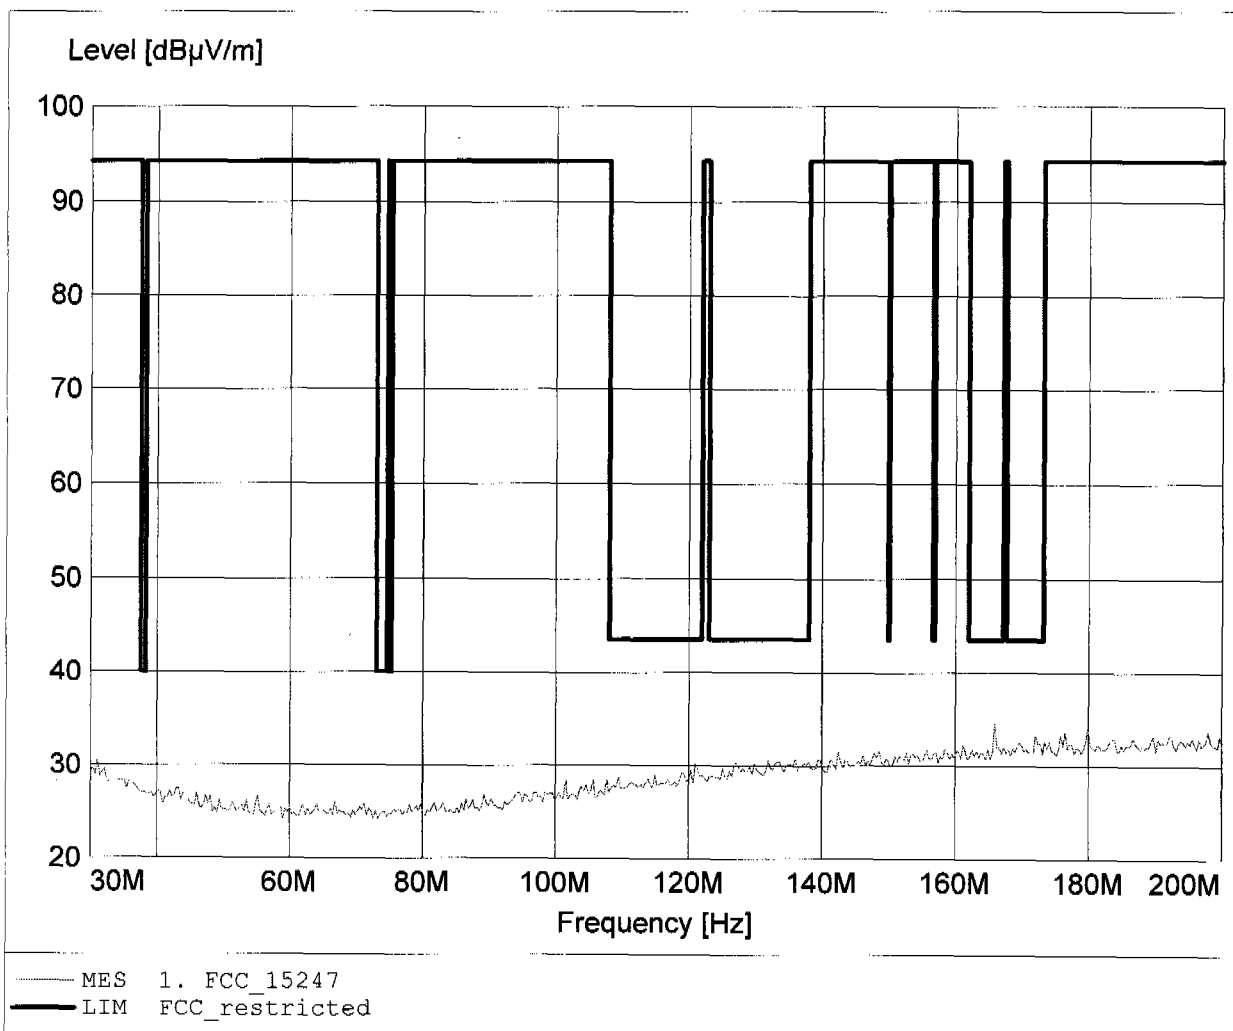

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 34.41dBµV/m, RBW: 100kHz

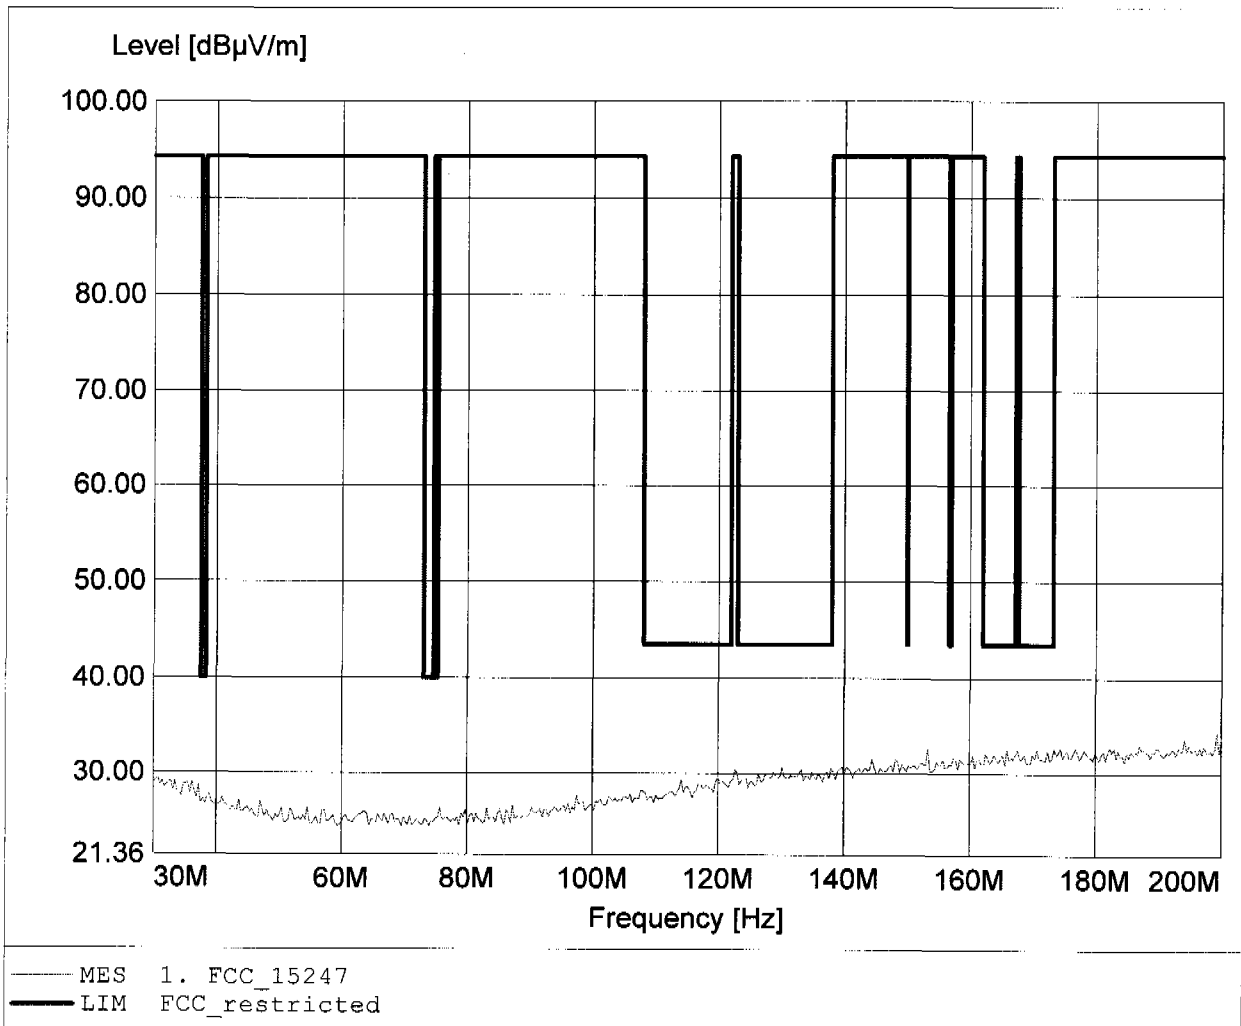

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 393.988MHz, Emax: 30.77dBµV/m, RBW: 100kHz

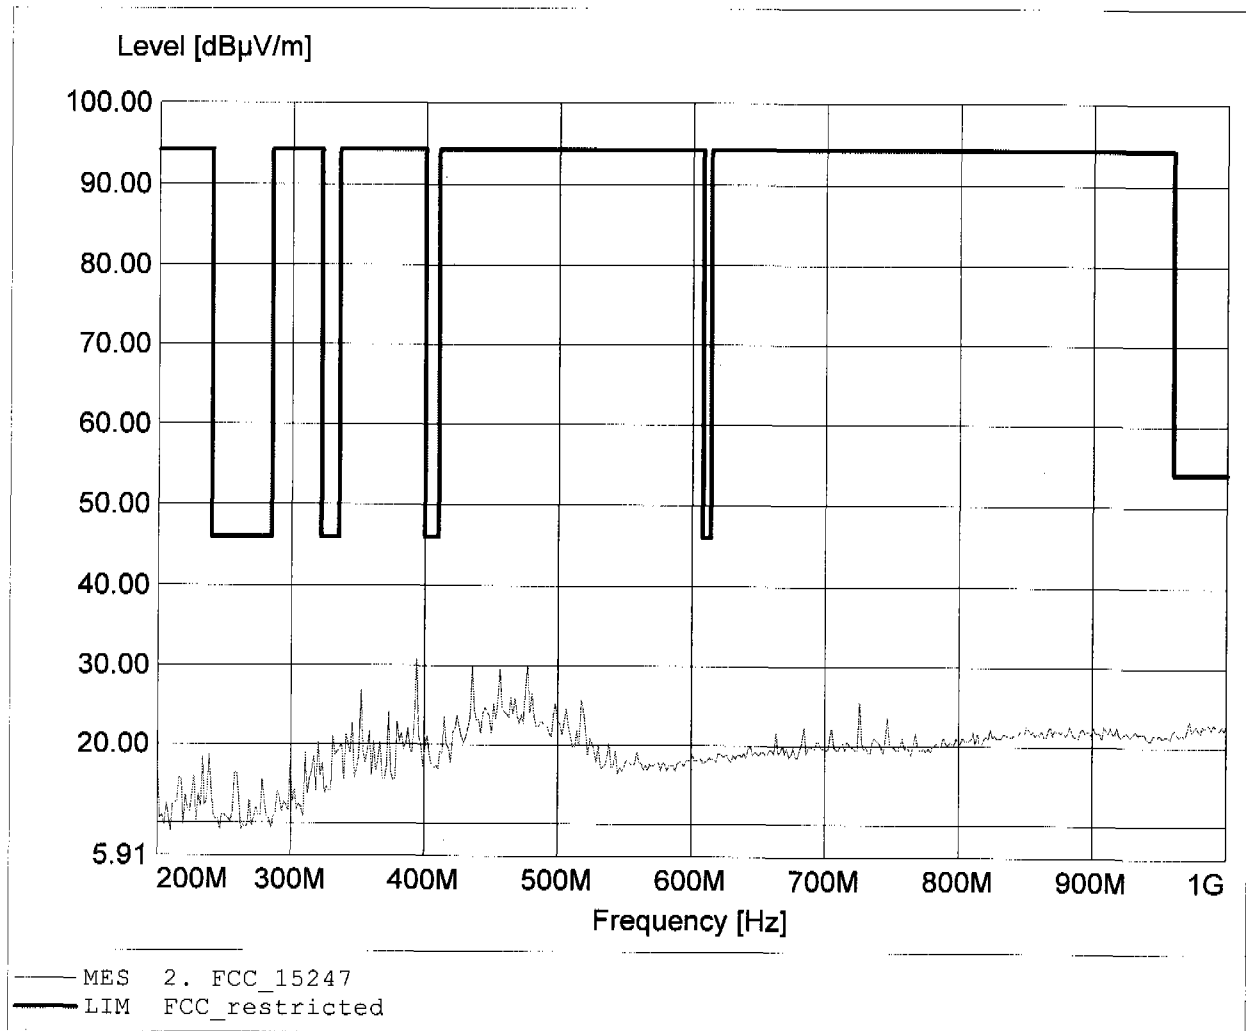

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 985.571MHz, Emax: 23.51dBµV/m, RBW: 100kHz

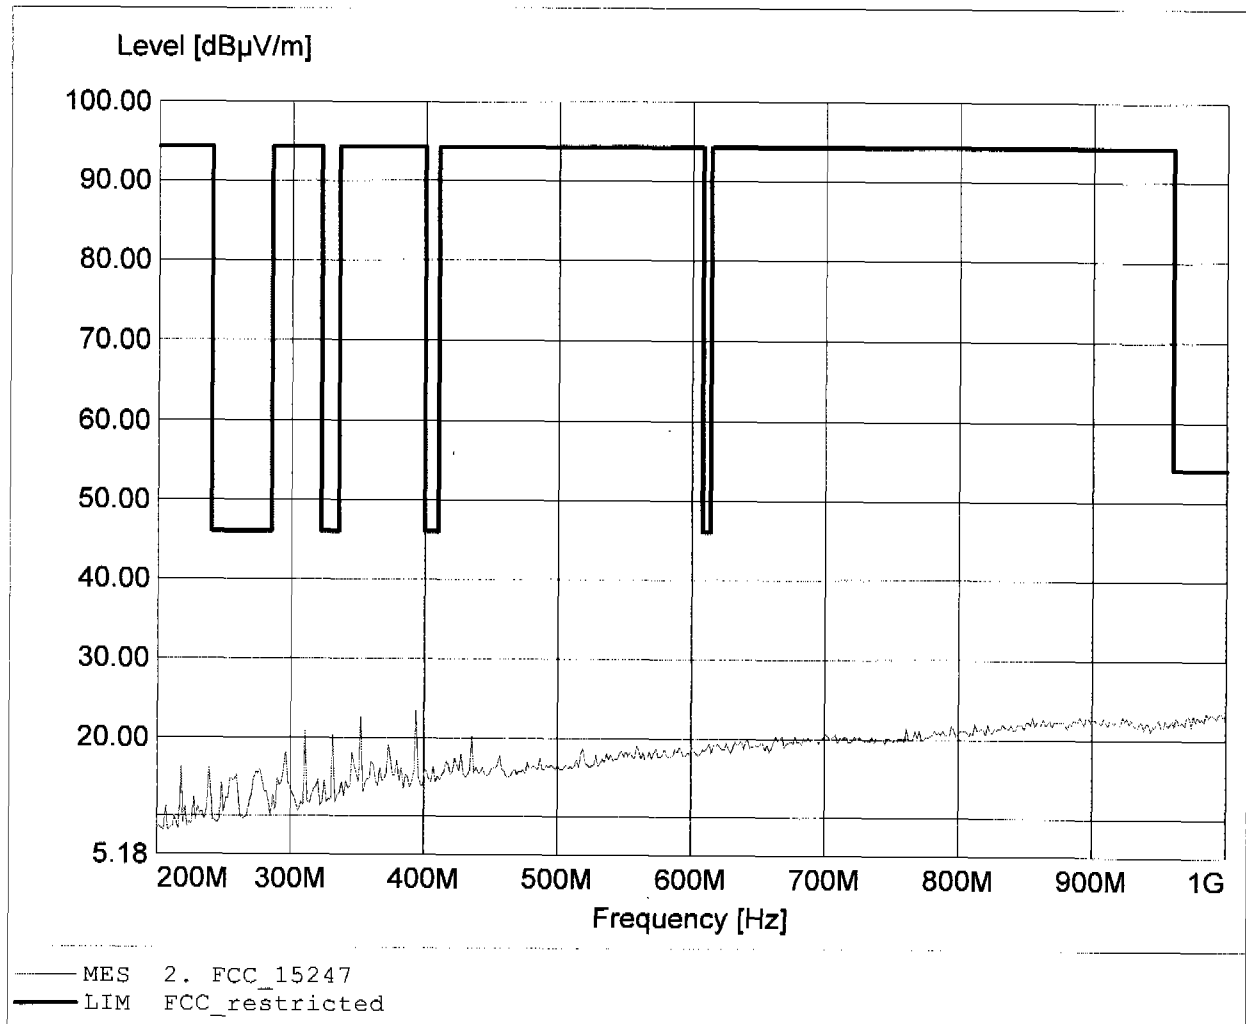

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.602GHz, Emax: 62.08dB μ V/m, RBW: 1MHz

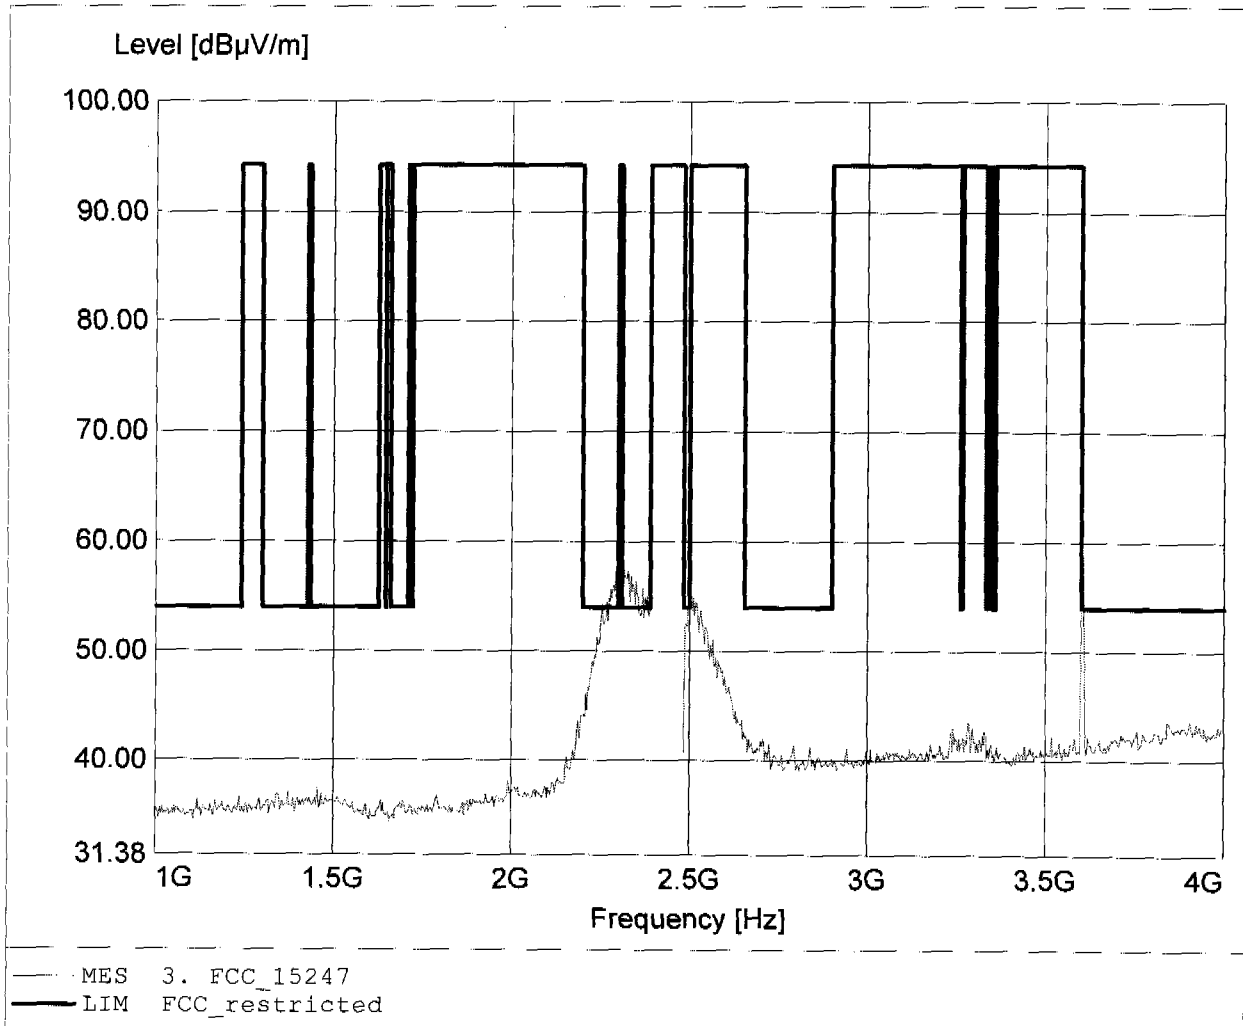

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.602GHz, Emax: 62.08dBµV/m, RBW: 1MHz

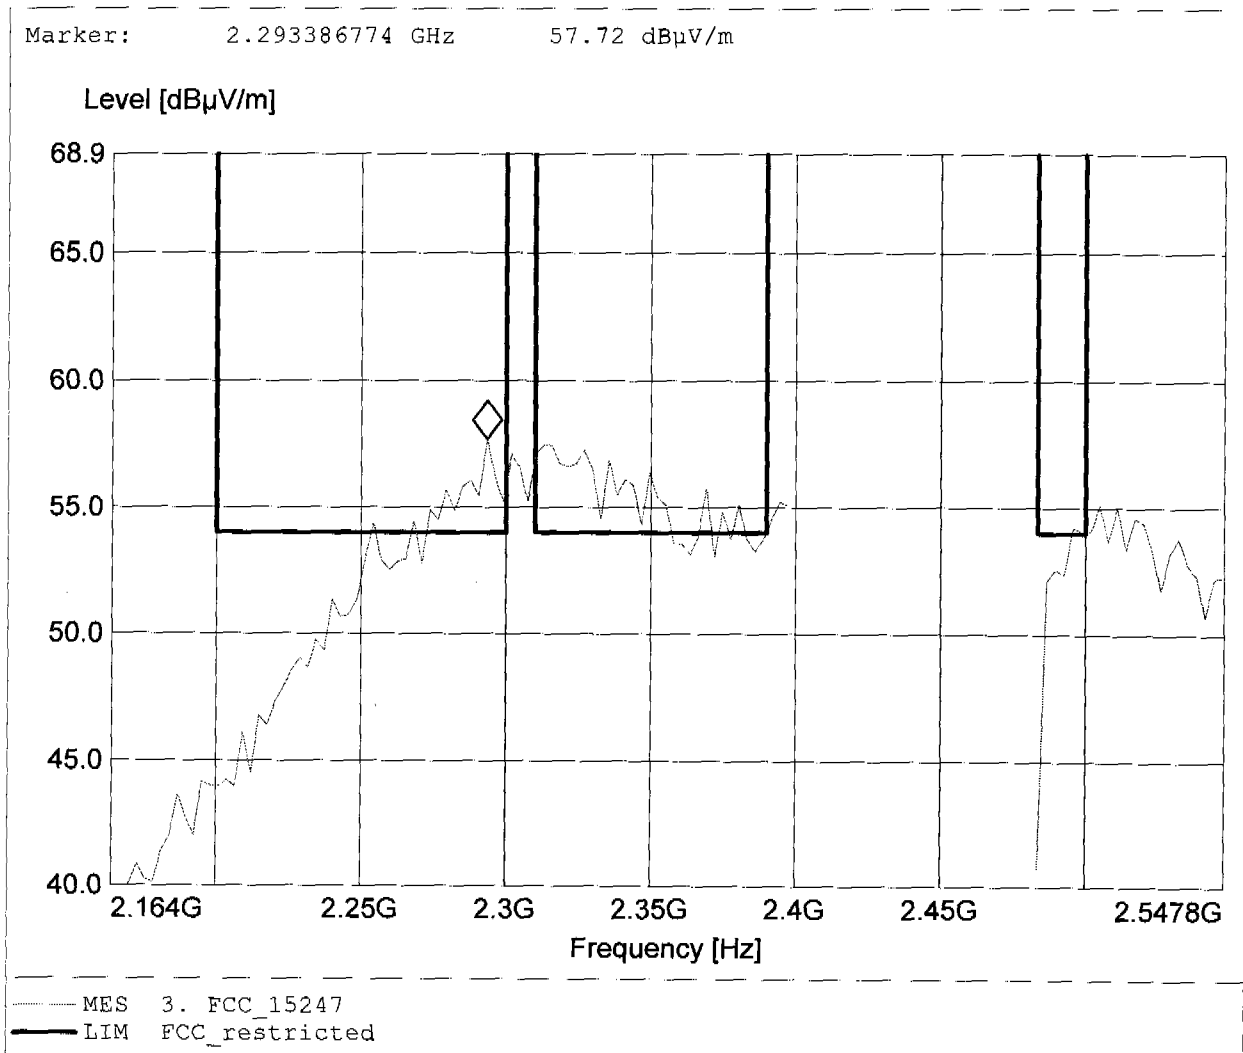

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.602GHz, Emax: 62.08dB μ V/m, RBW: 1MHz

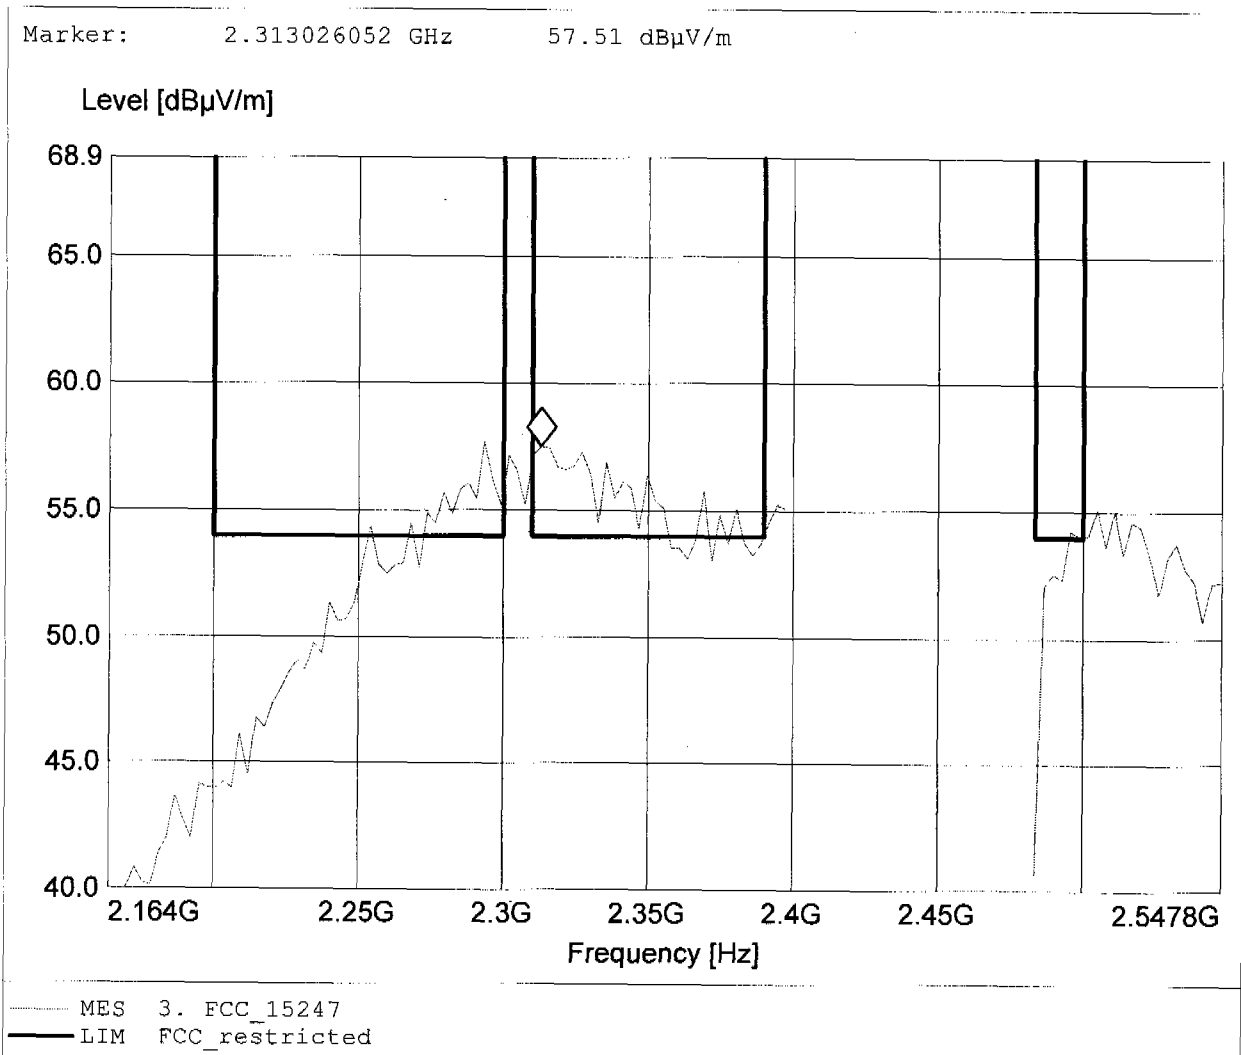

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.602GHz, Emax: 62.08dBµV/m, RBW: 1MHz

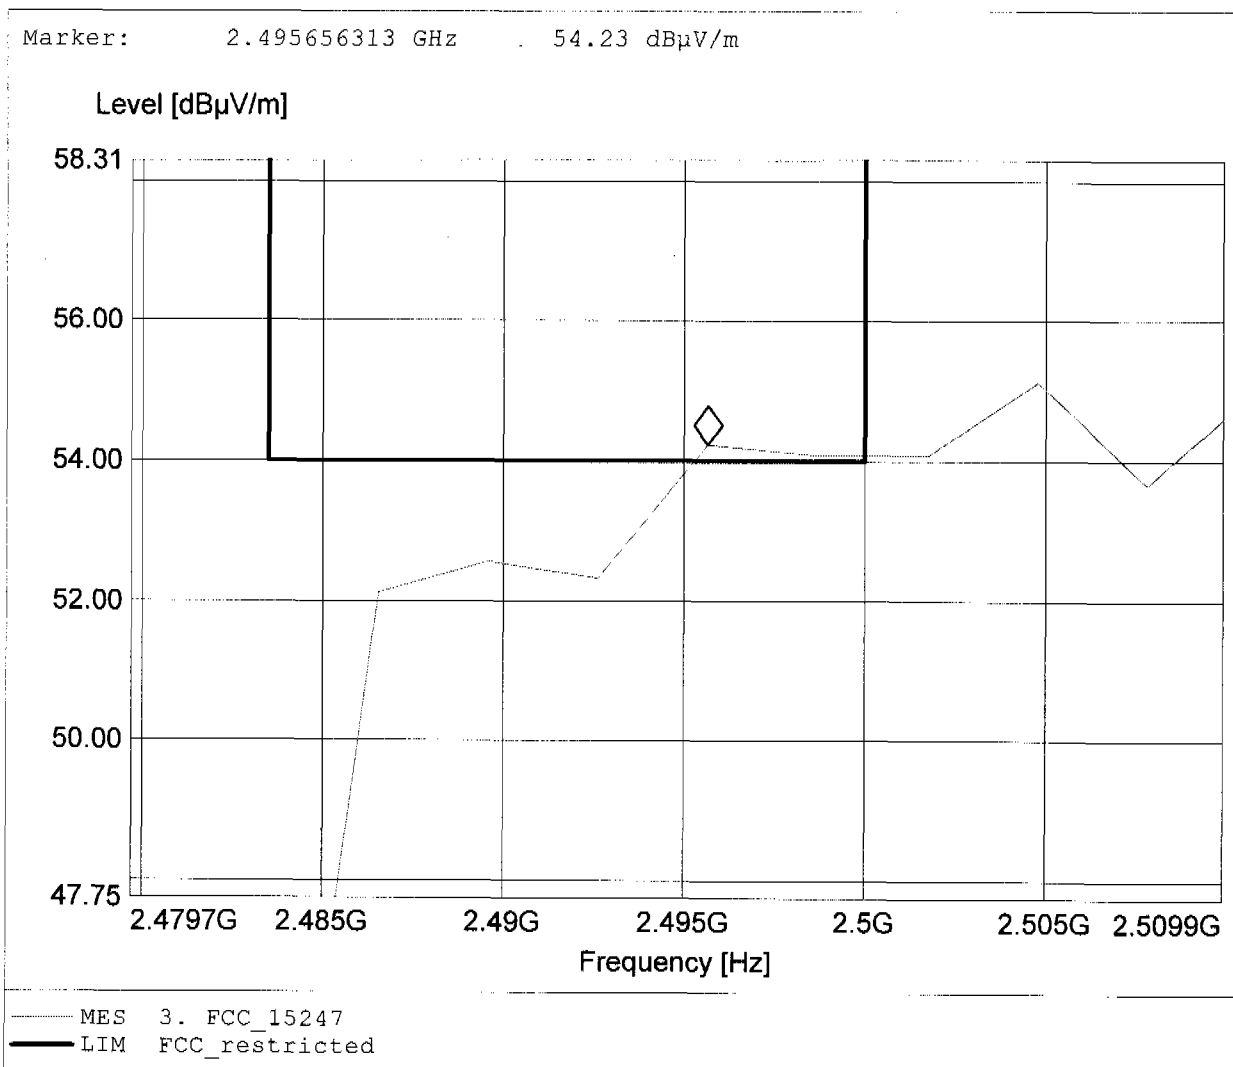

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 66.20dBµV/m, RBW: 1MHz

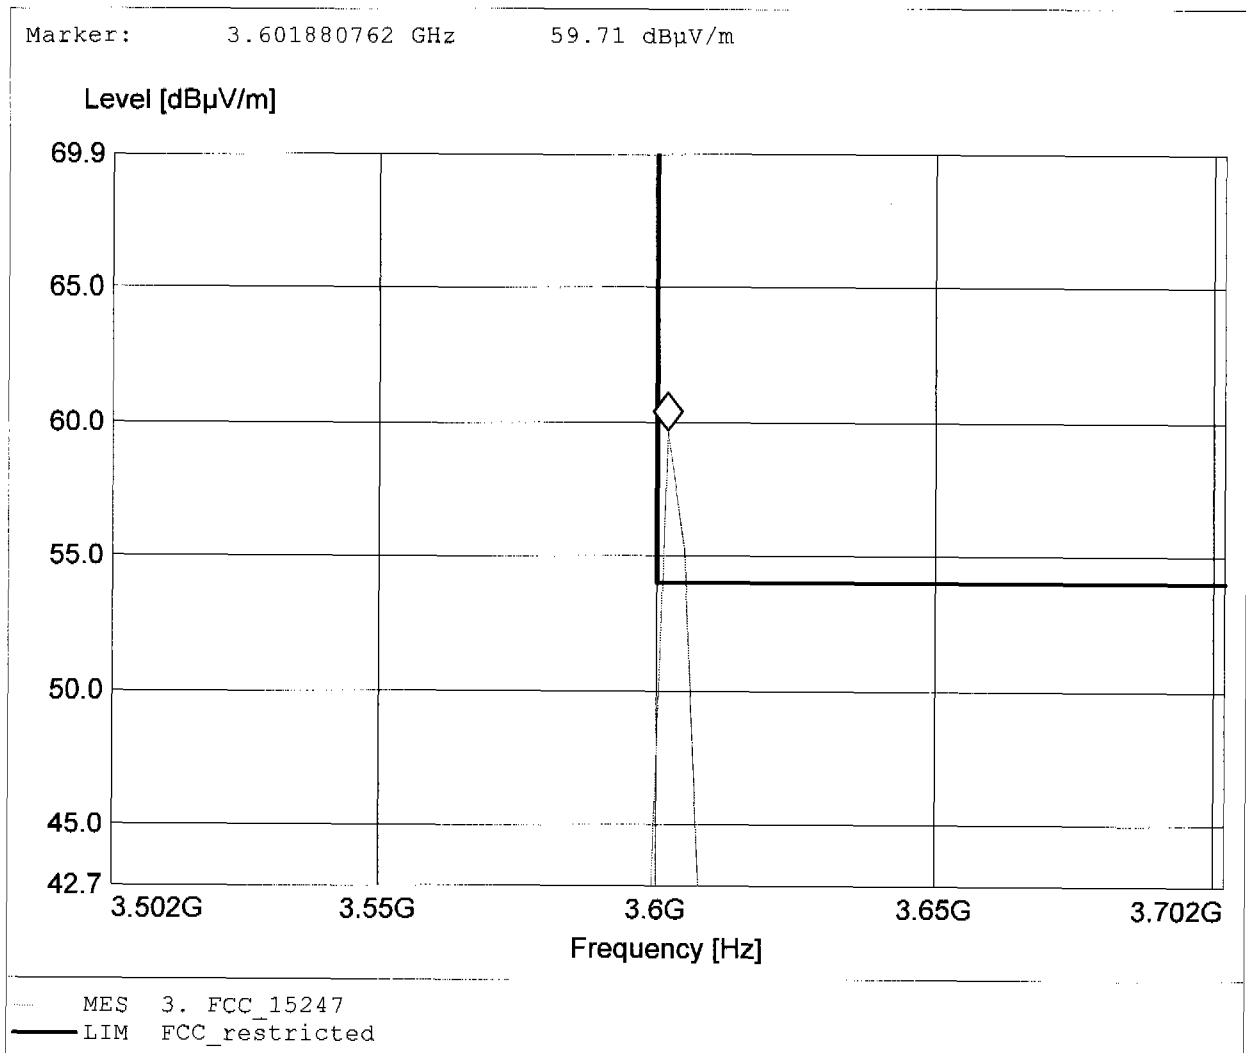

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 44.00dBµV/m, RBW: 1MHz

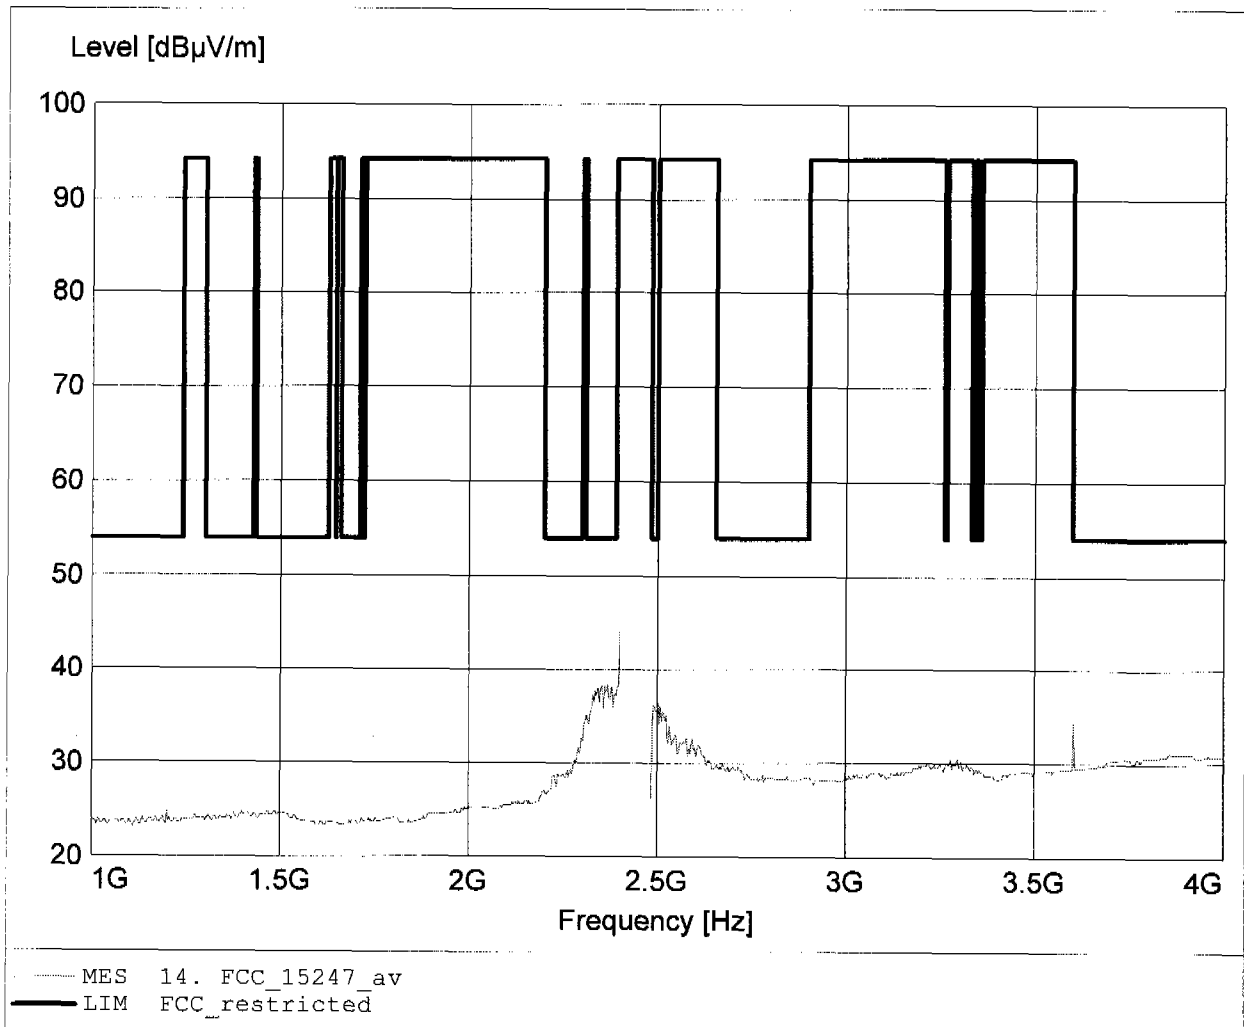

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 56.50dBµV/m, RBW: 1MHz

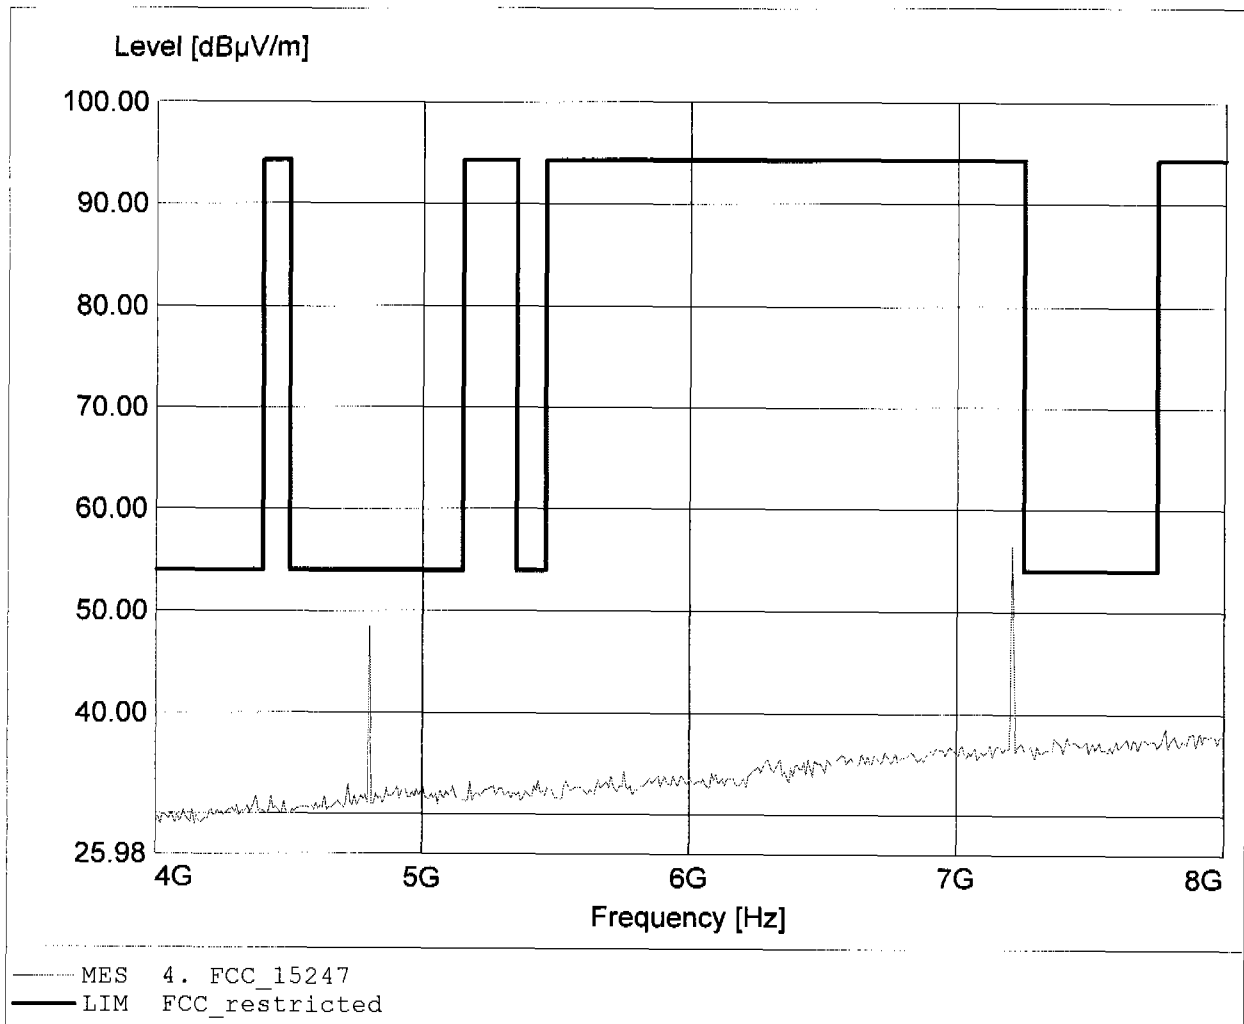

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 55.97dB μ V/m, RBW: 1MHz

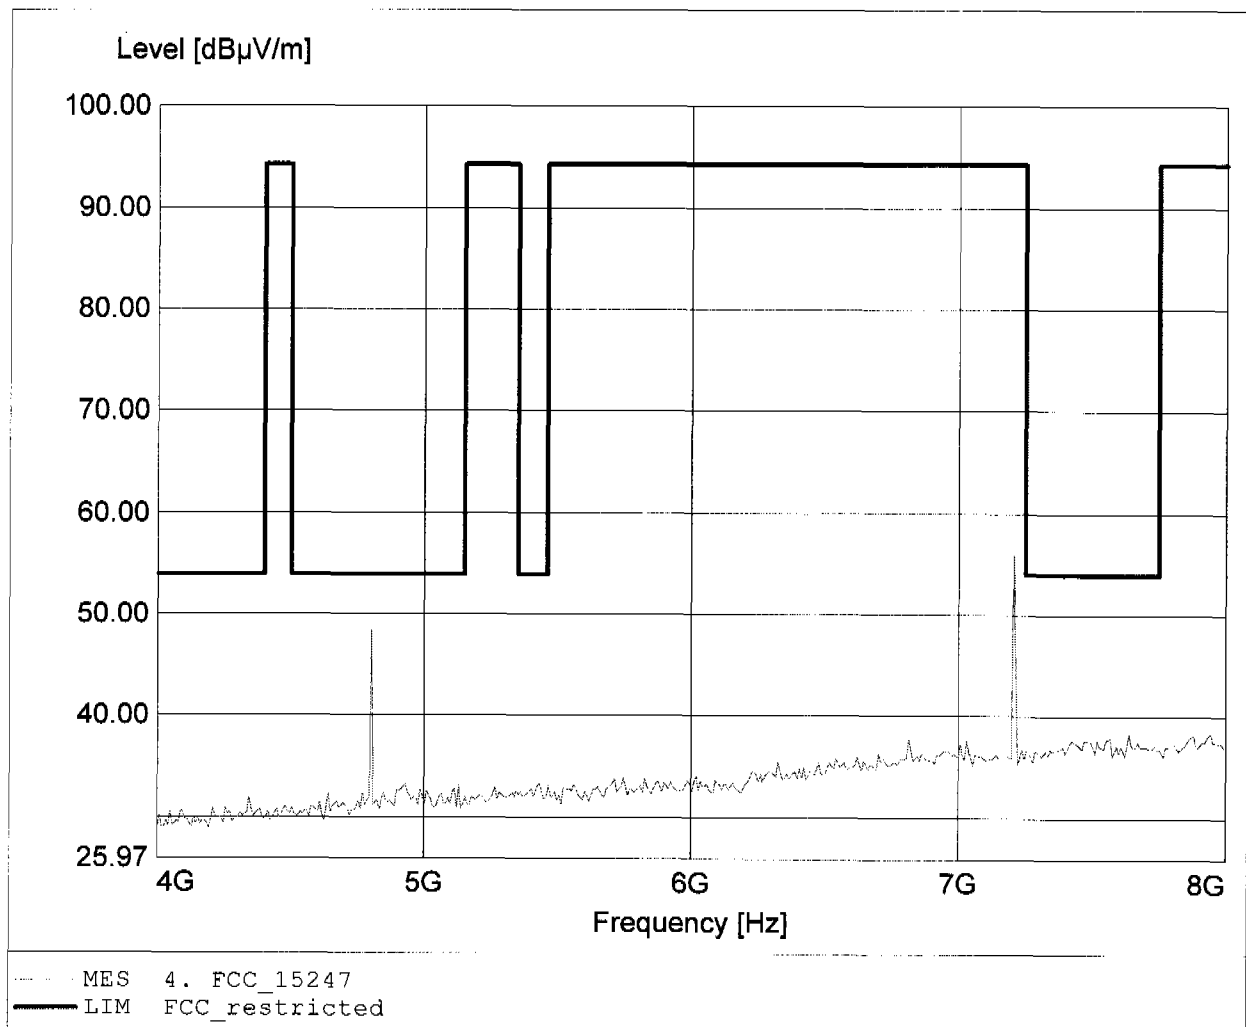

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 49.12dB μ V/m, RBW: 1MHz

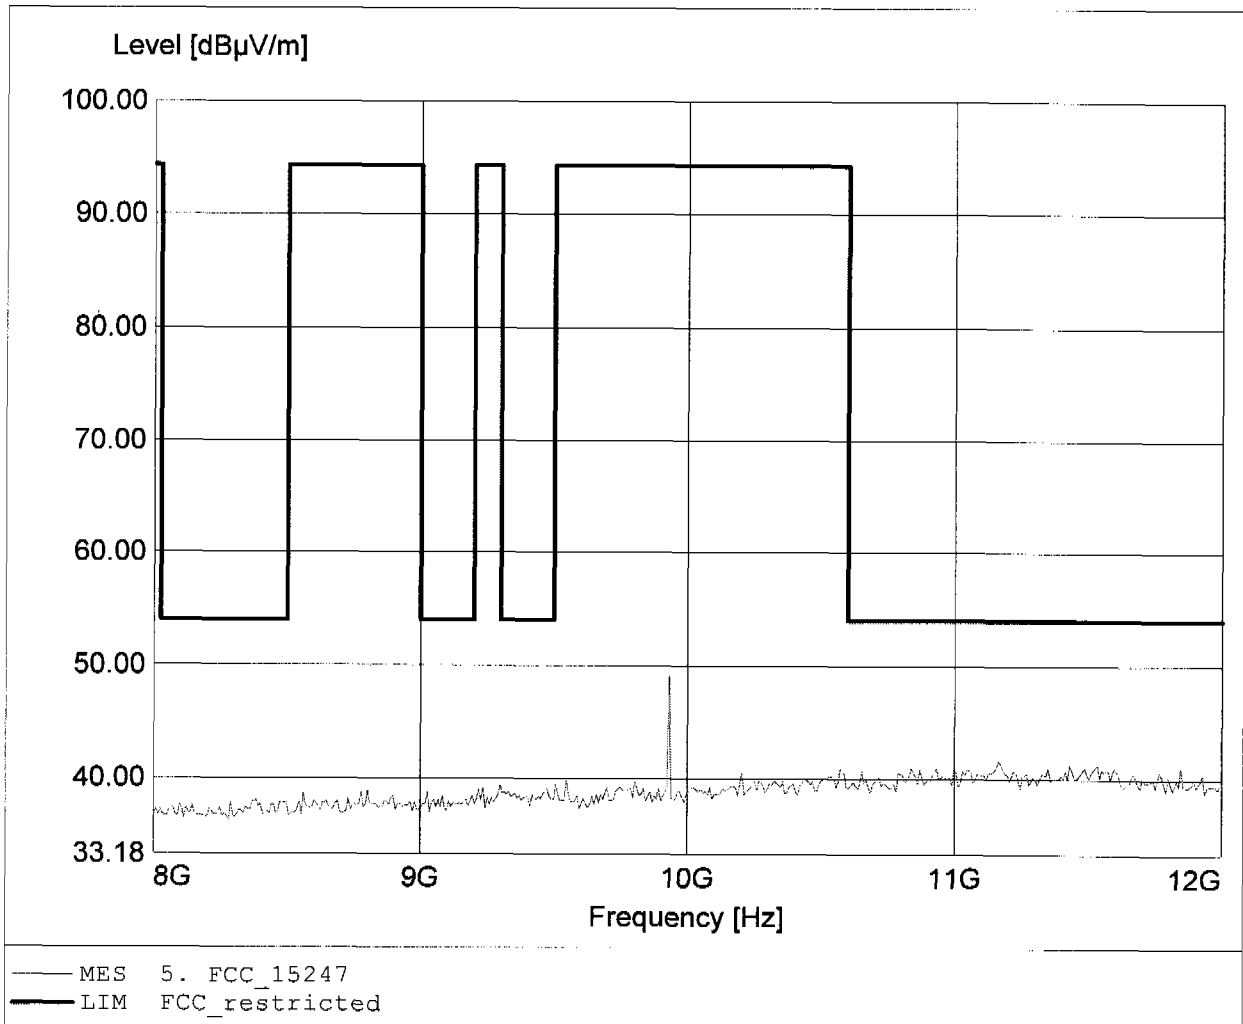

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 53.48dBµV/m, RBW: 1MHz

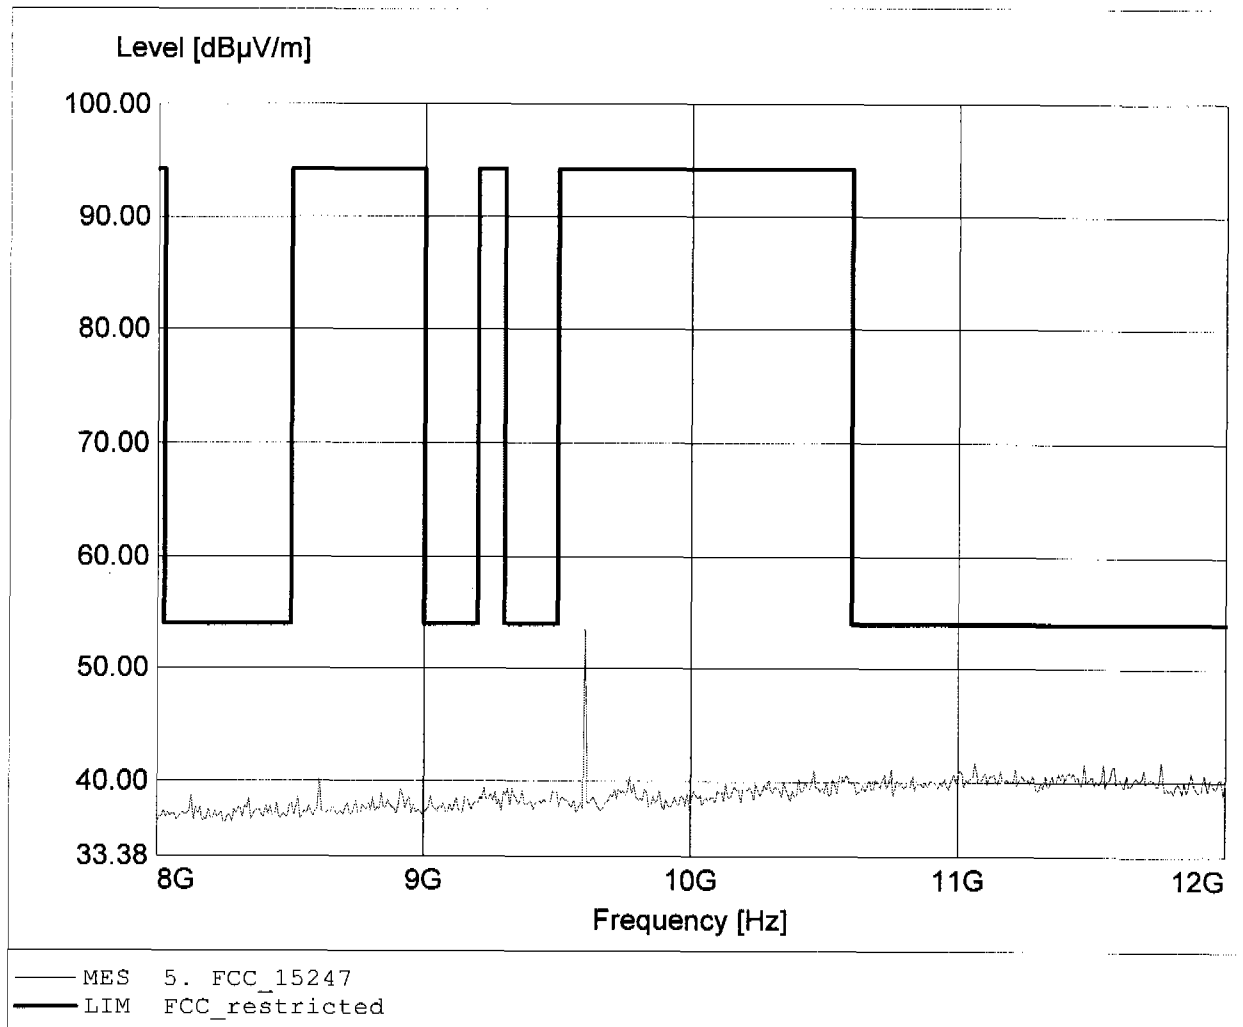

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 66.45dBµV/m, RBW: 1MHz

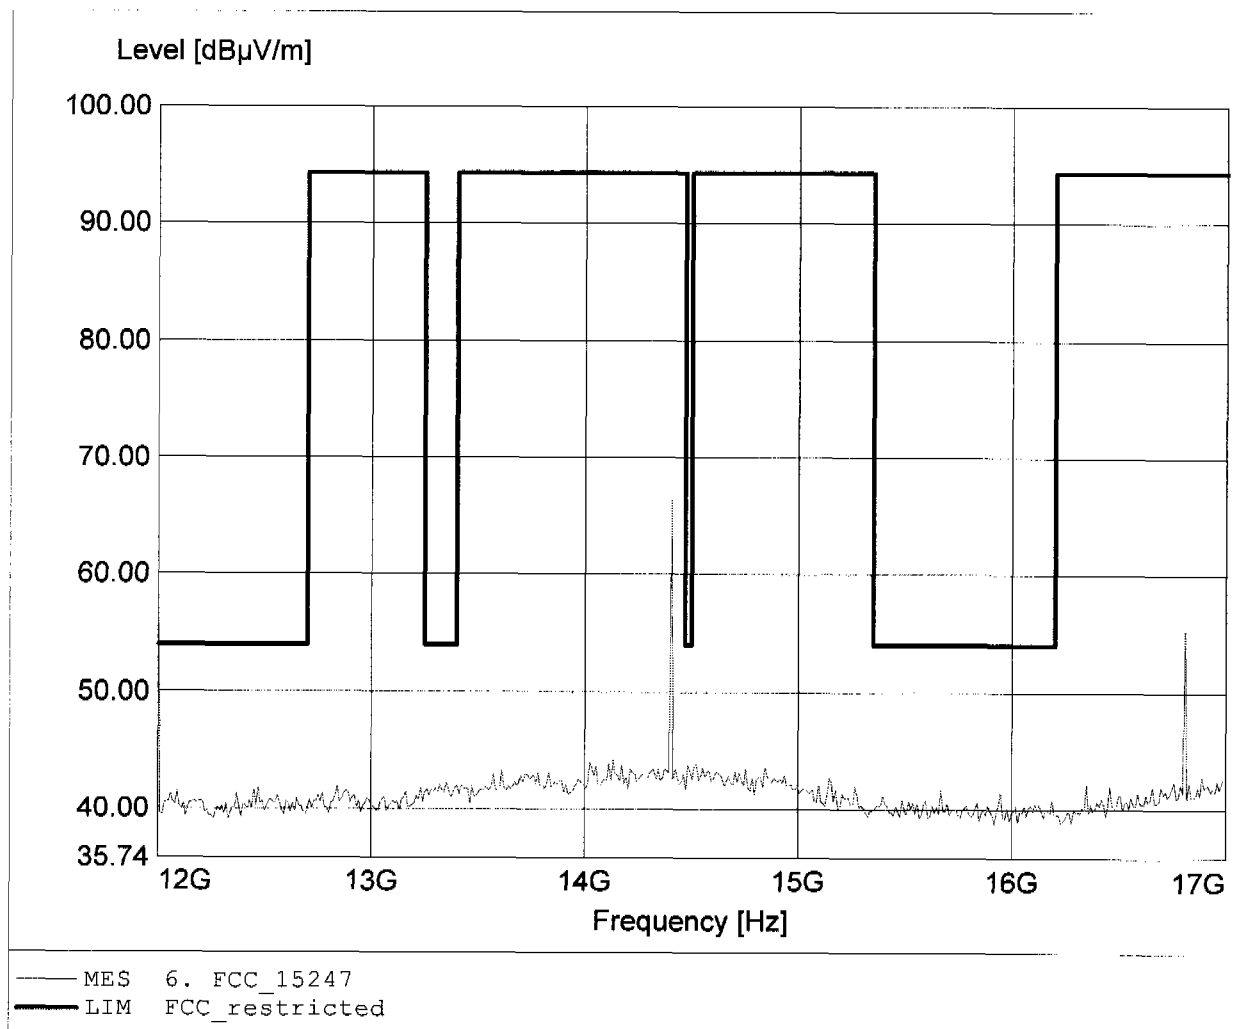

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 66.45dBµV/m, RBW: 1MHz

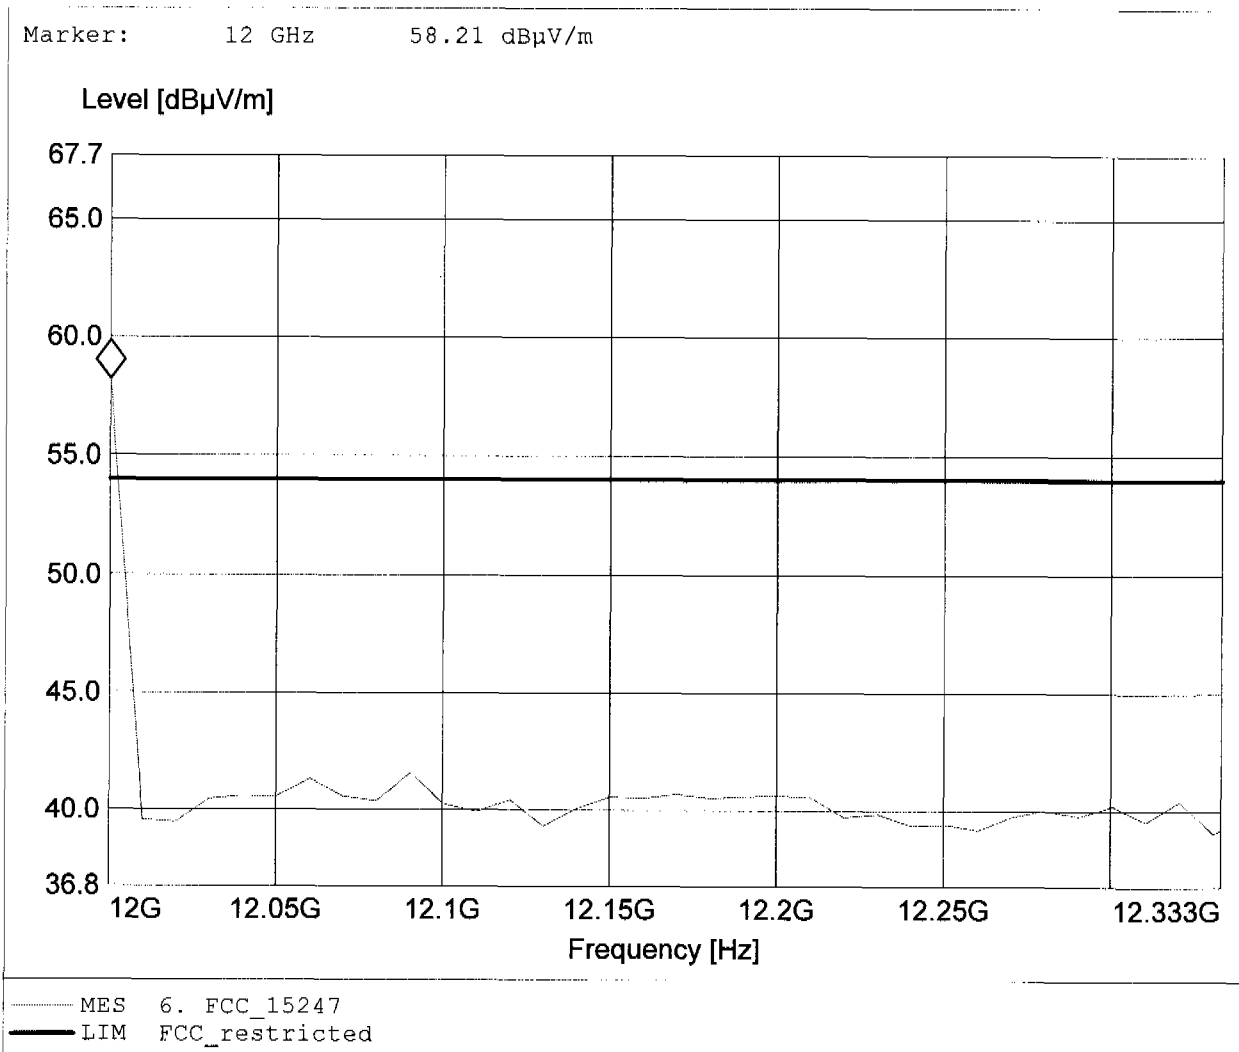

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 38.28dBµV/m, RBW: 1MHz

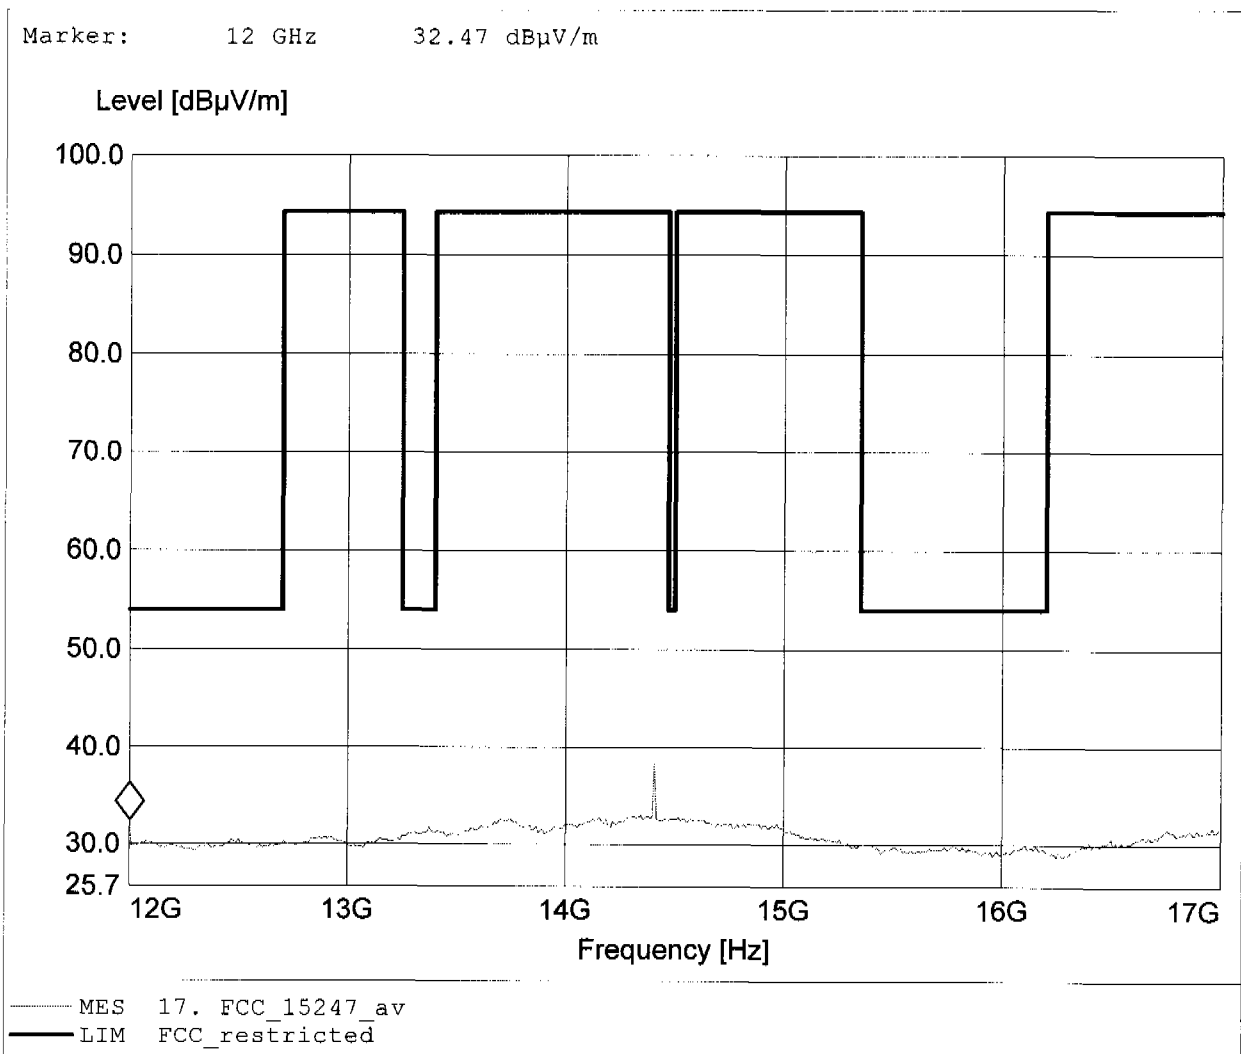

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.000GHz, Emax: 61.43dBµV/m, RBW: 1MHz

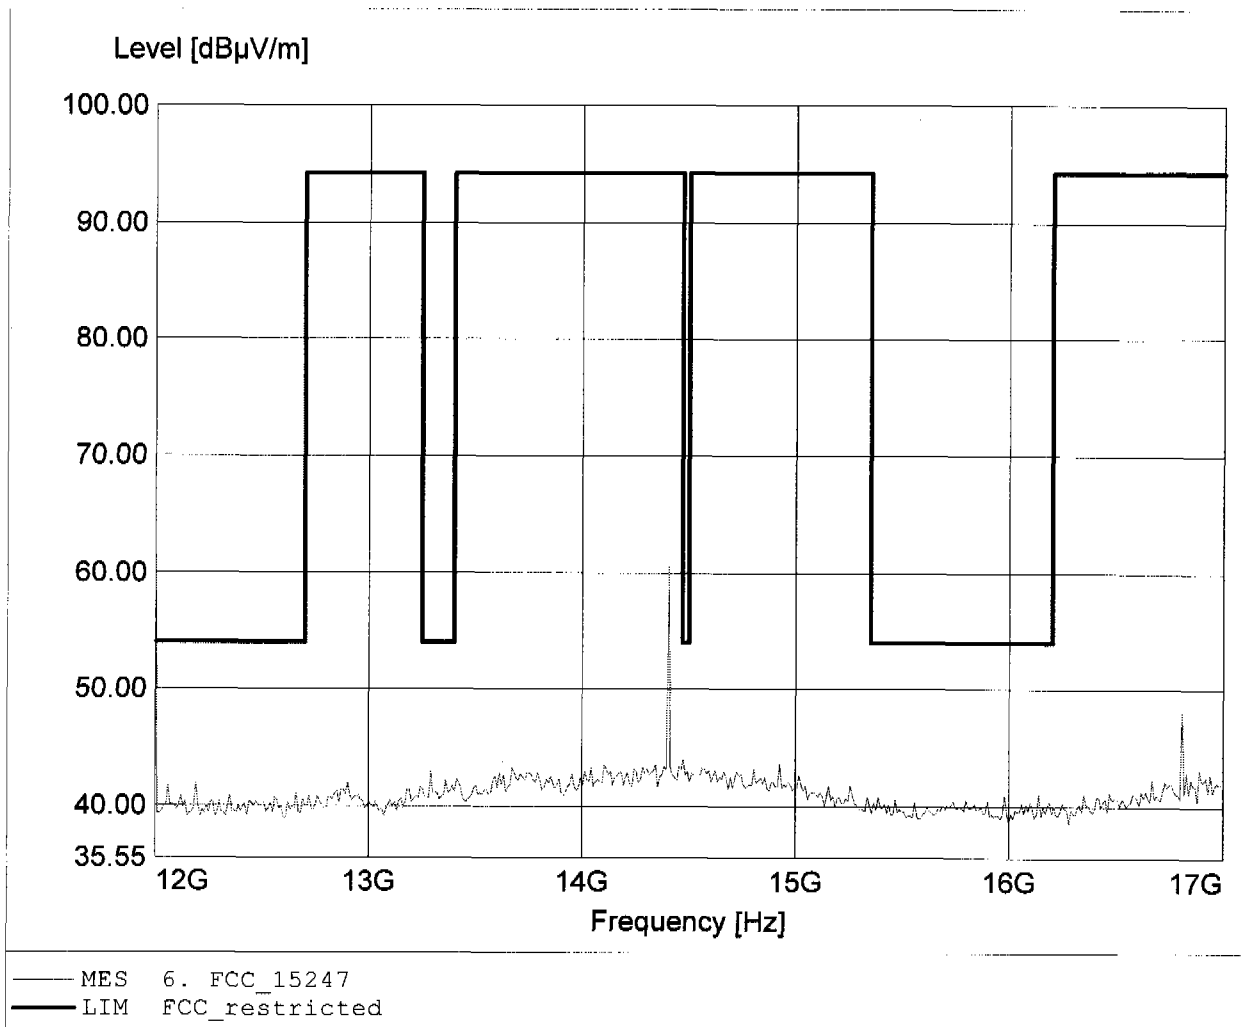

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.000GHz, Emax: 61.43dBµV/m, RBW: 1MHz

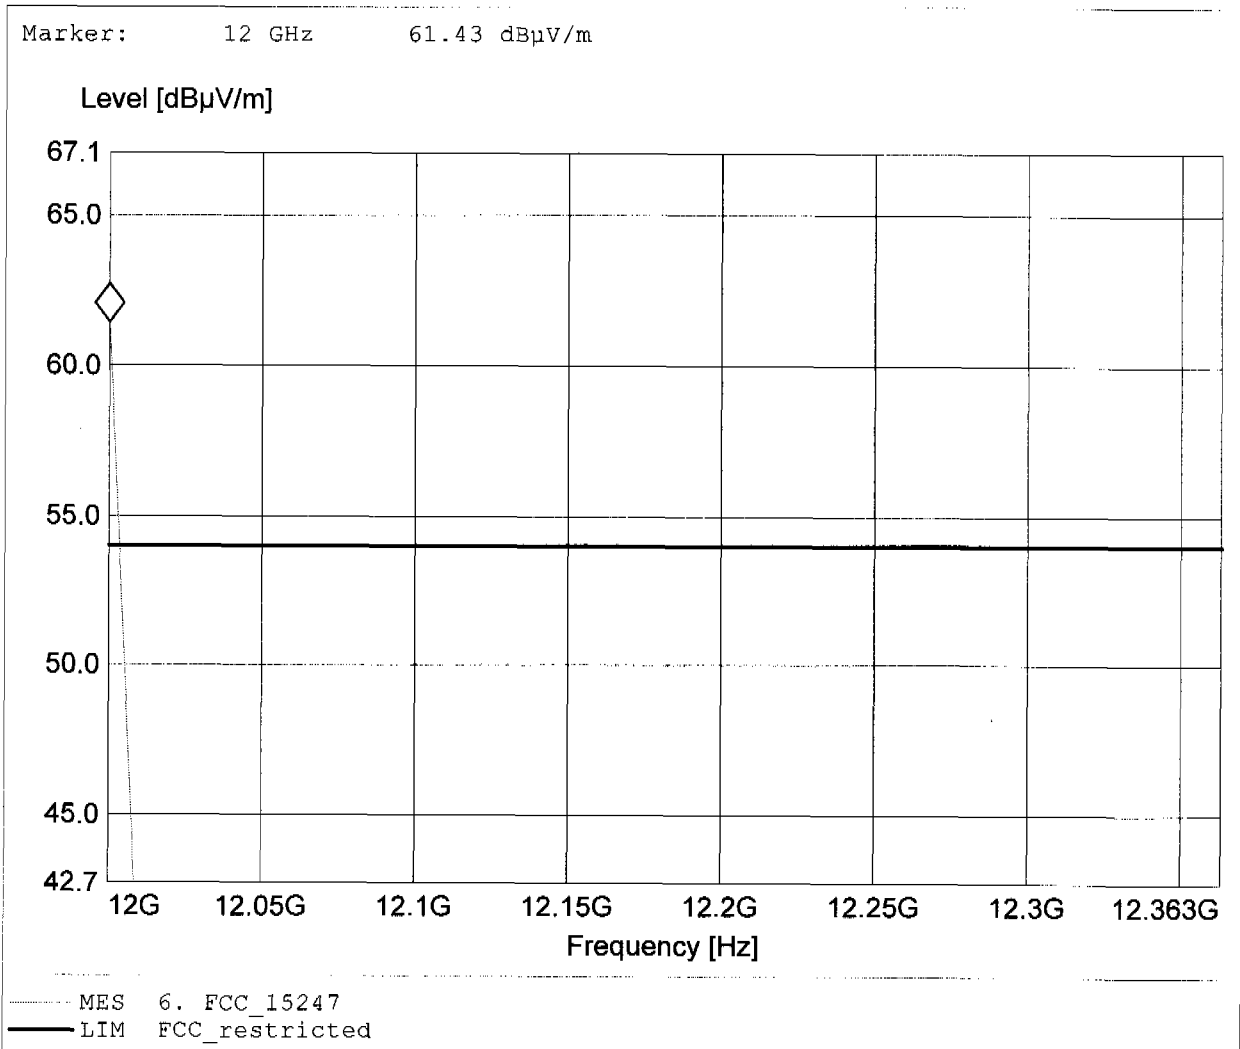

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.000GHz, Emax: 37.92dB μ V/m, RBW: 1MHz

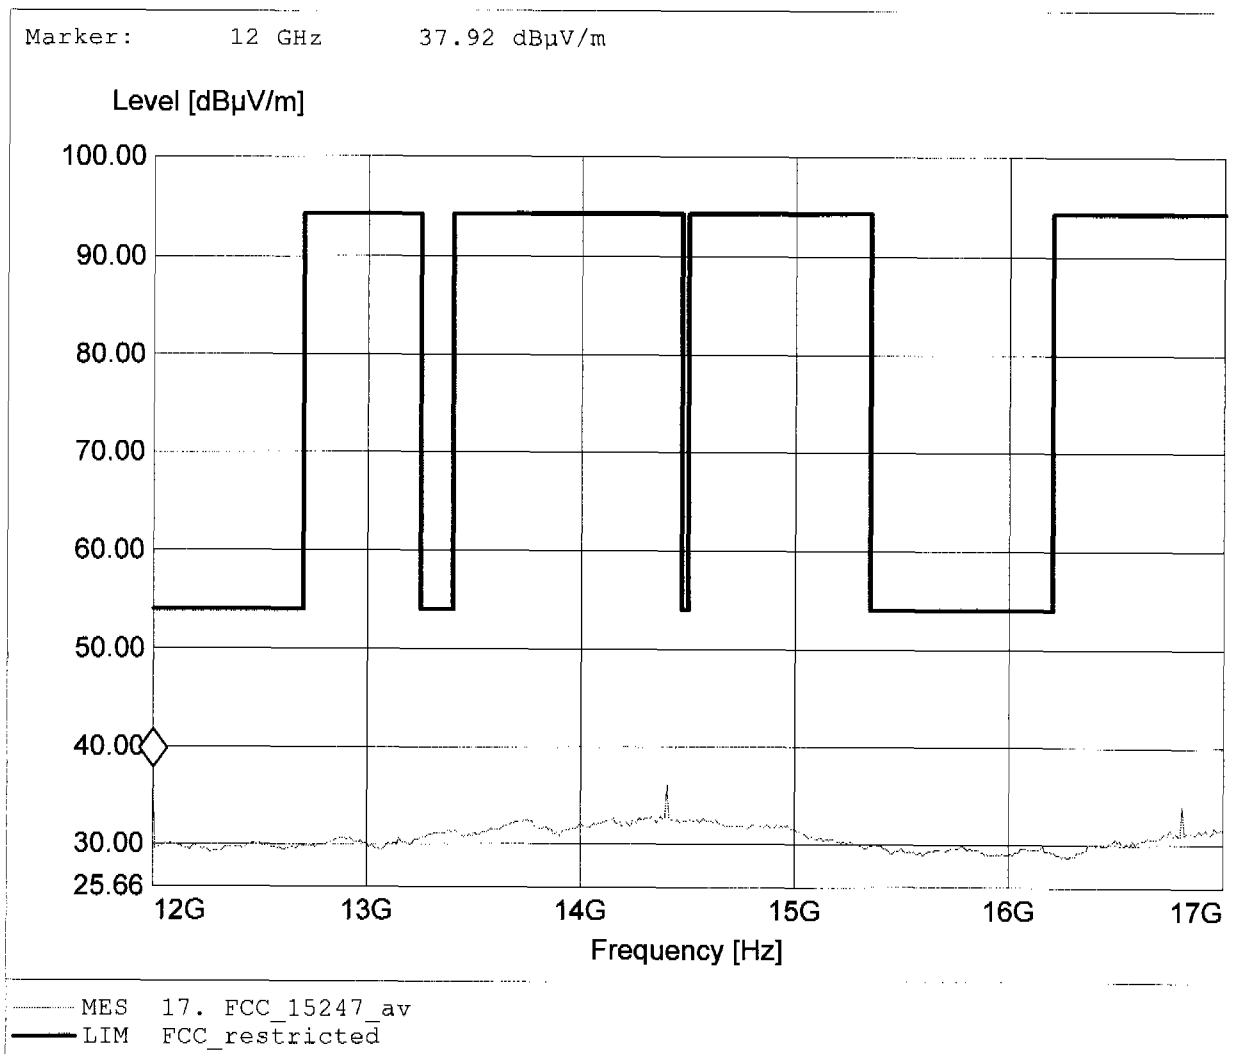

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 44.96dBµV/m, RBW: 1MHz

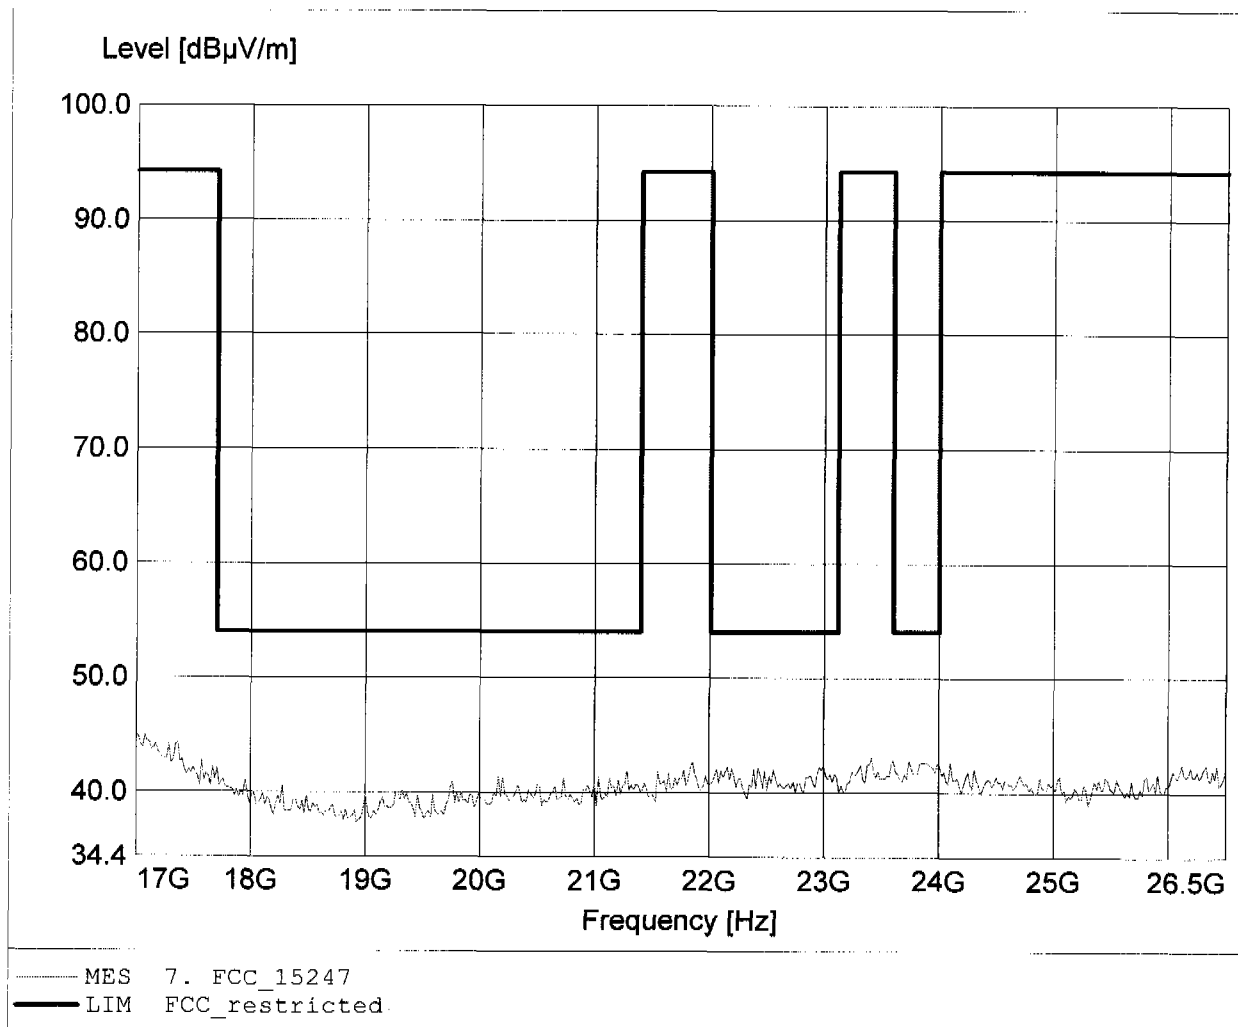

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 0
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 45.50dBµV/m, RBW: 1MHz

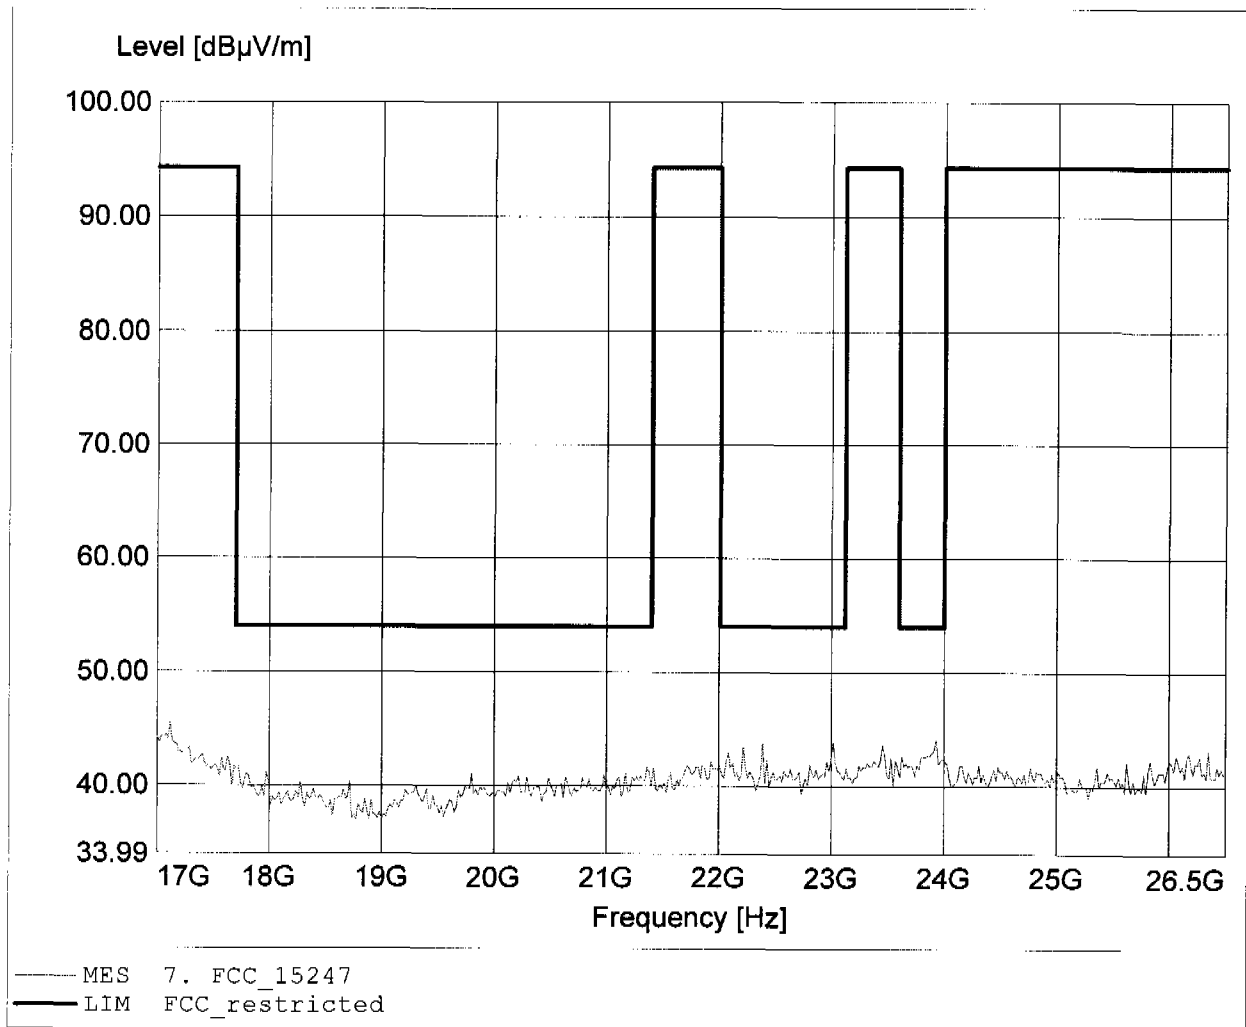

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 165.932MHz, Emax: 35.55dBµV/m, RBW: 100kHz

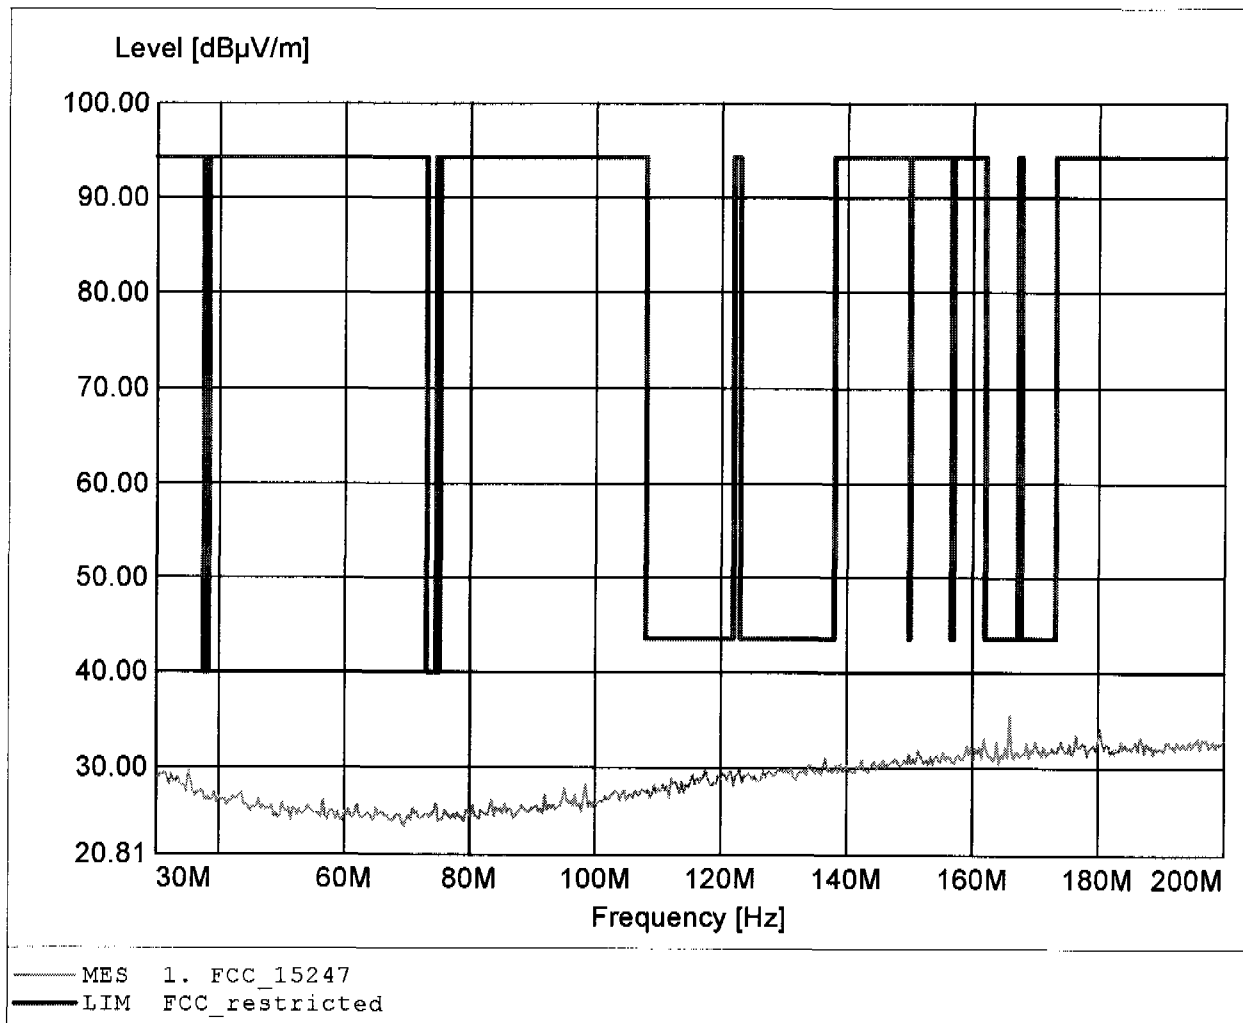

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 186.373MHz, Emax: 33.86dBµV/m, RBW: 100kHz

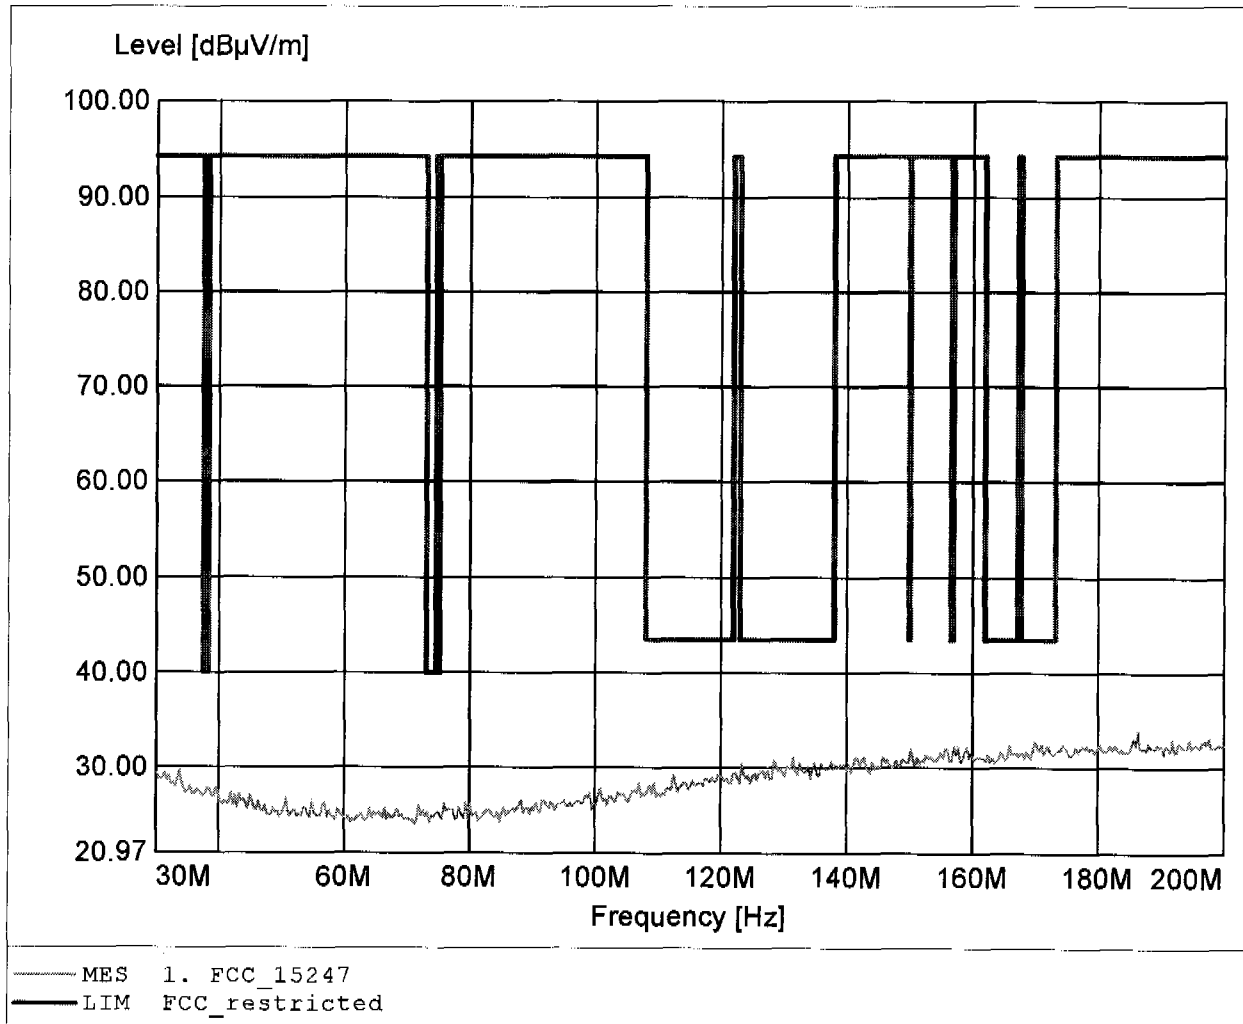

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 393.988MHz, Emax: 30.60dBµV/m, RBW: 100kHz

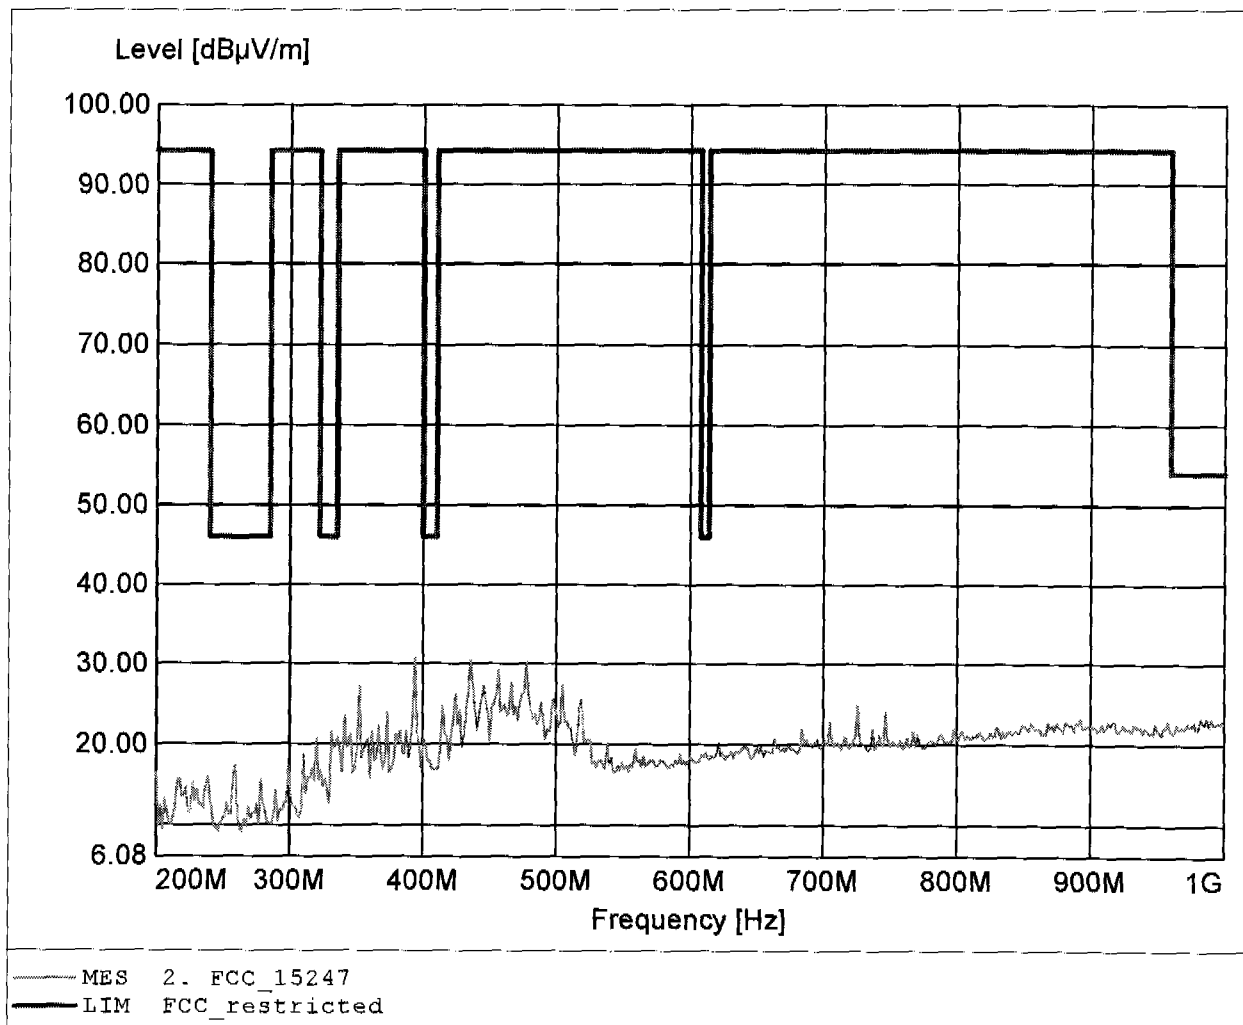

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 993.587MHz, Emax: 24.12dBµV/m, RBW: 100kHz

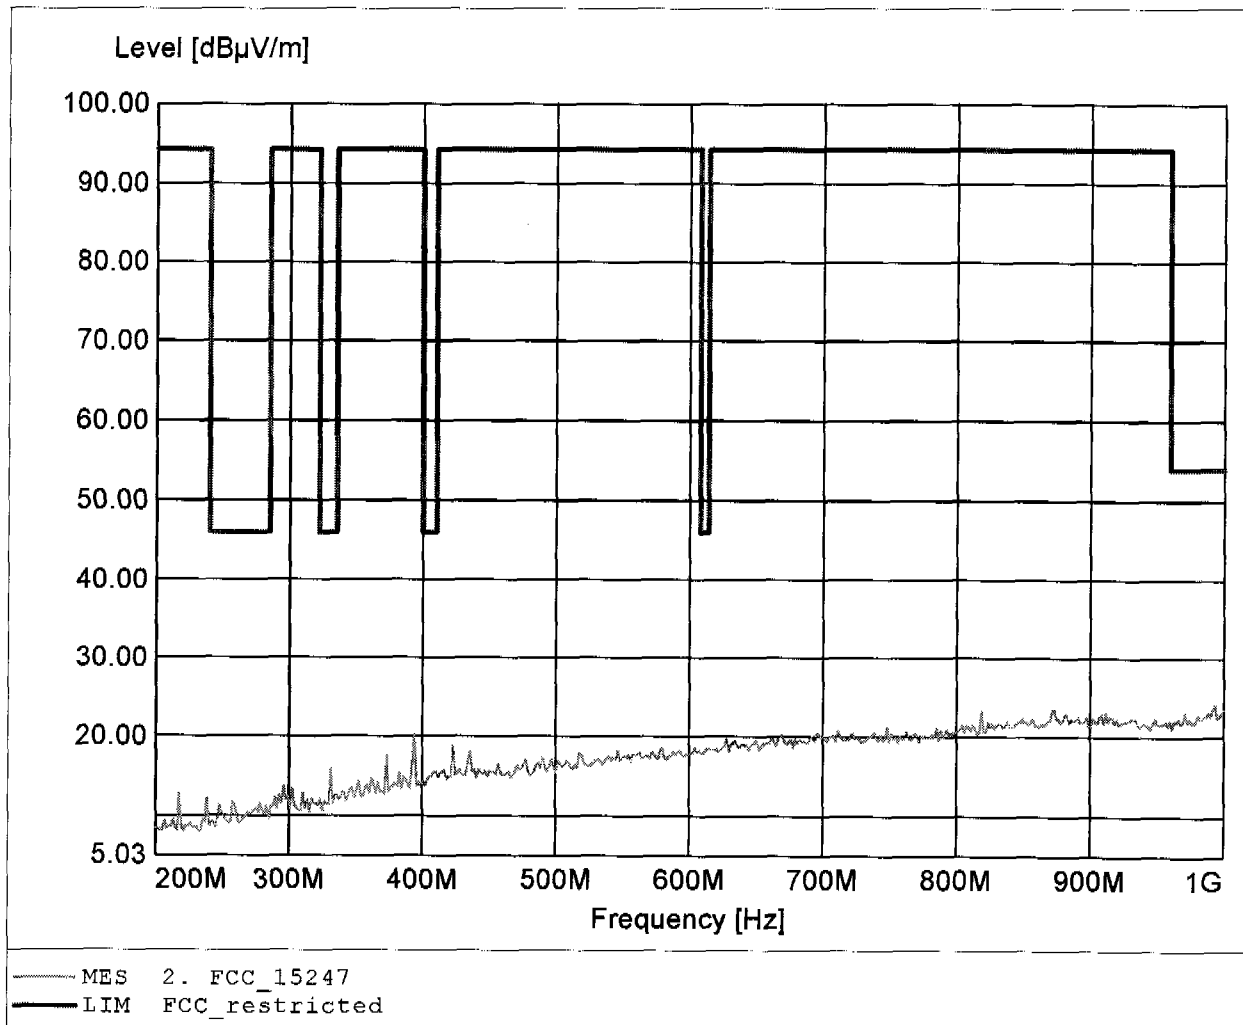

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.629GHz, Emax: 61.53dBµV/m, RBW: 1MHz

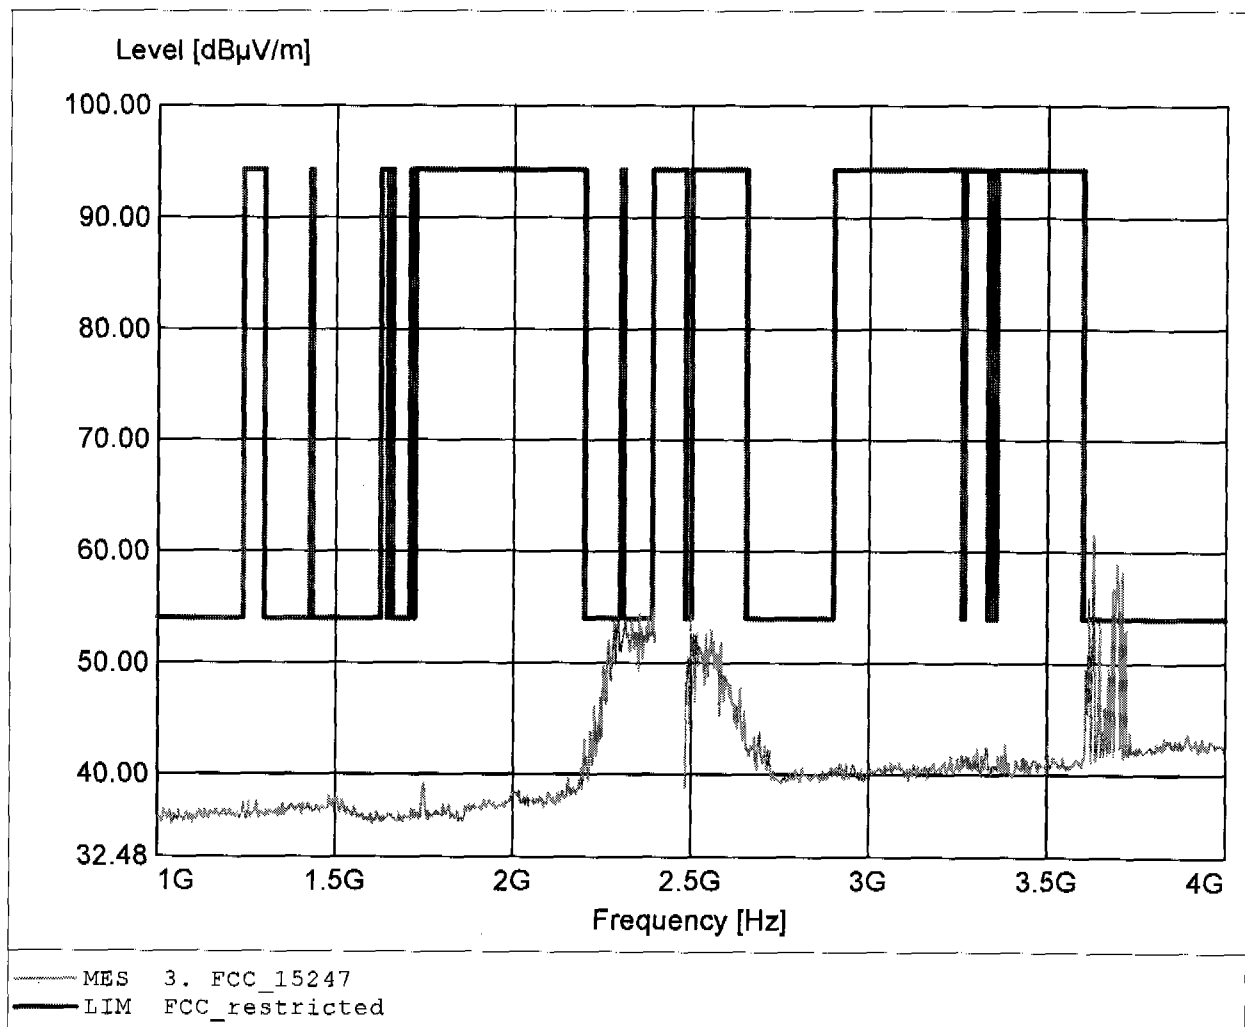

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.629GHz, Emax: 61.53dBµV/m, RBW: 1MHz

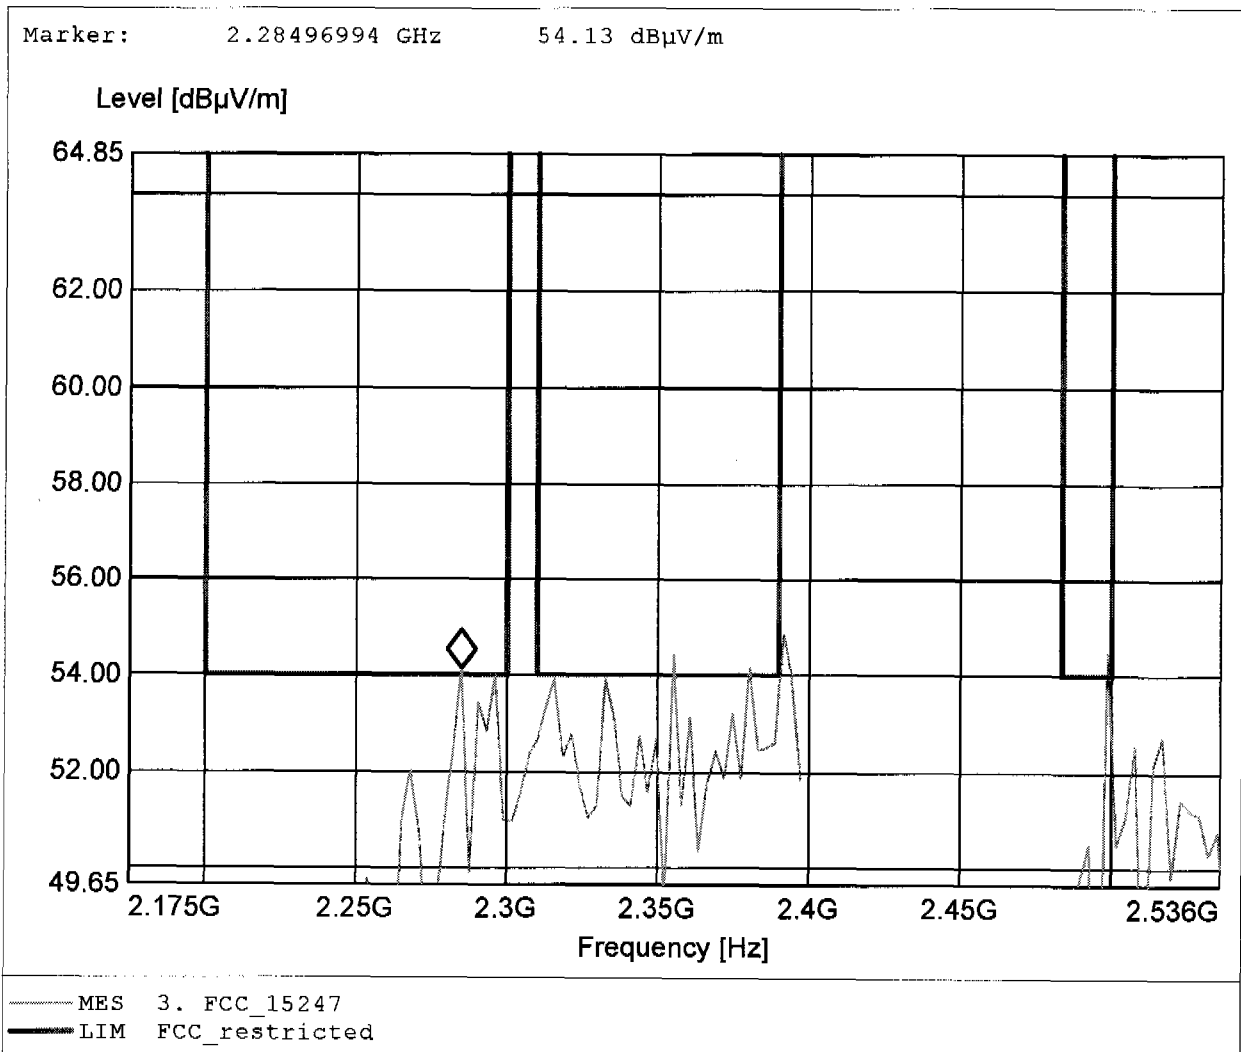

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m; Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.629GHz, Emax: 61.53dB μ V/m, RBW: 1MHz

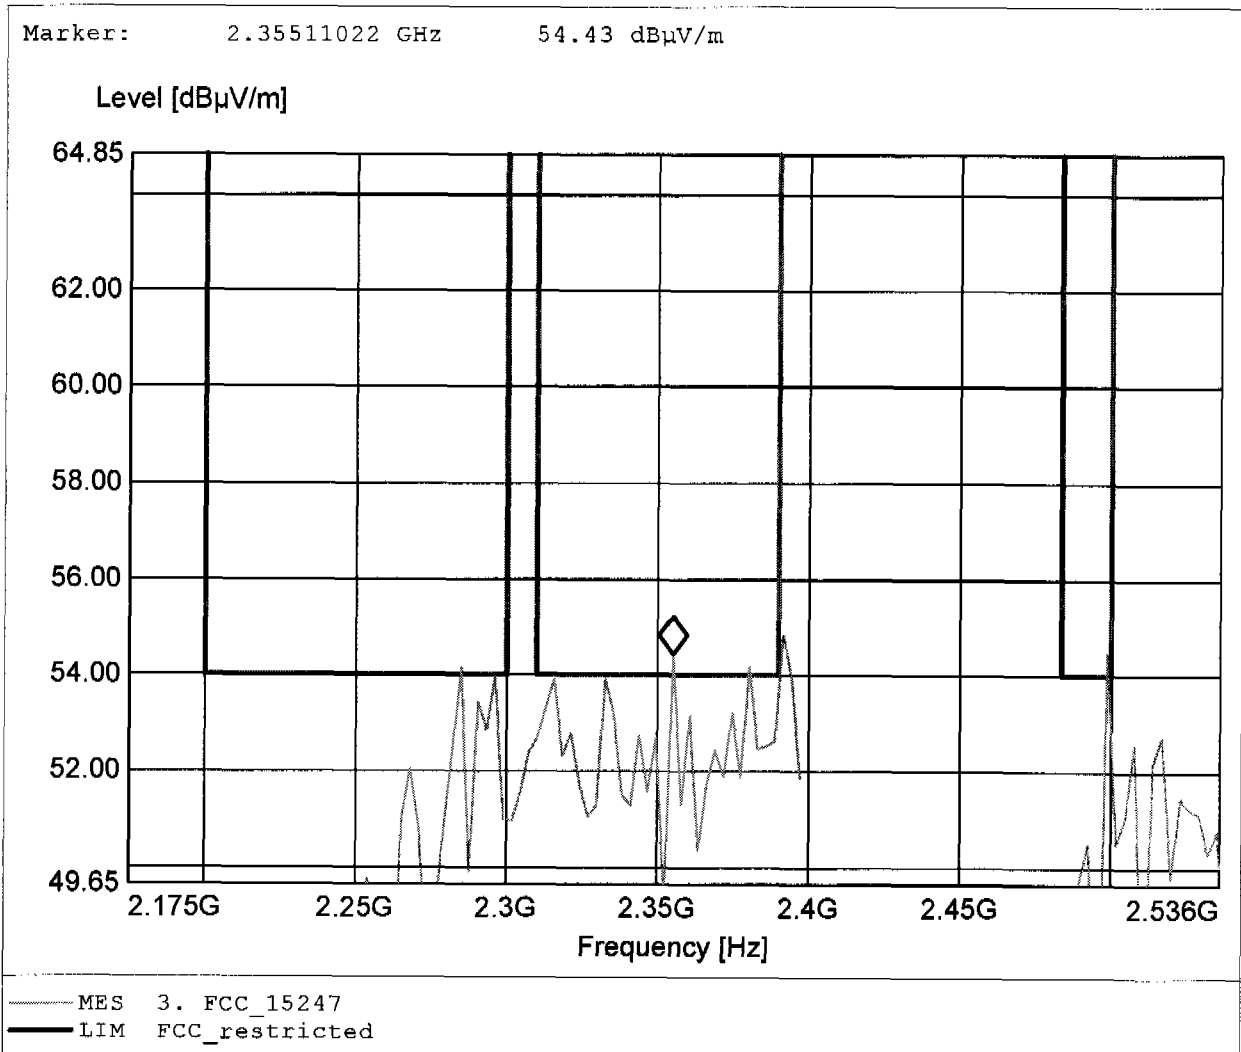

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.629GHz, Emax: 61.53dBµV/m, RBW: 1MHz

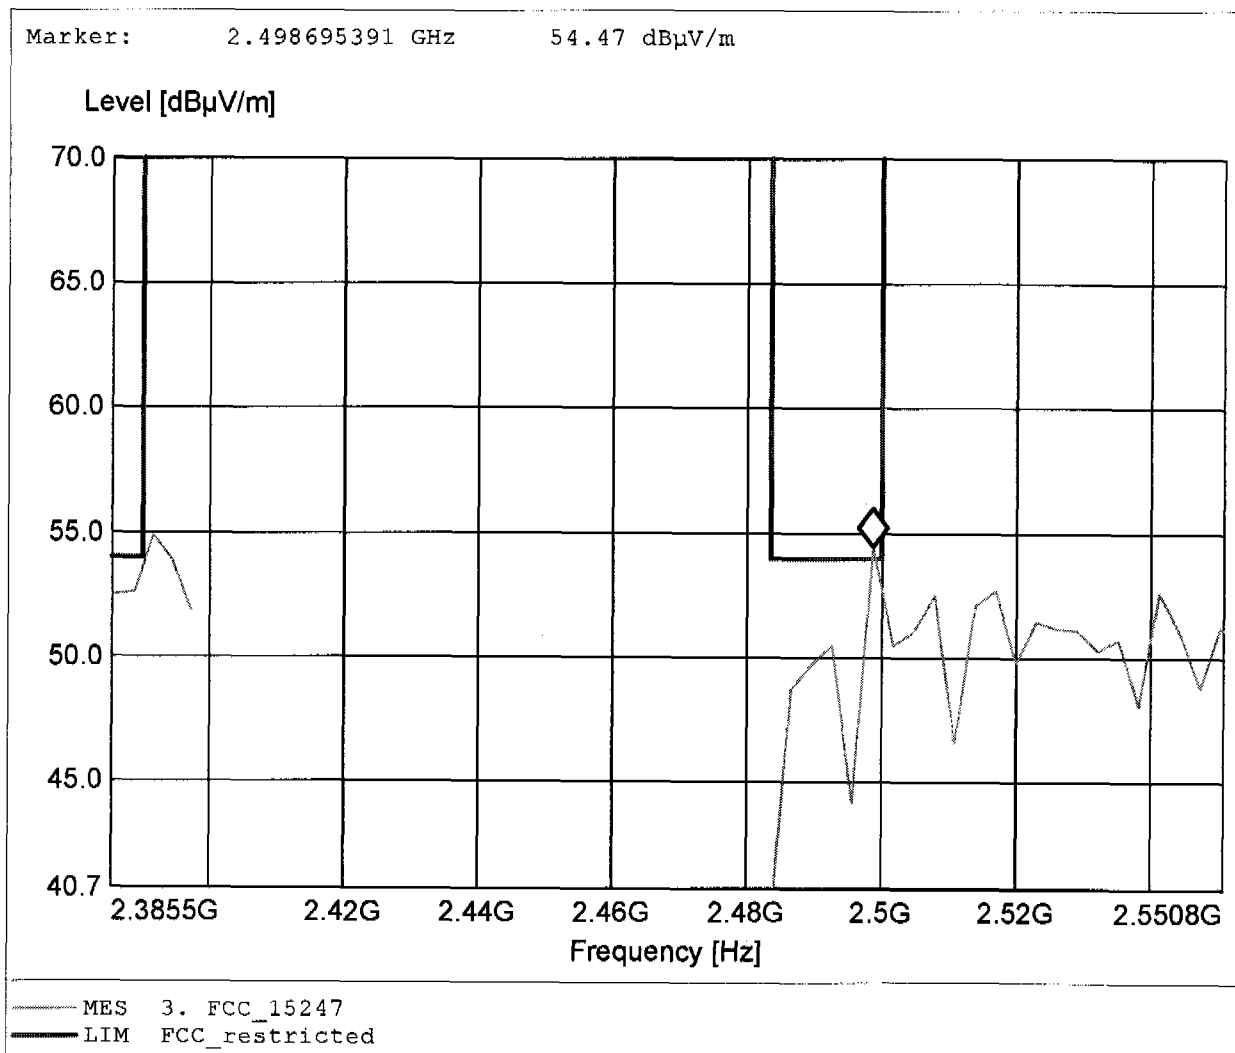

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.717GHz, Emax: 33.16dB μ V/m, RBW: 1MHz

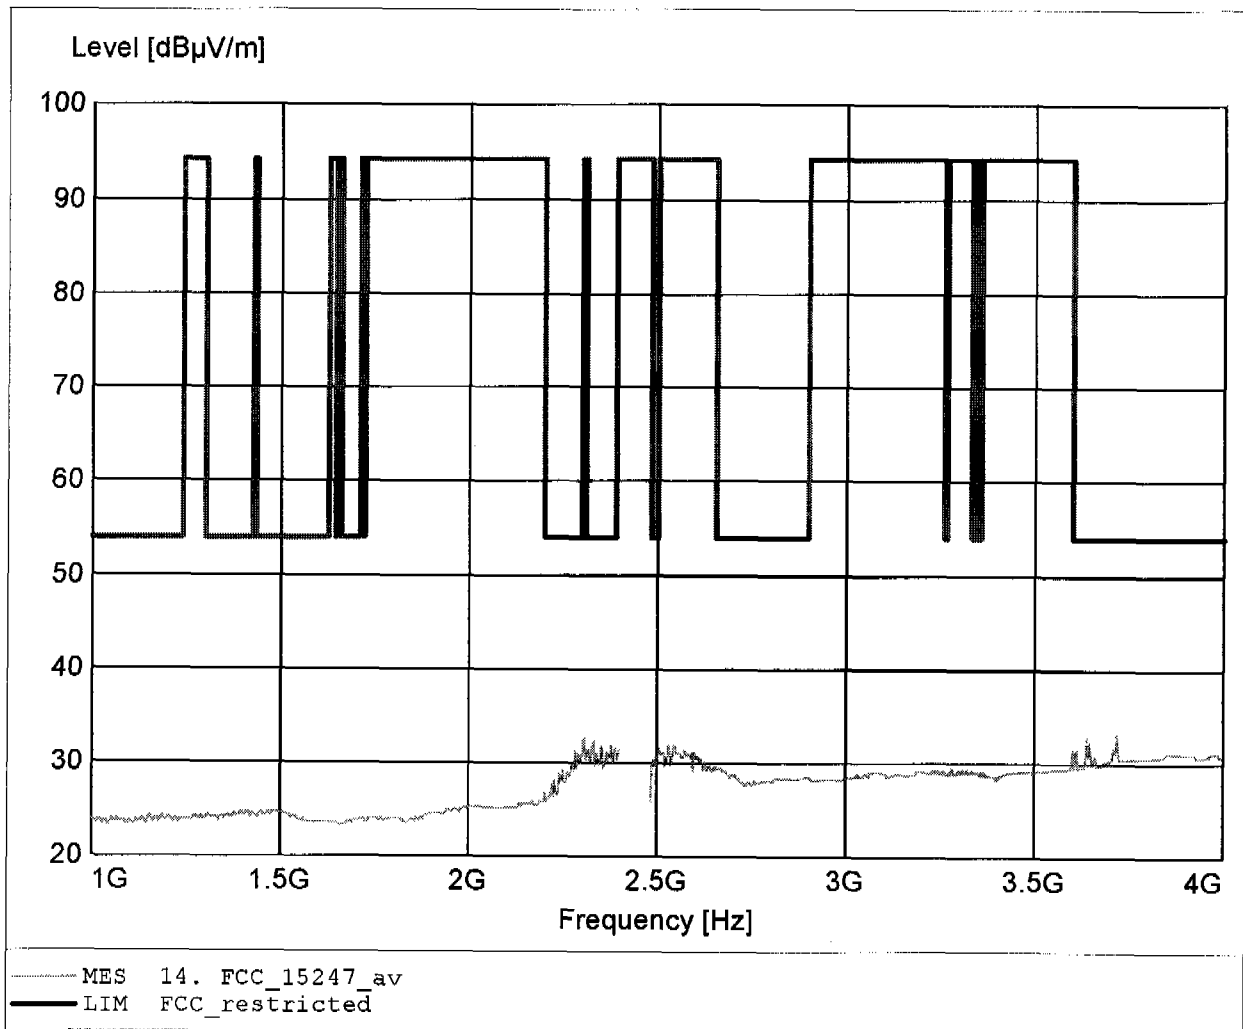

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.663GHz, Emax: 57.55dB μ V/m, RBW: 1MHz

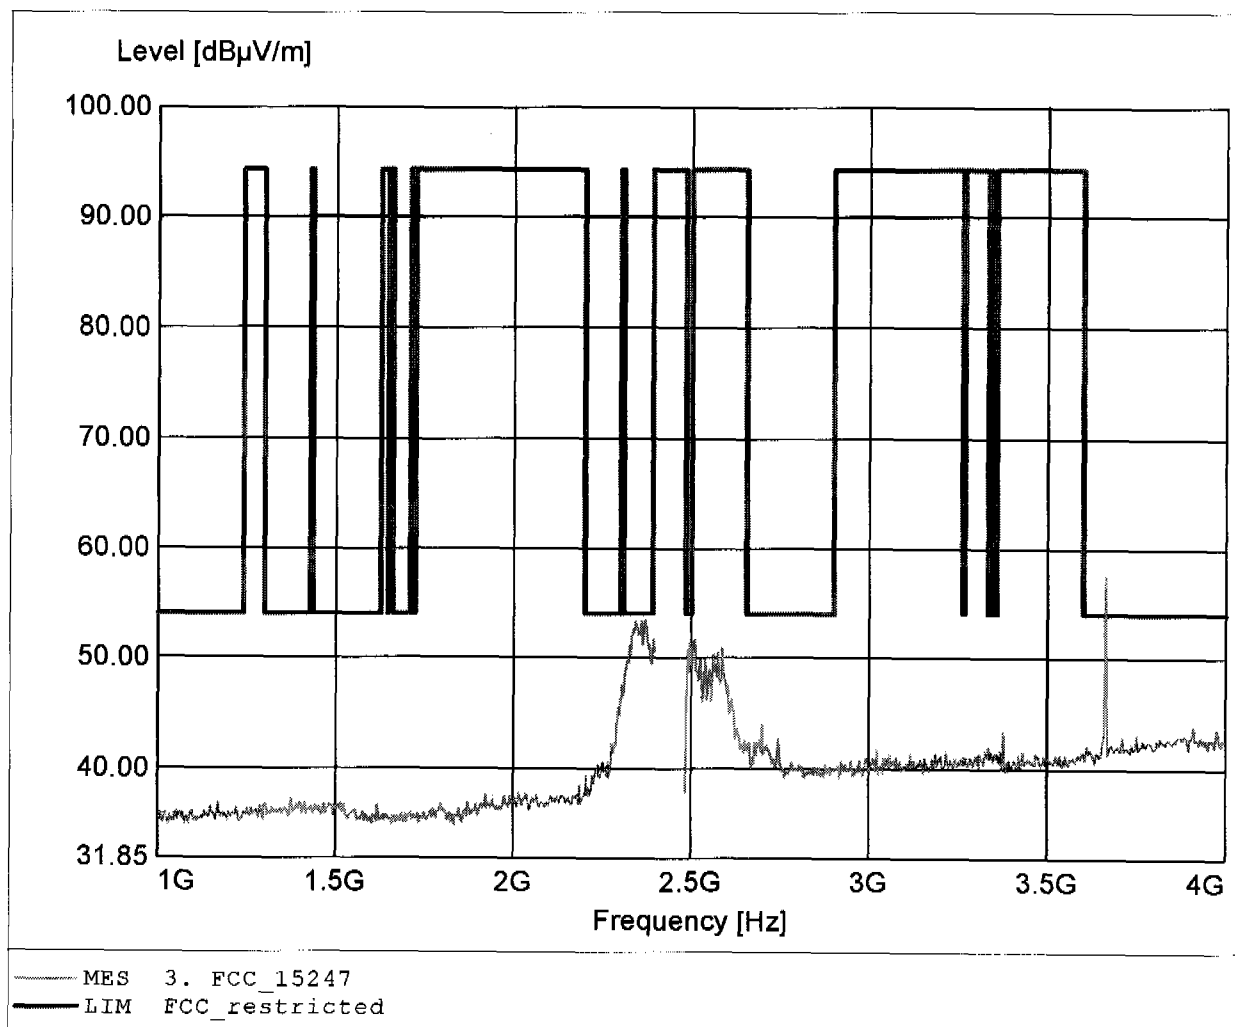

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.663GHz, Emax: 57.55dBµV/m, RBW: 1MHz

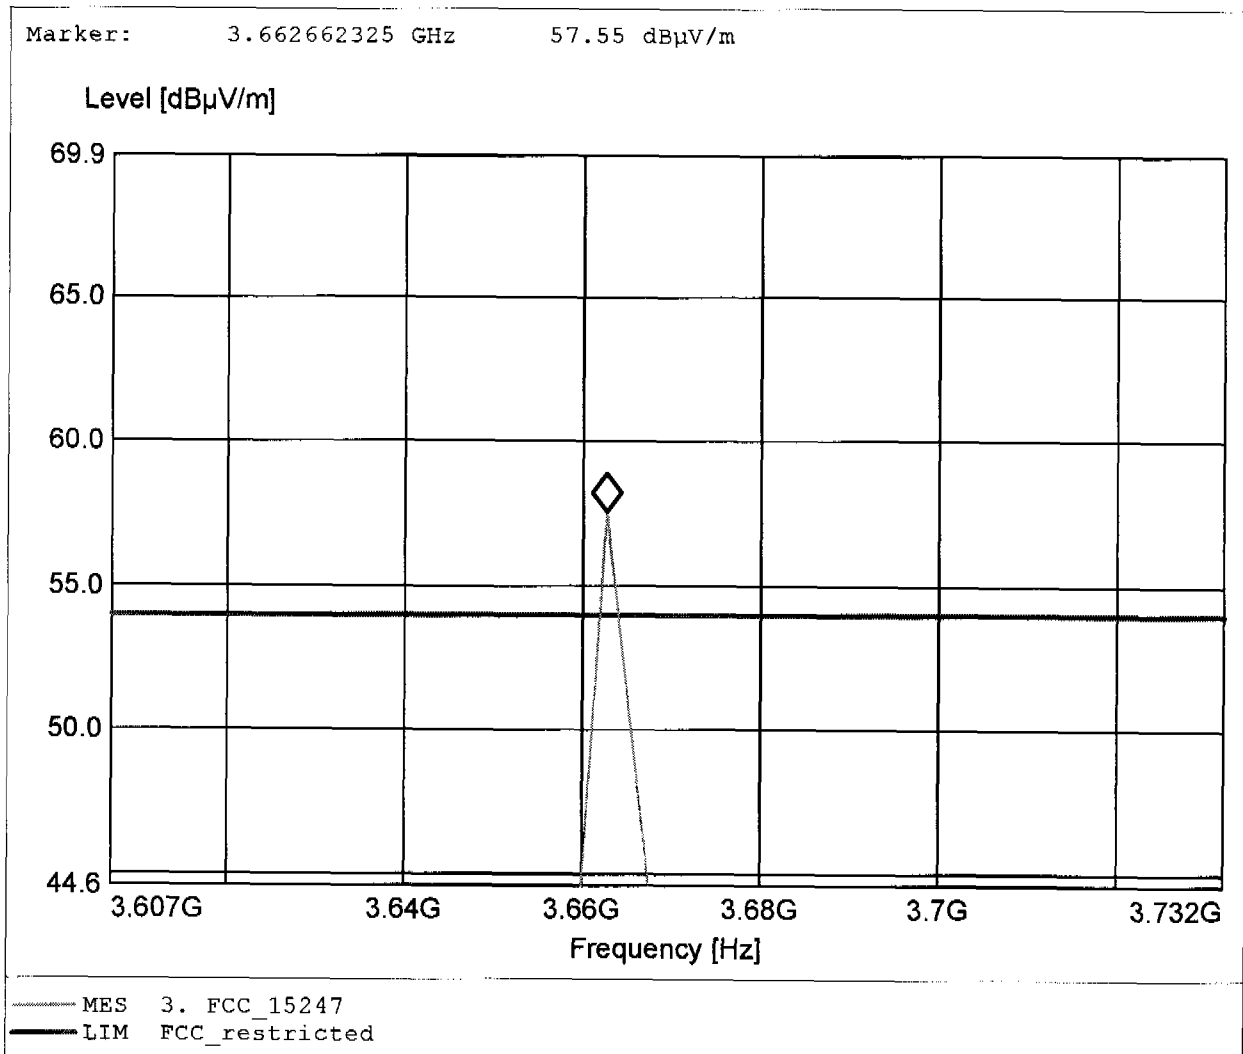

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.349GHz, Emax: 37.31dBµV/m, RBW: 1MHz

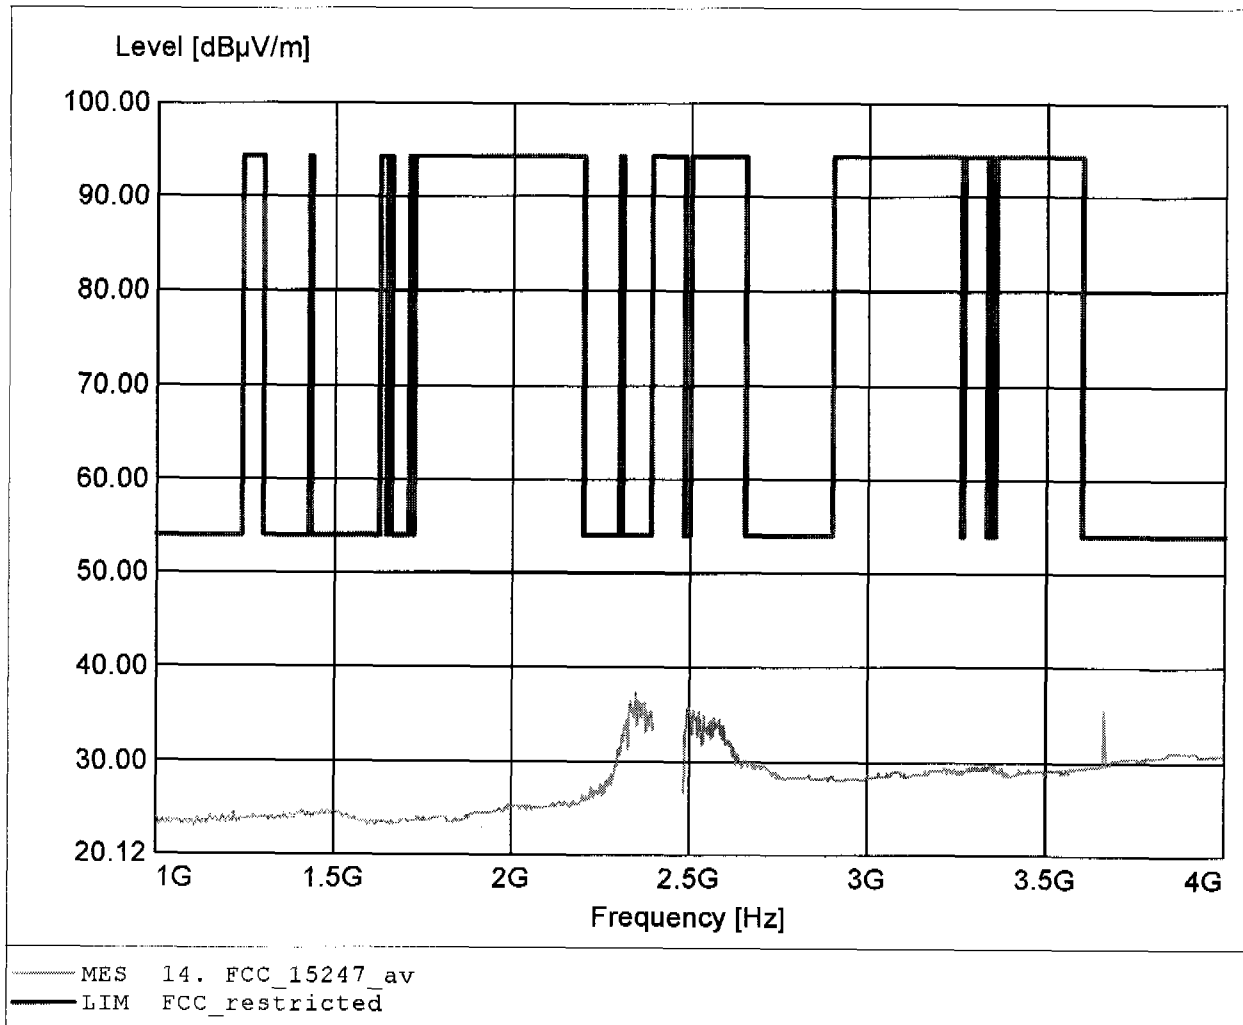

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.222GHz, Emax: 54.31dBµV/m, RBW: 1MHz

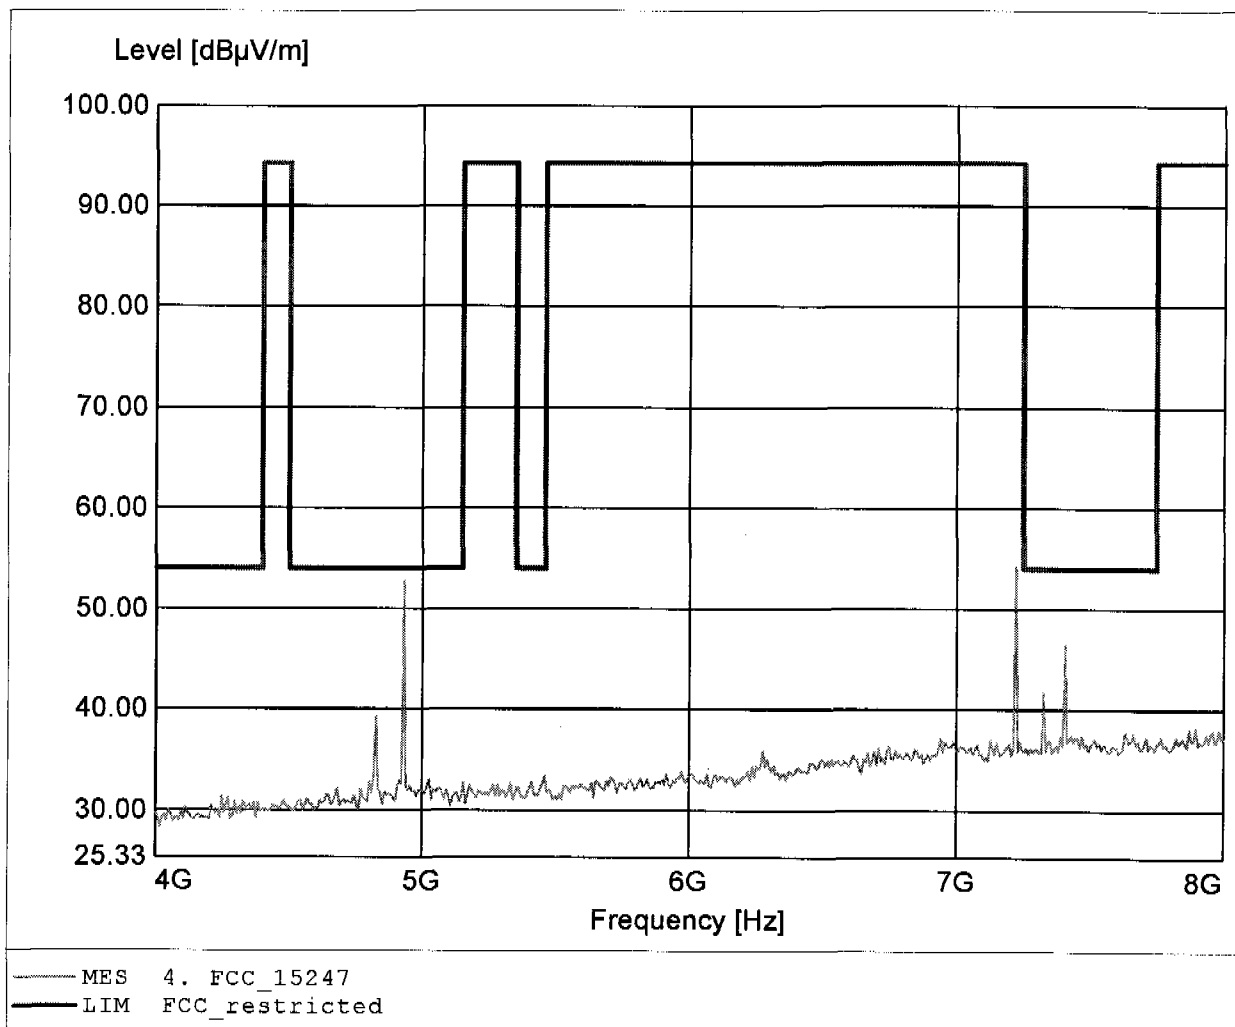

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 4.930GHz, Emax: 53.09dBµV/m, RBW: 1MHz

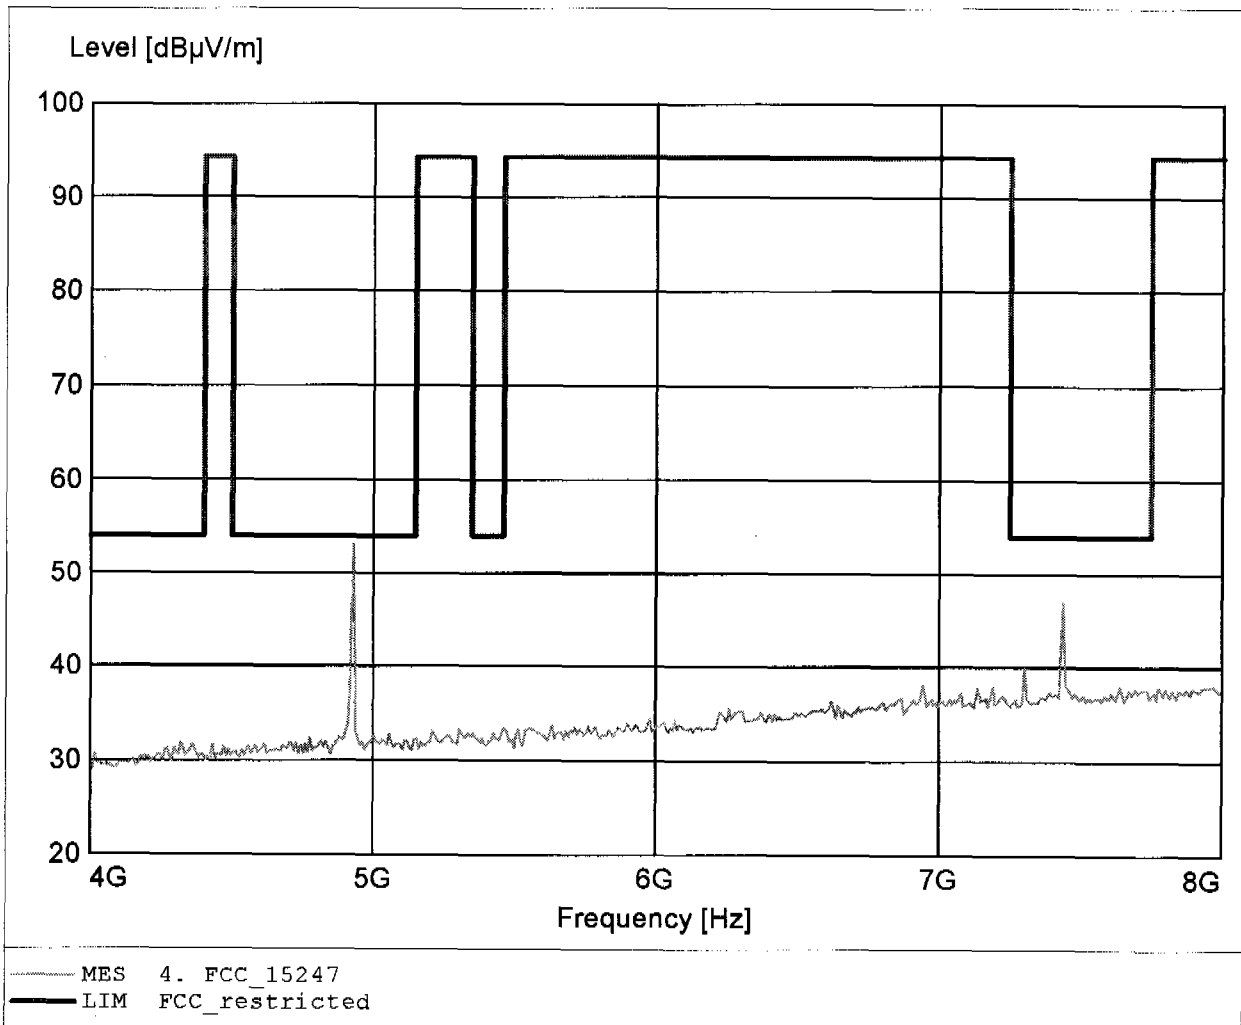

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 48.39dBµV/m, RBW: 1MHz

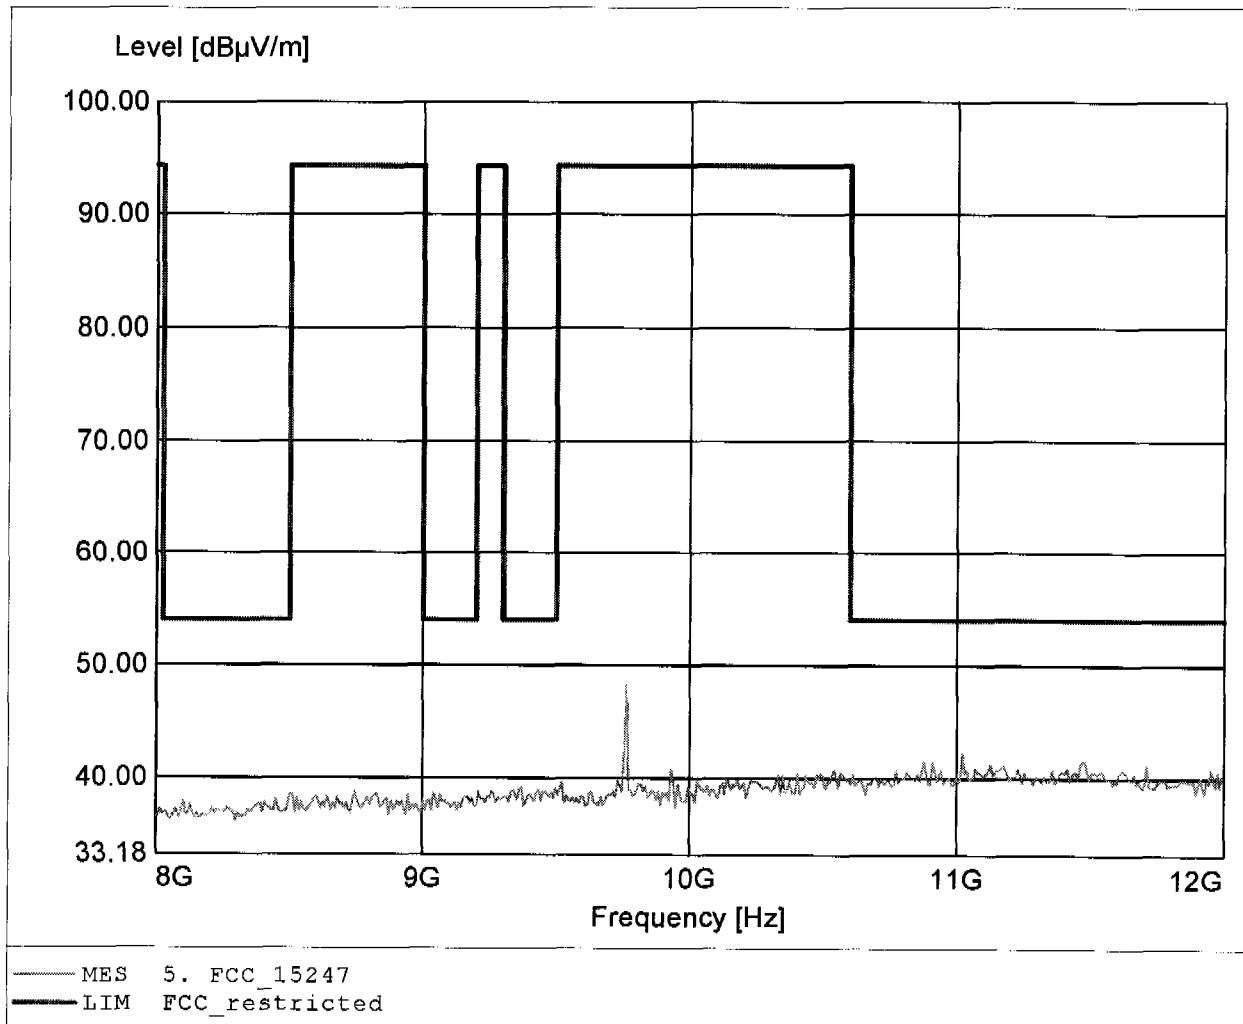

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 50.82dBµV/m, RBW: 1MHz

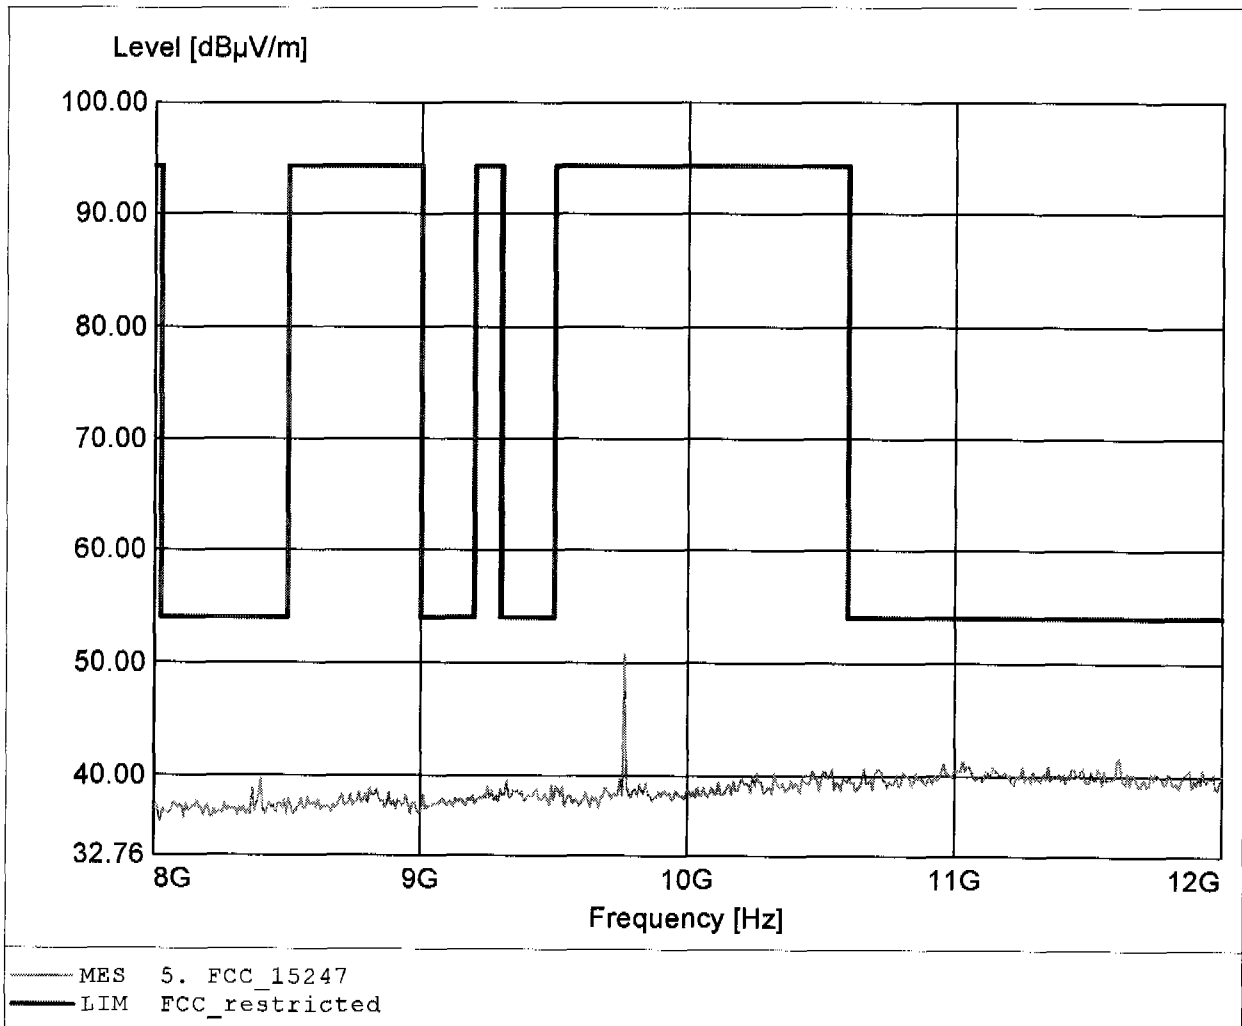

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.655GHz, Emax: 58.82dBµV/m, RBW: 1MHz

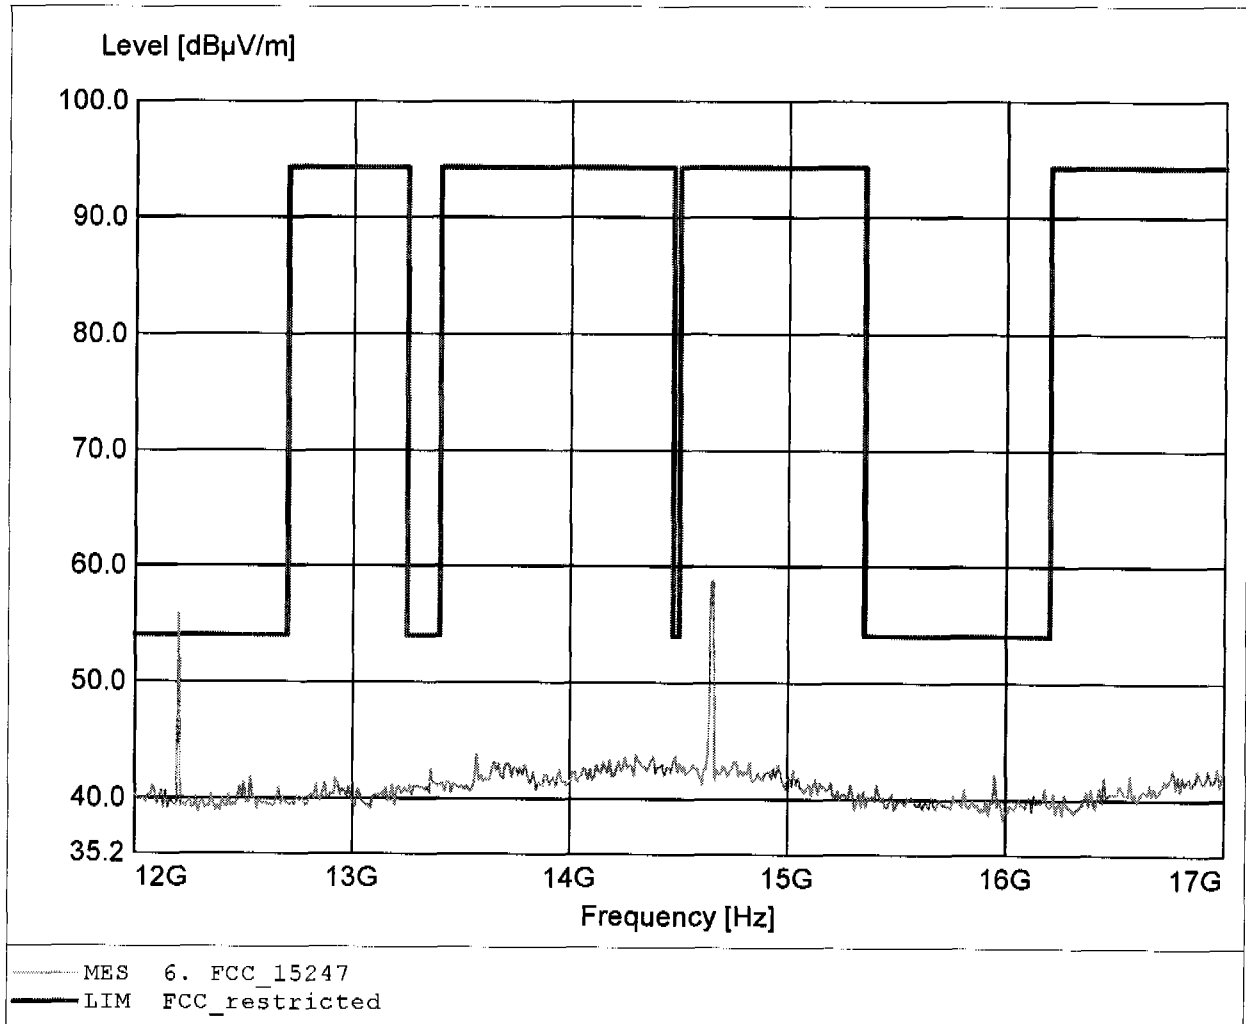

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.645GHz, Emax: 34.74dBµV/m, RBW: 1MHz

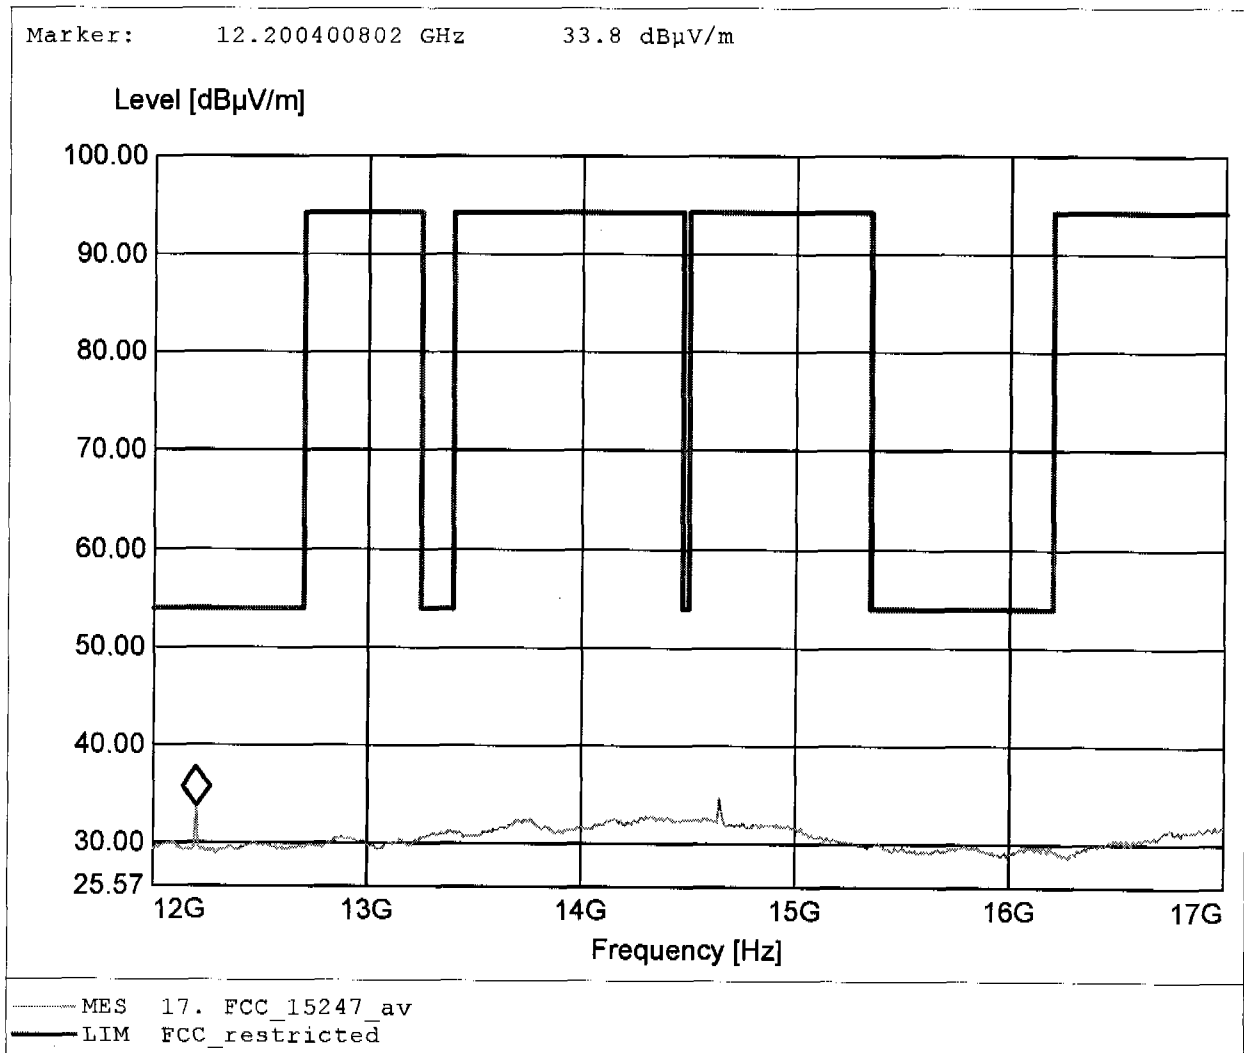

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 61.28dBµV/m, RBW: 1MHz

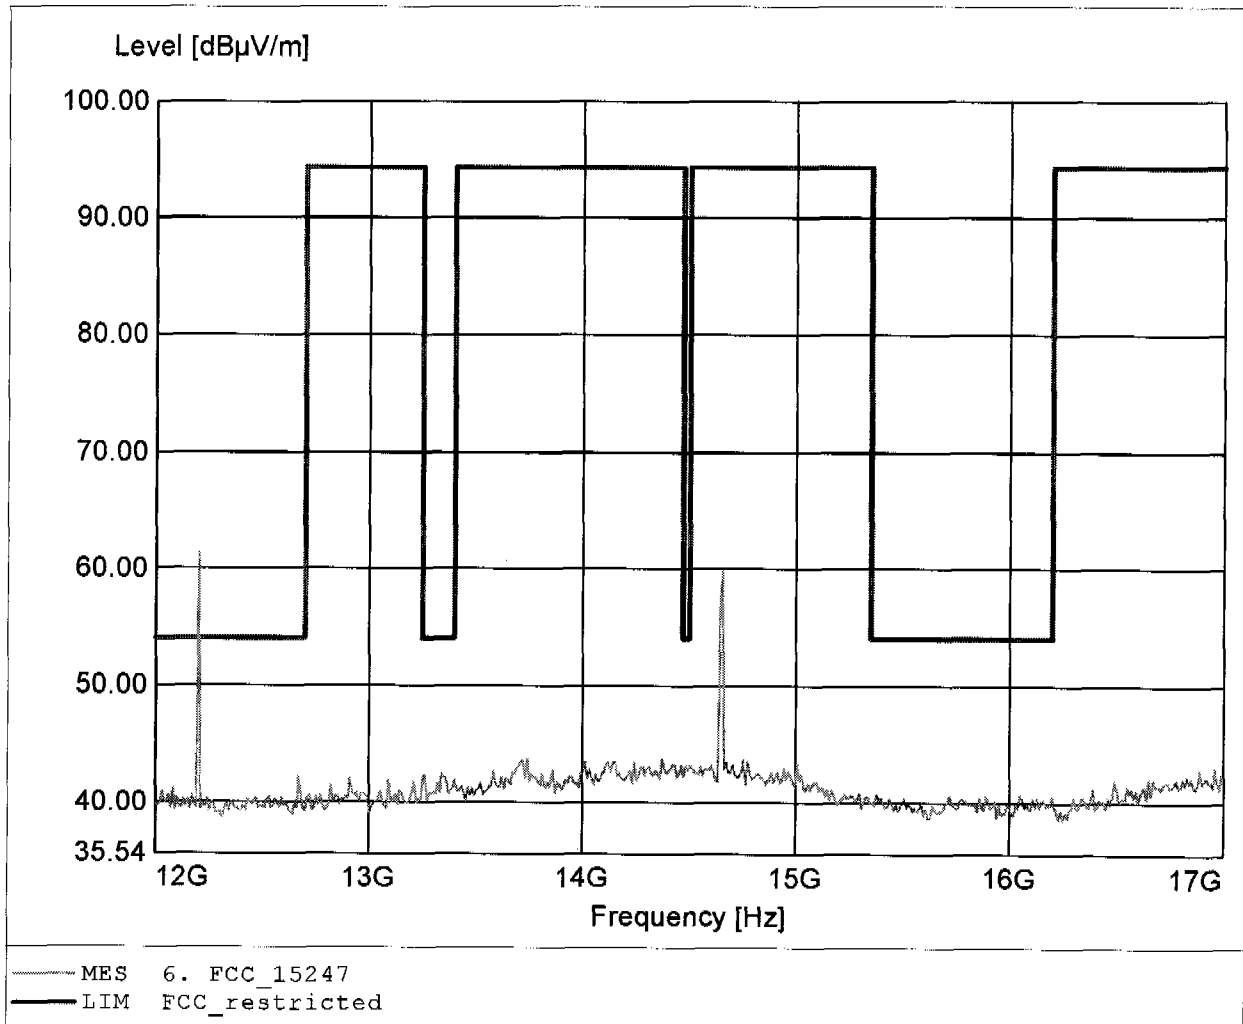

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 39.34dBµV/m, RBW: 1MHz

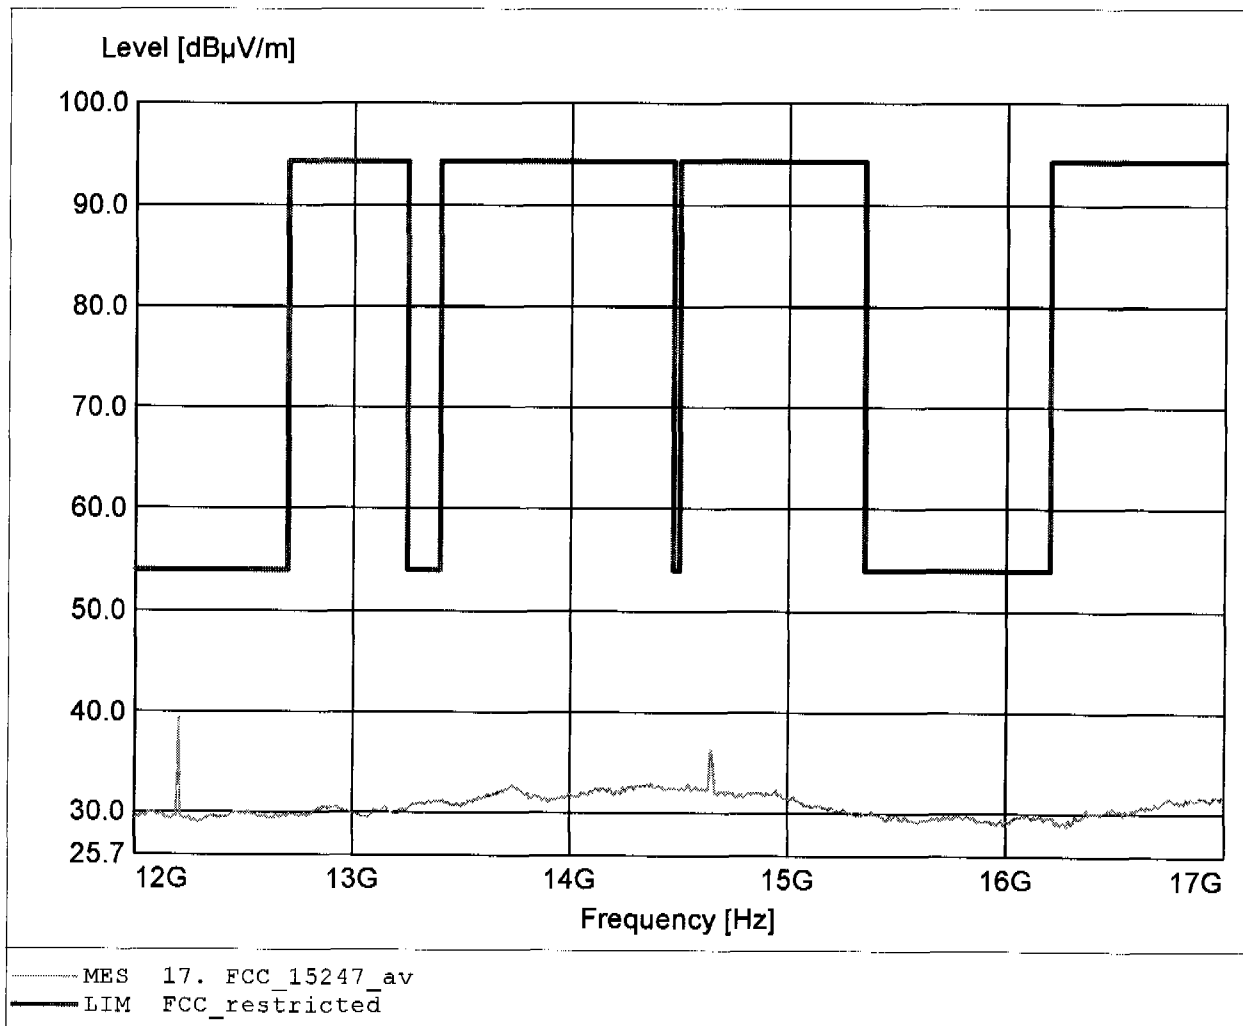

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 49.01dBµV/m, RBW: 1MHz

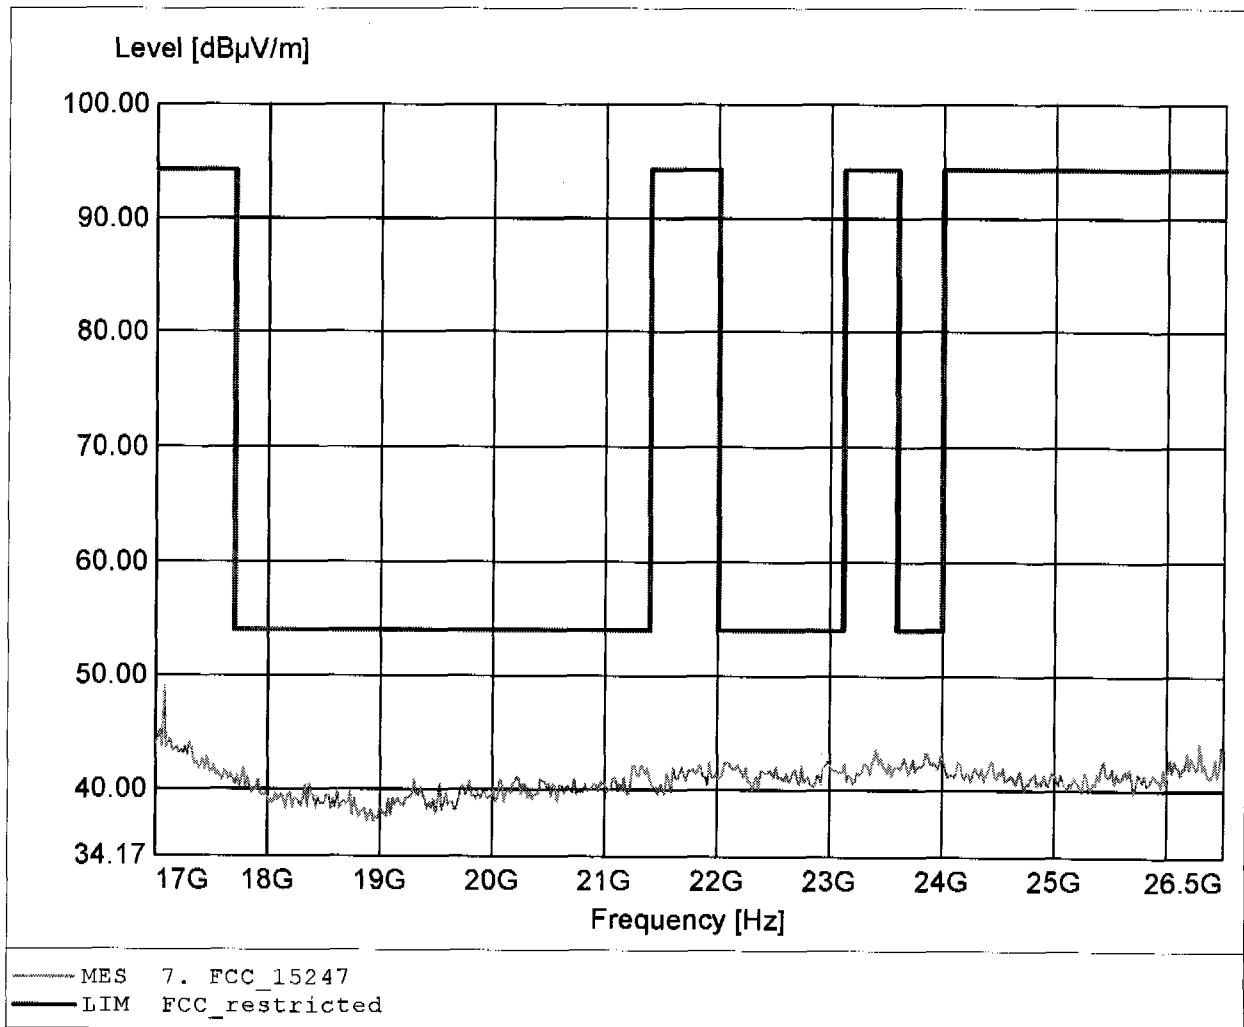

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 47
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.095GHz, Emax: 44.67dBµV/m, RBW: 1MHz

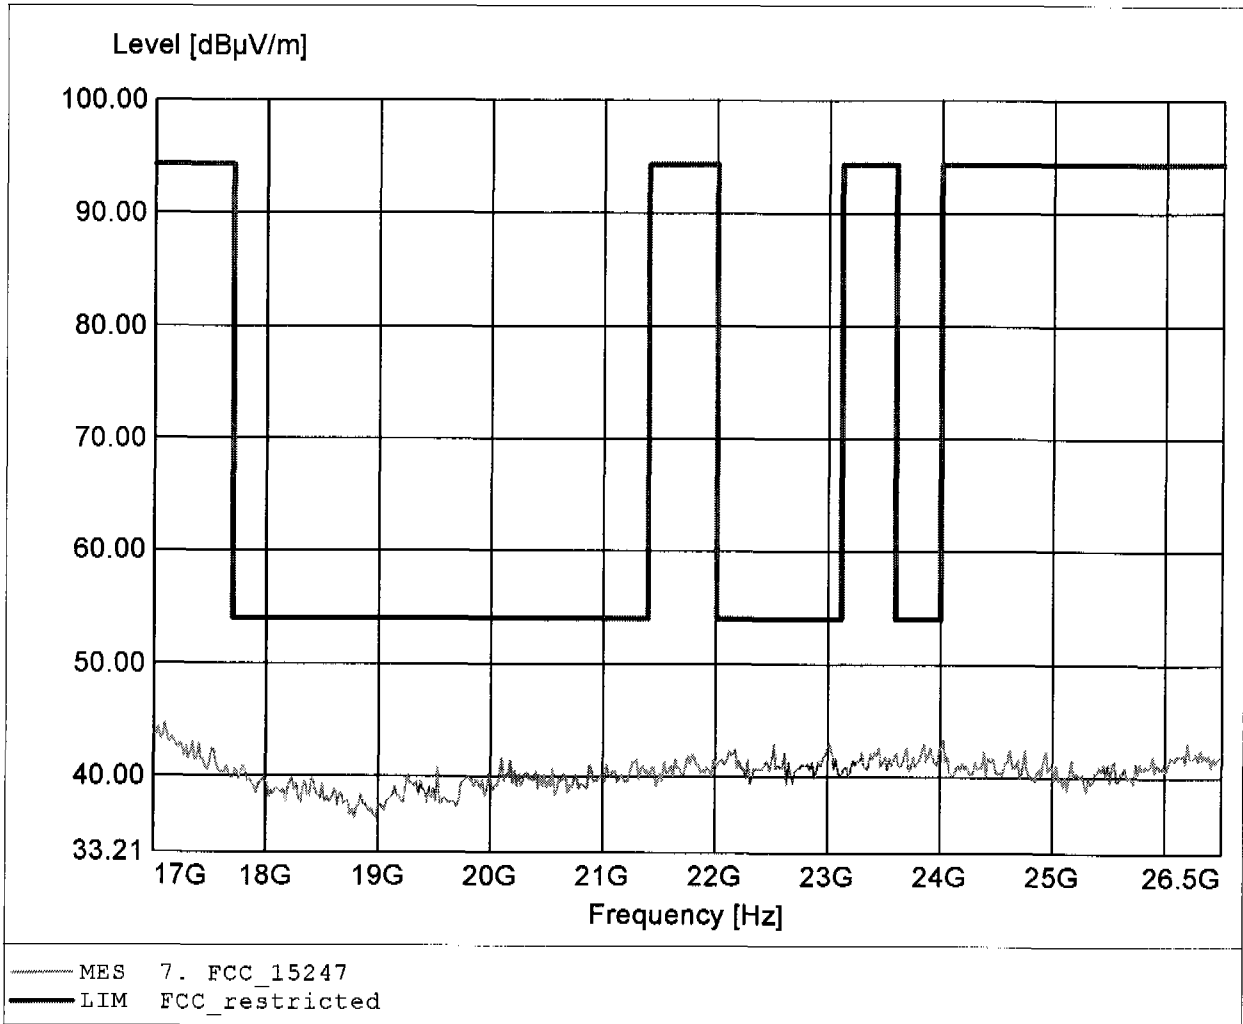

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 165.932MHz, Emax: 34.90dBµV/m, RBW: 100kHz

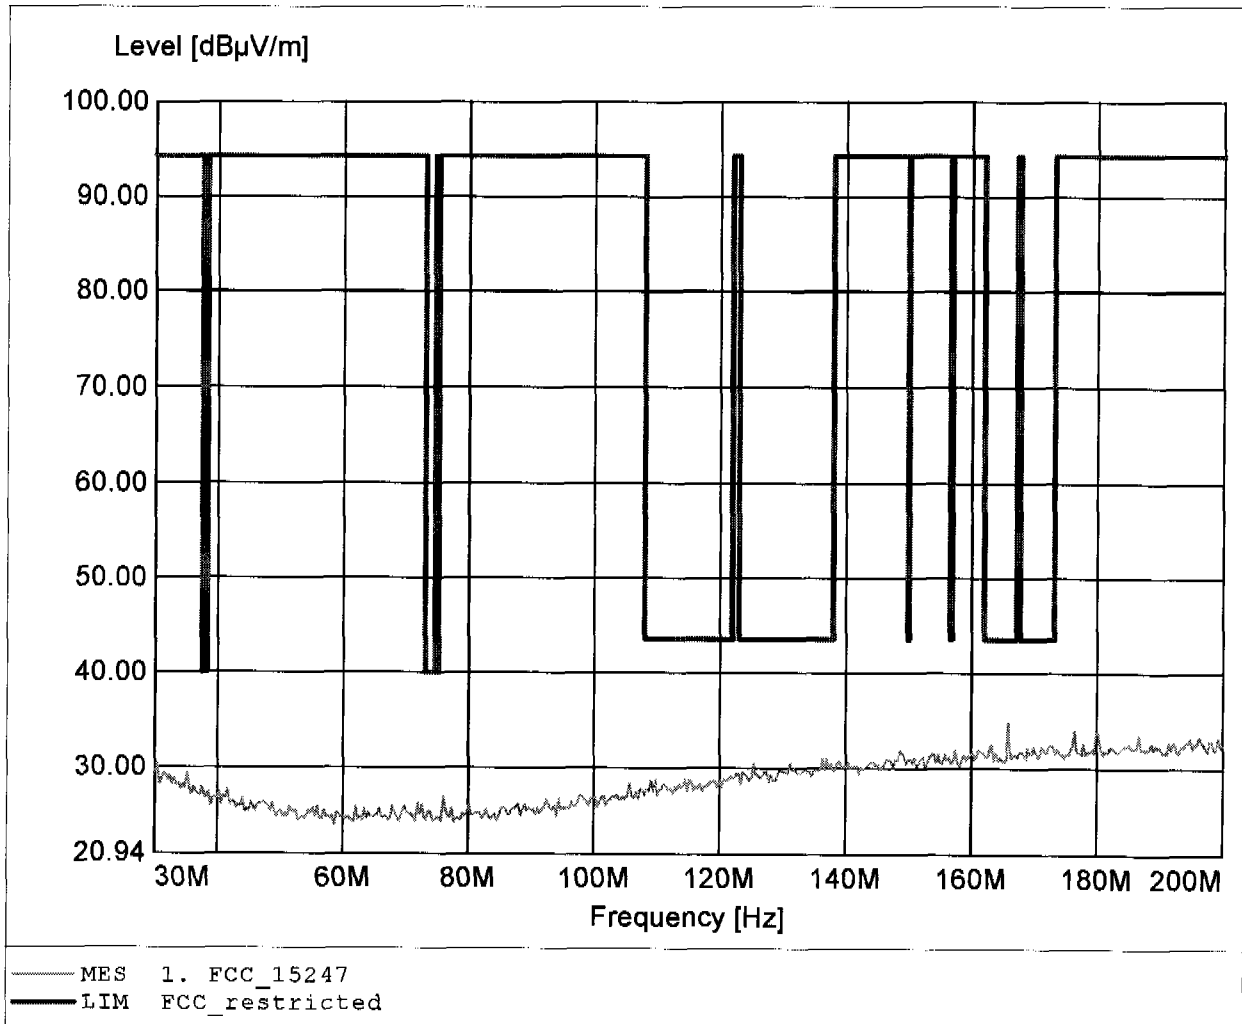

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 170.361MHz, Emax: 34.22dBµV/m, RBW: 100kHz

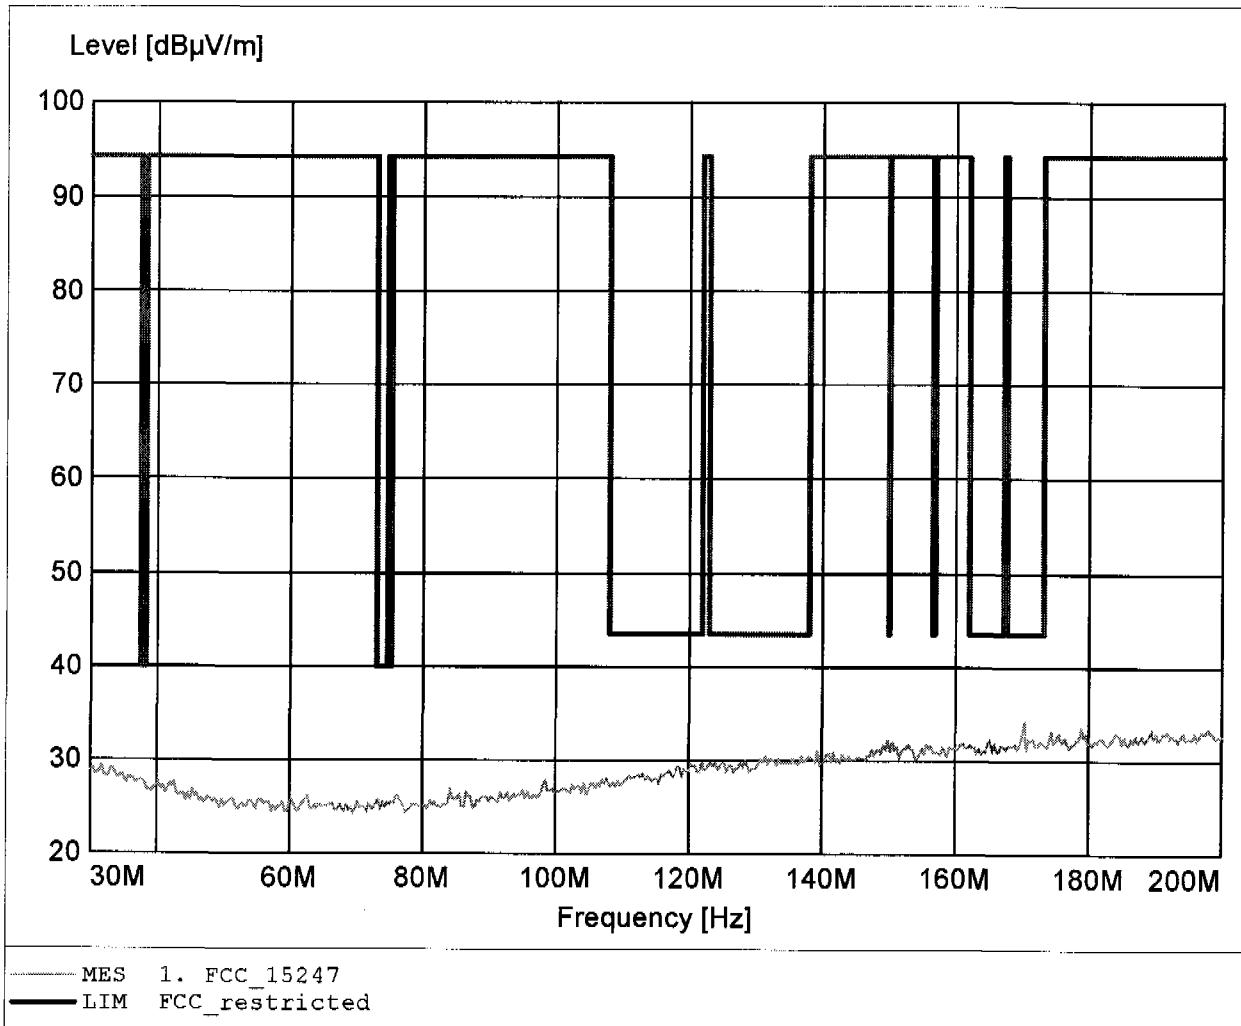

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 393.988MHz, Emax: 30.61dBµV/m, RBW: 100kHz

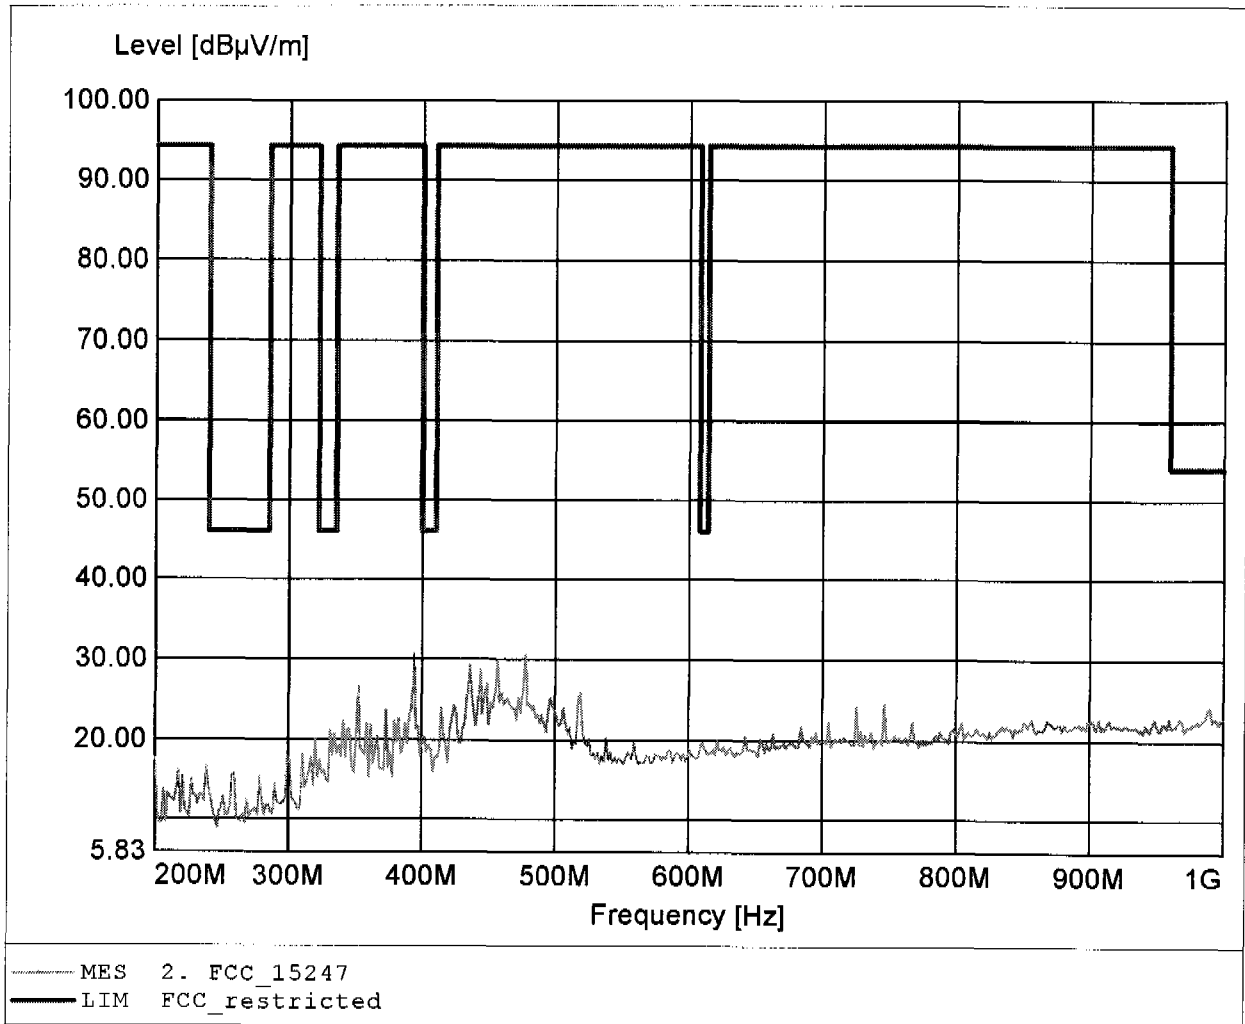

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 996.794MHz, Emax: 23.66dBuV/m, RBW: 100kHz

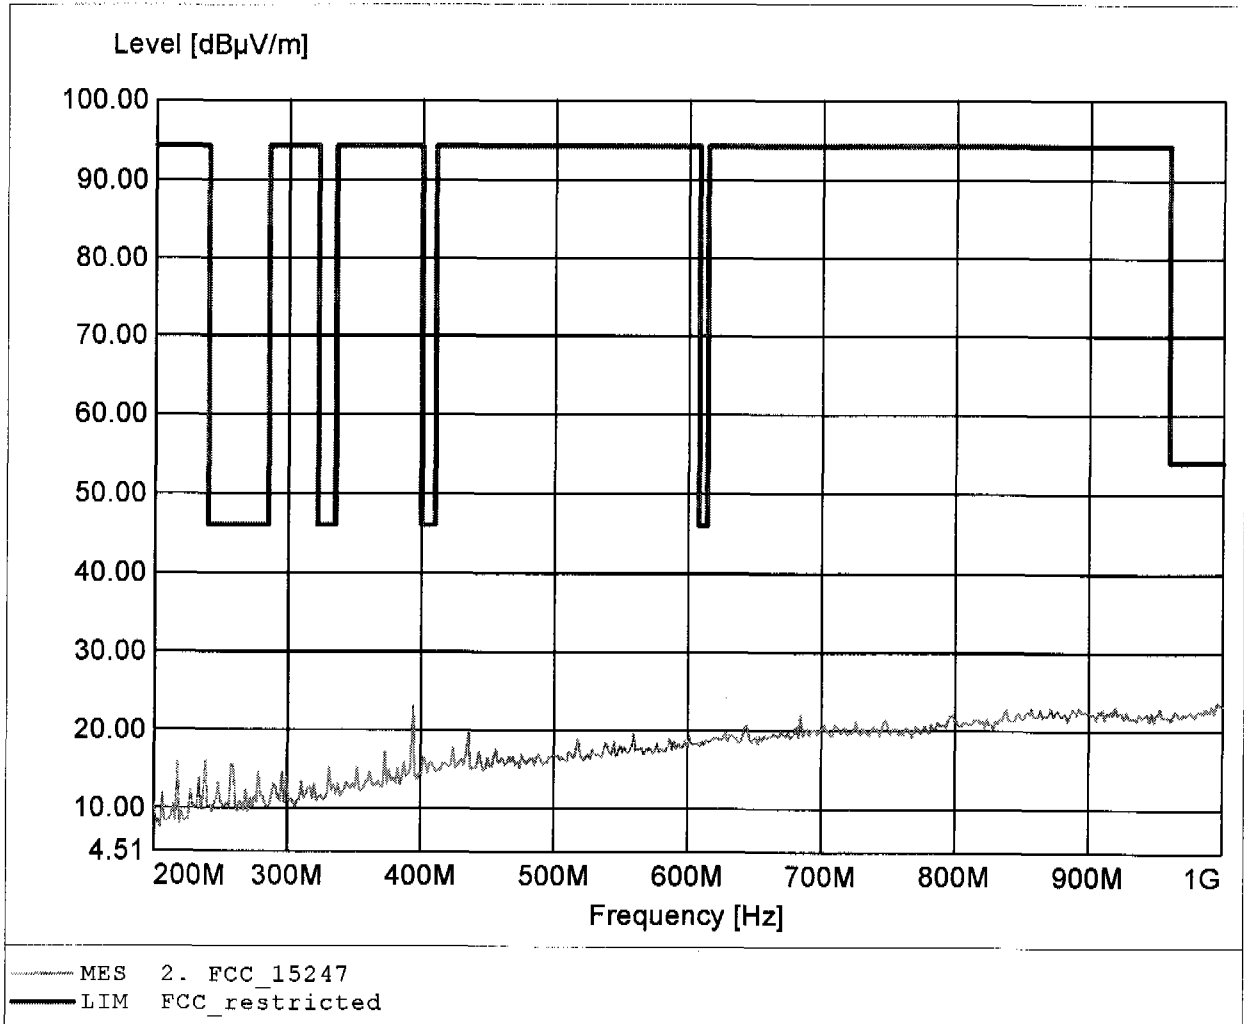

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.723GHz, Emax: 61.03dBµV/m, RBW: 1MHz

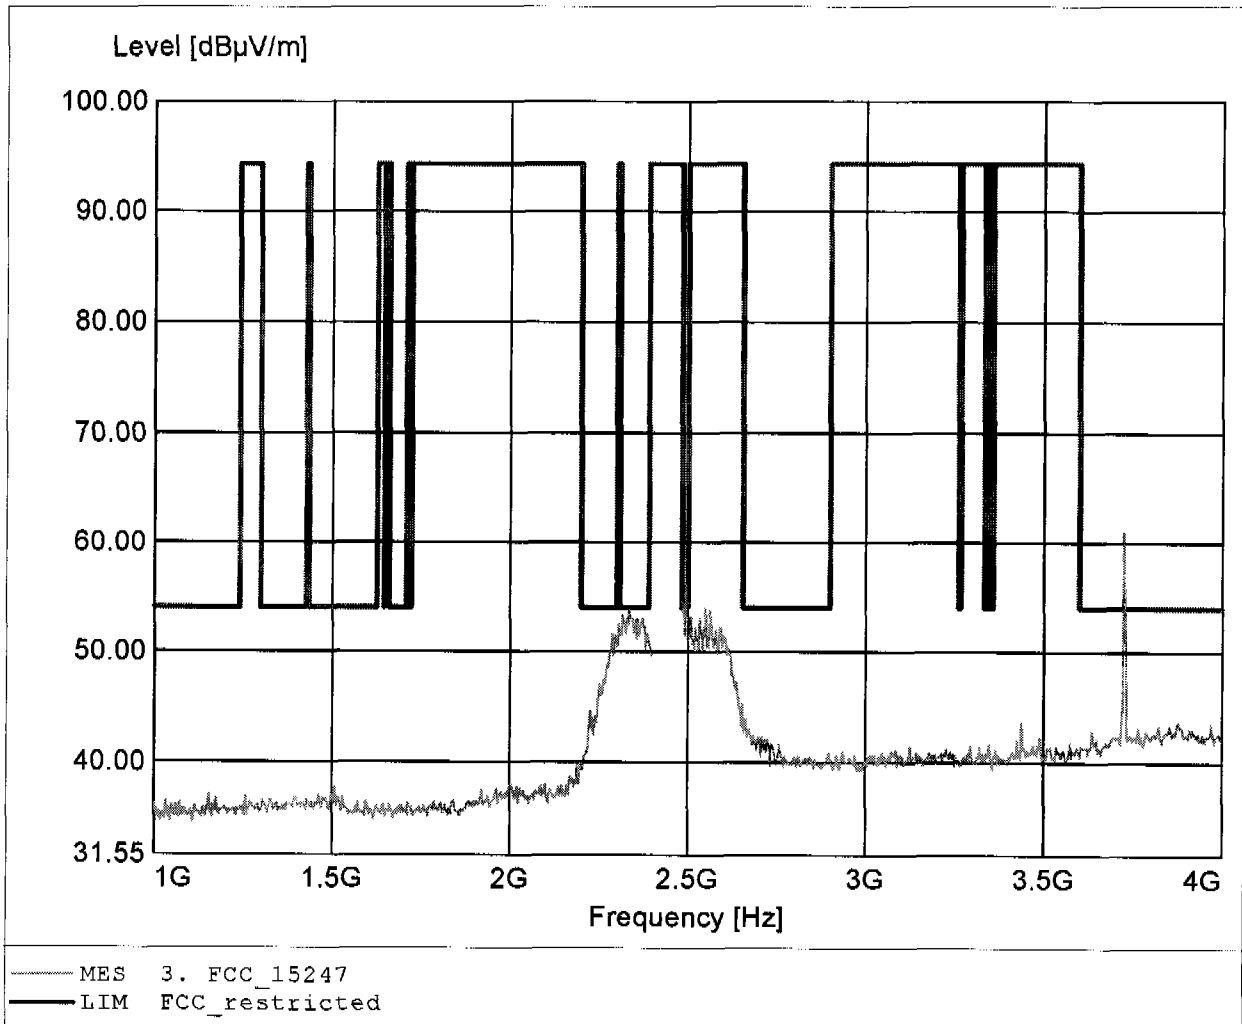

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.723GHz, Emax: 61.03dBuV/m, RBW: 1MHz

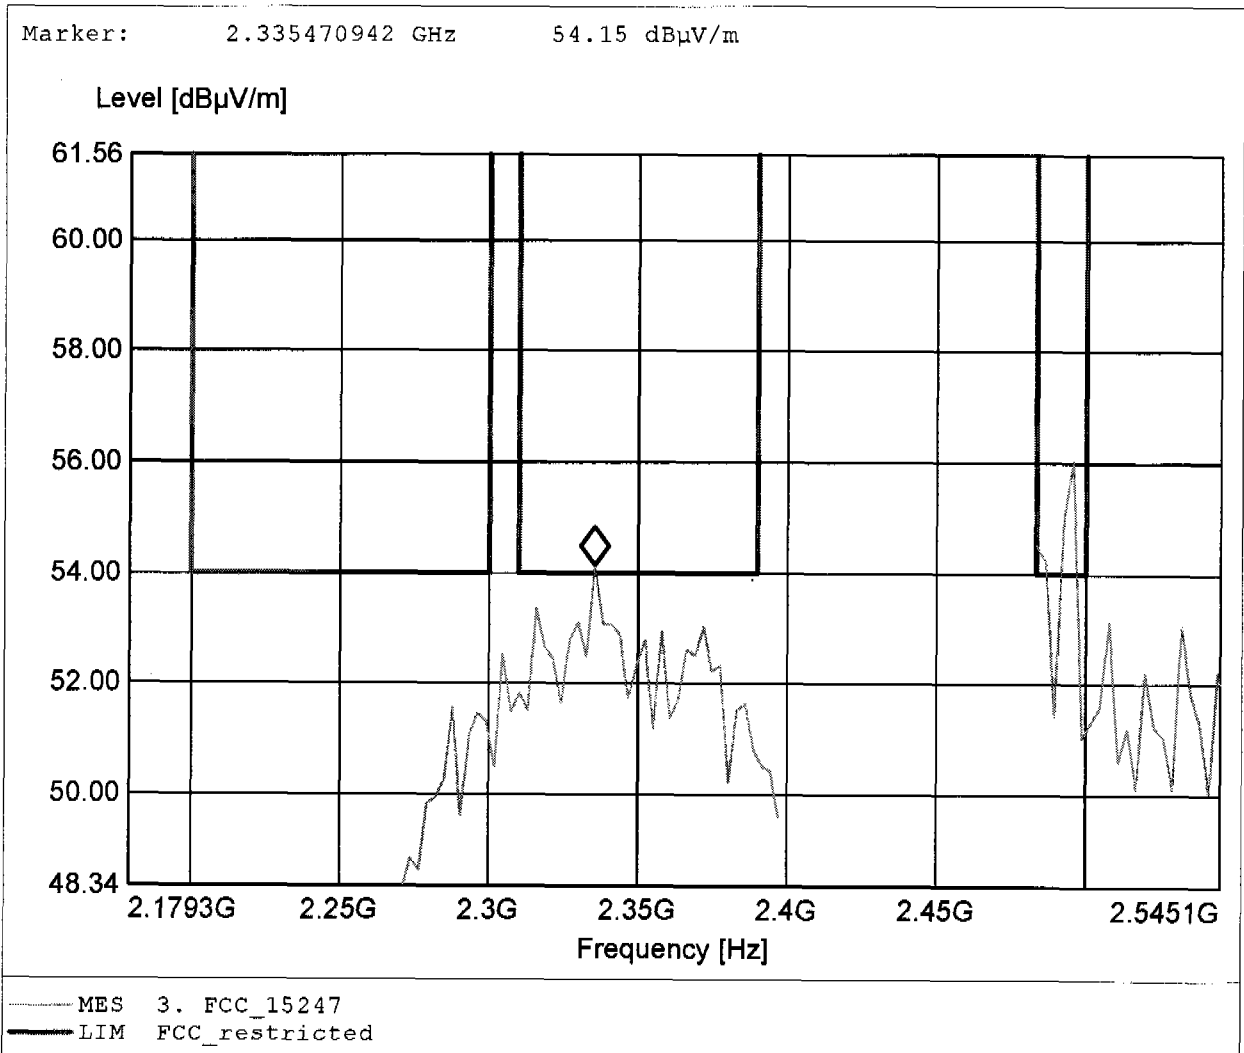

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.723GHz, Emax: 61.03dBµV/m, RBW: 1MHz

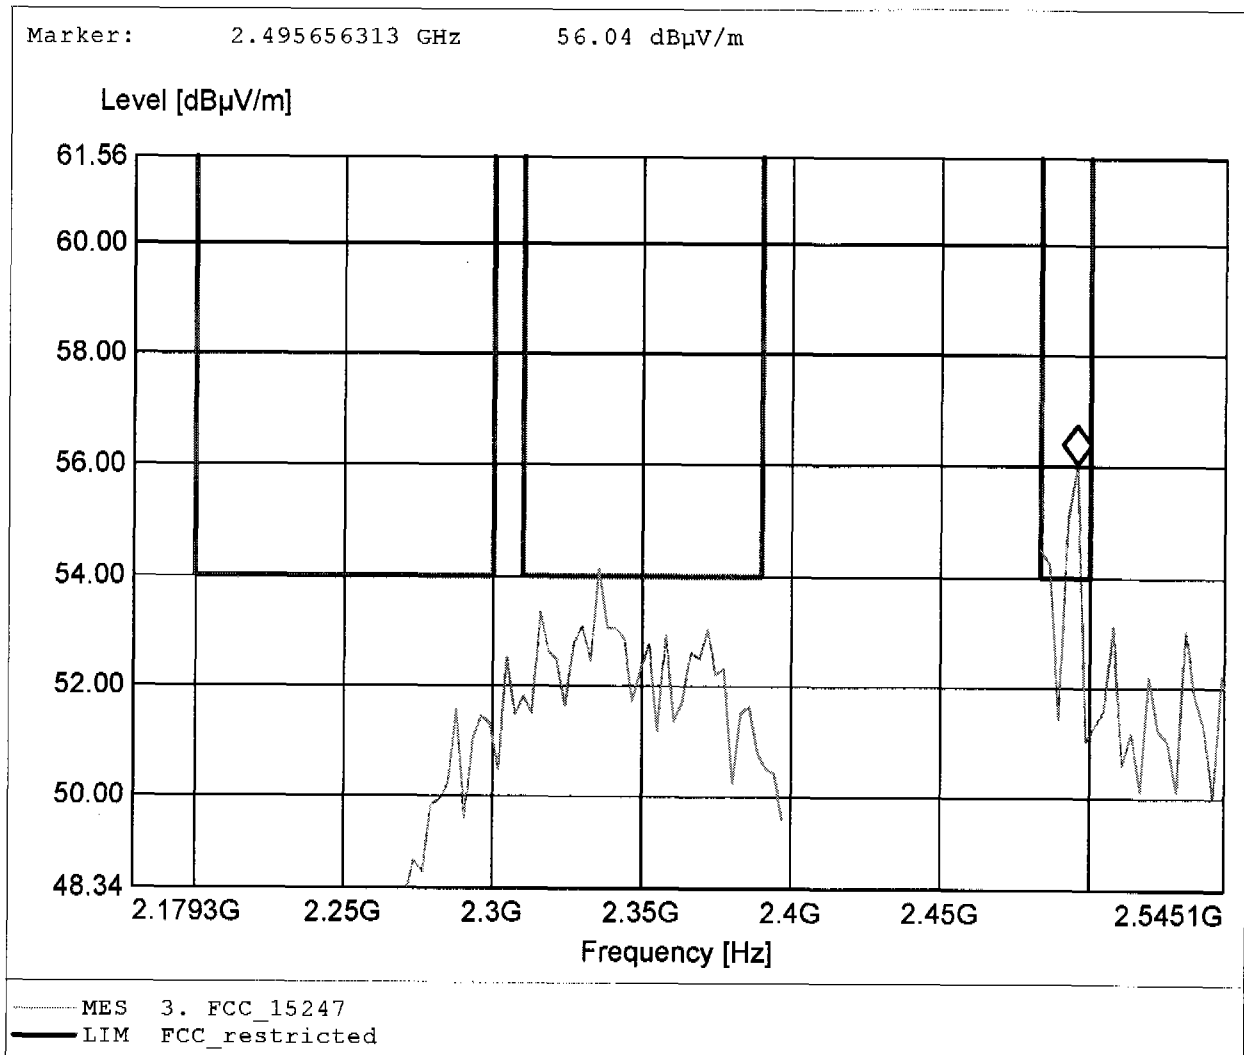

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.723GHz, Emax: 61.03dBµV/m, RBW: 1MHz

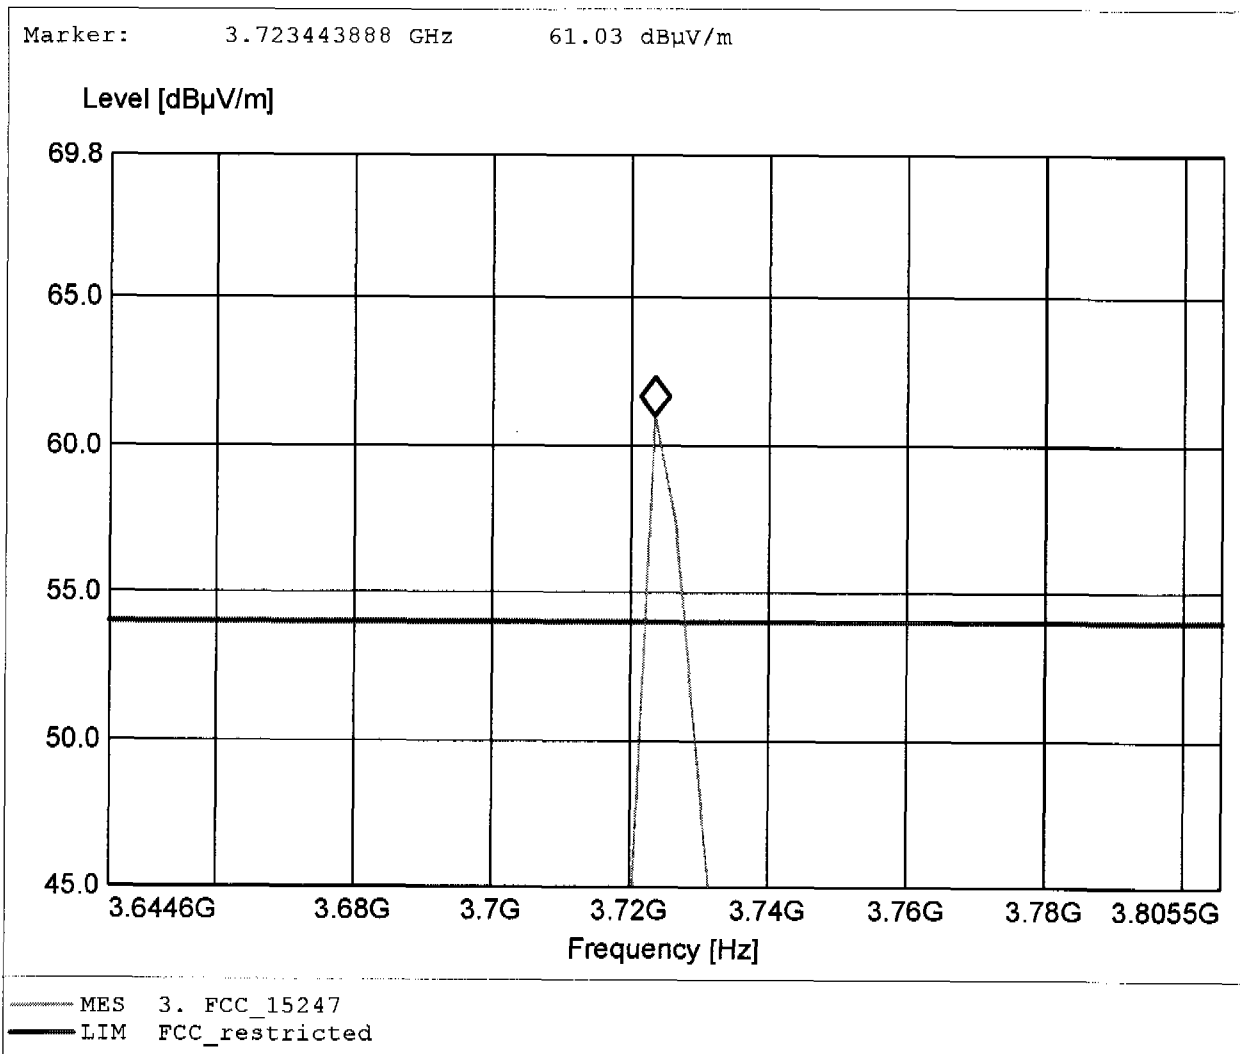

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.723GHz, Emax: 42.00dBµV/m, RBW: 1MHz

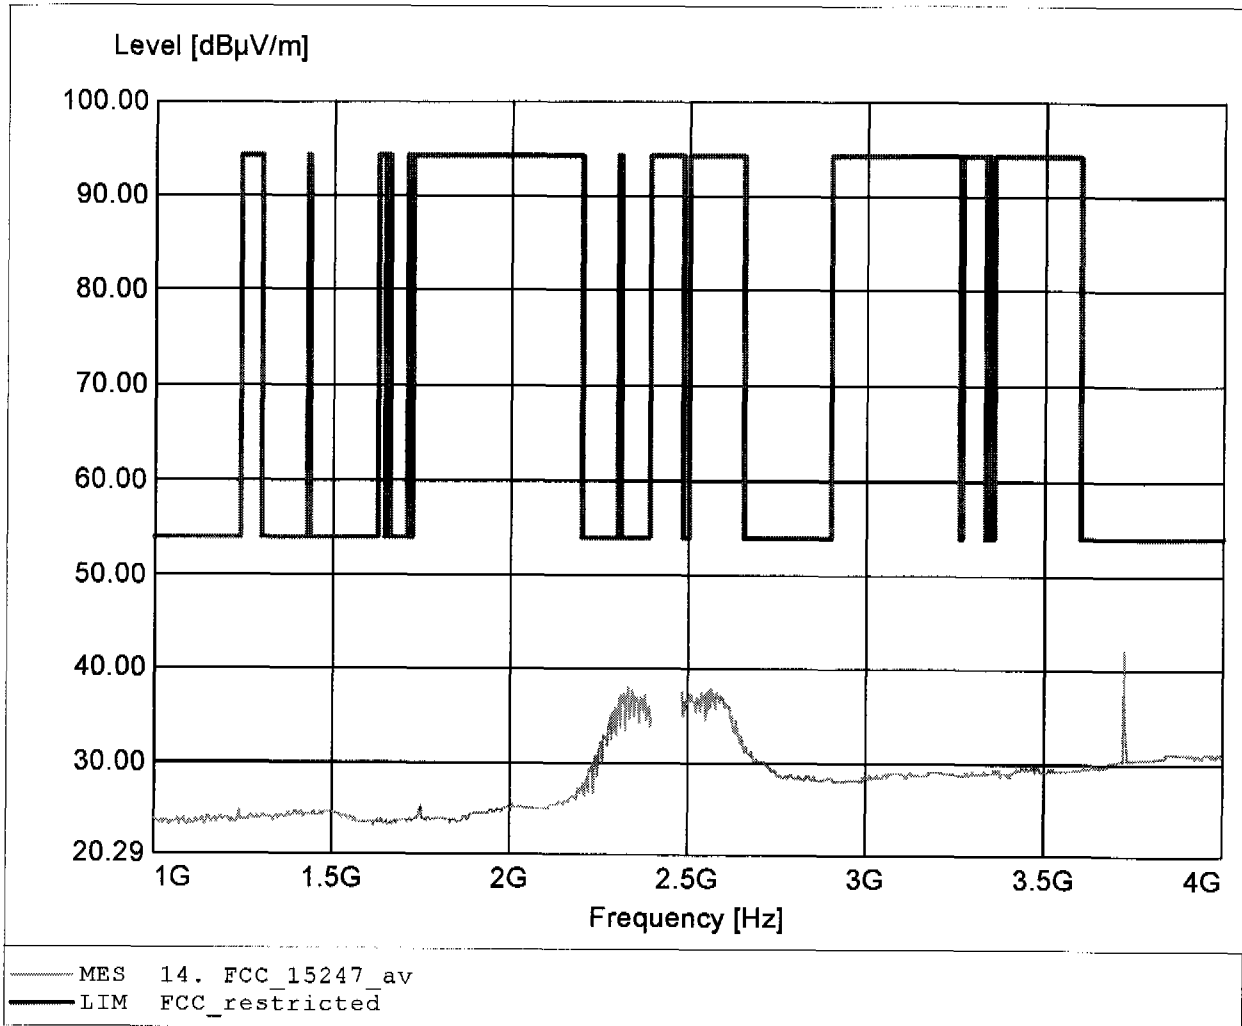

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.723GHz, Emax: 58.48dBµV/m, RBW: 1MHz

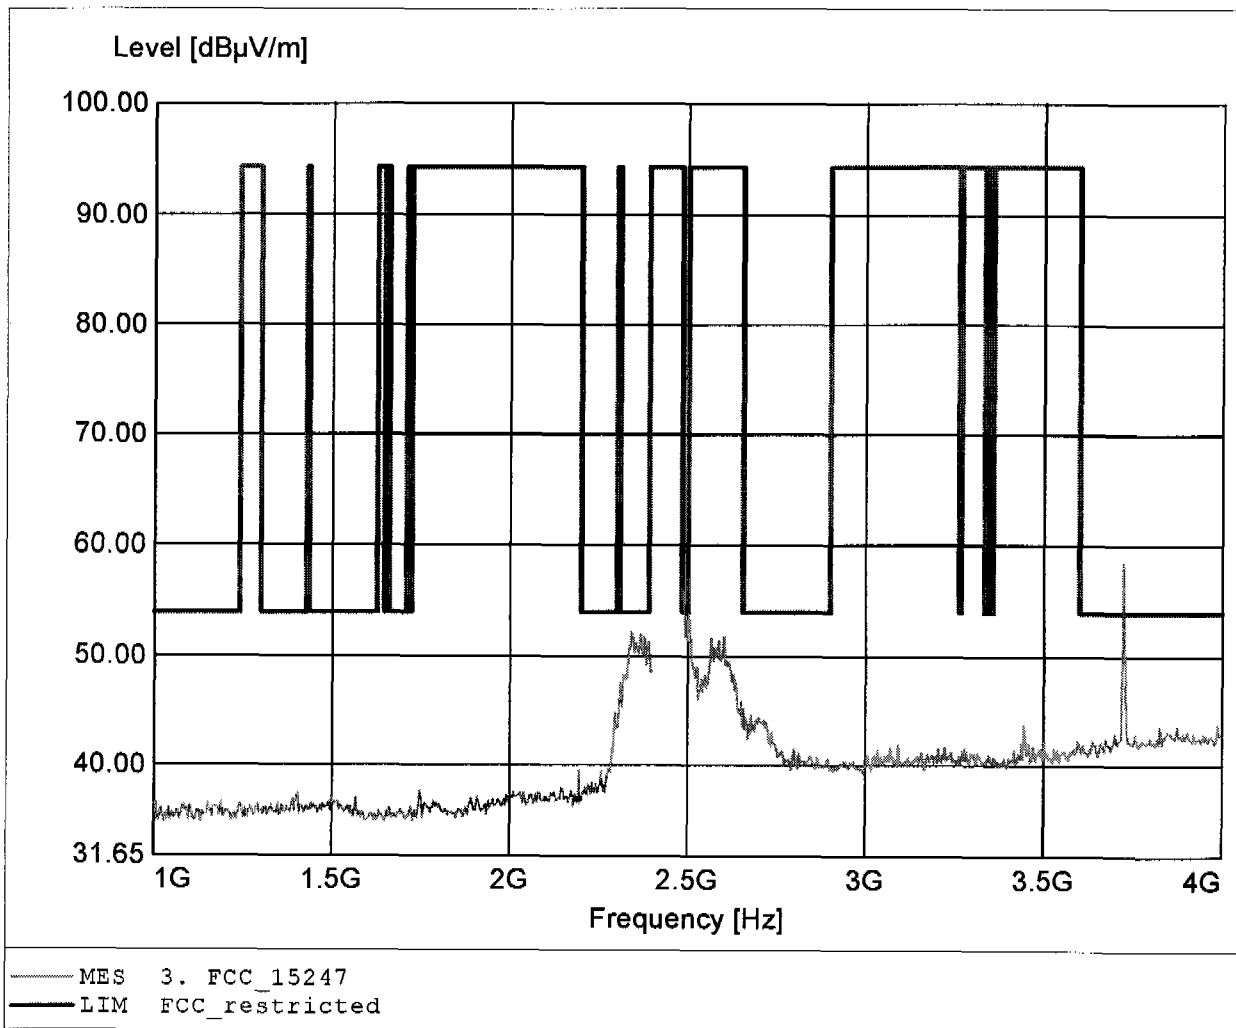

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.723GHz, Emax: 58.48dBµV/m, RBW: 1MHz

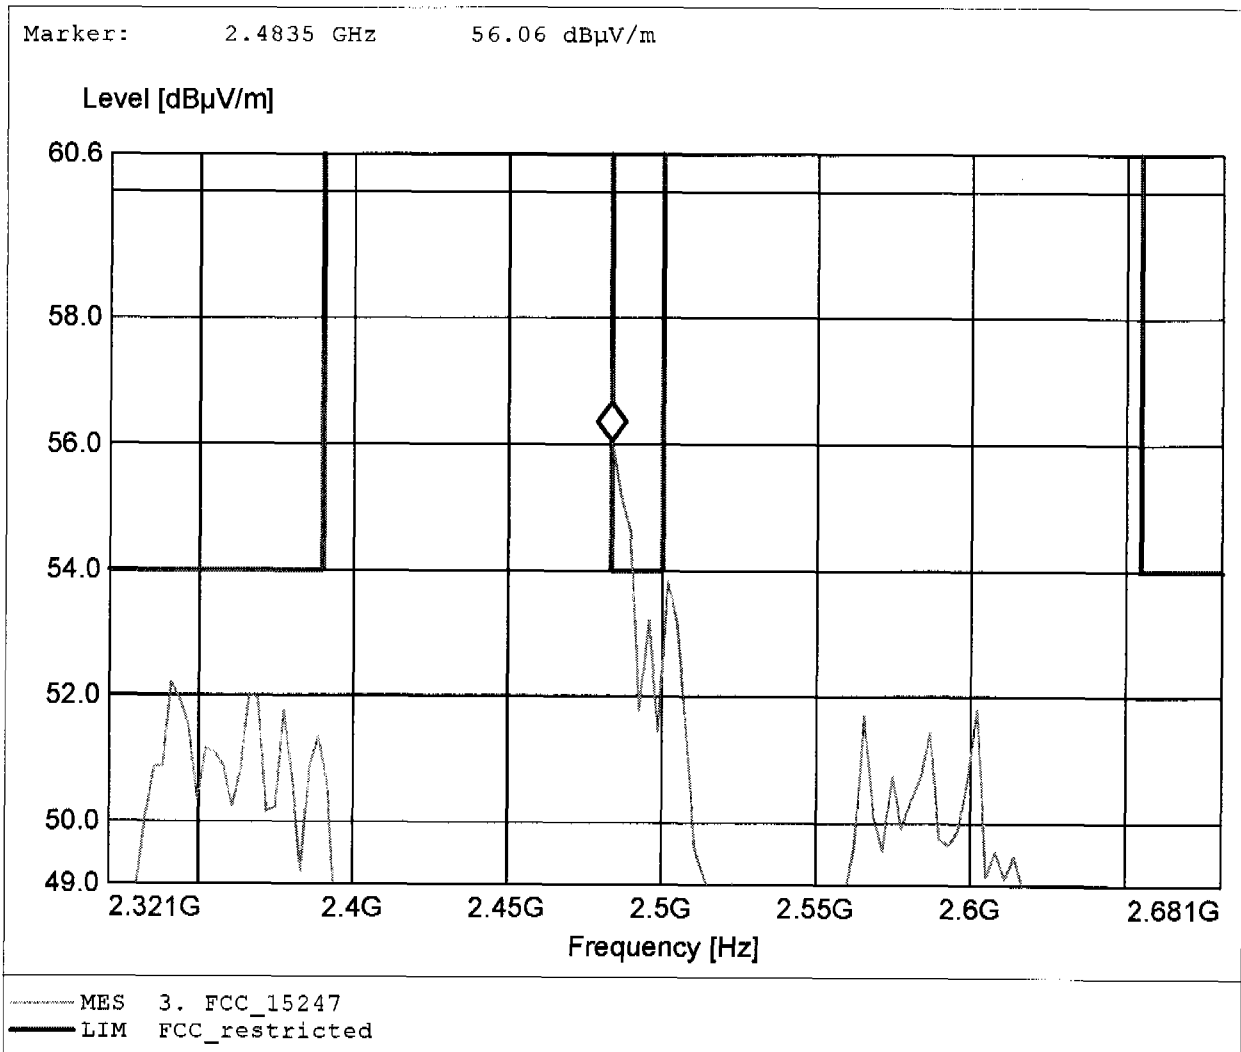

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.723GHz, Emax: 58.48dBµV/m, RBW: 1MHz

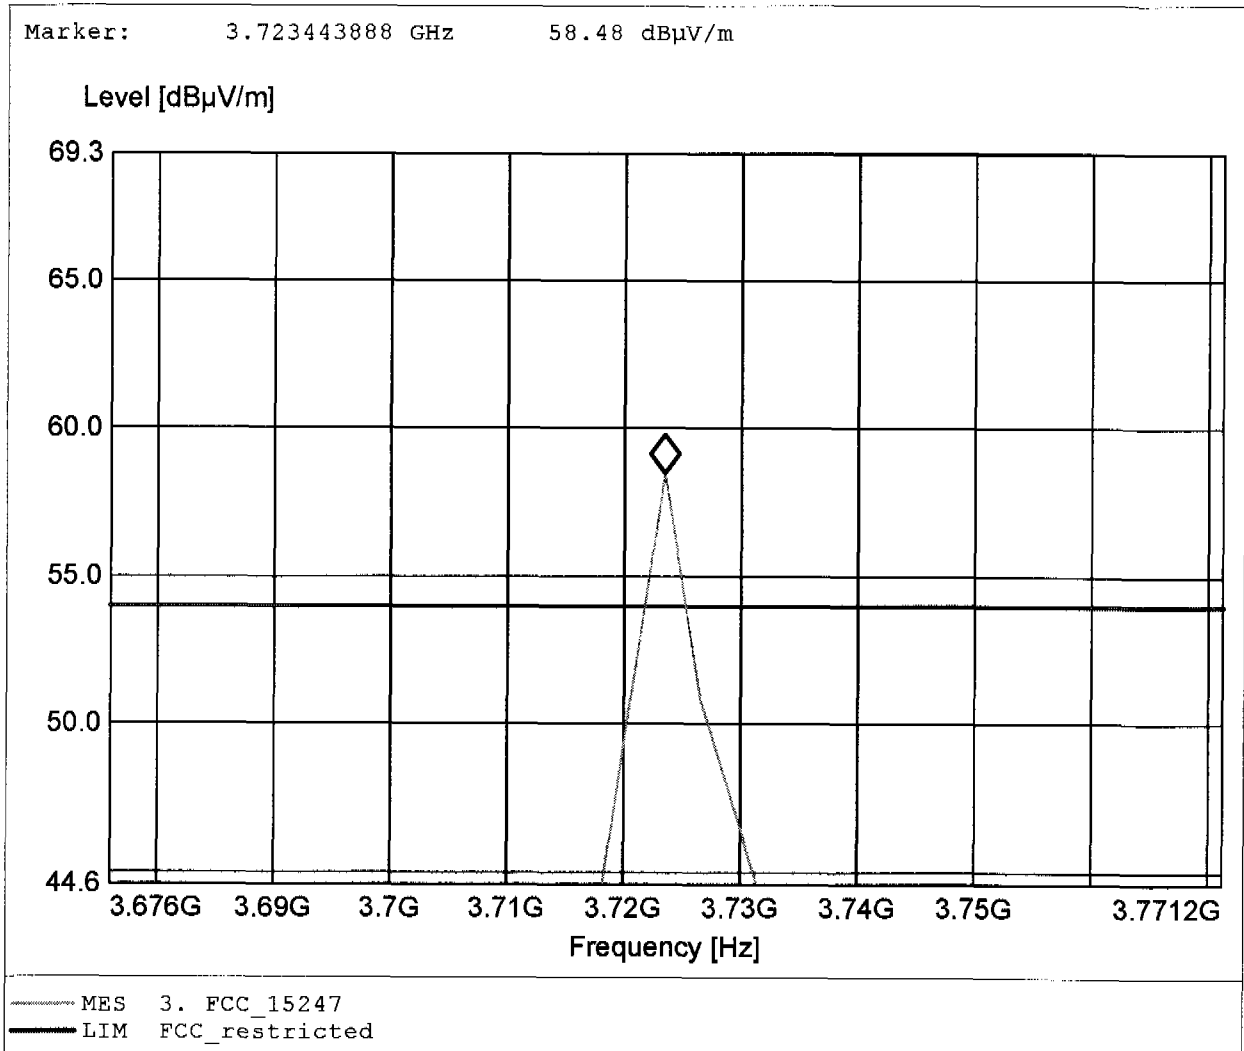

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.723GHz, Emax: 37.93dB μ V/m, RBW: 1MHz

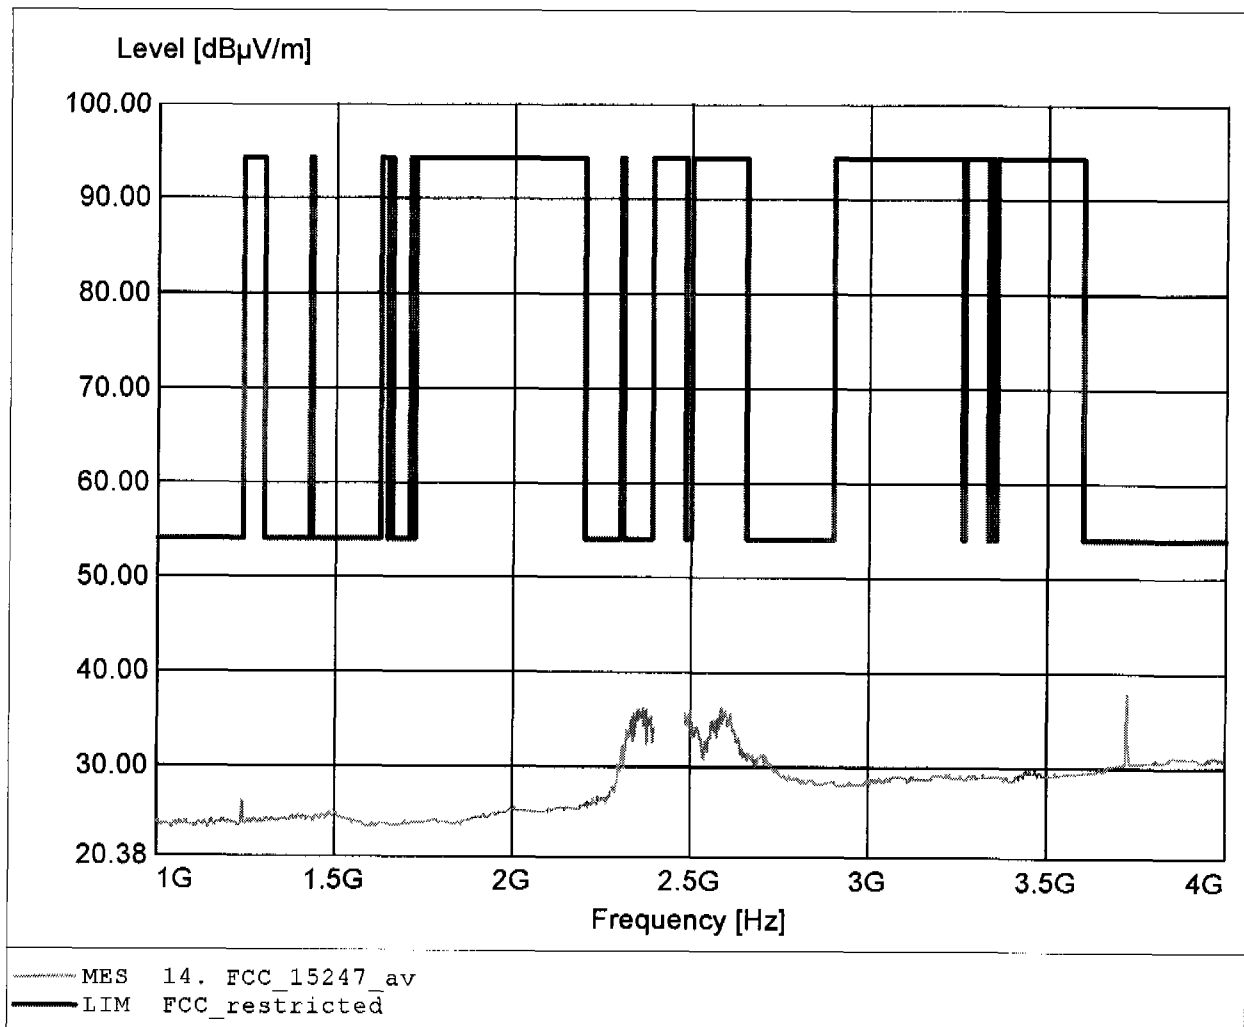

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 54.84dBµV/m, RBW: 1MHz

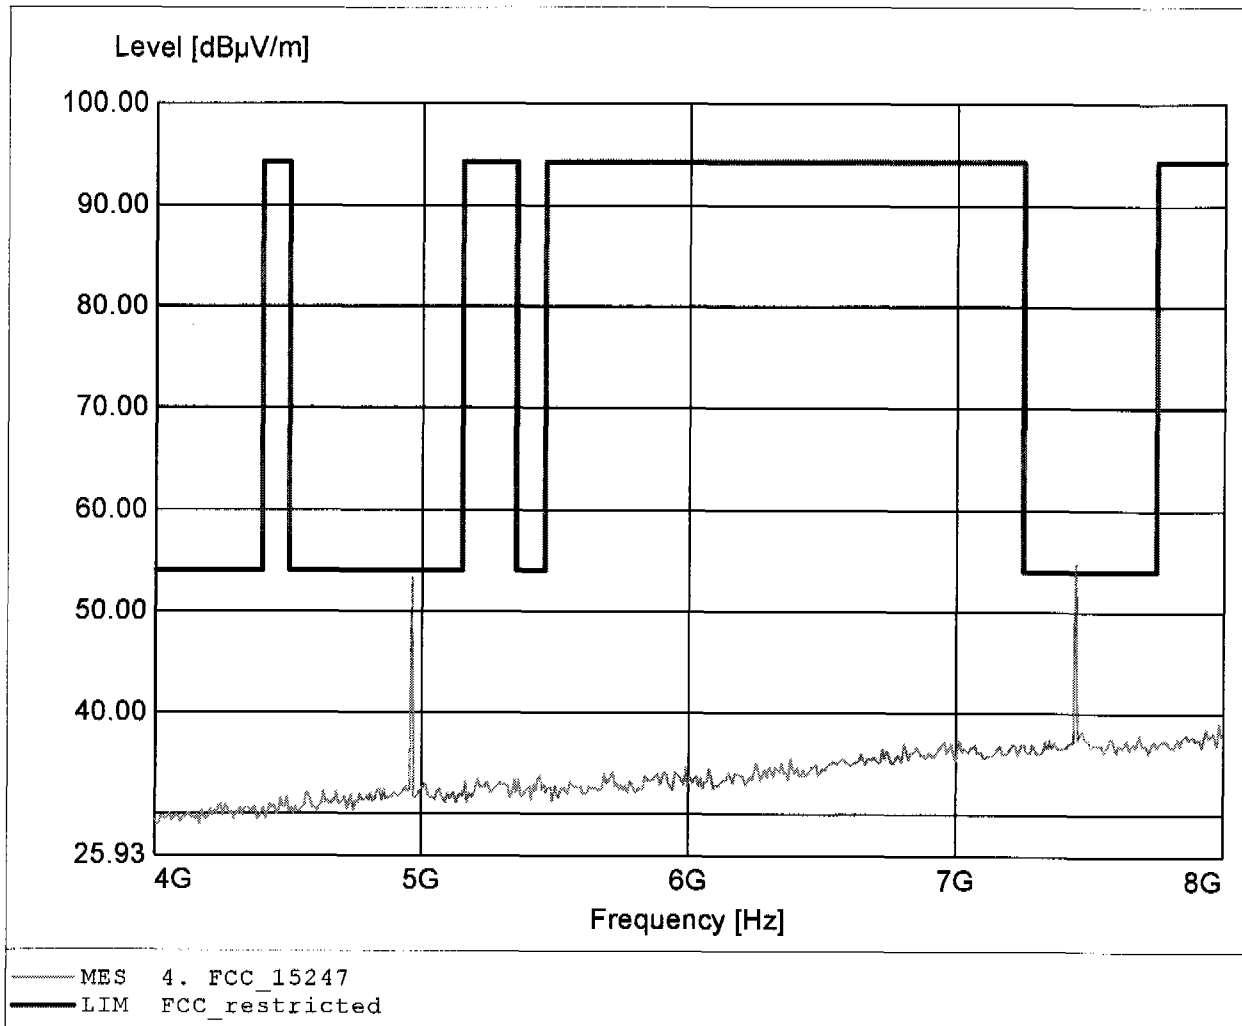

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 54.84dBµV/m, RBW: 1MHz

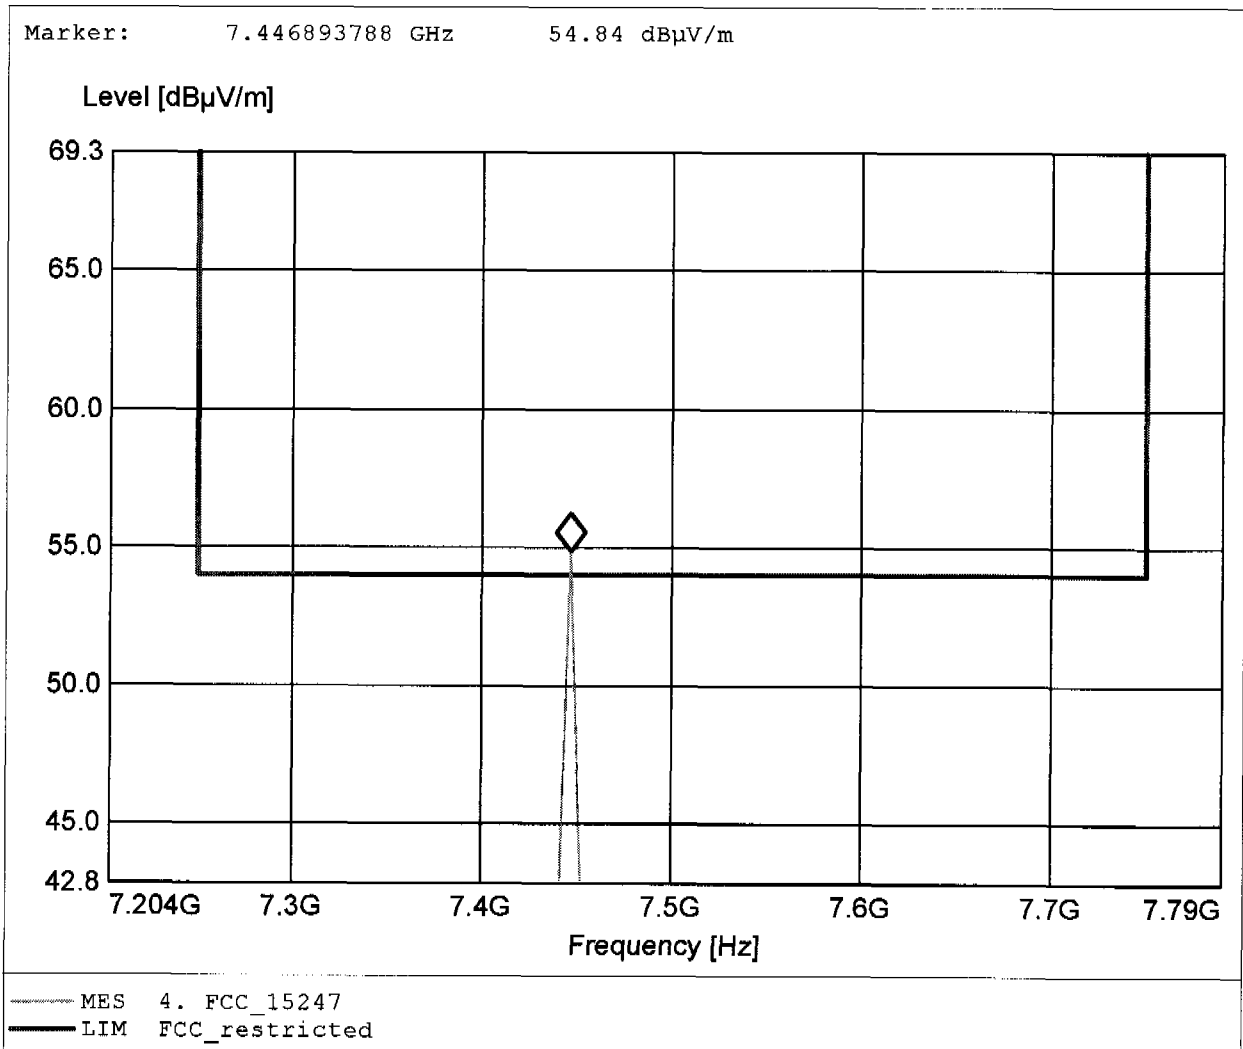

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 30.84dBµV/m, RBW: 1MHz

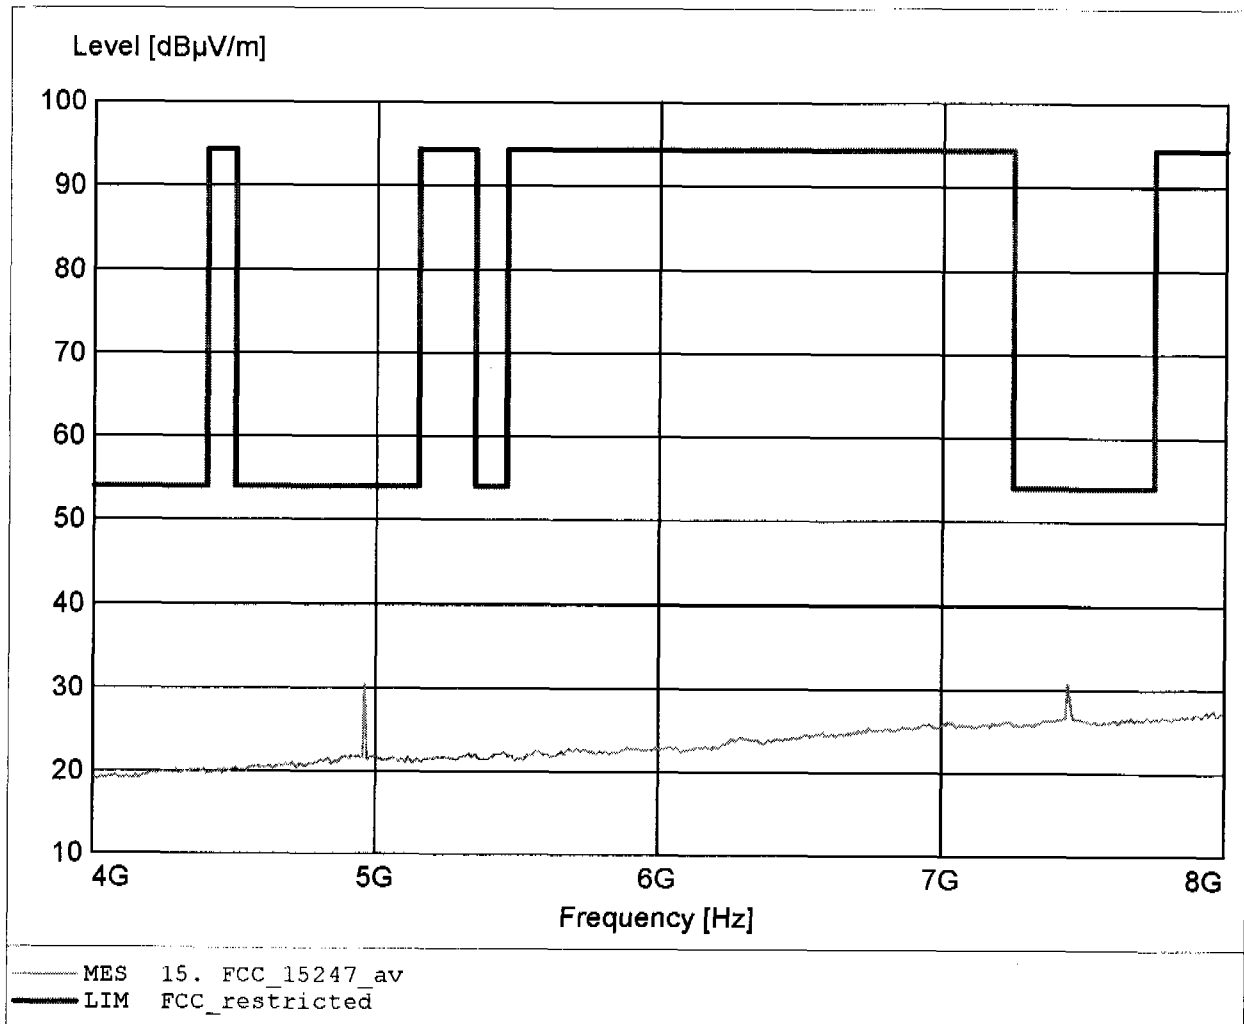

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 55.84dB μ V/m, RBW: 1MHz

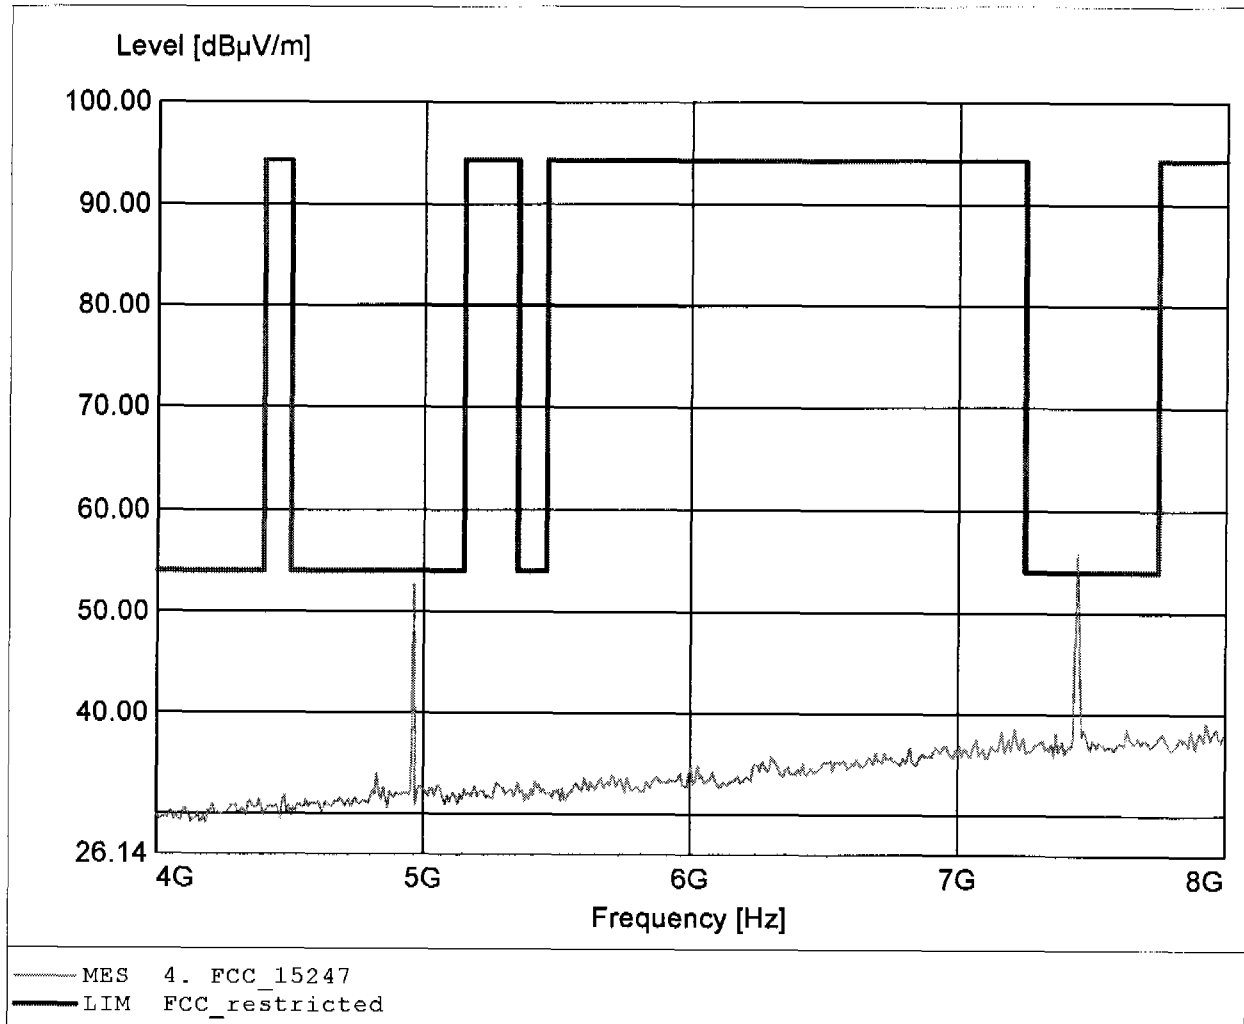

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 55.84dBµV/m, RBW: 1MHz

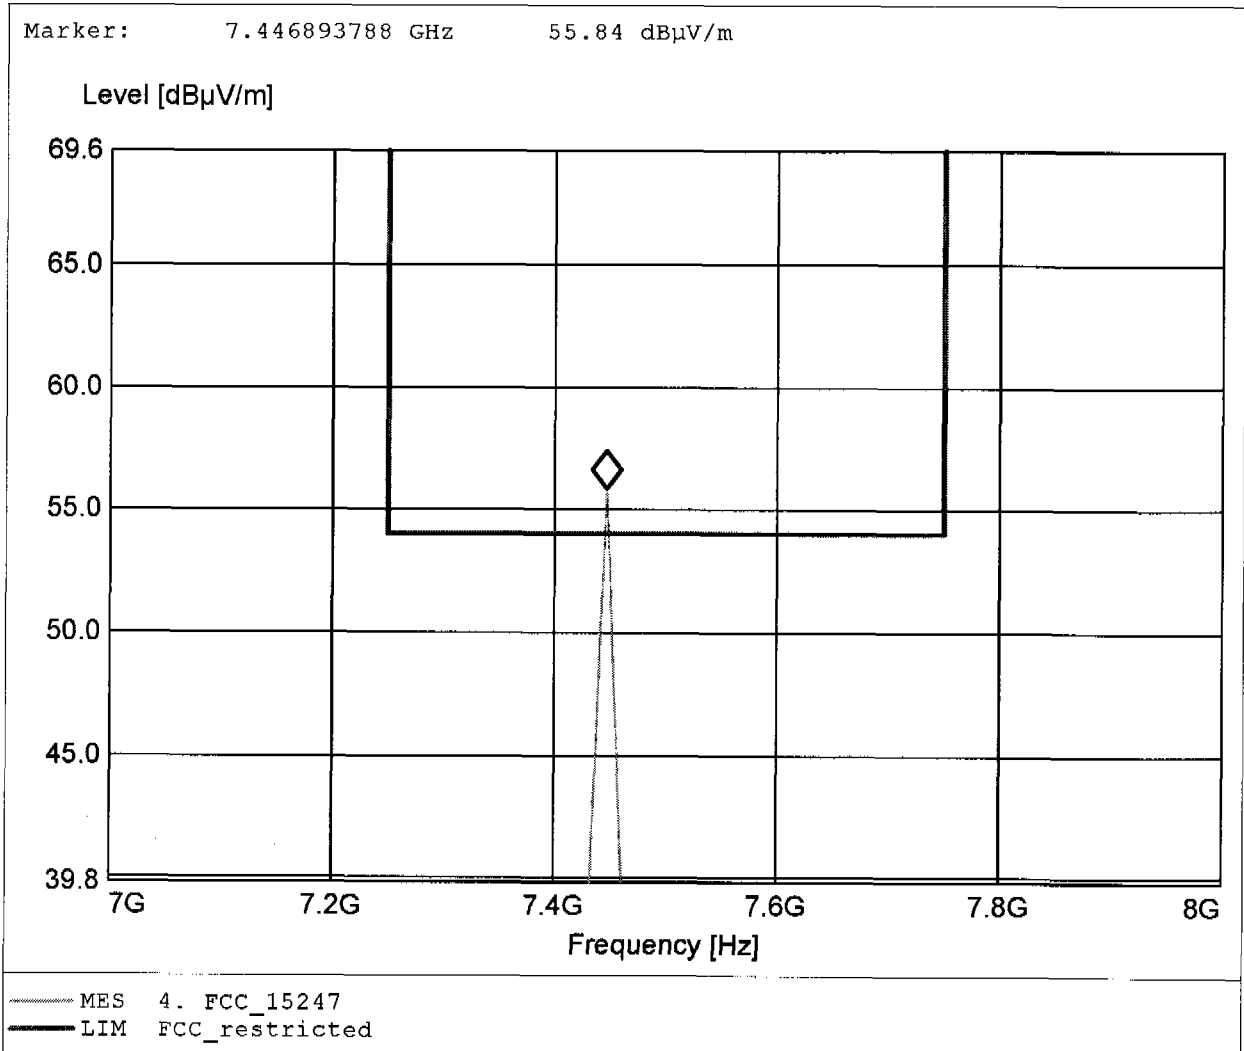

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 30.36dBuV/m, RBW: 1MHz

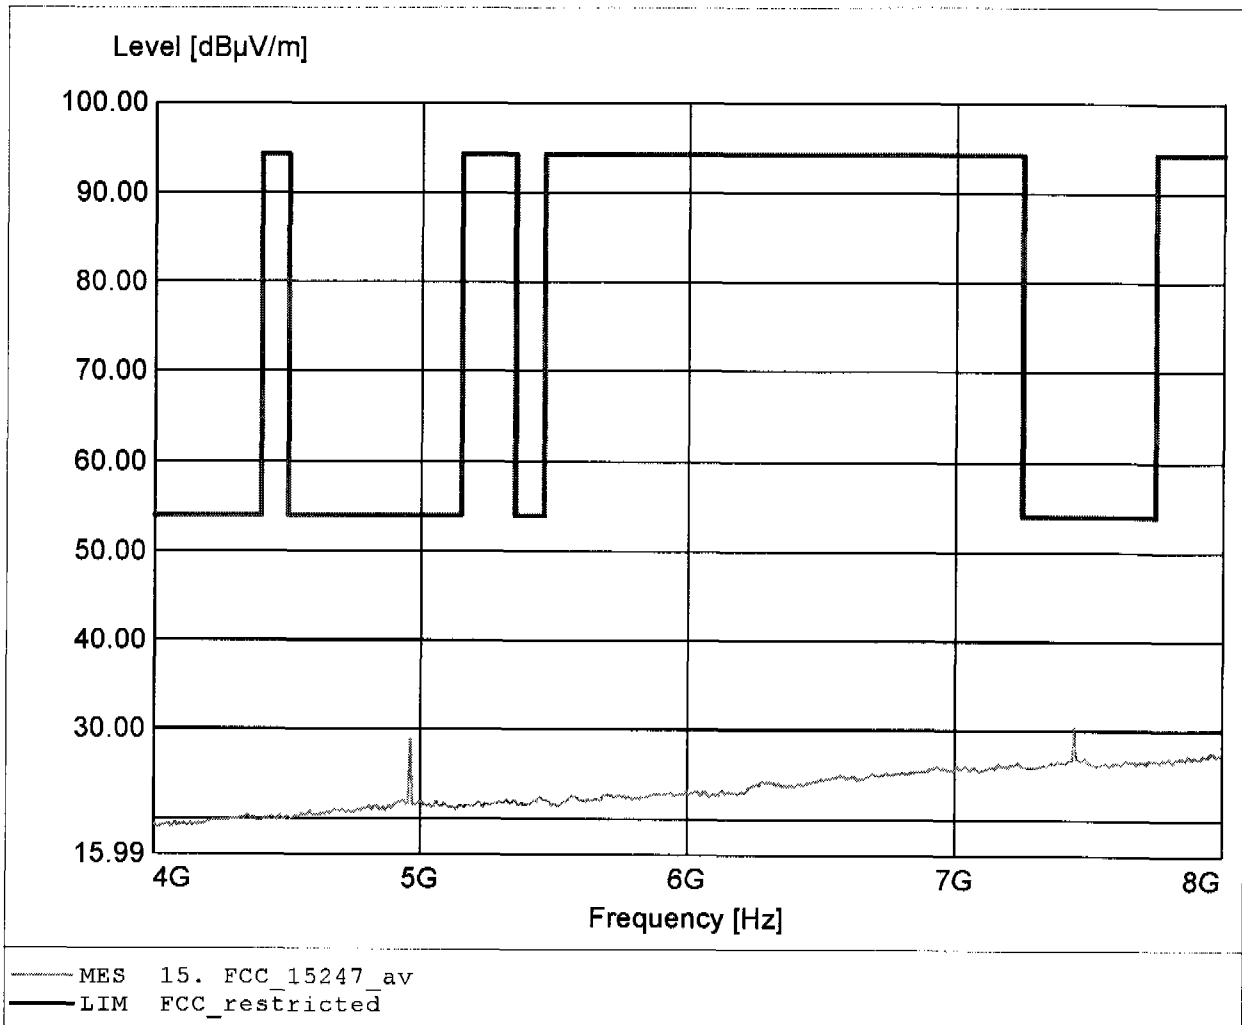

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 49.12dBµV/m, RBW: 1MHz

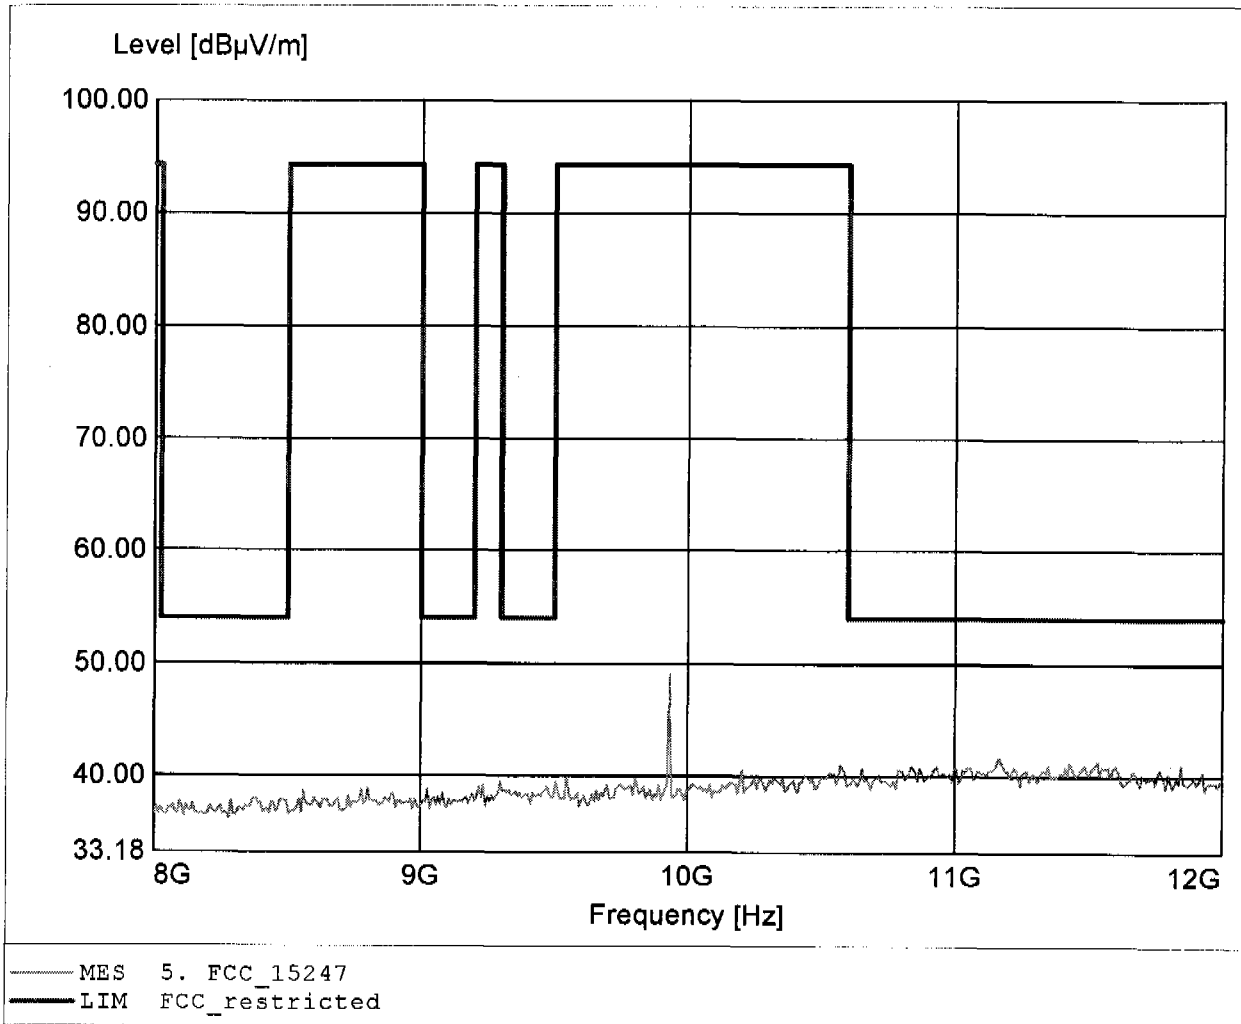

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 52.62dBµV/m, RBW: 1MHz

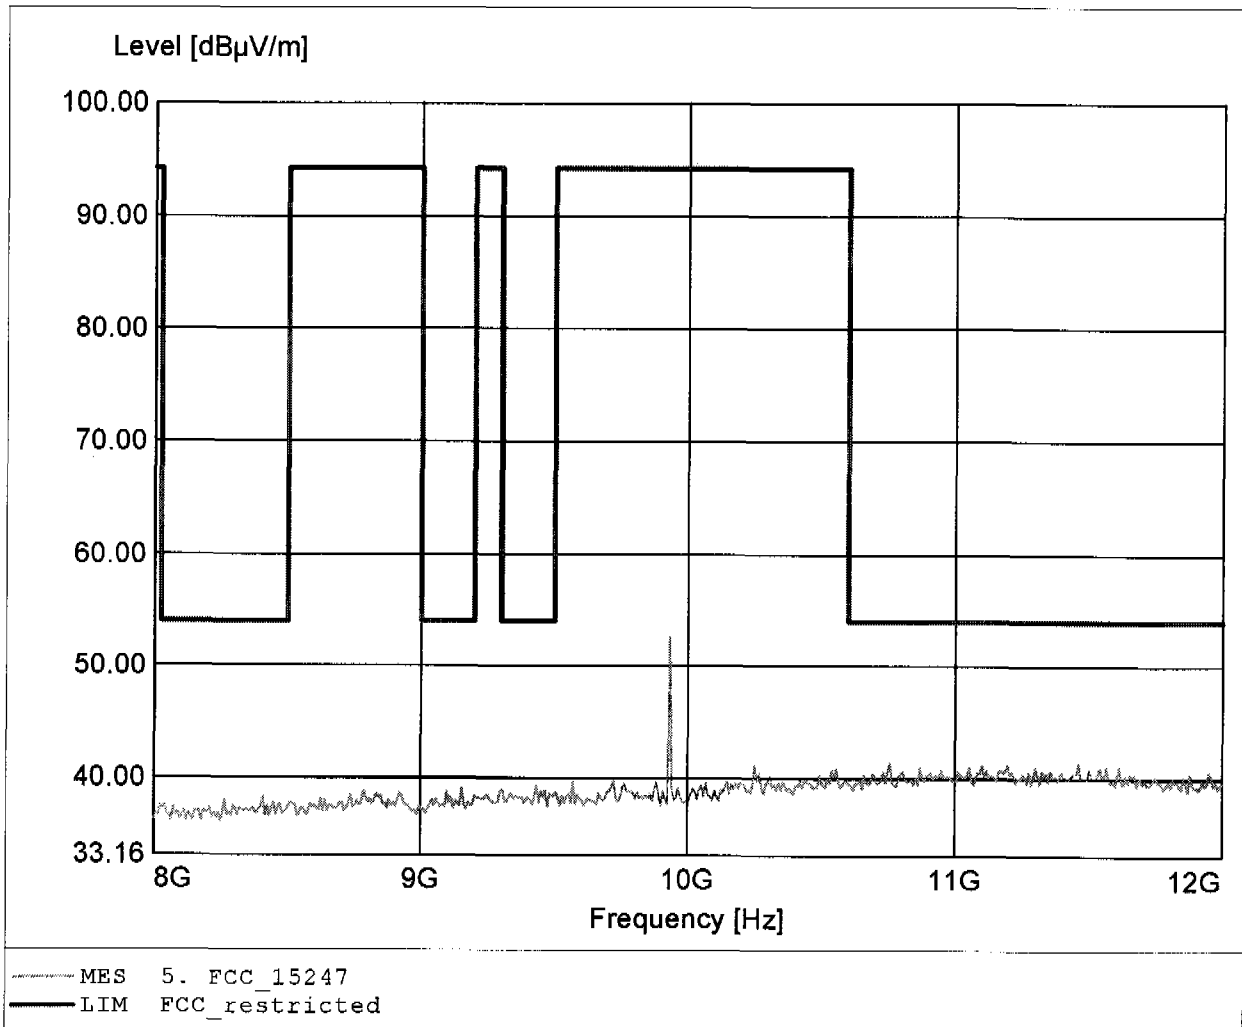

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.896GHz, Emax: 55.17dBµV/m, RBW: 1MHz

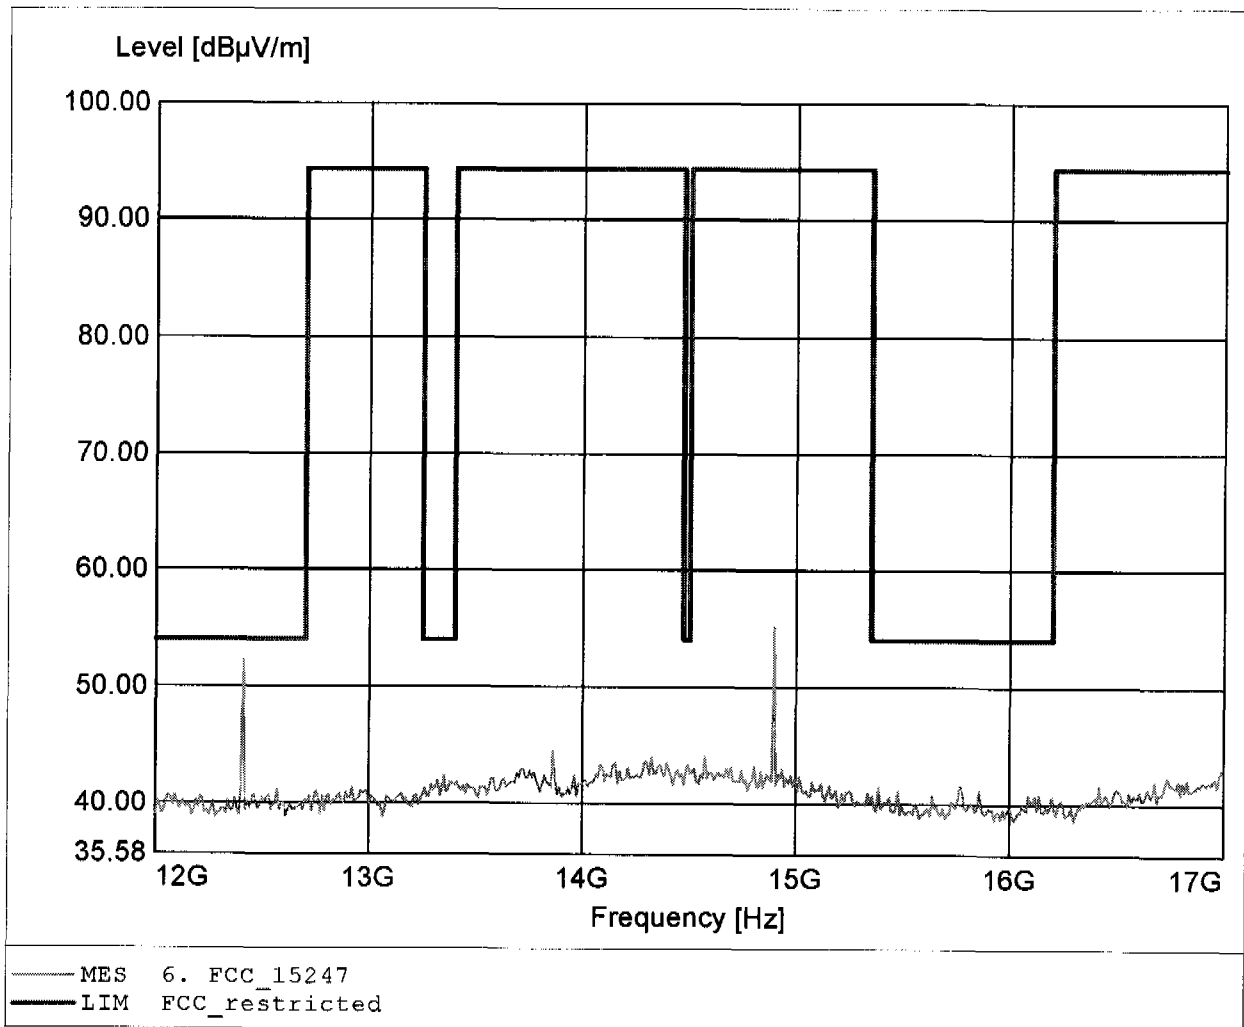

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 63.53dBµV/m, RBW: 1MHz

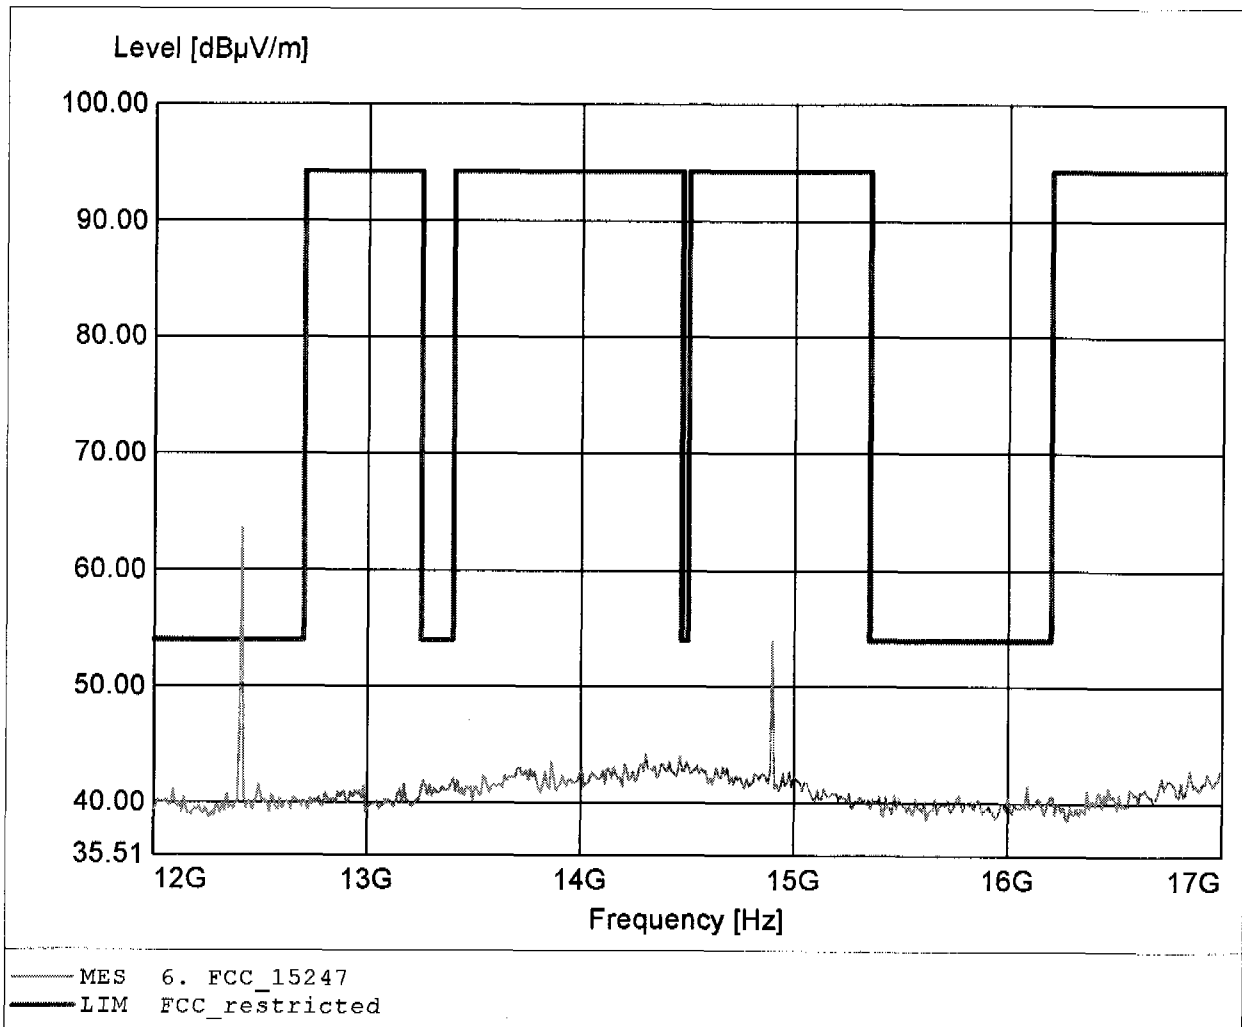

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.896GHz, Emax: 37.51dBµV/m, RBW: 1MHz

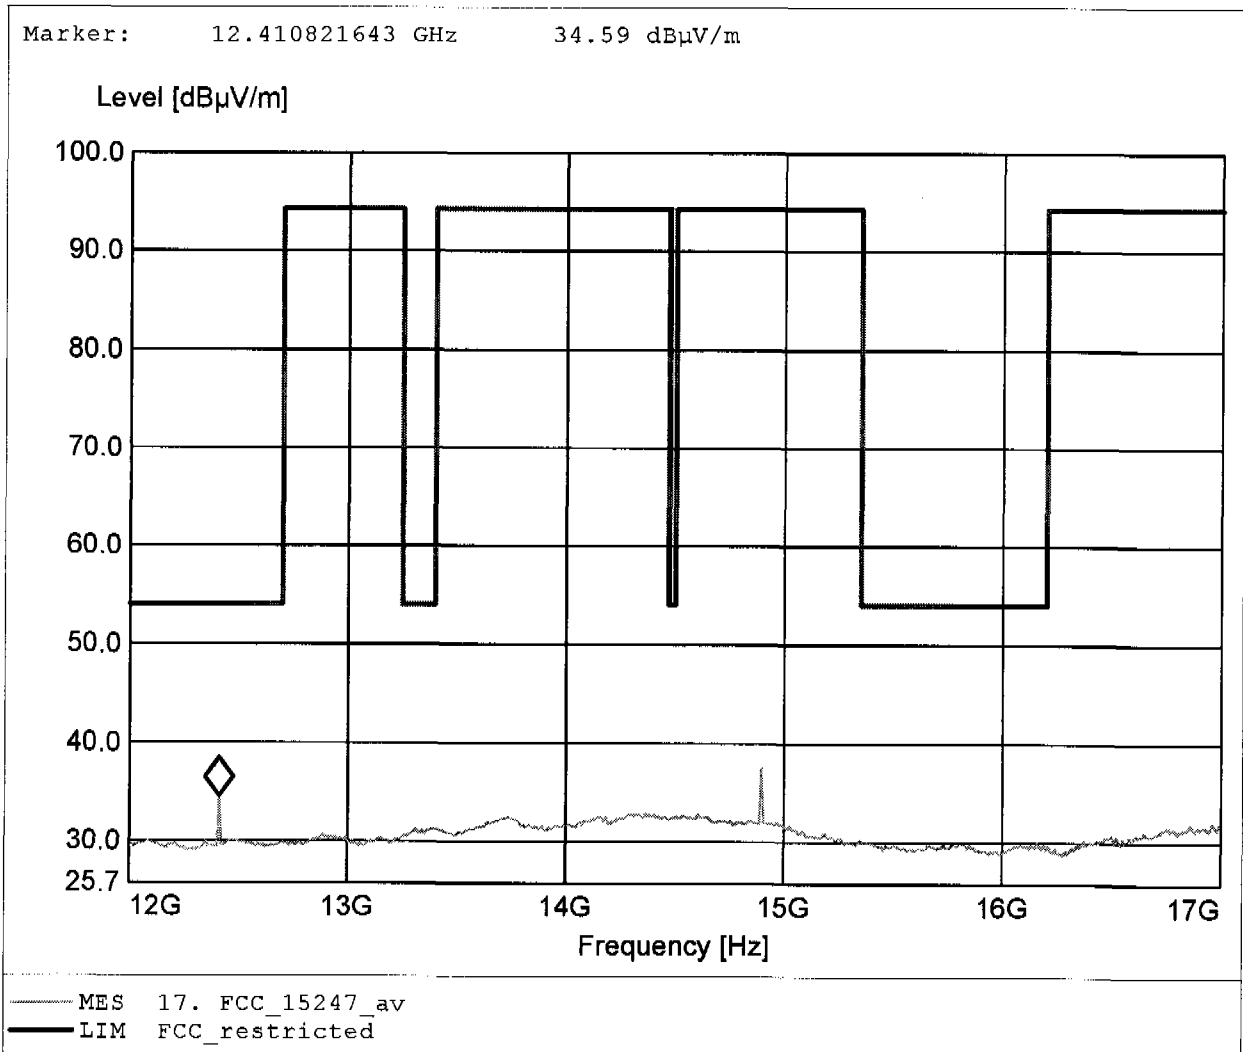

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.133GHz, Emax: 44.82dB μ V/m, RBW: 1MHz

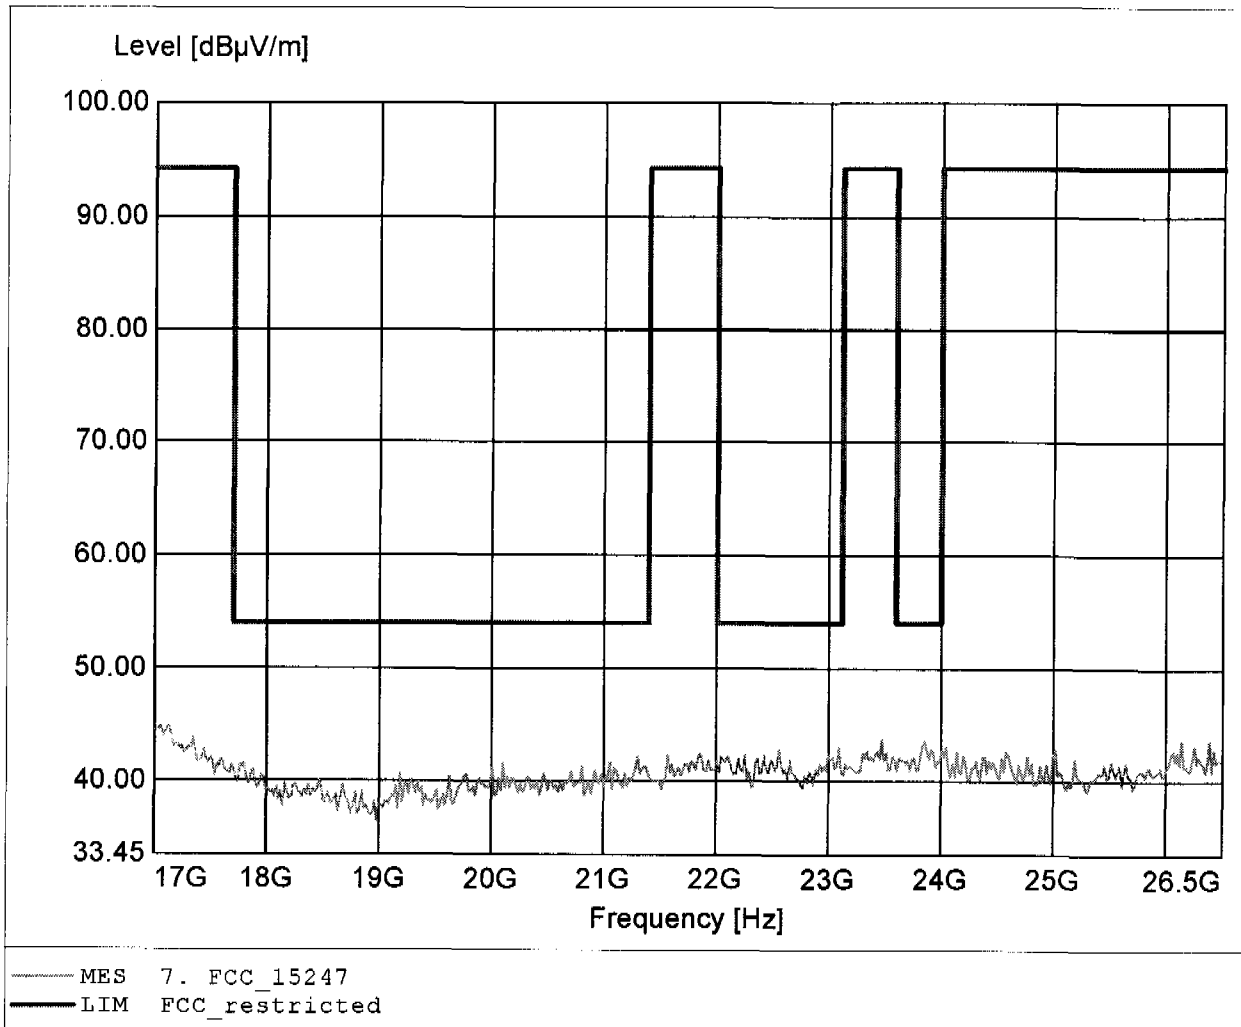

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Base
Model: USB7100 / 7200 / Antenna: 1 / Ch.: 94
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 7 V DC (120 V AC/DC adaptor)
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.362GHz, Emax: 45.55dBuV/m, RBW: 1MHz

