




Appendix B

Peak Output Power




Ref Lvl	21.16 dBm	RBW	1 MHz	RF Att	50 dB
30 dBm	2.40081051 GHz	VBW	1 MHz	Unit	dBm
		SWT	5 ms		

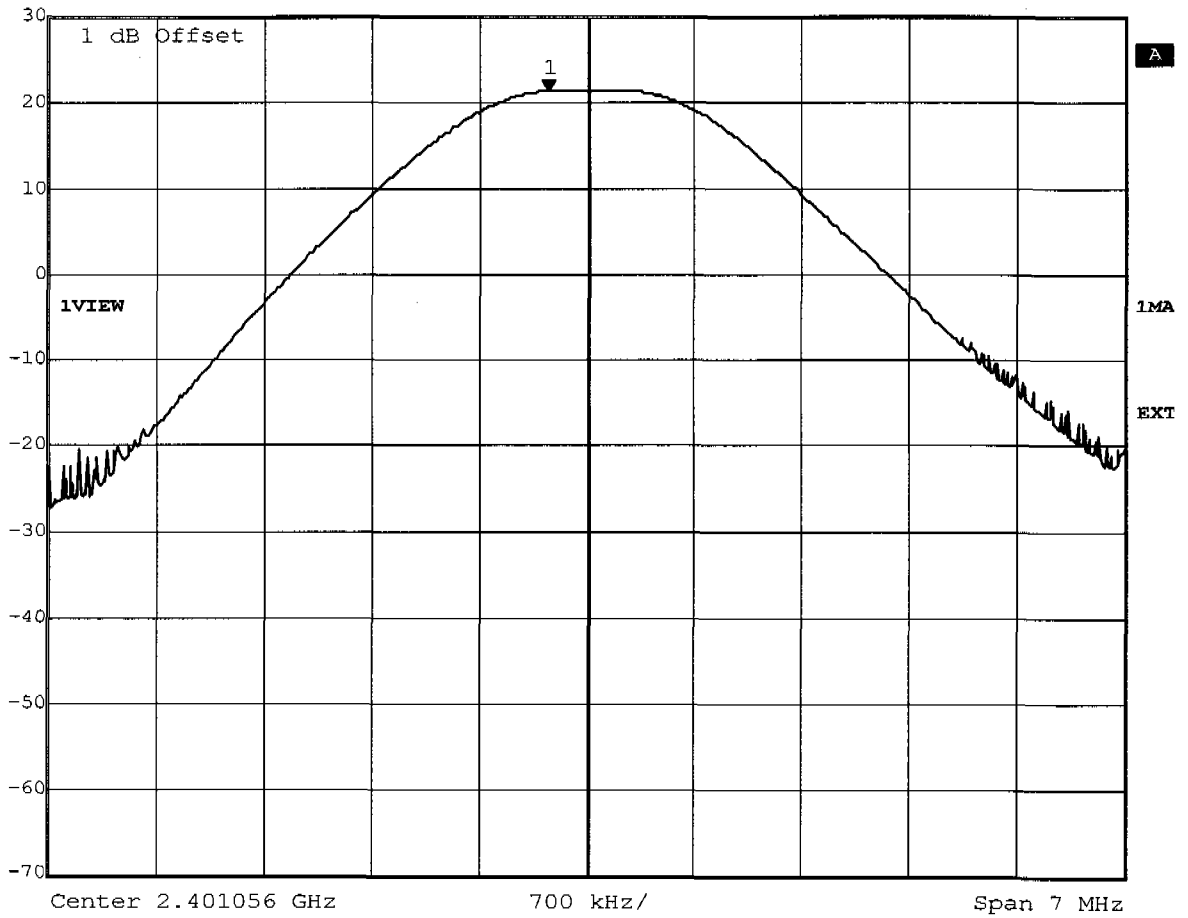

Title: Peak Output Power conducted Ch.: 0
Comment A: USB7100 / 7200 Handset
Date: 19.JUL.2005 08:25:56




Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	21.32 dBm	VBW	1 MHz	
30 dBm	2.44151671 GHz	SWT	5 ms	Unit dBm

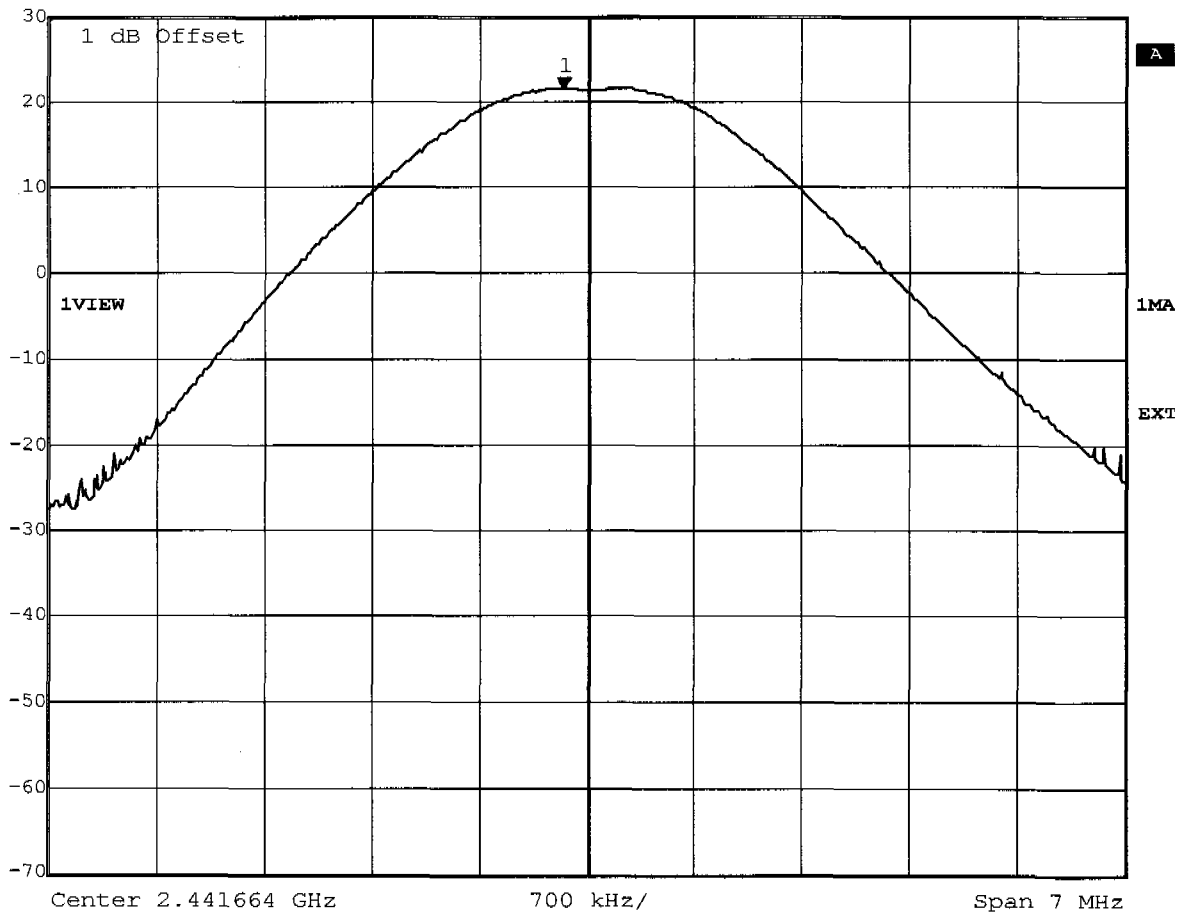

Title: Peak Output Power conducted Ch.: 47
Comment A: USB7100 / 7200 Handset
Date: 19.JUL.2005 08:26:47



Marker 1 [T1]	RBW	1 MHz	RF Att	50 dB
Ref Lvl	21.32 dBm	VBW	1 MHz	
30 dBm	2.48205457 GHz	SWT	5 ms	Unit dBm

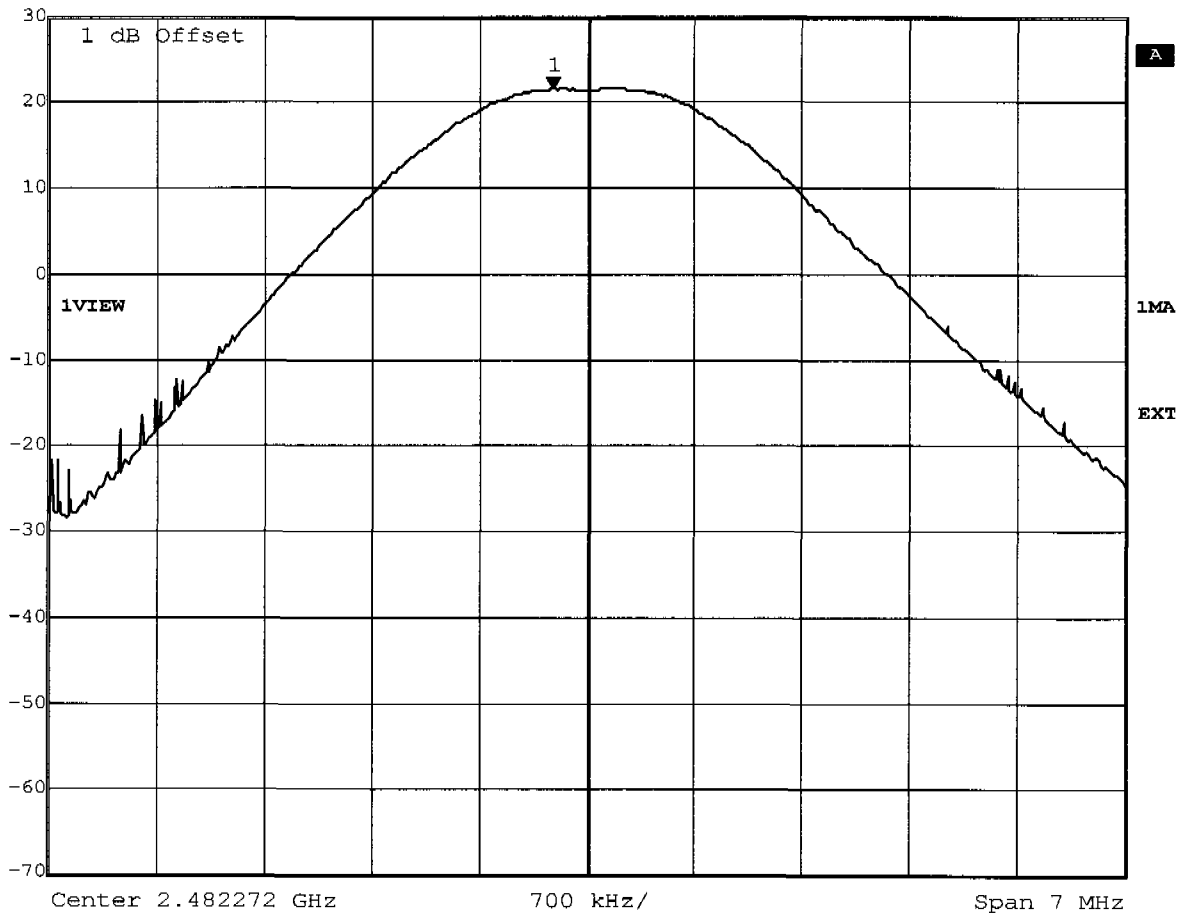


Title: Peak Output Power conducted Ch.: 94
Comment A: USB7100 / 7200 Handset
Date: 19.JUL.2005 08:27:38

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 19.59dBm, RBW: 5MHz

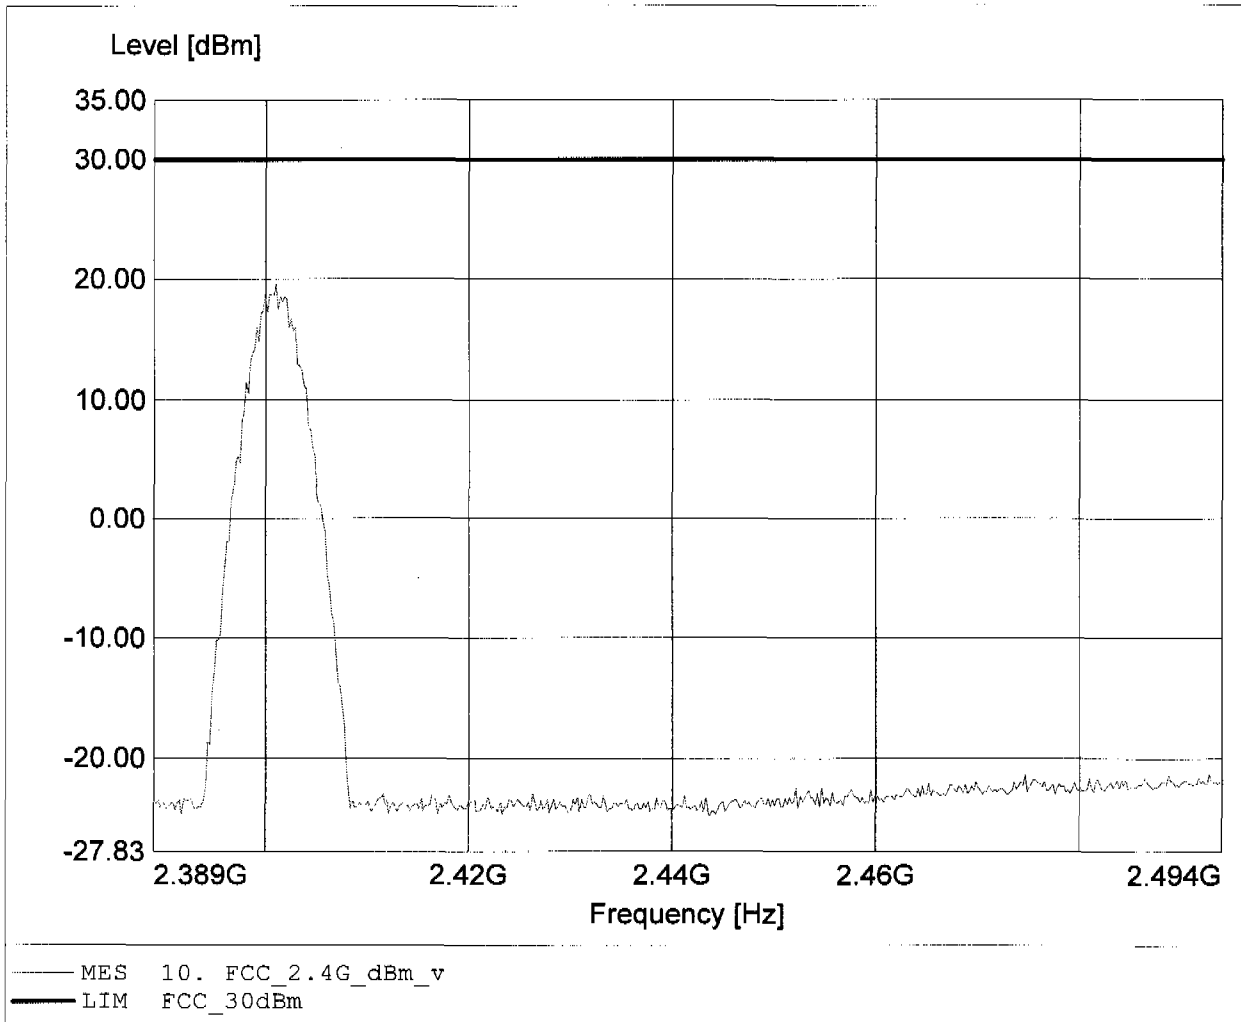

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Pmax: 22.94dBm, RBW: 5MHz

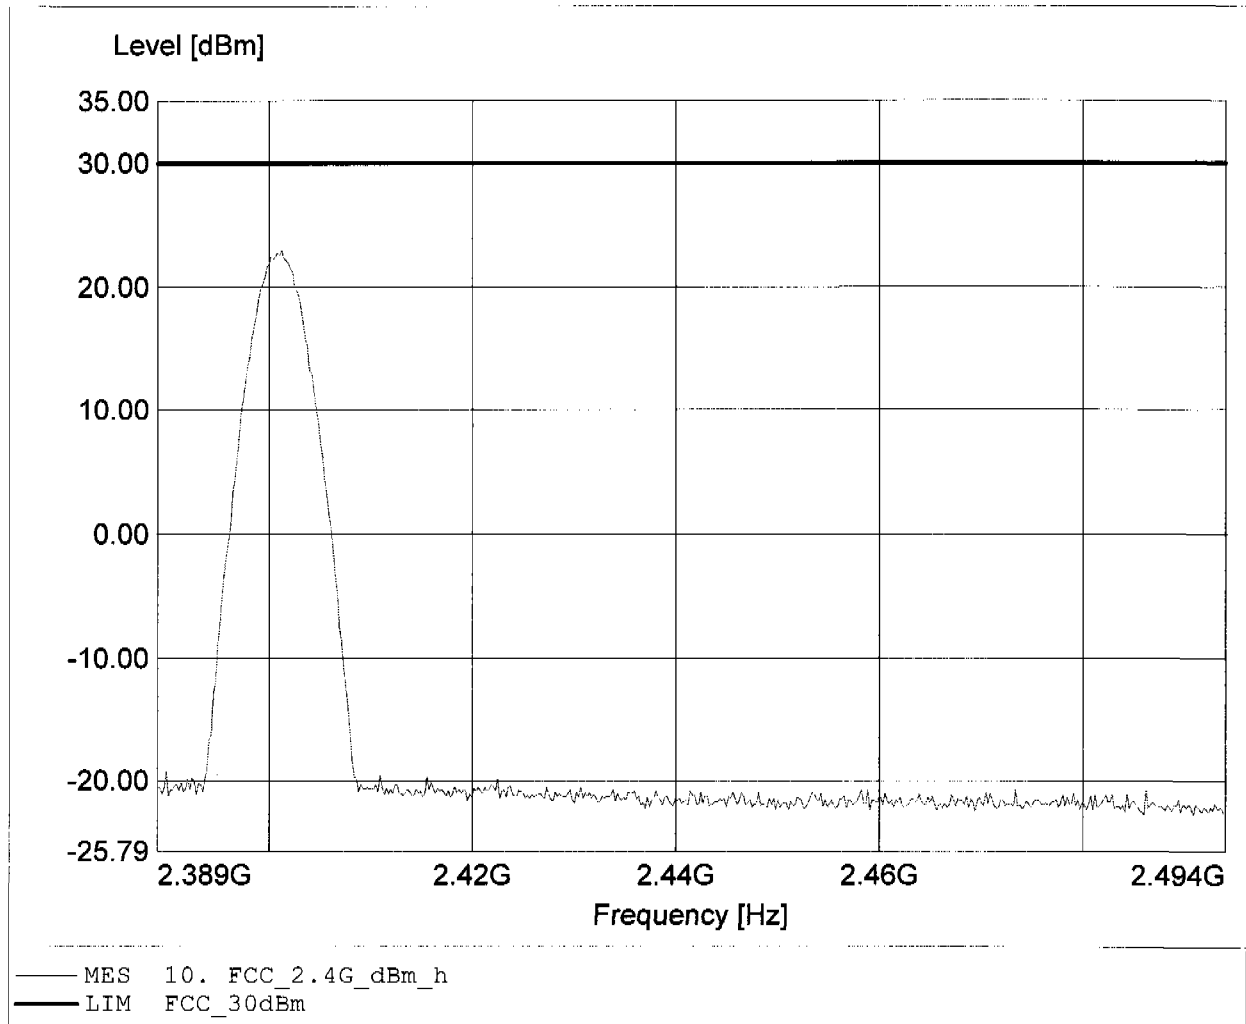

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: 18.40dBm, RBW: 5MHz

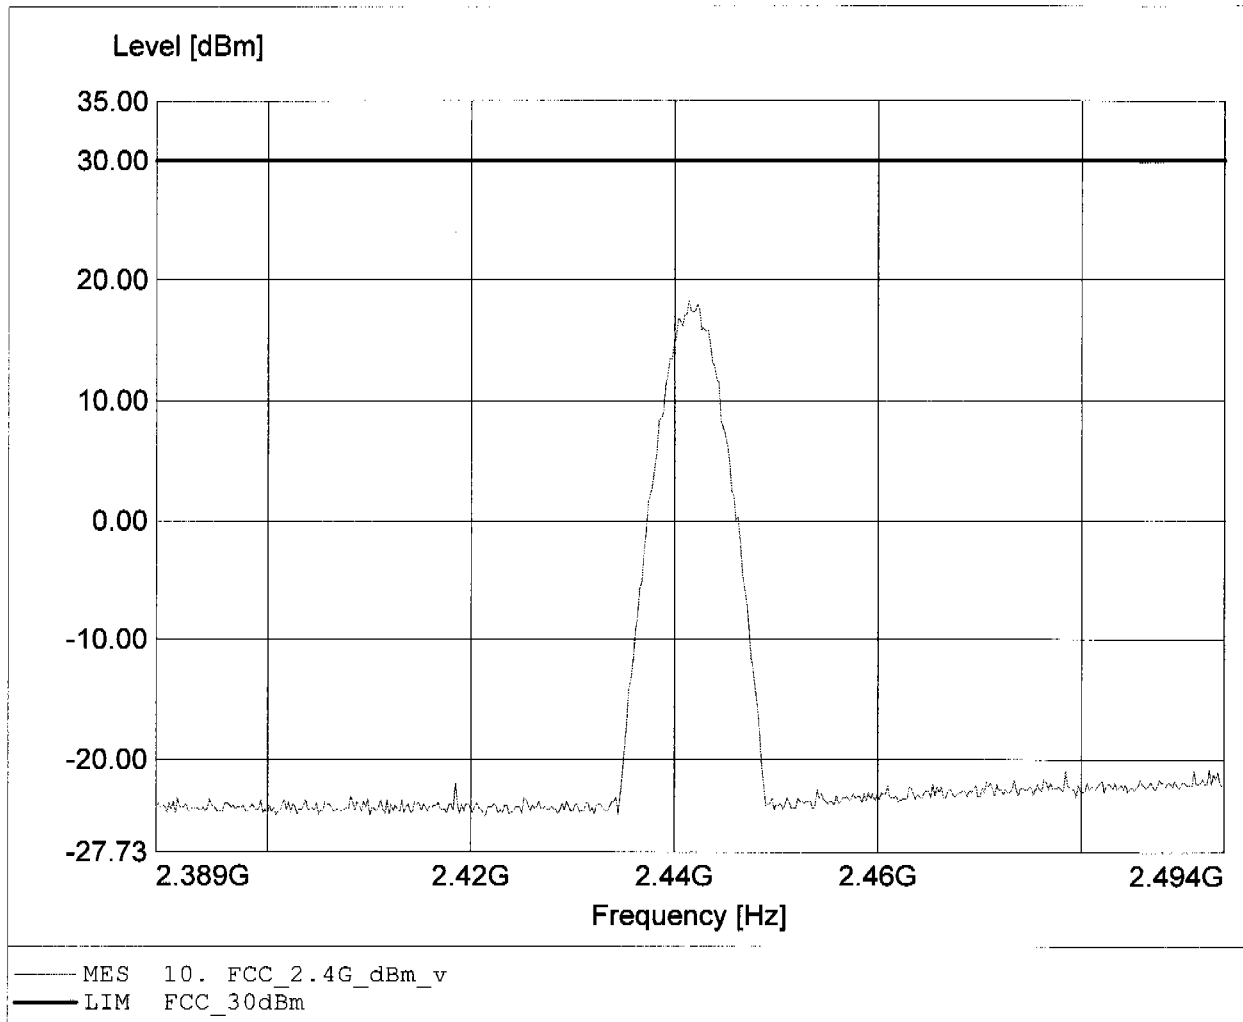

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.442GHz, Pmax: 21.38dBm, RBW: 5MHz

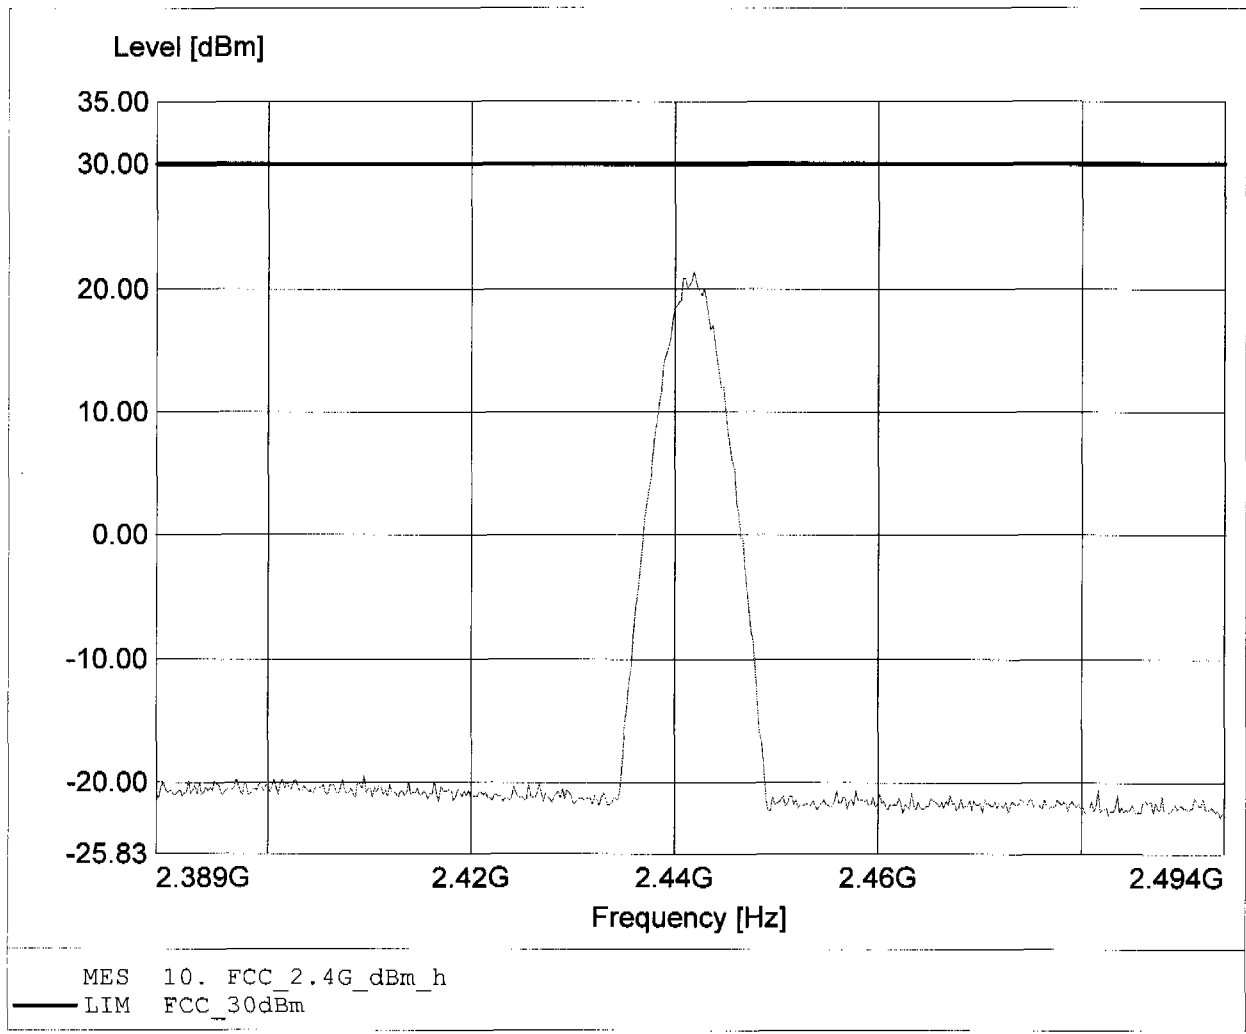

Carrier power (dBm)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 21.32dBm, RBW: 5MHz

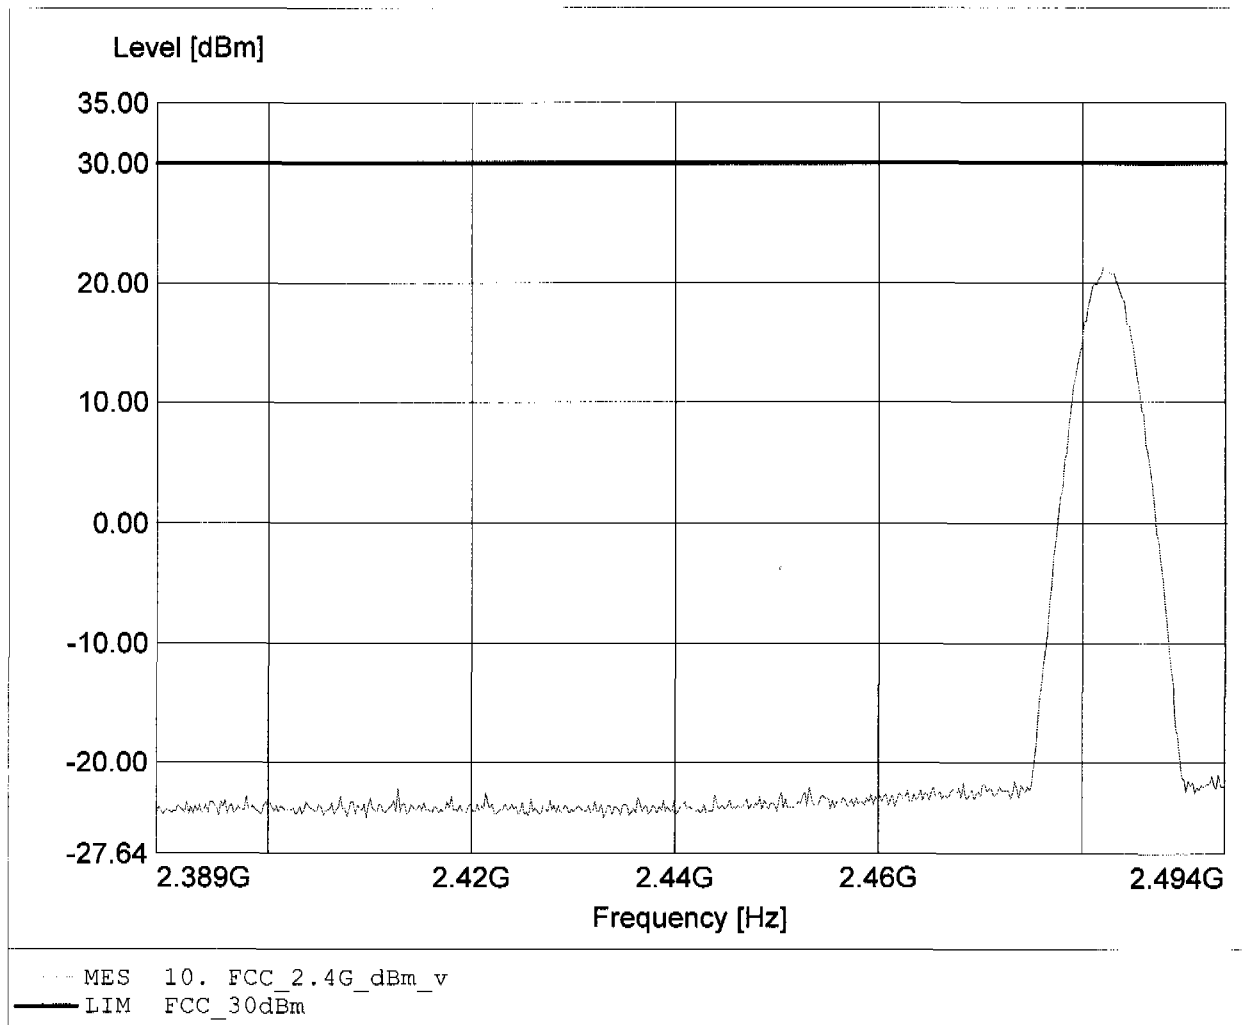

Carrier power (dBm)

FCC RULES PART 15, SUBPART C

Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.482GHz, Pmax: 20.39dBm, RBW: 5MHz

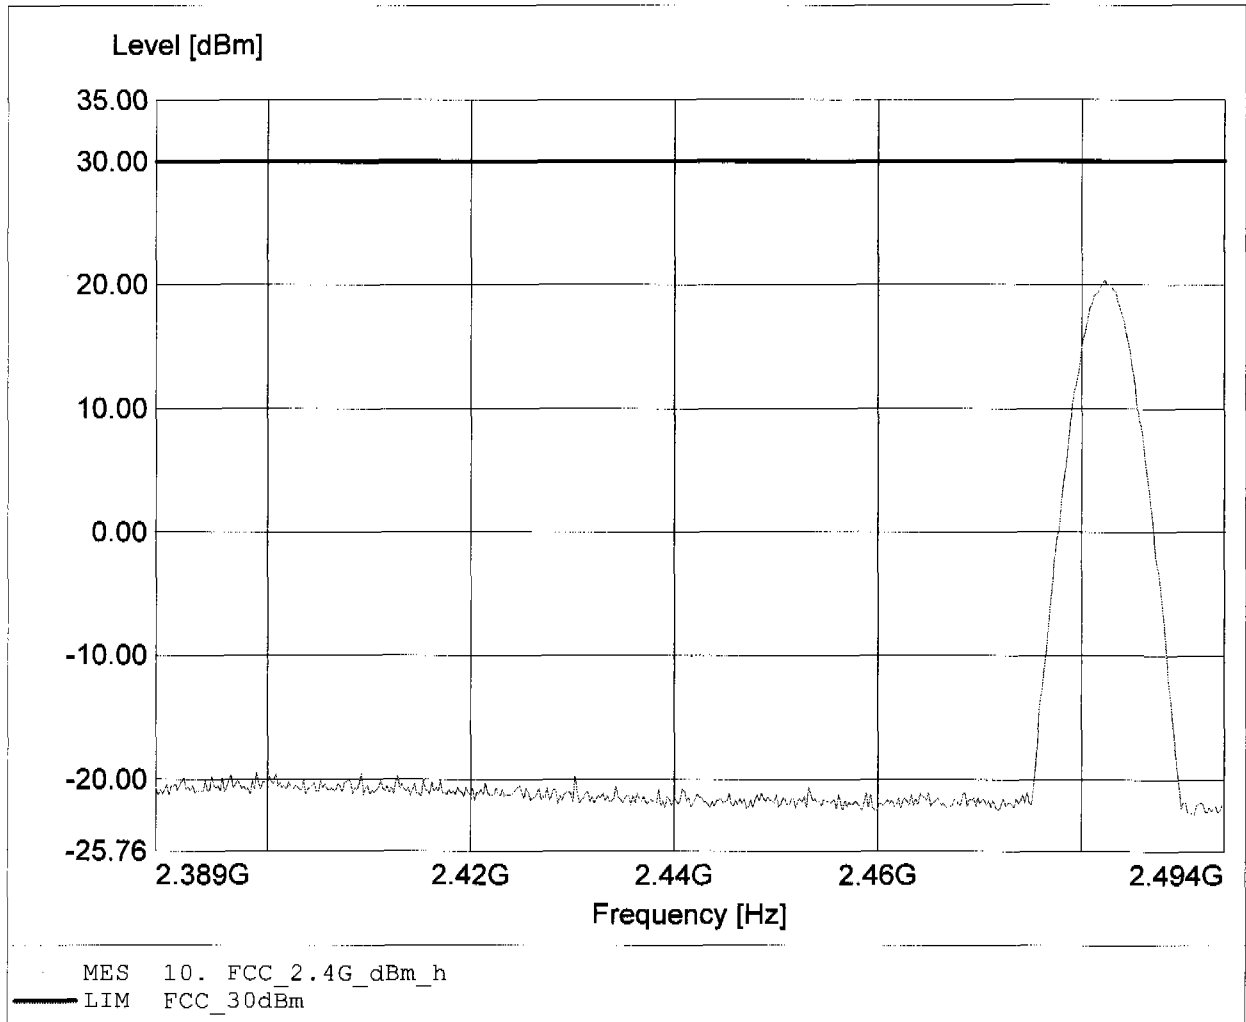




Appendix C

Spurious Emissions radiated - Transmitter operating

Carrier power (Field Strength)

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.401GHz, Emax: 114.41dBµV/m, RBW: 100kHz

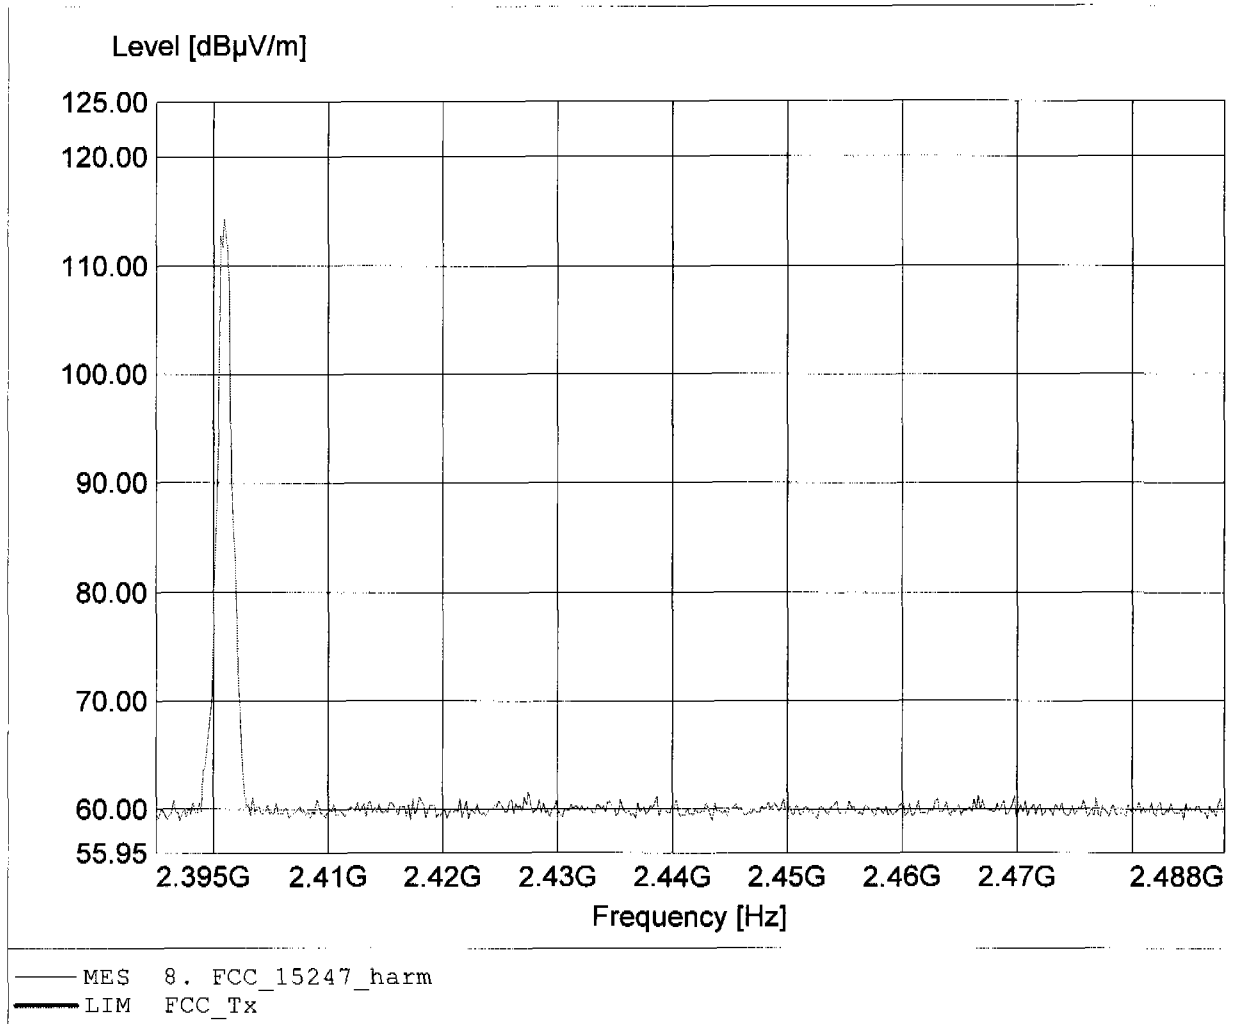

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.956MHz, Emax: 33.41dBµV/m, RBW: 100kHz

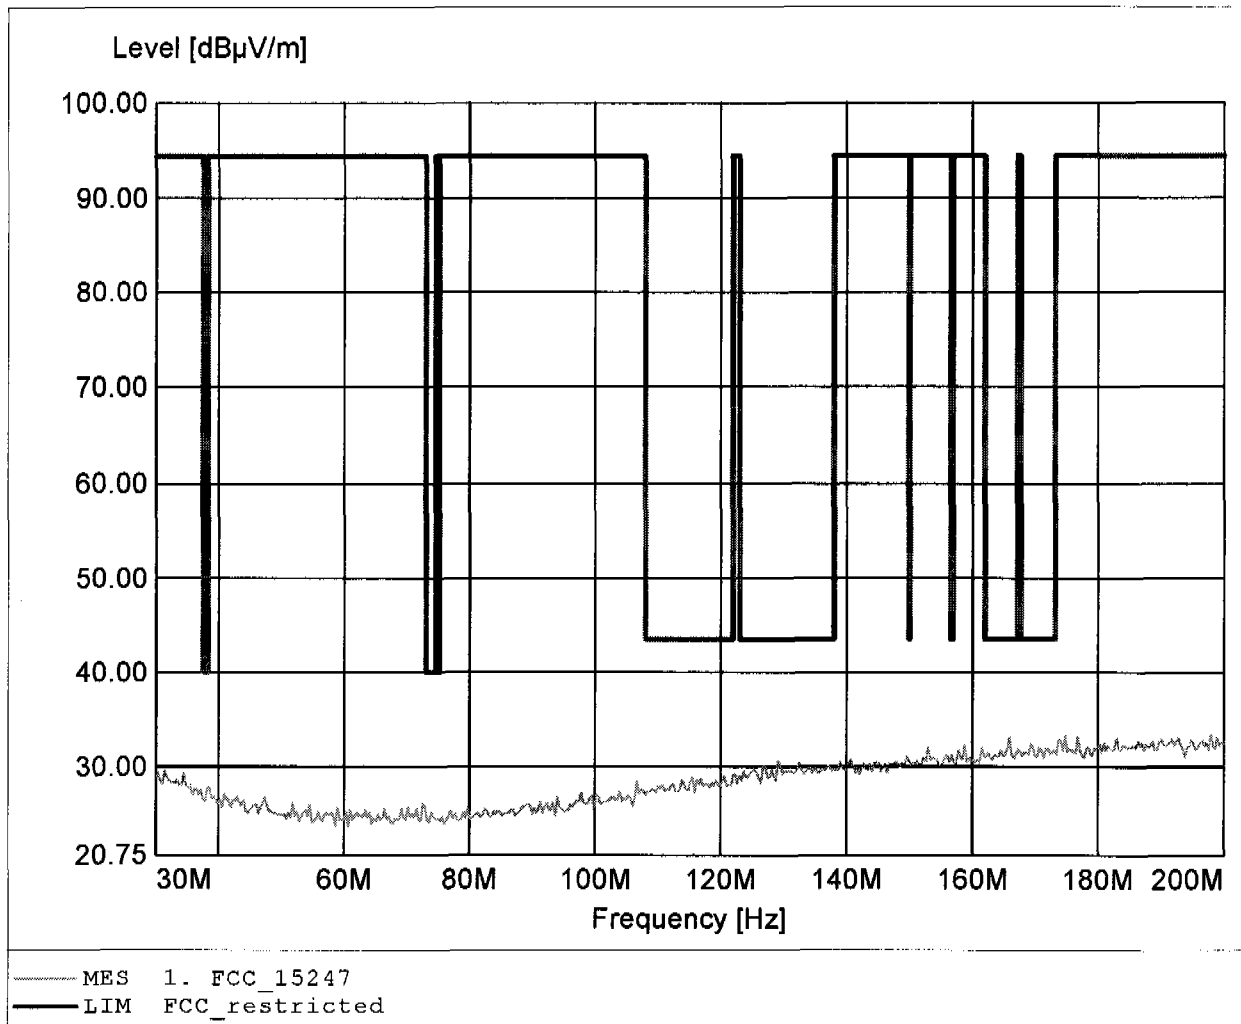

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 200.000MHz, Emax: 33.93dBµV/m, RBW: 100kHz

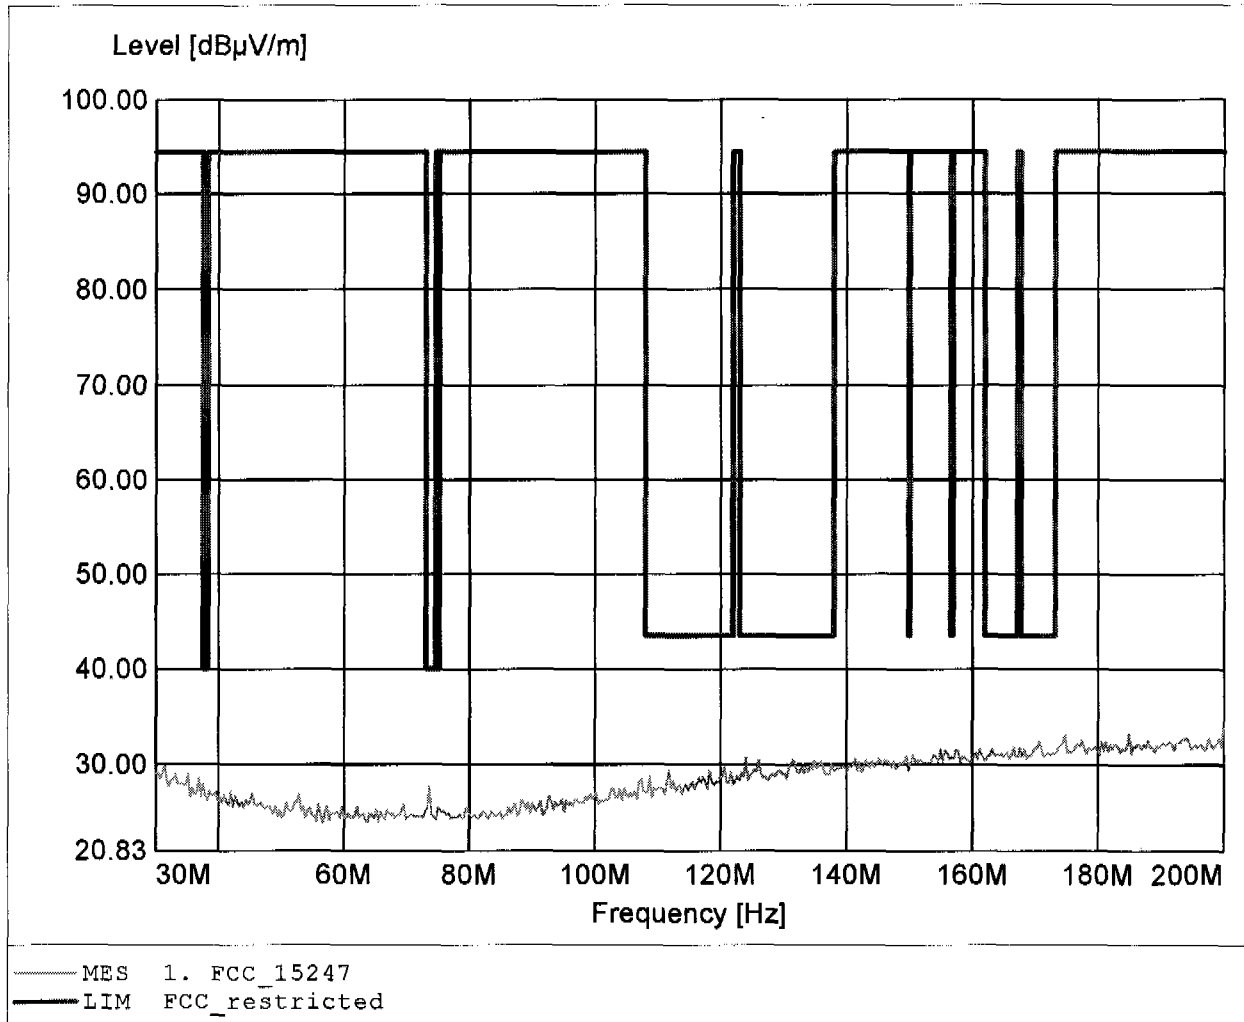

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 900.601MHz, Emax: 23.13dBµV/m, RBW: 100kHz

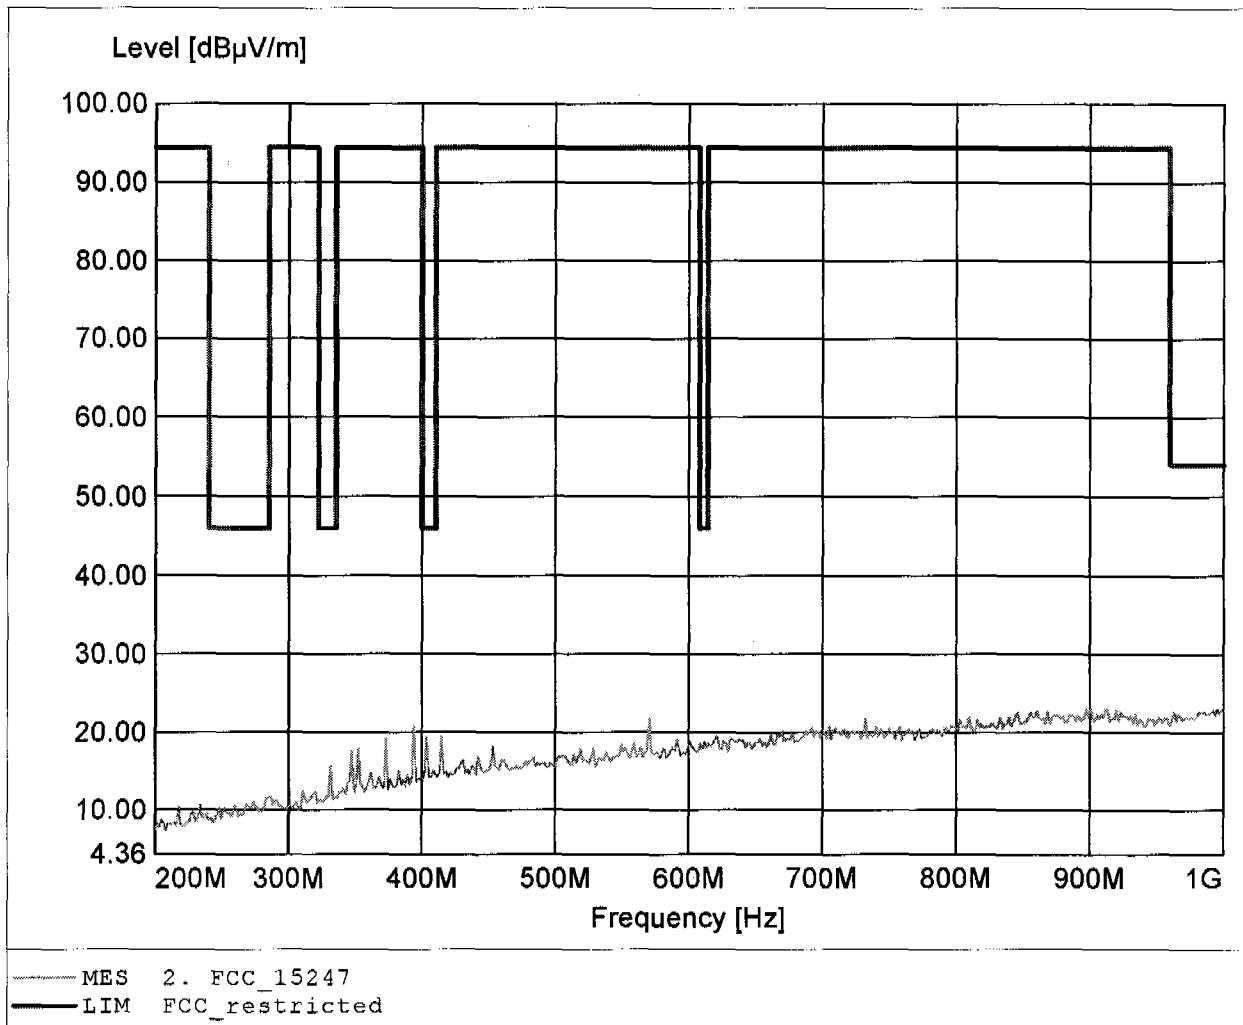

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 1.000GHz, Emax: 24.13dBµV/m, RBW: 100kHz

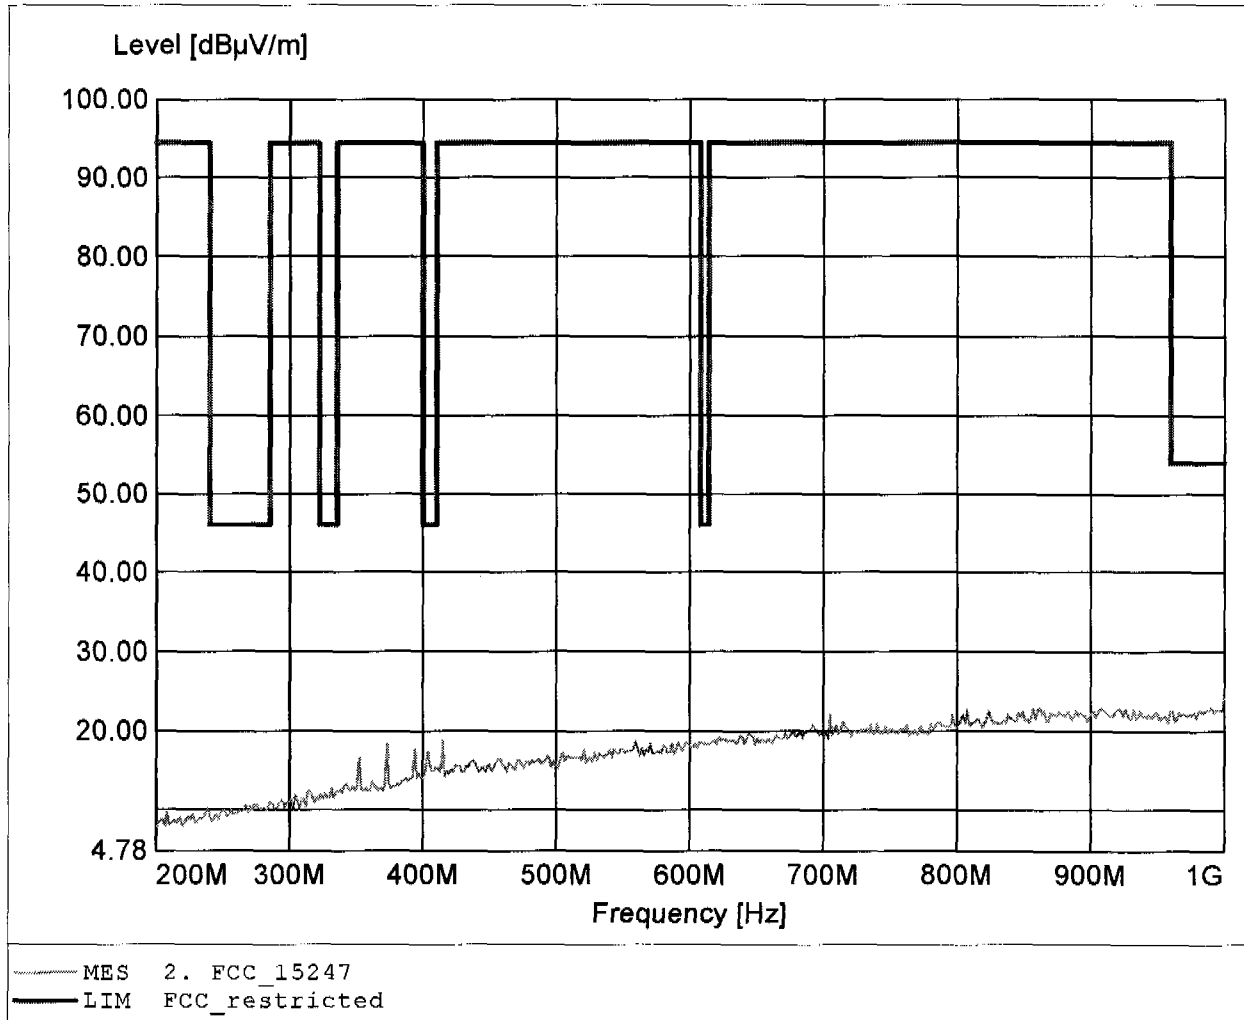

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.602GHz, Emax: 60.13dBµV/m, RBW: 1MHz

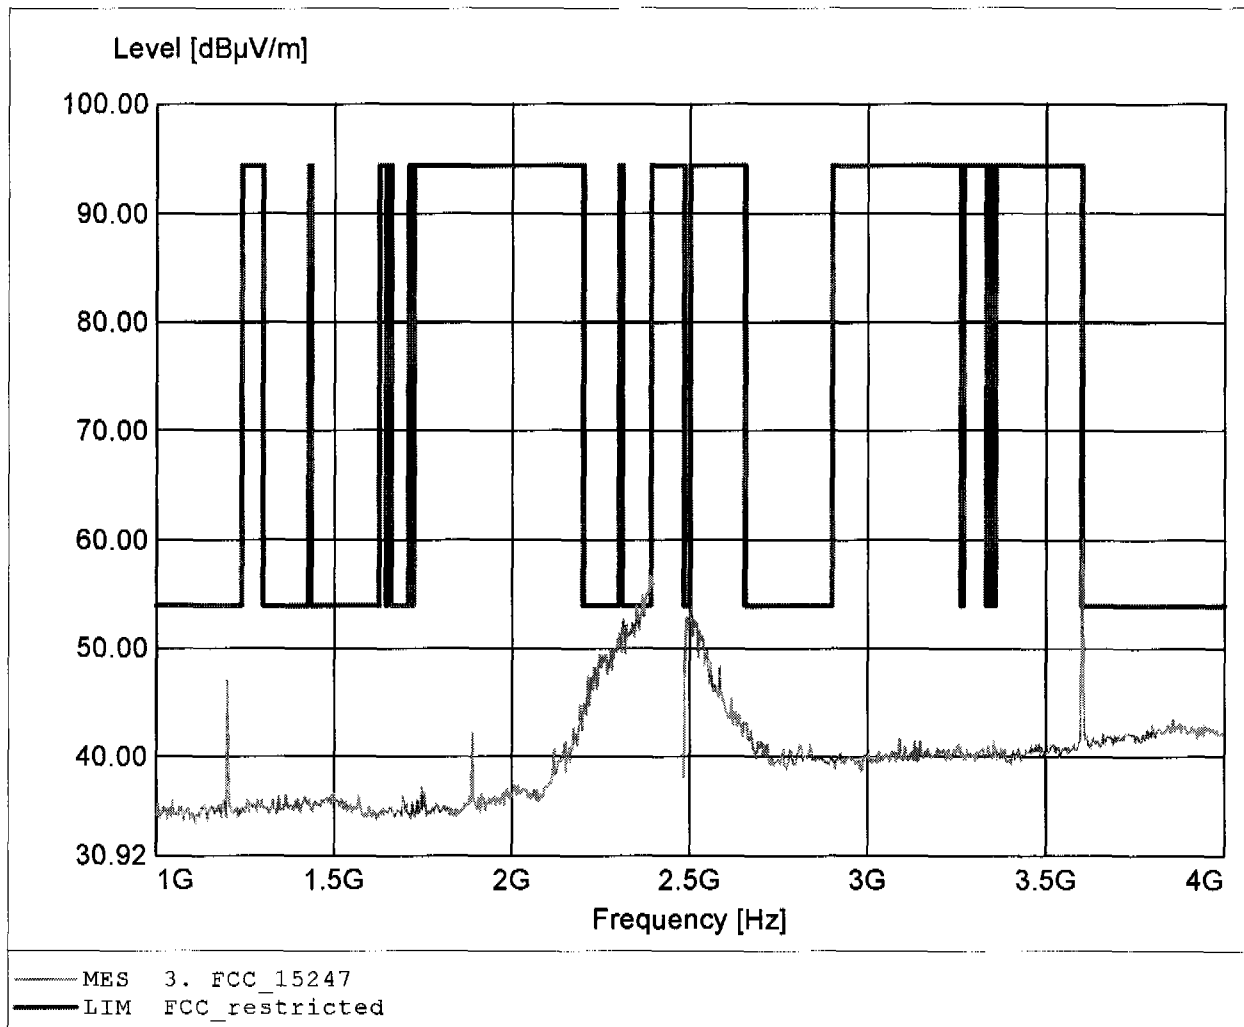

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.602GHz, Emax: 60.13dBµV/m, RBW: 1MHz

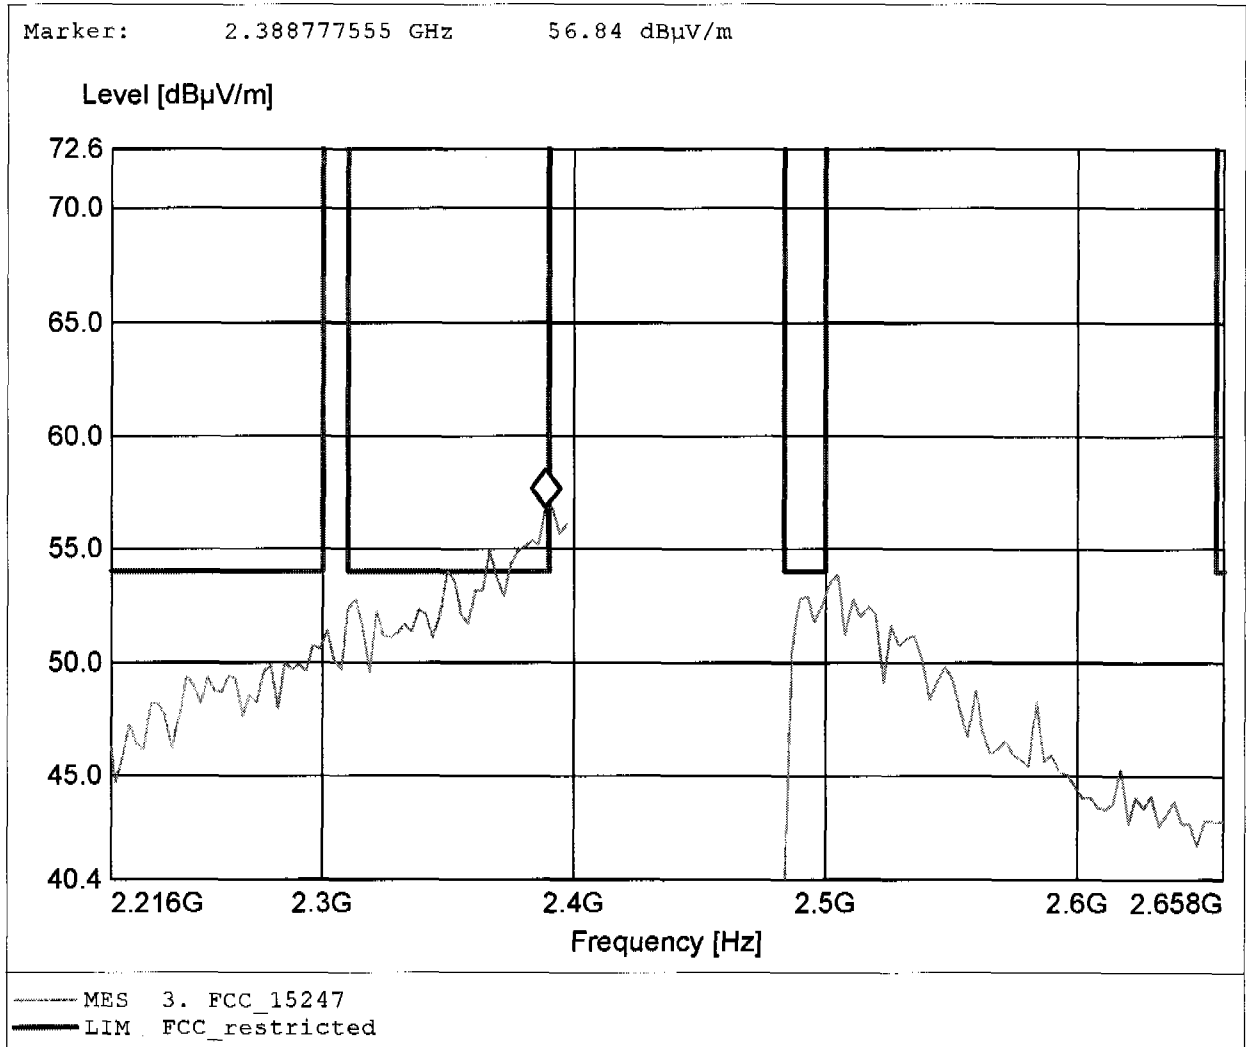

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.392GHz, Emax: 40.44dBµV/m, RBW: 1MHz

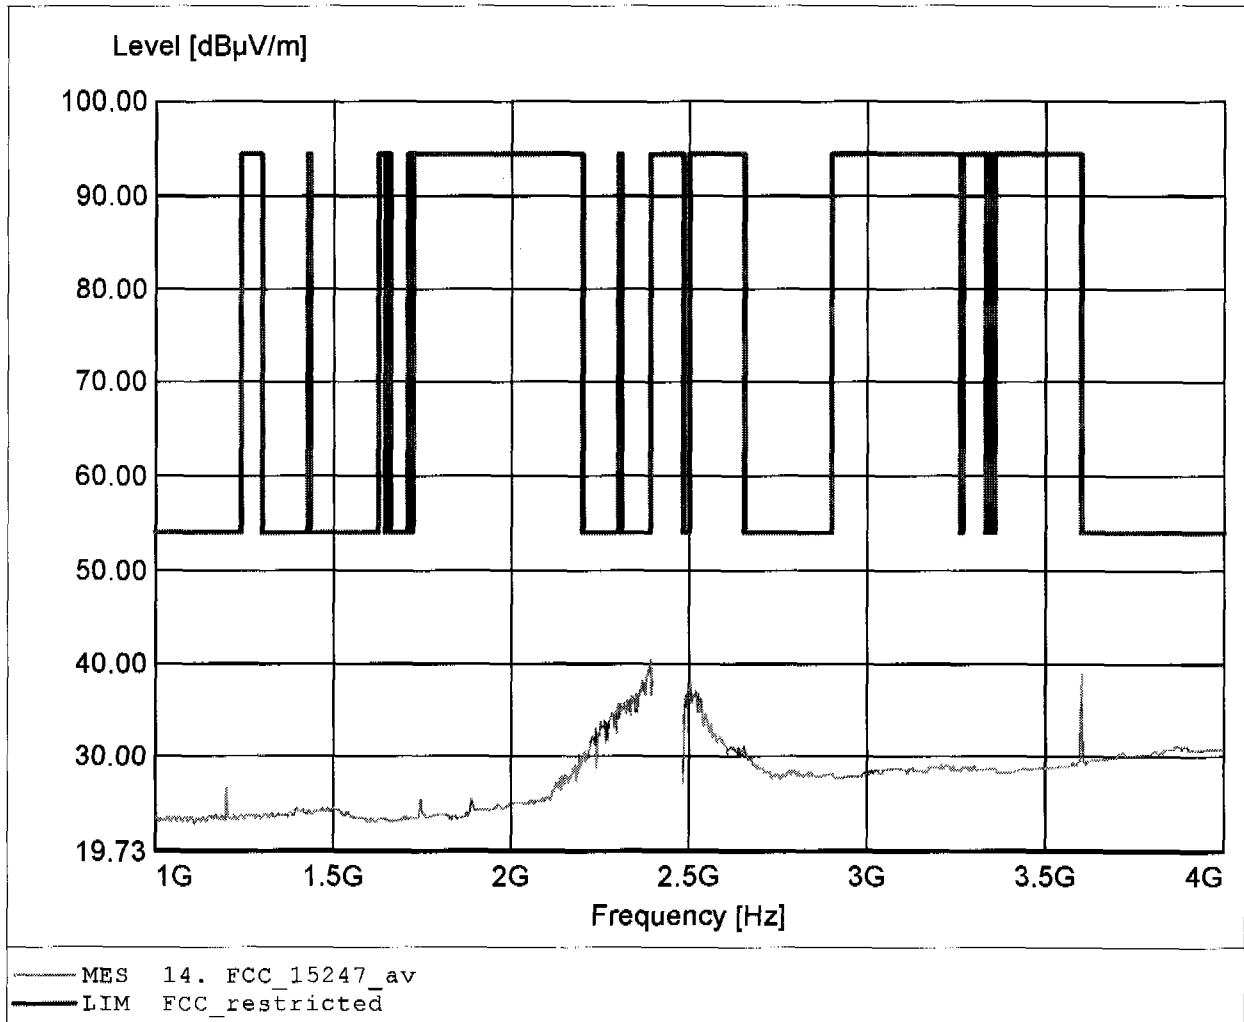

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 67.99dBµV/m, RBW: 1MHz

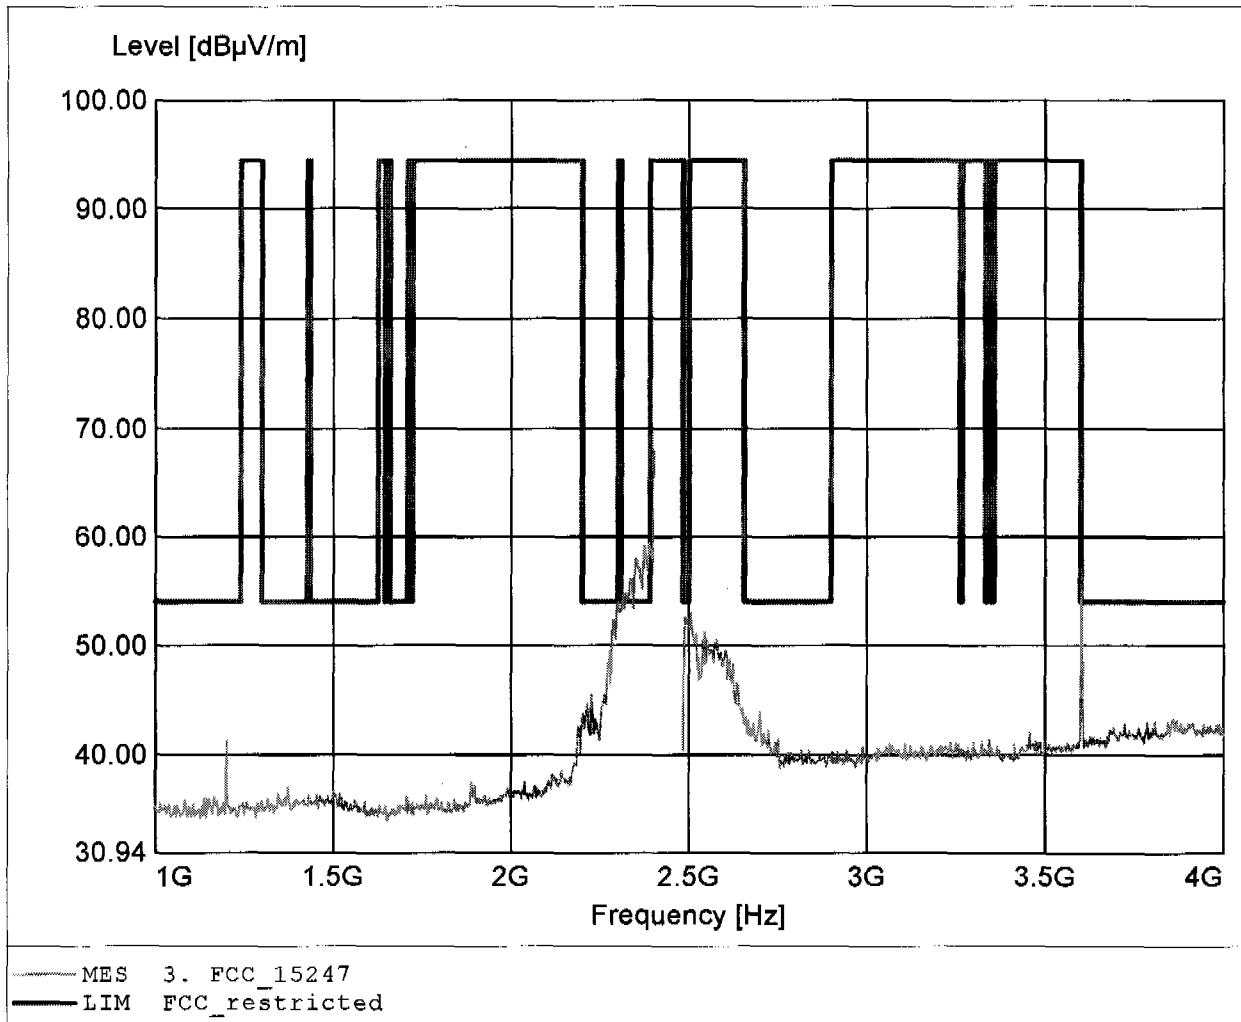

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.392GHz, Emax: 41.75dBµV/m, RBW: 1MHz

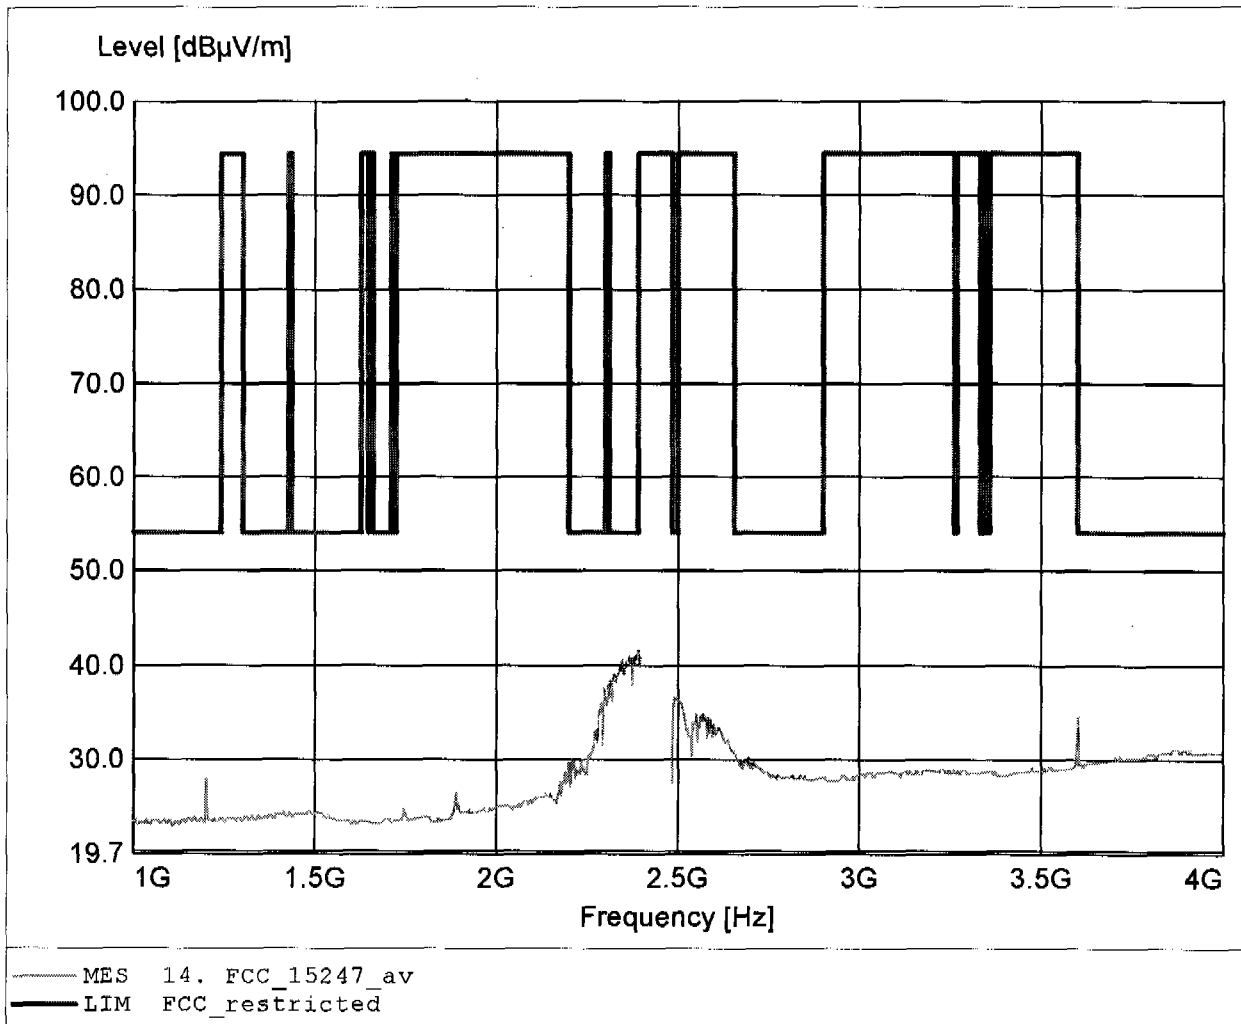

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 67.99dBµV/m, RBW: 1MHz

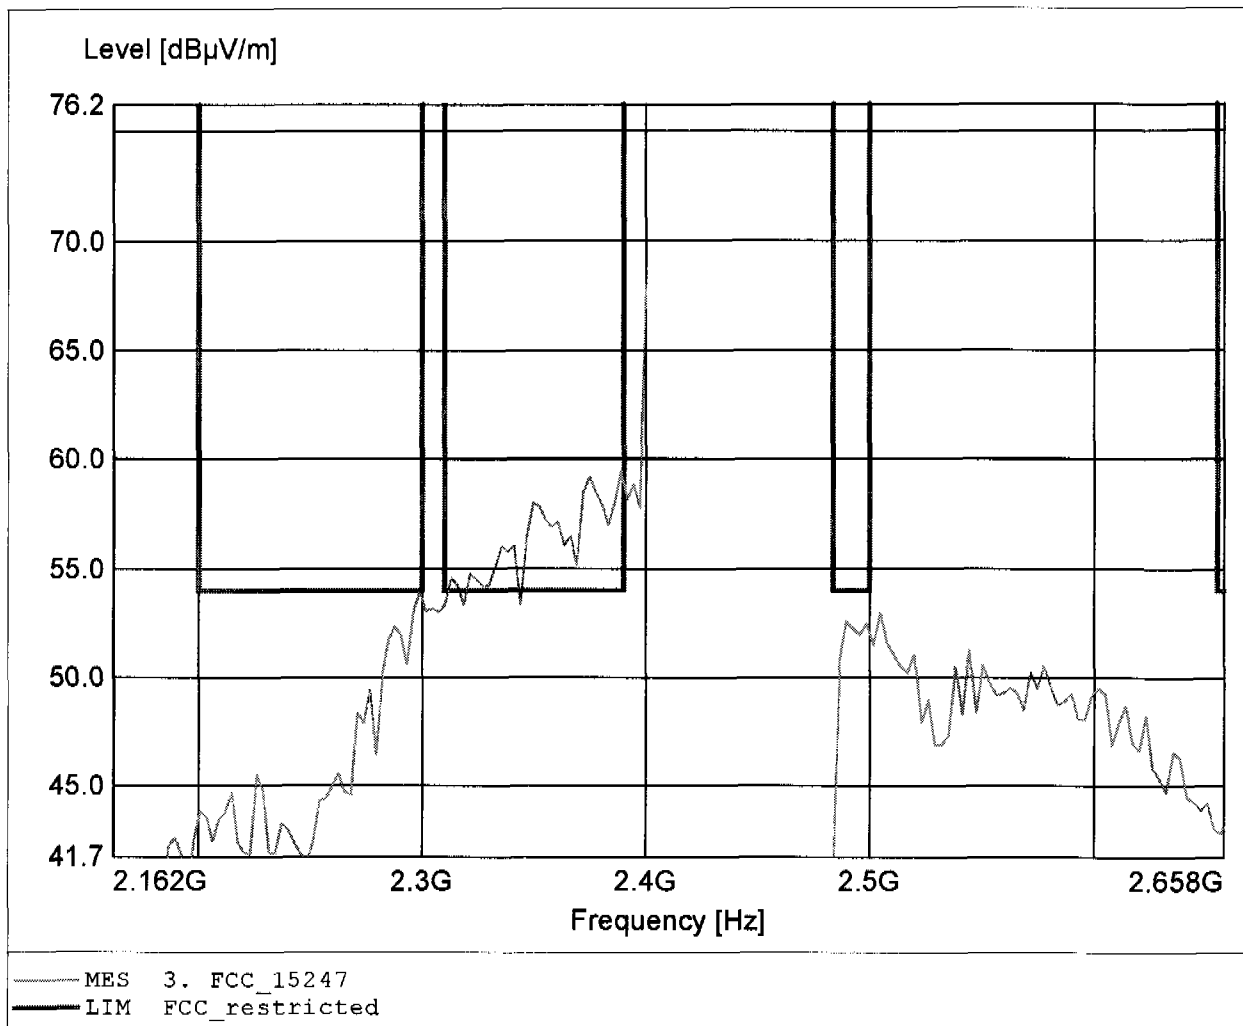

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 67.99dBµV/m, RBW: 1MHz

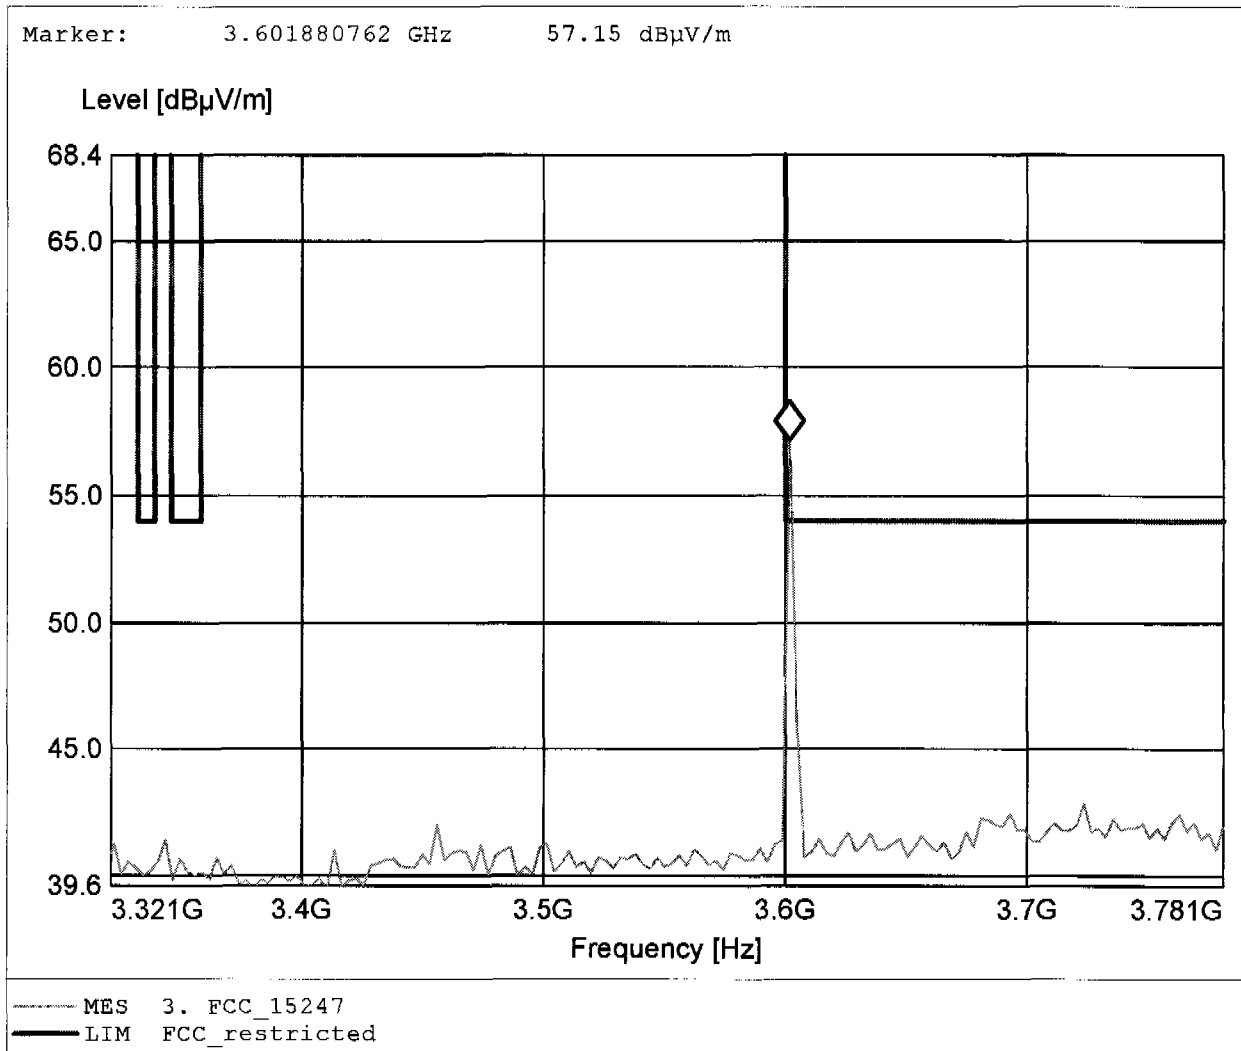

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m; Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.602GHz, Emax: 60.13dBµV/m, RBW: 1MHz

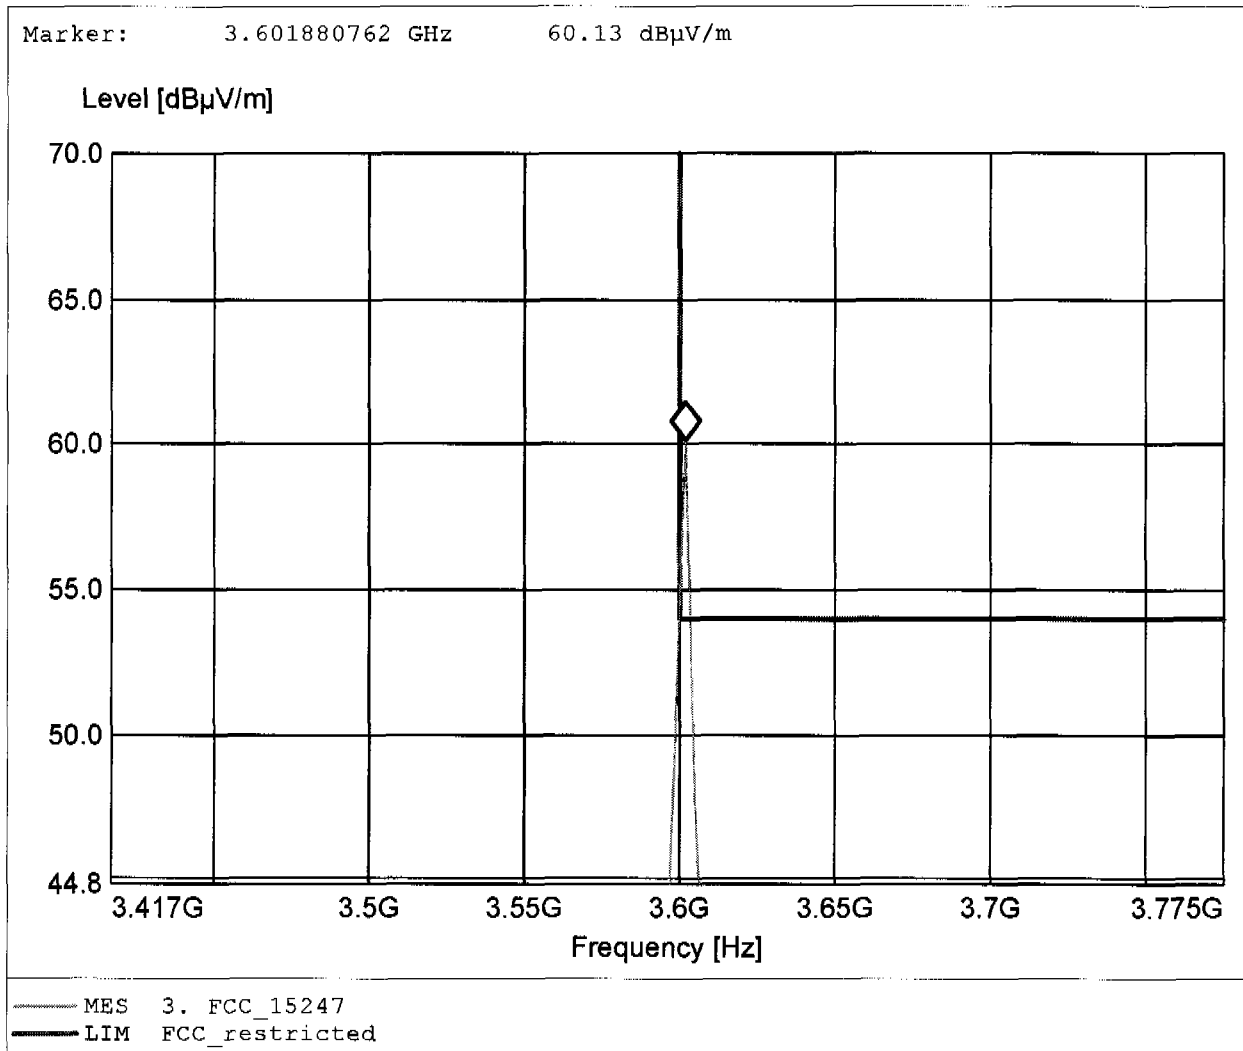

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 39.18dBµV/m, RBW: 1MHz

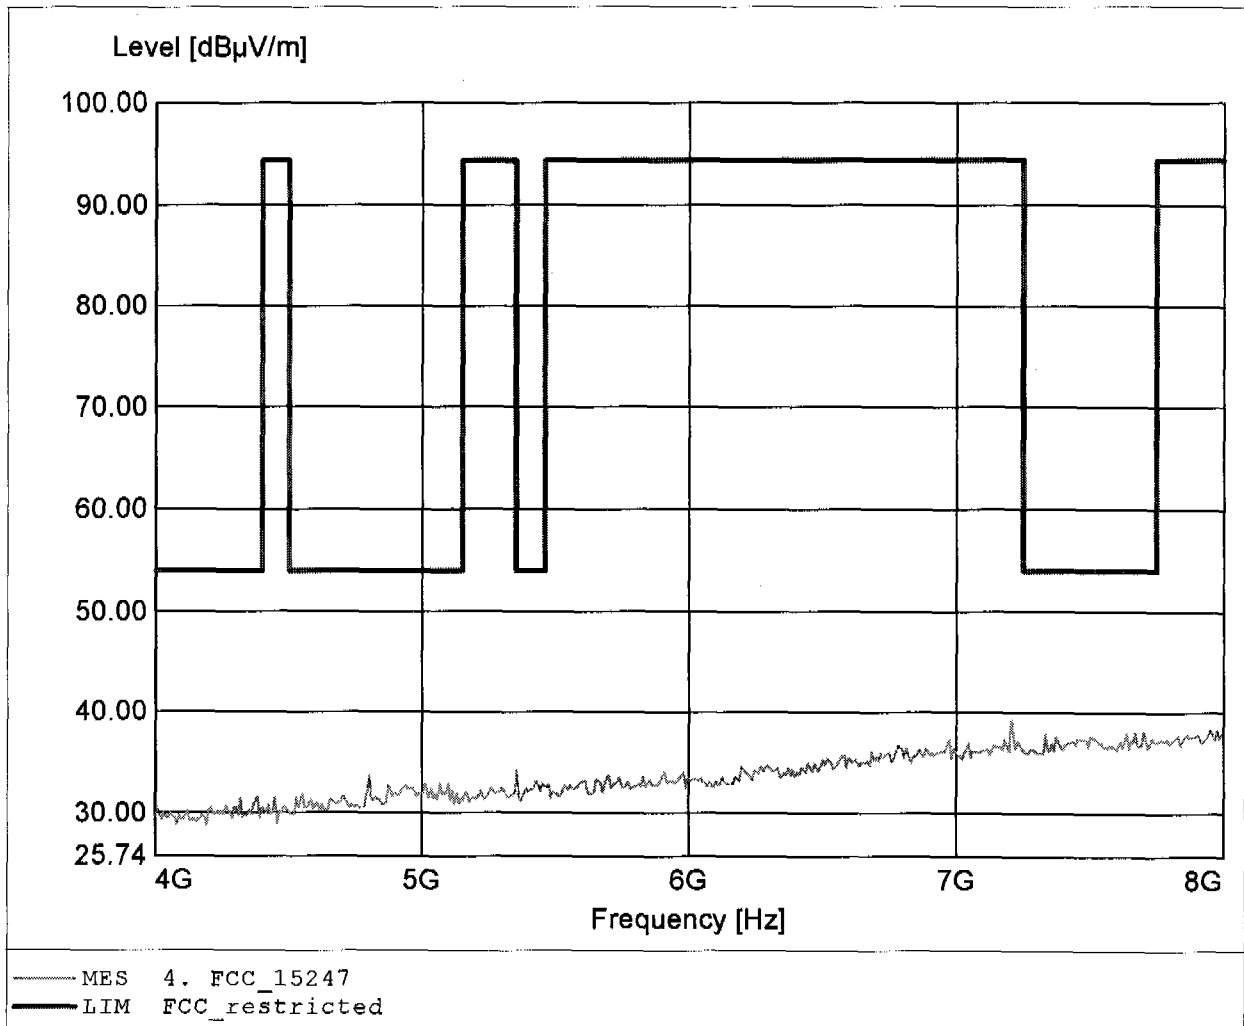

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.206GHz, Emax: 43.20dBµV/m, RBW: 1MHz

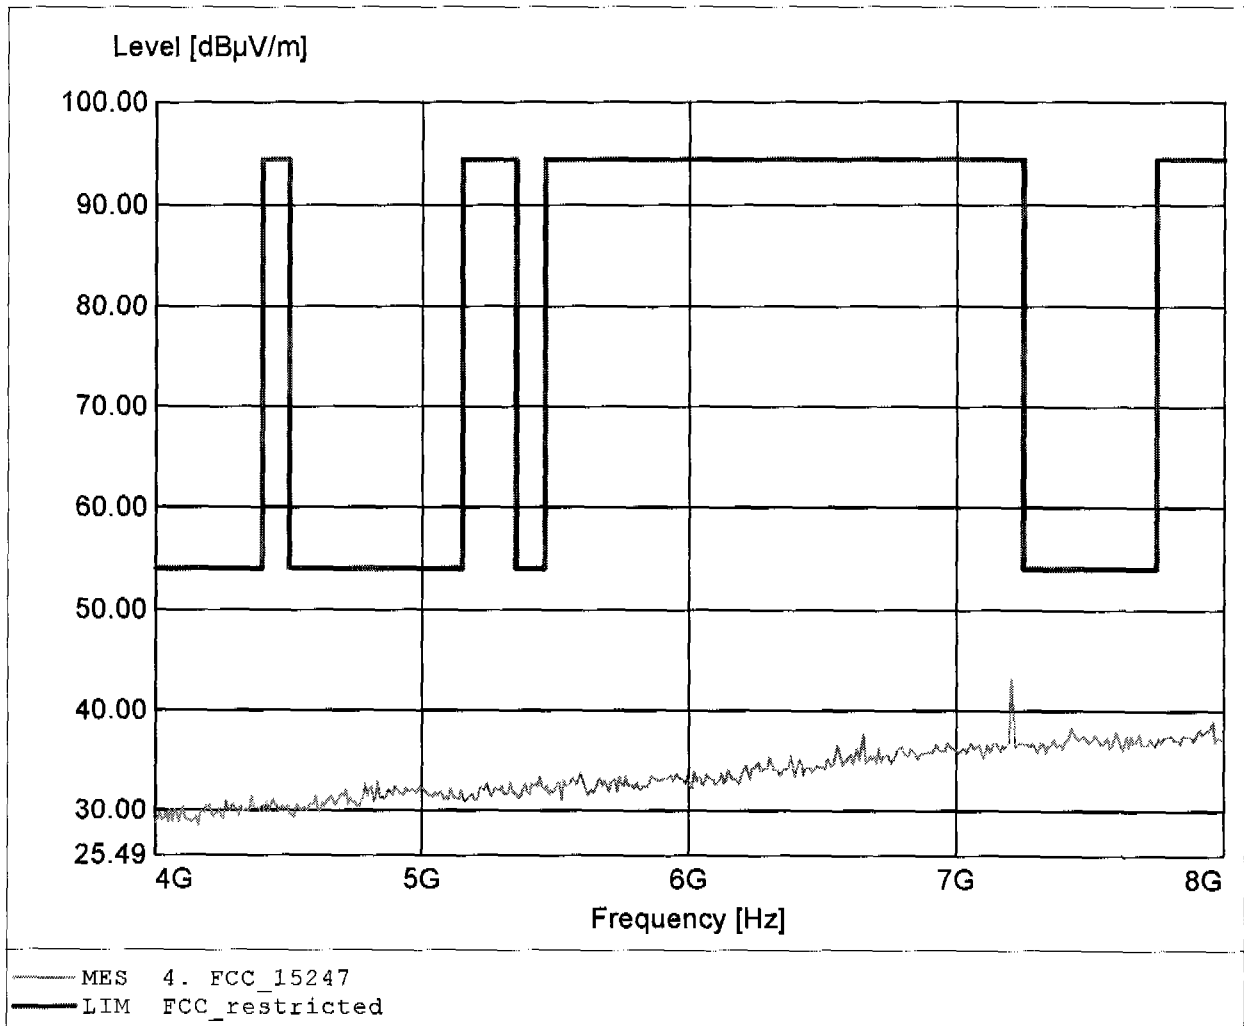

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 50.55dB μ V/m, RBW: 1MHz

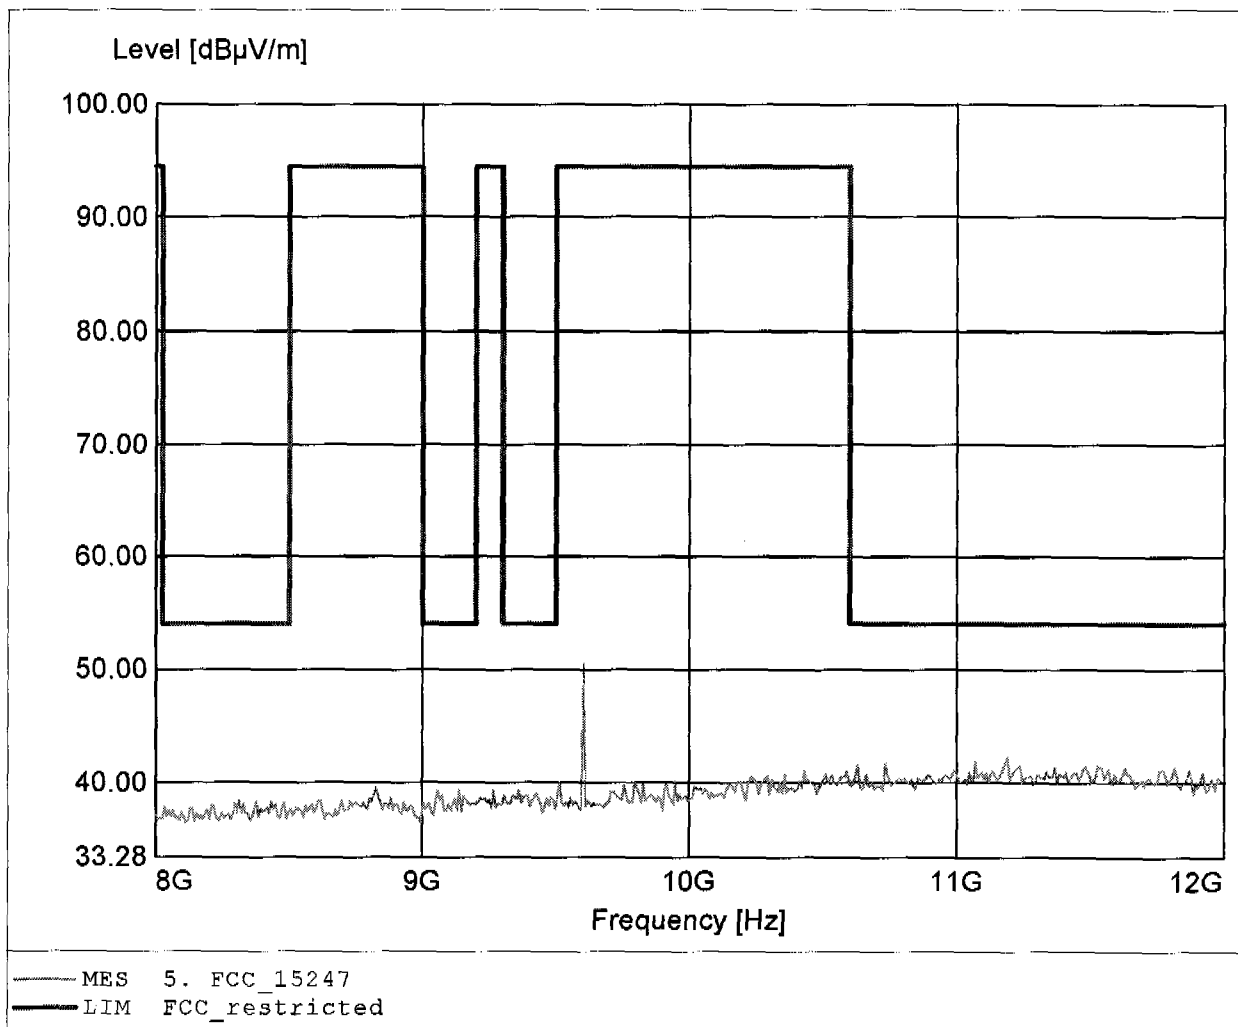

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.603GHz, Emax: 54.24dB μ V/m, RBW: 1MHz

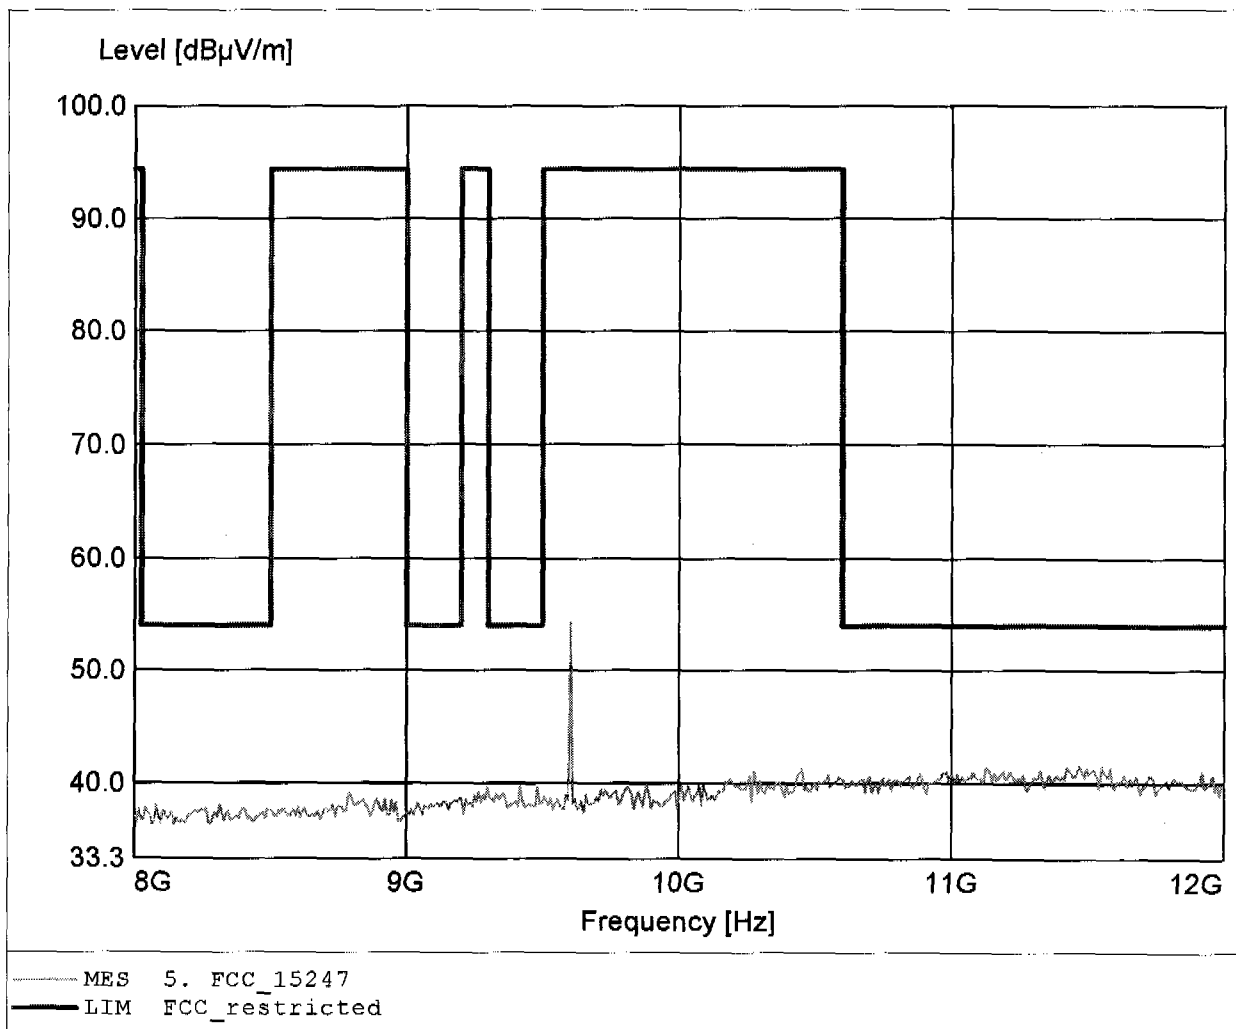

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 57.56dBµV/m, RBW: 1MHz

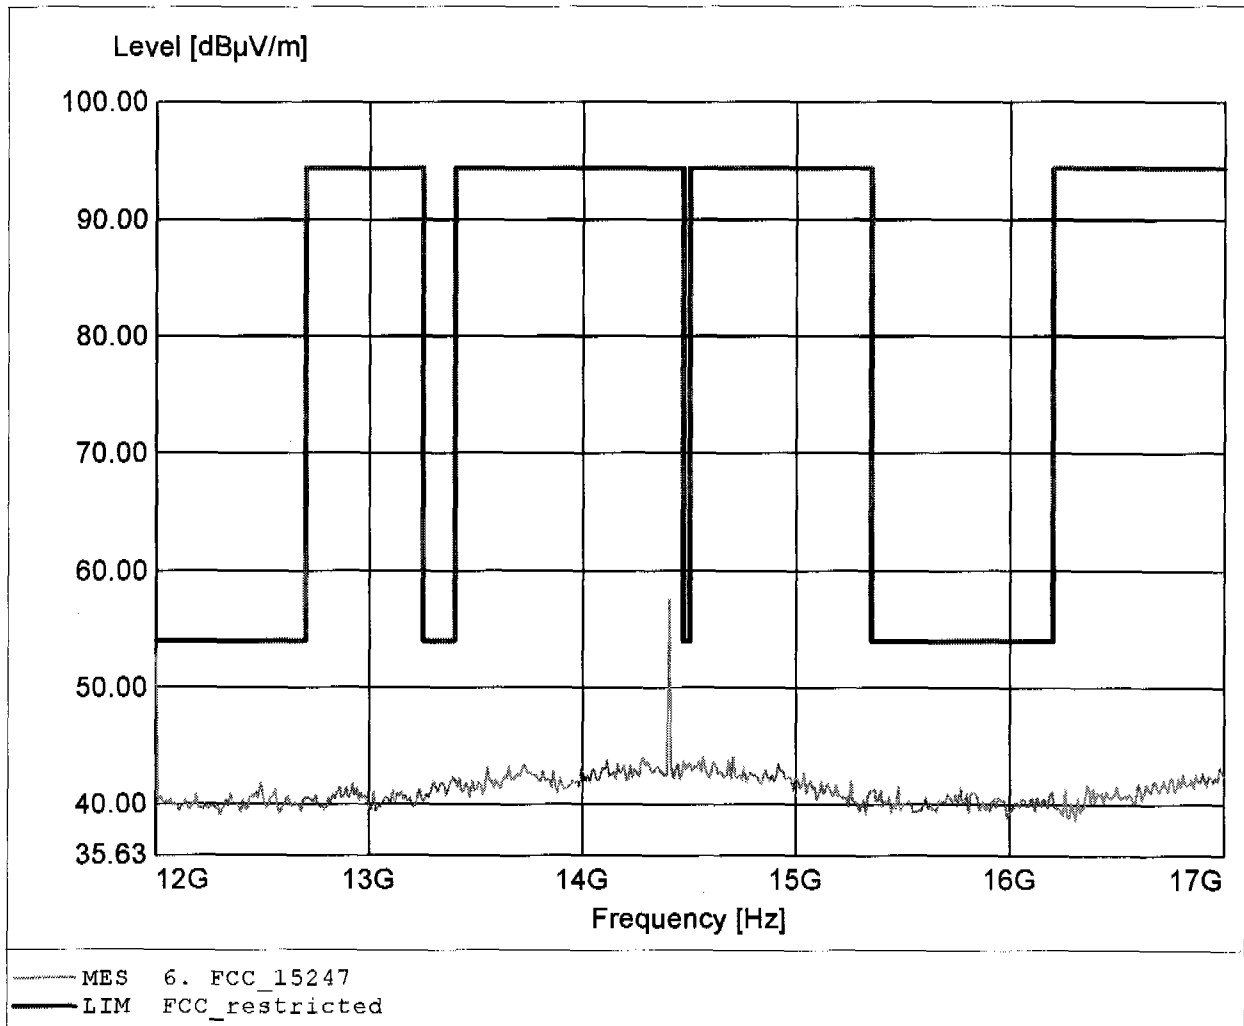

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 16.810GHz, Emax: 57.53dBµV/m, RBW: 1MHz

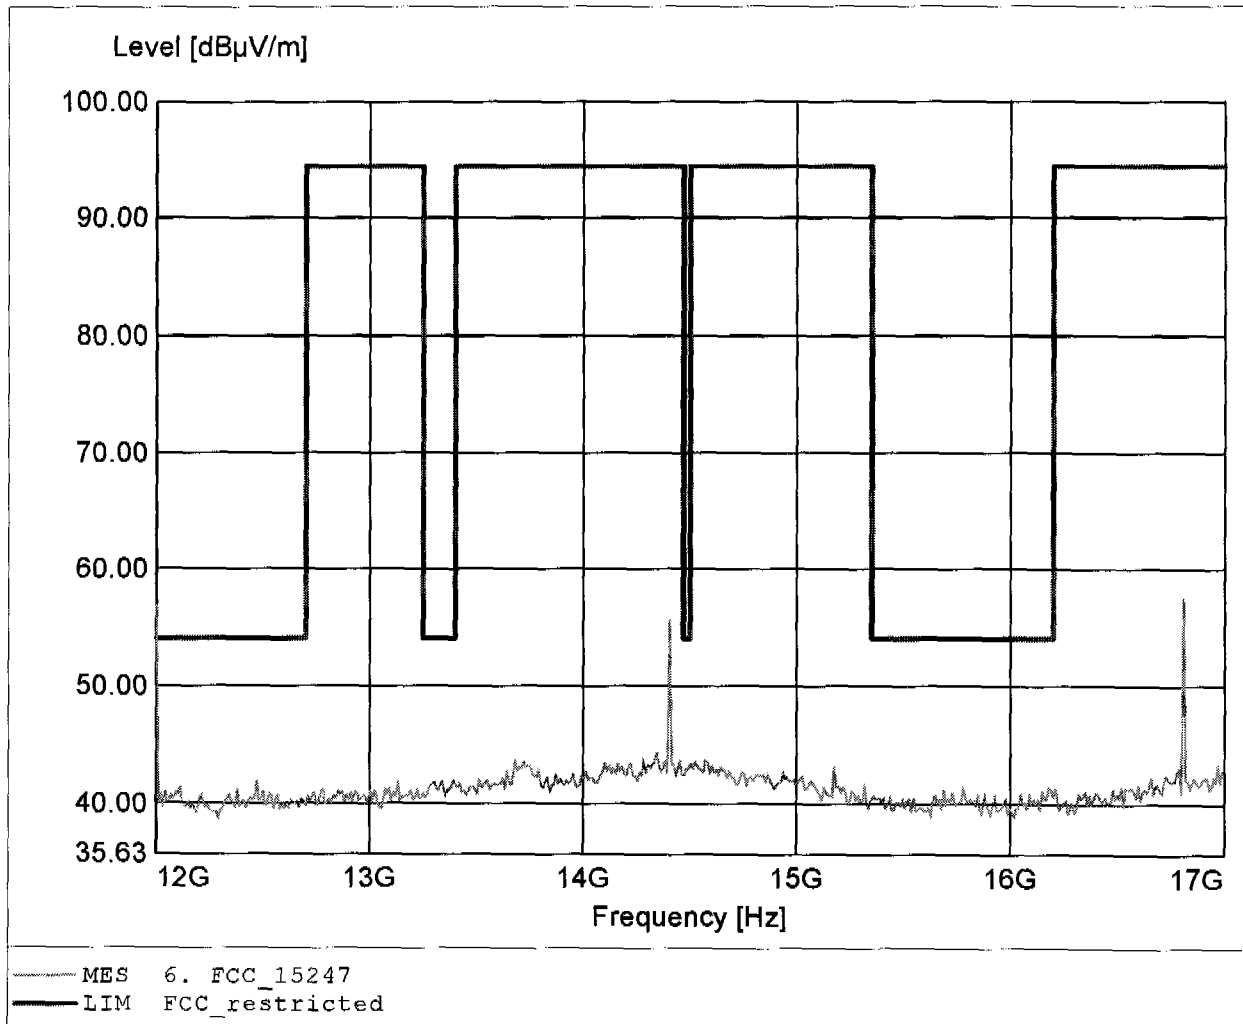

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 14.405GHz, Emax: 57.56dBµV/m, RBW: 1MHz

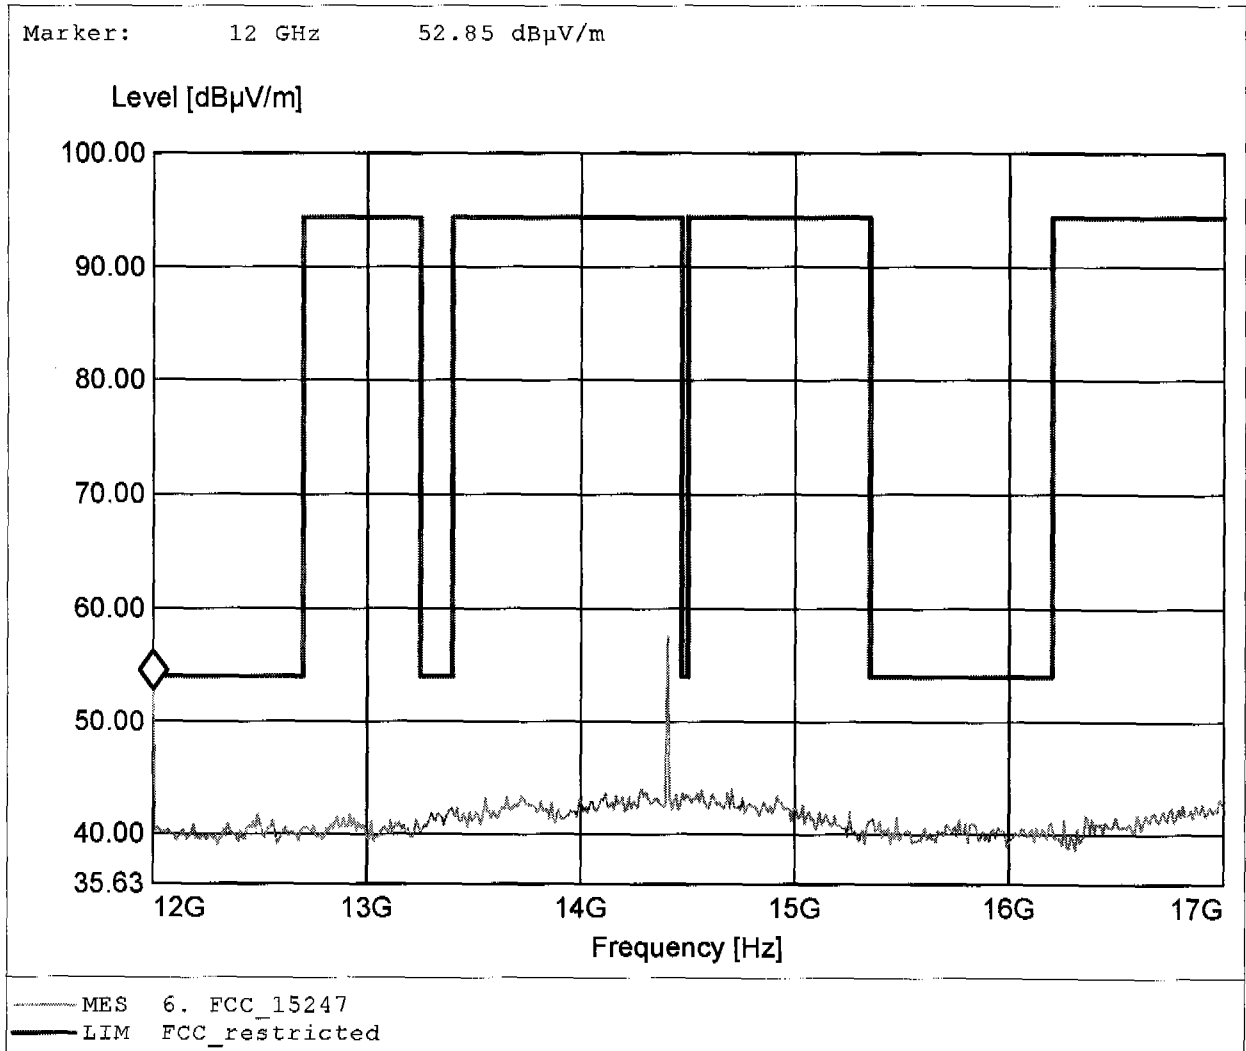

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 16.810GHz, Emax: 57.53dBµV/m, RBW: 1MHz

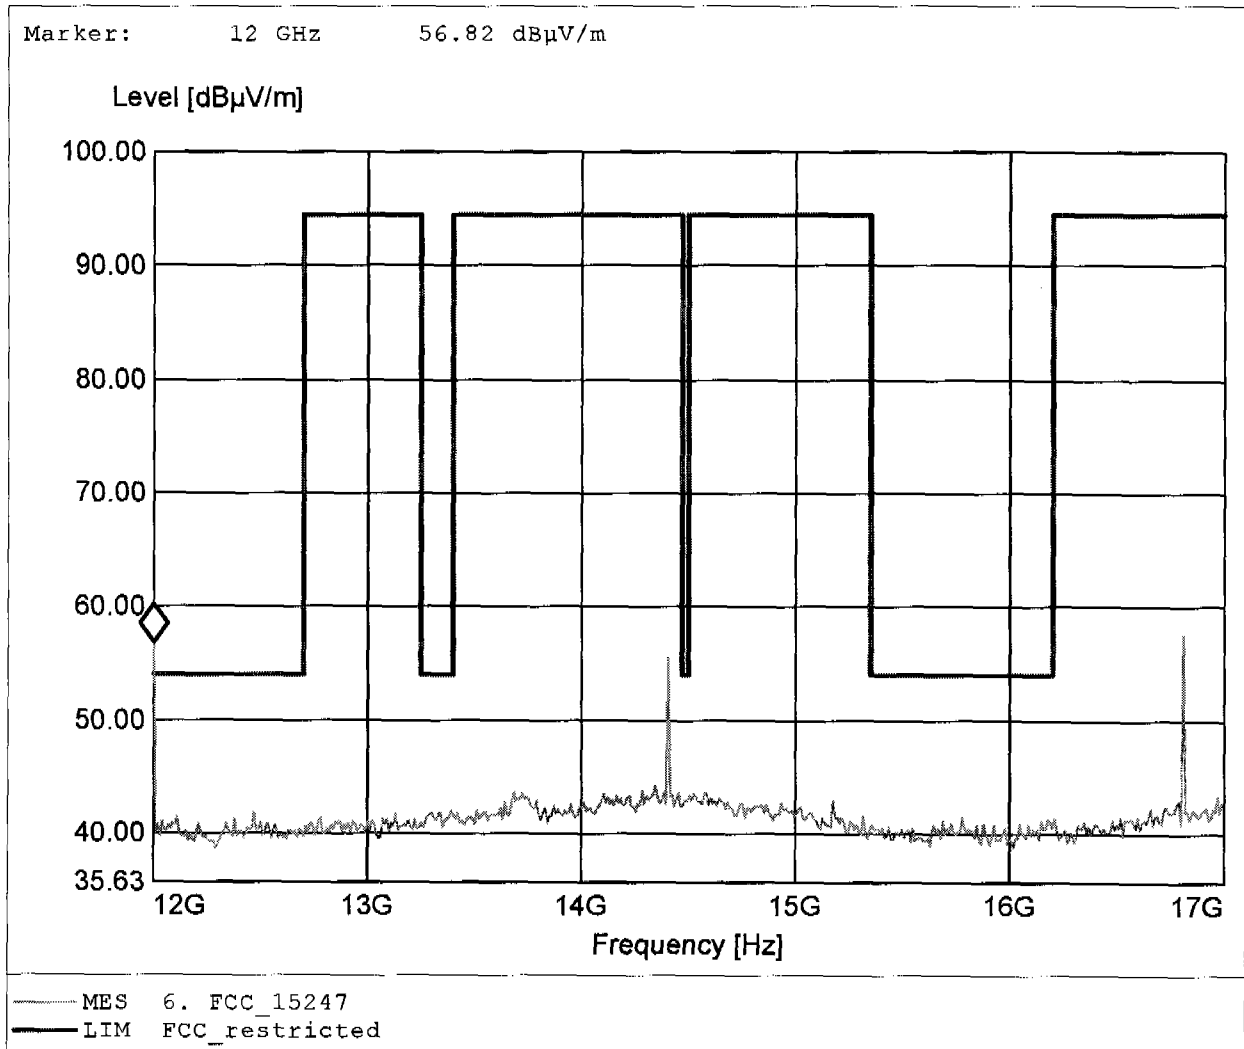

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.000GHz, Emax: 35.97dBµV/m, RBW: 1MHz

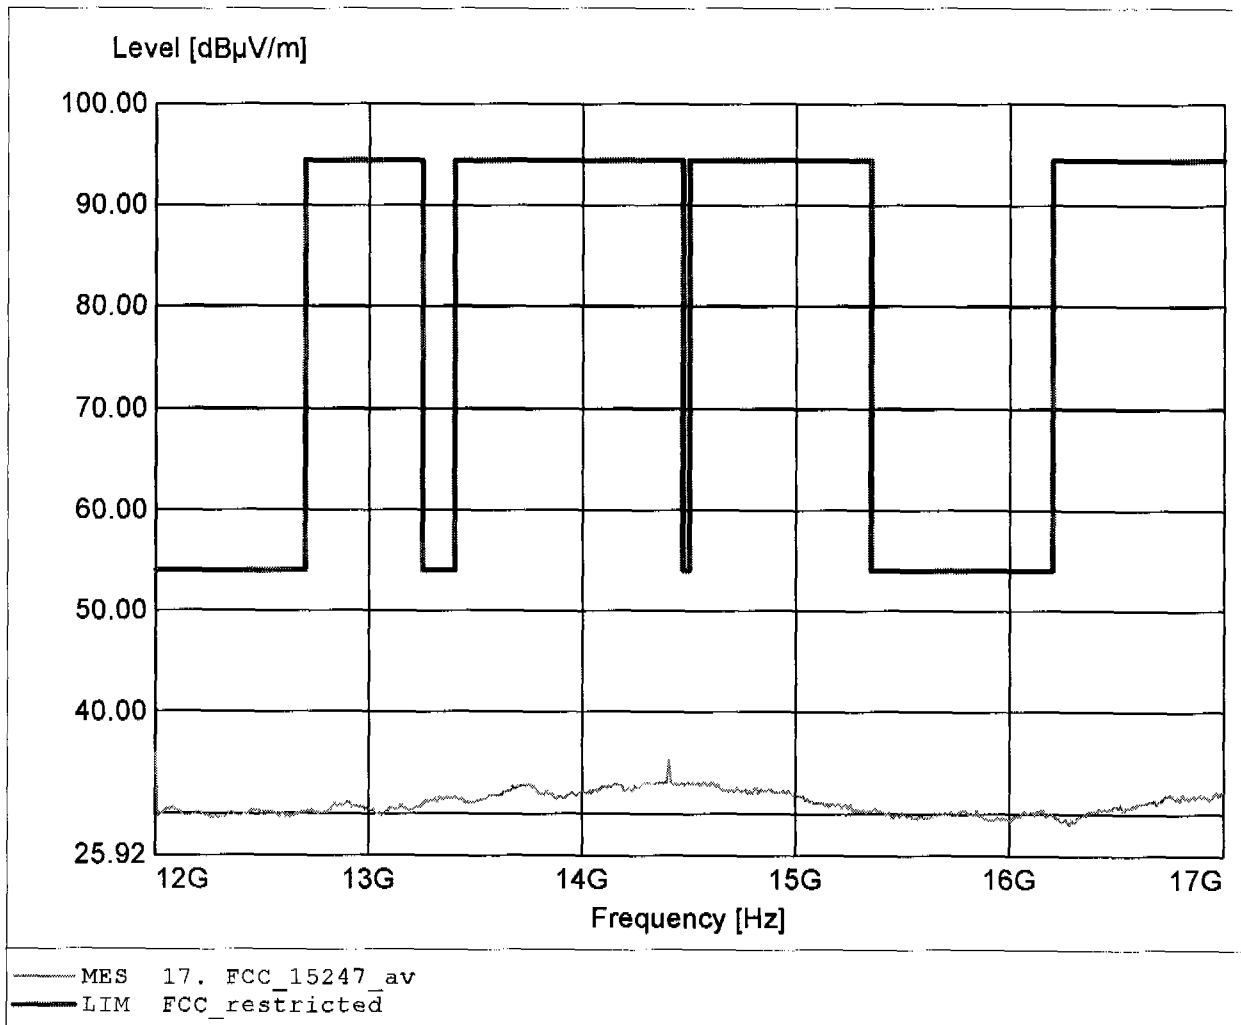

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 24.482GHz, Emax: 44.85dBµV/m, RBW: 1MHz

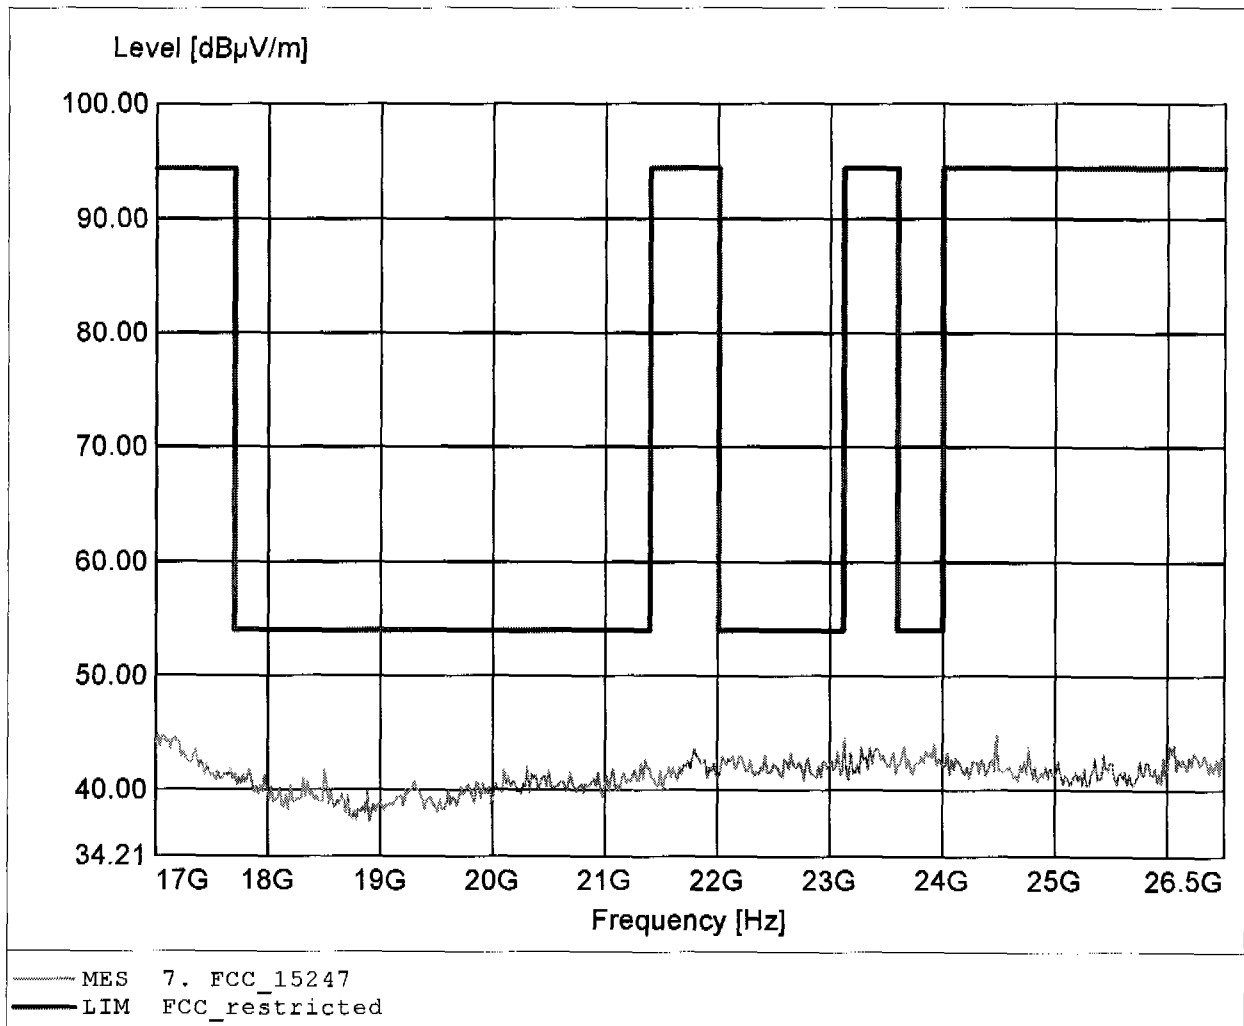

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 0
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.019GHz, Emax: 44.91dBµV/m, RBW: 1MHz

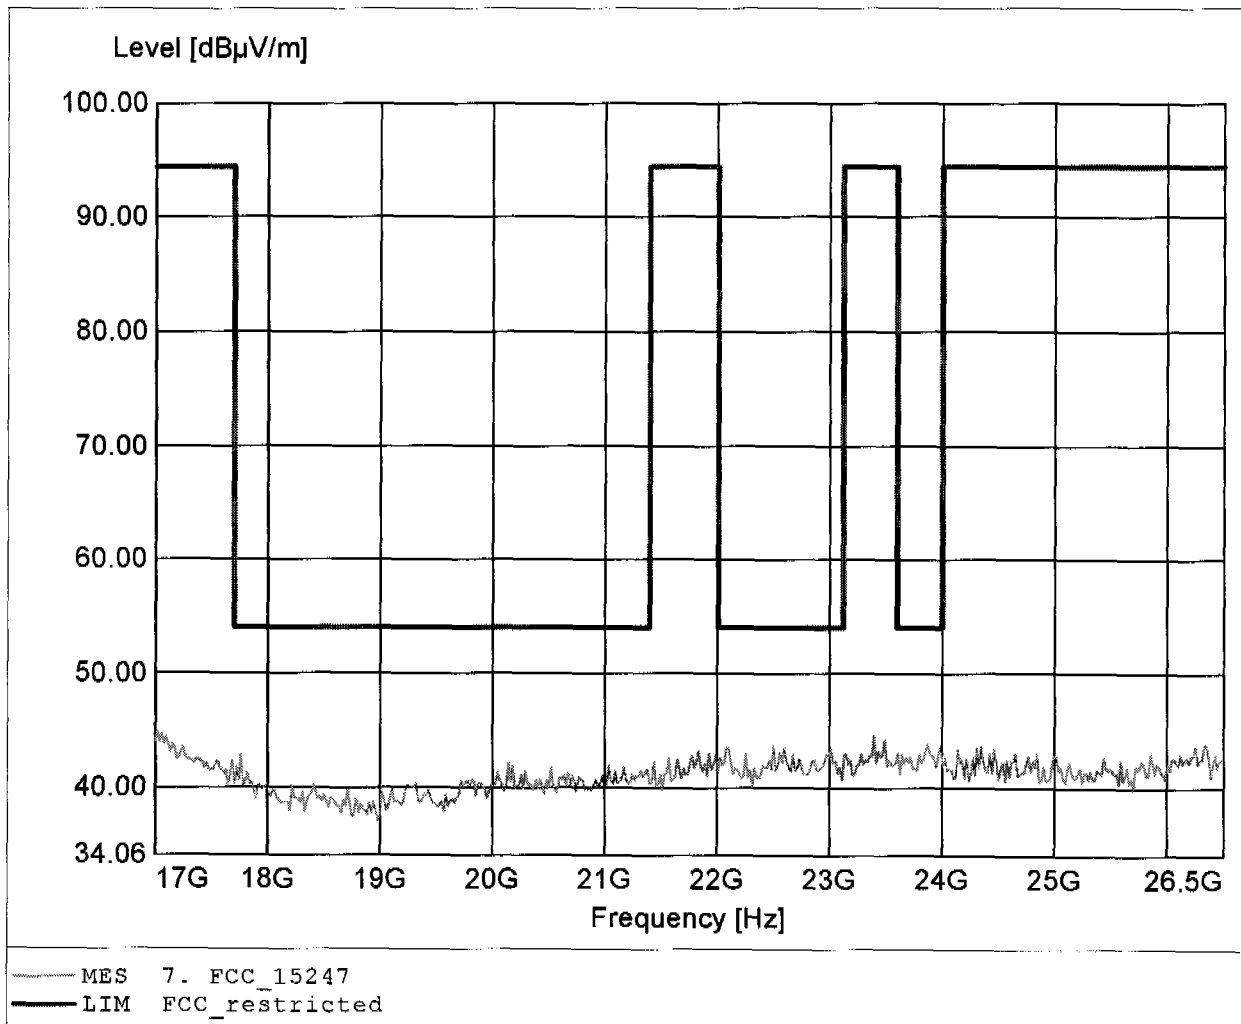

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 180.922MHz, Emax: 33.61dBµV/m, RBW: 100kHz

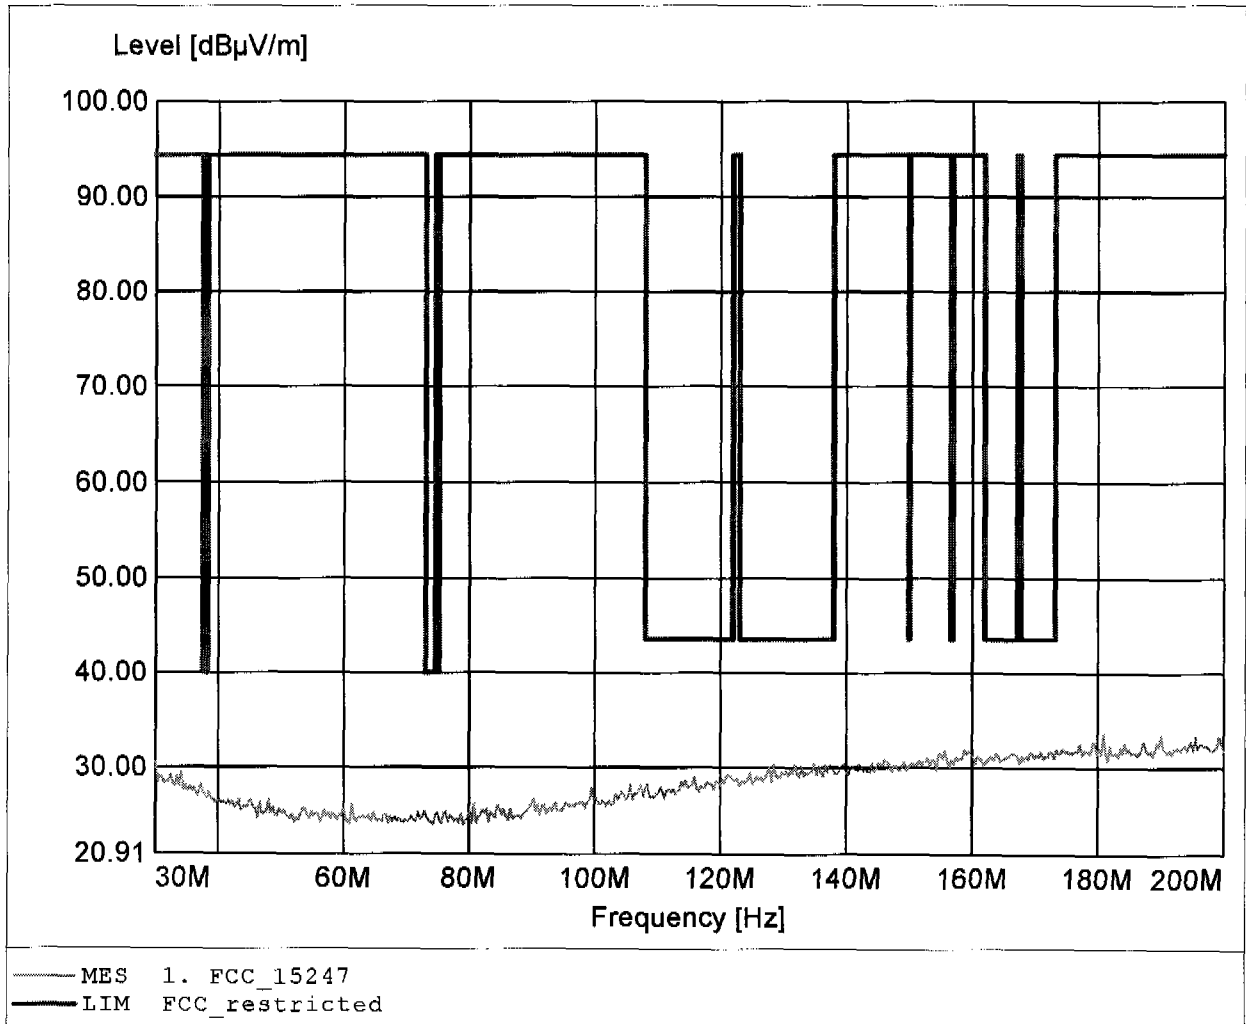

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 197.275MHz, Emax: 33.58dBµV/m, RBW: 100kHz

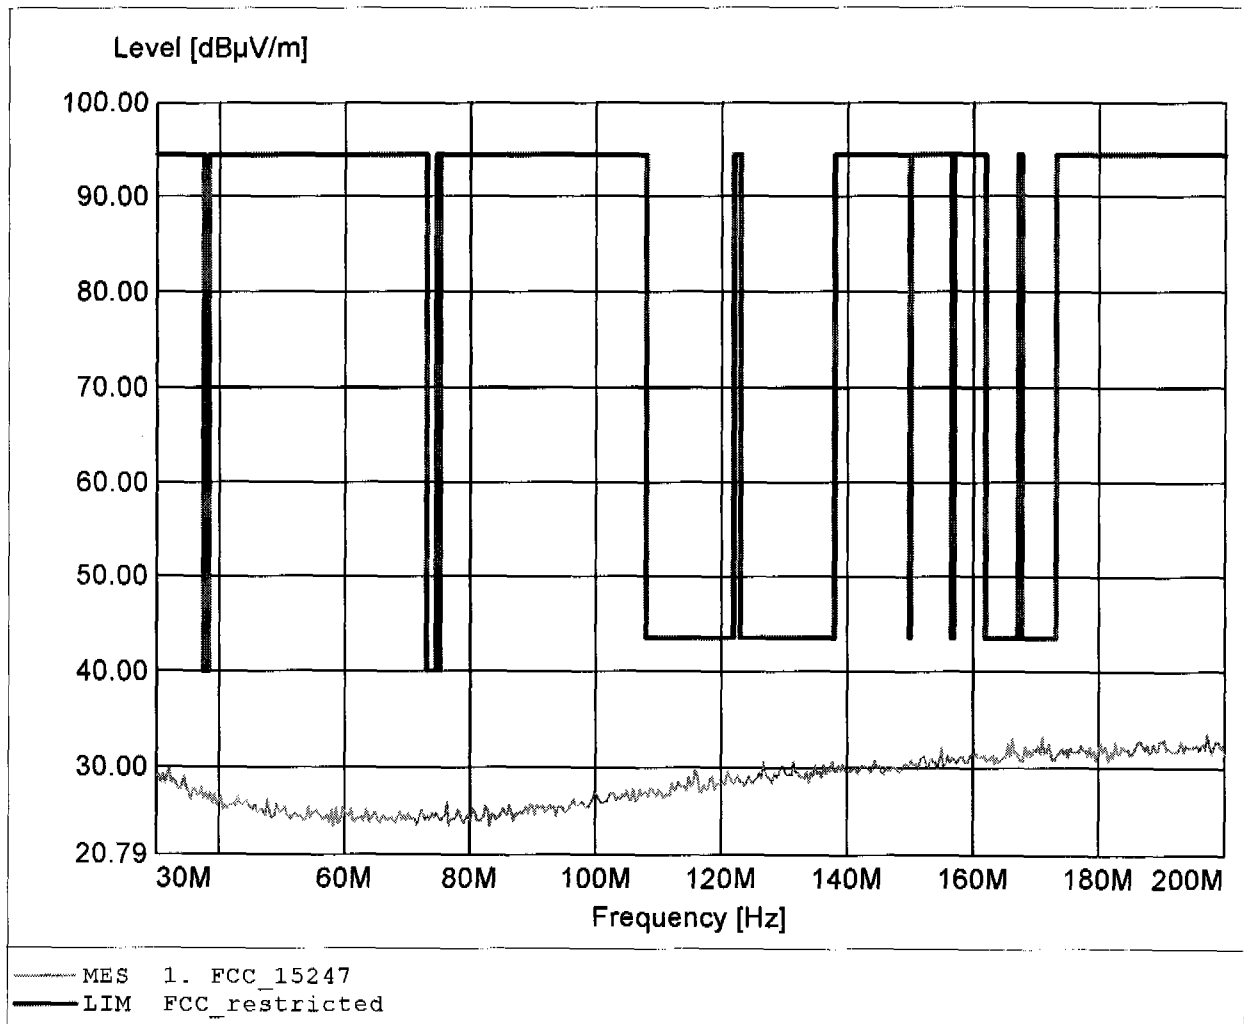

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 991.984MHz, Emax: 23.55dBµV/m, RBW: 100kHz

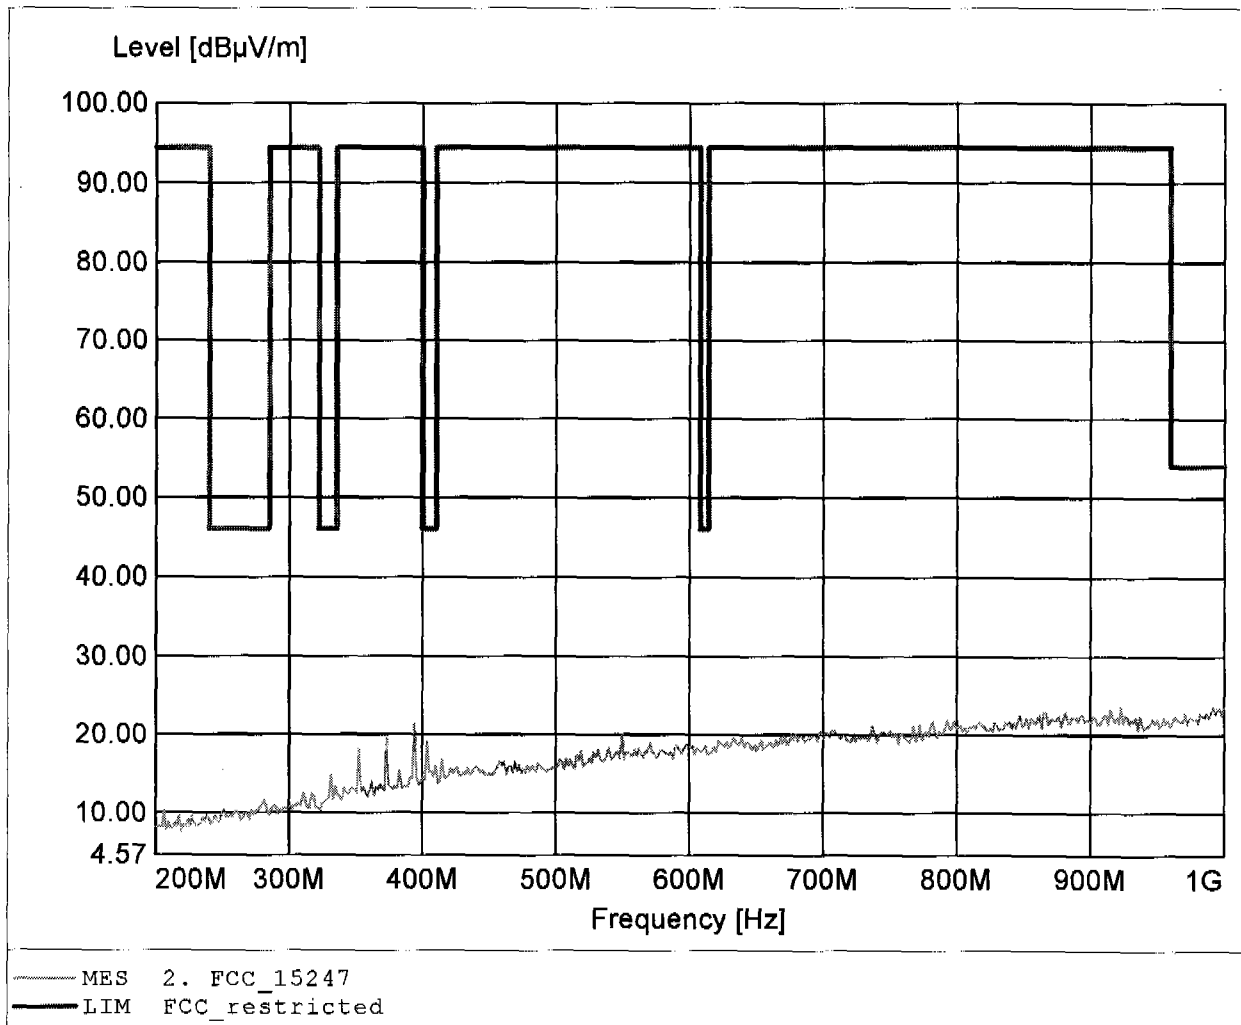

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 831.663MHz, Emax: 23.30dBµV/m, RBW: 100kHz

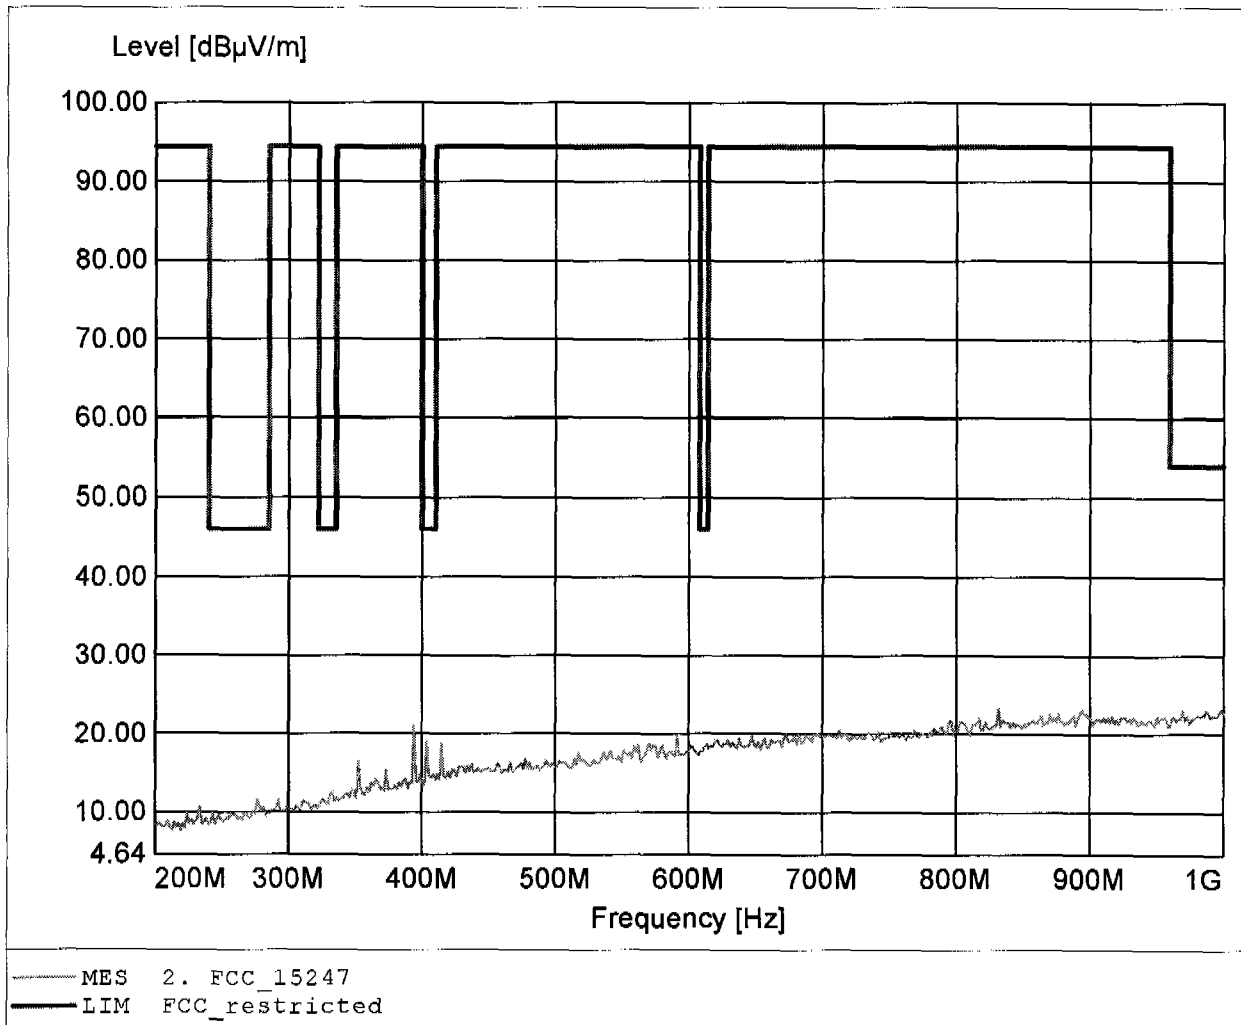

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.663GHz, Emax: 56.31dBµV/m, RBW: 1MHz

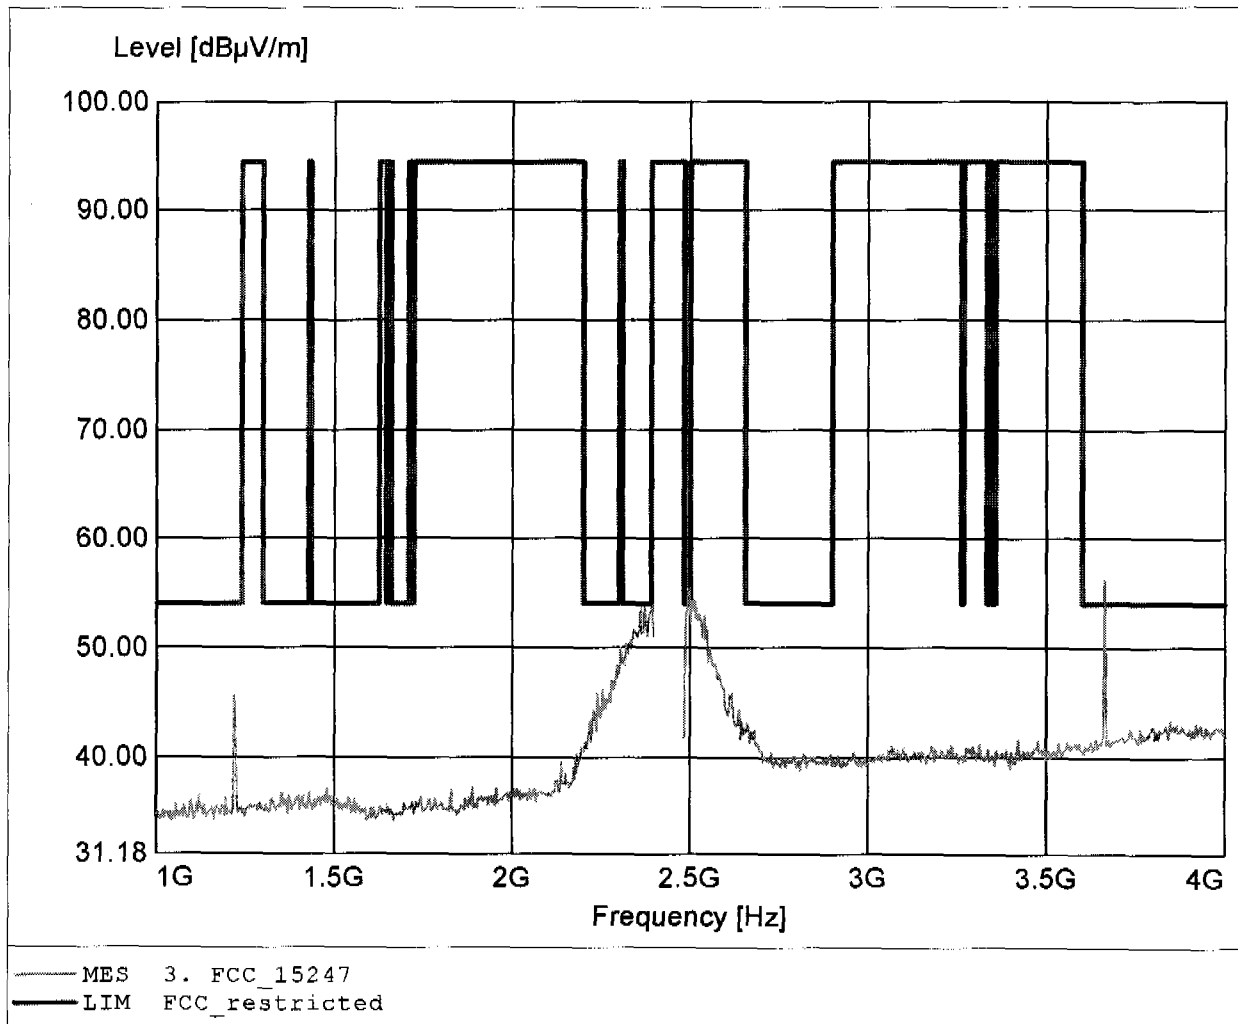

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.663GHz, Emax: 56.31dBµV/m, RBW: 1MHz

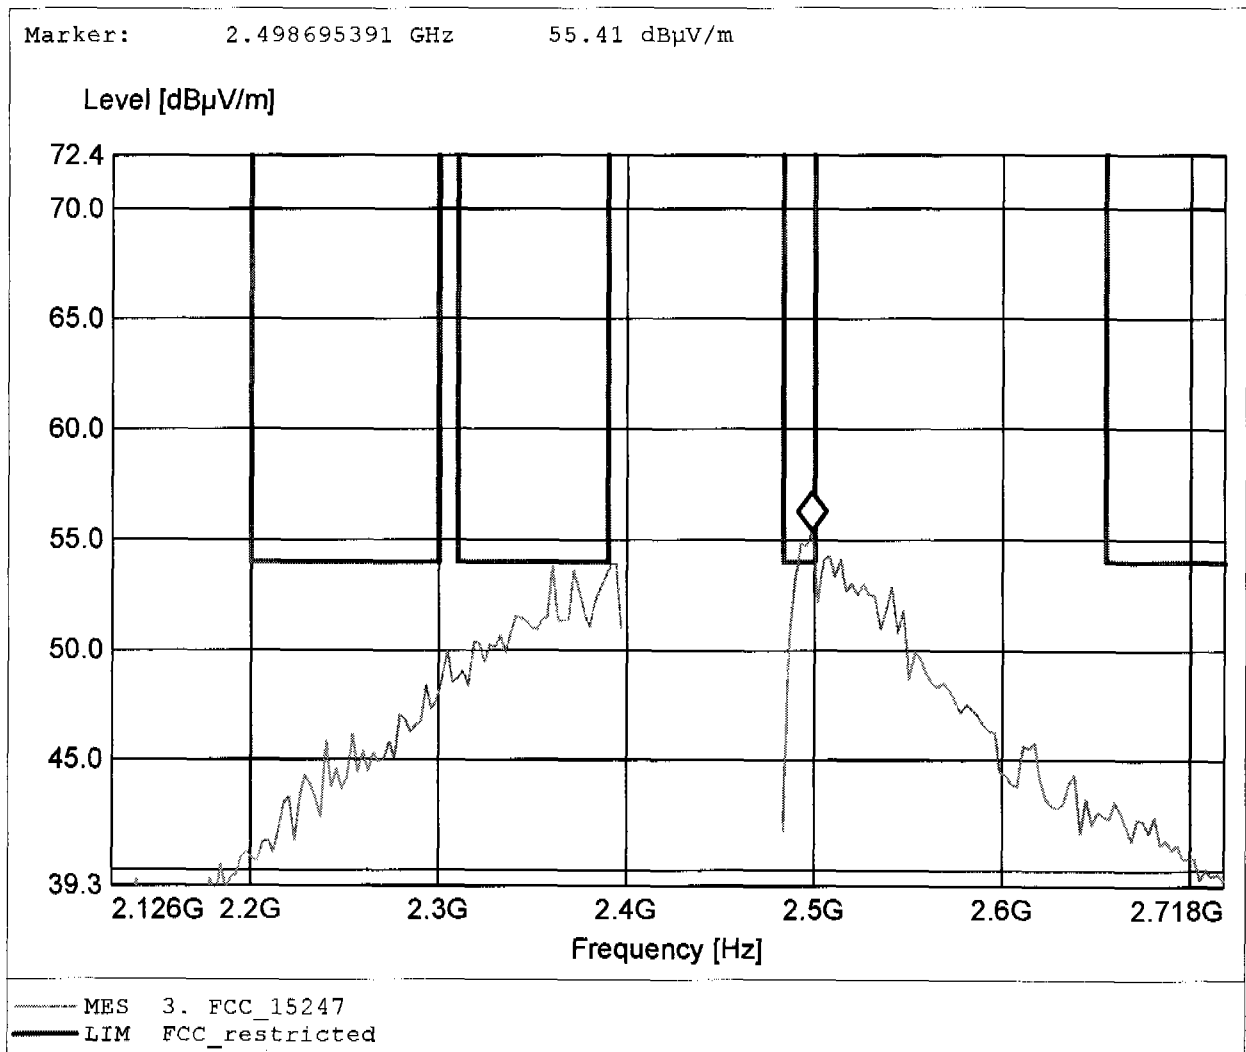

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 3.663GHz, Emax: 56.31dBμV/m, RBW: 1MHz

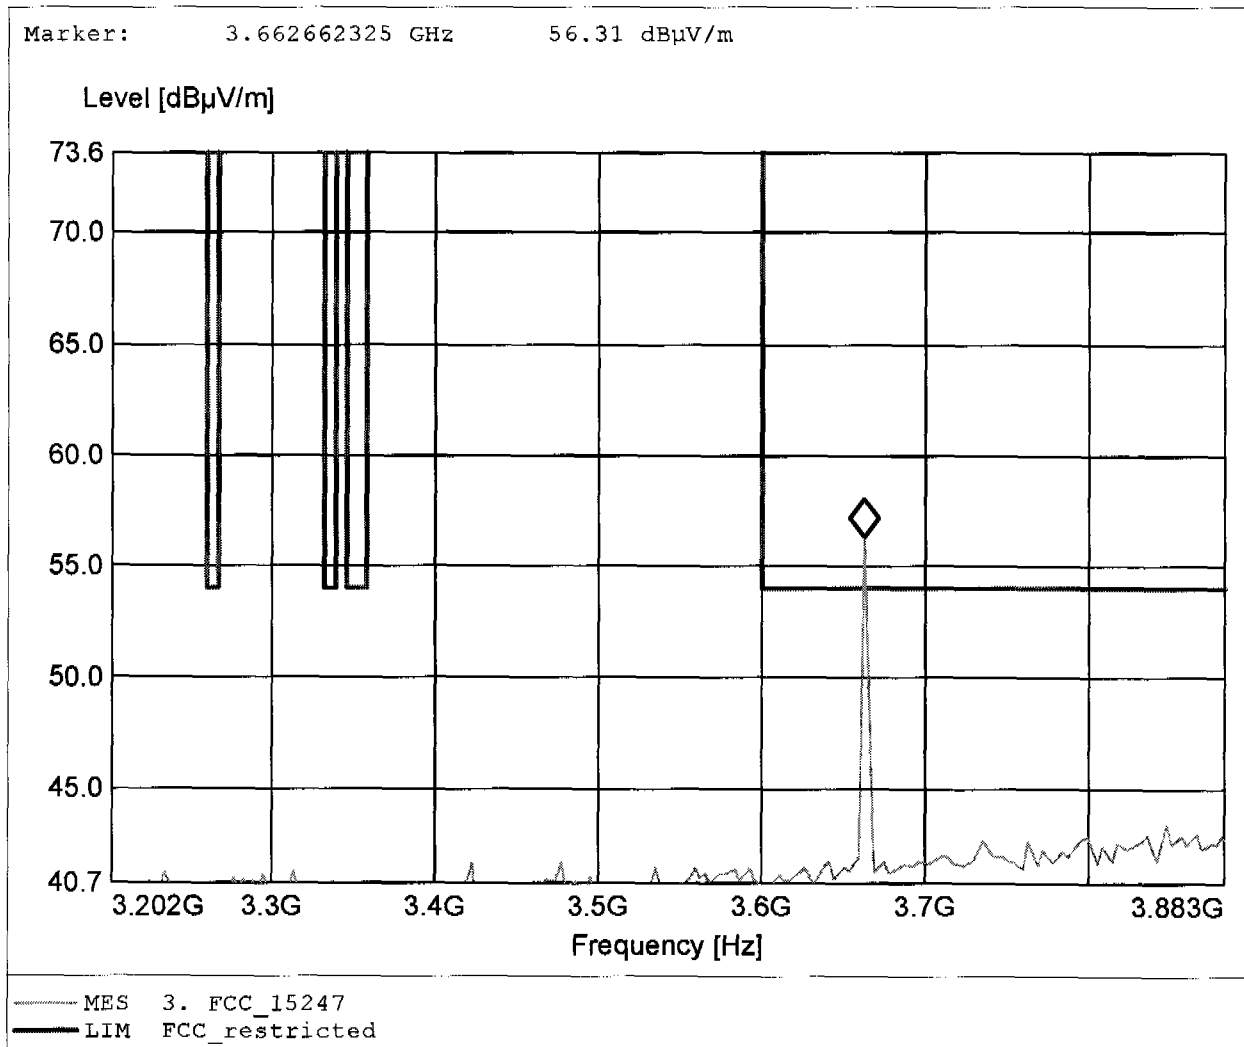

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.514GHz, Emax: 38.41dBuV/m, RBW: 1MHz

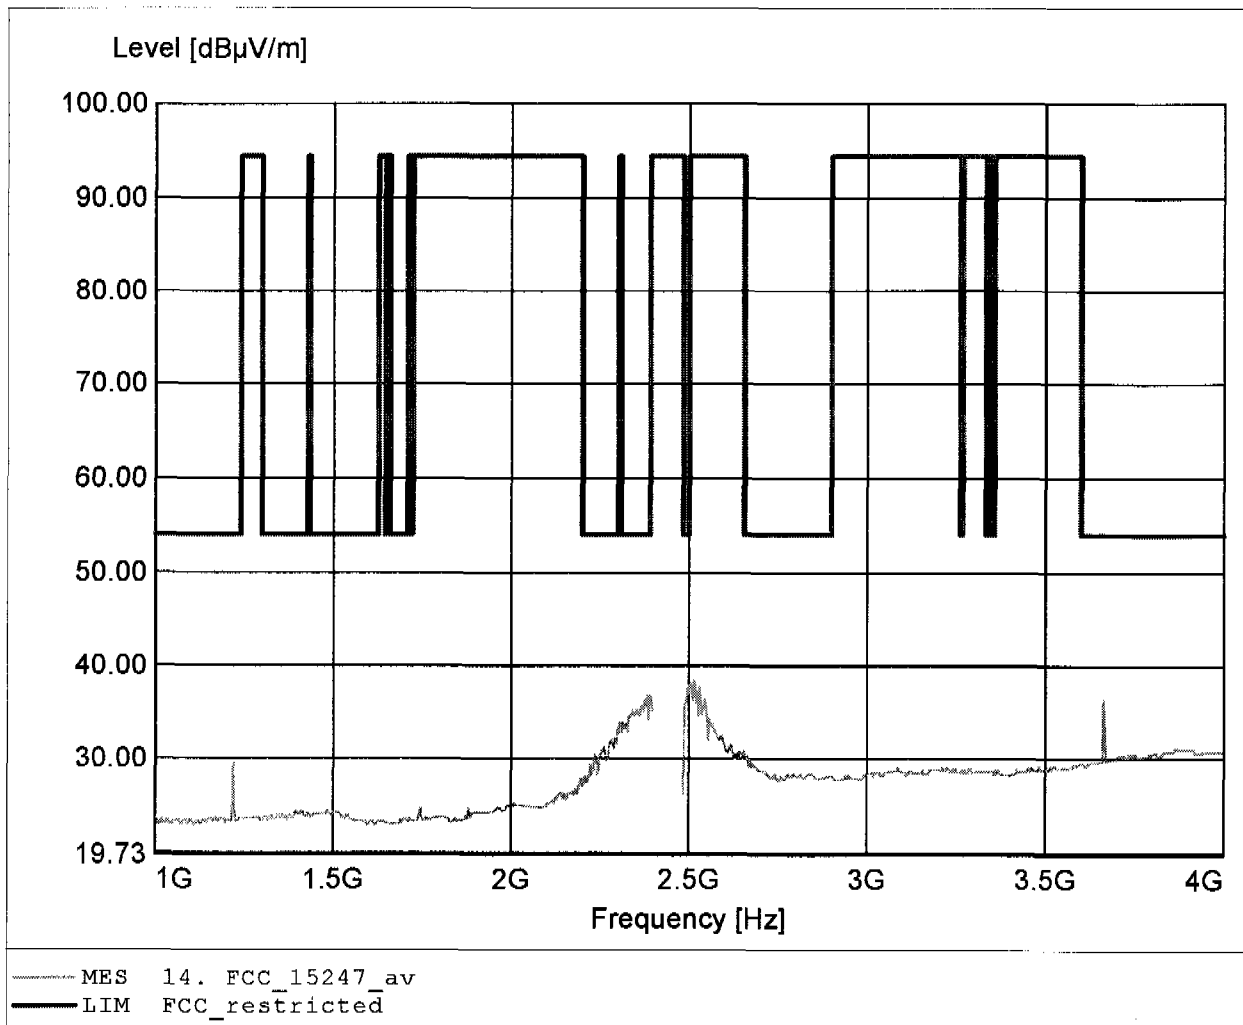

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.344GHz, Emax: 55.60dBµV/m, RBW: 1MHz

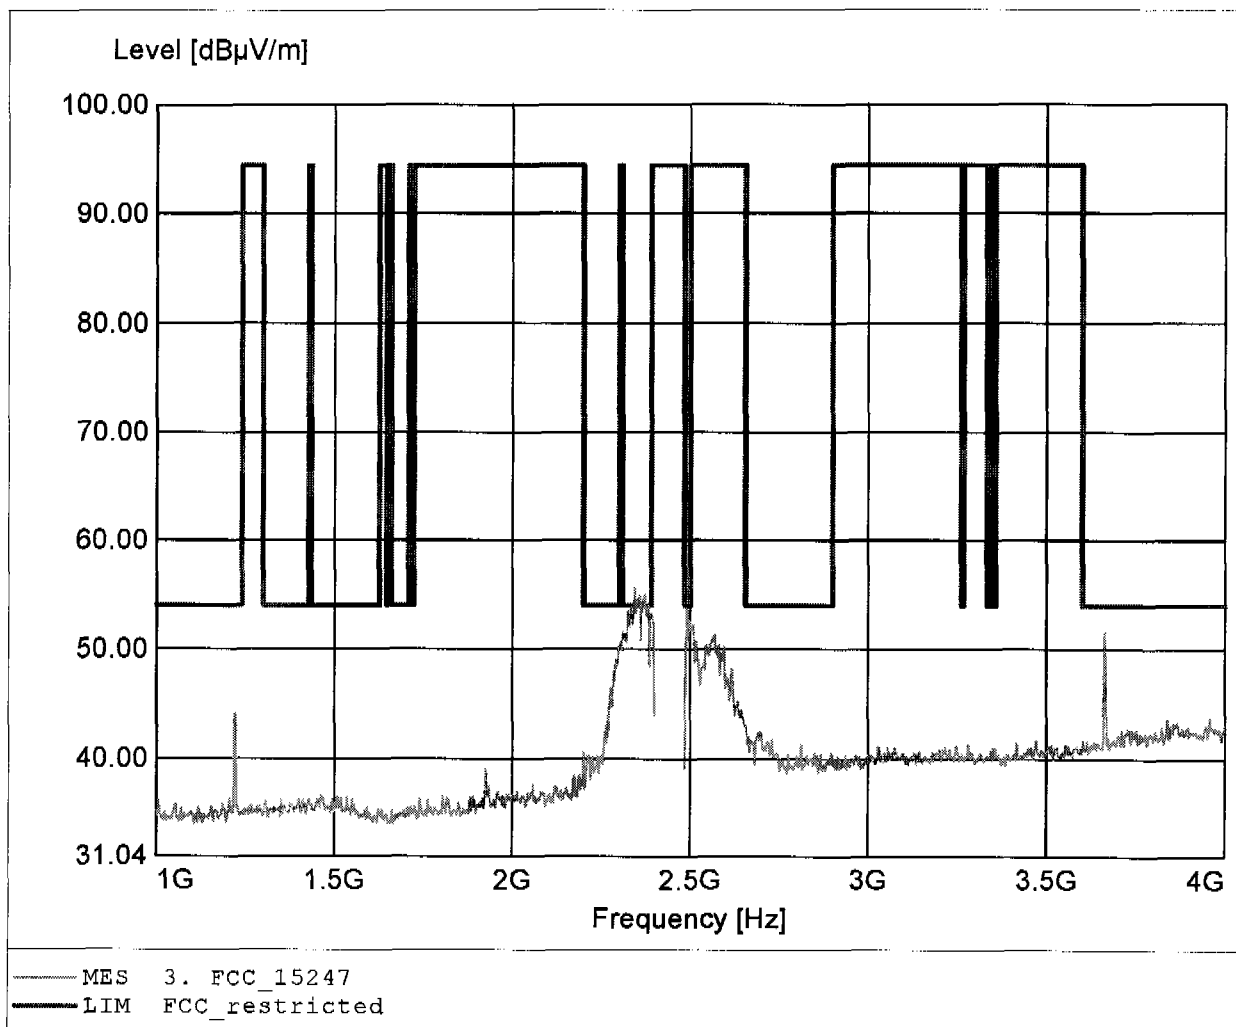

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.344GHz, Emax: 55.60dBµV/m, RBW: 1MHz

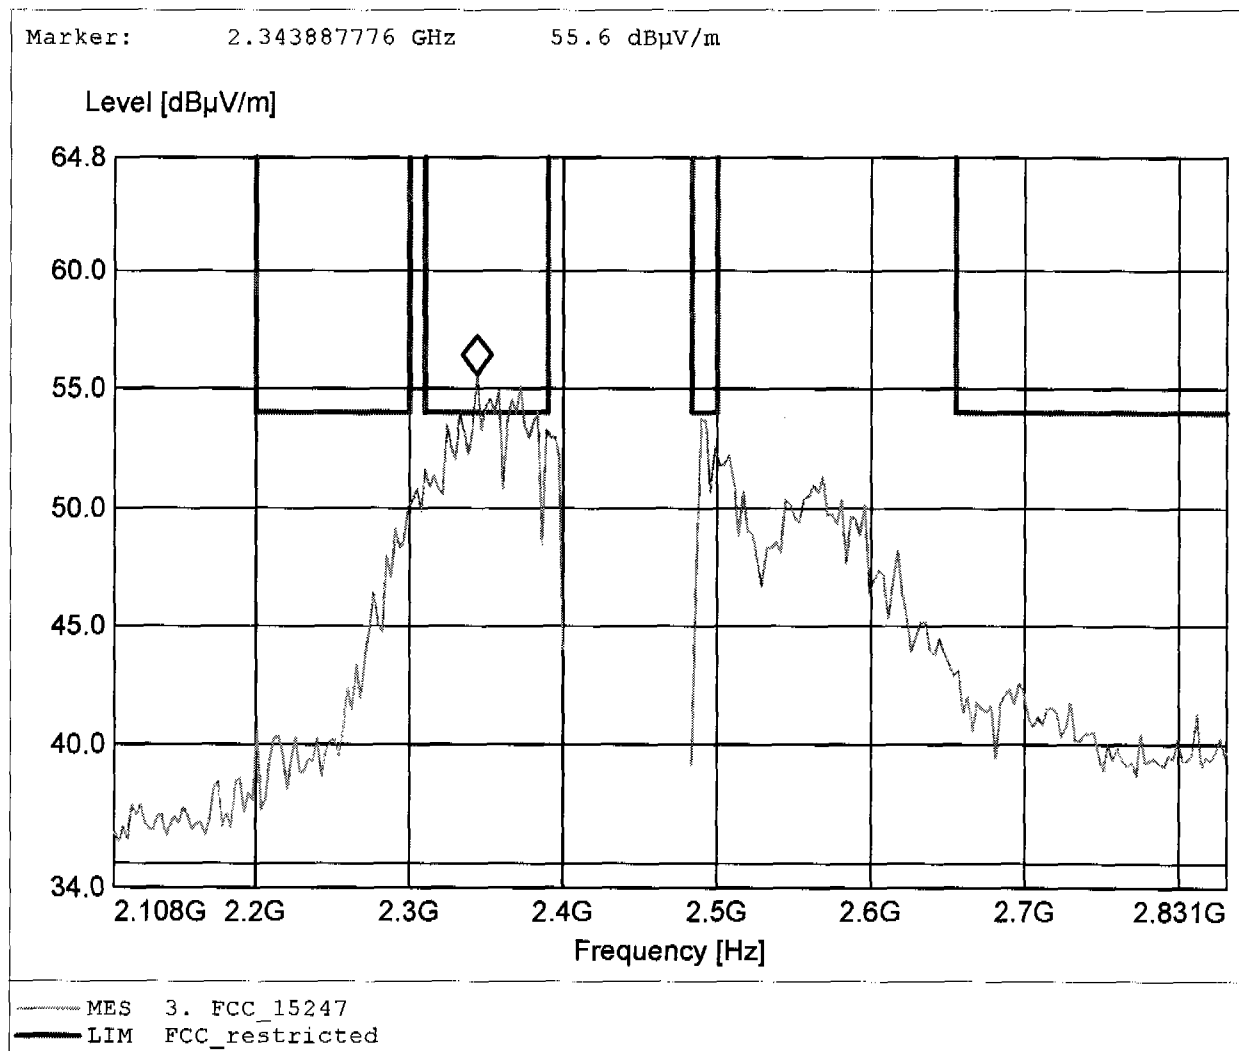

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.344GHz, Emax: 55.60dBµV/m, RBW: 1MHz

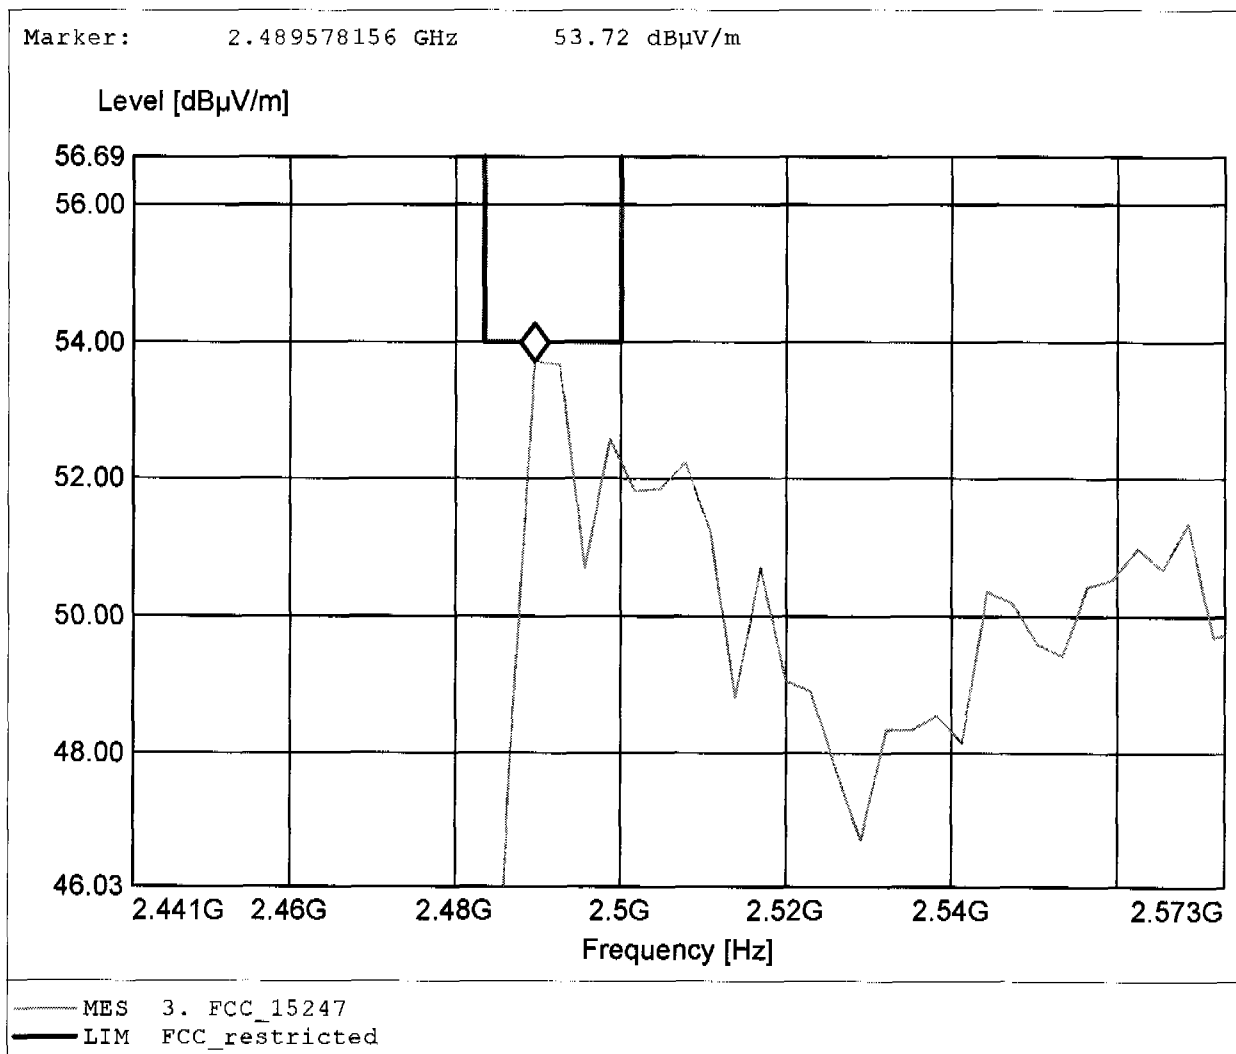

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.352GHz, Emax: 38.48dBμV/m, RBW: 1MHz

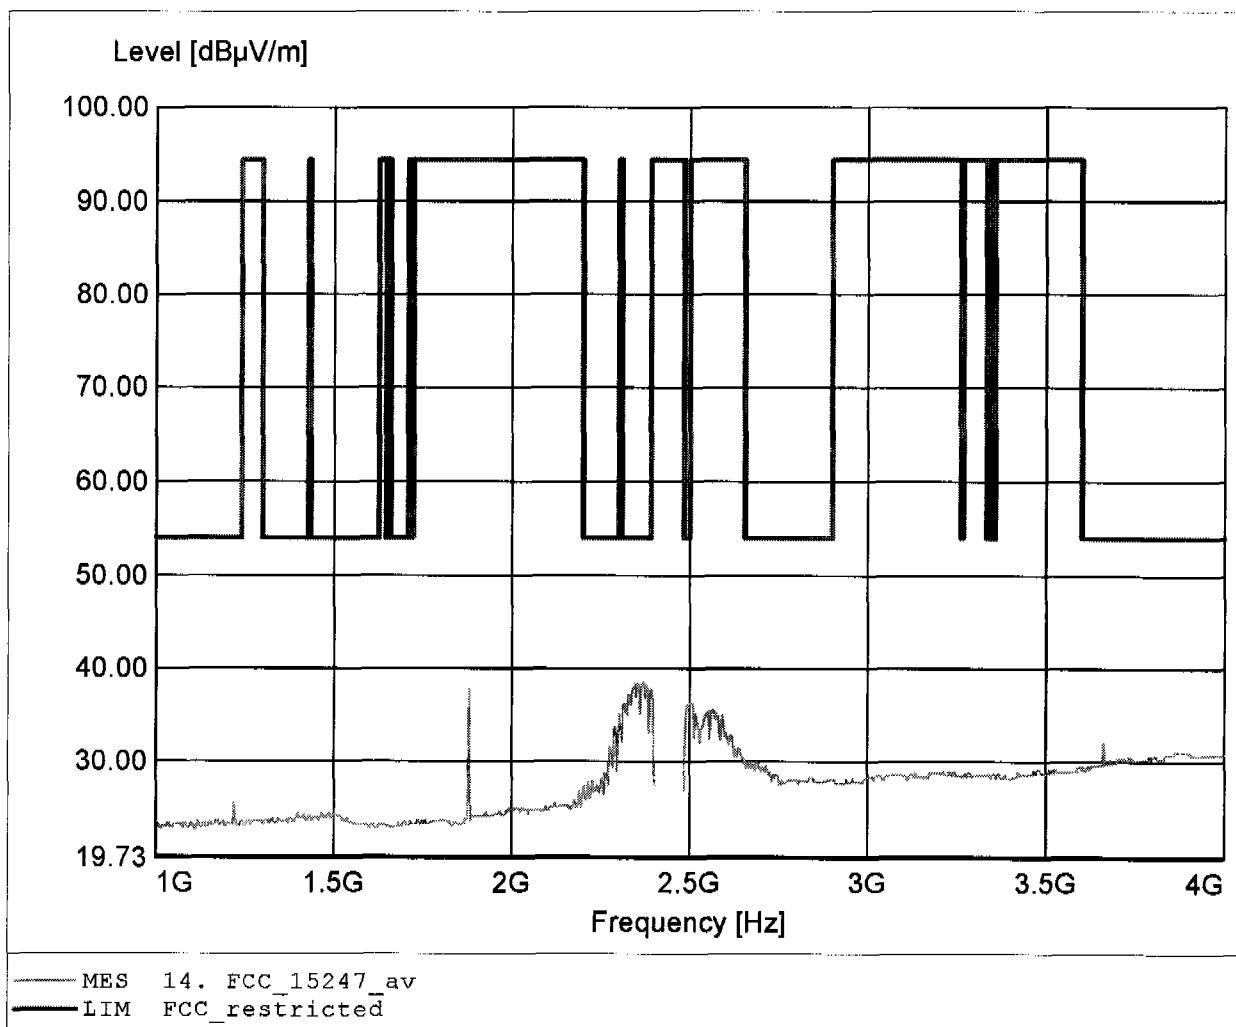

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 46.22dBµV/m, RBW: 1MHz

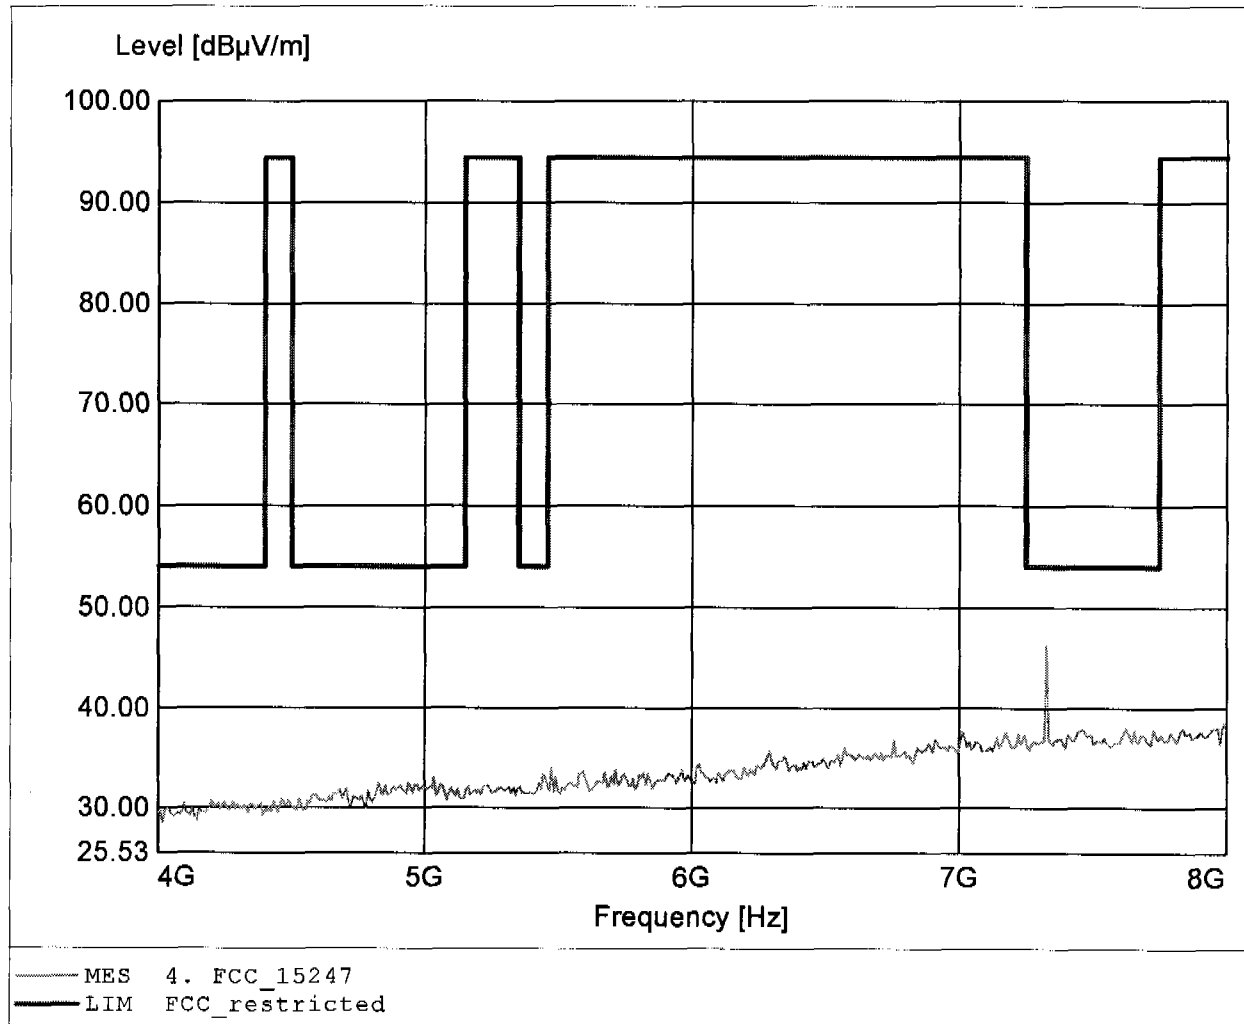

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.327GHz, Emax: 47.64dBuV/m, RBW: 1MHz

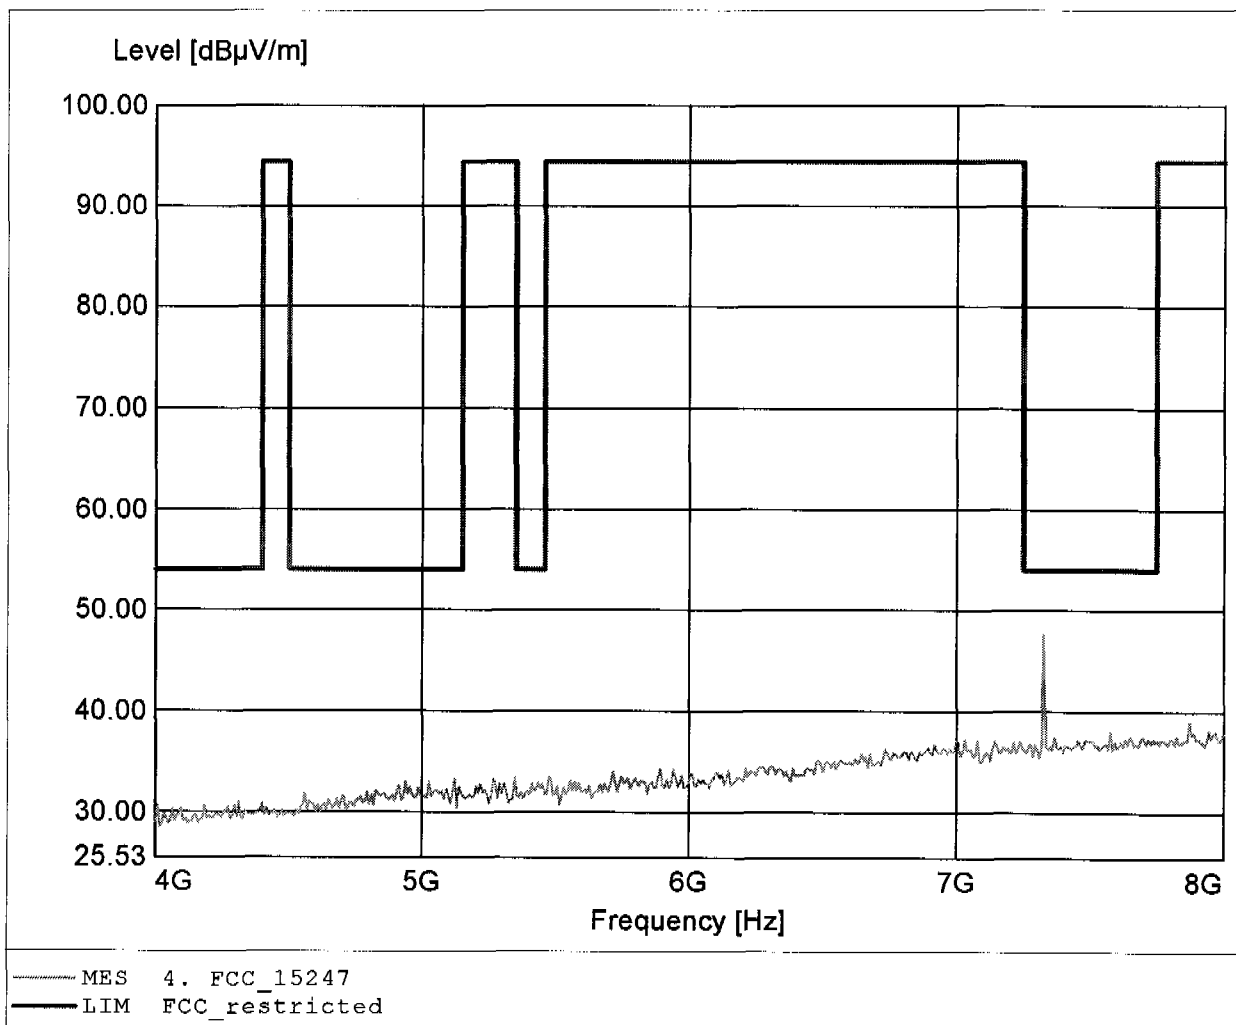

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 48.04dBμV/m, RBW: 1MHz

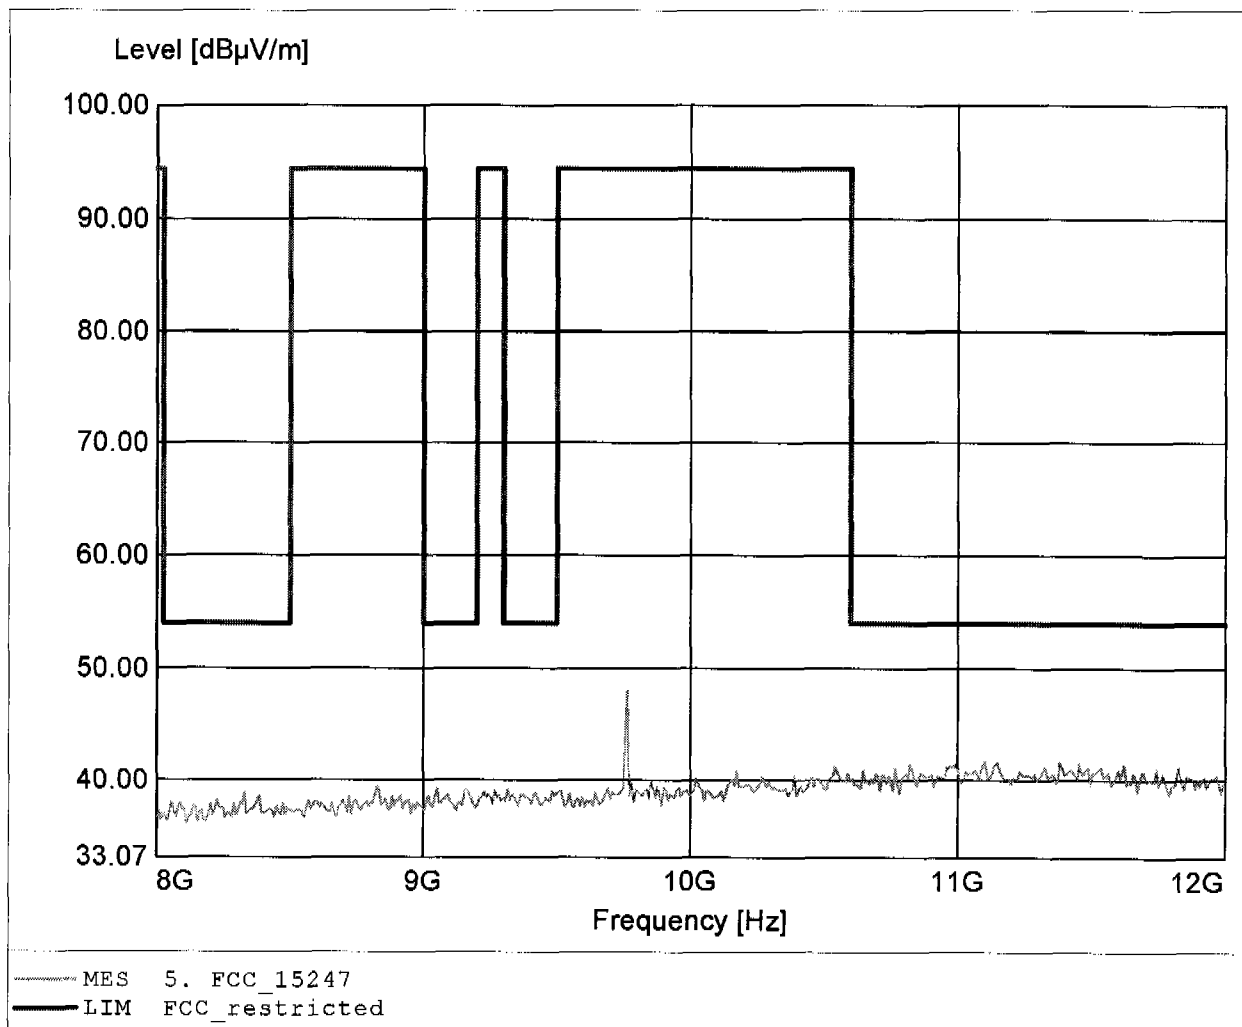

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.764GHz, Emax: 55.95dBµV/m, RBW: 1MHz

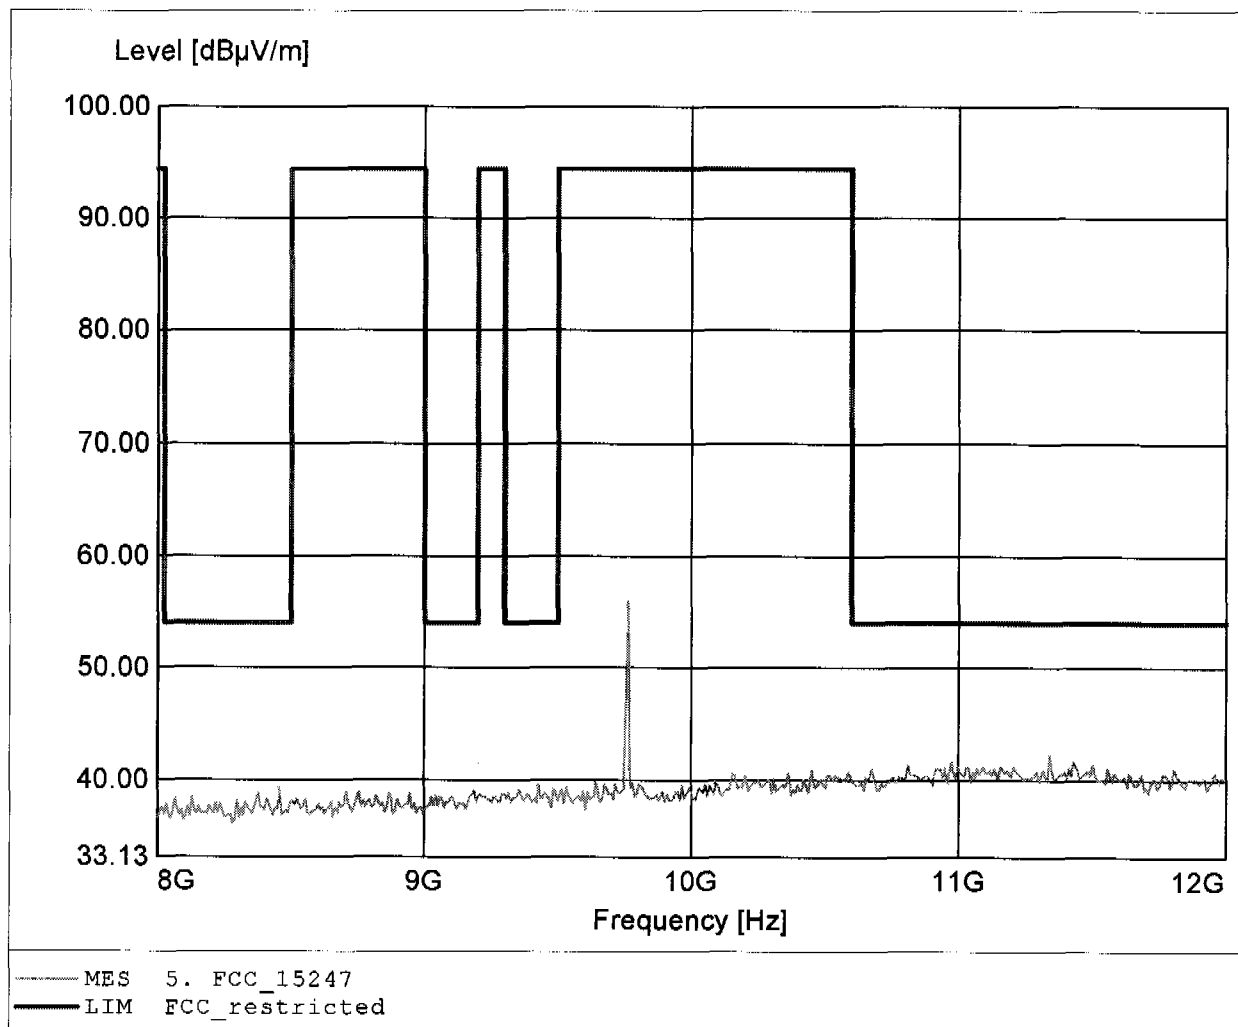

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 59.12dBµV/m, RBW: 1MHz

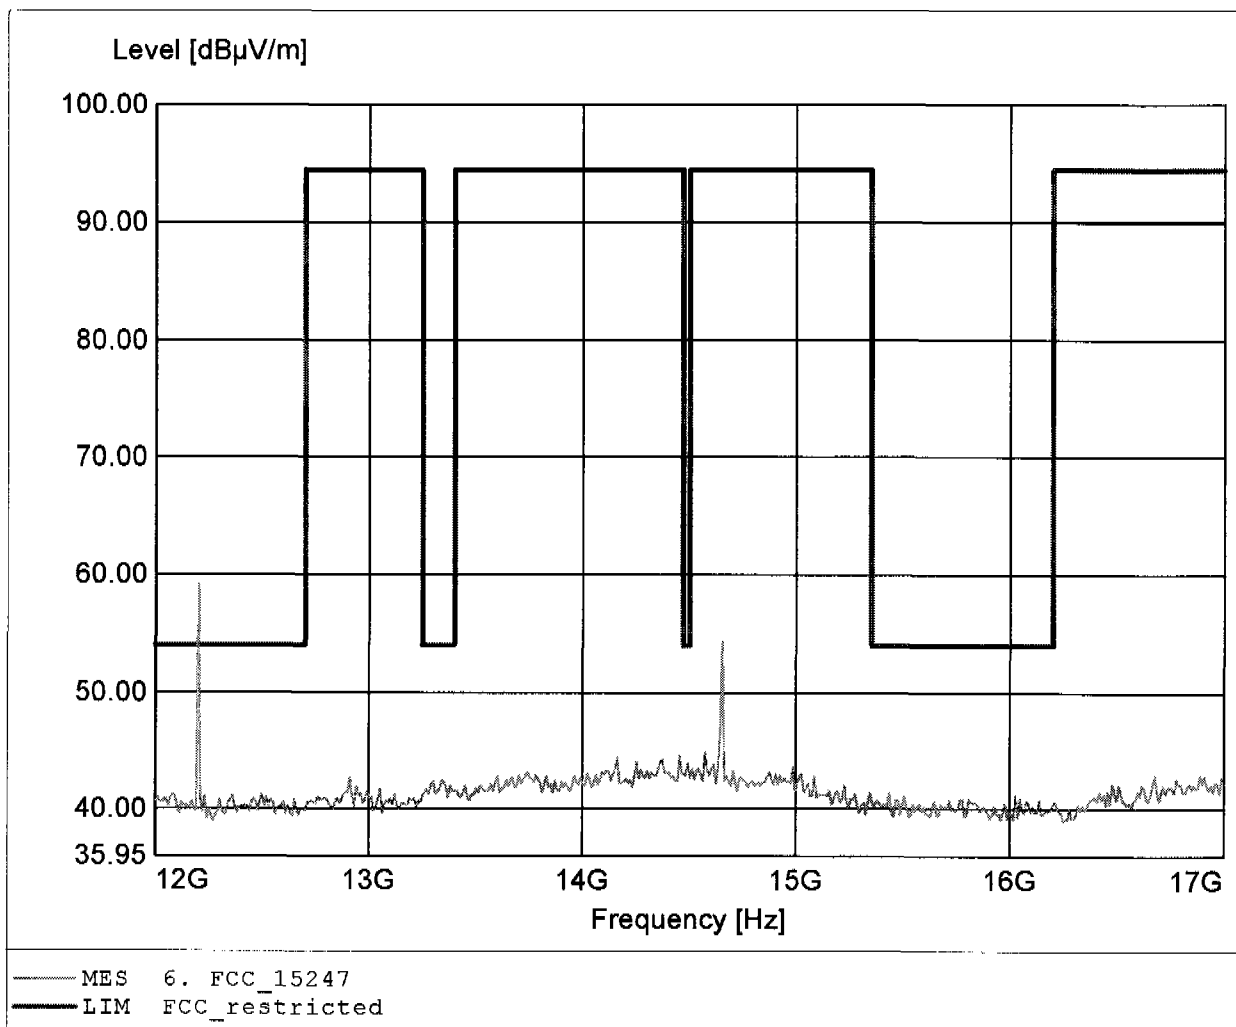

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 39.01dBµV/m, RBW: 1MHz

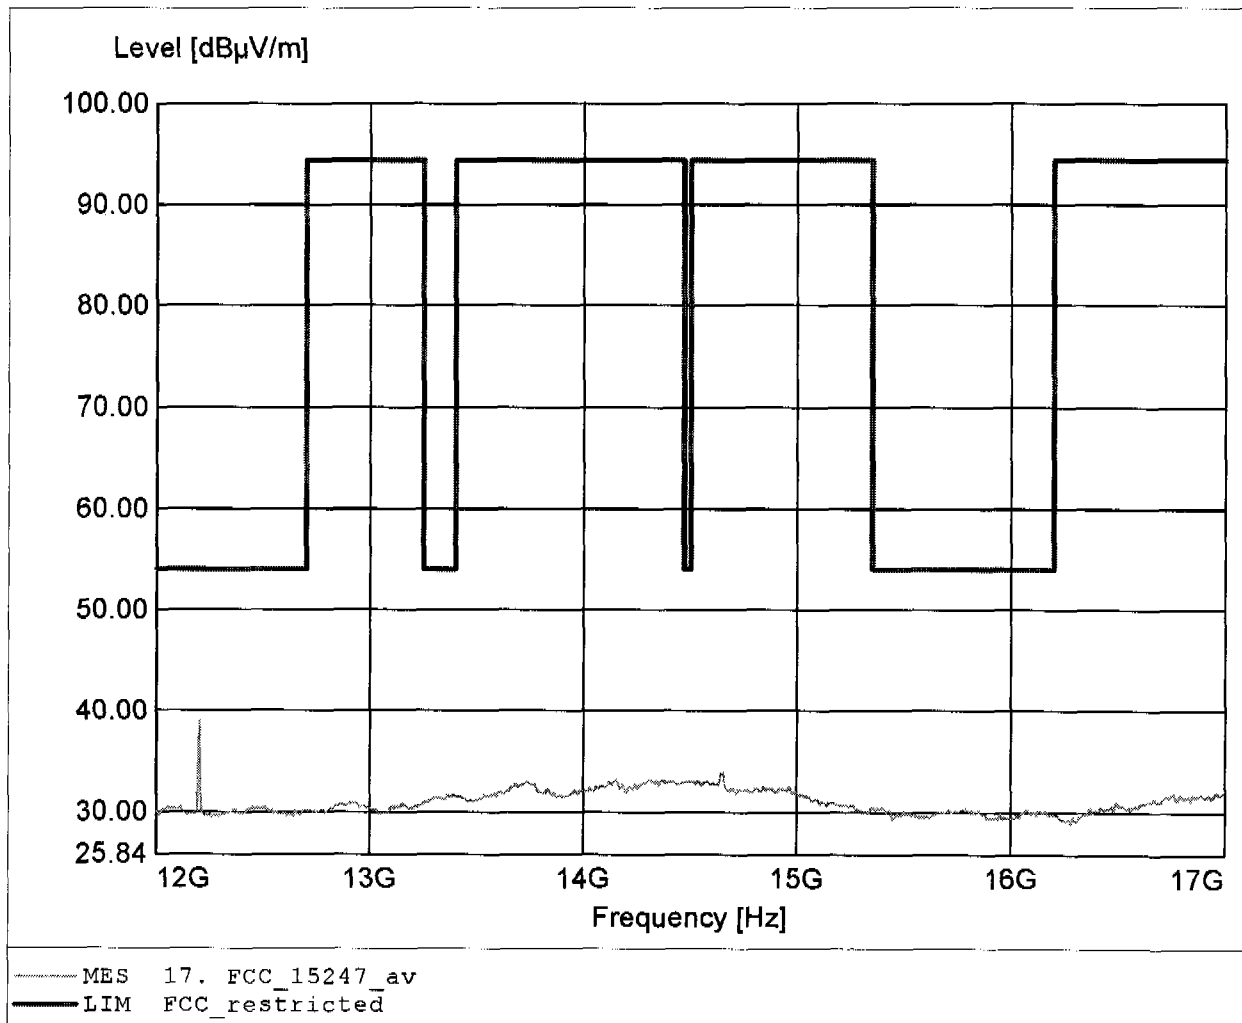

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.200GHz, Emax: 51.47dBµV/m, RBW: 1MHz

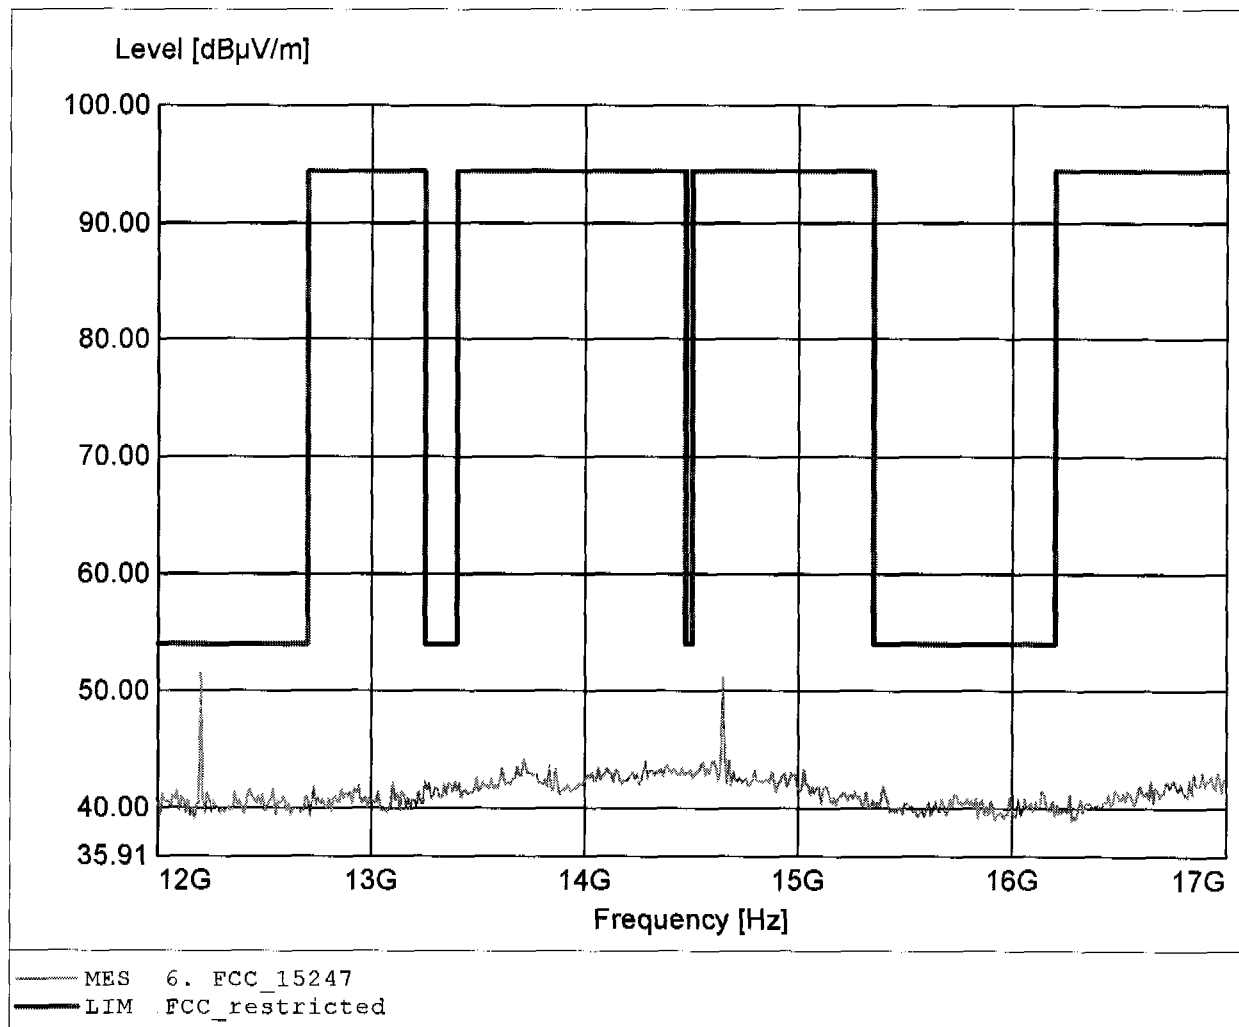

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.133GHz, Emax: 45.16dBµV/m, RBW: 1MHz

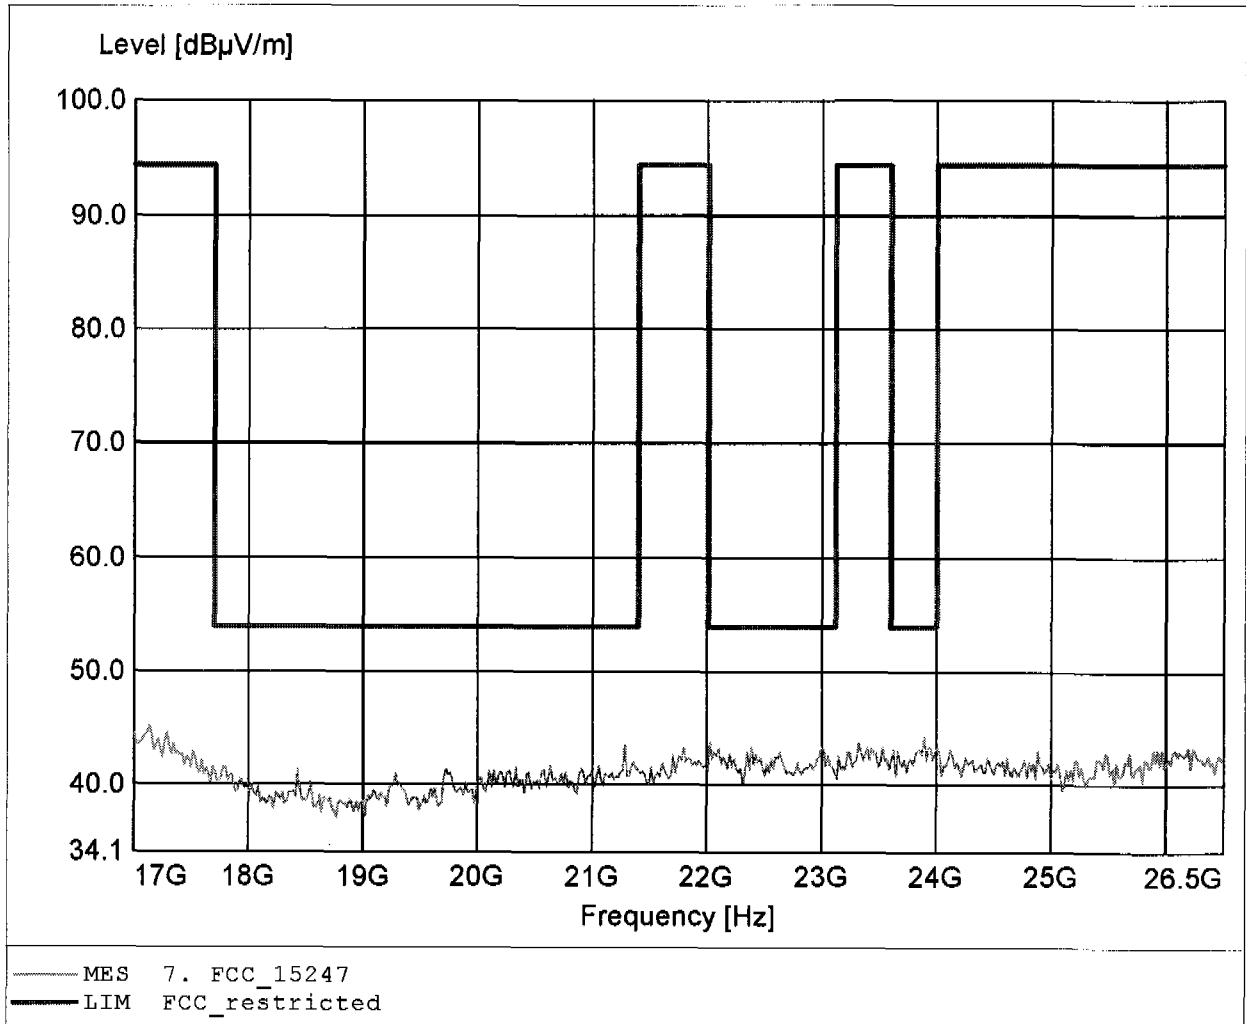

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 47
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 46.09dBµV/m, RBW: 1MHz

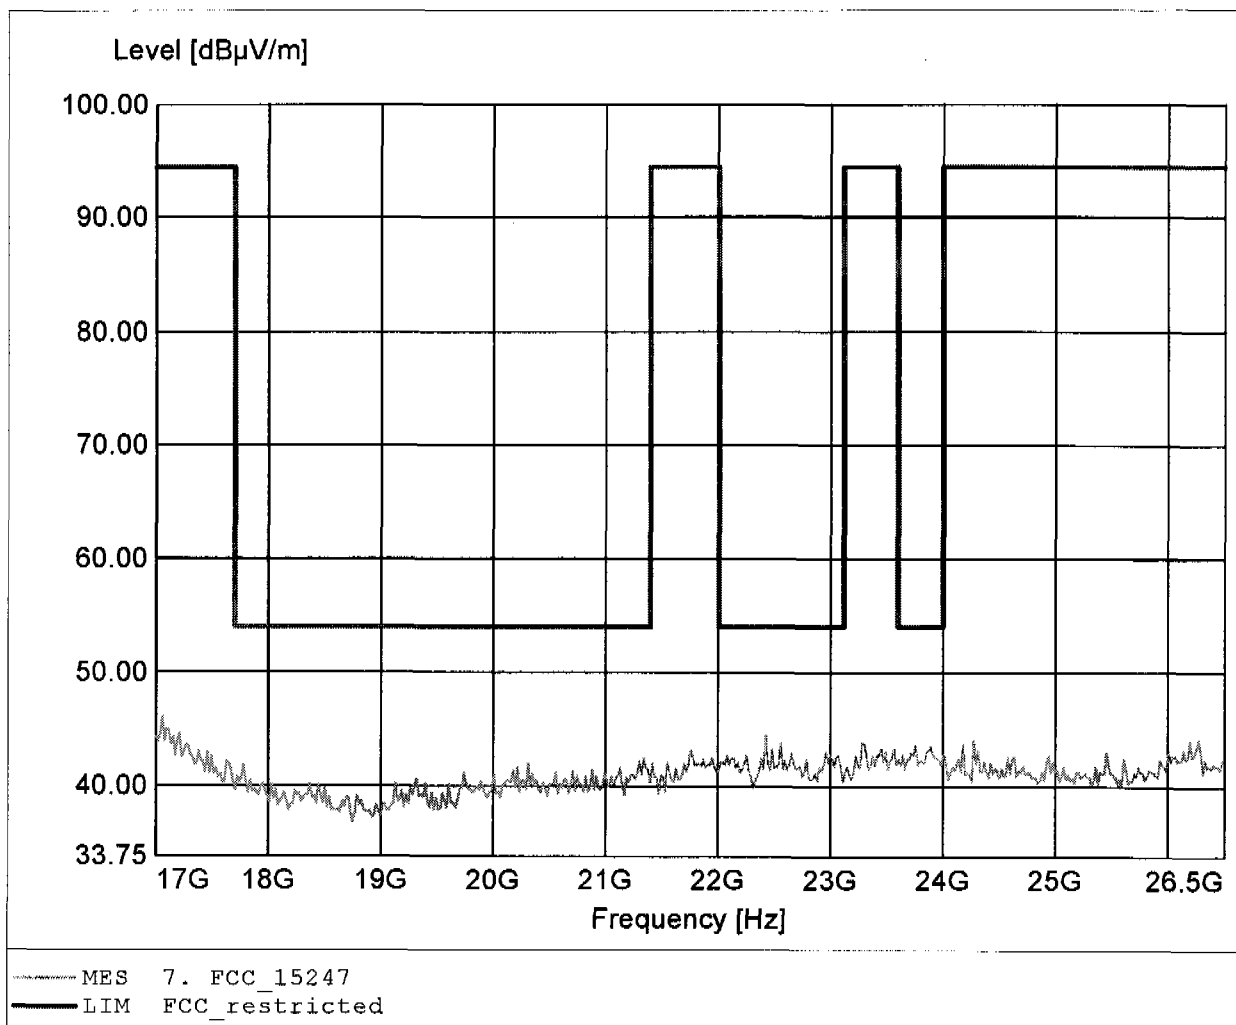

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 170.020MHz, Emax: 33.87dBµV/m, RBW: 100kHz

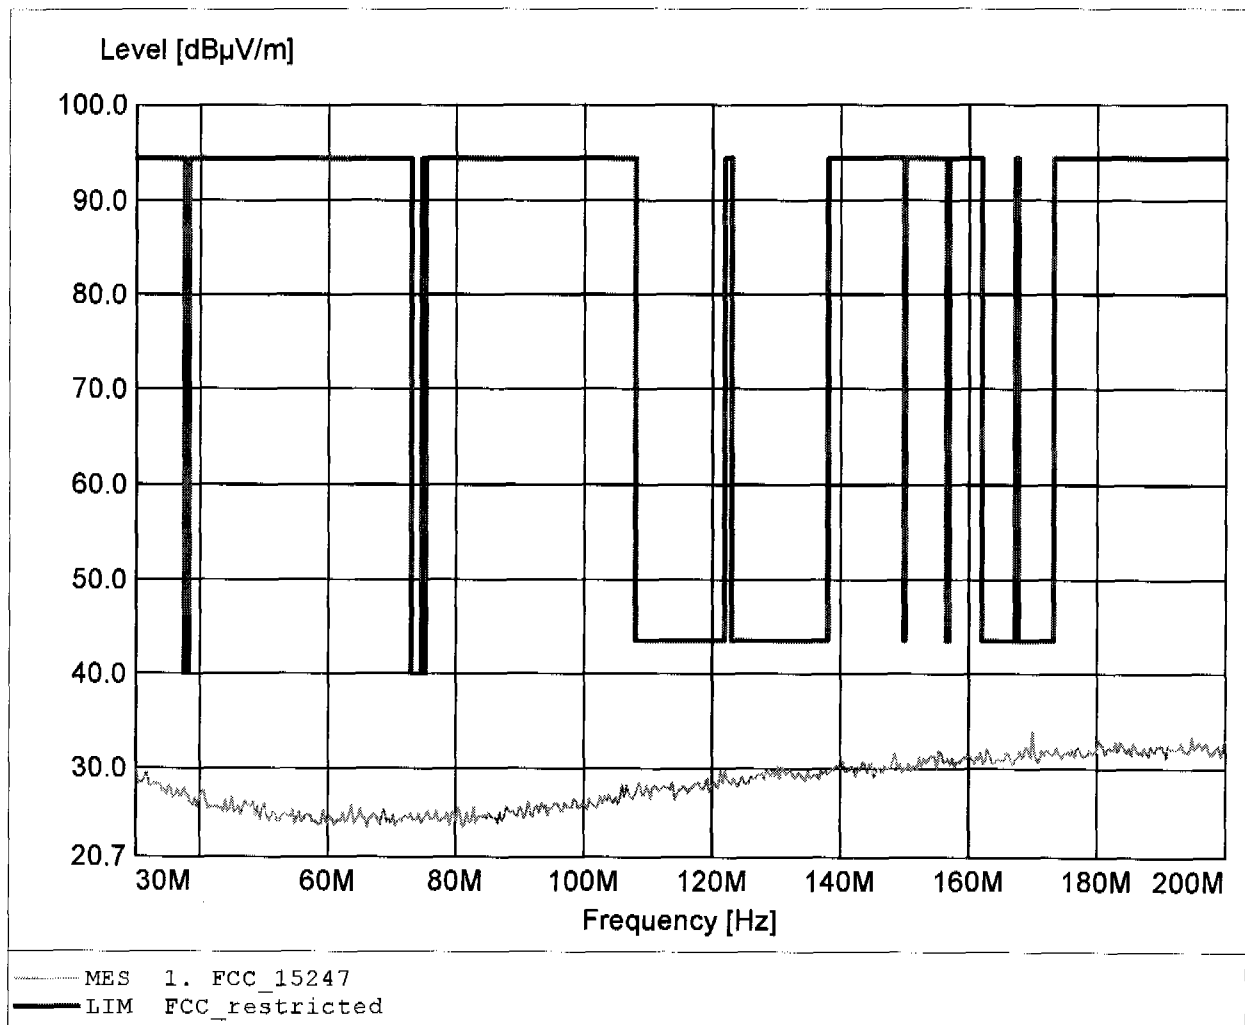

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 192.505MHz, Emax: 33.84dBµV/m, RBW: 100kHz

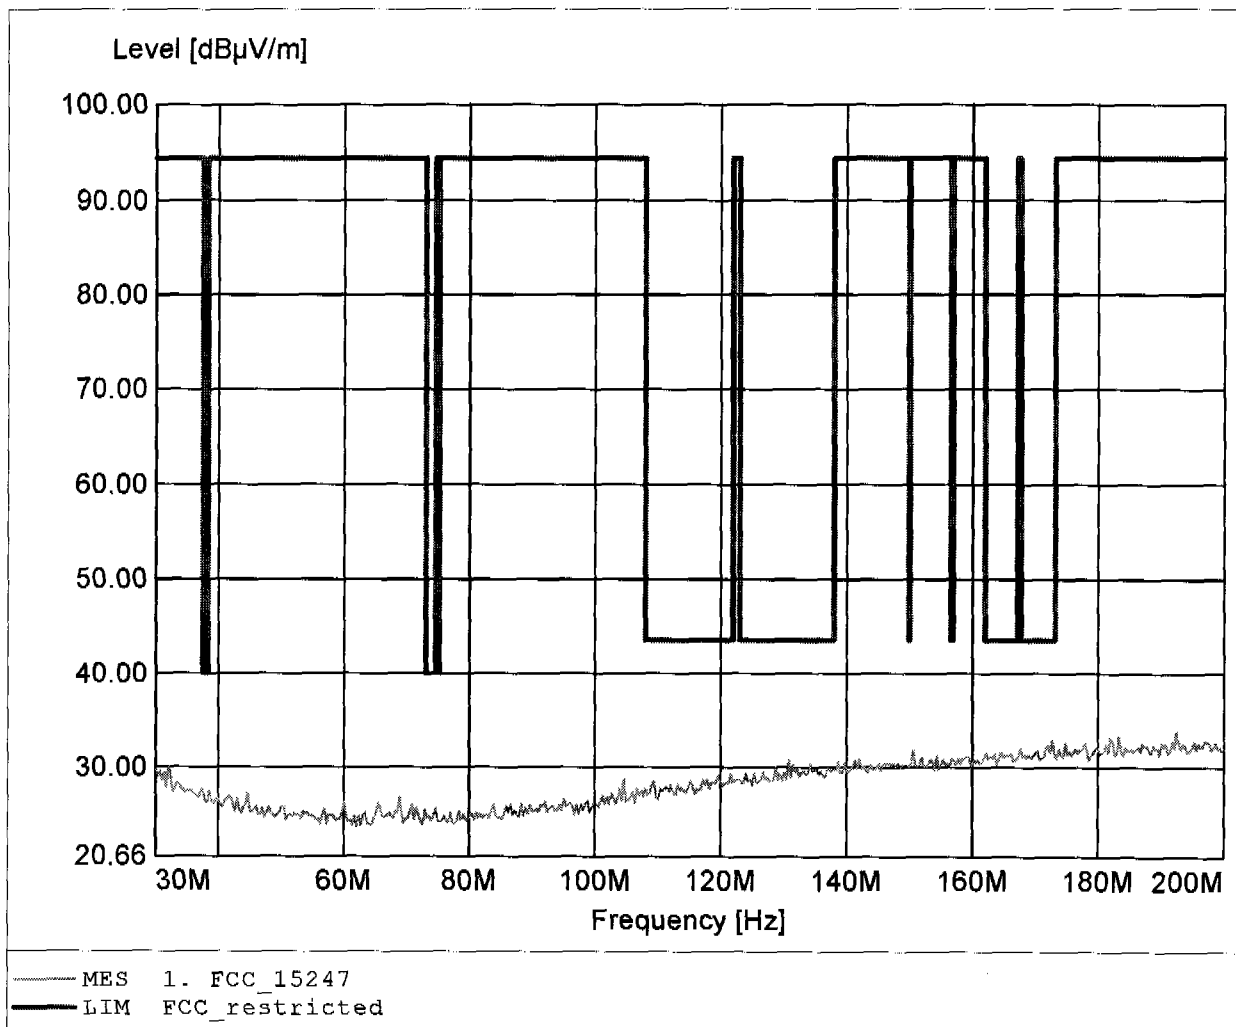

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 963.126MHz, Emax: 23.54dBµV/m, RBW: 100kHz

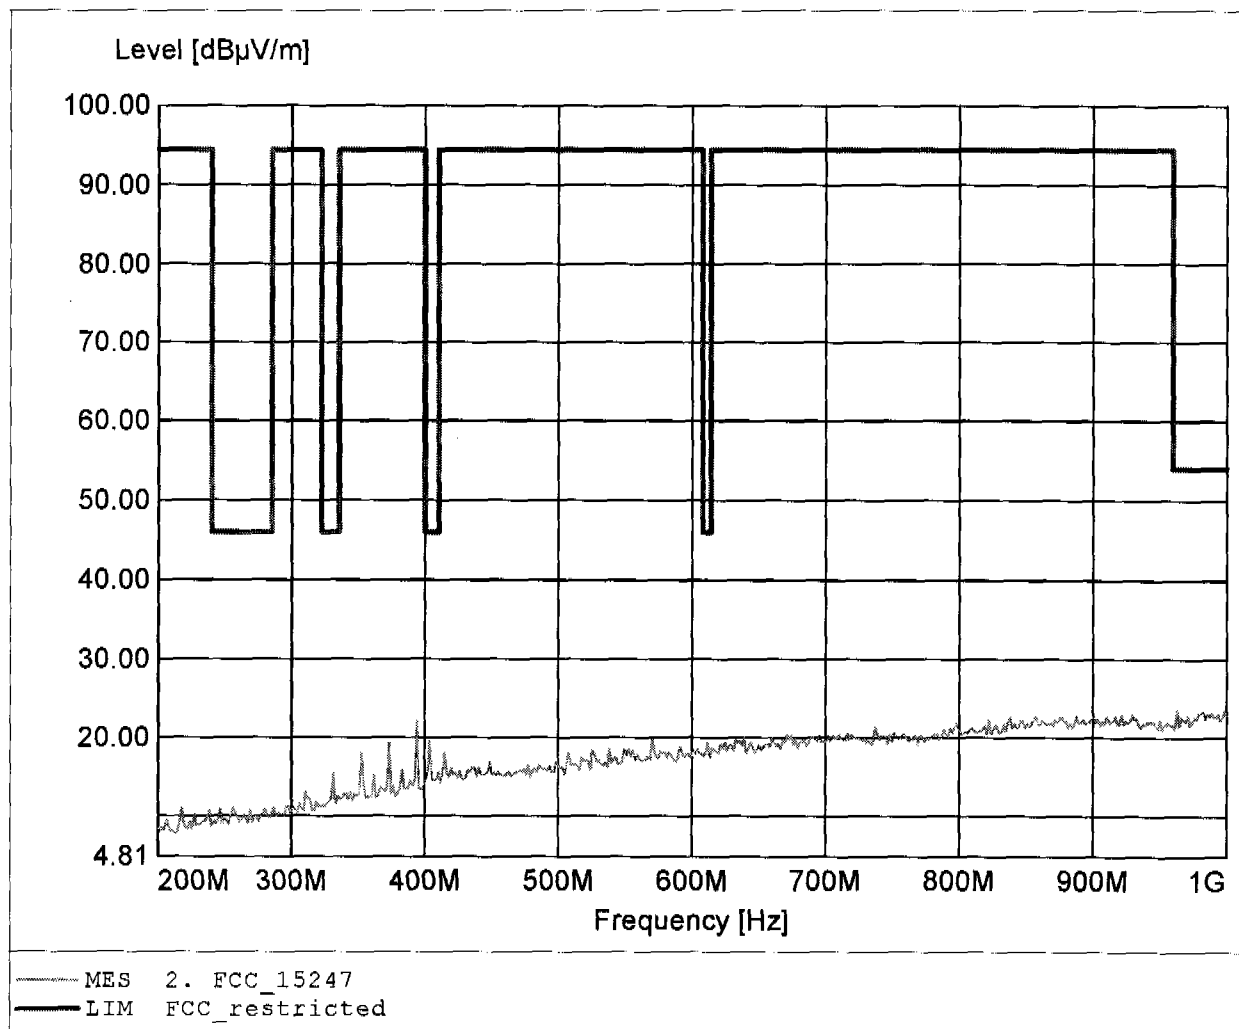

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 988.778MHz, Emax: 24.51dBµV/m, RBW: 100kHz

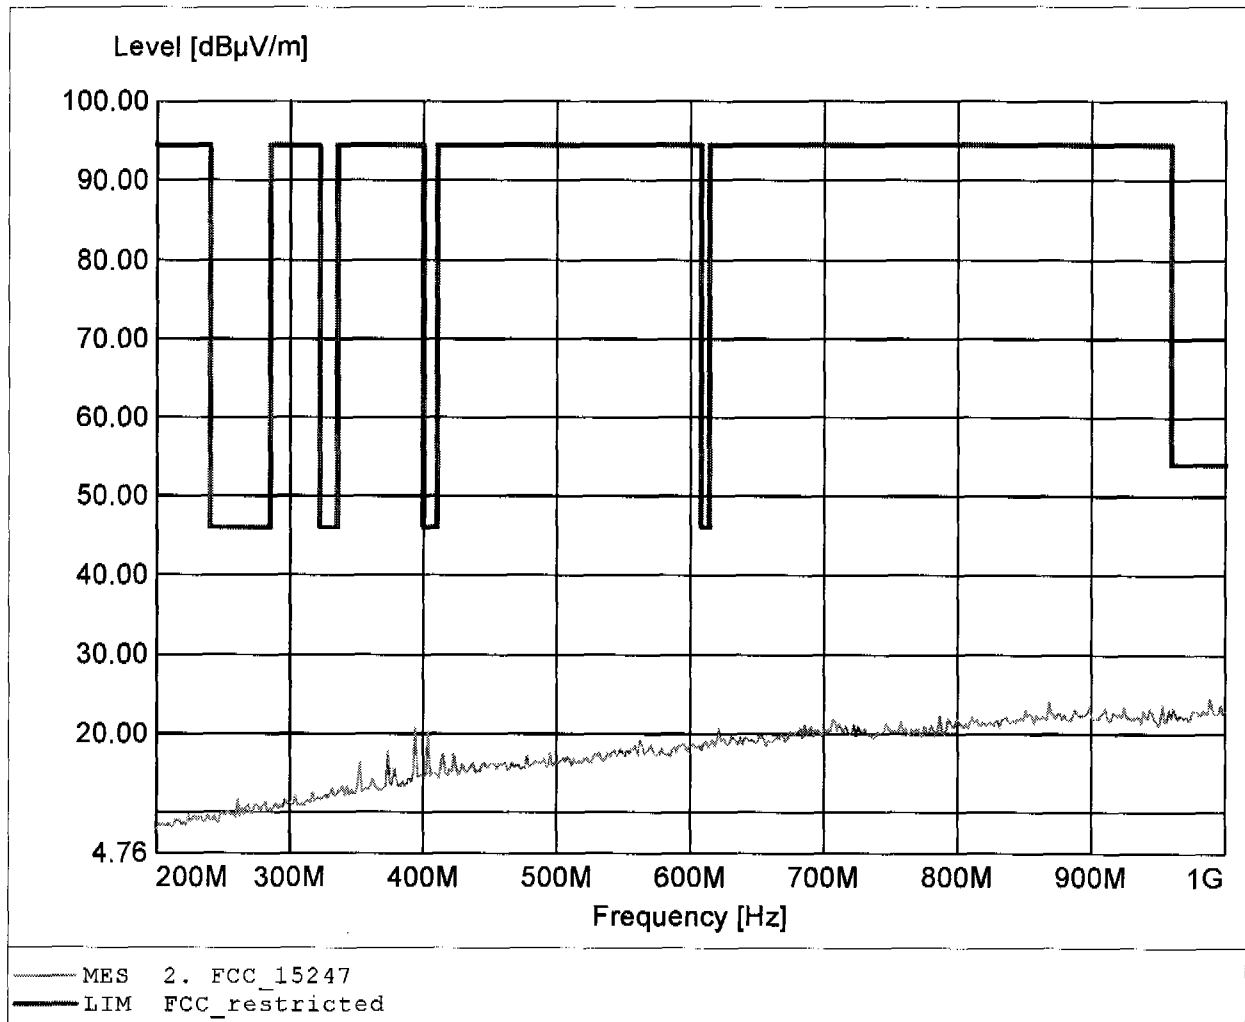

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.493GHz, Emax: 57.00dBµV/m, RBW: 1MHz

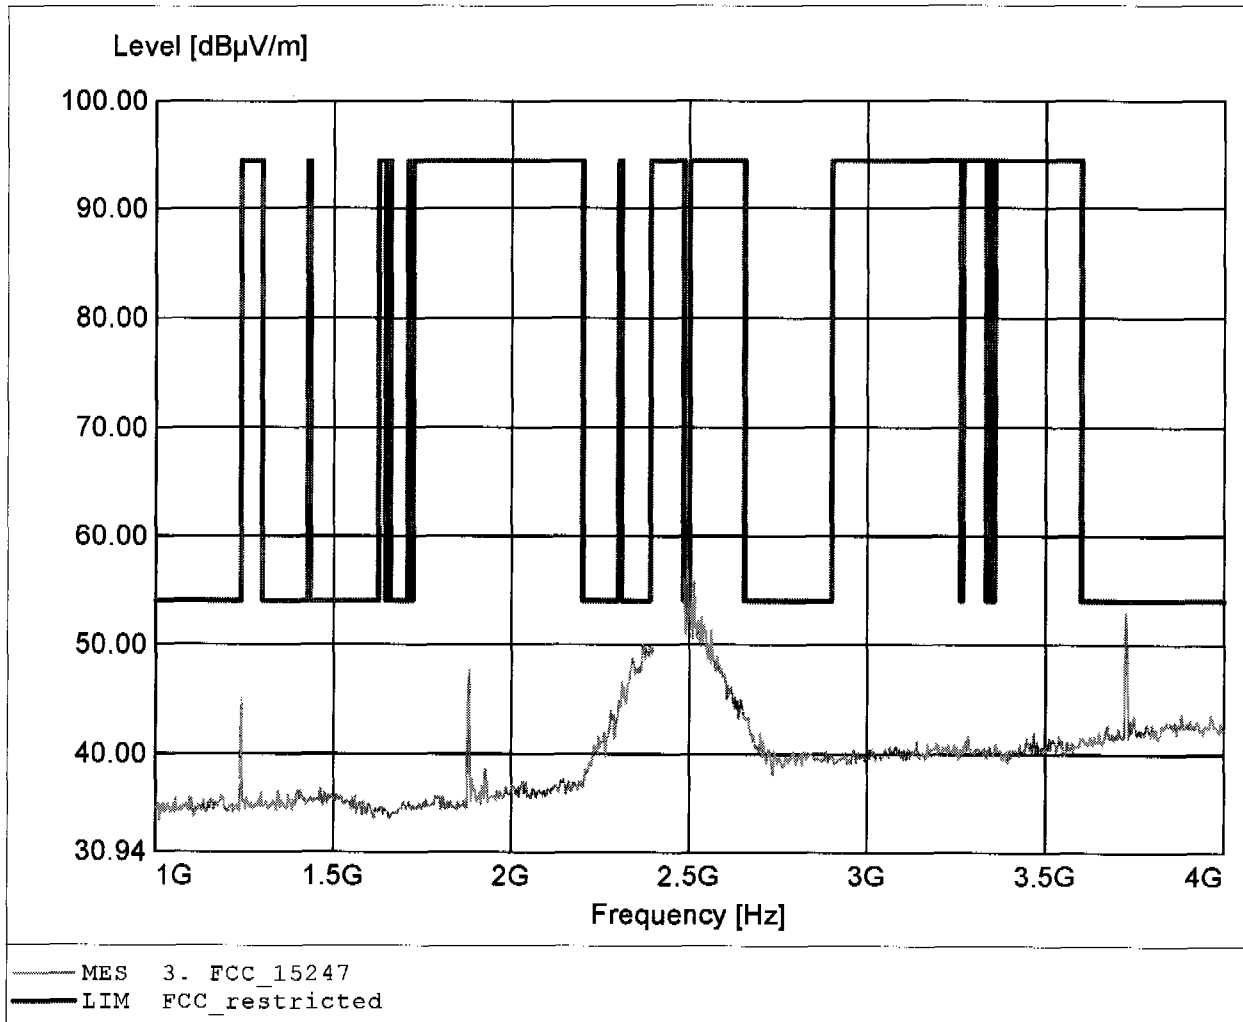

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.493GHz, Emax: 57.00dBµV/m, RBW: 1MHz

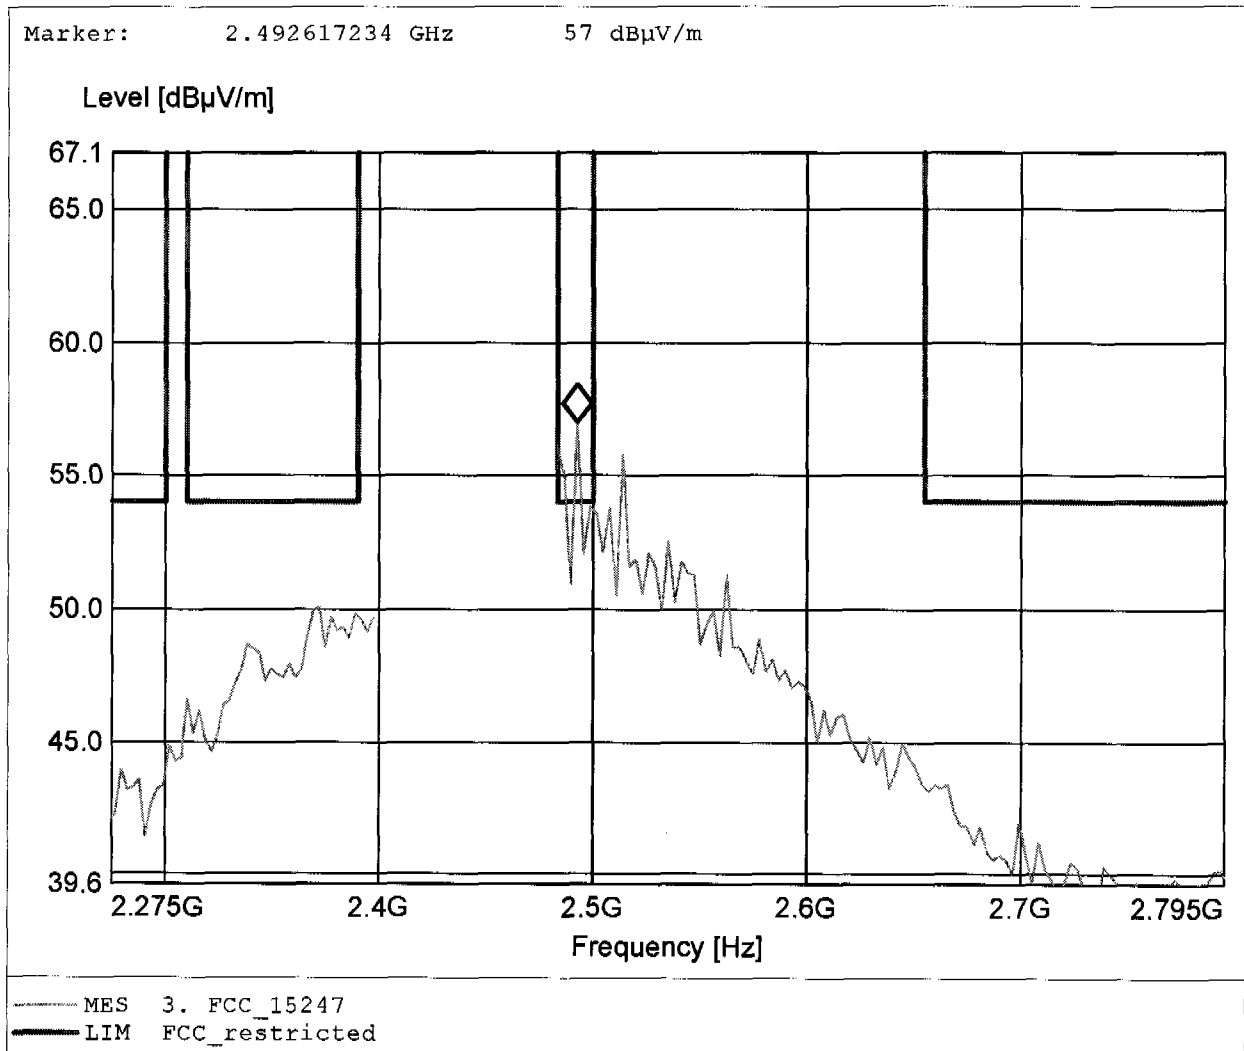

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.881GHz, Emax: 39.40dBµV/m, RBW: 1MHz

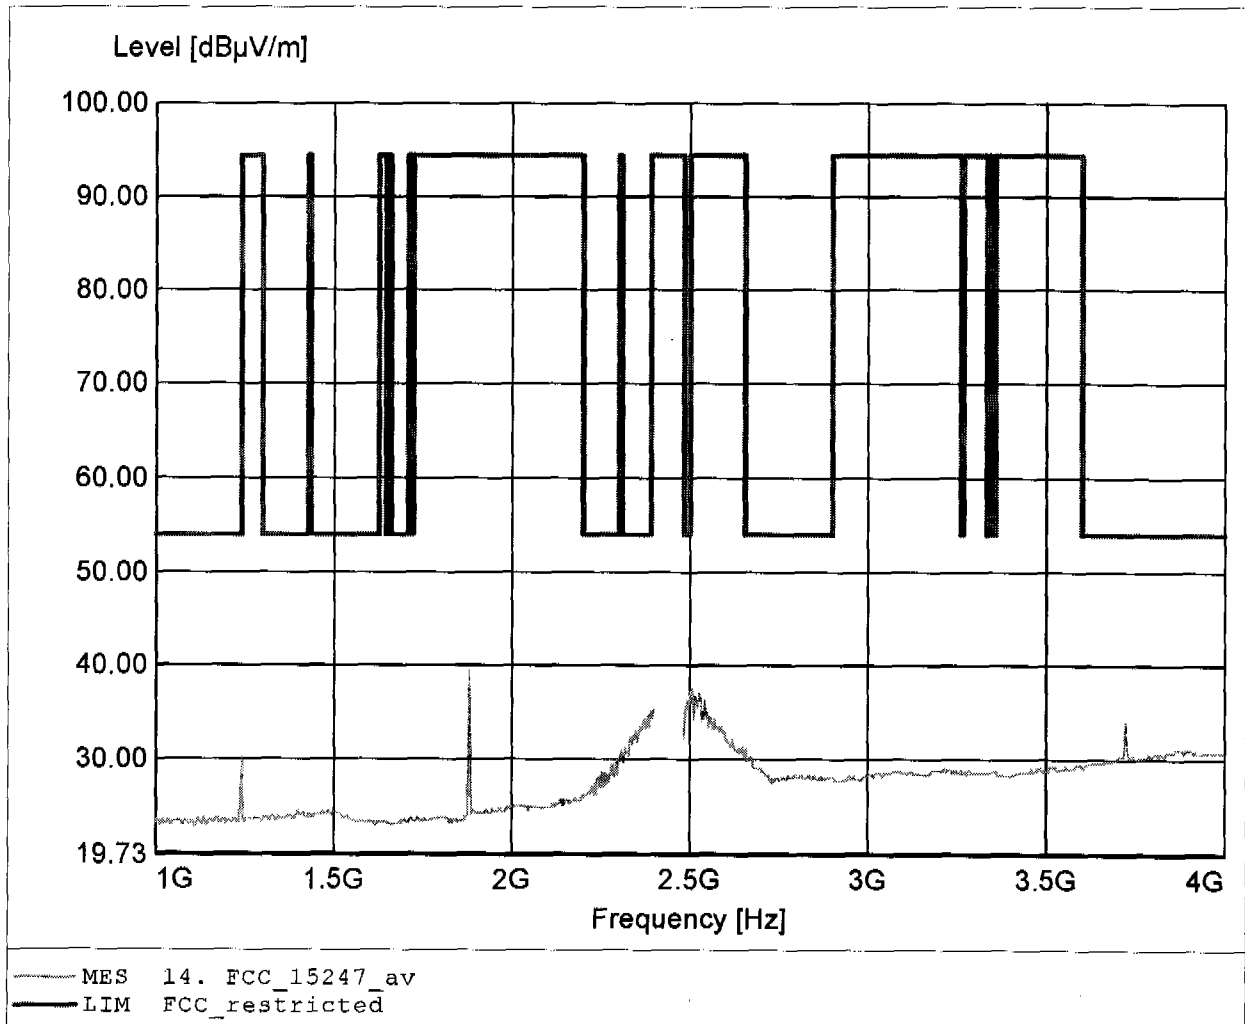

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 57.30dBµV/m, RBW: 1MHz

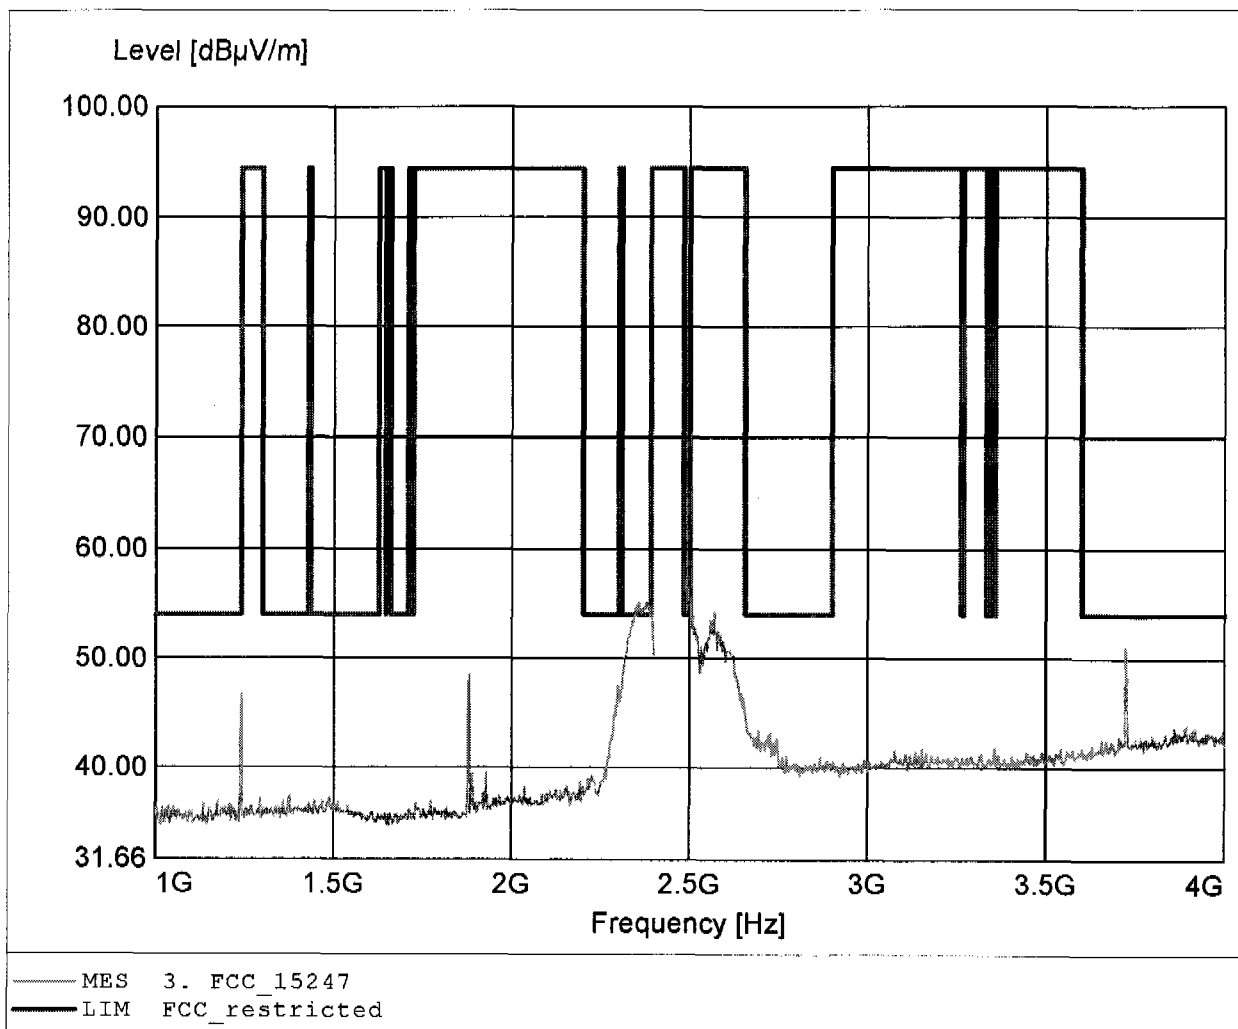

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 57.30dBµV/m, RBW: 1MHz

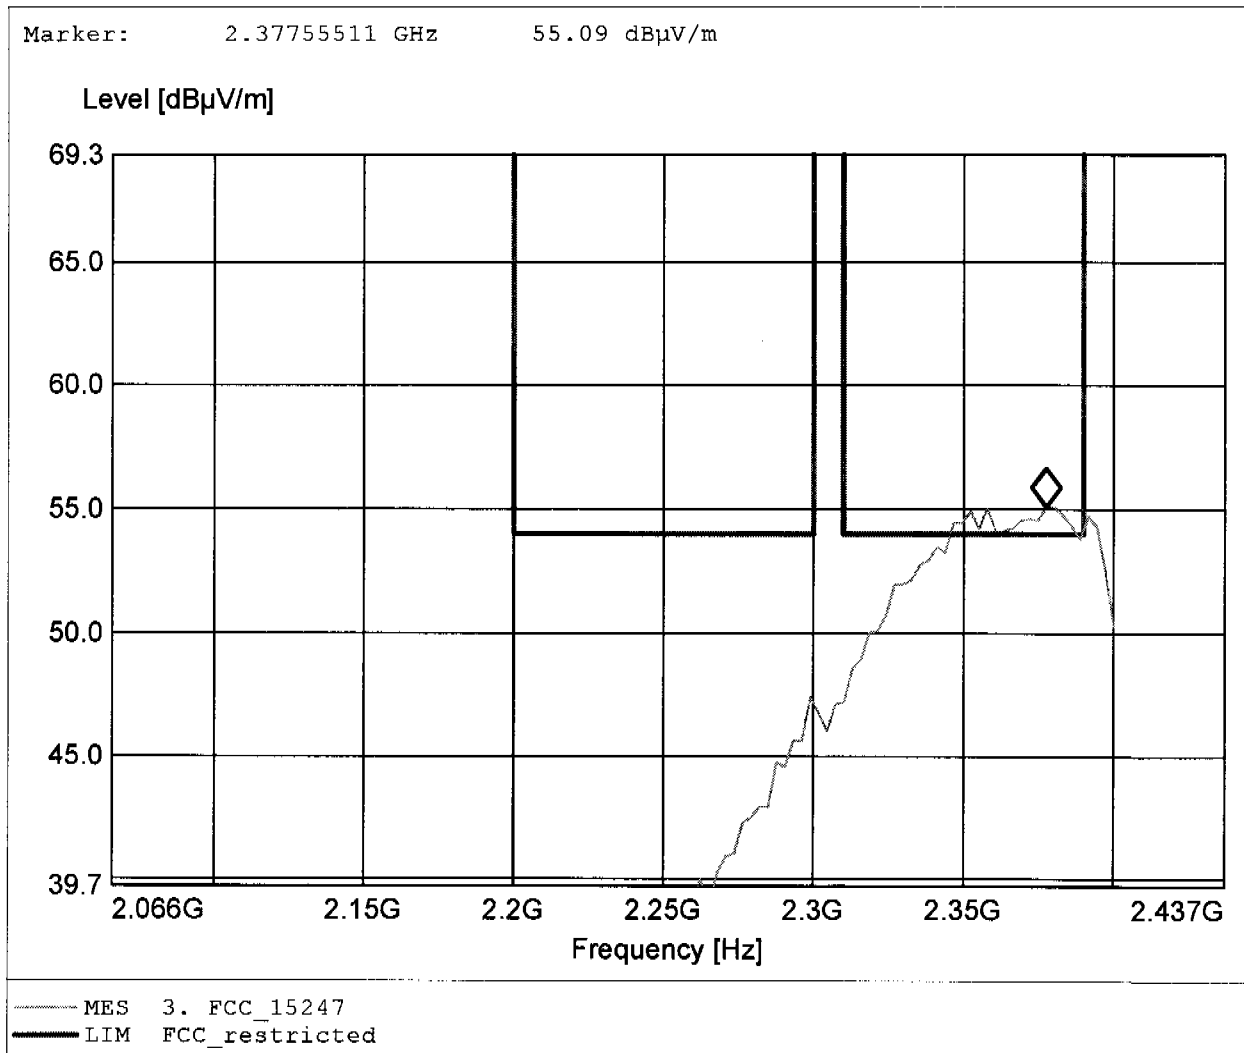

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 57.3dBµV/m, RBW: 1MHz

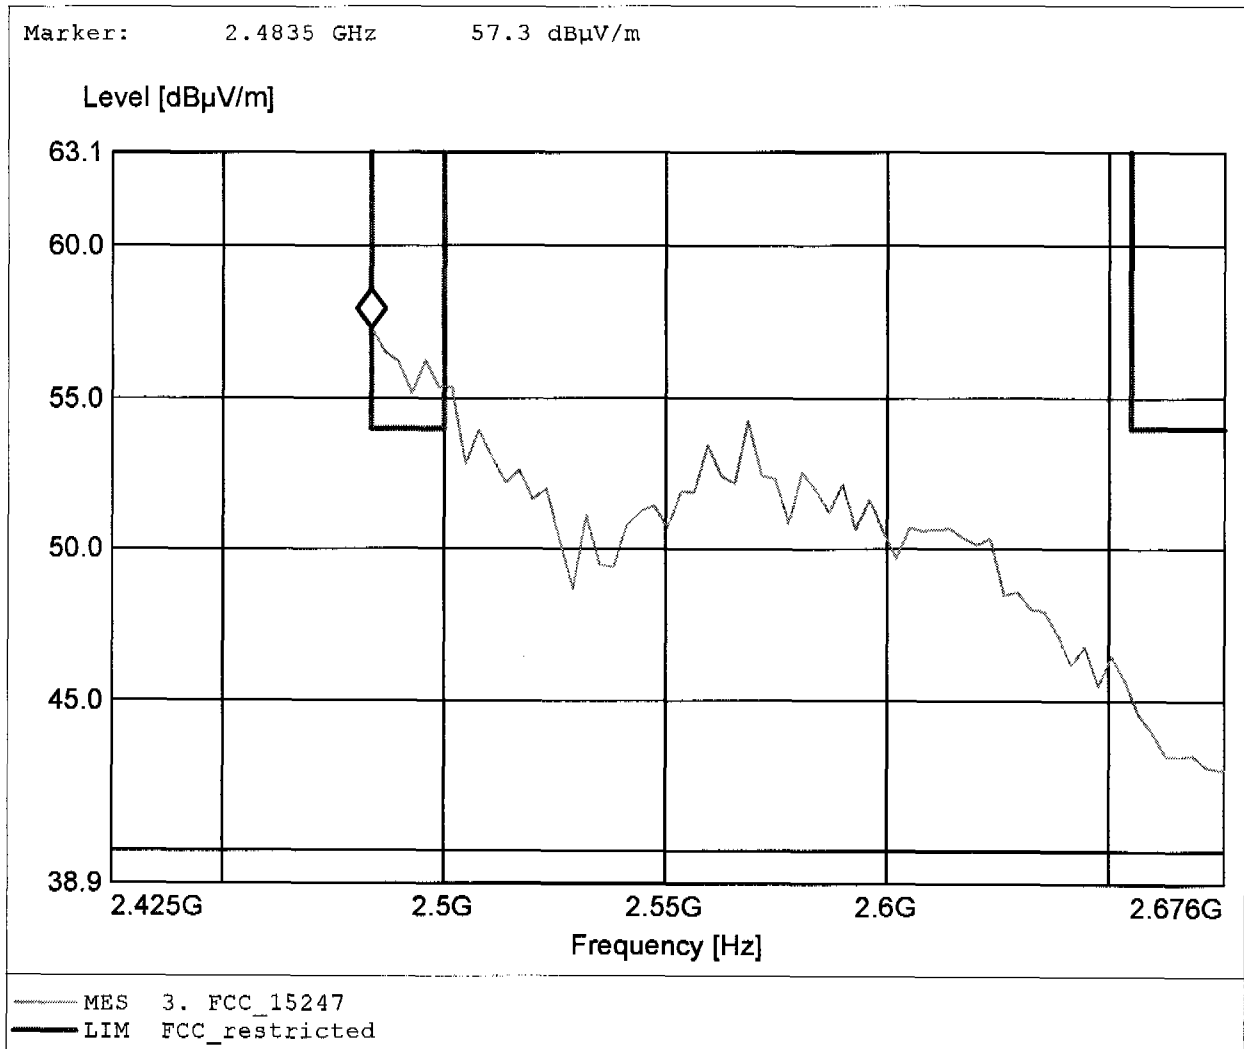

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, amplif.
Comment 2: Freq: 1.881GHz, Emax: 39.64dBuV/m, RBW: 1MHz

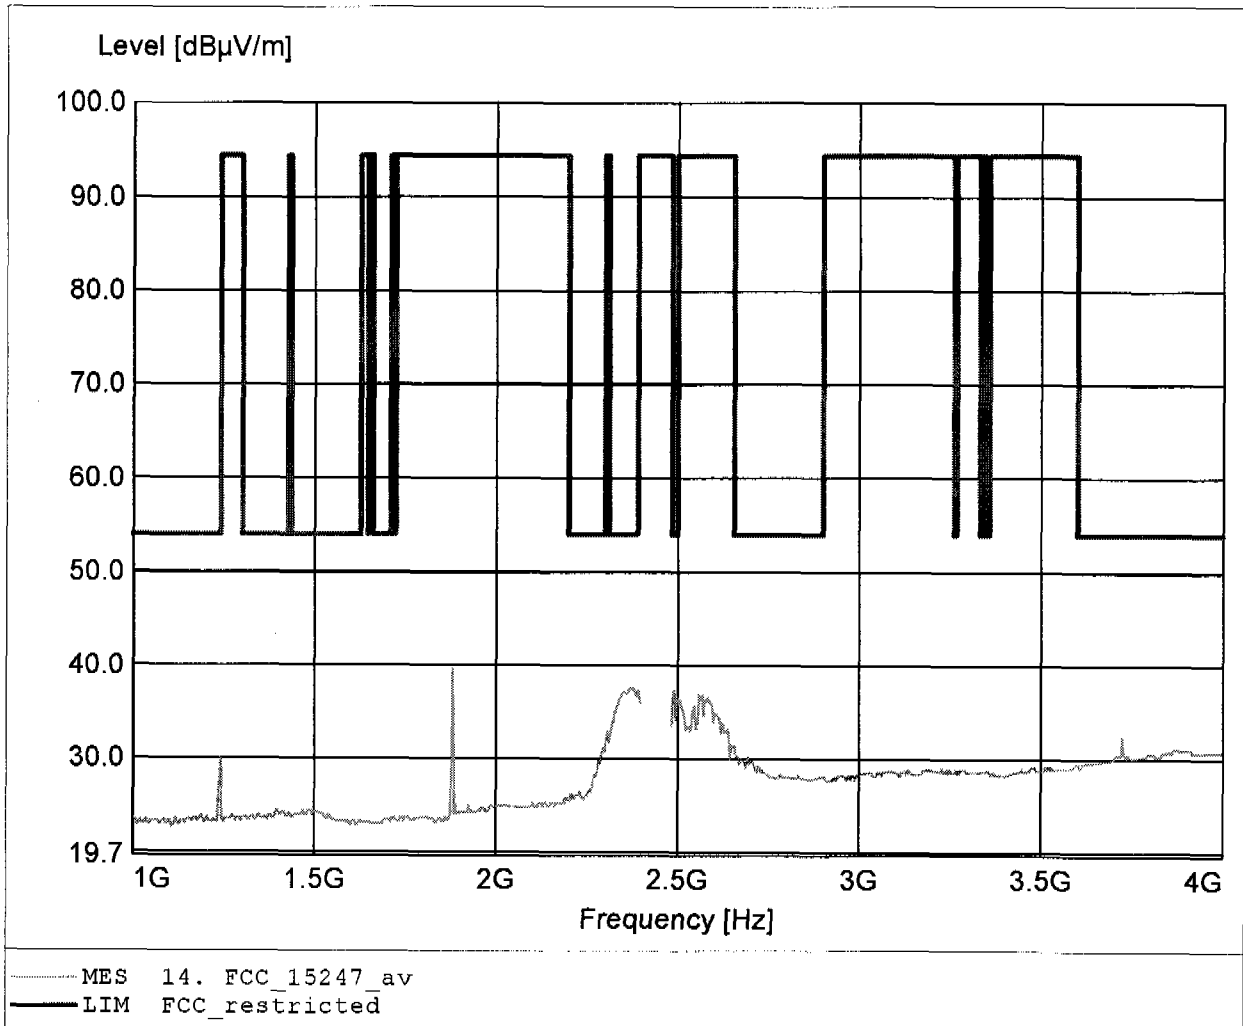

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 48.36dBuV/m, RBW: 1MHz

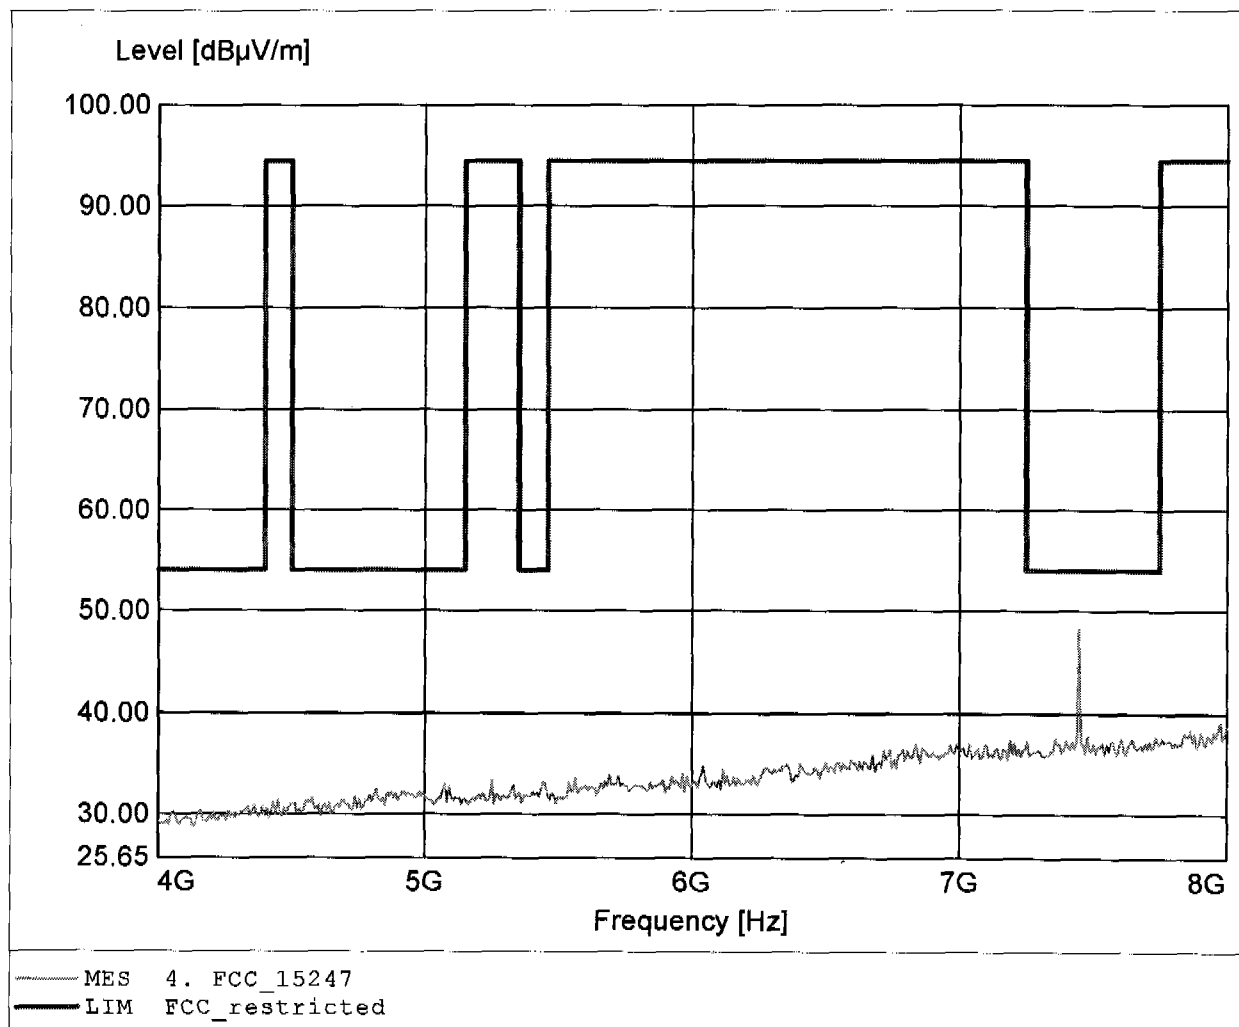

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 7.447GHz, Emax: 46.74dBµV/m, RBW: 1MHz

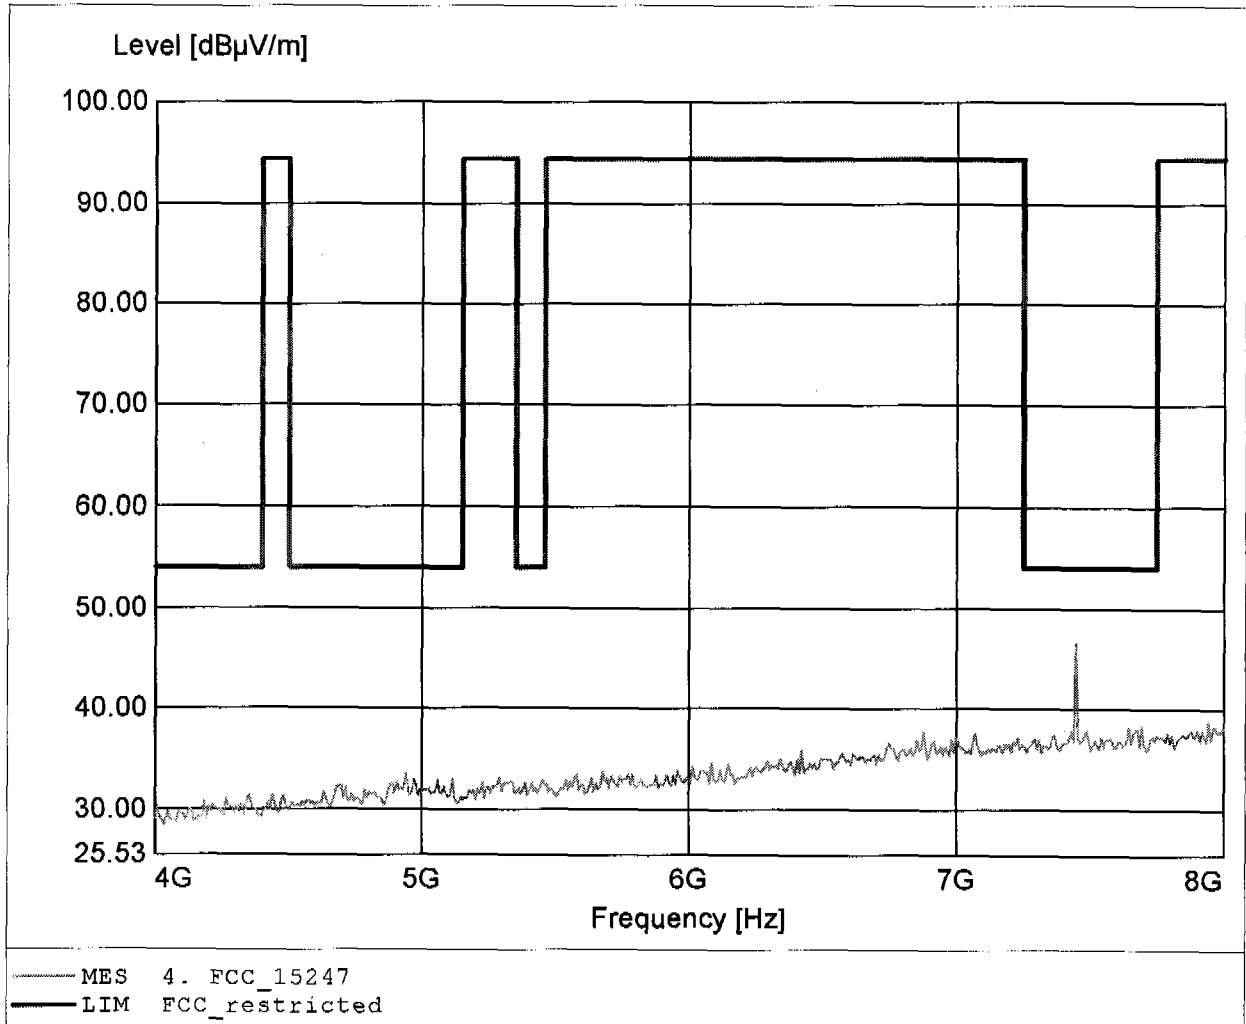

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 53.81dBµV/m, RBW: 1MHz

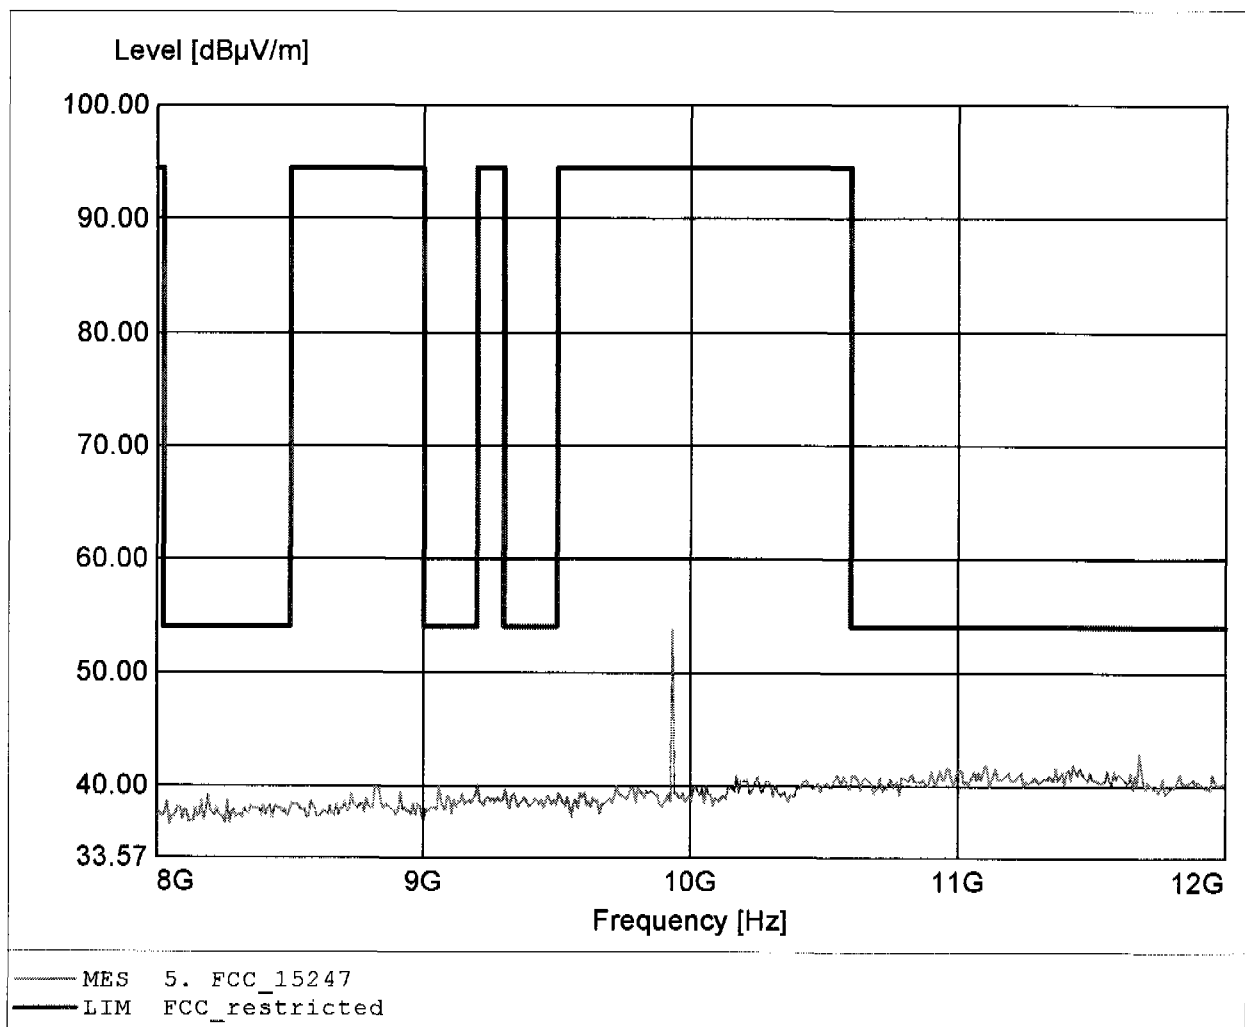

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 9.932GHz, Emax: 58.25dBµV/m, RBW: 1MHz

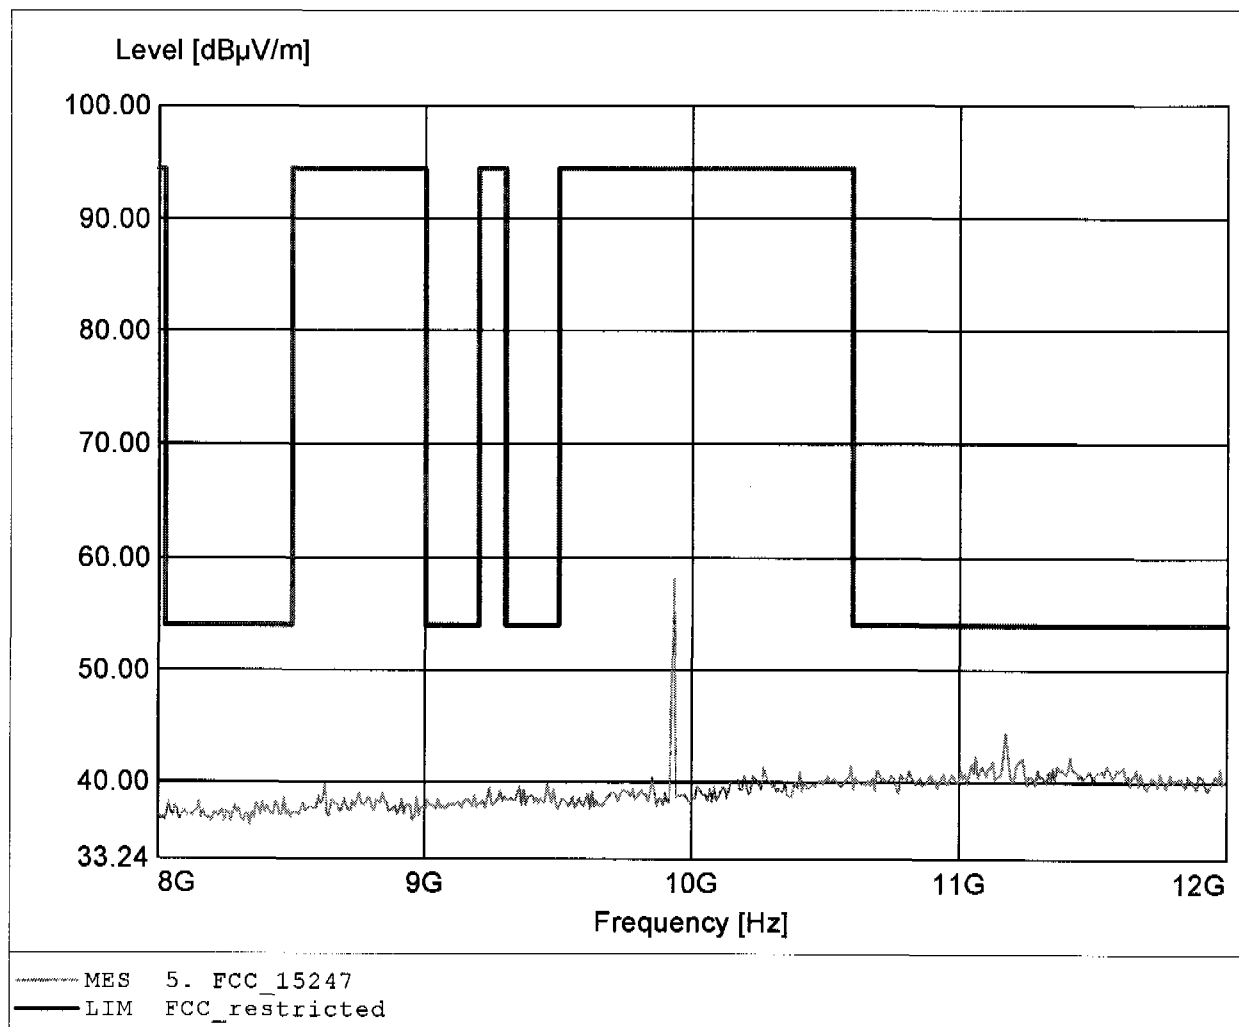

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 58.81dBµV/m, RBW: 1MHz

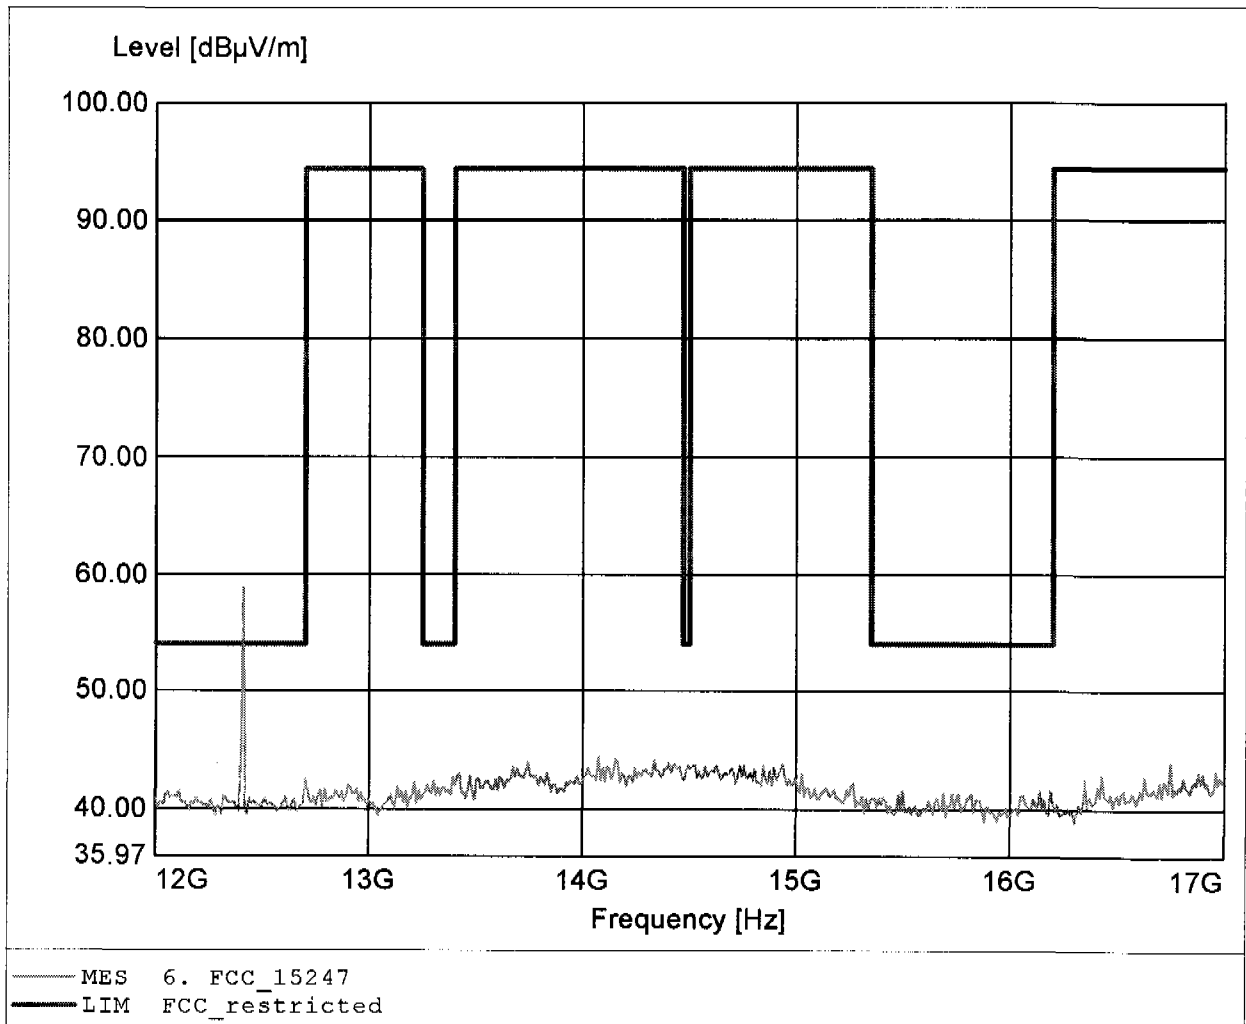

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 34.56dBµV/m, RBW: 1MHz

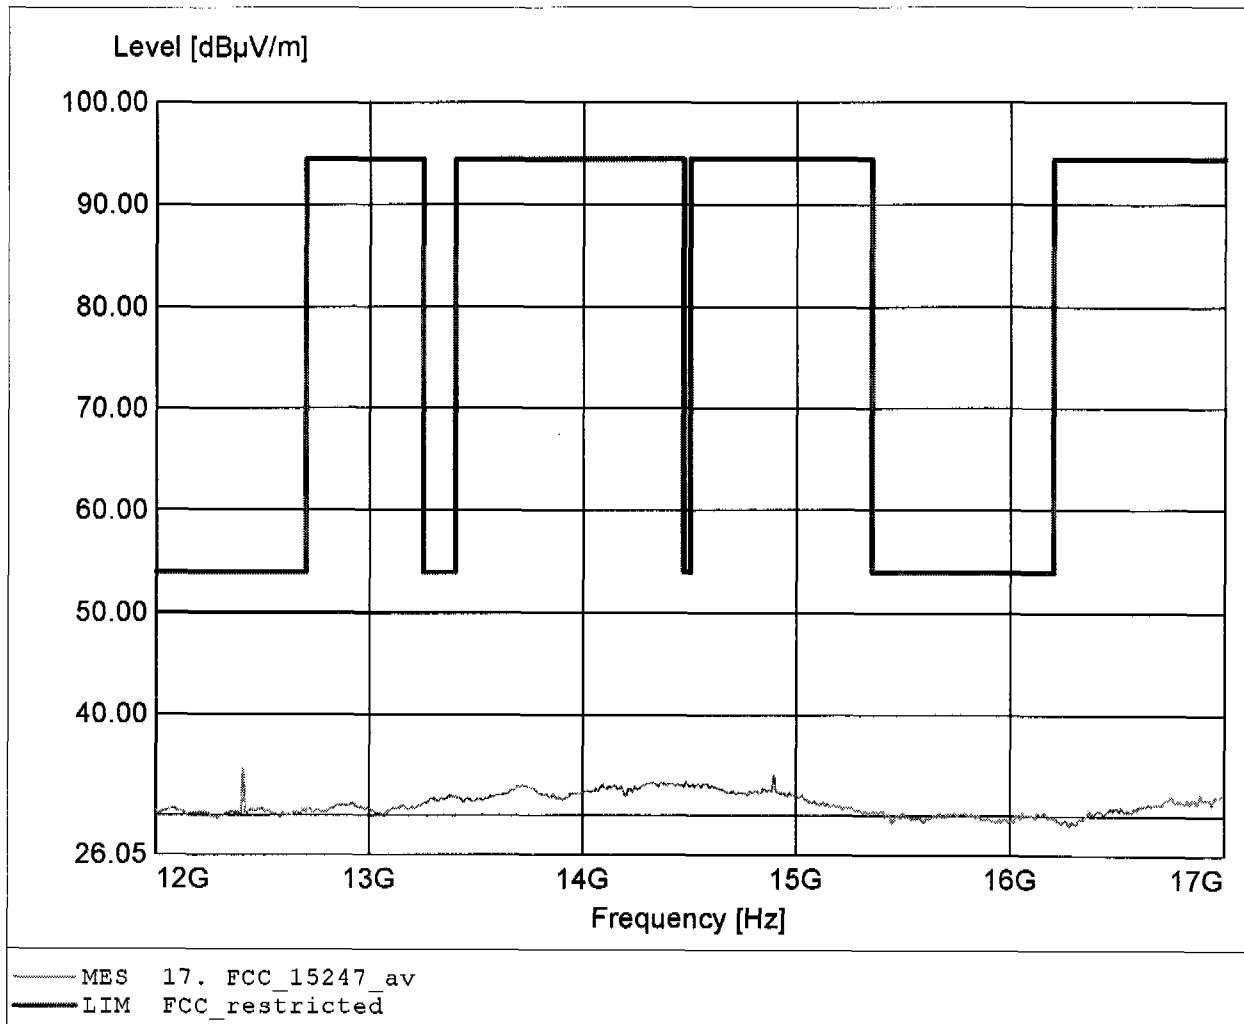

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA9120D, ampl.+HP.
Comment 2: Freq: 12.411GHz, Emax: 65.02dBµV/m, RBW: 1MHz

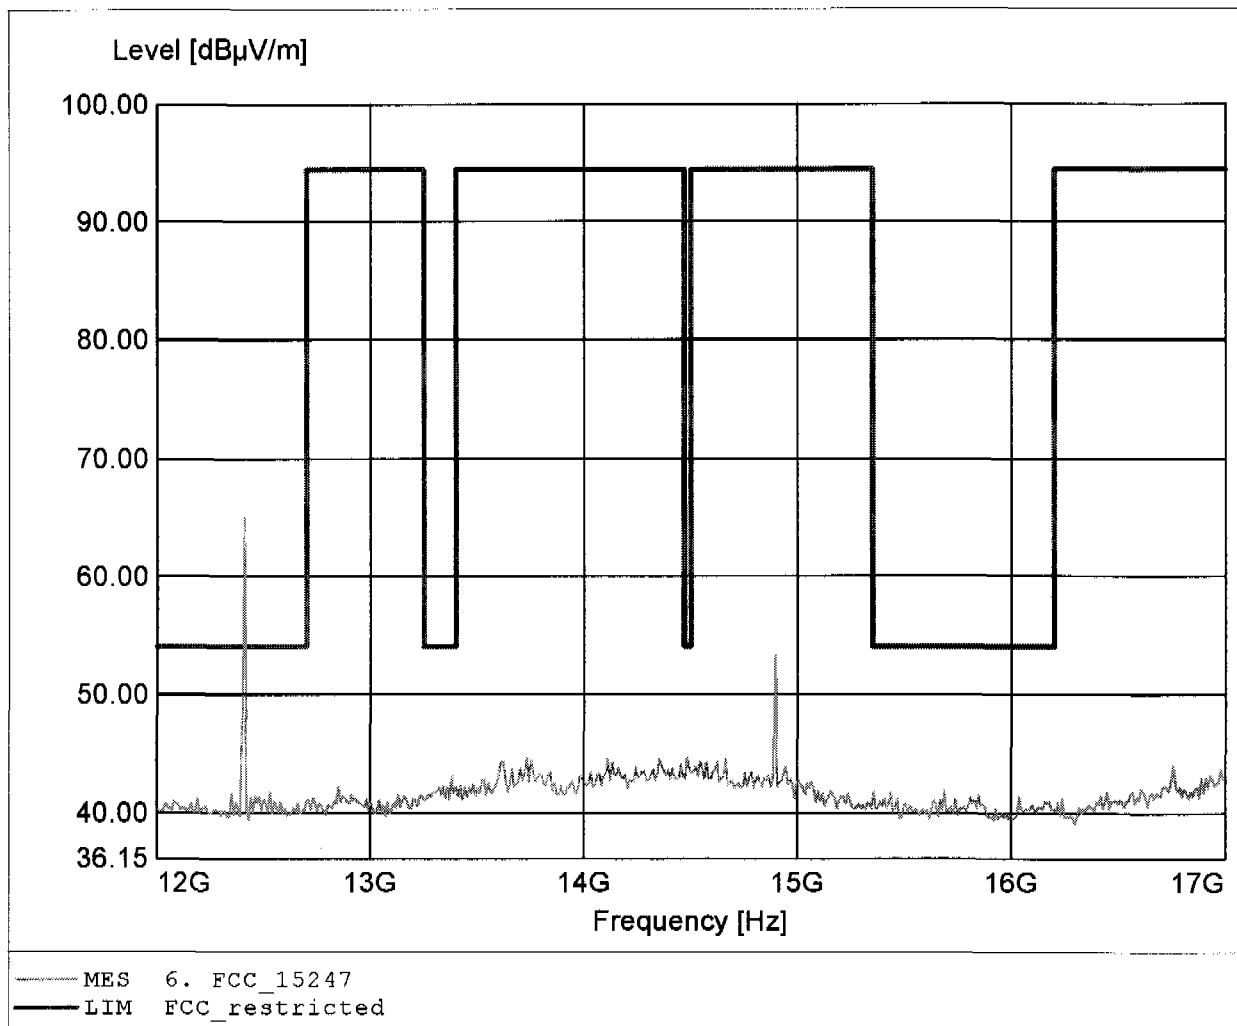

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C


Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 45.83dBµV/m, RBW: 1MHz

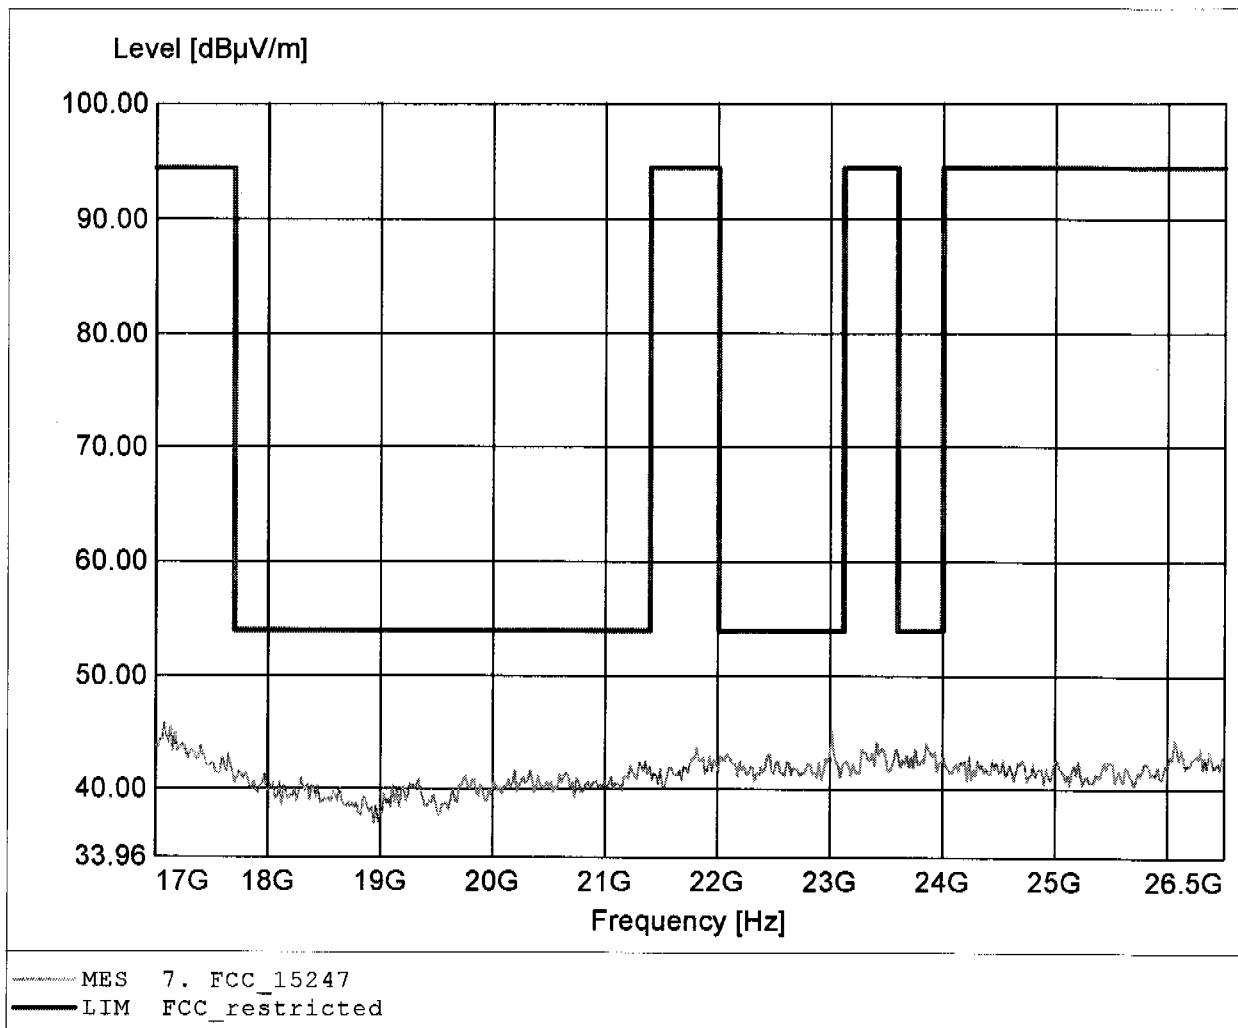

Spurious emissions Field Strength

FCC RULES PART 15, SUBPART C

Approval Holder: VTech Telecommunications Limited
EUT: 2.4GHz Cordless VoIP Telephone / Handset / Ch.: 94
Model: USB7100 / 7200
Test Site / Operator: ETS / Mr. Hoppe
Temperature/ Voltage: 25°C / Unom: 2.4 V DC
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.362GHz, Emax: 45.06dBµV/m, RBW: 1MHz

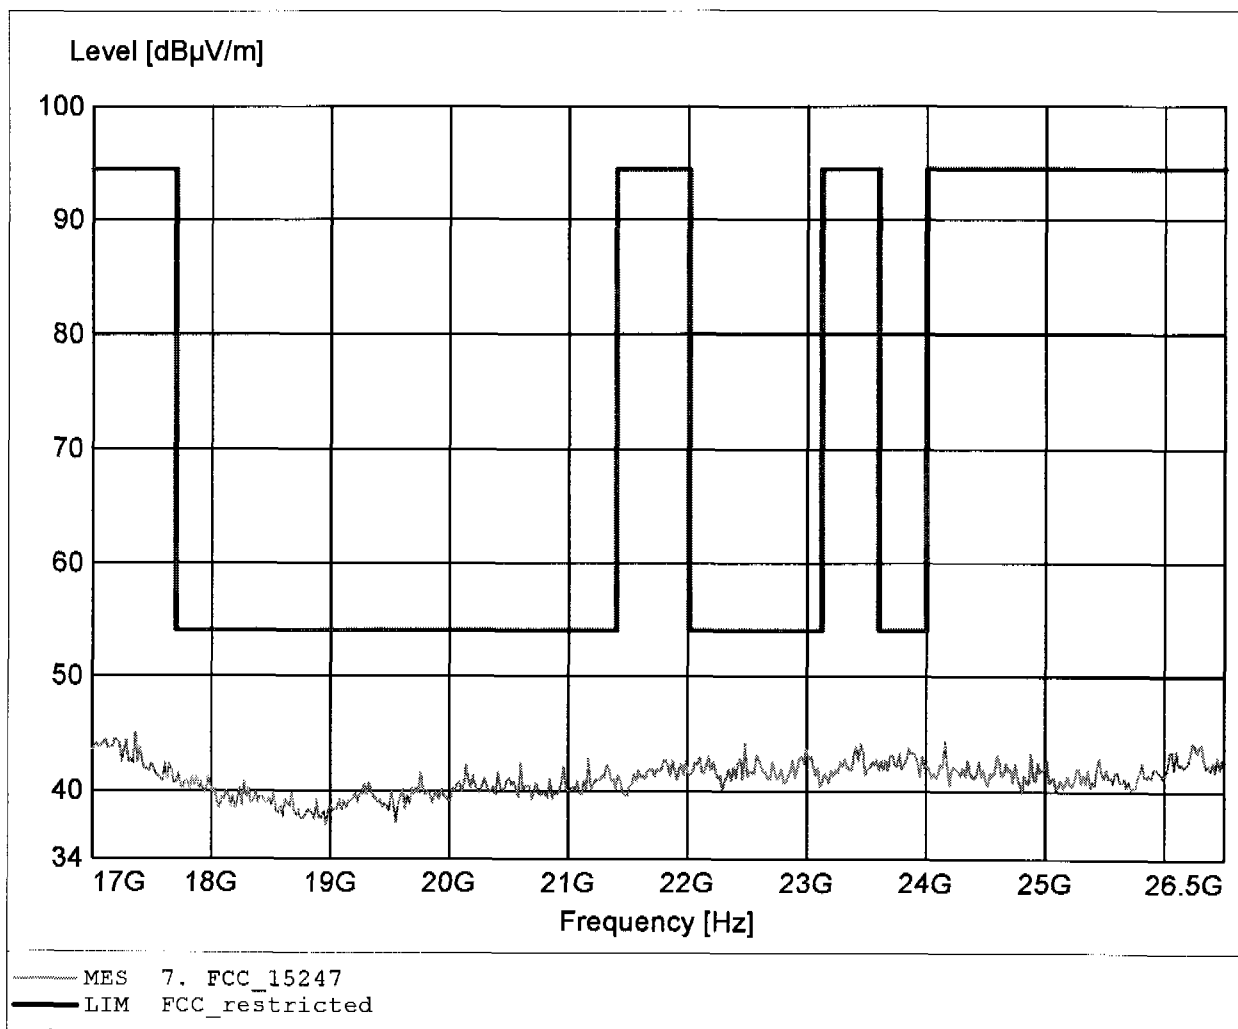



Appendix D

Spurious Emissions conducted - Transmitter operating




Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 0.00 dB VBW 100 kHz
30 dBm 885.37051162 kHz SWT 5 ms Unit dBm

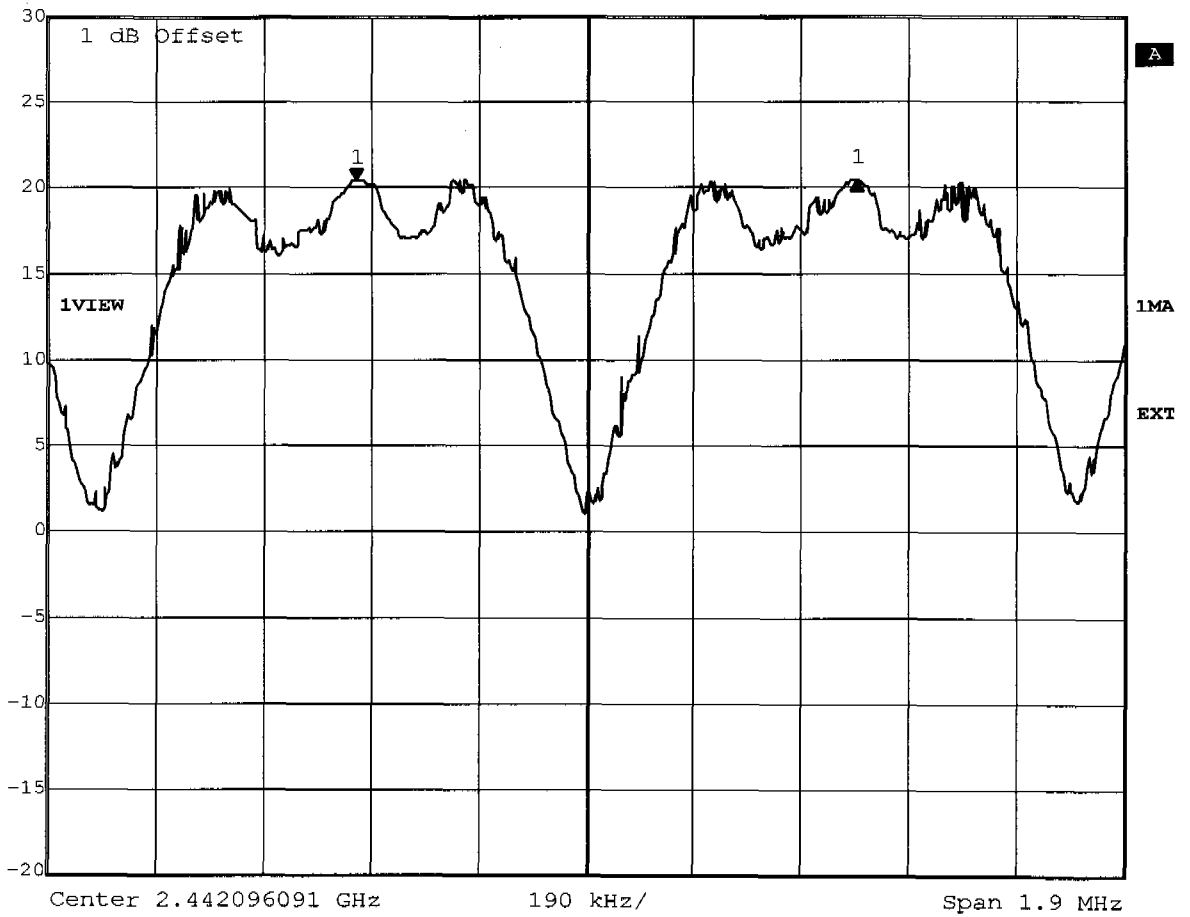

Title: Carrier Frequency Separation
Comment A: USB7100 / 7200 Handset
Date: 18.JUL.2005 14:56:48




Appendix F

Number of Hopping Frequencies



Ref Lvl
30 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

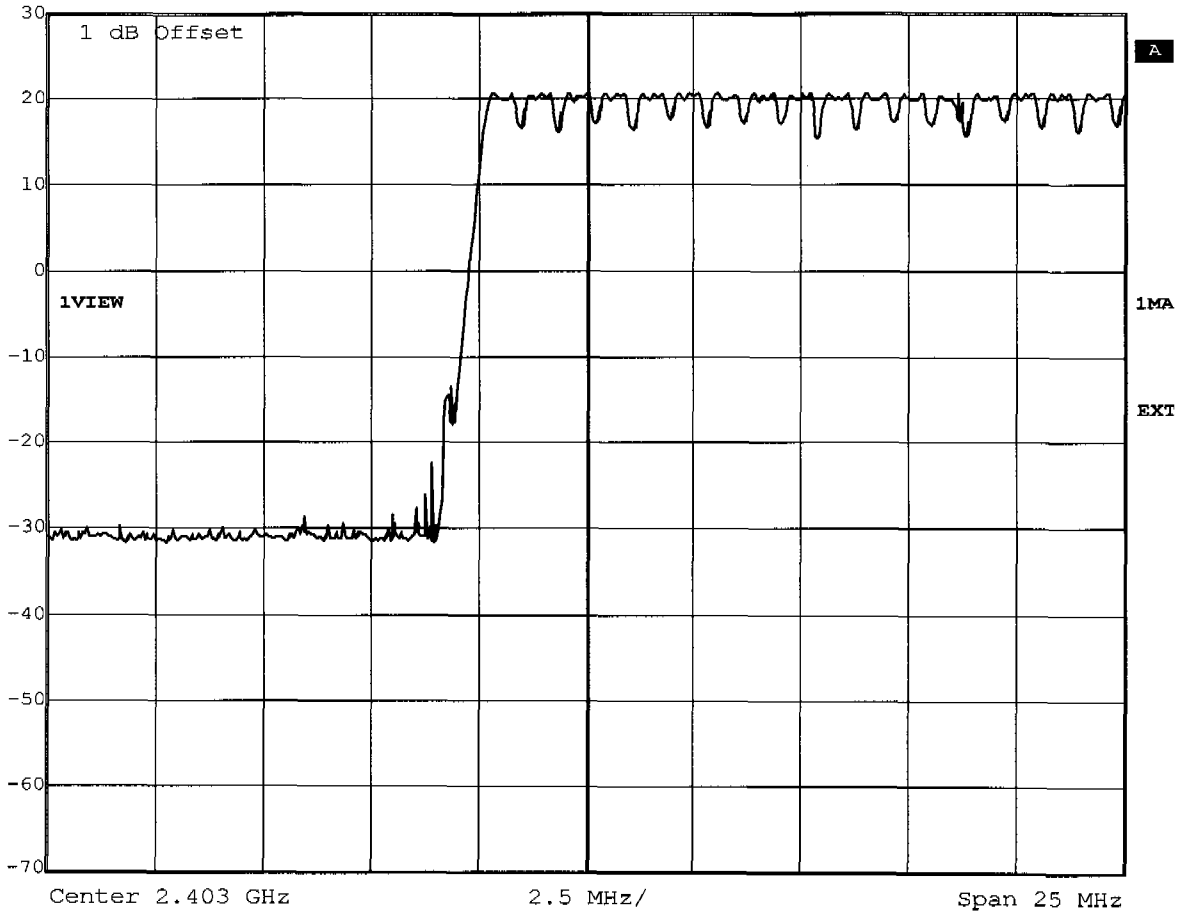


Title: Number of Hopping Frequencies Ch.: 0-16
Comment A: USB7100 / 7200 Handset
Date: 18.JUL.2005 15:07:21



Ref Lvl
30 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

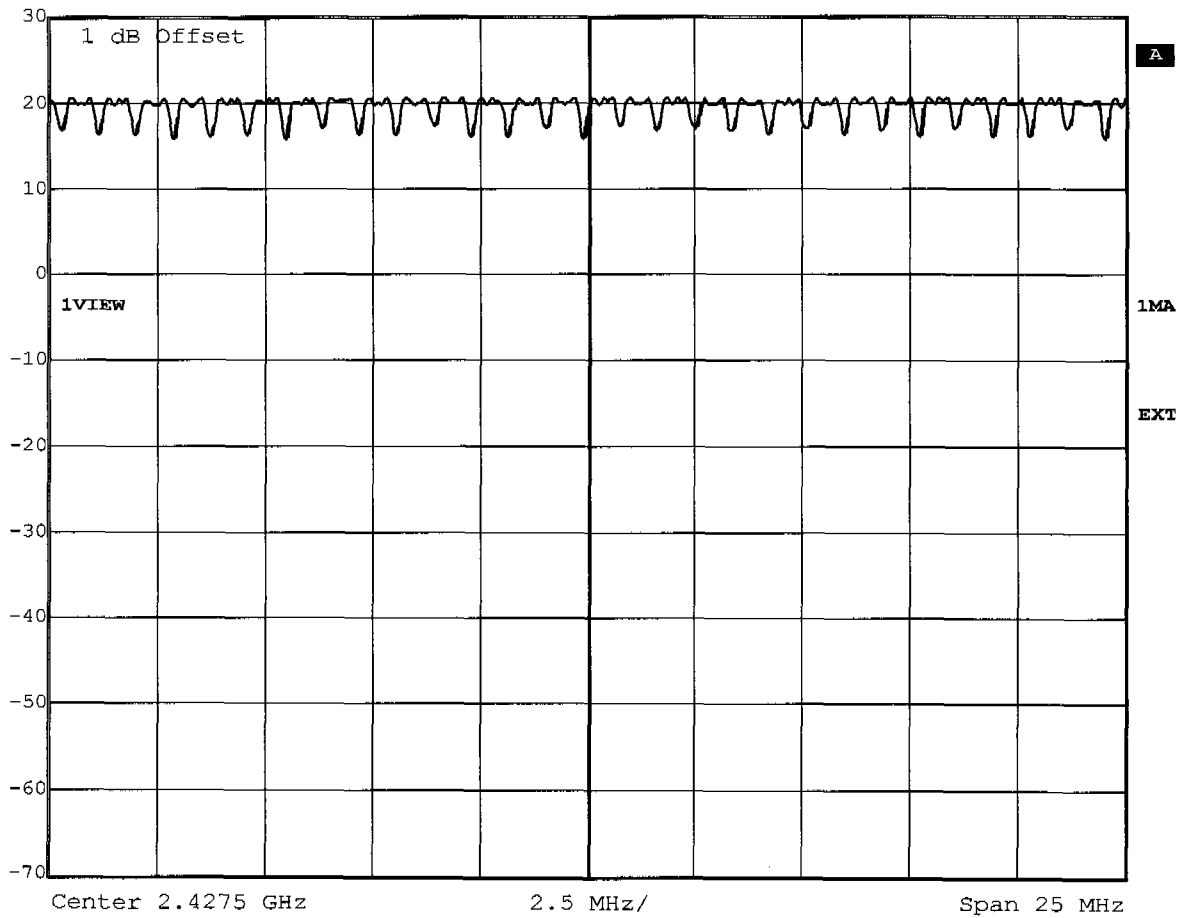


Title: Number of Hopping Frequencies Ch.: 17-44
Comment A: USB7100 / 7200 Handset
Date: 18.JUL.2005 15:15:55



Ref Lvl
30 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

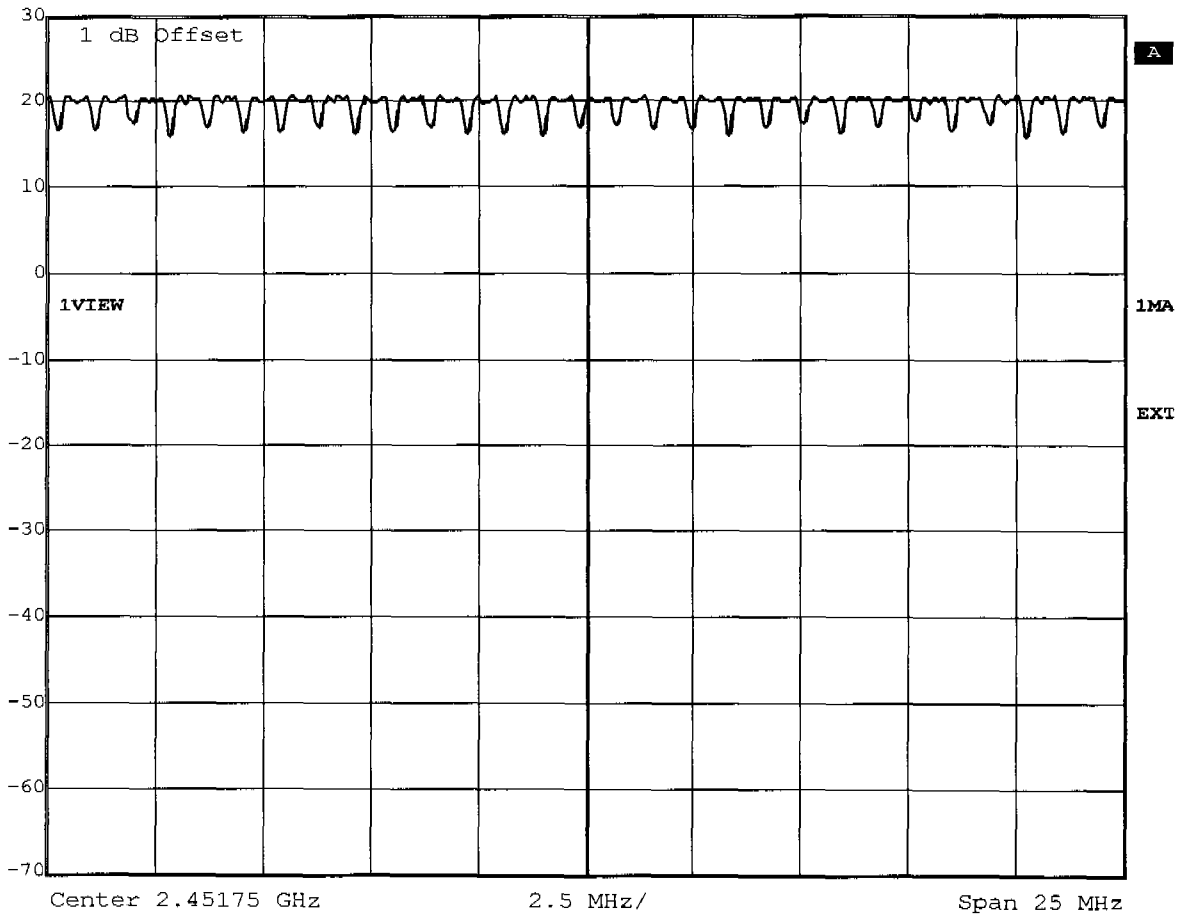


Title: Number of Hopping Frequencies Ch.: 45-72
Comment A: USB7100 / 7200 Handset
Date: 18.JUL.2005 15:24:55



Ref Lvl
30 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

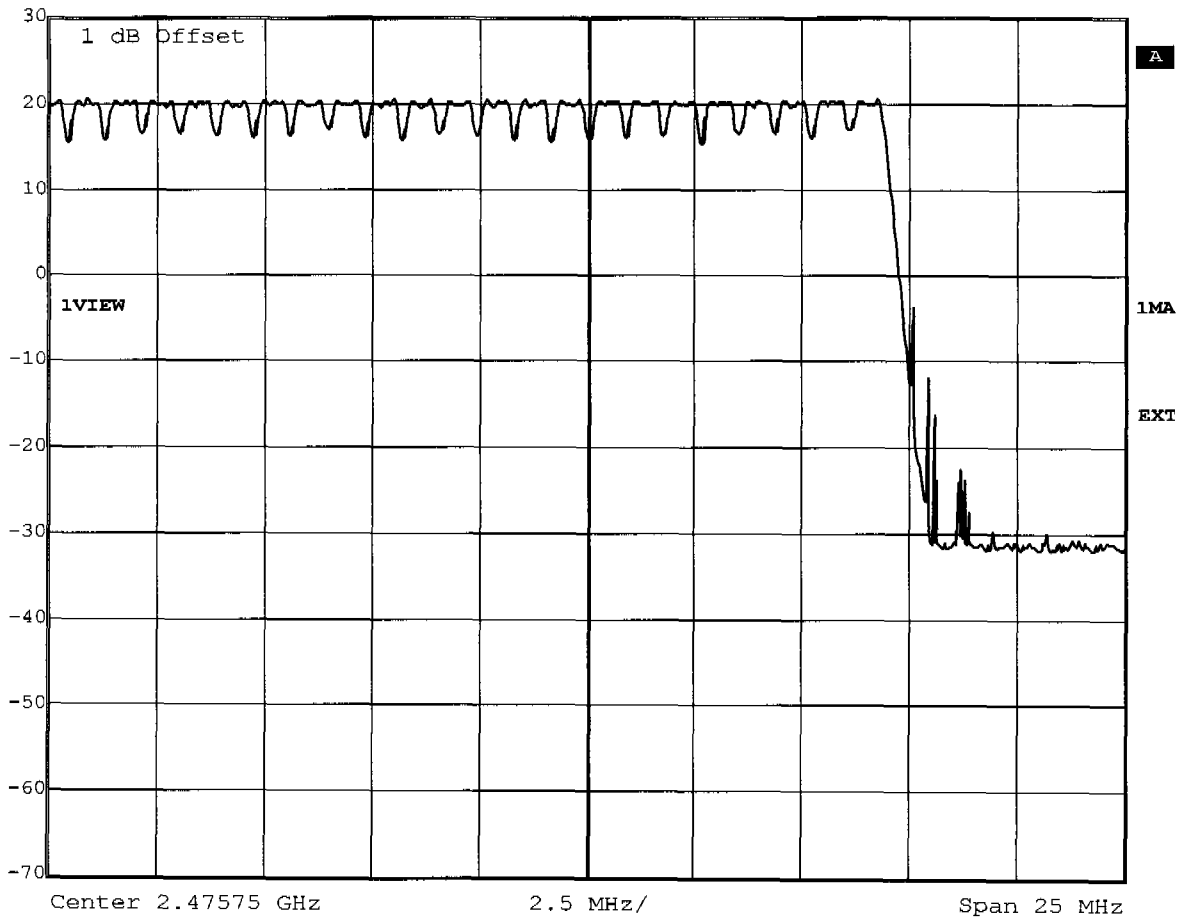

Title: Number of Hopping Frequencies Ch.: 73-94
Comment A: USB7100 / 7200 Handset
Date: 18.JUL.2005 15:31:18




Appendix G

Time of Occupancy (Dwell Time)




Delta 2 [T1] RBW 1 MHz RF Att 50 dB
 Ref Lvl -0.11 dB VBW 1 MHz
 30 dBm 10.013958 ms SWT 18 ms Unit dBm

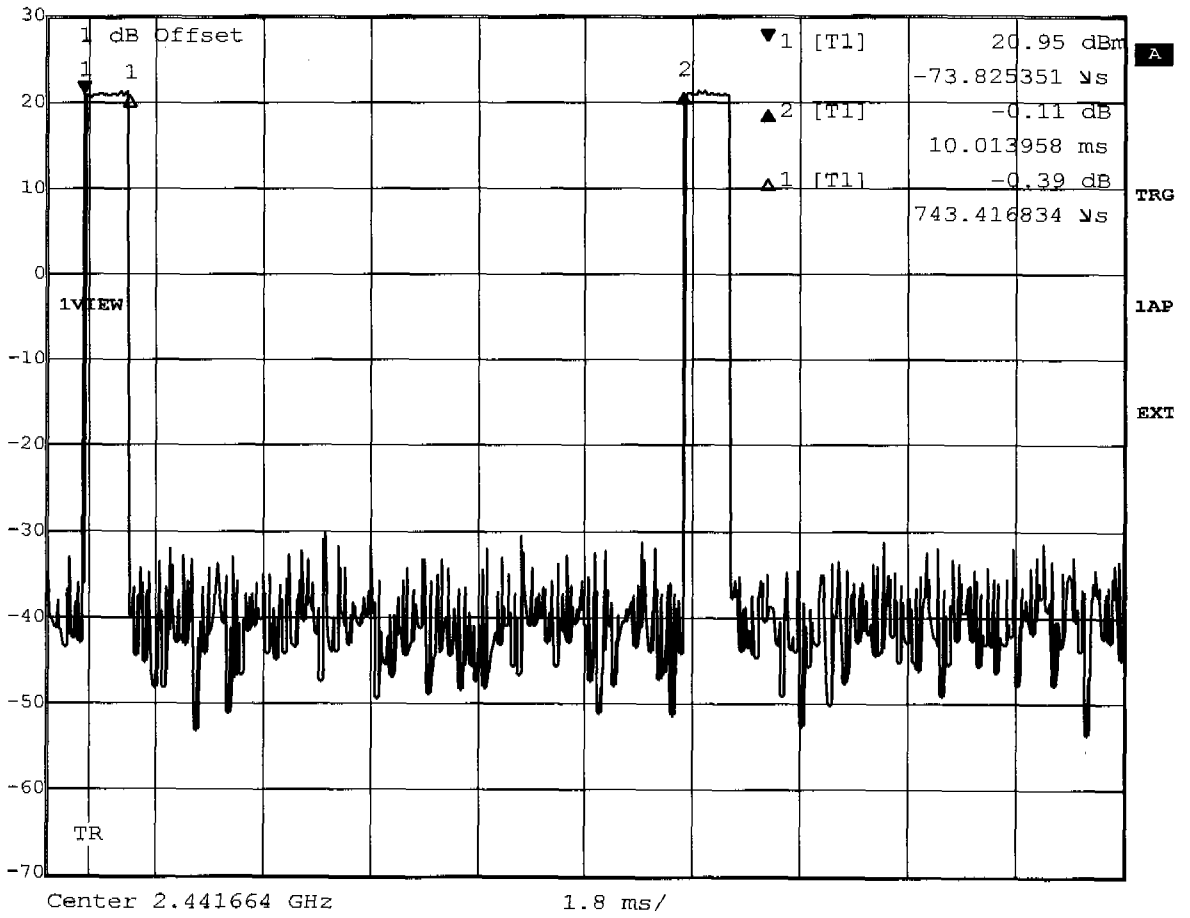

Title: Duty Cycle
 Comment A: USB7100 / 7200 Handset
 Date: 19.JUL.2005 09:08:53



Delta 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl -0.26 dB VBW 1 MHz
30 dBm 811.821643 μ s SWT 2.35 ms Unit dBm

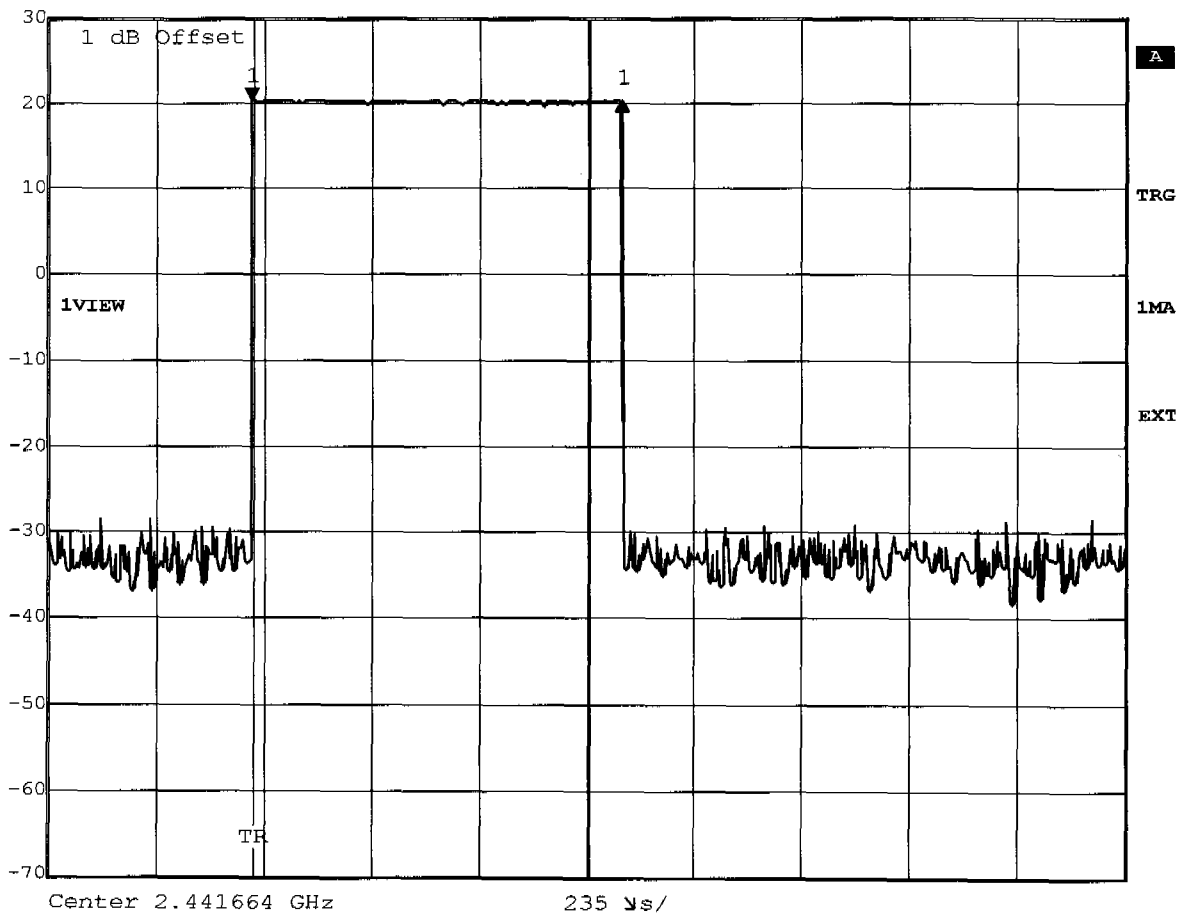

Title: Time of occupancy (Hopping) 40 events * 0.811822ms=32.473ms
Comment A: USB7100 / 7200 Handset
Date: 18.JUL.2005 14:11:51




Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.37 dB VBW 10 kHz
30 dBm 648.09619238 kHz SWT 56 ms Unit dBm

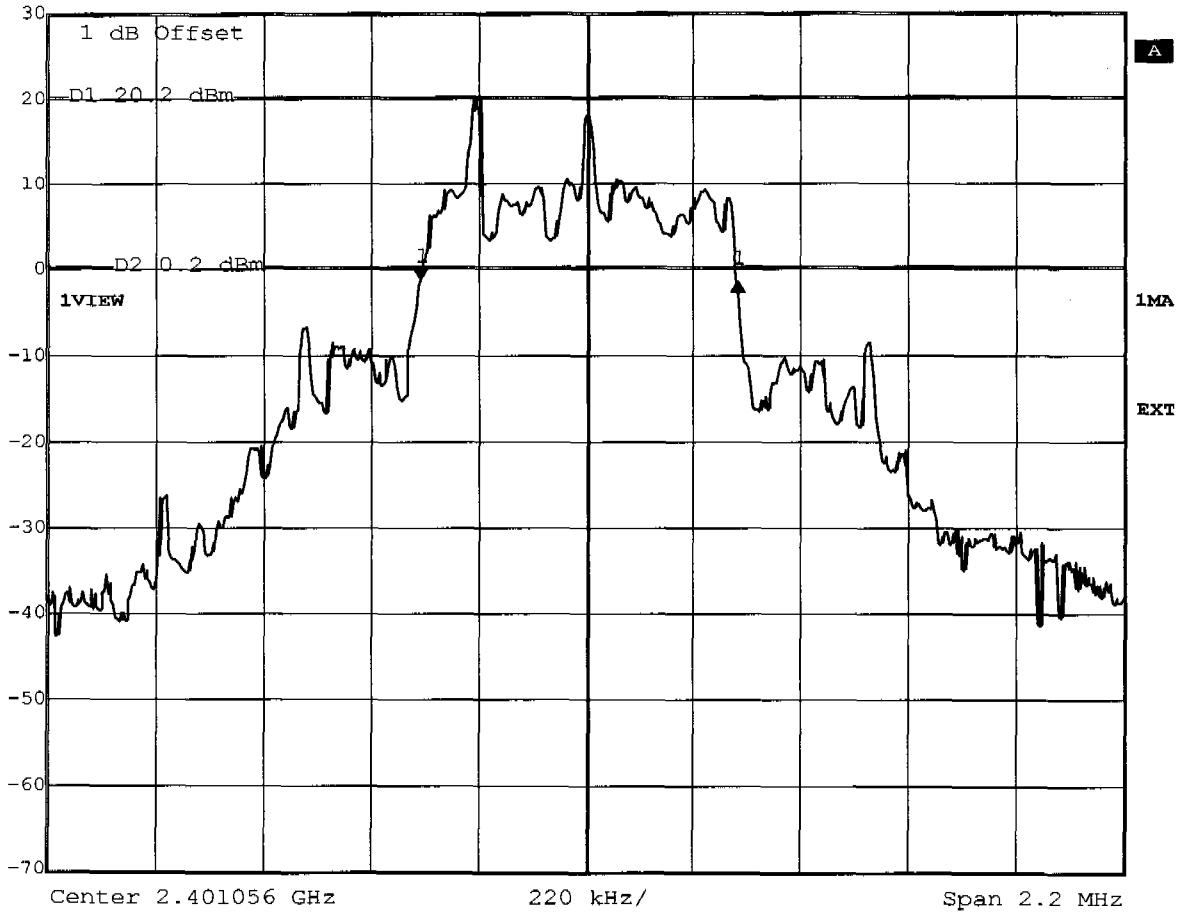

Title: -20dB Bandwidth Ch.: 0
Comment A: USB7100 / 7200 Handset
Date: 19.JUL.2005 08:34:53



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl 0.71 dB VBW 10 kHz
30 dBm 656.91382766 kHz SWT 56 ms Unit dBm

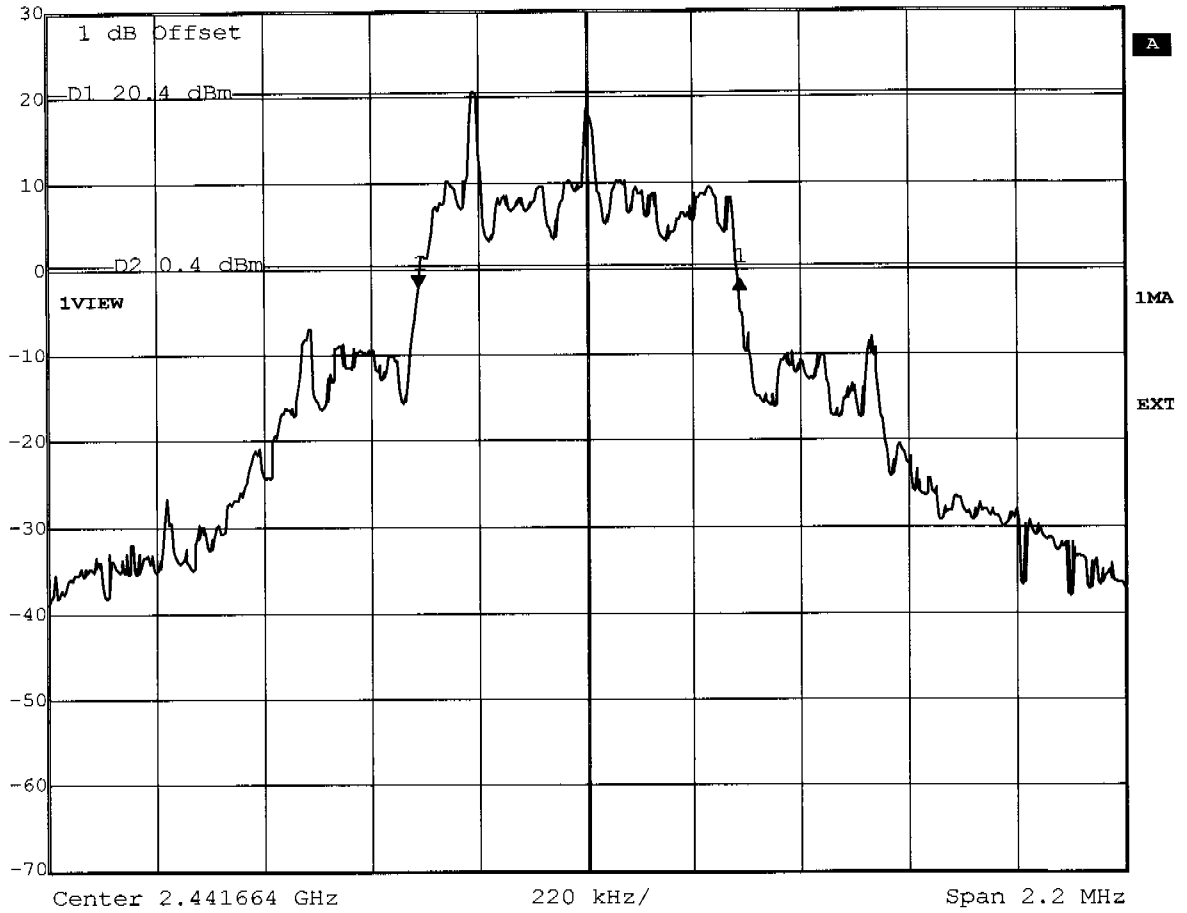

Title: -20dB Bandwidth Ch.: 47
Comment A: USB7100 / 7200 Handset
Date: 19.JUL.2005 08:33:24




Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 45.20 dB VBW 50 kHz
30 dBm 864.22845691 kHz SWT 5 ms Unit dBm

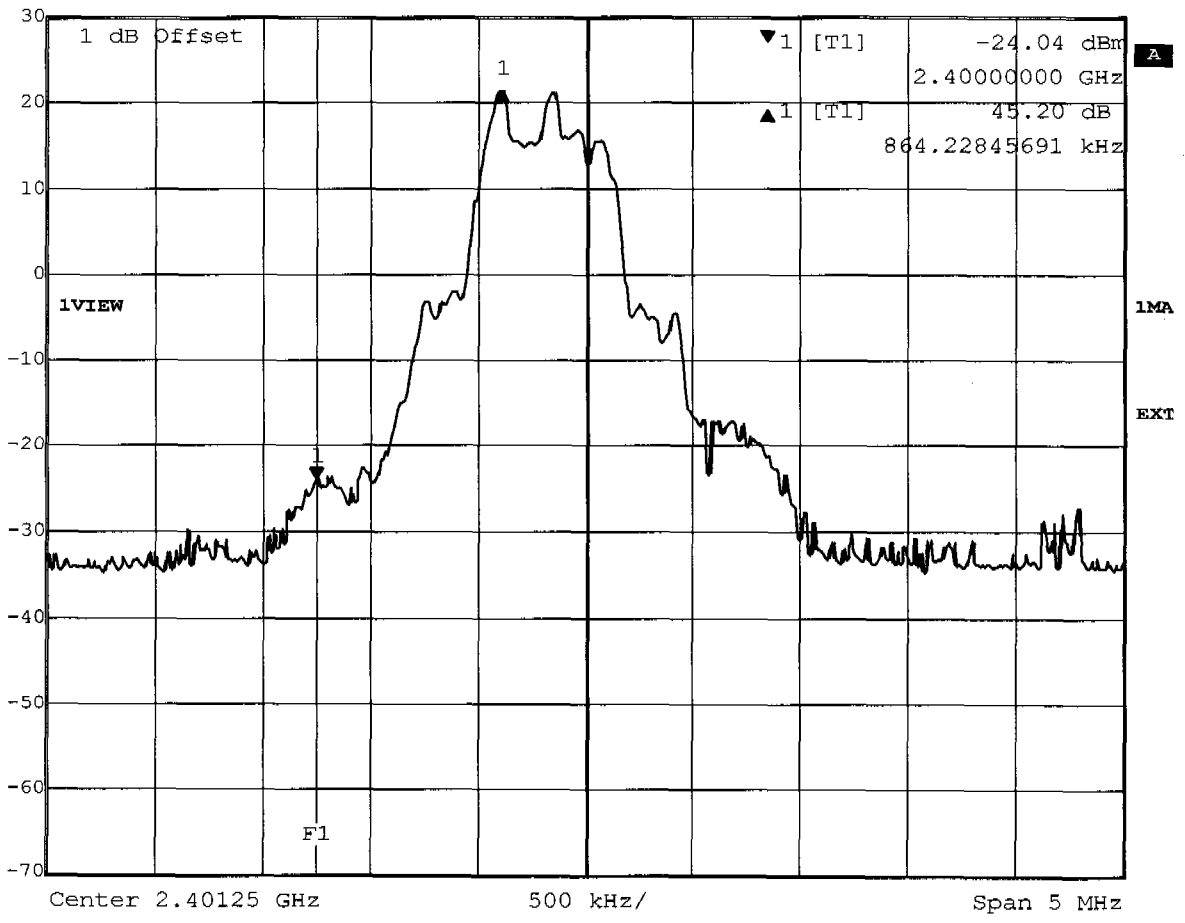

Title: Band-edge Compliance (conducted, single frequency)
Comment A: USB7100 / 7200 Handset
Date: 19.JUL.2005 08:39:25




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 44.56 dB VBW 50 kHz
30 dBm -1.41446090 MHz SWT 5 ms Unit dBm

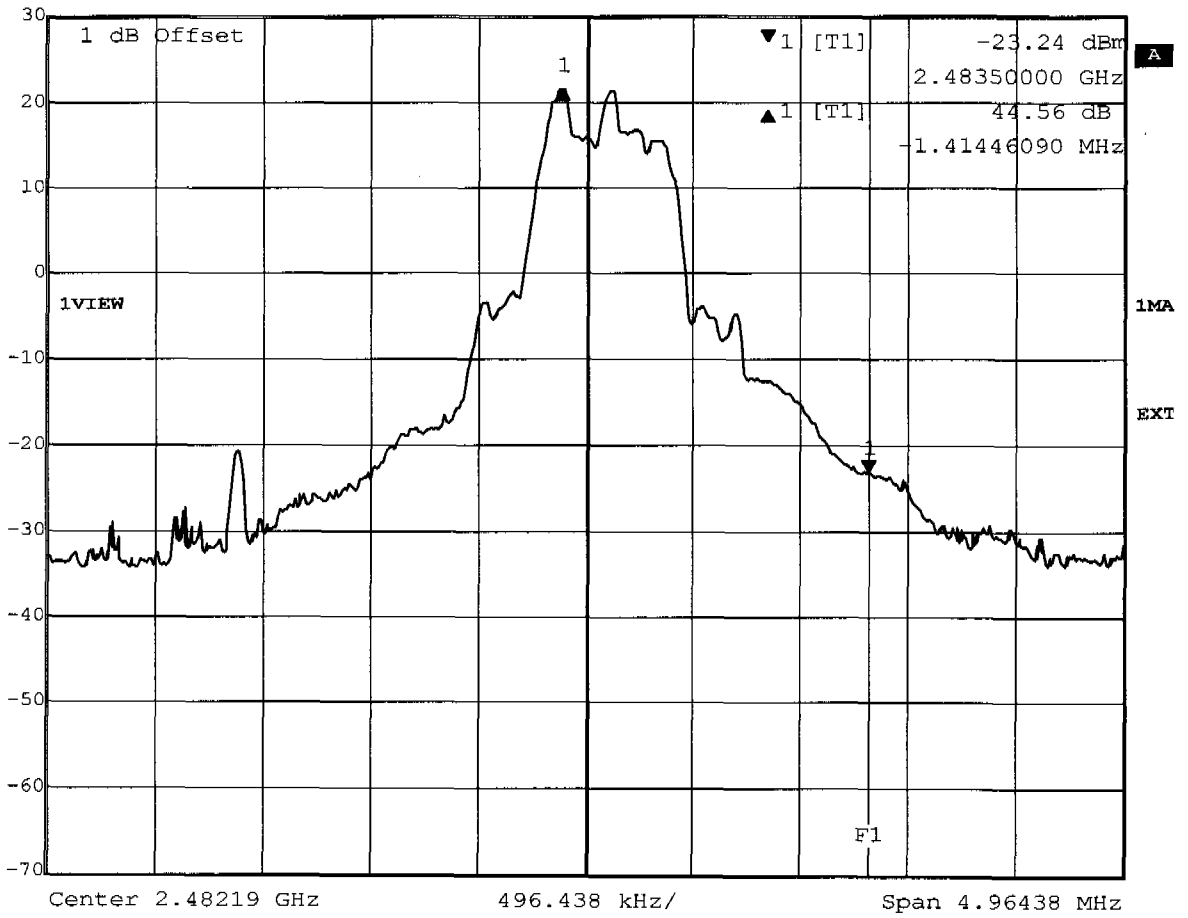

Title: Band-edge Compliance (conducted, single frequency)
Comment A: USB7100 / 7200 Handset
Date: 19.JUL.2005 08:49:03



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 47.89 dB VBW 50 kHz
30 dBm 1.23146293 MHz SWT 5 ms Unit dBm

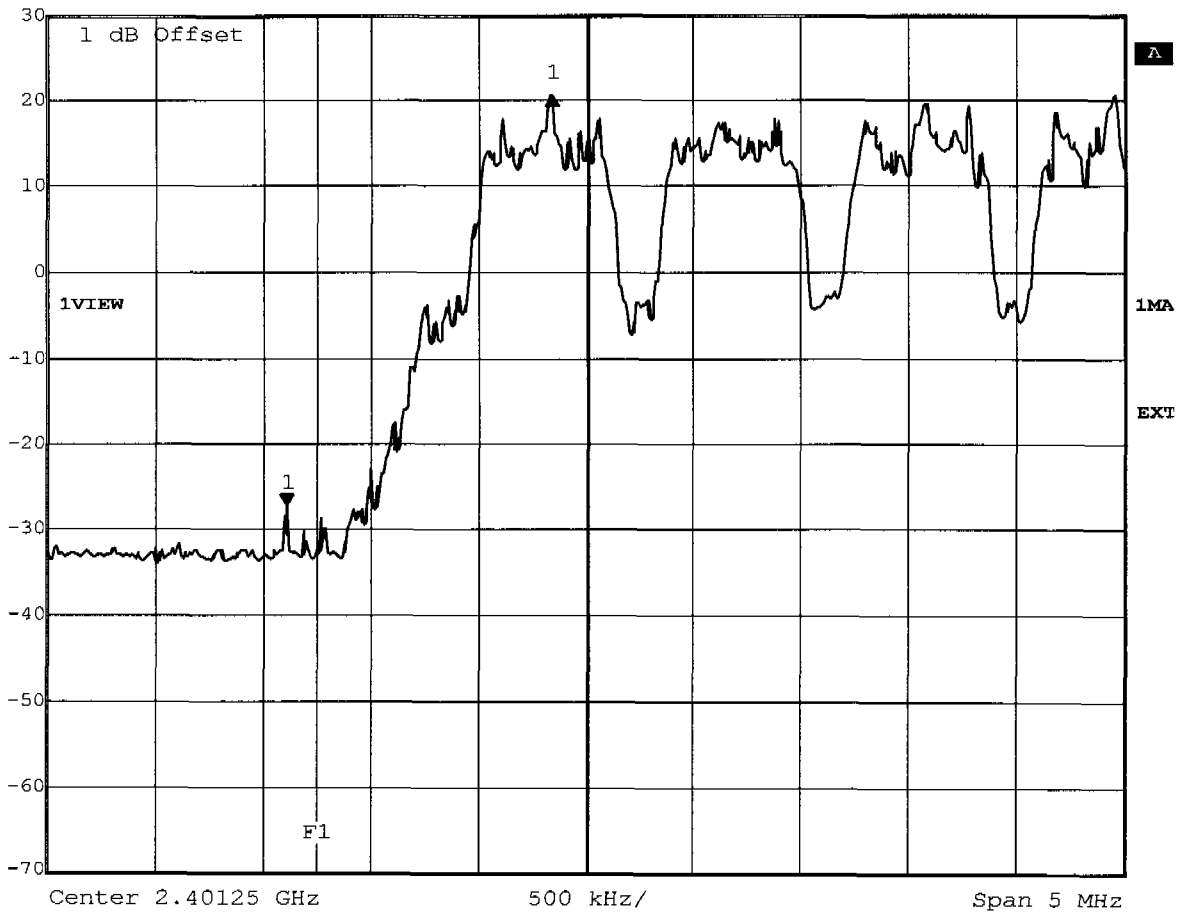


Title: Band-edge Compliance (conducted, hopping mode)

Comment A: USB7100 / 7200 Handset

Date: 18.JUL.2005 15:39:11



Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 44.77 dB VBW 50 kHz
30 dBm -1.22472946 MHz SWT 5 ms Unit dBm

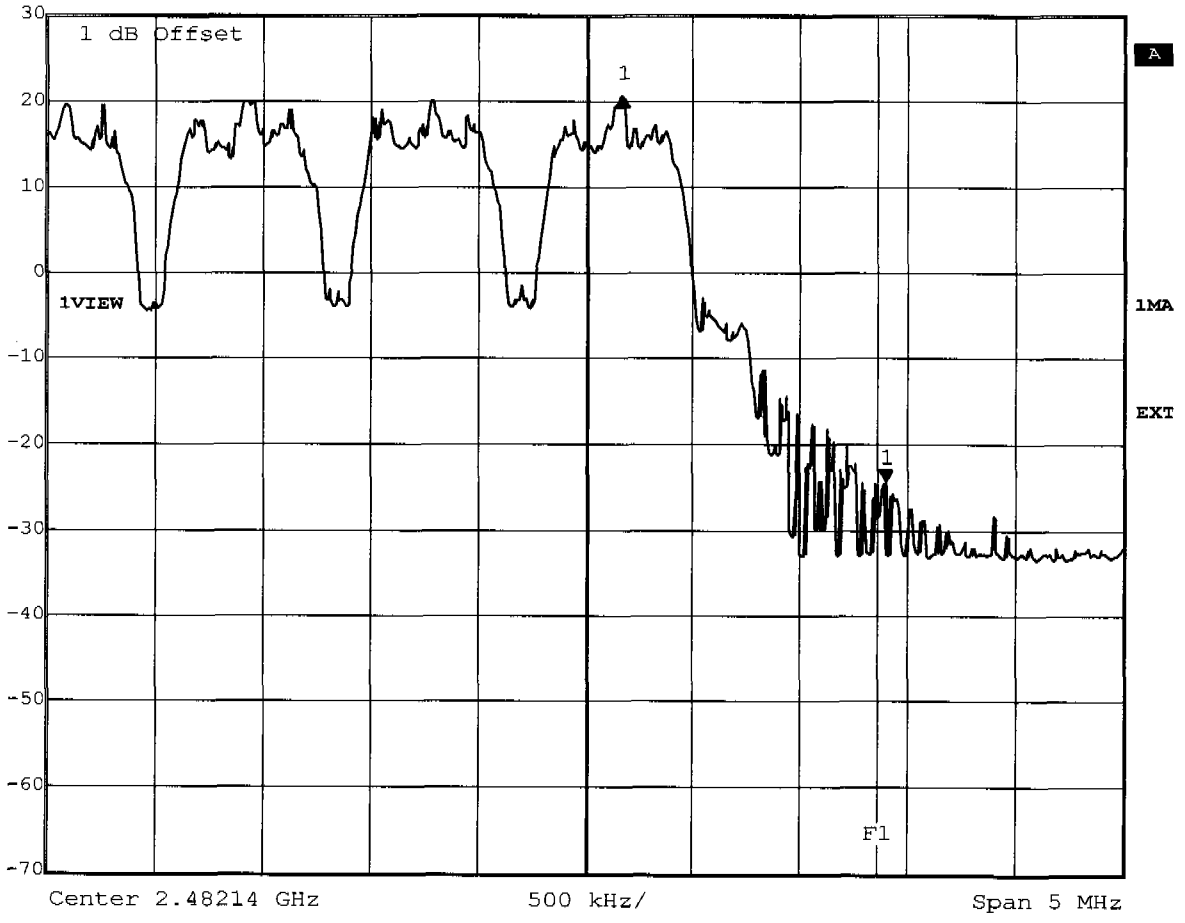

Title: Band-edge Compliance (conducted, hopping mode)
Comment A: USB7100 / 7200 Handset
Date: 19.JUL.2005 08:20:54




Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: 2.4GHz Cordless VoIP Telephone
Manufacturer: RTX Telecom A/S
Operating Condition: Unom: 120VAC(AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (L1)
Comment: model: USB7100 / 7200 mode: charging

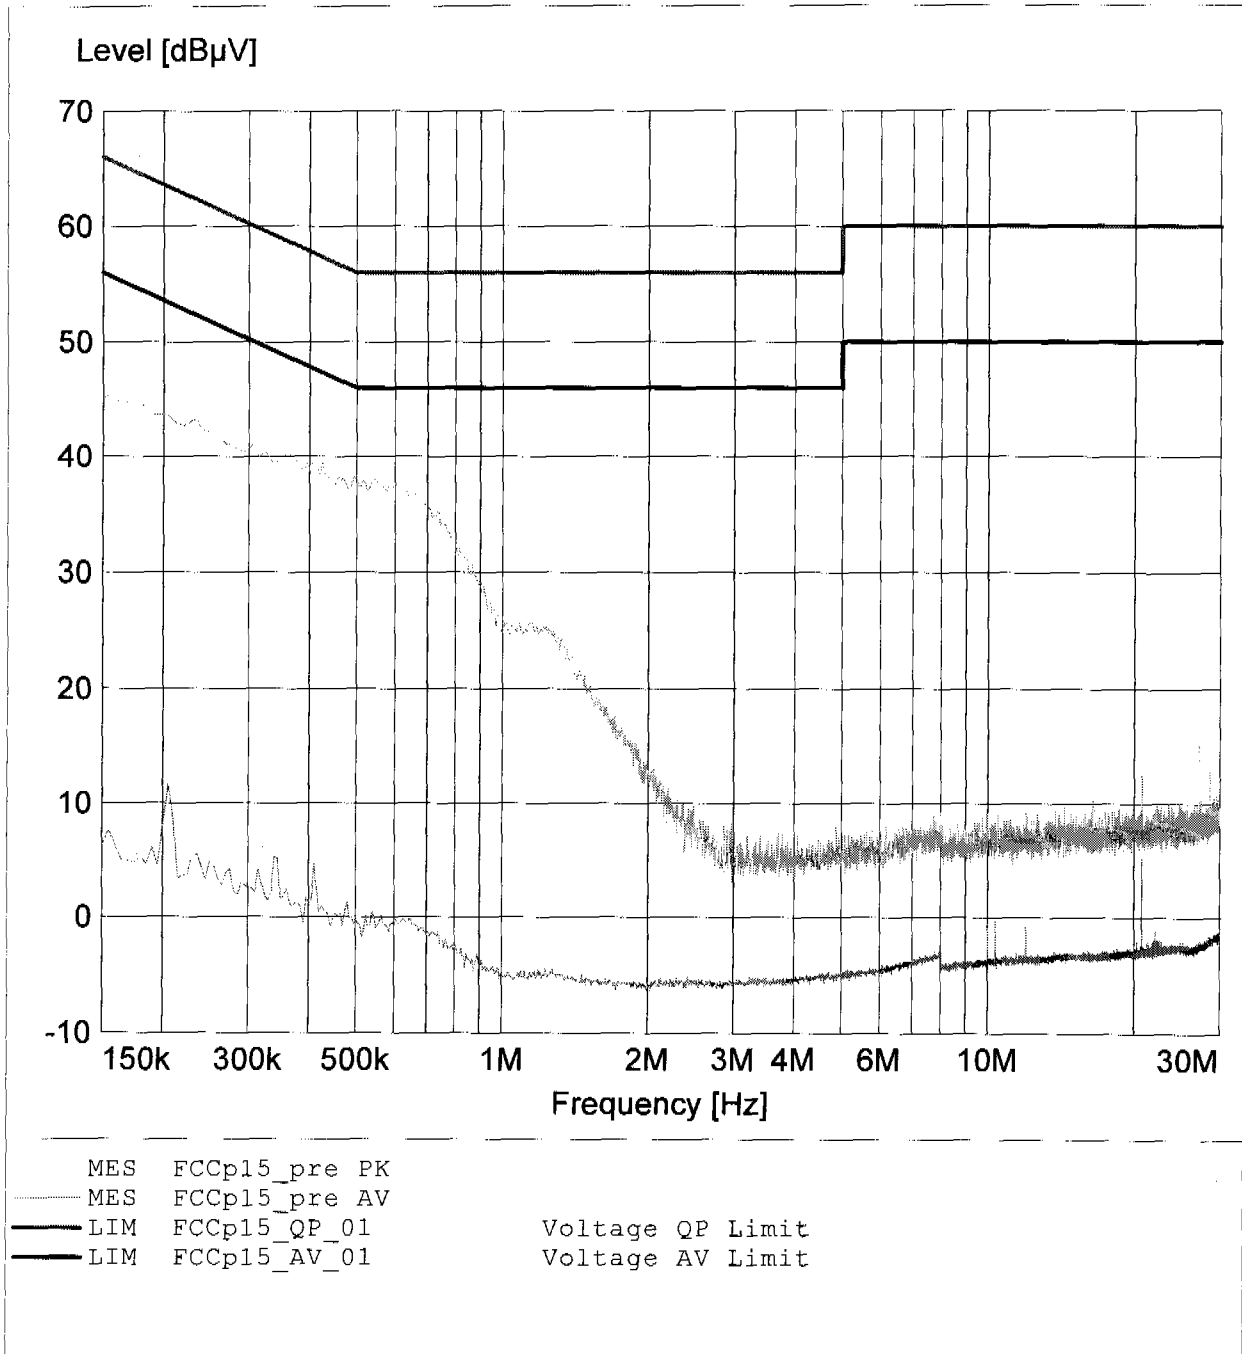

EMI voltage test in the ac-mains according to FCC part 15

EUT: 2.4GHz Cordless VoIP Telephone
Manufacturer: RTX Telecom A/S
Operating Condition: Unom: 120VAC(AC/DC-adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5 (N)
Comment: model: USB7100 / 7200 mode: charging

