

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF 60dB

Final Measurement: x QP / + AV

Meas Time: 1 s

Subranges: 16


Acc Margin: 20dB

Transducer No. Start Stop Name

2 1 9k 30M EW0700

3 9k 30M EW2454

12 9k 30M EW0090

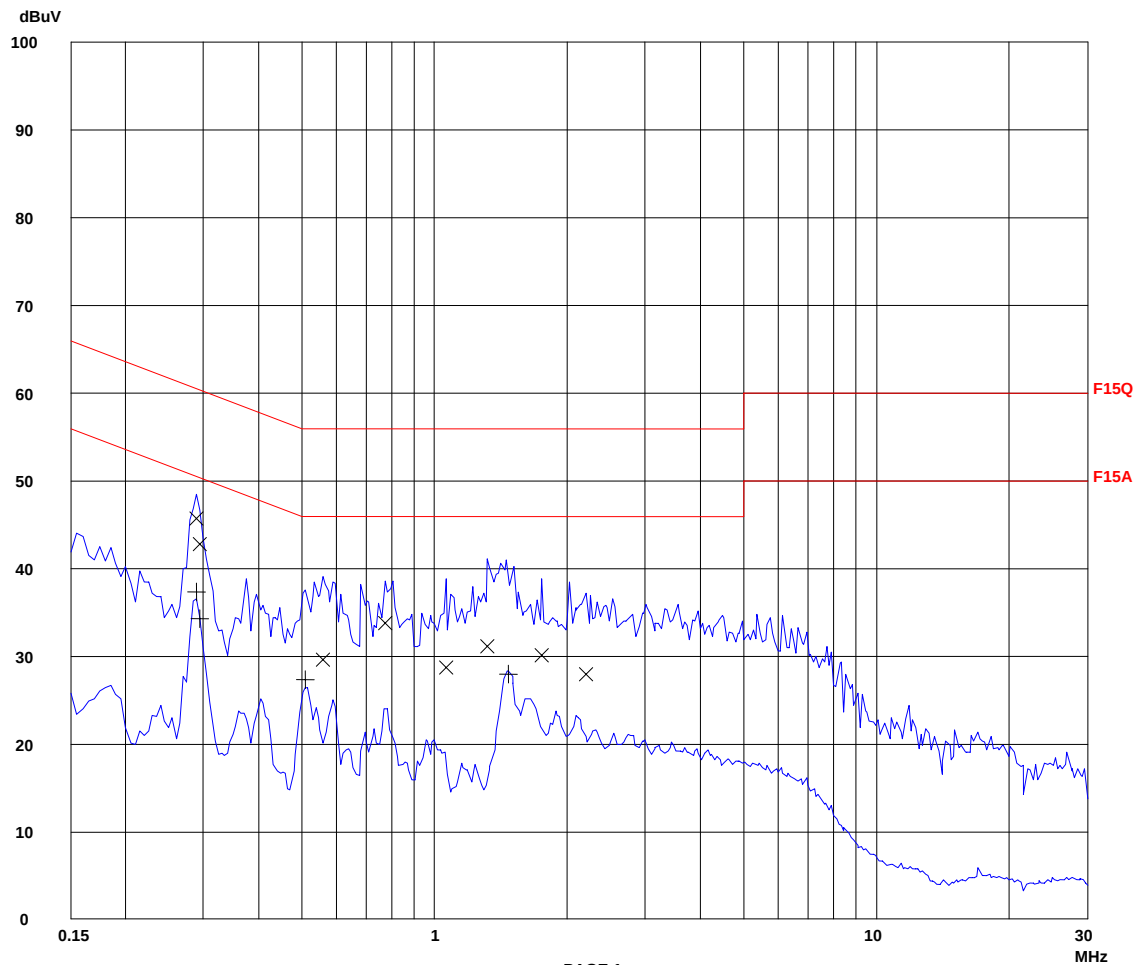



Report No.: HK08090559-1
Speakerphone Talk With
Charging Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.29000	45.7	60.6	-14.9
0.29500	42.8	60.3	-17.5
0.56000	29.5	56.0	-26.5
0.77500	33.7	56.0	-22.3
1.06500	28.6	56.0	-27.4
1.32000	31.0	56.0	-25.0
1.74500	30.0	56.0	-26.0
2.20500	27.9	56.0	-28.1

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.29000	37.3	50.6	-13.3
0.29500	34.3	50.3	-16.0
0.51000	27.2	46.0	-18.8
1.46500	27.9	46.0	-18.1

* limit exceeded