



VTech Telecommunications Ltd.

Application
For
Permissive Change Class II

Unlicensed Personal Communication Service Devices

FCC ID: EW780-6270-00

Test Report Number: 07262291

Issue Date: December 28, 2007

TL/ ac

- The evaluation data of the report will be kept for 3 years from the date of issuance.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Hong Kong Ltd.

2/F., Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong.
Tel: (852) 2173 8888 Fax: (852) 2785 5487 Website: www.hk.intertek-etlsemko.com

LIST OF EXHIBITS

INTRODUCTION

- | | |
|--------------------|---------------------------|
| <i>EXHIBIT 1:</i> | Summary of Tests |
| <i>EXHIBIT 2:</i> | General Description |
| <i>EXHIBIT 3:</i> | System Test Configuration |
| <i>EXHIBIT 4:</i> | Measurement Results |
| <i>EXHIBIT 5:</i> | Equipment Photographs |
| <i>EXHIBIT 6:</i> | Product Labelling |
| <i>EXHIBIT 7:</i> | Technical Specifications |
| <i>EXHIBIT 8:</i> | Instruction Manual |
| <i>EXHIBIT 9:</i> | UTAM Affidavit |
| <i>EXHIBIT 10:</i> | Declaration |
| <i>EXHIBIT 11:</i> | Security Code Information |
| <i>EXHIBIT 12:</i> | Letter of Agency |
| <i>EXHIBIT 13:</i> | Confidentiality Request |

INTERTEK TESTING SERVICES

MEASUREMENT/TECHNICAL REPORT

VTech Telecommunications Ltd. - Model: LS6115, LS6125, LS6126,
LS6115-x, LS6125-x, LS6126-x

FCC ID: EW780-6270-00

This report concerns (check one:) Original Grant Class II Change

Equipment Type : PUB - Part 15 Unlicensed PCS Base Station
PUE - Part 15 Unlicensed PCS portable Tx held to ear

Deferred grant requested per 47 CFR 0.457(d)(1)(ii)? Yes No

If yes, defer until :

_____ Date

Company Name agrees to notify the Commission by: _____ Date

of the intended date of announcement of the product so that the grant can be issued on that date.

Transition Rules Request per 15.37? Yes No

If no, assumed Part 15, Subpart D for Unlicensed Personal Communication Service Device - the new 47 CFR [05-04-07 Edition] Provision.

Report prepared by: Leung Wai Leung, Tommy

Intertek Testing Services Hong Kong Ltd.
2/F., Garment Centre,
576 Castle Peak Road,
Kowloon, Hong Kong.
Phone : 852-2173-8538
Fax: 852-2741-1693

INTERTEK TESTING SERVICES

Table of Contents

1.0 Summary of Test Results	7
2.0 General Description	9
2.1 Product Description	9
2.2 Purpose of Application.....	9
2.3 Test Methodology.....	10
2.4 Test Facility	10
3.0 System Test Configuration	12
3.1 Justification	12
3.2 Conducted Emission Test Configuration	13
3.3 Conducted Monitoring and Operational Test Configuration	13
3.4 EUT Exercising Software.....	13
3.5 Details of EUT and Description of Peripherals	14
3.6 Measurement Uncertainty	15
3.7 Equipment Modification	15
4.0 Measurement Results	17
4.1 Antenna Requirement	17
4.2 Digital Modulation Techniques.....	17
4.3 Emission Bandwidth	18
4.4 Directional Gain of the Antenna	21
4.5 Peak Transmit Power	22
4.6 Unwanted Emission Inside the Sub-Band	25
4.7 Emissions Outside the Sub-Band	27
4.7.1 Radiated Emissions Configuration Photographs	28
4.7.2 Radiated Emissions Data	29
4.7.3 Field Strength Calculation.....	45
4.7.4 Transmitter Duty Cycle Calculation and Measurements	46
4.8 AC Power Lines Conducted Emissions from Transmitter portion of EUT	47
4.8.1 AC Power Lines Conducted Emissions Configuration Photographs.....	48
4.8.2 AC Power Line Conducted Emissions Data	49
4.9 Radiated Emissions from Computing Device Peripheral Portion of EUT.....	50
4.10 AC Power Lines Conducted Emissions from Computing Device Peripheral Portion of EUT.....	51
4.11 Radio Frequency Radiation Exposure.....	52
4.12 Fame Period and Jitter	53
4.13 Monitoring Antenna	54
5.0 Equipment Photographs	56
6.0 Product Labelling	58
7.0 Technical Specifications	60
8.0 Instruction Manual	62

INTERTEK TESTING SERVICES

Table of Contents

9.0 UTAM Affidavit.....	64
10.0 Declaration.....	66
11.0 Security Code Information.....	68
12.0 Letter of Agency	70
13.0 Confidentiality Request	72

INTERTEK TESTING SERVICES

List of Attached Files

Exhibit Type	File Description	Filename
Operational Description	Technical Description	descri.pdf
Operational Description	Purpose of Change	product change.pdf
Test Report	Test Report	report.pdf
Test Report	Emission Bandwidth and Test Frequency Plots	26bw.pdf
Test Report	Peak Transmit Power Plots	peaktp.pdf
Test Report	Unwanted Emission Inside Sub-Band Plots	inband.pdf
Test Report	Duty Cycle Calculation and Measurement	dcc.pdf
Test Report	AC Lines Conducted Emission Data	conduct.pdf
Test Setup Photo	Radiated Emission Test Configuration	config photos.doc
Test Setup Photo	AC Lines Conducted Emission Test Configuration	
RF Exposure Info	RF Safety	RF exposure info.pdf
	SAR Report	SAR Report 1 of 2.pdf SAR Report 2 of 2.pdf
External Photos	External Photo	external photos.doc
Internal Photos	Internal Photo	internal photos.doc
ID Label/Location Info	Label Artwork and Location	label.pdf
Cover Letter	Label Location Justification	justification.pdf
Block Diagrams	Block Diagram	block.pdf
Schematics	Circuit Diagram	circuit.pdf
User Manual	User Manual	manual.pdf
Cover Letter	UTAM affidavit	utam.pdf
Attestation Statement	Declaration	declaration.pdf
Operational Description	Security Code Information	security code information.pdf
Cover Letter	Letter of Agency	letter of agency.pdf
Cover Letter	Confidentiality Request	request.pdf

**EXHIBIT 1
SUMMARY OF TEST RESULTS**

INTERTEK TESTING SERVICES

1.0 Summary of Test Results

**VTech Telecommunications Ltd. - Model: LS6115, LS6125, LS6126,
LS6115-x, LS6125-x, LS6126-x**

FCC ID: EW780-6270-00

Technical Requirements				
Test Items	FCC Part 15 Section	Test Procedure ANSI C63.17 / ANSI C63.4	Results	Details see section
Antenna Requirement	15.317	---	Pass	4.1
Digital Modulation Techniques	15.319(b)	6.1.4	Pass	4.2
Emission Bandwidth	15.323(a)	6.1.3	Pass	4.3
Directional Gain of the Antenna	15.319(e)	4.3.1	Pass	4.4
Peak Transmit Power	15.319(c)	6.1.2	Pass	4.5
AC Power Lines Conducted Emissions from Transmitter Portion of EUT	15.315	7 *	Pass	4.8
Radiated Emissions from Computing Device Peripheral Portion of EUT	15.109(a)	8 *	NA	4.9
AC Power Lines Conducted Emissions from Computing Device Peripheral Portion of EUT	15.107(a)	7 *	NA	4.10
Radio Frequency Radiation Exposure	15.319(i)	---	Pass	4.11
Unwanted Emission Inside the Sub-Band	15.323(d)	6.1.6.1	Pass	4.6
Emissions Outside the Sub-Band	15.323(d)	6.1.6.2	Pass	4.7
Monitoring Antenna	15.323(c)(8)	4	Pass	4.16

Test Engineer:



Ken Sit
Supervisor

Date: December 28, 2007

Approved By:



Leung Wai Leung, Tommy
Senior Manager

Date: December 28, 2007

**EXHIBIT 2
GENERAL DESCRIPTION**

INTERTEK TESTING SERVICES

2.0 General Description

2.1 Product Description

The LS6115-2 is 1.9GHz Digital Modulation Cordless Phone with Caller ID and Speakerphone, while LS6125-2 is 1.9GHz Digital Modulation Cordless Phone with Caller ID, Speakerphone, and Digital Answering Machine. They operate at frequency range of 1921.536MHz to 1928.448MHz with 5 channels. They are capable of either tone or pulse dialing. Their internal power supply's isolation are accomplished through a power transformer having an adequate dielectric rating. Their circuit wiring are consistent under the requirement of part 68.

The antennas used in base unit and handset are integral, and the test sample is a prototype.

The circuit description and digital modulation techniques description are saved as filename: descri.pdf

2.2 Purpose of Application

The purpose of change is saved as filename: product change.pdf

For Model: LS6115-2 and LS6125-2, the RF module and algorithm are the same as the previously granted Model: DS6111 and DS6121 respectively. Enclosure, RF and baseband, PCB layout and antenna are changed.

The Model: LS6115 and LS6115-x are the same as the Model: LS6115-2 in hardware aspects.

The Model: LS6125 and LS6125-x are the same as the Model: LS6125-2 in hardware aspects.

The Model: LS6126 and LS6126-x are the same as the Model: LS6125-2 in hardware aspects.

Suffix "x" followed by the model number represents number of handsets packed in the package. The difference in model number serves as the marketing strategy.

The RF module with antenna, algorithm and Listen-Before-Transmit protocol among all models are identical. The Base PCB layout and outlook is slightly different; LS6125, LS6125-x, LS6126 and LS6126-x have an extra Digital Telephone Answering Machine on the Base Unit, whereas LS6115 and LS6115-x do not.

The Handsets are identical among models as follows electrical designs, including software and firmware, PCB layout and construction design/ physical design/ enclosure.

Connection between the base unit and the telephone network is accomplished through the use of USOC RJ11C in the 2-wire loop calling central office line.

This is an application for Certification of a PUB - Part 15 Unlicensed PCS Base Station, PUE - Part 15 Unlicensed PCS portable Tx held to ear. The device is also subject to Part 68 Registration. A Verification report has been prepared for the digital device portion.

INTERTEK TESTING SERVICES

2.3 Test Methodology

The radiated emission measurements for unintentional radiator and AC power line-conducted emission measurements were performed according to the test procedures specified in ANSI C63.4 (2003). The radiated emission measurements for intentional radiator contained in UPCS device, and antenna conducted measurements were performed according to the test procedures specified in ANSI C63.17 (2006). All radiated measurements were performed in Open Area Test Sites. Preliminary scans were performed in the Open Area Test Sites only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "Justification Section" of this Application. All other measurements were made in accordance with the procedures in 47 CFR Part 2.

2.4 Test Facility

The open area test site and conducted measurement facility used to collect the emission data is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC.

**EXHIBIT 3
SYSTEM TEST CONFIGURATION**

INTERTEK TESTING SERVICES

3.0 System Test Configuration

3.1 Justification

For emissions testing, the equipment under test (EUT) was setup to transmit continuously in burst mode with pseudo-random data to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst-case emissions. The handset (if any) was powered by a fully charged battery.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the base unit attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Detector function was in peak mode. Radiated emissions are taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

The spectrum analyzer resolution bandwidth was approximately 1% of the EUT emission bandwidth, unless otherwise specified.

Radiated emission measurements were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

As the base unit has 2 antennas, both have been checked. While conducting the test on one of antennas, another one was being disable its transmission. The data in this report represented the worst-case.

INTERTEK TESTING SERVICES

3.2 Conducted Emission Test Configuration

The setup and equipment setting were made in accordance with ANSI C63.17. The antenna of EUT transmitter was replaced by a coaxial cable. The impedance matching of connection, cable loss and external RF attenuator are taken into account. The EUT was arranged to communicate via a fixed carrier frequency between its transmitter and a companion device. The transmission was configured in burst mode with pseudo-random data as typical as normal operation.

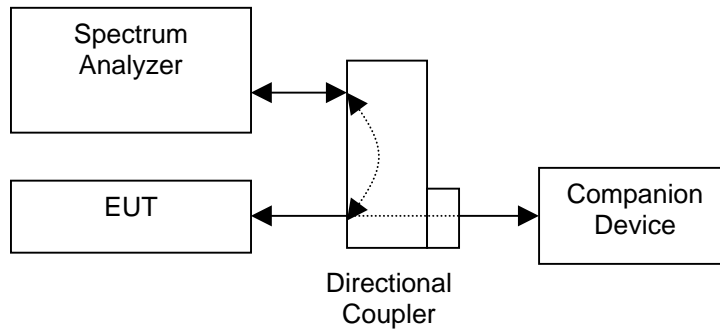


Figure 3.2.1

3.3 Conducted Monitoring and Operational Test Configuration

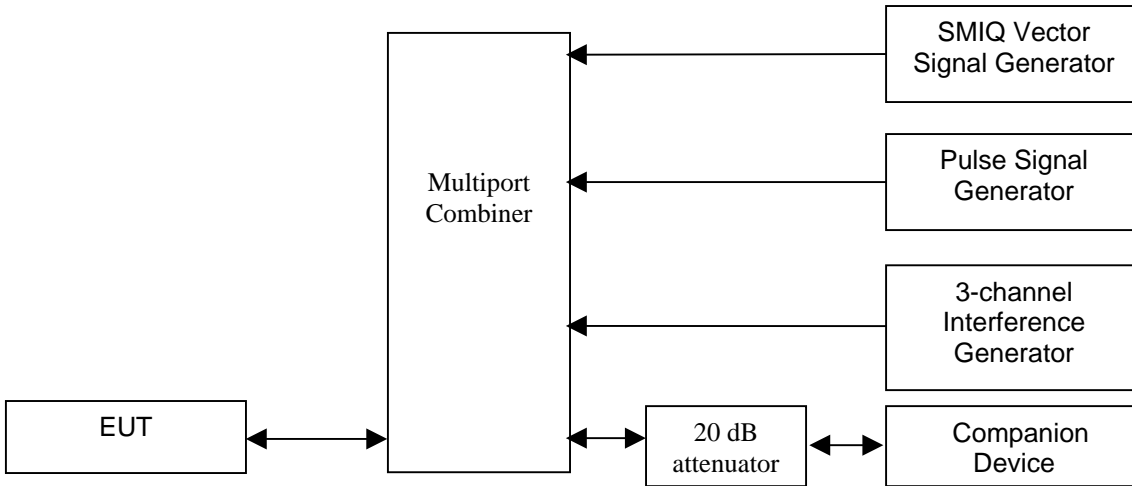


Figure 3.3.1

3.4 EUT Exercising Software

The EUT exercise program (if any) used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

INTERTEK TESTING SERVICES

3.5 Details of EUT and Description of Peripherals

Details of EUT:

An AC adaptor and/or a battery (provided with the unit) were used to power the device. Their description are listed below.

- (1) For Model LS6115-2: An AC adaptor (117VAC to 6VDC 300mA, Model: U060030D12) (Supplied by Client)
- (2) For Model LS6125-2: An AC adaptor (117VAC to 6VDC 400mA, Model: U060040D) (Supplied by Client)
- (3) Handset: A "Ni-MH" Type Rechargeable Battery Pack (2.4V 500mAh, 550mAh, 600mAh) (Supplied by Client)

Description of Peripherals:

- (1) Telecommunication cable with RJ11C connectors (1m, unshielded), terminated (Supplied by Intertek)

INTERTEK TESTING SERVICES

3.6 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty test has been considered.

Uncertainty and Compliance - Unless the standard specifically states that measured values are to be extended by the measurement uncertainty in determining compliance, all compliance determinations are based on the actual measured value.

3.7 Equipment Modification


Any modifications installed previous to testing by VTech Telecommunications Ltd. will be incorporated in each production model sold/leased in the United States.

No modifications were installed by Commercial and Electrical Division, Intertek Testing Services Hong Kong Ltd.

All the items listed under section 3.0 of this report are confirmed by:

Confirmed by:

*Leung Wai Leung, Tommy
Senior Manager
Intertek Testing Services Hong Kong Ltd.
Agent for VTech Telecommunications Ltd.*



Signature

December 28, 2007 Date

**EXHIBIT 4
MEASUREMENT RESULTS**

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.0 **Measurement Results**

4.1 Antenna Requirement, FCC Rule 15.317:

EUT must meet the antenna requirement of FCC Rule 15.203.

EUT uses a permanently attached antenna which is considered sufficient to comply with the provisions of this rule. Please refer to Exhibit 5: Internal Photos for more details.

EUT uses a unique antenna jack or electrical connector which is considered sufficient to comply with the provisions of this rule. Please refer to Exhibit 5: Internal Photos for more details.

4.2 Digital Modulation Techniques, FCC Rule 15.319(b):

All transmissions must use only digital modulation techniques.

The requirements are made in accordance with ANSI C63.17 sub-clause 6.1.4.

Attestation:

Please refer to the technical description in section 2.2 or relevant DECT standards for more details.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2

4.3 Emission Bandwidth, FCC Rule 15.323(a):

Operation shall be contained within the 1920 – 1930 MHz band. The emission bandwidth (*B*) shall be less than 2.5 MHz and greater than 50 kHz.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.3. Test setup is shown in section 3.2 Figure 3.2.1.

Test Results - Base Unit:

I. Traffic Carrier

Channel	Channel Frequency (MHz)	Measuring Signal Level	Measured Emission Bandwidth (MHz)	Results
Lowest	1921.536	26 dB down	1.52	Pass
Highest	1928.448	26 dB down	1.51	Pass

II. Dummy Carrier

Channel	Channel Frequency (MHz)	Measuring Signal Level	Measured Emission Bandwidth (MHz)	Results
Lowest	1921.536	26 dB down	1.39	Pass
Highest	1928.448	26 dB down	1.42	Pass

Please refer to the attached plots for more details:

Plot B1A1: Lowest Channel 26dB Emission Bandwidth (Traffic Carrier)

Plot B1D1: Highest Channel 26dB Emission Bandwidth (Traffic Carrier)

Plot B1G1: Lowest Channel 26dB Emission Bandwidth (Dummy Carrier)

Plot B1J1: Highest Channel 26dB Emission Bandwidth (Dummy Carrier)

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2

4.3 Emission Bandwidth, FCC Rule 15.323(a): - Continue

Operation shall be contained within the 1920 – 1930 MHz band. The emission bandwidth (*B*) shall be less than 2.5 MHz and greater than 50 kHz.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.3. Test setup is shown in section 3.2 Figure 3.2.1.

Test Results - Base Unit:

I. Traffic Carrier

Channel	Channel Frequency (MHz)	Measuring Signal Level	Measured Emission Bandwidth (MHz)	Results
Lowest	1921.536	26 dB down	1.51	Pass
Highest	1928.448	26 dB down	1.52	Pass

II. Dummy Carrier

Channel	Channel Frequency (MHz)	Measuring Signal Level	Measured Emission Bandwidth (MHz)	Results
Lowest	1921.536	26 dB down	1.47	Pass
Highest	1928.448	26 dB down	1.42	Pass

Please refer to the attached plots for more details:

Plot B1A2: Lowest Channel 26dB Emission Bandwidth (Traffic Carrier)
Plot B1D2: Highest Channel 26dB Emission Bandwidth (Traffic Carrier)
Plot B1G2: Lowest Channel 26dB Emission Bandwidth (Dummy Carrier)
Plot B1J2: Highest Channel 26dB Emission Bandwidth (Dummy Carrier)

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2

4.3 Emission Bandwidth, FCC Rule 15.323(a): - Continue

Operation shall be contained within the 1920 – 1930 MHz band. The emission bandwidth (*B*) shall be less than 2.5 MHz and greater than 50 kHz.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.3. Test setup is shown in section 3.2 Figure 3.2.1.

Test Results - Handset:

I. Traffic Carrier

Channel	Channel Frequency (MHz)	Measuring Signal Level	Measured Emission Bandwidth (MHz)	Results
Lowest	1921.536	26 dB down	1.51	Pass
Highest	1928.448	26 dB down	1.49	Pass

Please refer to the attached plots for more details:

Plot H1A: Lowest Channel 26dB Emission Bandwidth (Traffic Carrier)

Plot H1D: Highest Channel 26dB Emission Bandwidth (Traffic Carrier)

The plots of emission bandwidth and test frequency are saved as filename: 26bw.pdf

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.4 Directional Gain of the Antenna, FCC Rule FCC 15.319(e):

The peak transmit power shall be reduced by the amount in dB that the maximum directional gain of the antenna exceeds 3 dBi.

The requirements are made in accordance with ANSI C63.17 sub-clause 4.3.1.

Manufacturer declares that the directional gain of the antenna is less than or equal to 3dBi. No peak transmit power reduction is required.

Manufacturer declares that the directional gain of the antenna is greater than 3dBi. The peak transmit power shall be reduced by _____ dB.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2

4.5 Peak Transmit Power, FCC Rule 15.319(c):

The peak transmit power (P_{EUT}) shall not exceed $100\mu\text{W}$ multiplied by the square root of the emission bandwidth (B) in Hz or $5 \log_{10} B - 10$ dBm. The peak transmit power shall be reduced by the amount in dB that the maximum directional gain of the antenna exceeds 3 dBi.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.2. Test setup is shown in section 3.2 Figure 3.2.1. The cable loss and/or external attenuation are included in OFFSET function of spectrum analyzer.

Calculation of Peak Transmit Power Limit (P_{max}):

$$\begin{aligned} [\times] \quad P_{max} &= 5 \log_{10} B - 10 \text{ dBm} && \text{when } G_A \leq 3\text{dBi} \\ [\quad] \quad P_{max} &= 5 \log_{10} B - 10 \text{ dBm} - (G_A - 3\text{dBi}) && \text{when } G_A > 3\text{dBi} \end{aligned}$$

Where G_A = EUT Antenna Gain: 0 dBi

B = Measured Emission Bandwidth: (26dB down BW) in Hz

Test Results - Base Unit:

I. Traffic Carrier

Channel	Channel Frequency (MHz)	Measured Peak Transmit Power (dBm)	Limit (dBm)	Results
Lowest	1921.536	19.24	20.91	Pass
Highest	1928.448	19.21	20.89	Pass

II. Dummy Carrier

Channel	Channel Frequency (MHz)	Measured Peak Transmit Power (dBm)	Limit (dBm)	Results
Lowest	1921.536	19.21	20.72	Pass
Highest	1928.448	19.21	20.76	Pass

Please refer to the attached plots for more details:

Plot B2A1: Lowest Channel Peak Transmit Power (Traffic Carrier)

Plot B2B1: Highest Channel Peak Transmit Power (Traffic Carrier)

Plot B2C1: Lowest Channel Peak Transmit Power (Dummy Carrier)

Plot B2D1: Highest Channel Peak Transmit Power (Dummy Carrier)

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2

4.5 Peak Transmit Power, FCC Rule 15.319(c): - Continue

The peak transmit power (P_{EUT}) shall not exceed $100\mu\text{W}$ multiplied by the square root of the emission bandwidth (B) in Hz or $5 \log_{10} B - 10$ dBm. The peak transmit power shall be reduced by the amount in dB that the maximum directional gain of the antenna exceeds 3 dBi.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.2. Test setup is shown in section 3.2 Figure 3.2.1. The cable loss and/or external attenuation are included in OFFSET function of spectrum analyzer.

Calculation of Peak Transmit Power Limit (P_{max}):

$$\begin{aligned} [\times] \quad P_{max} &= 5 \log_{10} B - 10 \text{ dBm} && \text{when } G_A \leq 3\text{dBi} \\ [\quad] \quad P_{max} &= 5 \log_{10} B - 10 \text{ dBm} - (G_A - 3\text{dBi}) && \text{when } G_A > 3\text{dBi} \end{aligned}$$

Where G_A = EUT Antenna Gain: 0 dBi

B = Measured Emission Bandwidth: (26dB down BW) in Hz

Test Results - Base Unit:

I. Traffic Carrier

Channel	Channel Frequency (MHz)	Measured Peak Transmit Power (dBm)	Limit (dBm)	Results
Lowest	1921.536	19.47	20.89	Pass
Highest	1928.448	19.32	20.91	Pass

II. Dummy Carrier

Channel	Channel Frequency (MHz)	Measured Peak Transmit Power (dBm)	Limit (dBm)	Results
Lowest	1921.536	19.44	20.84	Pass
Highest	1928.448	19.32	20.76	Pass

Please refer to the attached plots for more details:

Plot B2A2: Lowest Channel Peak Transmit Power (Traffic Carrier)

Plot B2B2: Highest Channel Peak Transmit Power (Traffic Carrier)

Plot B2C2: Lowest Channel Peak Transmit Power (Dummy Carrier)

Plot B2D2: Highest Channel Peak Transmit Power (Dummy Carrier)

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2

4.5 Peak Transmit Power, FCC Rule 15.319(c): - Continue

The peak transmit power (P_{EUT}) shall not exceed $100\mu\text{W}$ multiplied by the square root of the emission bandwidth (B) in Hz or $5 \log_{10} B - 10$ dBm. The peak transmit power shall be reduced by the amount in dB that the maximum directional gain of the antenna exceeds 3 dBi.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.2. Test setup is shown in section 3.2 Figure 3.2.1. The cable loss and/or external attenuation are included in OFFSET function of spectrum analyzer.

Calculation of Peak Transmit Power Limit (P_{max}):

$$[\times] \quad P_{max} = 5 \log_{10} B - 10 \text{ dBm} \quad \text{when } G_A \leq 3\text{dBi}$$

$$[\quad] \quad P_{max} = 5 \log_{10} B - 10 \text{ dBm} - (G_A - 3\text{dBi}) \quad \text{when } G_A > 3\text{dBi}$$

Where G_A = EUT Antenna Gain: 0 dBi

B = Measured Emission Bandwidth: (26dB down BW) in Hz

Test Results - Handset:

I. Traffic Carrier

Channel	Channel Frequency (MHz)	Measured Peak Transmit Power (dBm)	Limit (dBm)	Results
Lowest	1921.536	19.93	20.89	Pass
Highest	1928.448	19.90	20.87	Pass

Please refer to the attached plots for more details:

Plot H2A: Lowest Channel Peak Transmit Power (Traffic Carrier)

Plot H2B: Highest Channel Peak Transmit Power (Traffic Carrier)

The plots of peak transmit power are saved as filename: peaktp.pdf

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.6 Unwanted Emission Inside the Sub-Band, FCC Rule 15.323(d):

Emissions inside the sub-band must comply with the following emission mask:

1. In the bands between $1B$ and $2B$ measured from the center of the emission bandwidth, emission shall be at least 30 dB below the permitted peak transmit power; i.e. -9.5 dBm
2. In the bands between $2B$ and $3B$ measured from the center of the emission bandwidth, emission shall be at least 50 dB below the permitted peak transmit power; i.e. -29.5 dBm
3. In the bands between $3B$ and the band edge, emission shall be at least 60 dB below the permitted peak transmit power. i.e. -39.5 dBm

Where B = emission bandwidth in Hz

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.6.1. Test setup is shown in section 3.2 Figure 3.2.1.

Test Results:

I. Traffic Carrier - Base Unit

Channel	Channel Frequency (MHz)	Results
Lowest	1921.536	Pass
Highest	1928.448	Pass

II. Dummy Carrier - Base Unit

Channel	Channel Frequency (MHz)	Results
Lowest	1921.536	Pass
Highest	1928.448	Pass

III. Traffic Carrier - Handset

Channel	Channel Frequency (MHz)	Results
Lowest	1921.536	Pass
Highest	1928.448	Pass

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.6 Unwanted Emission Inside the Sub-Band, FCC Rule 15.323(d): - Continue

Please refer to the attached plots for more details:

Model: LS6115-2 - Base Unit

Plot B4A1: Lowest Channel Unwanted Emission Inside the Sub-Band (Traffic Carrier)

Plot B4B1: Highest Channel Unwanted Emission Inside the Sub-Band (Traffic Carrier)

Plot B4C1: Lowest Channel Unwanted Emission Inside the Sub-Band (Dummy Carrier)

Plot B4D1: Highest Channel Unwanted Emission Inside the Sub-Band (Dummy Carrier)

Model: LS6125-2 - Base Unit

Plot B4A2: Lowest Channel Unwanted Emission Inside the Sub-Band (Traffic Carrier)

Plot B4B2: Highest Channel Unwanted Emission Inside the Sub-Band (Traffic Carrier)

Plot B4C2: Lowest Channel Unwanted Emission Inside the Sub-Band (Dummy Carrier)

Plot B4D2: Highest Channel Unwanted Emission Inside the Sub-Band (Dummy Carrier)

Handset:

Plot H4A: Lowest Channel Unwanted Emission Inside the Sub-Band (Traffic Carrier)

Plot H4B: Highest Channel Unwanted Emission Inside the Sub-Band (Traffic Carrier)

The plots of the unwanted emission inside the sub-band are saved as filename:
inband.pdf

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.7 Emissions Outside the Sub-Band, FCC Rule 15.323(d):

Emissions outside the sub-band shall be attenuated below a reference power of 112 mW (20.5 dBm) as follows:

1. 30 dB between the band edge and 1.25 MHz above or below the band;
2. 50 dB between 1.25 and 2.5 MHz above or below the band; and
3. 60 dB at 2.5 MHz or greater above or below the band, or shall not exceed the limits of FCC Rule 15.209.

Example: Calculation of Limit for emissions between the band edge and 1.25 MHz (1920.000 – 1918.750 MHz)

The emissions shall not exceed the Limit: 20.5 dBm – 30 dB = -9.5 dBm

Measurements are made in accordance with ANSI C63.17 sub-clause 6.1.6.2. As EUT has non-detachable antenna(s), radiated emissions test method is used for out-of-band emissions tests. Emissions that are directly caused by digital circuits in the transmit path and transmitter portion are measured. Test setup and procedures are described in section 3.2 Figure 3.2.1.

Test Results - Base Unit & Handset:

Channel	Carrier Frequency (MHz)	Measured Band (MHz)	Limit (dBm)	Results
Lowest	1921.536	1920.000 - 1918.750	-9.5	Pass
		1918.750 - 1917.500	-29.5	Pass
		0.009 - 1917.500 & 1932.500 - 19300.000	-39.5 / FCC Rule 15.209	Pass
Highest	1928.448	1930.000 - 1931.250	-9.5	Pass
		1931.250 - 1932.500	-29.5	Pass
		0.009 - 1917.500 & 1932.500 - 19300.000	-39.5 / FCC Rule 15.209	Pass

Please refer to the section 4.7.1 to 4.7.4 for more details.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2
Mode: Transmission

4.7.1 Radiated Emissions Configuration Photographs:

Worst Case Radiated Emission
at

Base Unit for LS6115-2 & LS6125-2: 3843.072 MHz

Handset: 5785.344 MHz

The worst case radiated emission configuration photographs are saved as filename:
cofing photos.doc.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2
Mode: Transmission

4.7.2 Radiated Emissions Data:

Data are included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

The data in table 1-15 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Base Unit for LS6115-2: Passed by 1.7 dB margin compare with the average limit

Base Unit for LS6125-2: Passed by 1.5 dB margin compare with the average limit

Handset: Passed by 5.1 dB margin compare with the peak limit

TEST ENGINEER:



Signature

Ken Sit, Supervisor
Typed/Printed Name

December 28, 2007
Date

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2
Mode: Transmission

Table 1, Base Unit

Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Lowest Channel:

Polari- zation	Frequency (MHz)	Emission Level at 3m (dBm)	Limit (dBm)	Margin (dB)
H	1919.851	-41.8	-9.5	-32.3
H	1917.865	-48.8	-29.5	-19.3
H	1917.102	-51.0	-39.5	-11.5

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
 Model: LS6115-2
 Mode: Transmission

Table 2, Base Unit

Radiated Emissions Data Pursuant To FCC Part 15 Section 15.209 Emissions Requirements

Lowest Channel:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (-dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	1281.024	51.4	33	26.1	44.5	15.9	28.6	54.0	-25.4
H	2562.048	47.4	33	30.4	44.8	15.9	28.9	54.0	-25.1
H	3843.072	67.9	33	33.3	68.2	15.9	52.3	54.0	-1.7
H	5764.608	55.8	33	36.6	59.4	15.9	43.5	54.0	-10.5
H	7686.144	59.5	33	38.9	65.4	15.9	49.5	54.0	-4.5
H	9607.680	50.0	33	40.4	57.4	15.9	41.5	54.0	-12.5
H	11529.216	45.7	33	40.5	53.2	15.9	37.3	54.0	-16.7
H	13450.752	40.0	33	41.9	48.9	15.9	33.0	54.0	-21.0

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	1281.024	51.4	33	26.1	44.5	74.0	-29.5
H	2562.048	47.4	33	30.4	44.8	74.0	-29.2
H	3843.072	67.9	33	33.3	68.2	74.0	-5.8
H	5764.608	55.8	33	36.6	59.4	74.0	-14.6
H	7686.144	59.5	33	38.9	65.4	74.0	-8.6
H	9607.680	50.0	33	40.4	57.4	74.0	-16.6
H	11529.216	45.7	33	40.5	53.2	74.0	-20.8
H	13450.752	40.0	33	41.9	48.9	74.0	-25.1

NOTES:

1. Peak detector is used for the emission measurement over 1000 MHz.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2
Mode: Transmission

Table 3, Base Unit

Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Highest Channel:

Polari- zation	Frequency (MHz)	Emission Level at 3m (dBm)	Limit (dBm)	Margin (dB)
H	1930.015	-42.0	-9.5	-32.5
H	1931.686	-48.9	-29.5	-19.4
H	1933.471	-51.1	-39.5	-11.6

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
 Model: LS6115-2
 Mode: Transmission

Table 4, Base Unit

Radiated Emissions Data Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Highest Channel:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (-dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	1285.632	51.7	33	26.1	44.8	15.9	28.9	54.0	-25.1
H	2571.264	47.2	33	30.4	44.6	15.9	28.7	54.0	-25.3
H	3856.896	67.8	33	33.3	68.1	15.9	52.2	54.0	-1.8
H	5785.344	56.0	33	36.6	59.6	15.9	43.7	54.0	-10.3
H	7713.792	59.3	33	38.9	65.2	15.9	49.3	54.0	-4.7
H	9642.240	50.0	33	40.4	57.4	15.9	41.5	54.0	-12.5
H	11570.688	45.7	33	40.5	53.2	15.9	37.3	54.0	-16.7
H	13499.136	39.7	33	41.9	48.6	15.9	32.7	54.0	-21.3

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	1285.632	51.7	33	26.1	44.8	74.0	-29.2
H	2571.264	47.2	33	30.4	44.6	74.0	-29.4
H	3856.896	67.8	33	33.3	68.1	74.0	-5.9
H	5785.344	56.0	33	36.6	59.6	74.0	-14.4
H	7713.792	59.3	33	38.9	65.2	74.0	-8.8
H	9642.240	50.0	33	40.4	57.4	74.0	-16.6
H	11570.688	45.7	33	40.5	53.2	74.0	-20.8
H	13499.136	39.7	33	41.9	48.6	74.0	-25.4

NOTES:

1. Peak detector is used for the emission measurement over 1000 MHz.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2
Mode: Transmission

Table 5, Base Unit

Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Lowest Channel:

Polari- zation	Frequency (MHz)	Emission Level at 3m (dBm)	Limit (dBm)	Margin (dB)
H	1919.880	-43.1	-9.5	-33.6
H	1918.605	-45.4	-29.5	-15.9
H	1917.001	-46.9	-39.5	-7.4

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
 Model: LS6125-2
 Mode: Transmission

Table 6, Base Unit

Radiated Emissions Data Pursuant To FCC Part 15 Section 15.209 Emissions Requirements

Lowest Channel:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (-dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	1281.024	51.7	33	26.1	44.8	15.9	28.9	54.0	-25.1
H	3843.072	68.1	33	33.3	68.4	15.9	52.5	54.0	-1.5
H	5764.608	64.4	33	36.6	68.0	15.9	52.1	54.0	-1.9
H	7686.144	56.1	33	38.9	62.0	15.9	46.1	54.0	-7.9
H	9607.680	51.6	33	40.4	59.0	15.9	43.1	54.0	-10.9
H	11529.216	50.1	33	40.5	57.6	15.9	41.7	54.0	-12.3

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	1281.024	51.7	33	26.1	44.8	74.0	-29.2
H	3843.072	68.1	33	33.3	68.4	74.0	-5.6
H	5764.608	64.4	33	36.6	68.0	74.0	-6.0
H	7686.144	56.1	33	38.9	62.0	74.0	-12.0
H	9607.680	51.6	33	40.4	59.0	74.0	-15.0
H	11529.216	50.1	33	40.5	57.6	74.0	-16.4

NOTES:

1. Peak detector is used for the emission measurement over 1000 MHz.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2
Mode: Transmission

Table 7, Base Unit

**Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements**

Highest Channel:

Polari- zation	Frequency (MHz)	Emission Level at 3m (dBm)	Limit (dBm)	Margin (dB)
H	1930.805	-39.7	-9.5	-30.2
H	1931.390	-44.8	-29.5	-15.3
H	1932.600	-45.9	-39.5	-6.4

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
 Model: LS6125-2
 Mode: Transmission

Table 8, Base Unit

Radiated Emissions Data Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Highest Channel:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (-dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	1285.632	52.4	33	26.1	45.5	15.9	29.6	54.0	-24.4
H	3856.896	67.7	33	33.3	68.0	15.9	52.1	54.0	-1.9
H	5785.344	64.1	33	36.6	67.7	15.9	51.8	54.0	-2.2
H	7713.792	56.2	33	38.9	62.1	15.9	46.2	54.0	-7.8
H	9642.240	52.1	33	40.4	59.5	15.9	43.6	54.0	-10.4
H	11570.688	50.0	33	40.5	57.5	15.9	41.6	54.0	-12.4

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	1285.632	52.4	33	26.1	45.5	74.0	-28.5
H	3856.896	67.7	33	33.3	68.0	74.0	-6.0
H	5785.344	64.1	33	36.6	67.7	74.0	-6.3
H	7713.792	56.2	33	38.9	62.1	74.0	-11.9
H	9642.240	52.1	33	40.4	59.5	74.0	-14.5
H	11570.688	50.0	33	40.5	57.5	74.0	-16.5

NOTES:

1. Peak detector is used for the emission measurement over 1000 MHz.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2
Mode: Talk

Table 9, Base Unit

Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Polarization	Frequency (MHz)	Emission Level at 3m (dBm)	Limit (dBm)	Margin (dB)
V	41.475	-67.8	-39.5	-28.3
V	55.300	-66.5	-39.5	-27.0
V	82.950	-63.8	-39.5	-24.3
H	124.425	-65.0	-39.5	-25.5
H	193.550	-65.4	-39.5	-25.9
H	276.500	-63.5	-39.5	-24.0
H	345.625	-64.9	-39.5	-25.4

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2
Mode: Talk

Table 10, Base Unit

Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Polarization	Frequency (MHz)	Emission Level at 3m (dBm)	Limit (dBm)	Margin (dB)
V	41.475	-66.3	-39.5	-26.8
V	55.300	-66.6	-39.5	-27.1
V	82.945	-67.8	-39.5	-28.3
H	124.416	-67.9	-39.5	-28.4
H	193.535	-67.3	-39.5	-27.8
H	207.360	-66.3	-39.5	-26.8
H	221.184	-66.5	-39.5	-27.0
H	276.503	-67.4	-39.5	-27.9

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2
Mode: Transmission

Table 11, Handset

Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Lowest Channel:

Polari- zation	Frequency (MHz)	Emission Level at 3m (dBm)	Limit (dBm)	Margin (dB)
V	1919.852	-34.8	-9.5	-25.3
V	1917.864	-49.8	-29.5	-20.3
V	1917.102	-51.6	-39.5	-12.1

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
 Model: LS6125-2
 Mode: Transmission

Table 12, Handset

Radiated Emissions Data Pursuant To FCC Part 15 Section 15.209 Emissions Requirements

Lowest Channel:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (-dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	1281.024	51.2	33	26.1	44.3	28.4	15.9	54.0	-38.1
H	2562.048	52.1	33	30.4	49.5	28.4	21.1	54.0	-32.9
H	3843.072	60.4	33	33.3	60.7	28.4	32.3	54.0	-21.7
H	5764.608	65.0	33	36.6	68.6	28.4	40.2	54.0	-13.8
H	7686.144	53.5	33	38.9	59.4	28.4	31.0	54.0	-23.0
H	9607.680	49.4	33	40.4	56.8	28.4	28.4	54.0	-25.6
H	11529.216	45.7	33	40.5	53.2	28.4	24.8	54.0	-29.2
H	13450.752	40.1	33	41.9	49.0	28.4	20.6	54.0	-33.4

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	1281.024	51.2	33	26.1	44.3	74.0	-29.7
H	2562.048	52.1	33	30.4	49.5	74.0	-24.5
H	3843.072	60.4	33	33.3	60.7	74.0	-13.3
H	5764.608	65.0	33	36.6	68.6	74.0	-5.4
H	7686.144	53.5	33	38.9	59.4	74.0	-14.6
H	9607.680	49.4	33	40.4	56.8	74.0	-17.2
H	11529.216	45.7	33	40.5	53.2	74.0	-20.8
H	13450.752	40.1	33	41.9	49.0	74.0	-25.0

NOTES:

1. Peak detector is used for the emission measurement over 1000 MHz.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2
Mode: Transmission

Table 13, Handset

**Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements**

Highest Channel:

Polari- zation	Frequency (MHz)	Emission Level at 3m (dBm)	Limit (dBm)	Margin (dB)
V	1930.016	-35.8	-9.5	-26.3
V	1931.686	-49.6	-29.5	-20.1
V	1933.476	-51.1	-39.5	-11.6

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
 Model: LS6125-2
 Mode: Transmission

Table 14, Handset

Radiated Emissions Data Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Highest Channel:

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp Gain (dB)	Antenna Factor (dB)	Net at 3m - Peak (dB μ V/m)	Average Factor (-dB)	Calculated at 3m (dB μ V/m)	Average Limit at 3m (dB μ V/m)	Margin (dB)
H	1285.632	51.1	33	26.1	44.2	28.4	15.8	54.0	-38.2
H	2571.264	52.0	33	30.4	49.4	28.4	21.0	54.0	-33.0
H	3856.896	60.5	33	33.3	60.8	28.4	32.4	54.0	-21.6
H	5785.344	65.3	33	36.6	68.9	28.4	40.5	54.0	-13.5
H	7713.792	52.6	33	38.9	58.5	28.4	30.1	54.0	-23.9
H	9642.240	49.5	33	40.4	56.9	28.4	28.5	54.0	-25.5
H	11570.688	45.9	33	40.5	53.4	28.4	25.0	54.0	-29.0
H	13499.136	40.3	33	41.9	49.2	28.4	20.8	54.0	-33.2

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-Amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Peak Limit at 3m (dB μ V/m)	Margin (dB)
H	1285.632	51.1	33	26.1	44.2	74.0	-29.8
H	2571.264	52.0	33	30.4	49.4	74.0	-24.6
H	3856.896	60.5	33	33.3	60.8	74.0	-13.2
H	5785.344	65.3	33	36.6	68.9	74.0	-5.1
H	7713.792	53.6	33	38.9	59.5	74.0	-14.5
H	9642.240	49.5	33	40.4	56.9	74.0	-17.1
H	11570.688	45.9	33	40.5	53.4	74.0	-20.6
H	13499.136	40.3	33	41.9	49.2	74.0	-24.8

NOTES:

1. Peak detector is used for the emission measurement over 1000 MHz.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2
Mode: Talk

Table 15, Handset

Radiated Emissions Data
Pursuant To FCC Part 15 Section 15.323 (d) Emissions Requirements

Polarization	Frequency (MHz)	Emission Level at 3m (dBm)	Limit (dBm)	Margin (dB)
V	41.475	-67.8	-39.5	-28.3
V	55.308	-66.5	-39.5	-27.0
V	82.953	-65.0	-39.5	-25.5
H	124.425	-63.8	-39.5	-24.3
H	193.552	-64.2	-39.5	-24.7
H	276.503	-64.5	-39.5	-25.0
H	345.623	-65.0	-39.5	-25.5

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters.
3. Negative value in the margin column shows emission below limit.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.7.3 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where FS = Field Strength in dB μ V/m
 RA = Receiver Amplitude (including preamplifier) in dB μ V
 CF = Cable Attenuation Factor in dB
 AF = Antenna Factor in dB
 AG = Amplifier Gain in dB
 PD = Pulse Desensitization in dB
 AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example

Assume a receiver reading of 62.0 dB μ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dB μ V/m. This value in dB μ V/m is converted to its corresponding level in μ V/m.

RA = 62.0 dB μ V
AF = 7.4 dB
CF = 1.6 dB
AG = 29.0 dB
PD = 0.0 dB
AV = -10 dB

$$FS = 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m}$$

$$\text{Level in mV/m} = \text{Common Antilogarithm} [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
 Model: LS6115-2, LS6125-2

4.7.4 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The EUT antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to EUT RF channel carrier. The SWEP function on the analyzer was set to ZERO SPAN. The transmitter ON time was determined from the resultant time-amplitude display:

Base Unit: (for handsets, single-slot operation with dummy)

$$\begin{aligned} \text{Duty cycle (DC)} &= \text{Maximum ON time in 10ms/10ms} \\ &= (4 \times 1 \times 0.376\text{ms} + 0.088\text{ms})/10\text{ms} \end{aligned}$$

$$\begin{aligned} \text{Duty cycle correction, dB} &= 20 * \log (\text{DC}) \\ &= 20 * \log (0.1592) \\ &= -15.9 \text{ dB} \end{aligned}$$

X	See attached spectrum analyzer chart (s) for transmitter timing Base Unit: Plot D71 (Base Dummy), Plot B71 (Base Traffic)
	See transmitter timing diagram provided by manufacturer
	Not applicable, duty cycle was not used.

Handset: (single-slot operation)

$$\begin{aligned} \text{Duty cycle (DC)} &= \text{Maximum ON time in 10ms/10ms} \\ &= (1 \times 0.376\text{ms})/10\text{ms} \end{aligned}$$

$$\begin{aligned} \text{Duty cycle correction, dB} &= 20 * \log (\text{DC}) \\ &= 20 * \log (0.0376) \\ &= -28.4 \text{ dB} \end{aligned}$$

X	See attached spectrum analyzer chart (s) for transmitter timing Handset: Plot H71 (Handset Traffic)
	See transmitter timing diagram provided by manufacturer
	Not applicable, duty cycle was not used.

For electronic filing, the above plots are saved with filenames: dcc.pdf

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.8 AC Power Lines Conducted Emissions from Transmitter portion of EUT, FCC Rule 15.315:

The AC power lines conducted emission shall not exceed the limits of FCC Rule 15.207.

Measurements are made in accordance with ANSI C63.4 sub-clause 7. Emissions that are directly caused by digital circuits in the transmit path and transmitter portion are measured.

Not applicable – EUT is only powered by battery for operation.

EUT connects to AC power lines. Emission Data are listed in following pages. Please refer to the section 4.8.1 to 4.8.2 for more details.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2
Mode: Talk

4.8.1 AC Power Lines Conducted Emissions Configuration Photographs:

Worst Case AC Power Line Conducted Emission

The worst case AC power Line conducted emission configuration photographs are saved as filename: config photos.doc

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2
Mode: Talk

4.8.2 AC Power Line Conducted Emissions Data:

The data on the following pages list the significant emission frequencies, the limit, and the margin of compliance.

Judgment: Passed by more than 20 dB margin

The worst case AC power line conducted emission data are saved as filename: conduct.pdf

TEST ENGINEER:



Signature

Ken Sit, Supervisor
Typed/Printed Name

December 28, 2007
Date

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.9 Radiated Emissions from Computing Device Peripheral Portion of EUT, FCC Rule 15.109(a):

EUT includes computing device peripheral circuitry and is subject to the requirements of FCC Part 15 Subpart B. The radiated emission shall not exceed the limits of FCC Rule 15.109(a).

Measurements are made in accordance with ANSI C63.4 sub-clause 8 and section 3.1. Radiated emissions shall be measured with EUT operating in typical operation modes. The spectrum analyzer resolution bandwidth was 100 kHz or greater for frequencies below 1000 MHz.

- Not applicable – No computing device peripheral
- The computing device peripheral portion of EUT is subject to FCC Part 15 Subpart B, Certification. Please refer to the section 4.9.1 for more details.
- The computing device peripheral portion of EUT is subject to FCC Part 15 Subpart B, DoC. Emission Data are included in the separated DoC report.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.10 AC Power Lines Conducted Emissions from Computing Device Peripheral Portion of EUT, FCC Rule 15.107(a):

EUT includes computing device peripheral and is subject to the requirements of FCC Part 15 Subpart B. The AC power lines conducted emission shall not exceed the limits of FCC Rule 15.107(a).

Measurements are made in accordance with ANSI C63.4 sub-clause 7. Conducted emissions shall be measured with EUT operating in typical operation modes.

- Not applicable – No computing device peripheral
- The computing device peripheral portion of EUT is subject to FCC Part 15 Subpart B, Certification. Please refer to the section 4.10.1 for more details.
- The computing device peripheral portion of EUT is subject to FCC Part 15 Subpart B, DoC. Emission Data are included in the separated DoC report.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.11 Radio Frequency Radiation Exposure, FCC Rule 15.319(i):

EUT is subject to the radio frequency exposure requirements specified in FCC Rule §§ 1.1307(b), 2.1091 and 2.1093. It shall be considered to operate in a “general population / uncontrolled” environment.

- [x] Handset Unit: EUT was evaluated for Specific Absorption Rate (SAR) evaluation compliance according to OET Bulletin 65, Supplement C (Edition 01-01). It is in compliance with the SAR evaluation requirements. The caution statement specified in the user manual. A SAR test report was submitted at the same time and saved as SAR report 1 of 2.pdf and SAR report 2 of 2.pdf
- [x] Base Unit: EUT was evaluated for Maximum Permissible Exposure (MPE) evaluation compliance according to OET Bulletin 65, Supplement C (Edition 01-01). The evaluation calculation results are saved as filename: RF exposure info.pdf.

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6125-2

4.12 Frame Period and Jitter, FCC Rule 15.323(e):

The frame period (a set of consecutive time slots in which the position of each time slot can be identified by reference to a synchronizing source) of EUT operating in these sub-bands shall be 20 ms or 10 ms/X where X is a positive whole number.

The jitter (time-related, abrupt, spurious variations in the duration of the frame interval) introduced at the two ends of such a communication link shall not exceed 25 μ s for any two consecutive transmissions. Transmissions shall be continuous in every time and spectrum window during the frame period defined for EUT.

Measurements are made in accordance with ANSI C63.17 sub-clause 6.2.3. Test setup is shown in section 3.2 Figure 3.2.1. A spectrum analyzer measures the time duration between the rising edges of two consecutive frames. The measurements are taken over 100,000 frames. These measurement values are used to compute mean value and the difference between any two consecutive frame periods. The mean value is the frame period.

Test Results:

I. Jitter - Handset

Measured Maximum Jitter (μ s)	Limit (μ s)	Results
-0.2993	± 25	Pass

INTERTEK TESTING SERVICES

Company: VTech Telecommunications Ltd. Date of Test: November 9-December 18, 2007
Model: LS6115-2, LS6125-2

4.13 Monitoring Antenna, FCC Rule 15.323(c)(8):

The monitoring system shall use the same antenna used for transmission, or an antenna that yields equivalent reception at that location.

EUT uses the same antenna used for transmission and monitoring that is in compliance meet above provision.

EUT uses difference antenna used for transmission and monitoring. It must be verified that the monitoring antenna provides coverage equivalent to that of the transmitting antenna. Measurements are made in accordance with ANSI C63.17 sub-clause 4.

**EXHIBIT 5
EQUIPMENT PHOTOGRAPHS**

INTERTEK TESTING SERVICES

5.0 Equipment Photographs

The photographs are saved as filename: external photos.doc & internal photos.doc

**EXHIBIT 6
PRODUCT LABELLING**

INTERTEK TESTING SERVICES

6.0 Product Labelling

The FCC ID label artwork and its location are saved as filename: label.pdf

The label location justification letter is saved as filename: justification.pdf

**EXHIBIT 7
TECHNICAL SPECIFICATIONS**

INTERTEK TESTING SERVICES

7.0 Technical Specifications

The block diagram and circuit diagram are saved as filename: block.pdf and circuit.pdf respectively.

**EXHIBIT 8
INSTRUCTION MANUAL**

INTERTEK TESTING SERVICES

8.0 Instruction Manual

A preliminary copy of the Instruction Manual is saved as filename: manual.pdf

The required FCC Information to the User is stated on P.58 and P.45 for LS6125-2 and LS6115-2 respectively of Instruction Manual.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**EXHIBIT 9
UTAM Affidavit**

INTERTEK TESTING SERVICES

9.0 UTAM Affidavit

A copy of the UTAM affidavit is saved as filename: utam.pdf

**EXHIBIT 10
DECLARATION**

INTERTEK TESTING SERVICES

10.0 Declaration

A copy of the Declaration is saved as filename: declaration.pdf

INTERTEK TESTING SERVICES

**EXHIBIT 11
SECURITY CODE INFORMATION**

INTERTEK TESTING SERVICES

11.0 Security Code Information

A copy of the Security Code Information is saved as filename: security code information.pdf

INTERTEK TESTING SERVICES

**EXHIBIT 12
LETTER OF AGENCY**

INTERTEK TESTING SERVICES

12.0 Letter of Agency

A copy of the Letter of Agency is saved as filename: letter of agency.pdf

**EXHIBIT 13
CONFIDENTIALITY REQUEST**

INTERTEK TESTING SERVICES

13.0 Confidentiality Request

A copy of the Confidentiality Request is saved as filename: request.pdf