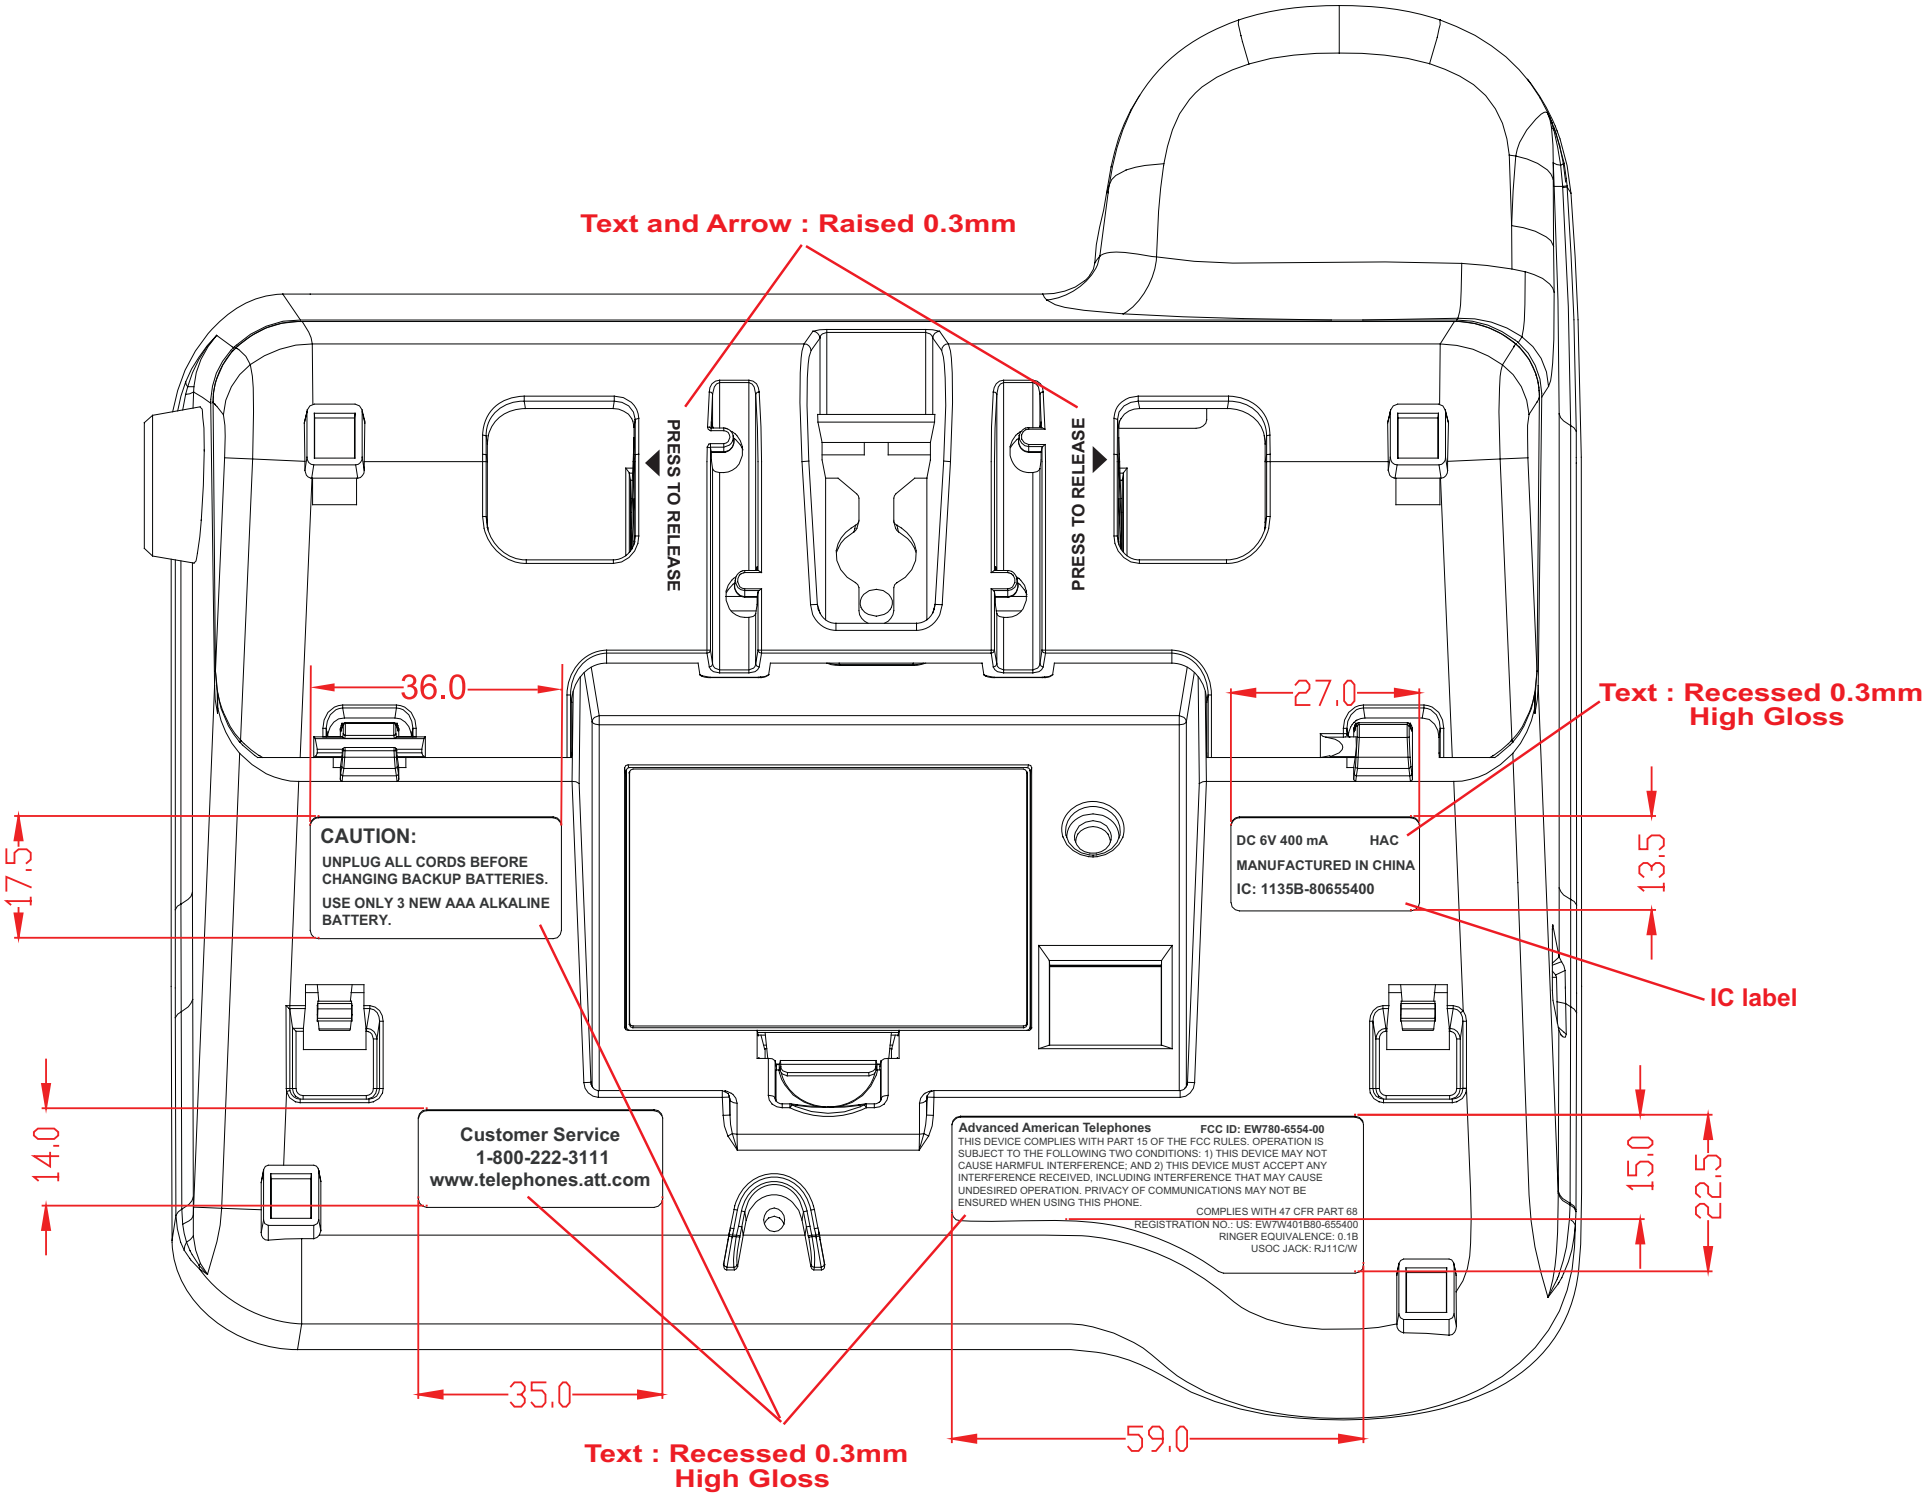
Text and Arrow : Raised 0.3mm
PRESS TO RELEASE
PRESS TO RELEASE
36.0
27.0
Text : Recessed 0.3mm
High Gloss
17.5
13.5
CAUTION:
UNPLUG ALL CORDS BEFORE CHANGING BACKUP BATTERIES.
USE ONLY 3 NEW AAA ALKALINE BATTERY.
DC 6V 400 mA HAC
MANUFACTURED IN CHINA
IC: 1135B-80655400
IC label
14.0
15.0
22.5
Customer Service
1-800-222-3111
www.telephones.att.com
Advanced American Telephones FCC ID: EW780-6554-00
THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS: 1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE; AND 2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRED OPERATION. PRIVACY OF COMMUNICATIONS MAY NOT BE ENSURED WHEN USING THIS PHONE.
COMPLIES WITH 47 CFR PART 68
REGISTRATION NO.: US: EW7W401B80-655400
RINGER EQUIVALENCE: 0.1B
USOC JACK: RJ11C/W
35.0
59.0
Text : Recessed 0.3mm
High Gloss

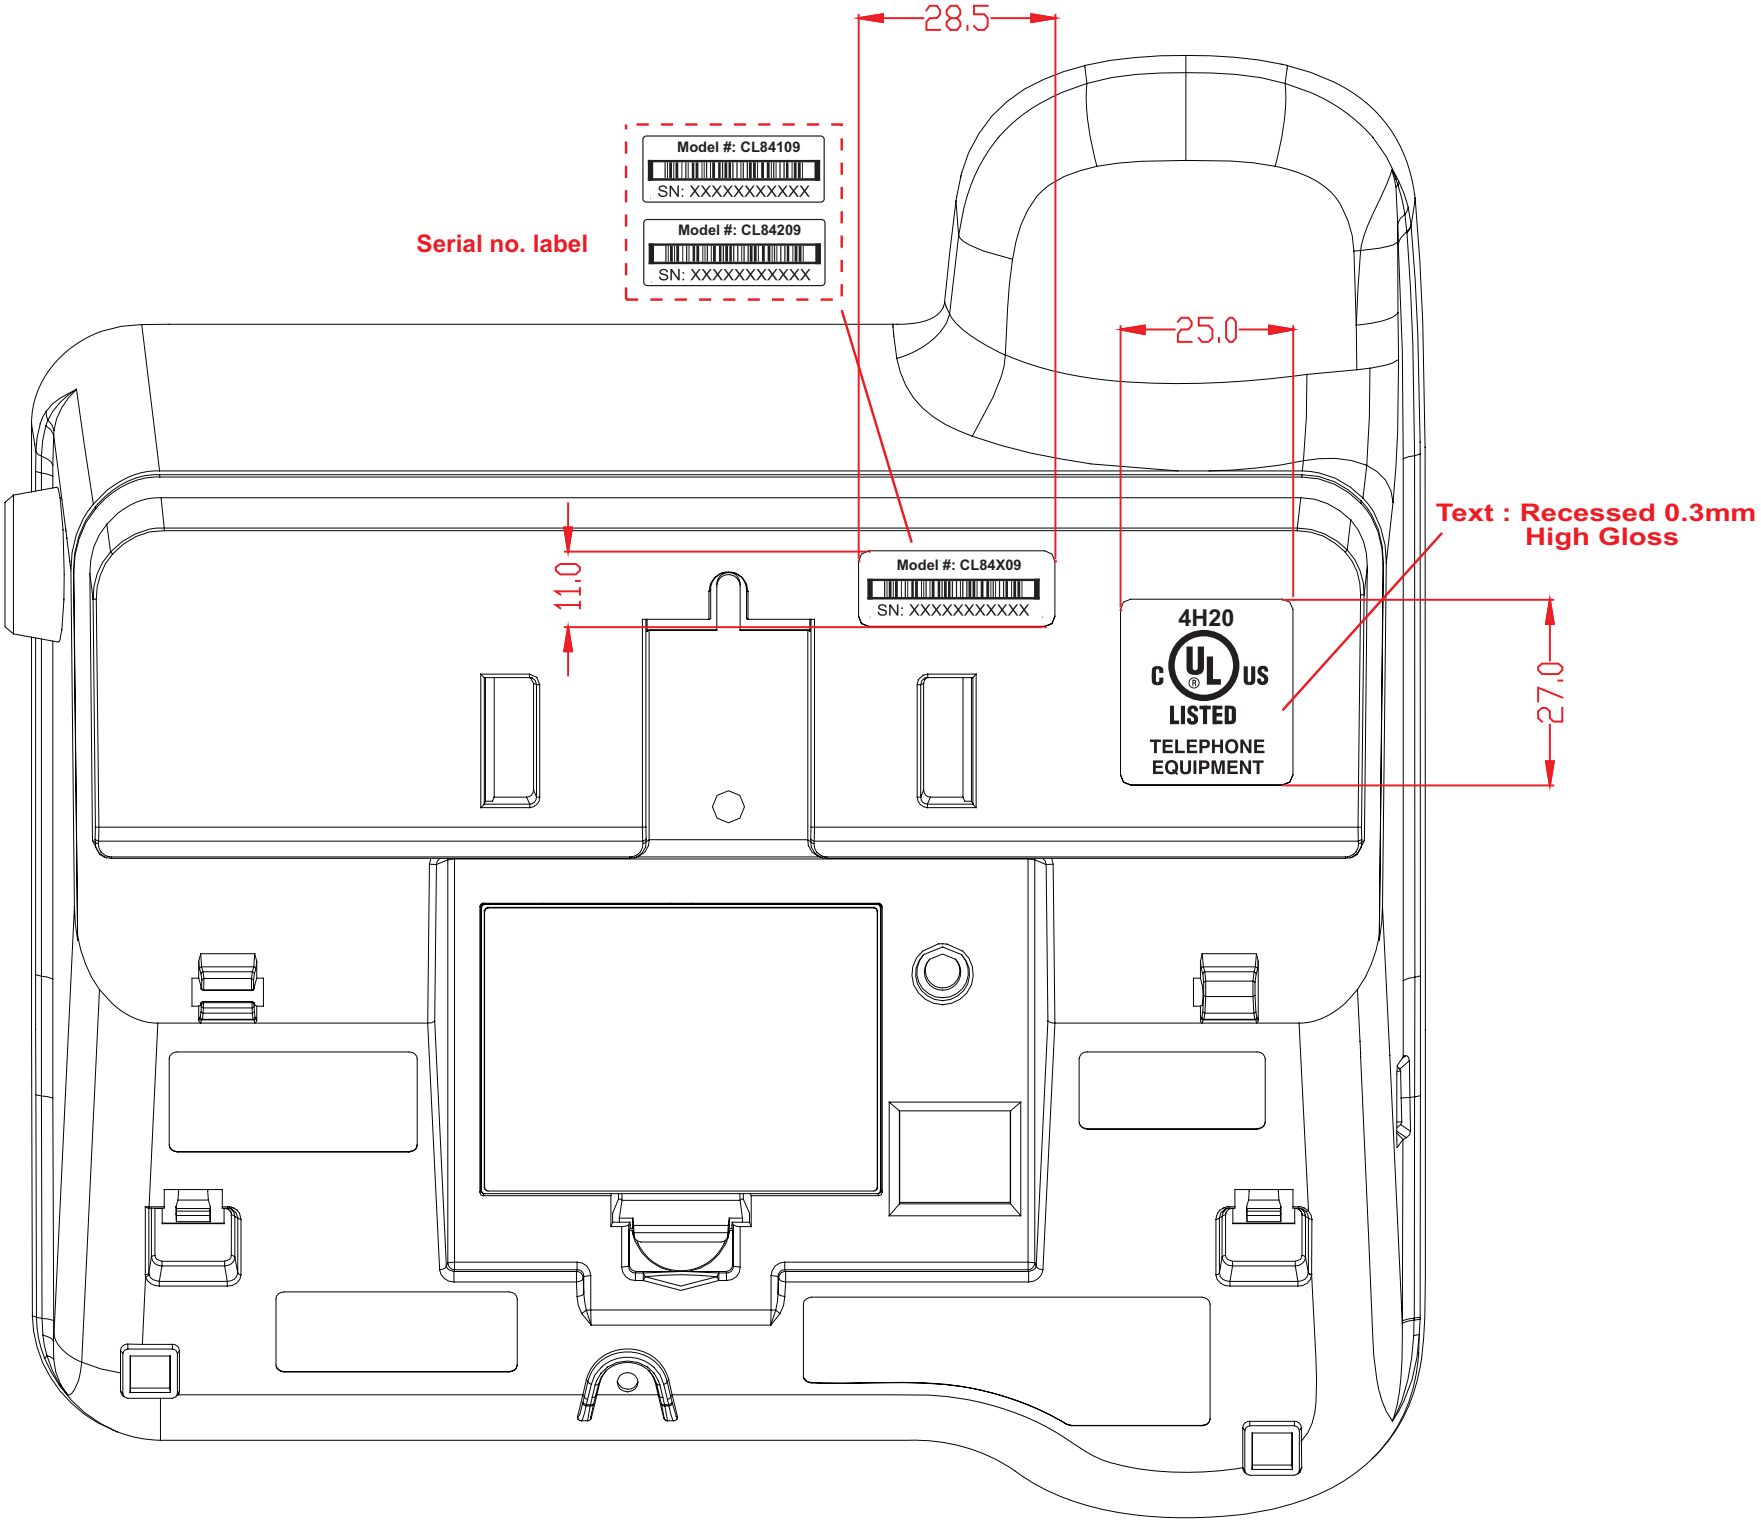
28.5
Model #: CL84109
SN: XXXXXXXXXXX
Model #: CL84209
SN: XXXXXXXXXXX
Serial no. label
25.0
Text : Recessed 0.3mm
High Gloss
11.0
Model #: CL84X09
SN: XXXXXXXXXXX
4H20
C UL US
LISTED
TELEPHONE
EQUIPMENT
27.0