




Report No.: HK09051589-1
Ringing Mode
AC Mains "L"

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
2 1	9k	30M	EW0700
3	9k	30M	EW2454
12	9k	30M	EW0090

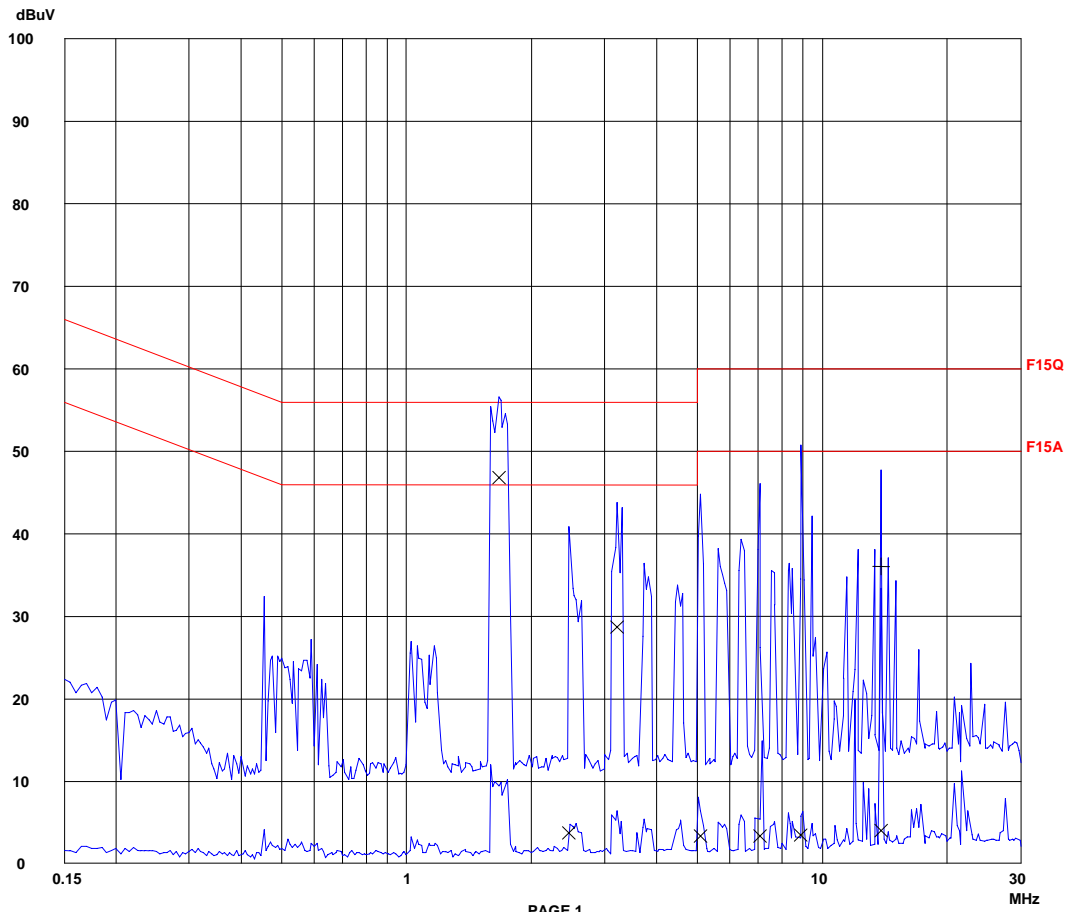

Ctrl No.: N/A



Report No.: HK09051589-1
Ringing Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
1.67000	46.8	56.0	-9.2
2.46000	3.6	56.0	-52.4
3.20000	28.6	56.0	-27.4
5.10500	3.4	60.0	-56.6
7.07500	3.3	60.0	-56.7
8.87500	3.5	60.0	-56.5
13.89000	3.9	60.0	-56.1

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
13.82500	36.0	50.0	-14.0

* limit exceeded