


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
 Meas Time: 1 s
 Subranges: 16
 Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

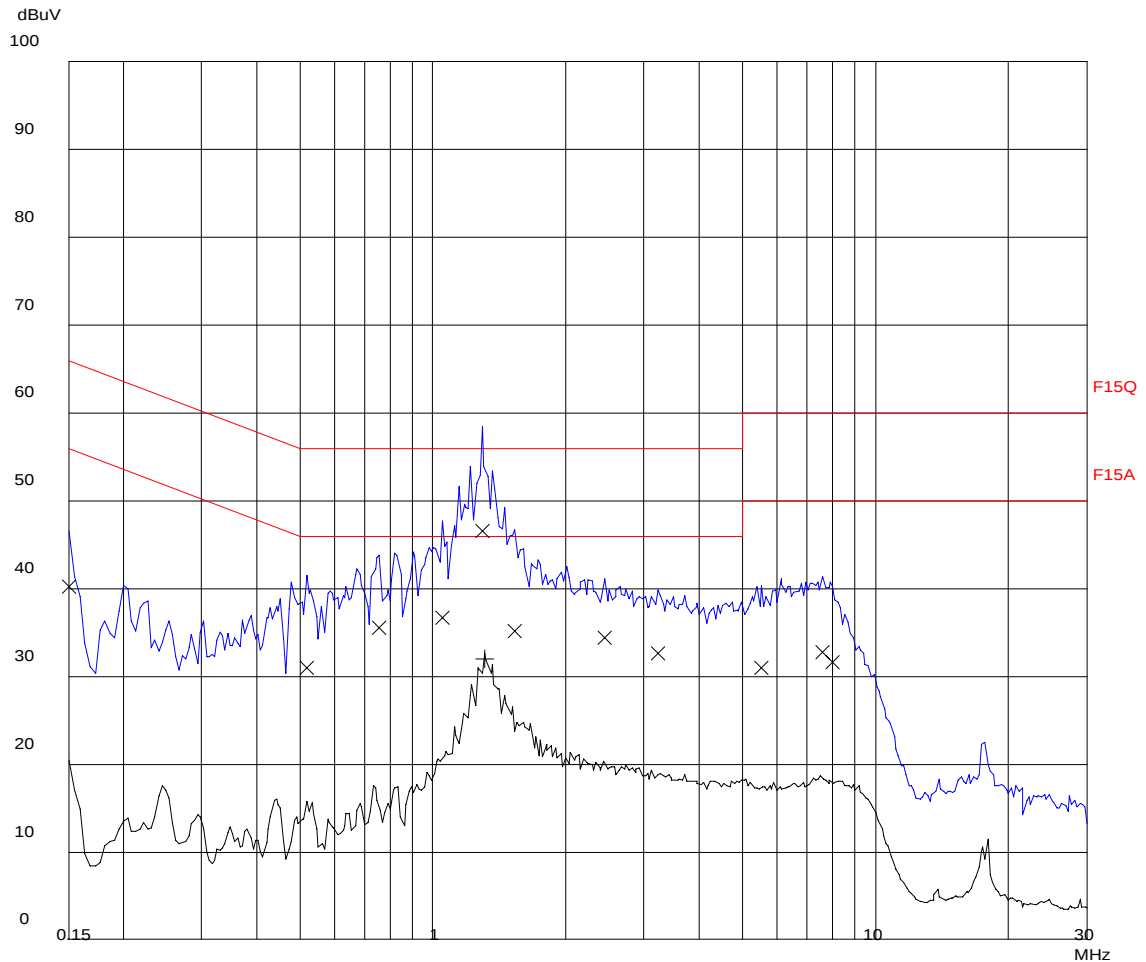



Report no.: HK09100358-1
Model:TL92270
Adaptor:Ten Pao
DECT Talk Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	40.2	66.0	-25.8
0.51900	31.0	56.0	-25.0
0.75750	35.5	56.0	-20.5
1.05000	36.7	56.0	-19.3
1.29300	46.5	56.0	-9.5
1.53150	35.1	56.0	-20.9
2.44050	34.3	56.0	-21.7
3.22350	32.6	56.0	-23.4
5.52750	30.9	60.0	-29.1
7.61550	32.8	60.0	-27.2
8.02050	31.6	60.0	-28.4

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
1.31100	32.0	46.0	-14.0


* limit exceeded

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
 Meas Time: 1 s
 Subranges: 16
 Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

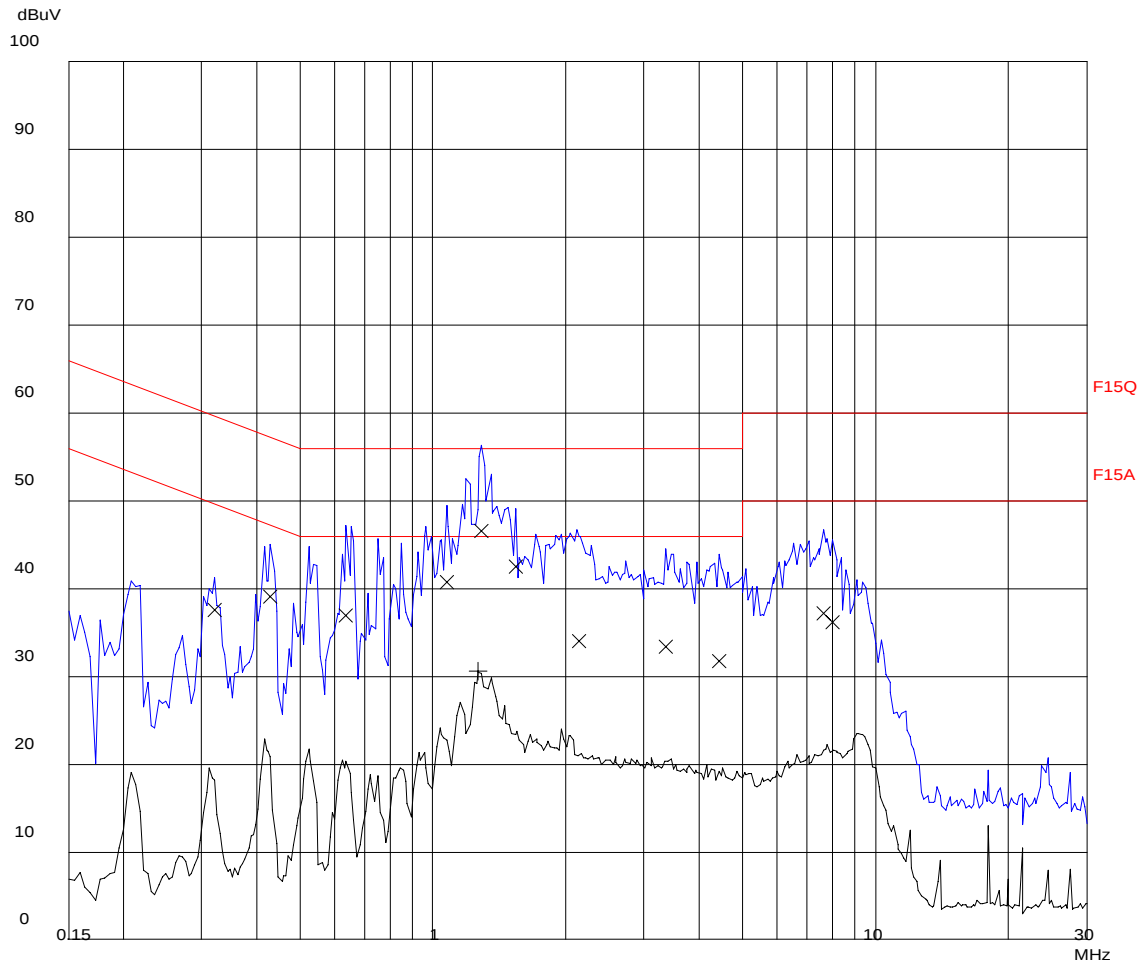



Report no.: HK09100358-1
Model: TL91270
Adaptor: Ten Pao
DECT Talk Mode
AC Mains "N"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.32100	37.5	59.7	-22.2
0.42900	39.0	57.3	-18.3
0.63600	36.9	56.0	-19.1
1.07700	40.7	56.0	-15.3
1.28850	46.6	56.0	-9.4
1.53600	42.5	56.0	-13.5
2.13450	34.0	56.0	-22.0
3.36300	33.4	56.0	-22.6
4.42500	31.8	56.0	-24.2
7.62900	37.1	60.0	-22.9
8.00250	36.1	60.0	-23.9

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
1.26600	30.5	46.0	-15.5


* limit exceeded

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
 Meas Time: 1 s
 Subranges: 16
 Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

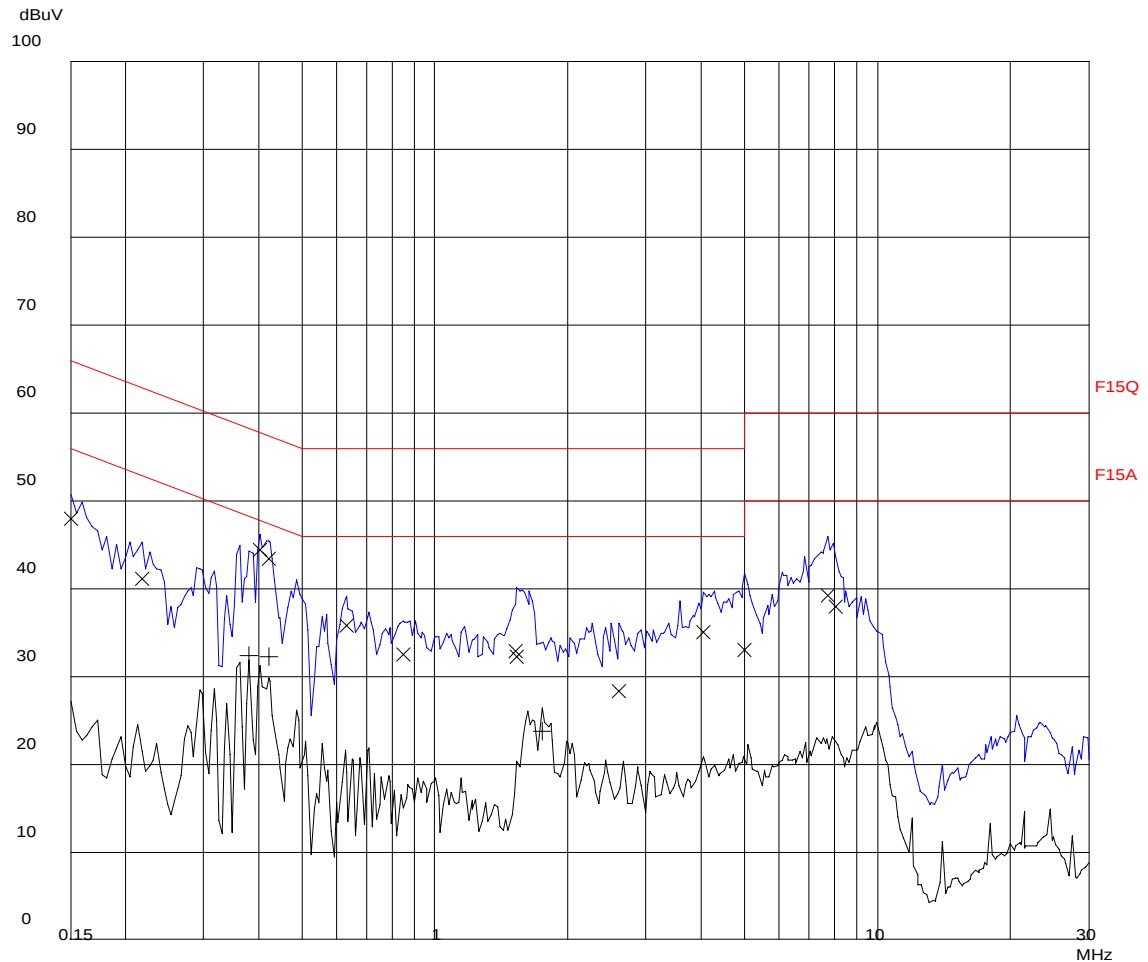



Report no.: HK09100358-1
Model: TL91270
Adaptor: Salcomp
DECT Talk Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	47.9	66.0	-18.1
0.21750	41.0	62.9	-21.9
0.40200	44.4	57.8	-13.4
0.42000	43.4	57.5	-14.1
0.63150	35.7	56.0	-20.3
0.84750	32.5	56.0	-23.5
1.51800	32.8	56.0	-23.2
1.53150	32.2	56.0	-23.8
2.59800	28.3	56.0	-27.7
4.03800	35.0	56.0	-21.0
5.01900	33.0	56.0	-23.0
7.70550	39.2	60.0	-20.8
8.02950	37.9	60.0	-22.1

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.37950	32.3	48.3	-16.0
0.42000	32.2	47.5	-15.3
1.74750	23.8	46.0	-22.2


* limit exceeded

Scan Settings (1 Range)

|----- Frequencies -----|----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement: x QP / + AV
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	1 9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

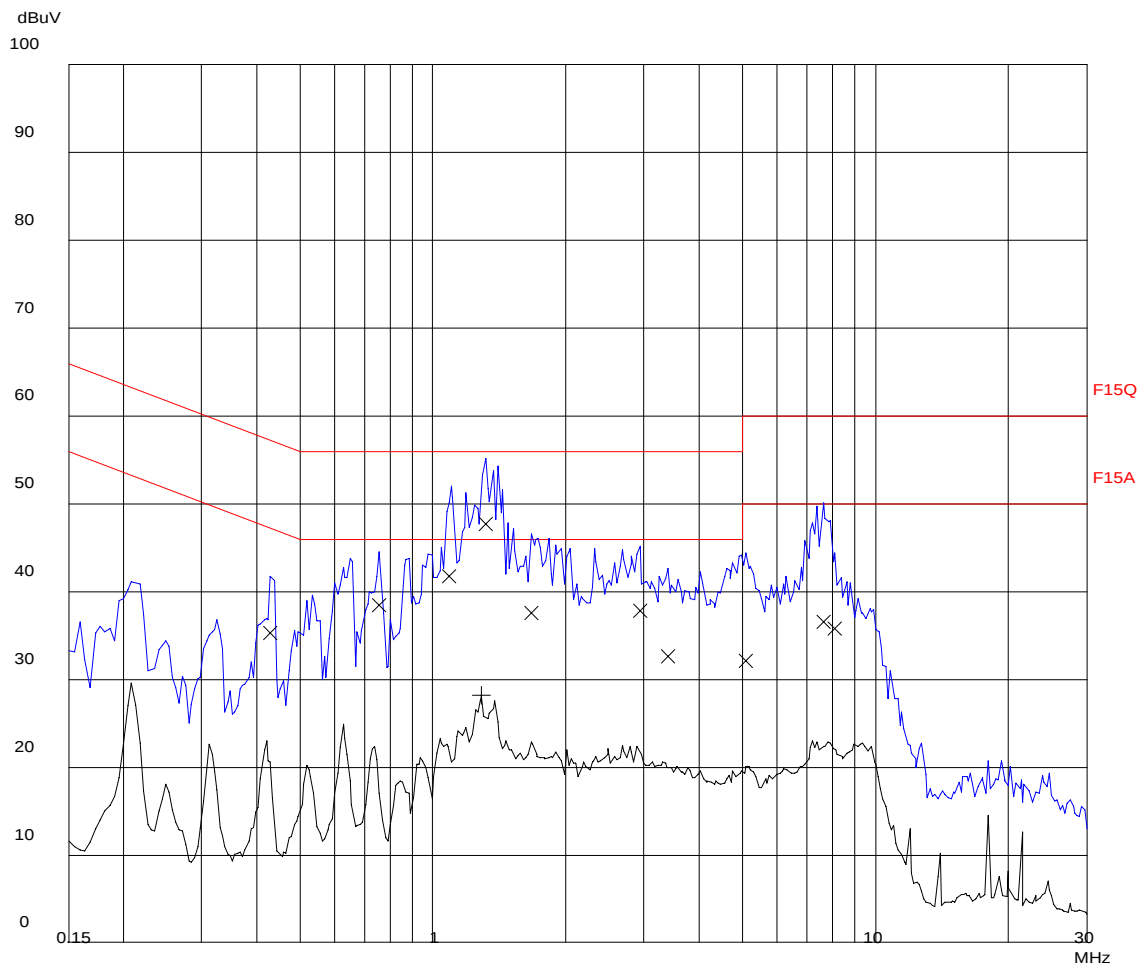



Report no.: HK09100358-1
Model:TL91270
Adaptor: Ten Pao
DECT Talk Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dB	dB	dB
0.42900	35.3	57.3	-22.0
0.75750	38.4	56.0	-17.6
1.08600	41.7	56.0	-14.3
1.31550	47.7	56.0	-8.3
1.67100	37.6	56.0	-18.4
2.93550	37.8	56.0	-18.2
3.39450	32.6	56.0	-23.4
5.08650	32.1	60.0	-27.9
7.65600	36.6	60.0	-23.4
8.09250	35.7	60.0	-24.3

Frequency	AV Level	AV Limit	Delta
MHz	dB	dB	dB
1.28850	28.2	46.0	-17.8


* limit exceeded

Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO LN OFF	60dB

Final Measurement: x QP / + AV
 Meas Time: 1 s
 Subranges: 16
 Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

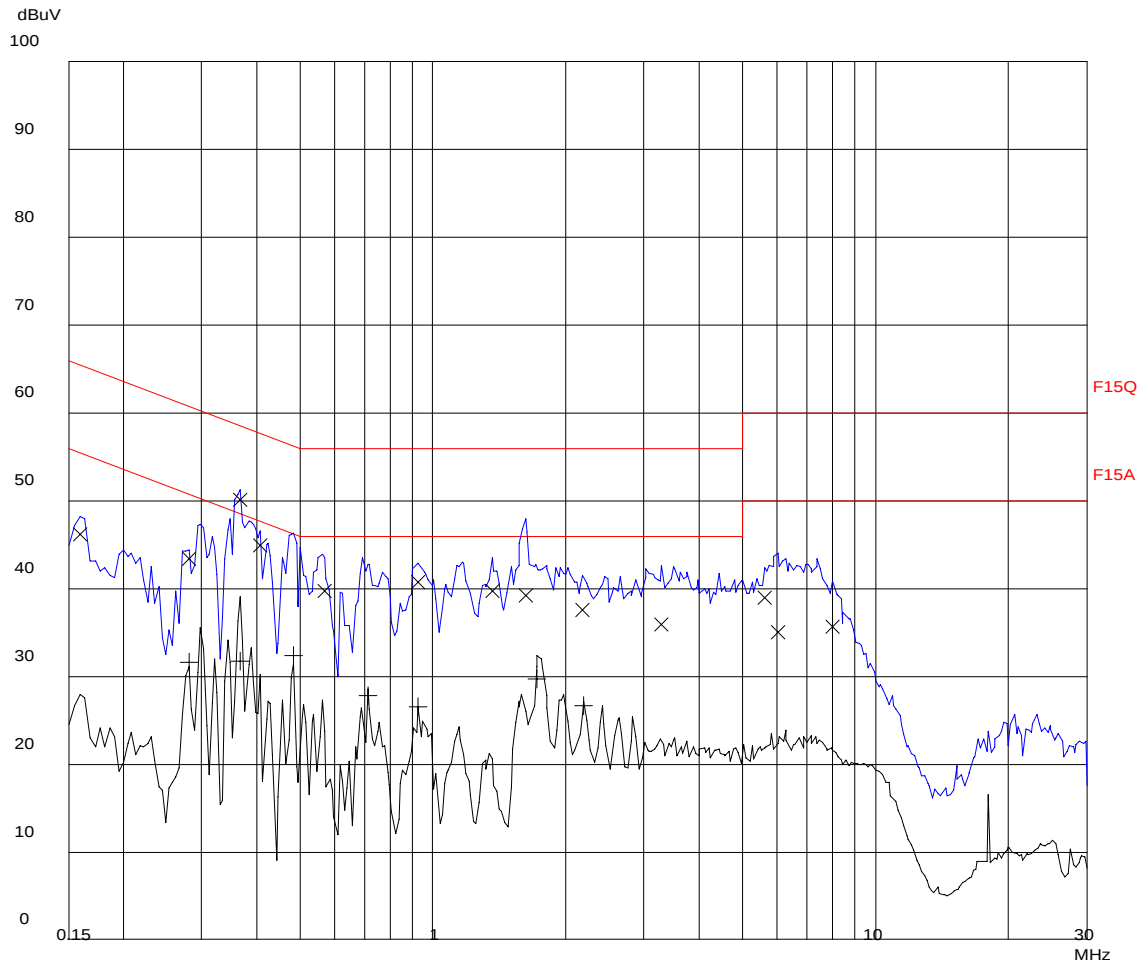



Report no.: HK09100358-1
Model: TL92270
Adaptor: Salcomp
DECT Talk Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB
Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dB	dB	dB
0.15900	46.1	65.5	-19.4
0.28050	43.4	60.8	-17.4
0.36600	50.0	58.6	-8.6
0.40650	44.9	57.7	-12.8
0.56850	39.7	56.0	-16.3
0.92400	40.7	56.0	-15.3
1.36500	39.7	56.0	-16.3
1.62150	39.1	56.0	-16.9
2.17950	37.6	56.0	-18.4
3.28650	35.9	56.0	-20.1
5.62650	39.0	60.0	-21.0
6.02700	34.9	60.0	-25.1
8.01150	35.6	60.0	-24.4

Frequency	AV Level	AV Limit	Delta
MHz	dB	dB	dB
0.28050	31.6	50.8	-19.2
0.36600	31.6	48.6	-17.0
0.48300	32.4	46.3	-13.9
0.71250	27.8	46.0	-18.2
0.92400	26.5	46.0	-19.5
1.72050	29.7	46.0	-16.3
2.18400	26.7	46.0	-19.3


* limit exceeded

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV
 Meas Time: 1 s
 Subranges: 16
 Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

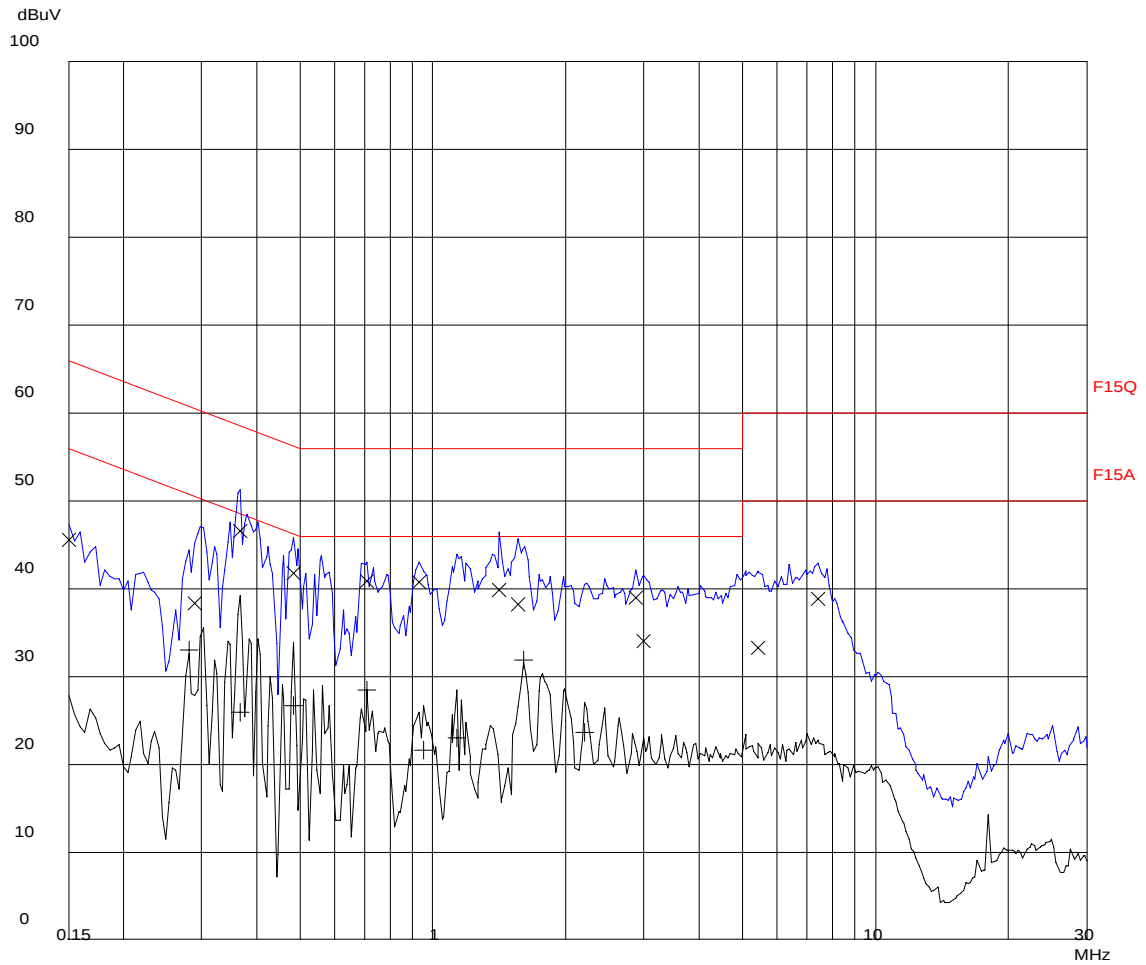



Report no.: HK09100358-1
Model: TL92270
Adaptor: Salcomp
DECT Talk Mode
AC Mains "N"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	45.6	66.0	-20.4
0.28950	38.4	60.6	-22.2
0.36600	46.5	58.6	-12.1
0.48300	41.7	56.3	-14.6
0.70800	40.8	56.0	-15.2
0.92850	40.7	56.0	-15.3
1.41000	39.8	56.0	-16.2
1.55400	38.2	56.0	-17.8
2.87250	38.9	56.0	-17.1
2.99850	34.0	56.0	-22.0
5.42400	33.2	60.0	-26.8
7.43100	38.8	60.0	-21.2

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.28050	33.0	50.8	-17.8
0.36600	25.9	48.6	-22.7
0.48300	26.6	46.3	-19.7
0.70800	28.4	46.0	-17.6
0.95100	21.6	46.0	-24.4
1.13100	22.9	46.0	-23.1
1.59900	31.8	46.0	-14.2
2.20200	23.7	46.0	-22.3

* limit exceeded