



Report no.: HK09100357-1
Model: TL91270
Adaptor: Ten Pao
Bluetooth Talk Mode
AC Mains "L"


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090
4	9k	30M	30_10_09

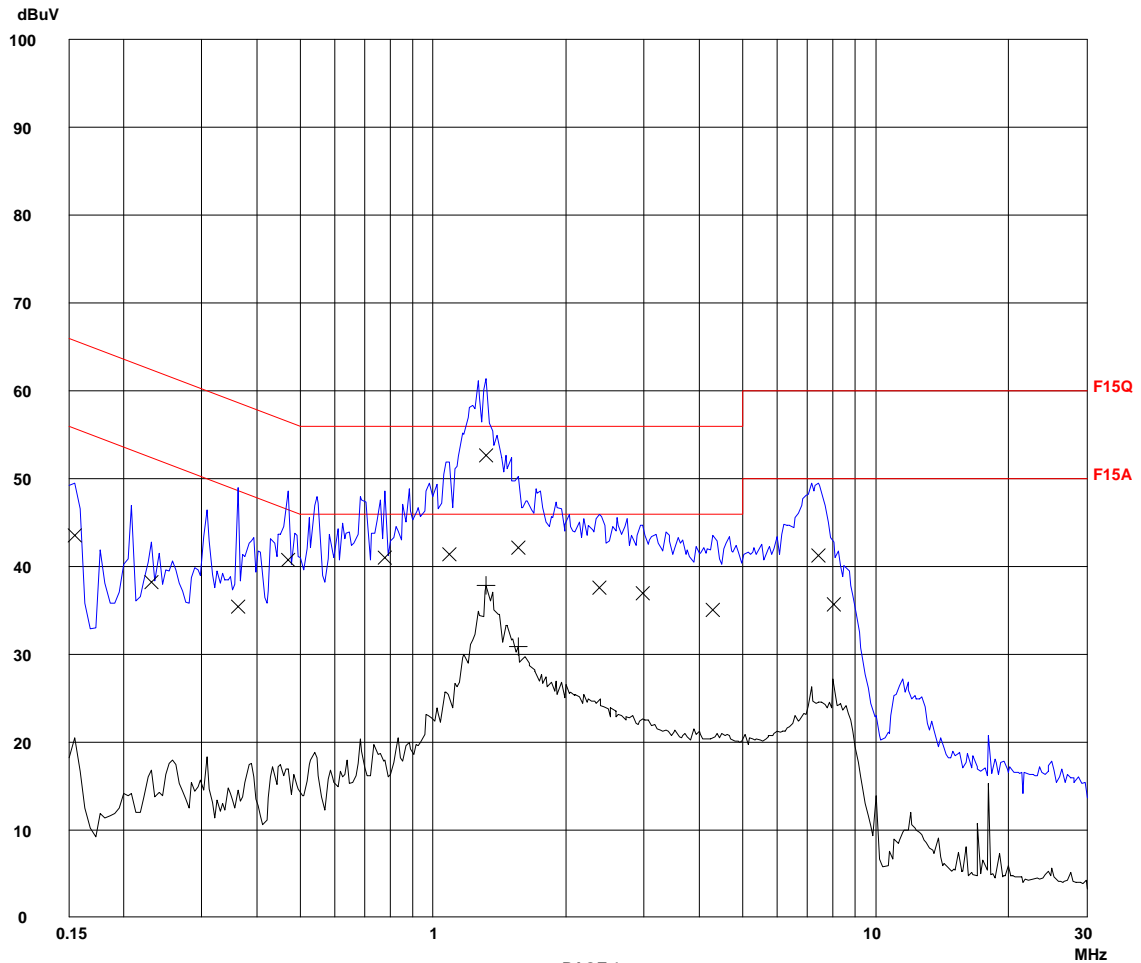



Report no.: HK09100357-1
Model: TL91270
Adaptor: Ten Pao
Bluetooth Talk Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----|----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15450	43.5	65.7	-22.2
0.23100	38.1	62.4	-24.3
0.36150	35.4	58.7	-23.3
0.46950	40.7	56.5	-15.8
0.77550	40.9	56.0	-15.1
1.08600	41.3	56.0	-14.7
1.32000	52.6	56.0	-3.4
1.55400	42.1	56.0	-13.9
2.37750	37.5	56.0	-18.5
2.97150	36.9	56.0	-19.1
4.29000	35.0	56.0	-21.0
7.43100	41.2	60.0	-18.8
8.05650	35.7	60.0	-24.3

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
1.32000	37.8	46.0	-8.2
1.55400	30.8	46.0	-15.2

* limit exceeded



Report no.: HK09100357-1
Model: TL91270
Adaptor: Ten Pao
Bluetooth Talk Mode
AC Mains "N"


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	1	9k	30M
2	9k	30M	0700
3	9k	30M	0090
4	9k	30M	30_10_09

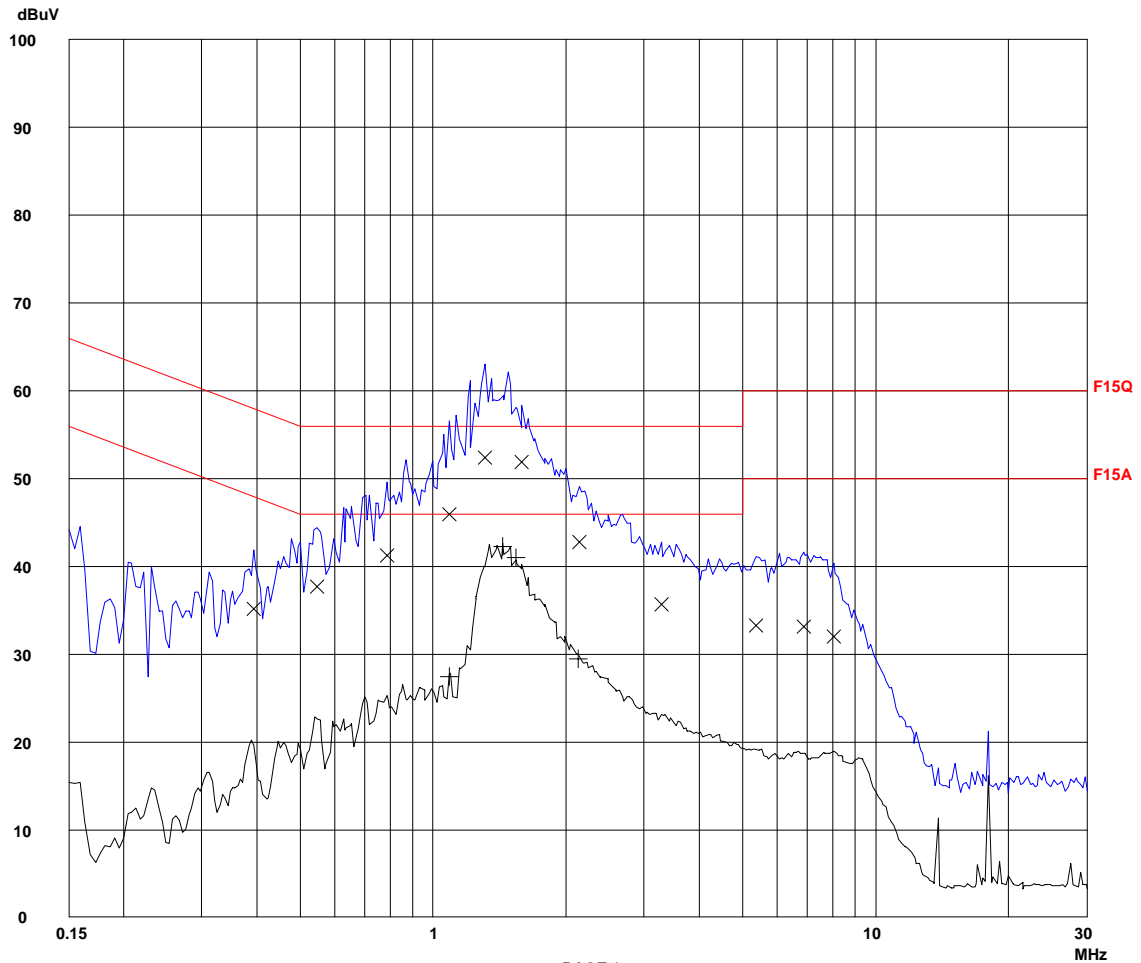



Report no.: HK09100357-1
Model: TL91270
Adaptor: Ten Pao
Bluetooth Talk Mode
AC Mains "N"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.39300	35.2	58.0	-22.8
0.54600	37.6	56.0	-18.4
0.78450	41.2	56.0	-14.8
1.08600	45.9	56.0	-10.1
1.30650	52.3	56.0	-3.7
1.58550	51.9	56.0	-4.1
2.13900	42.8	56.0	-13.2
3.28200	35.6	56.0	-20.4
5.37000	33.3	60.0	-26.7
6.89550	33.1	60.0	-26.9
8.05650	31.9	60.0	-28.1

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
1.08600	27.4	46.0	-18.6
1.43250	42.3	46.0	-3.7
1.54050	40.9	46.0	-5.1
2.12550	29.4	46.0	-16.6

* limit exceeded



Report no.: HK09100357-1
Model: TL92270
Adaptor: Ten Pao
Bluetooth Talk Mode
AC Mains "L"


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

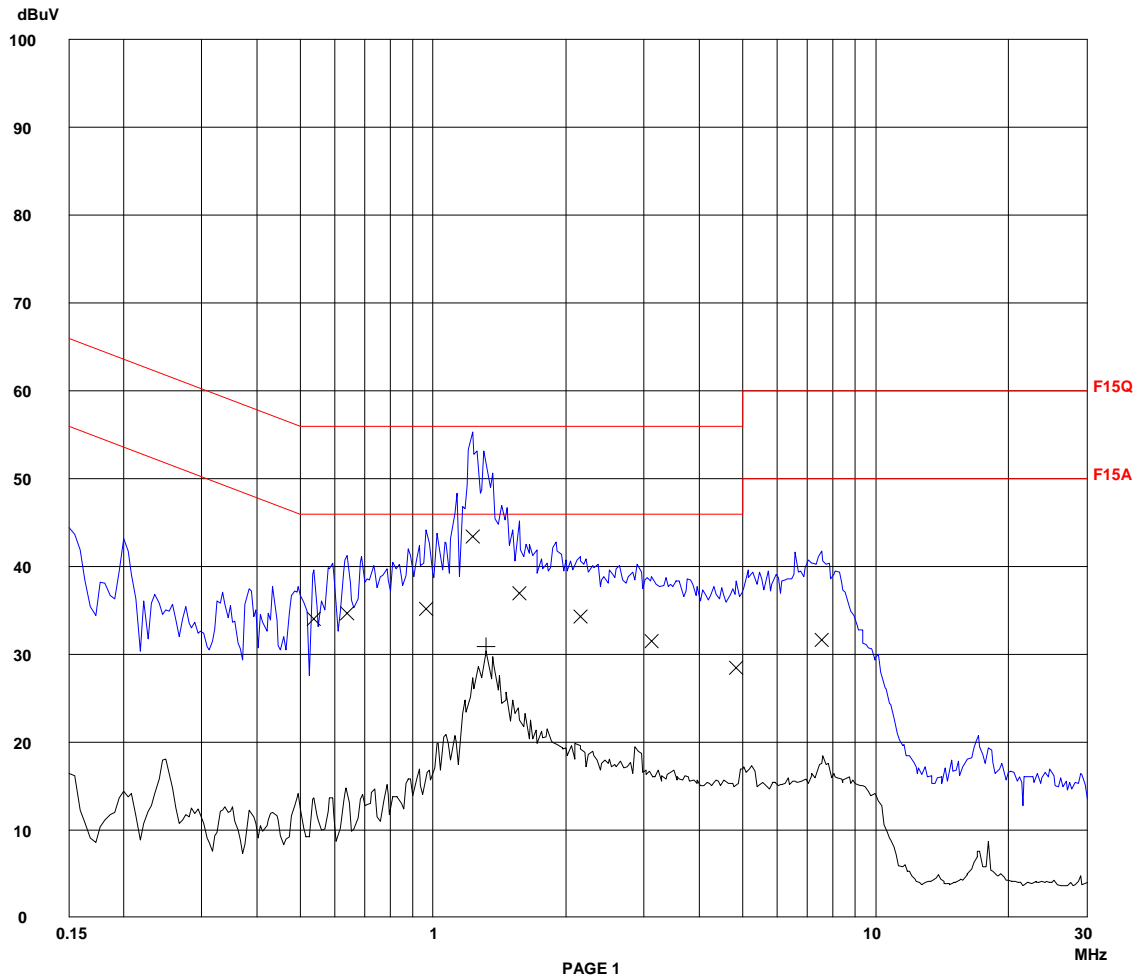



Report no.: HK09100357-1
Model:TL92270
Adaptor:Ten Pao
Bluetooth Talk Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dB	dB	dB
0.53700	34.0	56.0	-22.0
0.64050	34.6	56.0	-21.4
0.96450	35.1	56.0	-20.9
1.22550	43.4	56.0	-12.6
1.56300	36.8	56.0	-19.2
2.14800	34.2	56.0	-21.8
3.12000	31.4	56.0	-24.6
4.83000	28.4	56.0	-27.6
7.55250	31.6	60.0	-28.4

Frequency	AV Level	AV Limit	Delta
MHz	dB	dB	dB
1.32000	30.8	46.0	-15.2

* limit exceeded



Report no.: HK09100357-1
Model: TL92270
Adaptor: Salcomp
Bluetooth Talk Mode
AC Mains "L"


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	1 9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

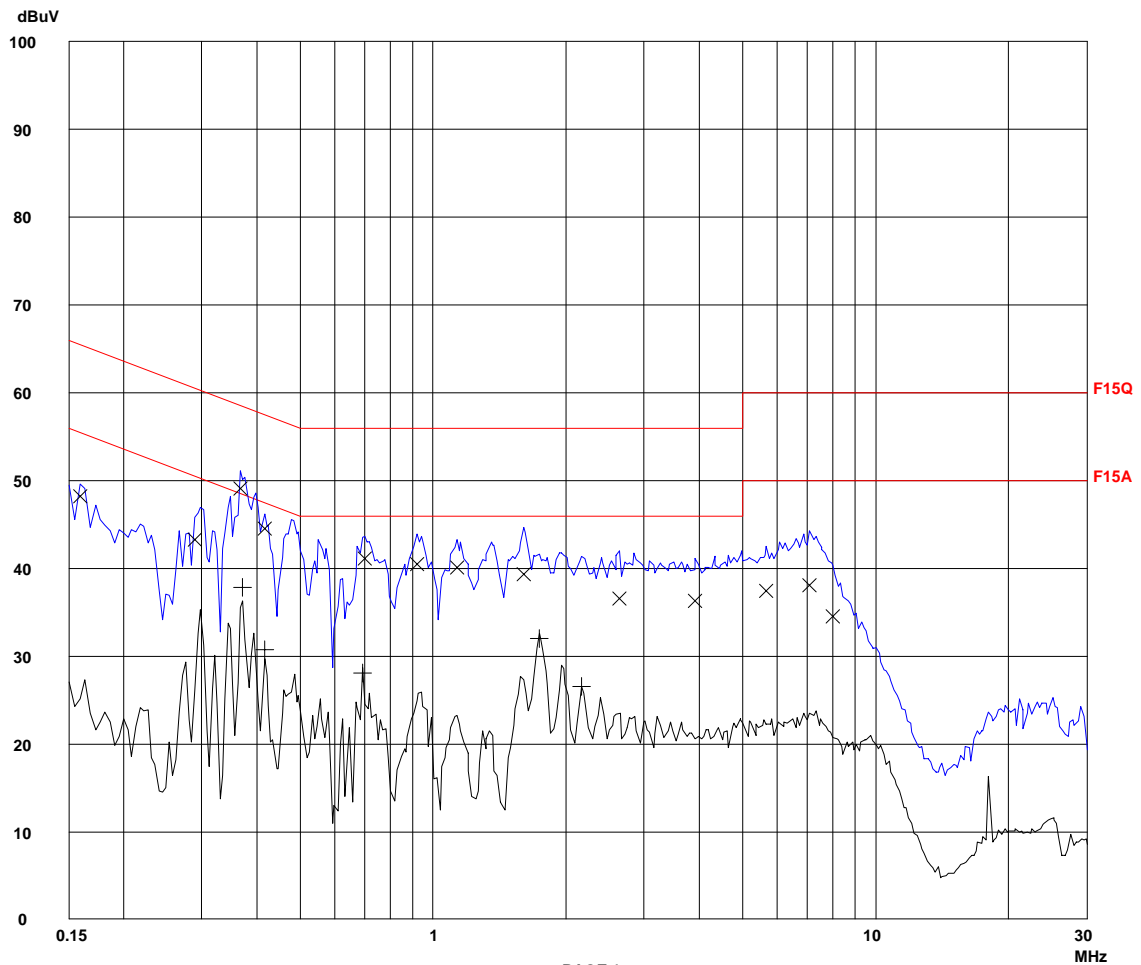



Report no.: HK09100357-1
Model: TL92270
Adaptor: Salcomp
Bluetooth Talk Mode
AC Mains "L"

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency MHz	QP Level dBuV	QP Limit dB	Delta dB
0.15900	48.2	65.5	-17.3
0.28950	43.3	60.6	-17.3
0.36600	49.1	58.6	-9.5
0.41550	44.6	57.6	-13.0
0.69900	41.1	56.0	-14.9
0.91950	40.5	56.0	-15.5
1.13100	40.1	56.0	-15.9
1.59900	39.3	56.0	-16.7
2.63400	36.5	56.0	-19.5
3.90300	36.3	56.0	-19.7
5.65800	37.4	60.0	-22.6
7.08900	38.0	60.0	-22.0
7.98900	34.5	60.0	-25.5

Frequency MHz	AV Level dBuV	AV Limit dB	Delta dB
0.37050	37.8	48.5	-10.7
0.41550	30.7	47.6	-16.9
0.69450	28.0	46.0	-18.0
1.73850	32.0	46.0	-14.0
2.17050	26.5	46.0	-19.5

* limit exceeded