



Report no.: HK10070763-1
Model: CS6124 (Single Antenna)
Talk Mode
Salcomp Adaptor
AC Mains "L"

Report No.:HK10070763-1


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

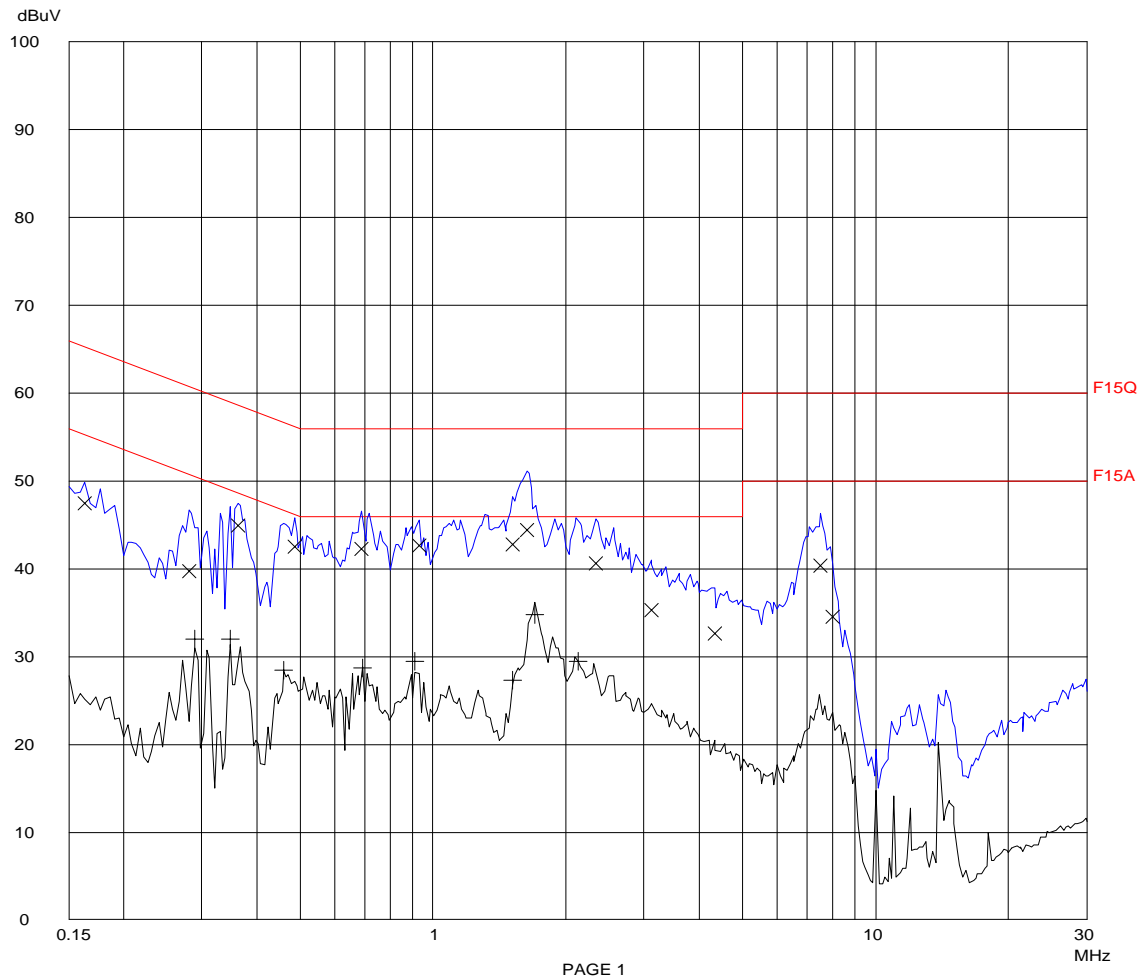

Ctrl No.: N/A



Report no.: HK10070763-1
Model: CS6124 (Single Antenna)
Talk Mode
Salcomp Adaptor
AC Mains "L"

Report No.:HK10070763-1

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|
Start Stop Step IF BW Detector M-Time Atten Preamp OpRge
150k 30M 4.5k 10k PK+AV 10ms AUTO LN OFF 60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.16350	47.4	65.3	-17.9
0.28050	39.7	60.8	-21.1
0.36150	44.8	58.7	-13.9
0.48750	42.5	56.3	-13.8
0.69000	42.3	56.0	-13.7
0.92850	42.5	56.0	-13.5
1.51350	42.7	56.0	-13.3
1.62600	44.4	56.0	-11.6
2.32800	40.5	56.0	-15.5
3.11100	35.2	56.0	-20.8
4.33050	32.5	56.0	-23.5
7.52100	40.4	60.0	-19.6
7.99800	34.5	60.0	-25.5

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.28950	32.0	50.6	-18.6
0.34800	31.9	49.0	-17.1
0.46050	28.4	46.7	-18.3
0.69450	28.7	46.0	-17.3
0.91050	29.5	46.0	-16.5
1.50900	27.2	46.0	-18.8
1.70250	34.7	46.0	-11.3
2.13000	29.4	46.0	-16.6

* limit exceeded



Report no.: HK10070763-1
Model: CS6124 (Single Antenna)
Talk Mode
Salcomp Adaptor
AC Mains "N"

Report No.:HK10070763-1

Scan Settings (1 Range)


Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
----------------	-------	------	------

1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

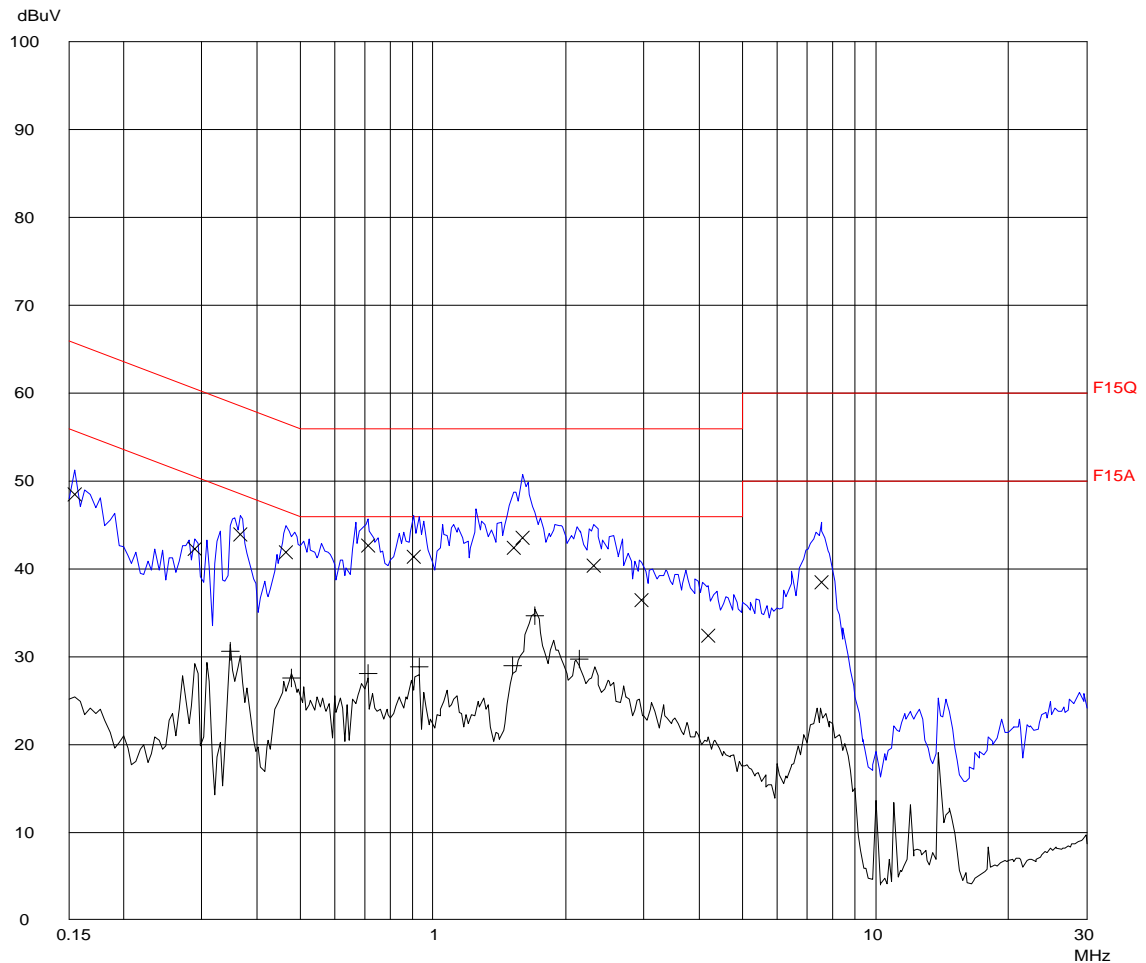

Ctrl No.: N/A



Report no.: HK10070763-1
Model: CS6124 (Single Antenna)
Talk Mode
Salcomp Adaptor
AC Mains "N"

Report No.:HK10070763-1

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15450	48.4	65.7	-17.3
0.28950	42.2	60.6	-18.4
0.36600	43.9	58.6	-14.7
0.46500	41.9	56.6	-14.7
0.71250	42.6	56.0	-13.4
0.90600	41.3	56.0	-14.7
1.51800	42.4	56.0	-13.6
1.59450	43.5	56.0	-12.5
2.30550	40.4	56.0	-15.6
2.95800	36.4	56.0	-19.6
4.19550	32.3	56.0	-23.7
7.54800	38.4	60.0	-21.6

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
0.34800	30.6	49.0	-18.4
0.47850	27.5	46.4	-18.9
0.71250	28.0	46.0	-18.0
0.92850	28.7	46.0	-17.3
1.51350	29.0	46.0	-17.0
1.69800	34.6	46.0	-11.4
2.13450	29.7	46.0	-16.3

* limit exceeded



Report no.: HK10070763-1
Model: CS6124 (Single Antenna)
Talk Mode
Ten Pao Adaptor
AC Mains "L"

Report No.:HK10070763-1


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

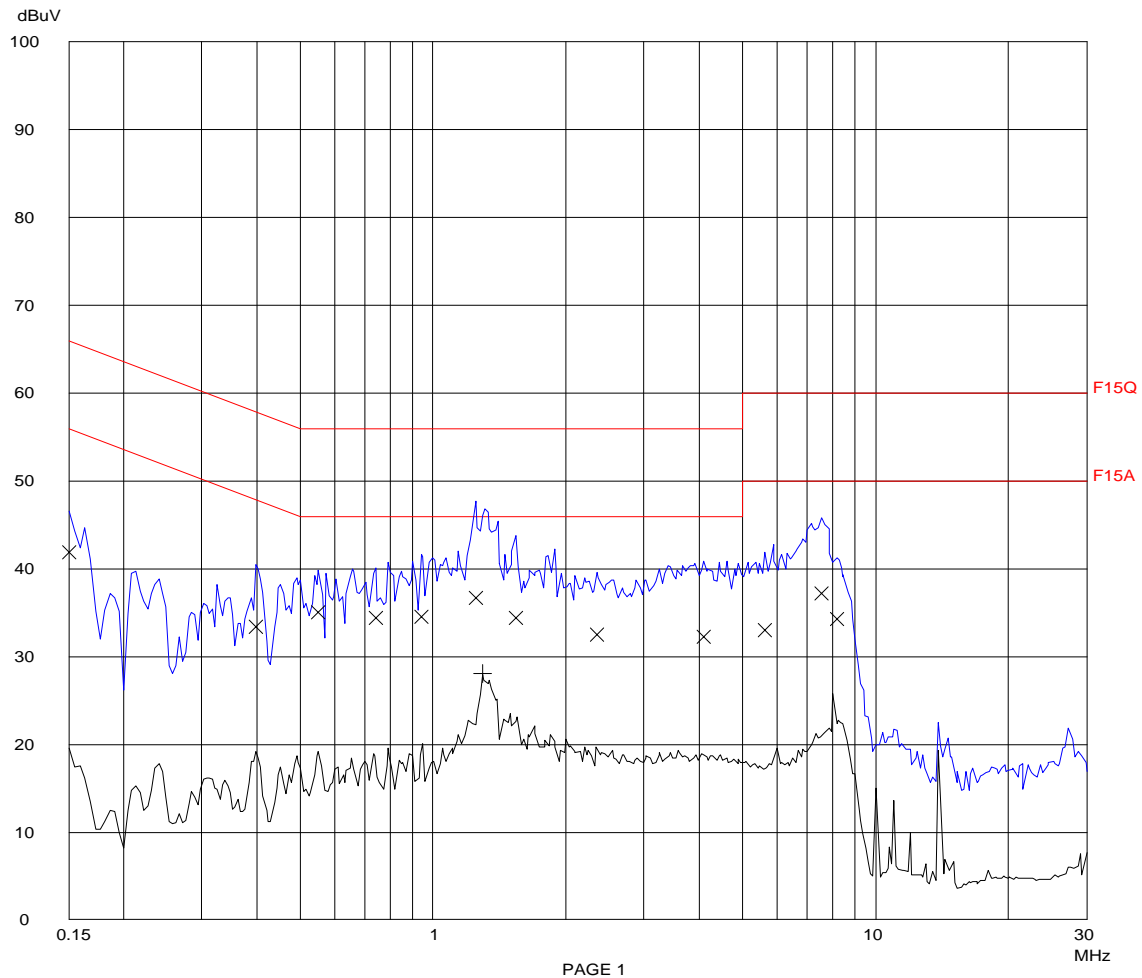

Ctrl No.: N/A



Report no.: HK10070763-1
Model: CS6124 (Single Antenna)
Talk Mode
Ten Pao Adaptor
AC Mains "L"

Report No.:HK10070763-1

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB
0.15000	41.9	66.0	-24.1
0.39750	33.4	57.9	-24.5
0.55050	35.0	56.0	-21.0
0.74400	34.4	56.0	-21.6
0.94200	34.5	56.0	-21.5
1.24800	36.6	56.0	-19.4
1.54050	34.3	56.0	-21.7
2.35050	32.5	56.0	-23.5
4.08750	32.3	56.0	-23.7
5.63550	33.0	60.0	-27.0
7.53450	37.1	60.0	-22.9
8.19150	34.2	60.0	-25.8

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB
1.29300	28.0	46.0	-18.0

* limit exceeded



Report no.: HK10070763-1
Model: CS6124 (Single Antenna)
Talk Mode
Ten Pao Adaptor
AC Mains "N"

Report No.:HK10070763-1


Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement: x QP / + AV

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
1	9k	30M	2454
2	9k	30M	0700
3	9k	30M	0090

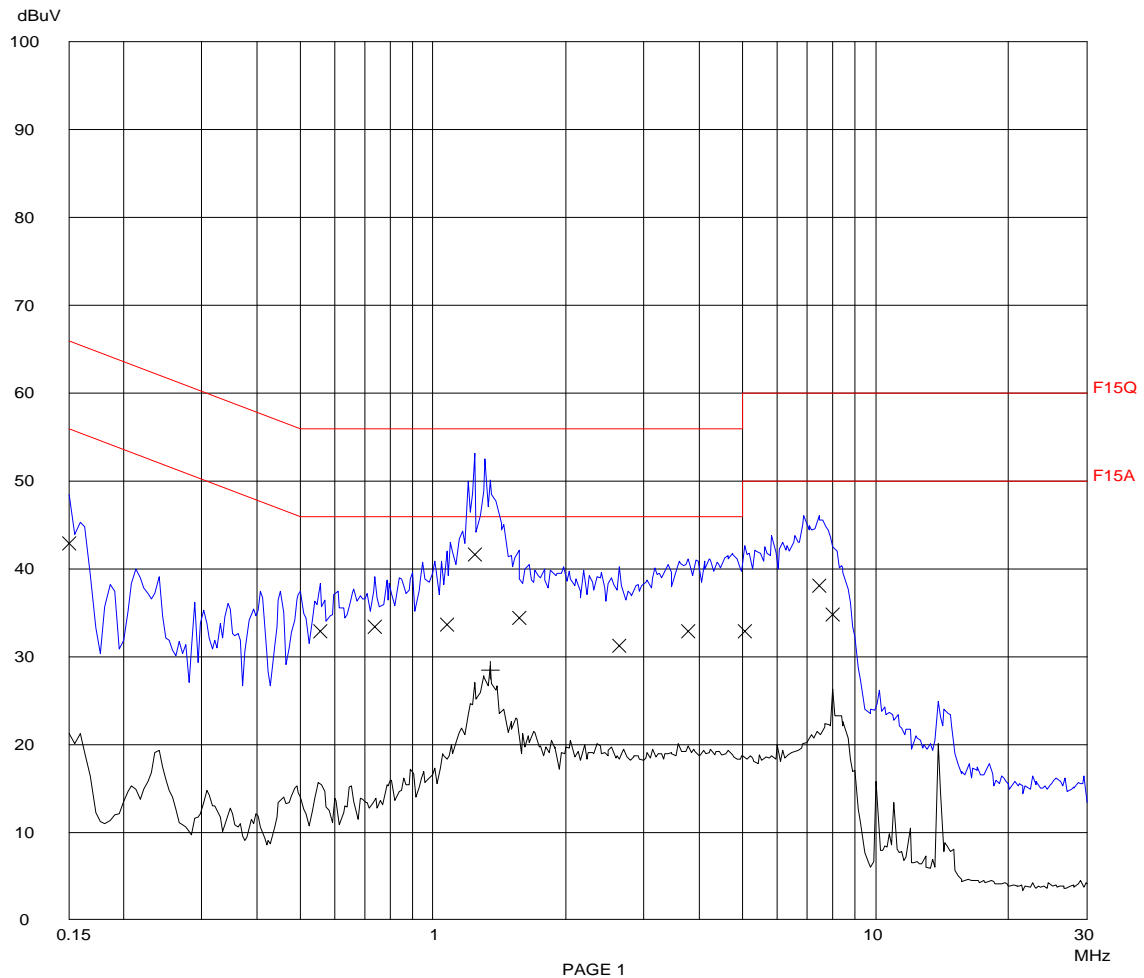



Report no.: HK10070763-1
Model: CS6124 (Single Antenna)
Talk Mode
Ten Pao Adaptor
AC Mains "N"

Report No.:HK10070763-1

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	4.5k	10k	PK+AV	10ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit	Delta
MHz	dBuV	dBuV	dB

0.15000	42.8	66.0	-23.2
0.55500	32.8	56.0	-23.2
0.73950	33.3	56.0	-22.7
1.07250	33.6	56.0	-22.4
1.24350	41.6	56.0	-14.4
1.56300	34.4	56.0	-21.6
2.63850	31.2	56.0	-24.8
3.77700	32.8	56.0	-23.2
5.07300	32.8	56.0	-23.2
7.46250	38.1	60.0	-21.9
7.98000	34.7	60.0	-25.3

Frequency	AV Level	AV Limit	Delta
MHz	dBuV	dBuV	dB

1.34700	28.4	46.0	-17.6
---------	------	------	-------

* limit exceeded