

## TEST REPORT

**Report Number: HK11061012-1**

Application  
for  
Original Grant of 47 CFR Part 15 Certification  
New Family of RSS-210 Issue 8 Equipment Certification

2.4GHz Frequency Hopping Spread Spectrum Video Baby Monitor - Baby Unit

**FCC ID: EW780-8252-00**

**IC: 1135B-80825200**

Prepared and Checked by:

Approved by:

Signed on File

---

Koo Wai Ip  
Lead Engineer  
July 26, 2011

---

Nip Ming Fung, Melvin  
Supervisor  
July 26, 2011

- The test report only allows to be revised within the retention period unless further standard or the requirement was noticed.
- This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

## INTERTEK TESTING SERVICES

---

### GENERAL INFORMATION

|                                    |   |
|------------------------------------|---|
| <b>Applicant Name:</b>             | VTech Telecommunications Ltd.   |
| <b>Applicant Address:</b>          | 23/F., Tai Ping Industrial Centre,<br>Block 1, 57 Ting Kok Road,<br>Tai Po, Hong Kong.          |
| <b>FCC Specification Standard:</b> | FCC Part 15, October 1, 2009 Edition  |
| <b>FCC ID:</b>                     | EW780-8252-00   |
| <b>FCC Model(s):</b>               | 1094SB, 1094B   |
| <b>IC Specification Standard:</b>  | RSS-210 Issue 8, December 2010<br>RSS-Gen Issue 3, December 2010<br>RSS-102 Issue 4, March 2010 |
| <b>IC:</b>                         | 1135B-80825200  |
| <b>IC Model(s):</b>                | 1094SB, 1094B   |
| <b>Type of EUT:</b>                | Spread Spectrum Transmitter   |
| <b>Description of EUT:</b>         | 2.4GHz Frequency Hopping Spread<br>Spectrum Video Baby Monitor                                  |
| <b>Serial Number:</b>              | N/A   |
| <b>Sample Receipt Date:</b>        | June 16, 2011   |
| <b>Date of Test:</b>               | June 30-July 12, 2011   |
| <b>Report Date:</b>                | July 26, 2011   |
| <b>Environmental Conditions:</b>   | Temperature: +10 to 40°C<br>Humidity: 10 to 90%   |

---

# INTERTEK TESTING SERVICES

---

## Table of Contents

|  |    |
|--|----|
| <b>1.0 Test Results Summary &amp; Statement of Compliance</b> .....              | 4  |
| 1.1 Summary of Test Results .....  | 4  |
| 1.2 Statement of Compliance .....  | 5  |
| <b>2.0 General Description</b> .....   | 7  |
| 2.1 Product Description .....  | 7  |
| 2.2 Test Methodology .....   | 7  |
| 2.3 Test Facility .....  | 7  |
| <b>3.0 System Test Configuration</b> .....                                       | 9  |
| 3.1 Justification .....  | 9  |
| 3.2 EUT Exercising Software .....  | 10 |
| 3.3 Details of EUT and Description of Accessories .....                          | 11 |
| 3.4 Measurement Uncertainty .....  | 11 |
| <b>4.0 Test Results</b> .....  | 13 |
| 4.1 Maximum Conducted Output Power at Antenna Terminals .....                    | 13 |
| 4.2 Maximum 20 dB RF Bandwidth .....   | 14 |
| 4.3 Minimum Number of Hopping Frequencies .....                                  | 15 |
| 4.4 Minimum Hopping Channel Carrier Frequency Separation .....                   | 16 |
| 4.5 Average Channel Occupancy Time .....   | 17 |
| 4.6 Out of Band Conducted Emissions .....  | 18 |
| 4.7 Field Strength Calculation .....   | 19 |
| 4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions .. | 20 |
| 4.8.1 Radiated Emission Configuration Photograph .....                           | 21 |
| 4.8.2 Radiated Emission Data .....   | 21 |
| 4.8.3 Transmitter Duty Cycle Calculation .....                                   | 22 |
| 4.9 Radiated Emissions from Receiver .....                                       | 27 |
| 4.9.1 Radiated Emission Configuration Photograph .....                           | 27 |
| 4.9.2 Radiated Emission Data .....   | 27 |
| 4.10 AC Power Line Conducted Emission .....                                      | 29 |
| 4.10.1 AC Power Line Conducted Emission Configuration Photograph .....           | 29 |
| 4.10.2 AC Power Line Conducted Emission Data .....                               | 29 |
| 4.11 Radio Frequency Radiation Exposure .....                                    | 36 |
| 4.12 Radio Frequency Exposure Compliance .....                                   | 36 |
| <b>5.0 Equipment List</b> .....  | 38 |

## Appendix – Exhibits for Application of Certification

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 1  
TEST RESULTS SUMMARY & STATEMENT OF COMPLIANCE**

## INTERTEK TESTING SERVICES

---

### 1.0 Test Results Summary & Statement of Compliance

#### 1.1 Summary of Test Results

| Test Items   | FCC Part 15 Section | RSS-210/<br>RSS-Gen <sup>#</sup><br>Section | Results | Details<br>see<br>section |
|--|---------------------|---|---------|---------------------------|
| Antenna Requirement  | 15.203              | 7.1.2 <sup>#</sup>                          | Pass    | 2.1                       |
| Max. Conducted Output Power                                  | 15.247(b)(1) & (4)  | A8.4(2)                                     | Pass    | 4.1                       |
| Max. 20dB RF Bandwidth                                       | 15.247(a)(1)(iii)   | A8.1(d)                                     | Pass    | 4.2                       |
| Min. No. of Hopping Frequencies                              | 15.247(a)(1)(iii)   | A8.1(d)                                     | Pass    | 4.3                       |
| Min. Hopping Channel Carrier Frequency Separation            | 15.247(a)(1)        | A8.1(b)                                     | Pass    | 4.4                       |
| Average Time of Occupancy                                    | 15.247(a)(1)(iii)   | A8.1(d)                                     | Pass    | 4.5                       |
| Out of Band Antenna Conducted Emission                       | 15.247(d)           | A8.5  | Pass    | 4.6                       |
| Radiated Emission in Restricted Bands and Spurious Emissions | 15.247(d) & 15.109  | 2.2   | Pass    | 4.8                       |
| Radiated Emission from Receiver                              | N/A                 | 2.3   | Pass    | 4.9                       |
| AC Power Line Conducted Emission                             | 15.207 & 15.107     | 7.2.4 <sup>#</sup>                          | Pass    | 4.10                      |
| Radio Frequency Radiation Exposure                           | 15.247(i)           | RSS-102                                     | Pass    | 4.11<br>4.12              |

Note: Pursuant to FCC Part 15 Section 15.215(c), the 20dB bandwidth of the emission was contained within the frequency band designated (mentioned as above) which the EUT operated. The effects, if any, from frequency sweeping, frequency hopping, other modulation techniques and frequency stability over expected variations in temperature and supply voltage were considered.

## INTERTEK TESTING SERVICES

---

### 1.2 Statement of Compliance

The equipment under test is found to be complying with the following standards:

FCC Part 15, October 1, 2009 Edition  
RSS-210 Issue 8, December 2010  
RSS-Gen Issue 3, December 2010  
RSS-102 Issue 4, March 2010

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 2  
GENERAL DESCRIPTION**

# INTERTEK TESTING SERVICES

---

## 2.0 General Description

### 2.1 Product Description

The Equipment Under Test (EUT) is a 2.4GHz Frequency Hopping Spread Spectrum Baby Unit of Video Monitor operating at frequency range of 2402.000MHz to 2478.500MHz. There are total of 52 channels, and 20 channels are used for each hopping sequence. The EUT is powered by a 100-240VAC to 6VDC 800mA switching AC adaptor and/or 4xAA size 1.5VDC battery.

The antenna used in the EUT is integral, and the test sample is a prototype.

For FCC and IC, The Model(s): 1094B is the same as the Model: 1094SB in electronics/electrical designs, including software & firmware, construction design/physical design/enclosure and PCB layout. The only differences between these models are model number, and removal of components for movement detection and sensor pad jack and switches in 1094B to be sold for marketing purpose.

The circuit description and frequency hopping algorithm are attached in the Appendix and saved with filename: descri.pdf.

### 2.2 Test Methodology

Both AC power line-conducted and radiated emission measurements were performed according to the procedures in ANSI C63.4 (2003). Preliminary radiated scans and all radiated measurements were performed in Open Area Test Sites. All Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application. Antenna port conducted measurements were performed according to FCC Public Notice DA 00-705. All other measurements were made in accordance with the procedures in 47 CFR Part 2.

### 2.3 Test Facility

The open area test site, AC Power Line conducted measurement facility, and antenna port conducted measurement facility used to collect the radiated data, AC Power Line conducted data, and conductive data are at Roof Top, 2<sup>nd</sup> Floor, and 5<sup>th</sup> Floor respectively of Intertek Testing Services Hong Kong Ltd., which is located at Garment Centre, 576 Castle Peak Road, Kowloon, Hong Kong. This test facility and site measurement data have been fully placed on file with the FCC and the Industry Canada.

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 3  
SYSTEM TEST CONFIGURATION**

## **INTERTEK TESTING SERVICES**

---

### **3.0 System Test Configuration**

#### **3.1 Justification**

For radiated emissions testing, the equipment under test (EUT) was setup to transmit / receive continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, all cables (if any) were manipulated to produce worst case emissions.

The EUT was powered by a 100-240VAC to 6VDC 800mA adaptor and/or 4 x "AA" size 1.5VDC battery.

For the measurements, the EUT was attached to a plastic stand if necessary and placed on the wooden turntable. If the EUT attached to peripherals, they were connected and operational (as typical as possible).

The signal was maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization were varied during the search for maximum signal level. The antenna height was varied from 1 to 4 meters. Radiated emissions were taken at three meters unless the signal level was too low for measurement at that distance. If necessary, a pre-amplifier was used and/or the test was conducted at a closer distance.

For any intentional radiator powered by AC power line, measurements of the radiated signal level of the fundamental frequency component of the emission was performed with the supply voltage varied between 85% and 115% of the nominal rated supply voltage.

For transmitter radiated measurement, the spectrum analyzer resolution bandwidth was 100 kHz for frequencies below 1000 MHz. The resolution bandwidth was 1 MHz for frequencies above 1000 MHz.

For receiver radiated measurement, the spectrum analyzer resolution bandwidth was 1MHz for measurement above 1GHz while 100kHz for measurement from 30MHz to 1GHz.

Radiated emission measurement for transmitter were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Radiated emission measurement for receiver was performed from 30MHz to the fifth harmonic of the highest frequency or 40GHz, whichever is lower.

Emission that are directly caused by digital circuits in the transmit path and transmitter portion were measured, and the limit are according to FCC Part 15 Section 15.109.

## INTERTEK TESTING SERVICES

---

### 3.1 Justification - Cont'd

Detector function for radiated emissions was in peak mode. Average readings, when required, were taken by measuring the duty cycle of the equipment under test and subtracting the corresponding amount in dB from the measured peak readings. A detailed description for the calculation of the average factor can be found in Section 4.8.3.

Determination of pulse desensitization was made according to *Hewlett Packard Application Note 150-2, Spectrum Analysis... Pulsed RF*. The effective period (Teff) was referred to section 4.8.3. With the resolution bandwidth 1MHz and spectrum analyzer IF bandwidth 3dB, the pulse desensitization factor was 0dB.

For AC line conducted emission test, the EUT along with its peripherals were placed on a 1.0m(W)x1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50ohm coupling impedance for measuring instrument. The LISN housing, measuring instrument case, reference ground plane, and vertical ground plane were bounded together. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were manipulated to find the maximum emission.

Two Models (1094B and 1094SB) have been tested, and the worst case data is included in this report.

All relevant operation modes have been tested, and the worst case data is included in this report.

### 3.2 EUT Exercising Software

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use.

## INTERTEK TESTING SERVICES

---

### 3.3 Details of EUT and Description of Accessories

#### Details of EUT:

An AC adaptor and/or a battery (provided with the unit) were used to power the device. Their description are listed below.

- (1) An AC adaptor (100-240VAC to 6VDC 800mA, Model: S006MU0600080) (Supplied by Client)
- (2) Backup Battery: 4 x "AA" size 1.5VDC battery (Supplied by Client)

#### Description of Accessories:

- (1) Parent Unit, Model: 1094SP, FCC ID: EW780-8252-01 (Provided by Client).
- (2) Sensor Pad, Model 1094SB

### 3.4 Measurement Uncertainty

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 4  
TEST RESULTS**

## INTERTEK TESTING SERVICES

---

### 4.0 Test Results

#### 4.1 Maximum Conducted Output Power at Antenna Terminals

- The antenna power of the EUT was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the EUT antenna terminals.
- The antenna port of the EUT was connected to the input of a spectrum analyzer. The analyzer was set for RBW>20dB bandwidth and power was read directly in dBm. External attenuation and cable loss were compensated for using the OFFSET function of the analyser.

| (Baby Unit) Antenna Gain = 2dBi |               |                 |
|---------------------------------|---------------|-----------------|
| Frequency (MHz)                 | Output in dBm | Output in mWatt |
| Low Channel: 2402.000           | 18.14         | 65.16           |
| Middle Channel: 2439.500        | 17.86         | 61.09           |
| High Channel: 2478.500          | 18.66         | 73.45           |

Cable loss : 0.5 dB External Attenuation : 0 dB

Cable loss, external attenuation:  included in OFFSET function  
 added to SA raw reading

dBm max. output level = 18.66 dBm

Limits:

- 0.125W (21dBm) for antennas with gains of 6dBi or less
- 0.25W (24dBm) for antennas with gains of 6dBi or less
- 1W (30dBm) for antennas with gains of 6dBi or less
- \_\_\_W (\_\_\_dBm) for antennas with gains more than 6dBi

The plots of conducted output power are attached in the Appendix and saved with filename: maxop.pdf

## INTERTEK TESTING SERVICES

---

### 4.2 Maximum 20 dB RF Bandwidth

The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was chosen so that the display was a result of the hopping channel modulation. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 20 dB lower than PEAK level. The 20 dB bandwidth was determined from where the channel output spectrum intersected the display line.

| Baby Unit       |                 |                       |
|-----------------|-----------------|-----------------------|
|                 | Frequency (MHz) | 20 dB Bandwidth (MHz) |
| Low Channel:    | 2402.000        | 2.10                  |
| Middle Channel: | 2439.500        | 2.10                  |
| High Channel:   | 2478.500        | 2.11                  |

#### Limits

$\leq 500\text{kHz}$  for 902-928MHz

N/A for 2400-2483.5MHz

$\leq 1\text{MHz}$  for 5725-5850MHz

The plots of 20dB RF bandwidth are attached in the Appendix and saved with filename: 20dB.pdf

---

## INTERTEK TESTING SERVICES

---

### 4.3 Minimum Number of Hopping Frequencies

With the analyzer set to MAX HOLD readings were taken for 2-3 minutes in each band. The channel peaks so recorded were added together, and the total number compared to the minimum number of channels required in the regulation.

| Baby Unit                         |    |
|-----------------------------------|----|
| No. of hopping channels (traffic) | 20 |
| No. of hopping channels (standby) | 52 |

Minimum Requirements:

- at least 50 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel < 250kHz)
- at least 25 hopping channels for 902MHz-928MHz (20 dB bandwidth of hopping channel  $\geq$  250kHz)
- at least 15 hopping channels for 2400MHz-2483.5MHz.
- at least 75 hopping channels for 5725MHz-5850MHz.

The plots of number of hopping frequencies are attached in the Appendix and saved with filename: chno.pdf

## INTERTEK TESTING SERVICES

---

### 4.4 Minimum Hopping Channel Carrier Frequency Separation

Using the DELTA MARKER function of the analyzer, the frequency separation between two adjacent channels was measured and met the requirement.

| Baby Unit   |        |
|---|--------|
| Channel Separation (Channel <u>25</u> and Channel <u>26</u> ) | 1.5MHz |

Limits:

The channel separation must be larger than:

25 kHz

20 dB bandwidth of hopping channel: \_\_\_Hz

2/3 of 20dB bandwidth of hopping channel: 1.41 MHz

The plot(s) of hopping channel carrier frequency separation is attached in the Appendix and saved with filename: fsepa.pdf

## INTERTEK TESTING SERVICES

---

### 4.5 Average Channel Occupancy Time

The spectrum analyzer center frequency was set to one of the known hopping channels. The SWEEP was set to 10ms, the SPAN was set to ZERO SPAN, and the TRIGGER was set to VIDEO. The time duration of the transmission so captured was measured with the MARKER DELTA function.

The SWEEP was then set to the time required by the regulation (20 seconds for 902-928 MHz devices, if the 20dB bandwidth is less than 250kHz, 10 seconds for 902-928 MHz if the 20dB bandwidth is or greater than 250kHz, "0.4 seconds x Number of hopping channels employed" seconds for 2400-2483.5 MHz, 30 seconds for 5725-5850 MHz). The analyzer was set to SINGLE SWEEP, the total ON time was added and compared against the limit (0.4 seconds).

| Baby Unit (worst-case: )  |         |
|---|---------|
| Average Occupancy Time = $0.880\text{ms} \times 4 \times 8\text{s} / (4.46 \times 20)\text{ms}$ | 315.7ms |

Limits:

Average 0.4 seconds maximum occupancy in:

- 8 seconds (0.4 sec. x 20) for 2400MHz-2483.5MHz
- 20 seconds for 902MHz-928MHz  $\geq$  50 hopping channels
- 10 seconds for 902MHz-928MHz  $\geq$  25 hopping channels
- 30 seconds for 5725-5850MHz

The plots of average channel occupancy time are attached in the Appendix and saved with filename: avetime.pdf

## INTERTEK TESTING SERVICES

---

### 4.6 Out of Band Conducted Emissions

In any 100 kHz bandwidth outside the EUT passband, the RF power produced by the modulation products of the spreading sequence, the information sequence, and the carrier frequency shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

The plot(s) of bandedge compliance is shown the worst-case which has been already considered between enable and disable the hopping function of the EUT.

Furthermore, delta measurement technique for measuring bandedge emissions was incorporated in the test of the edge at 2483.5MHz.

#### Limits:

All spurious emission and up to the tenth harmonic was measured and they were found to be at least 20 dB below the highest level of the desired power in the passband.

The plots of out of band conducted emissions are attached in the Appendix and saved with filenames: obantcon.pdf

---

## INTERTEK TESTING SERVICES

---

### 4.7 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

where

- FS = Field Strength in dB $\mu$ V/m
- RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V
- CF = Cable Attenuation Factor in dB
- AF = Antenna Factor in dB
- AG = Amplifier Gain in dB
- PD = Pulse Desensitization in dB
- AV = Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

#### Example

Assume a receiver reading of 62.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted. The pulse desensitization factor of the spectrum analyzer was 0 dB, and the resultant average factor was -10 dB. The net field strength for comparison to the appropriate emission limit is 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29 \text{ dB} \\ PD &= 0 \text{ dB} \\ AV &= -10 \text{ dB} \\ FS &= 62 + 7.4 + 1.6 - 29 + 0 + (-10) = 32 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm} [(32 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

## INTERTEK TESTING SERVICES

---

### 4.8 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

## INTERTEK TESTING SERVICES

---

### 4.8.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission  
at

42.675 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

### 4.8.2 Radiated Emission Data

The data in tables 1-4 list the significant emission frequencies, the limit and the margin of compliance.

Judgement -

Passed by 6.1 dB margin

## INTERTEK TESTING SERVICES

---

### 4.8.3 Transmitter Duty Cycle Calculation

For the worst case,  
Duty Cycle (DC)  
= Maximum On time in 96ms/96ms  
=  $(0.880\text{ms} \times 4) / (4.46 \times 20) \text{ ms}$   
= 0.03946

Average Factor (AF)  
=  $20 \log(\text{DC})$   
=  $20 * \log(0.03946)$   
= -28.0dB

The plot(s) shows the bit timing is attached in the Appendix and saved with filename:  
dcc.pdf

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 00

Table 1, Baby Unit

### Radiated Emission Data

| Polarization | Frequency (MHz)  | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (dB) | Calculated at 3m (dB $\mu$ V/m) | Average Limit at 3m (dB $\mu$ V/m) | Margin (dB)  |
|--------------|------------------|----------------------|-------------------|---------------------|---------------------|---------------------------------|------------------------------------|--------------|
| <i>H</i>     | <i>4804.000</i>  | <i>55.3</i>          | <i>33</i>         | <i>34.9</i>         | <i>28</i>           | <i>29.2</i>                     | <i>54.0</i>                        | <i>-24.8</i> |
| <i>H</i>     | <i>12010.000</i> | <i>42.7</i>          | <i>33</i>         | <i>40.5</i>         | <i>28</i>           | <i>22.2</i>                     | <i>54.0</i>                        | <i>-31.8</i> |

| Polarization | Frequency        | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dB $\mu$ V/m) | Peak Limit at 3m (dB $\mu$ V/m) | Margin (dB)  |
|--------------|------------------|----------------------|-------------------|---------------------|---------------------------------|---------------------------------|--------------|
| <i>H</i>     | <i>4804.000</i>  | <i>55.3</i>          | <i>33</i>         | <i>34.9</i>         | <i>57.2</i>                     | <i>74.0</i>                     | <i>-16.8</i> |
| <i>H</i>     | <i>12010.000</i> | <i>42.7</i>          | <i>33</i>         | <i>40.5</i>         | <i>50.2</i>                     | <i>74.0</i>                     | <i>-23.8</i> |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 25

Table 2, Baby Unit

### Radiated Emission Data

| Polarization    | Frequency (MHz)         | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (dB) | Calculated at 3m (dB $\mu$ V/m) | Average Limit at 3m (dB $\mu$ V/m) | Margin (dB)         |
|-----------------|-------------------------|----------------------|-------------------|---------------------|---------------------|---------------------------------|------------------------------------|---------------------|
| <b><i>H</i></b> | <b><i>4879.000</i></b>  | <b><i>54.9</i></b>   | <b><i>33</i></b>  | <b><i>34.9</i></b>  | <b><i>28</i></b>    | <b><i>28.8</i></b>              | <b><i>54.0</i></b>                 | <b><i>-25.2</i></b> |
| <b><i>H</i></b> | <b><i>7318.500</i></b>  | <b><i>45.0</i></b>   | <b><i>33</i></b>  | <b><i>37.9</i></b>  | <b><i>28</i></b>    | <b><i>21.9</i></b>              | <b><i>54.0</i></b>                 | <b><i>-32.1</i></b> |
| <b><i>H</i></b> | <b><i>12197.500</i></b> | <b><i>42.7</i></b>   | <b><i>33</i></b>  | <b><i>40.5</i></b>  | <b><i>28</i></b>    | <b><i>22.2</i></b>              | <b><i>54.0</i></b>                 | <b><i>-31.8</i></b> |

| Polarization    | Frequency               | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dB $\mu$ V/m) | Peak Limit at 3m (dB $\mu$ V/m) | Margin (dB)         |
|-----------------|-------------------------|----------------------|-------------------|---------------------|---------------------------------|---------------------------------|---------------------|
| <b><i>H</i></b> | <b><i>4879.000</i></b>  | <b><i>54.9</i></b>   | <b><i>33</i></b>  | <b><i>34.9</i></b>  | <b><i>56.8</i></b>              | <b><i>74.0</i></b>              | <b><i>-17.2</i></b> |
| <b><i>H</i></b> | <b><i>7318.500</i></b>  | <b><i>45.0</i></b>   | <b><i>33</i></b>  | <b><i>37.9</i></b>  | <b><i>49.9</i></b>              | <b><i>74.0</i></b>              | <b><i>-24.1</i></b> |
| <b><i>H</i></b> | <b><i>12197.500</i></b> | <b><i>42.7</i></b>   | <b><i>33</i></b>  | <b><i>40.5</i></b>  | <b><i>50.2</i></b>              | <b><i>74.0</i></b>              | <b><i>-23.8</i></b> |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by ***bold italic***) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

## INTERTEK TESTING SERVICES

---

Mode: TX-Channel 51

Table 3, Baby Unit

### Radiated Emission Data

| Polarization | Frequency (MHz)  | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Average Factor (dB) | Calculated at 3m (dB $\mu$ V/m) | Average Limit at 3m (dB $\mu$ V/m) | Margin (dB)  |
|--------------|------------------|----------------------|-------------------|---------------------|---------------------|---------------------------------|------------------------------------|--------------|
| H            | **2478.500       | 116.9                | 33                | 29.4                | 28                  | 85.3                            |                                    |              |
| <b>H</b>     | <b>4957.000</b>  | <b>55.0</b>          | <b>33</b>         | <b>34.9</b>         | <b>28</b>           | <b>28.9</b>                     | <b>54.0</b>                        | <b>-25.1</b> |
| <b>H</b>     | <b>7435.500</b>  | <b>44.7</b>          | <b>33</b>         | <b>37.9</b>         | <b>28</b>           | <b>21.6</b>                     | <b>54.0</b>                        | <b>-32.4</b> |
| <b>H</b>     | <b>12392.500</b> | <b>42.7</b>          | <b>33</b>         | <b>40.5</b>         | <b>28</b>           | <b>22.2</b>                     | <b>54.0</b>                        | <b>-31.8</b> |

| Polarization | Frequency (MHz)  | Reading (dB $\mu$ V) | Pre-Amp Gain (dB) | Antenna Factor (dB) | Net at 3m - Peak (dB $\mu$ V/m) | Peak Limit at 3m (dB $\mu$ V/m) | Margin (dB)  |
|--------------|------------------|----------------------|-------------------|---------------------|---------------------------------|---------------------------------|--------------|
| H            | **2478.500       | 116.9                | 33                | 29.4                | 113.3                           |                                 |              |
| <b>H</b>     | <b>4957.000</b>  | <b>55.0</b>          | <b>33</b>         | <b>34.9</b>         | <b>56.9</b>                     | <b>74.0</b>                     | <b>-17.1</b> |
| <b>H</b>     | <b>7435.500</b>  | <b>44.7</b>          | <b>33</b>         | <b>37.9</b>         | <b>49.6</b>                     | <b>74.0</b>                     | <b>-24.4</b> |
| <b>H</b>     | <b>12392.500</b> | <b>42.7</b>          | <b>33</b>         | <b>40.5</b>         | <b>50.2</b>                     | <b>74.0</b>                     | <b>-23.8</b> |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Horn antenna is used for the emission over 1000MHz.
  5. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.
- \*\* Fundamental emission was measured for determining band-edge compliance of using delta measurement technique. Peak level and average level at the upper bandedge were 59.5dB $\mu$ V/m and 31.5 dB $\mu$ V/m respectively.

## INTERTEK TESTING SERVICES

---

Mode: Talk

Table 4, Baby Unit

### Radiated Emission Data

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Limit at 3m (dB $\mu$ V/m) | Margin (dB)  |
|--------------|-----------------|----------------------|--------------|---------------------|--------------------------|----------------------------|--------------|
| V            | 42.675          | 39.9                 | 16           | 10.0                | 33.9                     | 40.0                       | -6.1         |
| V            | 85.350          | 41.8                 | 16           | 8.0                 | 33.8                     | 40.0                       | -6.2         |
| <b>V</b>     | <b>128.025</b>  | <b>36.1</b>          | <b>16</b>    | <b>14.0</b>         | <b>34.1</b>              | <b>43.5</b>                | <b>-9.4</b>  |
| <b>H</b>     | <b>170.170</b>  | <b>31.1</b>          | <b>16</b>    | <b>18.0</b>         | <b>33.1</b>              | <b>43.5</b>                | <b>-10.4</b> |
| H            | 213.375         | 33.8                 | 16           | 17.0                | 34.8                     | 43.5                       | -8.7         |
| <b>H</b>     | <b>256.050</b>  | <b>29.6</b>          | <b>16</b>    | <b>21.0</b>         | <b>34.6</b>              | <b>46.0</b>                | <b>-11.4</b> |
| H            | 298.725         | 29.2                 | 16           | 22.0                | 35.2                     | 46.0                       | -10.8        |
| H            | 320.062         | 30.6                 | 16           | 23.0                | 37.6                     | 46.0                       | -8.4         |
| H            | 362.737         | 27.2                 | 16           | 24.0                | 35.2                     | 46.0                       | -10.8        |
| H            | 384.075         | 29.9                 | 16           | 24.0                | 37.9                     | 46.0                       | -8.1         |
| H            | 426.750         | 27.8                 | 16           | 25.0                | 36.8                     | 46.0                       | -9.2         |
| H            | 448.087         | 26.2                 | 16           | 26.0                | 36.2                     | 46.0                       | -9.8         |
| H            | 490.762         | 27.8                 | 16           | 26.0                | 37.8                     | 46.0                       | -8.2         |
| H            | 512.100         | 25.5                 | 16           | 27.0                | 36.5                     | 46.0                       | -9.5         |
| H            | 554.775         | 23.1                 | 16           | 28.0                | 35.1                     | 46.0                       | -10.9        |

- NOTES:
1. Peak detector is used for the emission measurement.
  2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
  3. Negative value in the margin column shows emission below limit.
  4. Emission (the row indicated by **bold italic**) within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-210 Section 2.2.

## INTERTEK TESTING SERVICES

---

### 4.9 Radiated Emissions from Receiver

#### 4.9.1 Radiated Emission Configuration Photograph

Worst Case Radiated Emission  
at  
2437.500 MHz

The worst case radiated emission configuration photographs are attached in the Appendix and saved with filename: config photos.pdf

#### 4.9.2 Radiated Emission Data

The data in tables 5 list the significant emission frequencies, the limit and the margin of compliance.

Judgement –  
Passed by 13.2 dB margin

---

## INTERTEK TESTING SERVICES

---

Mode: Receiving – Middle Channel

Table 5, Baby Unit

### Radiated Emissions Data

| Polarization | Frequency (MHz) | Reading (dB $\mu$ V) | Pre-amp (dB) | Antenna Factor (dB) | Net at 3m (dB $\mu$ V/m) | Limit at 3m (dB $\mu$ V/m) | Margin (dB) |
|--------------|-----------------|----------------------|--------------|---------------------|--------------------------|----------------------------|-------------|
| V            | 2437.500        | 44.4                 | 33           | 29.4                | 40.8                     | 54.0                       | -13.2       |
| V            | 4875.000        | 38.3                 | 33           | 34.9                | 40.2                     | 54.0                       | -13.8       |
| V            | 7312.500        | 35.0                 | 33           | 37.9                | 39.9                     | 54.0                       | -14.1       |
| V            | 9750.000        | 32.2                 | 33           | 40.4                | 39.6                     | 54.0                       | -14.4       |
| V            | 12187.500       | 31.7                 | 33           | 40.5                | 39.2                     | 54.0                       | -14.8       |

NOTES:

1. Peak detector is used for the emission measurement.
2. All measurements were made at 3 meters. Radiated emissions not detected at the 3-meter distance were measured at 0.3-meter and an inverse proportional extrapolation was performed to compare the signal level to the 3-meter limit. No other radiated emissions than those reported were detected at a test distance of 0.3-meter.
3. Negative value in the margin column shows emission below limit.
4. Horn antenna is used for the emission over 1000MHz.

## INTERTEK TESTING SERVICES

---

### 4.10 AC Power Line Conducted Emission

- Not applicable – EUT is only powered by battery for operation.
- EUT connects to AC power line. Emission Data is listed in following pages.
- Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

#### 4.10.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration  
at

0.348 MHz

The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf


#### 4.10.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by more than 8.2 dB margin compare with average limit

# INTERTEK TESTING SERVICES

Worst Case: Standby

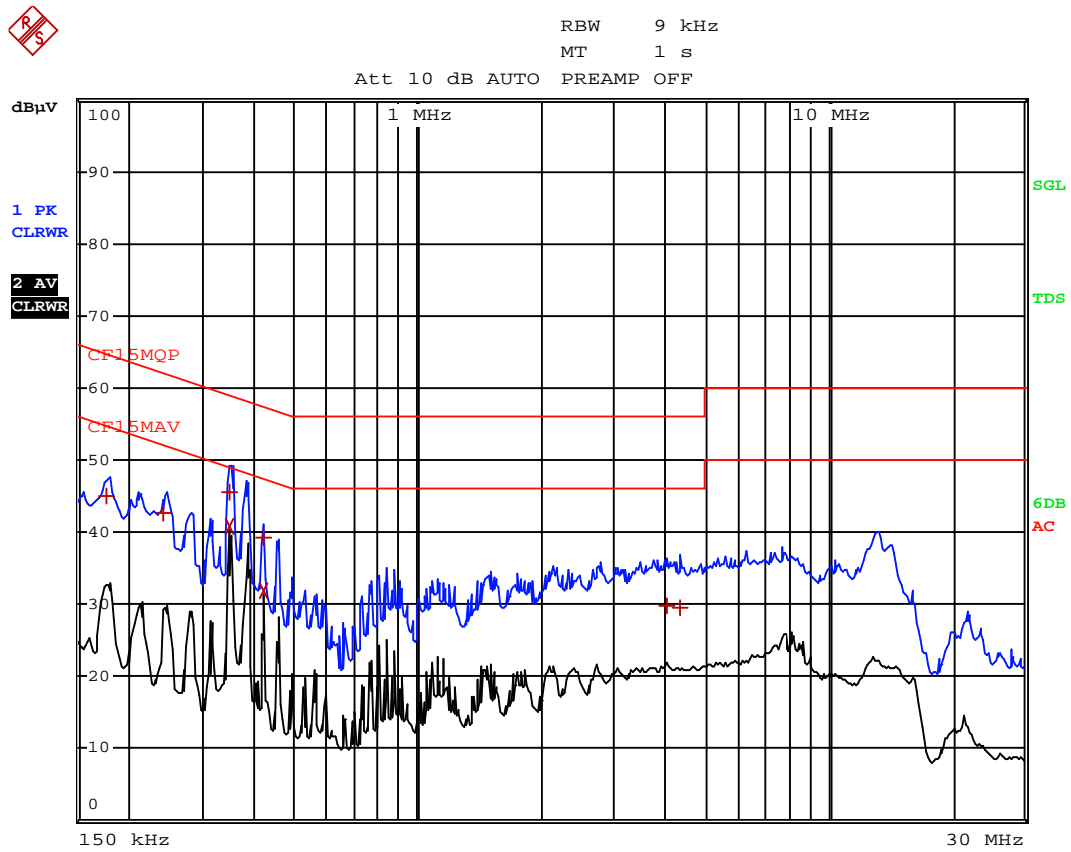

Date: 30.JUN.2011 19:26:08

# INTERTEK TESTING SERVICES

---

Worst Case: Standby

## EDIT PEAK LIST (Final Measurement Results)


Trace1: CF15MQP  
Trace2: CF15MAV  
Trace3: ---

|   | TRACE         | FREQUENCY | LEVEL | dB $\mu$ V | DELTA  | LIMIT | dB |
|---|---------------|-----------|-------|------------|--------|-------|----|
| 1 | Quasi Peak    | 177 kHz   | 45.04 | L1         | -19.57 |       |    |
| 1 | Quasi Peak    | 244.5 kHz | 42.64 | N          | -19.30 |       |    |
| 2 | CISPR Average | 348 kHz   | 40.80 | L1         | -8.20  |       |    |
| 1 | Quasi Peak    | 352.5 kHz | 45.41 | N          | -13.48 |       |    |
| 2 | CISPR Average | 420 kHz   | 31.82 | L1         | -15.62 |       |    |
| 1 | Quasi Peak    | 420 kHz   | 39.24 | N          | -18.20 |       |    |
| 1 | Quasi Peak    | 4.056 MHz | 29.67 | N          | -26.32 |       |    |
| 1 | Quasi Peak    | 4.335 MHz | 29.55 | N          | -26.44 |       |    |

Date: 30.JUN.2011 19:26:00

# INTERTEK TESTING SERVICES

Worst Case: Talking, Night Light and Sensor Pad Connecting

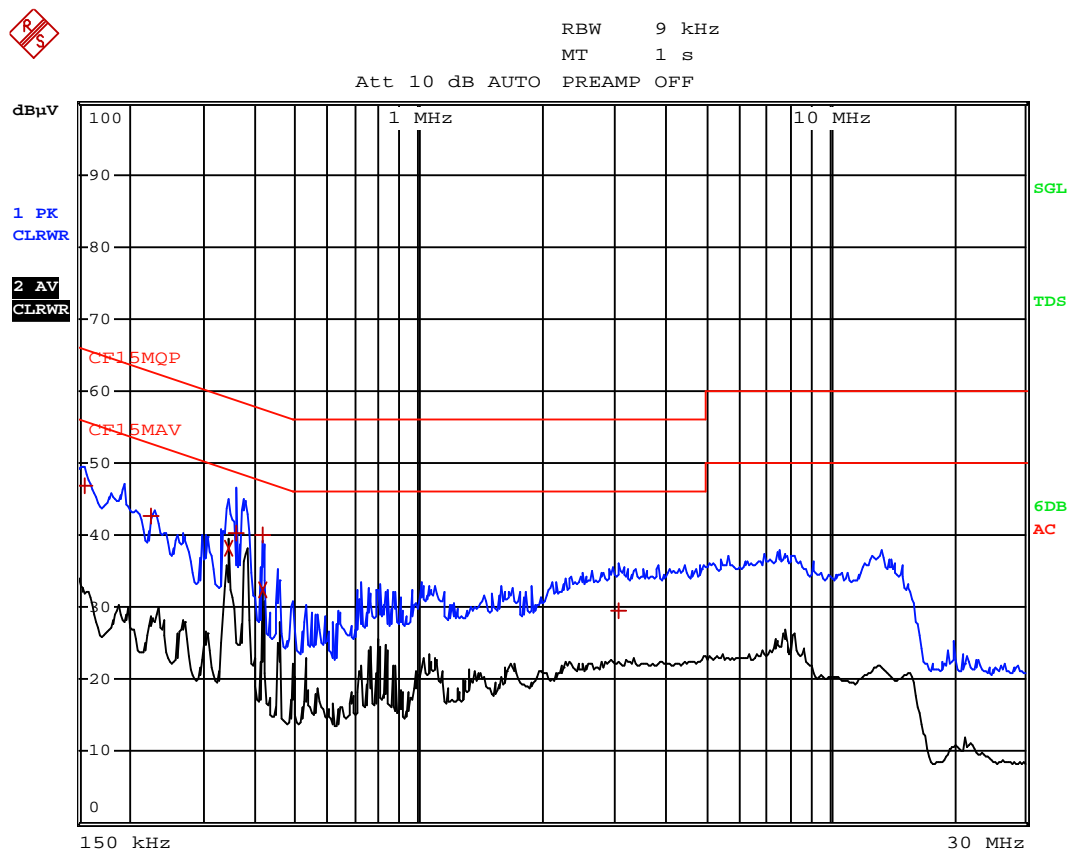

Date: 30.JUN.2011 19:31:51

# INTERTEK TESTING SERVICES

---


Worst Case: Talking, Night Light and Sensor Pad Connecting

| EDIT PEAK LIST (Final Measurement Results) |               |            |                  |  |                |
|--|---------------|------------|------------------|--|----------------|
| Trace1: CF15MQP                            |               |            |                  |  |                |
| Trace2: CF15MAV                            |               |            |                  |  |                |
| Trace3: ---                                |               |            |                  |  |                |
|  | TRACE         | FREQUENCY  | LEVEL dB $\mu$ V |  | DELTA LIMIT dB |
| 1  | Quasi Peak    | 154.5 kHz  | 46.79 N          |  | -18.95         |
| 1  | Quasi Peak    | 226.5 kHz  | 42.59 N          |  | -19.98         |
| 2  | CISPR Average | 343.5 kHz  | 38.21 L1         |  | -10.90         |
| 1  | Quasi Peak    | 357 kHz    | 40.37 N          |  | -18.42         |
| 1  | Quasi Peak    | 415.5 kHz  | 40.04 N          |  | -17.49         |
| 2  | CISPR Average | 415.5 kHz  | 32.40 L1         |  | -15.13         |
| 1  | Quasi Peak    | 3.0705 MHz | 29.62 L1         |  | -26.37         |

Date: 30.JUN.2011 19:31:43

# INTERTEK TESTING SERVICES

Worst Case: Talking, Night Light and Sensor Pad Alerting

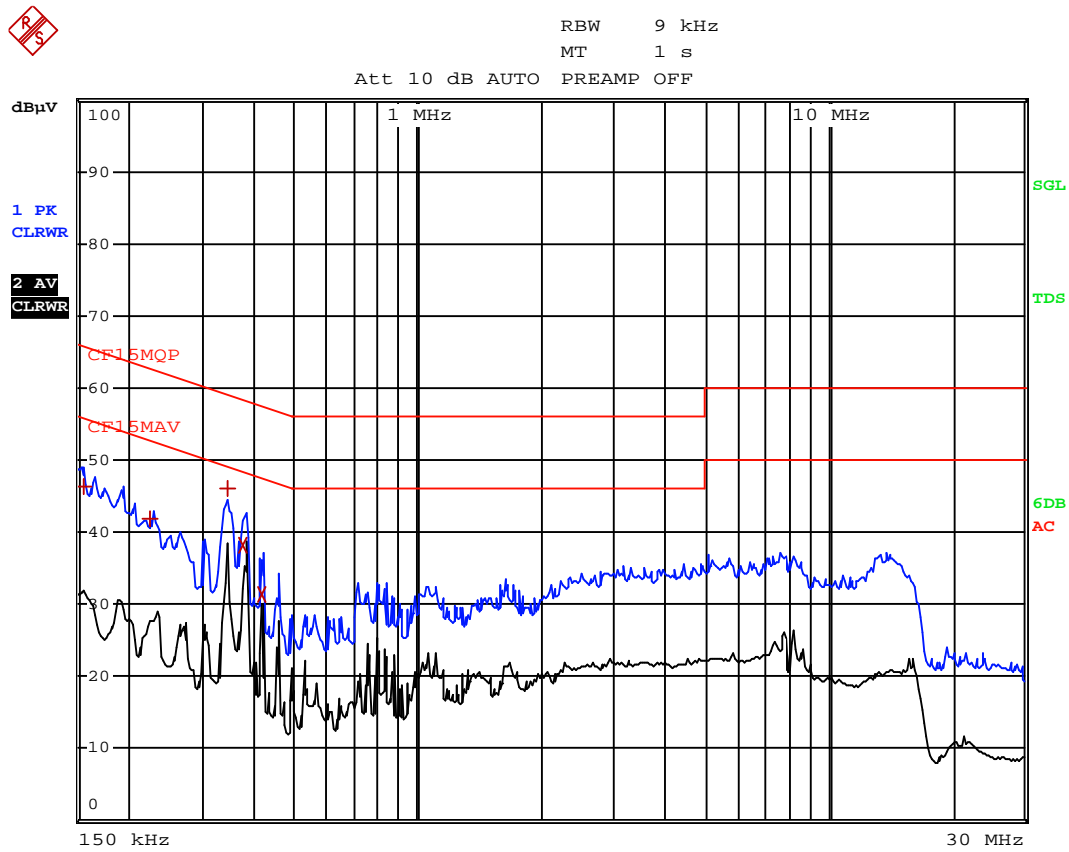

Date: 30.JUN.2011 19:35:36

## INTERTEK TESTING SERVICES

---

Worst Case: Talking, Night Light and Sensor Pad Alerting

### EDIT PEAK LIST (Final Measurement Results)

Trace1: CF15MQP

Trace2: CF15MAV

Trace3: ---

|   | TRACE         | FREQUENCY | LEVEL dB $\mu$ V | DELTA LIMIT dB |
|---|---------------|-----------|------------------|----------------|
| 1 | Quasi Peak    | 154.5 kHz | 46.23 N          | -19.52         |
| 1 | Quasi Peak    | 226.5 kHz | 41.92 N          | -20.64         |
| 1 | Quasi Peak    | 343.5 kHz | 46.07 N          | -13.04         |
| 2 | CISPR Average | 379.5 kHz | 38.24 L1         | -10.05         |
| 2 | CISPR Average | 415.5 kHz | 31.33 L1         | -16.20         |

Date: 30.JUN.2011 19:35:26

## INTERTEK TESTING SERVICES

---

### 4.11 Radio Frequency Radiation Exposure

EUT is subject to the radio frequency exposure requirements specified in FCC Rule §§ 1.1307. It shall be considered to operate in a “general population / uncontrolled” environment.

- Output power is less than the applicable low threshold from SAR evaluation. The evaluation calculation results are saved as filename: RF exposure info.pdf
- EUT was evaluated for Maximum Permissible Exposure (MPE) evaluation compliance according to OET Bulletin 65, Supplement C (Edition 01-01). The evaluation calculation results are attached in the Appendix and saved as filename: RF exposure info.pdf

### 4.12 Radio Frequency Exposure Compliance

The Routine RF Exposure Evaluation, Routine SAR Evaluation and Declaration of RF Exposure Compliance are saved as filename: RF exposure.pdf

**INTERTEK TESTING SERVICES**

---

**EXHIBIT 5  
EQUIPMENT LIST**

## INTERTEK TESTING SERVICES

---

### 5.0 Equipment List

#### 1) Radiated Emissions Test

| Equipment            | Biconical Antenna | Log Periodic Antenna | Double Ridged Guide Antenna |
|----------------------|-------------------|----------------------|-----------------------------|
| Registration No.     | EW-0954           | EW-0446              | EW-1015                     |
| Manufacturer         | EMCO              | EMCO                 | EMCO                        |
| Model No.            | 3104C             | 3146                 | 3115                        |
| Calibration Date     | Apr. 14, 2010     | Apr. 26, 2010        | Feb. 09, 2010               |
| Calibration Due Date | Oct. 14, 2011     | Oct. 26, 2011        | Aug. 09, 2011               |

| Equipment            | EMI Test Receiver | Spectrum Analyzer | Broad-Band Horn Antenna with frequency range 14G - 40GHz |
|----------------------|-------------------|-------------------|--|
| Registration No.     | EW-2500           | EW-2188           | EW-1679  |
| Manufacturer         | R&S               | AGILENTTECH       | SCHWARZBECK  |
| Model No.            | ESCI              | E4407B            | BBHA9170   |
| Calibration Date     | Jan. 25, 2011     | Dec. 27, 2010     | Mar. 03, 2011  |
| Calibration Due Date | Jan. 25, 2012     | Dec. 31, 2011     | Sep. 03, 2012  |

#### 2) Conducted Emissions Test

| Equipment            | EMI Test Receiver | LISN          | Pulse Limiter |
|----------------------|-------------------|---------------|---------------|
| Registration No.     | EW-2666           | EW-0192       | EW-0698       |
| Manufacturer         | R&S               | R&S           | R&S           |
| Model No.            | ESCI7             | ESH3-Z5       | ESH3-Z2       |
| Calibration Date     | Oct. 12, 2010     | Nov. 30, 2010 | Mar. 11, 2011 |
| Calibration Due Date | Oct. 12, 2011     | Nov. 30, 2011 | Mar. 11, 2012 |

#### 3) Conductive Measurement Test

| Equipment            | Spectrum Analyzer |
|----------------------|-------------------|
| Registration No.     | EW-2253           |
| Manufacturer         | R&S               |
| Model No.            | FSP40             |
| Calibration Date     | Nov. 23, 2010     |
| Calibration Due Date | Nov. 23, 2011     |

**END OF TEST REPORT**

**INTERTEK TESTING SERVICES**

---

**APPENDIX  
EXHIBITS OF APPLICATION FOR CERTIFICATION**