



中认信通
CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: VTech Telecommunications Ltd

Address: 23/F Tai Ping Ind Center Block 1 57 Ting Kok Rd Tai Po NT, Hong Kong

FCC ID: EW780-9047-00

Product Name: DECT 6.0 cordless phone

Standard(s): 47 CFR Part 15, Subpart C(15.247)
ANSI C63.10-2013
KDB 558074 D01 15.247 Meas Guidance v05r02

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: CR230744354-00A

Date Of Issue: 2023/10/31

Reviewed By: Calvin Chen

Title: RF Engineer

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)
No. 113, Pingkang Road, Dalang Town, Dongguan,
Guangdong, China
Tel: +86-769-82016888

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the No. 113, Pingkang Road, Dalang Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

CONTENTS

DOCUMENT REVISION HISTORY	5
1. GENERAL INFORMATION	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition:.....	8
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATED SPURIOUS EMISSIONS.....	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	15
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
3.2.4 Test Procedure	16
3.2.5 Corrected Amplitude & Margin Calculation.....	16
3.3 20 DB EMISSION BANDWIDTH	17
3.3.1 Applicable Standard.....	17
3.3.2 EUT Setup.....	17
3.3.3 Test Procedure	17
3.4 CHANNEL SEPARATION	19
3.4.1 Applicable Standard.....	19
3.4.2 EUT Setup.....	19
3.4.3 Test Procedure	19
3.5 NUMBER OF HOPPING FREQUENCY	20
3.5.1 Applicable Standard.....	20
3.5.2 EUT Setup.....	20
3.5.3 Test Procedure	20
3.6 TIME OF OCCUPANCY(DWELL TIME).....	21
3.6.1 Applicable Standard.....	21
3.6.2 EUT Setup.....	21
3.6.3 Test Procedure	21
3.7 MAXIMUM CONDUCTED OUTPUT POWER.....	22
3.7.1 Applicable Standard.....	22
3.7.2 EUT Setup.....	22

3.7.3 Test Procedure22

3.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE23

3.8.1 Applicable Standard.....23

3.8.2 EUT Setup.....23

3.8.3 Test Procedure23

3.9 ANTENNA REQUIREMENT.....24

3.9.1 Applicable Standard.....24

3.9.2 Judgment.....24

4. TEST DATA AND RESULTS 25

4.1 AC LINE CONDUCTED EMISSIONS.....25

4.2 RADIATED SPURIOUS EMISSIONS.....34

4.3 20 dB EMISSION BANDWIDTH68

4.4 CHANNEL SEPARATION72

4.5 NUMBER OF HOPPING FREQUENCY74

4.6 TIME OF OCCUPANCY(DWELL TIME).....76

4.7 MAXIMUM CONDUCTED OUTPUT POWER.....80

4.8 100 KHZ BANDWIDTH OF FREQUENCY BAND EDGE.....84

5. RF EXPOSURE EVALUATION 91

5.1 APPLICABLE STANDARD.....91

5.2 MEASUREMENT RESULT91

6. EUT PHOTOGRAPHS 93

7. TEST SETUP PHOTOGRAPHS 94

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	CR230744354-00A	Original Report	2023/10/31

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

EUT Name:	DECT 6.0 cordless phone
Trade Name:	AT&T
EUT Model:	EL52203
Multiple Model(s):	EL52103, EL52113, EL52213, EL52313, EL52253, EL52353, EL52503, EL52XY3, EL52303
Operation Frequency:	2402-2480 MHz
Maximum Peak Output Power (Conducted):	6.22 dBm
Modulation Type:	GFSK, $\pi/4$ -DQPSK, 8DPSK
Rated Input Voltage:	DC 6V from adapter
Serial Number:	RF: 2968_2 CE/RE: 2968_1
EUT Received Date:	2023/7/3
EUT Received Status:	Good
Note: The Multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

Operation Frequency Detail:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	40	2442
1	2403	41	2443
...
...
...	...	78	2480
39	2441	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2402
Middle	2441
Highest	2480

Antenna Information Detail▲:

Antenna Type	input impedance (Ohm)	Frequency Range	Antenna Gain
PCB	50	2.4~2.5GHz	0dBi

The Method of §15.203 Compliance:

- Antenna was permanently attached to the unit.
- Antenna use a unique type of connector to attach to the EUT.
- Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

Accessory Information:

Accessory Description	Manufacturer	Model	Parameters
Adapter	Jian Aohai	A318-060040W-US1	Input: AC 100-120V~50/60Hz, 0.15A Output: DC 6.0V 0.4A
Adapter	DEE VAN	DSA-3PFM-05 BUS 060040	Input: AC 100-120V~50/60Hz, 0.15A Output: DC 6.0V 0.4A, 2.4W
Adapter	MASS POWER	E004-1A060040VU	Input: AC 100-120V~50/60Hz, 0.1A Output: DC 6.0V 0.4A
Adapter	VTPL	VT05UUS06040	Input: AC 100-120V~60Hz, 150mA Output: DC 6.0V 400mA

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition:

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer.		
Equipment Modifications:	No		
EUT Exercise Software:	UniTool_4v91.exe		
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer▲:			
Test Modes	Power Level Setting		
	Lowest	Middle	Highest
GFSK	Max	Max	Max
$\pi/4$ -DQPSK	Max	Max	Max
8DPSK	Max	Max	Max

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
VTech	Handset	CS5319	Unknown

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
AC cable	NO	NO	1.2	LISN/ AC mains	Socket
DC cable	NO	NO	2.0	Adapter	EUT(Base)

1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:

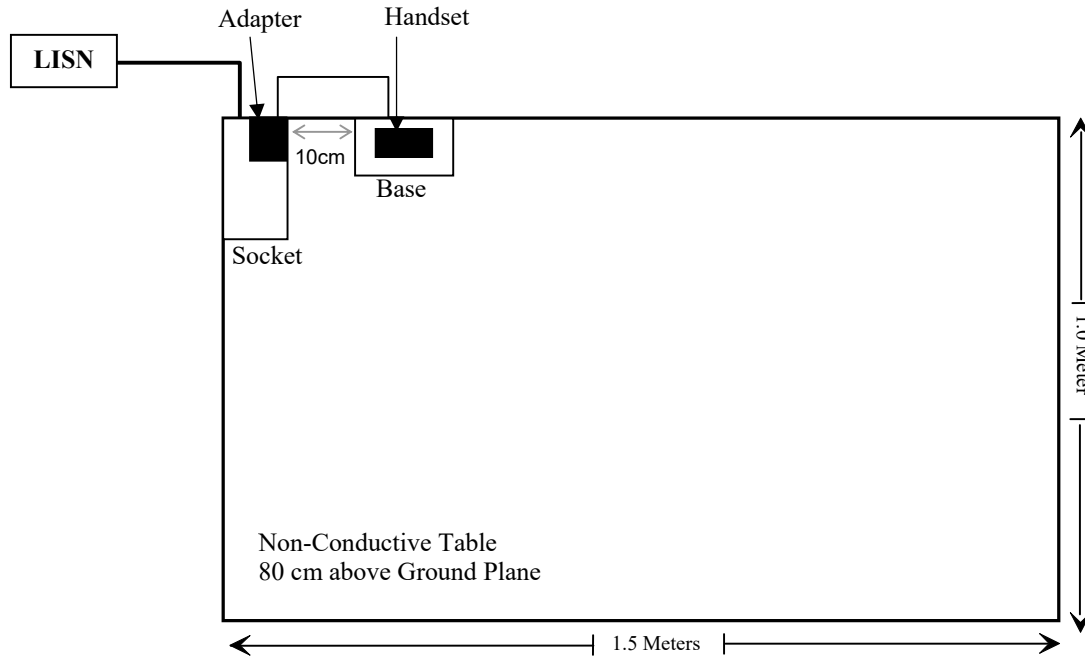

Spurious emissions:

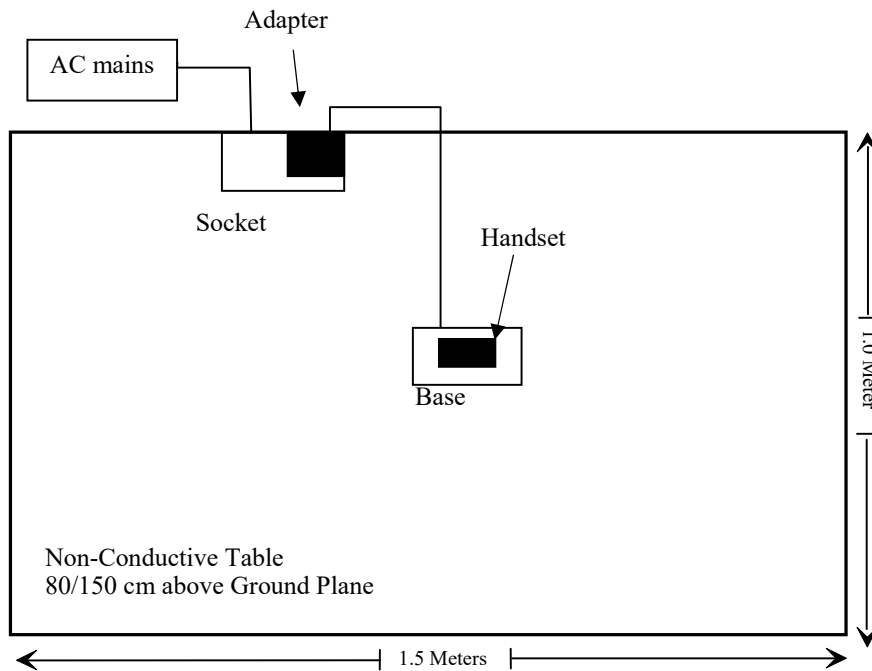

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF output power, conducted	±0.61dB
Power Spectral Density, conducted	±0.61 dB
Unwanted Emissions, radiated	30M~200MHz: 4.15 dB,200M~1GHz: 5.61 dB,1G~6GHz: 5.14 dB, 6G~18GHz: 5.93 dB,18G~26.5G:5.47 dB,26.5G~40G:5.63 dB
Unwanted Emissions, conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC and low frequency voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious Emissions	Compliant
FCC §15.247(a)(1)	20 dB Emission Bandwidth	Compliant
FCC §15.247(a)(1)	Channel Separation	Compliant
FCC §15.247(a)(1)(iii)	Number Of Hopping Frequency	Compliant
FCC §15.247(a)(1)(iii)	Time Of Occupancy (dwell time)	Compliant
FCC §15.247(b)(1)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	100 kHz Bandwidth Of Frequency Band Edge	Compliant
FCC §15.203	Antenna Requirement	Compliant
FCC§15.247 (i) & §1.1307	RF Exposure Evaluation	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC§15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

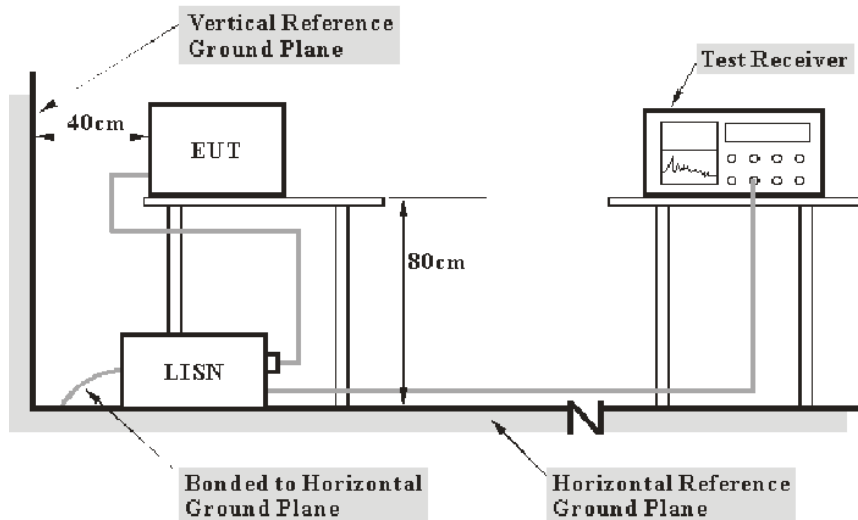

- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiated Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.2.2 EUT Setup

Below 1GHz:

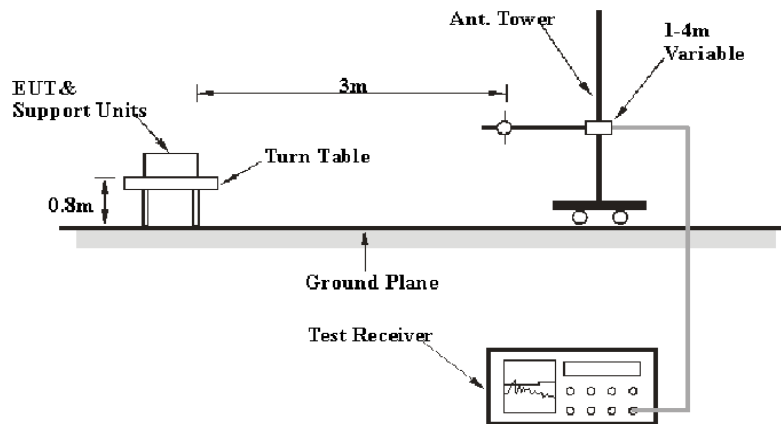

Above 1GHz:

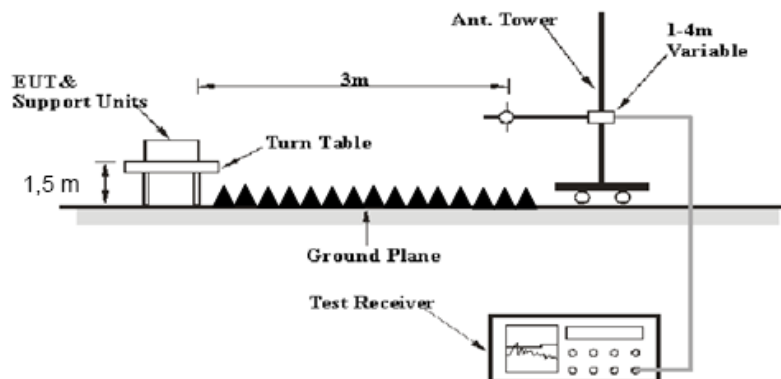

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	/	/	120 kHz	QP
	100 kHz	300 kHz	/	PK
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	AV

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 30 MHz-1 GHz, peak and Average detection modes for frequencies above 1 GHz.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 20 dB Emission Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.3.2 EUT Setup

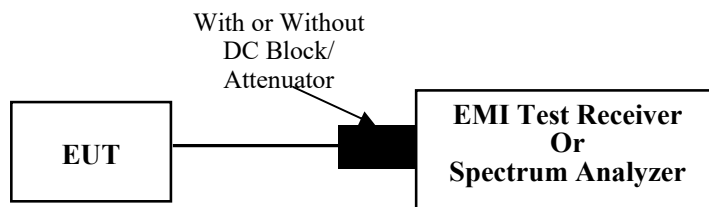

3.3.3 Test Procedure

According to ANSI C63.10-2013 Section 6.9.2

- a) The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the EMI receiver or spectrum analyzer shall be between two times and five times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW and video bandwidth (VBW) shall be approximately three times RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[\log(\text{OBW}/\text{RBW})]$ below the reference level. Specific guidance is given in 4.1.5.2
- d) Steps a) through c) might require iteration to adjust within the specified tolerances.
- e) The dynamic range of the instrument at the selected RBW shall be more than 10 dB below the target “-xx dB down” requirement; that is, if the requirement calls for measuring the -20 dB OBW, the instrument noise floor at the selected RBW shall be at least 30 dB below the reference value.
- f) Set detection mode to peak and trace mode to max hold.
- g) Determine the reference value: Set the EUT to transmit an unmodulated carrier or modulated signal, as applicable. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- h) Determine the “-xx dB down amplitude” using $[(\text{reference value}) - \text{xx}]$. Alternatively, this calculation may be made by using the marker-delta function of the instrument.
- i) If the reference value is determined by an unmodulated carrier, then turn the EUT modulation ON, and either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise, the trace from step g) shall be used for step j).

- j) Place two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-xx dB down amplitude” determined in step h). If a marker is below this “-xx dB down amplitude” value, then it shall be as close as possible to this value. The occupied bandwidth is the frequency difference between the two markers. Alternatively, set a marker at the lowest frequency of the envelope of the spectral display, such that the marker is at or slightly below the “-xx dB down amplitude” determined in step h). Reset the marker-delta function and move the marker to the other side of the emission until the delta marker amplitude is at the same level as the reference marker amplitude. The marker-delta frequency reading at this point is the specified emission bandwidth.
- k) The occupied bandwidth shall be reported by providing plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


3.4 Channel Separation

3.4.1 Applicable Standard

FCC §15.247 (a)(1)

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

3.4.2 EUT Setup

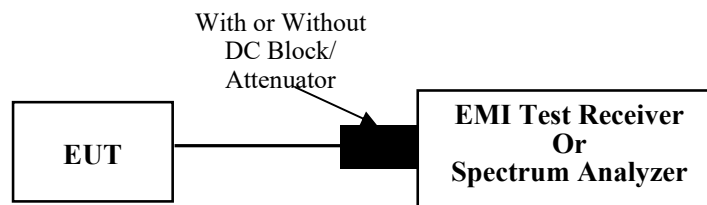

3.4.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.2

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Wide enough to capture the peaks of two adjacent channels.
- b) RBW: Start with the RBW set to approximately 30% of the channel spacing; adjust as necessary to best identify the center of each individual channel.
- c) Video (or average) bandwidth (VBW) \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize.

Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Compliance of an EUT with the appropriate regulatory limit shall be determined. A plot of the data shall be included in the test report.


3.5 Number Of Hopping Frequency

3.5.1 Applicable Standard

FCC §15.247 (a)(1)(iii)

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.5.2 EUT Setup

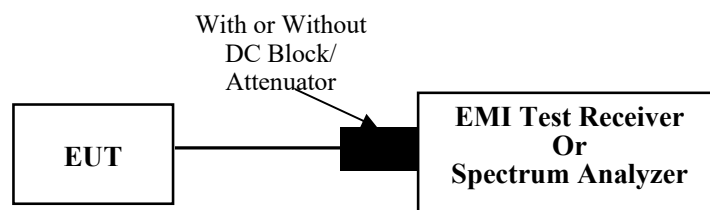

3.5.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.3

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: The frequency band of operation. Depending on the number of channels the device supports, it may be necessary to divide the frequency range of operation across multiple spans, to allow the individual channels to be clearly seen.
- b) RBW: To identify clearly the individual channels, set the RBW to less than 30% of the channel spacing or the 20 dB bandwidth, whichever is smaller.
- c) VBW \geq RBW.
- d) Sweep: Auto.
- e) Detector function: Peak.
- f) Trace: Max hold.
- g) Allow the trace to stabilize


It might prove necessary to break the span up into subranges to show clearly all of the hopping frequencies. Compliance of an EUT with the appropriate regulatory limit shall be determined for the number of hopping channels. A plot of the data shall be included in the test report.

3.6 Time Of Occupancy(Dwell Time)

3.6.1 Applicable Standard

Frequency hopping systems in the 2400-2483.5 MHz shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

3.6.2 EUT Setup

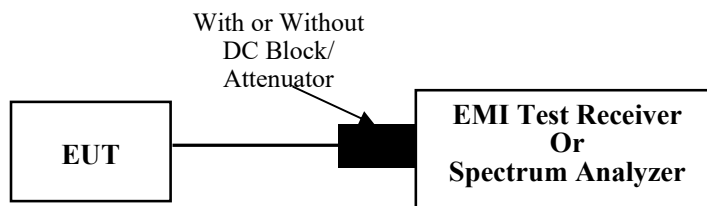

3.6.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.4

The EUT shall have its hopping function enabled. Use the following spectrum analyzer settings:

- a) Span: Zero span, centered on a hopping channel.
- b) RBW shall be \leq channel spacing and where possible RBW should be set $\gg 1 / T$, where T is the expected dwell time per channel.
- c) Sweep: As necessary to capture the entire dwell time per hopping channel; where possible use a video trigger and trigger delay so that the transmitted signal starts a little to the right of the start of the plot. The trigger level might need slight adjustment to prevent triggering when the system hops on an adjacent channel; a second plot might be needed with a longer sweep time to show two successive hops on a channel.
- d) Detector function: Peak.
- e) Trace: Max hold.

Use the marker-delta function to determine the transmit time per hop. If this value varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation in transmit time.

Repeat the measurement using a longer sweep time to determine the number of hops over the period specified in the requirements. The sweep time shall be equal to, or less than, the period specified in the requirements. Determine the number of hops over the sweep time and calculate the total number of hops in the period specified in the requirements, using the following equation:

$$\text{(Number of hops in the period specified in the requirements)} = \text{(number of hops on spectrum analyzer)} \times \text{(period specified in the requirements / analyzer sweep time)}$$

The average time of occupancy is calculated from the transmit time per hop multiplied by the number of hops in the period specified in the requirements. If the number of hops in a specific time varies with different modes of operation (data rate, modulation format, number of hopping channels, etc.), then repeat this test for each variation.

The measured transmit time and time between hops shall be consistent with the values described in the operational description for the EUT.


3.7 Maximum Conducted Output Power

3.7.1 Applicable Standard

FCC §15.247 (b)(1)

For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts

3.7.2 EUT Setup

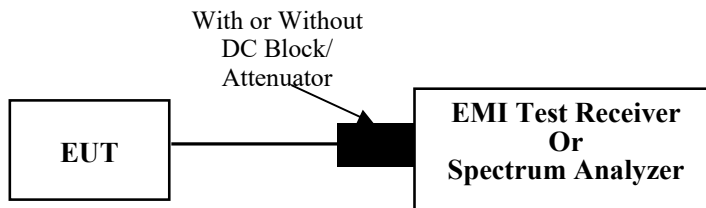

3.7.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.5

This is an RF-conducted test to evaluate maximum peak output power. Use a direct connection between the antenna port of the unlicensed wireless device and the spectrum analyzer, through suitable attenuation. Offset the Insertion loss of the RF cable, DC Block/ Attenuator into the spectrum analyzer. The hopping shall be disabled for this test:

- a) Use the following spectrum analyzer settings:
 - 1) Span: Approximately five times the 20 dB bandwidth, centered on a hopping channel.
 - 2) RBW > 20 dB bandwidth of the emission being measured.
 - 3) VBW \geq RBW.
 - 4) Sweep: Auto.
 - 5) Detector function: Peak.
 - 6) Trace: Max hold.
- b) Allow trace to stabilize.
- c) Use the marker-to-peak function to set the marker to the peak of the emission.
- d) The indicated level is the peak output power, after any corrections for external attenuators and cables.
- e) A plot of the test results and setup description shall be included in the test report.

NOTE—A peak responding power meter may be used, where the power meter and sensor system video bandwidth is greater than the occupied bandwidth of the unlicensed wireless device, rather than a spectrum analyzer.


3.8 100 kHz Bandwidth Of Frequency Band Edge

3.8.1 Applicable Standard

FCC §15.247 (d);

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.8.2 EUT Setup

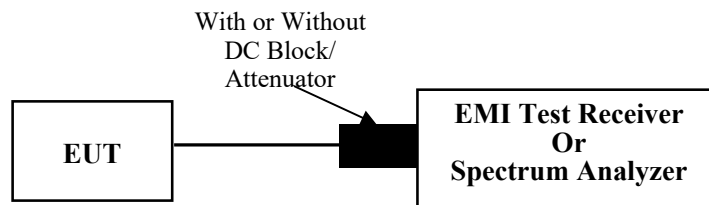

3.8.3 Test Procedure

According to ANSI C63.10-2013 Section 7.8.6

For band-edge measurements, use the band-edge procedure in 6.10. Band-edge measurements shall be tested both on single channels, and with the EUT hopping.

- a) Set the center frequency and span to encompass frequency range to be measured.
- b) Set the RBW = 100 kHz.
- c) Set the VBW $\geq [3 \times \text{RBW}]$.
- d) Detector = peak.
- e) Sweep time = auto couple.
- f) Trace mode = max hold.
- g) Allow trace to fully stabilize.
- h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements. Report the three highest emissions relative to the limit.

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Serial Number:	2968_1	Test Date:	2023/9/9
Test Site:	CE	Test Mode:	Transmitting(maximum output power mode 8DPSK High channel)
Tester:	David Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25	Relative Humidity: (%)	52	ATM Pressure: (kPa)	100.1
----------------------	----	------------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2023/03/31	2024/03/30
R&S	EMI Test Receiver	ESR3	102726	2023/03/31	2024/03/30
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2023/08/06	2024/08/05
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

For Adapter: A318-060040W-US1

Project No.: CR230744354-RF
 Tester: David Huang
 Port: Line
 Note:


Date: 2023-09-09

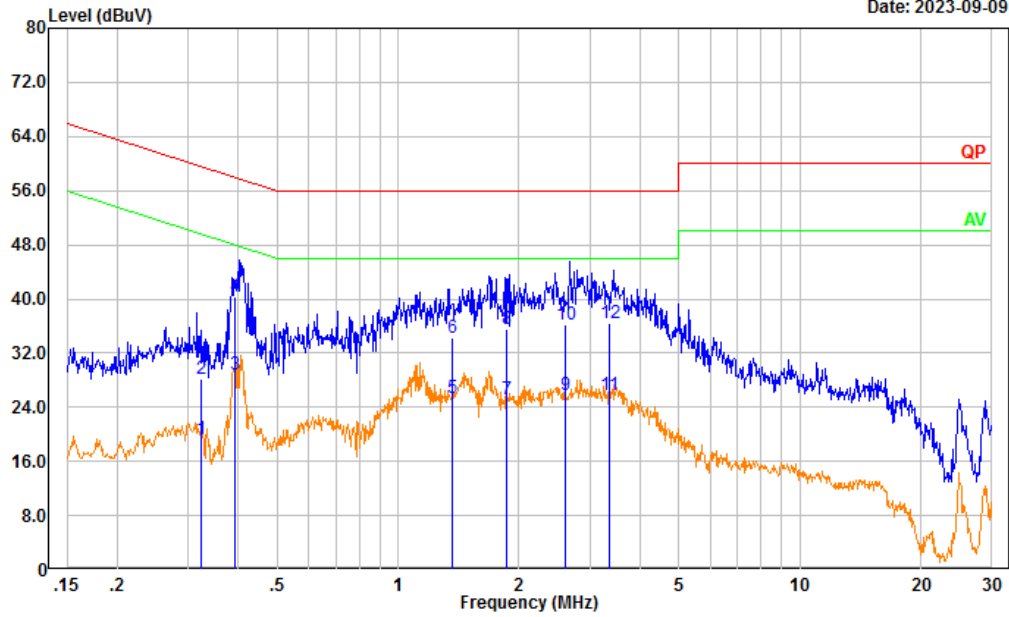

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.325	9.66	9.61	19.27	49.58	30.31	Average
2	0.325	18.54	9.61	28.15	59.58	31.43	QP
3	0.394	19.32	9.61	28.93	47.98	19.05	Average
4	0.394	30.73	9.61	40.34	57.98	17.64	QP
5	1.363	15.65	9.62	25.27	46.00	20.73	Average
6	1.363	24.55	9.62	34.17	56.00	21.83	QP
7	1.859	15.49	9.63	25.12	46.00	20.88	Average
8	1.859	25.90	9.63	35.53	56.00	20.47	QP
9	2.617	16.17	9.64	25.81	46.00	20.19	Average
10	2.617	26.49	9.64	36.13	56.00	19.87	QP
11	3.350	16.07	9.65	25.72	46.00	20.28	Average
12	3.350	26.79	9.65	36.44	56.00	19.56	QP

Project No.: CR230744354-RF
 Tester: David Huang
 Port: neutral
 Note:

Date: 2023-09-09

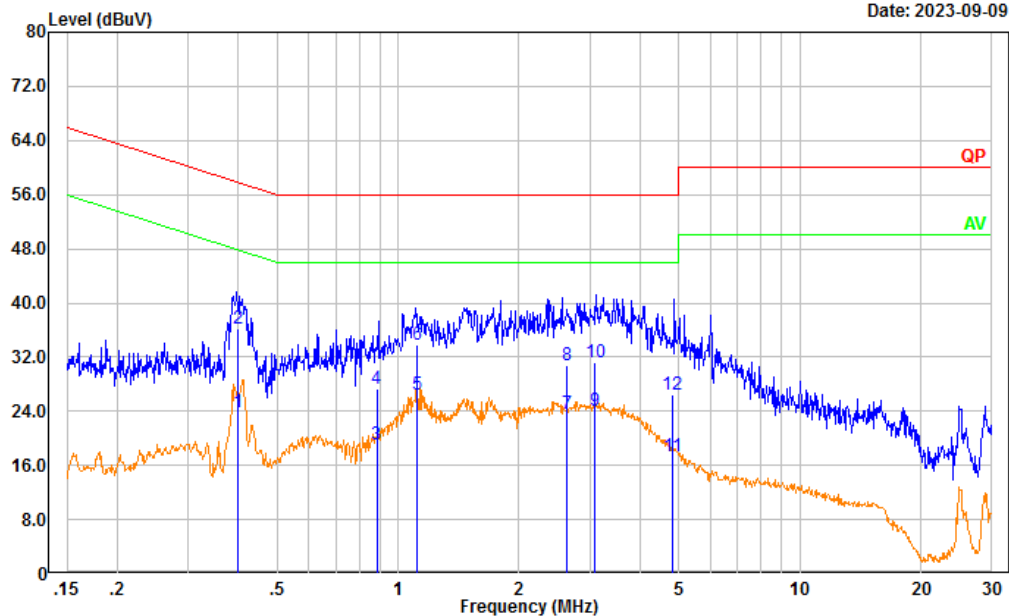


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.400	14.31	9.61	23.92	47.85	23.93	Average
2	0.400	26.69	9.61	36.30	57.85	21.55	QP
3	0.884	9.37	9.62	18.99	46.00	27.01	Average
4	0.884	17.78	9.62	27.40	56.00	28.60	QP
5	1.116	16.86	9.62	26.48	46.00	19.52	Average
6	1.116	24.21	9.62	33.83	56.00	22.17	QP
7	2.619	13.99	9.64	23.63	46.00	22.37	Average
8	2.619	21.07	9.64	30.71	56.00	25.29	QP
9	3.084	14.47	9.65	24.12	46.00	21.88	Average
10	3.084	21.46	9.65	31.11	56.00	24.89	QP
11	4.799	7.69	9.66	17.35	46.00	28.65	Average
12	4.799	16.89	9.66	26.55	56.00	29.45	QP

For Adapter: DSA-3PFM-05 BUS 060040

Project No.: CR230744354-RF
 Tester: David Huang
 Port: Line
 Note:


Date: 2023-09-09

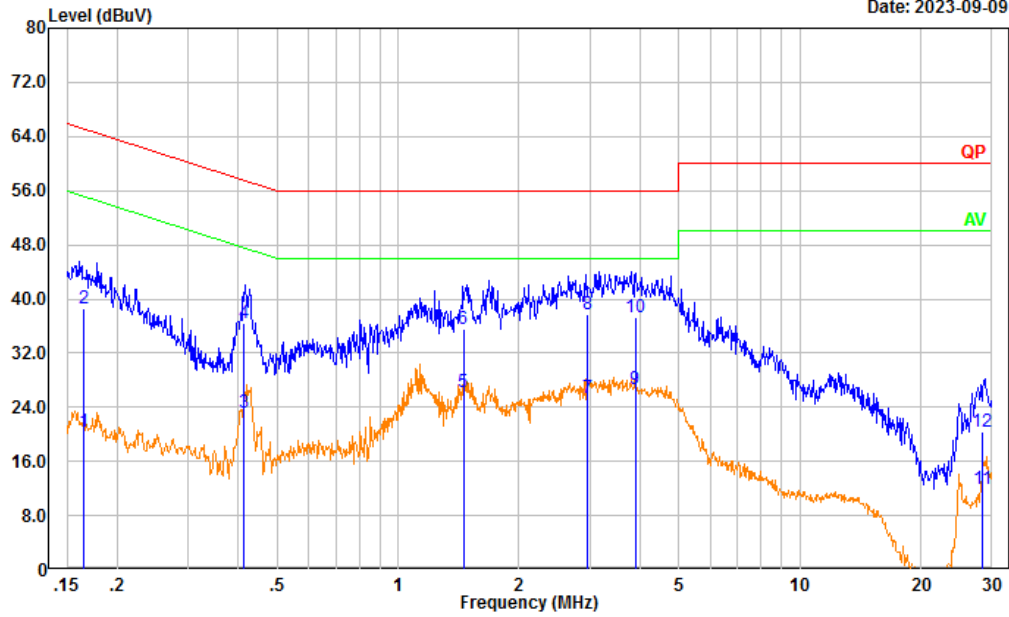

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.165	10.82	9.61	20.43	55.19	34.76	Average
2	0.165	28.90	9.61	38.51	65.19	26.68	QP
3	0.415	13.60	9.61	23.21	47.55	24.34	Average
4	0.415	26.87	9.61	36.48	57.55	21.07	QP
5	1.453	16.52	9.62	26.14	46.00	19.86	Average
6	1.453	26.02	9.62	35.64	56.00	20.36	QP
7	2.959	15.61	9.65	25.26	46.00	20.74	Average
8	2.959	28.17	9.65	37.82	56.00	18.18	QP
9	3.888	16.94	9.65	26.59	46.00	19.41	Average
10	3.888	27.62	9.65	37.27	56.00	18.73	QP
11	28.328	2.09	9.83	11.92	50.00	38.08	Average
12	28.328	10.59	9.83	20.42	60.00	39.58	QP

Project No.: CR230744354-RF
 Tester: David Huang
 Port: neutral
 Note:

Date: 2023-09-09

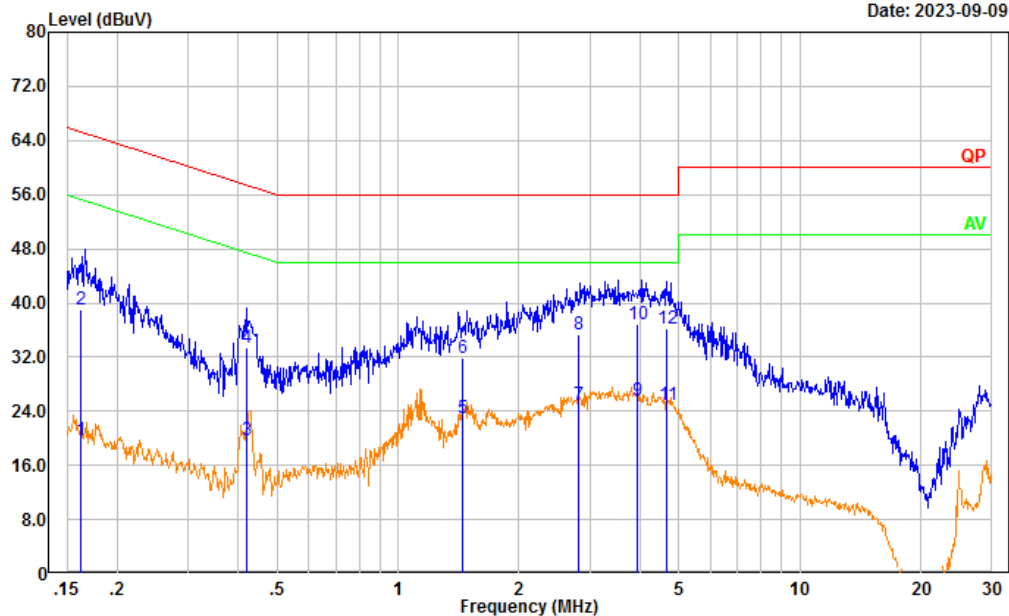


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.163	10.08	9.61	19.69	55.33	35.64	Average
2	0.163	29.41	9.61	39.02	65.33	26.31	QP
3	0.421	10.08	9.61	19.69	47.43	27.74	Average
4	0.421	23.69	9.61	33.30	57.43	24.13	QP
5	1.441	13.40	9.62	23.02	46.00	22.98	Average
6	1.441	22.20	9.62	31.82	56.00	24.18	QP
7	2.809	15.25	9.65	24.90	46.00	21.10	Average
8	2.809	25.66	9.65	35.31	56.00	20.69	QP
9	3.948	15.93	9.65	25.58	46.00	20.42	Average
10	3.948	27.21	9.65	36.86	56.00	19.14	QP
11	4.678	15.23	9.66	24.89	46.00	21.11	Average
12	4.678	26.44	9.66	36.10	56.00	19.90	QP

For Adapter: E004-1A060040VU

Project No.: CR230744354-RF
 Tester: David Huang
 Port: Line
 Note:


Date: 2023-09-09

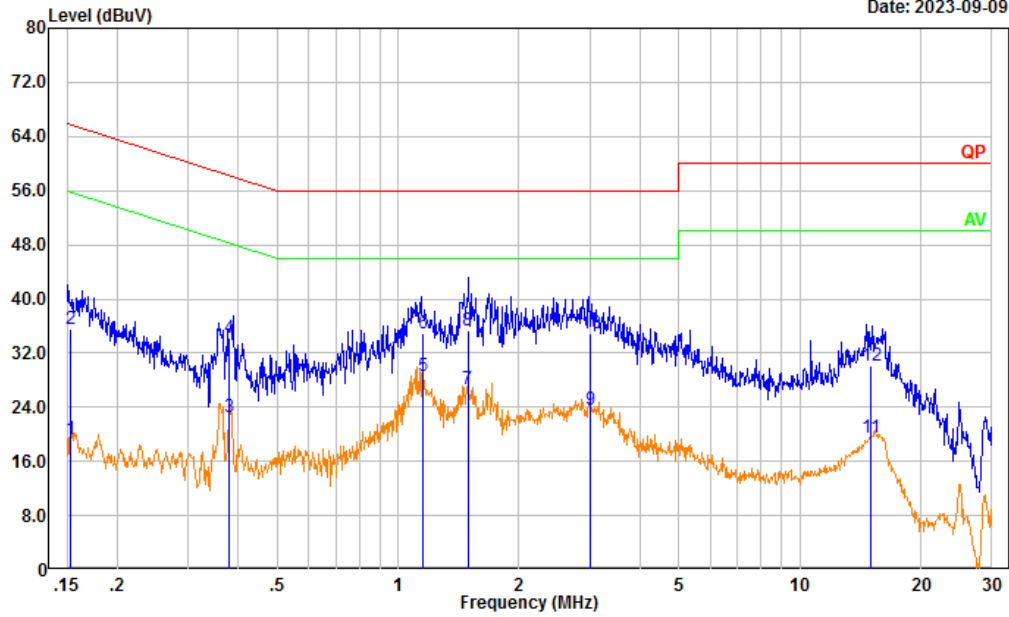

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.154	9.71	9.61	19.32	55.80	36.48	Average
2	0.154	25.93	9.61	35.54	65.80	30.26	QP
3	0.379	12.93	9.61	22.54	48.30	25.76	Average
4	0.379	24.63	9.61	34.24	58.30	24.06	QP
5	1.156	19.03	9.62	28.65	46.00	17.35	Average
6	1.156	25.36	9.62	34.98	56.00	21.02	QP
7	1.490	16.99	9.62	26.61	46.00	19.39	Average
8	1.490	25.61	9.62	35.23	56.00	20.77	QP
9	3.016	13.99	9.65	23.64	46.00	22.36	Average
10	3.016	25.31	9.65	34.96	56.00	21.04	QP
11	14.996	9.89	9.69	19.58	50.00	30.42	Average
12	14.996	20.40	9.69	30.09	60.00	29.91	QP

Project No.: CR230744354-RF
 Tester: David Huang
 Port: neutral
 Note:

Date: 2023-09-09

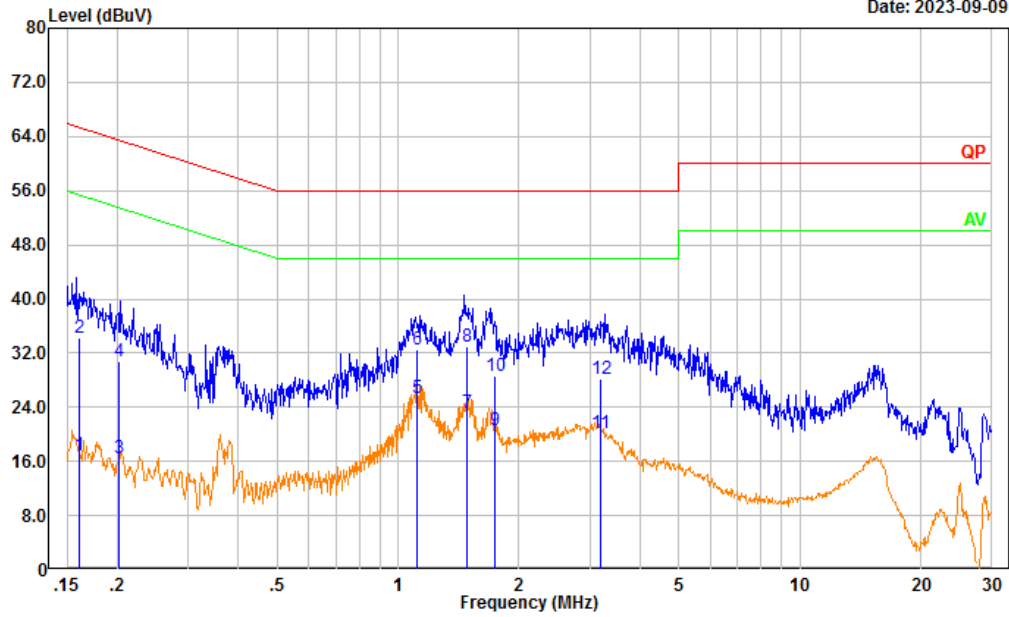


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.161	7.34	9.61	16.95	55.43	38.48	Average
2	0.161	24.69	9.61	34.30	65.43	31.13	QP
3	0.203	6.95	9.61	16.56	53.50	36.94	Average
4	0.203	21.22	9.61	30.83	63.50	32.67	QP
5	1.117	15.73	9.62	25.35	46.00	20.65	Average
6	1.117	22.95	9.62	32.57	56.00	23.43	QP
7	1.488	13.58	9.62	23.20	46.00	22.80	Average
8	1.488	23.31	9.62	32.93	56.00	23.07	QP
9	1.738	10.86	9.63	20.49	46.00	25.51	Average
10	1.738	19.00	9.63	28.63	56.00	27.37	QP
11	3.190	10.48	9.65	20.13	46.00	25.87	Average
12	3.190	18.61	9.65	28.26	56.00	27.74	QP

For Adapter: VT05UUS06040

Project No.: CR230744354-RF
 Tester: David Huang
 Port: Line
 Note:


Date: 2023-09-09

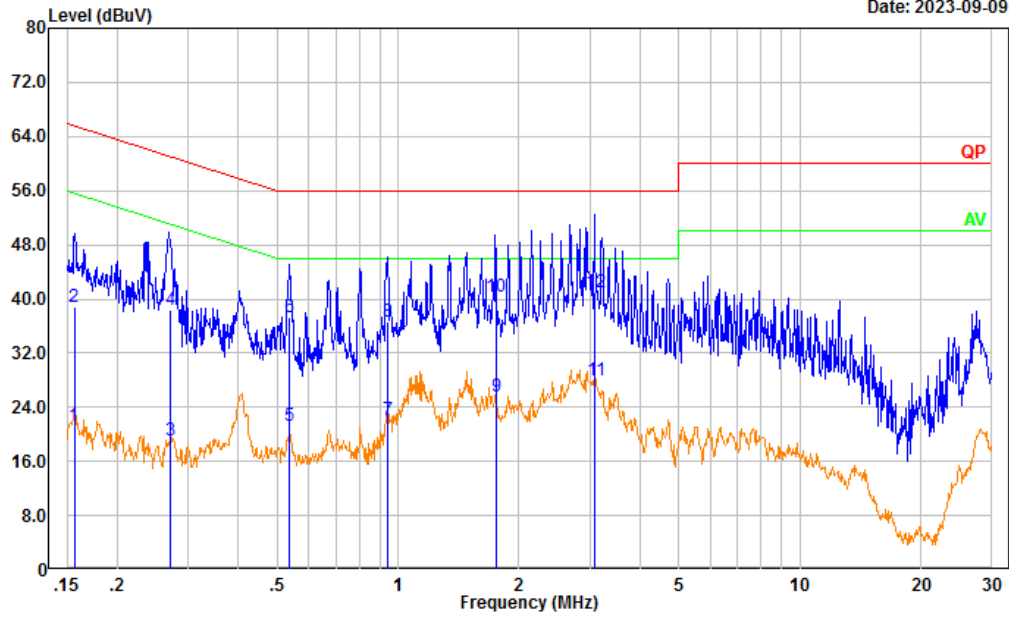

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.156	11.56	9.61	21.17	55.65	34.48	Average
2	0.156	29.17	9.61	38.78	65.65	26.87	QP
3	0.271	9.38	9.61	18.99	51.08	32.09	Average
4	0.271	28.87	9.61	38.48	61.08	22.60	QP
5	0.537	11.71	9.61	21.32	46.00	24.68	Average
6	0.537	27.79	9.61	37.40	56.00	18.60	QP
7	0.942	12.47	9.62	22.09	46.00	23.91	Average
8	0.942	27.09	9.62	36.71	56.00	19.29	QP
9	1.749	15.98	9.63	25.61	46.00	20.39	Average
10	1.749	30.66	9.63	40.29	56.00	15.71	QP
11	3.093	18.24	9.65	27.89	46.00	18.11	Average
12	3.093	31.34	9.65	40.99	56.00	15.01	QP

Project No.: CR230744354-RF
 Tester: David Huang
 Port: neutral
 Note:

Date: 2023-09-09

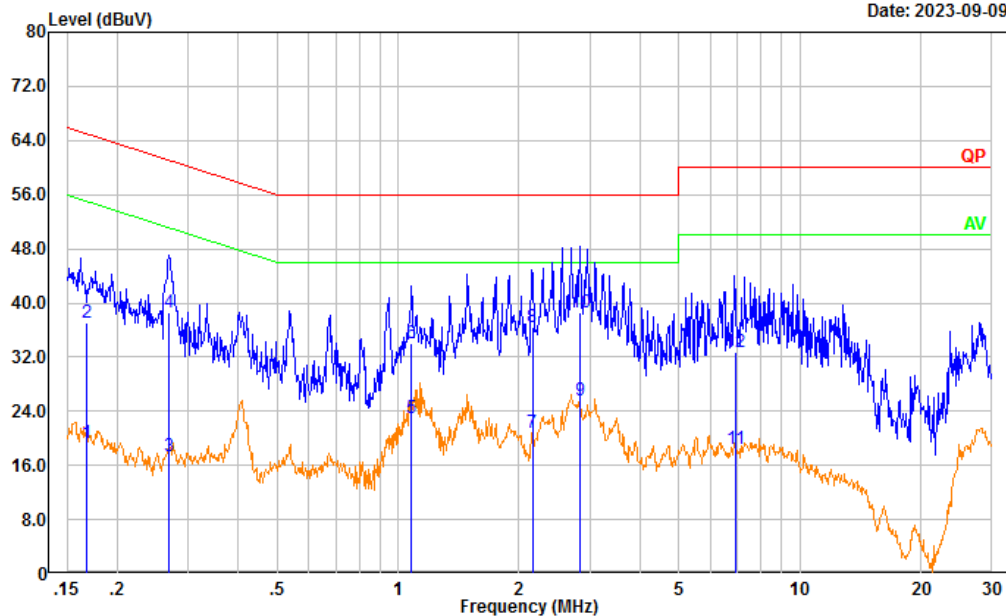

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB)	Result (dBμV)	Limit (dBμV)	Margin (dB)	Detector
1	0.167	9.70	9.61	19.31	55.09	35.78	Average
2	0.167	27.41	9.61	37.02	65.09	28.07	QP
3	0.268	7.81	9.61	17.42	51.17	33.75	Average
4	0.268	28.99	9.61	38.60	61.17	22.57	QP
5	1.077	13.44	9.62	23.06	46.00	22.94	Average
6	1.077	24.43	9.62	34.05	56.00	21.95	QP
7	2.157	11.09	9.63	20.72	46.00	25.28	Average
8	2.157	26.85	9.63	36.48	56.00	19.52	QP
9	2.835	15.85	9.65	25.50	46.00	20.50	Average
10	2.835	28.87	9.65	38.52	56.00	17.48	QP
11	6.891	8.72	9.66	18.38	50.00	31.62	Average
12	6.891	23.01	9.66	32.67	60.00	27.33	QP

4.2 Radiated Spurious Emissions

Serial Number:	2968_1	Test Date:	2023/10/29 for below 1GHz 2023/9/10 for above 1GHz
Test Site:	966-1, 966-2	Test Mode:	Transmitting
Tester:	Jeff Luo, coco Tian	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.5~26.5	Relative Humidity: (%)	55~63	ATM Pressure: (kPa)	100.8~101
----------------------	-----------	---------------------------	-------	------------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Below 1GHz					
Sunol Sciences	Antenna	JB6	A082520-6	2023/9/18	2026/9/17
R&S	EMI Test Receiver	ESR3	102724	2023/3/31	2024/3/30
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0470-02	2023/7/16	2024/7/15
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0780-01	2023/7/16	2024/7/15
Sonoma	Amplifier	310N	186165	2023/7/16	2024/7/15
Audix	Test Software	E3	201021 (V9)	N/A	N/A
Above 1GHz					
ETS-Lindgren	Horn Antenna	3115	9912-5985	2020/10/13	2023/10/12
R&S	Spectrum Analyzer	FSV40	101591	2023/3/31	2024/3/30
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2023/8/6	2024/8/5
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2023/8/6	2024/8/5
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2022/11/9	2023/11/8
Audix	Test Software	E3	201021 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2021/2/5	2024/2/4
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2022/09/16	2023/09/15
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2023/8/6	2024/8/5
E-Microwave	Band Rejection Filter	2400-2483.5MHz	OE01902424	2023/8/6	2024/8/5
Mini Circuits	High Pass Filter	VHF-6010+	31119	2023/8/6	2024/8/5

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Please refer to the below table and plots.


1) 30MHz-1GHz (Maximum Conducted Output Power Mode 8DPSK)

For Adapter: A318-060040W-US1

Low Channel:

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

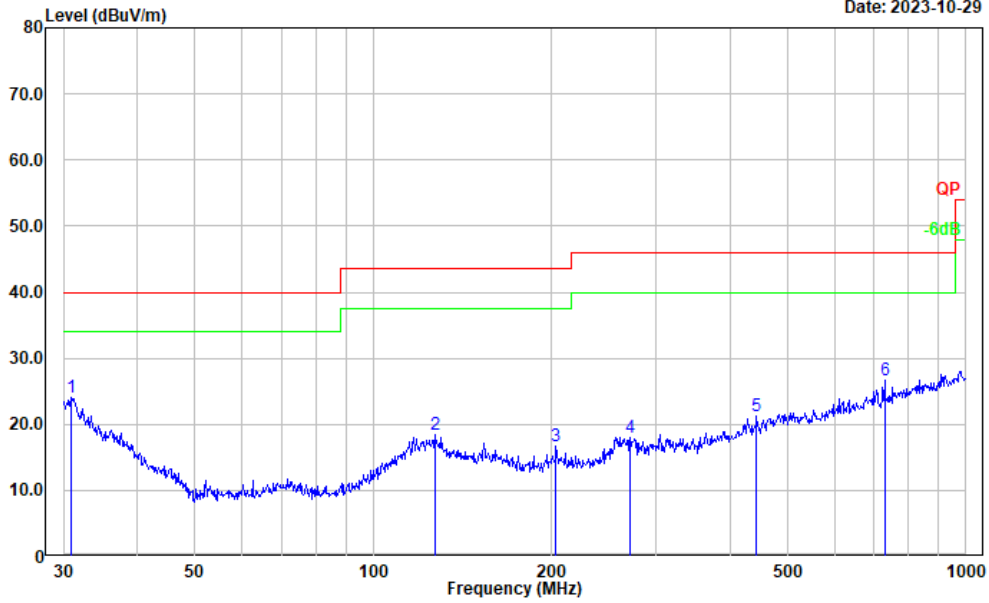

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.853	28.49	-4.45	24.04	40.00	15.96	Peak
2	127.218	29.72	-11.35	18.37	43.50	25.13	Peak
3	203.523	29.00	-12.33	16.67	43.50	26.83	Peak
4	271.325	30.11	-12.10	18.01	46.00	27.99	Peak
5	443.294	28.34	-7.18	21.16	46.00	24.84	Peak
6	729.358	29.76	-3.09	26.67	46.00	19.33	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

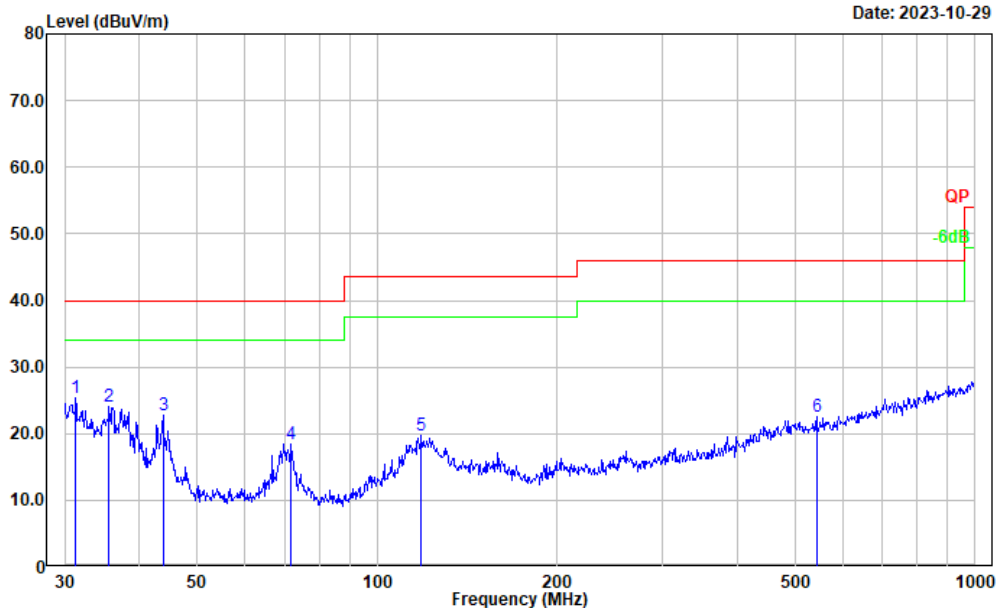


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.289	30.09	-4.77	25.32	40.00	14.68	Peak
2	35.624	32.18	-8.10	24.08	40.00	15.92	Peak
3	43.812	36.30	-13.58	22.72	40.00	17.28	Peak
4	71.832	35.08	-16.74	18.34	40.00	21.66	Peak
5	118.601	31.32	-11.57	19.75	43.50	23.75	Peak
6	543.274	28.40	-5.89	22.51	46.00	23.49	Peak

Middle Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

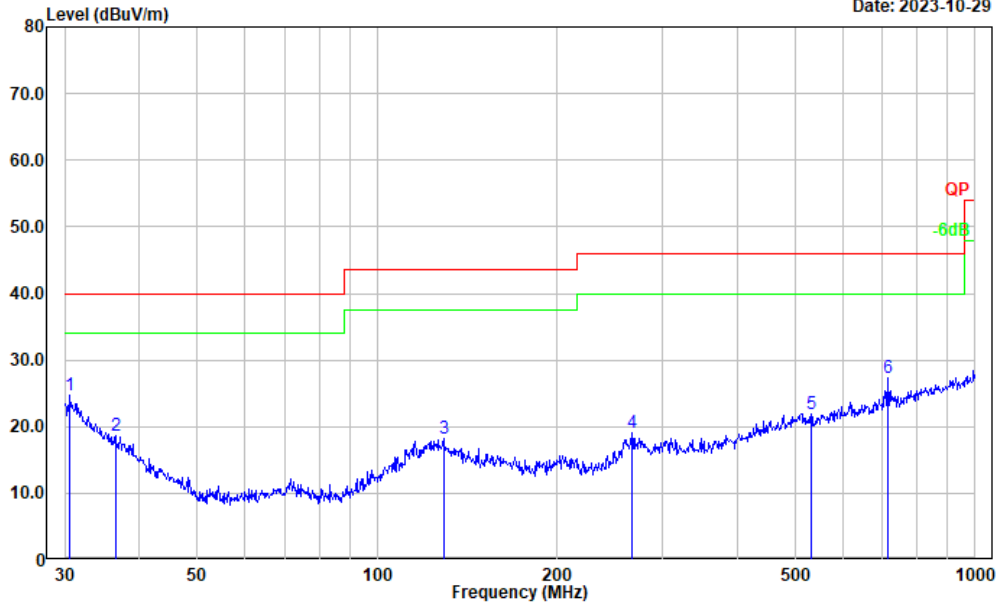

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	28.89	-4.28	24.61	40.00	15.39	Peak
2	36.509	27.47	-8.76	18.71	40.00	21.29	Peak
3	129.015	29.48	-11.28	18.20	43.50	25.30	Peak
4	266.609	31.38	-12.28	19.10	46.00	26.90	Peak
5	531.964	27.87	-5.99	21.88	46.00	24.12	Peak
6	714.173	30.90	-3.49	27.41	46.00	18.59	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

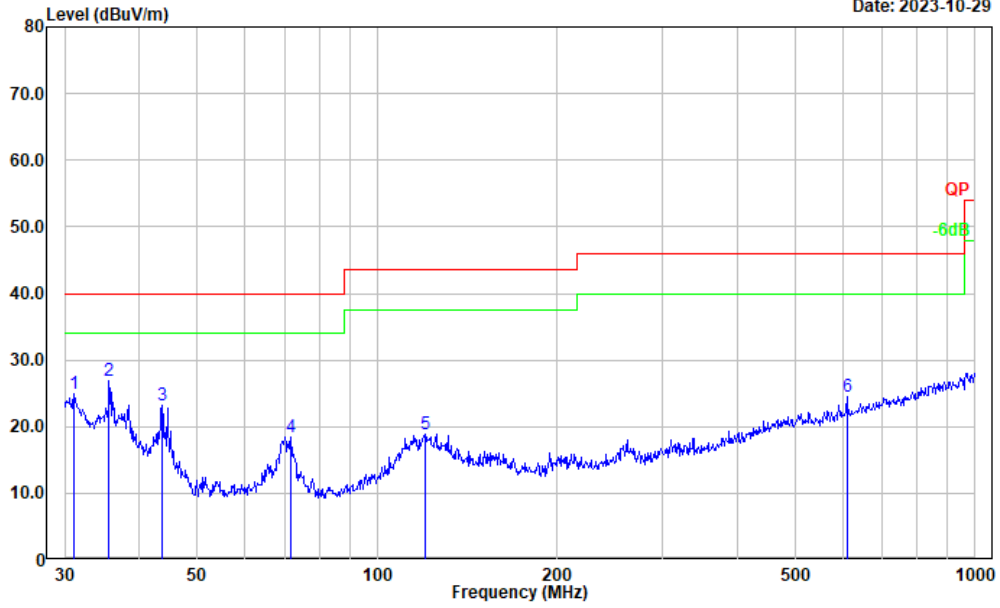


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.071	29.51	-4.61	24.90	40.00	15.10	Peak
2	35.624	34.99	-8.10	26.89	40.00	13.11	Peak
3	43.659	36.63	-13.49	23.14	40.00	16.86	Peak
4	71.832	35.26	-16.74	18.52	40.00	21.48	Peak
5	120.277	30.24	-11.44	18.80	43.50	24.70	Peak
6	609.922	29.35	-4.82	24.53	46.00	21.47	Peak

High Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

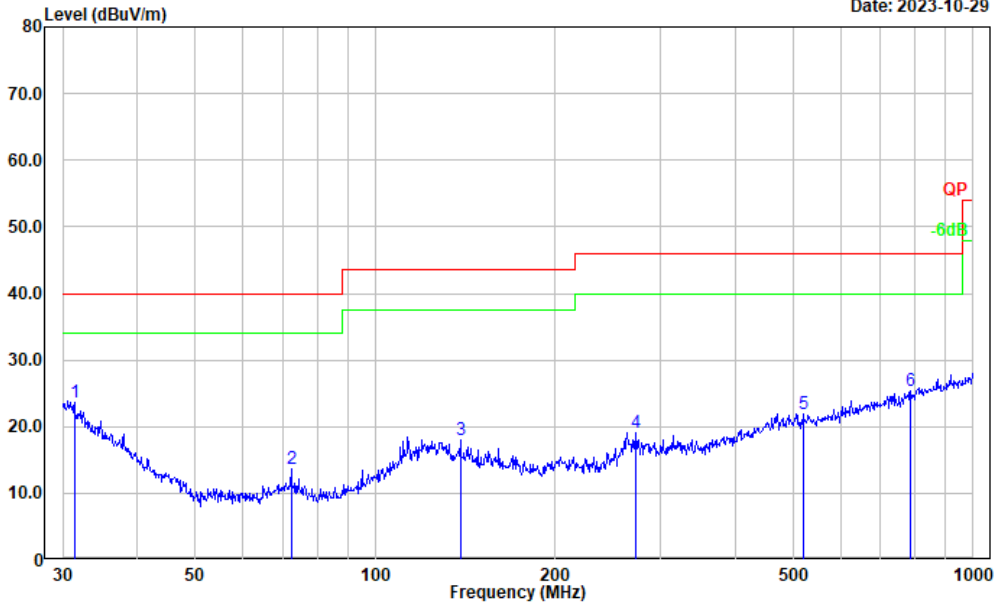

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.399	28.60	-4.86	23.74	40.00	16.26	Peak
2	72.338	30.35	-16.78	13.57	40.00	26.43	Peak
3	138.874	29.70	-11.71	17.99	43.50	25.51	Peak
4	273.234	31.08	-12.02	19.06	46.00	26.94	Peak
5	519.065	27.79	-5.84	21.95	46.00	24.05	Peak
6	785.093	27.63	-2.36	25.27	46.00	20.73	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

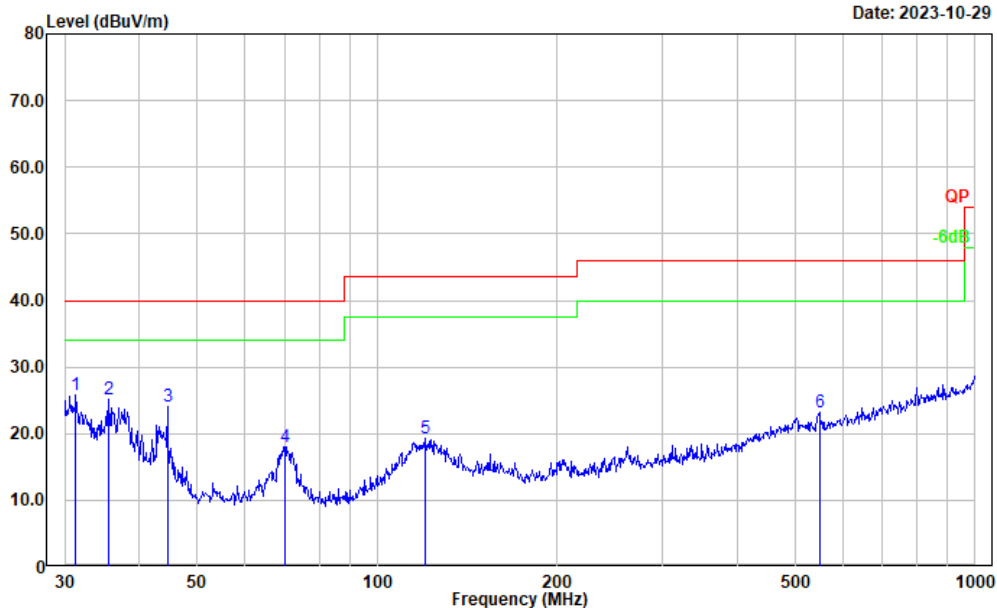


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.289	30.54	-4.77	25.77	40.00	14.23	Peak
2	35.624	33.29	-8.10	25.19	40.00	14.81	Peak
3	44.587	38.15	-14.00	24.15	40.00	15.85	Peak
4	70.090	34.65	-16.57	18.08	40.00	21.92	Peak
5	120.277	30.63	-11.44	19.19	43.50	24.31	Peak
6	549.020	29.01	-5.77	23.24	46.00	22.76	Peak

For Adapter: DSA-3PFM-05 BUS 060040
 Low Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

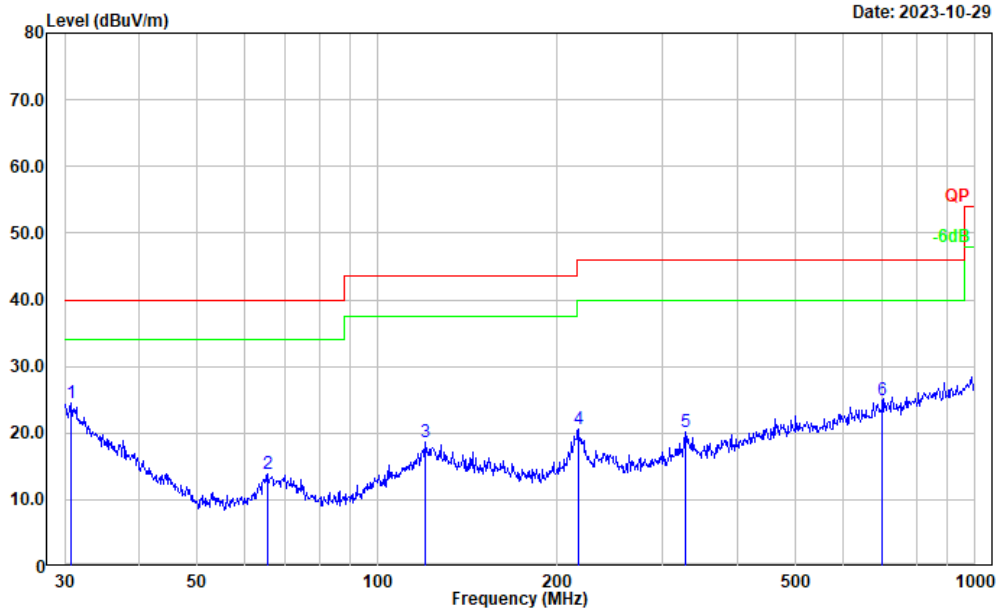

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.745	28.92	-4.36	24.56	40.00	15.44	Peak
2	65.573	30.84	-16.91	13.93	40.00	26.07	Peak
3	120.277	30.11	-11.44	18.67	43.50	24.83	Peak
4	216.783	33.30	-12.72	20.58	46.00	25.42	Peak
5	327.887	30.56	-10.30	20.26	46.00	25.74	Peak
6	699.305	28.59	-3.61	24.98	46.00	21.02	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

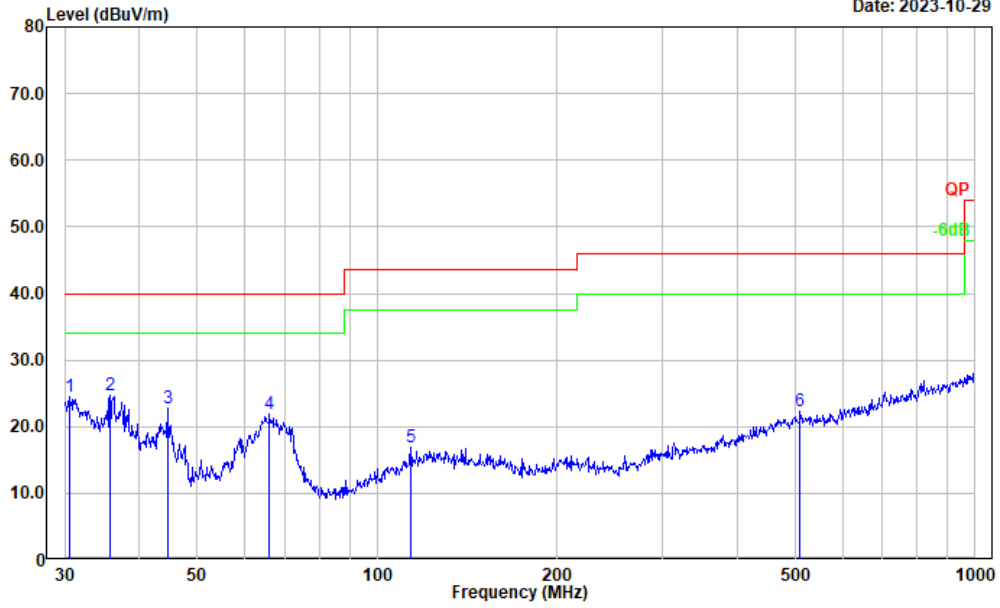


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	28.77	-4.20	24.57	40.00	15.43	Peak
2	35.749	32.95	-8.20	24.75	40.00	15.25	Peak
3	44.587	36.72	-14.00	22.72	40.00	17.28	Peak
4	66.034	38.68	-16.89	21.79	40.00	18.21	Peak
5	113.714	28.82	-12.01	16.81	43.50	26.69	Peak
6	510.044	28.23	-5.81	22.42	46.00	23.58	Peak

Middle Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

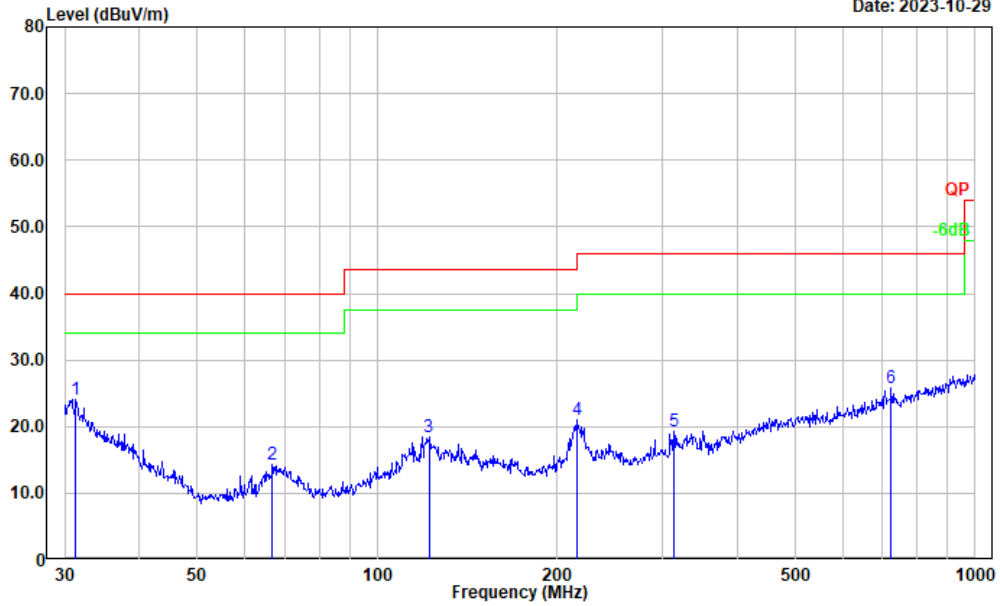

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	31.289	28.85	-4.77	24.08	40.00	15.92	Peak
2	66.733	31.11	-16.83	14.28	40.00	25.72	Peak
3	121.976	29.95	-11.42	18.53	43.50	24.97	Peak
4	215.268	33.73	-12.65	21.08	43.50	22.42	Peak
5	313.276	30.00	-10.60	19.40	46.00	26.60	Peak
6	724.261	29.05	-3.20	25.85	46.00	20.15	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

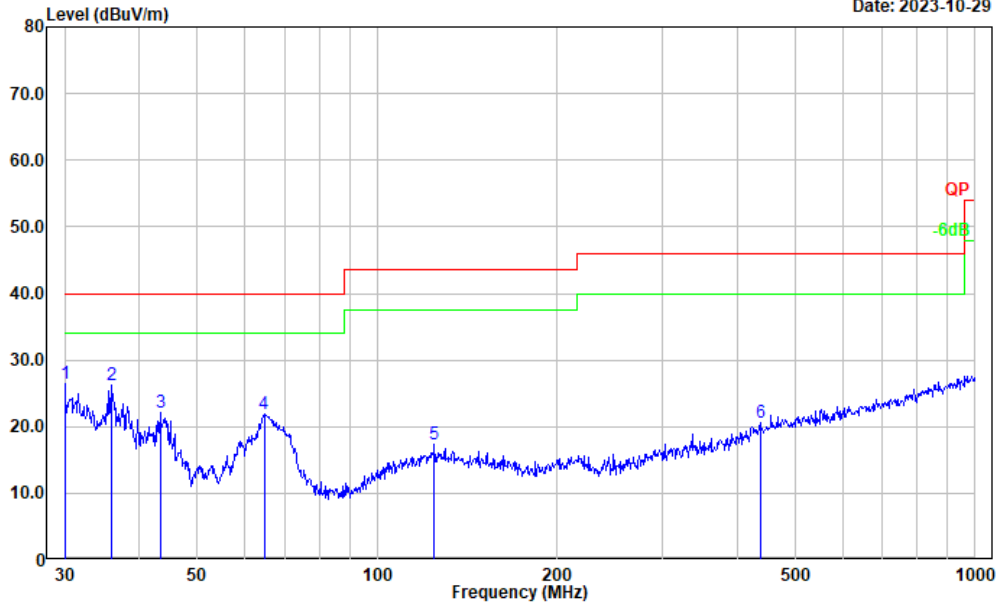


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	30.28	-3.80	26.48	40.00	13.52	Peak
2	36.001	34.67	-8.38	26.29	40.00	13.71	Peak
3	43.353	35.41	-13.32	22.09	40.00	17.91	Peak
4	64.659	38.75	-16.95	21.80	40.00	18.20	Peak
5	124.569	28.77	-11.35	17.42	43.50	26.08	Peak
6	437.120	28.02	-7.32	20.70	46.00	25.30	Peak

High Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

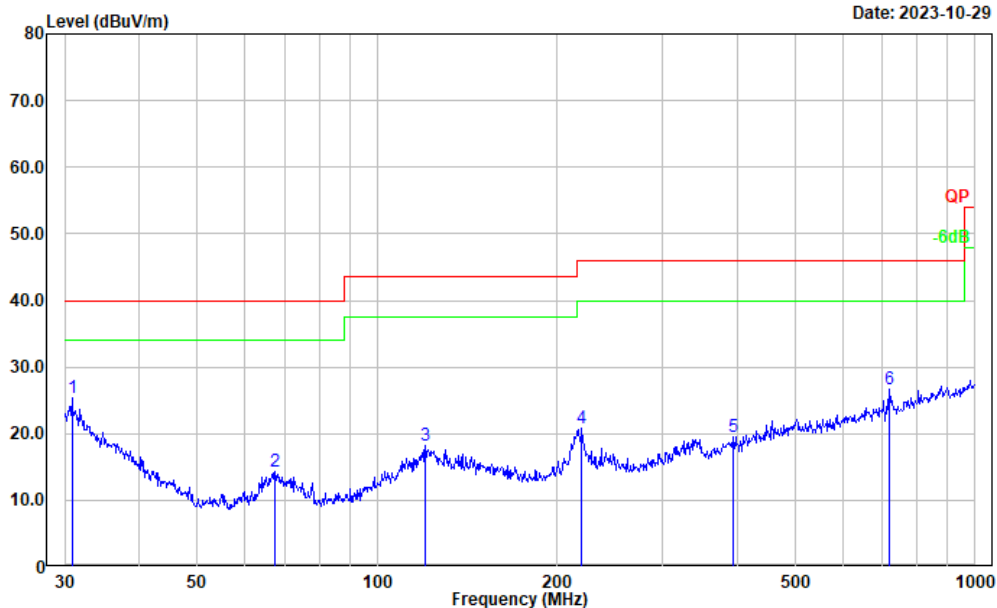

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.853	29.88	-4.45	25.43	40.00	14.57	Peak
2	67.438	31.04	-16.77	14.27	40.00	25.73	Peak
3	120.277	29.55	-11.44	18.11	43.50	25.39	Peak
4	219.845	33.59	-12.86	20.73	46.00	25.27	Peak
5	393.472	28.31	-8.84	19.47	46.00	26.53	Peak
6	716.682	30.05	-3.45	26.60	46.00	19.40	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

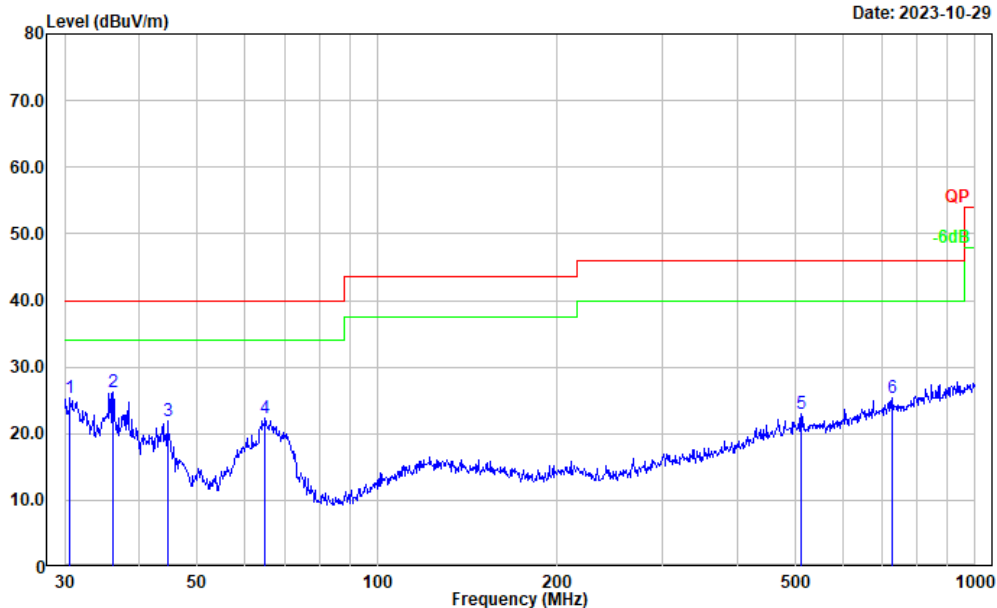


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	29.66	-4.28	25.38	40.00	14.62	Peak
2	36.127	34.78	-8.48	26.30	40.00	13.70	Peak
3	44.587	35.89	-14.00	21.89	40.00	18.11	Peak
4	64.887	39.21	-16.94	22.27	40.00	17.73	Peak
5	511.835	28.74	-5.82	22.92	46.00	23.08	Peak
6	726.805	28.50	-3.13	25.37	46.00	20.63	Peak

For Adapter: E004-1A060040VU
 Low Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

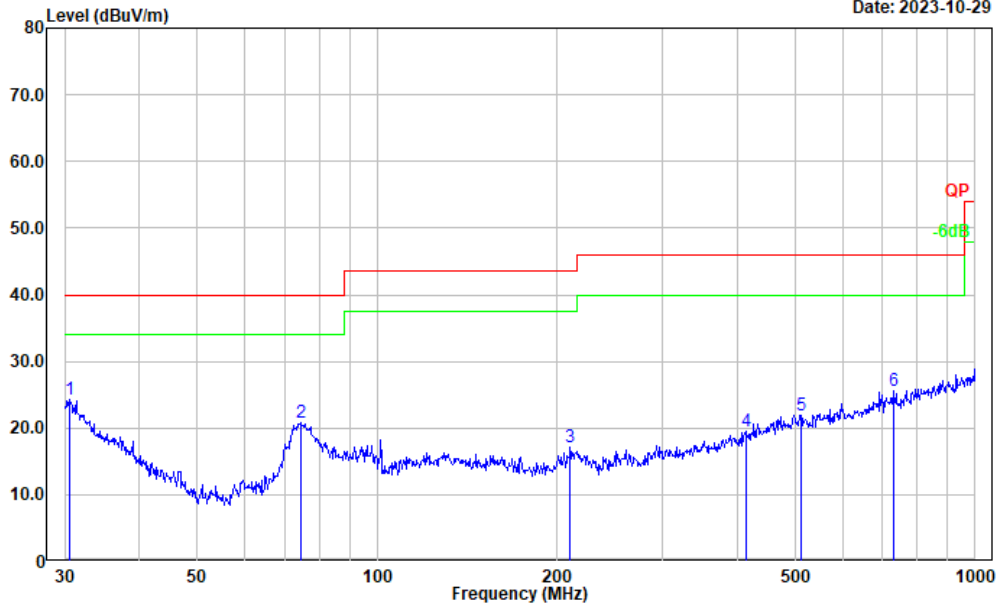

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.531	28.54	-4.20	24.34	40.00	15.66	Peak
2	74.657	37.82	-16.97	20.85	40.00	19.15	Peak
3	210.048	29.70	-12.49	17.21	43.50	26.29	Peak
4	413.271	27.69	-8.23	19.46	46.00	26.54	Peak
5	511.835	27.82	-5.82	22.00	46.00	24.00	Peak
6	729.358	28.71	-3.09	25.62	46.00	20.38	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

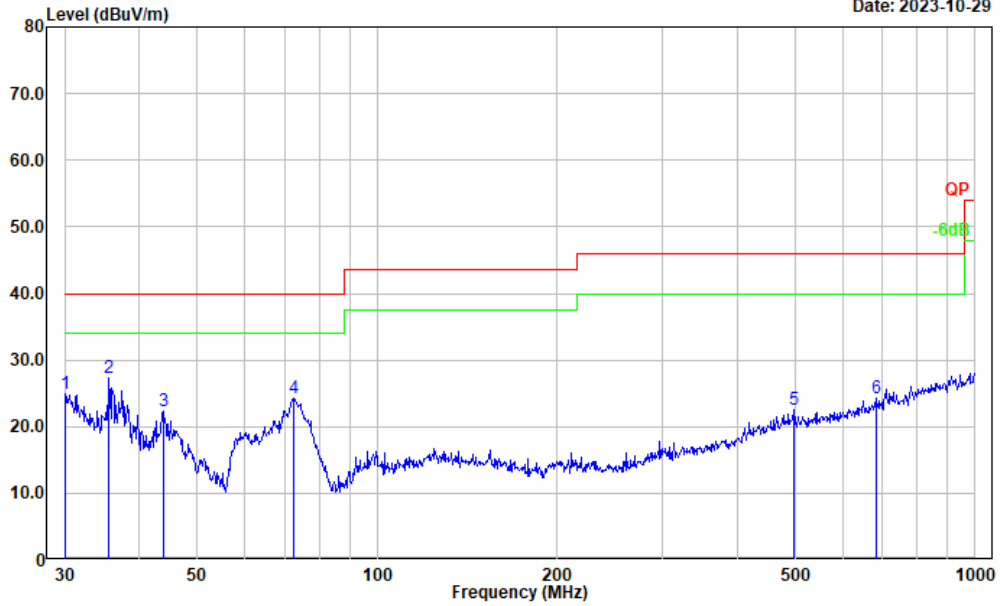


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.105	28.89	-3.88	25.01	40.00	14.99	Peak
2	35.624	35.31	-8.10	27.21	40.00	12.79	Peak
3	43.812	35.87	-13.58	22.29	40.00	17.71	Peak
4	72.592	41.13	-16.78	24.35	40.00	15.65	Peak
5	497.677	28.70	-6.07	22.63	46.00	23.37	Peak
6	682.348	28.07	-3.79	24.28	46.00	21.72	Peak

Middle Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

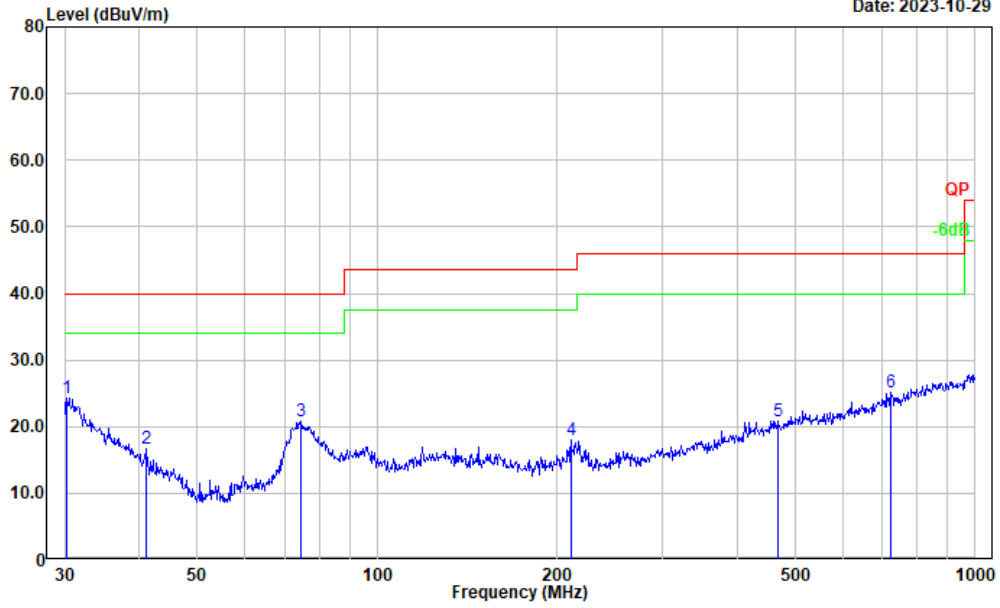

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	28.34	-3.96	24.38	40.00	15.62	Peak
2	41.132	28.67	-12.07	16.60	40.00	23.40	Peak
3	74.657	37.76	-16.97	20.79	40.00	19.21	Peak
4	210.786	30.59	-12.52	18.07	43.50	25.43	Peak
5	467.235	27.27	-6.41	20.86	46.00	25.14	Peak
6	724.261	28.45	-3.20	25.25	46.00	20.75	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

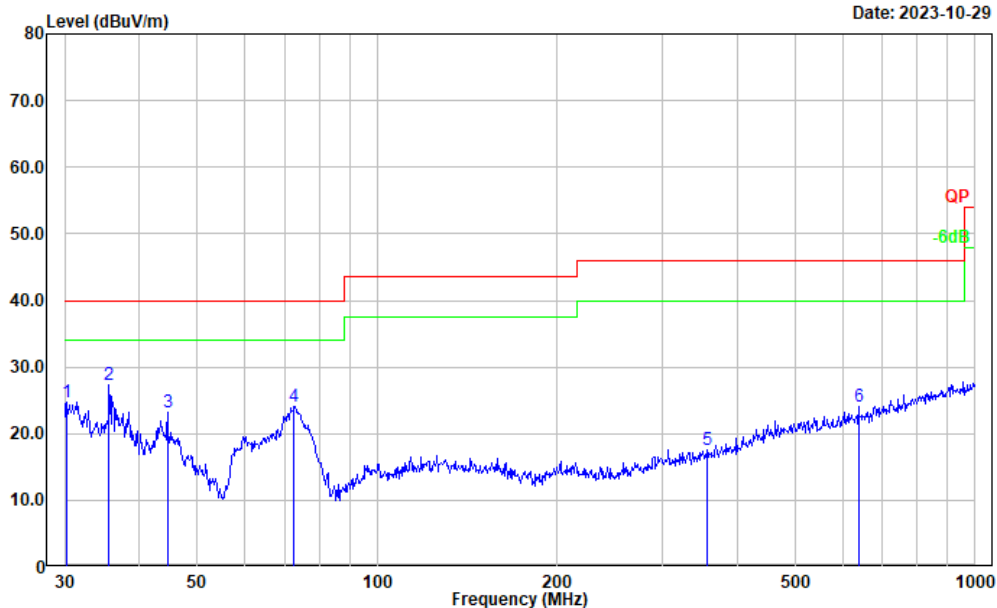


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.211	28.63	-3.96	24.67	40.00	15.33	Peak
2	35.624	35.46	-8.10	27.36	40.00	12.64	Peak
3	44.587	37.13	-14.00	23.13	40.00	16.87	Peak
4	72.592	40.82	-16.78	24.04	40.00	15.96	Peak
5	356.676	27.53	-9.89	17.64	46.00	28.36	Peak
6	638.369	28.56	-4.48	24.08	46.00	21.92	Peak

High Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

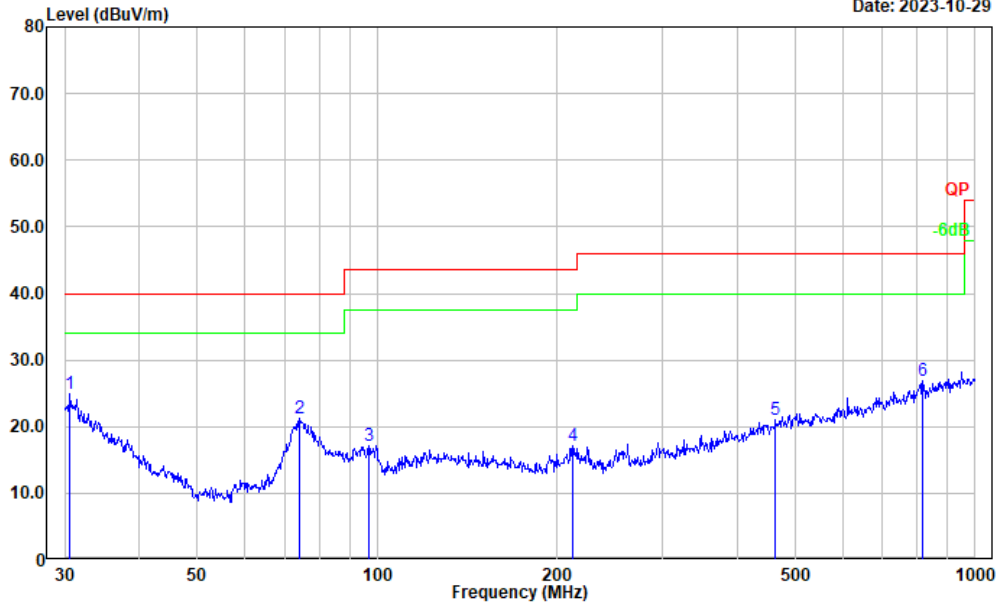

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	29.31	-4.28	25.03	40.00	14.97	Peak
2	74.135	38.13	-16.96	21.17	40.00	18.83	Peak
3	96.775	32.20	-15.13	17.07	43.50	26.43	Peak
4	212.270	29.70	-12.57	17.13	43.50	26.37	Peak
5	463.970	27.44	-6.51	20.93	46.00	25.07	Peak
6	815.968	28.69	-1.82	26.87	46.00	19.13	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

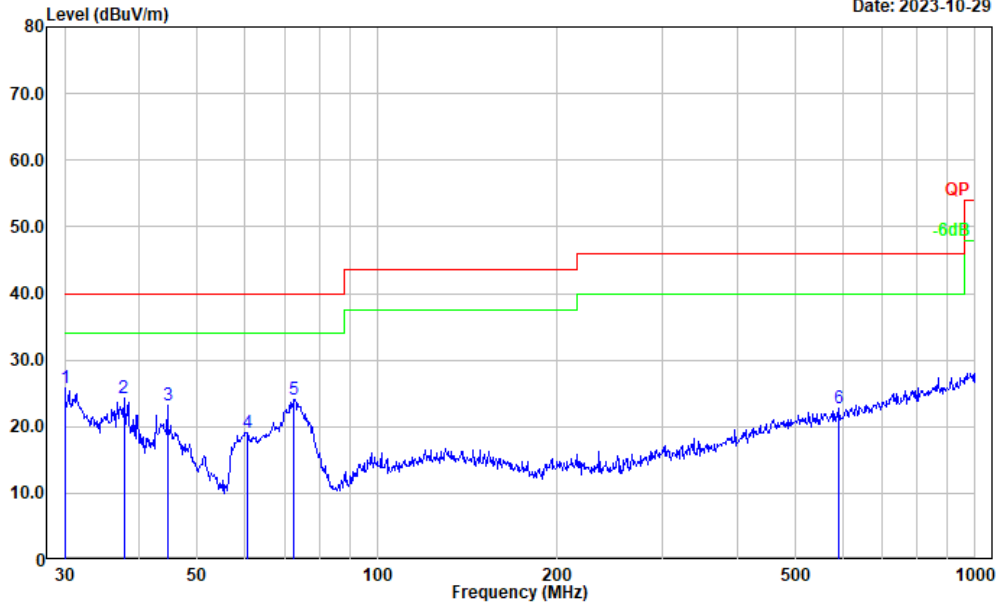


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.000	29.60	-3.80	25.80	40.00	14.20	Peak
2	37.680	33.90	-9.62	24.28	40.00	15.72	Peak
3	44.587	37.17	-14.00	23.17	40.00	16.83	Peak
4	60.704	36.44	-17.29	19.15	40.00	20.85	Peak
5	72.592	40.82	-16.78	24.04	40.00	15.96	Peak
6	590.974	28.03	-5.28	22.75	46.00	23.25	Peak

For Adapter: VT05UUS06040

Low channel:

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

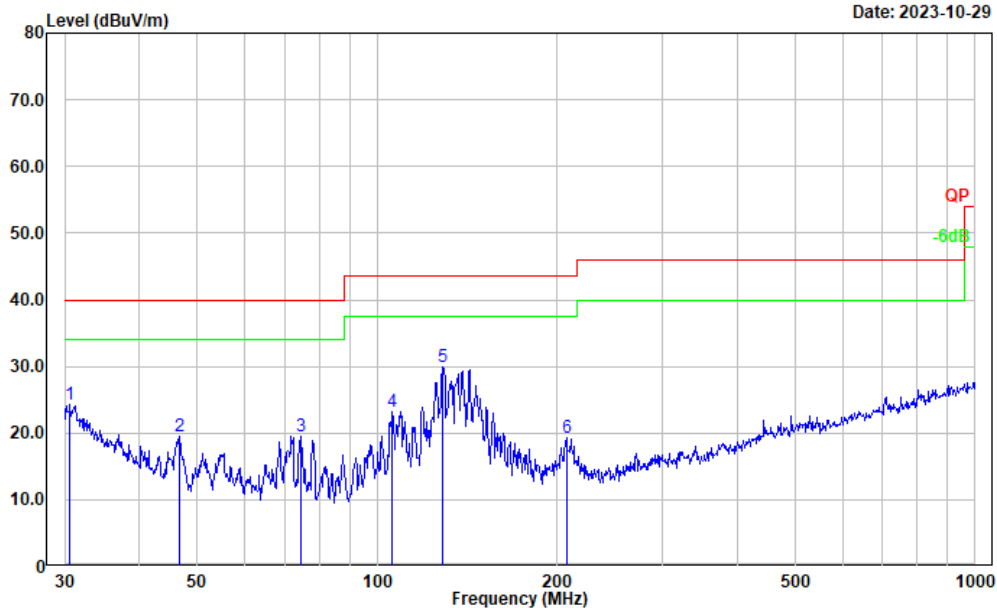

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	28.47	-4.28	24.19	40.00	15.81	Peak
2	46.666	34.75	-15.20	19.55	40.00	20.45	Peak
3	74.396	36.49	-16.98	19.51	40.00	20.49	Peak
4	106.013	36.43	-13.16	23.27	43.50	20.23	Peak
5	128.563	41.27	-11.28	29.99	43.50	13.51	Peak
6	207.123	31.73	-12.41	19.32	43.50	24.18	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

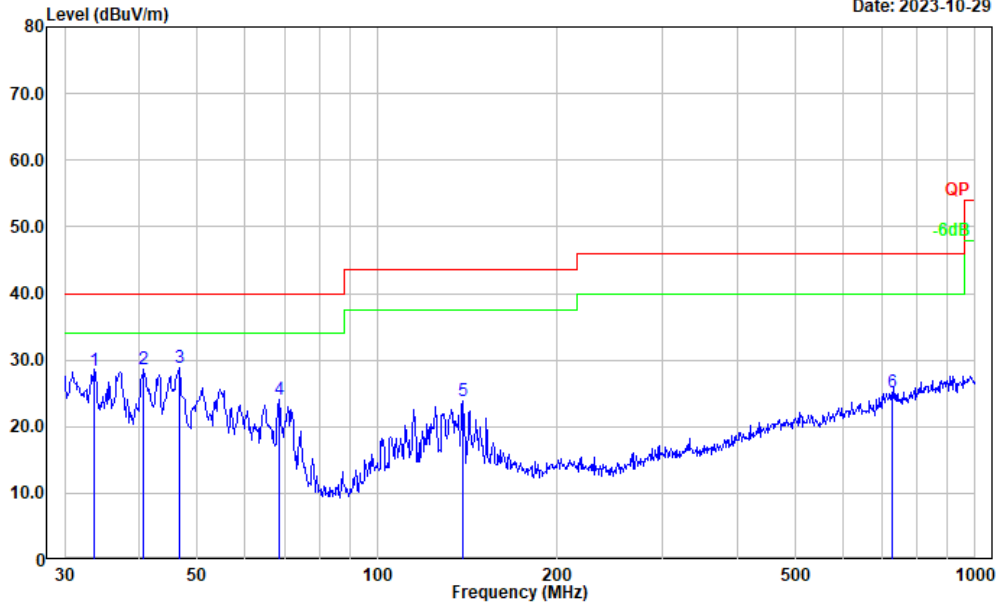


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	33.562	34.99	-6.50	28.49	40.00	11.51	Peak
2	40.702	40.35	-11.82	28.53	40.00	11.47	Peak
3	46.666	43.93	-15.20	28.73	40.00	11.27	Peak
4	68.391	40.83	-16.72	24.11	40.00	15.89	Peak
5	139.361	35.64	-11.74	23.90	43.50	19.60	Peak
6	726.805	28.34	-3.13	25.21	46.00	20.79	Peak

Middle Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

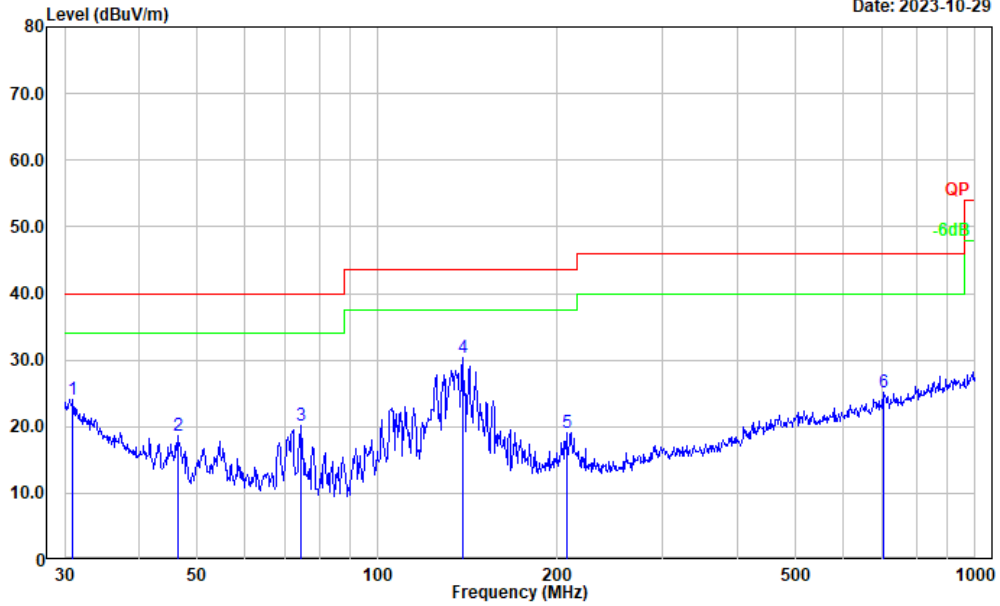

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.962	28.58	-4.53	24.05	40.00	15.95	Peak
2	46.340	33.71	-15.01	18.70	40.00	21.30	Peak
3	74.396	37.04	-16.98	20.06	40.00	19.94	Peak
4	138.874	42.14	-11.71	30.43	43.50	13.07	Peak
5	207.123	31.48	-12.41	19.07	43.50	24.43	Peak
6	704.226	28.84	-3.60	25.24	46.00	20.76	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

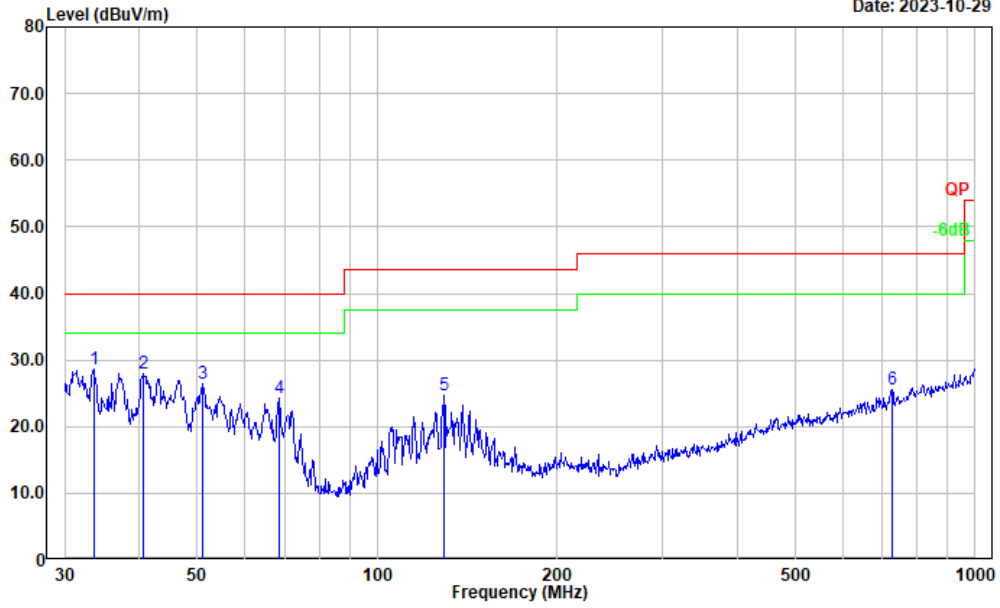


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	33.562	35.05	-6.50	28.55	40.00	11.45	Peak
2	40.559	39.72	-11.74	27.98	40.00	12.02	Peak
3	50.942	43.49	-17.11	26.38	40.00	13.62	Peak
4	68.391	40.90	-16.72	24.18	40.00	15.82	Peak
5	129.468	35.95	-11.28	24.67	43.50	18.83	Peak
6	726.805	28.62	-3.13	25.49	46.00	20.51	Peak

High Channel

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: horizontal
 Note:


Date: 2023-10-29

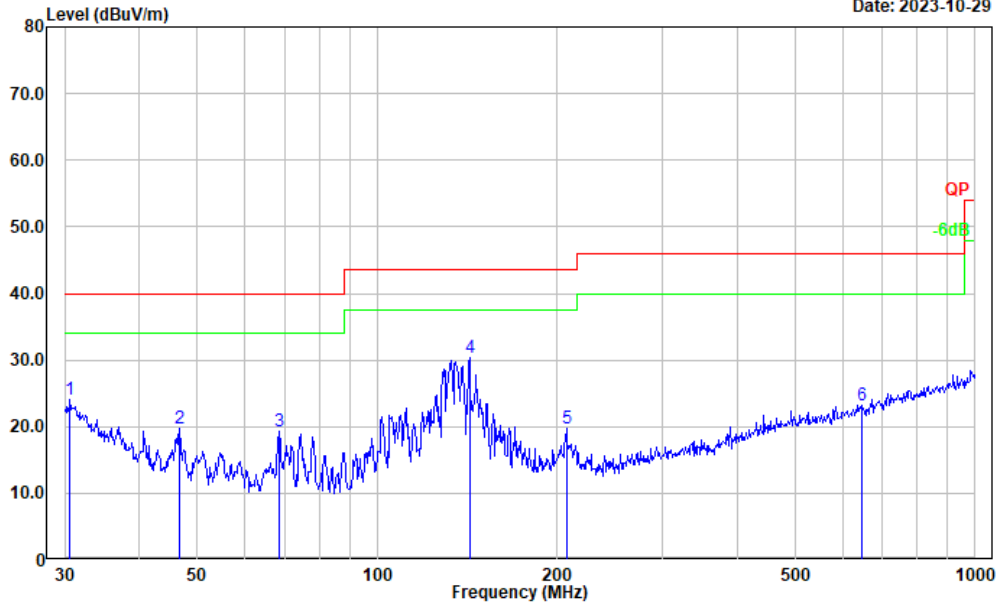

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	30.638	28.34	-4.28	24.06	40.00	15.94	Peak
2	46.666	34.94	-15.20	19.74	40.00	20.26	Peak
3	68.391	36.05	-16.72	19.33	40.00	20.67	Peak
4	142.824	42.25	-11.81	30.44	43.50	13.06	Peak
5	207.123	32.08	-12.41	19.67	43.50	23.83	Peak
6	645.120	27.54	-4.29	23.25	46.00	22.75	Peak

Project No.: CR230744354-RF
 Tester: Jeff Luo
 Polarization: vertical
 Note:

Date: 2023-10-29

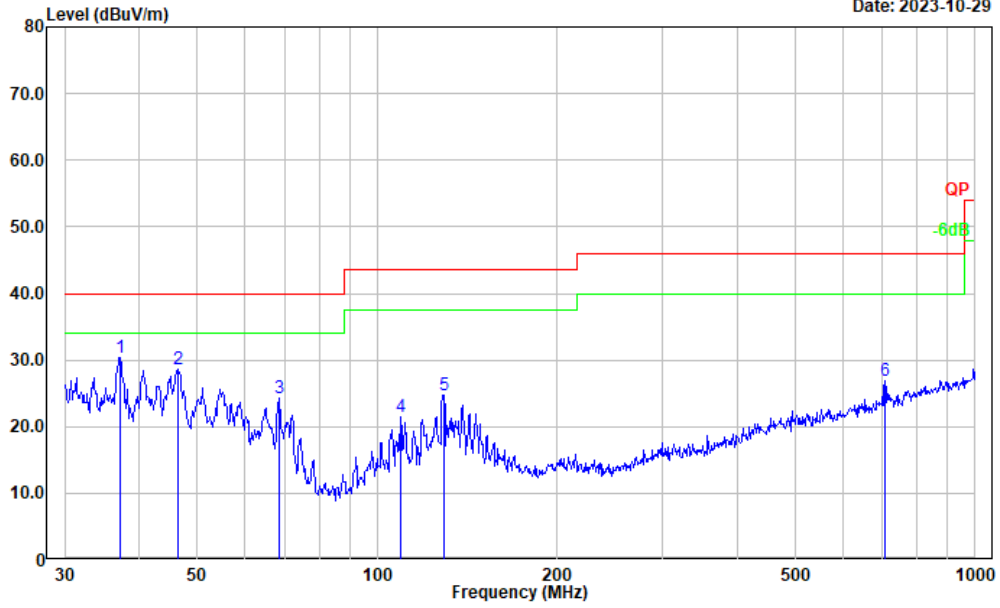

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	37.155	39.69	-9.25	30.44	40.00	9.56	Peak
2	46.503	43.81	-15.11	28.70	40.00	11.30	Peak
3	68.391	41.03	-16.72	24.31	40.00	15.69	Peak
4	109.412	33.84	-12.41	21.43	43.50	22.07	Peak
5	129.468	35.96	-11.28	24.68	43.50	18.82	Peak
6	706.700	30.51	-3.59	26.92	46.00	19.08	Peak

2) 1-25GHz: For Adapter VT05UUS06040

BDR Mode(GFSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	29.54	PK	H	31.46	61.00	74.00	13.00
2390.000	15.25	AV	H	31.46	46.71	54.00	7.29
2390.000	27.36	PK	V	31.46	58.82	74.00	15.18
2390.000	14.85	AV	V	31.46	46.31	54.00	7.69
4804.000	43.37	PK	H	10.91	54.28	74.00	19.72
4804.000	35.72	AV	H	10.91	46.63	54.00	7.37
4804.000	41.59	PK	V	10.91	52.50	74.00	21.50
4804.000	32.32	AV	V	10.91	43.23	54.00	10.77
Middle Channel: 2441 MHz							
4882.000	43.10	PK	H	11.07	54.17	74.00	19.83
4882.000	34.34	AV	H	11.07	45.41	54.00	8.59
4882.000	41.36	PK	V	11.07	52.43	74.00	21.57
4882.000	34.15	AV	V	11.07	45.22	54.00	8.78
High Channel: 2480 MHz							
2483.500	30.27	PK	H	31.65	61.92	74.00	12.08
2483.500	15.81	AV	H	31.65	47.46	54.00	6.54
2483.500	30.07	PK	V	31.65	61.72	74.00	12.28
2483.500	15.11	AV	V	31.65	46.76	54.00	7.24
4960.000	42.99	PK	H	11.24	54.23	74.00	19.77
4960.000	33.52	AV	H	11.24	44.76	54.00	9.24
4960.000	40.37	PK	V	11.24	51.61	74.00	22.39
4960.000	30.62	AV	V	11.24	41.86	54.00	12.14

2EDR Mode ($\pi/4$ -DQPSK):

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel: 2402 MHz							
2390.000	29.43	PK	H	31.46	60.89	74.00	13.11
2390.000	14.90	AV	H	31.46	46.36	54.00	7.64
2390.000	26.95	PK	V	31.46	58.41	74.00	15.59
2390.000	14.64	AV	V	31.46	46.10	54.00	7.90
4804.000	43.03	PK	H	10.91	53.94	74.00	20.06
4804.000	35.45	AV	H	10.91	46.36	54.00	7.64
4804.000	41.21	PK	V	10.91	52.12	74.00	21.88
4804.000	31.97	AV	V	10.91	42.88	54.00	11.12
Middle Channel: 2441 MHz							
4882.000	42.83	PK	H	11.07	53.90	74.00	20.10
4882.000	34.06	AV	H	11.07	45.13	54.00	8.87
4882.000	40.93	PK	V	11.07	52.00	74.00	22.00
4882.000	33.73	AV	V	11.07	44.80	54.00	9.20
High Channel: 2480 MHz							
2483.500	29.97	PK	H	31.65	61.62	74.00	12.38
2483.500	15.60	AV	H	31.65	47.25	54.00	6.75
2483.500	29.61	PK	V	31.65	61.26	74.00	12.74
2483.500	14.73	AV	V	31.65	46.38	54.00	7.62
4960.000	42.89	PK	H	11.24	54.13	74.00	19.87
4960.000	33.48	AV	H	11.24	44.72	54.00	9.28
4960.000	40.37	PK	V	11.24	51.61	74.00	22.39
4960.000	30.45	AV	V	11.24	41.69	54.00	12.31

3EDR Mode (8DPSK):


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
	Reading (dB μ V)	Detector					
Low Channel:				2402	MHz		
2390.000	29.15	PK	H	31.46	60.61	74.00	13.39
2390.000	15.19	AV	H	31.46	46.65	54.00	7.35
2390.000	27.12	PK	V	31.46	58.58	74.00	15.42
2390.000	14.85	AV	V	31.46	46.31	54.00	7.69
4804.000	43.24	PK	H	10.91	54.15	74.00	19.85
4804.000	35.47	AV	H	10.91	46.38	54.00	7.62
4804.000	41.28	PK	V	10.91	52.19	74.00	21.81
4804.000	32.21	AV	V	10.91	43.12	54.00	10.88
Middle Channel:				2441	MHz		
4882.000	42.81	PK	H	11.07	53.88	74.00	20.12
4882.000	34.32	AV	H	11.07	45.39	54.00	8.61
4882.000	41.23	PK	V	11.07	52.30	74.00	21.70
4882.000	33.90	AV	V	11.07	44.97	54.00	9.03
High Channel:				2480	MHz		
2483.500	30.24	PK	H	31.65	61.89	74.00	12.11
2483.500	15.41	AV	H	31.65	47.06	54.00	6.94
2483.500	29.69	PK	V	31.65	61.34	74.00	12.66
2483.500	14.88	AV	V	31.65	46.53	54.00	7.47
4960.000	42.63	PK	H	11.24	53.87	74.00	20.13
4960.000	33.52	AV	H	11.24	44.76	54.00	9.24
4960.000	40.05	PK	V	11.24	51.29	74.00	22.71
4960.000	30.51	AV	V	11.24	41.75	54.00	12.25

Worst Harmonic Margin Test plots (GFSK Low channel)

Horizontal

Project No.: CR230744354-RF
 Tester: coco Tian
 Polarization: horizontal
 Note:

Date: 2023-9-10

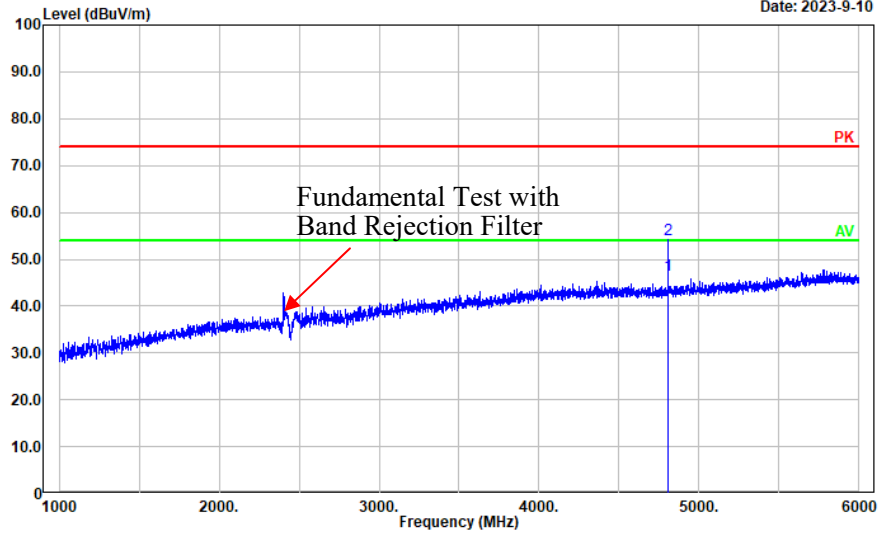


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4804.000	35.72	10.91	46.63	54.00	7.37	Average
2	4804.000	43.37	10.91	54.28	74.00	19.72	Peak

Horizontal

Project No.: CR230744354-RF
 Tester: coco Tian
 Polarization: horizontal
 Note:

Date: 2023-9-10

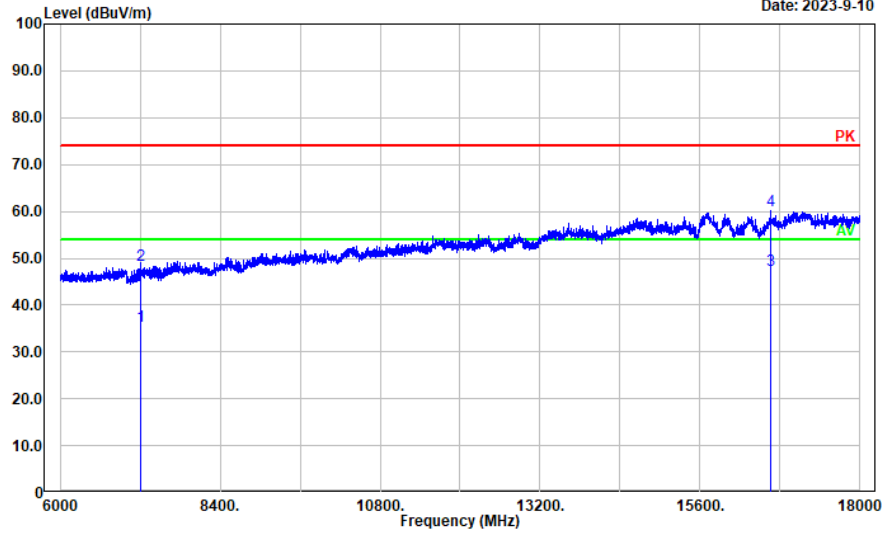


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7206.000	21.23	14.21	35.44	54.00	18.56	Average
2	7206.000	34.22	14.21	48.43	74.00	25.57	Peak
3	16653.330	23.67	23.65	47.32	54.00	6.68	Average
4	16653.330	36.40	23.65	60.05	74.00	13.95	Peak

Horizontal

Project No.: CR230744354-RF
 Tester: coco Tian
 Polarization: Horizontal
 Note:

Date: 2023-9-10

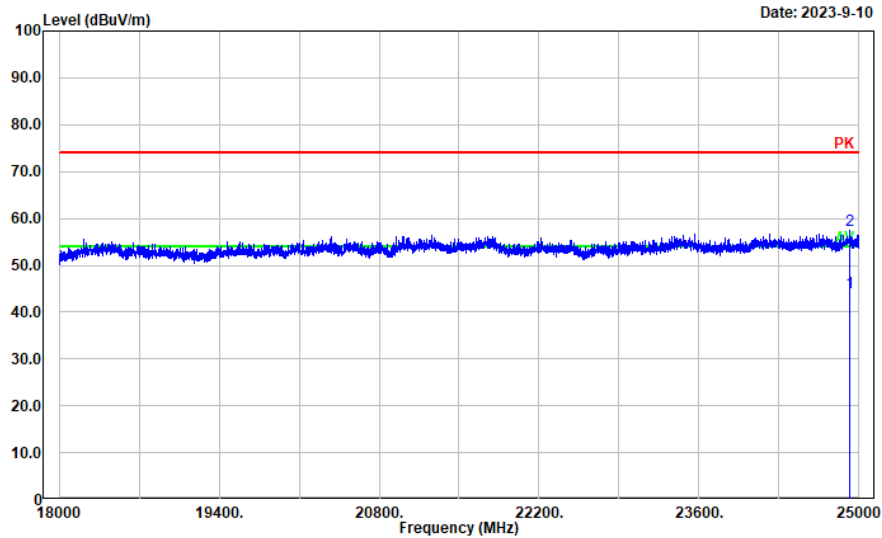


18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	24921.580	37.90	6.38	44.28	54.00	9.72	Average
2	24921.580	51.13	6.38	57.51	74.00	16.49	Peak

Vertical

Project No.: CR230744354-RF
 Tester: coco Tian
 Polarization: vertical
 Note:

Date: 2023-9-10

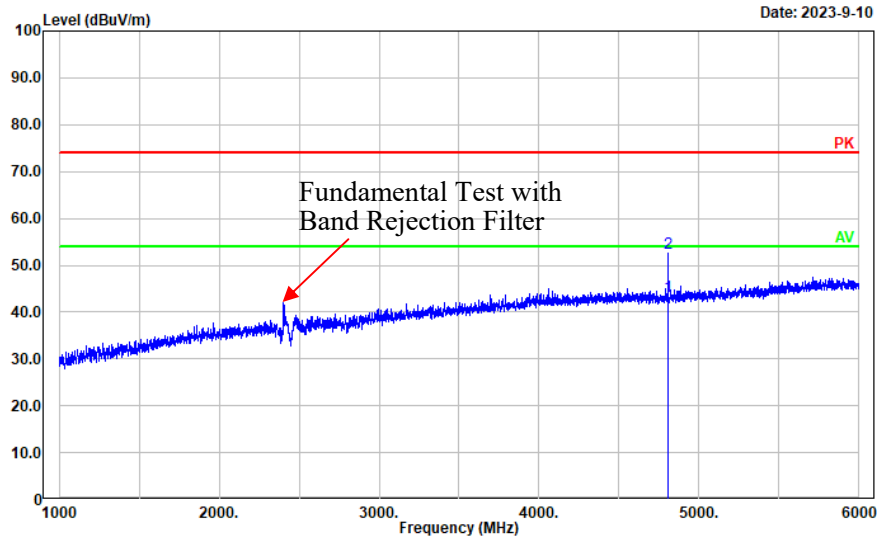


1-6GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	4804.000	32.32	10.91	43.23	54.00	10.77	Average
2	4804.000	41.59	10.91	52.50	74.00	21.50	Peak

Vertical

Project No.: CR230744354-RF
 Tester: coco Tian
 Polarization: vertical
 Note:

Date: 2023-9-10

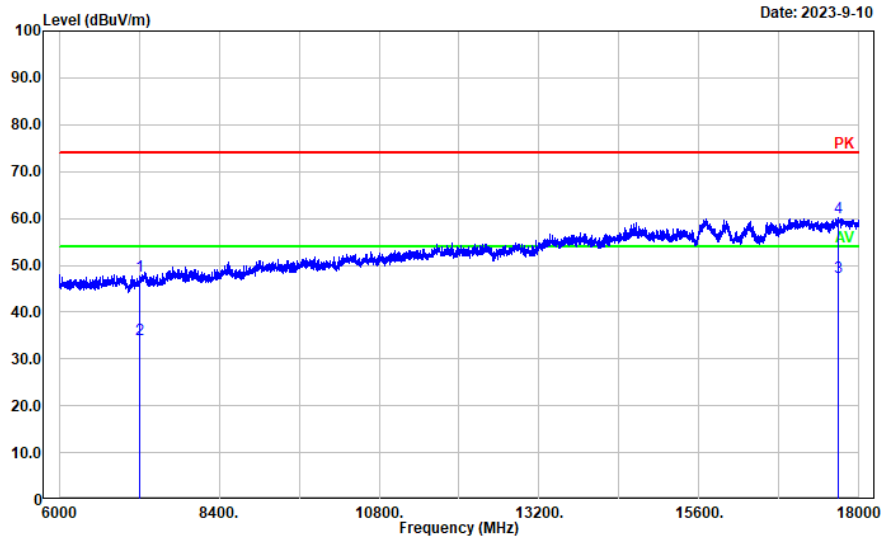


6-18GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	7206.000	33.40	14.21	47.61	54.00	6.39	Average
2	7206.000	20.04	14.21	34.25	74.00	39.75	Peak
3	17687.940	17.09	30.24	47.33	54.00	6.67	Average
4	17687.940	29.79	30.24	60.03	74.00	13.97	Peak

Vertical

Project No.: CR230744354-RF
 Tester: coco Tian
 Polarization: Vertical
 Note:

Date: 2023-9-10

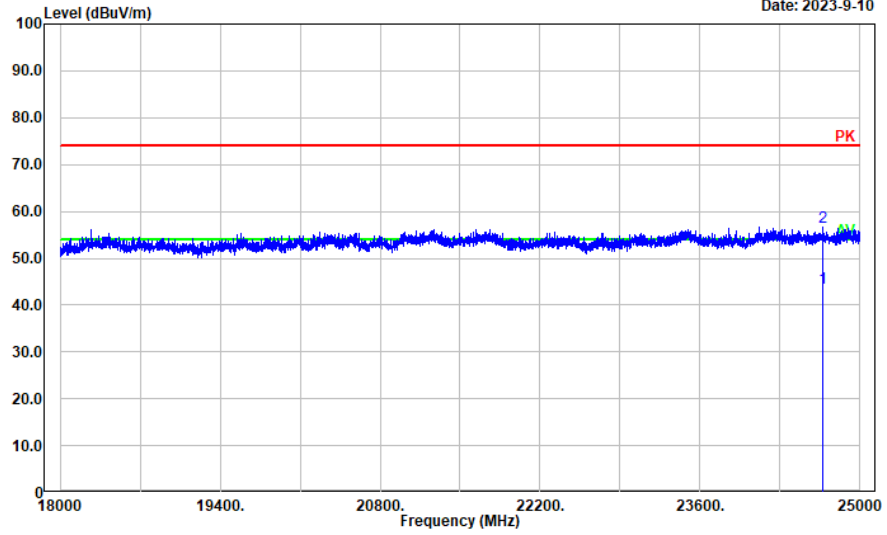

18-25GHz

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector
1	24673.730	38.18	5.40	43.58	54.00	10.42	Average
2	24673.730	51.35	5.40	56.75	74.00	17.25	Peak

4.3 20 dB Emission Bandwidth

Serial Number:	2968_2	Test Date:	2023/7/5~2023/7/6
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7-26.5	Relative Humidity: (%)	57-61	ATM Pressure: (kPa)	100.8-101
----------------------	-----------	------------------------------	-------	------------------------	-----------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Channel	Test Frequency (MHz)	20 dB Bandwidth (MHz)
BDR Mode (GFSK)	Lowest	2402	1.053
	Middle	2441	1.034
	Highest	2480	1.048
EDR Mode ($\pi/4$ -DQPSK)	Lowest	2402	1.371
	Middle	2441	1.371
	Highest	2480	1.371
EDR Mode (8DPSK)	Lowest	2402	1.356
	Middle	2441	1.353
	Highest	2480	1.353

BDR Mode (GFSK)

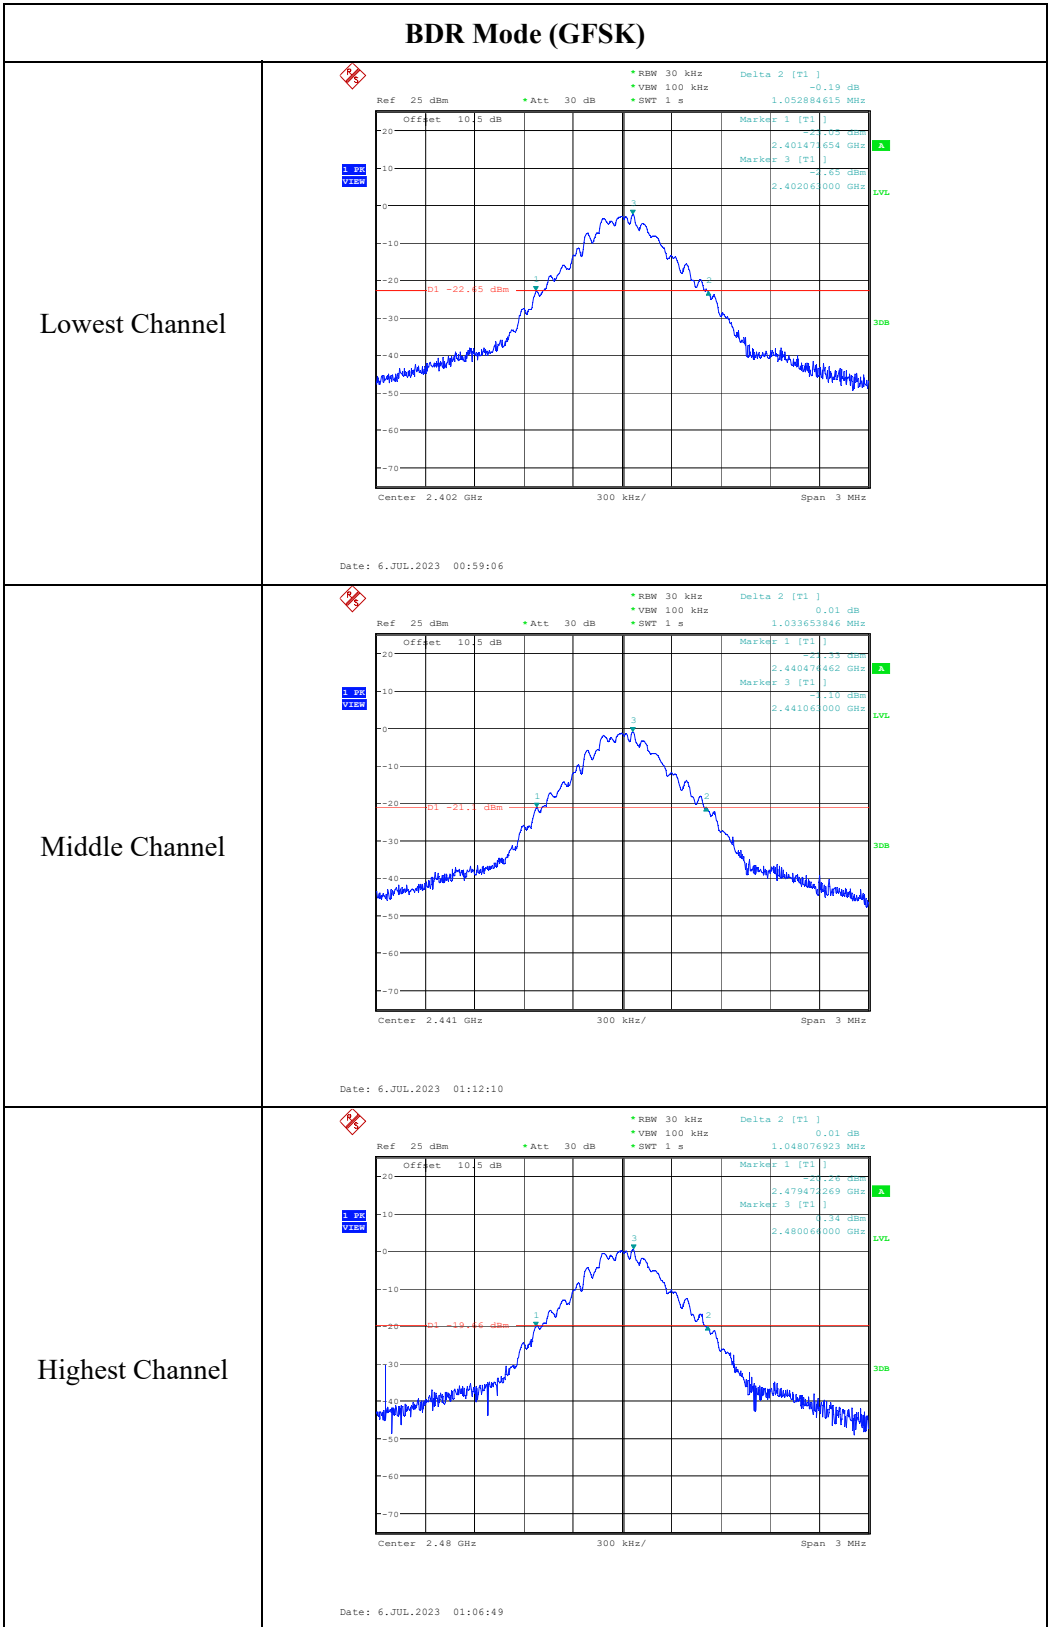

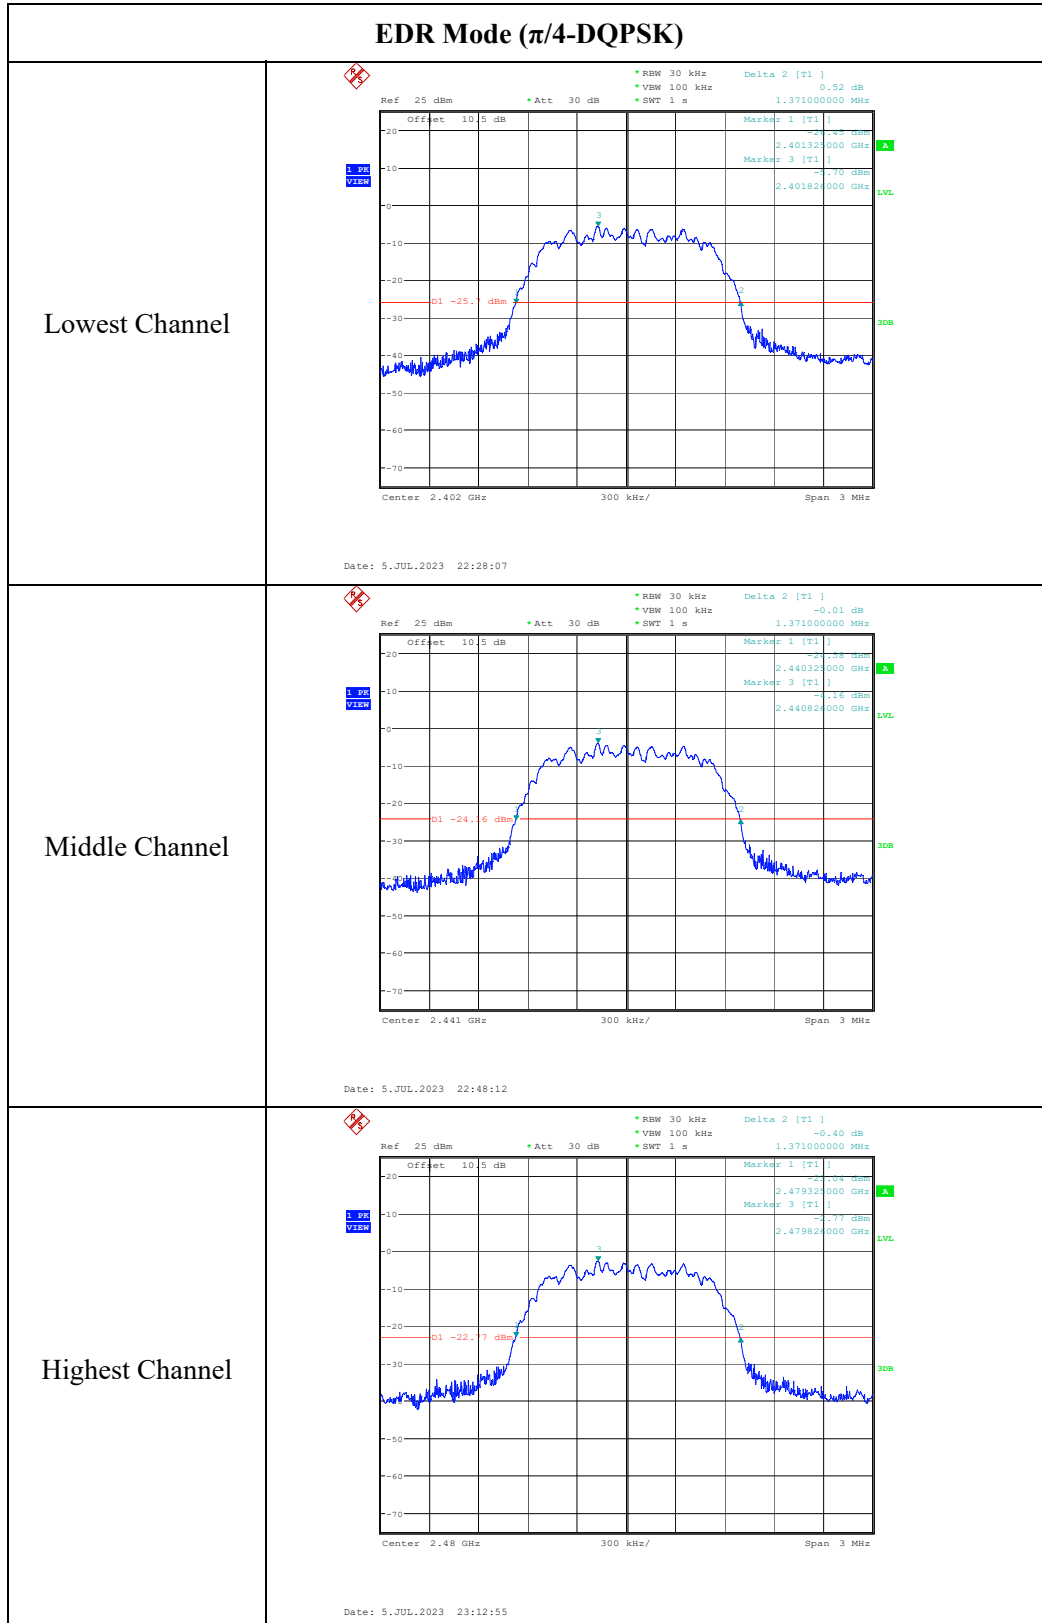

EDR Mode (8DPSK)

<p>Lowest Channel</p>	<p>Date: 5.JUL.2023 22:33:28</p>
<p>Middle Channel</p>	<p>Date: 5.JUL.2023 22:54:08</p>
<p>Highest Channel</p>	<p>Date: 5.JUL.2023 23:18:40</p>

4.4 Channel Separation

Serial Number:	2968_2	Test Date:	2023/7/6
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7	Relative Humidity: (%)	57	ATM Pressure: (kPa)	100.8
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


Test Modes	Test Frequency (MHz)	Channel Separation (MHz)	Limits (MHz)
BDR Mode (GFSK)	2441_Hop	0.996	0.689
EDR Mode ($\pi/4$ -DQPSK)	2441_Hop	1.006	0.914
EDR Mode (8DPSK)	2441_Hop	1.013	0.902

BDR Mode (GFSK)

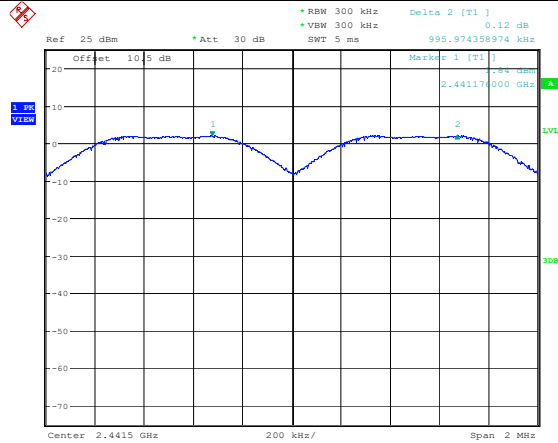


Date: 6.JUL.2023 00:04:28

EDR Mode ($\pi/4$ -DQPSK)

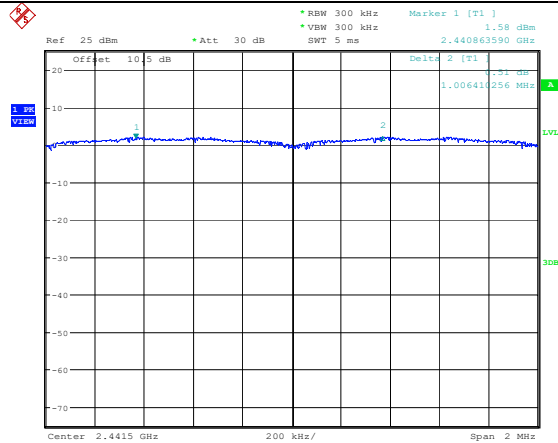

Date: 6.JUL.2023 00:14:14

EDR Mode (8DPSK)

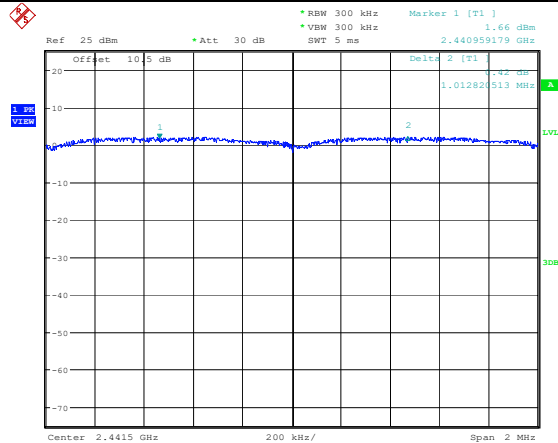

Date: 6.JUL.2023 00:19:04

4.5 Number Of Hopping Frequency

Serial Number:	2968_2	Test Date:	2023/7/5~2023/7/6
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7-26.5	Relative Humidity: (%)	57-61	ATM Pressure: (kPa)	100.8-101
----------------------	-----------	------------------------------	-------	------------------------	-----------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Frequency Range (MHz)	Number of Hopping Channel	Limits
GFSK	2400-2483.5	79	≥15
$\pi/4$ -DQPSK	2400-2483.5	79	≥15
8DPSK	2400-2483.5	79	≥15


Number of Hopping Channel

**BDR Mode
(GFSK)**

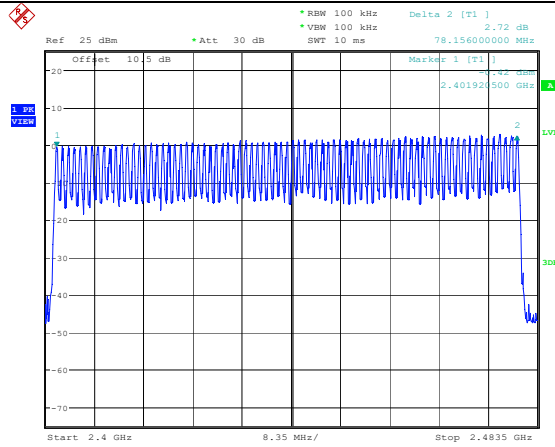


Date: 5.JUL.2023 23:25:22

**EDR Mode
($\pi/4$ -DQPSK)**

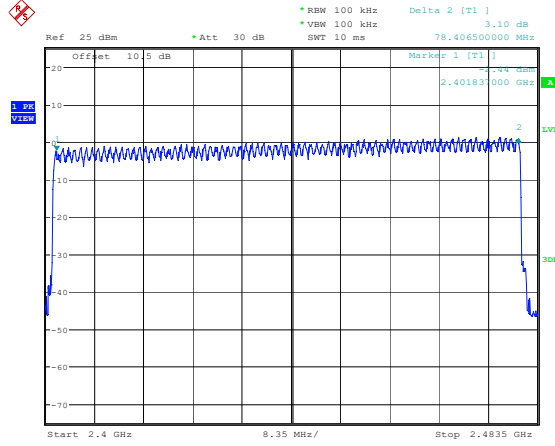

Date: 6.JUL.2023 00:42:59

**EDR Mode
(8DPSK)**

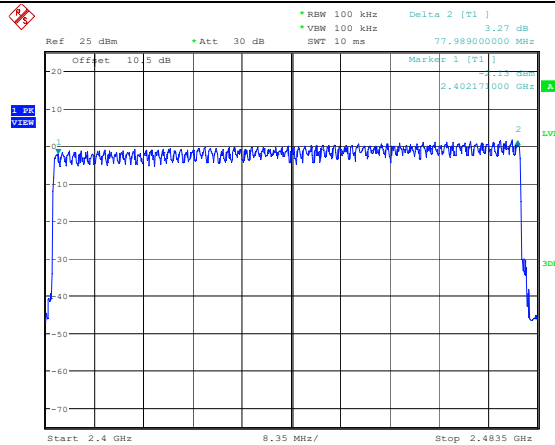

Date: 5.JUL.2023 23:44:58

4.6 Time Of Occupancy(Dwell Time)

Serial Number:	2968_2	Test Date:	2023/7/5
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.5	Relative Humidity: (%)	61	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Packet Type	Test Frequency (MHz)	Pulse width (ms)	Result (s)	Limit (s)
BDR Mode (GFSK)	DH1	2441	0.479	0.153	0.400
	DH3	2441	1.731	0.277	0.400
	DH5	2441	3.070	0.327	0.400
EDR Mode ($\pi/4$ -DQPSK)	2DH1	2441	0.483	0.155	0.400
	2DH3	2441	1.737	0.278	0.400
	2DH5	2441	3.000	0.320	0.400
EDR Mode (8DPSK)	3DH1	2441	0.484	0.155	0.400
	3DH3	2441	1.740	0.278	0.400
	3DH5	2441	3.005	0.321	0.400

Note:


DH1:Dwell time=Pulse time (ms) \times (1600/2/79) \times 31.6 s

DH3:Dwell time=Pulse time (ms) \times (1600/4/79) \times 31.6 s

DH5:Dwell time=Pulse time (ms) \times (1600/6/79) \times 31.6 s


BDR Mode (GFSK)

DH1:

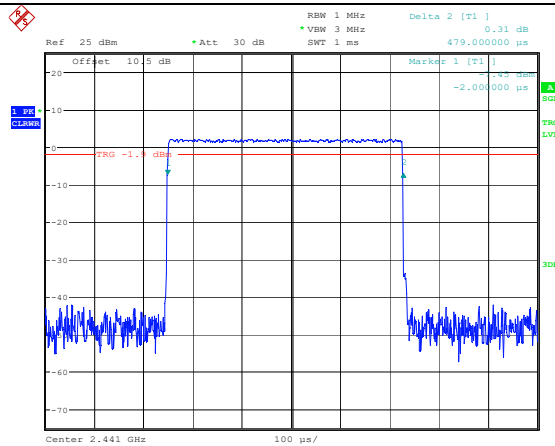


Date: 5.JUL.2023 23:22:35

DH3:

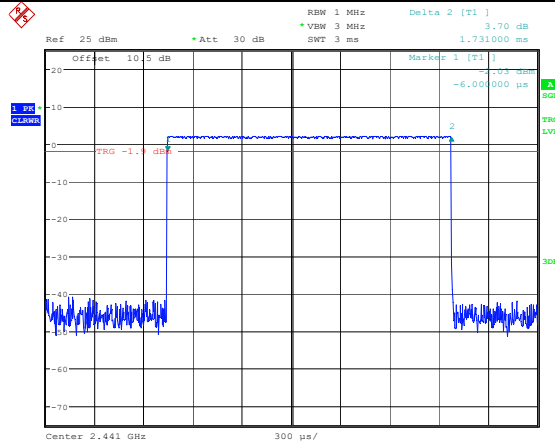

Date: 5.JUL.2023 23:23:29

DH5:

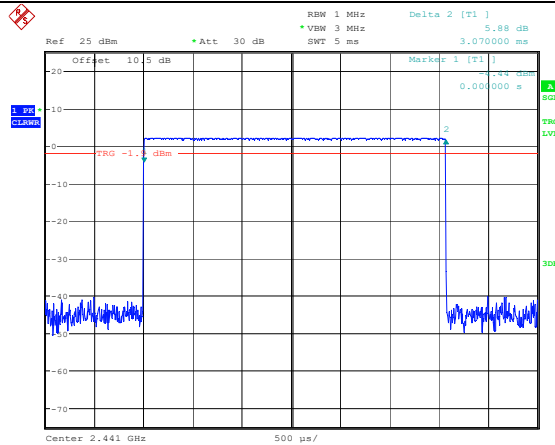


Date: 5.JUL.2023 23:27:03

EDR Mode ($\pi/4$-DQPSK)	
2DH1:	<p>Ref: 25 dBm *Att: 30 dB RBW: 1 MHz Delta 2 [T1]: 6.09 dB *VBW: 3 MHz 483.000000 ps SWT: 1 ms Offset: 10.5 dB Marker 1 [T1]: -2.000000 ps Center: 2.441 GHz 100 us/</p> <p>Date: 5.JUL.2023 23:29:45</p>
2DH3:	<p>Ref: 25 dBm *Att: 30 dB RBW: 1 MHz Delta 2 [T1]: 11.38 dB *VBW: 3 MHz 1.737000 ms SWT: 3 ms Offset: 10.5 dB Marker 1 [T1]: -6.000000 ps Center: 2.441 GHz 300 us/</p> <p>Date: 5.JUL.2023 23:30:46</p>
2DH5:	<p>Ref: 25 dBm *Att: 30 dB RBW: 1 MHz Delta 2 [T1]: 0.63 dB *VBW: 3 MHz 3.000000 ms SWT: 5 ms Offset: 10.5 dB Marker 1 [T1]: 5.000000 ps Center: 2.441 GHz 500 us/</p> <p>Date: 5.JUL.2023 23:35:18</p>


EDR Mode (8DPSK)

3DH1:

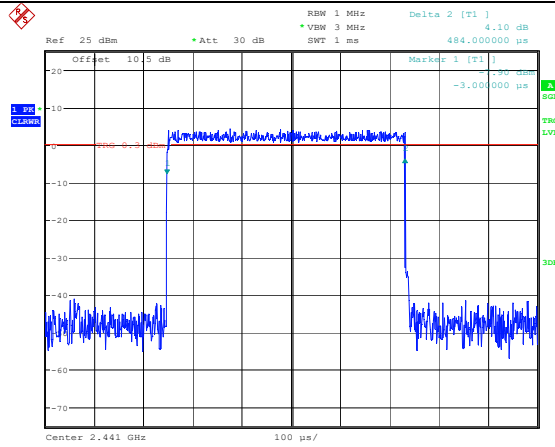


Date: 5.JUL.2023 23:38:52

3DH3:

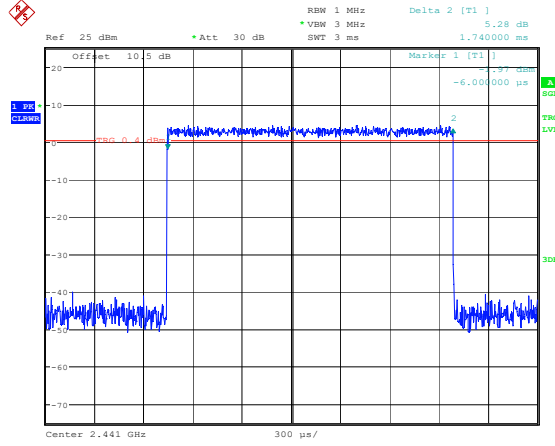

Date: 5.JUL.2023 23:40:01

3DH5:

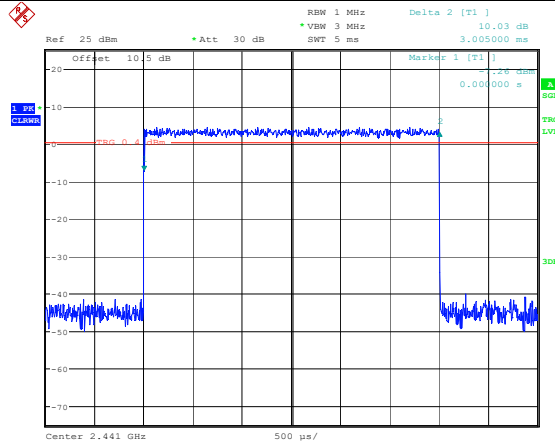

Date: 5.JUL.2023 23:46:17

4.7 Maximum Conducted Output Power

Serial Number:	2968_2	Test Date:	2023/7/5
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	26.5	Relative Humidity: (%)	61	ATM Pressure: (kPa)	101
----------------------	------	------------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A


* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

Test Modes	Test Frequency (MHz)	Peak Conducted Output Power (dBm)	Limits (dBm)
BDR Mode (GFSK)	2402	0.79	21
	2441	2.29	21
	2480	3.72	21
EDR Mode ($\pi/4$ -DQPSK)	2402	2.77	21
	2441	4.31	21
	2480	5.67	21
EDR Mode (8DPSK)	2402	3.31	21
	2441	4.91	21
	2480	6.22	21

BDR Mode (GFSK)

<p>Lowest Channel</p>	<p>Date: 5.JUL.2023 22:16:48</p>
<p>Middle Channel</p>	<p>Date: 5.JUL.2023 22:35:42</p>
<p>Highest Channel</p>	<p>Date: 5.JUL.2023 22:55:10</p>

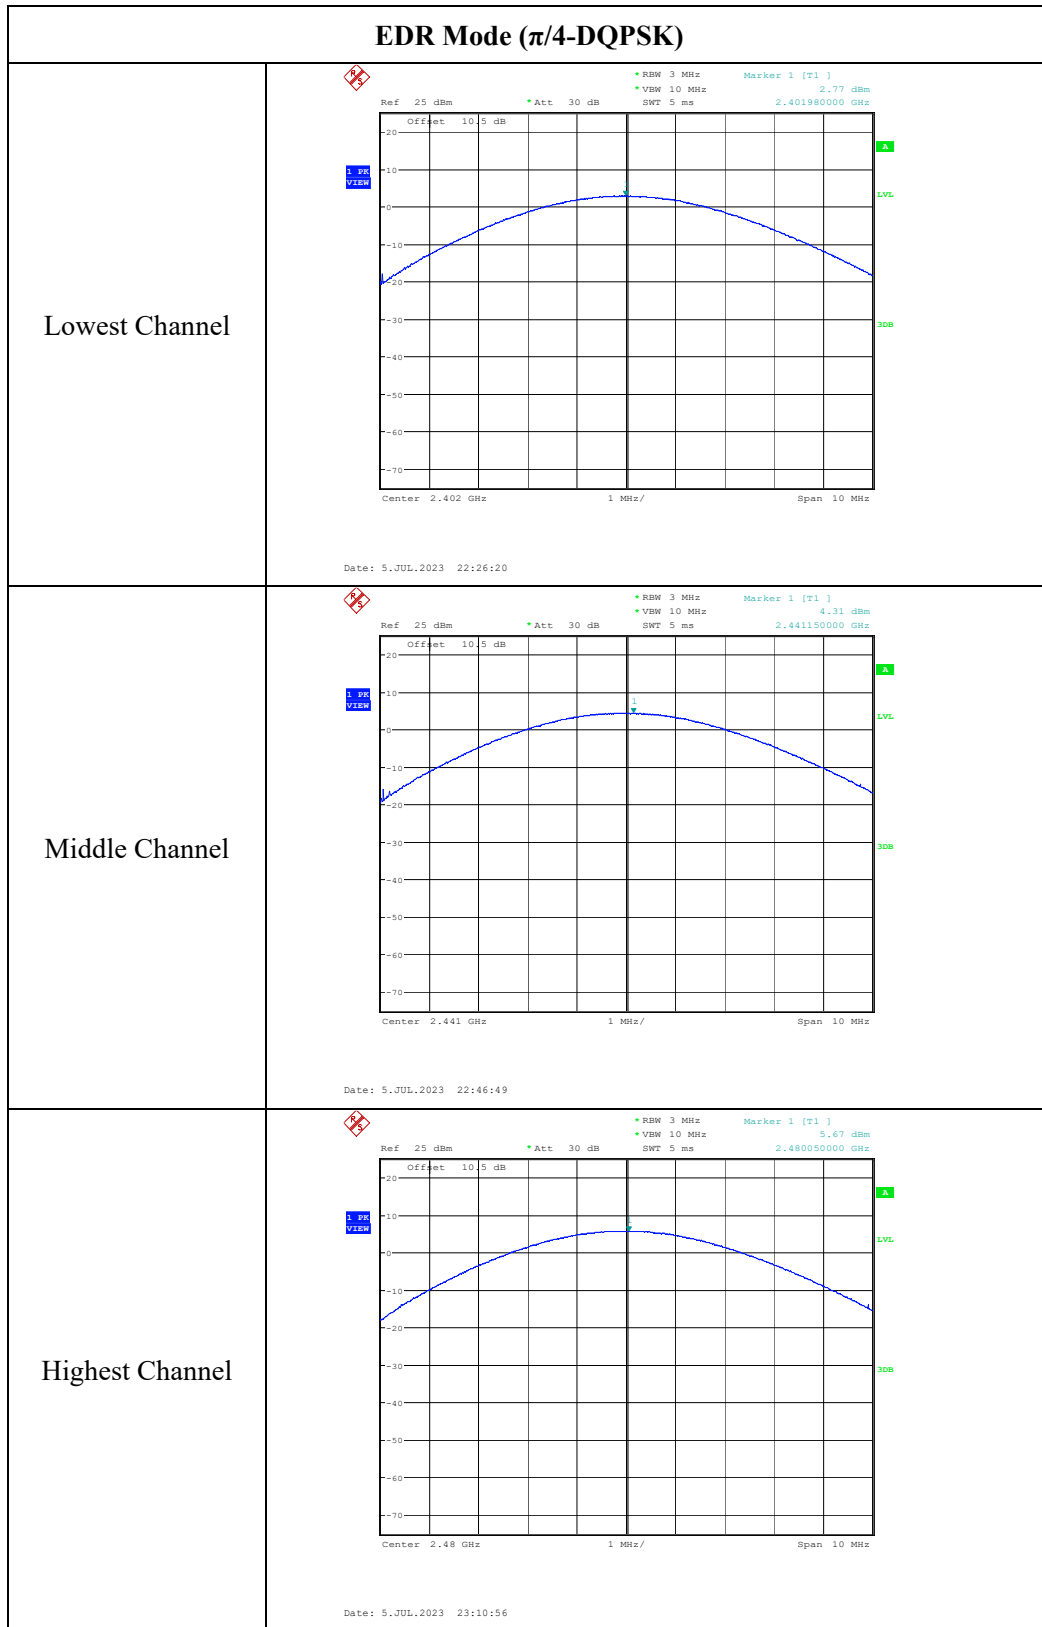

EDR Mode (8DPSK)

<p>Lowest Channel</p>	<p>Ref: 25 dBm *Att: 30 dB *RBW: 3 MHz Marker 1 [T1] 3.31 dBm *VBW: 10 MHz *SWT: 5 ms 2.401980000 GHz</p> <p>Offset: 10.5 dB</p> <p>Center: 2.402 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 5.JUL.2023 22:31:41</p>
<p>Middle Channel</p>	<p>Ref: 25 dBm *Att: 30 dB *RBW: 3 MHz Marker 1 [T1] 4.91 dBm *VBW: 10 MHz *SWT: 5 ms 2.440980000 GHz</p> <p>Offset: 10.5 dB</p> <p>Center: 2.441 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 5.JUL.2023 22:52:22</p>
<p>Highest Channel</p>	<p>Ref: 25 dBm *Att: 30 dB *RBW: 3 MHz Marker 1 [T1] 6.22 dBm *VBW: 10 MHz *SWT: 5 ms 2.479840000 GHz</p> <p>Offset: 10.5 dB</p> <p>Center: 2.478 GHz 1 MHz/ Span: 10 MHz</p> <p>Date: 5.JUL.2023 23:16:53</p>

4.8 100 kHz Bandwidth of Frequency Band Edge

Serial Number:	2968_2	Test Date:	2023/7/5~2023/7/6
Test Site:	RF	Test Mode:	Transmitting
Tester:	Hale Li	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7~26.5	Relative Humidity: (%)	57~61	ATM Pressure: (kPa)	100.8~101
----------------------	-----------	------------------------------	-------	------------------------	-----------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	Spectrum Analyzer	FSU26	100147	2023/3/31	2024/3/30
zhuoxiang	Coaxial Cable	SMA-178	211001	Each time	N/A
eastsheep	Coaxial Attenuator	2W-SMA-JK-18G	21060301	Each time	N/A

** Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).*

Test Data:


Band Edge, Single Channel

**BDR Mode
(GFSK),
Left Side**

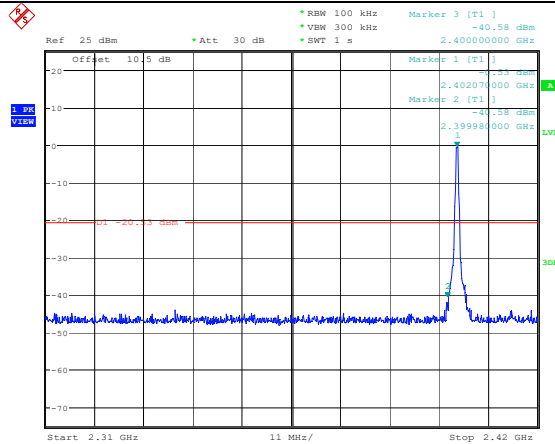

Date: 5.JUL.2023 22:18:59


**BDR Mode
(GFSK),
Right Side**

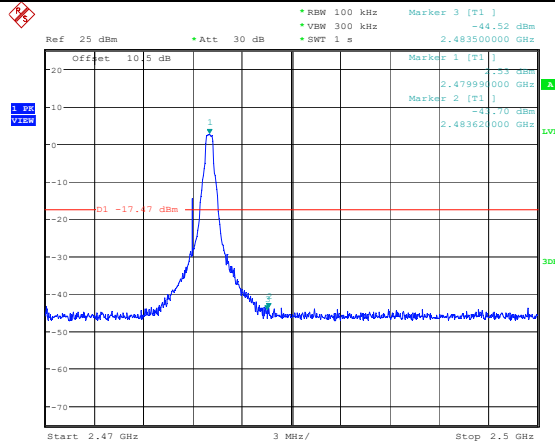


Date: 5.JUL.2023 22:57:56

Band Edge, Single Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

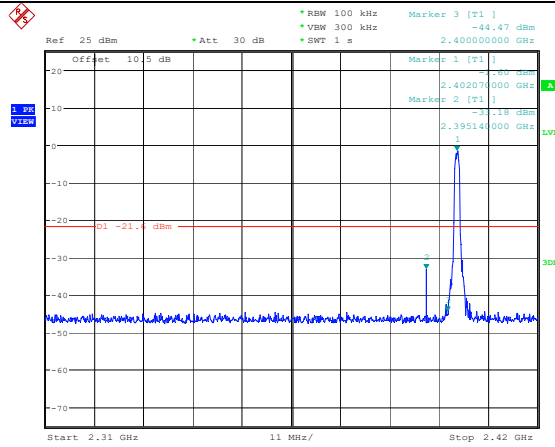


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

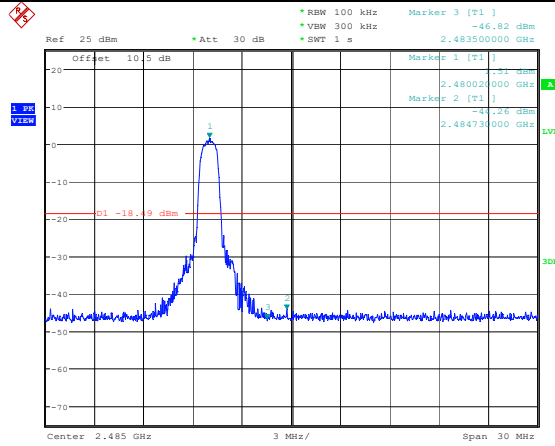


Band Edge, Single Channel

**EDR Mode
(8DPSK),
Left Side**

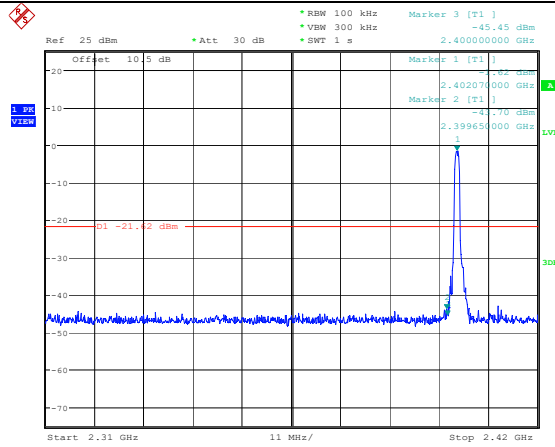

Date: 5.JUL.2023 22:34:04


**EDR Mode
(8DPSK),
Right Side**

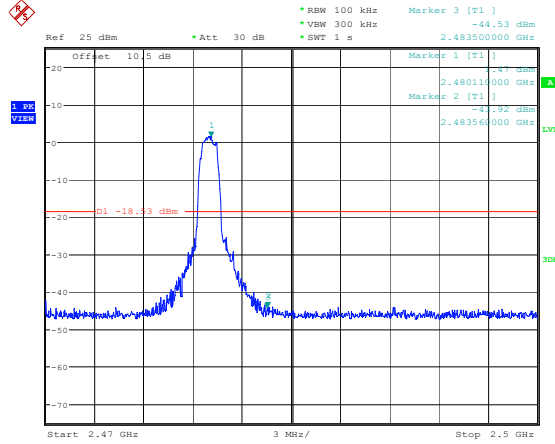


Date: 5.JUL.2023 23:19:29

Band Edge, Hopping Channel

**BDR Mode
(GFSK),
Left Side**

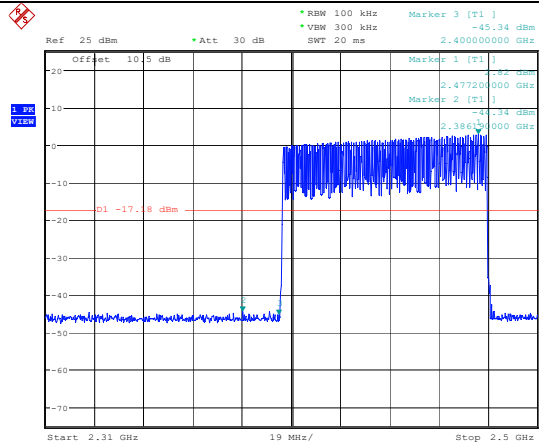


**BDR Mode
(GFSK),
Right Side**

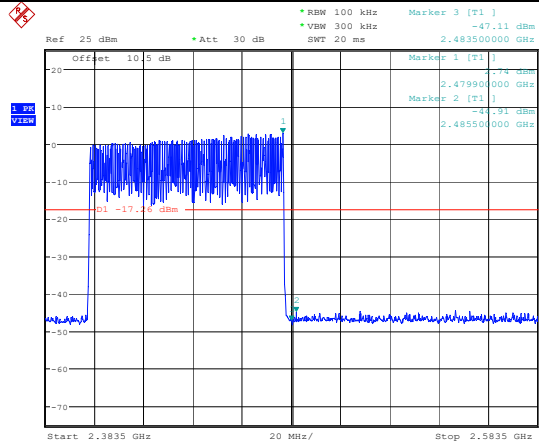


Band Edge, Hopping Channel

**EDR Mode
($\pi/4$ -DQPSK),
Left Side**

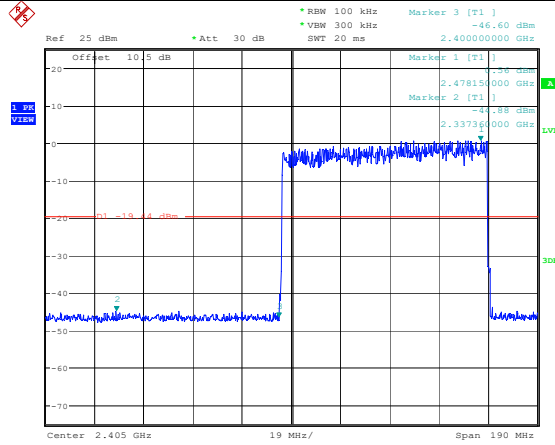

Date: 5.JUL.2023 23:36:46


**EDR Mode
($\pi/4$ -DQPSK),
Right Side**

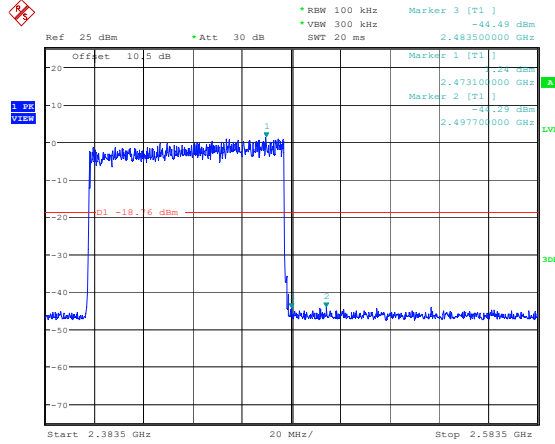

Date: 5.JUL.2023 23:37:50


Band Edge, Hopping Channel

**EDR Mode
(8DPSK),
Left Side**

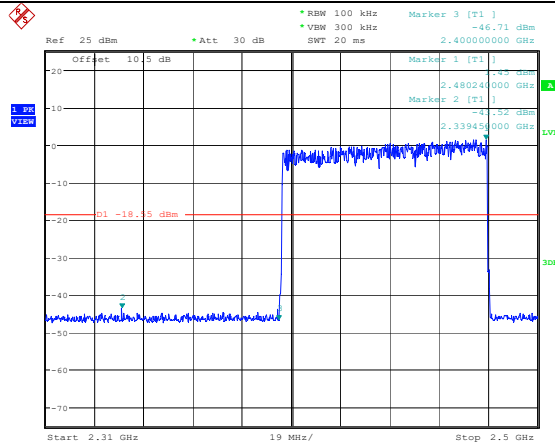

Date: 5.JUL.2023 23:48:26

**EDR Mode
(8DPSK),
Right Side**

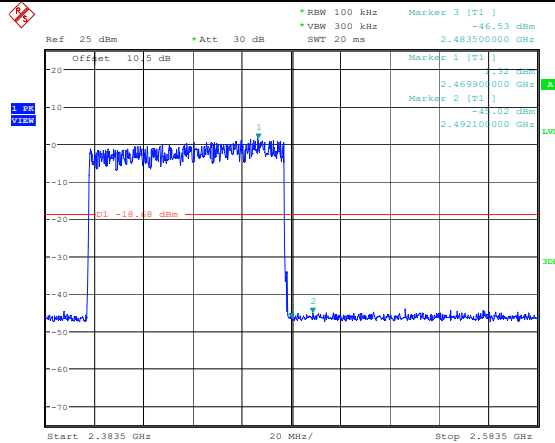

Date: 5.JUL.2023 23:49:53

5. RF EXPOSURE EVALUATION

5.1 Applicable Standard

According to §1.1307(b)(3)(i)

(C) Or using Table 1 and the minimum separation distance (R in meters) from the body of a nearby person for the frequency (f in MHz) at which the source operates, the ERP (watts) is no more than the calculated value prescribed for that frequency. For the exemption in Table 1 to apply, R must be at least $\lambda/2\pi$, where λ is the free-space operating wavelength in meters. If the ERP of a single RF source is not easily obtained, then the available maximum time-averaged power may be used in lieu of ERP if the physical dimensions of the radiating structure(s) do not exceed the electrical length of $\lambda/4$ or if the antenna gain is less than that of a half-wave dipole (1.64 linear value).

Table 1 to § 1.1307(b)(3)(i)(C) - Single RF Sources Subject to Routine Environmental Evaluation

RF Source frequency (MHz)	Threshold ERP (watts)
0.3-1.34	$1,920 R^2$.
1.34-30	$3,450 R^2/f^2$.
30-300	$3.83 R^2$.
300-1,500	$0.0128 R^2f$.
1,500-100,000	$19.2R^2$.

5.2 Measurement Result

Mode	Frequency (MHz)	$\lambda/2\pi$ (mm)	Distance (mm)	Exemption ERP		Maximum Conducted Power including Tune-up Tolerance (dBm)	Antenna Gain (dBi)	ERP		MPE-Based Exemption
				(mW)	(dBm)			(dBm)	(mW)	
DECT	1920-1930	24.87	200	768	28.85	21.0	0	18.85	76.74	Compliant
BT	2402-2480	19.80	200	768	28.85	6.5	0	4.35	2.72	Compliant

Note:

The Maximum Conducted Power including Tune-up Tolerance was declared by manufacturer.
The DECT and BT can transmit simultaneously.

$$\sum_{i=1}^a \frac{P_i}{P_{th,i}} + \sum_{j=1}^b \frac{ERP_j}{ERP_{th,j}} + \sum_{k=1}^c \frac{Evaluated_k}{Exposure Limit_k}$$

$$=ERP_{DECT} / Limit + ERP_{BT} / Limit$$

$$=76.74/768 + 2.72/768$$

$$=0.103$$

$$< 1.0$$

Result: The device compliant the MPE-Based Exemption at 20cm distances.

6. EUT PHOTOGRAPHS

Please refer to the attachment CR230744354-EXP EUT EXTERNAL PHOTOGRAPHS and CR230744354-INP EUT INTERNAL PHOTOGRAPHS

7. TEST SETUP PHOTOGRAPHS

Please refer to the attachment CR230744354-00A-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====