


TEST REPORT

3.4 Maximum Power Spectral Density

The figure below shows the test setup, which is utilized to make these measurements.



The output from the transmitter was connected to an attenuator and then to the input of the RF Spectrum Analyzer.

Spectrum analyser according to the following Settings:

For U-NII-1, U-NII-2A, U-NII-2C Band:

Using Method SA-2

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 1 MHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Sweep time = auto, trigger set to "free run".
- d) Trace average at least 100 traces in power averaging mode.
- e) Record the max value and add 10 log (1/duty cycle)

For U-NII-3 Band:

- a) Set span to encompass the entire emission bandwidth (EBW) of the signal.
- b) Set RBW = 500 kHz, Set VBW $\geq$ 3 RBW, Detector = RMS
- c) Use the peak marker function to determine the maximum power level in any 500 kHz band segment within the fundamental EBW.
- d) Sweep time = auto, trigger set to "free run".
- e) Trace average at least 100 traces in power averaging mode.
- f) Record the max value and add 10 log (1/duty cycle)

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

TEST REPORT

For Maximum EIRP (Peak Antenna Gain = 0 dBi)

IEEE 802.11ac (20MHz) (MCS0)

Frequency (MHz)	PSD in 1MHz (dBm)	EIRP PSD in 1MHz (dBm)	PSD in 500kHz (dBm)
5180	2.502	2.502	N/A
5220	2.447	2.447	N/A
5240	2.770	2.770	N/A
5260	2.906	2.906	N/A
5300	3.563	3.563	N/A
5320	3.156	3.156	N/A
5500	1.271	1.271	N/A
5580	3.888	3.888	N/A
5700	4.302	4.302	N/A
5745	N/A	N/A	0.119
5785	N/A	N/A	-0.607
5825	N/A	N/A	-0.663

IEEE 802.11ac (40MHz) (MCS0)

Frequency (MHz)	PSD in 1MHz (dBm)	EIRP PSD in 1MHz (dBm)	PSD in 500kHz (dBm)
5190	-0.480	-0.480	N/A
5230	-0.484	-0.484	N/A
5270	-0.107	-0.107	N/A
5310	0.160	0.160	N/A
5510	-1.596	-1.596	N/A
5550	0.278	0.278	N/A
5670	-0.403	-0.403	N/A
5755	N/A	N/A	-2.252
5795	N/A	N/A	-3.325

IEEE 802.11ac (80MHz) (MCS0)

Frequency (MHz)	PSD in 1MHz (dBm)	EIRP PSD in 1MHz (dBm)	PSD in 500kHz (dBm)
5210	-2.802	-2.802	N/A
5290	-2.000	-2.000	N/A
5530	-3.020	-3.020	N/A
5775	N/A	N/A	-4.714

TEST REPORT

IEEE 802.11a (20MHz) (OFDM, 6 Mbps)

Frequency (MHz)	PSD in 1MHz (dBm)	EIRP PSD in 1MHz (dBm)	PSD in 500kHz (dBm)
5180	2.737	2.737	N/A
5220	3.160	3.160	N/A
5240	3.187	3.187	N/A
5260	3.593	3.593	N/A
5300	3.760	3.760	N/A
5320	3.417	3.417	N/A
5500	2.385	2.385	N/A
5580	4.953	4.953	N/A
5700	5.336	5.336	N/A
5745	N/A	N/A	1.279
5785	N/A	N/A	0.380
5825	N/A	N/A	0.129

IEEE 802.11n (20MHz) (OFDM, MCS0)

Frequency (MHz)	PSD in 1MHz (dBm)	EIRP PSD in 1MHz (dBm)	PSD in 500kHz (dBm)
5180	2.263	2.263	N/A
5220	2.778	2.778	N/A
5240	3.161	3.161	N/A
5260	3.391	3.391	N/A
5300	3.736	3.736	N/A
5320	4.103	4.103	N/A
5500	1.630	1.630	N/A
5580	3.897	3.897	N/A
5700	4.278	4.278	N/A
5745	N/A	N/A	0.661
5785	N/A	N/A	-0.348
5825	N/A	N/A	0.006

IEEE 802.11n (40MHz) (OFDM, MCS0)

Frequency (MHz)	PSD in 1MHz (dBm)	EIRP PSD in 1MHz (dBm)	PSD in 500kHz (dBm)
5190	-0.663	-0.663	N/A
5230	0.143	0.143	N/A
5270	0.294	0.294	N/A
5310	0.052	0.052	N/A
5510	-1.288	-1.288	N/A
5550	0.254	0.254	N/A
5670	-0.415	-0.415	N/A
5755	N/A	N/A	-2.664
5795	N/A	N/A	-2.880

TEST REPORT

Remark:

1. Cable Loss: 1.02dB
2. e.i.r.p = Power Spectral Density + Duty Cycle Factor + Antenna Gain
3. Power Spectral Density = Power Spectral Density + Duty Cycle Factor
4. Duty Cycle = On Time/ Period
Duty Cycle Factor = $10 * \log (1/ \text{Duty Cycle})$
Average factor = $20 \log 10 \text{ Duty Cycle}$.

Limits for FCC:

For U-NII-1: 11dBm/MHz for mobile/portable device

For U-NII-2: 11dBm/MHz

For U-NII-3 in 3kHz: 30dBm/500kHz

Limits for RSS:

For U-NII-1: 10dBm/MHz E.I.R.P

For U-NII-2: 11dBm/MHz


For U-NII-3 in 3kHz: 30dBm/500kHz

The plots of Maximum Power Spectral Density are saved as below.


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11ac (20MHz), 5180MHz

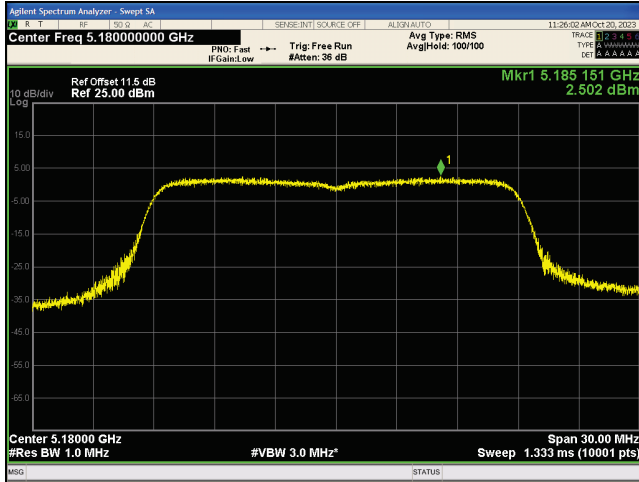


802.11ac (20MHz), 5220MHz

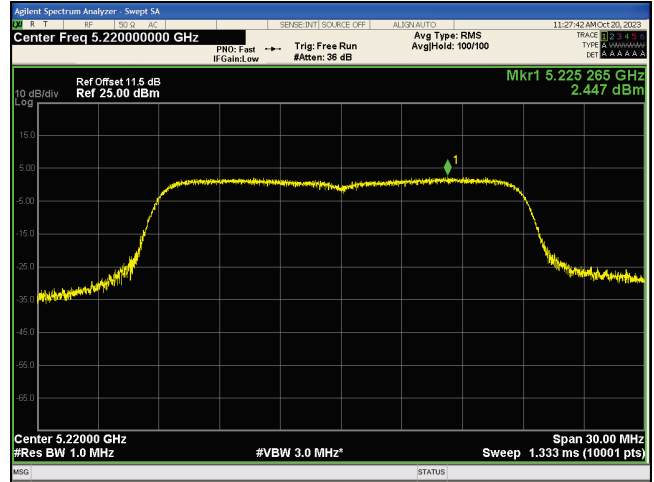


802.11ac (20MHz), 5240MHz

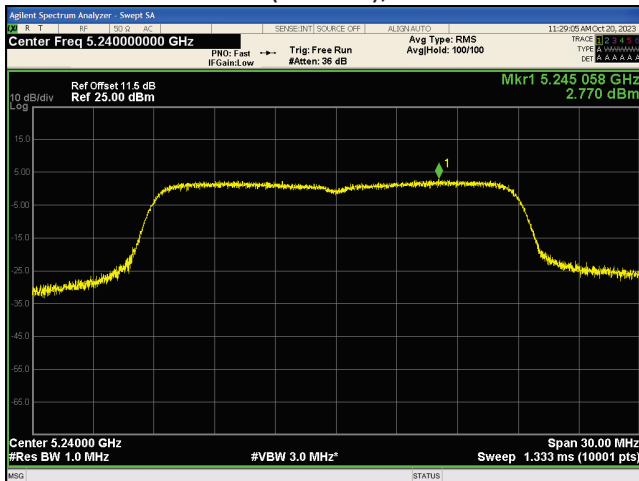


802.11ac (20MHz), 5260MHz

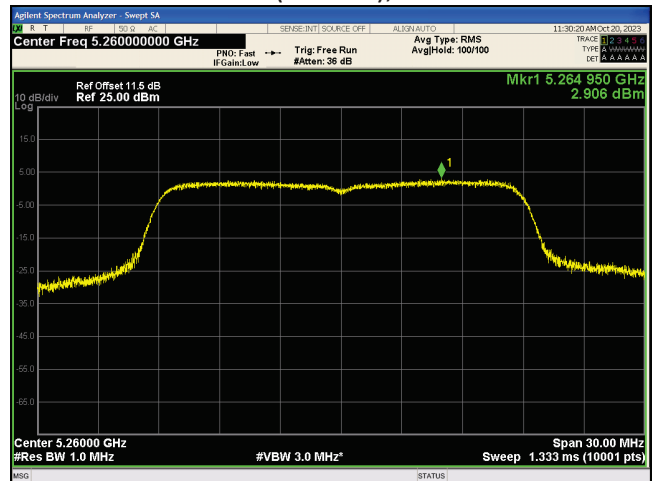

802.11ac (20MHz), 5300MHz

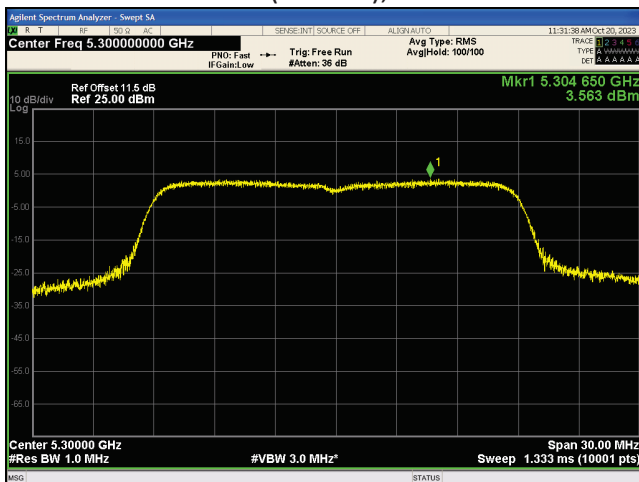


802.11ac (20MHz), 5320MHz

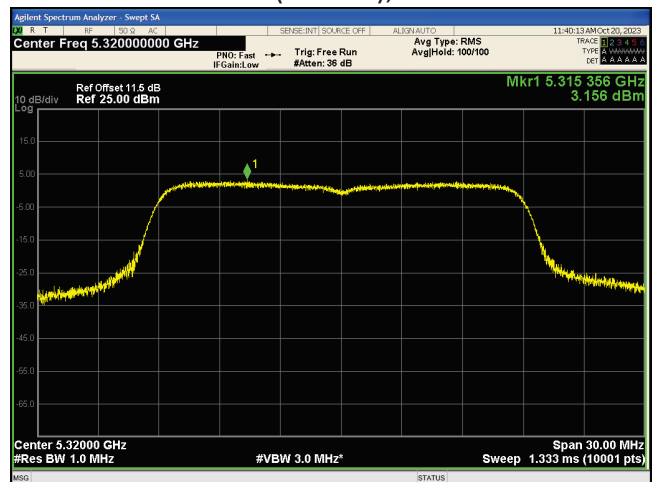


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11ac (20MHz), 5500MHz

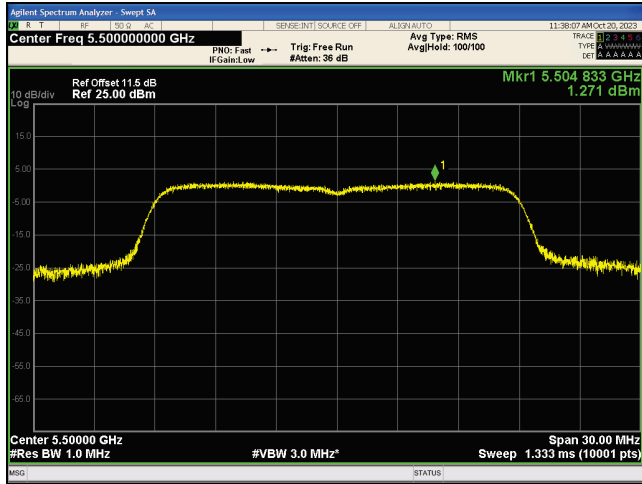


802.11ac (20MHz), 5580MHz

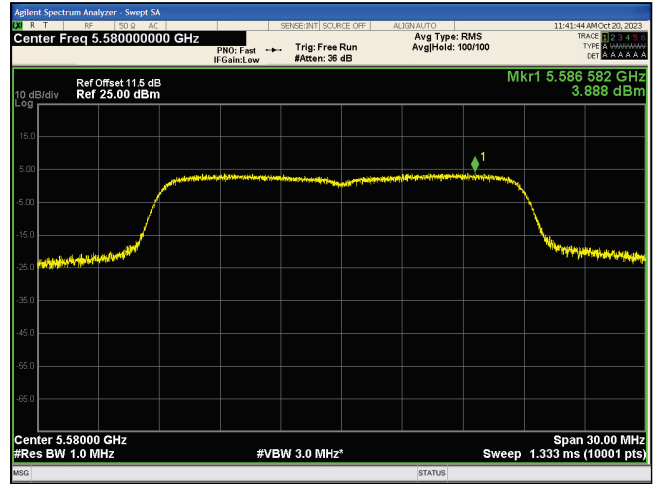


802.11ac (20MHz), 5700MHz

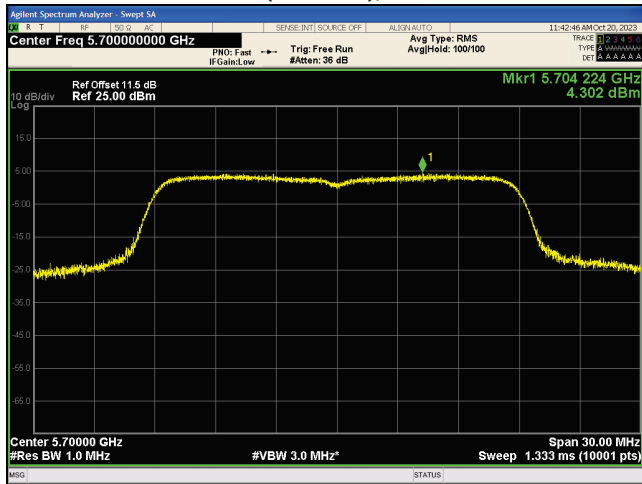


802.11ac (20MHz), 5745MHz

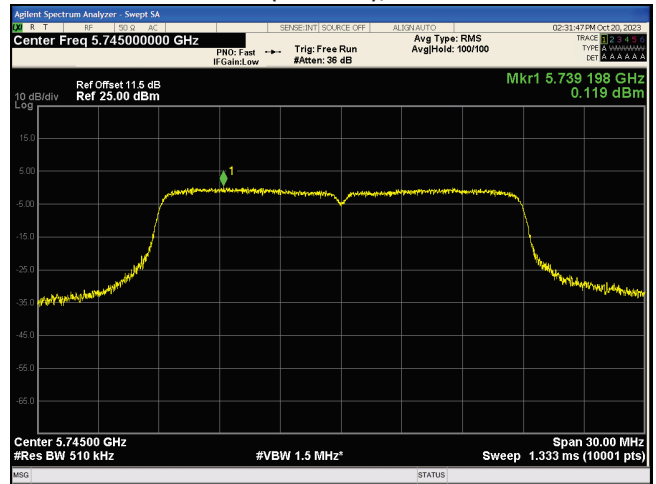

802.11ac (20MHz), 5785MHz

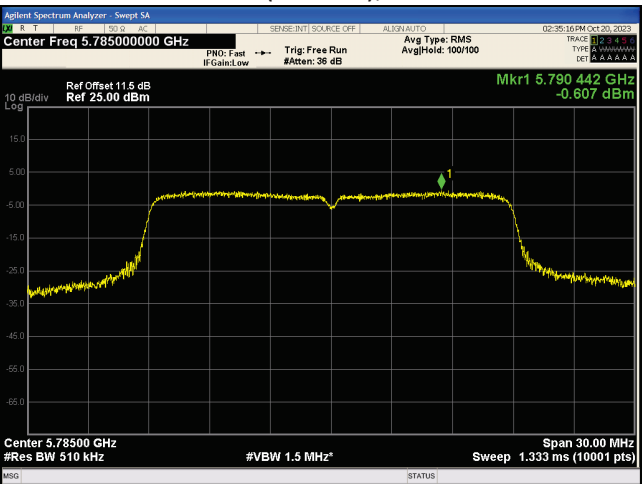


802.11ac (20MHz), 5825MHz

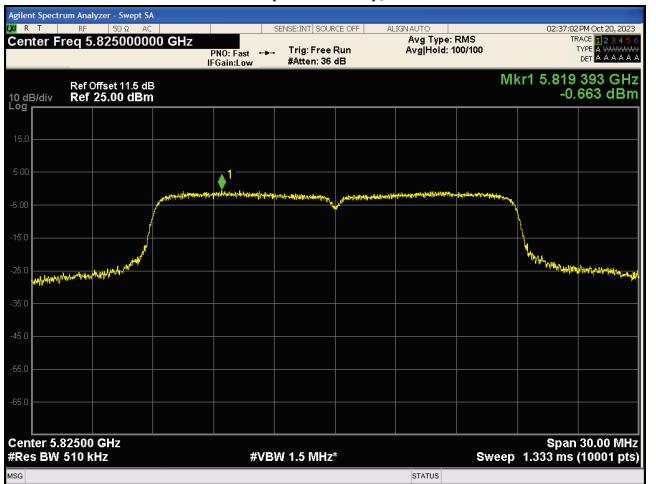


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11ac (40MHz), 5190MHz

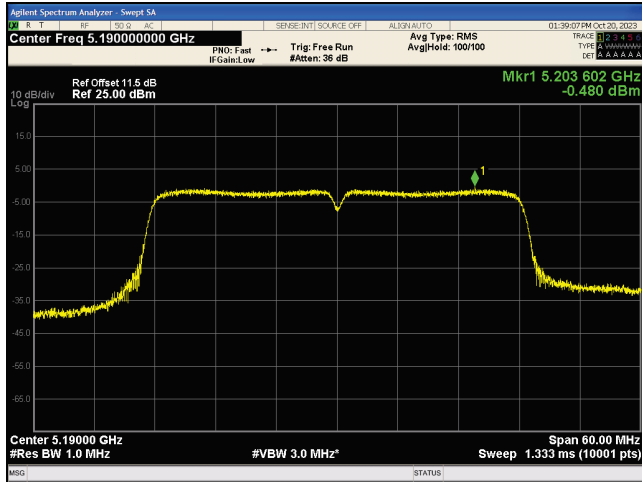


802.11ac (40MHz), 5230MHz

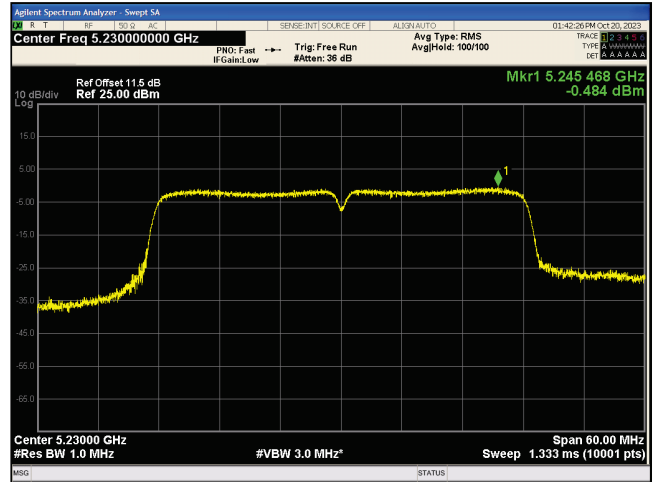


802.11ac (40MHz), 5270MHz

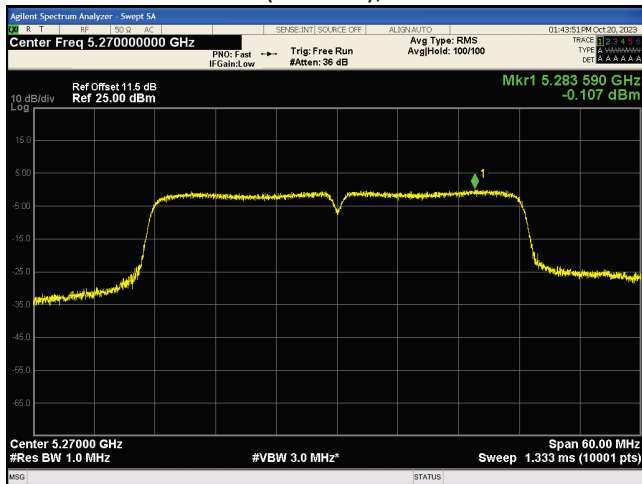


802.11ac (40MHz), 5310MHz

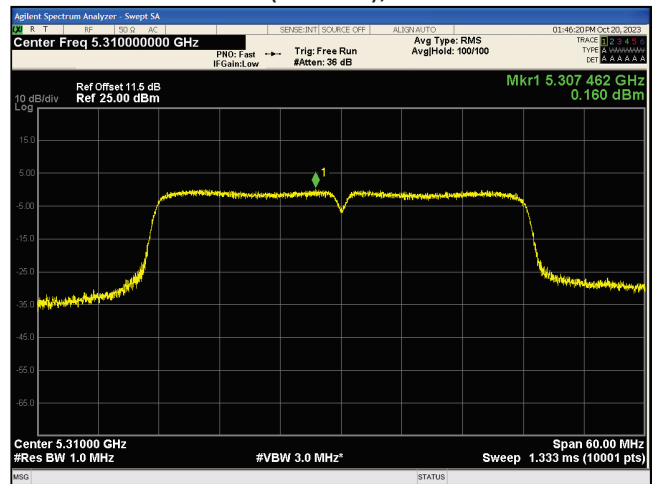

802.11ac (40MHz), 5510MHz

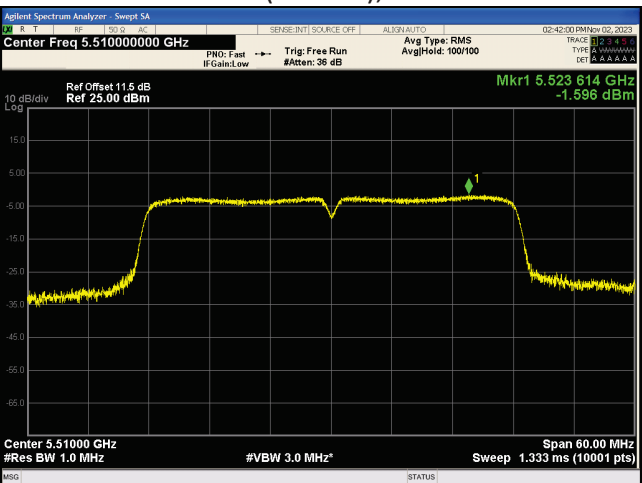


802.11ac (40MHz), 5550MHz

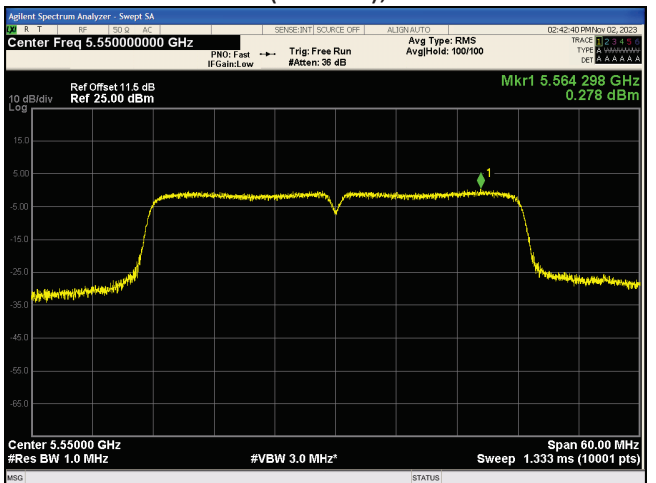


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11ac (40MHz), 5670MHz

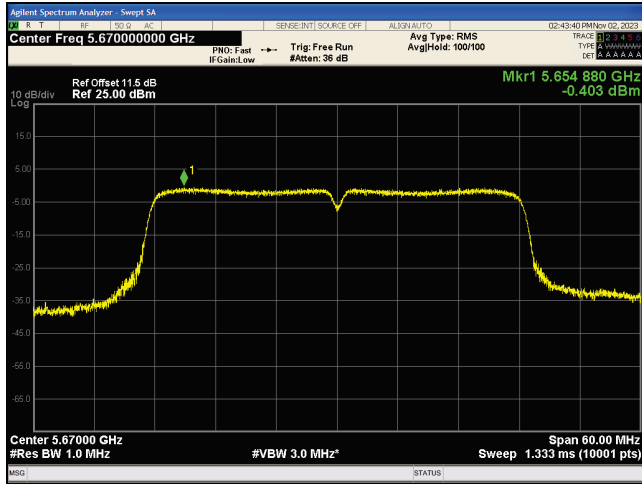

802.11ac (40MHz), 5755MHz

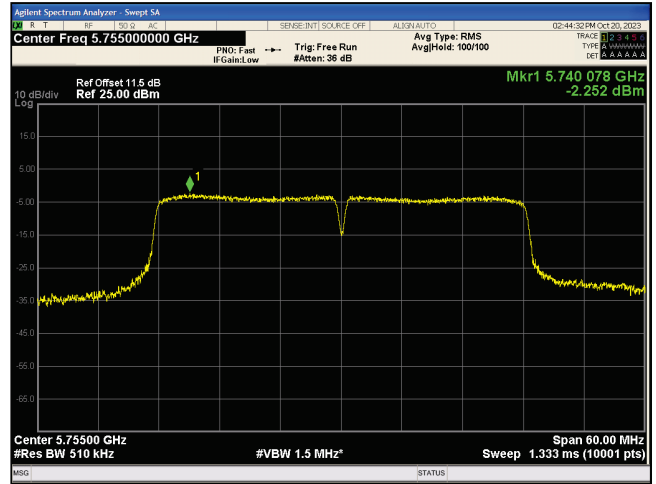


802.11ac (40MHz), 5795MHz

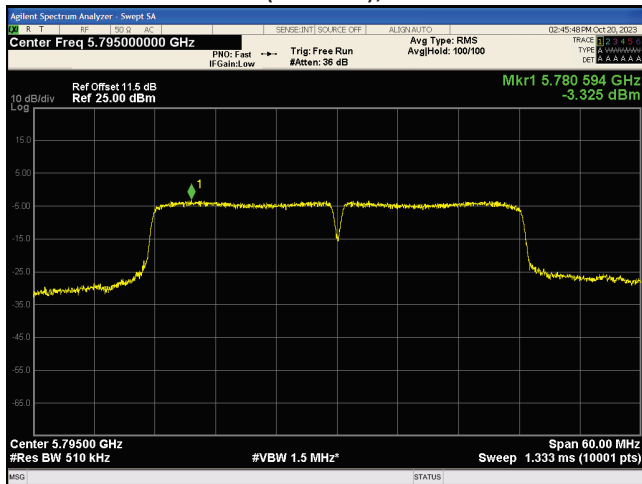


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11ac (80MHz), 5210MHz

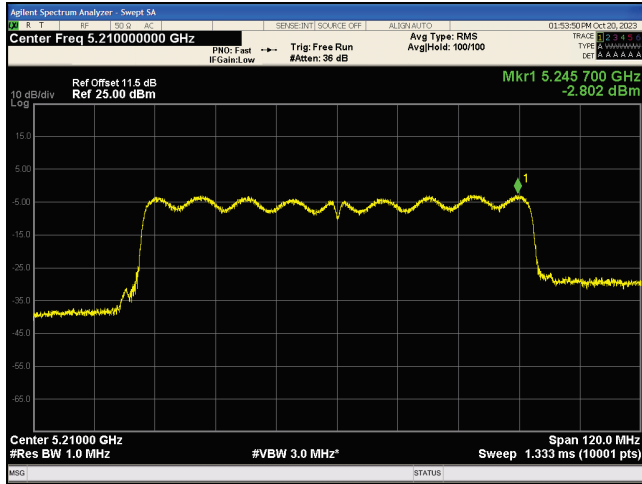


802.11ac (80MHz), 5290MHz

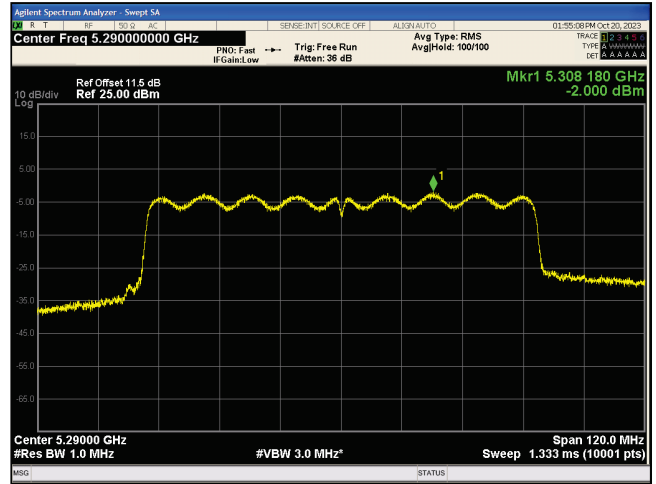

802.11ac (80MHz), 5530MHz

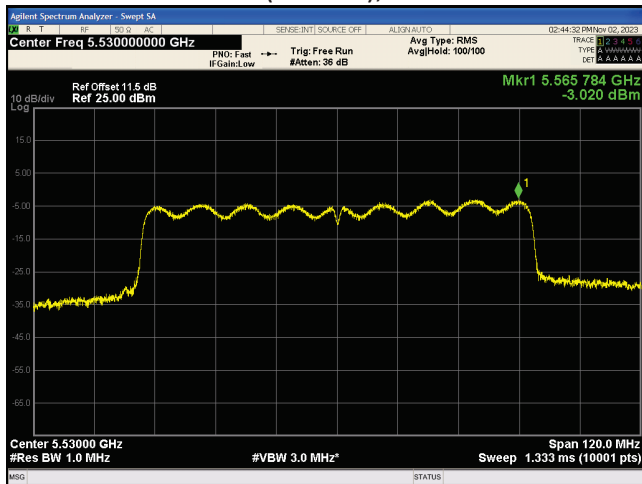


802.11ac (80MHz), 5775MHz

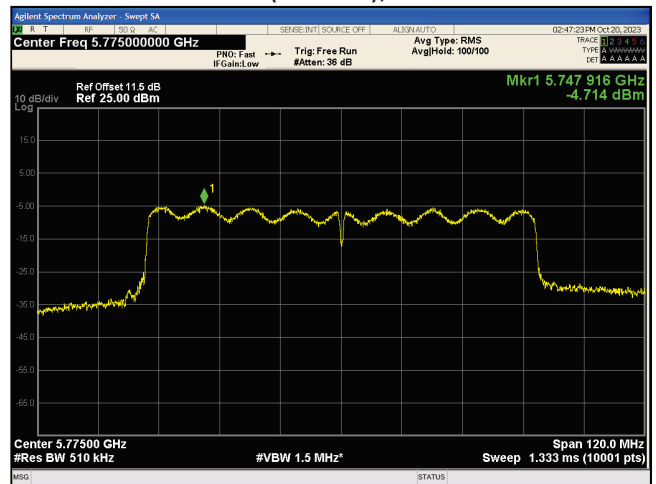


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11a, 5180MHz

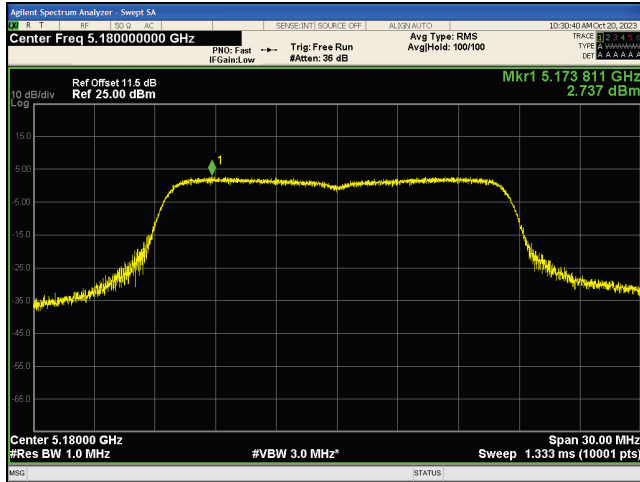


802.11a, 5220MHz

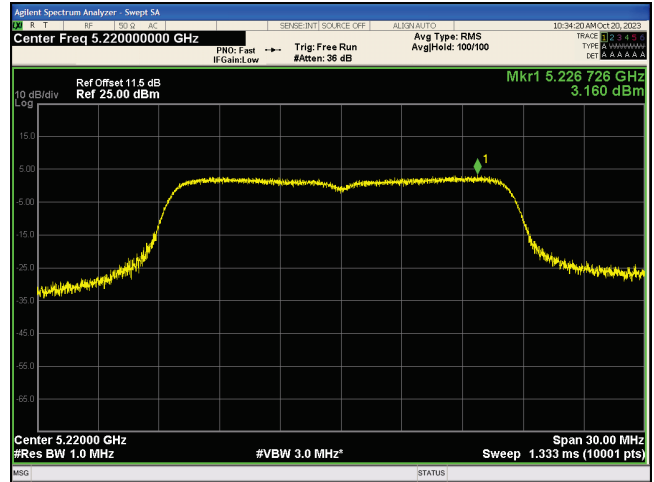


802.11a, 5240MHz

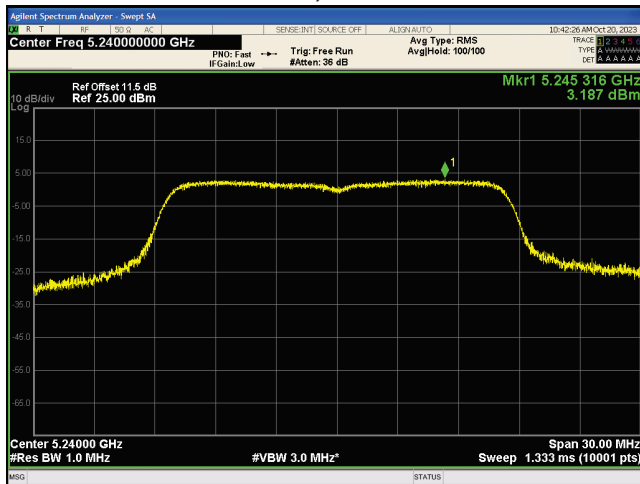


802.11a, 5260MHz

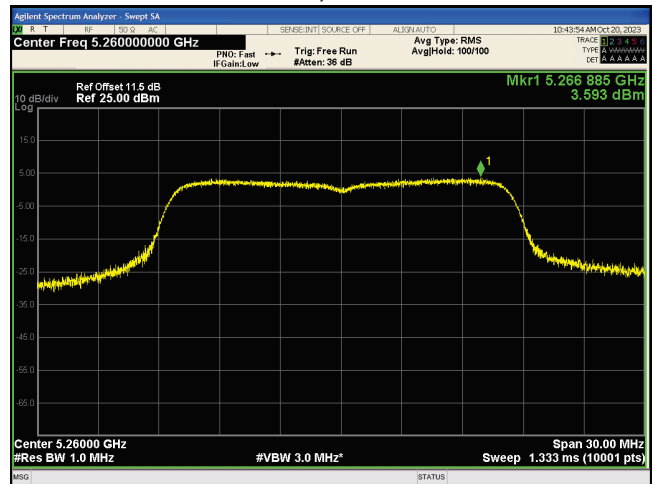

802.11a, 5300MHz

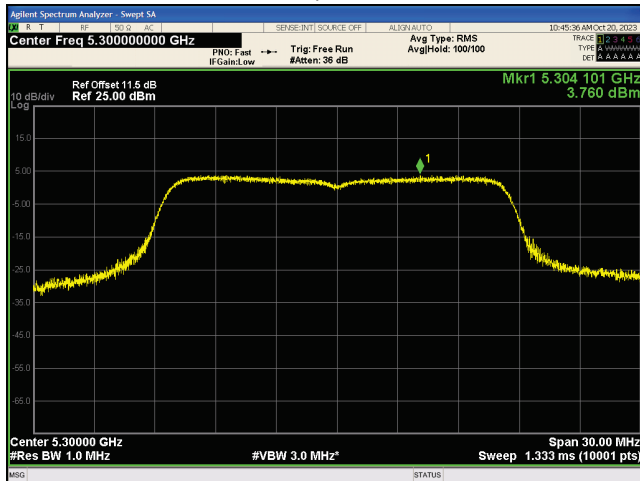


802.11a, 5320MHz

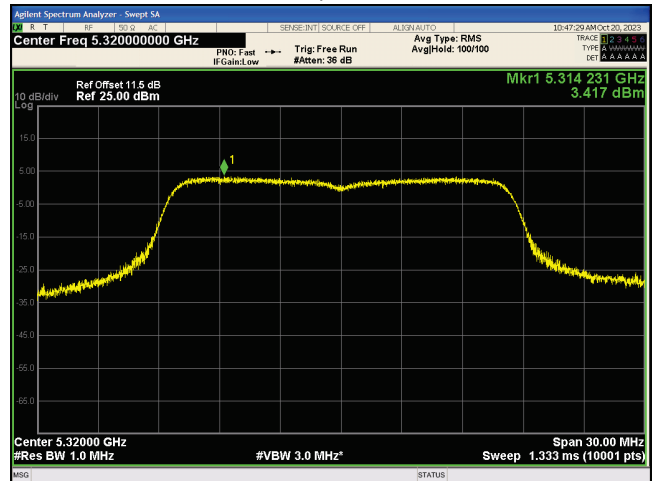


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11a, 5500MHz

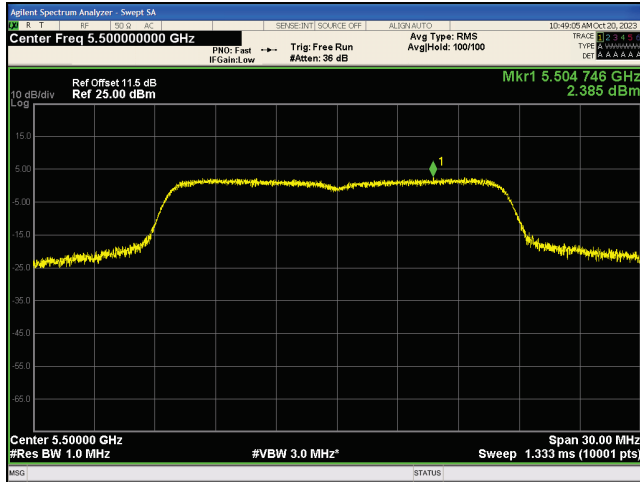


802.11a, 5580MHz

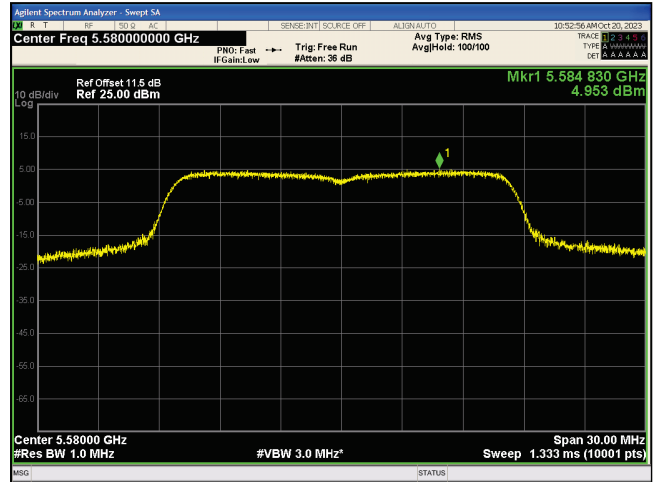


802.11a, 5700MHz

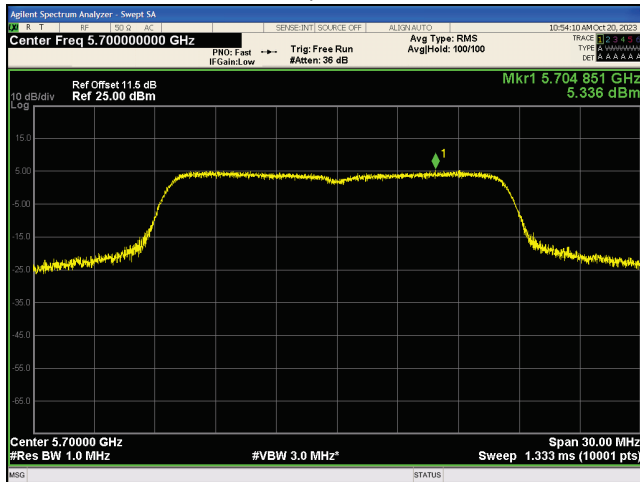


802.11a, 5745MHz

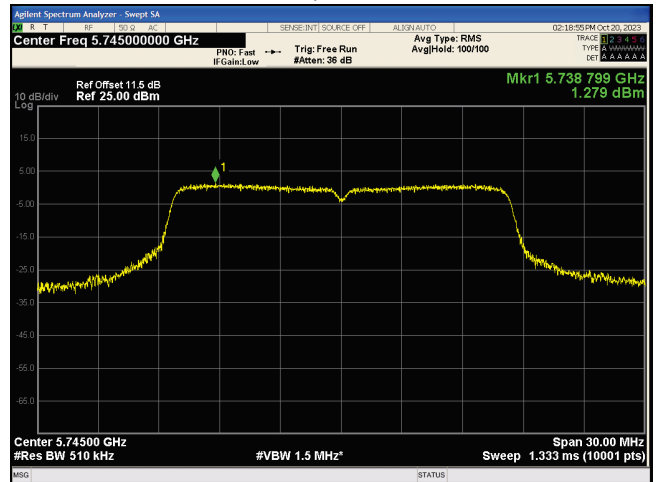

802.11a, 5785MHz

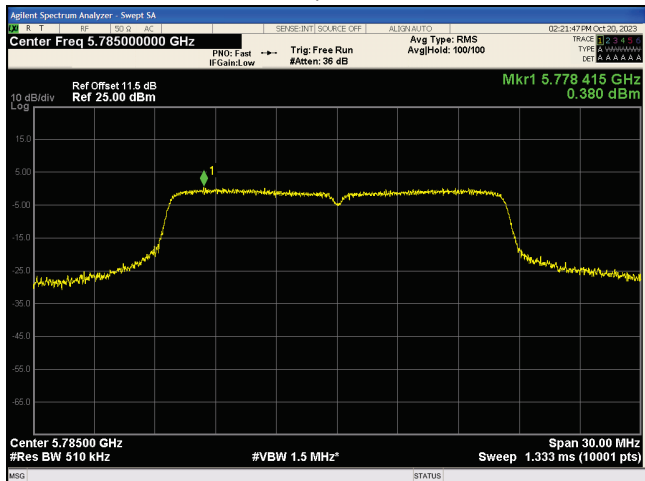


802.11a, 5825MHz

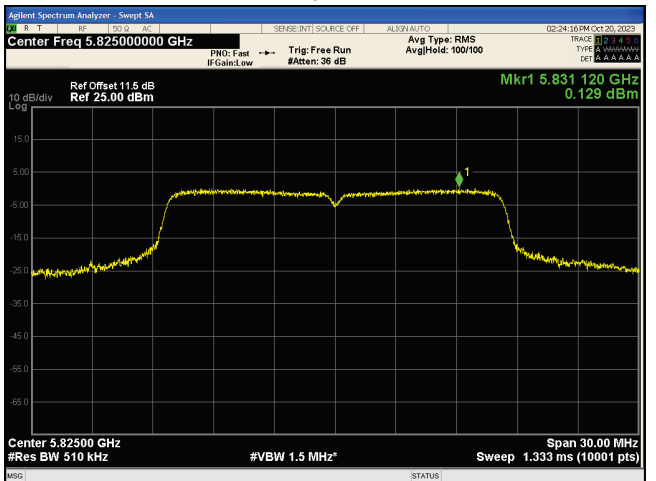


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11n (20MHz), 5180MHz

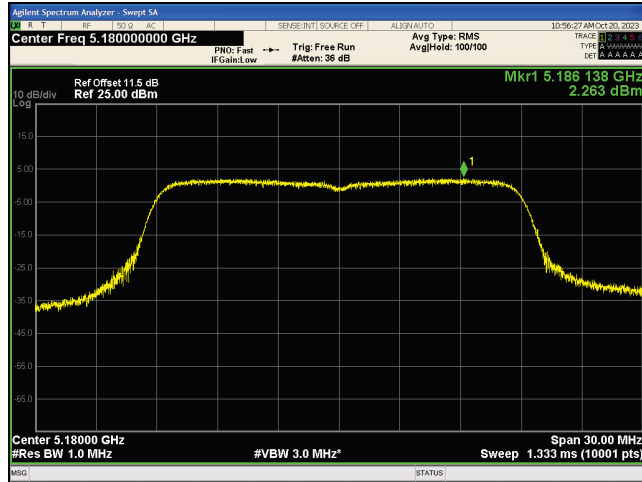


802.11n (20MHz), 5220MHz

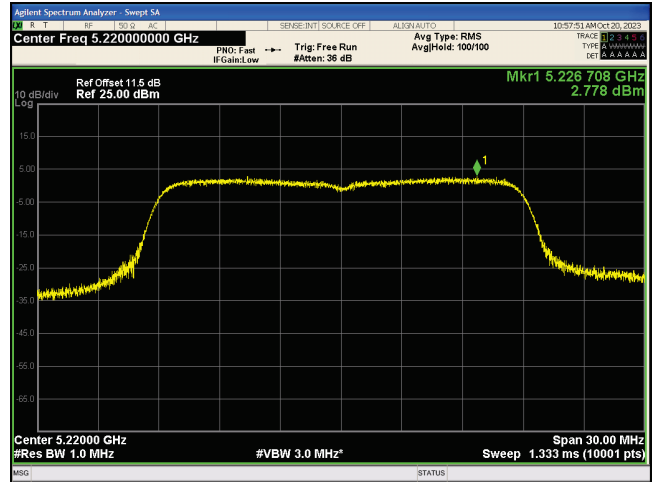


802.11n (20MHz), 5240MHz

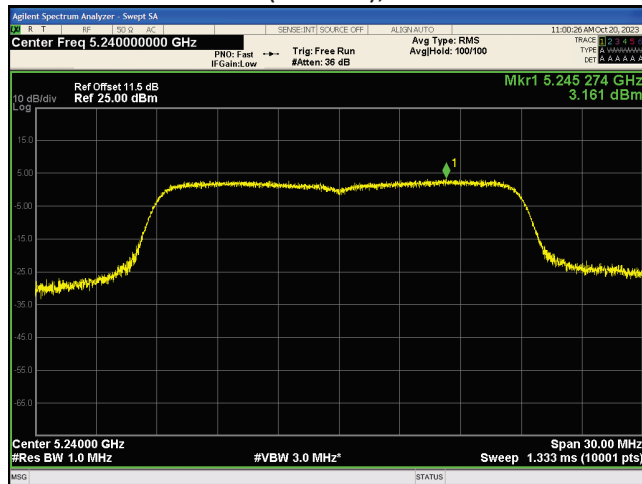


802.11n (20MHz), 5260MHz

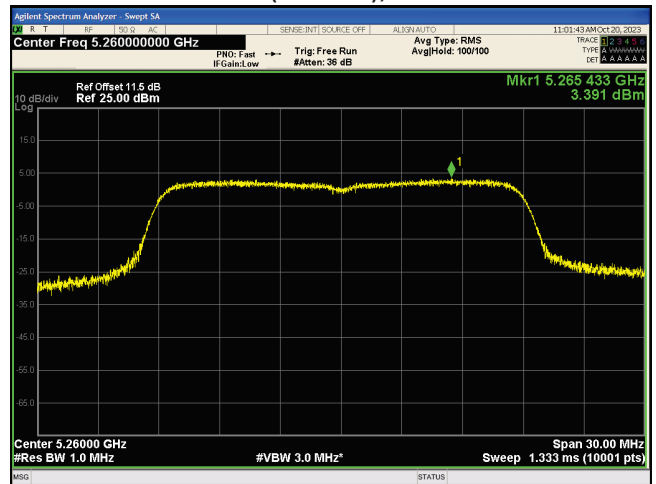

802.11n (20MHz), 5300MHz

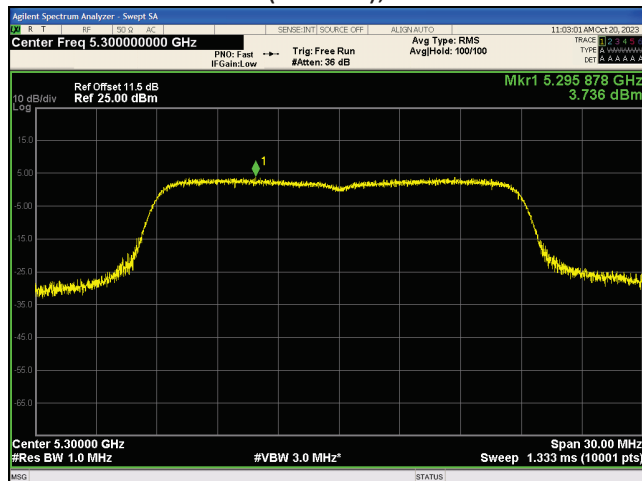


802.11n (20MHz), 5320MHz

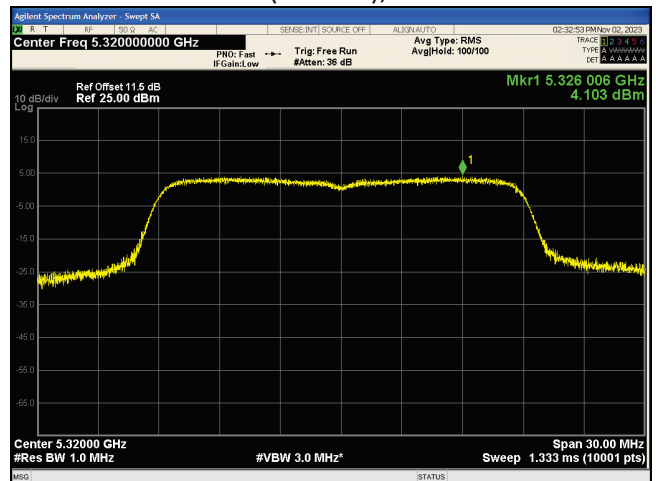


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11n (20MHz), 5500MHz

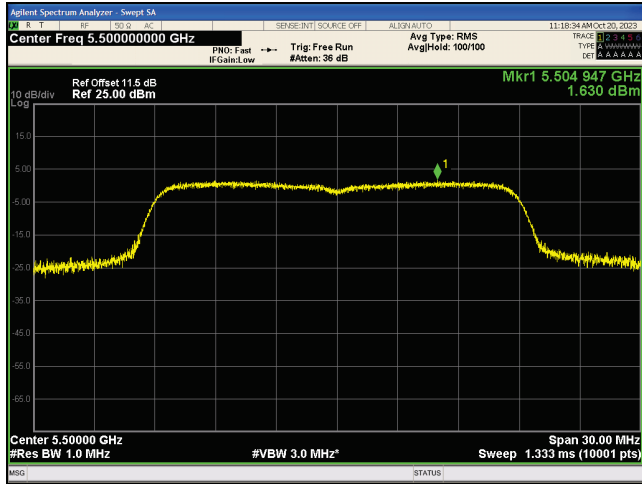


802.11n (20MHz), 5580MHz

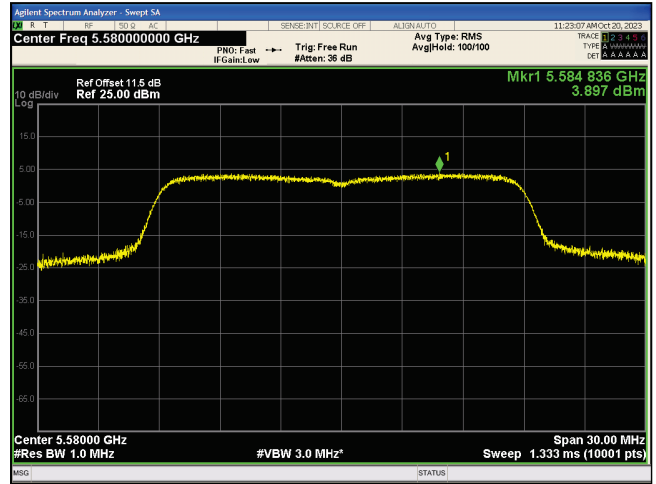


802.11n (20MHz), 5700MHz

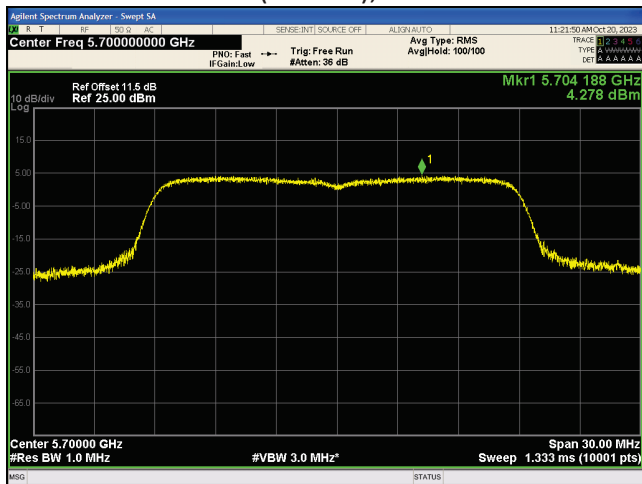


802.11n (20MHz), 5745MHz

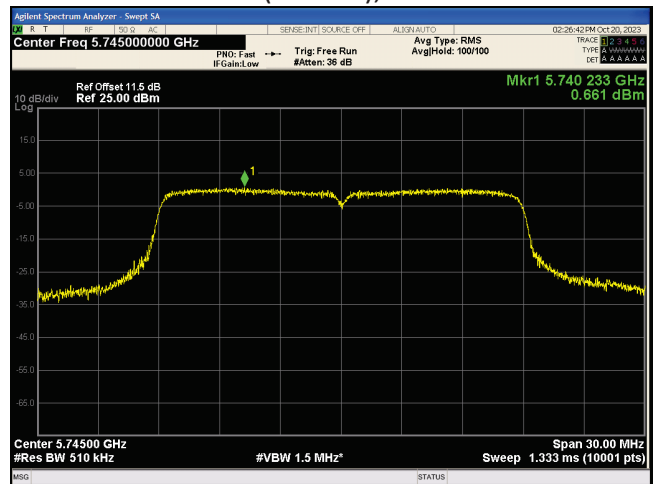

802.11n (20MHz), 5785MHz

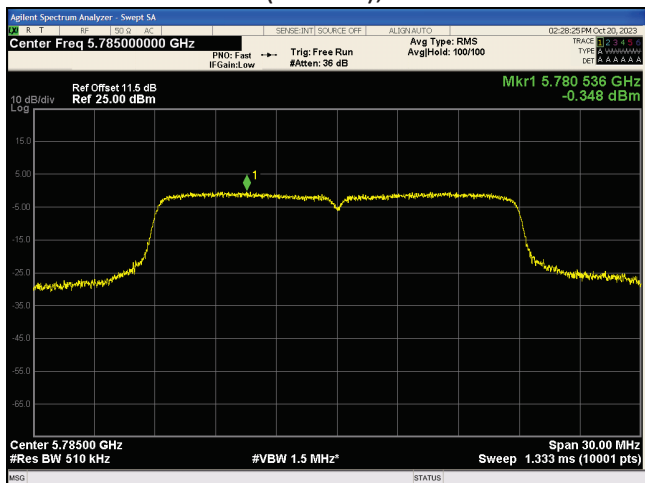


802.11n (20MHz), 5825MHz

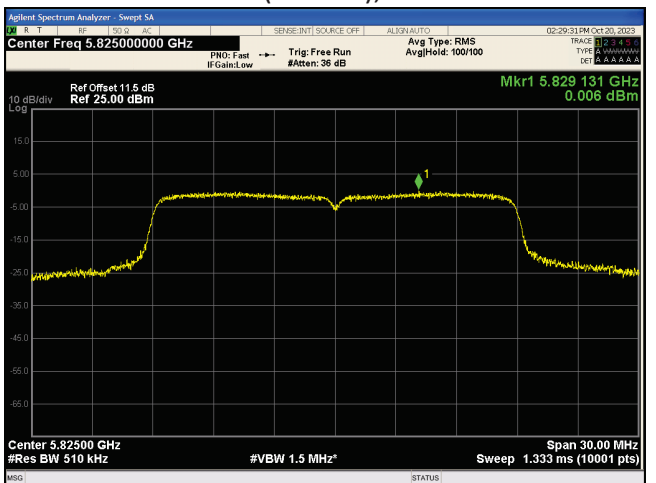


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11n (40MHz), 5190MHz

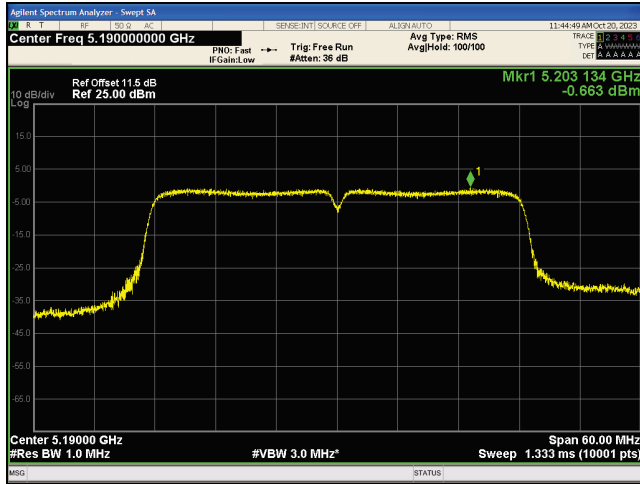


802.11n (40MHz), 5230MHz

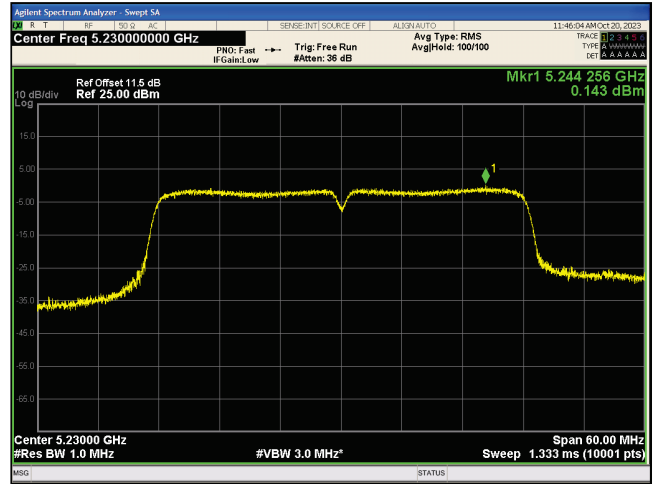


802.11n (40MHz), 5270MHz

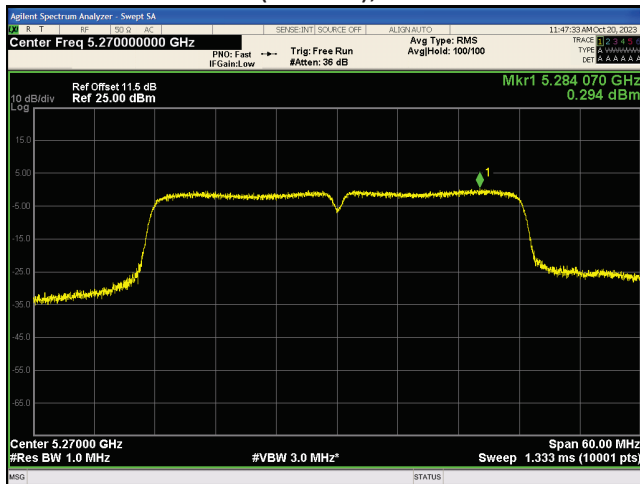


802.11n (40MHz), 5310MHz

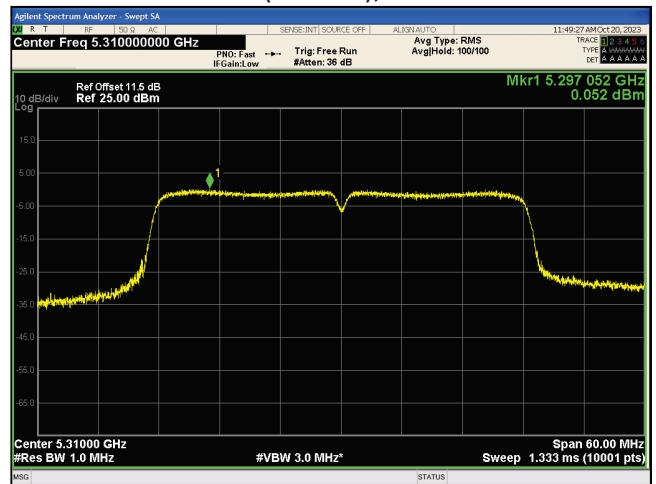

802.11n (40MHz), 5510MHz

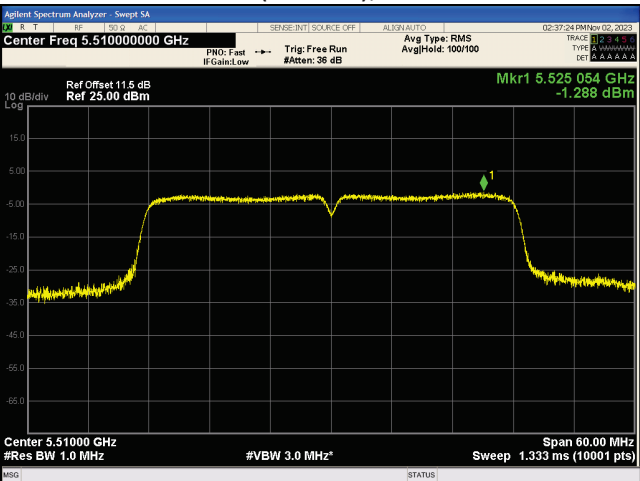


802.11n (40MHz), 5550MHz

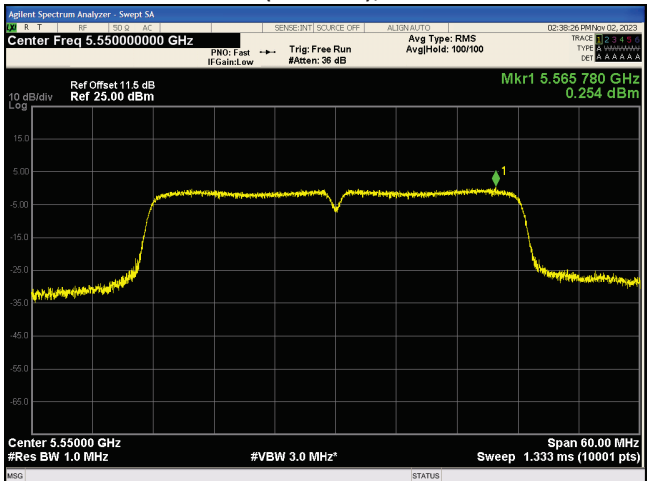


TEST REPORT

PLOTS OF POWER SPECTRAL DENSITY


802.11n (40MHz), 5670MHz

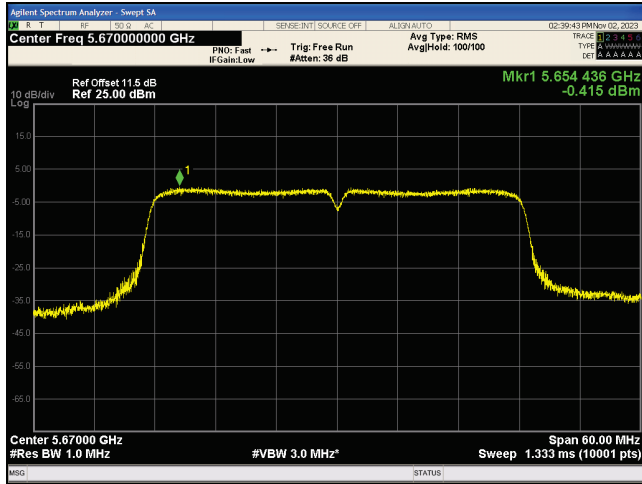

802.11n (40MHz), 5755MHz

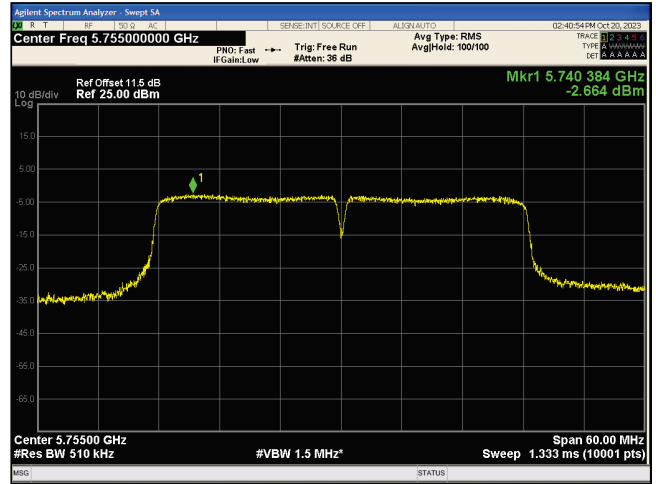

802.11n (40MHz), 5795MHz

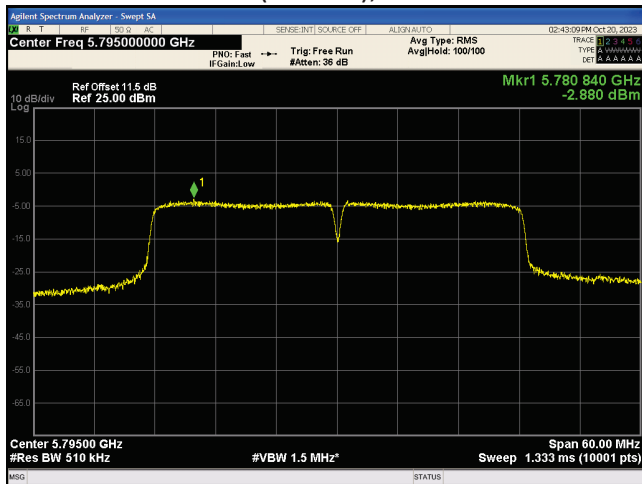

TEST REPORT

3.5 Field Strength Calculation

The field strength is calculated by adding the reading on the Spectrum Analyzer to the factors associated with preamplifiers (if any), antennas, cables, pulse desensitization and average factors (when specified limit is in average and measurements are made with peak detectors). A sample calculation is included below.

$$FS = RA + AF + CF - AG + PD + AV$$

Where	FS	=	Field Strength in dBμV/m
	RA	=	Receiver Amplitude (including preamplifier) in dBμV
	CF	=	Cable Attenuation Factor in dB
	AF	=	Antenna Factor in dB
	AG	=	Amplifier Gain in dB
	PD	=	Pulse Desensitization in dB
	AV	=	Average Factor in -dB

In the radiated emission table which follows, the reading shown on the data table may reflect the preamplifier gain. An example of the calculations, where the reading does not reflect the preamplifier gain, follows:

$$FS = RA + AF + CF - AG + PD + AV$$

Example:

Assume a receiver reading of 62.0 dBμV is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB is added. The amplifier gain of 29.0 dB is subtracted. The pulse desensitization factor of the spectrum analyzer is 0.0 dB, and the resultant average factor is -10.0 dB. The net field strength for comparison to the appropriate emission limit is 32.0 dBμV/m. This value in dBμV/m is converted to its corresponding level in μV/m.

$$\begin{aligned} RA &= 62.0 \text{ dB}\mu\text{V} \\ AF &= 7.4 \text{ dB} \\ CF &= 1.6 \text{ dB} \\ AG &= 29.0 \text{ dB} \\ PD &= 0.0 \text{ dB} \\ AV &= -10.0 \text{ dB} \\ FS &= 62.0 + 7.4 + 1.6 - 29.0 + 0.0 + (-10.0) = 32.0 \text{ dB}\mu\text{V/m} \end{aligned}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(32.0 \text{ dB}\mu\text{V/m})/20] = 39.8 \mu\text{V/m}$$

TEST REPORT

3.6 Transmitter Radiated Emissions in Restricted Bands and Spurious Emissions

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

3.6.1 Radiated Emission Configuration Photograph

Worst Case Restricted Band Radiated Emission at 625.095 MHz.

The worst case radiated emission configuration photographs are saved with filename:
config photos.pdf

3.6.2 Radiated Emission Data


The data in below tables list the significant emission frequencies, the limit and the margin of compliance.

Judgement – Passed by 0.1 dB margin


TEST REPORT

3.6.3 Radiated Emission Test Setup

The figure below shows the test setup, which is utilized to make these measurements.

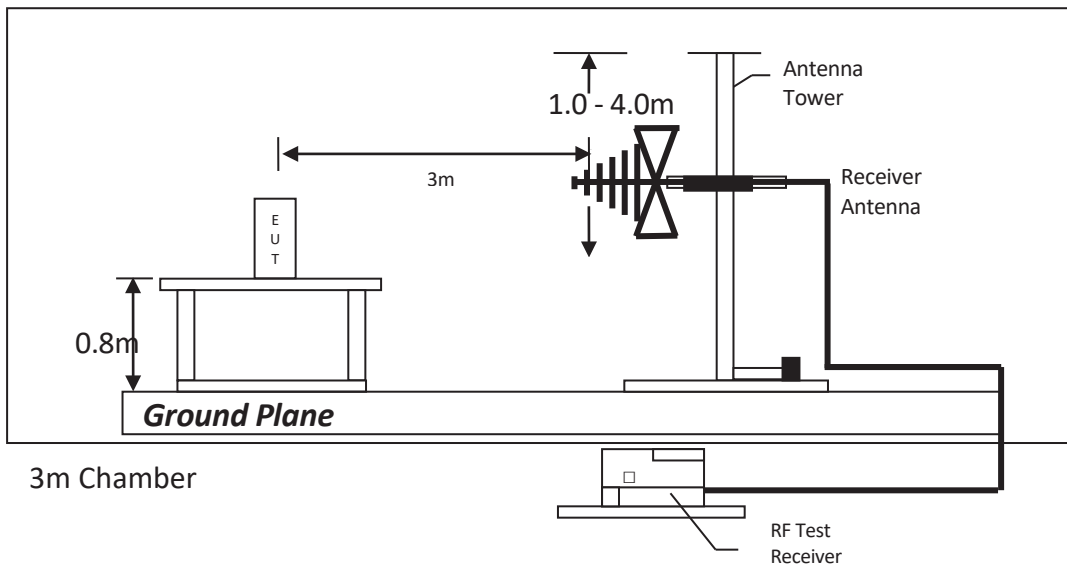

Test setup of radiated emissions up to 1GHz

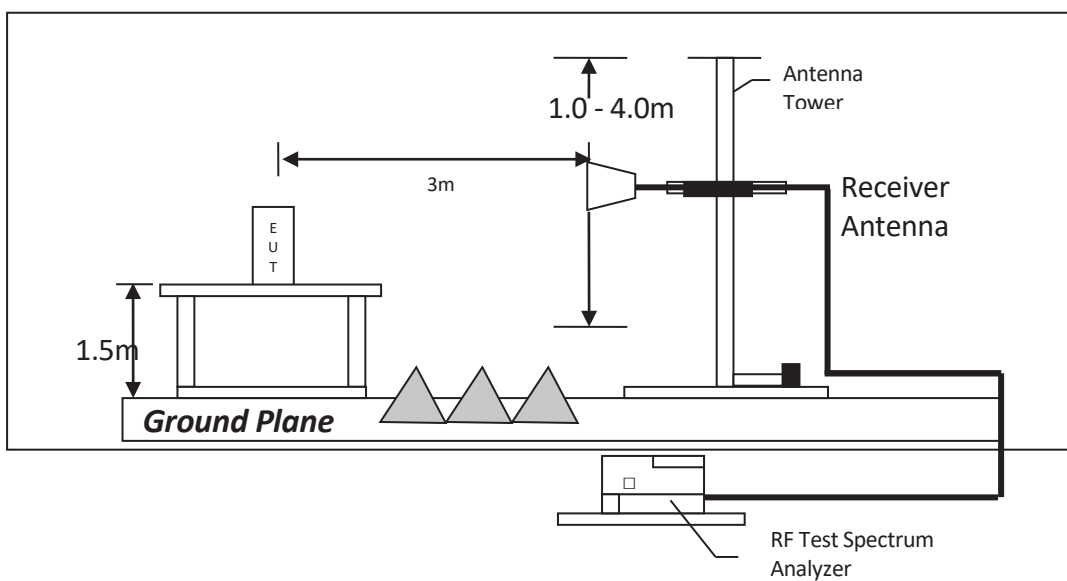

Test setup of radiated emissions above 1GHz

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT20_5180MHz (Channel 36)								
1	10360	37.18	7.19	44.37	68.2	-23.83	Peak	Horizontal
2	10360	24.45	7.19	31.64	54	-22.36	Average	Horizontal
3	15540	35.75	11.93	47.68	74	-26.32	Peak	Horizontal
4	15540	23.80	11.93	35.73	54	-18.27	Average	Horizontal
5	10360	37.78	7.19	44.97	68.2	-23.23	Peak	Vertical
6	10360	26.32	7.19	33.51	54	-20.49	Average	Vertical
7	15540	43.67	11.93	55.60	74	-18.40	Peak	Vertical
8	15540	23.71	11.93	35.64	54	-18.36	Average	Vertical
IEEE 802.11ac-VHT20_5220MHz (Channel 44)								
1	10440	43.08	7.23	50.31	68.2	-17.89	Peak	Horizontal
2	10440	28.50	7.23	35.73	54	-18.27	Average	Horizontal
3	15660	36.89	11.94	48.83	74	-25.17	Peak	Horizontal
4	15660	24.27	11.94	36.21	54	-17.79	Average	Horizontal
5	10440	47.39	7.23	54.62	68.2	-13.58	Peak	Vertical
6	10440	29.34	7.23	36.57	54	-17.43	Average	Vertical
7	15660	37.21	11.94	49.15	74	-24.85	Peak	Vertical
8	15660	24.27	11.94	36.21	54	-17.79	Average	Vertical
IEEE 802.11ac-VHT20_5240MHz (Channel 48)								
1	10480	35.18	7.24	42.42	68.2	-25.78	Peak	Horizontal
2	10480	24.45	7.24	31.69	54	-22.31	Average	Horizontal
3	15720	34.66	11.96	46.62	74	-27.38	Peak	Horizontal
4	15720	23.82	11.96	35.78	54	-18.22	Average	Horizontal
5	10480	46.00	7.24	53.24	68.2	-14.96	Peak	Vertical
6	10480	25.51	7.24	32.75	54	-21.25	Average	Vertical
7	15720	42.56	11.96	54.52	74	-19.48	Peak	Vertical
8	15720	23.91	11.96	35.87	54	-18.13	Average	Vertical
IEEE 802.11ac-VHT20_5260MHz (Channel 52)								
1	10520	35.00	7.29	42.29	68.2	-25.91	Peak	Horizontal
2	10520	24.48	7.29	31.77	54	-22.23	Average	Horizontal
3	15780	34.72	11.98	46.70	74	-27.30	Peak	Horizontal
4	15780	23.80	11.98	35.78	54	-18.22	Average	Horizontal
5	10520	35.97	7.29	43.26	68.2	-24.94	Peak	Vertical
6	10520	25.30	7.29	32.59	54	-21.41	Average	Vertical
7	15780	34.85	11.98	46.83	74	-27.17	Peak	Vertical
8	15780	23.80	11.98	35.78	54	-18.22	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT20_5300MHz (Channel 60)								
1	10600	36.57	7.44	44.01	74.00	-29.99	Peak	Horizontal
2	10600	24.40	7.44	31.84	54.00	-22.16	Average	Horizontal
3	15900	34.57	12.01	46.58	74.00	-27.42	Peak	Horizontal
4	15900	23.13	12.01	35.14	54.00	-18.86	Average	Horizontal
5	10600	35.63	7.44	43.07	74.00	-30.93	Peak	Vertical
6	10600	24.91	7.44	32.35	54.00	-21.65	Average	Vertical
7	15900	33.87	12.01	45.88	74.00	-28.12	Peak	Vertical
8	15900	23.13	12.01	35.14	54.00	-18.86	Average	Vertical
IEEE 802.11ac-VHT20_5320MHz (Channel 64)								
1	10640	52.63	7.52	60.15	74.00	-13.85	Peak	Horizontal
2	10640	30.93	7.52	38.45	54.00	-15.55	Average	Horizontal
3	15960	36.97	12.01	48.98	74.00	-25.02	Peak	Horizontal
4	15960	23.23	12.01	35.24	54.00	-18.76	Average	Horizontal
5	10640	55.26	7.52	62.78	74.00	-11.22	Peak	Vertical
6	10640	33.32	7.52	40.84	54.00	-13.16	Average	Vertical
7	15960	37.52	12.01	49.53	74.00	-24.47	Peak	Vertical
8	15960	23.43	12.01	35.44	54.00	-18.56	Average	Vertical
IEEE 802.11ac-VHT20_5500MHz (Channel 100)								
1	11000	51.94	8.22	60.16	74	-13.84	Peak	Horizontal
2	11000	34.43	8.22	42.65	54	-11.35	Average	Horizontal
3	16500	35.15	12.75	47.90	68.2	-20.30	Peak	Horizontal
4	16500	23.33	12.75	36.08	54	-17.92	Average	Horizontal
5	11000	49.42	8.22	57.64	74	-16.36	Peak	Vertical
6	11000	32.11	8.22	40.33	54	-13.67	Average	Vertical
7	16500	35.87	12.75	48.62	68.2	-19.58	Peak	Vertical
8	16500	23.33	12.75	36.08	54	-17.92	Average	Vertical
IEEE 802.11ac-VHT20_5580MHz (Channel 116)								
1	11160	46.31	8.05	54.36	74	-19.64	Peak	Horizontal
2	11160	27.57	8.05	35.62	54	-18.38	Average	Horizontal
3	16740	38.33	12.86	51.19	68.2	-17.01	Peak	Horizontal
4	16740	23.79	12.86	36.65	54	-17.35	Average	Horizontal
5	11160	50.87	8.05	58.92	74	-15.08	Peak	Vertical
6	11160	30.62	8.05	38.67	54	-15.33	Average	Vertical
7	16740	41.19	12.86	54.05	68.2	-14.15	Peak	Vertical
8	16740	23.50	12.86	36.36	54	-17.64	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT20_5700MHz (Channel 140)								
1	11400	41.35	7.79	49.14	74	-24.86	Peak	Horizontal
2	11400	27.24	7.79	35.03	54	-18.97	Average	Horizontal
3	17100	35.08	13.26	48.34	68.2	-19.86	Peak	Horizontal
4	17100	22.99	13.26	36.25	54	-17.75	Average	Horizontal
5	11400	48.39	7.79	56.18	74	-17.82	Peak	Vertical
6	11400	30.47	7.79	38.26	54	-15.74	Average	Vertical
7	17100	35.40	13.26	48.66	68.2	-19.54	Peak	Vertical
8	17100	22.99	13.26	36.25	54	-17.75	Average	Vertical
IEEE 802.11ac-VHT20_5745MHz (Channel 149)								
1	11490	36.34	7.70	44.04	74	-29.96	Peak	Horizontal
2	11490	23.25	7.70	30.95	54	-23.05	Average	Horizontal
3	17235	34.37	13.65	48.02	68.2	-20.18	Peak	Horizontal
4	17235	22.52	13.65	36.17	54	-17.83	Average	Horizontal
5	11490	39.65	7.70	47.35	74	-26.65	Peak	Vertical
6	11490	23.82	7.70	31.52	54	-22.48	Average	Vertical
7	17235	34.28	13.65	47.93	68.2	-20.27	Peak	Vertical
8	17235	22.30	13.65	35.95	54	-18.05	Average	Vertical
IEEE 802.11ac-VHT20_5785MHz (Channel 157)								
1	11570	36.60	7.79	44.39	74	-29.61	Peak	Horizontal
2	11570	25.37	7.79	33.16	54	-20.84	Average	Horizontal
3	17355	34.55	13.98	48.53	68.2	-19.67	Peak	Horizontal
4	17355	22.91	13.98	36.89	54	-17.11	Average	Horizontal
5	11570	44.27	7.79	52.06	74	-21.94	Peak	Vertical
6	11570	28.82	7.79	36.61	54	-17.39	Average	Vertical
7	17355	35.05	13.98	49.03	68.2	-19.17	Peak	Vertical
8	17355	23.01	13.98	36.99	54	-17.01	Average	Vertical
IEEE 802.11ac-VHT20_5825MHz (Channel 165)								
1	11650	40.38	7.91	48.29	74	-25.71	Peak	Horizontal
2	11650	26.03	7.91	33.94	54	-20.06	Average	Horizontal
3	17475	34.13	14.32	48.45	68.2	-19.75	Peak	Horizontal
4	17475	22.75	14.32	37.07	54	-16.93	Average	Horizontal
5	11650	41.89	7.91	49.80	74	-24.20	Peak	Vertical
6	11650	26.59	7.91	34.50	54	-19.50	Average	Vertical
7	17475	34.07	14.32	48.39	68.2	-19.81	Peak	Vertical
8	17475	22.64	14.32	36.96	54	-17.04	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT40_5190MHz (Channel 38)								
1	10380	36.48	7.20	43.68	68.2	-24.52	Peak	Horizontal
2	10380	24.08	7.20	31.28	54	-22.72	Average	Horizontal
3	15570	36.17	11.92	48.09	74	-25.91	Peak	Horizontal
4	15570	23.81	11.92	35.73	54	-18.27	Average	Horizontal
5	10380	37.90	7.20	45.10	68.2	-23.10	Peak	Vertical
6	10380	25.88	7.20	33.08	54	-20.92	Average	Vertical
7	15570	36.37	11.92	48.29	74	-25.71	Peak	Vertical
8	15570	23.90	11.92	35.82	54	-18.18	Average	Vertical
IEEE 802.11ac-VHT40_5230MHz (Channel 46)								
1	10460	36.09	7.23	43.32	68.2	-24.88	Peak	Horizontal
2	10460	25.64	7.23	32.87	54	-21.13	Average	Horizontal
3	15690	35.88	11.96	47.84	74	-26.16	Peak	Horizontal
4	15690	24.34	11.96	36.30	54	-17.70	Average	Horizontal
5	10460	37.28	7.23	44.51	68.2	-23.69	Peak	Vertical
6	10460	27.16	7.23	34.39	54	-19.61	Average	Vertical
7	15690	34.87	11.96	46.83	74	-27.17	Peak	Vertical
8	15690	24.16	11.96	36.12	54	-17.88	Average	Vertical
IEEE 802.11ac-VHT40_5270MHz (Channel 54)								
1	10540	35.11	7.32	42.43	68.2	-25.77	Peak	Horizontal
2	10540	22.44	7.32	29.76	54	-24.24	Average	Horizontal
3	15810	35.11	7.32	42.43	74	-31.57	Peak	Horizontal
4	15810	28.00	7.32	35.32	54	-18.68	Average	Horizontal
5	10540	34.83	7.32	42.15	68.2	-26.05	Peak	Vertical
6	10540	22.87	7.32	30.19	54	-23.81	Average	Vertical
7	15810	36.07	11.98	48.05	74	-25.95	Peak	Vertical
8	15810	23.34	11.98	35.32	54	-18.68	Average	Vertical
IEEE 802.11ac-VHT40_5310MHz (Channel 62)								
1	10620	35.89	7.49	43.38	74.00	-30.62	Peak	Horizontal
2	10620	24.43	7.49	31.92	54.00	-22.08	Average	Horizontal
3	15930	34.17	12.02	46.19	74.00	-27.81	Peak	Horizontal
4	15930	23.82	12.02	35.84	54.00	-18.16	Average	Horizontal
5	10620	35.56	7.49	43.05	74.00	-30.95	Peak	Vertical
6	10620	24.61	7.49	32.10	54.00	-21.90	Average	Vertical
7	15930	33.68	12.02	45.70	74.00	-28.30	Peak	Vertical
8	15930	22.92	12.02	34.94	54.00	-19.06	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT40_5510MHz (Channel 102)								
1	11020	37.32	8.20	45.52	74	-28.48	Peak	Horizontal
2	11020	25.96	8.20	34.16	54	-19.84	Average	Horizontal
3	16530	34.76	12.77	47.53	68.2	-20.67	Peak	Horizontal
4	16530	23.21	12.77	35.98	54	-18.02	Average	Horizontal
5	11020	37.36	8.20	45.56	74	-28.44	Peak	Vertical
6	11020	26.39	8.20	34.59	54	-19.41	Average	Vertical
7	16530	34.58	12.77	47.35	68.2	-20.85	Peak	Vertical
8	16530	23.11	12.77	35.88	54	-18.12	Average	Vertical
IEEE 802.11ac-VHT40_5550MHz (Channel 110)								
1	11100	35.70	8.11	43.81	74	-30.19	Peak	Horizontal
2	11100	25.39	8.11	33.50	54	-20.50	Average	Horizontal
3	16650	34.34	12.82	47.16	68.2	-21.04	Peak	Horizontal
4	16650	22.73	12.82	35.55	54	-18.45	Average	Horizontal
5	11100	35.09	8.11	43.20	74	-30.80	Peak	Vertical
6	11100	24.99	8.11	33.10	54	-20.90	Average	Vertical
7	16650	34.09	12.82	46.91	68.2	-21.29	Peak	Vertical
8	16650	22.52	12.82	35.34	54	-18.66	Average	Vertical
IEEE 802.11ac-VHT40_5670MHz (Channel 134)								
1	11340	35.00	7.86	42.86	74	-31.14	Peak	Horizontal
2	11340	24.45	7.86	32.31	54	-21.69	Average	Horizontal
3	17010	33.43	13.01	46.44	68.2	-21.76	Peak	Horizontal
4	17010	22.88	13.01	35.89	54	-18.11	Average	Horizontal
5	11340	34.41	7.86	42.27	74	-31.73	Peak	Vertical
6	11340	23.82	7.86	31.68	54	-22.32	Average	Vertical
7	17010	34.53	13.01	47.54	68.2	-20.66	Peak	Vertical
8	17010	22.99	13.01	36.00	54	-18.00	Average	Vertical
IEEE 802.11ac-VHT40_5755MHz (Channel 151)								
1	11510	34.37	7.70	42.07	74	-31.93	Peak	Horizontal
2	11510	23.04	7.70	30.74	54	-23.26	Average	Horizontal
3	17265	34.67	13.73	48.40	68.2	-19.80	Peak	Horizontal
4	17265	22.22	13.73	35.95	54	-18.05	Average	Horizontal
5	11510	33.49	7.70	41.19	74	-32.81	Peak	Vertical
6	11510	23.34	7.70	31.04	54	-22.96	Average	Vertical
7	17265	32.45	13.73	46.18	68.2	-22.02	Peak	Vertical
8	17265	22.22	13.73	35.95	54	-18.05	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT40_5795MHz (Channel 159)								
1	11590	36.39	7.82	44.21	74	-29.79	Peak	Horizontal
2	11590	24.78	7.82	32.60	54	-21.40	Average	Horizontal
3	17385	34.52	14.06	48.58	68.2	-19.62	Peak	Horizontal
4	17385	22.72	14.06	36.78	54	-17.22	Average	Horizontal
5	11590	38.21	7.82	46.03	74	-27.97	Peak	Vertical
6	11590	26.31	7.82	34.13	54	-19.87	Average	Vertical
7	17385	34.52	14.06	48.58	68.2	-19.62	Peak	Vertical
8	17385	22.83	14.06	36.89	54	-17.11	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11ac-VHT80_5210MHz (Channel 42)								
1	10420	38.08	7.22	45.30	68.2	-22.90	Peak	Horizontal
2	10420	25.88	7.22	33.10	54	-20.90	Average	Horizontal
3	15630	37.59	11.94	49.53	74	-24.47	Peak	Horizontal
4	15630	24.27	11.94	36.21	54	-17.79	Average	Horizontal
5	10420	38.91	7.22	46.13	68.2	-22.07	Peak	Vertical
6	10420	26.78	7.22	34.00	54	-20.00	Average	Vertical
7	15630	36.46	11.94	48.40	74	-25.60	Peak	Vertical
8	15630	24.27	11.94	36.21	54	-17.79	Average	Vertical
IEEE 802.11ac-VHT80_5290MHz (Channel 58)								
1	10580	33.07	7.39	40.46	68.2	-27.74	Peak	Horizontal
2	10580	22.48	7.39	29.87	54	-24.13	Average	Horizontal
3	15870	34.09	12.00	46.09	74	-27.91	Peak	Horizontal
4	15870	23.22	12.00	35.22	54	-18.78	Average	Horizontal
5	10580	34.89	7.39	42.28	68.2	-25.92	Peak	Vertical
6	10580	22.48	7.39	29.87	54	-24.13	Average	Vertical
7	15870	33.49	12.00	45.49	74	-28.51	Peak	Vertical
8	15870	23.32	12.00	35.32	54	-18.68	Average	Vertical
IEEE 802.11ac-VHT80_5530MHz (Channel 106)								
1	11060	41.10	8.15	49.25	74	-24.75	Peak	Horizontal
2	11060	29.04	8.15	37.19	54	-16.81	Average	Horizontal
3	16590	35.19	12.80	47.99	68.2	-20.21	Peak	Horizontal
4	16590	22.39	12.80	35.19	54	-18.81	Average	Horizontal
5	11060	45.40	8.15	53.55	74	-20.45	Peak	Vertical
6	11060	31.63	8.15	39.78	54	-14.22	Average	Vertical
7	16590	35.11	12.80	47.91	68.2	-20.29	Peak	Vertical
8	16590	22.28	12.80	35.08	54	-18.92	Average	Vertical
IEEE 802.11ac-VHT80_5775MHz (Channel 155)								
1	11550	34.74	7.76	42.50	74	-31.50	Peak	Horizontal
2	11550	23.19	7.76	30.95	54	-23.05	Average	Horizontal
3	17325	34.53	13.90	48.43	68.2	-19.77	Peak	Horizontal
4	17325	22.16	13.90	36.06	54	-17.94	Average	Horizontal
5	11550	36.78	7.76	44.54	74	-29.46	Peak	Vertical
6	11550	24.65	7.76	32.41	54	-21.59	Average	Vertical
7	17325	34.53	13.90	48.43	68.2	-19.77	Peak	Vertical
8	17325	21.94	13.90	35.84	54	-18.16	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_5180MHz (Channel 36)								
1	10360	35.45	7.19	42.64	68.2	-25.56	Peak	Horizontal
2	10360	23.34	7.19	30.53	54	-23.47	Average	Horizontal
3	15540	34.98	11.93	46.91	74	-27.09	Peak	Horizontal
4	15540	23.52	11.93	35.45	54	-18.55	Average	Horizontal
5	10360	36.07	7.19	43.26	68.2	-24.94	Peak	Vertical
6	10360	24.09	7.19	31.28	54	-22.72	Average	Vertical
7	15540	34.91	11.93	46.84	74	-27.16	Peak	Vertical
8	15540	23.52	11.93	35.45	54	-18.55	Average	Vertical
IEEE 802.11a_5220MHz (Channel 44)								
1	10440	38.29	7.23	45.52	68.2	-22.68	Peak	Horizontal
2	10440	25.26	7.23	32.49	54	-21.51	Average	Horizontal
3	15660	36.13	11.94	48.07	74	-25.93	Peak	Horizontal
4	15660	24.09	11.94	36.03	54	-17.97	Average	Horizontal
5	10440	44.03	7.23	51.26	68.2	-16.94	Peak	Vertical
6	10440	28.46	7.23	35.69	54	-18.31	Average	Vertical
7	15660	36.18	11.94	48.12	74	-25.88	Peak	Vertical
8	15660	24.00	11.94	35.94	54	-18.06	Average	Vertical
IEEE 802.11a_5240MHz (Channel 48)								
1	10480	34.71	7.24	41.95	68.2	-26.25	Peak	Horizontal
2	10480	23.91	7.24	31.15	54	-22.85	Average	Horizontal
3	15720	34.24	11.96	46.20	74	-27.80	Peak	Horizontal
4	15720	23.63	11.96	35.59	54	-18.41	Average	Horizontal
5	10480	37.45	7.24	44.69	68.2	-23.51	Peak	Vertical
6	10480	25.03	7.24	32.27	54	-21.73	Average	Vertical
7	15720	36.11	11.96	48.07	74	-25.93	Peak	Vertical
8	15720	23.53	11.96	35.49	54	-18.51	Average	Vertical
IEEE 802.11a_5260MHz (Channel 52)								
1	10520	36.22	7.29	43.51	68.2	-24.69	Peak	Horizontal
2	10520	24.04	7.29	31.33	54	-22.67	Average	Horizontal
3	15780	35.93	11.98	47.91	74	-26.09	Peak	Horizontal
4	15780	23.70	11.98	35.68	54	-18.32	Average	Horizontal
5	10520	35.52	7.29	42.81	68.2	-25.39	Peak	Vertical
6	10520	24.82	7.29	32.11	54	-21.89	Average	Vertical
7	15780	34.31	11.98	46.29	74	-27.71	Peak	Vertical
8	15780	23.61	11.98	35.59	54	-18.41	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_5300MHz (Channel 60)								
1	10600	34.14	7.44	41.58	74.00	-32.42	Peak	Horizontal
2	10600	23.85	7.44	31.29	54.00	-22.71	Average	Horizontal
3	15900	33.10	12.01	45.11	74.00	-28.89	Peak	Horizontal
4	15900	22.72	12.01	34.73	54.00	-19.27	Average	Horizontal
5	10600	36.76	7.44	44.20	74.00	-29.80	Peak	Vertical
6	10600	24.31	7.44	31.75	54.00	-22.25	Average	Vertical
7	15900	34.84	12.01	46.85	74.00	-27.15	Peak	Vertical
8	15900	22.82	12.01	34.83	54.00	-19.17	Average	Vertical
IEEE 802.11a_5320MHz (Channel 64)								
1	10640	35.58	7.52	43.10	74.00	-30.90	Peak	Horizontal
2	10640	23.87	7.52	31.39	54.00	-22.61	Average	Horizontal
3	15960	34.46	12.01	46.47	74.00	-27.53	Peak	Horizontal
4	15960	22.82	12.01	34.83	54.00	-19.17	Average	Horizontal
5	10640	36.00	7.52	43.52	74.00	-30.48	Peak	Vertical
6	10640	24.32	7.52	31.84	54.00	-22.16	Average	Vertical
7	15960	35.02	12.01	47.03	74.00	-26.97	Peak	Vertical
8	15960	22.82	12.01	34.83	54.00	-19.17	Average	Vertical
IEEE 802.11a_5500MHz (Channel 100)								
1	11000	36.30	8.22	44.52	54	-19.91	Peak	Horizontal
2	11000	25.87	8.22	34.09	68.2	-21.07	Average	Horizontal
3	16500	34.38	12.75	47.13	54	-18.22	Peak	Horizontal
4	16500	23.03	12.75	35.78	74	-28.42	Average	Horizontal
5	11000	37.36	8.22	45.58	54	-19.62	Peak	Vertical
6	11000	26.16	8.22	34.38	68.2	-21.04	Average	Vertical
7	16500	34.41	12.75	47.16	54	-18.22	Peak	Vertical
8	16500	23.03	12.75	35.78	54	-19.91	Average	Vertical
IEEE 802.11a_5580MHz (Channel 116)								
1	11160	36.24	8.05	44.29	74	-29.71	Peak	Horizontal
2	11160	25.13	8.05	33.18	54	-20.82	Average	Horizontal
3	16740	33.54	12.86	46.40	68.2	-21.80	Peak	Horizontal
4	16740	22.48	12.86	35.34	54	-18.66	Average	Horizontal
5	11160	35.83	8.05	43.88	74	-30.12	Peak	Vertical
6	11160	25.45	8.05	33.50	54	-20.50	Average	Vertical
7	16740	33.67	12.86	46.53	68.2	-21.67	Peak	Vertical
8	16740	22.48	12.86	35.34	54	-18.66	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11a_5700MHz (Channel 140)								
1	11400	35.60	7.79	43.39	74	-30.61	Peak	Horizontal
2	11400	24.27	7.79	32.06	54	-21.94	Average	Horizontal
3	17100	34.74	13.26	48.00	68.2	-20.20	Peak	Horizontal
4	17100	22.78	13.26	36.04	54	-17.96	Average	Horizontal
5	11400	35.20	7.79	42.99	74	-31.01	Peak	Vertical
6	11400	24.00	7.79	31.79	54	-22.21	Average	Vertical
7	17100	33.62	13.26	46.88	68.2	-21.32	Peak	Vertical
8	17100	22.57	13.26	35.83	54	-18.17	Average	Vertical
IEEE 802.11a_5745MHz (Channel 149)								
1	11490	36.50	7.70	44.20	74	-29.80	Peak	Horizontal
2	11490	23.04	7.70	30.74	54	-23.26	Average	Horizontal
3	17235	35.74	13.65	49.39	68.2	-18.81	Peak	Horizontal
4	17235	22.52	13.65	36.17	54	-17.83	Average	Horizontal
5	11490	42.16	7.70	49.86	74	-24.14	Peak	Vertical
6	11490	24.96	7.70	32.66	54	-21.34	Average	Vertical
7	17235	34.45	13.65	48.10	68.2	-20.10	Peak	Vertical
8	17235	22.52	13.65	36.17	54	-17.83	Average	Vertical
IEEE 802.11a_5785MHz (Channel 157)								
1	11570	36.66	7.79	44.45	74	-29.55	Peak	Horizontal
2	11570	25.45	7.79	33.24	54	-20.76	Average	Horizontal
3	17355	35.41	13.98	49.39	68.2	-18.81	Peak	Horizontal
4	17355	22.91	13.98	36.89	54	-17.11	Average	Horizontal
5	11570	40.86	7.79	48.65	74	-25.35	Peak	Vertical
6	11570	27.75	7.79	35.54	54	-18.46	Average	Vertical
7	17355	35.18	13.98	49.16	68.2	-19.04	Peak	Vertical
8	17355	23.01	13.98	36.99	54	-17.01	Average	Vertical
IEEE 802.11a_5825MHz (Channel 165)								
1	11650	38.02	7.91	45.93	74	-28.07	Peak	Horizontal
2	11650	25.96	7.91	33.87	54	-20.13	Average	Horizontal
3	17475	34.84	14.32	49.16	68.2	-19.04	Peak	Horizontal
4	17475	22.64	14.32	36.96	54	-17.04	Average	Horizontal
5	11650	41.85	7.91	49.76	74	-24.24	Peak	Vertical
6	11650	26.39	7.91	34.30	54	-19.70	Average	Vertical
7	17475	35.30	14.32	49.62	68.2	-18.58	Peak	Vertical
8	17475	22.64	14.32	36.96	54	-17.04	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT20_5180MHz (Channel 36)								
1	10360	45.83	7.19	53.02	68.2	-15.18	Peak	Horizontal
2	10360	27.56	7.19	34.75	54	-19.25	Average	Horizontal
3	15540	44.38	11.93	56.31	74	-17.69	Peak	Horizontal
4	15540	23.80	11.93	35.73	54	-18.27	Average	Horizontal
5	10360	52.79	7.19	59.98	68.2	-8.22	Peak	Vertical
6	10360	31.98	7.19	39.17	54	-14.83	Average	Vertical
7	15540	49.05	11.93	60.98	74	-13.02	Peak	Vertical
8	15540	31.12	11.93	43.05	54	-10.95	Average	Vertical
IEEE 802.11n-HT20_5220MHz (Channel 44)								
1	10440	55.82	7.23	63.05	68.2	-5.15	Peak	Horizontal
2	10440	36.81	7.23	44.04	54	-9.96	Average	Horizontal
3	15660	45.08	11.94	57.02	74	-16.98	Peak	Horizontal
4	15660	28.72	11.94	40.66	54	-13.34	Average	Horizontal
5	10440	53.54	7.23	60.77	68.2	-7.43	Peak	Vertical
6	10440	35.16	7.23	42.39	54	-11.61	Average	Vertical
7	15660	41.94	11.94	53.88	74	-20.12	Peak	Vertical
8	15660	24.18	11.94	36.12	54	-17.88	Average	Vertical
IEEE 802.11n-HT20_5240MHz (Channel 48)								
1	10480	49.77	7.24	57.01	68.2	-11.19	Peak	Horizontal
2	10480	30.81	7.24	38.05	54	-15.95	Average	Horizontal
3	15720	35.13	11.96	47.09	74	-26.91	Peak	Horizontal
4	15720	23.63	11.96	35.59	54	-18.41	Average	Horizontal
5	10480	56.07	7.24	63.31	68.2	-4.89	Peak	Vertical
6	10480	36.74	7.24	43.98	54	-10.02	Average	Vertical
7	15720	44.24	11.96	56.20	74	-17.80	Peak	Vertical
8	15720	23.72	11.96	35.68	54	-18.32	Average	Vertical
IEEE 802.11n-HT20_5260MHz (Channel 52)								
1	10520	36.72	7.29	44.01	68.2	-24.19	Peak	Horizontal
2	10520	24.65	7.29	31.94	54	-22.06	Average	Horizontal
3	15780	35.53	11.98	47.51	74	-26.49	Peak	Horizontal
4	15780	23.70	11.98	35.68	54	-18.32	Average	Horizontal
5	10520	36.06	7.29	43.35	68.2	-24.85	Peak	Vertical
6	10520	25.38	7.29	32.67	54	-21.33	Average	Vertical
7	15780	35.16	11.98	47.14	74	-26.86	Peak	Vertical
8	15780	23.61	11.98	35.59	54	-18.41	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT20_5300MHz (Channel 60)								
1	10600	57.80	7.44	65.24	74.00	-8.76	Peak	Horizontal
2	10600	39.75	7.44	47.19	54.00	-6.81	Average	Horizontal
3	15900	47.46	12.01	59.47	74.00	-14.53	Peak	Horizontal
4	15900	29.13	12.01	41.14	54.00	-12.86	Average	Horizontal
5	10600	61.02	7.44	68.46	74.00	-5.54	Peak	Vertical
6	10600	42.72	7.44	50.16	54.00	-3.84	Average	Vertical
7	15900	48.06	12.01	60.07	74.00	-13.93	Peak	Vertical
8	15900	29.28	12.01	41.29	54.00	-12.71	Average	Vertical
IEEE 802.11n-HT20_5320MHz (Channel 64)								
1	10640	58.00	7.52	65.52	74.00	-8.48	Peak	Horizontal
2	10640	41.89	7.52	49.41	54.00	-4.59	Average	Horizontal
3	15960	48.37	12.01	60.38	74.00	-13.62	Peak	Horizontal
4	15960	27.73	12.01	39.74	54.00	-14.26	Average	Horizontal
5	10640	60.68	7.52	68.20	74.00	-5.80	Peak	Vertical
6	10640	41.18	7.52	48.70	54.00	-5.30	Average	Vertical
7	15960	49.66	12.01	61.67	74.00	-12.33	Peak	Vertical
8	15960	27.30	12.01	39.31	54.00	-14.69	Average	Vertical
IEEE 802.11n-HT20_5500MHz (Channel 100)								
1	11000	37.78	8.22	46.00	74	-28.00	Peak	Horizontal
2	11000	26.30	8.22	34.52	54	-19.48	Average	Horizontal
3	16500	34.27	12.75	47.02	68.2	-21.18	Peak	Horizontal
4	16500	23.23	12.75	35.98	54	-18.02	Average	Horizontal
5	11000	37.08	8.22	45.30	74	-28.70	Peak	Vertical
6	11000	26.51	8.22	34.73	54	-19.27	Average	Vertical
7	16500	35.30	12.75	48.05	68.2	-20.15	Peak	Vertical
8	16500	23.23	12.75	35.98	54	-18.02	Average	Vertical
IEEE 802.11n-HT20_5580MHz (Channel 116)								
1	11160	52.26	8.05	60.31	74	-13.69	Peak	Horizontal
2	11160	30.53	8.05	38.58	54	-15.42	Average	Horizontal
3	16740	46.51	12.86	59.37	68.2	-8.83	Peak	Horizontal
4	16740	26.49	12.86	39.35	54	-14.65	Average	Horizontal
5	11160	51.55	8.05	59.60	74	-14.40	Peak	Vertical
6	11160	32.42	8.05	40.47	54	-13.53	Average	Vertical
7	16740	45.82	12.86	58.68	68.2	-9.52	Peak	Vertical
8	16740	27.52	12.86	40.38	54	-13.62	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT20_5700MHz (Channel 140)								
1	11400	44.74	7.79	52.53	74	-21.47	Peak	Horizontal
2	11400	30.47	7.79	38.26	54	-15.74	Average	Horizontal
3	17100	47.77	13.26	61.03	68.2	-7.17	Peak	Horizontal
4	17100	29.54	13.26	42.80	54	-11.20	Average	Horizontal
5	11400	51.70	7.79	59.49	74	-14.51	Peak	Vertical
6	11400	35.30	7.79	43.09	54	-10.91	Average	Vertical
7	17100	50.01	13.26	63.27	68.2	-4.93	Peak	Vertical
8	17100	29.86	13.26	43.12	54	-10.88	Average	Vertical
IEEE 802.11n-HT20_5745MHz (Channel 149)								
1	11490	34.90	7.70	42.60	74	-31.40	Peak	Horizontal
2	11490	23.15	7.70	30.85	54	-23.15	Average	Horizontal
3	17235	32.84	13.65	46.49	68.2	-21.71	Peak	Horizontal
4	17235	22.41	13.65	36.06	54	-17.94	Average	Horizontal
5	11490	44.75	7.70	52.45	74	-21.55	Peak	Vertical
6	11490	25.52	7.70	33.22	54	-20.78	Average	Vertical
7	17235	44.79	13.65	58.44	68.2	-9.76	Peak	Vertical
8	17235	22.30	13.65	35.95	54	-18.05	Average	Vertical
IEEE 802.11n-HT20_5785MHz (Channel 157)								
1	11570	40.88	7.79	48.67	74	-25.33	Peak	Horizontal
2	11570	26.19	7.79	33.98	54	-20.02	Average	Horizontal
3	17355	33.71	13.98	47.69	68.2	-20.51	Peak	Horizontal
4	17355	22.91	13.98	36.89	54	-17.11	Average	Horizontal
5	11570	43.39	7.79	51.18	74	-22.82	Peak	Vertical
6	11570	27.81	7.79	35.60	54	-18.40	Average	Vertical
7	17355	45.36	13.98	59.34	68.2	-8.86	Peak	Vertical
8	17355	22.91	13.98	36.89	54	-17.11	Average	Vertical
IEEE 802.11n-HT20_5825MHz (Channel 165)								
1	11650	47.98	7.91	55.89	74	-18.11	Peak	Horizontal
2	11650	30.03	7.91	37.94	54	-16.06	Average	Horizontal
3	17475	33.60	14.32	47.92	68.2	-20.28	Peak	Horizontal
4	17475	22.42	14.32	36.74	54	-17.26	Average	Horizontal
5	11650	47.67	7.91	55.58	74	-18.42	Peak	Vertical
6	11650	29.56	7.91	37.47	54	-16.53	Average	Vertical
7	17475	43.71	14.32	58.03	68.2	-10.17	Peak	Vertical
8	17475	22.42	14.32	36.74	54	-17.26	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT40_5190MHz (Channel 38)								
1	10380	37.29	7.20	44.49	68.2	-23.71	Peak	Horizontal
2	10380	24.17	7.20	31.37	54	-22.63	Average	Horizontal
3	15570	36.35	11.92	48.27	74	-25.73	Peak	Horizontal
4	15570	23.81	11.92	35.73	54	-18.27	Average	Horizontal
5	10380	37.79	7.20	44.99	68.2	-23.21	Peak	Vertical
6	10380	25.42	7.20	32.62	54	-21.38	Average	Vertical
7	15570	35.69	11.92	47.61	74	-26.39	Peak	Vertical
8	15570	23.72	11.92	35.64	54	-18.36	Average	Vertical
IEEE 802.11n-HT40_5230MHz (Channel 46)								
1	10460	37.14	7.23	44.37	68.2	-23.83	Peak	Horizontal
2	10460	25.79	7.23	33.02	54	-20.98	Average	Horizontal
3	15690	36.22	11.96	48.18	74	-25.82	Peak	Horizontal
4	15690	24.16	11.96	36.12	54	-17.88	Average	Horizontal
5	10460	44.45	7.23	51.68	68.2	-16.52	Peak	Vertical
6	10460	29.54	7.23	36.77	54	-17.23	Average	Vertical
7	15690	37.43	11.96	49.39	74	-24.61	Peak	Vertical
8	15690	24.51	11.96	36.47	54	-17.53	Average	Vertical
IEEE 802.11n-HT40_5270MHz (Channel 54)								
1	10540	37.31	7.32	44.63	68.2	-23.57	Peak	Horizontal
2	10540	23.28	7.32	30.60	54	-23.40	Average	Horizontal
3	15810	36.02	11.98	48.00	74	-26.00	Peak	Horizontal
4	15810	23.44	11.98	35.42	54	-18.58	Average	Horizontal
5	10540	45.44	7.32	52.76	68.2	-15.44	Peak	Vertical
6	10540	30.76	7.32	38.08	54	-15.92	Average	Vertical
7	15810	35.03	11.98	47.01	74	-26.99	Peak	Vertical
8	15810	23.34	11.98	35.32	54	-18.68	Average	Vertical
IEEE 802.11n-HT40_5310MHz (Channel 62)								
1	10620	41.10	7.49	48.59	74.00	-25.41	Peak	Horizontal
2	10620	27.11	7.49	34.60	54.00	-19.40	Average	Horizontal
3	15930	35.51	12.02	47.53	74.00	-26.47	Peak	Horizontal
4	15930	23.12	12.02	35.14	54.00	-18.86	Average	Horizontal
5	10620	49.70	7.49	57.19	74.00	-16.81	Peak	Vertical
6	10620	35.06	7.49	42.55	54.00	-11.45	Average	Vertical
7	15930	35.06	12.02	47.08	74.00	-26.92	Peak	Vertical
8	15930	23.22	12.02	35.24	54.00	-18.76	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA

Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT40_5510MHz (Channel 102)								
1	11020	45.47	8.20	53.67	74	-20.33	Peak	Horizontal
2	11020	31.26	8.20	39.46	54	-14.54	Average	Horizontal
3	16530	35.15	12.77	47.92	68.2	-20.28	Peak	Horizontal
4	16530	23.79	12.77	36.56	54	-17.44	Average	Horizontal
5	11020	44.84	8.20	53.04	74	-20.96	Peak	Vertical
6	11020	30.34	8.20	38.54	54	-15.46	Average	Vertical
7	16530	37.29	12.77	50.06	68.2	-18.14	Peak	Vertical
8	16530	23.98	12.77	36.75	54	-17.25	Average	Vertical
IEEE 802.11n-HT40_5550MHz (Channel 110)								
1	11100	40.74	8.11	48.85	74	-25.15	Peak	Horizontal
2	11100	27.87	8.11	35.98	54	-18.02	Average	Horizontal
3	16650	34.06	12.82	46.88	68.2	-21.32	Peak	Horizontal
4	16650	22.73	12.82	35.55	54	-18.45	Average	Horizontal
5	11100	44.50	8.11	52.61	74	-21.39	Peak	Vertical
6	11100	30.38	8.11	38.49	54	-15.51	Average	Vertical
7	16650	34.59	12.82	47.41	68.2	-20.79	Peak	Vertical
8	16650	22.73	12.82	35.55	54	-18.45	Average	Vertical
IEEE 802.11n-HT40_5670MHz (Channel 134)								
1	11340	38.72	7.86	46.58	74	-27.42	Peak	Horizontal
2	11340	28.42	7.86	36.28	54	-17.72	Average	Horizontal
3	17010	34.77	13.01	47.78	68.2	-20.42	Peak	Horizontal
4	17010	23.19	13.01	36.20	54	-17.80	Average	Horizontal
5	11340	44.05	7.86	51.91	74	-22.09	Peak	Vertical
6	11340	31.06	7.86	38.92	54	-15.08	Average	Vertical
7	17010	34.72	13.01	47.73	68.2	-20.47	Peak	Vertical
8	17010	23.09	13.01	36.10	54	-17.90	Average	Vertical
IEEE 802.11n-HT40_5755MHz (Channel 151)								
1	11510	34.53	7.70	42.23	74	-31.77	Peak	Horizontal
2	11510	23.04	7.70	30.74	54	-23.26	Average	Horizontal
3	17265	33.15	13.73	46.88	68.2	-21.32	Peak	Horizontal
4	17265	22.22	13.73	35.95	54	-18.05	Average	Horizontal
5	11510	41.83	7.70	49.53	74	-24.47	Peak	Vertical
6	11510	28.09	7.70	35.79	54	-18.21	Average	Vertical
7	17265	35.20	13.73	48.93	68.2	-19.27	Peak	Vertical
8	17265	22.22	13.73	35.95	54	-18.05	Average	Vertical

TEST REPORT

RADIATED EMISSION DATA



Radiated Emission Test Data (Above 1GHz): Worst-Case Configuration								
No.	Frequency (MHz)	Reading (dBμV)	Correction factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Antenna Polaxis
IEEE 802.11n-HT40_5795MHz (Channel 159)								
1	11590	35.04	7.82	42.86	74	-31.14	Peak	Horizontal
2	11590	24.94	7.82	32.76	54	-21.24	Average	Horizontal
3	17385	33.26	14.06	47.32	68.2	-20.88	Peak	Horizontal
4	17385	22.93	14.06	36.99	54	-17.01	Average	Horizontal
5	11590	37.23	7.82	45.05	74	-28.95	Peak	Vertical
6	11590	25.42	7.82	33.24	54	-20.76	Average	Vertical
7	17385	34.19	14.06	48.25	68.2	-19.95	Peak	Vertical
8	17385	22.72	14.06	36.78	54	-17.22	Average	Vertical

- Notes:
1. Peak detector is used for the emission measurement.
 2. Average detector is used for the average data of emission measurement.
 3. All measurements were made at 3 meters.
 4. Negative value in the margin column shows emission below limit.
 5. Horn antenna is used for the emission over 1000MHz.
 6. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 7. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11ac-VHT20

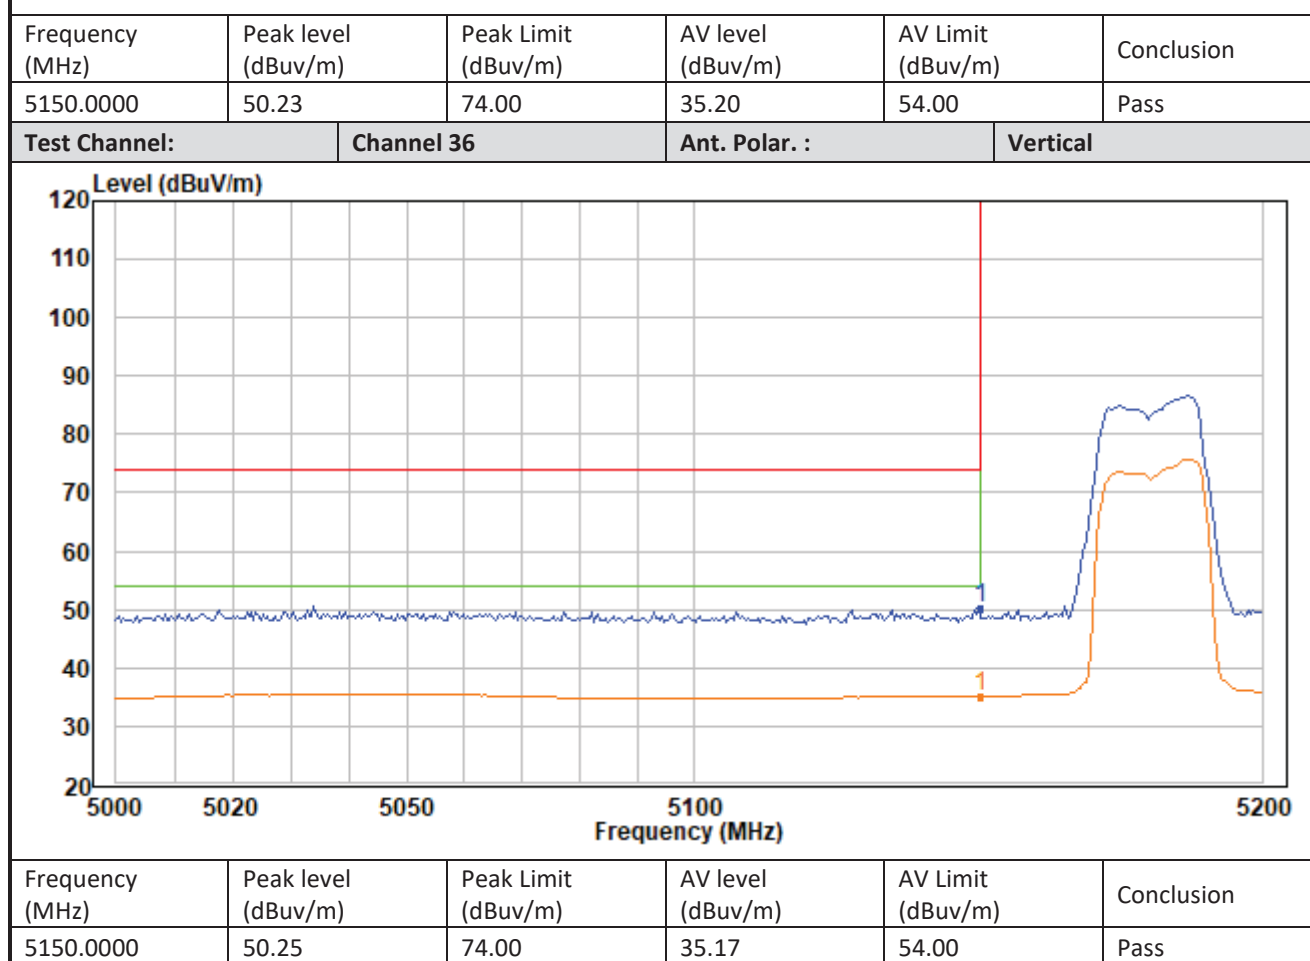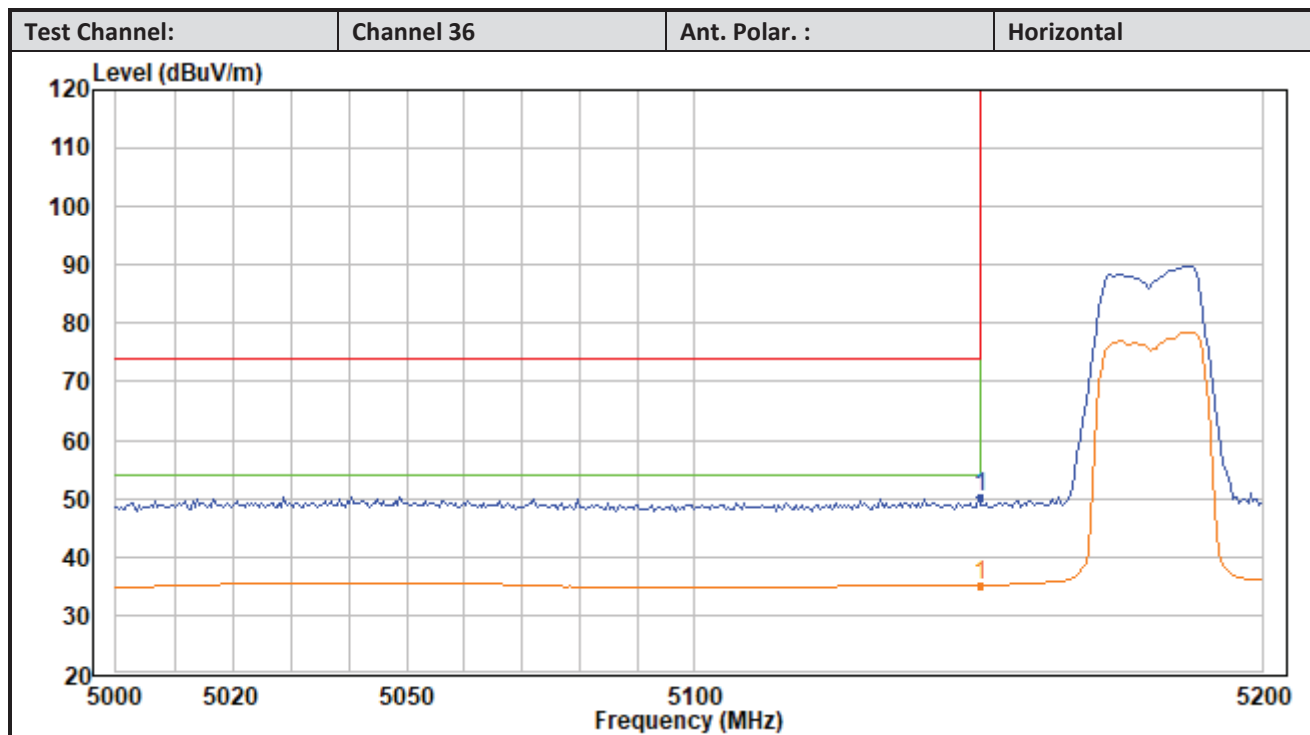

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11ac-VHT20

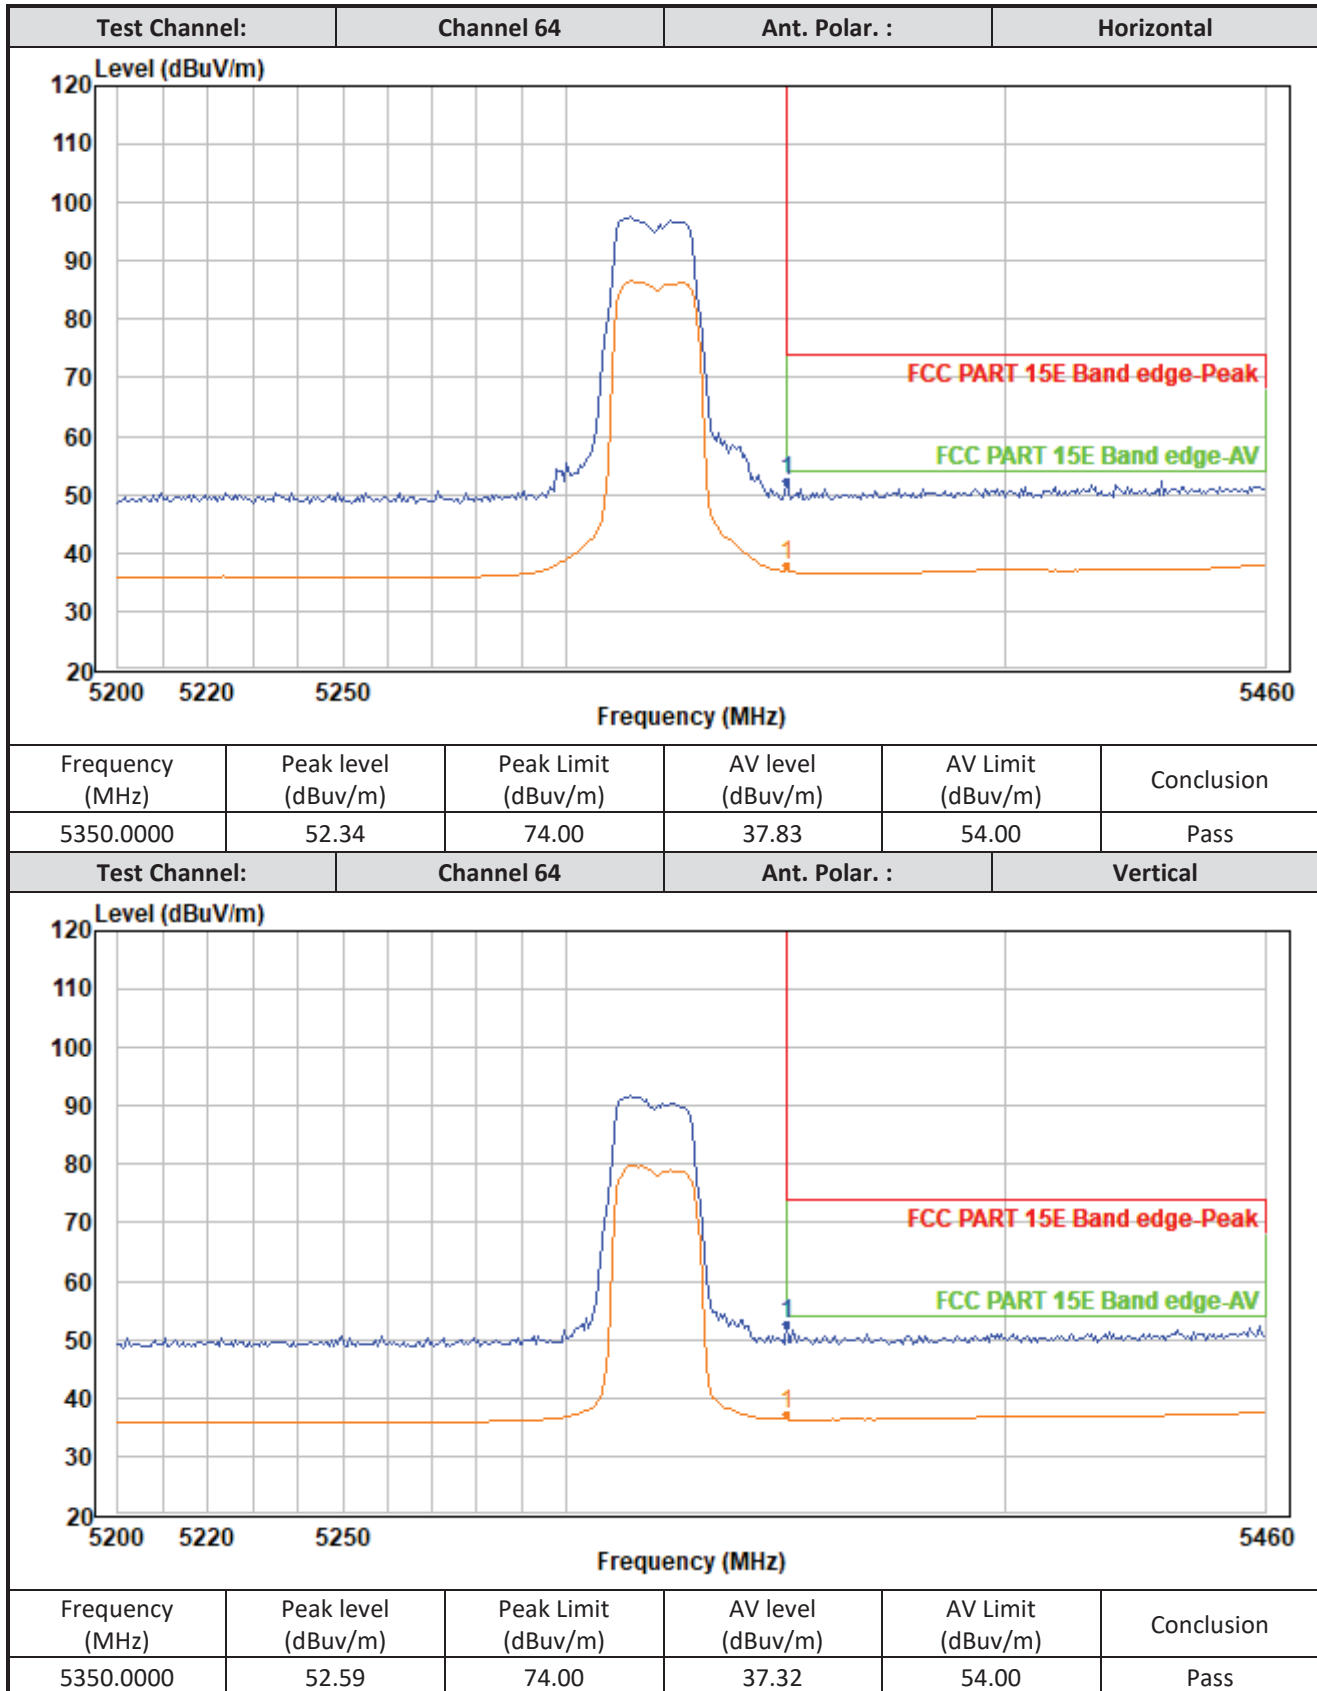


TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)

IEEE 802.11ac-VHT20

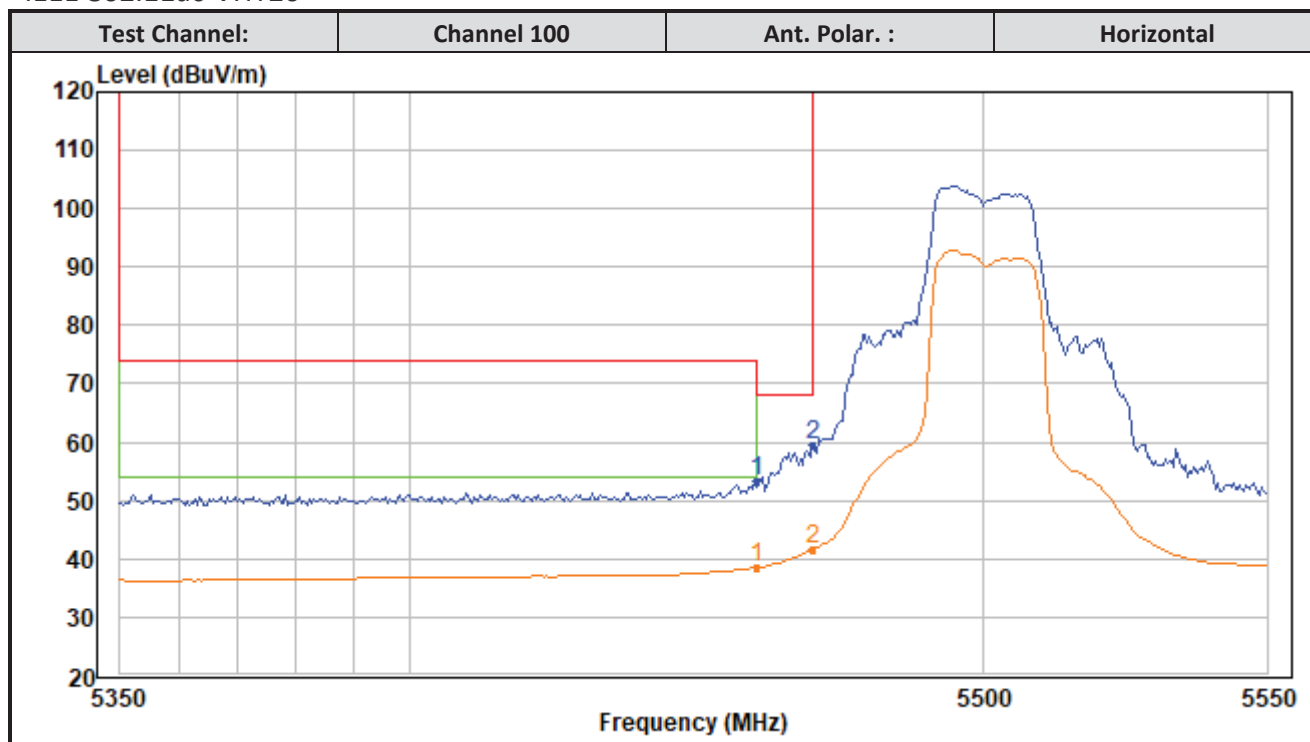

Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)	AV Limit (dBuV/m)	Conclusion
5460.0000	53.29	68.20	38.50	54.00	Pass
5470.0000	59.41	68.20	41.54	68.20	Pass


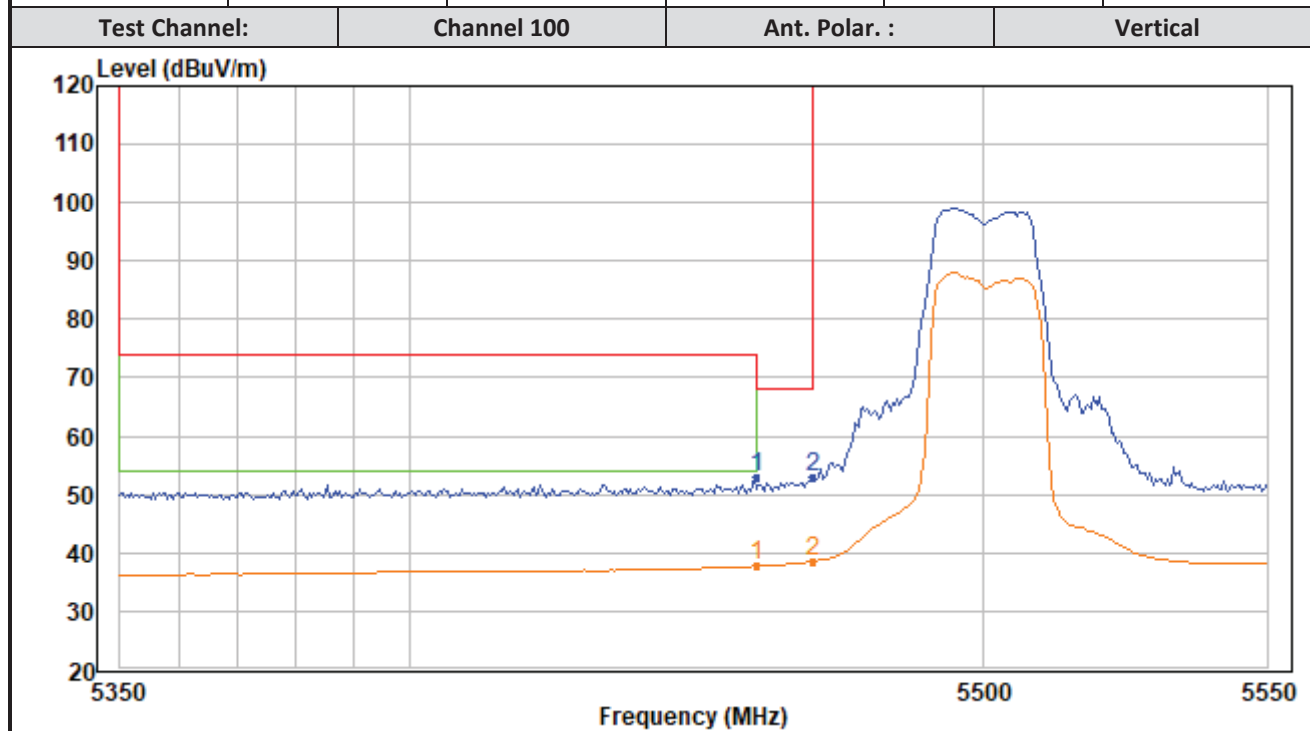


Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)	AV Limit (dBuV/m)	Conclusion
5460.0000	52.88	68.20	37.72	54.00	Pass
5470.0000	53.14	68.20	38.51	68.20	Pass

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11ac-VHT40

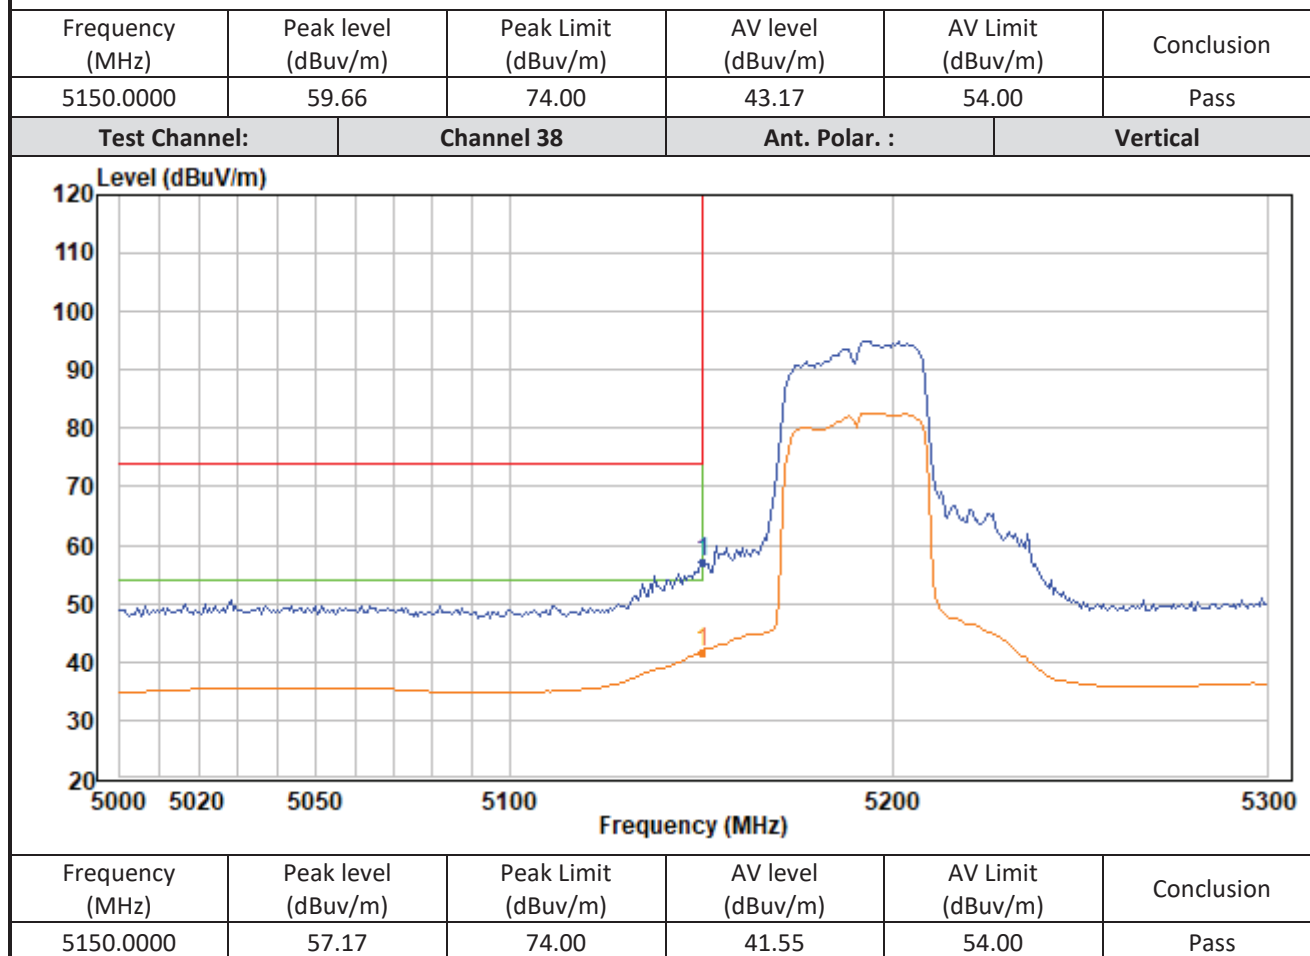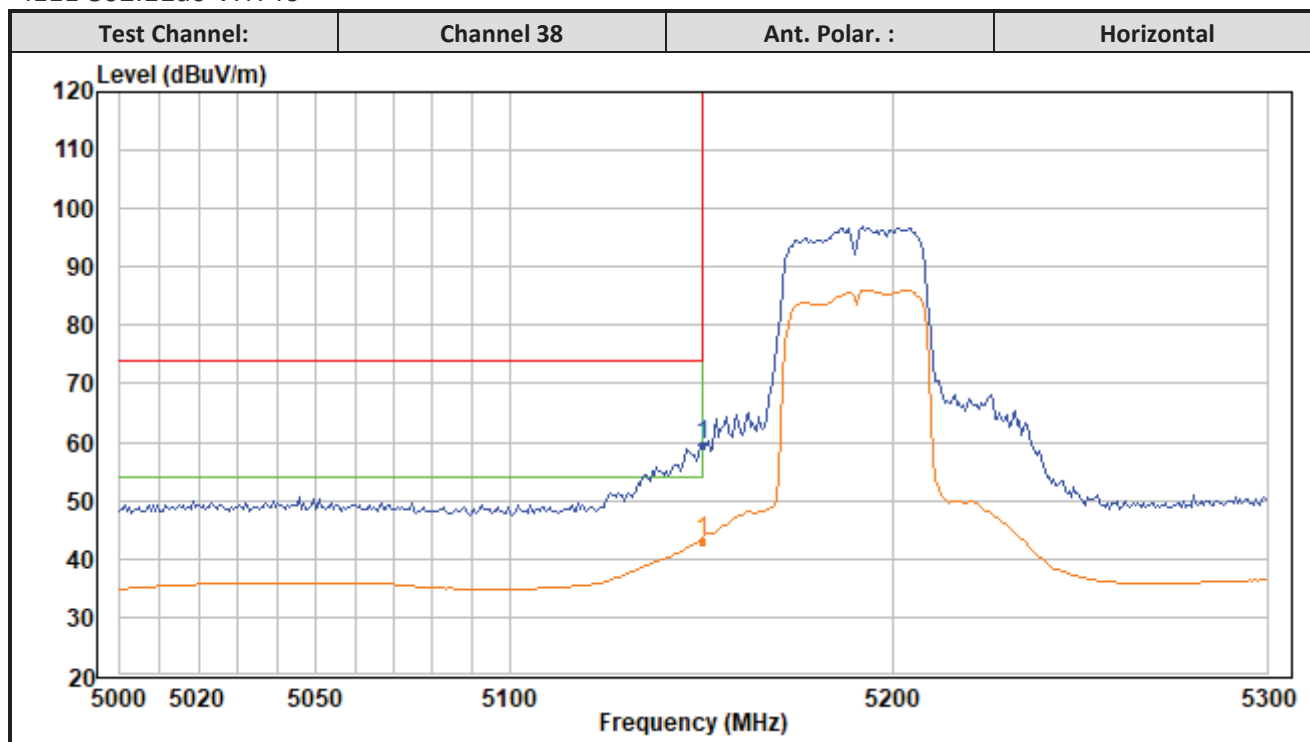

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11ac-VHT40

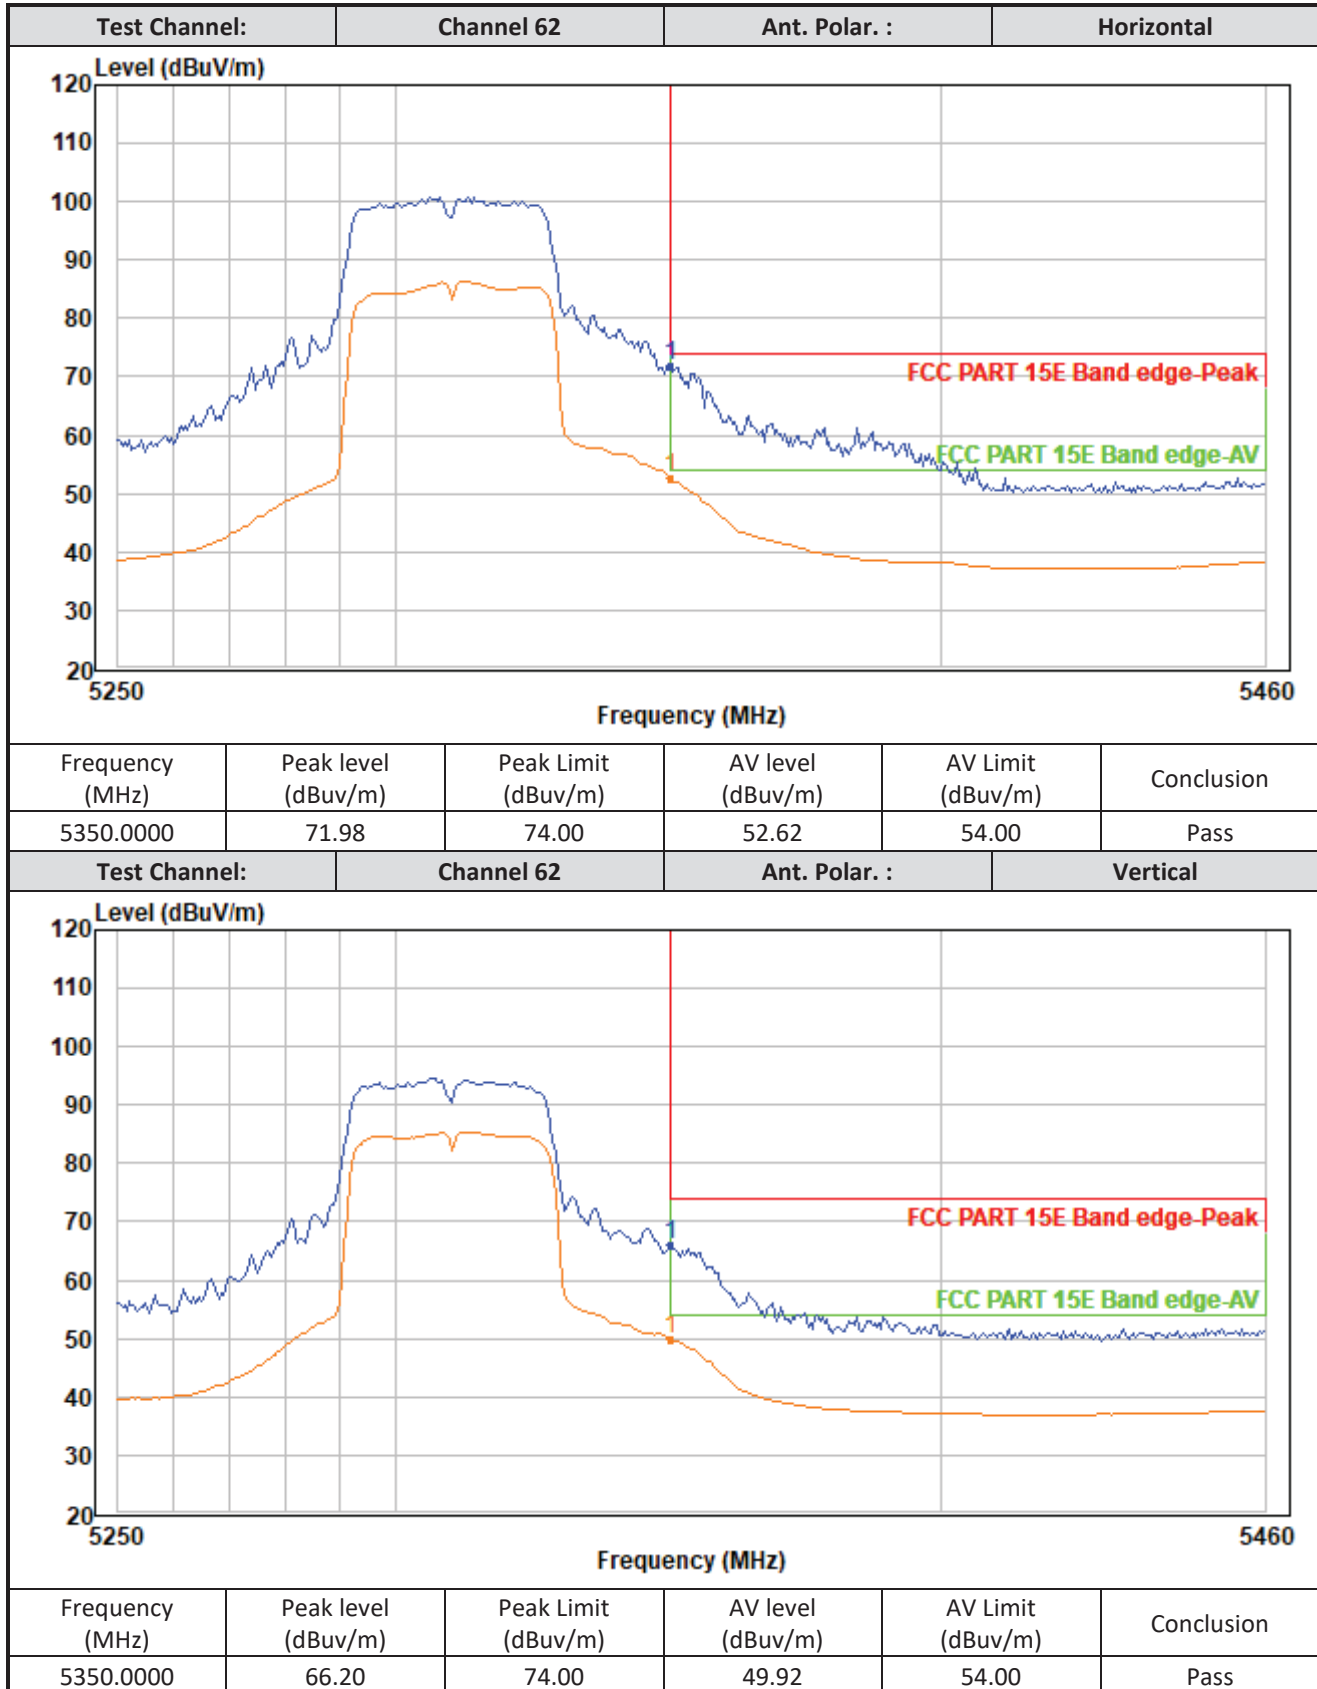


TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)

IEEE 802.11ac-VHT40

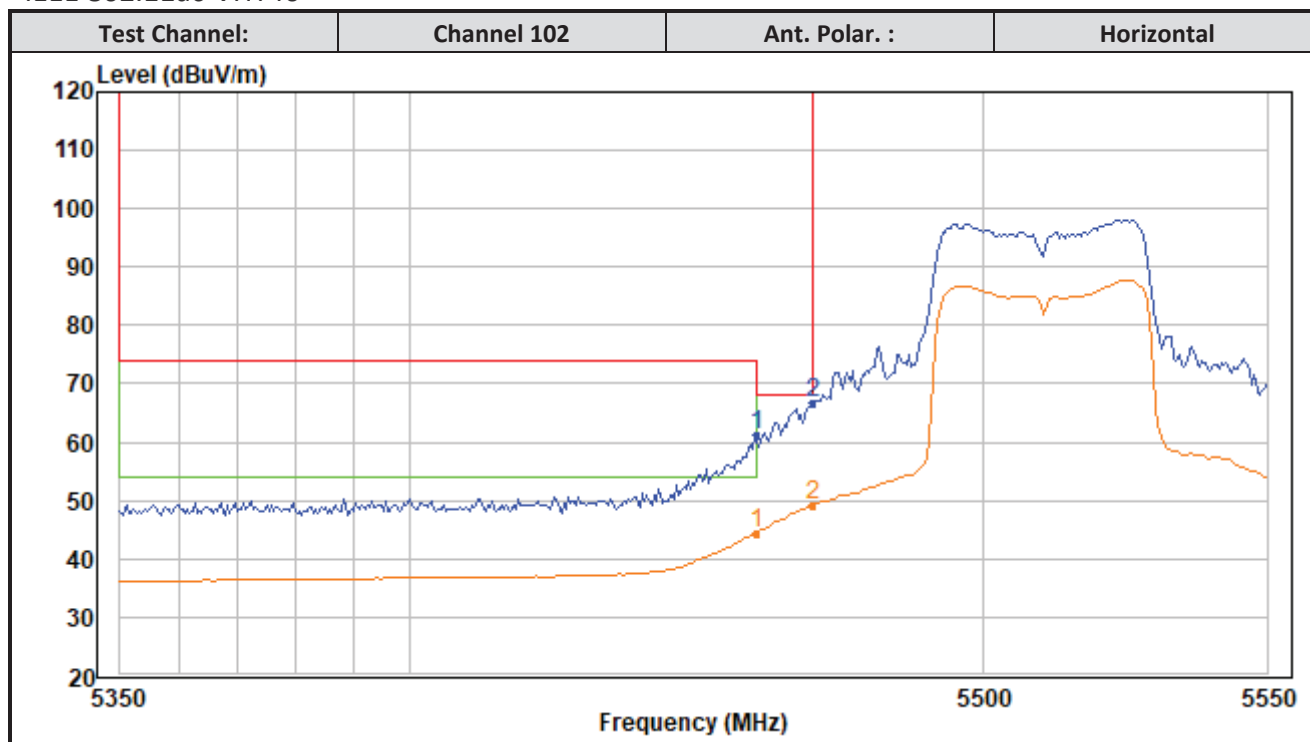

Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)	AV Limit (dBuV/m)	Conclusion
5460.0000	61.34	68.20	44.27	54.00	Pass
5470.0000	66.89	68.20	49.09	68.20	Pass

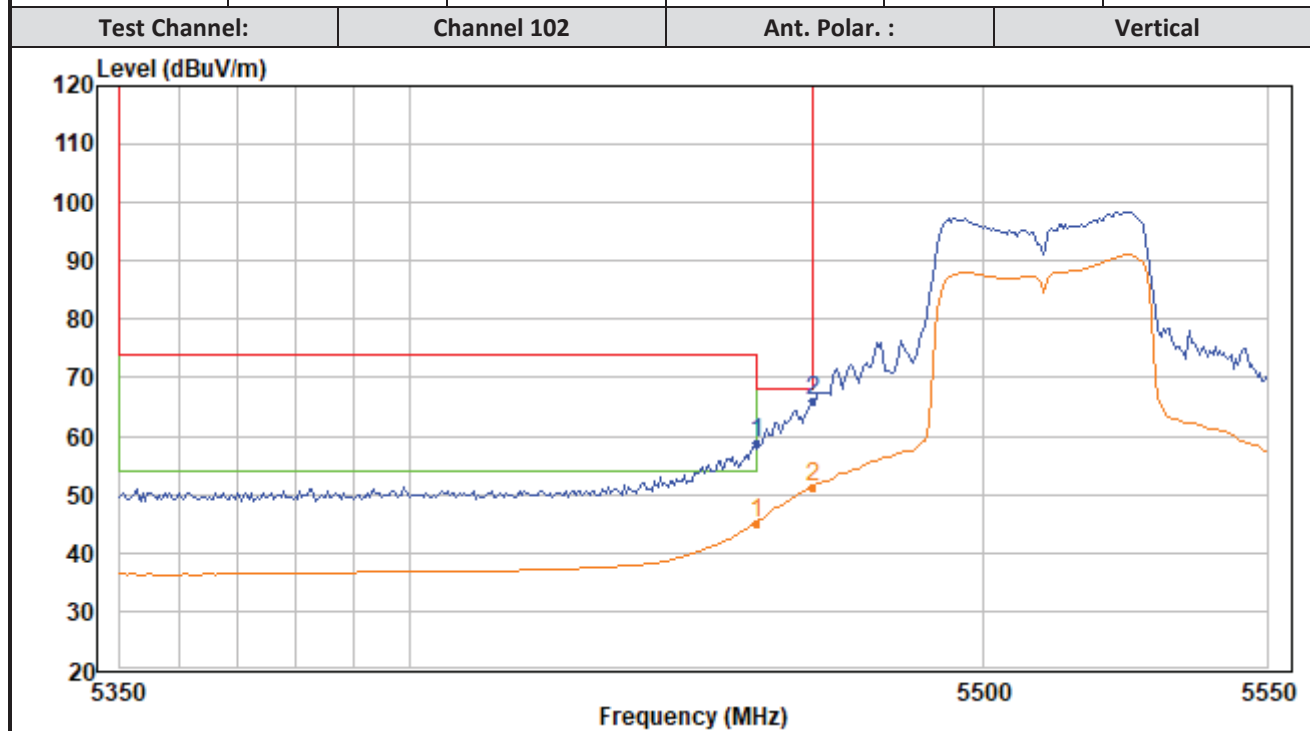


Frequency (MHz)	Peak level (dBuV/m)	Peak Limit (dBuV/m)	AV level (dBuV/m)	AV Limit (dBuV/m)	Conclusion
5460.0000	58.79	68.20	45.10	54.00	Pass
5470.0000	66.03	68.20	51.25	68.20	Pass


TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)

IEEE 802.11ac-VHT80

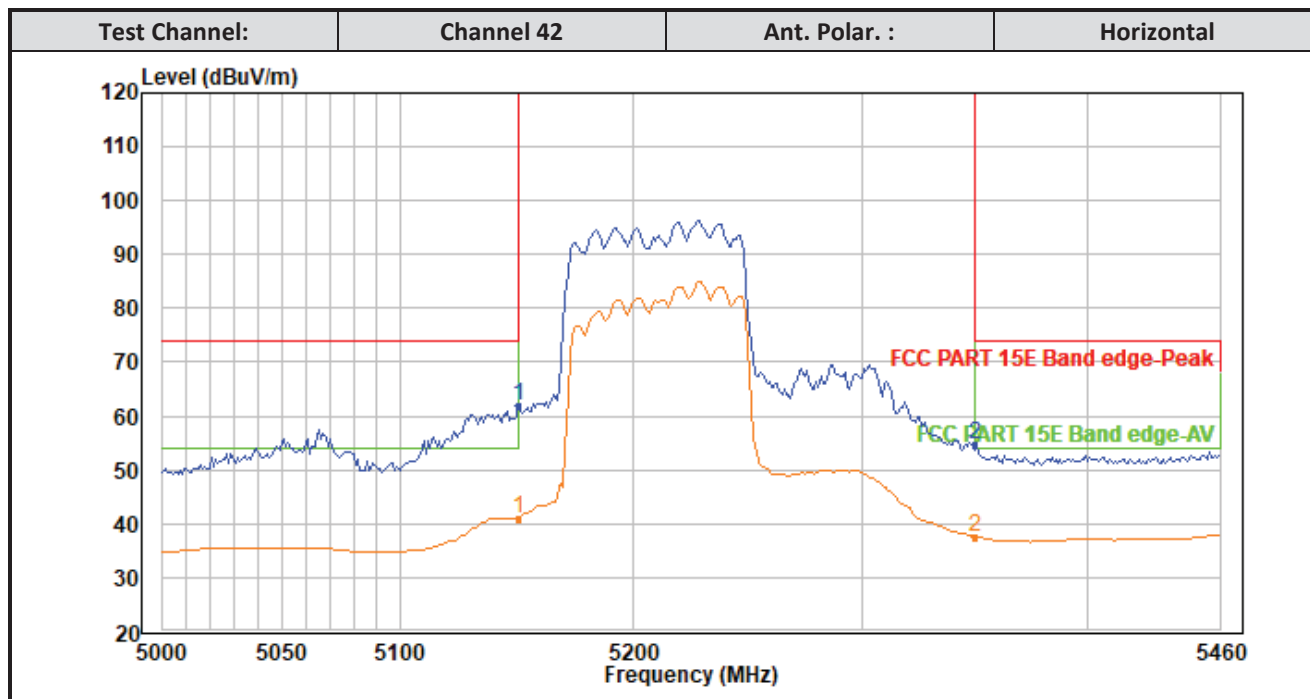

Test Channel:	Channel 42	Ant. Polar. :	Vertical
---------------	------------	---------------	----------


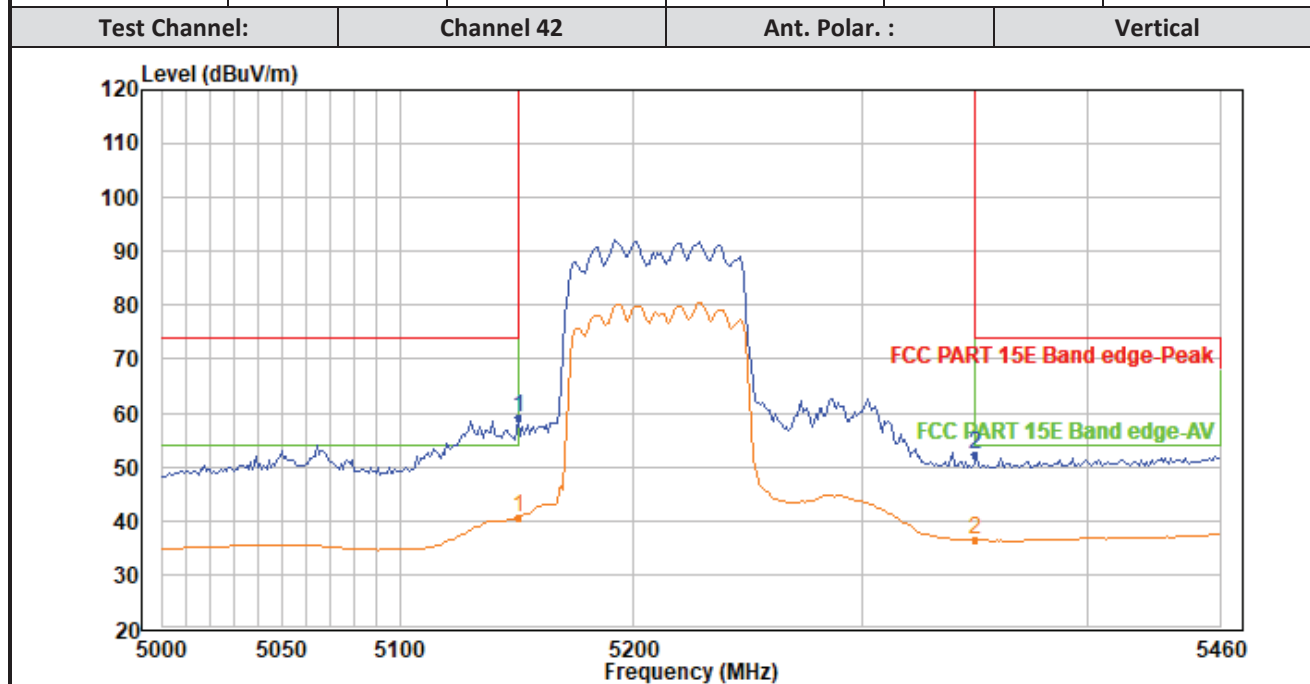


Test Channel:	Channel 42	Ant. Polar. :	Vertical
---------------	------------	---------------	----------

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11ac-VHT80

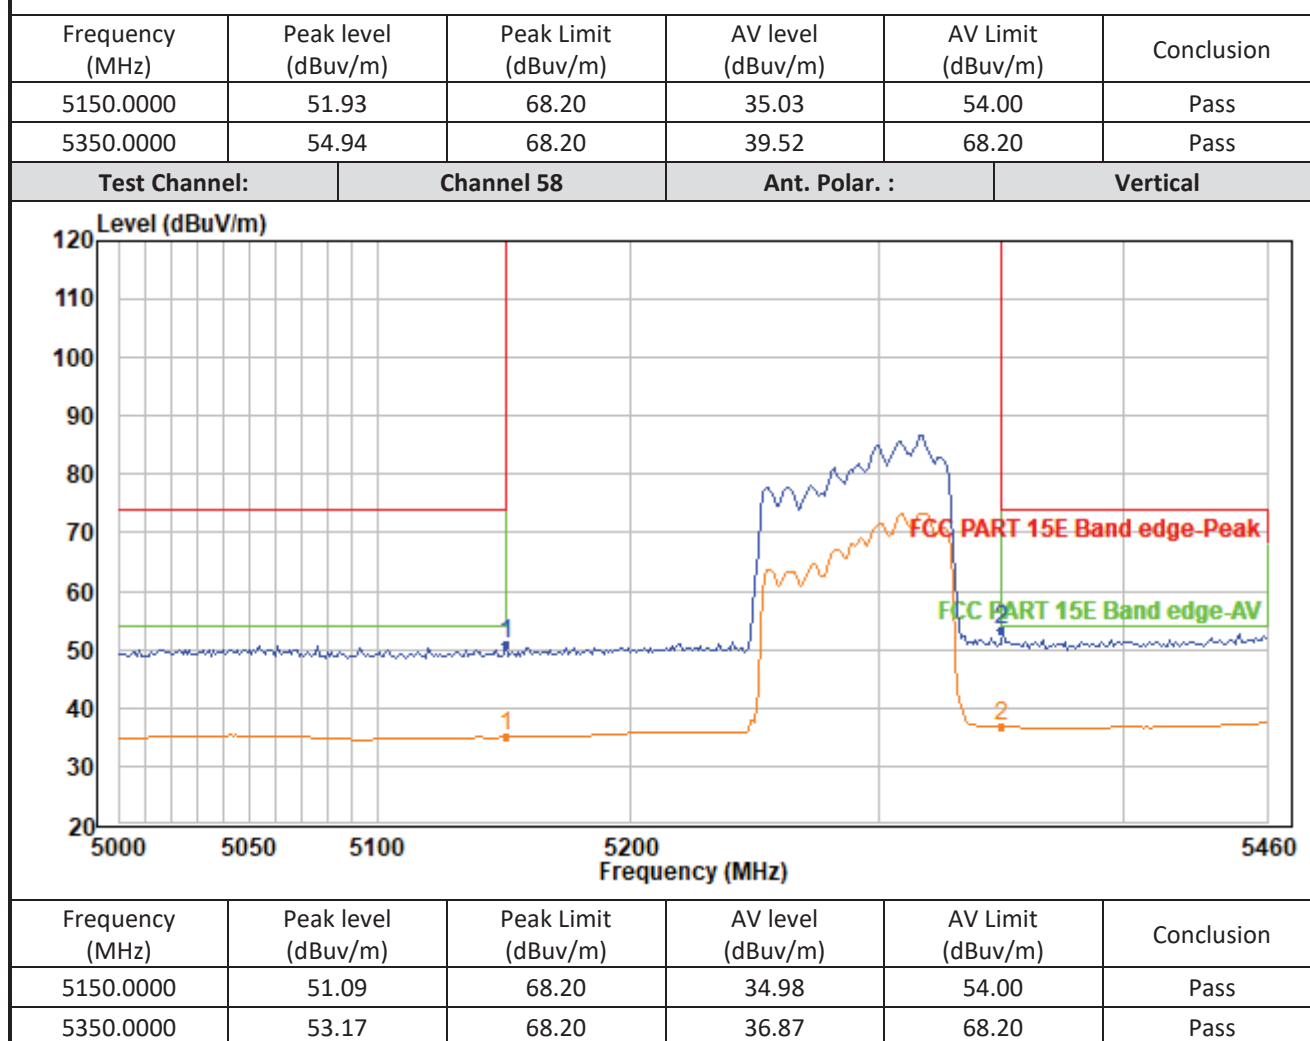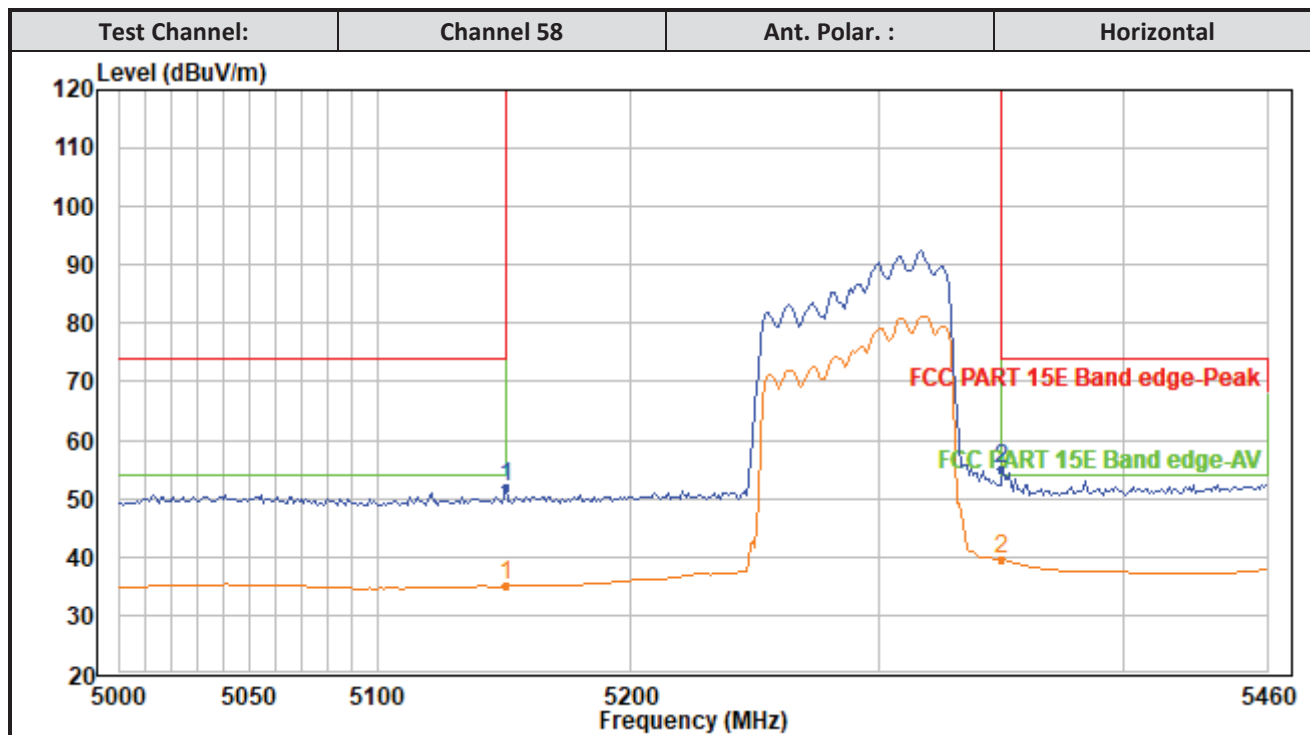


TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)

IEEE 802.11ac-VHT80

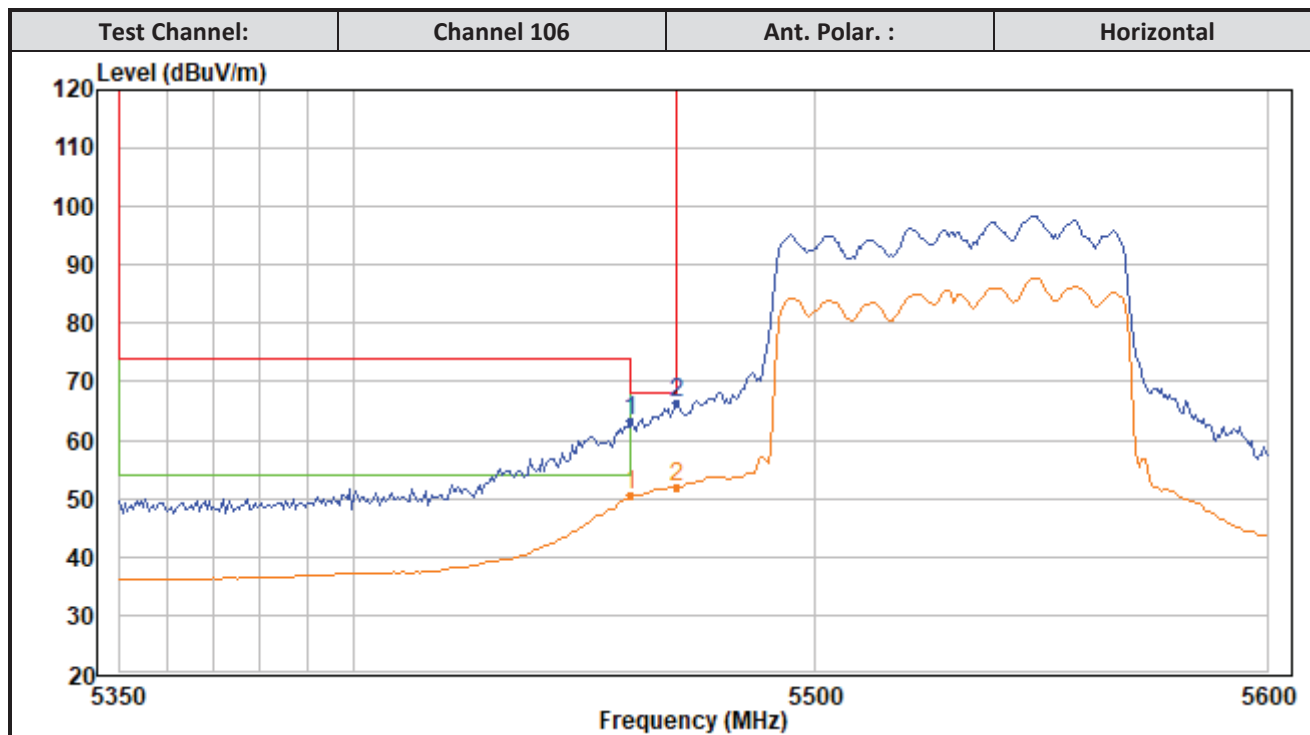

Test Channel:	Channel 106	Ant. Polar. :	Vertical
---------------	-------------	---------------	----------


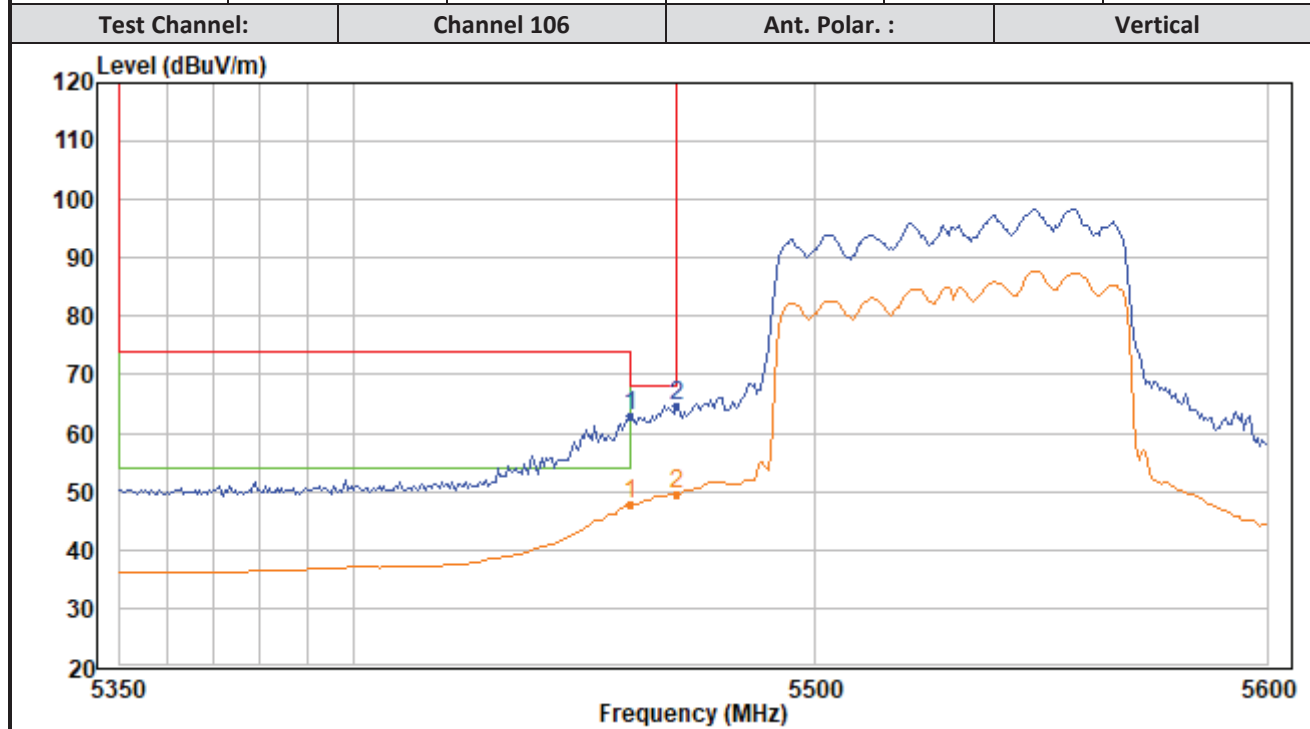


Test Channel:	Channel 106	Ant. Polar. :	Vertical
---------------	-------------	---------------	----------

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11a

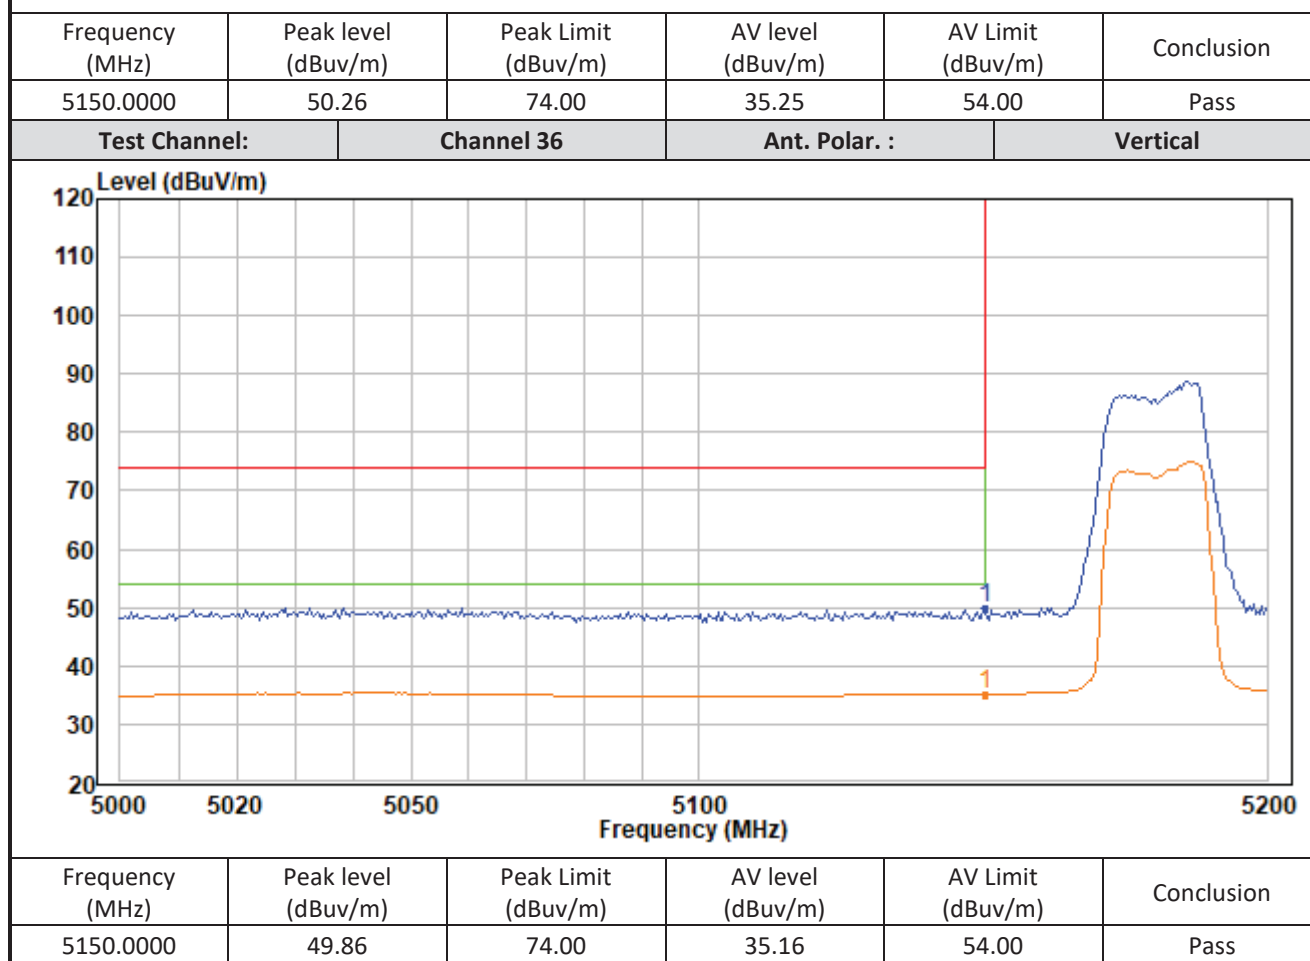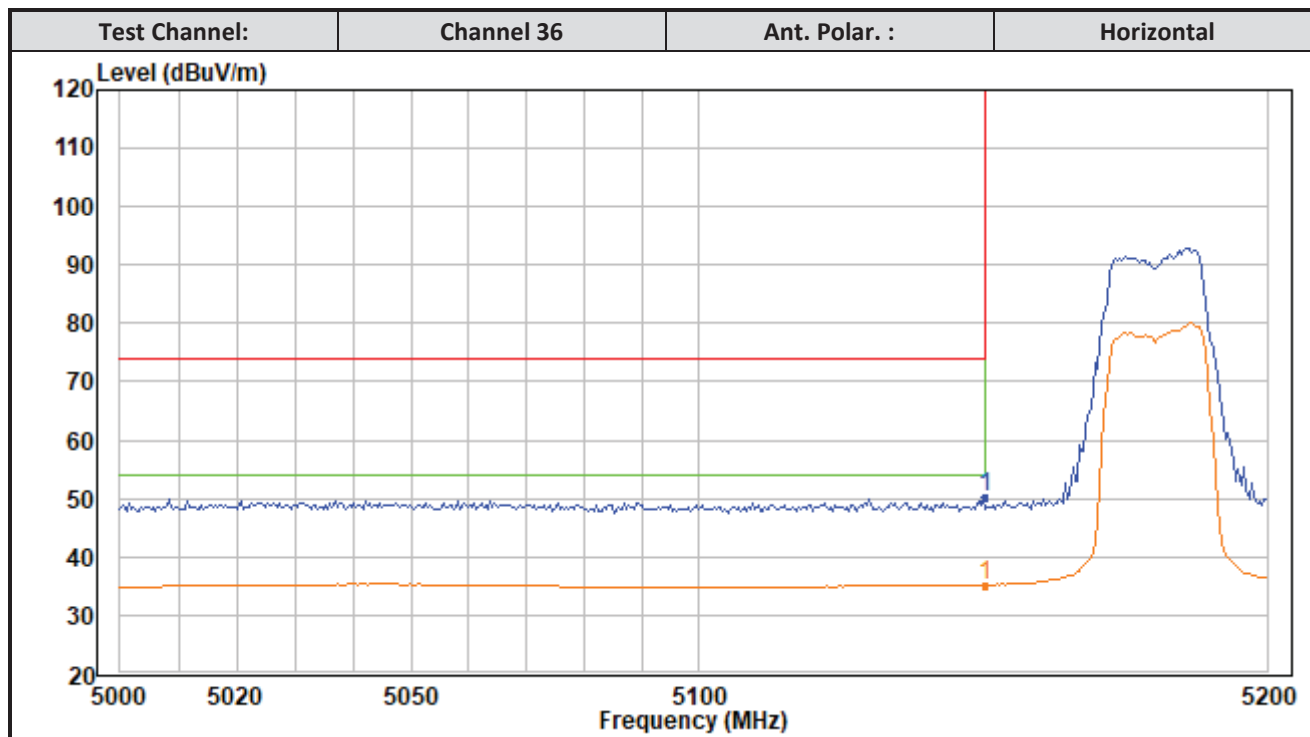

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11a

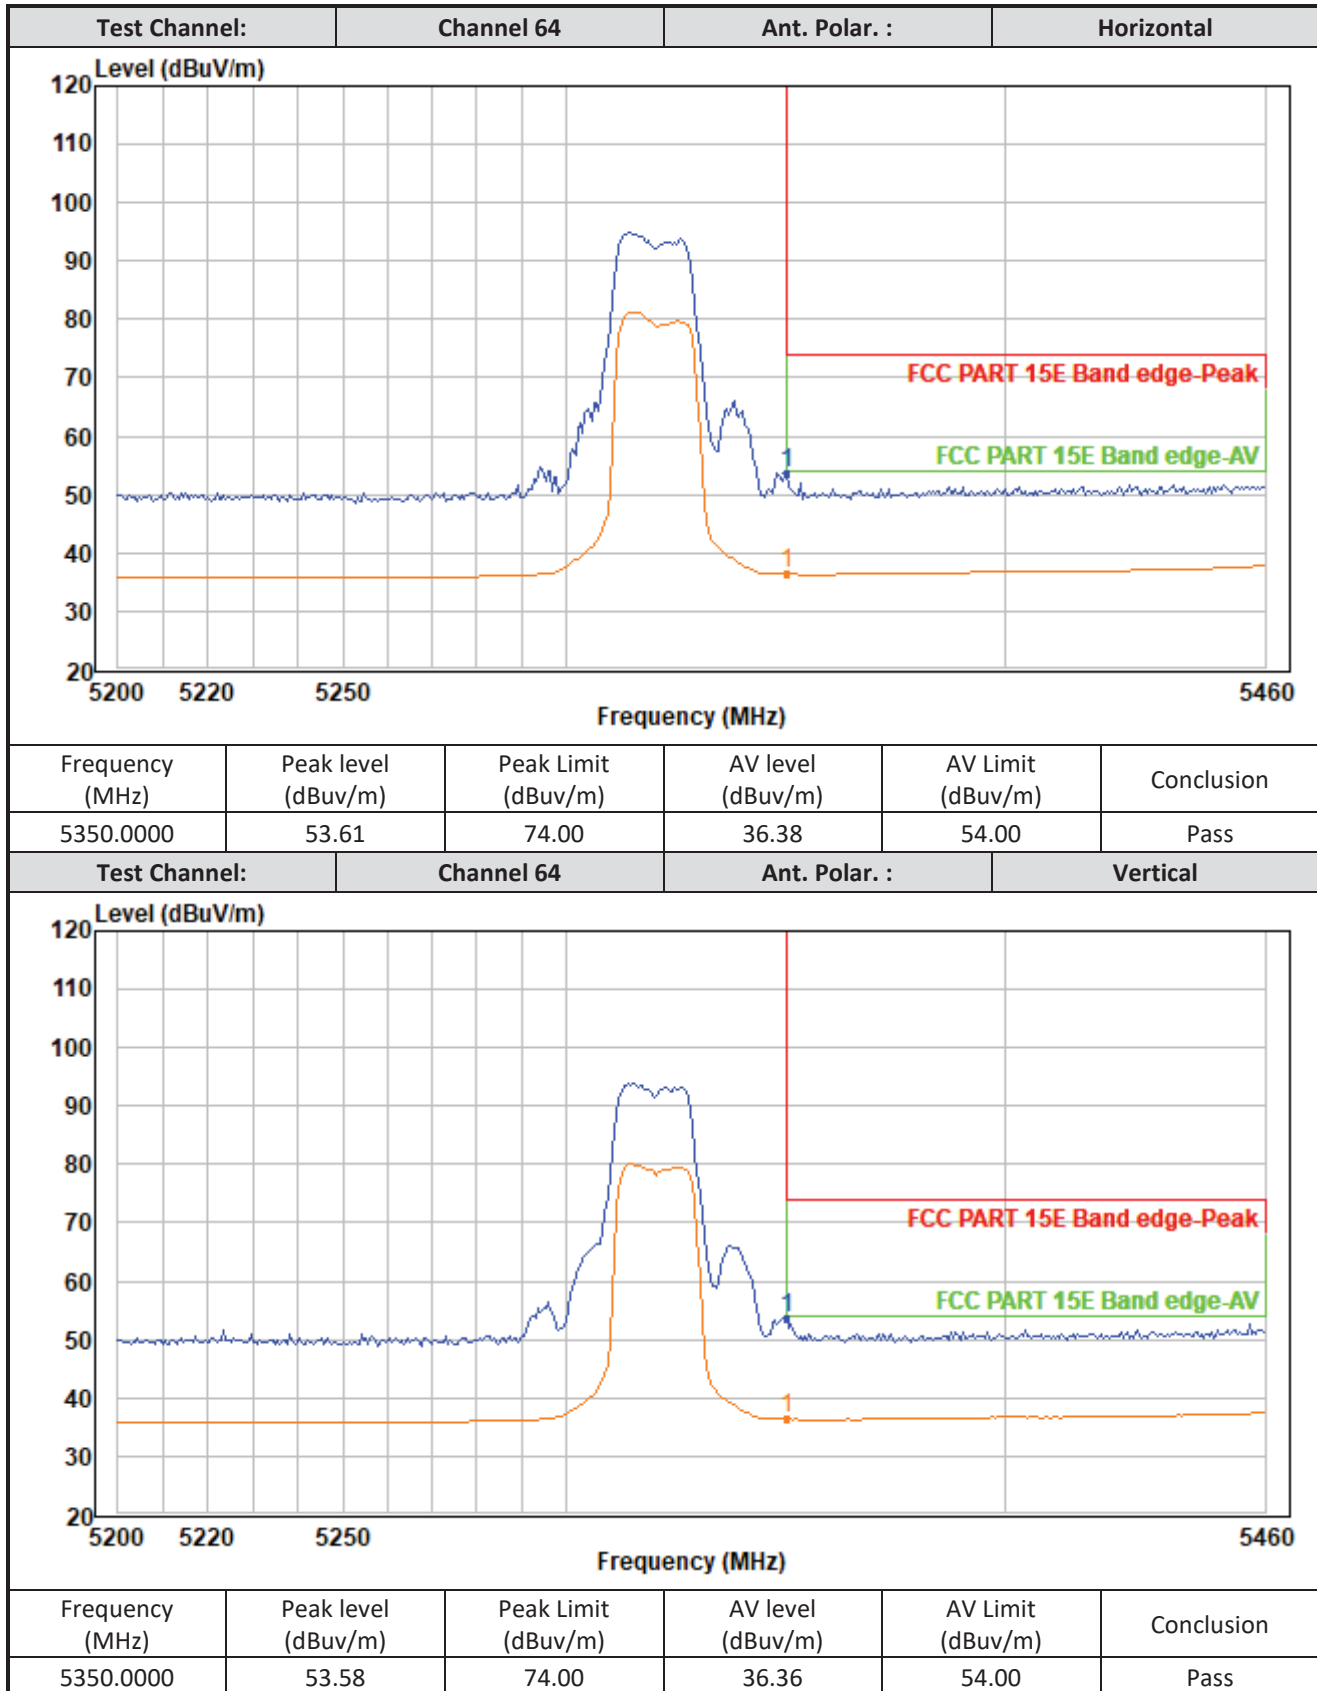


TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)

IEEE 802.11a

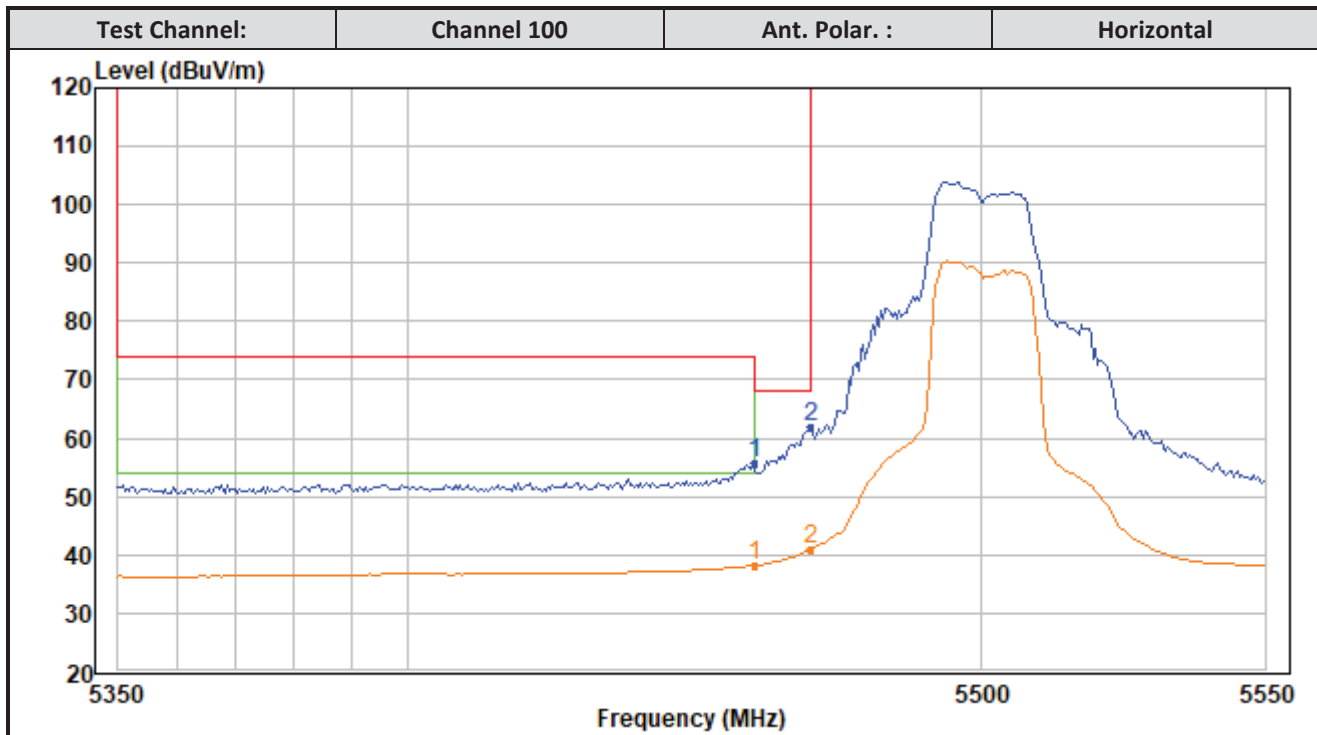

Test Channel:	Channel 100	Ant. Polar. :	Vertical
---------------	-------------	---------------	----------


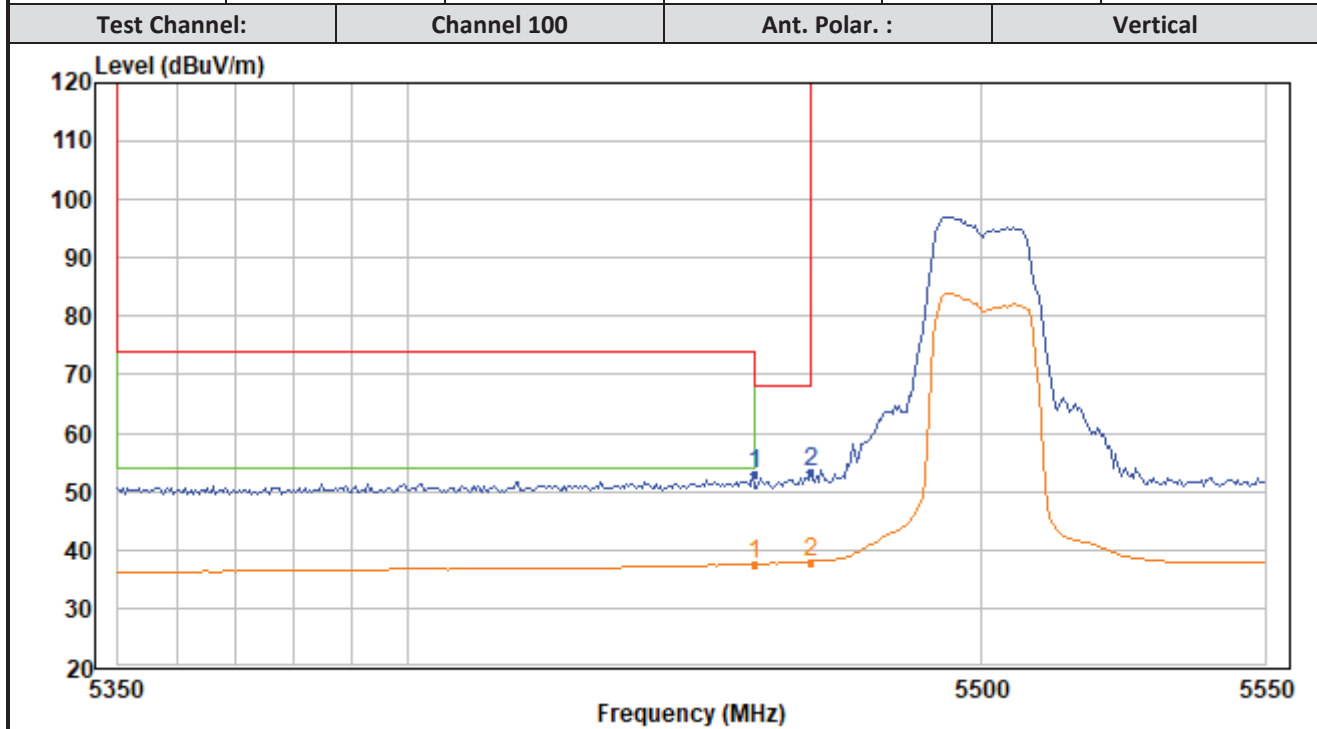


Test Channel:	Channel 100	Ant. Polar. :	Vertical
---------------	-------------	---------------	----------

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11n-HT20

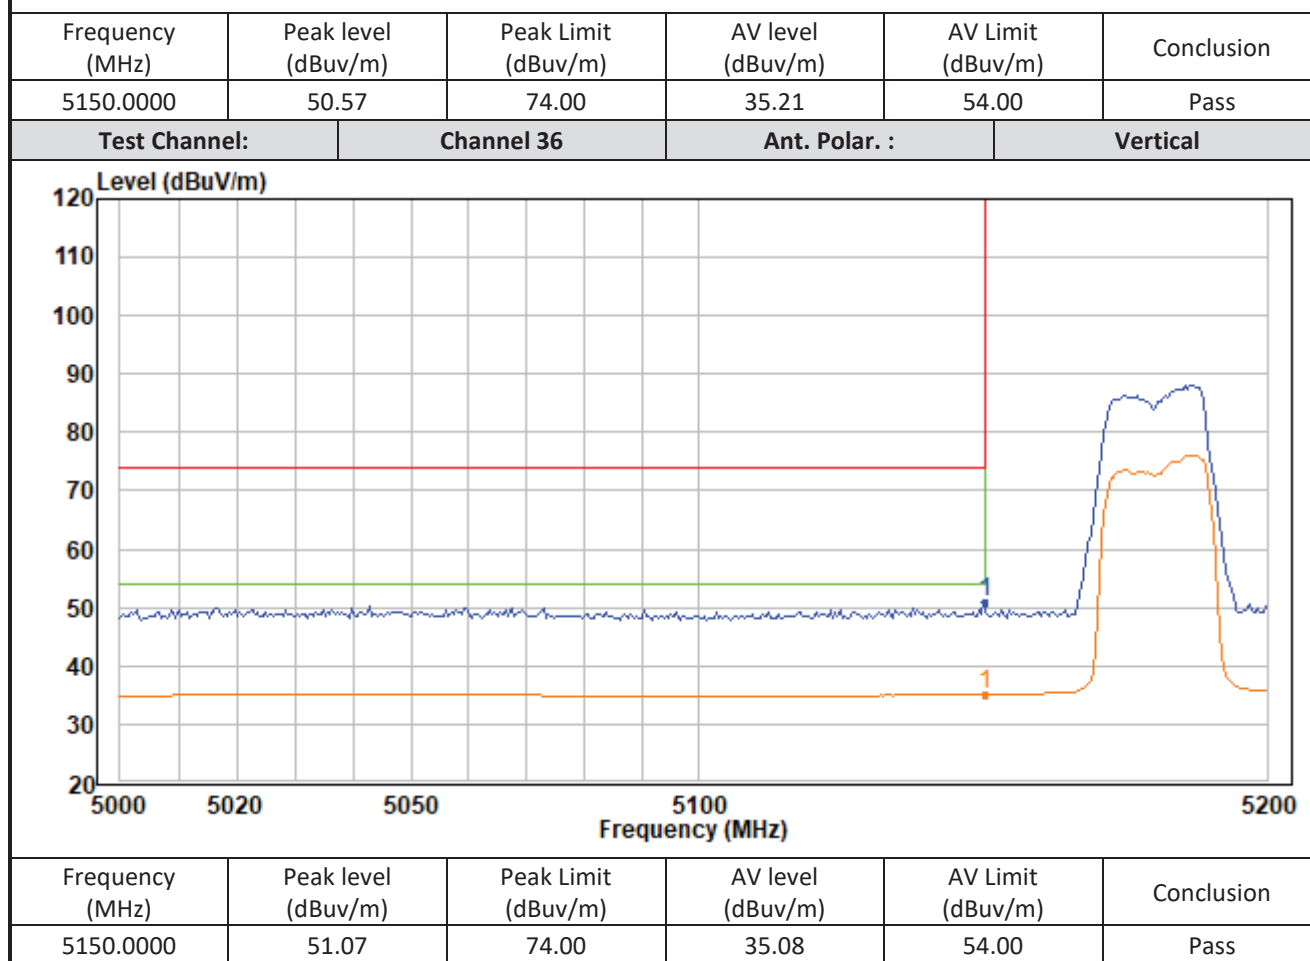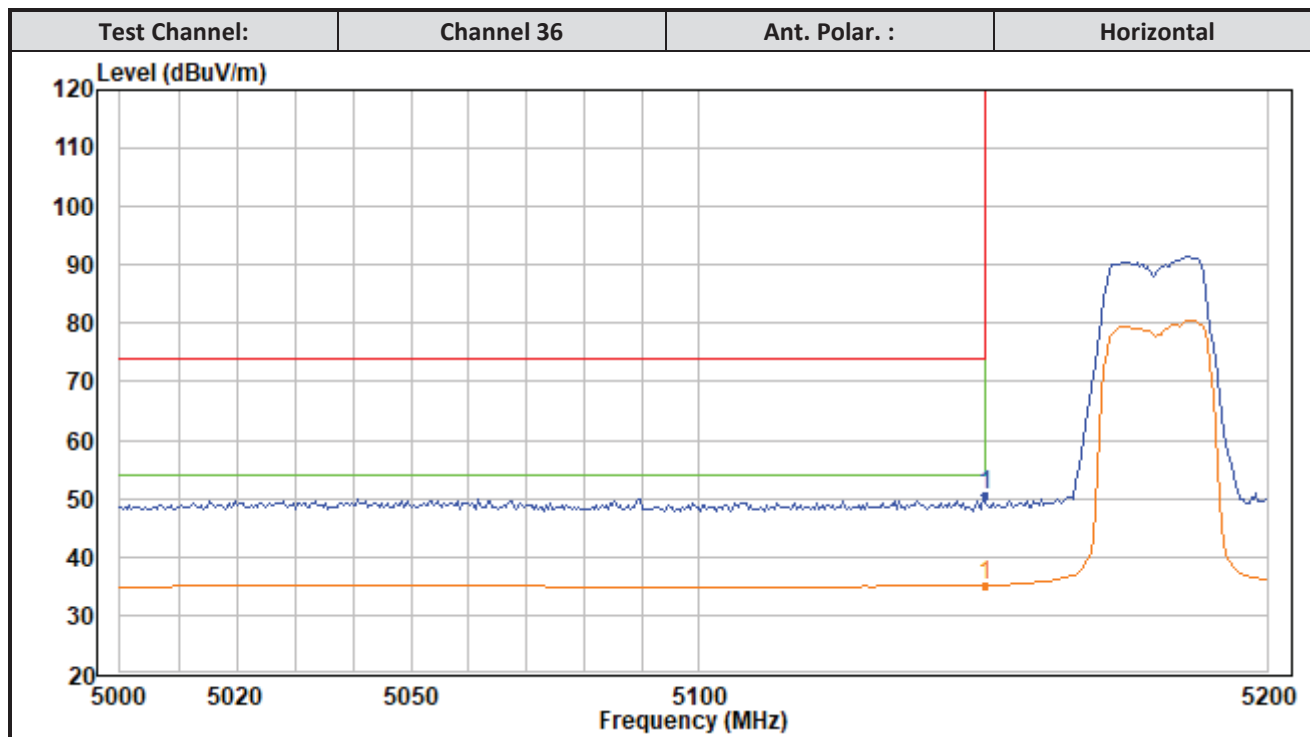

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)



IEEE 802.11n-HT20

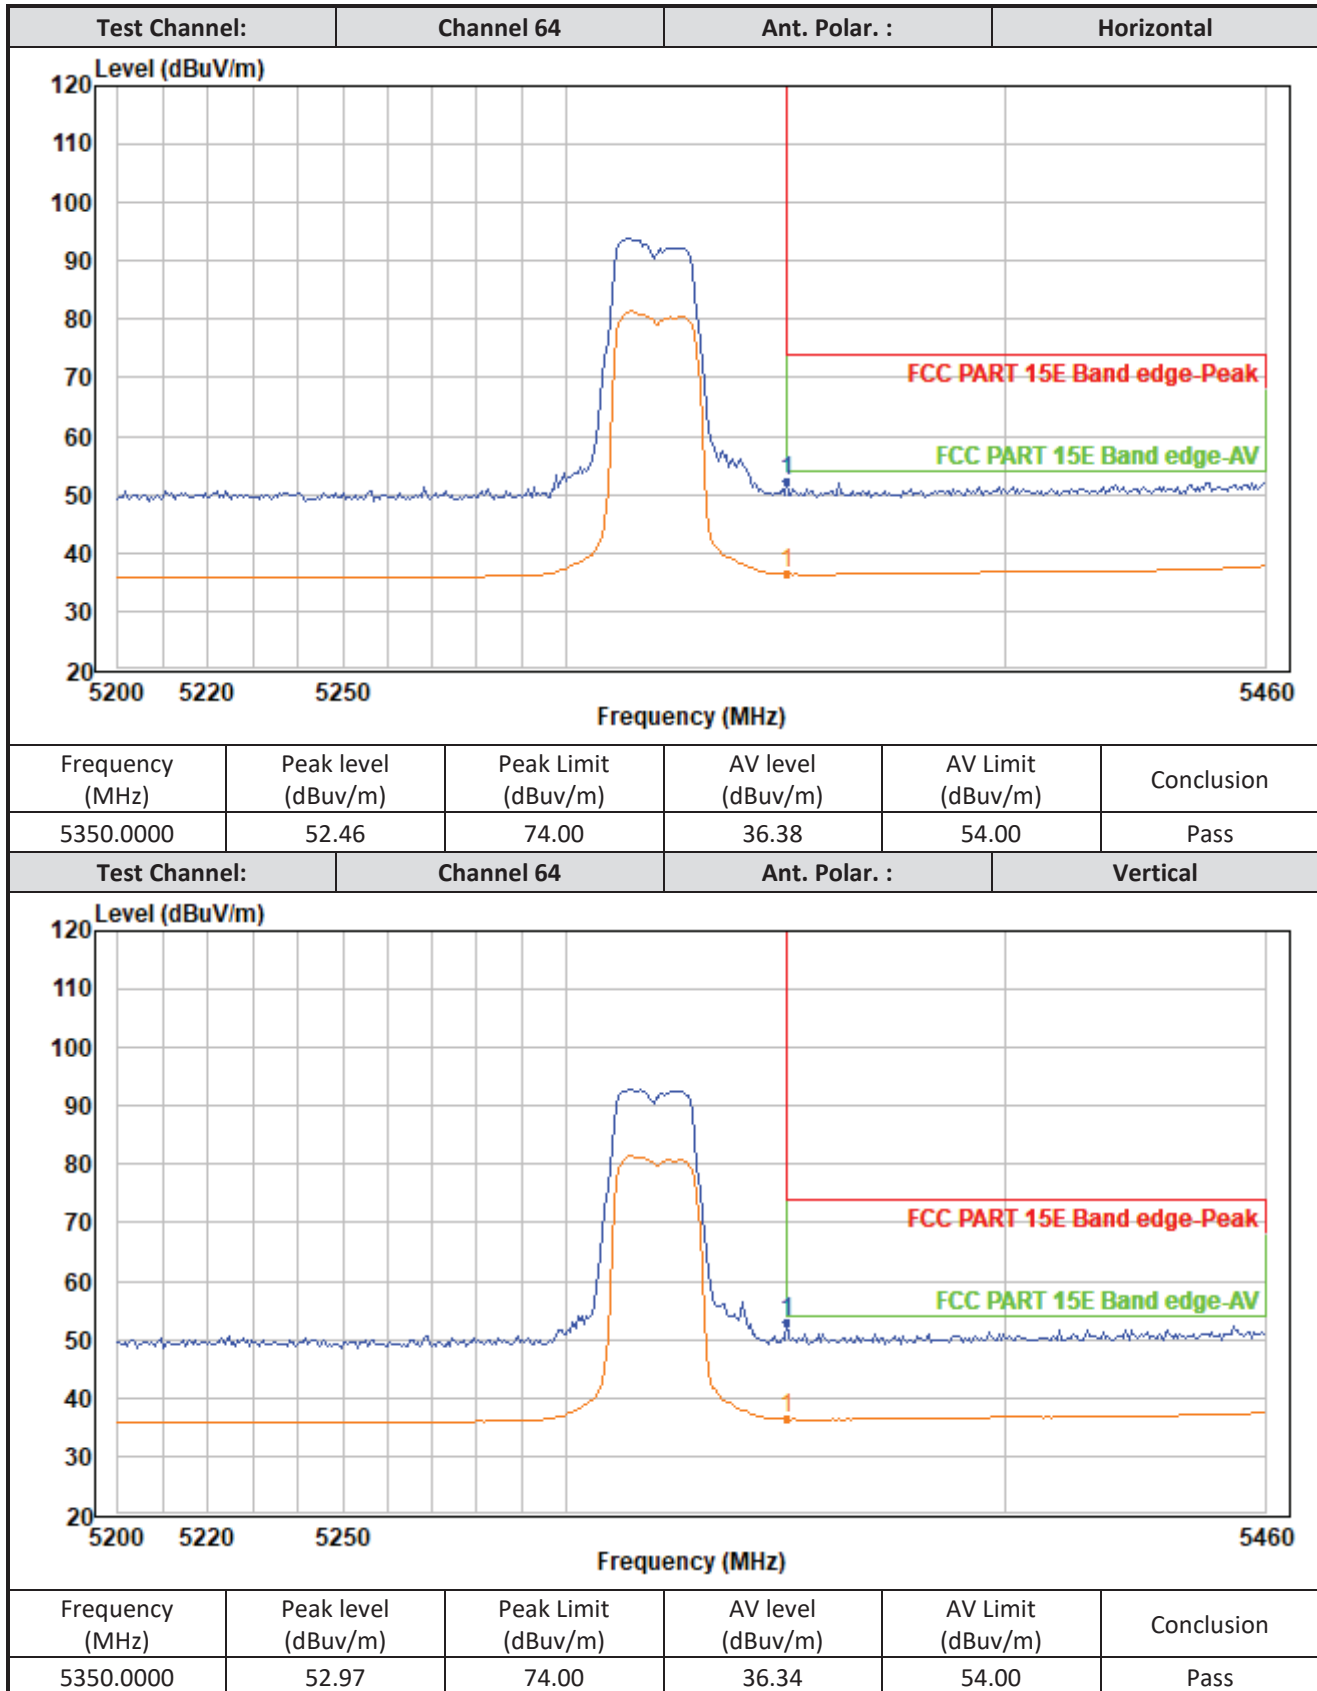

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)



IEEE 802.11n-HT20

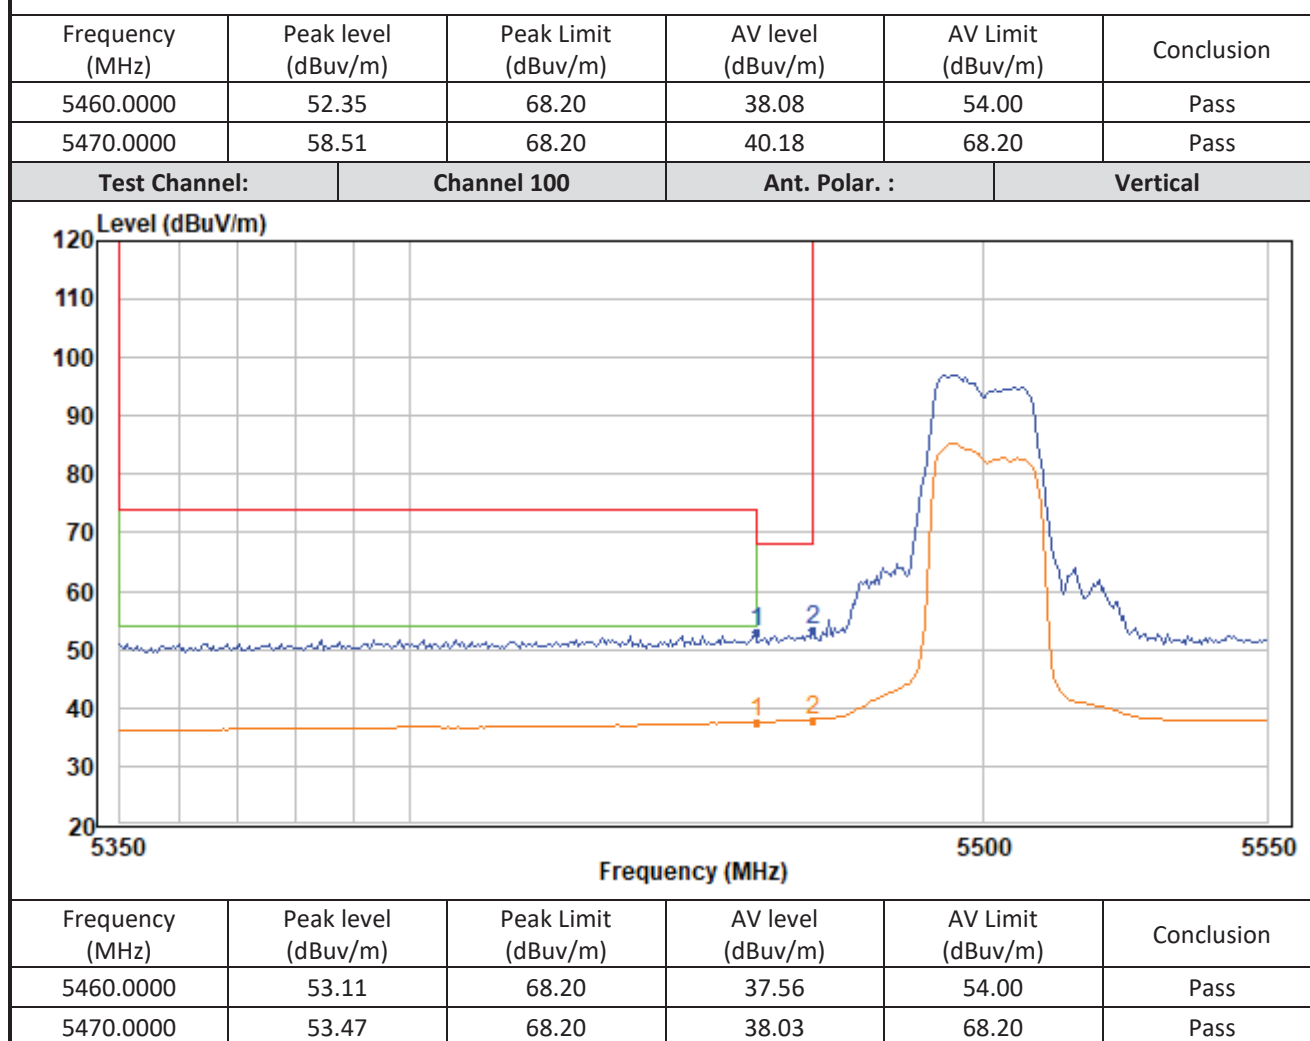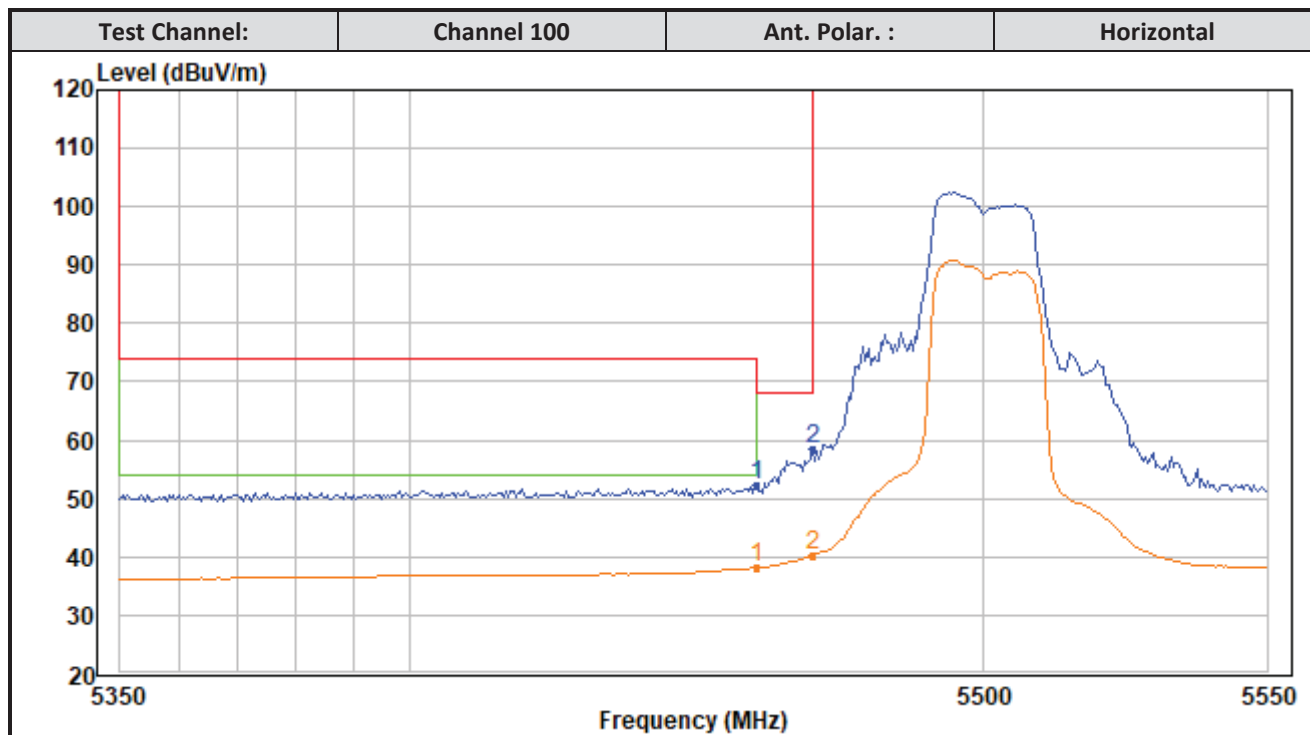

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11n-HT40

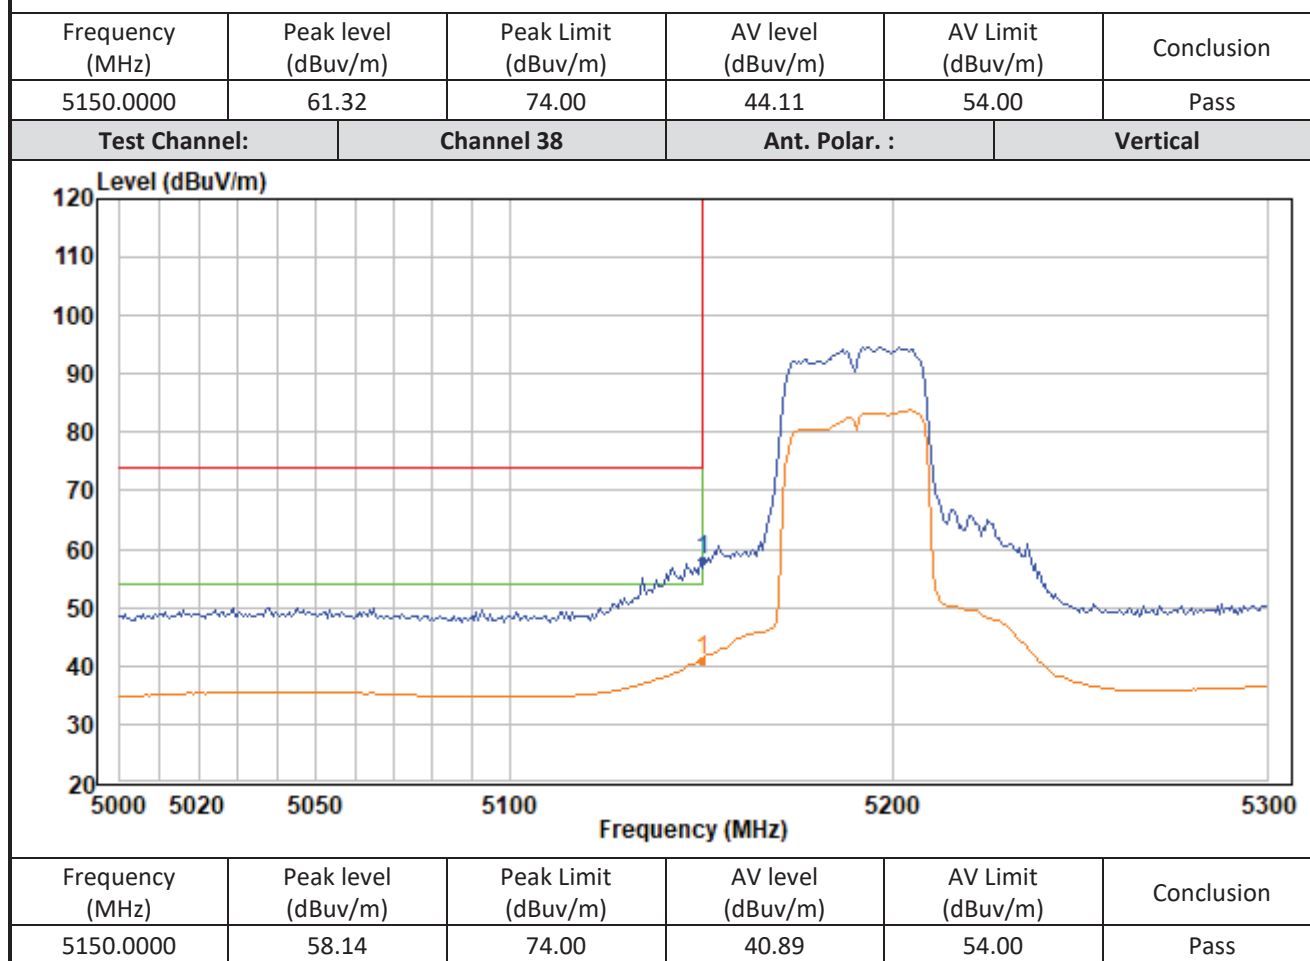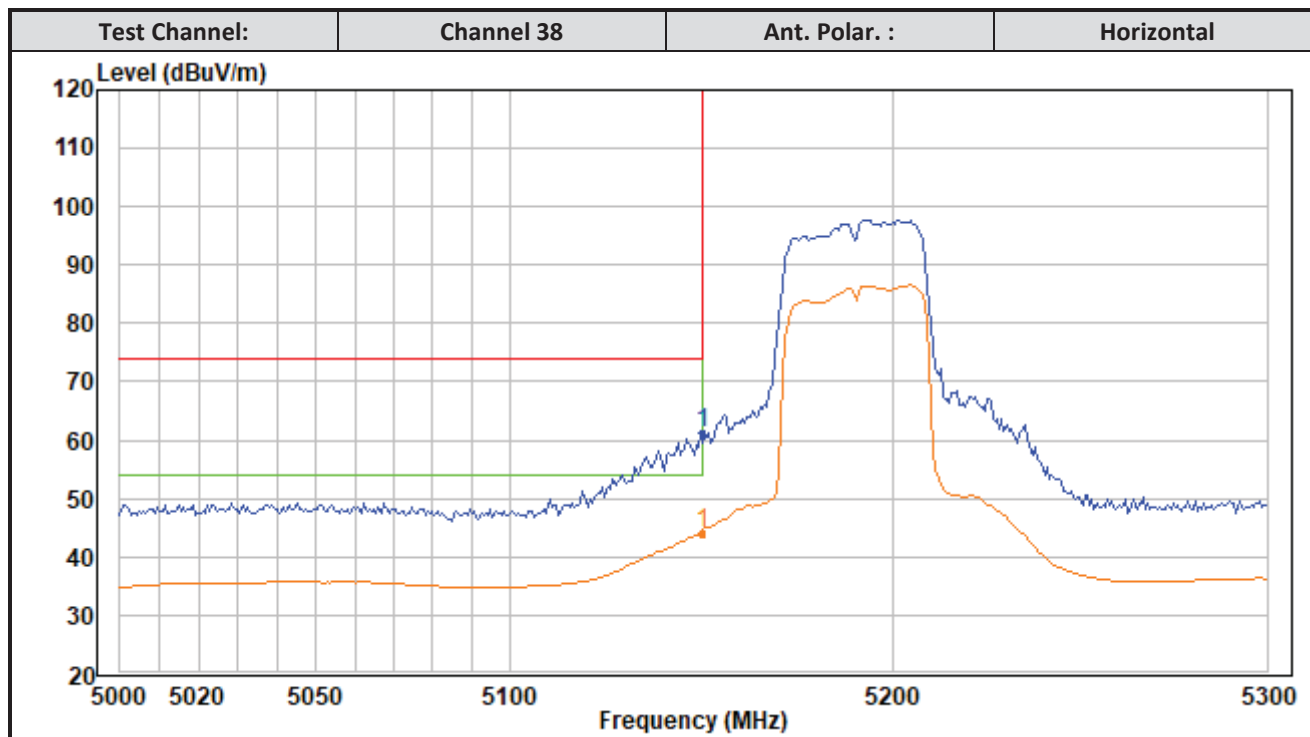

TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)


IEEE 802.11n-HT40

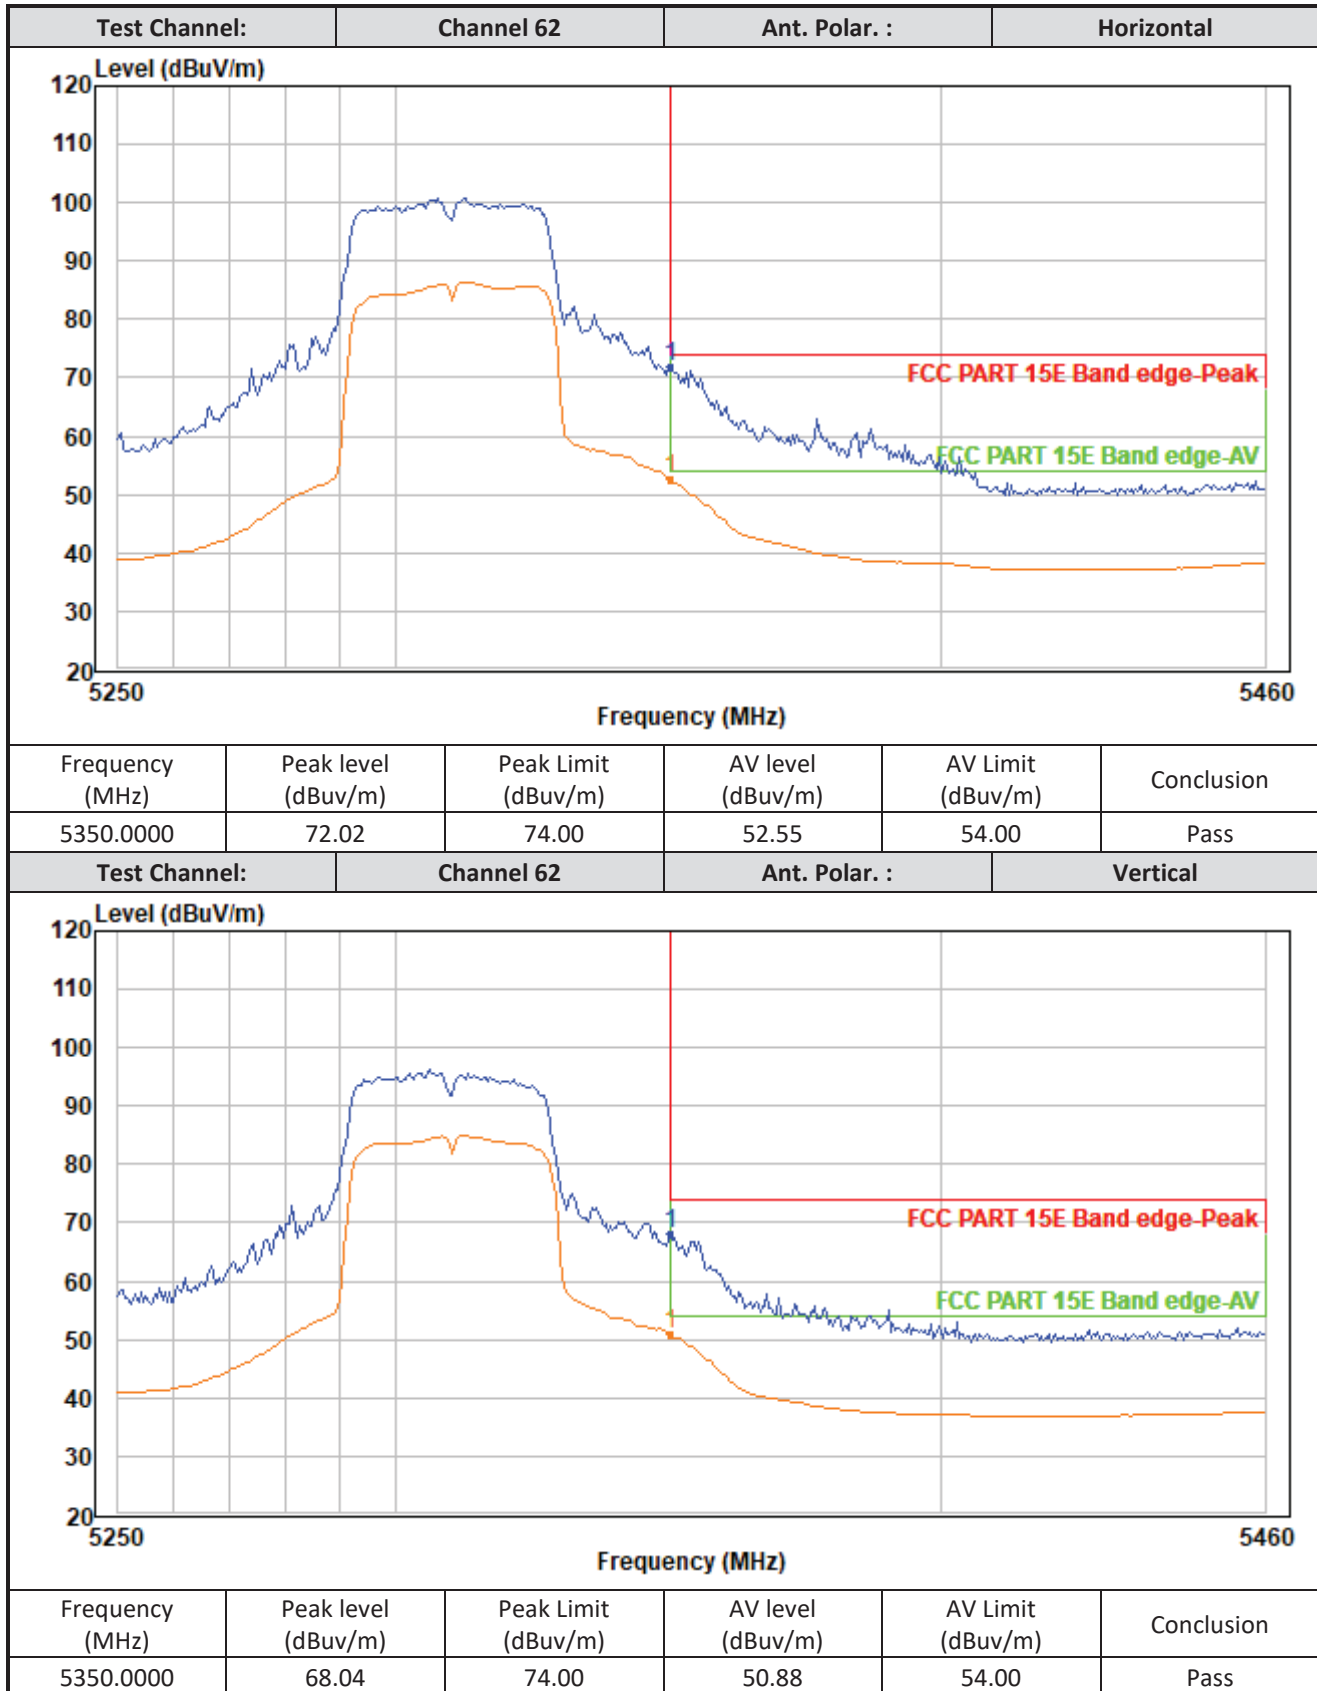


TEST REPORT

RADIATED EMISSION DATA (BAND EDGE MEASUREMENTS)

IEEE 802.11n-HT40

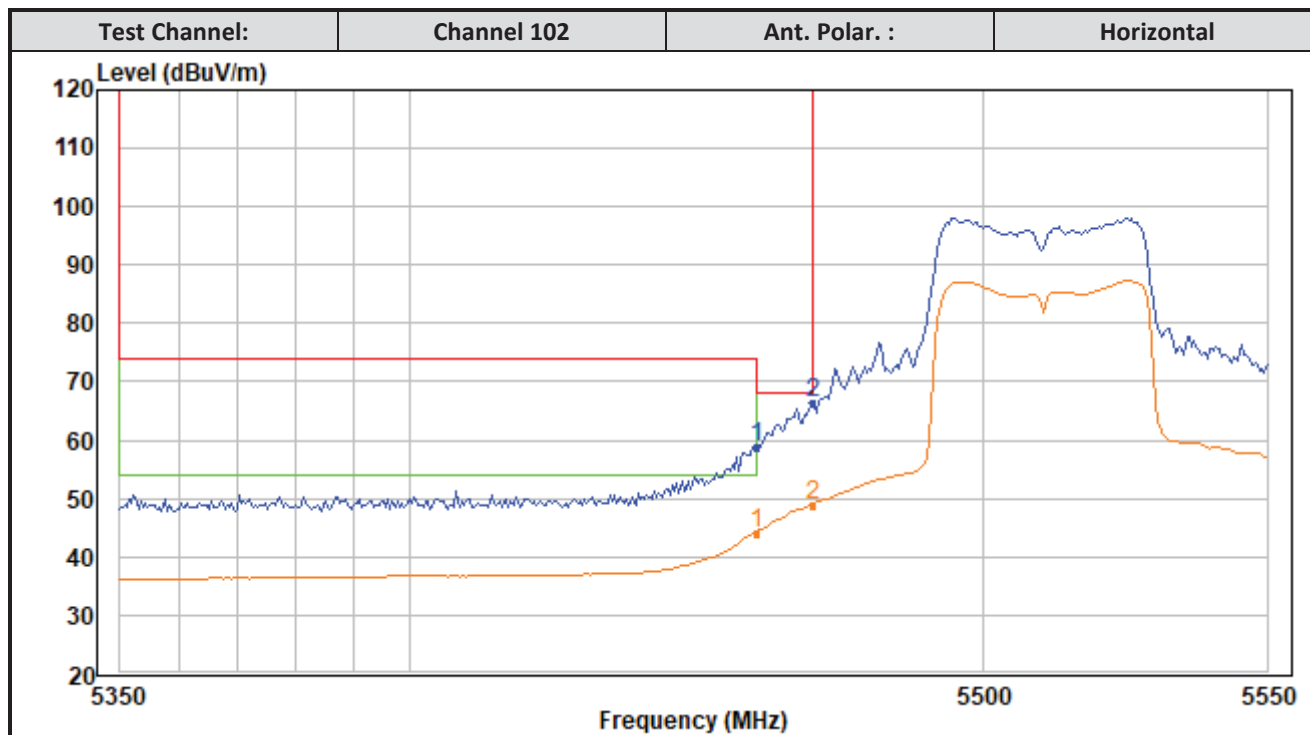

Test Channel:	Channel 102	Ant. Polar. :	Vertical
---------------	-------------	---------------	----------

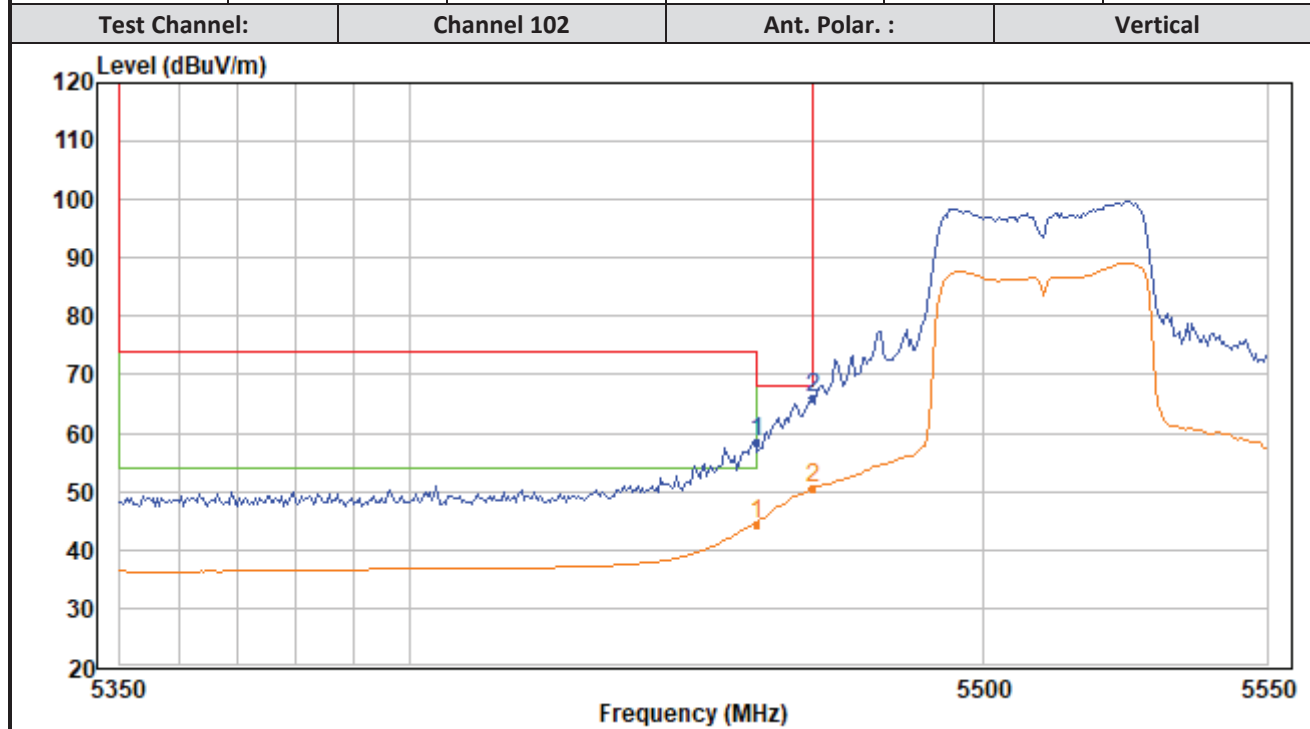

Test Channel:	Channel 102	Ant. Polar. :	Vertical
---------------	-------------	---------------	----------

TEST REPORT

RADIATED EMISSION DATA

Mode: 5GHz Wi-Fi and Bluetooth Operating (VTPL adaptor)

Polarization	Frequency (MHz)	Reading (dB μ V)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dB μ V/m)	Limit at 3m (dB μ V/m)	Margin (dB)
H	124.939	38.3	16	14.0	36.3	43.5	-7.2
V	165.921	41.2	16	17.0	42.2	43.5	-1.3
H	374.956	35.7	16	24.0	43.7	46.0	-2.3
V	625.095	32.9	16	29.0	45.9	46.0	-0.1
H	750.104	30.1	16	30.0	44.1	46.0	-1.9
H	875.113	27.7	16	32.0	43.7	46.0	-2.3

- Notes:
1. Quasi-Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 5. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

RADIATED EMISSION DATA

Mode: 5GHz Wi-Fi and Bluetooth Operating (Mass Power adaptor)

Polarization	Frequency (MHz)	Reading (dBμV)	Pre-amp (dB)	Antenna Factor (dB)	Net at 3m (dBμV/m)	Limit at 3m (dBμV/m)	Margin (dB)
H	180.108	37.6	16	20.0	41.6	43.5	-1.9
H	277.108	36.0	16	22.0	42.0	46.0	-4.0
H	374.956	37.1	16	24.0	45.1	46.0	-0.9
V	625.095	31.9	16	29.0	44.9	46.0	-1.1
H	750.104	29.7	16	30.0	43.7	46.0	-2.3
H	875.113	28.0	16	32.0	44.0	46.0	-2.0

- Notes:
1. Quasi-Peak detector is used for the emission measurement.
 2. All measurements were made at 3 meters.
 3. Negative value in the margin column shows emission below limit.
 4. Emissions within the restricted band meets the requirement of FCC Part 15 Section 15.205 / RSS-Gen Section 8.10.
 5. Measurement Uncertainty is ± 5.3 dB at a level of confidence of 95%.

TEST REPORT

3.7 AC Power Line Conducted Emission

- ☐ Not Applicable – EUT is only powered by battery for operation.
- ☒ EUT connects to AC power line. Emission Data is listed in following pages.
- ☐ Base Unit connects to AC power line and has transmission. Handset connects to AC power line but has no transmission. Emission Data of Base Unit is listed in following pages.

3.7.1 AC Power Line Conducted Emission Configuration Photograph

Worst Case Line-Conducted Configuration at 27.4425 MHz.


The worst case line conducted configuration photographs are attached in the Appendix and saved with filename: config photos.pdf.

3.7.2 AC Power Line Conducted Emission Data

The plot(s) and data in the following pages list the significant emission frequencies, the limit and the margin of compliance.

Passed by 2.21 dB margin compare with CISPR Average limit.

3.7.3 Conducted Emission Test Setup

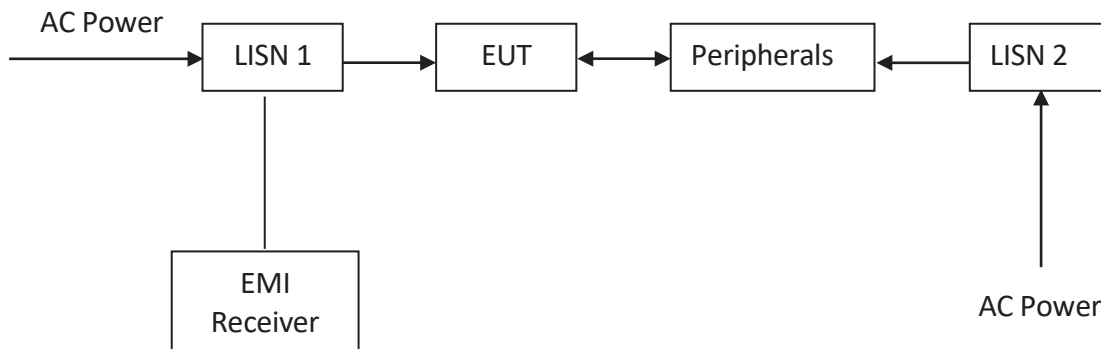


The EUT along with its peripherals were placed on a 1.0m(W)×1.5m(L) and 0.8m in height wooden table and the EUT was adjusted to maintain a 0.4 meter space from a vertical reference plane. The EUT was connected to power mains through a line impedance stabilization network (LISN), which provided 50 ohm coupling impedance for measuring instrument and the chassis ground was bounded to the horizontal ground plane of shielded room. The excess power cable between the EUT and the LISN was bundled.

All connecting cables of EUT and peripherals were moved to find the maximum emission.

TEST REPORT

CONDUCTED EMISSION

Model: D815WB
Date of Test: 10 January, 2025
Worst-Case Operating Mode: 5GHz Wi-Fi and Bluetooth Operating (VTPL adaptor)

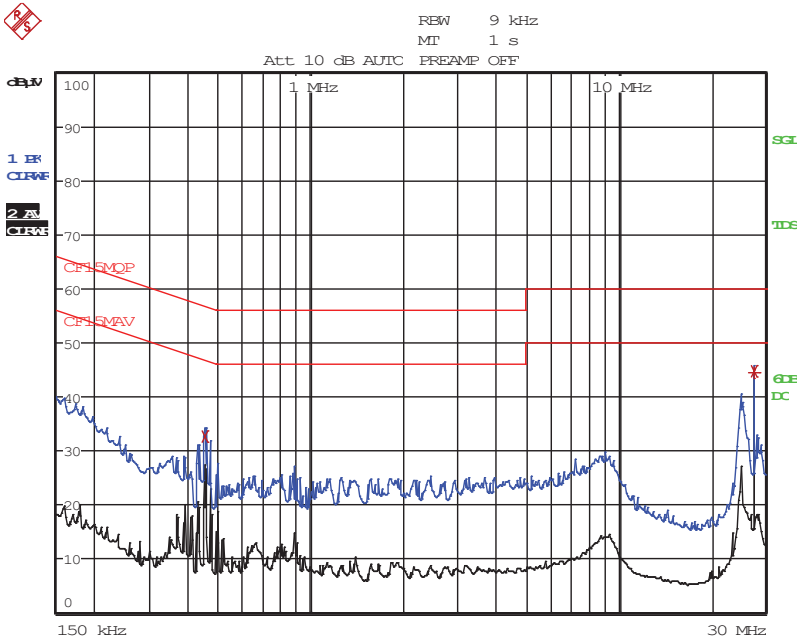


EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MQP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA	LIMIT dB
2 CISPR Average	451.5 kHz	32.59 N	-14.25	
1 Quasi Peak	27.4425 MHz	44.51 L1	-15.48	
2 CISPR Average	27.4425 MHz	44.75 L1	-5.24	

Note: Measurement Uncertainty is ±4.2dB at a level of confidence of 95%.

TEST REPORT

CONDUCTED EMISSION

Model: D815WB
Date of Test: 10 January, 2025
Worst-Case Operating Mode: 5GHz Wi-Fi and Bluetooth Operating (Mass Power adaptor)

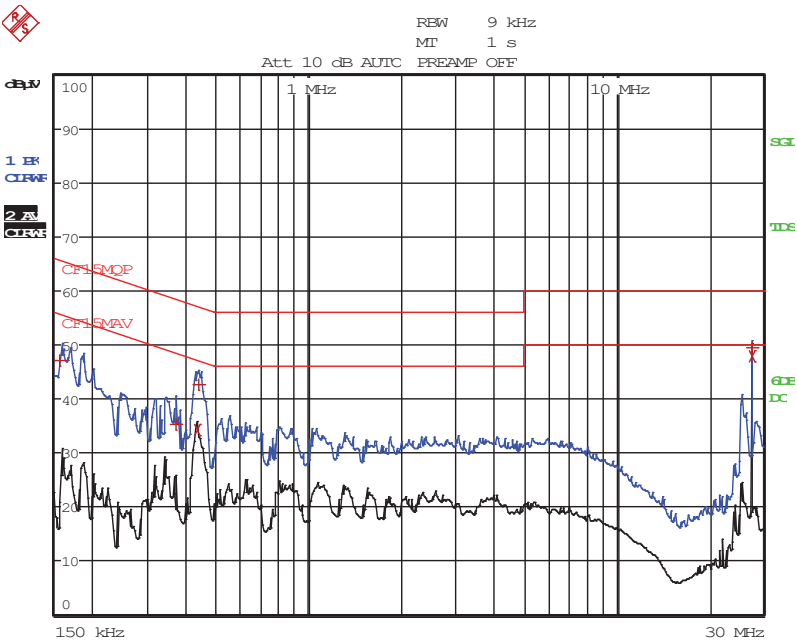

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF15MOP			
Trace2:	CF15MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dBμV	DELTA LIMIT dB	
1 Quasi Peak	159 kHz	47.12 L1	-18.38	
1 Quasi Peak	370.5 kHz	35.40 L1	-23.08	
2 CISPR Average	433.5 kHz	34.35 L1	-12.82	
1 Quasi Peak	438 kHz	42.61 L1	-14.48	
1 Quasi Peak	27.4425 MHz	49.59 N	-10.40	
2 CISPR Average	27.4425 MHz	47.78 N	-2.21	

Note: Measurement Uncertainty is ±4.2dB at a level of confidence of 95%.

TEST REPORT

3.8 Frequency Stability Requirement

Frequency (MHz)	Mode	Measured Value (ppm) (0°C)	Measured Value (ppm) (10°C)	Measured Value (ppm) (20°C)	Measured Value (ppm) (30°C)	Measured Value (ppm) (40°C)	Measured Value (ppm) (50°C)
5180	A	0.804	0.952	4.054	4.102	3.840	3.700
5745		0.725	0.854	4.090	4.894	3.842	4.418

Temperature (°C)	Frequency (MHz)	Mode	Measured Value (ppm) 120VAC	Measured Value (ppm) 132VAC	Measured Value (ppm) 108VAC
25	5180	A	4.054	4.601	3.893
25	5745		4.09	3.568	4.496

The Maximum value is +4.894 ppm.

It is proved that the frequency stability such that an emission is maintained within the band of operation under all condition.

3.9 U-NII-1 99% Bandwidth Requirement

For the case if a channel operating in U-NII-1 band has a 26-dB bandwidth that straddles into U-NII-2A band but its 99% occupied power bandwidth does not. For this rare case, DFS requirement does not apply.

The plots of U-NII-1 99% bandwidth is saved with filename:
DATA.pdf proved that no further test for DFS.

TEST REPORT

3.10 Dynamic Frequency Selection (DFS)

According to standard 905462 DO2 UNII DFS Compliance Procedures New Rules v02 Section 5.1.1 and 5.1.2.

3.10.1 Master Devices

- a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 - 5350 MHz and 5470- 5725 MHz bands. DFS is not required in the 5150 - 5250 MHz or 5725 - 5825 MHz bands.
- b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

3.10.2 Client Devices

- a) A Client Device will not transmit before having received appropriate control signals from a Master Device.
- b) A Client Device will stop all its transmissions whenever instructed by a Master Device to which it is associated and will meet the Channel Move Time and Channel Closing Transmission Time requirements. The Client Device will not resume any transmissions until it has again received control signals from a Master Device.
- c) If a Client Device is performing In-Service Monitoring and detects a Radar Waveform above the DFS Detection Threshold, it will inform the Master Device. This is equivalent to the Master Device detecting the Radar Waveform and d) through f) of section 5.1.1 apply.
- d) Irrespective of Client Device or Master Device detection the Channel Move Time and Channel Closing Transmission Time requirements remain the same.
- e) The client test frequency must be monitored to ensure no transmission of any type has occurred for 30 minutes. Note: If the client moves with the master, the device is considered compliant if nothing appears in the client non-occupancy period test. For devices that shut down (rather than moving channels), no beacons should appear.

TEST REPORT

Applicability of DFS Requirement During Normal Operation

Requirement	Operational Mode	
	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>DFS Detection Threshold</i>	Yes	Not required
<i>Channel Closing Transmission Time</i>	Yes	Yes
<i>Channel Move Time</i>	Yes	Yes
<i>U-NII Detection Bandwidth</i>	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
<i>U-NII Detection Bandwidth and Statistical Performance Check</i>	All BW modes must be tested	Not required
<i>Channel Move Time and Channel Closing Transmission Time</i>	Test using widest BW mode available	Test using the widest BW mode available for the link
<i>All other tests</i>	Any single BW mode	Not required
Note: Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.		

The operational behavior and individual DFS requirements that are associated with these modes are as follows:

TEST REPORT

Response Requirements

Parameter	Value
<i>Non-occupancy period</i>	Minimum 30 minutes
<i>Channel Availability Check Time</i>	60 seconds
<i>Channel Move Time</i>	10 seconds See Note 1.
<i>Channel Closing Transmission Time</i>	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
<i>U-NII Detection Bandwidth</i>	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: <i>Channel Move Time</i> and the <i>Channel Closing Transmission Time</i> should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The <i>Channel Closing Transmission Time</i> is comprised of 200 milliseconds starting at the beginning of the <i>Channel Move Time</i> plus any additional intermittent control signals required to facilitate a <i>Channel</i> move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the <i>U-NII Detection Bandwidth</i> detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

TEST REPORT

3.11 Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right), \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					


TEST REPORT

3.12 Calibration Setup and DFS Test Results

3.12.1 Calibration Procedure of Radar Waveform:

The Interference Radar Detection Threshold Level is $-62\text{dBm} + 0\text{dBi} + 1\text{ dB} = -61\text{dBm}$ that had been taken into account the output power range and antenna gain. The following equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for radar type 0. During this process there were no transmissions by either the Master or client device. The Spectrum analyzer was switched was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 1MHz or 3MHz respectively to measure the type 0 radar waveform. The spectrum analyzer had offset to compensate and RF cable loss. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm. Capture the spectrum analyzer plots on short pulse radar waveform.

3.12.2 Conducted Setup

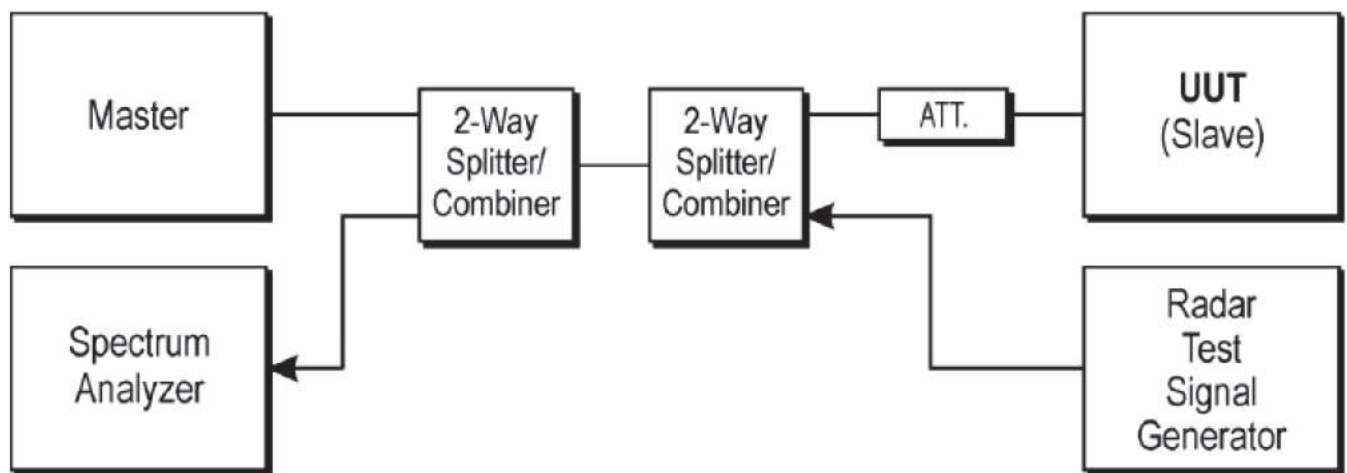

3.12.3 Radar Waveform Calibration Result

The results are saved in DFS Test Data.pdf.

3.12.4 Test Deviation


There is no deviation with the original standard.

TEST REPORT

3.13.1 Test Procedures

1. The radar pulse generator is setup to provide a pulse at frequency that the Master and Client are operating. A type 0 radar pulse with a 1us pulse width and a 1428 us PRI is used for the testing.
2. The vector signal generator is adjusted to provide the radar burst (18 pules) at a level approximately -62dBm at the antenna of the Master device.
3. An external trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
4. A U-NII device operating as a Client Device (EUT) will associate with the Master at same channel. The MEPEG file "TestFile.mpg" specified by the FCC is streamed from the "file computer" through the master to the client device (EUT).
5. When a radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the operating Channel of the U-NII device. At time T0 the Radar Waveform generator sends a Burst of pulse of the radar waveform at Detection Threshold +1dB.
6. Observe the transmission of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time. One 20seconds plot is reported for the short pulse Radar Type 0. The plot for the short pulse radar types start at the end if the radar burst.
7. Measurement of the aggregate duration of the Channel Closing Transmission Time method:
Center Frequency: operating frequency
Span: Zero
RBW: 1MHz
VBW: 3MHz
Sweep Time: 32Sec
Detector: Max Peak
Sweep: Single.
8. Measure the EUT for more than 30mintes following the Channel move time to verify the no transmission or beacons occur on this Channel.

3.13.2 Test Setup

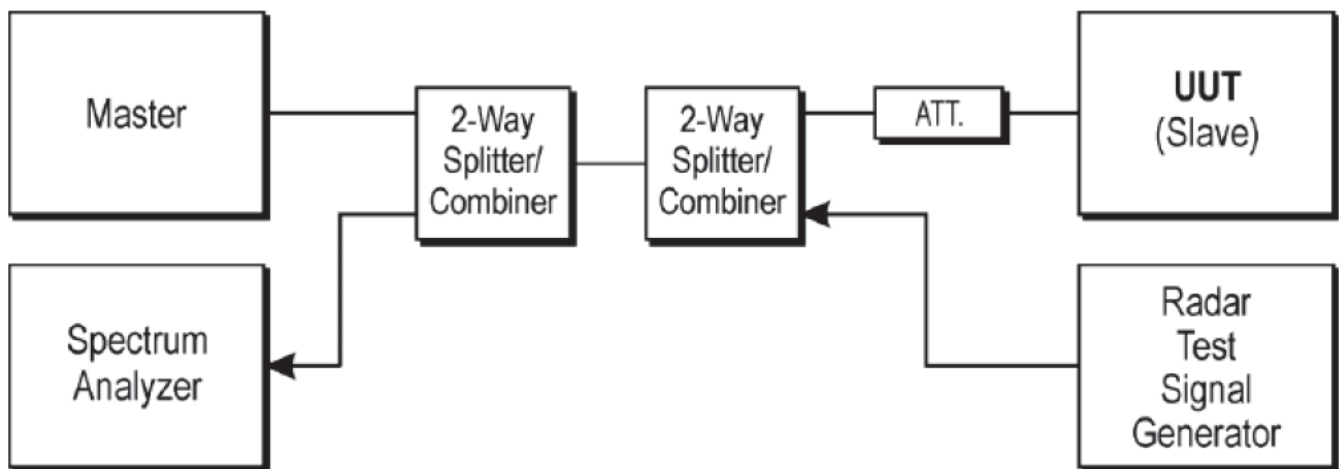

3.13.3 Test Deviation

There is no deviation with the original standard.

TEST REPORT

3.13.4 Test Result

The results are saved in DFS Test Data.pdf.

TEST REPORT

EQUIPMENT LIST

1) Radiated Emissions Test

Radiated Emission Test - 3M Chamber						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	3m Chamber & Accessory Equipment	ETS-Lindgren	3m	Euroshiedpn-CT001270-1317	11-Nov-2023	10-Nov-2026
☒	Broadband Antenna	ETS-Lindgren	3142E	00201566	30-Oct-2023	29-Oct-2024
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	30-Oct-2023	29-Oct-2024
☒	Pre-amplifier	HP	8447F	2805A02960	31-Oct-2023	30-Oct-2024
☒	Receiver	ROHDE & SCHWARZ	ESIB26	100114	27-Oct-2023	26-Oct-2024
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier) 高频	ETS-LINDGREN	3117-PA	00201541	16- Apr-2023	15- Apr-2025
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	31-Oct-2023	30-Oct-2024
☒	Multi device Controller	ETS-Lindgren	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

Equipment	EMI Test Receiver (9kHz to 26.5GHz)	Biconical Antenna (30MHz to 300MHz)	Log Periodic Antenna
Registration No.	EW-3156	EW-3242	EW-3243
Manufacturer	ROHDESCHWARZ	EMCO	EMCO
Model No.	ESR26	3110C	3148B
Calibration Date	January 31, 2024	July 30, 2024	July 30, 2024
Calibration Due Date	May 01, 2025	July 30, 2026	July 30, 2026

Equipment	Double Ridged Guide Antenna (1GHz - 18GHz)	Active Loop Antenna (H-field) (9kHz to 30MHz)	RF Preamplifier (9kHz to 6000MHz)
Registration No.	EW-0194	EW-3326	EW-3006b
Manufacturer	EMCO	EMCO	SCHWARZBECK
Model No.	3115	6502	BBV9718
Calibration Date	May 10, 2023	January 05, 2024	October 20, 2023
Calibration Due Date	May 10, 2025	July 05, 2025	April 20, 2025

TEST REPORT

5.0 EQUIPMENT LIST (CONT'D)

Equipment	5GHz Notch Filter	14m Double Shield RF Cable (9kHz - 6GHz)	RF Cable 14m (1GHz to 26.5GHz)
Registration No.	EW-3437	EW-2376	EW-2781
Manufacturer	MICROWAVE	RADIALL	GREATBILLION
Model No.	N1255031	n m/br56/bnc m 14m	SMA m/SHF5MPU /SMA m ra14m,26G
Calibration Date	December 25, 2024	October 09, 2024	January 16, 2024
Calibration Due Date	December 25, 2025	October 09, 2025	April 16, 2025

Equipment	12 metre RF Cable (1-40)GHz	Pyramidal Horn Antenna
Registration No.	EW-2774	EW-0905
Manufacturer	GREATBILLION	EMCO
Model No.	SMA m-m ra 12m 40G outdoor	3160-09
Calibration Date	January 16, 2024	December 15, 2023
Calibration Due Date	April 16, 2025	June 15, 2025

2) Conducted Emissions Test

Conducted Emission Test						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	LISN	R&S	ESH2-Z5	860014/024	27-Oct-2023	26-Oct-2024
☒	LISN	ETS-Lindgren	3816/2SH	00201088	27-Oct-2023	26-Oct-2024
☒	ISN	Schwarzbeck	NTFM 8158	NTFM 8158#113	27-Oct-2023	26-Oct-2024
☒	Receiver	R&S	ESR7	101181	27-Oct-2023	26-Oct-2024
☒	Pulse Limiter	R&S	ESH3-Z2	0357.8810.54	27-Oct-2023	26-Oct-2024
☒	Shielding room	ETS-Lindgren	843	Euroshiedpn-CT001270-1246	5-Nov-2021	4-Nov-2024
☒	Test Software	EZ-EMC	EZ-CON	Software Version: EMC-CON 3A1.1		

Equipment	RF Cable 240cm (RG142) (9kHz to 30MHz)	Artificial Mains Network	EMI Test Receiver (9kHz to 3GHz)
Registration No.	EW-2454	EW-3360	EW-3095
Manufacturer	RADIALL	ROHDESCHWARZ	ROHDESCHWARZ
Model No.	Bnc m st / 142 / bnc mra 240cm	ENV-216	ESCI
Calibration Date	June 20, 2024	April 07, 2024	January 18, 2024
Calibration Due Date	June 20, 2025	April 07, 2025	April 18, 2025

TEST REPORT

5.0 EQUIPMENT LIST (CONT'D)

3) Control Software for Radiated Emission

Software Information	
Software Name	EMC32
Manufacturer	ROHDESCHWARZ
Software version	10.50.40

4) RF test

RF test						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	2023-04-14	2024-04-13
☒	USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY55430035	2023-10-27	2024-10-26
☒	EXG-B RF Analog Signal Generator	KEYSIGHT	N5171B	MY53051777	2023-10-27	2024-10-26
☒	MXG X-Series RF Vector Signal Generator	KEYSIGHT	N5182B	MY51350267	2023-10-27	2024-10-26
☒	Temp & Humidity chamber	Votisch	VT4002	58566133290020	2023-04-14	2024-04-13

END OF TEST REPORT