



Intertek Testing Services

ETL SEMKO

Report No.: 0001391

Mode : Charging

Tested By: Hong, Report No.: 0001391


Scan Settings (1 Range)

Frequencies				Receiver Settings			
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF 60dB

Final Measurement: x QP

Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

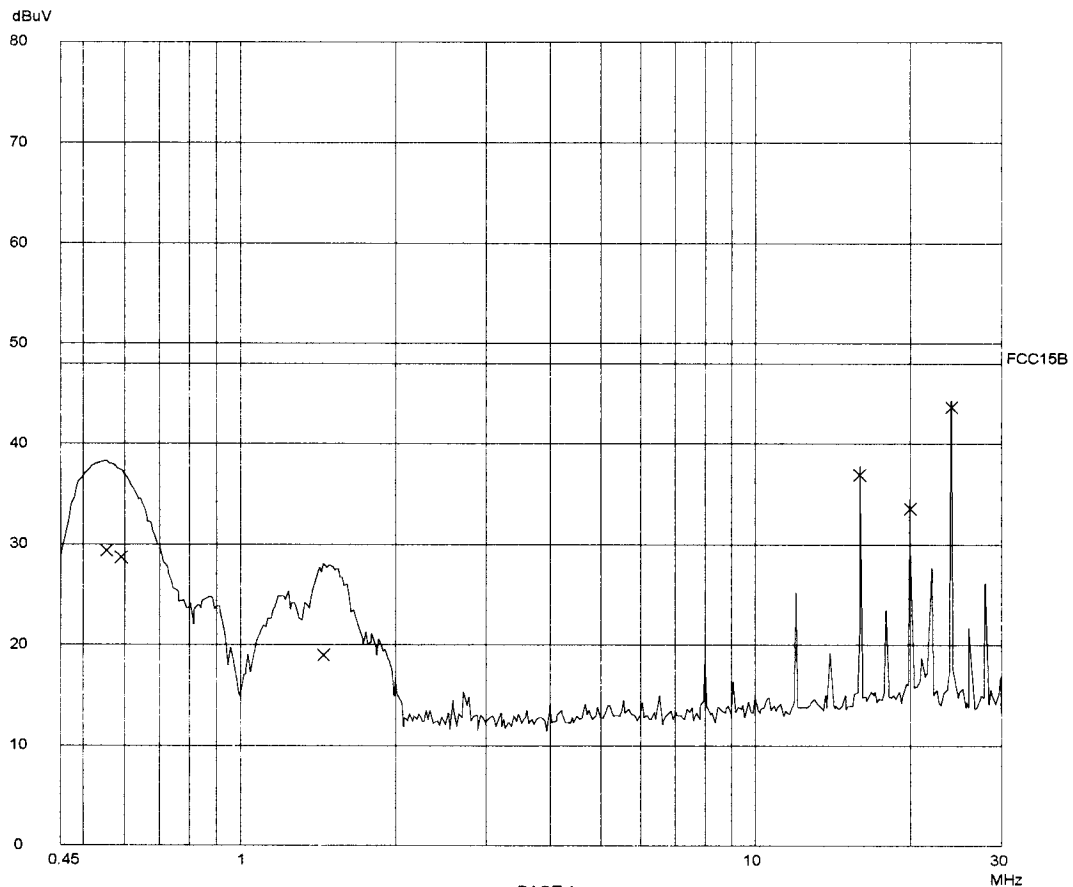

PAGE 1

Ctrl No.: N/A



Intertek Testing Services

ETL SEMKO

Report No.: 0001391

Mode: Charging

Tested By: Hong, Report No.: 0001391

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.55500	29.4	48.0
0.59000	28.6	48.0
1.45000	18.9	48.0
15.99500	36.9	48.0
19.99500	33.5	48.0
23.99500	43.6	48.0

* limit exceeded

Ctrl No.: N/A



Intertek Testing Services

ETL SEMKO

Report No.: 0001391

Mode: Standby

Tested By: Hong, Report No.: 0001391

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN	OFF 60dB

Final Measurement: x QP


Meas Time: 1 s

Subranges: 16

Acc Margin: 20dB

Transducer No. Start Stop Name

21 9k 30M EW0698

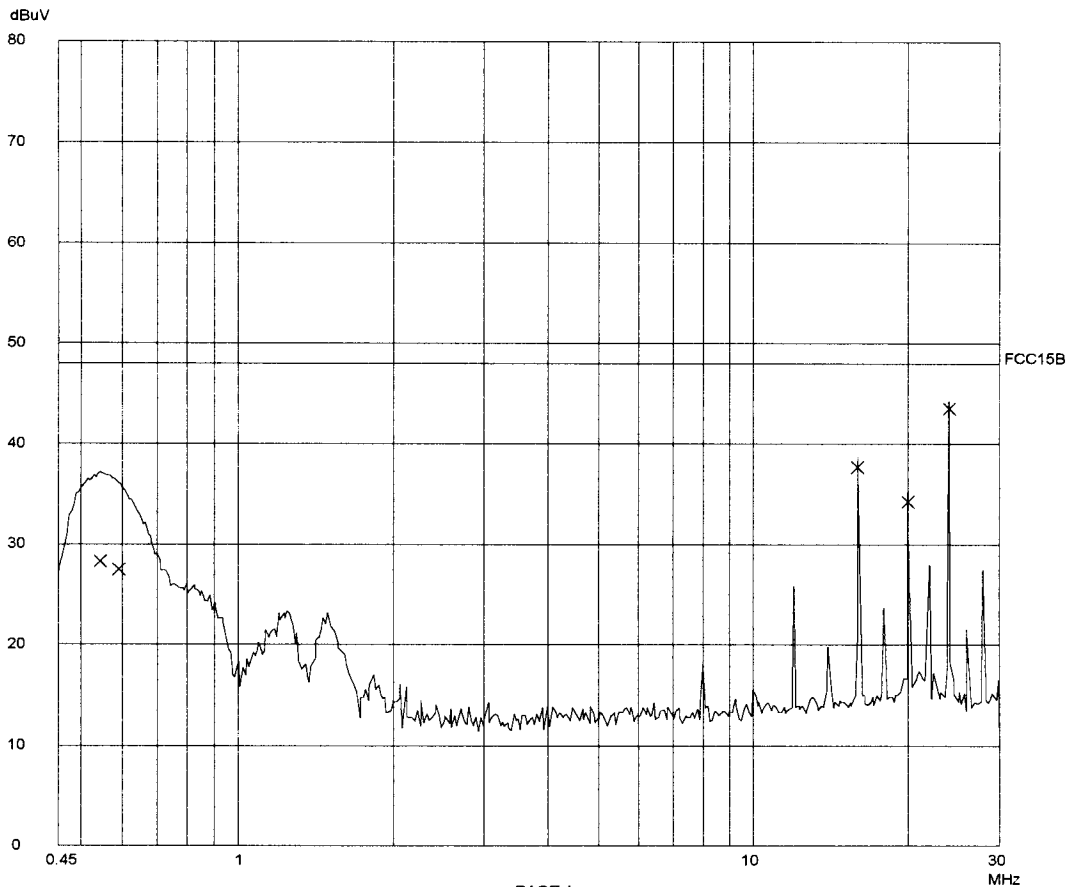

Ctrl No.: N/A



Intertek Testing Services

ETL SEMKO

Report No.: 0001391

Mode: Standby

Tested By: Hong, Report No.: 0001391

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.54500	28.2	48.0
0.59000	27.4	48.0
15.99500	37.6	48.0
19.99500	34.2	48.0
23.99500	43.5	48.0

* limit exceeded

Ctrl No.: N/A



Intertek Testing Services

ETL SEMKO

Report No.: 0001391

Mode: Transmission


Tested By: Hong, Report No.: 0001391

Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement: x QP
Meas Time: 1 s
Subranges: 16
Acc Margin: 20dB

Transducer No.	Start	Stop	Name
21	9k	30M	EW0698

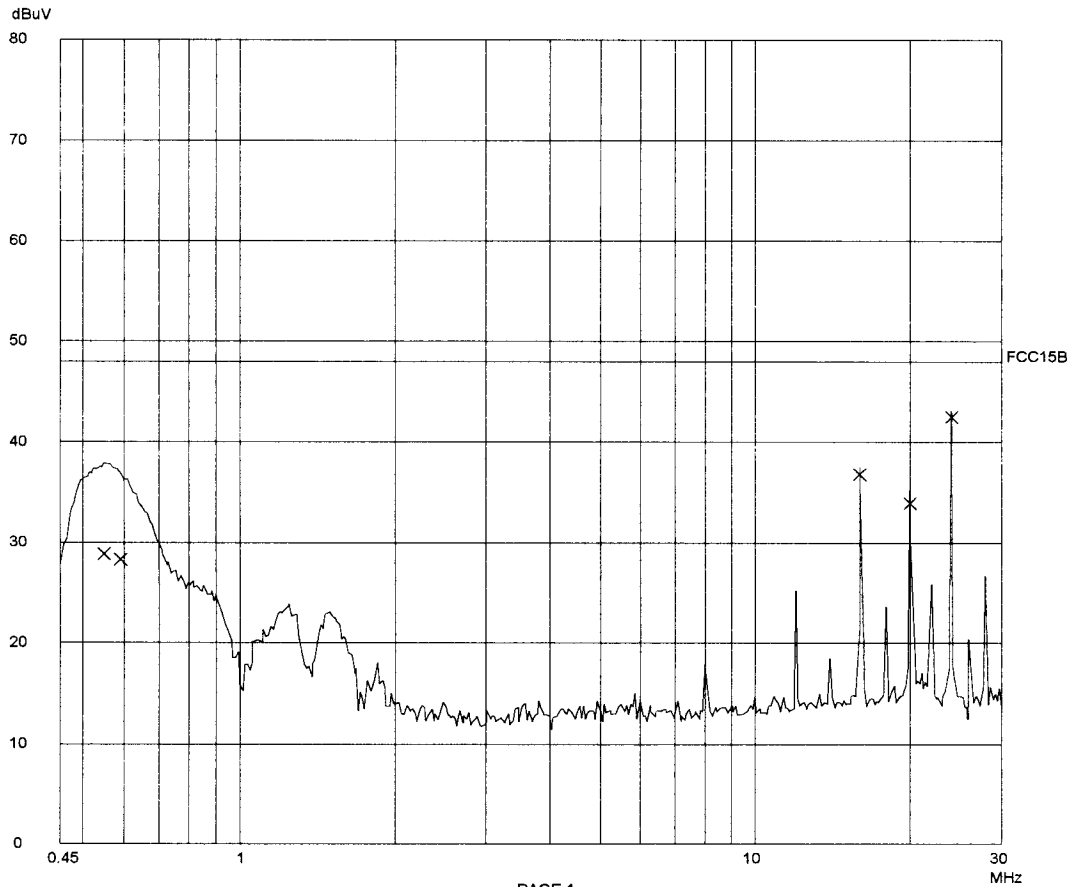

Ctrl No.: N/A



Intertek Testing Services

ETL SEMKO

Report No.: 0001391

Mode: *Transmission*

Tested By: Hong, Report No.: 0001391

Scan Settings (1 Range)

|----- Frequencies -----||----- Receiver Settings -----|

Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
450k	30M	5k	10k	PK	20ms	AUTO	LN OFF	60dB

Final Measurement Results:

Frequency	QP Level	QP Limit
MHz	dBuV	dBuV

0.55000	28.8	48.0
0.59000	28.2	48.0
15.99500	36.7	48.0
19.99500	33.8	48.0
23.99500	42.5	48.0

* limit exceeded

Ctrl No.: N/A