



REGULATORY COMPLIANCE TEST REPORT

FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247

Report No.: ITRO67-U8 Rev A

Company: Itron, Inc.

Model Name: ERG-5600-008



REGULATORY COMPLIANCE TEST REPORT

Company Name: Itron, Inc.

Model Name: ERG-5600-008

To: FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247

Test Report Serial No.: ITRO67-U8 Rev A

This report supersedes: NONE

Applicant: Itron, Inc.
2401 North State St.
Waseca,
Minnesota 56093
United States of America

Issue Date: 18th July 2024

This Test Report is Issued Under the Authority of:

MiCOM Labs, Inc.
575 Boulder Court
Pleasanton California 94566
USA
Phone: +1 (925) 462-0304
Fax: +1 (925) 462-0306
www.micomlabs.com



MiCOM Labs is an ISO 17025 Accredited Testing Laboratory

Table of Contents

1. ACCREDITATION, LISTINGS & RECOGNITION	4
1.1. TESTING ACCREDITATION	4
1.2. RECOGNITION	5
1.3. PRODUCT CERTIFICATION	6
2. DOCUMENT HISTORY	7
3. TEST RESULT CERTIFICATE	8
4. REFERENCES AND MEASUREMENT UNCERTAINTY	9
4.1. Normative References	9
4.2. Test and Uncertainty Procedure	10
5. PRODUCT DETAILS AND TEST CONFIGURATIONS	11
5.1. Technical Details	11
5.2. Scope Of Test Program	12
5.3. Equipment Model(s) and Serial Number(s)	13
5.4. Antenna Details	13
5.5. Cabling and I/O Ports	13
5.6. Test Configurations	14
5.7. Equipment Modifications	14
5.8. Deviations from the Test Standard	14
6. TEST SUMMARY	15
7. TEST EQUIPMENT CONFIGURATION(S)	16
7.1. Radiated	16
7.2. Conducted Test Setup	19
8. MEASUREMENT AND PRESENTATION OF TEST DATA	21
9. TEST RESULTS	22
9.1. 20 dB & 99% Bandwidth	22
9.2. Frequency Hopping Tests	27
9.2.1. <i>Number of Hopping Channels</i>	28
9.2.2. <i>Channel Separation</i>	32
9.3. Output Power	36
9.4. Emissions	42
9.4.1. <i>Conducted Emissions</i>	42
9.4.1.1. Conducted Unwanted Spurious Emissions	43
9.4.1.2. Conducted Band-Edge Emissions	47
9.4.2. <i>Radiated Emissions</i>	63
9.4.2.3. TX Spurious & Restricted Band Emissions 30MHz to 1GHz	65
9.4.2.3.1. <i>GFSK</i>	65
9.4.2.3.2. <i>OOK Power Level 3</i>	71
9.4.2.4. TX Spurious & Restricted Band Emissions 1GHz to 18GHz	77
9.4.2.4.1. <i>GFSK</i>	77
9.4.2.4.2. <i>OOK Power Level 3</i>	83
10. Manufacturer Dwell & Channel Occupancy Declaration	87
11. Manufacturer Declaration of Similarity	88
A. APPENDIX - GRAPHICAL IMAGES	89
A.1. 20 dB & 99% Bandwidth	90
A.2. Frequency Hopping Tests	102
A.2.1. <i>Number of Hopping Channels</i>	102
A.2.2. <i>Channel Separation</i>	114
A.3. Emissions	118
A.3.1. <i>Conducted Emissions</i>	118
A.3.1.1. Conducted Unwanted Spurious Emissions	118
A.3.1.2. Conducted Band-Edge Emissions	130

1. ACCREDITATION, LISTINGS & RECOGNITION

1.1. TESTING ACCREDITATION

MiCOM Labs, Inc. is an accredited Electrical testing laboratory per the international standard ISO/IEC 17025:2017. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.01. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-01.pdf>



1.2. RECOGNITION

MiCOM Labs, Inc is widely recognized for its wireless testing and certification capabilities. In addition to being recognized for Testing and Certification under Phase 2 Mutual Recognition Agreements (MRA) with Canada, Europe, United Kingdom and Japan, our international recognition includes Conformity Assessment Body (CAB) designation status under agreements with Asia Pacific (APEC) MRA Phase 1 countries giving acceptance of MiCOM Labs test reports. MiCOM Labs test reports are accepted globally.

Country	Recognition Body	Status	MRA Phase	Identification No.
USA	Federal Communications Commission (FCC)	TCB	-	US0159 Test Firm Designation#: US1084
Canada	Industry Canada (ISED)	FCB	APEC MRA 2	US0159 ISED#: 4143A
Japan	MIC (Ministry of Internal Affairs and Communication)	CAB	Japan MRA 2	RCB 210
	Japan Approvals Institute for Telecommunication Equipment (JATE)			
	VCCI	--	--	A-0012
Europe	European Commission	NB	EU MRA 2	NB 2280
United Kingdom	Department for Business, Energy & Industrial Strategy (BEIS)	AB	UK MRA 2	AB 2280
Mexico	Instituto Federal de Telecomunicaciones (IFT)	CAB	Mexico MRA 1	US0159
Australia	Australian Communications and Media Authority (ACMA)	CAB	APEC MRA 1	US0159
Hong Kong	Office of the Telecommunication Authority (OFTA)			
Korea	Ministry of Information and Communication Radio Research Laboratory (RRL)			
Singapore	Infocomm Development Authority (IDA)			
Taiwan	National Communications Commission (NCC) Bureau of Standards, Metrology and Inspection (BSMI)			
Vietnam	Ministry of Communication (MIC)			

TCB – Telecommunications Certification Bodies (TCB)

FCB – Foreign Certification Body

CAB – Conformity Assessment Body

NB – Notified Body

AB – Approved Body

MRA – Mutual Recognition Agreement

MRA Phase I - recognition for product testing

MRA Phase II – recognition for both product testing and certification

1.3. PRODUCT CERTIFICATION

MiCOM Labs, Inc. is an accredited Product Certification Body per the international standard ISO/IEC 17065:2012. The company is accredited by the American Association for Laboratory Accreditation (A2LA) www.a2la.org test laboratory number 2381.02. MiCOM Labs test schedule is available at the following URL; <http://www.a2la.org/scopepdf/2381-02.pdf>



United States of America – Telecommunication Certification Body (TCB)
Industry Canada – Certification Body, CAB Identifier – US0159
Europe – Notified Body (NB), NB Identifier - 2280
UK – Approved Body (AB), AB Identifier - 2280
Japan – Recognized Certification Body (RCB), RCB Identifier - 210

2. DOCUMENT HISTORY

Document History		
Revision	Date	Comments
Draft	8th July 2024	Draft for client review
Rev A	18th July 2024	Initial release.
.		
.		
.		
.		
.		

In the above table the latest report revision will replace all earlier versions.

3. TEST RESULT CERTIFICATE

Manufacturer: Itron, Inc.
313 North Hwy 11.
West Union,
South Carolina 29696-2706
USA

Tested By: MiCOM Labs, Inc.
575 Boulder Court
Pleasanton
California 94566 USA

Model: RF-based meter data
collection solution

Telephone: +1 925 462 0304

Type Of Equipment: ERG-5600-008

Fax: +1 925 462 0306

S/N's: Conducted: 2935662-08
Radiated: 2935662-05

Test Date(s): 13th – 19th June 2024

Website: www.micomlabs.com

STANDARD(S)

FCC CFR 47 Part 15 Subpart C 15.247 & ISED
RSS-247

TEST RESULTS


EQUIPMENT COMPLIES

MiCOM Labs, Inc. tested the equipment mentioned in accordance with the requirements set forth in the above standards. Test results indicate that the equipment tested is capable of demonstrating compliance with the requirements as documented within this report.


Notes:

1. This document reports conditions under which testing was conducted and the results of testing performed.
2. Details of test methods used have been recorded and kept on file by the laboratory.
3. Test results apply only to the item(s) tested.

Approved & Released for MiCOM Labs, Inc. by:

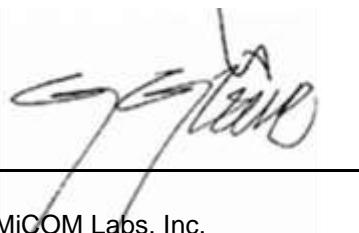

Graeme Grieve
Quality Manager MiCOM Labs, Inc.



Gordon Hurst
President & CEO MiCOM Labs, Inc.

4. REFERENCES AND MEASUREMENT UNCERTAINTY

4.1. Normative References

REF.	PUBLICATION	YEAR	TITLE
I	KDB 558074 D01 v05r02	Apr 2019	Guidance for Compliance Measurements on Digital Transmission System, Frequency Hopping Spread Spectrum System, and Hybrid System Devices operating under section 15.247 of the FCC Rules.
II	A2LA	16th April 2024	R105 - Requirement's When Making Reference to A2LA Accreditation Status
III	ANSI C63.10	2020	American National Standard for Testing Unlicensed Wireless Devices
IV	ANSI C63.4	2014	American National Standards for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
V	ETSI TR 100 028	2001-12	Parts 1 and 2 Electromagnetic compatibility and Radio Spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics
VI	FCC 47 CFR Part 15, Subpart B	Nov 2017	Title 47: Telecommunication PART 15—RADIO FREQUENCY DEVICES, SubPart B; Unintentional Radiators
VII	FCC 47 CFR Part 15.247	Apr 2020	Radio Frequency Devices; Subpart C – Intentional Radiators
VIII	FCC Public Notice DA 00-705	Mar 2000	Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems
IX	ICES-003	Issue 7; Oct 2020	Information Technology Equipment (Including Digital Apparatus)
X	UKAS M3003	Edition 6 March 2024	The Expression of Uncertainty and Confidence in Measurements
XI	RSS-247 Issue 3	Aug 2023	Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and Licence-Exempt Local Area Network (LE-LEN) Devices
XII	RSS-Gen Issue 5	Amendment 1,2 (Feb 2021)	General Requirements for Compliance of Radio Apparatus. With Amendments 1: March 2019 and 2: Feb 2021.
XIII	FCC 47 CFR Part 2.1033	Feb 2023	FCC requirements and rules regarding photographs and test setup diagrams.
XIV	UKAS LAB 12	Edition 4 April 2022	The Expression of Uncertainty in Testing

4.2. Test and Uncertainty Procedure

Conducted and radiated emission measurements were conducted in accordance with American National Standards Institute ANSI C63.4, listed in the Normative References section of this report.

Measurement uncertainty figures are calculated in accordance with ETSI TR 100 028 Parts 1 and 2.

Measurement uncertainties stated are based on a standard uncertainty multiplied by a coverage factor $k = 2$, providing a level of confidence of approximately 95 % in accordance with UKAS document M 3003 listed in the Normative References section of this report.

5. PRODUCT DETAILS AND TEST CONFIGURATIONS

5.1. Technical Details

Details	Description
Purpose:	Test of the Itron, Inc. 100G ERT® Module (ERG-5600-008) to FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247
Applicant:	Ittron, Inc. 2401 North State St. Waseca MN 56093 United States of America
Manufacturer:	Ittron, Inc.
Laboratory performing the tests:	MiCOM Labs, Inc. 575 Boulder Court Pleasanton California 94566 USA
Test report reference number:	ITRO67-U8
Date EUT received:	13 th June 2024
Standard(s) applied:	FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247
Dates of test (from - to):	13 th – 19 th June 2024
No of Units Tested:	2
Product Family Name:	100G ERT Modules
Model(s):	ERG-5600-008 ERG-5600-007
Location for use:	Indoors and Outdoors
Declared Frequency Range(s):	902 - 928 MHz;
Type of Modulation:	GFSK, OOK
EUT Modes of Operation:	902 - 928 MHz: GFSK, 37.5kbps, DEV 16.4kHz (FHSS); GFSK, 37.5kbps, DEV 50kHz (FHSS); OOK - PL1; OOK - PL3;
Declared Nominal Output Power (dBm):	30
Rated Input Voltage and Current:	3.6VDC, 0.25A
Operating Temperature Range:	-40°C to +70°C
ITU Emission Designator:	GFSK 136KF1D OOK 132KN1D
Equipment Dimensions:	5.54 x 3.57 x 3.1
Weight:	0.85 LB
Hardware Rev:	3
Software Rev:	CSL 10.0.15.0

5.2. Scope Of Test Program

Itron, Inc. ERG-5600-008

The scope of the test program was to test the Itron, Inc. ERG-5600-008, 100G ERT® Module (ERG-5600-008) configurations in the frequency ranges 902 - 928 MHz; for compliance against the following specification:

FCC CFR 47 Part 15 Subpart C 15.247 & ISED RSS-247 (FHSS)

Radio Frequency Devices; Subpart C – Intentional Radiators

ISED RSS-247

Digital Transmission Systems (DTSs), Frequency Hopping System (FHSs) and License-Exempt Local Area Network (LE-LEN) Devices

The Itron ERG-5600-008 is also marketed as the following Model Numbers per Manufacturer Declaration (refer to Section 11 of this report)

ERG-5600-007

5.3. Equipment Model(s) and Serial Number(s)

Type (EUT/Support)	Equipment Description	Mfr	Model No.	Serial No.
EUT	RF-based meter data collection solution	Itron, Inc.	ERG-5600-008	Conducted: 2935662-08 Radiated: 2935662-05
Laptop Computer	Support	Lenovo	ThinkPad	N/A

5.4. Antenna Details

Type	Manufacturer	Model	Family	Gain (dBi)	BF Gain	Dir BW	X-Pol	Frequency Band (MHz)
Integral	Itron, Inc.	Integral	PCB	2.23	-	360	-	902-928
BF Gain - Beamforming Gain								
Dir BW - Directional BeamWidth								
X-Pol - Cross Polarization								

5.5. Cabling and I/O Ports

1. NONE

5.6. Test Configurations

Results for the following configurations are provided in this report:

Operational Mode(s)	Data Rate with Highest Power MBit/s	Channel Frequency (MHz)		
		Low	Mid	High
902 - 928 MHz				
GFSK, 37.5kbps, DEV 16.4kHz	37.5	903.00	915.00	926.80
GFSK, 37.5kbps, DEV 50kHz	37.5	903.00	915.00	926.80
OOK - PL1	16.38	903.00	915.00	926.80
OOK - PL3	16.38	903.00	915.00	926.80

5.7. Equipment Modifications

The following modifications were required to bring the equipment into compliance:

1. NONE

5.8. Deviations from the Test Standard

The following deviations from the test standard were required in order to complete the test program:

1. NONE

6. TEST SUMMARY

List of Measurements

Test Header	Result	Data Link
20 dB & 99% Bandwidth	Complies	View Data
Frequency Hopping Tests	Complies	-
Number of Hopping Channels	Complies	View Data
Channel Separation	Complies	View Data
Output Power	Complies	View Data
Emissions	Complies	-
(1) Conducted Emissions	Complies	-
(i) Conducted Unwanted Spurious Emissions	Complies	View Data
(ii) Conducted Band-Edge Emissions	Complies	View Data
(2) Radiated Emissions	Complies	-
(i) TX Spurious & Restricted Band Emissions	Complies	View Data
(ii) RX Spurious Emissions	Complies	View Data


Note: Dwell Time and Channel Occupancy were not tested as part of this test program, these were declared for normal network operation by Itron. See Section 10 of this report for additional information.

7. TEST EQUIPMENT CONFIGURATION(S)


7.1. Radiated

Radiated emissions above and below 1GHz.

Radiated Emissions Above 1GHz Test Setup

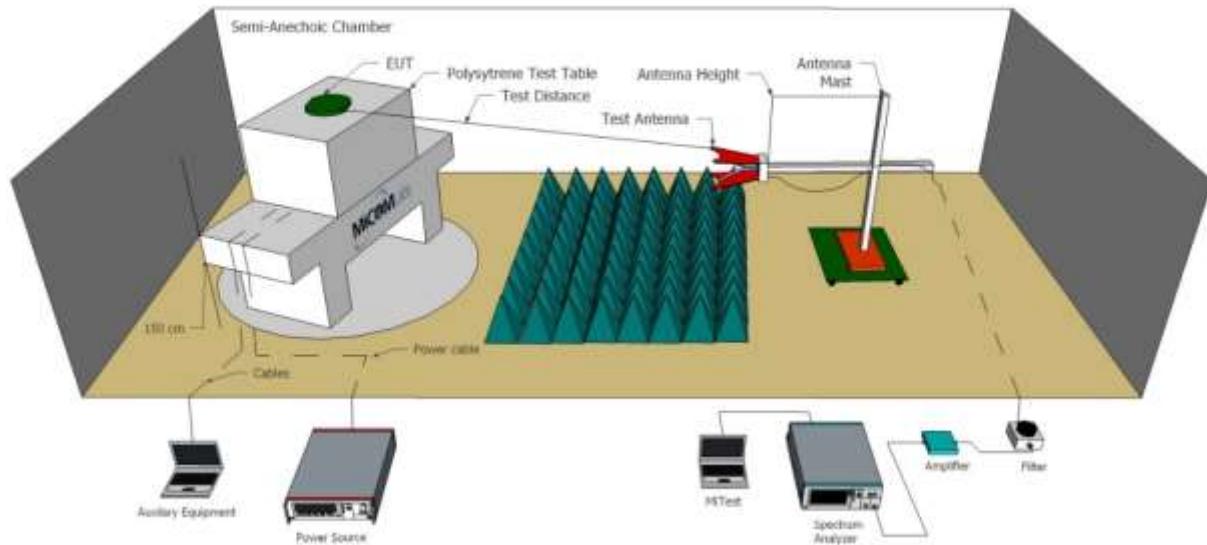

Radiated Emissions Below 1GHz Test Setup

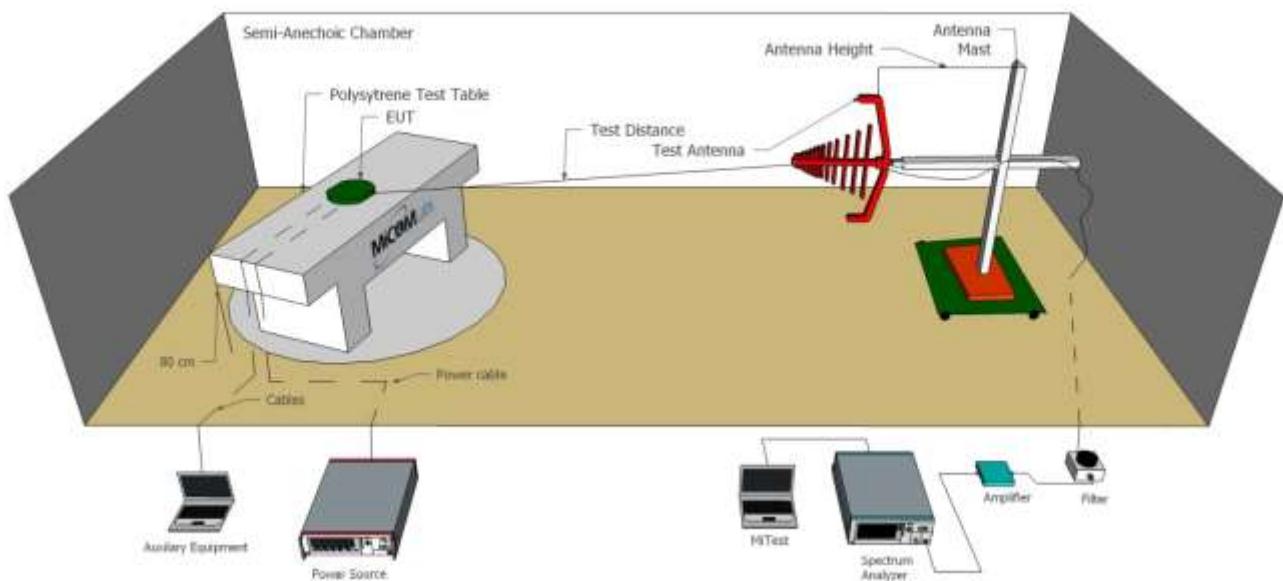

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
170	Video System Controller for Semi Anechoic Chamber	Panasonic	WV-CU101	04R08507	Not Required
266	10 Hz to 50GHz MXA Signal Analyzer	Keysight	N9020B	MY60110791	25 Jul 2025
285	DC Power Supply	Keysight	E36155A	MY63000156	4 Dec 2024
298	3M Radiated Emissions Chamber Maintenance Check	MiCOM	3M Chamber	298	11 Oct 2024
330	Variac 0-280 Vac	Staco Energy Co	3PN1020B	0546	Cal when used
336	Active loop Ant 10kHz to 30 MHz	EMCO	EMCO 6502	00060498	7 Dec 2024
338	Sunol 30 to 3000 MHz Antenna	Sunol	JB3	A052907	5 Dec 2024
341	900MHz Notch Filter	EWT	EWT-14-0199	H1	13 Sep 2024
346	1.6 TO 10GHz High Pass Filter	EWT	EWT-57-0112	H1	13 Sep 2024
373	26III RMS Multimeter	Fluke	Fluke 26 series III	76080720	29 Sep 2024
377	Band Rejection Filter 5150 to 5880MHz	Microtronics	BRM50716	034	13 Sep 2024
396	2.4 GHz Notch Filter	Microtronics	BRM50701	001	13 Sep 2024
397	Amp 10 - 2500MHz	MiCOM Labs	Amp 10 - 2500 MHz	NA	27 Oct 2024
399	ETS 1-18 GHz Horn Antenna	ETS	3117	00154575	7 Dec 2024
406	Amplifier for Radiated Emissions	MiCOM Labs	40dB 1 to 18GHz Amp	0406	2 Nov 2024
410	Desktop Computer	Dell	Inspiron 620	WS38	Not Required
411	Mast/Turntable Controller	Sunol Sciences	SC98V	060199-1D	Not Required
412	USB to GPIB Interface	National Instruments	GPIB-USB HS	11B8DC2	Not Required
413	Mast Controller	Sunol Science	TWR95-4	030801-3	Not Required
415	Turntable Controller	Sunol Sciences	Turntable Controller	None	Not Required
416	Gigabit ethernet filter	ETS-Lingren	Gigafoil 260366	None	Not Required
447	MiTest Rad Emissions Test Software	MiCOM	Rad Emissions Test Software Version 1.0	447	Not Required
462	Schwarzbeck cable from Antenna to Amplifier.	Schwarzbeck	AK 9513	462	18 Sep 2024
463	Schwarzbeck cable from Amplifier to Bulkhead.	Schwarzbeck	AK 9513	463	18 Sep 2024
464	Schwarzbeck cable from Bulkhead to Receiver	Schwarzbeck	AK 9513	464	16 Sep 2024
465	Low Pass Filter DC-	Mini-Circuits	NLP-1200+	VUU01901402	14 Sep 2024




Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

	1000 MHz				
480	Cable - Bulkhead to Amp	SRC Haverhill	157-3050360	480	18 Sep 2024
481	Cable - Bulkhead to Receiver	SRC Haverhill	151-3050787	481	18 Sep 2024
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2026
554	Precision SMA Cable	Fairview Microwave	SCE18060101-400CM	554	18 Sep 2024
555	Rhode & Schwarz Receiver (Firmware Version : 3.10 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2025
578	DC Power Supply 0 - 60 V, 0 - 15 A	HP	6274B	2537A-08192	Not Required
87	Uninterruptible Power Supply	Falcon Electric	ED2000-1/2LC	F3471 02/01	Cal when used
CC05	Confidence Check	MiCOM	CC05	None	11 Aug 2024

7.2. Conducted Test Setup

MiTest Automated Test System

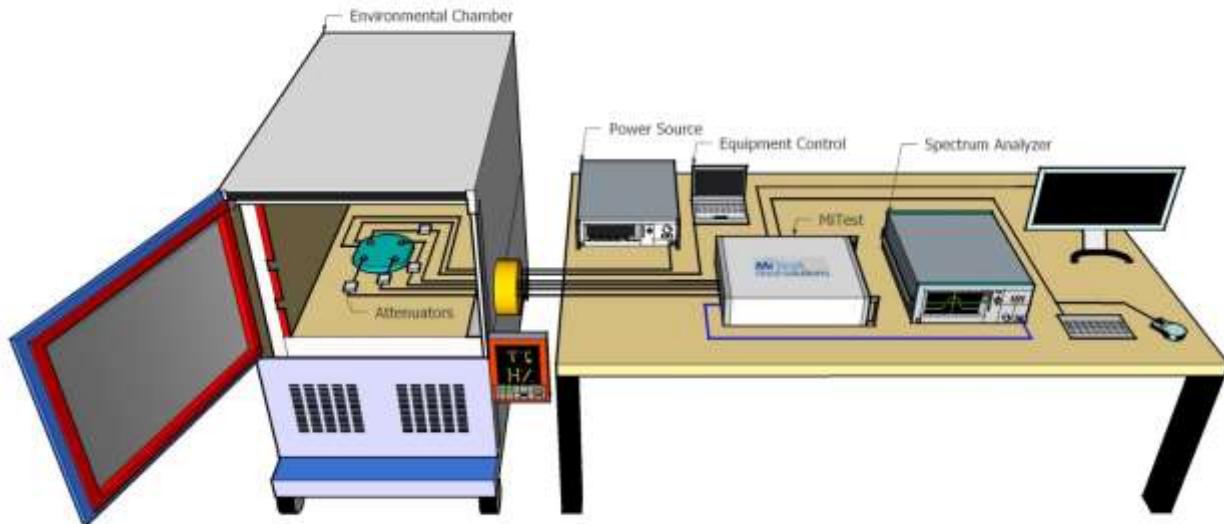

A full system calibration was performed on the test station and any resulting system losses (or gains) were considered in the production of all final measurement data.

Asset#	Description	Manufacturer	Model#	Serial#	Calibration Due Date
#3 SA	MiTest Box to SA	Fairview Microwave	SCA1814-0101-72	#3 SA	26 Oct 2024
#3P1	EUT to MiTest box port 1	Fairview Microwave	SCA1814-0101-72	#3P1	26 Oct 2024
#3P2	EUT to MiTest box port 2	Fairview Microwave	SCA1814-0101-72	#3P2	26 Oct 2024
#3P3	EUT to MiTest box port 3	Fairview Microwave	SCA1814-0101-72	#3P3	26 Oct 2024
#3P4	EUT to MiTest box port 4	Fairview Microwave	SCA1812-0101-72	#3P4	26 Oct 2024
249	Thermocouple; Resistance Thermometer	Thermotronics	GR2105-02	9340 #2	22 Mar 2025
266	10 Hz to 50GHz MXA Signal Analyzer	Keysight	N9020B	MY60110791	25 Jul 2025
285	DC Power Supply	Keysight	E36155A	MY63000156	4 Dec 2024
398	MiTest RF Conducted Test Software	MiCOM	MiTest ATS	Version 4.2.3.0	Not Required
405	DC Power Supply 0-60V	Agilent	6654A	MY4001826	Cal when used
408	USB to GPIB interface	National Instruments	GPIB-USB HS	14C0DE9	Not Required
441	USB Wideband Power Sensor	Boonton	55006	9179	4 Dec 2024
442	USB Wideband Power	Boonton	55006	9181	12 Dec 2024




	Sensor				
445	PoE Injector	D-Link	DPE-101GL	QTAH1E2000625	Not Required
461	Spectrum Analyzer	Agilent	E4440A	MY46185537	27 Sep 2024
493	USB Wideband Power Sensor	Boonton	55006	9634	8 Oct 2024
494	USB Wideband Power Sensor	Boonton	55006	9726	12 Dec 2024
510	Barometer/Thermometer	Digi Sense	68000-49	170871375	4 Jan 2026
512	MiTest Cloud Solutions RF Test Box	MiCOM	2nd Gen	512	24 Oct 2024
516	USB Wideband Power Sensor	Boonton	RTP5006	10511	4 Dec 2024
555	Rhode & Schwarz Receiver (Firmware Version : 3.10 SP1)	Rhode & Schwarz	ESW 44	101893	28 Jun 2025
75	Environmental Chamber	Thermatron	SE-300-2-2	27946	20 Nov 2024

8. MEASUREMENT AND PRESENTATION OF TEST DATA

The measurement and graphical data presented in this test report was generated automatically using state-of-the-art technology creating an easy to read report structure. Numerical measurement data is separated from supporting graphical data (plots) through hyperlinks. Numerical measurement data can be reviewed without scrolling through numerous graphical pages to arrive at the next data matrix.

Plots have been relegated into the Appendix 'Graphical Data'.

Test and report automation was performed by [MiTest](#). [MiTest](#) is an automated test system developed by MiCOM Labs. [MiTest](#) is the first cloud based modular test system enabling end-to-end automation of regulatory compliance testing for conducted RF testing.

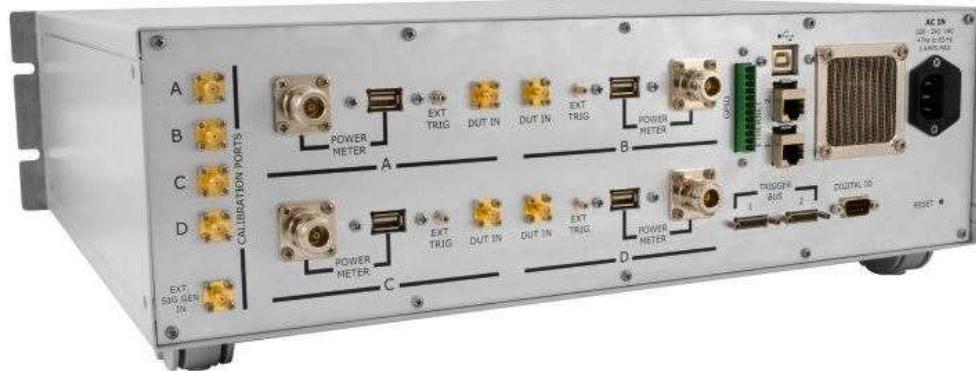

The MiCOM Labs "[MiTest](#)" Automated Test System" (Patent Pending)

9. TEST RESULTS

9.1. 20 dB & 99% Bandwidth

Conducted Test Conditions for 20 dB and 99% Bandwidth			
Standard:	FCC CFR 47:15.247 ISED RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	20 dB and 99 % Bandwidth	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1)(i)/(ii) Section 5.1	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for 20 dB and 99% Bandwidth Measurement

The bandwidth at 20 dB and 99 % was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for 20 dB and 99% Bandwidth

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	37.5kbps, DEV 16.4kHz	Duty Cycle (%):	100
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
903.0	0.068				0.068	0.068	0.5	-0.43
915.0	0.076				0.076	0.076	0.5	-0.42
926.8	0.065				0.065	0.065	0.5	-0.44

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
903.0	0.062				0.062		
915.0	0.065				0.065		
926.8	0.062				0.062		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	37.5kbps, DEV 50kHz	Duty Cycle (%):	100
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d				
903.0	0.136				0.136	0.136	0.5	-0.36
915.0	0.136				0.136	0.136	0.5	-0.36
926.8	0.142				0.142	0.142	0.5	-0.36

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
903.0	0.131				0.131		
915.0	0.131				0.131		
926.8	0.132				0.132		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	OOK - PL1	Duty Cycle (%):	100
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
903.0	0.060				0.060	0.060	0.5	-0.44
915.0	0.061				0.061	0.061	0.5	-0.44
926.8	0.060				0.060	0.060	0.5	-0.44

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
903.0	0.124				0.124		
915.0	0.125				0.125		
926.8	0.123				0.123		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for 20 dB 99% Bandwidth

Variant:	OOK - PL3	Duty Cycle (%):	100
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured 20 dB Bandwidth (MHz)				20 dB Bandwidth (MHz)		Limit	Lowest Margin
	Port(s)				Highest	Lowest		
MHz	a	b	c	d			MHz	MHz
903.0	0.062				0.062	0.062	0.5	-0.44
915.0	0.068				0.068	0.068	0.5	-0.43
926.8	0.061				0.061	0.061	0.5	-0.44

Test Frequency	Measured 99% Bandwidth (MHz)				Maximum 99% Bandwidth (MHz)		
	Port(s)						
MHz	a	b	c	d			
903.0	0.127				0.127		
915.0	0.129				0.129		
926.8	0.127				0.127		

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2. Frequency Hopping Tests

Conducted Test Conditions for Frequency Hopping Measurements			
Standard:	FCC CFR 47:15.247 ISED RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Frequency Hopping Tests	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1)(i)/(ii) Section 5.1	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References, FCC Public Notice DA 00-705		

Test Procedure for Frequency Hopping Measurements

These tests cover the following measurements:

- i) channel separation
- ii) channel occupancy
- iii) dwell time
- iv) number of hopping frequencies

Frequency hopping testing was measured with a spectrum analyzer connected to the antenna terminal, while EUT is operating in transmission mode at the appropriate center frequency or hopping mode.

Testing was performed under ambient conditions at nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits for Frequency Hopping Measurements

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

(ii) Frequency hopping systems operating in the 5725-5850 MHz band shall use at least 75 hopping frequencies. The maximum 20 dB bandwidth of the hopping channel is 1 MHz. The average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period.

(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

9.2.1. Number of Hopping Channels

Equipment Configuration for Number of Hopping Channels			
Variant:	37.5kbps, DEV 16.4kHz	Antenna:	Not Applicable
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	100.0	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results			
Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	35	--	--
910.0-920.0	50	--	--
920.0-928.0	35	--	--
Total number of Hops	120	50	Pass

Traceability to Industry Recognized Test Methodologies	
Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Number of Hopping Channels

Variant:	37.5kbps, DEV 50kHz	Antenna:	Not Applicable
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	100.0	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	35	--	--
910.0-920.0	50	--	--
920.0-928.0	35	--	--
Total number of Hops	120	50	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Number of Hopping Channels

Variant:	OOK - PL1	Antenna:	Not Applicable
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	100.0	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	35	--	--
910.0-920.0	50	--	--
920.0-928.0	35	--	--
Total number of Hops	120	50	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Number of Hopping Channels

Variant:	OOK - PL3	Antenna:	Not Applicable
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	100.0	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Frequency Range (MHz)	Number of Hopping Channels	Limit	Pass / Fail
902.0-910.0	35	--	--
910.0-920.0	50	--	--
920.0-928.0	35	--	--
Total number of Hops	120	50	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.2.2. Channel Separation

Equipment Configuration for Channel Separation

Variant:	37.5kbps, DEV 16.4kHz	Antenna:	Not Applicable
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	100.0	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.0	199.148	0.068	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

Equipment Configuration for Channel Separation

Variant:	37.5kbps, DEV 50kHz	Antenna:	Not Applicable
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	100.0	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.0	0.203	0.136	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

Equipment Configuration for Channel Separation

Variant:	OOK - PL1	Antenna:	Not Applicable
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	100.0	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.0	201.403	0.060	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

Equipment Configuration for Channel Separation

Variant:	OOK - PL3	Antenna:	Not Applicable
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
Duty Cycle (%):	100.0	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Center Frequency (MHz)	Chan Separation (MHz)	Limit (MHz)	Pass / Fail
915.0	196.894	0.061	Pass

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-03 MEASURING RF SPECTRUM MASK
Measurement Uncertainty:	±2.81 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.3. Output Power

Conducted Test Conditions for Fundamental Emission Output Power			
Standard:	FCC CFR 47:15.247 ISED RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Output Power	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (a)(1), (b)(1)/(2)/(3) Section 5.4	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Fundamental Emission Output Power Measurement

In the case of average power measurements an average power sensor was utilized.

For peak power measurements the spectrum analyzer built-in power function was used to integrate peak power over the 20 dB bandwidth.

Testing was performed under ambient conditions, nominal voltage. Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured, summed (Σ) and reported.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Supporting Information

$$\text{Calculated Power} = A + G + Y + 10 \log (1/x) \text{ dBm}$$

A = Total Power $[10^{\text{Log10}} (10^{a/10} + 10^{b/10} + 10^{c/10} + 10^{d/10})]$

G = Antenna Gain

Y = Beamforming Gain

x = Duty Cycle (average power measurements only)

Limits for Fundamental Emission Output Power

(a) Operation under the provisions of this Section is limited to frequency hopping and digitally modulated intentional radiators that comply with the following provisions:

(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

(b) The maximum peak conducted output power of the intentional radiator shall not exceed the following for frequency hopping systems:

(1) For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

(2) For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

Equipment Configuration for Output Power Peak

Variant:	37.5kbps, DEV 16.4kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	2.23
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
903.0	24.18				24.18	30.00	-5.82	27.00
915.0	23.92				23.92	30.00	-6.08	27.00
926.8	23.41				23.41	30.00	-6.59	27.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.



Equipment Configuration for Output Power Peak

Variant:	37.5kbps, DEV 50kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	2.23
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
903.0	24.14				24.14	30.00	-5.86	27.00
915.0	24.01				24.01	30.00	-5.99	27.00
926.8	23.29				23.29	30.00	-6.71	27.00

Traceability to Industry Recognized Test Methodologies

Work Instruction: WI-01 MEASURING RF OUTPUT POWER

Measurement Uncertainty: ± 1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.



Equipment Configuration for Output Power Peak

Variant:	OOK - PL1	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	2.23
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
903.0	4.07				4.07	30.00	-25.93	10.00
915.0	3.90				3.90	30.00	-26.10	10.00
926.8	3.58				3.58	30.00	-26.42	10.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.



Equipment Configuration for Output Power Peak

Variant:	OOK - PL3	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	2.23
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Measured Output Power (dBm)				Calculated Total Power Σ Port(s)	Limit	Margin	EUT Power Setting
	Port(s)							
MHz	a	b	c	d	dBm	dBm	dB	
903.0	21.00				16.81	30.00	-13.19	27.00
915.0	19.93				16.42	30.00	-13.58	27.00
926.8	18.58				15.03	30.00	-14.97	27.00

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-01 MEASURING RF OUTPUT POWER
Measurement Uncertainty:	±1.33 dB

The above measurements are true pulse readings and therefore a Duty Cycling correction factor is not required.

9.4. Emissions

9.4.1. Conducted Emissions

Conducted Test Conditions for Transmitter Conducted Spurious and Band-Edge Emissions			
Standard:	FCC CFR 47:15.247 ISED RSS-247	Ambient Temp. (°C):	24.0 - 27.5
Test Heading:	Transmitter Conducted Spurious and Band-Edge Emissions	Rel. Humidity (%):	32 - 45
Standard Section(s):	15.247 (d) Section 5.5	Pressure (mBars):	999 - 1001
Reference Document(s):	See Normative References		

Test Procedure for Transmitter Conducted Spurious and Band-Edge Emissions Measurement

Transmitter Conducted Spurious and Band-Edge emissions were measured at a limit of 30 dBc (average detector) or 20 dBc (peak detector) below the highest in-band spectral density measured with a spectrum analyzer connected to the antenna terminal. Measurements were made while EUT was operating in transmit mode of operation at the appropriate centre frequency closest to the band-edge. Emissions were maximized during the measurement and limits derived from the peak spectral power and drawn on each plot.

Where the device operated with multiple antenna ports i.e. MIMO device, each port was measured separately. Testing was performed under ambient conditions at nominal voltage only.

Test configuration and setup used for the measurement was per the Conducted Test Set-up specified in this document.

Limits Transmitter Conducted Spurious and Band-Edge Emissions

(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

9.4.1.1. Conducted Unwanted Spurious Emissions

Equipment Configuration for Unwanted Emissions Peak

Variant:	37.5kbps, DEV 16.4kHz	Duty Cycle (%):	100
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
903.0	30.0 - 10000.0	-29.382	3.74						
915.0	30.0 - 10000.0	-30.072	3.74						
926.8	30.0 - 10000.0	-29.081	2.99						

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Unwanted Emissions Peak

Variant:	37.5kbps, DEV 50kHz	Duty Cycle (%):	100
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
903.0	30.0 - 10000.0	-29.852	3.71						
915.0	30.0 - 10000.0	-29.966	3.71						
926.8	30.0 - 10000.0	-29.270	2.75						

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Unwanted Emissions Peak

Variant:	OOK - PL1	Duty Cycle (%):	100
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
903.0	30.0 - 10000.0	-31.457	-12.92						
915.0	30.0 - 10000.0	-30.782	-12.70						
926.8	30.0 - 10000.0	-31.601	-13.17						

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Unwanted Emissions Peak

Variant:	OOK - PL3	Duty Cycle (%):	100
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Test Frequency	Frequency Range	Unwanted Emissions Peak (dBm)							
		Port a		Port b		Port c		Port d	
MHz	MHz	SE	Limit	SE	Limit	SE	Limit	SE	Limit
903.0	30.0 - 10000.0	-28.595	-0.07						
915.0	30.0 - 10000.0	-29.622	-0.25						
926.8	30.0 - 10000.0	-30.845	-1.71						

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.1.2. Conducted Band-Edge Emissions

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	37.5kbps, DEV 16.4kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	903.0 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-35.86	3.94	902.80		-0.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	37.5kbps, DEV 50kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	903.0 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-33.87	3.92	902.80		-0.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	OOK - PL1	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	903.0 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-33.08	-12.65	902.80		-0.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

Equipment Configuration for Conducted Low Band-Edge Emissions (Hopping) Peak

Variant:	OOK - PL3	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	903.0 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-21.89	0.33	902.80		-0.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	37.5kbps, DEV 16.4kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	903.0 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)		Band-Edge Markers and Limit		Revised Limit	Margin
		M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)
a		-35.67	4.03	902.80	

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	37.5kbps, DEV 50kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	903.0 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-35.00	3.92	902.80		-0.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	OOK - PL1	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	903.0 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-31.30	-12.60	902.80		-0.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Low Band-Edge Emissions (Static) Peak

Variant:	OOK - PL3	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	903.0 MHz				
Band-Edge Frequency:	902.0 MHz				
Test Frequency Range:	875.0 - 905.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M1 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-21.47	0.30	902.80		-0.800

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	37.5kbps, DEV 16.4kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.8 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-37.58	3.51	927.00		-1.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS		
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB		

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	37.5kbps, DEV 50kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.8 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-33.00	3.48	927.00		-1.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	OOK - PL1	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.8 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-34.64	-12.30	927.00		-1.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS		
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB		

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Hopping) Peak

Variant:	OOK - PL3	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.8 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-25.32	-0.47	927.00		-1.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS		
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB		

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	37.5kbps, DEV 16.4kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.8 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-34.68	3.70	927.00		-1.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	37.5kbps, DEV 50kHz	Duty Cycle (%):	100.0
Data Rate:	37.50 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.8 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-33.36	3.75	927.00		-1.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	OOK - PL1	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	OOK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.8 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-33.10	-12.50	927.00		-1.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS		
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB		

Note: click the links in the above matrix to view the graphical image (plot).

Equipment Configuration for Conducted Upper Band-Edge Emissions (Static) Peak

Variant:	OOK - PL3	Duty Cycle (%):	100.0
Data Rate:	16.38 KBit/s	Antenna Gain (dBi):	Not Applicable
Modulation:	GFSK	Beam Forming Gain (Y)(dB):	Not Applicable
TPC:	Not Applicable	Tested By:	BQ
Engineering Test Notes:			

Test Measurement Results

Channel Frequency:	926.8 MHz				
Band-Edge Frequency:	928.0 MHz				
Test Frequency Range:	925.0 - 950.0 MHz				
Port(s)	Band-Edge Markers and Limit			Revised Limit	Margin
	M3 Amplitude (dBm)	Plot Limit (dBm)	M2 Frequency (MHz)	Amplitude (dBm)	M2A Frequency (MHz)
a	-24.68	-0.59	927.00		-1.000

Traceability to Industry Recognized Test Methodologies

Work Instruction:	WI-05 MEASUREMENT OF SPURIOUS EMISSIONS
Measurement Uncertainty:	<=40 GHz ±2.37 dB, > 40 GHz ±4.6 dB

Note: click the links in the above matrix to view the graphical image (plot).

9.4.2. Radiated Emissions

Frequency Band			
MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.

(c) Except as provided in paragraphs (d) and (e) of this section, regardless of the field strength limits specified elsewhere in this subpart, the provisions of this section apply to emissions from any intentional radiator.

(d) The following devices are exempt from the requirements of this section:

- (1) Swept frequency field disturbance sensors operating between 1.705 and 37 MHz provided their emissions only sweep through the bands listed in paragraph (a) of this section, the sweep is never stopped with the fundamental emission within the bands listed in paragraph (a) of this section, and the fundamental emission is outside of the bands listed in paragraph (a) of this section more than 99% of the time the device is actively transmitting, without compensation for duty cycle.
- (2) Transmitters used to detect buried electronic markers at 101.4 kHz which are employed by telephone companies.
- (3) Cable locating equipment operated pursuant to §15.213.
- (4) Any equipment operated under the provisions of §15.253, 15.255, and 15.256 in the frequency band 75-85 GHz, or §15.257 of this part.
- (5) Biomedical telemetry devices operating under the provisions of §15.242 of this part are not subject to the restricted band 608-614 MHz but are subject to compliance within the other restricted bands.
- (6) Transmitters operating under the provisions of subparts D or F of this part.
- (7) Devices operated pursuant to §15.225 are exempt from complying with this section for the 13.36-13.41 MHz band only.



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

(8) Devices operated in the 24.075-24.175 GHz band under §15.245 are exempt from complying with the requirements of this section for the 48.15-48.35 GHz and 72.225-72.525 GHz bands only, and shall not exceed the limits specified in §15.245(b).

(9) Devices operated in the 24.0-24.25 GHz band under §15.249 are exempt from complying with the requirements of this section for the 48.0-48.5 GHz and 72.0-72.75 GHz bands only, and shall not exceed the limits specified in §15.249(a).

(e) Harmonic emissions appearing in the restricted bands above 17.7 GHz from field disturbance sensors operating under the provisions of §15.245 shall not exceed the limits specified in §15.245(b).

9.4.2.3. TX Spurious & Restricted Band Emissions 30MHz to 1GHz

9.4.2.3.1. GFSK


Equipment Configuration for 30 MHZ TO 1 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	903.00	Data Rate:	37.5kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz

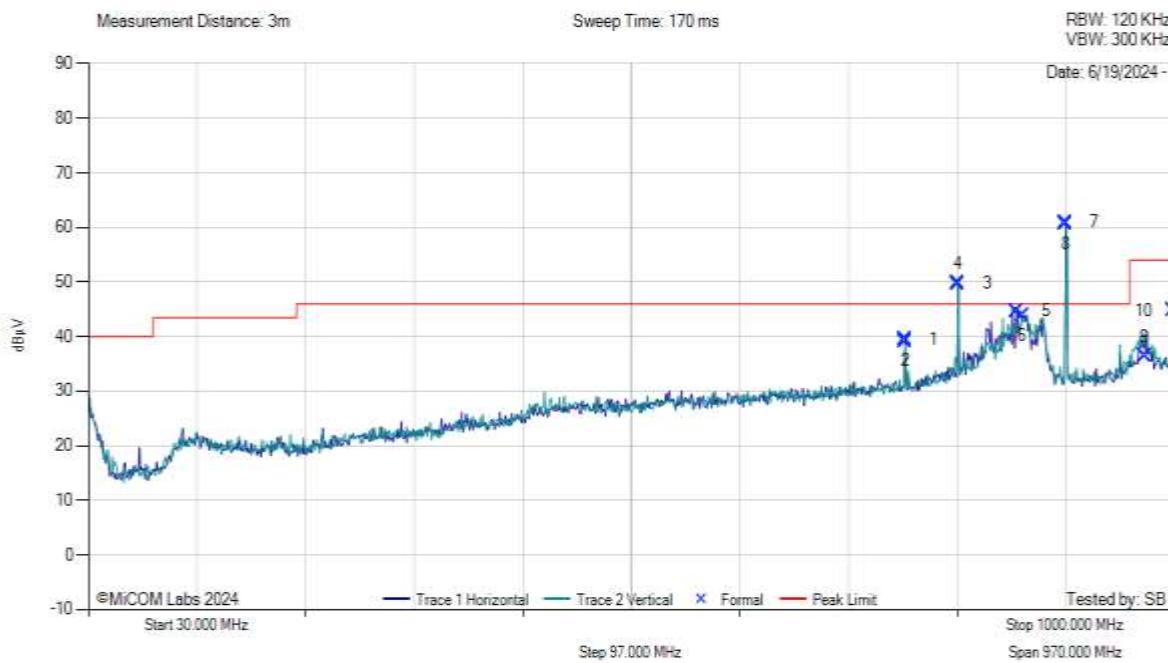



30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	759.44	36.78	6.49	-3.72	39.55	NRB	Horizontal	99	330	--	--	Pass
2	759.44	36.4	6.49	-3.72	39.17	NRB	Vertical	99	209	--	--	Pass
3	806.97	46.01	6.65	-2.92	49.74	NRB	Horizontal	99	239	--	--	Pass
4	806.97	45.98	6.65	-2.92	49.71	NRB	Vertical	99	239	--	--	Pass
5	859.35	40.19	6.7	-2.2	44.69	NRB	Horizontal	99	59	--	--	Pass
6	864.2	39.28	6.81	-2.23	43.86	NRB	Vertical	99	59	--	--	Pass
7	903.0	25.29	6.93	28.7	60.92	Fundamental	Horizontal	199	29	--	--	Pass
8	903.0	55.46	6.93	28.7	60.54	Fundamental	Vertical	199	29	--	--	Pass
9	973.47	30.33	7.14	-1.07	36.39	MaxQP	Vertical	104	0	54.0	-17.6	Pass
10	998.96	38.51	7.23	-0.94	44.80	MaxQP	Vertical	181	265	54.0	-9.2	Pass

Test Notes: SN: 2935662-05, GFSK, 903 MHz, 37.5 kbps, Power Level 3

Non Restrictive Band (NRB)


Equipment Configuration for 30 MHZ TO 1 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	915.00	Data Rate:	37.5kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz

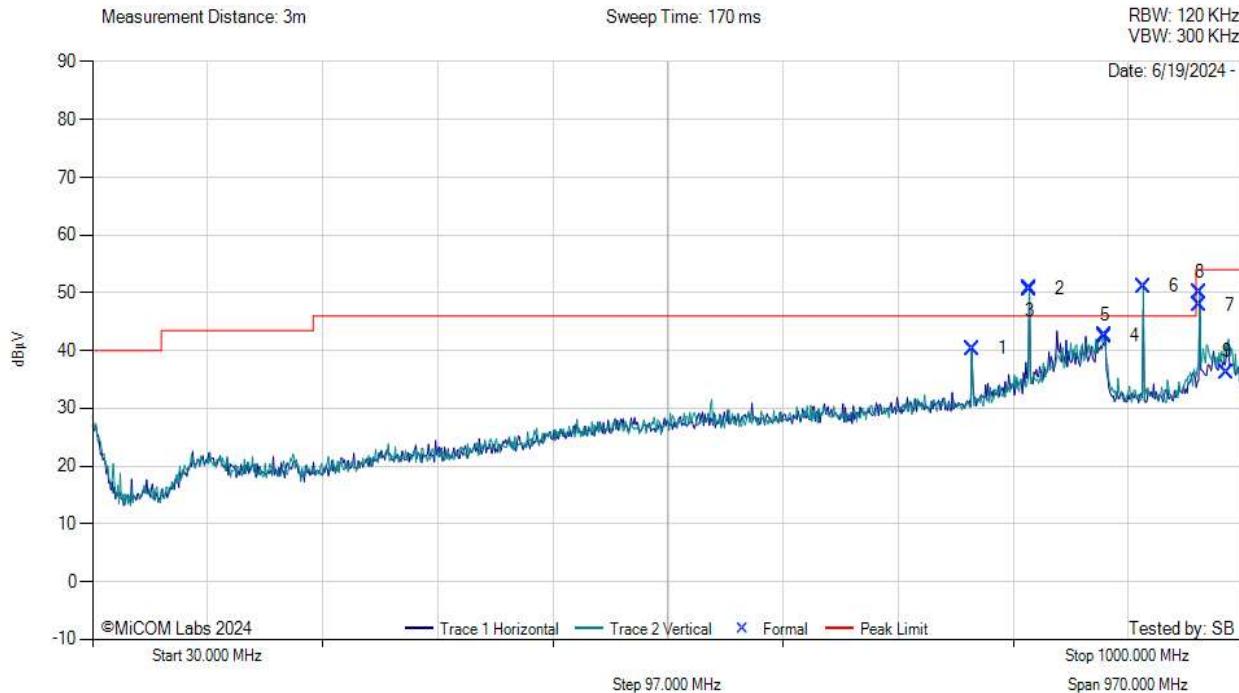



30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	771.08	37.45	6.56	-3.65	40.36	NRB	Vertical	100	209	--	--	Pass
2	819.58	46.8	6.69	-2.67	50.81	NRB	Horizontal	100	300	--	--	Pass
3	819.58	46.56	6.69	-2.67	50.58	NRB	Vertical	100	300	--	--	Pass
4	882.63	37.81	6.88	-2.23	42.45	NRB	Vertical	199	0	--	--	Pass
5	883.6	37.97	6.88	-2.24	42.61	NRB	Horizontal	100	210	--	--	Pass
6	915.0	45.89	6.98	-1.75	51.12	Fundamental	Vertical	101	0	--	--	Pass
7	963.05	41.80	7.11	-1.09	47.82	MaxQP	Horizontal	148	333	54.0	-6.2	Pass
8	963.06	44.02	7.11	-1.09	50.04	MaxQP	Vertical	110	0	54.0	-4.0	Pass
9	986.17	30.16	7.17	-1.03	36.30	MaxQP	Vertical	149	310	54.0	-17.7	Pass

Test Notes: SN: 2935662-05, GFSK, 915 MHz, 37.5 kbps, Power Level 3

Non Restrictive Band (NRB)


Equipment Configuration for 30 MHZ TO 1 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	926.8	Data Rate:	37.5kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz

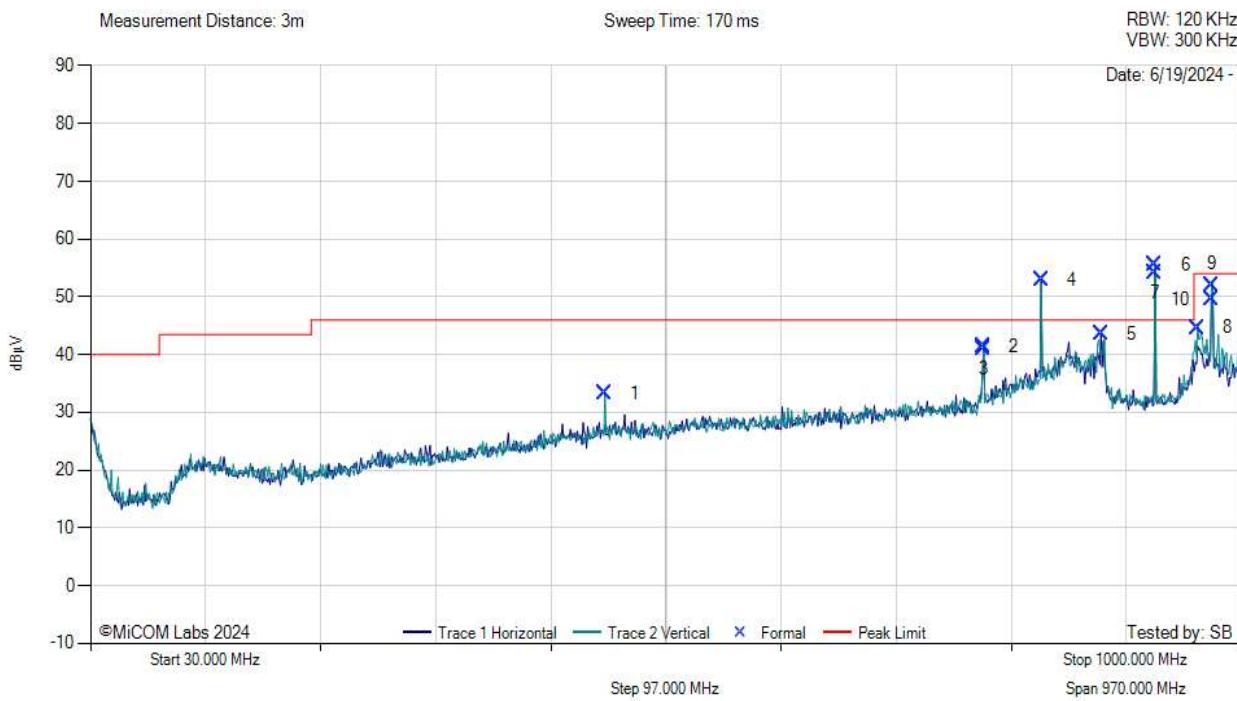



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	463.59	35.08	5.56	-7.3	33.35	NRB	Vertical	100	89	--	--	Pass
2	782.72	38.16	6.57	-3.25	41.48	NRB	Horizontal	199	0	--	--	Pass
3	782.72	37.78	6.57	-3.25	41.1	NRB	Vertical	199	0	--	--	Pass
4	831.22	48.71	6.72	-2.57	52.86	NRB	Horizontal	199	110	--	--	Pass
5	881.66	38.88	6.88	-2.23	43.53	NRB	Horizontal	199	90	--	--	Pass
6	926.8	50.06	7	-1.55	55.51	Fundamental	Vertical	199	29	--	--	Pass
7	926.8	48.82	7	-1.55	54.27	Fundamental	Horizontal	199	180	--	--	Pass
8	962.94	38.62	7.11	-1.09	44.64	MaxQP	Vertical	102	5	54.0	-9.4	Pass
9	974.76	46.05	7.16	-1.09	52.12	MaxQP	Vertical	101	331	54.0	-1.9	Pass
10	974.85	43.55	7.16	-1.09	49.62	MaxQP	Horizontal	195	304	54.0	-4.4	Pass

Test Notes: SN: 2935662-05, GFSK, 926.8 MHz, 37.5 kbps, Power Level 3

Non Restrictive Band (NRB)

9.4.2.3.2. OOK Power Level 3


Equipment Configuration for 30 MHZ TO 1 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	OOK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	903.00	Data Rate:	16.384kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz

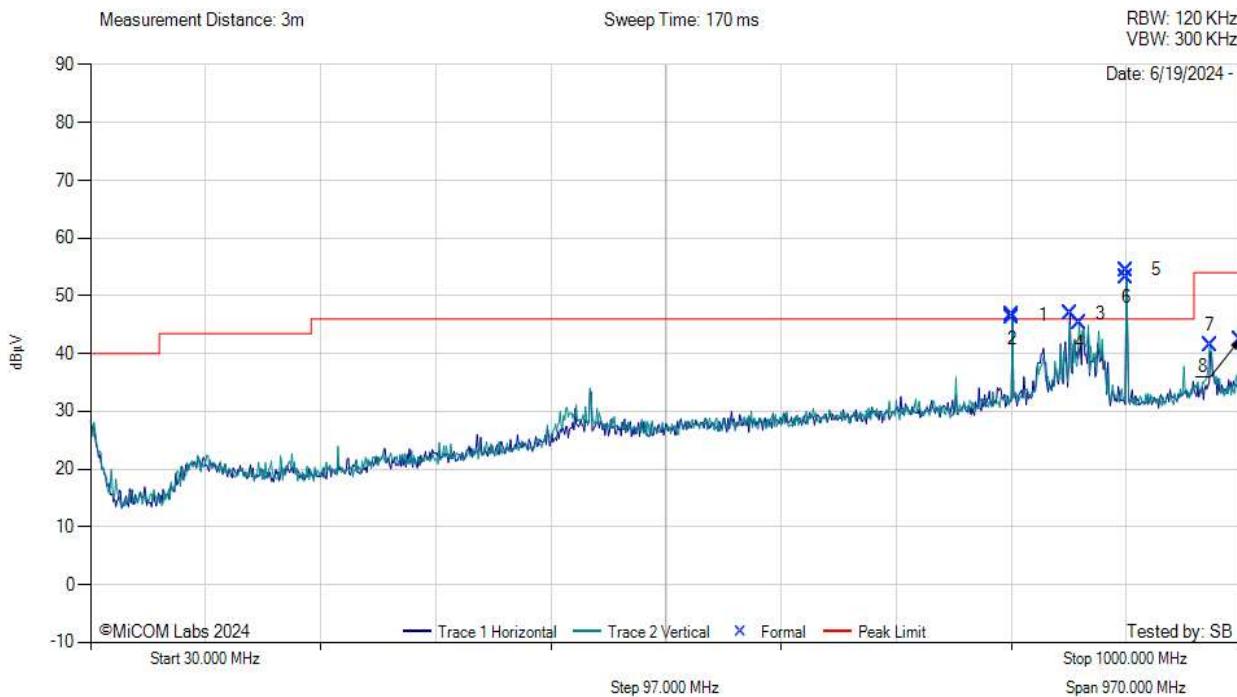



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	806.97	43.02	6.65	-2.92	46.75	NRB	Vertical	99	209	--	--	Pass
2	806.97	42.47	6.65	-2.92	46.20	NRB	Horizontal	99	330	--	--	Pass
3	855.47	42.46	6.78	-2.36	46.88	NRB	Horizontal	199	0	--	--	Pass
4	863.23	40.82	6.81	-2.22	45.40	NRB	Vertical	99	90	--	--	Pass
5	903.00	49.43	6.93	28.70	54.51	Fundamental	Vertical	199	29	--	--	Pass
6	903.00	48.18	6.93	28.70	53.26	Fundamental	Horizontal	99	330	--	--	Pass
7	973.54	35.31	7.14	-1.08	41.37	MaxQP	Vertical	110	2	54.0	-12.6	Pass
8	999.01	36.20	7.23	-0.94	42.49	MaxQP	Vertical	148	294	54.0	-11.5	Pass

Test Notes: SN: 2935662-05, OOK, 903 MHz, 16.384 kbps, Power Level 3

Non Restrictive Band (NRB)


Equipment Configuration for 30 MHZ TO 1 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	OOK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	915.00	Data Rate:	16.384kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz

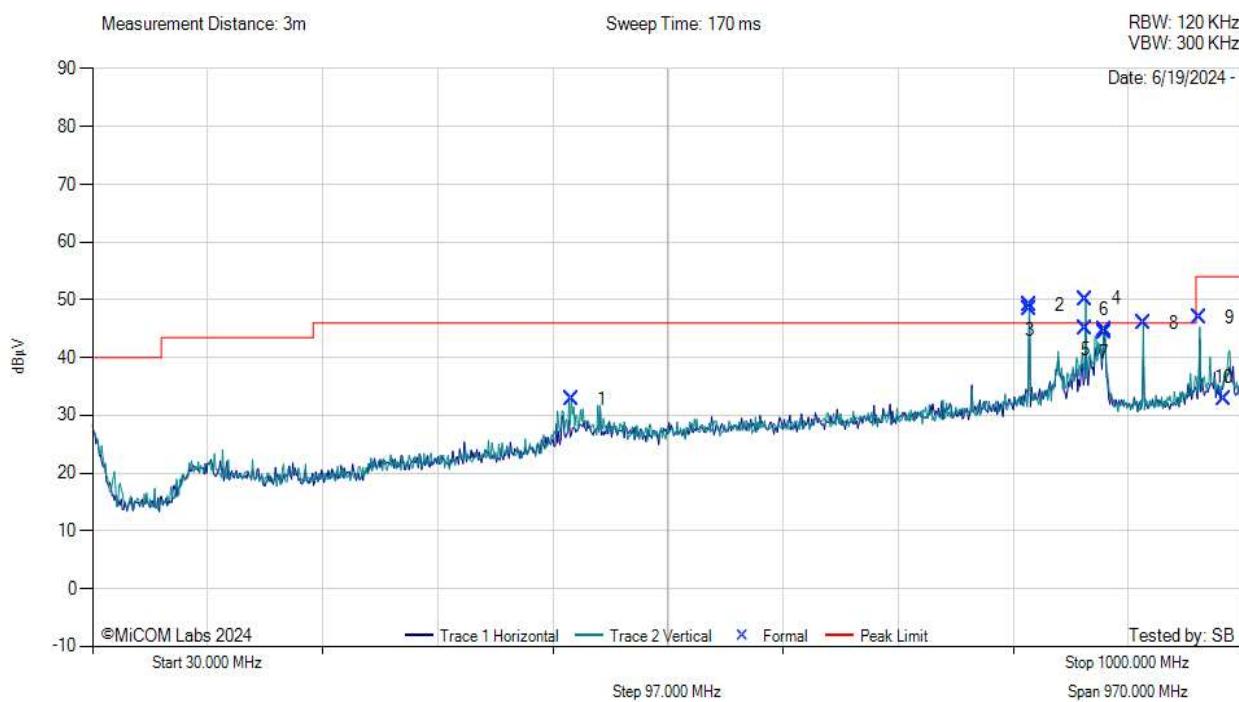



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	433.52	35.36	5.47	-8.07	32.76	NRB	Vertical	100	179	--	--	Pass
2	819.58	45.00	6.69	-2.67	49.02	NRB	Horizontal	100	330	--	--	Pass
3	819.58	44.30	6.69	-2.67	48.31	NRB	Vertical	100	150	--	--	Pass
4	867.11	45.56	6.82	-2.18	50.20	NRB	Vertical	199	299	--	--	Pass
5	867.11	40.40	6.82	-2.18	45.04	NRB	Horizontal	100	299	--	--	Pass
6	882.63	40.16	6.87	-2.2	44.83	NRB	Horizontal	199	95	--	--	Pass
7	882.63	39.78	6.88	-2.23	44.42	NRB	Vertical	199	0	--	--	Pass
8	915.00	40.81	6.98	-1.75	46.04	Fundamental	Vertical	100	0	--	--	Pass
9	963.00	40.94	7.11	29.42	46.96	MaxQP	Vertical	111	29	54.0	-7.0	Pass
10	983.91	26.81	7.15	-1.07	32.89	MaxQP	Vertical	98	341	54.0	-21.1	Pass

Test Notes: SN: 2935662-05, OOK, 915 MHz, 16.384 kbps, Power Level 3

Non Restrictive Band (NRB)


Equipment Configuration for 30 MHZ TO 1 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	OOK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	926.80	Data Rate:	16.384kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



30 MHz to 1 GHz

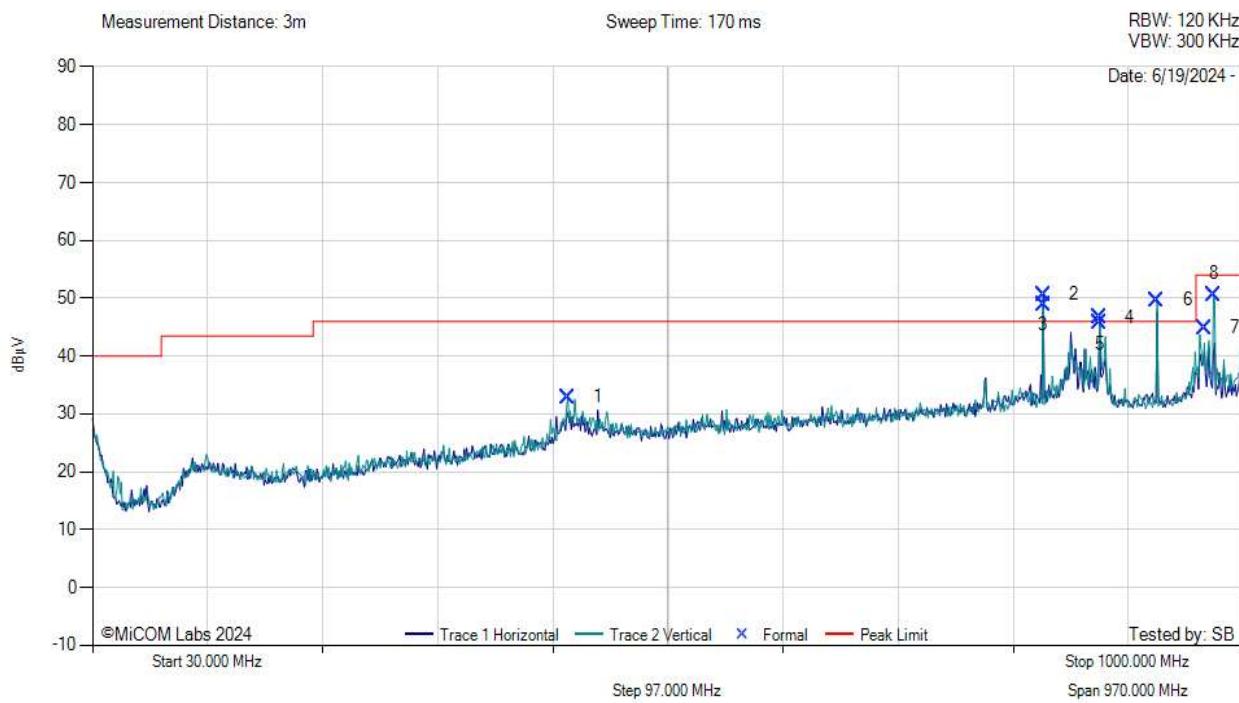



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

30.00 - 1000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	430.61	35.43	5.45	-8.01	32.88	MaxP	Vertical	100	179	--	--	Pass
2	831.22	46.50	6.72	-2.57	50.65	MaxP	Horizontal	100	330	--	--	Pass
3	831.22	44.77	6.72	-2.57	48.92	MaxP	Vertical	100	119	--	--	Pass
4	878.75	42.03	6.86	-2.2	46.69	MaxP	Horizontal	100	29	--	--	Pass
5	878.75	41.1	6.86	-2.2	45.76	MaxP	Vertical	100	29	--	--	Pass
6	926.80	44.24	7.00	-1.55	49.69	Fundamental	Vertical	199	29	--	--	Pass
7	966.80	38.81	7.14	-1.10	44.86	MaxQP	Vertical	105	10	54.0	-9.1	Pass
8	974.81	44.54	7.16	-1.09	50.61	MaxQP	Vertical	106	1	54.0	-3.4	Pass

Test Notes: SN: 2935662-05, OOK, 926.8 MHz, 16.384 kbps, Power Level 3

Non Restrictive Band (NRB)

9.4.2.4. TX Spurious & Restricted Band Emissions 1GHz to 18GHz

9.4.2.4.1. GFSK


Equipment Configuration for FCC SPURIOUS 1 GHZ -18 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	903.00	Data Rate:	37.5kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

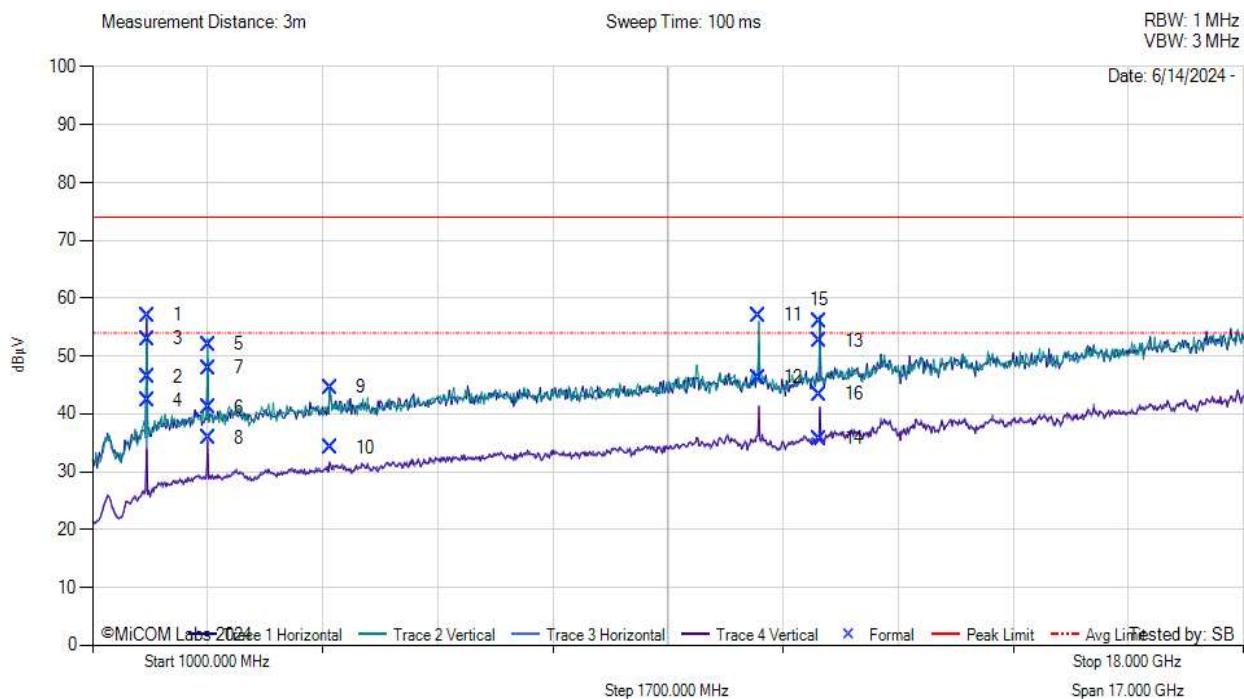



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	1806.08	69.90	1.71	-14.53	57.08	MaxP	Horizontal	156	251	74.0	-16.9	Pass
2	1806.08	59.15	1.71	-14.53	46.33	AVG	Horizontal	156	251	54.0	-7.7	Pass
3	1806.12	65.77	1.71	-14.53	52.95	MaxP	Vertical	150	301	74.0	-21.0	Pass
4	1806.12	55.11	1.71	-14.53	42.29	AVG	Vertical	150	301	54.0	-11.7	Pass
5	2708.93	61.73	2.07	-11.77	52.03	MaxP	Vertical	156	60	74.0	-22.0	Pass
6	2708.93	50.84	2.07	-11.77	41.14	AVG	Vertical	156	60	54.0	-12.9	Pass
7	2708.95	57.61	2.07	-11.77	47.91	MaxP	Horizontal	164	16	74.0	-26.1	Pass
8	2708.95	45.52	2.07	-11.77	35.82	AVG	Horizontal	164	16	54.0	-18.2	Pass
9	4515.28	53.90	2.79	-12.12	44.56	MaxP	Vertical	185	50	74.0	-29.4	Pass
10	4515.28	43.47	2.79	-12.12	34.13	AVG	Vertical	185	50	54.0	-19.9	Pass
11	10835.41	57.12	4.59	-4.68	57.04	MaxP	Vertical	149	292	74.0	-17.0	Pass
12	10835.41	46.35	4.59	-4.68	46.26	AVG	Vertical	149	292	54.0	-7.7	Pass
13	11739.46	54.08	5.02	-6.52	52.58	MaxP	Horizontal	162	50	74.0	-21.4	Pass
14	11739.46	37.20	5.02	-6.52	35.70	AVG	Horizontal	162	50	54.0	-18.3	Pass
15	11739.69	57.59	5.02	-6.52	56.09	MaxP	Vertical	163	296	74.0	-17.9	Pass
16	11739.69	44.86	5.02	-6.52	43.36	AVG	Vertical	163	296	54.0	-10.6	Pass

Test Notes: SN: 2935662-05, GFSK, 903 MHz, 37.5 kbps, Power Level 3


Equipment Configuration for FCC SPURIOUS 1 GHZ -18 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	915.00	Data Rate:	37.5kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

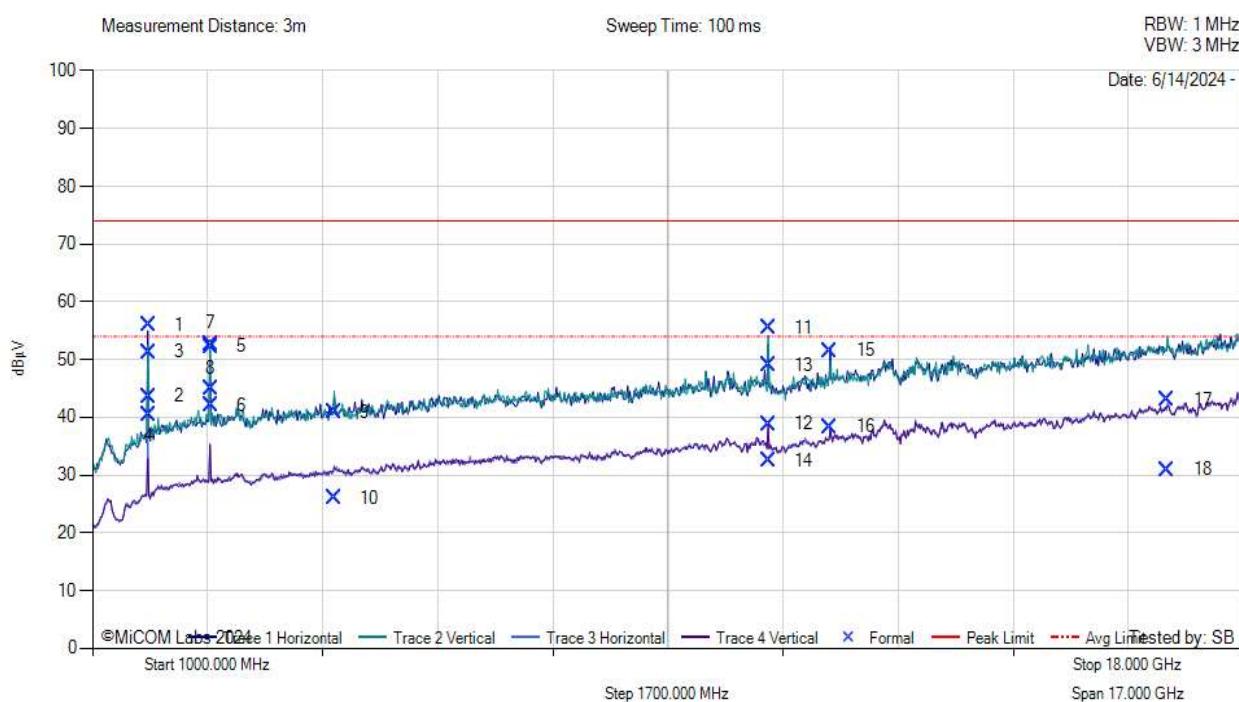



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	1830.03	68.60	1.75	-14.36	55.99	MaxP	Horizontal	199	112	74.0	-18.0	Pass
2	1830.03	56.21	1.75	-14.36	43.60	AVG	Horizontal	199	112	54.0	-10.4	Pass
3	1830.12	63.87	1.75	-14.36	51.26	MaxP	Vertical	150	242	74.0	-22.7	Pass
4	1830.12	53.02	1.75	-14.36	40.41	AVG	Vertical	150	242	54.0	-13.6	Pass
5	2745.08	61.90	2.11	-11.74	52.27	MaxP	Vertical	150	61	74.0	-21.7	Pass
6	2745.08	51.69	2.11	-11.74	42.06	AVG	Vertical	150	61	54.0	-11.9	Pass
7	2745.16	62.37	2.11	-11.74	52.74	MaxP	Horizontal	180	22	74.0	-21.3	Pass
8	2745.16	54.52	2.11	-11.74	44.89	AVG	Horizontal	180	22	54.0	-9.1	Pass
9	4574.67	50.29	2.82	-12.26	40.85	MaxP	Vertical	149	287	74.0	-33.1	Pass
10	4574.67	35.47	2.82	-12.26	26.04	AVG	Vertical	149	287	54.0	-28.0	Pass
11	10979.53	56.07	4.61	-5.18	55.50	MaxP	Vertical	160	290	74.0	-18.5	Pass
12	10979.53	39.42	4.61	-5.18	38.85	AVG	Vertical	160	290	54.0	-15.1	Pass
13	10980.29	49.65	4.59	-5.17	49.07	MaxP	Horizontal	153	24	74.0	-24.9	Pass
14	10980.29	33.12	4.59	-5.17	32.54	AVG	Horizontal	153	24	54.0	-21.5	Pass
15	11895.68	52.74	4.96	-6.15	51.55	MaxP	Horizontal	149	48	74.0	-22.5	Pass
16	11895.68	39.59	4.96	-6.15	38.40	AVG	Horizontal	149	48	54.0	-15.6	Pass
17	16876.32	37.01	6.65	-0.55	43.11	MaxP	Vertical	194	235	74.0	-30.9	Pass
18	16876.32	24.87	6.65	-0.55	30.97	AVG	Vertical	194	235	54.0	-23.0	Pass

Test Notes: SN: 2935662-05, GFSK, 915 MHz, 37.5 kbps, Power Level 3


Equipment Configuration for FCC SPURIOUS 1 GHZ -18 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	GFSK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	926.8	Data Rate:	37.5kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

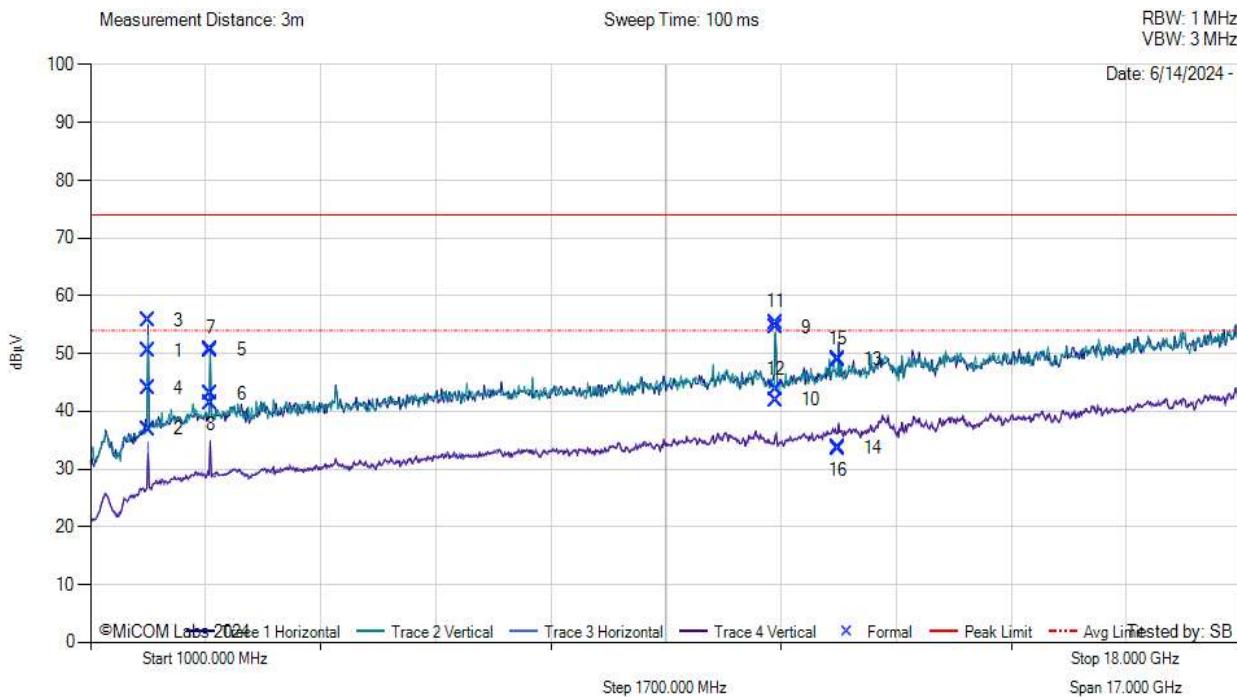



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	1853.45	62.94	1.71	-14.16	50.50	MaxP	Vertical	175	0	74.0	-23.5	Pass
2	1853.45	49.35	1.71	-14.16	36.91	AVG	Vertical	175	0	54.0	-17.1	Pass
3	1853.52	68.18	1.72	-14.16	55.74	MaxP	Horizontal	198	118	74.0	-18.3	Pass
4	1853.52	56.40	1.72	-14.16	43.96	AVG	Horizontal	198	118	54.0	-10.0	Pass
5	2780.26	60.28	2.13	-11.79	50.62	MaxP	Horizontal	161	18	74.0	-23.4	Pass
6	2780.26	52.72	2.13	-11.79	43.06	AVG	Horizontal	161	18	54.0	-10.9	Pass
7	2780.58	60.46	2.13	-11.79	50.80	MaxP	Vertical	154	67	74.0	-23.2	Pass
8	2780.58	51.09	2.13	-11.79	41.43	AVG	Vertical	154	67	54.0	-12.6	Pass
9	11121.06	55.69	4.51	-5.60	54.61	MaxP	Horizontal	159	27	74.0	-19.4	Pass
10	11121.06	43.00	4.51	-5.60	41.91	AVG	Horizontal	159	27	54.0	-12.1	Pass
11	11122.18	56.51	4.51	-5.63	55.39	MaxP	Vertical	152	293	74.0	-18.6	Pass
12	11122.18	44.85	4.51	-5.63	43.73	AVG	Vertical	152	293	54.0	-10.3	Pass
13	12047.88	49.83	4.71	-5.61	48.92	MaxP	Vertical	167	296	74.0	-25.1	Pass
14	12047.88	34.58	4.71	-5.61	33.67	AVG	Vertical	167	296	54.0	-20.3	Pass
15	12047.88	49.91	4.71	-5.61	49.00	MaxP	Horizontal	171	30	74.0	-25.0	Pass
16	12047.88	34.36	4.71	-5.61	33.45	AVG	Horizontal	171	30	54.0	-20.5	Pass

Test Notes: SN: 2935662-05, GFSK, 926.8 MHz, 37.5 kbps, Power Level 3

9.4.2.4.2. OOK Power Level 3


Equipment Configuration for FCC SPURIOUS 1 GHZ -18 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	OOK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	903.00	Data Rate:	16.384kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

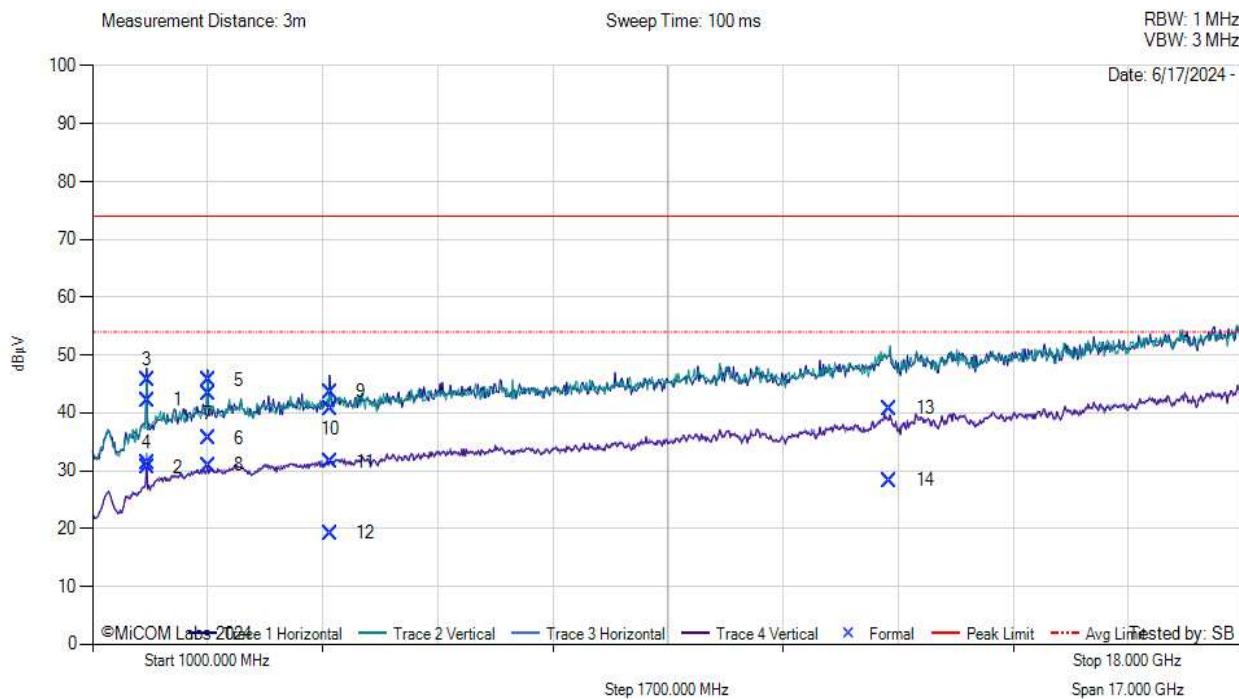



Title: Itron ERG-5600-008
To: FCC CFR 47 Part 15C 15.247 & ISED RSS-247
Serial #: ITRO67-U8 Rev A

1000.00 - 18000.00 MHz												
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail
1	1806.07	55.04	1.71	-14.53	42.22	MaxP	Vertical	166	179	74.0	-31.8	Pass
2	1806.07	43.44	1.71	-14.53	30.62	AVG	Vertical	166	179	54.0	-23.4	Pass
3	1806.08	58.50	1.71	-14.53	45.68	MaxP	Horizontal	158	268	74.0	-28.3	Pass
4	1806.08	44.05	1.71	-14.53	31.23	AVG	Horizontal	158	268	54.0	-22.8	Pass
5	2709.06	55.40	2.07	-11.77	45.70	MaxP	Vertical	171	51	74.0	-28.3	Pass
6	2709.06	45.27	2.07	-11.77	35.57	AVG	Vertical	171	51	54.0	-18.4	Pass
7	2709.09	53.08	2.07	-11.77	43.38	MaxP	Horizontal	157	19	74.0	-30.6	Pass
8	2709.09	40.65	2.07	-11.77	30.95	AVG	Horizontal	157	19	54.0	-23.0	Pass
9	4515.00	52.96	2.79	-12.12	43.62	MaxP	Vertical	181	98	74.0	-30.4	Pass
10	4515.00	50.12	2.79	-12.12	40.79	AVG	Vertical	181	98	54.0	-13.2	Pass
11	4515.29	40.85	2.79	-12.12	31.52	MaxP	Horizontal	158	54	74.0	-42.5	Pass
12	4515.29	28.54	2.79	-12.12	19.21	AVG	Horizontal	158	54	54.0	-34.8	Pass
13	12779.24	43.24	5.32	-7.79	40.77	MaxP	Vertical	150	316	74.0	-33.2	Pass
14	12779.24	30.82	5.32	-7.79	28.34	AVG	Vertical	150	316	54.0	-25.7	Pass

Test Notes: SN: 2935662-05, OOK, 903 MHz, 16.384 kbps, Power Level 3


Equipment Configuration for FCC SPURIOUS 1 GHZ -18 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	OOK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	915.00	Data Rate:	16.384kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

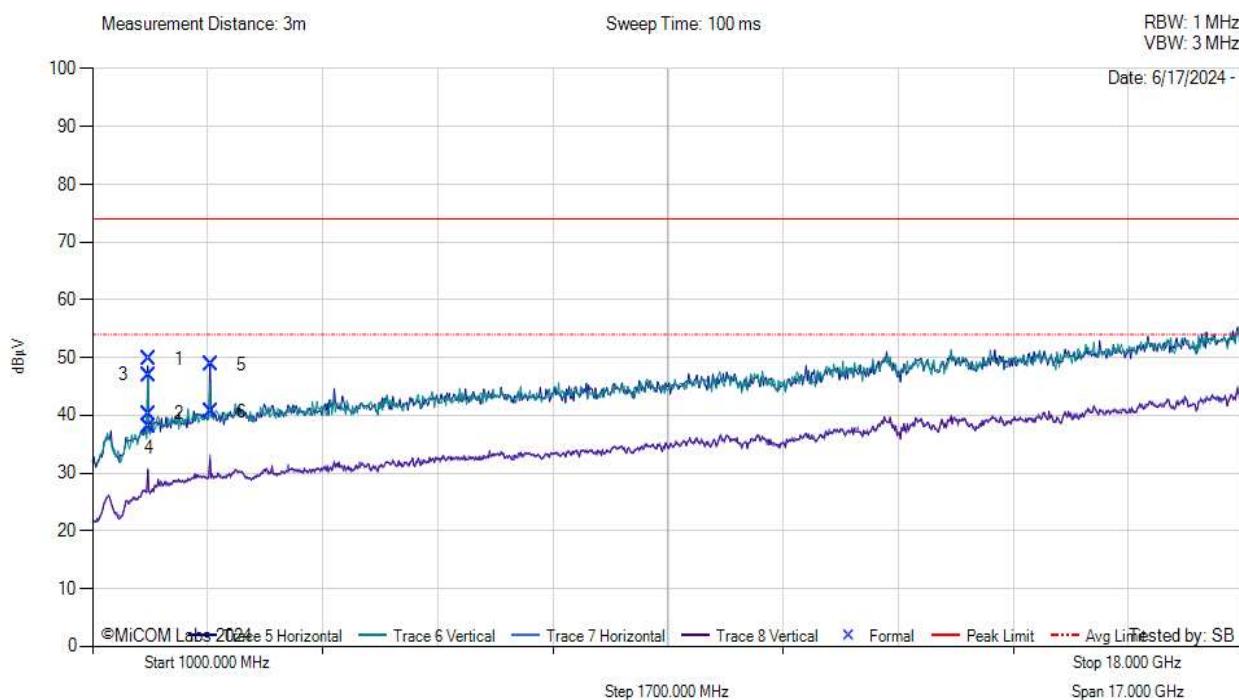

1000.00 - 18000.00 MHz

Num	Frequency MHz	Raw dBµV	Cable Loss dB	AF dB/m	Level dBµV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBµV/m	Margin dB	Pass /Fail
1	1829.99	62.34	1.75	-14.36	49.73	MaxP	Horizontal	194	98	74.0	-24.3	Pass
2	1829.99	52.91	1.75	-14.36	40.30	AVG	Horizontal	194	98	54.0	-13.7	Pass
3	1830.03	59.59	1.75	-14.36	46.98	MaxP	Vertical	163	0	74.0	-27.0	Pass
4	1830.03	50.60	1.75	-14.36	37.99	AVG	Vertical	163	0	54.0	-16.0	Pass
5	2744.97	58.45	2.11	-11.74	48.81	MaxP	Horizontal	175	30	74.0	-25.2	Pass
6	2744.97	50.21	2.11	-11.74	40.57	AVG	Horizontal	175	30	54.0	-13.4	Pass

Test Notes: SN: 2935662-05, OOK, 915 MHz, 16.384 kbps, Power Level 3


Equipment Configuration for FCC SPURIOUS 1 GHZ -18 GHZ

Antenna:	Integral	Variant:	100G DM
Antenna Gain (dBi):	Not Applicable	Modulation:	OOK
Beam Forming Gain (Y):	Not Applicable	Duty Cycle (%):	99
Channel Frequency (MHz):	926.80	Data Rate:	16.384kbps
Power Setting:	Power Level 3	Tested By:	SB

Test Measurement Results



FCC Spurious 1 GHz -18 GHz

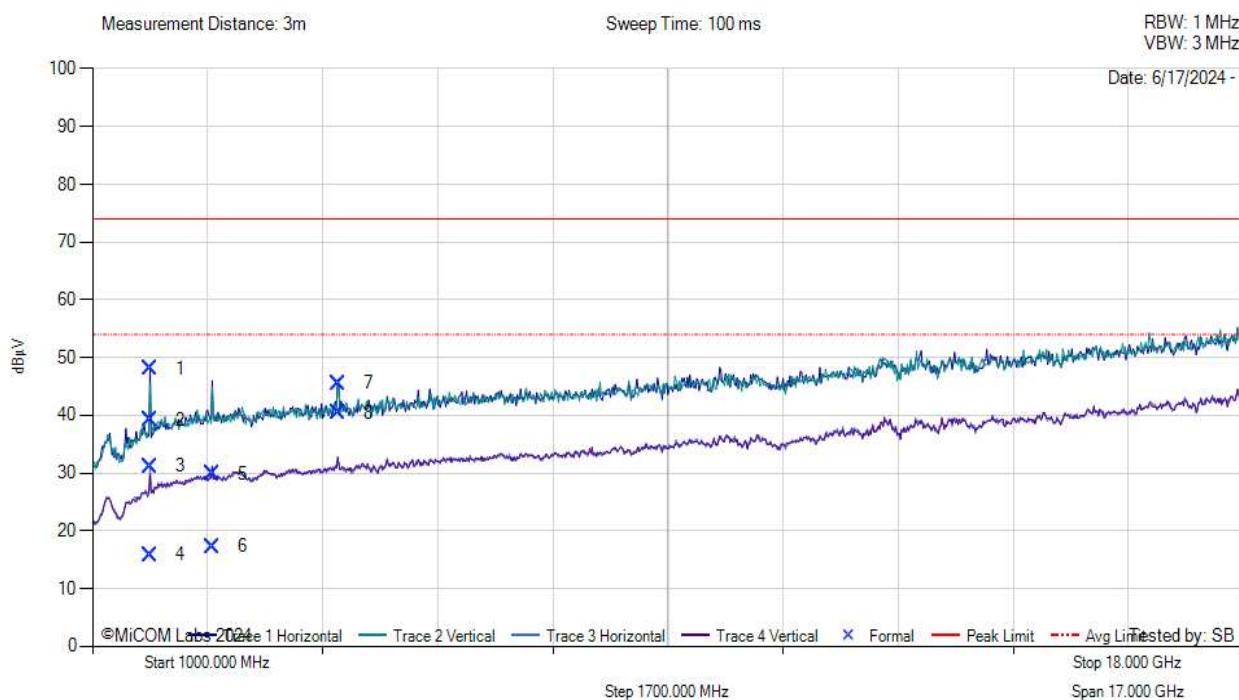

1000.00 - 18000.00 MHz													
Num	Frequency MHz	Raw dB μ V	Cable Loss dB	AF dB/m	Level dB μ V/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dB μ V/m	Margin dB	Pass /Fail	
1	1853.63	60.57	1.72	-14.16	48.13	MaxP	Horizontal	149	98	74.0	-25.9	Pass	
2	1853.63	51.67	1.72	-14.16	39.23	AVG	Horizontal	149	98	54.0	-14.8	Pass	
3	1853.76	43.57	1.72	-14.15	31.13	MaxP	Vertical	148	6	74.0	-42.9	Pass	
4	1853.76	28.28	1.72	-14.15	15.84	AVG	Vertical	148	6	54.0	-38.2	Pass	
5	2761.82	39.48	2.14	-11.74	29.88	MaxP	Horizontal	156	57	74.0	-44.1	Pass	
6	2761.82	26.90	2.14	-11.74	17.30	AVG	Horizontal	156	57	54.0	-36.7	Pass	
7	4633.95	55.01	2.80	-12.27	45.54	MaxP	Horizontal	182	61	74.0	-28.5	Pass	
8	4633.95	49.89	2.80	-12.27	40.42	AVG	Horizontal	182	61	54.0	-13.6	Pass	

Test Notes: SN: 2935662-05, OOK, 926.8 MHz, 16.384 kbps, Power Level 3

10. Manufacturer Dwell & Channel Occupancy Declaration

Note: Dwell Time and Channel Occupancy were not tested as part of this test program, these were declared for normal network operation by Itron in the following document provided as an exhibit in support of this test program.

“BPD Time of Use and Equal Usage” 800-0016 Version 06 Dated 29th November 2023

This document contains Dwell & Occupancy times as compliant for the following operation modes declared by the manufacturer for the Itron 100G ERT® Module in normal operation.

- 1) 100S Mode pages 7 to 9
- 2) Local Port Mode pages 10 to 12;
- 3) BACT Mode Pages P13 to P17,
- 4) EFC/ EFC + Mode P18 to 20.
- 5) INS Mode Pages 21 to 22.

11. Manufacturer Declaration of Similarity



June 28, 2024

Itron, Inc.
2401 N. State St.
Waseca, MN 56093
507-781-4300
www.itron.com

Subject: Declaration of Similarity: EWQ100GTC, 864D-100GTC

Dear Sir or Madam,

We declare the product models listed below are electrically identical.

Product Information	
Marketing Name	100G ERT Module
Description	Gas utility AMR device
Models(s)	ERG-5600-007, ERG-5600-008

The only difference between these variant models is the housing and the gas meter wriggler interface. The differences of these variants does not affect any RF or EMC performance.


Sincerely,



Dan Bomsta
Sr. Principal Regulatory Engineer
507-781-4480
dan.bomsta@itron.com
Itron, Inc.

A. APPENDIX - GRAPHICAL IMAGES

A.1. 20 dB & 99% Bandwidth

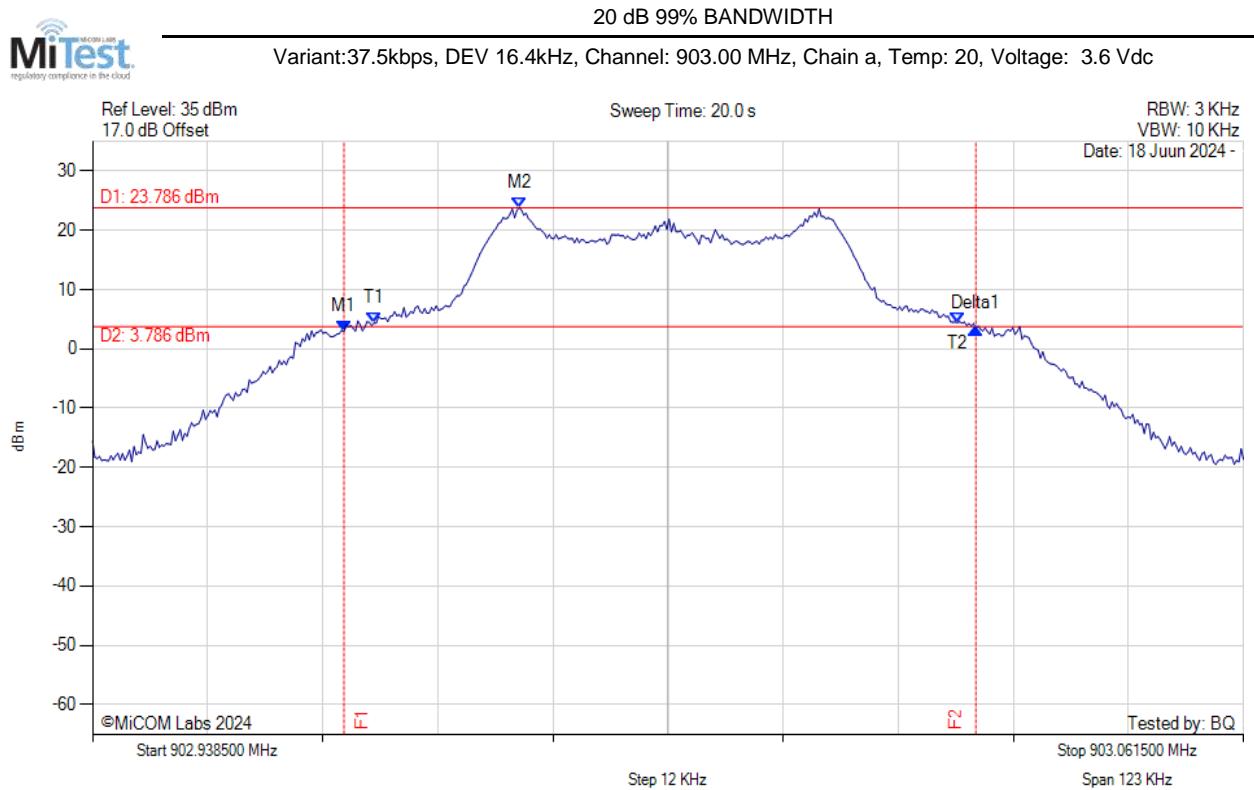


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.965 MHz : 2.960 dBm M2 : 902.984 MHz : 23.786 dBm Delta1 : 68 KHz : 0.478 dB T1 : 902.969 MHz : 4.339 dBm T2 : 903.031 MHz : 4.463 dBm OBW : 62 KHz	Measured 20 dB Bandwidth: 0.068 MHz Limit: 0.5 kHz Margin: -0.43 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant:37.5kbps, DEV 16.4kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

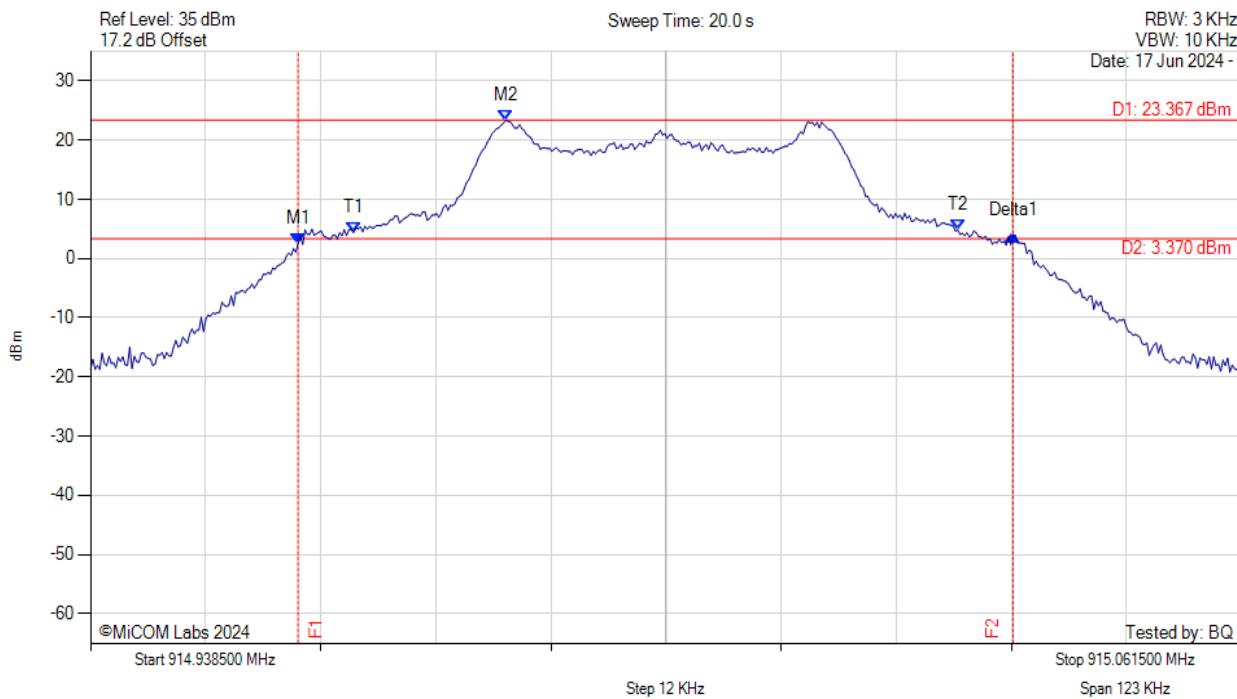


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 914.961 MHz : 2.548 dBm M2 : 914.983 MHz : 23.367 dBm Delta1 : 76 KHz : 1.291 dB T1 : 914.967 MHz : 4.402 dBm T2 : 915.031 MHz : 4.833 dBm OBW : 65 KHz	Measured 20 dB Bandwidth: 0.076 MHz Limit: 0.5 kHz Margin: -0.42 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant:37.5kbps, DEV 16.4kHz, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

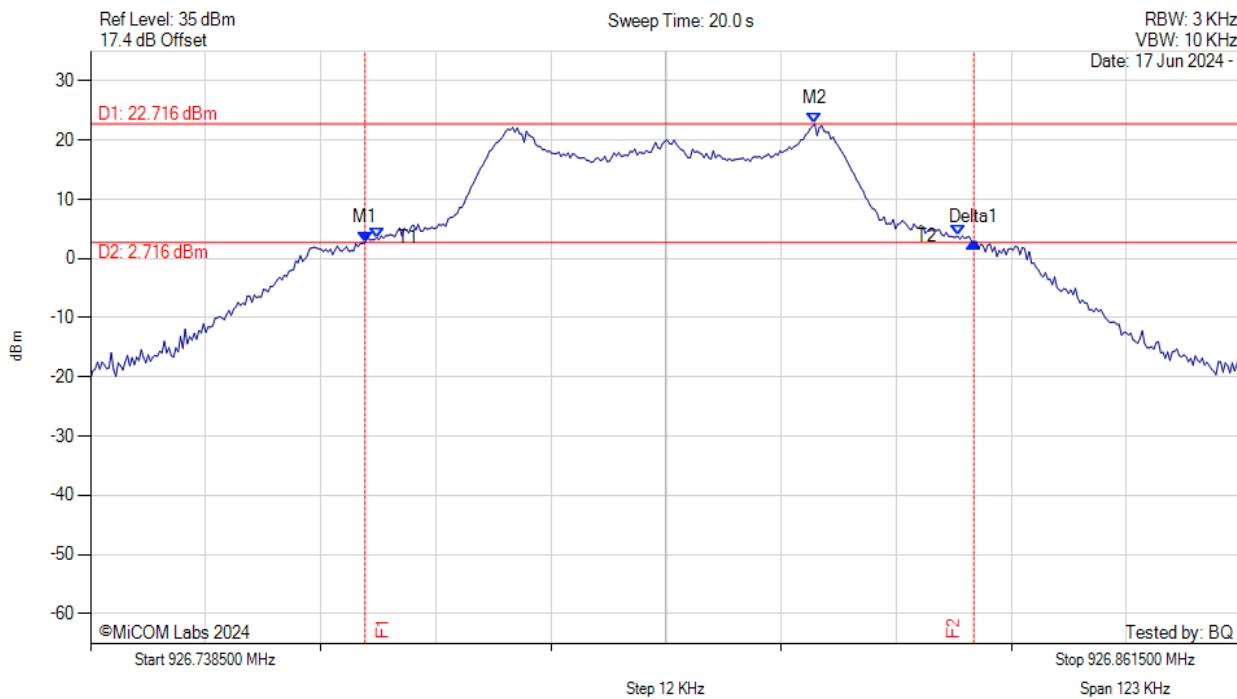


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.768 MHz : 2.694 dBm M2 : 926.816 MHz : 22.716 dBm Delta1 : 65 KHz : 0.057 dB T1 : 926.769 MHz : 3.503 dBm T2 : 926.831 MHz : 3.798 dBm OBW : 62 KHz	Measured 20 dB Bandwidth: 0.065 MHz Limit: 0.5 kHz Margin: -0.44 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH

Variant:37.5kbps, DEV 50kHz, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

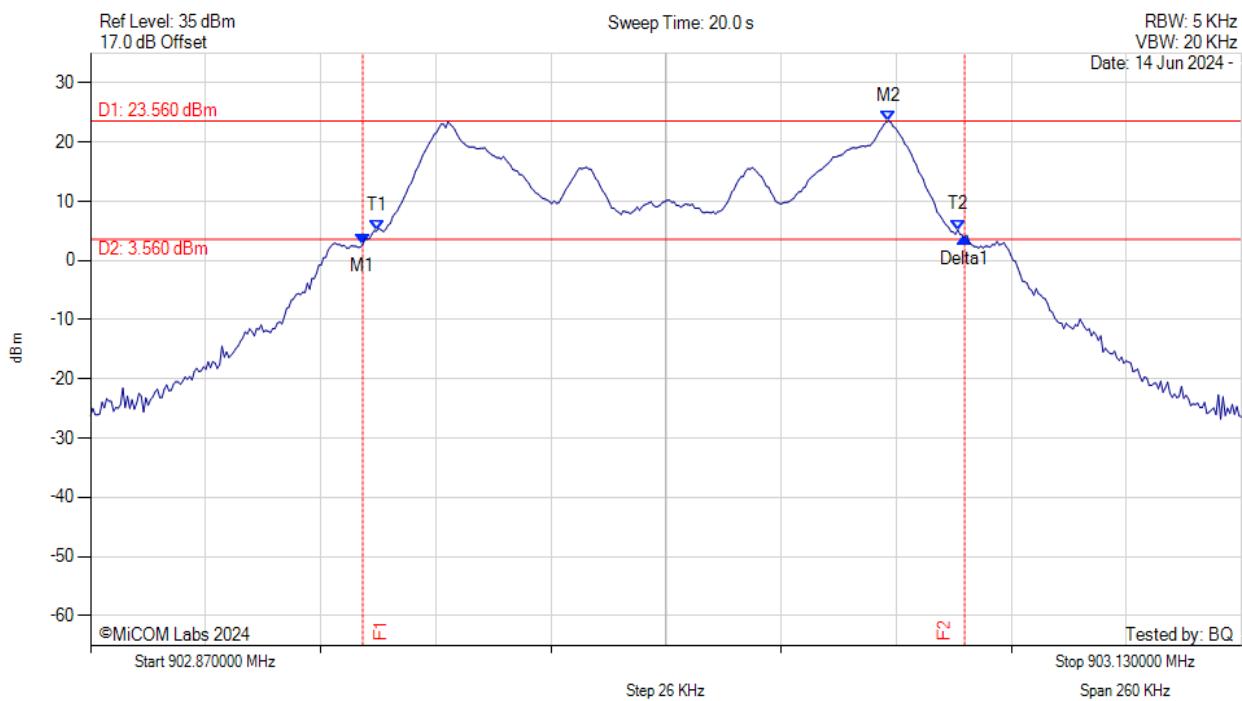


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.931 MHz : 2.747 dBm M2 : 903.050 MHz : 23.560 dBm Delta1 : 136 KHz : 1.125 dB T1 : 902.935 MHz : 4.998 dBm T2 : 903.066 MHz : 5.183 dBm OBW : 131 KHz	Measured 20 dB Bandwidth: 0.136 MHz Limit: 0.5 kHz Margin: -0.36 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant:37.5kbps, DEV 50kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

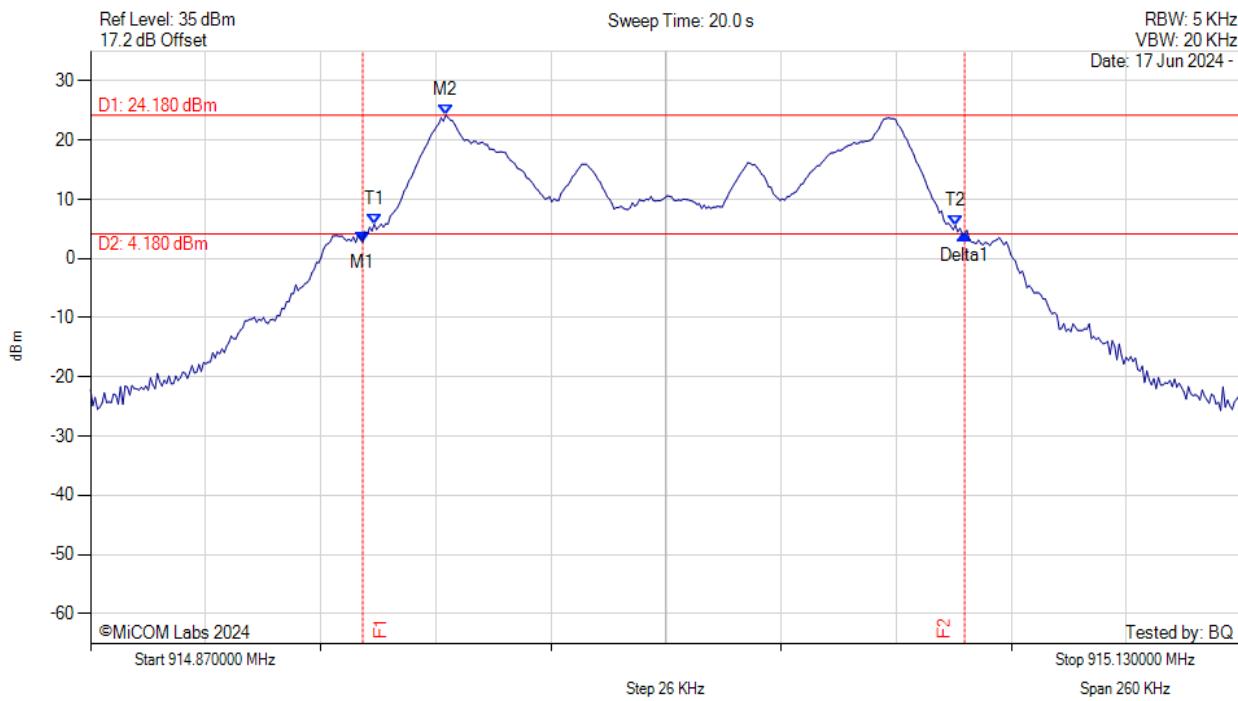


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 914.931 MHz : 2.761 dBm M2 : 914.950 MHz : 24.180 dBm Delta1 : 136 KHz : 1.348 dB T1 : 914.934 MHz : 5.797 dBm T2 : 915.065 MHz : 5.596 dBm OBW : 131 KHz	Measured 20 dB Bandwidth: 0.136 MHz Limit: 0.5 kHz Margin: -0.36 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH

Variant:37.5kbps, DEV 50kHz, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

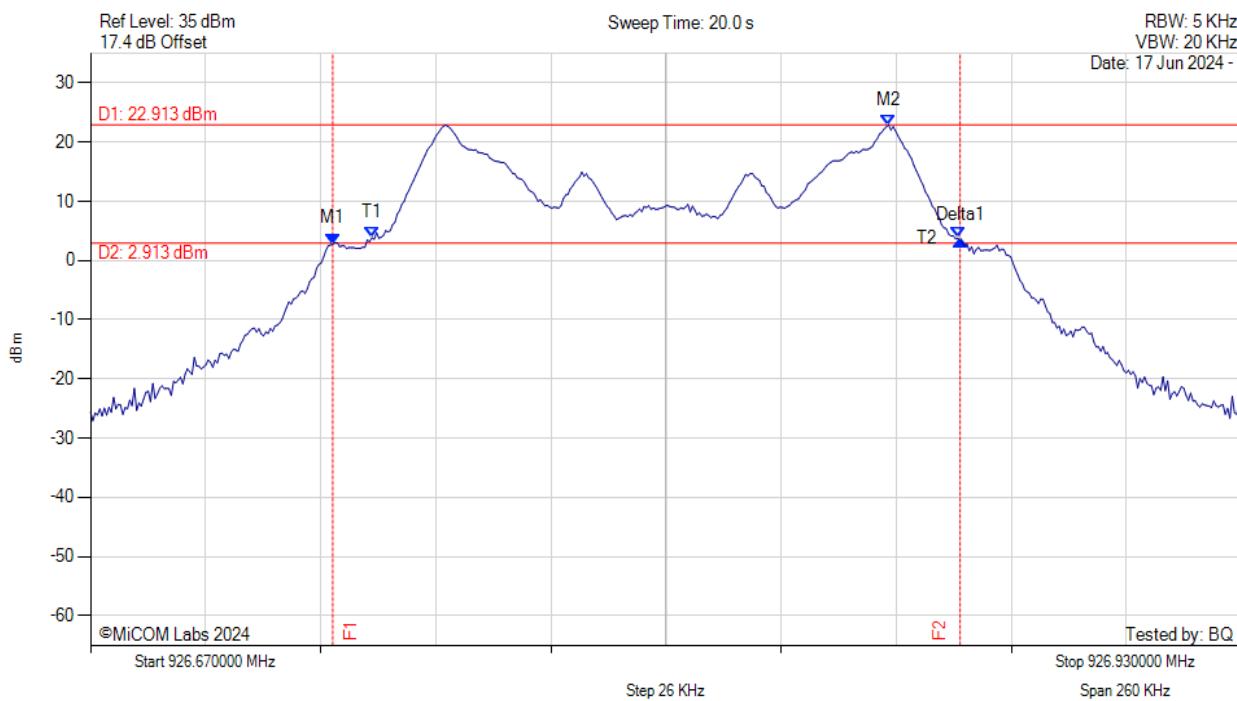


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.725 MHz : 2.828 dBm M2 : 926.850 MHz : 22.913 dBm Delta1 : 142 KHz : 0.673 dB T1 : 926.734 MHz : 3.847 dBm T2 : 926.866 MHz : 3.790 dBm OBW : 132 KHz	Measured 20 dB Bandwidth: 0.142 MHz Limit: 0.5 kHz Margin: -0.36 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: OOK - PL1, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

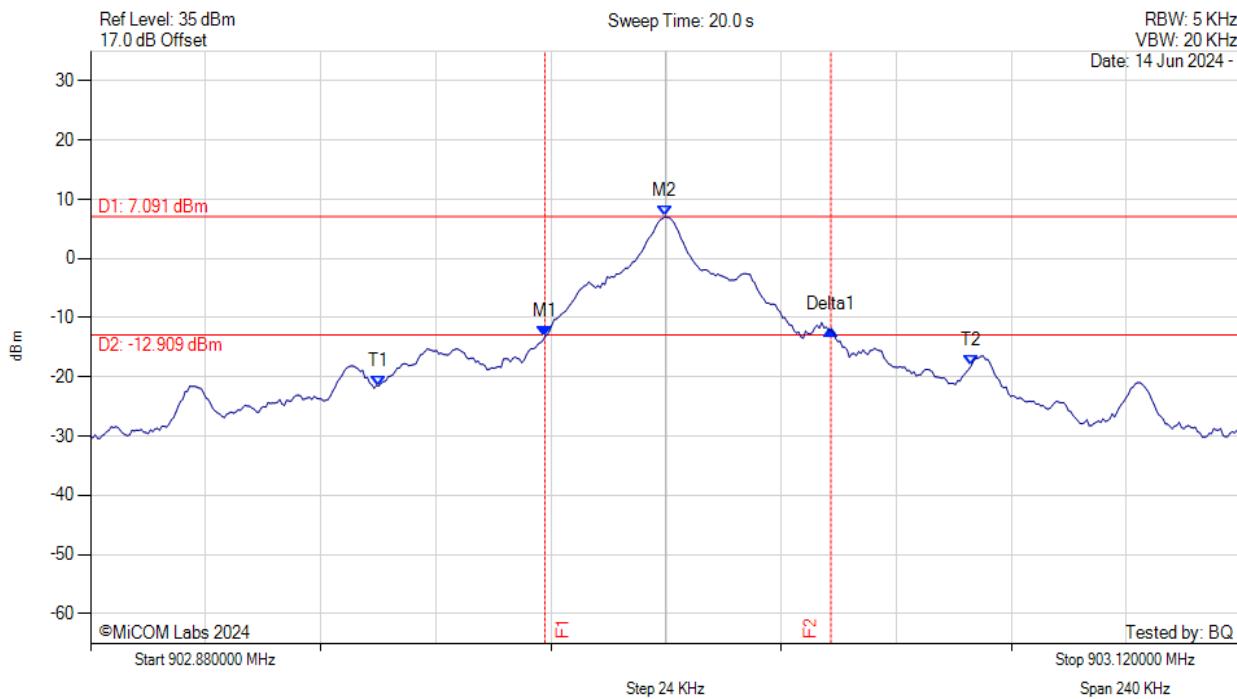


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.975 MHz : -13.167 dBm M2 : 903.000 MHz : 7.091 dBm Delta1 : 60 KHz : 1.070 dB T1 : 902.940 MHz : -21.524 dBm T2 : 903.064 MHz : -17.983 dBm OBW : 124 KHz	Measured 20 dB Bandwidth: 0.060 MHz Limit: 0.5 kHz Margin: -0.44 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: OOK - PL1, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

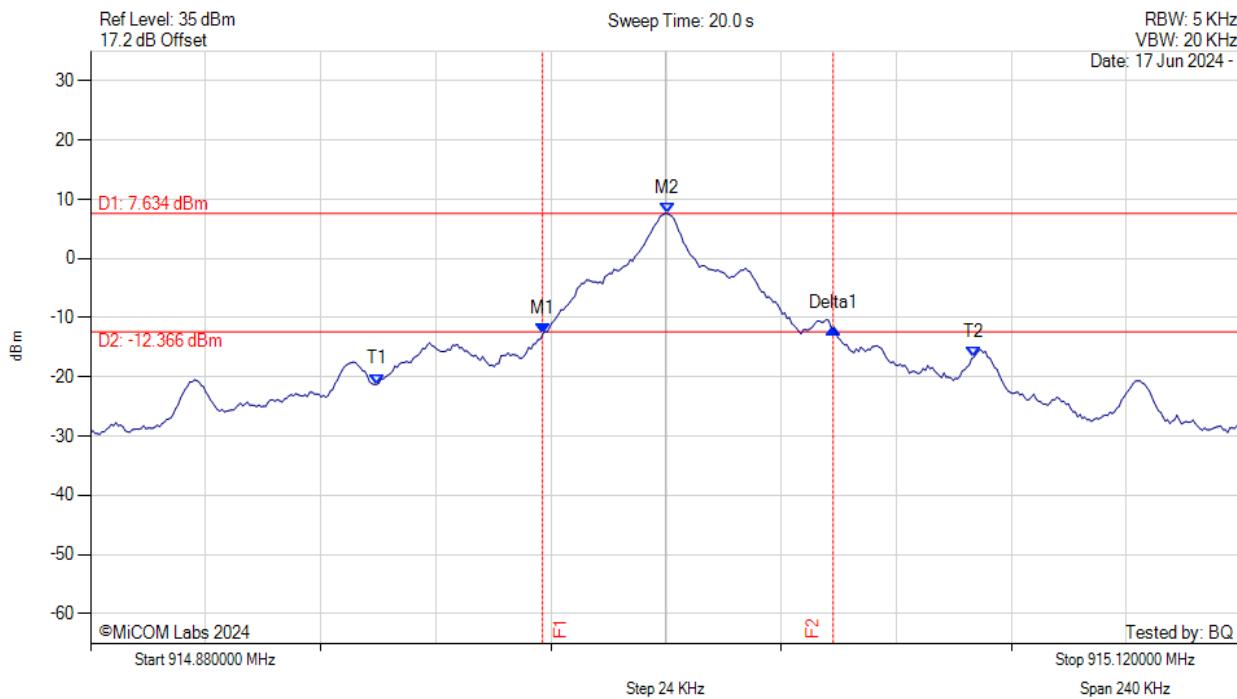


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 914.974 MHz : -12.769 dBm M2 : 915.000 MHz : 7.634 dBm Delta1 : 61 KHz : 0.976 dB T1 : 914.940 MHz : -21.245 dBm T2 : 915.064 MHz : -16.661 dBm OBW : 125 KHz	Measured 20 dB Bandwidth: 0.061 MHz Limit: 0.5 kHz Margin: -0.44 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: OOK - PL1, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

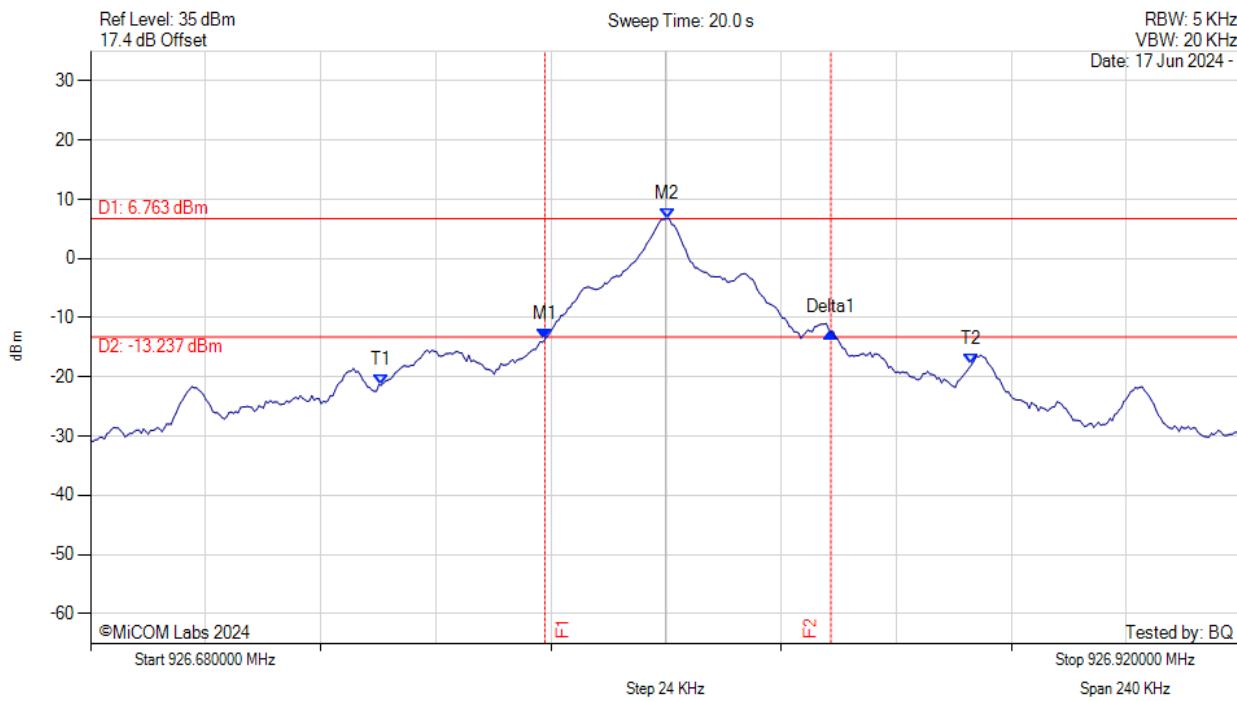


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.775 MHz : -13.657 dBm M2 : 926.800 MHz : 6.763 dBm Delta1 : 60 KHz : 1.267 dB T1 : 926.741 MHz : -21.406 dBm T2 : 926.864 MHz : -17.906 dBm OBW : 123 KHz	Measured 20 dB Bandwidth: 0.060 MHz Limit: 0.5 kHz Margin: -0.44 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: OOK - PL3, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

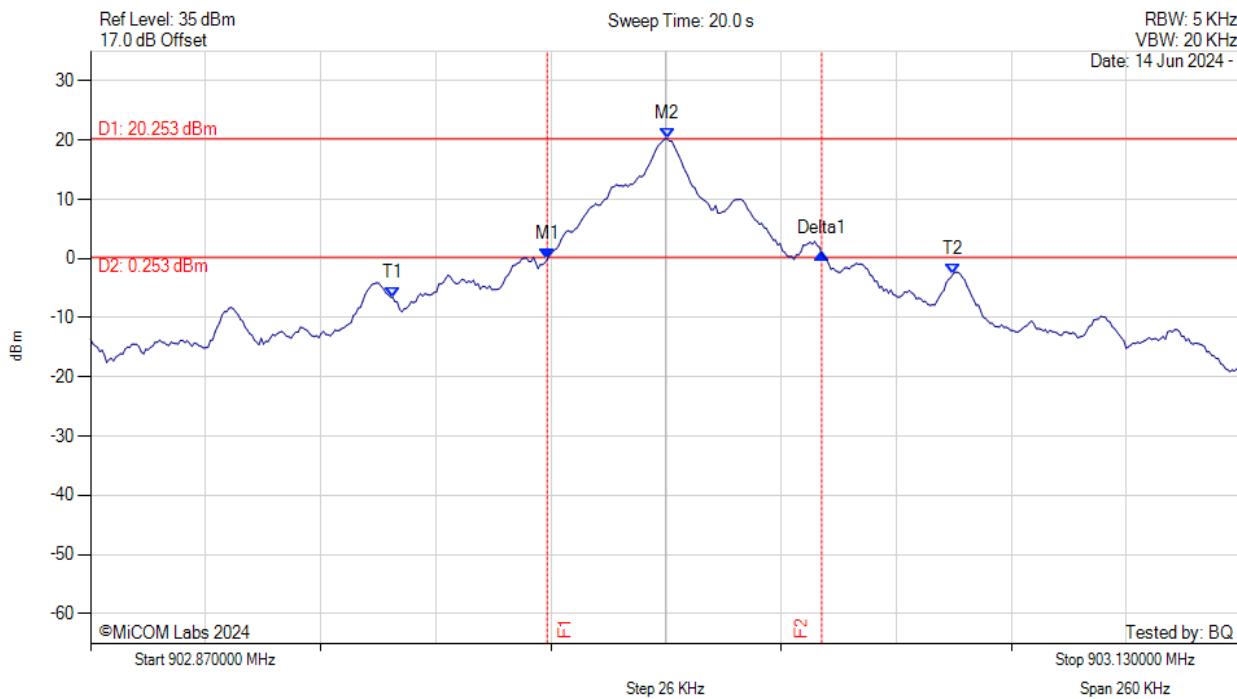


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 902.973 MHz : -0.182 dBm M2 : 903.000 MHz : 20.253 dBm Delta1 : 62 KHz : 0.999 dB T1 : 902.938 MHz : -6.541 dBm T2 : 903.065 MHz : -2.565 dBm OBW : 127 KHz	Measured 20 dB Bandwidth: 0.062 MHz Limit: 0.5 kHz Margin: -0.44 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: OOK - PL3, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

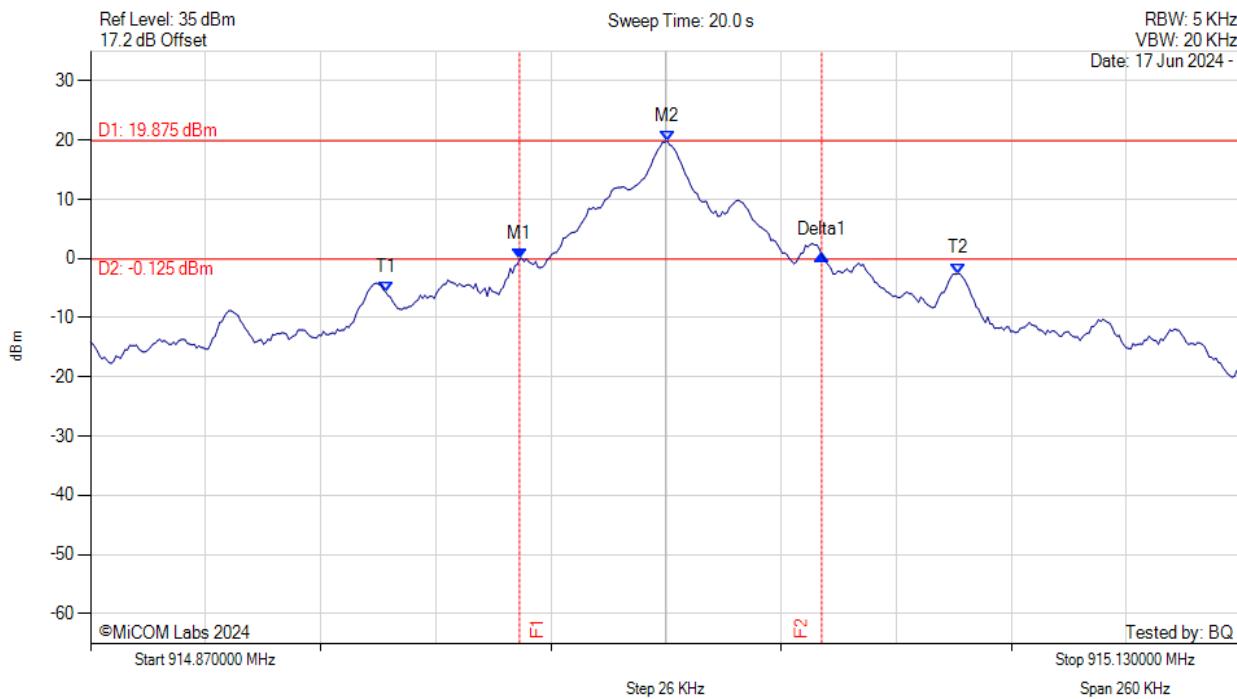


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 914.967 MHz : -0.157 dBm M2 : 915.000 MHz : 19.875 dBm Delta1 : 68 KHz : 0.818 dB T1 : 914.937 MHz : -5.669 dBm T2 : 915.066 MHz : -2.527 dBm OBW : 129 KHz	Measured 20 dB Bandwidth: 0.068 MHz Limit: 0.5 kHz Margin: -0.43 MHz

[back to matrix](#)

20 dB 99% BANDWIDTH



Variant: OOK - PL3, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

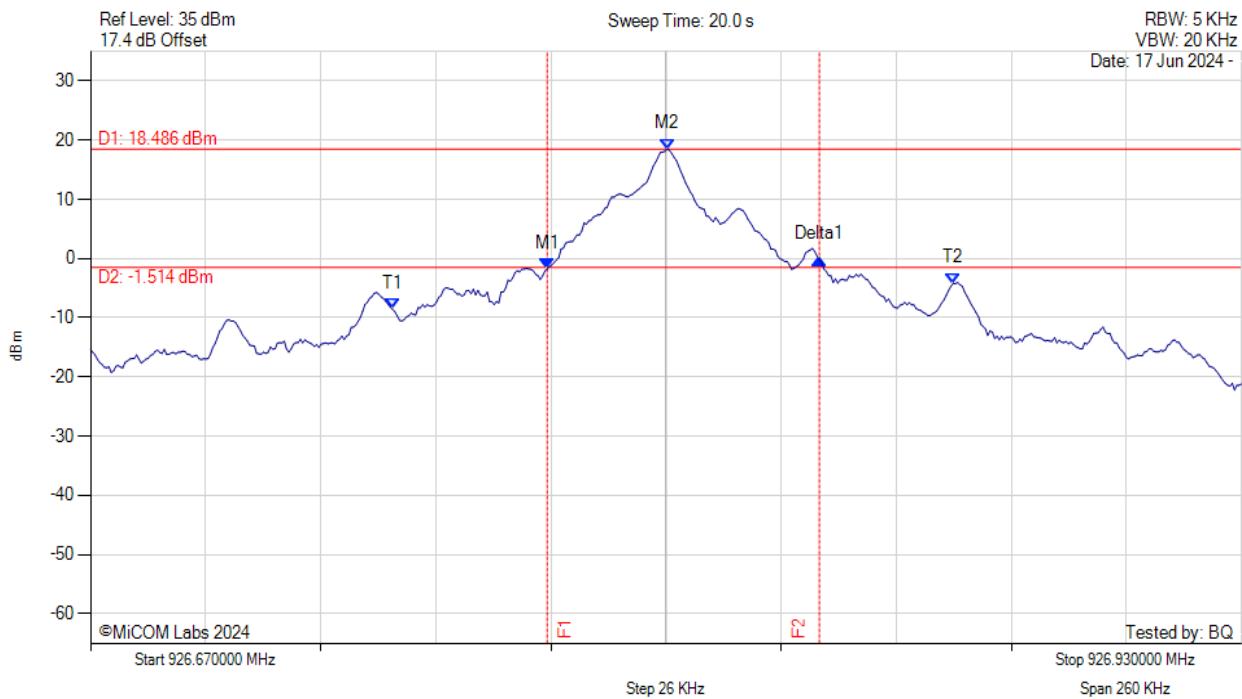


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = MAX HOLD	M1 : 926.773 MHz : -1.799 dBm M2 : 926.800 MHz : 18.486 dBm Delta1 : 61 KHz : 1.666 dB T1 : 926.738 MHz : -8.599 dBm T2 : 926.865 MHz : -4.184 dBm OBW : 127 KHz	Measured 20 dB Bandwidth: 0.061 MHz Limit: 0.5 kHz Margin: -0.44 MHz

[back to matrix](#)

A.2. Frequency Hopping Tests

A.2.1. Number of Hopping Channels

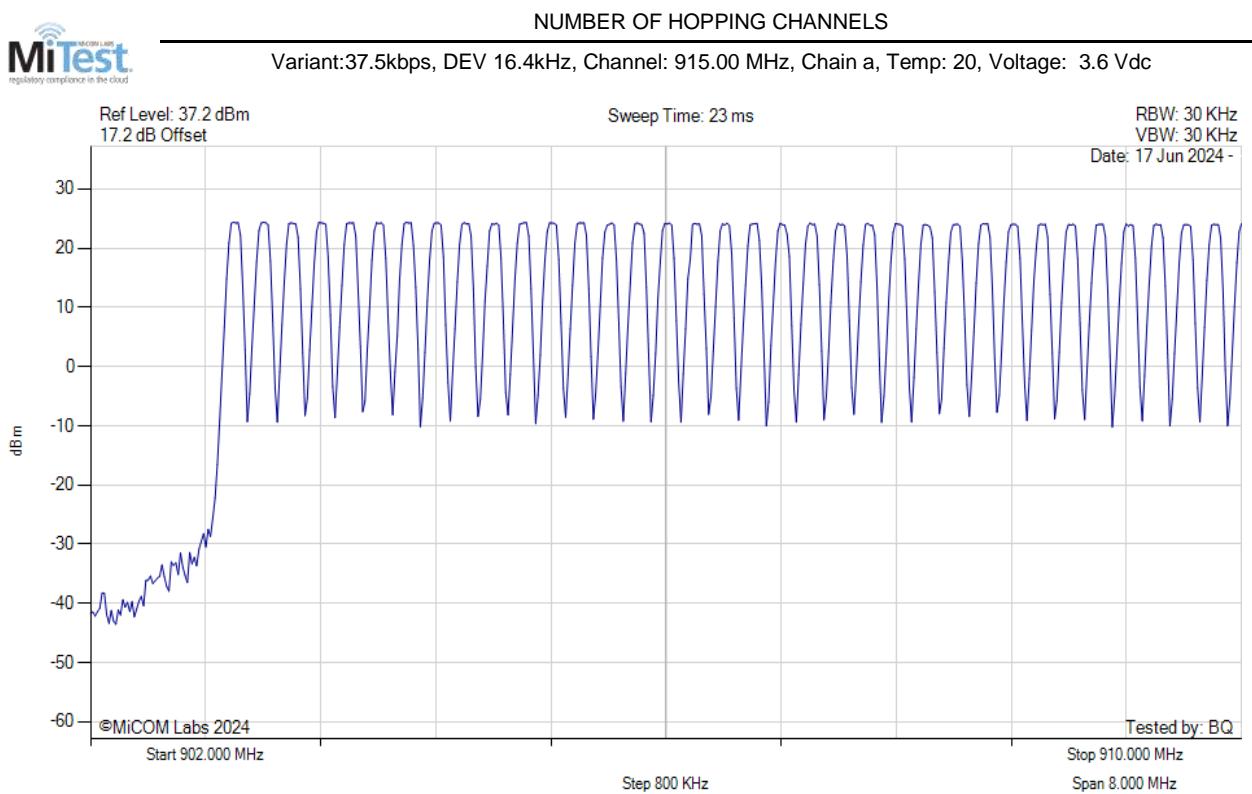


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant:37.5kbps, DEV 16.4kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

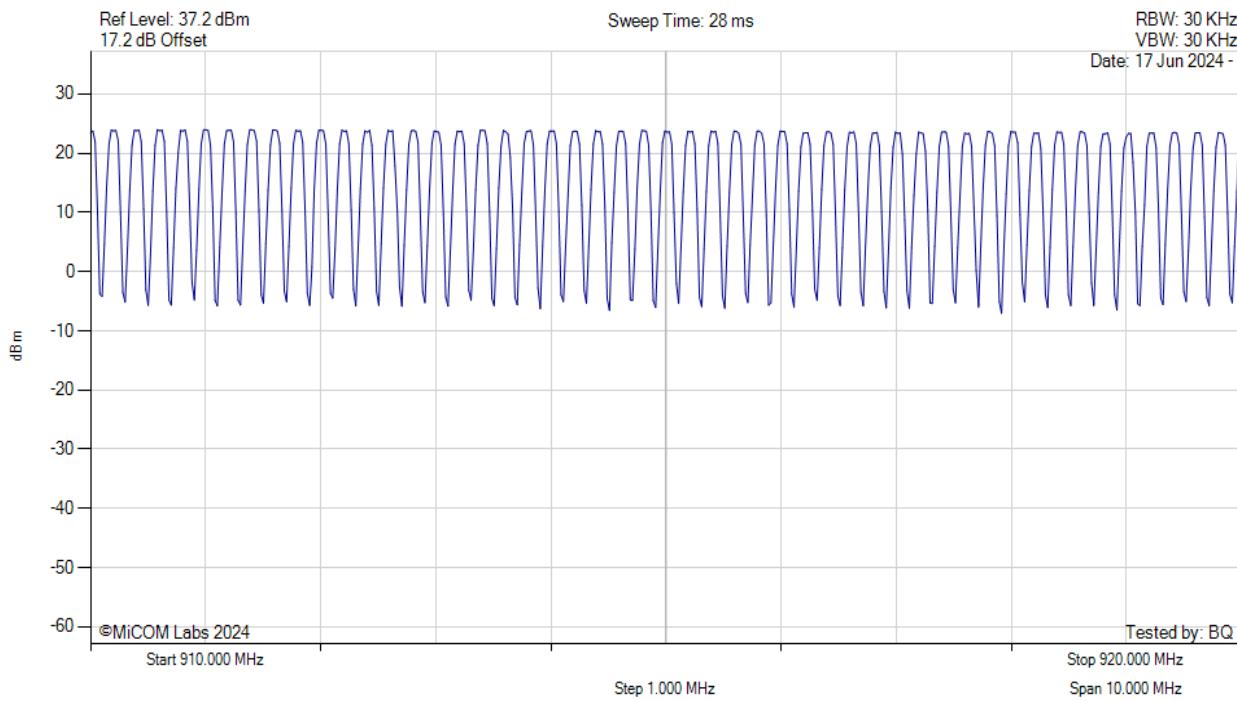


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant:37.5kbps, DEV 16.4kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

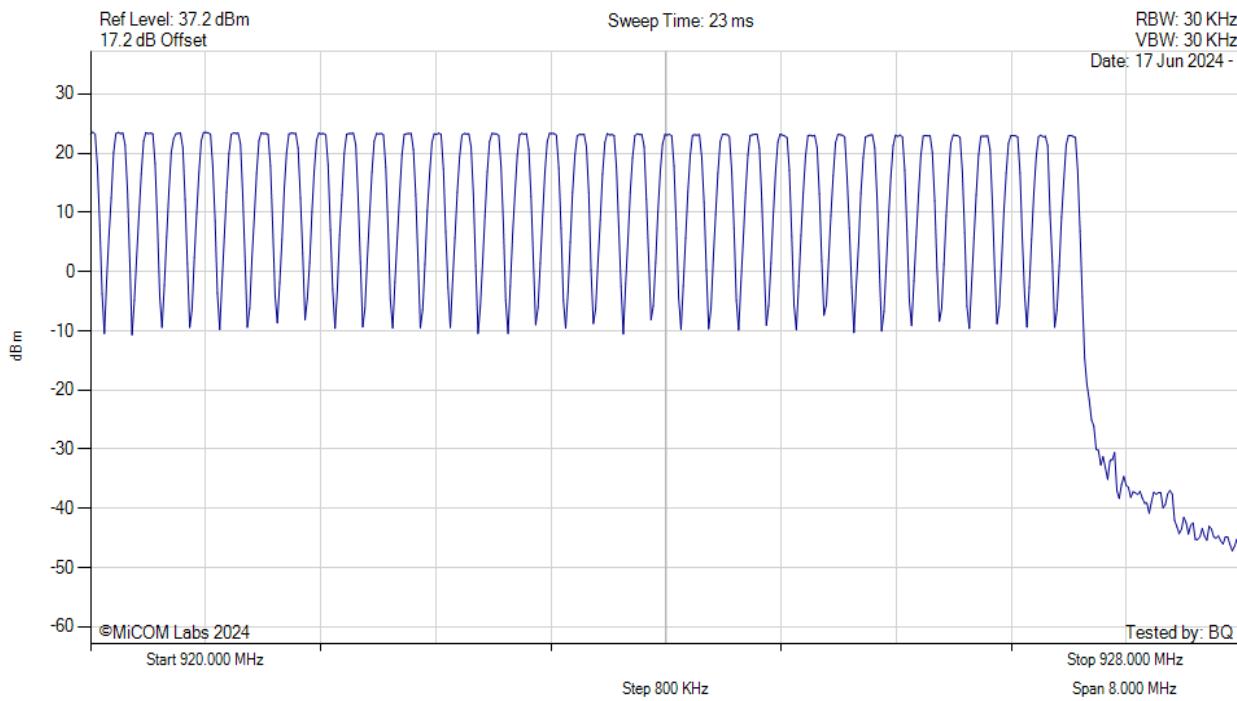


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant:37.5kbps, DEV 50kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

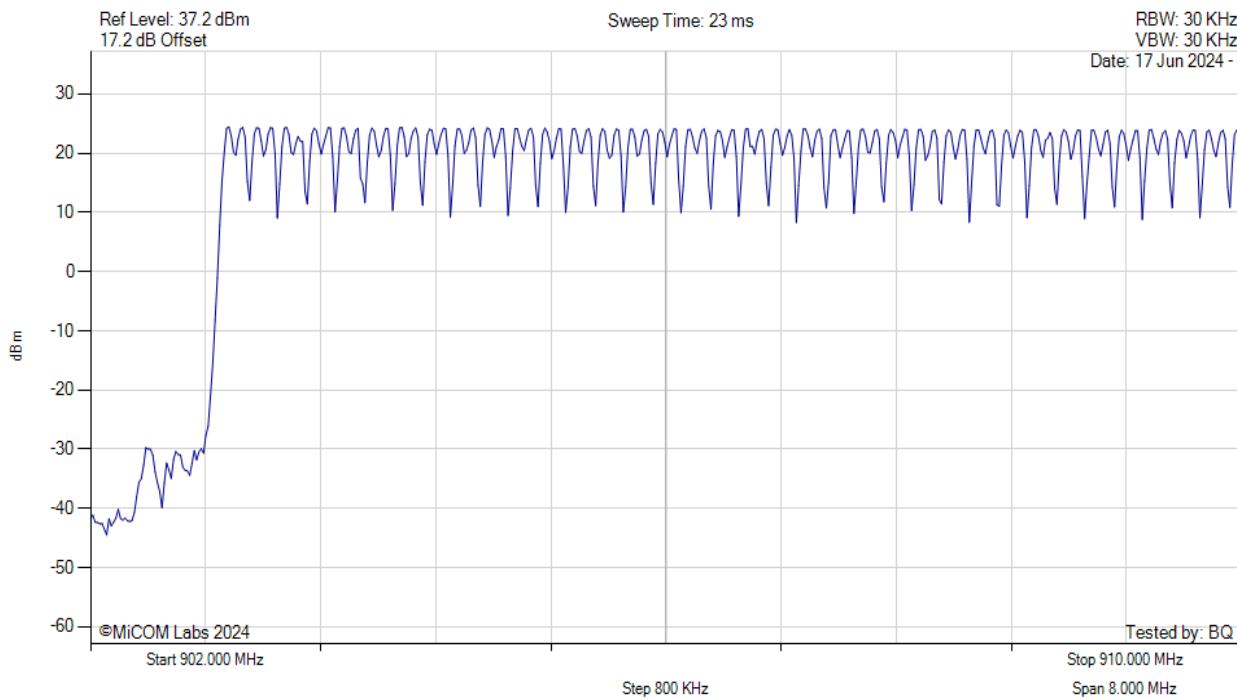


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant:37.5kbps, DEV 50kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

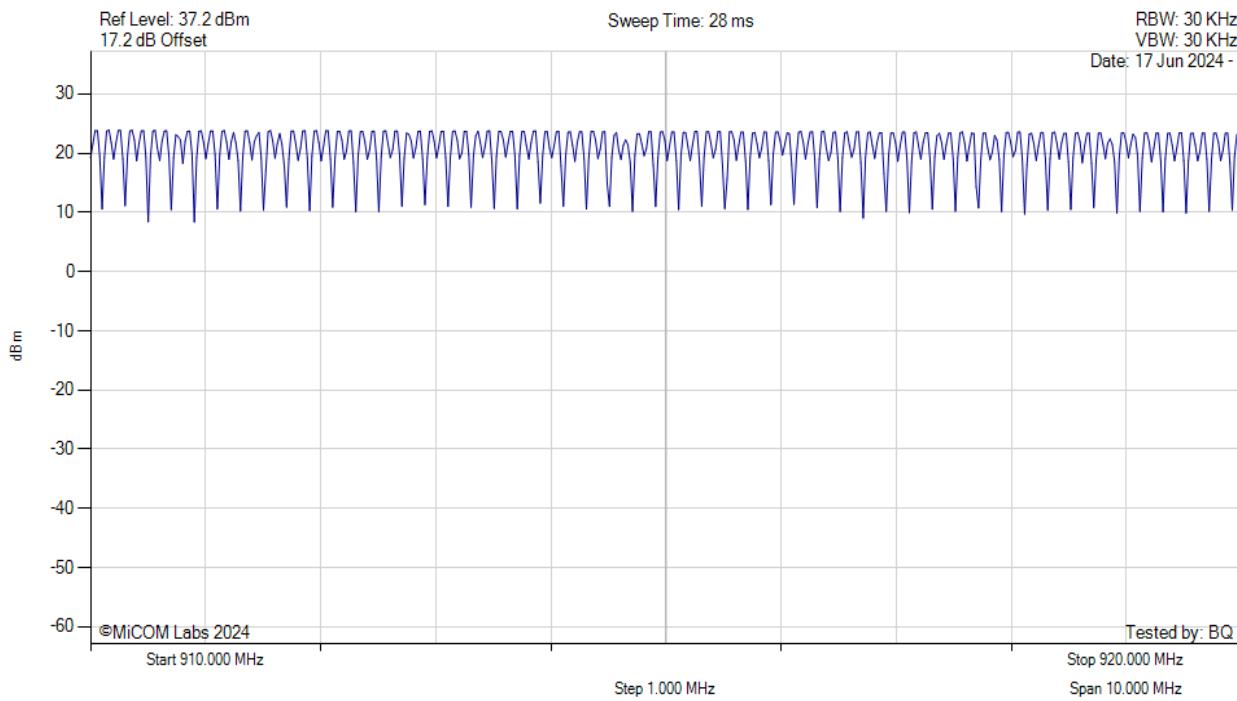


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant:37.5kbps, DEV 50kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

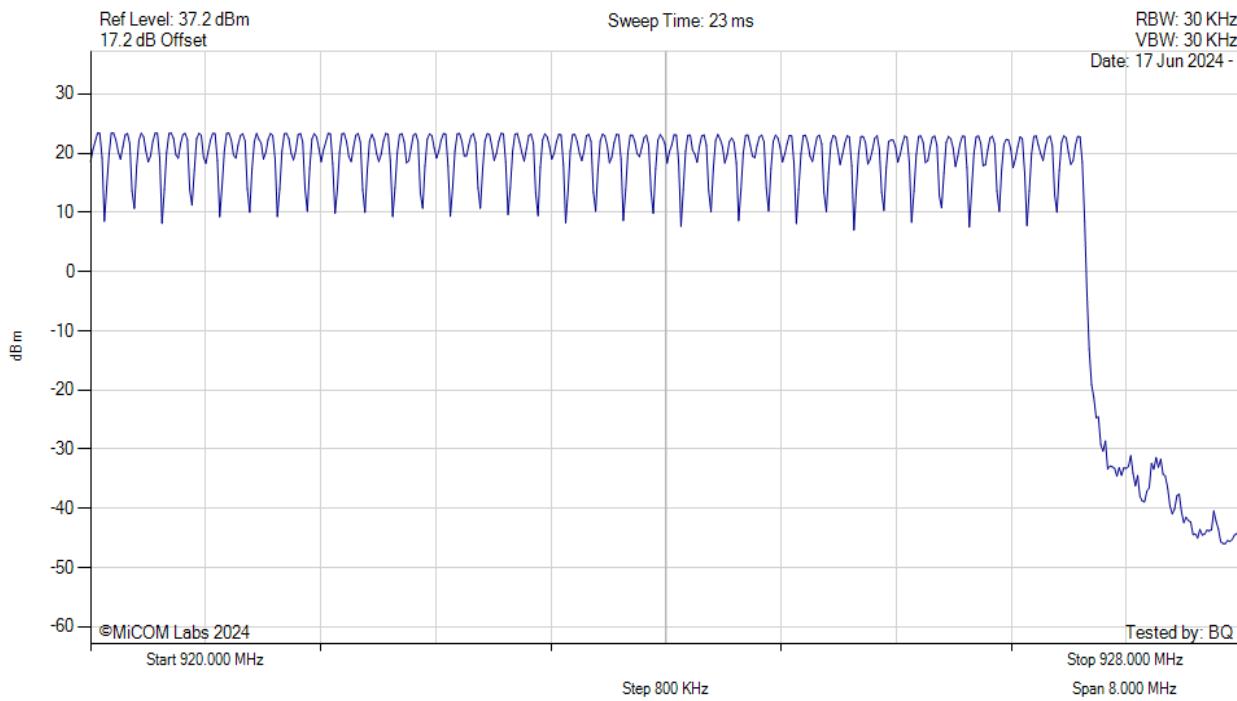


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: OOK - PL1, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

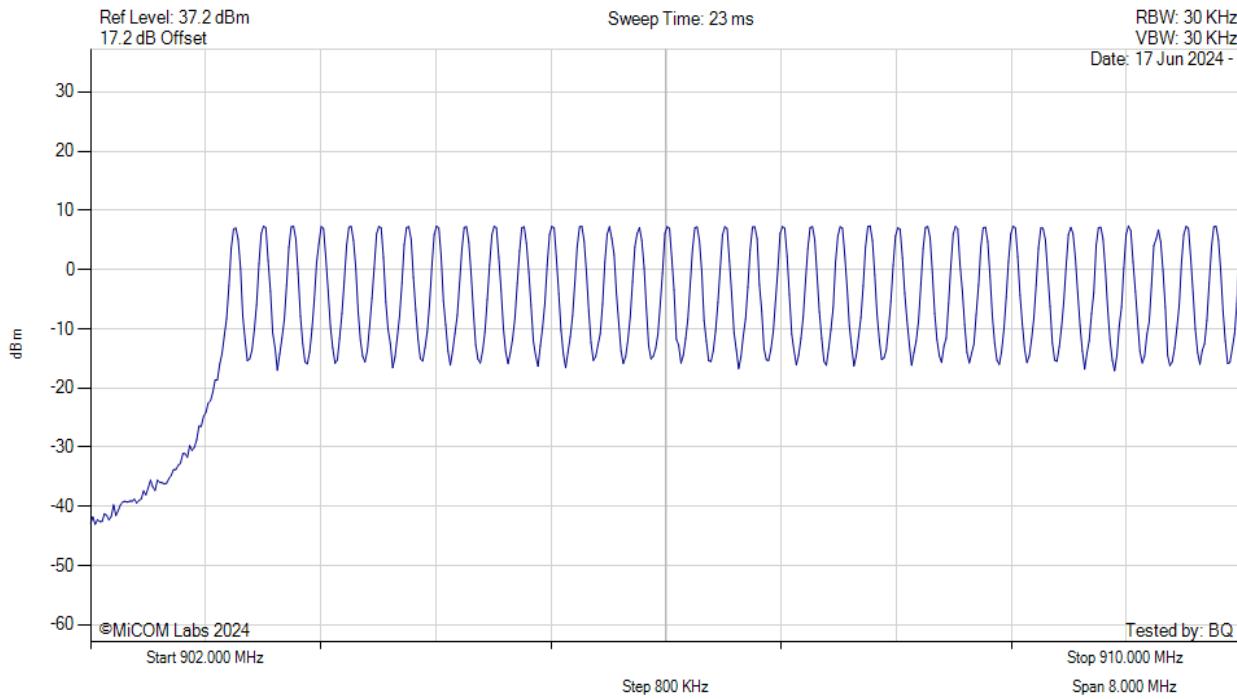


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: OOK - PL1, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

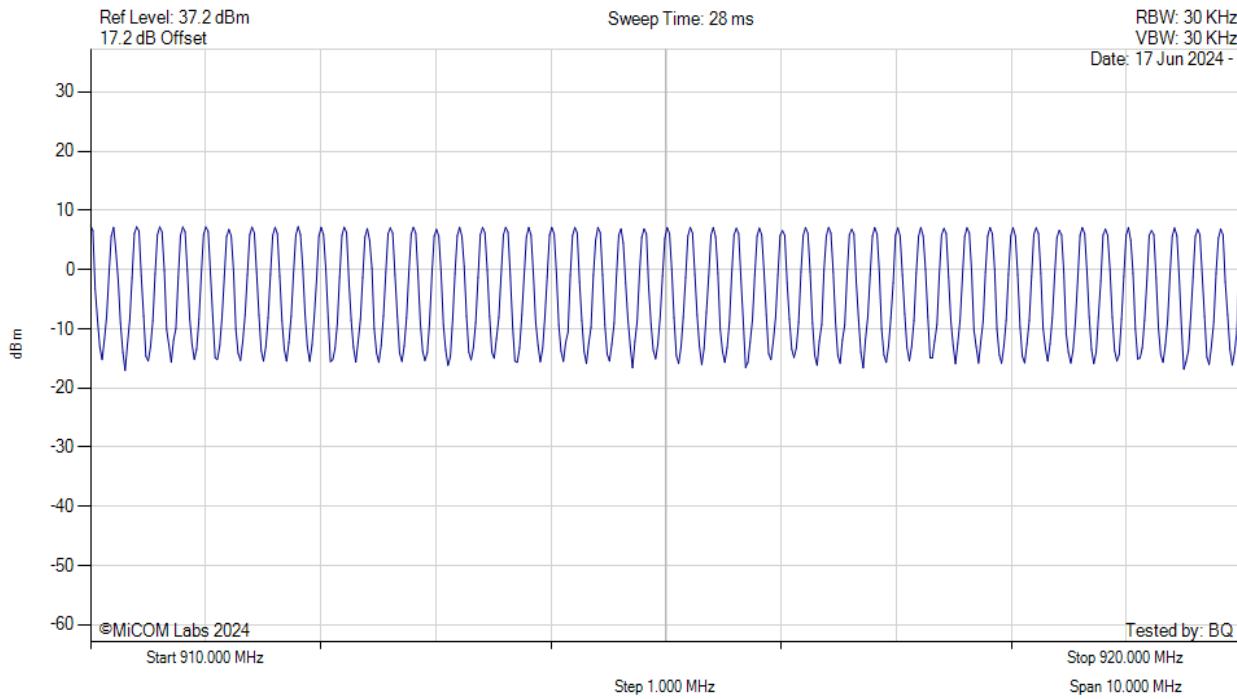


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: OOK - PL1, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

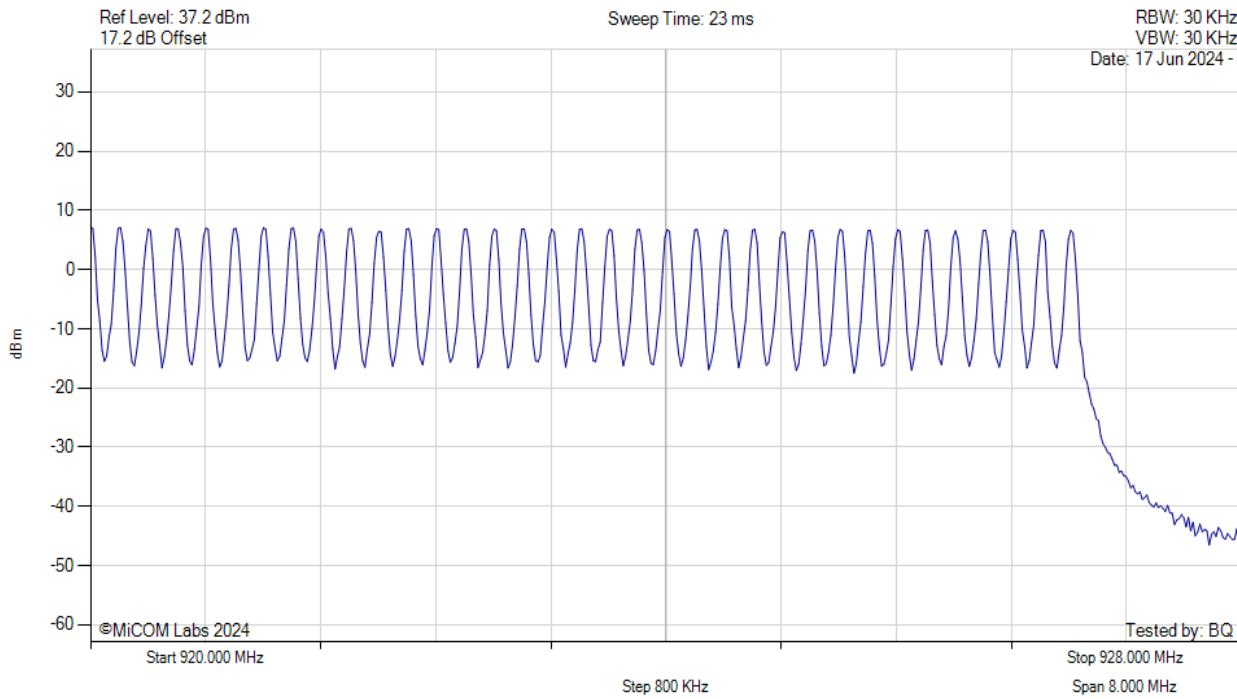


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: OOK - PL3, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

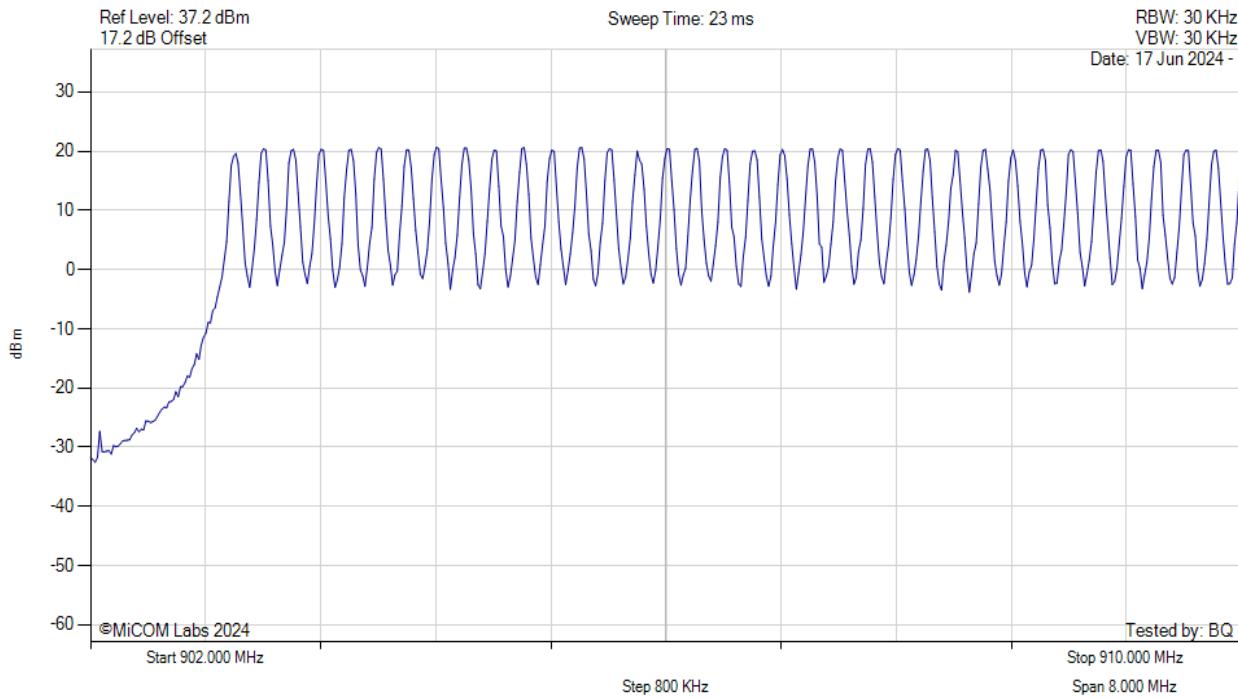


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS



Variant: OOK - PL3, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

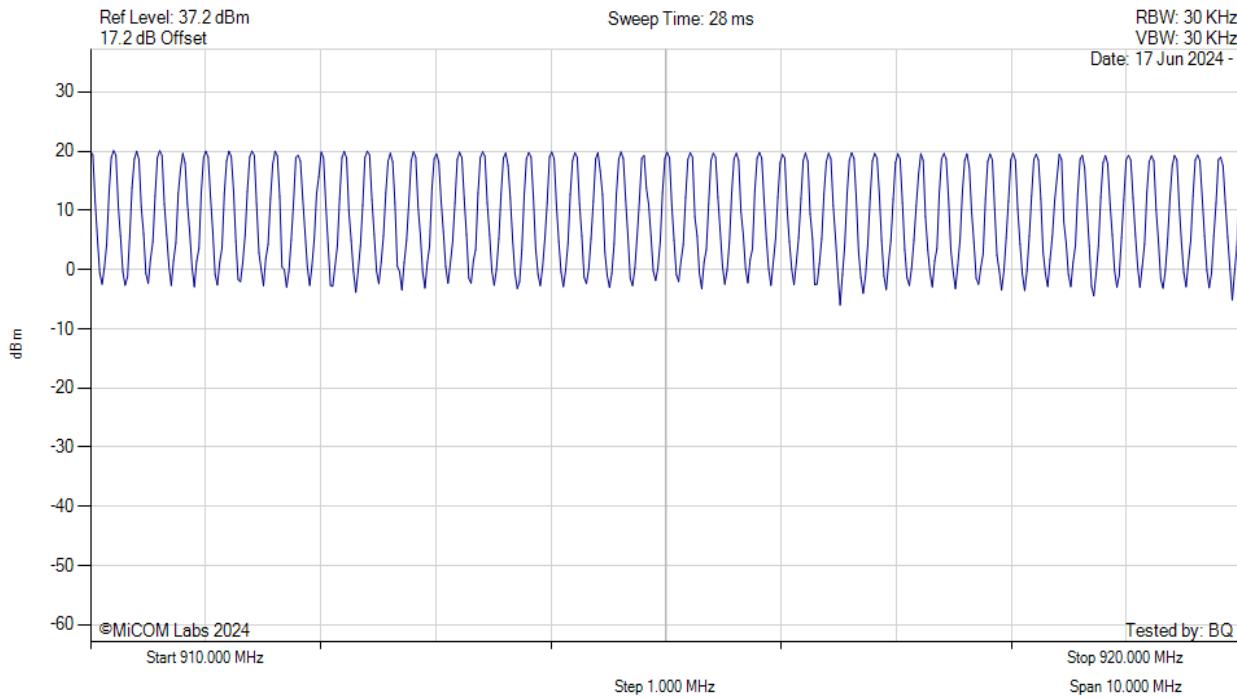


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

NUMBER OF HOPPING CHANNELS




Variant: OOK - PL3, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

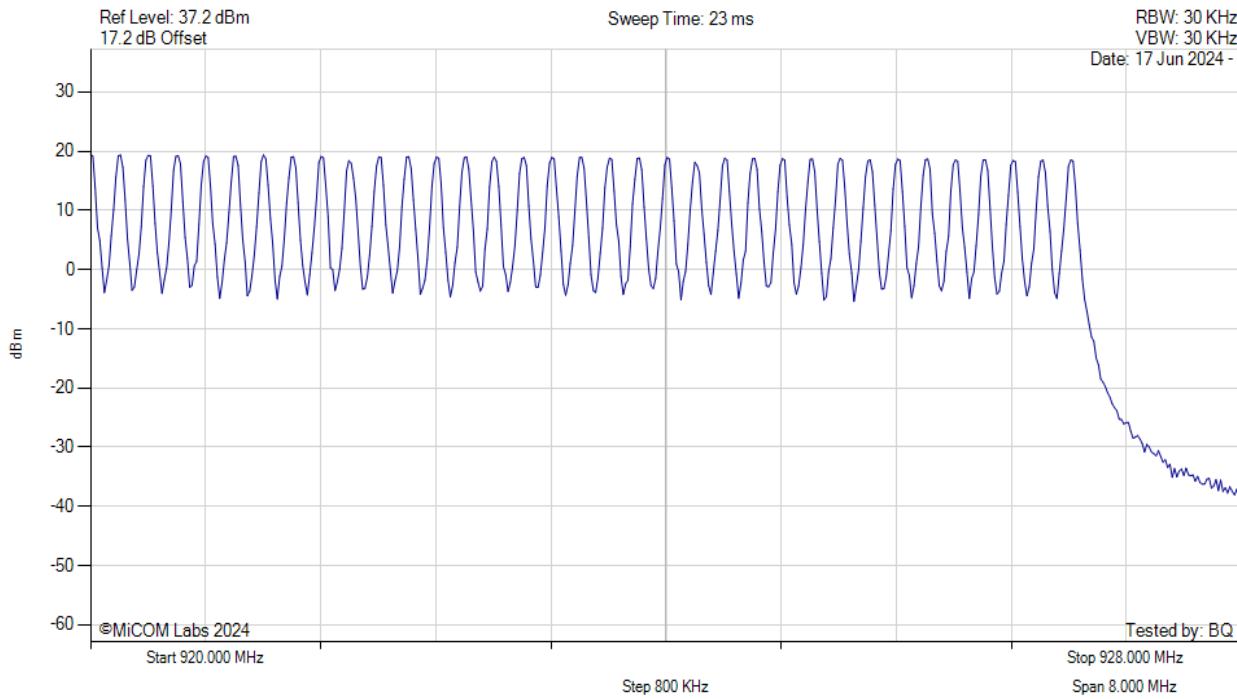

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW		Channel Frequency: 915.00 MHz

[back to matrix](#)

A.2.2. Channel Separation

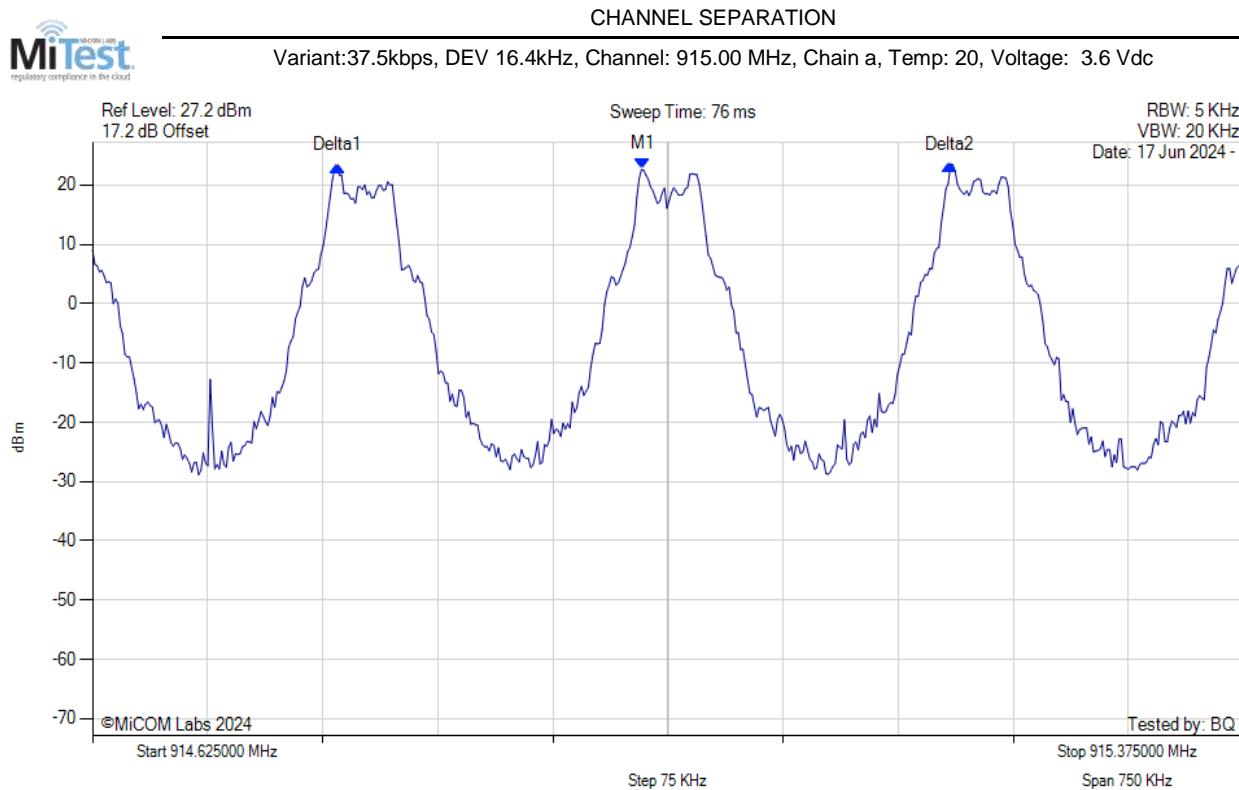


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 914.983 MHz : 22.634 dBm Delta1 : -199148 Hz : 0.616 dB Delta2 : 200 kHz : 0.844 dB	Channel Frequency: 915.00 MHz

[back to matrix](#)

CHANNEL SEPARATION



Variant:37.5kbps, DEV 50kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

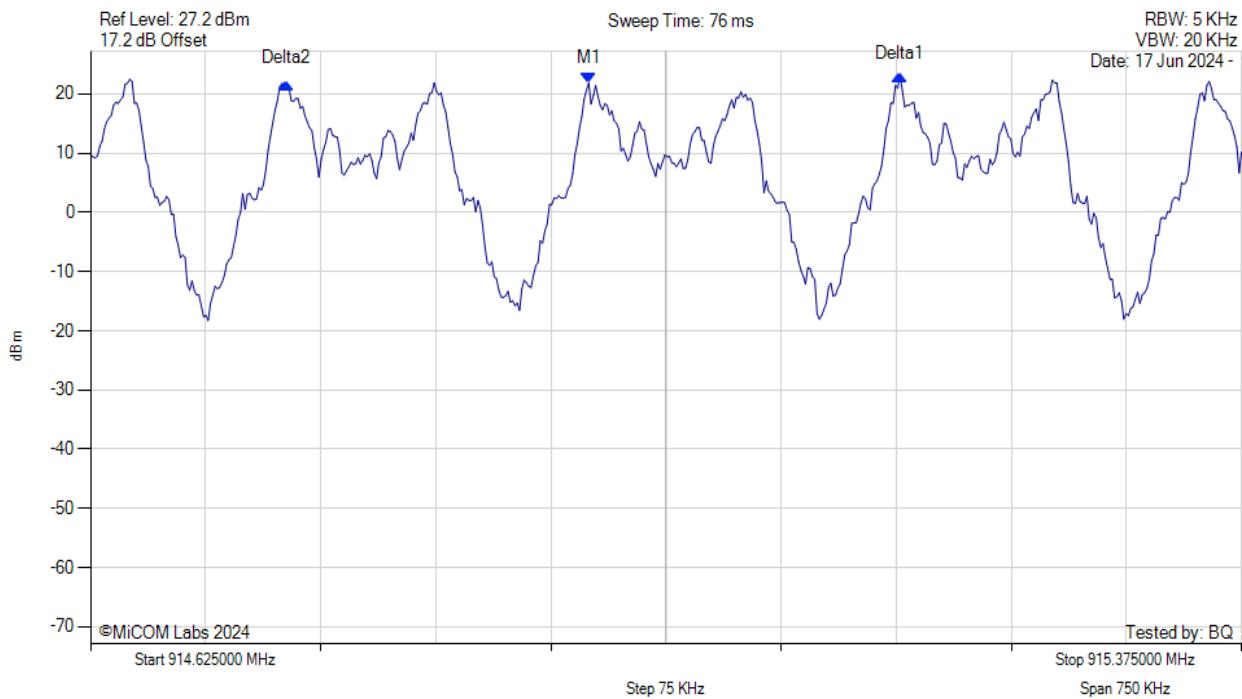


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = MAX HOLD	M1 : 914.950 MHz : 21.843 dBm Delta1 : 203 KHz : 1.409 dB Delta2 : -196894 Hz : -0.033 dB	Channel Frequency: 915.00 MHz

[back to matrix](#)

CHANNEL SEPARATION



Variant: OOK - PL1, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

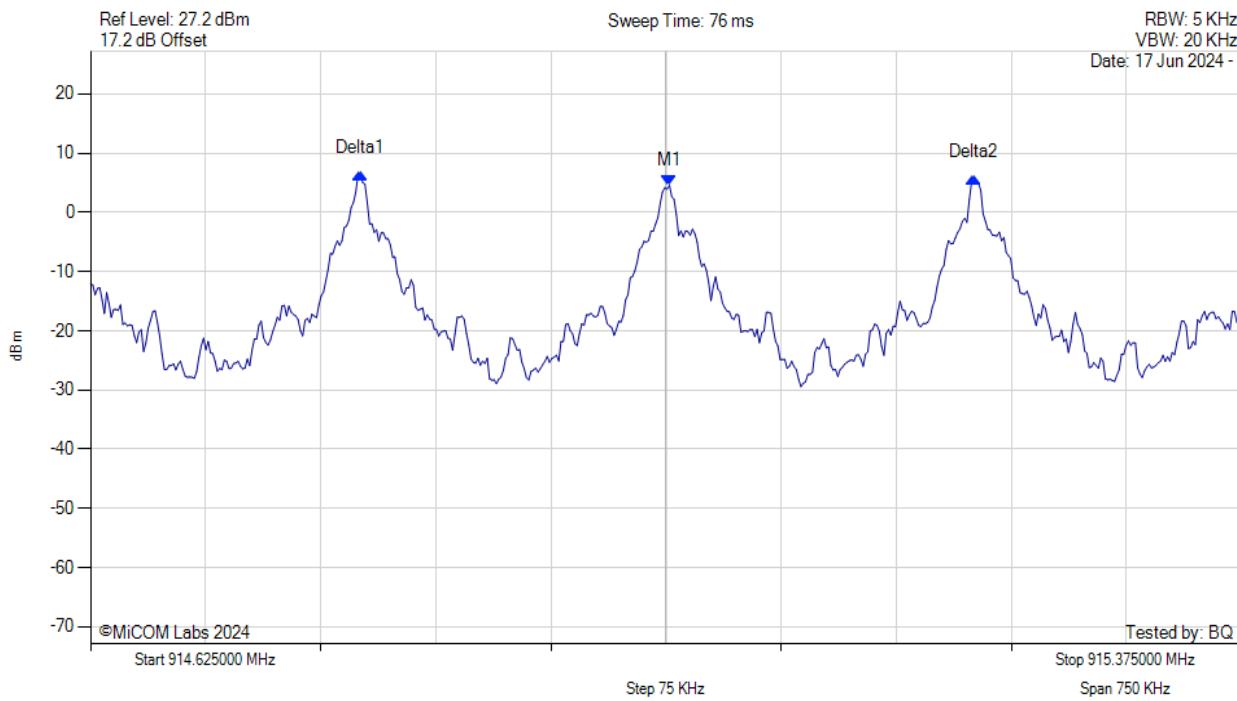


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 915.002 MHz : 4.552 dBm Delta1 : -201403 Hz : 2.036 dB Delta2 : 198 KHz : 1.348 dB	Channel Frequency: 915.00 MHz

[back to matrix](#)

CHANNEL SEPARATION



Variant: OOK - PL3, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

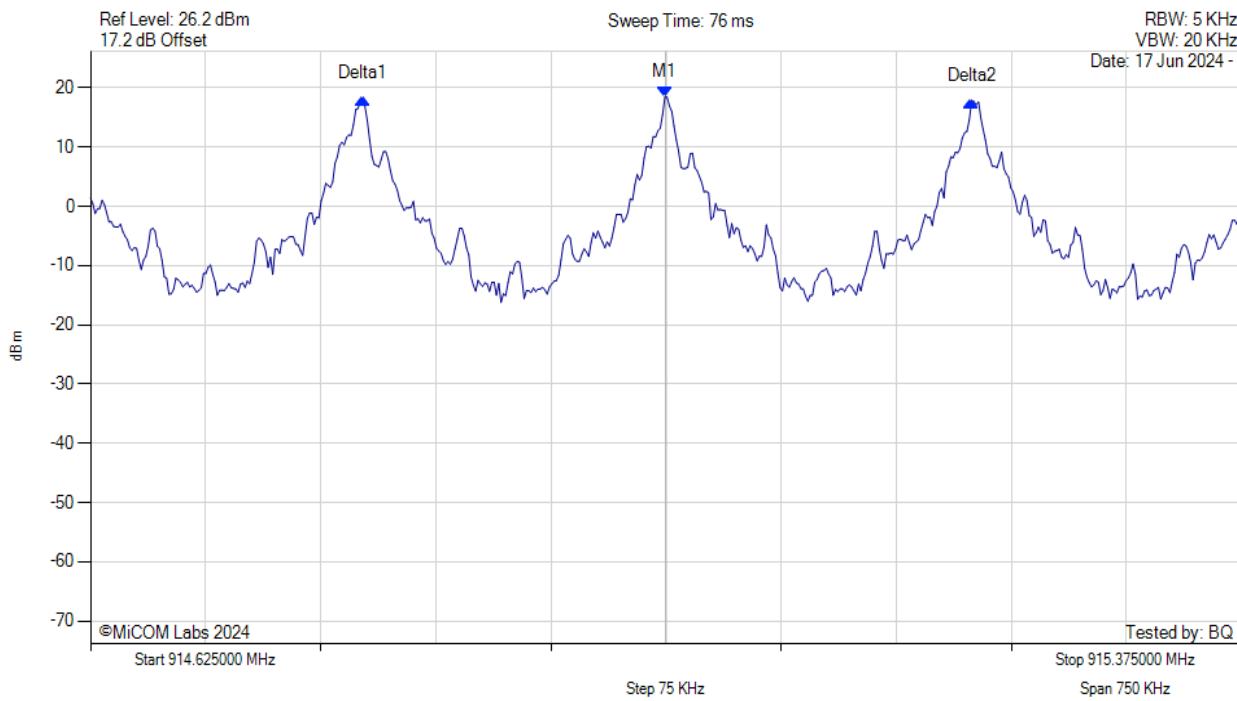


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 20 Trace Mode = VIEW	M1 : 914.999 MHz : 18.455 dBm Delta1 : -196894 Hz : -0.329 dB Delta2 : 200 KHz : -0.704 dB	Channel Frequency: 915.00 MHz

[back to matrix](#)

A.3. Emissions

A.3.1. Conducted Emissions

A.3.1.1. Conducted Unwanted Spurious Emissions

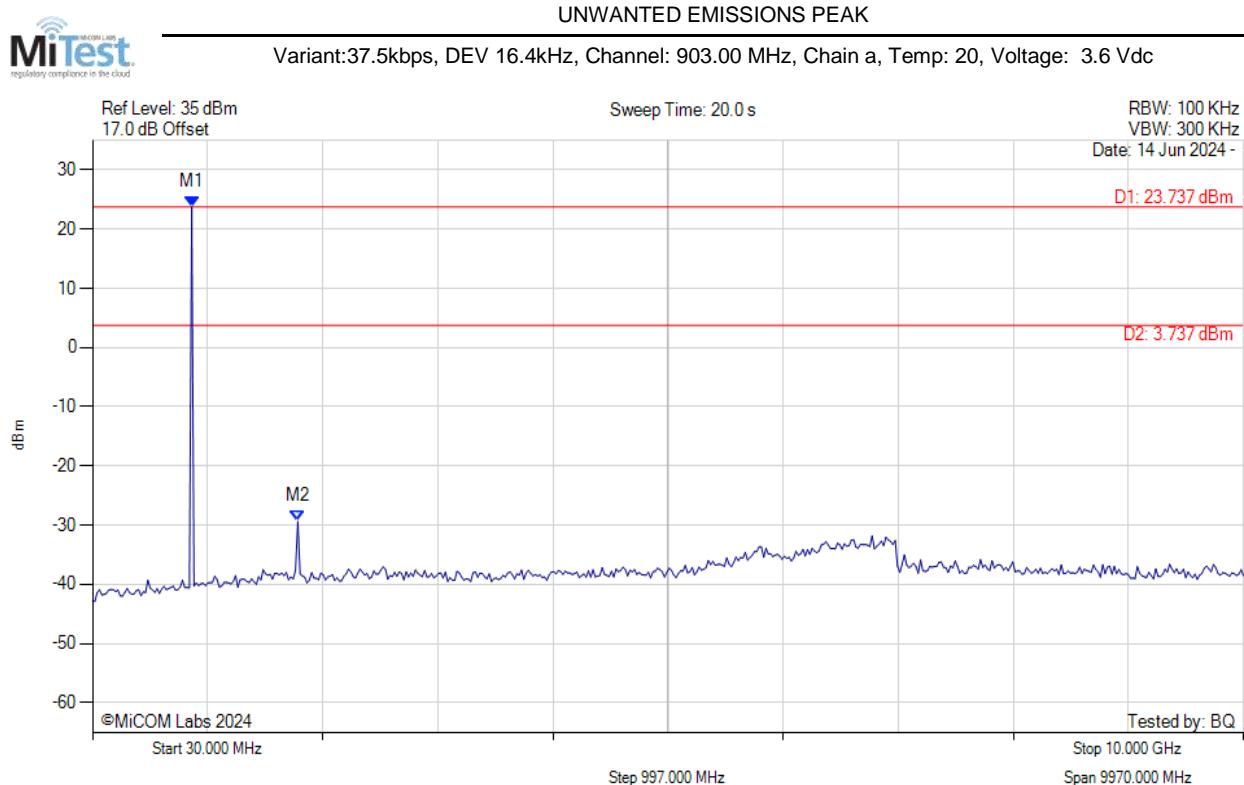


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 889.138 MHz : 23.737 dBm M2 : 1808.216 MHz : -29.382 dBm	Limit: 3.74 dBm Margin: -33.12 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant:37.5kbps, DEV 16.4kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

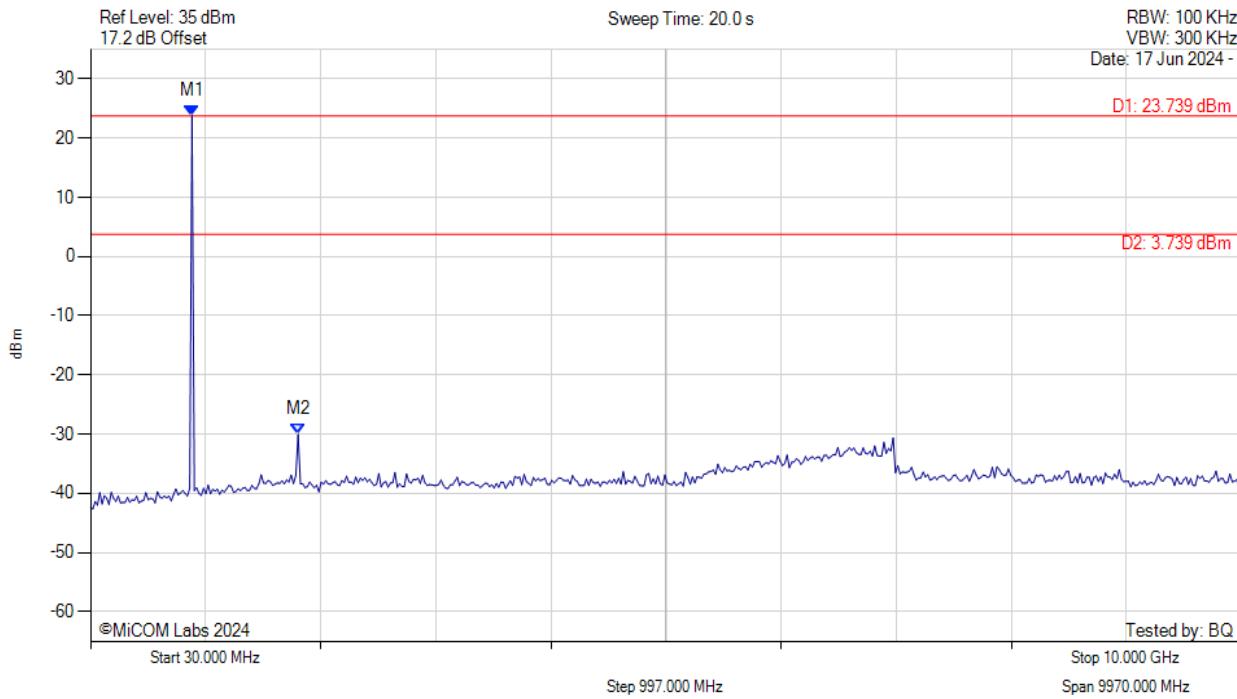


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 23.739 dBm M2 : 1828.196 MHz : -30.072 dBm	Limit: 3.74 dBm Margin: -33.81 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant:37.5kbps, DEV 16.4kHz, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

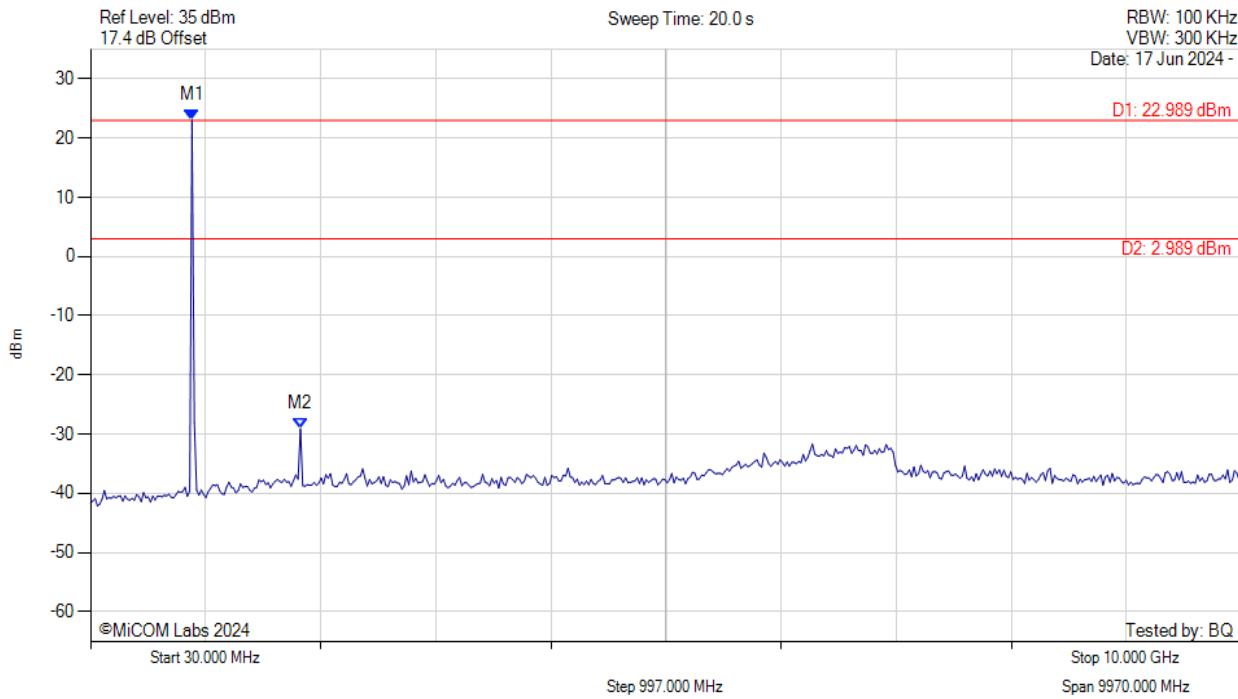


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 22.989 dBm M2 : 1848.176 MHz : -29.081 dBm	Limit: 2.99 dBm Margin: -32.07 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant:37.5kbps, DEV 50kHz, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

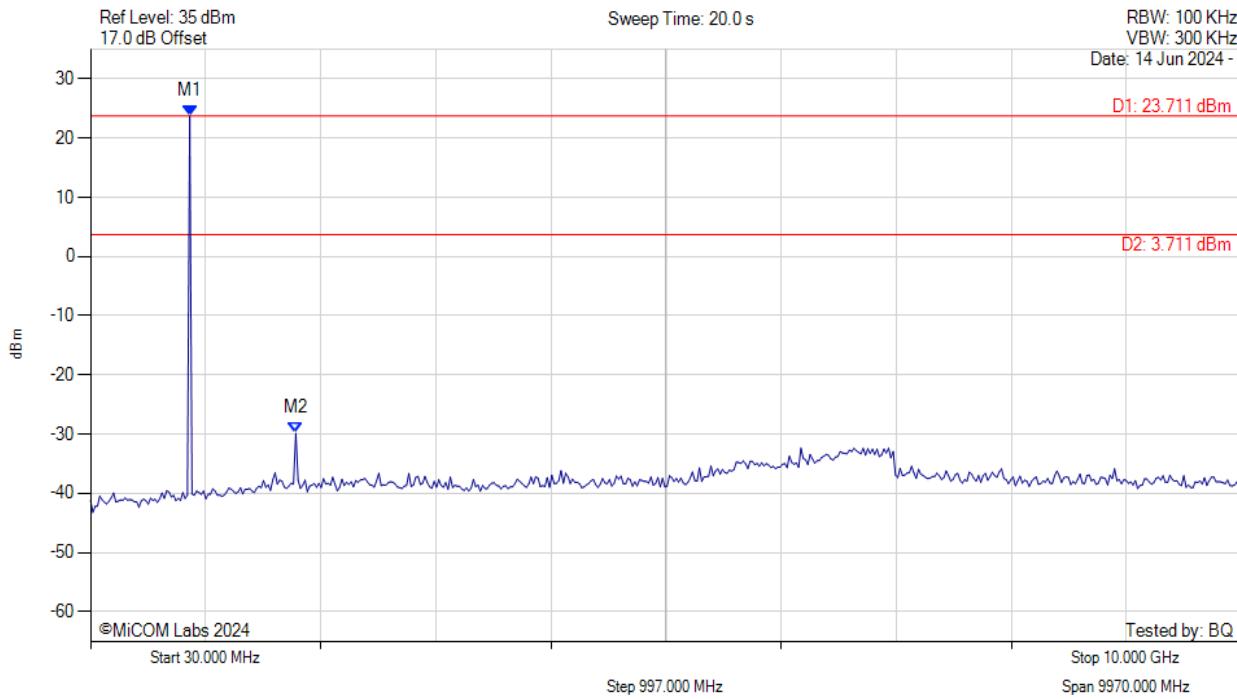


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 889.138 MHz : 23.711 dBm M2 : 1808.216 MHz : -29.852 dBm	Limit: 3.71 dBm Margin: -33.56 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant:37.5kbps, DEV 50kHz, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

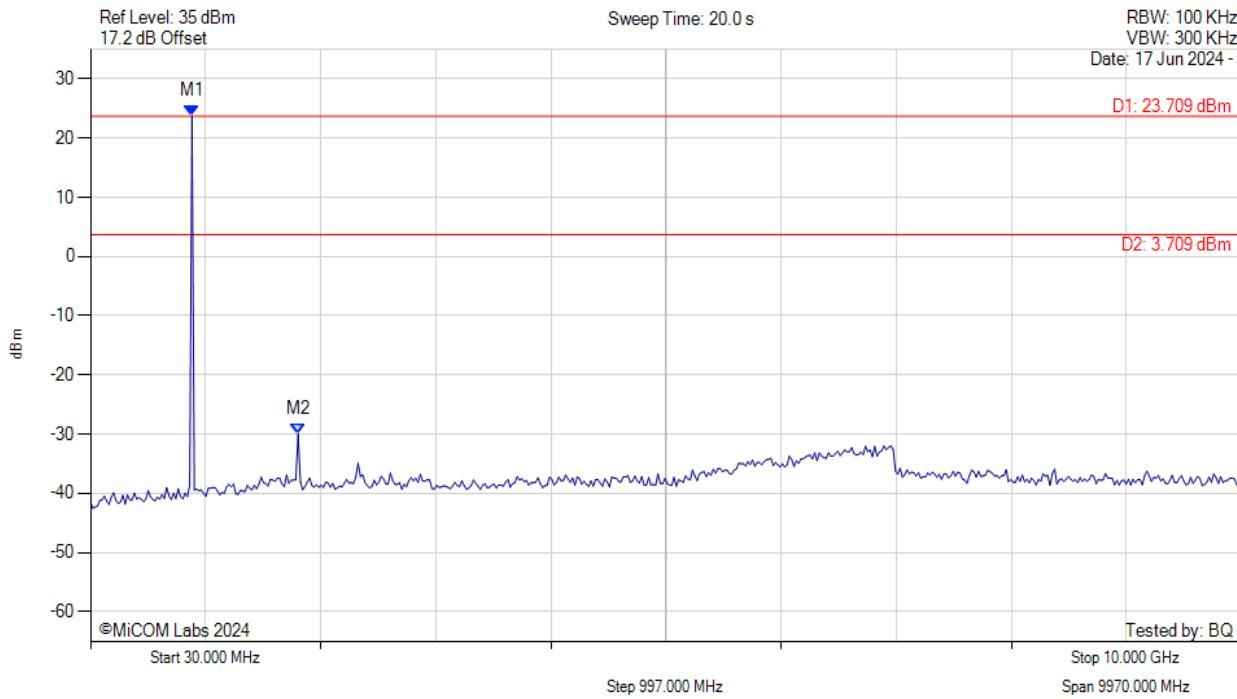


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 23.709 dBm M2 : 1828.196 MHz : -29.966 dBm	Limit: 3.71 dBm Margin: -33.68 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant:37.5kbps, DEV 50kHz, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

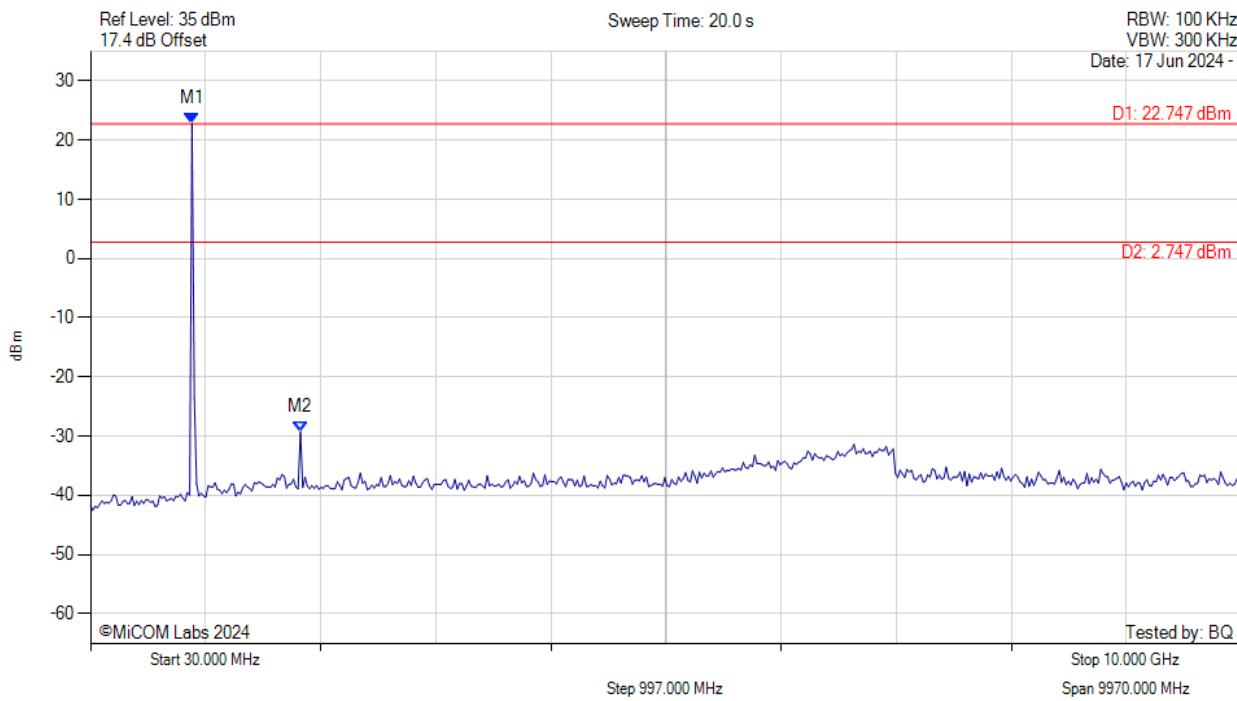


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 22.747 dBm M2 : 1848.176 MHz : -29.270 dBm	Limit: 2.75 dBm Margin: -32.02 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: OOK - PL1, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

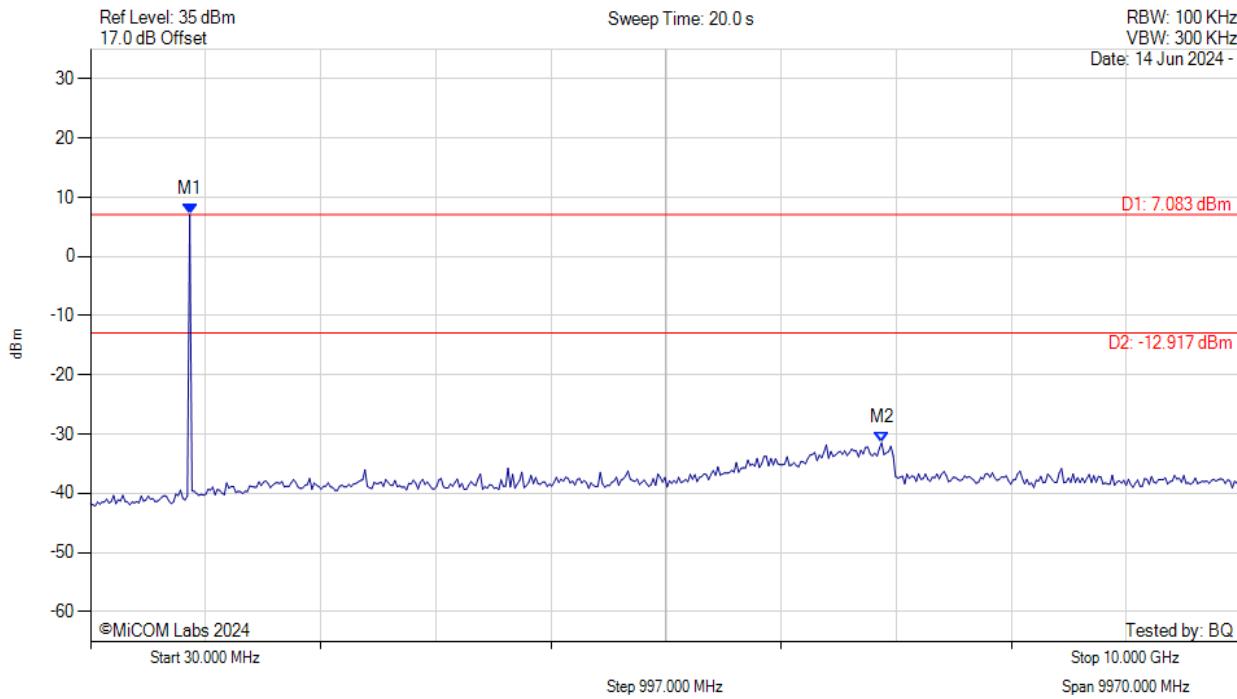


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 889.138 MHz : 7.083 dBm M2 : 6883.126 MHz : -31.457 dBm	Limit: -12.92 dBm Margin: -18.54 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: OOK - PL1, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

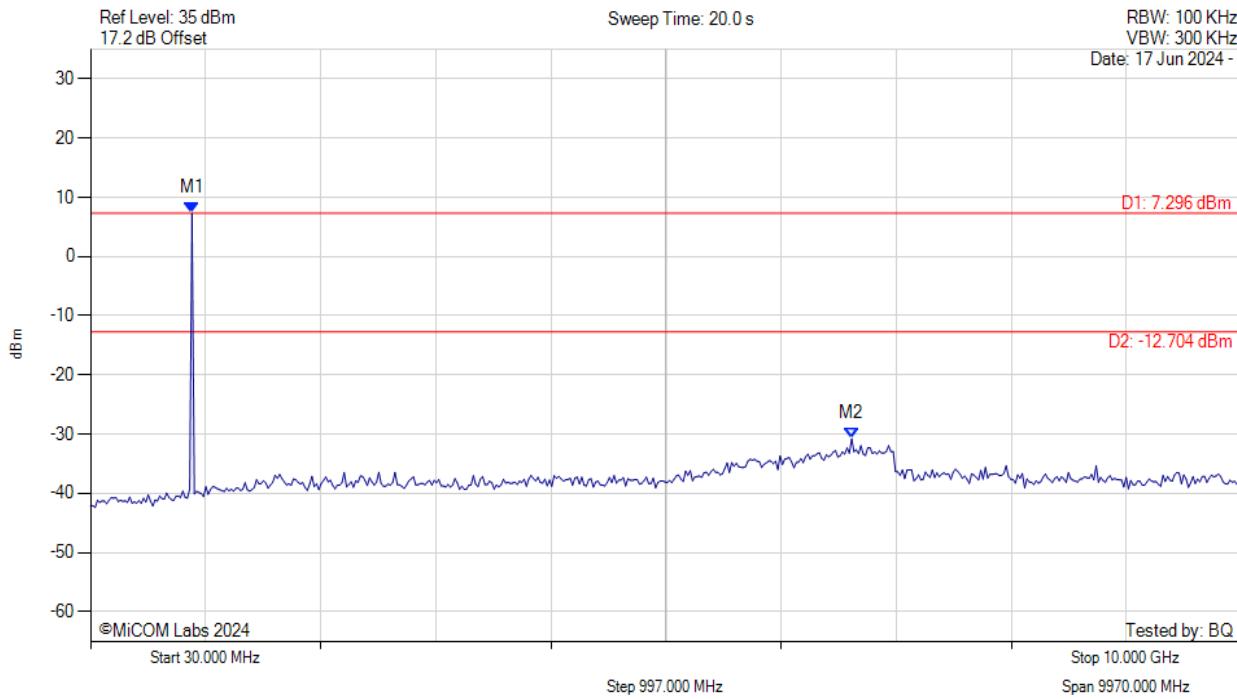


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 7.296 dBm M2 : 6623.387 MHz : -30.782 dBm	Limit: -12.70 dBm Margin: -18.08 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: OOK - PL1, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

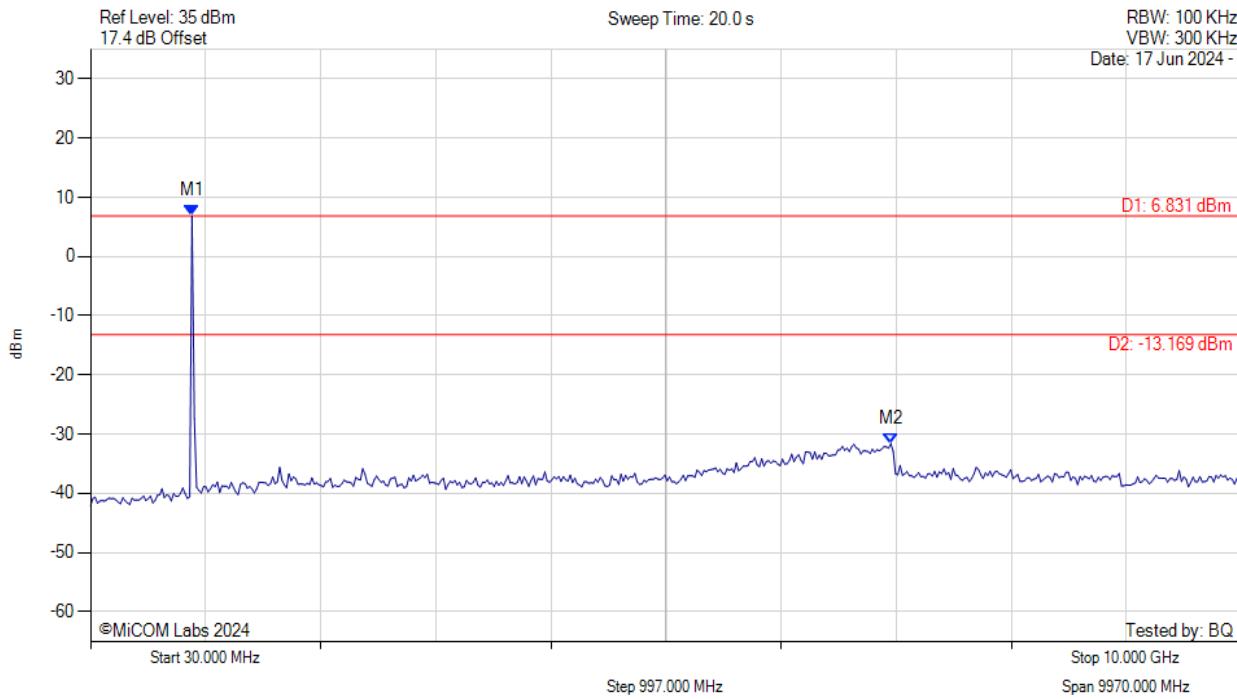


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 6.831 dBm M2 : 6963.046 MHz : -31.601 dBm	Limit: -13.17 dBm Margin: -18.43 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: OOK - PL3, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

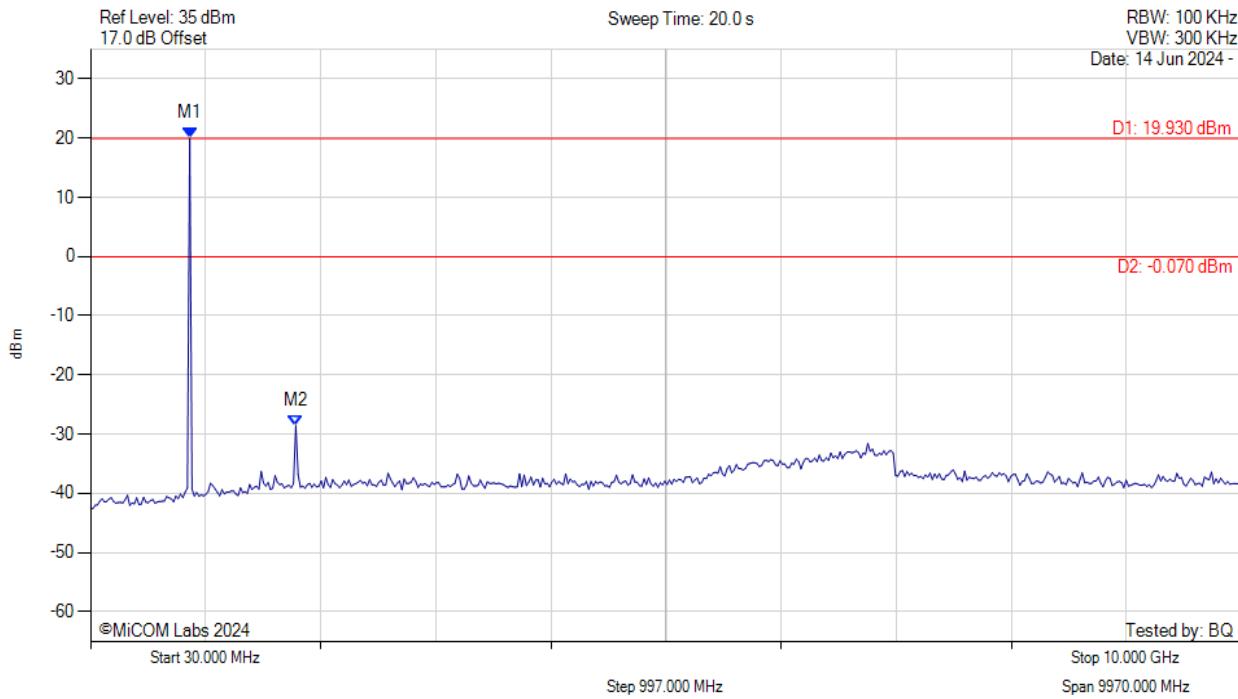


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 889.138 MHz : 19.930 dBm M2 : 1808.216 MHz : -28.595 dBm	Limit: -0.07 dBm Margin: -28.52 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: OOK - PL3, Channel: 915.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

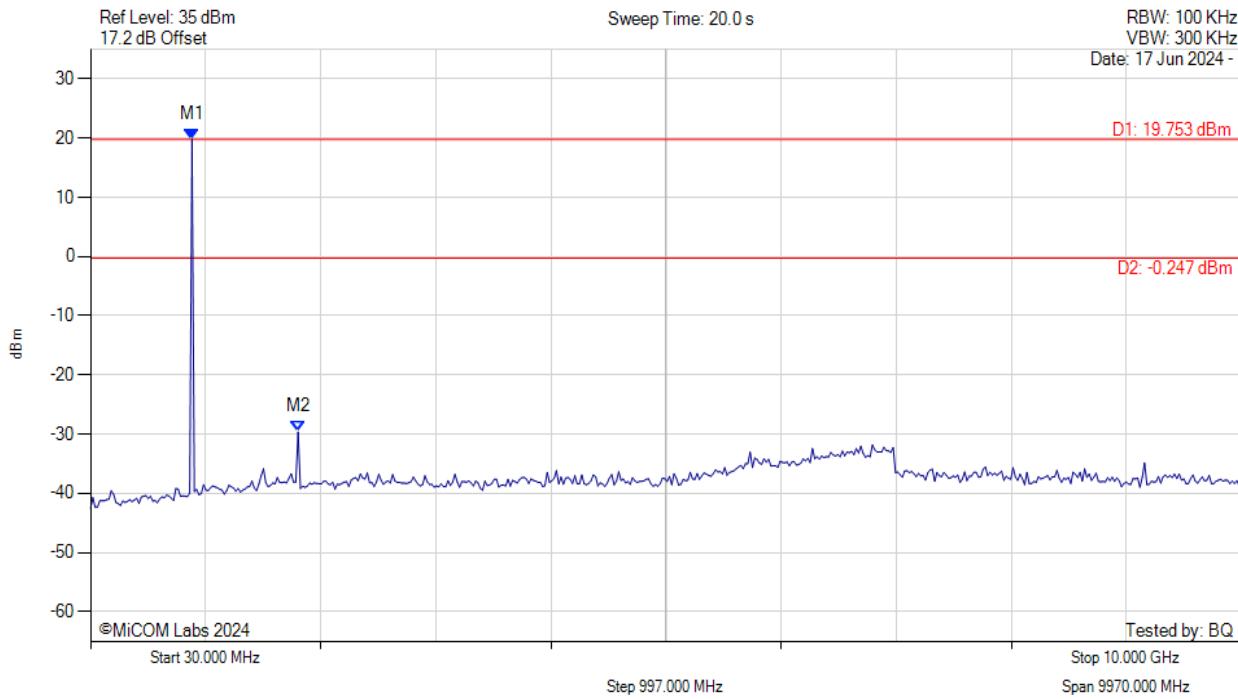


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 19.753 dBm M2 : 1828.196 MHz : -29.622 dBm	Limit: -0.25 dBm Margin: -29.37 dB

[back to matrix](#)

UNWANTED EMISSIONS PEAK



Variant: OOK - PL3, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

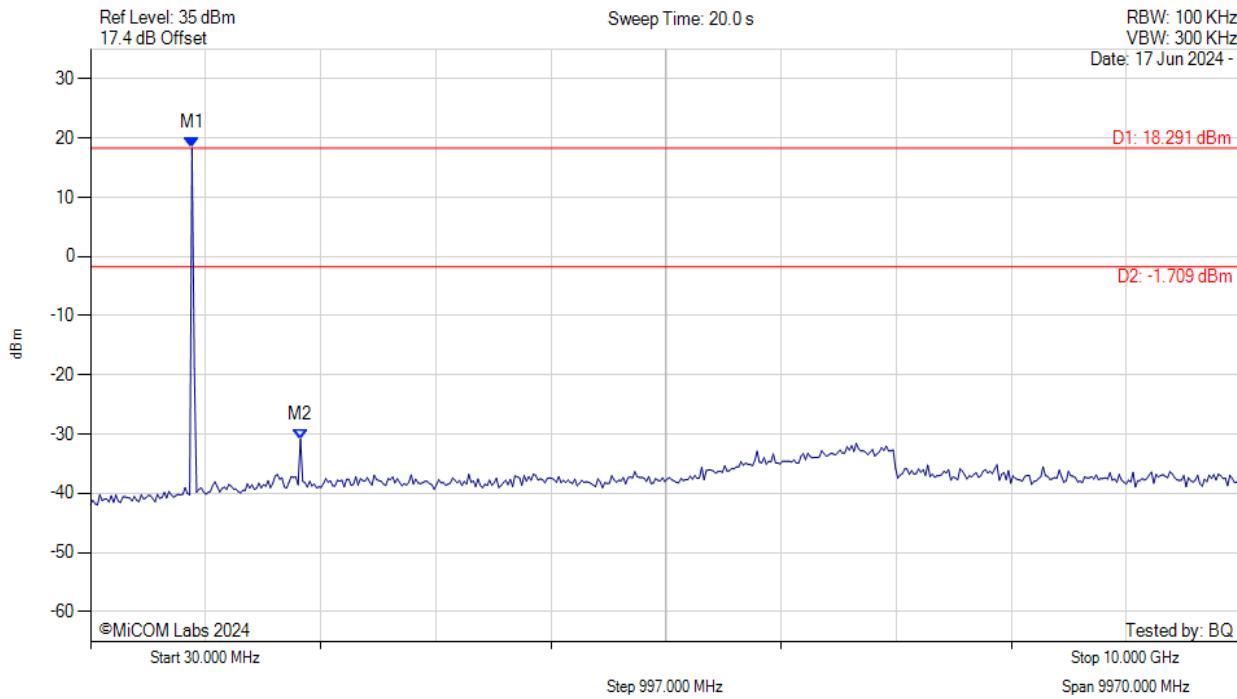

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 909.118 MHz : 18.291 dBm M2 : 1848.176 MHz : -30.845 dBm	Limit: -1.71 dBm Margin: -29.13 dB


[back to matrix](#)

A.3.1.2. Conducted Band-Edge Emissions



CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK

Variant:37.5kbps, DEV 16.4kHz, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

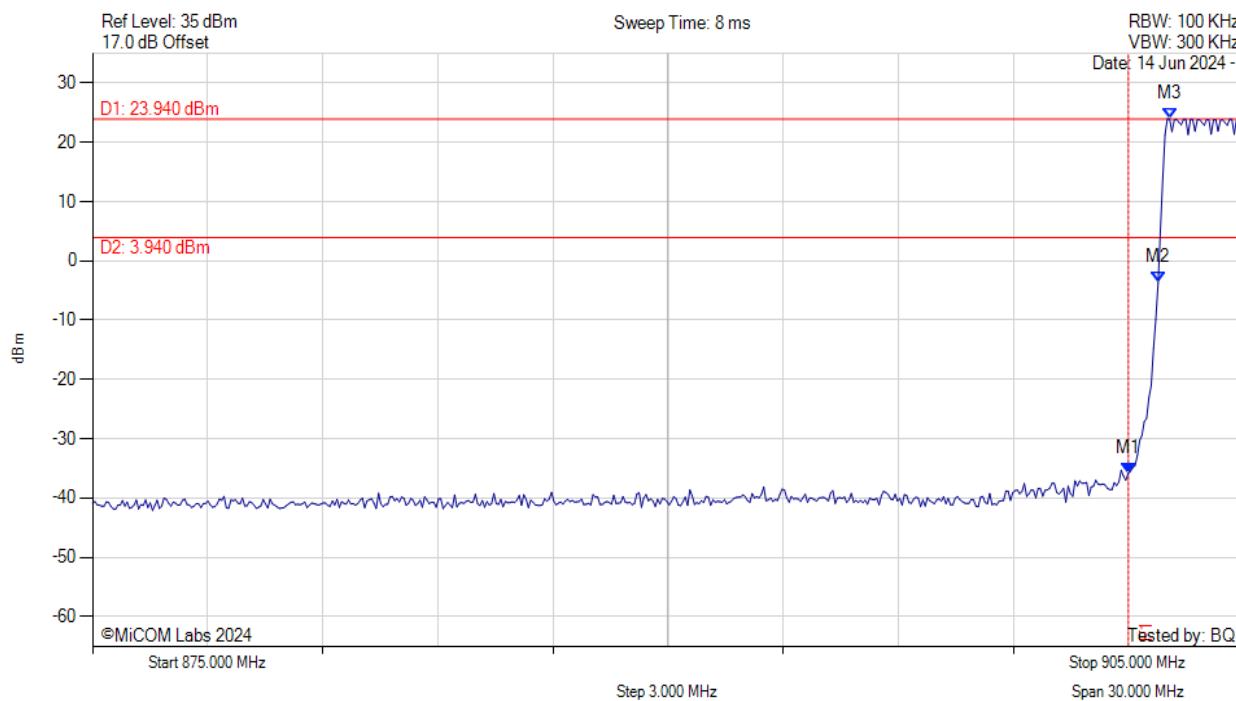


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -35.856 dBm M2 : 902.776 MHz : -3.664 dBm M3 : 903.076 MHz : 23.940 dBm	Channel Frequency: 903.00 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant:37.5kbps, DEV 50kHz, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

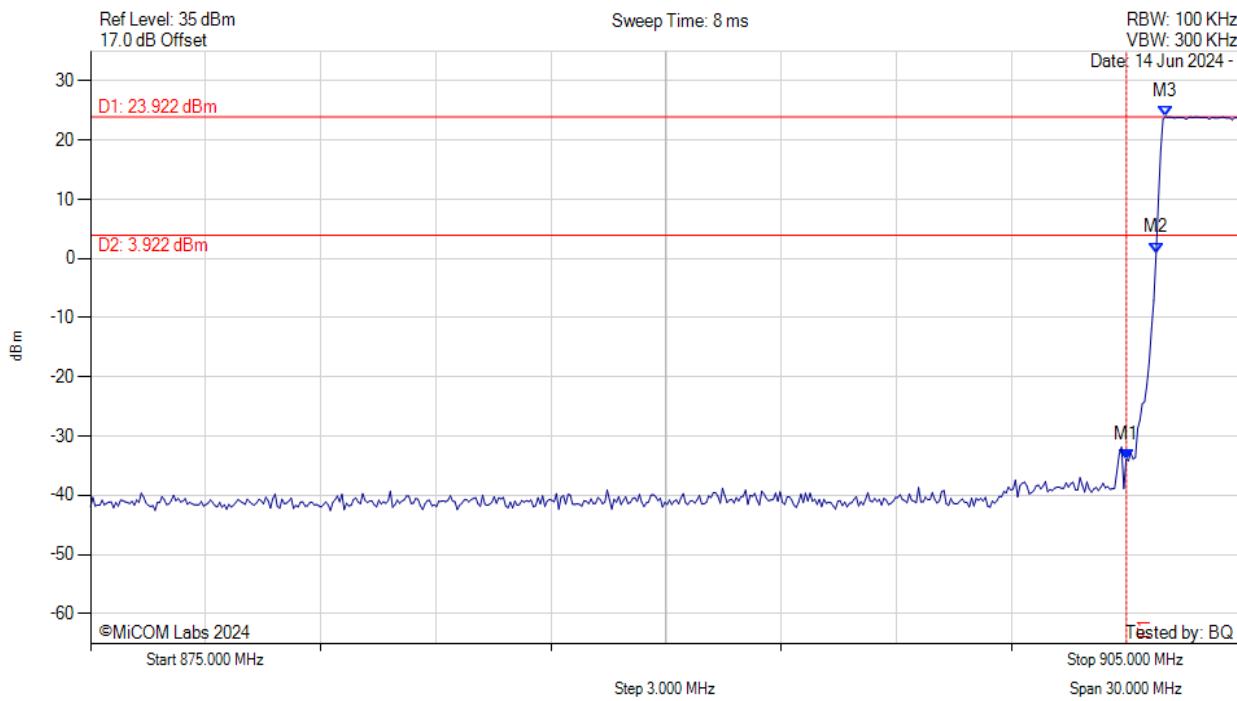


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -33.871 dBm M2 : 902.776 MHz : 0.963 dBm M3 : 903.016 MHz : 23.922 dBm	Channel Frequency: 903.00 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: OOK - PL1, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

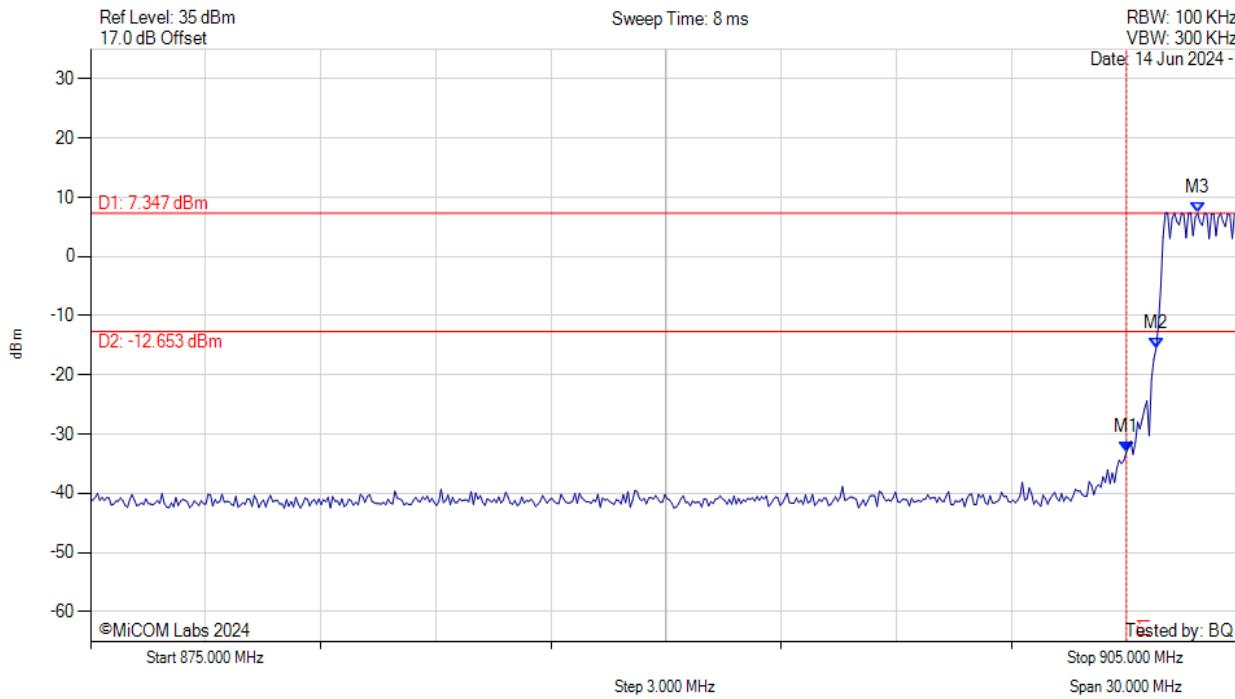


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -33.078 dBm M2 : 902.776 MHz : -15.443 dBm M3 : 903.858 MHz : 7.347 dBm	Channel Frequency: 903.00 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: OOK - PL3, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

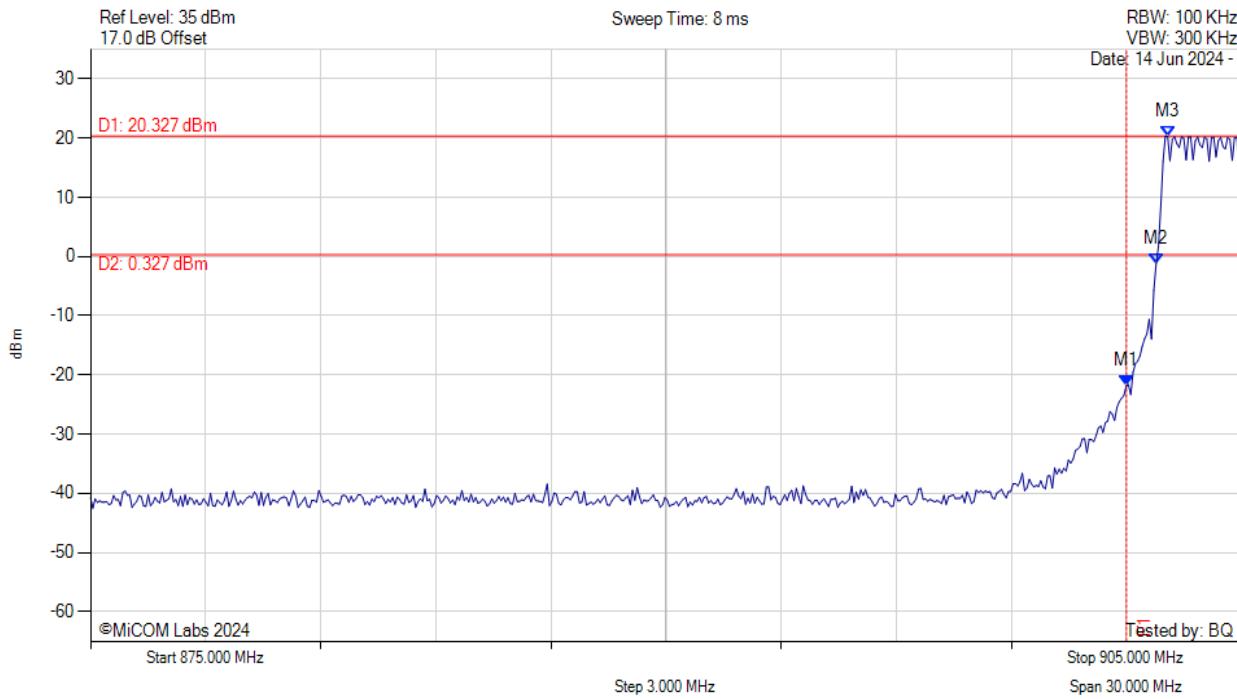


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -21.892 dBm M2 : 902.776 MHz : -1.156 dBm M3 : 903.076 MHz : 20.327 dBm	Channel Frequency: 903.00 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant:37.5kbps, DEV 16.4kHz, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

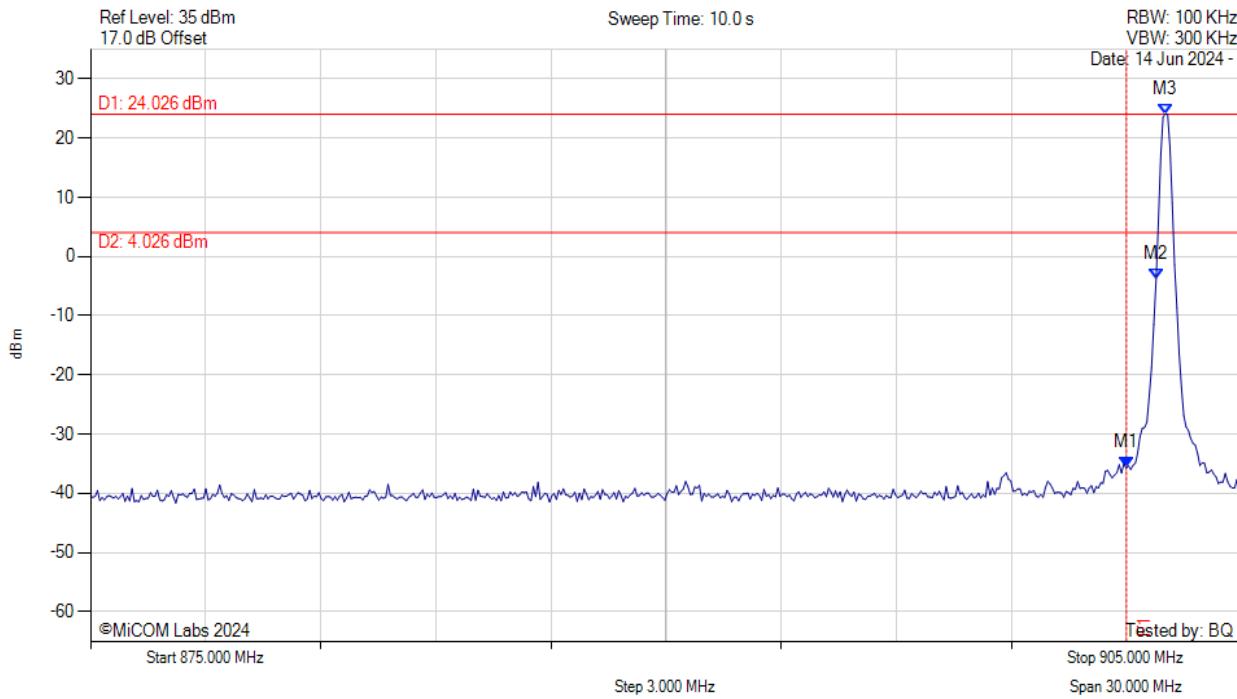


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -35.669 dBm M2 : 902.776 MHz : -3.769 dBm M3 : 903.016 MHz : 24.026 dBm	Channel Frequency: 903.00 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant:37.5kbps, DEV 50kHz, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

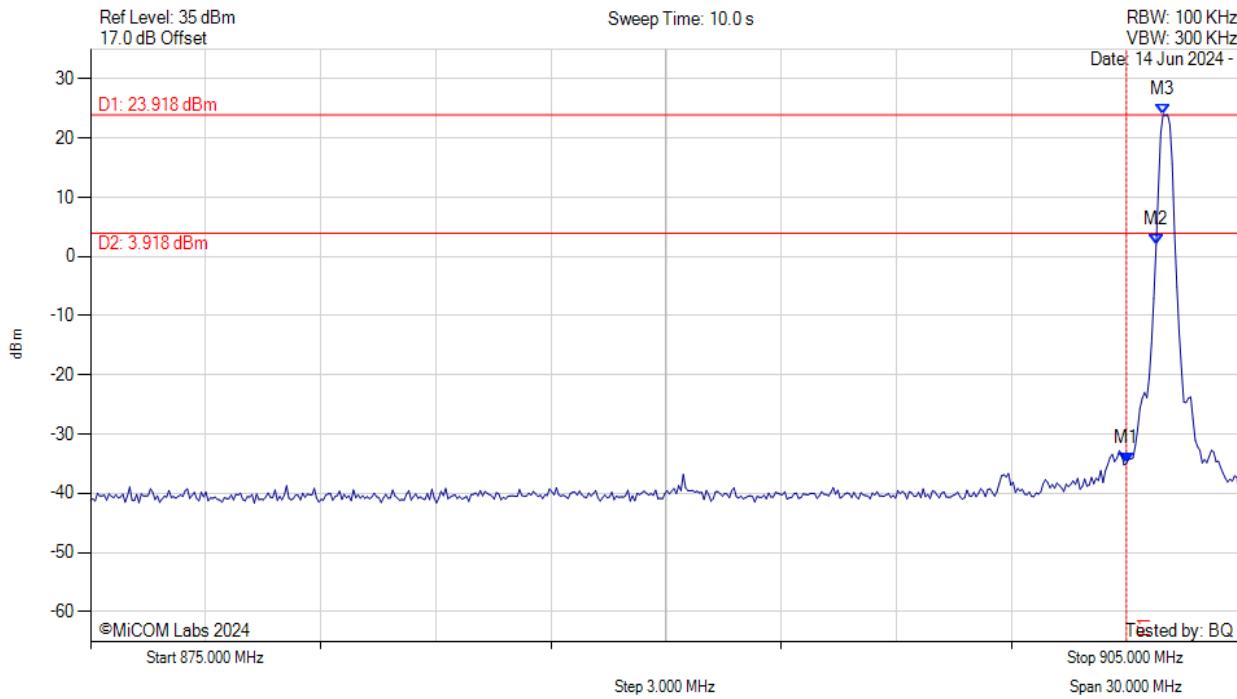


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -34.995 dBm M2 : 902.776 MHz : 1.933 dBm M3 : 902.956 MHz : 23.918 dBm	Channel Frequency: 903.00 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: OOK - PL1, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

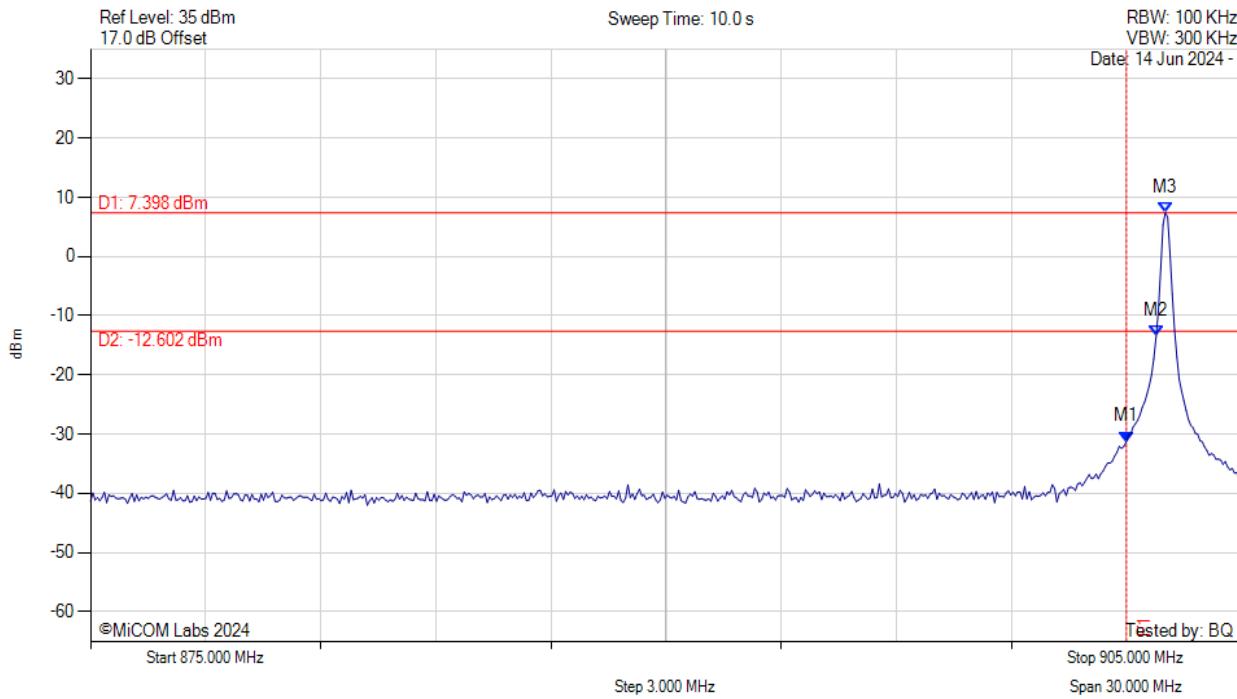


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -31.296 dBm M2 : 902.776 MHz : -13.460 dBm M3 : 903.016 MHz : 7.398 dBm	Channel Frequency: 903.00 MHz

[back to matrix](#)

CONDUCTED LOW BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: OOK - PL3, Channel: 903.00 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

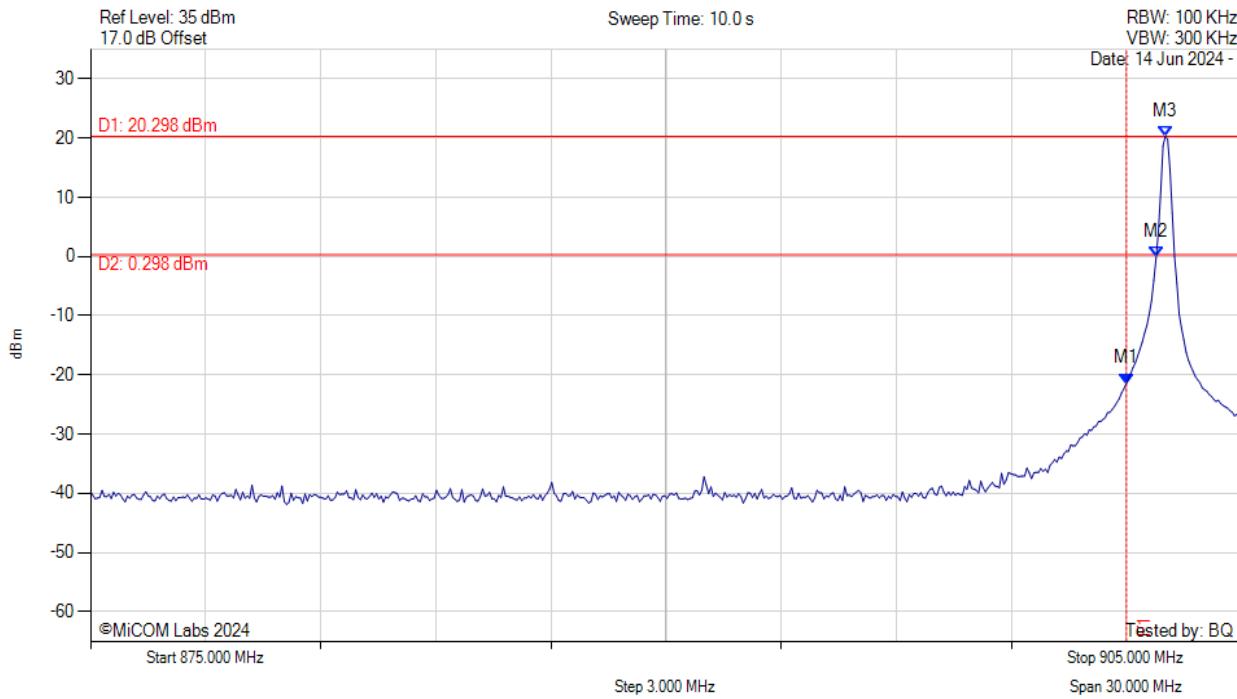


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 902.000 MHz : -21.471 dBm M2 : 902.776 MHz : -0.180 dBm M3 : 903.016 MHz : 20.298 dBm	Channel Frequency: 903.00 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant:37.5kbps, DEV 16.4kHz, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

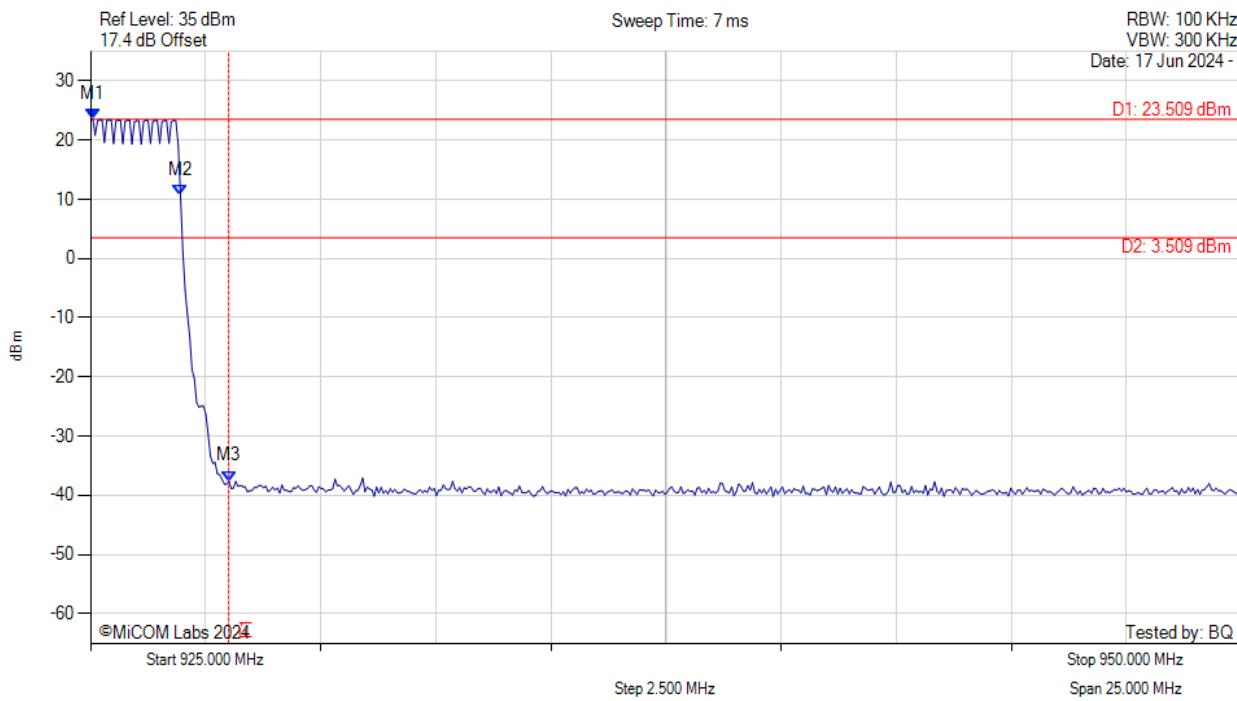


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 925.050 MHz : 23.509 dBm M2 : 926.954 MHz : 10.719 dBm M3 : 928.000 MHz : -37.584 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant:37.5kbps, DEV 50kHz, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

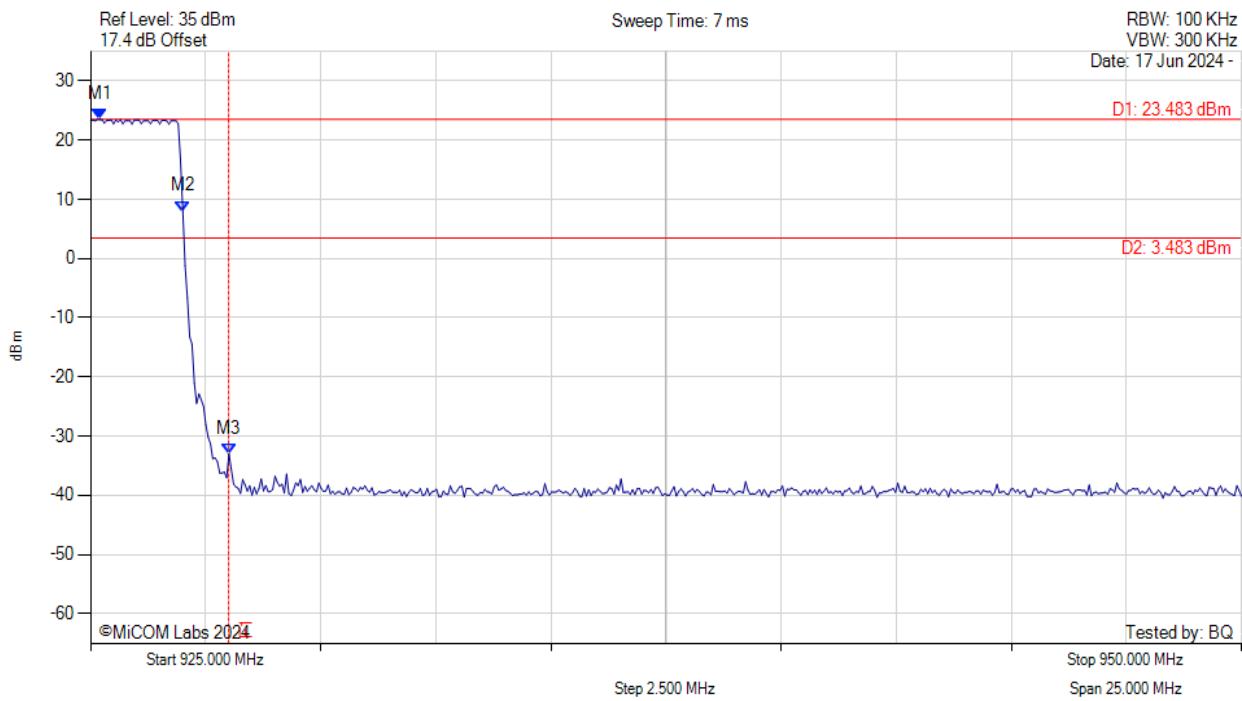


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 925.200 MHz : 23.483 dBm M2 : 927.004 MHz : 7.972 dBm M3 : 928.000 MHz : -32.996 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: OOK - PL1, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

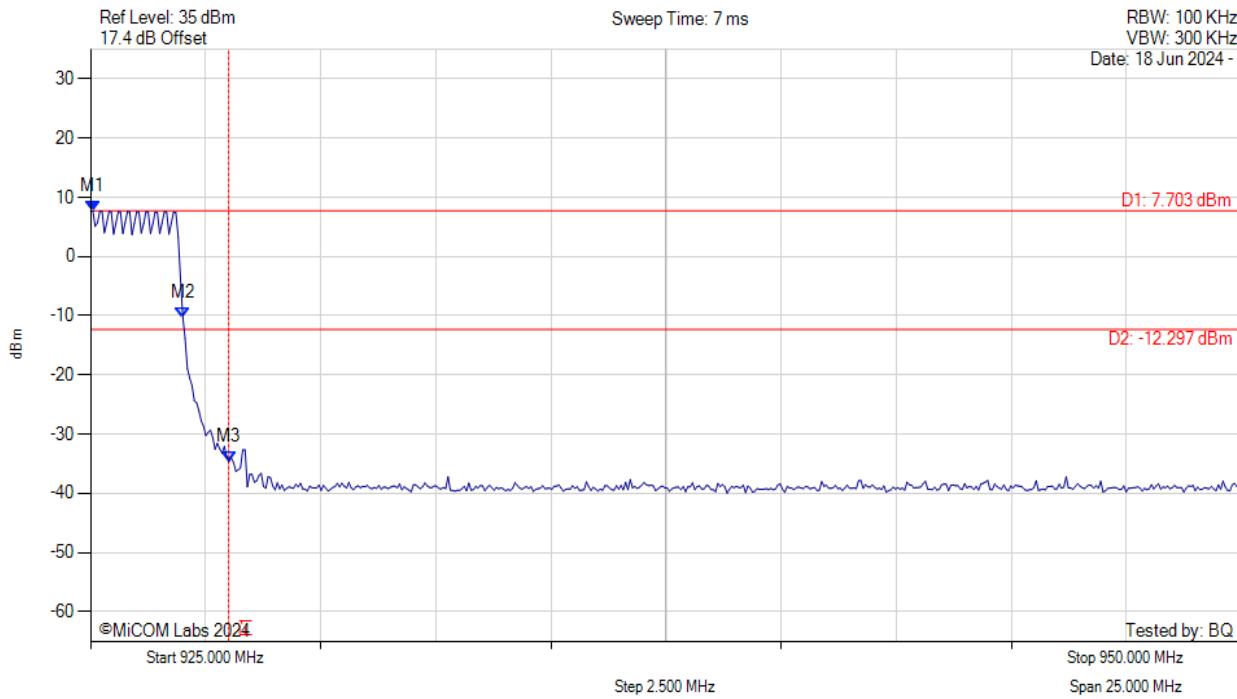


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 925.050 MHz : 7.703 dBm M2 : 927.004 MHz : -10.275 dBm M3 : 928.000 MHz : -34.640 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (HOPPING) PEAK



Variant: OOK - PL3, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

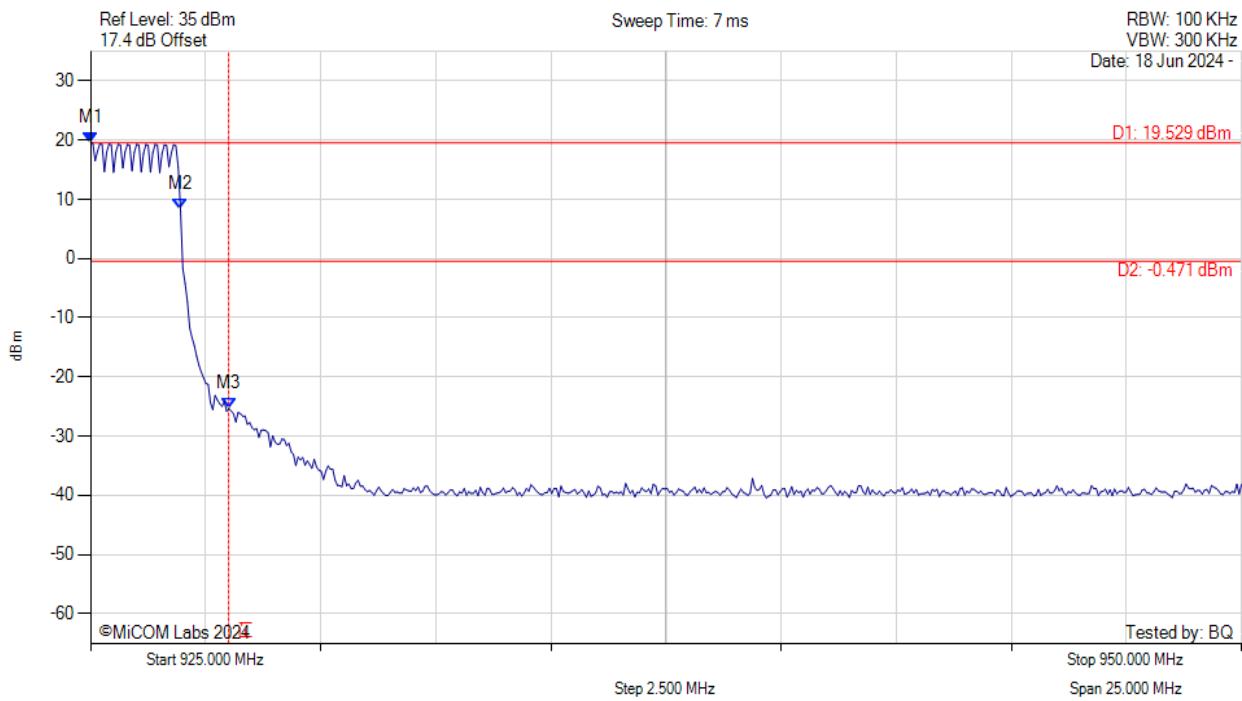


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 925.000 MHz : 19.529 dBm M2 : 926.954 MHz : 8.386 dBm M3 : 928.000 MHz : -25.315 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant:37.5kbps, DEV 16.4kHz, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

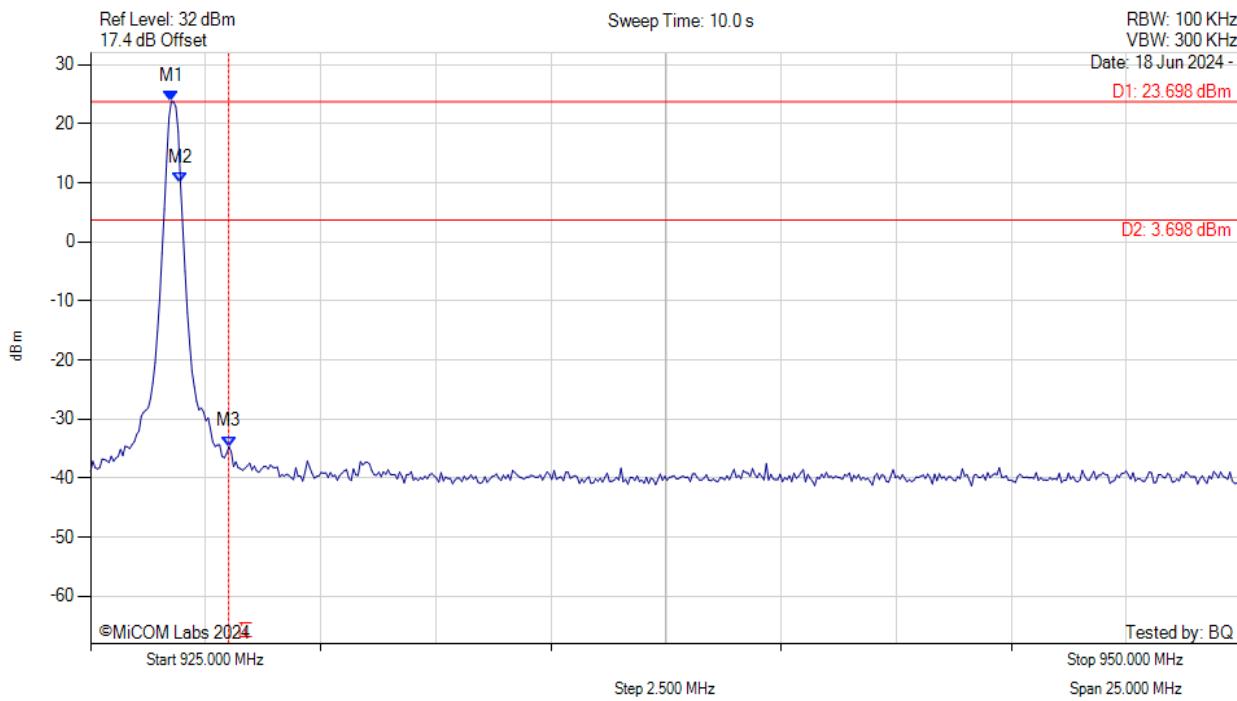


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.754 MHz : 23.698 dBm M2 : 926.954 MHz : 9.914 dBm M3 : 928.000 MHz : -34.678 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant:37.5kbps, DEV 50kHz, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

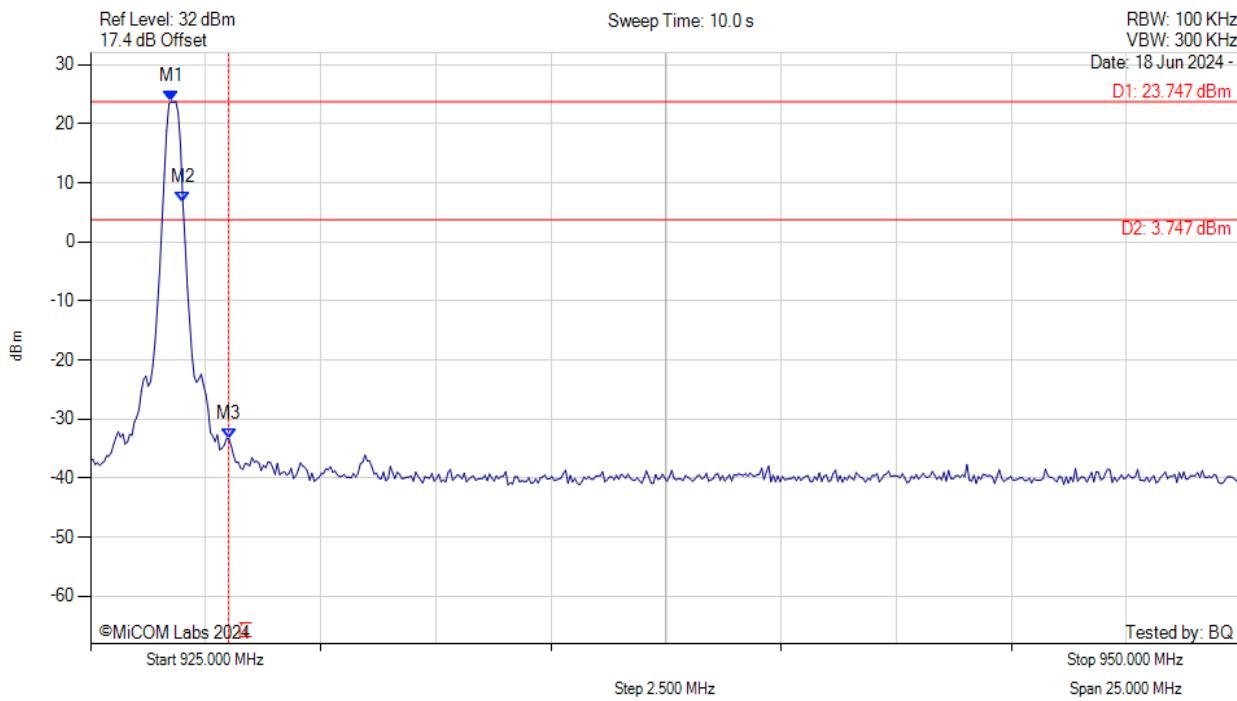


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.754 MHz : 23.747 dBm M2 : 927.004 MHz : 6.686 dBm M3 : 928.000 MHz : -33.358 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: OOK - PL1, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

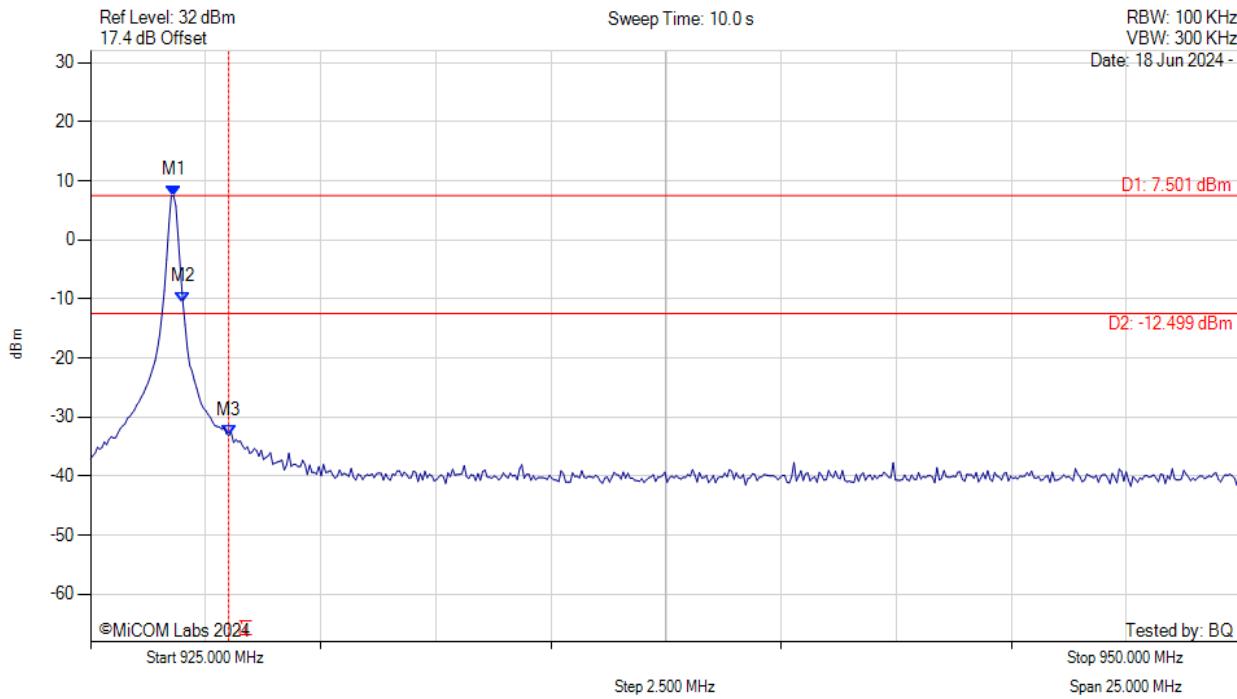


Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.804 MHz : 7.501 dBm M2 : 927.004 MHz : -10.540 dBm M3 : 928.000 MHz : -33.098 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)

CONDUCTED UPPER BAND-EDGE EMISSIONS (STATIC) PEAK



Variant: OOK - PL3, Channel: 926.80 MHz, Chain a, Temp: 20, Voltage: 3.6 Vdc

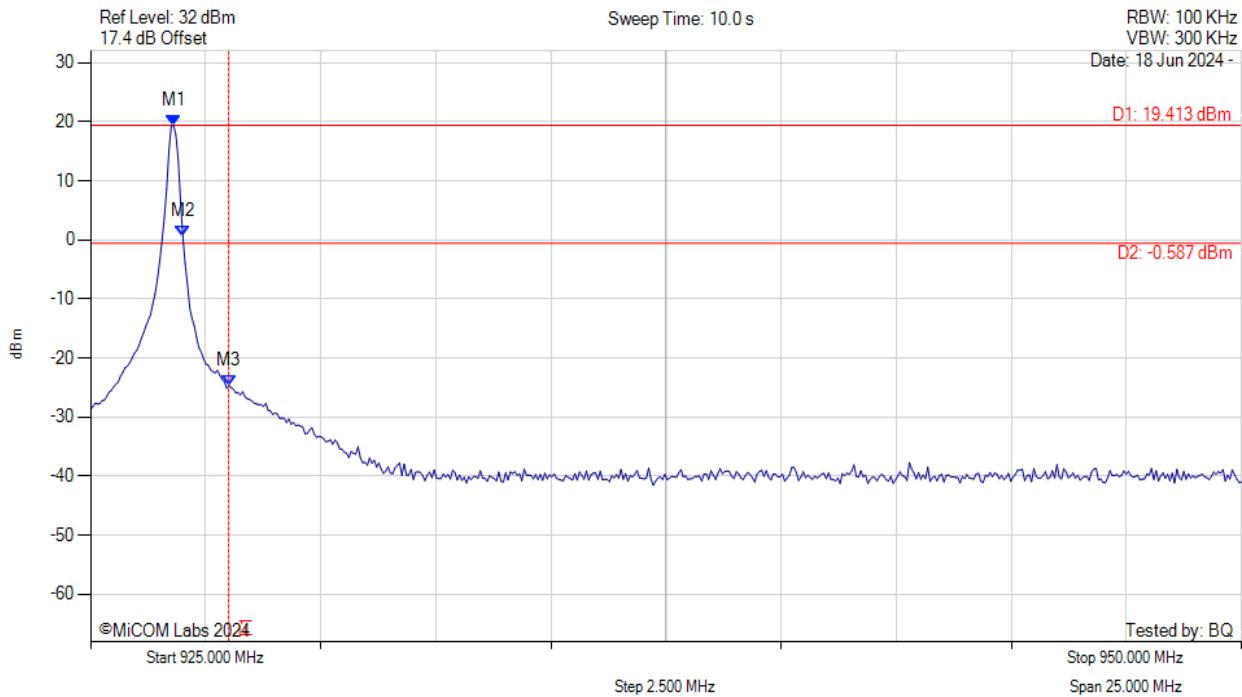

Analyzer Setup	Marker:Frequency:Amplitude	Test Results
Detector = MAX PEAK Sweep Count = 0 RF Atten (dB) = 30 Trace Mode = VIEW	M1 : 926.804 MHz : 19.413 dBm M2 : 927.004 MHz : 0.577 dBm M3 : 928.000 MHz : -24.678 dBm	Channel Frequency: 926.80 MHz

[back to matrix](#)



575 Boulder Court
Pleasanton, California 94566, USA
Tel: +1 (925) 462 0304
Fax: +1 (925) 462 0306
www.micomlabs.com