

REGULATORY COMPLIANCE REPORT

TITLE: FCC & IC Test Report for 15.247 & RSS-210 unlicensed Device

Itron 100W+

AUTHOR: Roger Mulcahy

REV	CCO	DESCRIPTION OF CHANGE	DATE	APPROVALS	
001		INITIAL RELEASE		Engineering	
				Regulatory	

REVISION HISTORY

	a	initial upload	09nov12	Engineering	
				Regulatory	
	b	added more for DTS	12nov12	Engineering	
				Regulatory	
	c	clarified for 15nov question s	16nov12	Engineering	
				Regulatory	

NOTICE OF PROPRIETARY INFORMATION

Information contained herein is proprietary and is property of ITRON, Inc. where furnished with a proposal, the recipient shall use it solely to evaluate the proposal. Where furnished to a customer it shall be used solely for the purposes of inspection, installation or maintenance. Where furnished to a supplier, it shall be used solely in the performance of work contracted for this company. The information shall not be used or disclosed by the recipient for any other purpose, whatsoever.

Test Data Summary**FCC 15.247 / IC RSS-210; Frequency Hopping & DTS Transmitter;**

100W+ - Residential, 903 MHz - 926.85 MHz for EUT

FCC ID:EWQ100WD IC:864D-100WD IC Device Models(for IC): 100WD and 100WRD

Part Numbers: ERW-1300-201 through 220 Serial Numbers

69501161,69501228,67400051

OATS Registration Number: FCC 90716, IC 864D-1

Rule	Description	Spec Limit	Max. Reading	Pass/Fail
Part 15.247 (a)(1)	System Receivers	see below	Match this device	Pass
Part 15.31(e)	Variation of Input Voltage - Conducted	n/a	n/a	n/a
Part 15.207 / RSS-Gen 7.2.2	AC Power line Conducted Emissions	n/a	n/a	n/a
Part 15.247(a)(1)(i) / RSS-210 A8.1(c)	Number of Hopping Channels - conducted	=> 50	50 Itron AM 120 Itron FM	Pass
Part 15.247(a)(1)(i) / RSS 210 8.1 (a)	20dB Bandwidth - conducted	< 250KHz	134.7 / 99.1 kHz AM 177.7 / 198.5kHz FM	Pass
Part 15.247(a)(1) / RSS-210 A8.1(b)	Carrier Frequency Separation - conducted	> 20dB BW	200.2 Khz Itron AM FM	Pass
Part 15.247(a)(1)(i);(g);(h) / RSS-210 A8.1(c)	Time of Occupancy, Short Burst, Intelligence	< 400mS in 20sec	307.35 ms. In a 20 second period AM.	Pass
Part 15.247(b) (2) / RSS-210 A8.4(1)	Power Output - conducted	< 1.0W	0.007 / 0.386 Watts AM 0.007 / 0.388 Watts FM	Pass
Part 15.247(a) (2)	Emission Bandwidth	=>500kHz @ 6db	522.5kHz	Pass
Part 15.247 (b) (3)	Max Peak conducted Power level	<1.0W	20.45dBm (0.111 Watts)	Pass
Part 15.247 (d)	Max Power spectral Density	< 8dBm in 3 kHz	5.2 dBm	Pass
Part 15.247(d) / RSS-210 A8.5	Spurious Emissions - radiated	< -20dBc	-36.00dbc @6487.6 MHz AM power setting8 -36.01dbc @6487.6 MHz FM power setting8 -41.71dbc @1853.6MHz (DTS power setting D)	Pass
Parts 15.205 & 15.209 / RSS-210 2.2, 2.6 Tables 1 & 2	Restricted Bands / Spurious Emissions - radiated	table	Average level 38.89 dbuV/m @7414MHz (AM setting 8) Average level 43.47 dbuV/m @8127MHz (AM setting C) Average level 48.32 dbuV/m @7414 MHz(FM setting 8) Average level 52.97 dbuV/m @2780.4 MHz(FM setting E) Average level 41.99 dbuV/m @8127MHz(DTS setting D)	Pass

RSS-Gen 7.2.3 Part 15.109 Class B	Receiver Spurious Emissions - radiated	table	27dbuV/m	Pass
Parts 1.1310 & 2.1091(mobile) or 2.1093 (portable)/RSS-102 Sec 4.2	Limits for Maximum Permissible Exposure (MPE)	formula	0.315 mW / cm ² @ 20 cm 3.15 W/M ² @ 0.2 M	Pass
15.247 (d)	Band-edge compliance of RF Conducted Emissions	same as spurious	Band edge @ 902 MHz is down -31.14 dbc Band edge @ 928 MHz is down -32.45 dbc	Pass

Rule versions: FCC Part 1; FCC Part 2; FCC Part 15, RSS-102 Issue 4 (03-2010); RSS-210 Issue 8 (12-2010); RSS-Gen Issue 3 (12-2010).

Reference docs: ANSI C63.4-2003; DA 00-705 (03-30-2000); OET65 (08-1997); OET65C (06-2001); IEEE C95.3-2002.

Cognizant Personnel	
<u>Name</u> Roger Mulcahy	<u>Title</u> Test Technician
<u>Name</u> Jay Holcomb	<u>Title</u> Regulatory Manager
<u>Name</u> Jason Woodruff	<u>Title</u> Project Lead

CONDITIONS DURING TESTING

No Modifications to the EUT were necessary during the testing.

FCC 15.31(m) – IC _n/a_; Number of Channels

This device was tested on three channels.

ANSI C63.4 - Temperature and Humidity During Testing

The temperature during testing was within +10° C and +40° C.

The Relative humidity was between 10% and 90%.

RSS-Gen 4.3: Tests shall be performed at ambient temperature

EQUIPMENT UNDER TEST (EUT) DESCRIPTION

Itron declares that the EUT tested was representative of a production unit.

EQUIPMENT UNDER TEST

EUT Module

Manuf: Itron, Inc.
Itron Model: Itron 100W+ and 100WP+ Endpoint
Serial Number(s) Listed Below
Power source Fresh Batteries

Plot Information

In the zero span measurements, the line in the display is the trigger level.

Peripheral Devices

None

15.247(a)(1)**System receivers**

... The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals

THIS DEVICE IS OPERATED IN SYSTEMS THAT THE READING DEVICES, HAVE INPUT BANDWIDTHS THAT MATCH THIS DEVICE AND THAT STAY IN SYNCRONIZATION.

15.31(e)**Variation of Supply Voltage**

Vary the supply voltage from 85% to 115% of the nominal voltage. If the power level of the fundamental signal varies with supply voltage, record the voltage level at which the fundamental signal is at its highest and use that voltage level for all further testing.

DEVICE IS BATTERY OPERATED NOT CONNECTED TO THE POWER LINE. BATTERY IS NOT RECHARGEABLE. THEREFORE THIS TEST IS N/A.

15.207 / RSS-GEN 7.2.2**Power line Conducted Emissions**

Measure the AC power line conducted emissions from 150kHz to 30 MHz using a 50 mH/50 ohm line impedance stabilization network (LISN) according to the procedure specified in ANSI C63.4. Verify that no emissions exceed the following limits:

Frequency (MHz)	Quasi-Peak (dBuV)	Average (dBuV)
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of frequency

DEVICE IS BATTERY OPERATED NOT CONNECTED TO THE POWER LINE. BATTERY IS NOT RECHARGEABLE. THEREFORE THIS TEST IS N/A.

15.247(a) (1) (i) / RSS-210 A8.1 (c)**Number of Hopping Channels, conducted**

For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies.

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = the frequency band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = Peak

Trace = max hold

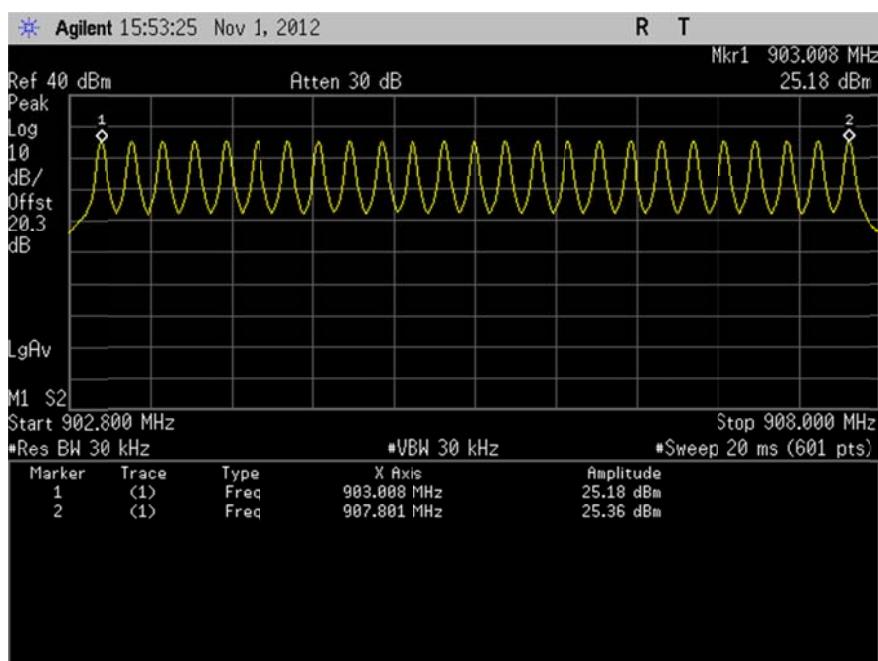
Allow the trace to stabilize. It may prove necessary to break the span up into sections, in order to clearly show all of the hopping frequencies.



Equipment Used	Serial Number	Cal Date	Due
E4440A	MY45305142	24-Apr-12	24-Apr-13
Date	Tested by		
11/01/2012 to 11/02/2013	Roger Mulcahy		



Unit tested with a fresh Battery: 69501228



There are 50 channels in the Itron AM modulation mode.



There are 120 channels in the Itron FM modulation mode.


Channels 5 to 29 Itron AM Mode

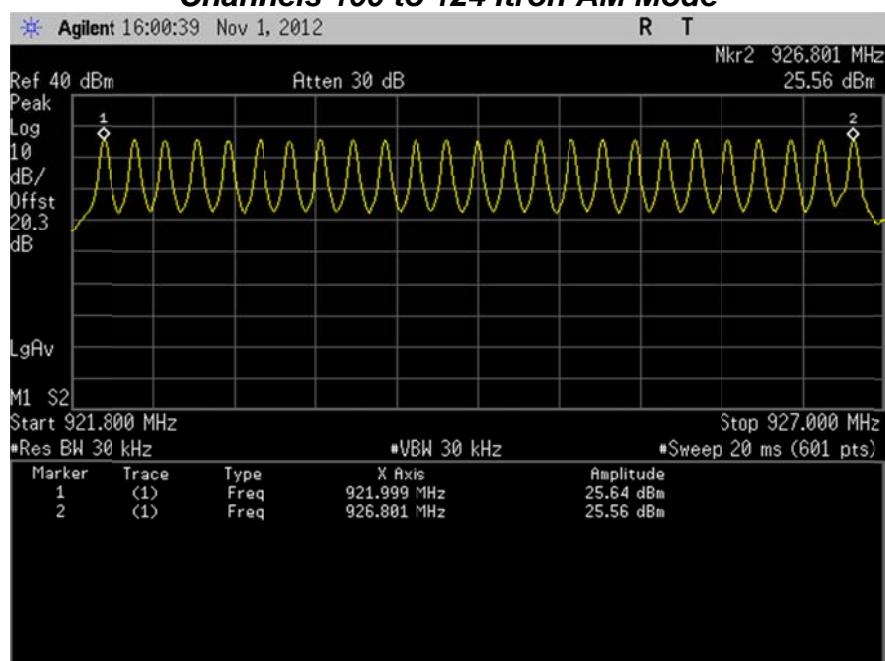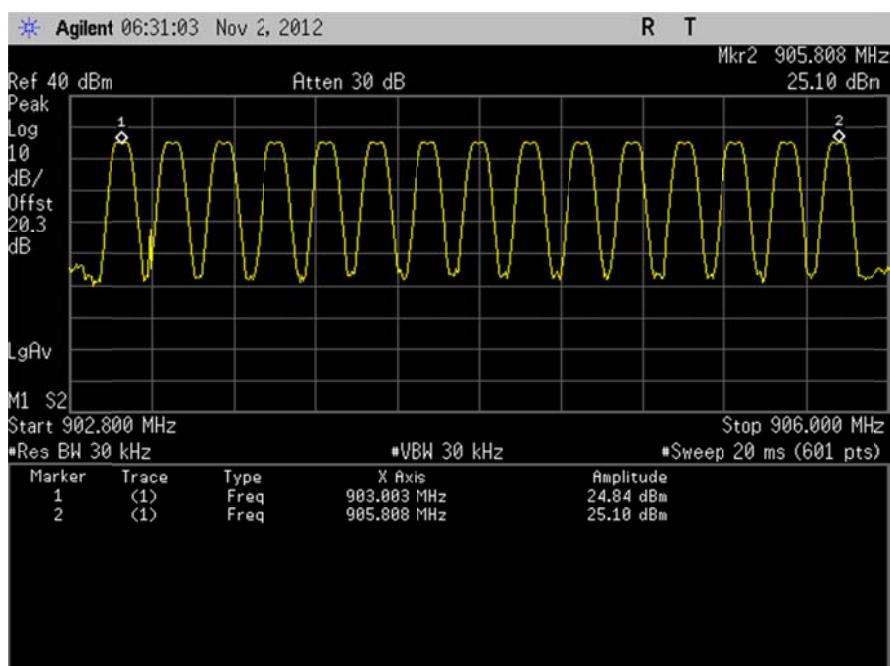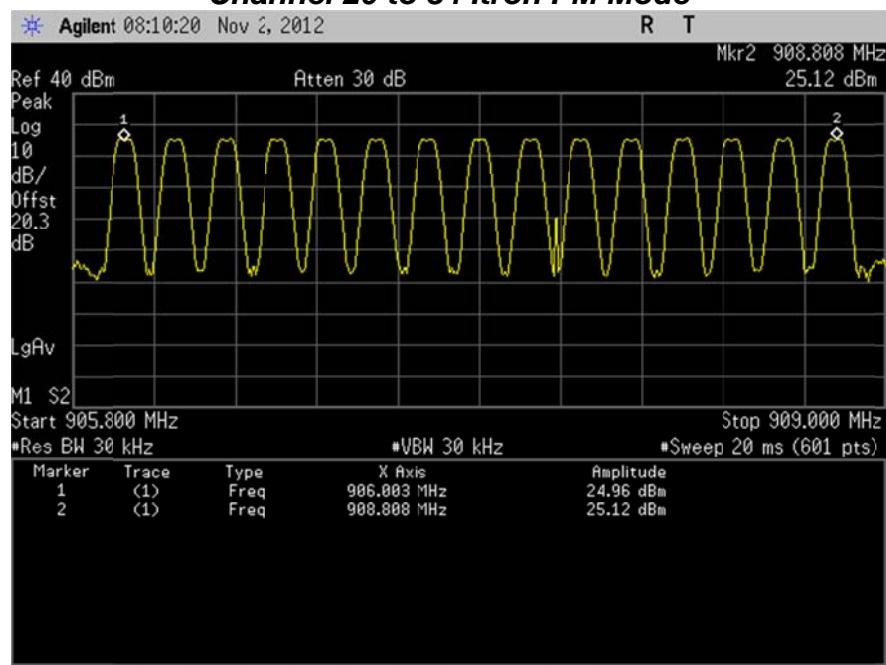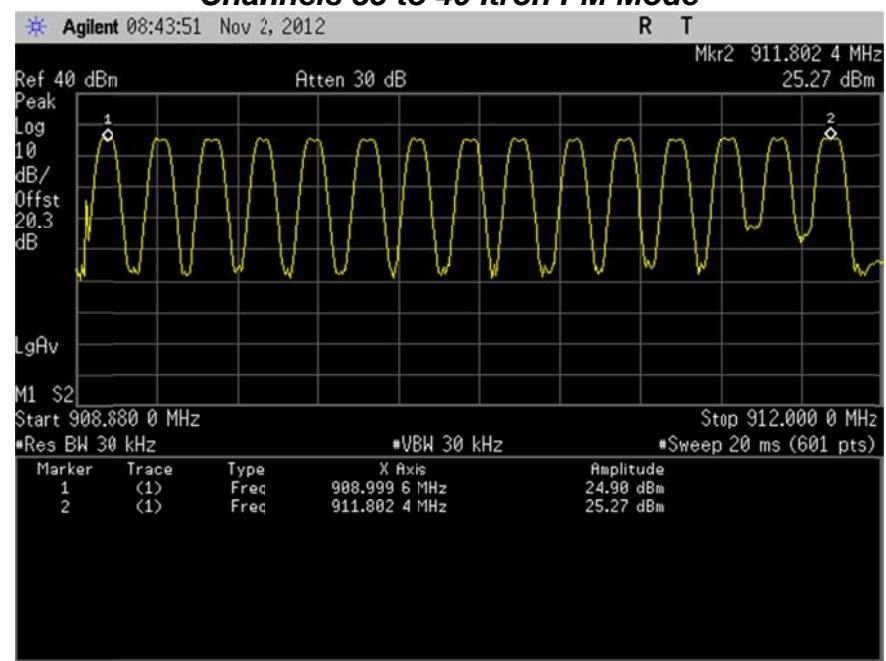Channels 100 to 124 Itron AM Mode**Channel 5 to 19 Itron FM Mode**

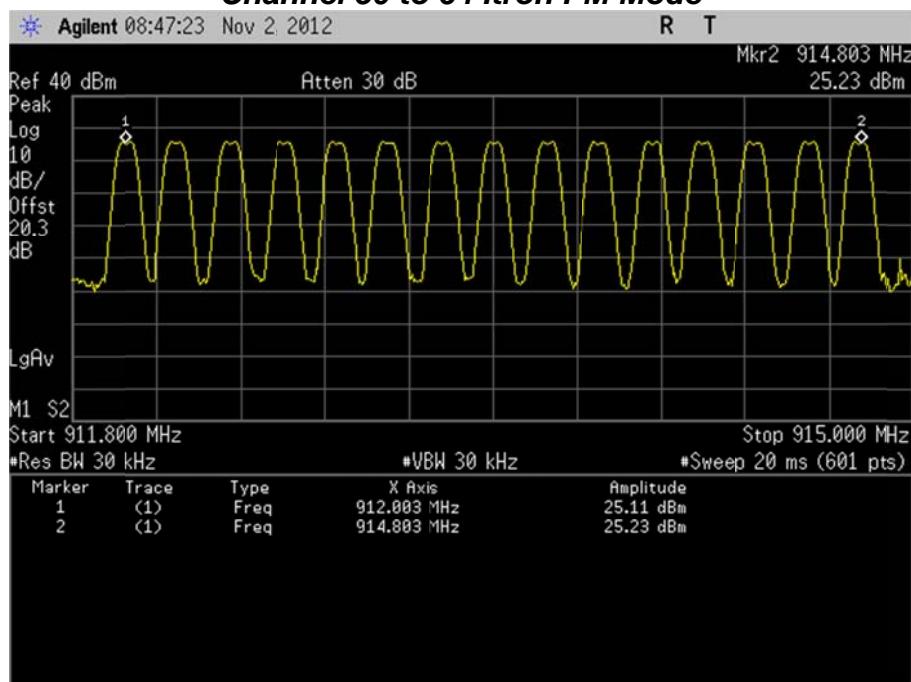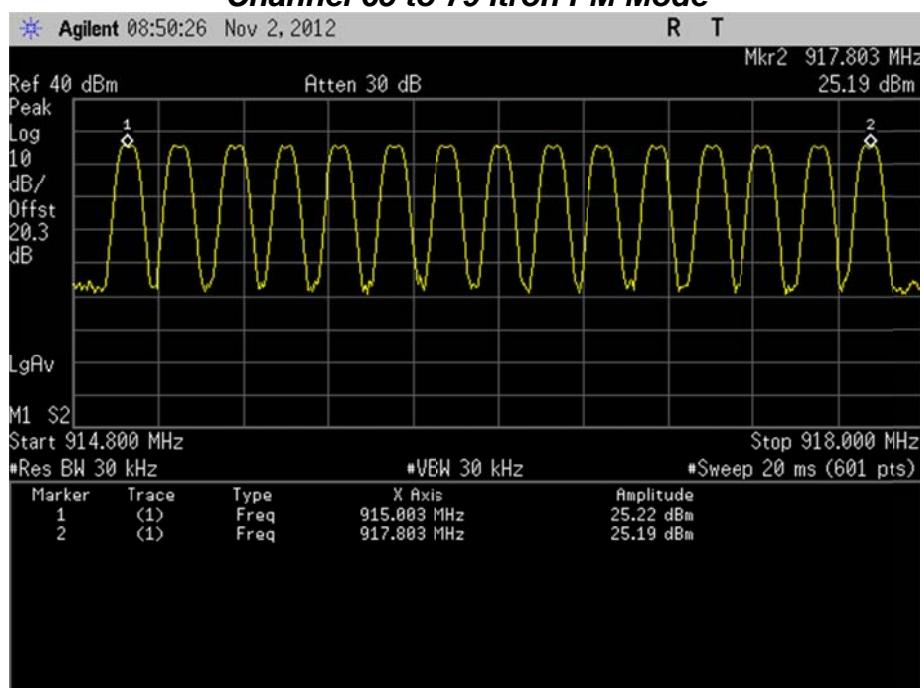Channel 20 to 34 Itron FM Mode**Channels 35 to 49 Itron FM Mode**

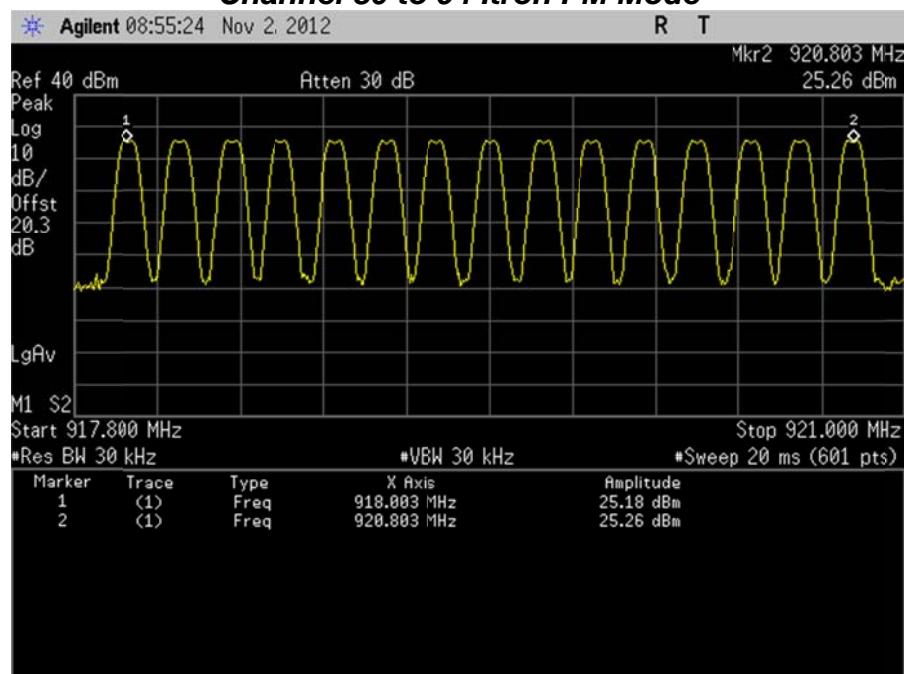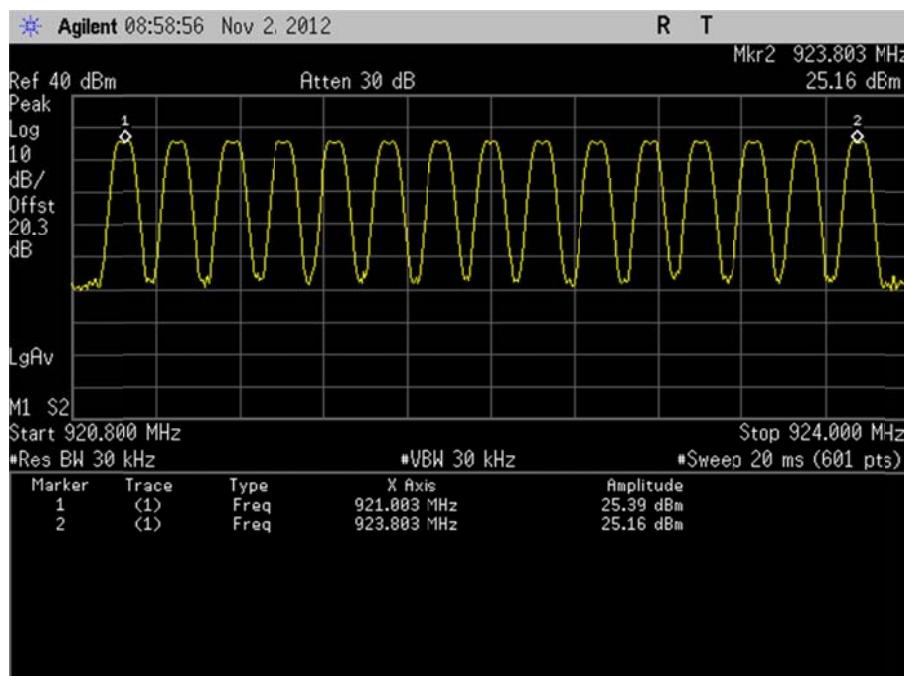Channel 50 to 64 Itron FM Mode**Channel 65 to 79 Itron FM Mode**

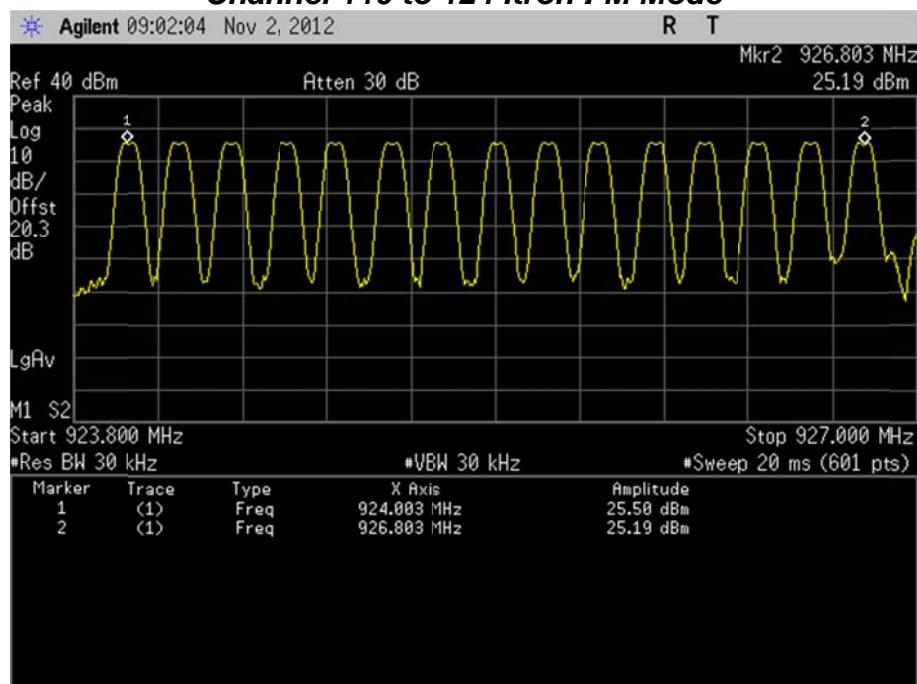Channel 80 to 94 Itron FM Mode**Channel 95 to 109 Itron FM Mode**

Channel 110 to 124 Itron FM Mode

15.247(a) (1) (i) / RSS-210 A8.1 (a)**20 dB Bandwidth, Conducted**

(i) For frequency hopping systems operating in the 902-928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies

Verify that the 20 dB bandwidth of the hopping channel is less than 250 kHz.

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel.

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

Equipment Used	Serial Number	Cal Date	Due
E4440A	MY45305142	24-Apr-12	24-Apr-13
Date	Tested by		
11/03/2012 to 11/05/2012	Roger Mulcahy		

Unit tested with a fresh Battery: 69501228



system channel (²)	Channel Frequency (MHz)	message modulation type (¹)	20dB bandwidth (kHz) level E	20dB bandwidth level C	20db bandwidth level 8
5	903	AM	73.6	99.1	87.7
65	915	AM	72.4	73.1	86.5
124	926.8	AM	76.4	74.3	134.7
5	903	FM37.5kbd w/ 16.4kHz dev	47.6	54.9	48.9
65	915	FM37.5kbd w/ 16.4kHz dev	46.9	50.9	48.9
124	926.8	FM37.5kbd w/ 16.4kHz dev	50.3	49.6	47.6
5	903	FM37.5kbd w/ 50kHz dev	164.1	162.1	163
65	915	FM37.5kbd w/ 50kHz dev	162.8	162.8	162.1
124	926.8	FM37.5kbd w/ 50kHz dev	198.5	170.9	193.1
5	903	FM12.5kbd w/50kHz dev	140	140.7	140.7
65	915	FM12.5kbd w/50kHz dev	140.7	144.8	141.3
124	926.8	FM12.5kbd w/50kHz dev	177.1	145.4	177.7



⁽¹⁾Channel spacing is 200Khz for Itron AM and FM



⁽²⁾Itron AM uses 50 channels between channel 5(903 MHz) and channel 124(926.8 MHz)

⁽²⁾Itron FM uses all 120 channels between channel 5(903 MHz) and channel 124(926.8 MHz)

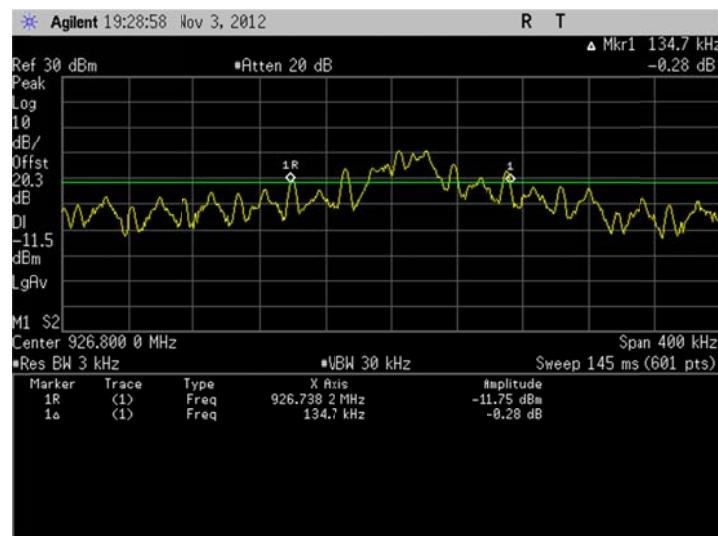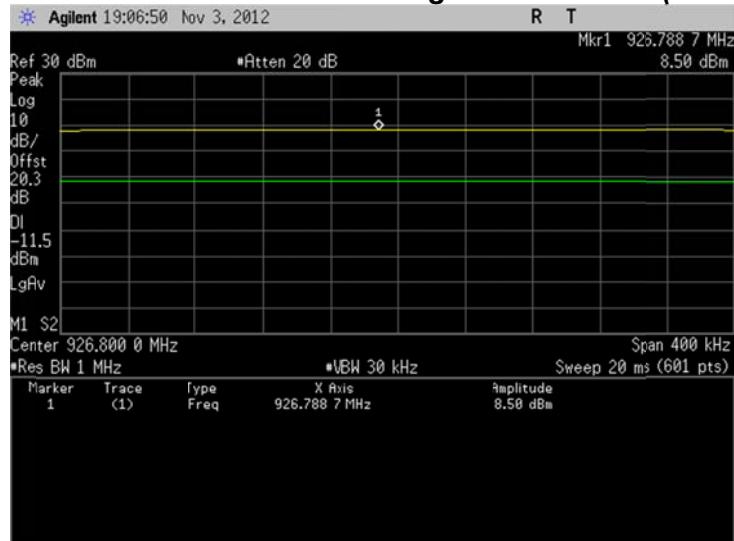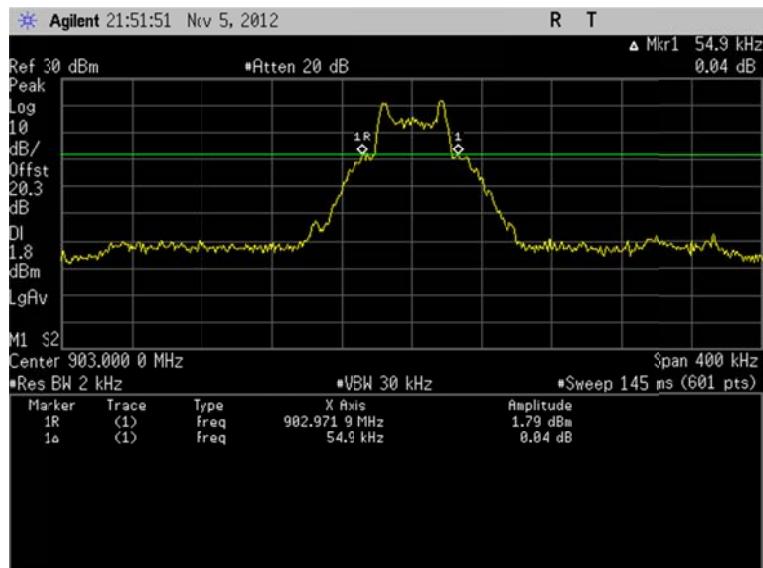
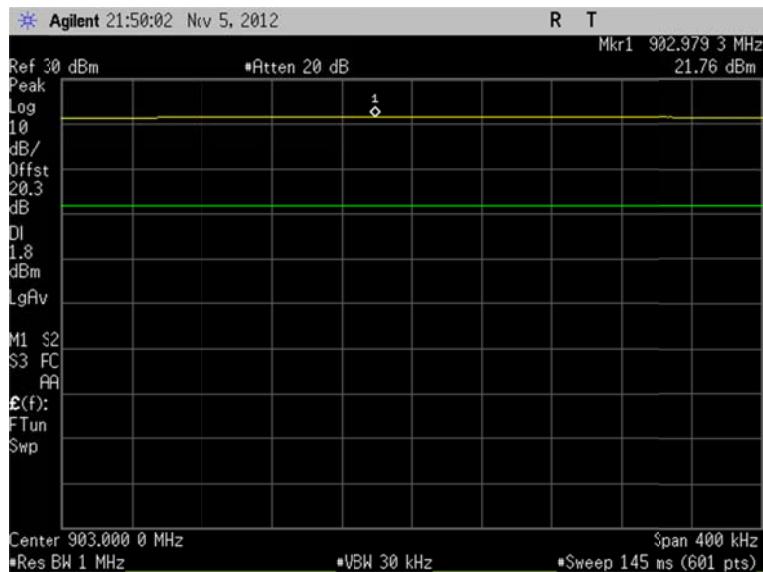
20db bandwidth Itron AM Power setting 8 Channel 124 (926.800MHz)



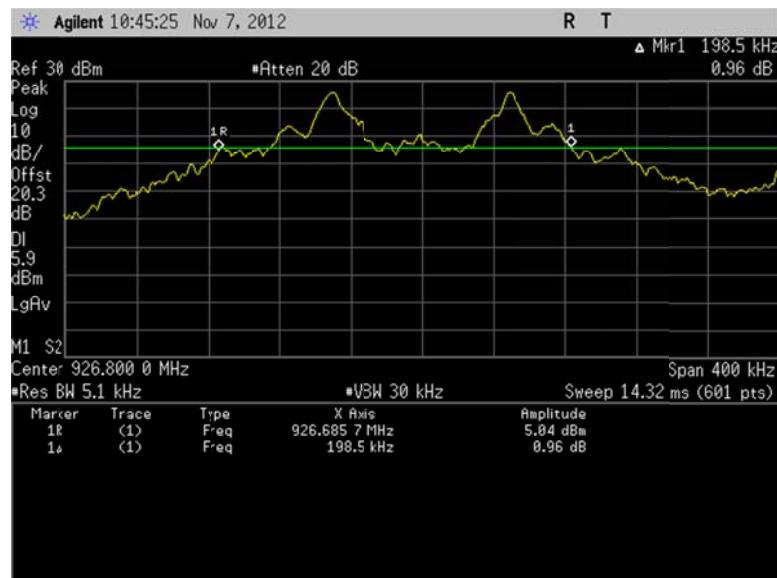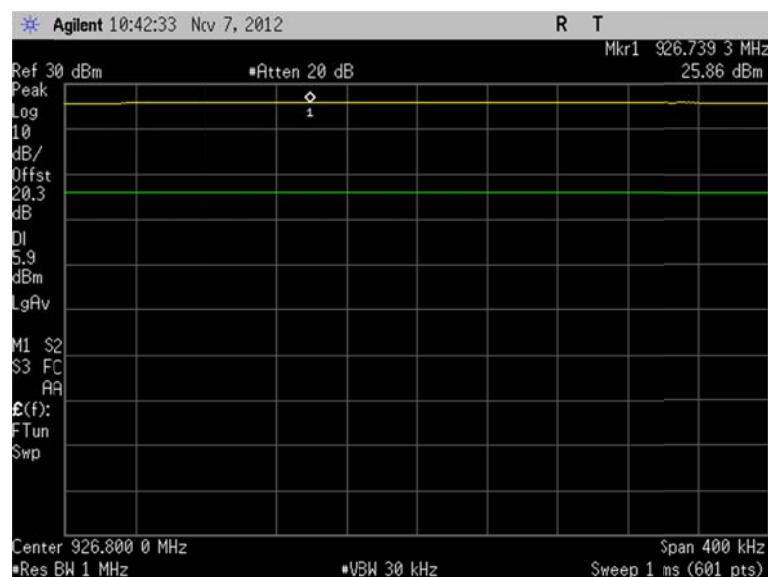20db bandwidth FM(37.5kdb w/16.4kHz dev) Power setting C Channel 5 (903MHz)

20db bandwidth FM(37.5kdb w/50kHz dev) Power setting C Channel 5 (903MHz)

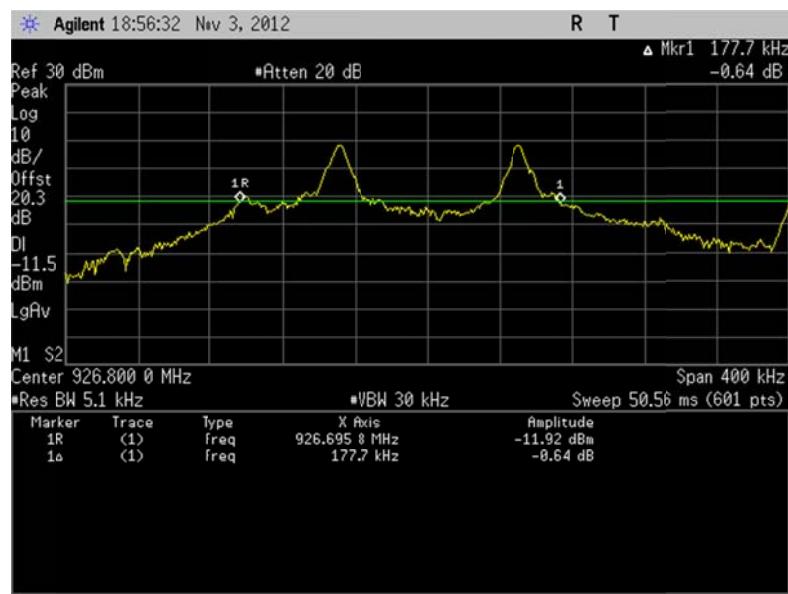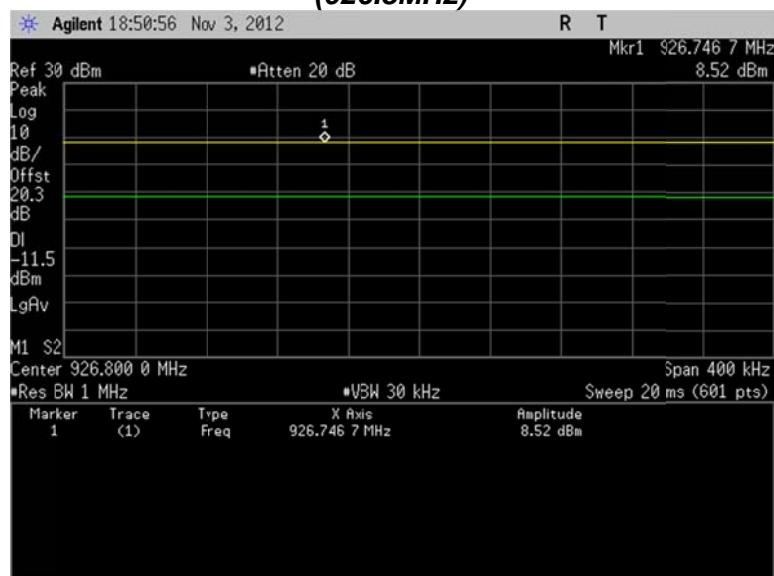**20db bandwidth Itron FM (FM12.5kbd w/50kHz dev) Power setting 8 Channel 124
(926.8MHz)**



15.247(a) (1) / RSS-210 A8.1 (b)**Carrier Frequency Separation, conducted**

Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Verify that the channel separation is > the 20dB bandwidth of a single transmission.

The EUT must have its hopping function enabled. Use the following analyzer settings:

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels.

Equipment Used	Serial Number	Cal Date	Due
E4440A	MY45305142	24-Apr-12	24-Apr-13
Date	Tested by		
11/03/2012 to 11/05/2012	Roger Mulcahy		


Unit tested with a fresh Battery: 69501228

Channels ⁽²⁾	Channel separation ⁽¹⁾ Itron AM and FM
Low (903MHz)	199.5 KHz
Middle (915MHz)	200.2 KHz
High (926.8MHz)	199.5 KHz

⁽¹⁾Channel spacing is 200Khz for Itron AM and FM

⁽²⁾Itron AM uses 50 channels between channel 5(903 MHz) and channel 124(926.8 MHz)

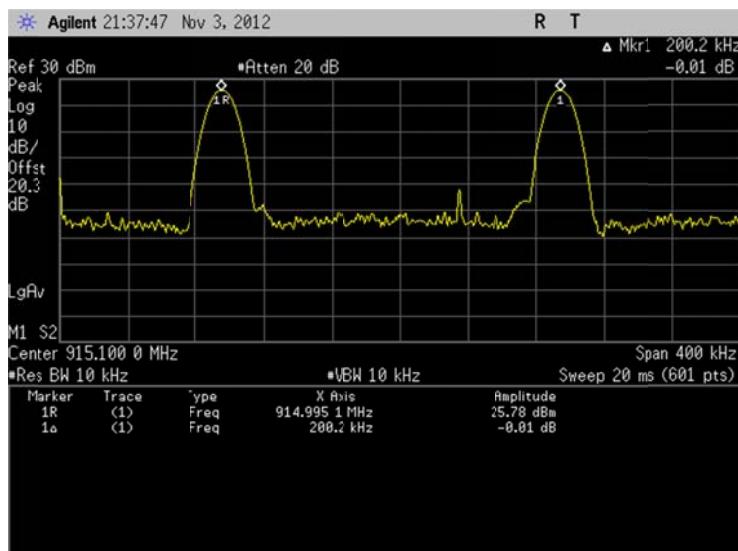Itron FM uses all 120 channels between channel 5(903 MHz) and channel 124(926.8 MHz)



15.247(a) (1) (i); (g); (h) / RSS-210 A8.1 (c)

Time of Occupancy

Verify that the transmitted signal does not occupy a single frequency for more than 400 mS in a 20 second period.

Short Bursts

... a system employing short transmission bursts must comply with the definition of a frequency hopping system and must distribute its transmissions over the minimum number of hopping channels specified in this section.

Intelligence

The coordination of frequency hopping systems in any other manner for the express purpose of avoiding the simultaneous occupancy of individual hopping frequencies by multiple transmitters is not permitted.

The EUT must have its hopping function enabled. Use the following spectrum analyzer settings:

Span = zero span, centered on a hopping channel

RBW = 1 MHz

VBW \geq RBW

Sweep = as necessary to capture the entire dwell time per hopping channel

Detector function = peak

Trace = max hold

If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.

The maximum possible occupancy time on any one frequency is 400 mS within a 20 second period.


The system this product is used in does not incorporate any type of intelligence to avoid the simultaneous occupancy of individual hopping frequencies.

Equipment Used	Serial Number	Cal Date	Due
Agilent E4402B	My44210913	10/25/2012	10/25/2014
Date	Tested by		
11/01/2012 thru 11/6/2012	Roger Mulcahy/Aaron Fitzgerald		


Mode	dBm	Initial message length	Number of Initial messages	Worst case Two way message length	Number of two way messages	Total transmission time in 20 second period (milliseconds)
AM itron	24	26.85	1	56.1	5	307.35
AM itron	27	26.85	1	28.79	5	170.8
FM itron	24	12.79	1	25.05	5	138.04
FM itron	27	12.79	1	12.68	5	76.19
AM itron	10	26.85	1	N/A	N/A	N/A
FM itron	10	12.79	1	N/A	N/A	N/A
Fm Beacon	22	3.315	1	N/A	N/A	N/A


Unit tested w/ 3.6V power supply

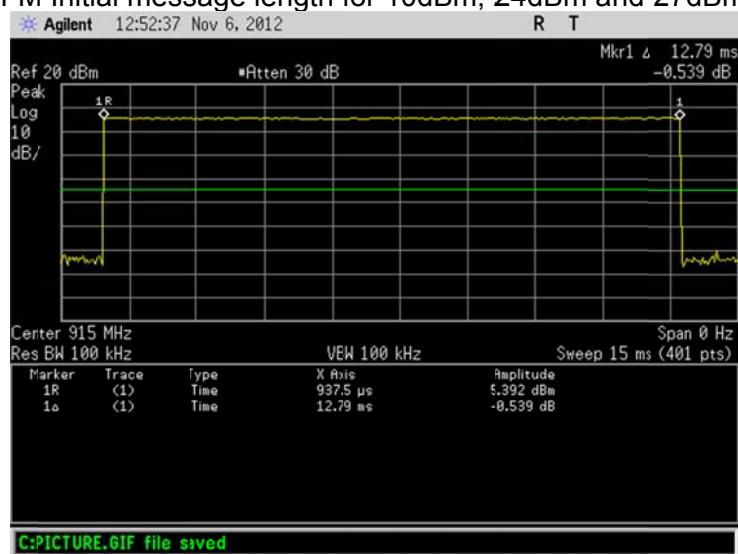FM Initial message length for 10dBm, 24dBm and 27dBm






Two Way FM message length at 27dBm

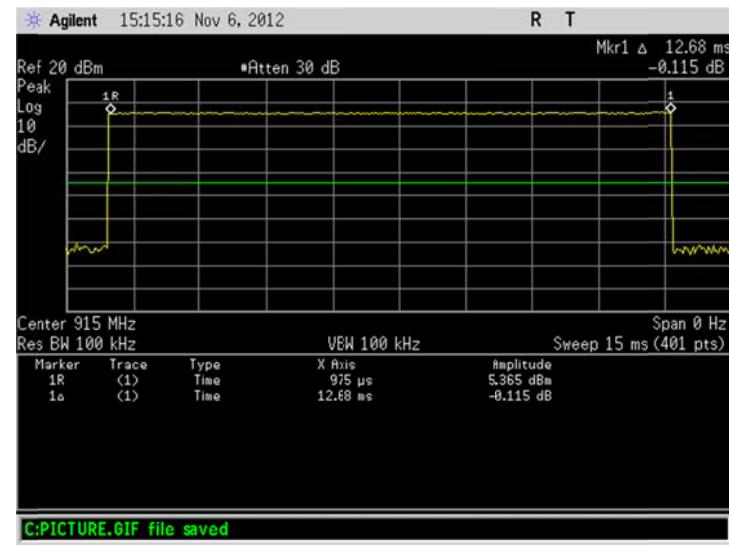

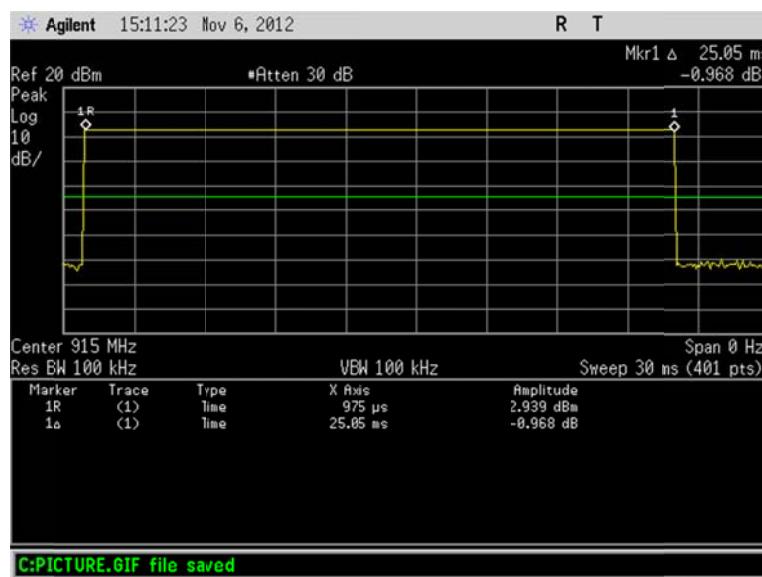Two Way FM message length at 24dBm

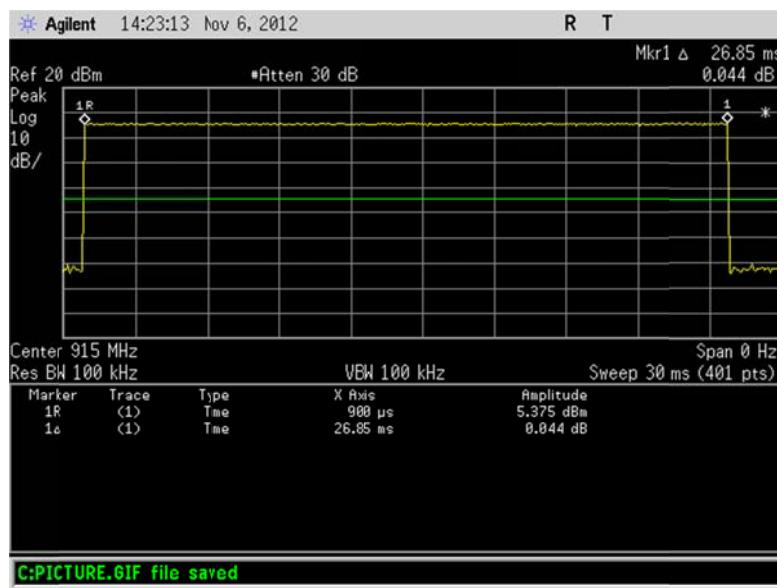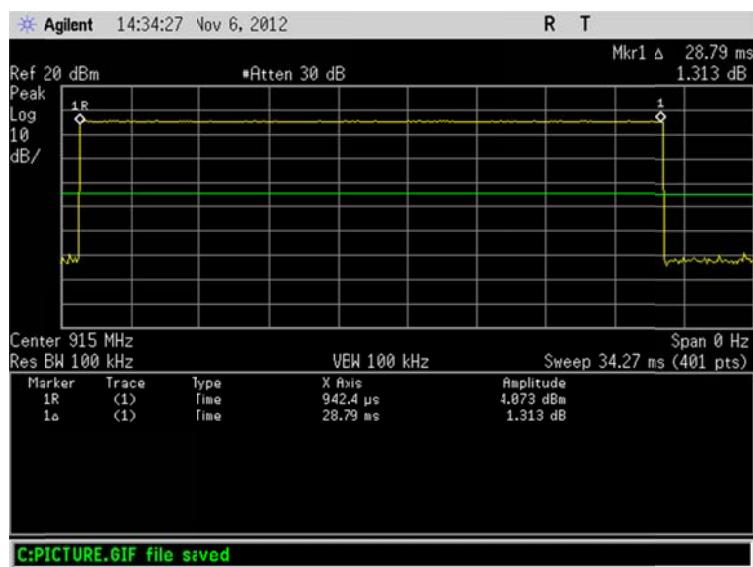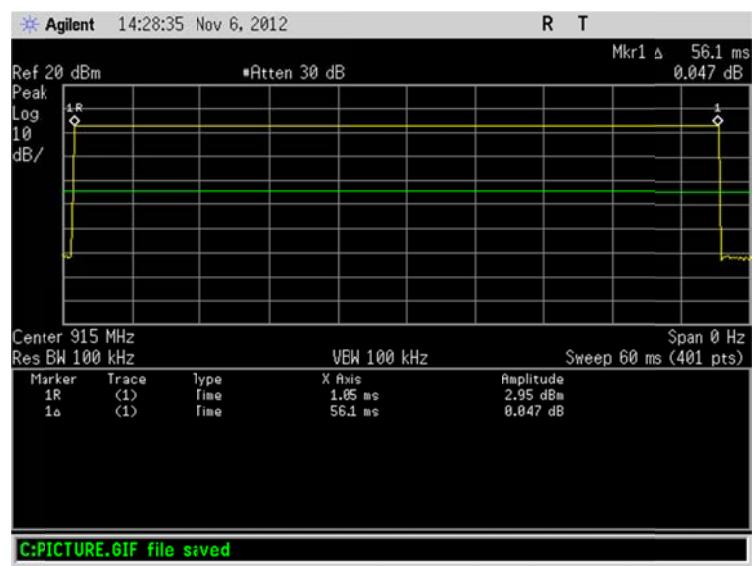AM Initial message length for 10dBm, 24dBm and 27dBm





Two Way AM message length at 27dBmTwo Way AM message length at 24dBm

AM and FM Maximum Channel Time Occupancy in 20 Seconds

For FM, the maximum occupancy on a single channel during a 20 second period is 138.04 milliseconds. The initial message is 12.79 milliseconds long and the 5 linked messages worst case are 25.05 milliseconds long each.

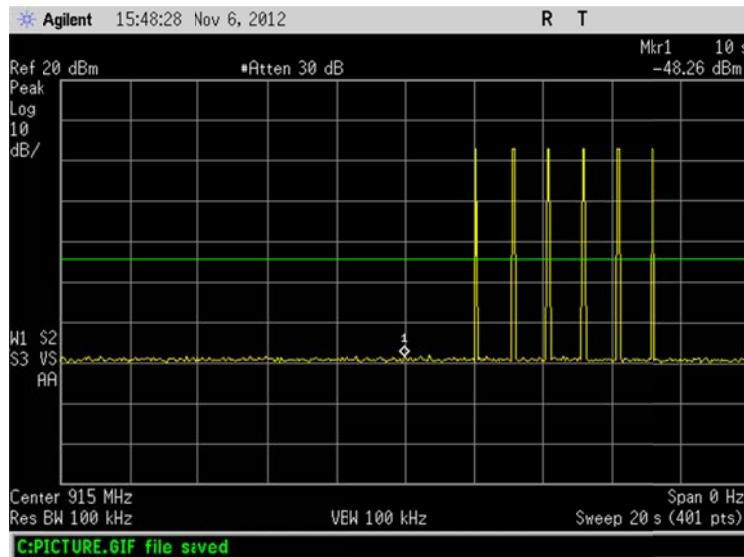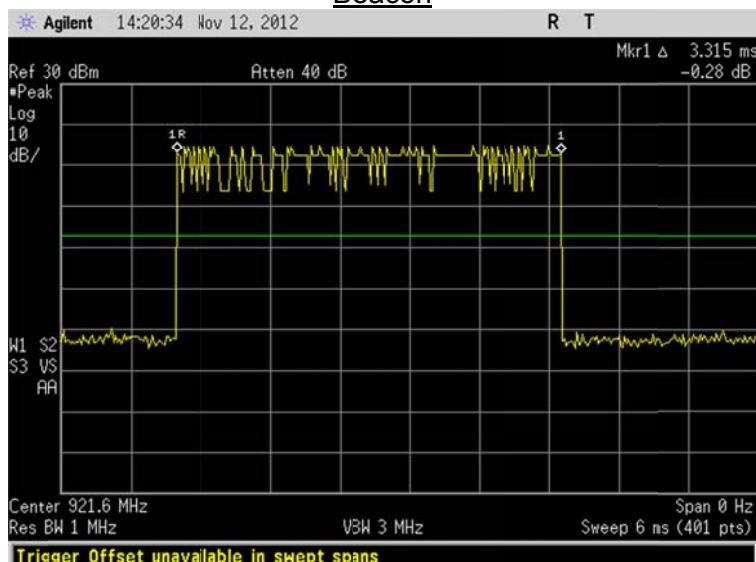For AM, the maximum occupancy on a single channel during a 20 second period is 307.35 milliseconds. The initial message is 26.85 milliseconds long and the 5 linked messages worst case are 56.1 milliseconds long each.

Beacon

15.247(b) (2) / RSS-210 A8.4 (1)

Power Output - Conducted

The maximum peak conducted output power of the intentional radiator shall not exceed the following: For frequency hopping systems operating in the 902-928 MHz band: 1 watt for systems employing at least 50 hopping channels.

Use the following spectrum analyzer settings:

Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.
RBW > the 20 dB bandwidth of the emission being measured.
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold
Set RF level offset=cable loss

Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.

Equipment Used	Serial Number	Cal Date	Due
E4440A	MY45305142	24-Apr-12	24-Apr-13
Date	Tested by		
11/03/2012 to 11/05/2012	Roger Mulcahy		



Unit tested with a fresh Battery: 69501228



system channel ⁽²⁾	Channel Frequency (MHz)	message modulation type ⁽¹⁾	conducted power (dbm) @ power level E	conducted power (dbm) @ power level C	conducted power (dbm) @ power level 8
5	903	AM	25.5	21.73	8.53
65	915	AM	25.76	21.69	8.53
124	926.8	AM	25.87	21.47	8.49
5	903	FM	25.56	21.84	8.54
65	915	FM	25.83	21.61	8.51
124	926.8	FM	25.89	N/A	N/A

⁽¹⁾Channel spacing is 200Khz for Itron AM and FM


⁽²⁾Itron AM uses 50 channels between channel 5(903 MHz) and channel 124(926.8 MHz)

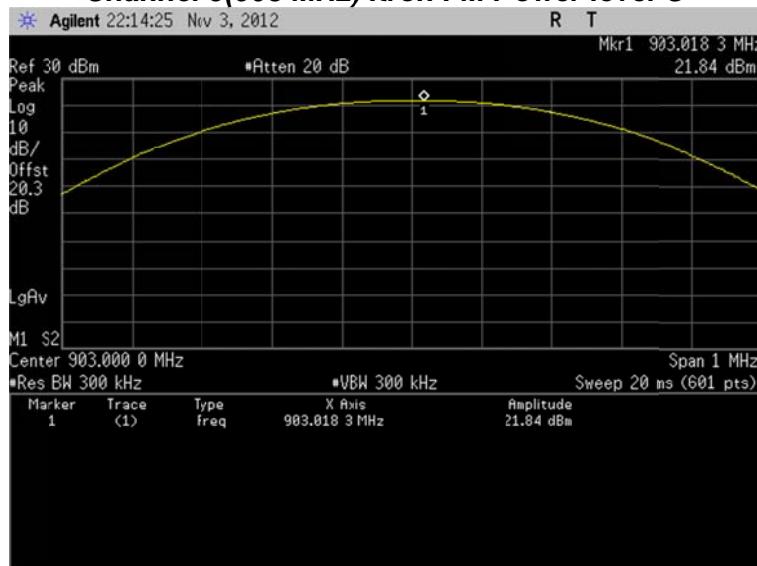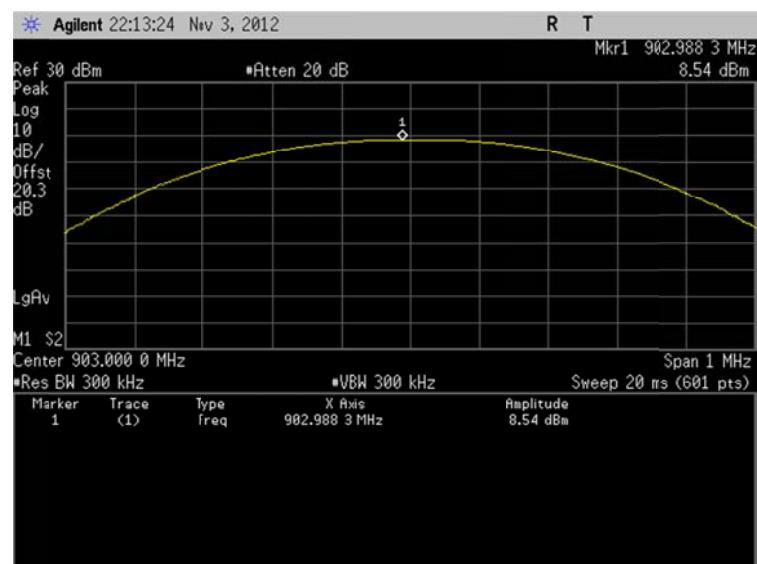⁽²⁾Itron FM uses all 120 channels between channel 5(903 MHz) and channel 124(926.8 MHz)

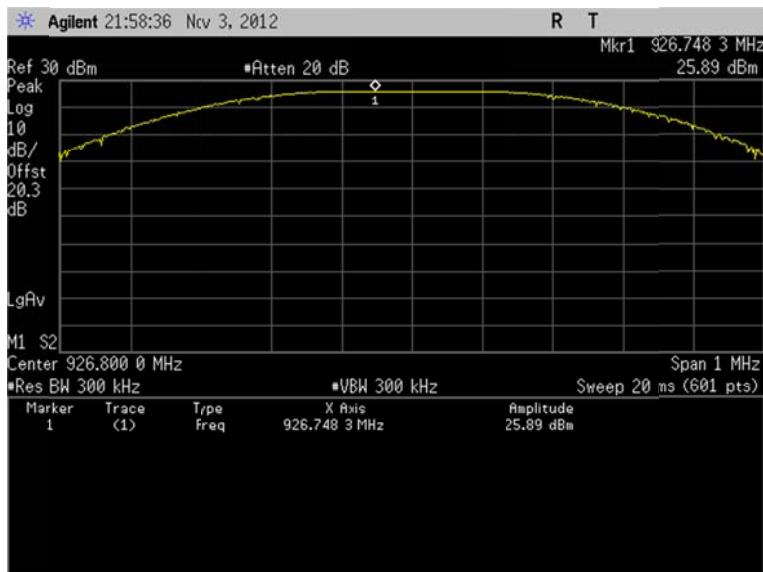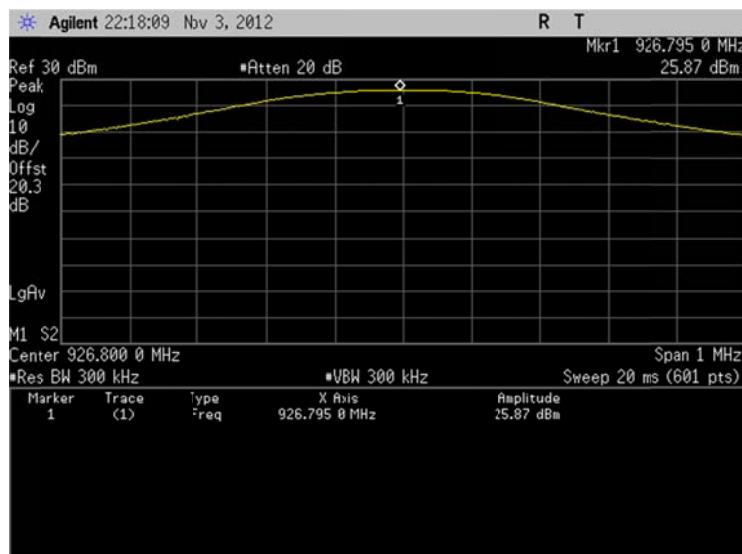
Channel 5(903 MHz) Itron FM Power level C**Channel 5(903 MHz) Itron FM Power level 8**

Channel 124(926.8 MHz) Itron FM Power level E**Channel 124(926.8MHz) Itron AM Power level E**

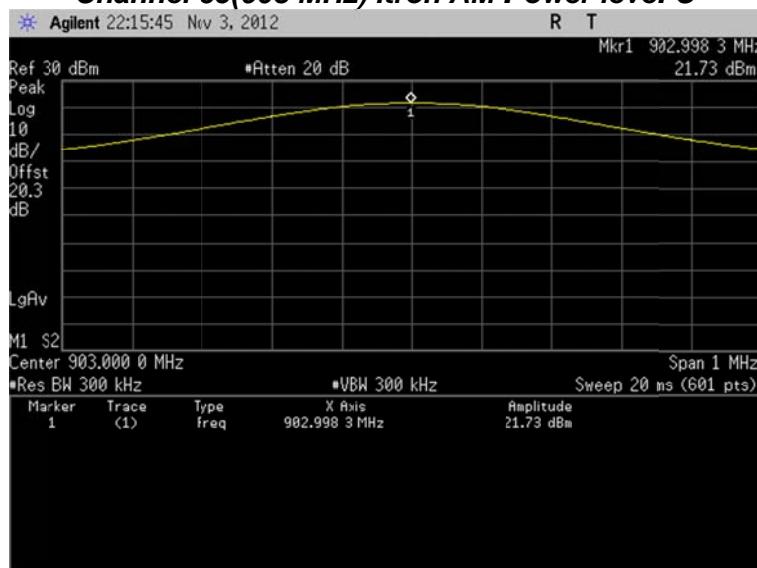Channel 65(903 MHz) Itron AM Power level C



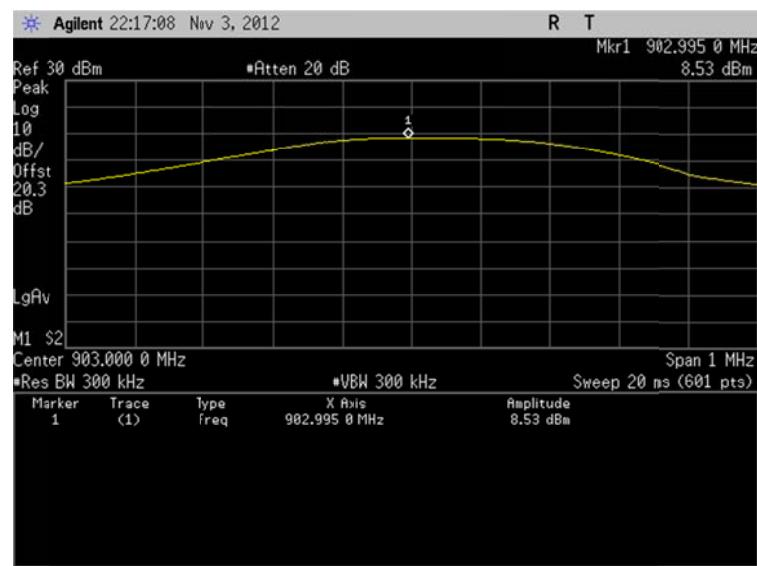Channel 5(903 MHz) Itron AM Power level 8



15.247(a) (2)**Emission Bandwidth of Beacon**

In some instances, the endpoint will transmit a spread spectrum signal.

15.247 (a) (2)

For direct sequence systems, the minimum 6 dB bandwidth shall be at least 500 kHz.

RBW set to 1-5% of EBW = 10 KHz

VBW set to 3 x RBW or greater = 30 KHz


Detector = Peak

Trace = Max Hold

Sweep = Auto Couple

Measure max width of outermost amplitude points attenuated by 6dB relative to the maximum level measured in the fundamental transmission.

Equipment Used	Serial Number	Cal Date	Due
Agilent E4402B	My44210913	10/25/2012	10/25/2014
Date	Tested by		
11/07/2012	Aaron Fitzgerald		

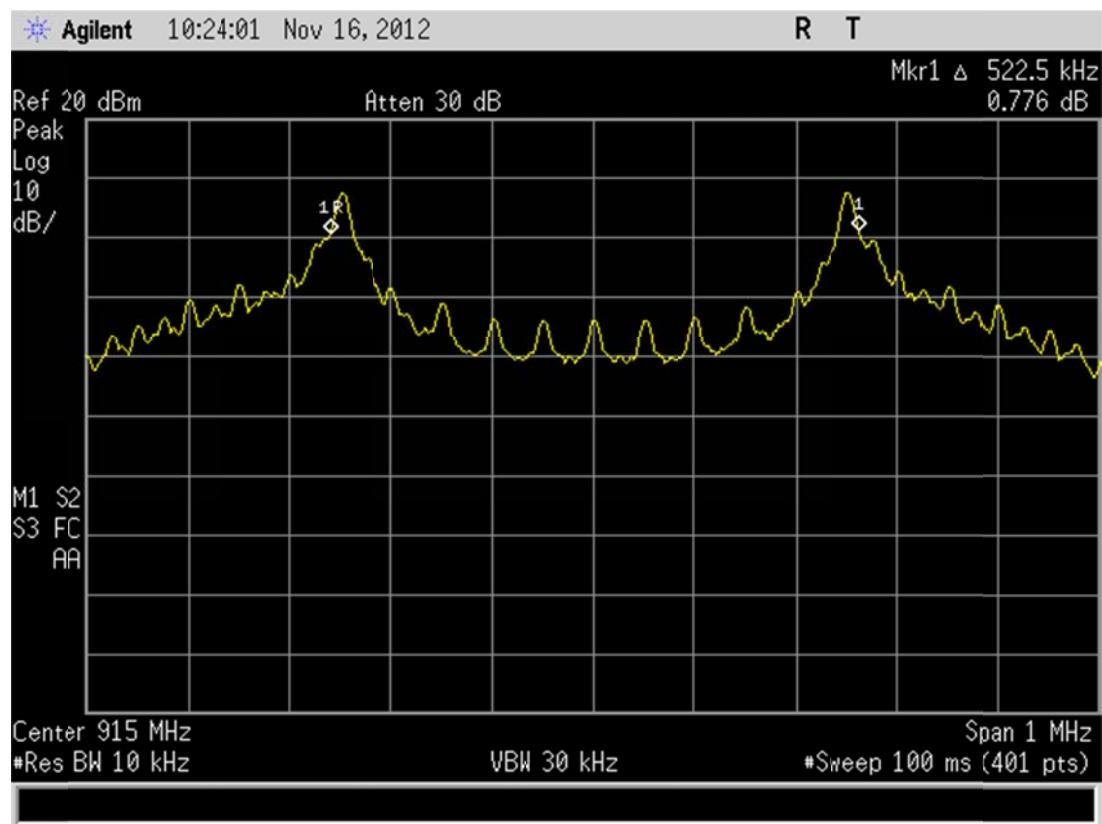EBW measured to be 522.5 KHz

15.247(b) (3)**Maximum Peak Conducted Power Level for Beacon**

Peak conducted power measurement of the spread spectrum signal.

15.247 (b) (3)

The maximum peak output power of the transmitter shall not exceed 1 Watt.

RBW set to \geq EBW = 1 MHz

VBW set to 3 x RBW or greater = 3 MHz

Span = Zero

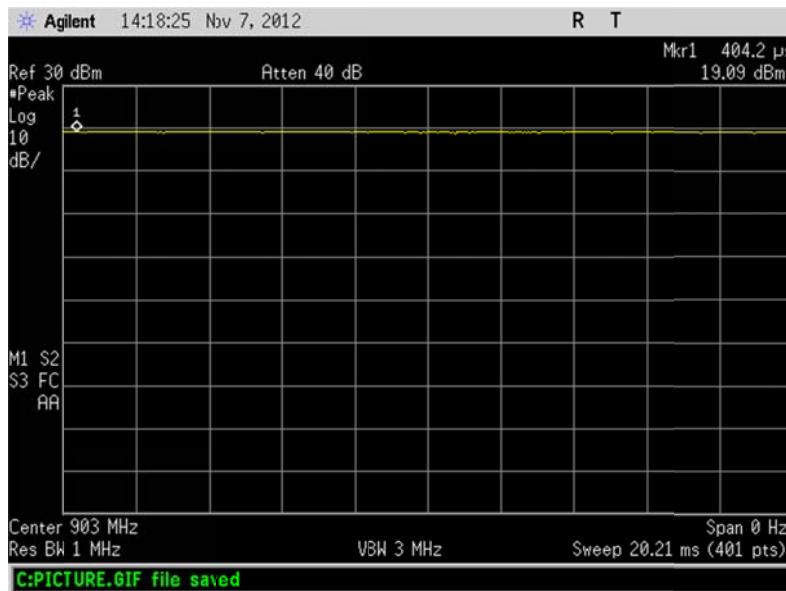
Detector = Peak

Trace = Max Hold


Sweep = Auto Couple

Use peak marker function to measure max amplitude of fundamental transmission.


Maximum Peak Power Level @ 903 MHz = 19.09 dBm + 1.09 dB cable loss = 20.18 dBm



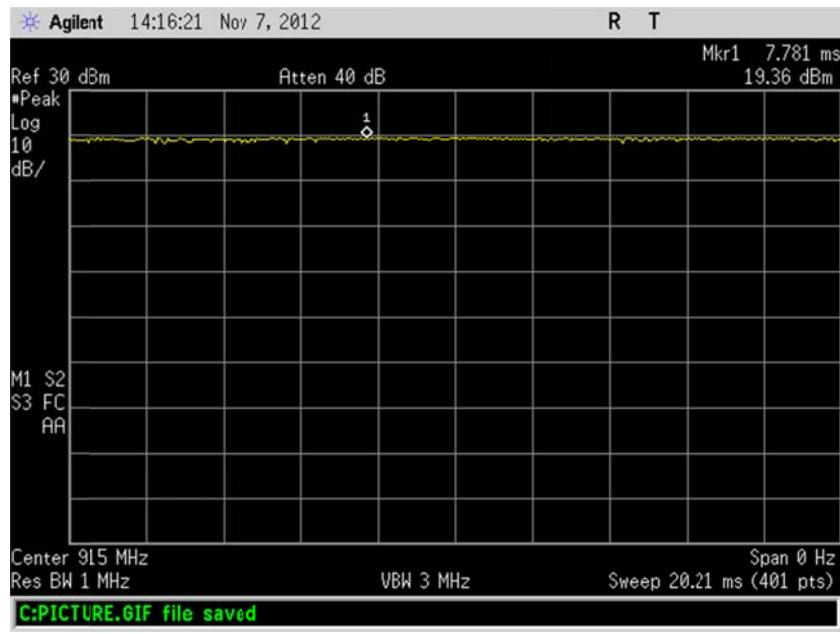Maximum Peak Power Level @ 915 MHz = 19.36 dBm + 1.09 dB cable loss = 20.45 dBm



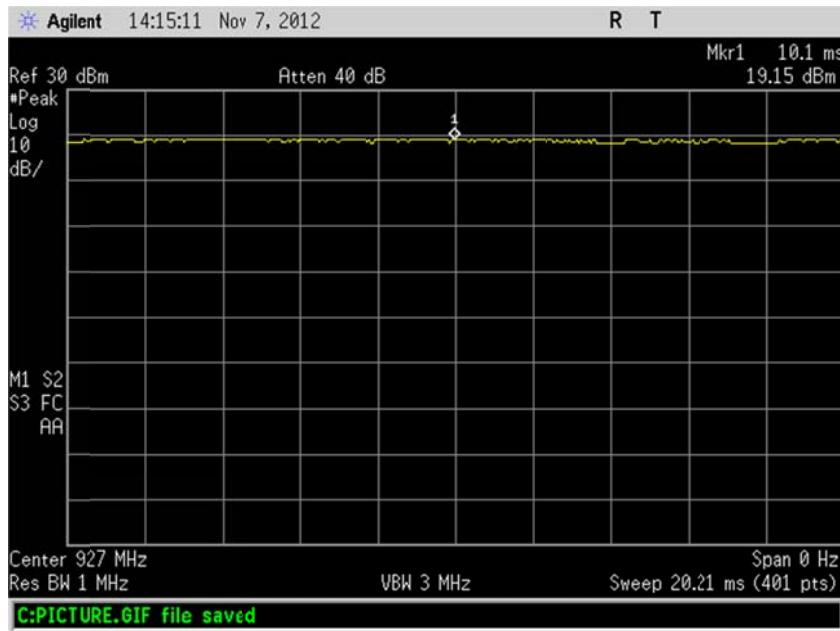Maximum Peak Power Level @ 927 MHz = 19.15 dBm + 1.09 dB cable loss = 20.24 dBm



15.247(d)

Maximum Power Spectral Density Level for Beacon

PSD measurement of the spread spectrum signal.

15.247 (d)

The peak power density shall not be greater than 8 dBm in any 3 kHz band during any one second interval.

RBW set to 100 KHz

VBW set to 3 x RBW or greater = 300 KHz

Span = 5-30% greater than EBW = 700 KHz

Detector = Peak

Trace = Max Hold

Sweep = Auto Couple

Use peak marker function to measure max power level in any 100 KHz band segment within the fundamental EBW.

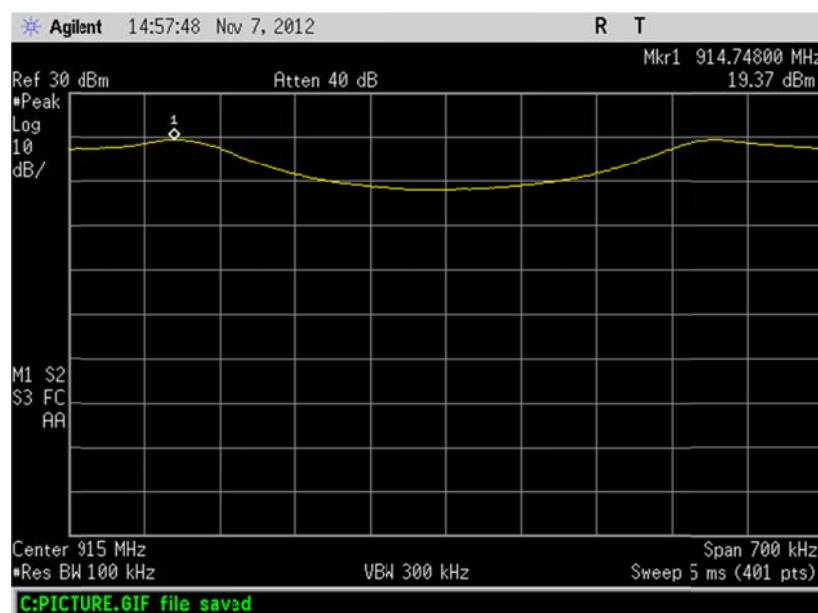
The Beacon transmits for **4.79 ms once every minute** when enabled.

Maximum Power Level @ 915 MHz = 19.37 dBm + 1.09 dB cable loss = **20.46 dBm**

Scale observed power to equivalent level in 3 KHz by bandwidth correction factor.

BWCF = $10 \log (3 \text{ KHz} / 100 \text{ KHz}) = -15.23 \text{ dB}$

$20.46 \text{ dBm} - 15.23 \text{ dB} = \textbf{5.2 dBm}$



15.247(d) / RSS-210 A8.5**Spurious Emissions - Radiated**

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)). (note: 15.247 (b)(3) is for digital modulation.

Follow the procedure outlined in Annex A, and B of this document.

Equipment Used		Serial Number	Cal Date	Due
Agilent E7405A Spectrum Analyzer		MY45113415	7/19/2012	7/19/2013
Microcoax 40 foot cable		H1G315G1	4/15/2011	4/15/2013
AH systems preamplifier model number PAM 0126		146	2/6/2012	2/6/2013
Emco 6502 Loop (9kHz to 30MHz)		9509-2970	11/5/2012	11/5/2014
Emco 3110B Biconical (30MHz-to 300MHz)		9807-3129	7/20/2011	7/20/2013
Emco 3146 Log Periodic (200MHz to 1GHz)		9203-3358	7/20/2011	7/20/2013
Emco 3115 waveguide (1Ghz - 18GHz)		9508-4550	12/21/2011	12/21/2012
1.3Ghz high pass filter		405735	6/3/2011	6/3/2013
Huber&Suhner sucotest cable		2	4/26/2011	4/26/2013
Date		Tested by		
11/1/2012 to 11/8/2012		Roger Mulcahy		

Unit tested: with a fresh battery were units 69501161

Frequency range investigated was 9 kHz to 9.28GHz. (part 15.33 (a)

FM power level E

1	2	3	4	5	6	7	8	9	10
Freq. MHz	Ant. Pos. Vert. or Horz.	Antenna Height / Table Azimuth	Level dBm	Cable Loss dB	Ant. Factor dB/m	Amplifier Gain dB	peak corrected Level dBuV/m	emissions dBc	Margin dB
926.8	Vertical	114/245	-6.63	2.81	22.83	N/A	126.01		
1853.6	Vertical	100/275	-23.88	4.74	26.86	-33.34	81.62	-44.39	24.39
1853.6	Horizontal	110/250	-30.02	4.74	26.95	-33.34	75.48	-50.53	30.53
1830	Vertical	100/285	-30.25	4.72	34.16	-33.33	75.33	-50.68	30.68
6321	Vertical	100/80	-42.72	8.47	34.22	-33.93	73.66	-52.35	32.35
6405	Vertical	109/70	-45.42	8.52	27.03	-33.86	70.8	-55.21	35.21
1806	Vertical	100/275	-34.91	4.7	34.83	-33.32	70.75	-55.26	35.26

[8] = [4] + [5] + [6] - [7]+107;

[9] = [8] - Power Out first rows; [10] = -20 - [9]

AM power level E

1	2	3	4	5	6	7	8	9	10
Freq. MHz	Ant. Pos. Vert. or Horz.	Antenna Height / Table Azimuth	Level dBm	Cable Loss dB	Ant. Factor dB/m	Amplifier Gain dB	peak corrected Level dBuV/m	emissions dBc	Margin dB
926.8	Vertical	114/245	-6.65	2.81	22.83	N/A	125.99		
1853.6	Vertical	100/275	-23.88	4.74	26.86	-33.34	81.62	-44.37	24.37
1853.6	Horizontal	110/250	-30.02	4.74	26.95	-33.34	75.48	-50.51	30.51
1830	Vertical	100/285	-30.25	4.72	34.16	-33.33	75.33	-50.66	30.66
6321	Vertical	100/80	-42.72	8.47	34.22	-33.93	73.66	-52.33	32.33
6405	Vertical	109/70	-45.42	8.52	27.03	-33.86	70.8	-55.19	35.19
1806	Vertical	100/275	-34.91	4.7	34.83	-33.32	70.75	-55.24	35.24

$$[8] = [4] + [5] + [6] - [7] + 107; \quad [9] = [8] - \text{Power Out first rows}; \quad [10] = -20 - [9]$$

FM power level C

1	2	3	4	5	6	7	8	9	10
Freq. MHz	Ant. Pos. Vert. or Horz.	Antenna Height / Table Azimuth	Level dBm	Cable Loss dB	Ant. Factor dB/m	Amplifier Gain dB	peak corrected Level dBuV/m	emissions dBc	Margin dB
926.8	Vertical	114/260	-11.95	2.81	22.83	N/A	120.69		
1853.6	Vertical	100/285	-28.26	4.74	26.86	-33.34	77.24	-43.45	23.45
1853.6	Horizontal	110/255	-34.07	4.74	26.95	-33.34	71.43	-49.26	29.26
1830	Vertical	100/285	-34.74	4.72	34.16	-33.33	70.84	-49.85	29.85
6321	Vertical	150/100	-37.36	4.72	34.22	-33.33	68.22	-52.47	32.47
6405	Vertical	100/65	-49.3	8.47	27.03	-33.93	67.08	-53.61	33.61
1806	Vertical	100/285	-40.39	4.7	34.83	-33.32	65.27	-55.42	35.42

$$[8] = [4] + [5] + [6] - [7] + 107; \quad [9] = [8] - \text{Power Out first rows}; \quad [10] = -20 - [9]$$

AM power level C

1	2	3	4	5	6	7	8	9	10
Freq. MHz	Ant. Pos. Vert. or Horz.	Antenna Height / Table Azimuth	Level dBm	Cable Loss dB	Ant. Factor dB/m	Amplifier Gain dB	peak corrected Level dBuV/m	emissions dBc	Margin dB
926.8	Vertical	114/260	-11.98	2.81	22.83	N/A	120.66		
1853.6	Vertical	100/285	-28.26	4.74	26.86	-33.34	77.24	-43.42	23.42
1853.6	Horizontal	110/255	-34.07	4.74	26.95	-33.34	71.43	-49.23	29.23
1830	Vertical	100/285	-34.74	4.72	34.16	-33.33	70.84	-49.82	29.82
6321	Vertical	150/100	-37.36	4.72	34.22	-33.33	68.22	-52.44	32.44
6405	Vertical	100/65	-49.3	8.47	27.03	-33.93	67.08	-53.58	33.58
1806	Vertical	100/285	-40.39	4.7	34.83	-33.32	65.27	-55.39	35.39

$$[8] = [4] + [5] + [6] - [7] + 107; \quad [9] = [8] - \text{Power Out first rows}; \quad [10] = -20 - [9]$$

FM power level 8

1	2	3	4	5	6	7	8	9	10
Freq. MHz	Ant. Pos. Vert. or Horz.	Antenna Height / Table Azimuth	Level dBm	Cable Loss dB	Ant. Factor dB/m	Amplifier Gain dB	peak corrected Level dBuV/m	emissions dBc	Margin dB
926.8	Vertical	114/260	-23.37	2.81	22.3	N/A	109.27		
6487.6	Horizontal	115/82	-42.92	8.57	26.86	-33.79	73.26	-36.01	16.01
6487.6	Vertical	100/180	-45.2	8.57	26.95	-33.79	70.98	-38.29	18.29
6321	Horizontal	109/185	-45.75	8.47	34.16	-33.93	70.63	-38.64	18.64
6405	Horizontal	118/85	-45.67	8.52	34.22	-33.86	70.55	-38.72	18.72
6405	Vertical	100/185	-46.16	8.52	27.03	-33.86	70.06	-39.21	19.21
1806	Horizontal	160/98	-37.42	4.7	34.83	-33.32	68.24	-41.03	21.03

[8] = [4] + [5] + [6] - [7]+107; [9] = [8] - Power Out first rows; [10] = -20 - [9]

AM power level 8

1	2	3	4	5	6	7	8	9	10
Freq. MHz	Ant. Pos. Vert. or Horz.	Antenna Height / Table Azimuth	Level dBm	Cable Loss dB	Ant. Factor dB/m	Amplifier Gain dB	peak corrected Level dBuV/m	emissions dBc	Margin dB
926.8	Vertical	114/260	-23.38	2.81	22.3	N/A	109.26		
6487.6	Horizontal	115/82	-42.92	8.57	26.86	-33.79	73.26	-36.00	16.00
6487.6	Vertical	100/180	-45.2	8.57	26.95	-33.79	70.98	-38.28	18.28
6321	Horizontal	109/185	-45.75	8.47	34.16	-33.93	70.63	-38.63	18.63
6405	Horizontal	118/85	-45.67	8.52	34.22	-33.86	70.55	-38.71	18.71
6405	Vertical	100/185	-46.16	8.52	27.03	-33.86	70.06	-39.20	19.20
1806	Horizontal	160/98	-37.42	4.7	34.83	-33.32	68.24	-41.02	21.02

[8] = [4] + [5] + [6] - [7]+107; [9] = [8] - Power Out first rows; [10] = -20 - [9]

Beacon power level D

1	2	3	4	5	6	7	8	9	10
Freq. MHz	Ant. Pos. Vert. or Horz.	Antenna Height / Table Azimuth	Level dBm	Cable Loss dB	Ant. Factor dB/m	Amplifier Gain dB	peak corrected Level dBuV/m	emissions dBc	Margin dB
926.8	Vertical	114/245	-15.09	2.81	22.83	N/A	117.55		
1853.6	Vertical	100/285	-29.66	4.74	27.1	-33.34	75.84	-41.71	21.71
1853.6	Horizontal	115/255	-34.98	4.74	27.1	-33.34	70.52	-47.03	27.03
1830	Vertical	100/280	-35.91	4.72	27.19	-33.33	69.67	-47.88	27.88
1806	Vertical	100/205	-36.71	4.7	27.28	-33.32	68.95	-48.6	28.6
1830	Horizontal	150/100	-38.12	4.72	27.19	-33.33	67.46	-50.09	30.09
6321	Vertical	100/70	-50.45	8.47	34.84	-33.93	65.93	-51.62	31.62

[8] = [4] + [5] + [6] - [7]+107; [9] = [8] - Power Out first rows; [10] = -20 - [9]

15.205, 15.209(Radiated) / RSS-210 2.2, 2.6

Restricted Bands Spurious Emissions - radiated*(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:**(b) Except as provided in paragraphs (d) and (e) of this section, the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in §15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in §15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in §15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in §15.35 apply to these measurements.*

Measure the field strength of all transmitter spurious emissions in the restricted bands listed below. Follow the procedure outlined in Annex A and B of this document.

MHz	MHz	MHz	GHz
0.090-0.110	13.36-13.41	399.9-410	5.35-5.46
0.495-0.505 (FCC)	16.42-16.423	608-614	7.25-7.75
2.1735-2.1905	16.69475-16.69525	960- 1427*	8.025-8.5
4.125-4.128	16.80425-16.80475	1435-1626.5	9.0-9.2
4.17725-4.17775	25.5-25.67	1645.5-1646.5	9.3-9.5
4.20725-4.20775	37.5-38.25	1660-1710	10.6-12.7
5.677-5.683 (IC)	73-74.6	1718.8-1722.2	13.25-13.4
6.215-6.218	74.8-75.2	2200-2300	14.47-14.5
6.26775-6.26825	108-121.94	2310-2390	15.35-16.2
6.31175-6.31225	123-138	2483.5-2500	17.7-21.4
8.291-8.294	149.9-150.05	2655-2900**	22.01-23.12
8.362-8.366	156.52475-156.52525	3260-3267	23.6-24.0
8.37625-8.38675	156.7-156.9	3332-3339	31.2-31.8
8.41425-8.41475	162.0125-167.17	3345.8-3358	36.43-36.5
12.29-12.293	167.72-173.2	3600-4400	Above 38.6
12.51975-12.52025	240-285	4.5-5.15	
12.57675-12.57725	322-335.4		

- for reference the FCC has relaxed some of the restricted bands and IC has not. In the FCC rules today: *960-1240 and *1300-1427MHz; **2690-2900MHz;
-

Equipment Used	Serial Number	Cal Date	Due
Agilent E7405A Spectrum Analyzer	MY45113415	7/19/2012	7/19/2013
Agilent E4440A Spectrum Analyzer	MY45305142	24-Apr-12	24-Apr-13
Microcoax 40 foot cable	H1G315G1	4/15/2011	4/15/2013
AH systems preamplifier model number PAM 0126	146	2/6/2012	2/6/2013
Emco 6502 Loop (9kHz to 30MHz)	9509-2970	11/5/2012	11/5/2014
Emco 3110B Biconical (30MHz-to 300MHz)	9807-3129	7/20/2011	7/20/2013
Emco 3146 Log Periodic (200MHz to 1GHz)	9203-3358	7/20/2011	7/20/2013
Emco 3115 waveguide (1Ghz - 18GHz)	9508-4550	12/21/2011	12/21/2012
1.3Ghz high pass filter	405735	6/3/2011	6/3/2013
Huber&Suhner sucotest cable	2	4/26/2011	4/26/2013
Date	Tested by		
10/28/2012 to 11/8/2012	Roger Mulcahy		

Unit tested: 69501161 with a fresh battery

Spurious Emission Limits

Frequency (MHz)	Field Strength (microvolts/meter)	in dBuV/m	Measurement Distance (meters)*	maximum Peak +20 over Avg limit dBuV/m**
0.009-0.490	2400F	2440F (kHz)	300	
0.490-1.705	24000F	2400F (kHz)	30	
1.705-30.0		30	30	49.5
30-88		100	40	60
88-216		150	43.5	63.5
216-960		200	46	66
Above 960		500	54	74

FS (dBuV) = 20 * log (FS(uV/m))

* Adjust 40dB/decade when measuring at different distances than specified.

** per frequencies where average limit applies, 15.35 (b)

For emissions measurements below 30MHz, rotate the loop antenna about its horizontal and vertical positions to maximize emissions.

Per FCC DA 00-705. a Duty Cycle Correction Factor (20log(dwell time/100mS)) can be applied to show compliance to the 15.209 limit.

All power levels

10dbm

Am	20 log(26.85ms*100ms)=11.42db relaxation
Fm	20 log(12.79ms*100ms)=17.86db relaxation

24dBm

Am	20 log(56.1ms*100ms)=5.02db relaxation
Fm	20 log(25.05ms*100ms)=12.02db relaxation

22dBm

Fm	20 log(3.315ms*100ms)=29.59db relaxation, max is 20dB
----	---

27dBm

Am	20 log(26.85ms*100ms)=11.42db relaxation
Fm	20 log(12.68ms*100ms)=17.94db relaxation

FM power level E

1	2	3	4	5	6	7	8	9	10	11	12	13
Ant.	10Hz VBW \geq VBW				VBW \geq				Corr Factor			
Pos.	RBW				RBW Peak Corrected Level				17.94dB Average* Corrected Level			
Freq.	vert or MHz	Peak Level dBm	Average Level dBm	Cable Loss dB	Ant. Factor dB/m	Amplifier Gain dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
2780.4	Horizontal	-37.42		5.56	28.97	-33.2	70.91	74	3.09	52.97	54	1.03
2745	Horizontal	-37.62		5.53	28.84	-33.22	70.53	74	3.47	52.59	54	1.41
8127	Horizontal	-50.03		9.58	36.99	-33.24	70.3	74	3.7	52.36	54	1.64
2709	Horizontal	-37.87		5.49	28.7	-33.23	70.09	74	3.91	52.15	54	1.85
7320	Horizontal	-50.95		9.09	36.35	-33.54	67.95	74	6.05	50.01	54	3.99
9150	Horizontal	-55.23		10.28	37.67	-32.19	67.53	74	6.47	49.59	54	4.41

[8] = [3]+[5]+[6]-[7];

[9] from table above; [10] = [9] - [8]

[11] = [4]+[5]+[6]+[7] - * Duty Cycle Corr. Factor;

[12] from table above; [13] = [12] - [11]

[10] = [9]-[8]

AM Itron, power level E

1	2	3	4	5	6	7	8	9	10	11	12	13
Ant.		10Hz VBW \geq VBW				VBW \geq				Corr Factor		
Pos.		RBW				RBW Peak				11.42dB Average*		
Freq.	vert or	Peak Level	Average Level	Cable Loss	Ant. Factor	Amplifier Gain	Corrected Level	Peak Limit	Peak Margin	Corrected Level	Average Limit	Average Margin
MHz	horz.	dBm	dBm	dB	dB/m	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
2780.4	Horizontal	-37.3	-60.7	5.56	28.97	-33.2	71.03	74	2.97	36.21	54	17.79
2745	Horizontal	-37.47	-60.7	5.53	28.84	-33.22	70.68	74	3.32	36.03	54	17.97
8127	Horizontal	-50.13	-68.24	9.58	36.99	-33.24	70.2	74	3.8	40.67	54	13.33
2709	Horizontal	-38.44	-61.04	5.49	28.7	-33.23	69.52	74	4.48	35.5	54	18.50
7320	Horizontal	-50.95	-68.95	9.09	36.35	-33.54	67.95	74	6.05	38.53	54	15.47
9030	Vertical	-55.49	-71.03	10.22	37.67	-32.36	67.04	74	6.96	40.08	54	13.92

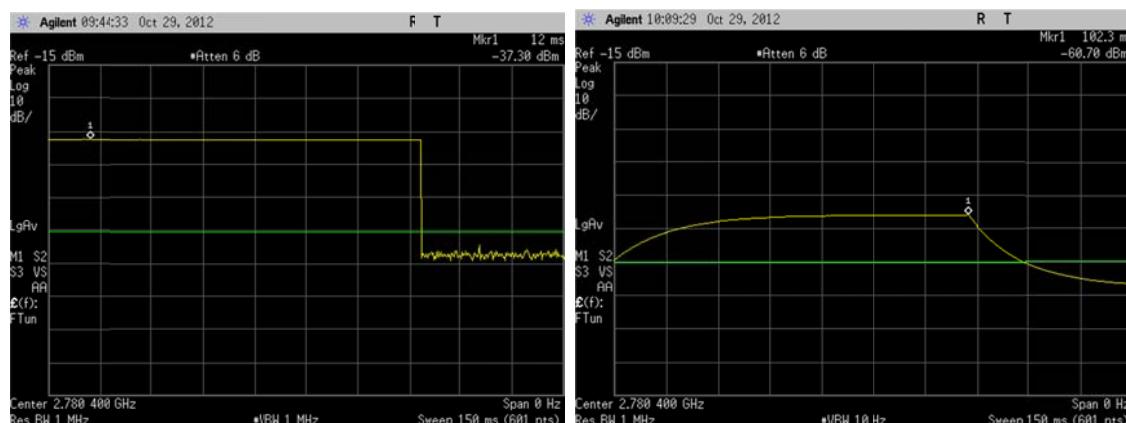
$$[8] = [3]+[5]+[6]-[7];$$

$$[9] \text{ from table above; } [10] = [9] - [8]$$

$$[11] = [4]+[5]+[6]+[7] - * \text{ Duty Cycle Corr. Factor}; [12] \text{ from table above}; [13] = [12] - [11]$$

$$[10] = [9]-[8]$$

Note: Level (dBm) + 107 = (dbuV) @ 50 ohm



FM power level C

1	2	3	4	5	6	7	8	9	10	11	12	13
Ant.		10Hz VBW \geq VBW				VBW \geq				Corr Factor		
Pos.		RBW				RBW Peak				12.02dB Average*		
Freq.	vert or	Peak Level	Average Level	Cable Loss	Ant. Factor	Amplifier Gain	Corrected Level	Peak Limit	Peak Margin	Corrected Level	Average Limit	Average Margin
MHz	horz.	dBm	dBm	dB	dB/m	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
8127	Horizontal	-57.3		9.58	36.99	-33.24	63.03	74	10.97	51.007	54	2.99
7320	Horizontal	-57.08		9.09	36.35	-33.54	61.82	74	12.18	49.797	54	4.20
7320	Vertical	-57.43		9.09	36.35	-33.54	61.47	74	12.53	49.447	54	4.55
8127	Vertical	-59.18		9.58	36.99	-33.24	61.15	74	12.85	49.127	54	4.87
2709	Horizontal	-46.87		5.49	28.7	-33.23	61.09	74	12.91	49.067	54	4.93
8235	Horizontal	-59.49		9.66	37.01	-33.21	60.97	74	13.03	48.947	54	5.05

$$[8] = [3]+[5]+[6]-[7];$$

$$[9] \text{ from table above; } [10] = [9] - [8]$$

$$[11] = [4]+[5]+[6]+[7] - * \text{ Duty Cycle Corr. Factor};$$

$$[10] = [9]-[8]$$

AM Mode, power level C

1	2	3	4	5	6	7	8	9	10	11	12	13
Ant.		10Hz		VBW \geq		VBW \geq		Corr Factor				
		z		VB		RBW		RBW Peak		5.02dB Average*		
		Pos.		RBW								
Freq.	vert or	Peak Level	Average Level	Cable Loss	Ant. Factor	Amplifier Gain	Corrected Level	Peak Limit	Peak Margin	Corrected Level	Average Limit	Average Margin
MHz	horz.	dBm	dBm	dB	dB/m	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
8127	Horizontal	-57.24	-71.84	9.58	36.99	-33.24	63.09	74	8.56	43.47	54	10.53
7320	Horizontal	-57.02	-71.29	9.09	37.67	-33.54	61.88	74	7.56	42.59	54	11.41
7320	Vertical	-57.43	-71.66	9.09	37.17	-33.54	61.47	74	8.05	42.22	54	11.78
8127	Vertical	-59.18	-73.71	9.58	36.58	-33.24	61.15	74	7.91	41.6	54	12.40
9150	Vertical	-61.34	-76.33	10.28	37.01	-32.19	61.42	74	10.9	41.41	54	12.59
2709	Horizontal	-47.31	-65.21	5.49	28.97	-33.23	60.65	74	11.31	37.73	54	16.27

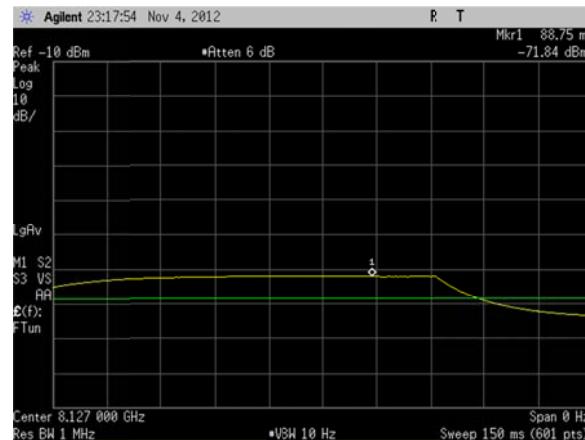
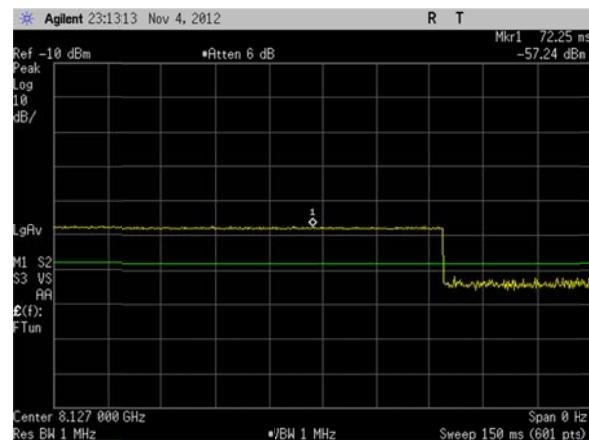
[8] = [3]+[5]+[6]-[7];

[9] from table above; [10] = [9] - [8]

[11] = [4]+[5]+[6]+[7] +107- * Duty Cycle Corr. Factor; [12] from table above; [13] = [12] - [11]

[10] = [9]-[8]

Note: Level (dBm) + 107 = (dbuV) @ 50 ohm



FM Mode, power level 8

1	2	3	4	5	6	7	8	9	10	11	12	13
Ant.		10Hz		VBW \geq		VBW \geq		Corr Factor				
		VBW		VBW		RBW		RBW Peak		17.86dB Average*		
Freq.	vert or	Peak Level	Average Level	Cable Loss	Ant. Factor	Amplifier Gain	Corrected Level	Peak Limit	Peak Margin	Corrected Level	Average Limit	Average Margin
MHz	horz.	dBm	dBm	dB	dB/m	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
7414.4	Horizontal	-53.05		9.14	36.58	-33.49	66.18	74	7.82	48.32	54	5.68
7320	Horizontal	-52.95		9.09	36.35	-33.54	65.95	74	8.05	48.09	54	5.91
8127	Vertical	-54.49		9.58	36.99	-33.24	65.84	74	8.16	47.98	54	6.02
8127	Horizontal	-54.89		9.58	36.99	-33.24	65.44	74	8.56	47.58	54	6.42
8235	Horizontal	-57.36		9.66	37.01	-33.21	63.1	74	10.9	45.24	54	8.76
8341.2	Horizontal	-59.55		9.73	37.17	-33.18	62.98	74	11.02	45.12	54	8.88

[8] = [3]+[5]+[6]-[7];

[9] from table above; [10] = [9] - [8]

[11] = [4]+[5]+[6]+[7] - * Duty Cycle Corr. Factor; [12] from table above; [13] = [12] - [11]

[10] = [9]-[8}

AM Mode, power level 8

1	2	3	4	5	6	7	8	9	10	11	12	13
	Ant.	10Hz	VBW \geq						VBW \geq			
		VBW	VBW						Corr Factor			
Freq.	vert or	Peak Level	Average Level	Cable Loss	Ant. Factor	Amplifier Gain	Corrected Level	Peak Limit	Peak Margin	Corrected Level	Average Limit	Average Margin
MHz	horz.	dBm	dBm	dB	dB/m	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
7414.4	Horizontal	-52.79	-68.92	9.14	37.67	-33.49	66.44	74	7.56	38.89	54	15.11
8127	Vertical	-54.24	-70.26	9.58	36.58	-33.24	66.09	74	7.91	38.65	54	15.35
7320	Horizontal	-52.95	-68.75	9.09	37.17	-33.54	65.95	74	8.05	38.73	54	15.27
8127	Vertical	-54.24	-70.26	9.58	36.58	-33.24	66.09	74	7.91	38.65	54	15.35
8235	Horizontal	-57.36	-72.3	9.66	37.01	-33.21	63.1	74	10.9	36.74	54	17.26
8235	Vertical	-57.77	-72.35	9.66	28.97	-33.21	62.69	74	11.31	36.69	54	17.31

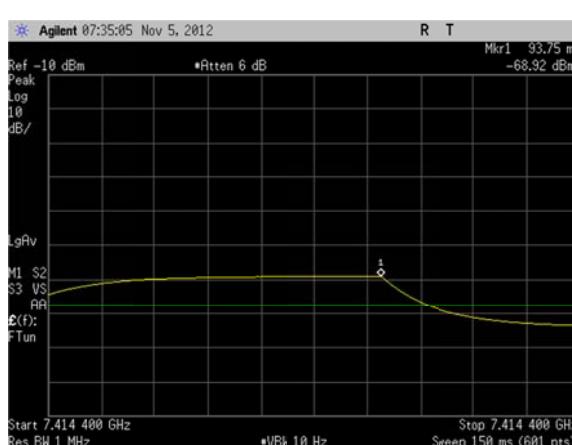
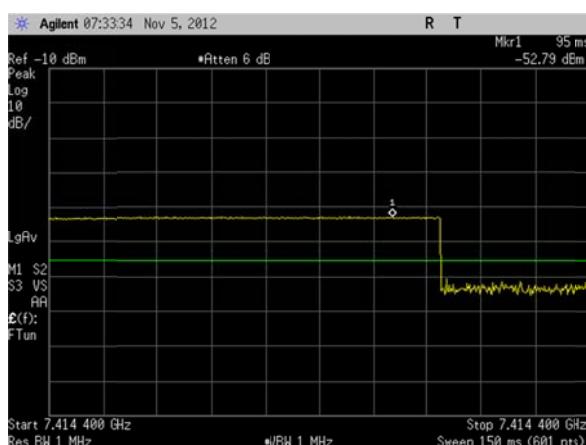
[8] = [3]+[5]+[6]-[7];

[9] from table above; [10] = [9] - [8]

[11] = [4]+[5]+[6]+[7]+107 - * Duty Cycle Corr. Factor; [12] from table above; [13] = [12] - [11]

[10] = [9]-[8]

Note: Level (dBm) + 107 = (dbuV) @ 50 ohm



Beacon Mode, power level D

1	2	3	4	5	6	7	8	9	10	11	12	13
	Ant.	10Hz	VBW \geq						VBW \geq			
		VBW	VBW						Corr Factor			
Freq.	vert or	Peak Level	Average Level	Cable Loss	Ant. Factor	Amplifier Gain	Corrected Level	Peak Limit	Peak Margin	Corrected Level	Average Limit	Average Margin
MHz	horz.	dBm	dBm	dB	dB/m	dB	dBuV/m	dBuV/m	dB	dBuV/m	dBuV/m	dB
8127	Horizontal	-58.34		9.58	36.99	-33.24	61.99	74	12.01	41.99	54	12.01
7320	Horizontal	-58.16		9.09	36.35	-33.54	60.74	74	13.26	40.74	54	13.26
8235	Horizontal	-60.28		9.66	37.01	-33.21	60.18	74	13.82	40.18	54	13.82
8127	Vertical	-60.45		9.58	36.99	-33.24	59.88	74	14.12	39.88	54	14.12
2709	Horizontal	-48.22		5.49	28.7	-33.23	59.74	74	14.26	39.74	54	14.26
2745	Horizontal	-48.58		5.53	28.84	-33.22	59.57	74	14.43	39.57	54	14.43

[8] = [3]+[5]+[6]-[7];

[9] from table above; [10] = [9] - [8]

[11] = [4]+[5]+[6]+[7]+107 - * Duty Cycle Corr. Factor; [12] from table above; [13] = [12] - [11]

[10] = [9]-[8]

Note: Level (dBm) + 107 = (dbuV) @ 50 ohm

**RSS-Gen 7.2.3 (RSS-GEN 4.10) and Part 15.109 Class B
Receiver Spurious Emission Limits**

7.2.3.2 Radiated Measurement

All spurious emissions shall comply with the limits of Table 1.

Receiver Spurious Emissions

The receiver shall be operated in the normal receive mode near the mid-point of the band over which the receiver is designed to operate. Unless otherwise specified in the applicable RSS, the radiated emission measurement is the standard measurement method (with the device's antenna in place) to measure receiver spurious emissions. Radiated emission measurements are to be performed using a calibrated open-area test site. As an alternative, the conducted measurement method may be used when the antenna is detachable. In such a case, the receiver spurious signal may be measured at the antenna port. If the receiver is super-regenerative, stabilize it by coupling to it an un-modulated carrier on the receiver frequency (antenna conducted measurement) or by transmitting an un-modulated carrier on the receiver frequency from an antenna in the proximity of the receiver (radiated measurement). Taking care not to overload the receiver, vary the amplitude and frequency of the stabilizing signal to obtain the highest level of the spurious emissions from the receiver. For either method, the search for spurious emissions shall be from the lowest frequency internally generated or used in the receiver (e.g. local oscillator, intermediate or carrier frequency), or 30 MHz, whichever is the higher, to at least 3 times the highest tunable or local oscillator frequency, whichever is the higher, without exceeding 40 GHz.

Receiver Spurious Emission Standard

The following receiver spurious emission limits shall be complied with:

(a) If a radiated measurement is made, all spurious emissions shall comply with the limits of Table 1. The resolution bandwidth of the spectrum analyzer shall be 100 kHz for spurious emission measurements below 1.0 GHz, and 1.0 MHz for measurements above 1.0 GHz.

Equipment Used	Serial Number	Cal Date	Due
Agilent E7405A Spectrum Analyzer	MY45113415	7/19/2012	7/19/2013
Microcoax 40 foot cable	H1G315G1	4/15/2011	4/15/2013
AH systems preamplifier model number PAM 0126	146	2/6/2012	2/6/2013
Emco 3110B Biconical (30MHz-to 300MHz)	9807-3129	7/20/2011	7/20/2013
Emco 3146 Log Periodic (200MHz to 1GHz)	9203-3358	7/20/2011	7/20/2013
Emco 3115 waveguide (1Ghz - 18GHz)	9508-4550	12/21/2011	12/21/2012
Huber&Suhner suctest cable	2	4/26/2011	4/26/2013
Date	Tested by		
11/8/2012	Roger Mulcahy		

Unit tested: 46550128 with a fresh battery

Table 1- Spurious Emission Limits for Receivers

Spurious Frequency (MHz)	Field Strength (microvolt/m at 3 meters)	in dBuV/m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

FS(uV/m) = 10 raised to the power of $\{(dBuV/m)/20\}$

Frequency range investigated was 30MHz to 5 GHz. Emissions from the Receiver were below the noise floor.

No emissions noise floor is 27dbuV/m

**1.1310 & 2.1091(mobile) or 2.1093(portable) / RSS-102 Sec 4.2-Canada Safety
Code 6; Table 5**

Maximum Permissible Exposure (MPE)

Radiofrequency radiation exposure limits. - The criteria listed in Table 1 shall be used to evaluate the environmental impact of human exposure to radiofrequency (RF) radiation as specified in §1.1307(b), except in the case of portable devices which shall be evaluated according to the provisions of §2.1093 of this chapter.

1.1307 (b) In addition to the actions listed in paragraph (a) of this section, Commission actions granting construction permits, licenses to transmit or renewals thereof, equipment authorizations or modifications in existing facilities, require the preparation of an Environmental Assessment (EA) if the particular facility, operation or transmitter would cause human exposure to levels of radiofrequency radiation in excess of the limits in §§1.1310 and 2.1093 of this chapter.

unit 46550128 Field strength (dbuV/m)	EIRP (dbm)	unit 69501228 conducted power (dbm)	conducted power (watts)	antenna gain (dbi)	antenna gain numeric
109.27	15.27	8.54	.0072	6.73	4.710
120.69	26.69	21.84	.153	4.85	3.036
126.01	32.00	25.89	0.388	6.11	4.083

Determine the maximum power density for the general / uncontrolled population minimum separation distance of 20 cm. ($f_{MHz} / 1500 \text{ mW/cm}^2 = f_{MHz} / 150 \text{ W/M}^2$)

The power density is calculated as:

$$P_d = \text{power density in } \text{mW/cm}^2$$

$$P_t = \text{transmit power in milliwatts}$$

$$P_d = \frac{P_t \times G}{4 \times \pi \times r^2}$$

$$G = \text{numeric antenna gain}$$

$$r = \text{distance between body and transmitter in centimeters.}$$

$$\text{FCC Limits: } 926.8\text{MHz} / 1500 = 0.618 \text{ mW / cm}^2 @ 20\text{cm}$$

$$\text{IC Limits: } 926.8\text{MHz} / 150 = 6.18 \text{ W / M}^2 (@ 0.2\text{M})$$

Power level E

$$\text{Max antenna gain} = 6.11 \text{ dBi} = 4.083 \text{ numeric}$$

$$\text{Max TX power} = 25.89 \text{ dBm} = .388 \text{ milliwatts}$$

$$\text{results: } P_D = (388 \times 4.083) / (4 \times \pi \times 20\text{cm}^2) = 0.315 \text{ mW / cm}^2 @ 20 \text{ cm}$$

$$W/m2 = 10 \text{ times mW/cm}^2 = 3.15 \text{ W/M}^2 @ 0.2 \text{ M}$$

Power level C

$$\text{Max antenna gain} = 4.85 \text{ dBi} = 3.036 \text{ numeric}$$

$$\text{Max TX power} = 21.84 \text{ dBm} = .153 \text{ milliwatts}$$

$$\text{results: } P_D = (153 \times 3.036) / (4 \times \pi \times 20\text{cm}^2) = 0.0294 \text{ mW / cm}^2 @ 20 \text{ cm}$$

$$W/m2 = 10 \text{ times mW/cm}^2 = .294 \text{ W/M}^2 @ 0.2 \text{ M}$$

Power level 8

$$\text{Max antenna gain} = 6.73 \text{ dBi} = 4.710 \text{ numeric}$$

$$\text{Max TX power} = 8.54 \text{ dBm} = .0072 \text{ milliwatts}$$

$$\text{results: } P_D = (7.2 \times 4.710) / (4 \times \pi \times 20\text{cm}^2) = 0.0068 \text{ mW / cm}^2 @ 20 \text{ cm}$$

$$W/m2 = 10 \text{ times mW/cm}^2 = .068 \text{ W/M}^2 @ 0.2 \text{ M}$$

15.247 (d)

Band-edge compliance of RF Conducted Emissions

see spurious emissions section above for rules.

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation

RBW \geq 1% of the span

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the emission at the band edge, or on the highest modulation product outside of the band, if this level is greater than that at the band edge. Enable the marker-delta function, and then use the marker-to-peak function to move the marker to the peak of the in-band emission. The marker-delta value now displayed must comply with the limit specified in this Section.

Now, using the same instrument settings, enable the hopping function of the EUT. Allow the trace to stabilize. Follow the same procedure listed above to determine if any spurious emissions caused by the hopping function also comply with the specified limit.

Equipment Used	Serial Number	Cal Date	Due
E4440A	MY45305142	24-Apr-12	24-Apr-13
Date	Tested by		
11/03/2012 to 11/05/2012	Roger Mulcahy		

Unit tested with a fresh Battery: 69501228, 67400051

Conducted measurements


power level	system channel ⁽²⁾	frequency (MHz)	message modulation type ⁽¹⁾	Band edge Conducted (dBc)
8	5	903	Itron AM	-31.2
C	5	903	Itron AM	<u>-31.14</u>
E	5	903	Itron AM	-31.15
8	5	903	FM37.5kbd w/ 16.4kHz dev	-57.1
C	5	903	FM37.5kbd w/ 16.4kHz dev	-59.3
E	5	903	FM37.5kbd w/ 16.4kHz dev	-59.93
8	5	903	FM37.5kbd w/ 50kHz dev	-58.94
C	5	903	FM37.5kbd w/ 50kHz dev	-60.6
E	5	903	FM37.5kbd w/ 50kHz dev	-59.63
8	5	903	FM12.5kbd w/50kHz dev	-60.63
C	5	903	FM12.5kbd w/50kHz dev	-60.52
E	5	903	FM12.5kbd w/50kHz dev	-61.53
D	5	903	FM50 kbd w/250kHz dev (Becon Mode)	<u>-54.22</u>
8	5	926.8	Itron AM	<u>-32.45</u>
C	5	926.8	Itron AM	-32.87
E	5	926.8	Itron AM	32.73
8	5	926.85	FM37.5kbd w/ 16.4kHz dev(50kHzoffset)	-60.26
C	5	926.85	FM37.5kbd w/ 16.4kHz dev(50kHzoffset)	-63.45
E	5	926.85	FM37.5kbd w/ 16.4kHz dev(50kHzoffset)	-63.82
8	5	926.85	FM37.5kbd w/ 50kHz dev(50kHz offset)	-61.15
C	5	926.85	FM37.5kbd w/ 50kHz dev(50kHzoffset)	-64.8
E	5	926.85	FM37.5kbd w/ 50kHz dev(50kHzoffset)	-64.14
8	5	926.85	FM12.5kbd w/50kHz dev(50kHzoffset)	-62.5
C	5	926.85	FM12.5kbd w/50kHz dev(50kHzoffset)	-62.33
E	5	926.85	FM12.5kbd w/50kHz dev(50kHzoffset)	-64.71
D	5	926.85	FM50 kbd w/250kHz dev (Becon Mode)	<u>-60.2</u>

⁽¹⁾Channel spacing is 200Khz for Itron AM and FM

^(1 2)Itron AM uses 50 channels between channel 5(903 MHz) and channel 124(926.8 MHz)

⁽²⁾Itron FM uses all 120 channels between channel 5(903 MHz) and channel 124(926.8 MHz)

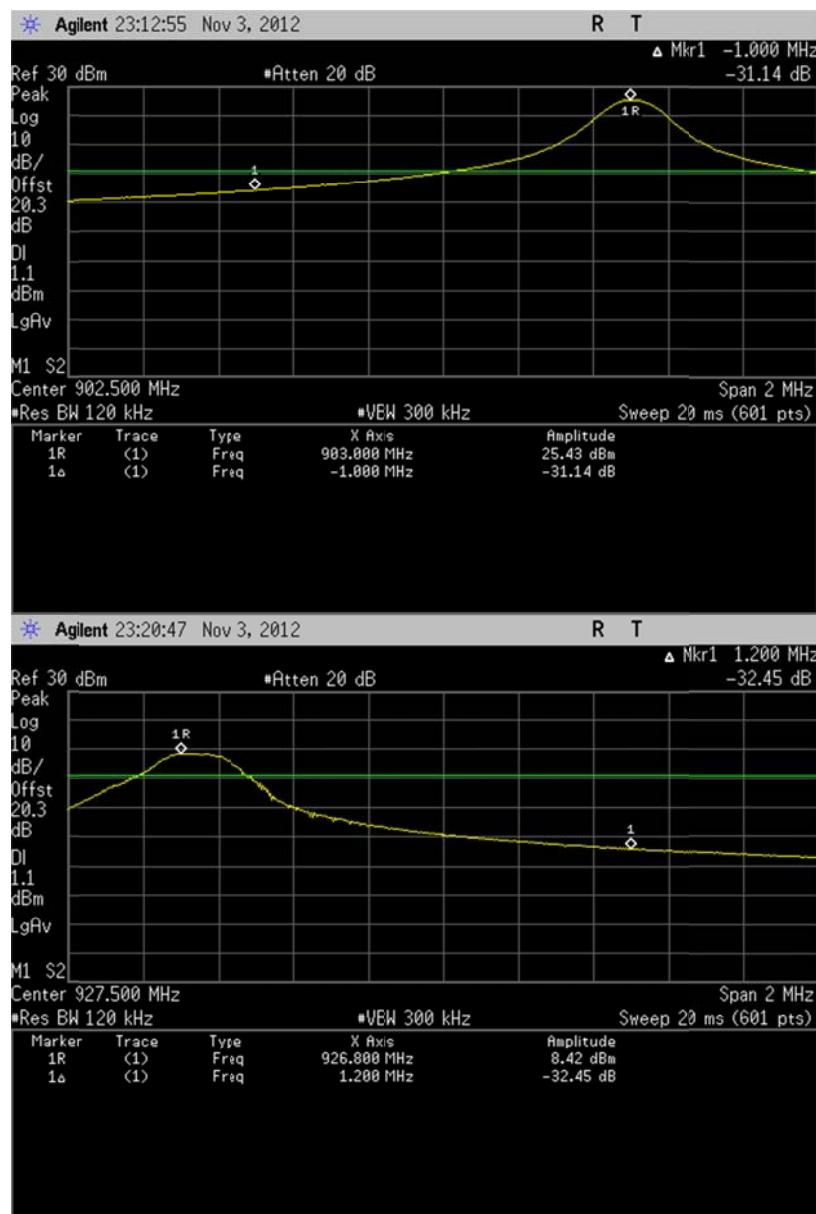
Conducted



Radiated measurements

power level	system channel ⁽²⁾	frequency (MHz)	message modulation type ⁽¹⁾	Band edge Conducted (dBc)
8	5	903	Itron AM	-34.29
C	5	903	Itron AM	-33.73
E	5	903	Itron AM	-33.74
8	5	903	FM37.5kbd w/ 16.4kHz dev	-44.63
C	5	903	FM37.5kbd w/ 16.4kHz dev	-56.21
E	5	903	FM37.5kbd w/ 16.4kHz dev	-58.99
8	5	903	FM37.5kbd w/ 50kHz dev	-40.46
C	5	903	FM37.5kbd w/ 50kHz dev	-53.87
E	5	903	FM37.5kbd w/ 50kHz dev	-57.19
8	5	903	FM12.5kbd w/50kHz dev	-45.03
C	5	903	FM12.5kbd w/50kHz dev	-56.46
E	5	903	FM12.5kbd w/50kHz dev	-58.96
D	<u>5</u>	903	FM50 kbd w/250kHz dev (Becon Mode)	<u>-55.79</u>
8	5	926.8	Itron AM	-34.5
C	5	926.8	Itron AM	-35.78
E	5	926.8	Itron AM	-36.65
8	5	926.85	FM37.5kbd w/ 16.4kHz dev(50kHzoffset)	-44.24
C	5	926.85	FM37.5kbd w/ 16.4kHz dev(50kHzoffset)	-55.15
E	5	926.85	FM37.5kbd w/ 16.4kHz dev(50kHzoffset)	-60.6
8	5	926.85	FM37.5kbd w/ 50kHz dev(50kHz offset)	-38.82
C	5	926.85	FM37.5kbd w/ 50kHz dev(50kHzoffset)	-52.02
E	5	926.85	FM37.5kbd w/ 50kHz dev(50kHzoffset)	-54.09
8	5	926.85	FM12.5kHzkbd w/50kHz dev(50kHzoffset)	-39.4
C	5	926.85	FM12.5kHzkbd w/50kHz dev(50kHzoffset)	-52.51
E	5	926.85	FM12.5kHzkbd w/50kHz dev(50kHzoffset)	-54.02
<u>D</u>	<u>5</u>	926.85	FM50 kbd w/250kHz dev (Becon Mode)	<u>-55.38</u>

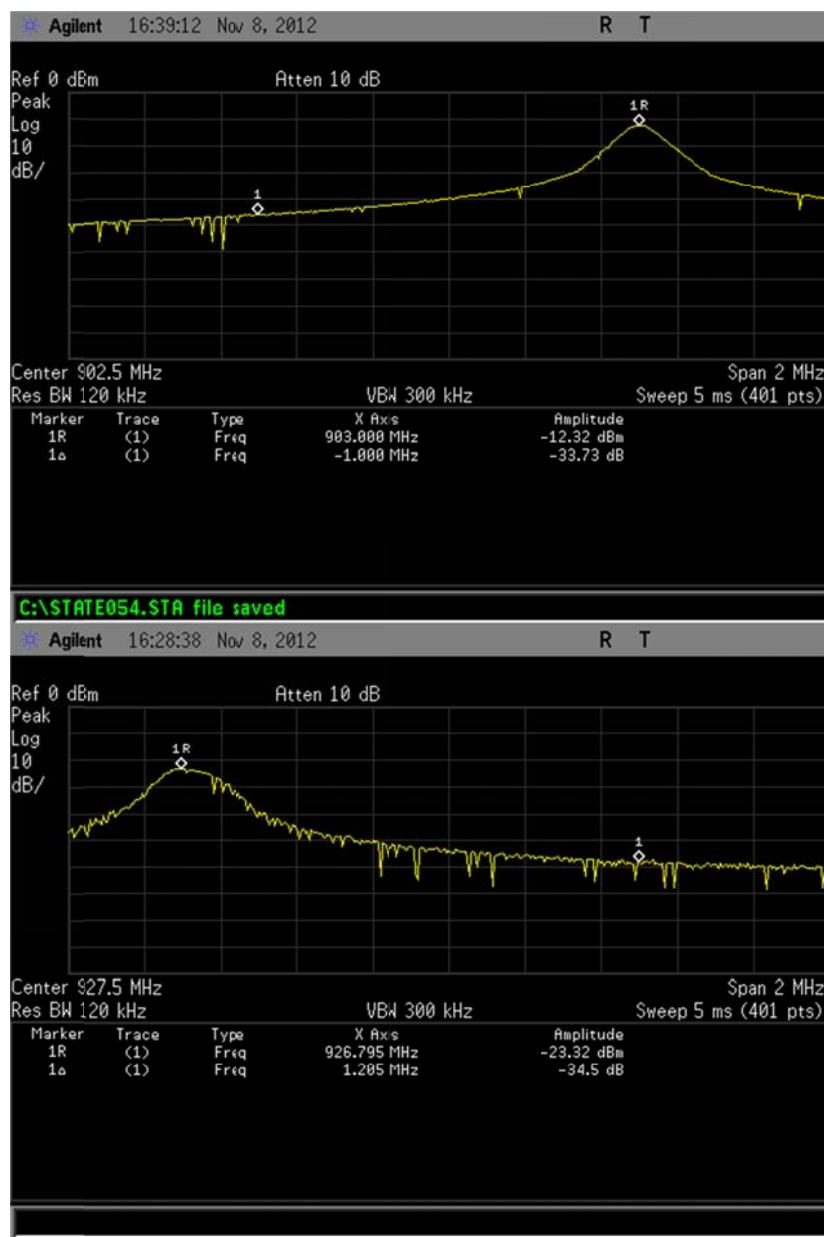Radiated



ANNEX A
direct from FCC DA-00-705, March 30, 2000
(ANSI references updated however)

Spurious RF Conducted Emissions

Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. The level displayed must comply with the limit specified in this Section. Submit these plots.

Spurious Radiated Emissions

This test is required for any spurious emission or modulation product that falls in a Restricted Band, as defined in Section 15.205. It must be performed with the highest gain of each type of antenna proposed for use with the EUT. Use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 1 MHz for $f \geq 1$ GHz, 100 kHz for $f < 1$ GHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Follow the guidelines in ANSI C63.4-2003 with respect to maximizing the emission by rotating the EUT, measuring the emission while the EUT is situated in three orthogonal planes (if appropriate), adjusting the measurement antenna height and polarization, etc. A pre-amp and a high pass filter are required for this test, in order to provide the measuring system with sufficient sensitivity. Allow the trace to stabilize. The peak reading of the emission, after being corrected by the antenna factor, cable loss, pre-amp gain, etc., is the peak field strength, which must comply with the limit specified in Section 15.35(b). Submit this data.

Now set the VBW to 10 Hz, while maintaining all of the other instrument settings. This peak level, once corrected, must comply with the limit specified in Section 15.209. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be

further adjusted by a "duty cycle correction factor", derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit. Submit this data.

If the emission on which a radiated measurement must be made is located at the edge of the authorized band of operation, then the alternative "marker-delta" method, listed at the end of this document, may be employed.

Alternative Test Procedures

If antenna conducted tests cannot be performed on this device, radiated tests to show compliance with the peak output power limit specified in Section 15.247(b) (2) and the spurious RF conducted emission limit specified in Section 15.247(d) are acceptable. A pre-amp, and, in the latter case, a high pass filter, are required for the following measurements.

- 1) Calculate the transmitter's peak power using the following equation:

$$E = \frac{\sqrt{30PG}}{d}$$

Where: E is the measured maximum fundamental field strength in V/m, utilizing a RBW \geq the 20 dB bandwidth of the emission, VBW $>$ RBW, peak detector function. Follow the procedures in C63.4-2003 with respect to maximizing the emission.

G is the numeric gain of the transmitting antenna with reference to an isotropic radiator.

d is the distance in meters from which the field strength was measured.

P is the power in watts for which you are solving:

$$P = \frac{(E \times d)^2}{30G}$$

- 2) To demonstrate compliance with the spurious RF conducted emission requirement of Section 15.247(d), use the following spectrum analyzer settings:

Span = wide enough to fully capture the emission being measured

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold

Measure the field strength of both the fundamental emission and all spurious emissions with these settings. Follow the procedures in C63.4-2003 with respect to maximizing the emissions. The measured field strength of all spurious emissions must be below the measured field strength of the fundamental emission by the amount specified in Section 15.247(d). Note that if the emission falls in a Restricted Band, as defined in Section 15.205, the procedure for measuring spurious radiated emissions, listed above, must be followed.

Marker-Delta Method

In making radiated band-edge measurements, there can be a problem obtaining meaningful data since a measurement instrument that is tuned to a band-edge frequency may also capture some in-band signals when using the resolution bandwidth (RBW) required by measurement procedure ANSI C63.4-2003 (hereafter C63.4). In an effort to compensate for this problem, we have developed the following technique for determining band-edge compliance.

STEP 1) Perform an in-band field strength measurement of the fundamental emission using the RBW and detector function required by C63.4 and our Rules for the frequency being measured. For example, for a device operating in the 902-928 MHz band under Section 15.249, use a 120 kHz RBW with a CISPR QP detector (a peak detector with 100 kHz RBW may alternatively be used). For transmitters operating above 1 GHz, use a 1 MHz RBW, a 1 MHz VBW, and a peak detector (as required by Section 15.35). Repeat the measurement with an average detector (i.e., 1 MHz RBW with 10 Hz VBW). Note: For pulsed emissions, other factors must be included. Please contact the FCC Lab for details if the emission under investigation is pulsed. Also, please note that radiated measurements of the fundamental emission of a transmitter operating under 15.247 are not normally required, but they are necessary in connection with this procedure.

STEP 2) Choose a spectrum analyzer span that encompasses both the peak of the fundamental emission and the band-edge emission under investigation. Set the analyzer RBW to 1% of the total span (but never less than 30 kHz) with a video bandwidth equal to or greater than the RBW. Record the peak levels of the fundamental emission and the relevant band-edge emission (i.e., run several sweeps in peak hold mode). Observe the stored trace and measure the amplitude delta between the peak of the fundamental and the peak of the band-edge emission. This is not a field strength measurement; it is only a relative measurement to determine the amount by which the emission drops at the band-edge relative to the highest fundamental emission level.

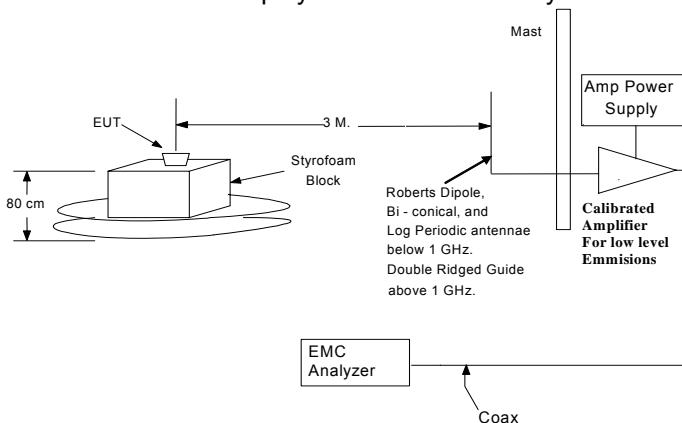
STEP 3) Subtract the delta measured in step (2) from the field strengths measured in step (1). The resultant field strengths (CISPR QP, average, or peak, as appropriate) are then used to determine band-edge compliance as required by Section 15.205.

STEP 4) The above "delta" measurement technique may be used for measuring emissions that are up to two "standard" bandwidths away from the band-edge, where a "standard" bandwidth is the bandwidth specified by C63.4 for the frequency being measured. For example, for band-edge measurements in the restricted band that begins at 2483.5 MHz, C63.4 specifies a measurement bandwidth of at least 1 MHz. Therefore you may use the "delta" technique for measuring emissions up to 2 MHz removed from the band-edge. Radiated emissions that are removed by more than two "standard" bandwidths must be measured in the conventional manner.

ANNEX BField Strength Measurement Procedure

This test measures the field strength of radiated emissions using a spectrum analyzer and a receiving antenna in accordance with ANSI C63.4-2003. During the test, the EUT is to be placed on a non-conducting support at 80 cm above the horizontal ground plane of the OATS. The horizontal distance between the antenna and the EUT is to be 3 meters. The bandwidths used shall be; 200 Hz from 9 kHz to 150 kHz, 9 kHz from 150 kHz to 30 MHz, 120 kHz from 30 MHz to 1000 MHz, and 1 MHz from 1 GHz to 40 GHz, with the detector set to peak hold.

- 1) The antenna correction factor, preamplifier gain (if the preamplifier is installed), and cable loss may be stored in tables in the EMC analyzer and the level at the analyzer is then the corrected level in dbuV/m. Otherwise it is calculated externally.
- 2) Monitor the frequency range of interest at a fixed antenna height and EUT azimuth.
- 3) If appropriate, manipulate the system cables to produce the highest amplitude signal relative to the limit. Note the amplitude and frequency of the suspect signal.
- 4) Rotate the EUT 360° to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, go back to the azimuth and repeat step 3). Otherwise, orient the EUT azimuth to repeat the highest amplitude observation and proceed.
- 5) Move the antenna over its fully allowed range of travel to maximize the suspected highest amplitude signal. If the signal or another at a different frequency is observed to exceed the previously noted highest amplitude signal by 1 dB or more, return to step 3) with the antenna fixed at this height. Otherwise, move the antenna to the height that repeats the highest amplitude observation and proceed.
- 6) Change the polarity of the antenna and repeat step 3), step 4), and step 5). Compare the resulting suspected highest amplitude signal with that found for the other polarity. Select and note the higher of the two signals.
- 7) The final maximized level displayed on the EMC analyzer is the field strength.



ANNEX C

Several of the FCC / IC rules that are referenced.

Section 15.247(b) (3): For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

1997 FCC Decisions, Amendment of Parts 2 and 15. 7 CR 534, 12 FCC Rcd 7488, 62 FR 26239, 1997 FCC LEXIS 1927. FCC 917-114 Report and Order, Released: April 10, 1997:

Section 15.247(c): Spurious emissions. The following tests are required:

(1) RF antenna conducted test: Set RBW = 100 kHz, Video bandwidth (VBW) > RBW, scan up through 10th harmonic. All harmonics/spurs must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW.

(2) Radiated emission test: Applies to harmonics/spurs that fall in the restricted bands listed in Section 15.205. The maximum permitted average field strength is listed in Section 15.209. A pre-amp (and possibly a high-pass filter) is necessary for this measurement. For measurements above 1 GHz, set RBW = 1 MHz, VBW = 10 Hz, Sweep: Auto. If the emission is pulsed, modify the unit for continuous operation, use the settings shown above, then correct the reading by subtracting the peak-average correction factor, derived from the appropriate duty cycle calculation. See Section 15.35(b) and (c).

§15.33 Frequency range of radiated measurements.

(a) For an intentional radiator, the spectrum shall be investigated from the lowest radio frequency signal generated in the device, without going below 9 kHz, up to at least the frequency shown in this paragraph:

(1) If the intentional radiator operates below 10 GHz: to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

Section 15.33 (b) - Frequency range of radiated measurements. For unintentional radiators: see part. (9kHz or lowest generated to 5GHz or 5th harmonic)

Section 15.35 Measurement detector functions and bandwidths. - The conducted and radiated emission limits shown in this part are based on the following, unless otherwise specified elsewhere in this part:

(a) ... (a) does not apply to this report)

(b) Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1 MHz. When average radiated emission measurements are specified in this part, including average emission measurements below 1000 MHz, there also is a limit on the peak level of the radio frequency emissions. Unless otherwise specified, e.g., see §§15.250, 15.252, 15.255, and 15.509-15.519, the limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device, e.g., the total peak power level. Note that the use of a pulse desensitization correction factor may be needed to determine the total peak emission level. The instruction manual or application note for the measurement instrument should be consulted for determining pulse desensitization factors, as necessary.

(c) Unless otherwise specified, e.g. §15.255(b), when the radiated emission limits are expressed in terms of the average value of the emission, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value. The exact method of calculating the average field strength shall be submitted with any application for certification or shall be retained in the measurement data file for equipment subject to Declaration of Conformity or verification.

RSS-GEN 4.9 Transmitter Unwanted Emissions:

The search for unwanted emissions shall be from the lowest frequency internally generated or used in the device (local oscillator, intermediate or carrier frequency), or from 30 MHz, whichever is the lower, to the 5th harmonic of the highest frequency generated without exceeding 40 GHz.