

Itron, Inc.

REVISED TEST REPORT FOR 107148-3

Itron Cellular 500G Module Model: 500GDC

Tested to The Following Standards:

FCC Part 15 Subpart C Section(s)

15.247
(FHSS 902-928 MHz)

Report No.: 107148-3A

Date of issue: December 23, 2022



This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of testing for CKC Laboratories, Inc.



We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

Test Certificate # 803.01

This report contains a total of 66 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.

TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Revision History	3
Report Authorization	3
Test Facility Information	4
Software Versions	4
Site Registration & Accreditation Information	4
Summary of Results	5
Modifications During Testing	5
Conditions During Testing	5
Equipment Under Test	6
General Product Information	7
FCC Part 15 Subpart C	10
15.247(a) Transmitter Characteristics	10
15.247(a)(1) 20 dB Bandwidth	10
15.247(a)(1) Carrier Separation	14
15.247(a)(1)(iii) Number of Hopping Channels	16
15.247(b)(1) Output Power	19
15.247(d) Radiated Emissions & Band Edge	31
Supplemental Information	65
Measurement Uncertainty	65
Emissions Test Details	65

ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR:

Itron, Inc.
2111 N. Molter Road
Liberty Lake, WA 99019

Representative: Johann Dejager
Customer Reference Number: 263856

REPORT PREPARED BY:

Viviana Prado
CKC Laboratories, Inc.
5046 Sierra Pines Drive
Mariposa, CA 95338

Project Number: 107148

DATE OF EQUIPMENT RECEIPT:

August 15, 2022

DATE(S) OF TESTING:

August 15 - 19, 2022

Revision History

Original: Testing of the Itron Cellular 500G Module, Model: 500GDC to FCC Part 15.247

Revision A: Provided appropriate notes to indicate 15.207 AC Conducted Emissions were not applicable. Revised incorrect limit for OOK Power.

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the equipment provided by the client, tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.



Steve Behm
Director of Quality Assurance & Engineering Services
CKC Laboratories, Inc.

Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S):
 CKC Laboratories, Inc.
 Canyon Park
 22116 23rd Drive S.E., Suite A
 Bothell, WA 98021

Software Versions

CKC Laboratories Proprietary Software	Version
EMITest Emissions	5.03.20

Site Registration & Accreditation Information

Location	*NIST CB #	FCC	Canada	Japan
Canyon Park, Bothell, WA	US0103	US1024	3082C	A-0136
Brea, CA	US0103	US1024	3082D	A-0136
Fremont, CA	US0103	US1024	3082B	A-0136
Mariposa, CA	US0103	US1024	3082A	A-0136

*CKC's list of NIST designated countries can be found at: <https://standards.gov/cabs/designations.html>

SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C - 15.247 (FHSS 902-928MHz)

Test Procedure	Description	Modifications	Results
15.247(a)(1)(i)	Occupied Bandwidth	NA	Pass
15.247(a)(1)	Carrier Separation	NA	Pass
15.247(a)(1)(i)	Number of Hopping Channels	NA	Pass
15.247(a)(1)(i)	Average Time of Occupancy	NA	NP
15.247(b)(2)	Output Power	NA	Pass
15.247(d)	RF Conducted Emissions & Band Edge	NA	NA1
15.247(d)	Radiated Emissions & Band Edge	NA	Pass
15.207	AC Conducted Emissions	NA	NA2

NA = Not applicable

NA1 = Not applicable because the EUT does not have a permanent external antenna port.

NA2 = Not applicable because the EUT is battery powered.

NP = CKC Laboratories was not contracted to perform test.

ISO/IEC 17025 Decision Rule

The declaration of pass or fail herein is based upon assessment to the specification(s) listed above, including where applicable, assessment of measurement uncertainties. For performance related tests, equipment was monitored for specified criteria identified in that section of testing.

Modifications During Testing

This list is a summary of the modifications made to the equipment during testing.

Summary of Conditions

No modifications were made during testing.

Modifications listed above must be incorporated into all production units.

Conditions During Testing

This list is a summary of the conditions noted to the equipment during testing.

Summary of Conditions

None

EQUIPMENT UNDER TEST (EUT)

During testing, numerous configurations may have been utilized. The configurations listed below support compliance to the standard(s) listed in the Summary of Results section.

Configuration 1

Equipment Tested:

Device	Manufacturer	Model #	S/N
Itron Cellular 500G Module	Itron, Inc.	500GDC	107148-cond

Support Equipment:

Device	Manufacturer	Model #	S/N
Laptop	HP	14-dq1033cl	NA
AC Adapter (for Laptop)	HP	L25296-002	NA
USB Hub	Insignia	NS-PCH5420	NA
USB Interface Board	Itron, Inc.	PCB-TEMP-0007 Rev3	NA

Configuration 2

Equipment Tested:

Device	Manufacturer	Model #	S/N
Itron Cellular 500G Module	Itron, Inc.	500GDC	107148-rad

Support Equipment:

Device	Manufacturer	Model #	S/N
USB Interface Board	Itron, Inc.	PCB-TEMP-0007 Rev3	NA

General Product Information:

Product Information	Manufacturer-Provided Details
Equipment Type:	Stand-Alone Equipment
Type of Wideband System:	FHSS
Operating Frequency Range:	902.4-927.6MHz (GFSK Level 3) 903-926.8MHz (OOK Level 1, Level 3)
Number of Hopping Channels:	64 Channels (GFSK Level 3) 120 Channels (OOK Level 1, Level 3)
Receiver Bandwidth and Synchronization:	The manufacturer declares the receiver input bandwidth matches the transmit channel bandwidth and shifts frequencies in synchronization with the transmitter.
Modulation Type(s):	GFSK and OOK
Maximum Duty Cycle:	Assume 100% as worst case
Number of TX Chains:	1
Antenna Type(s) and Gain:	Wide band PCB dipole antenna, -0.4dBi
Beamforming Type:	NA
Antenna Connection Type:	Integral (External connector provided to facilitate testing)
Nominal Input Voltage:	3.68V Battery
Firmware / Software used for Test:	Support Laptop CLI Tool (Version 2.0.1.24) EUT App Version 10.0.48.8 EUT CSL Version 19.0.12.1
The validity of results is dependent on the stated product details, the accuracy of which the manufacturer assumes full responsibility.	

EUT and Accessory Photo(s)




Support Equipment Photo(s)



Block Diagram of Test Setup(s)


Configuration 1

Test Setup Block Diagram

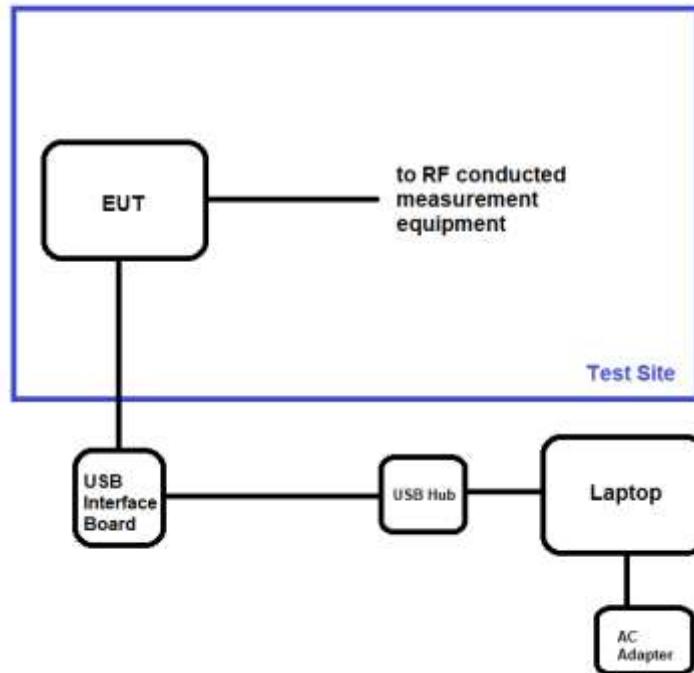

Configuration 2

Test Setup Block Diagram

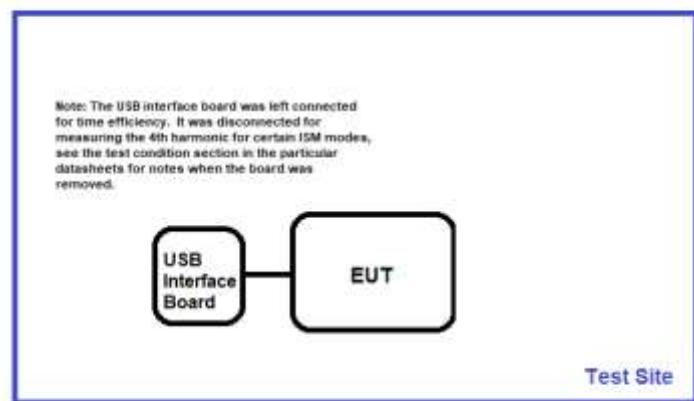

FCC Part 15 Subpart C

15.247(a) Transmitter Characteristics



Test Setup/Conditions			
Test Location:	Bothell Lab Bench	Test Engineer:	M. Harrison/M. Atkinson
Test Method:	ANSI C63.10 (2013)	Test Date(s):	8/15/22 to 8/19/22, 9/30/2022
Configuration:	1		
Test Setup:	EUT has temporary antenna connector attached. EUT directly connected to spectrum analyzer through appropriate cables and attenuators. EUT is transmitting with modulation.		

Environmental Conditions			
Temperature (°C)	21-24	Relative Humidity (%):	40-50

Test Equipment					
Asset#	Description	Manufacturer	Model	Cal Date	Cal Due
02872	Spectrum Analyzer	Agilent	E4440A	11/29/2021	11/29/2023
P06452	Cable	Andrews	Heliax	1/17/2022	1/17/2024
P05503	Attenuator	Narda	766-10	6/8/2021	6/8/2023
02673	Spectrum Analyzer	Agilent	E4446A	2/3/2021	2/3/2023


15.247(a)(1) 20 dB Bandwidth

Test Data Summary					
Frequency (MHz)	Antenna Port	Modulation	Measured (kHz)	Limit (kHz)	Results
902.4	1	GFSK	358.442	≤500	Pass
915.2	1	GFSK	356.886	≤500	Pass
927.6	1	GFSK	356.580	≤500	Pass
903	1	OOK	166.558	≤500	Pass
915	1	OOK	166.492	≤500	Pass
926.8	1	OOK	166.258	≤500	Pass

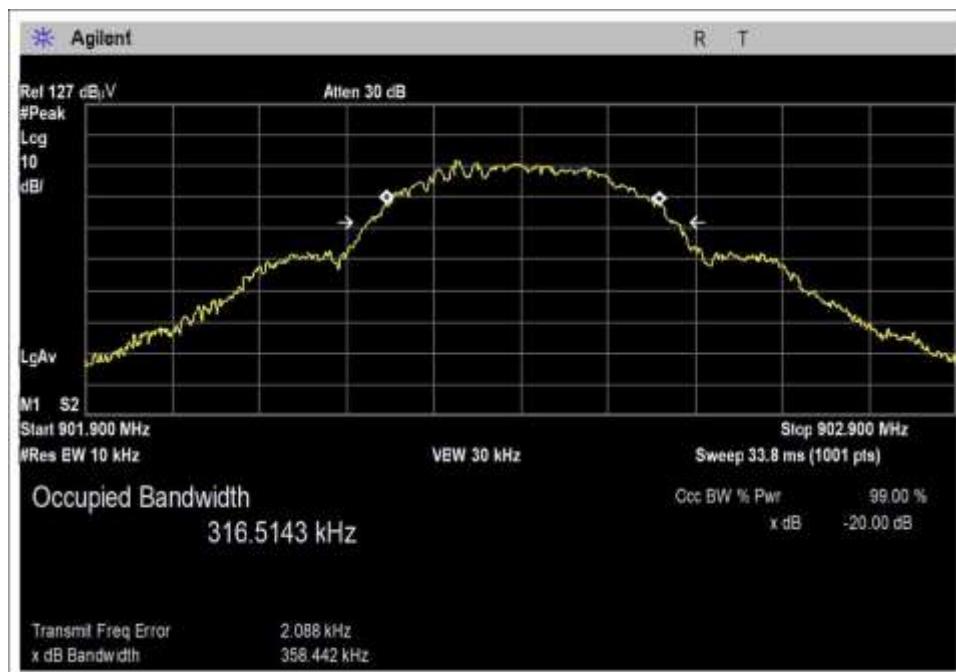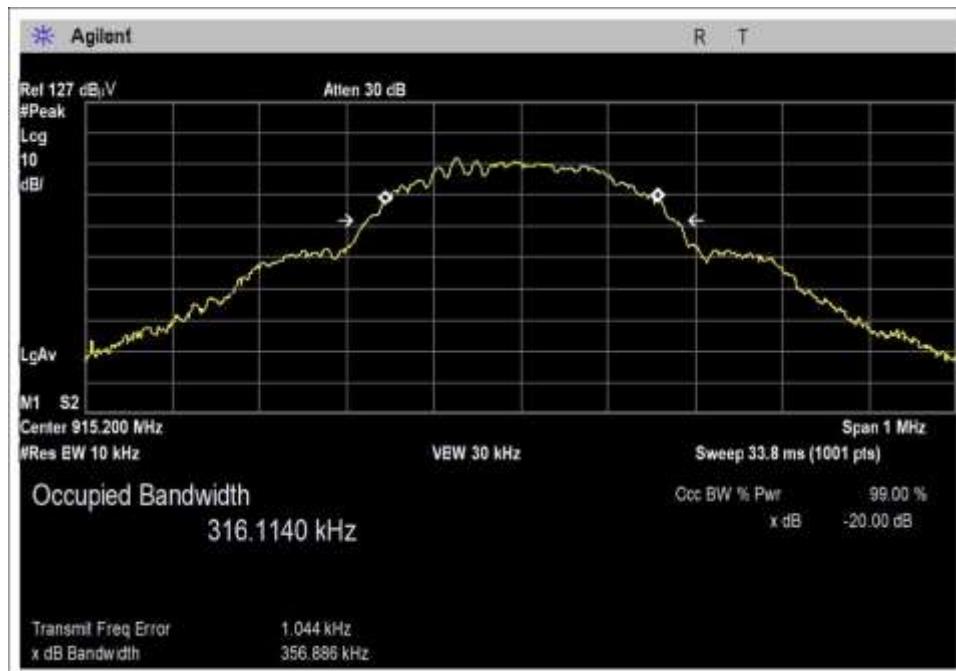
Plot(s)

GFSK Low Channel

GFSK Middle Channel

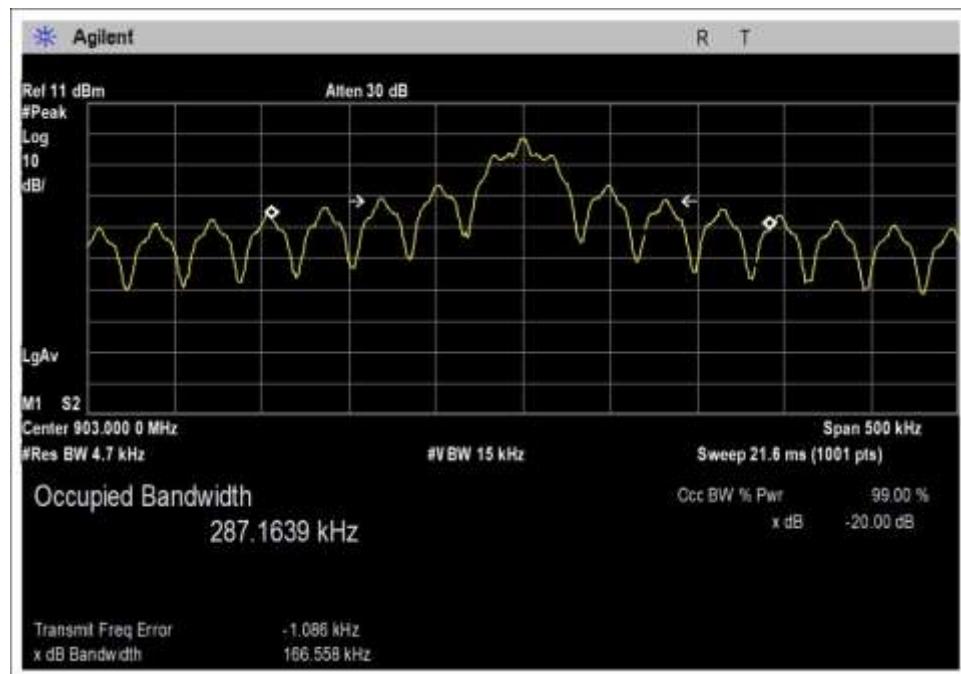


GFSK High Channel

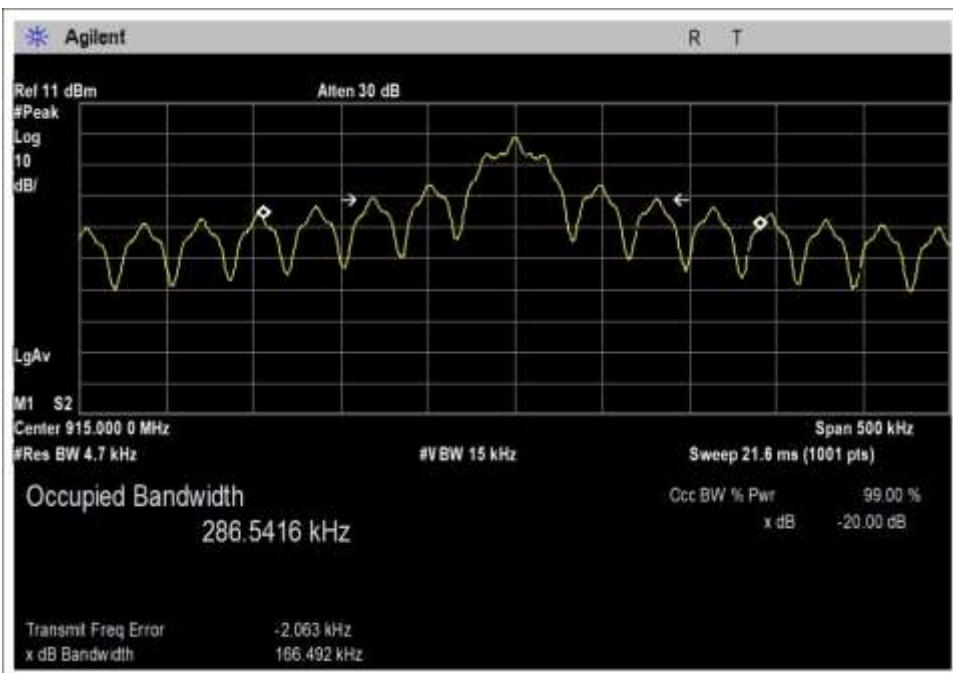

OOK Low Channel



OOK Middle Channel

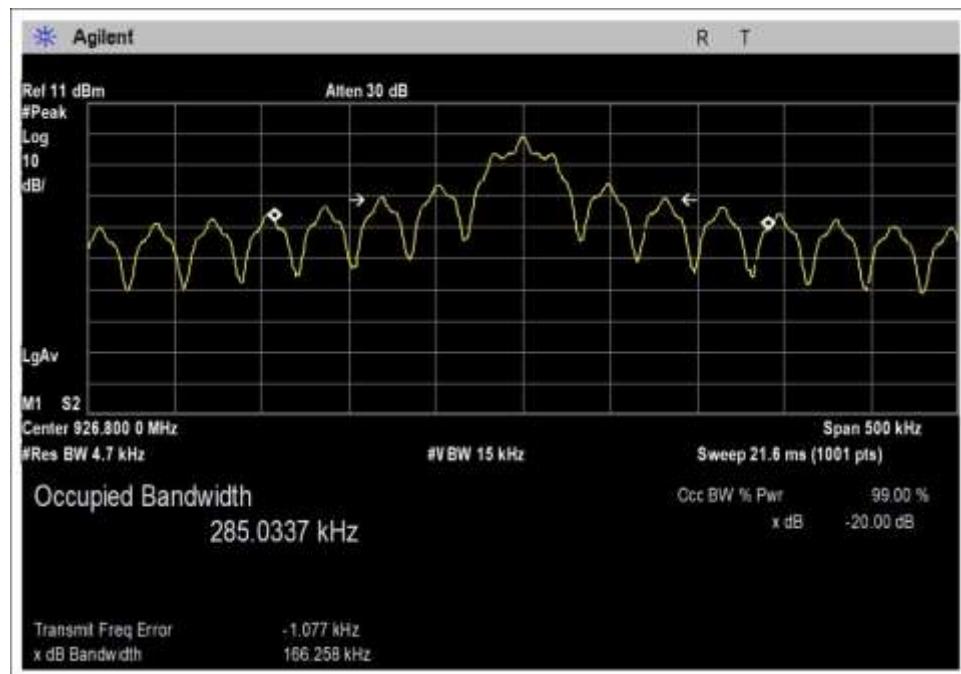


OOK High Channel


15.247(a)(1) Carrier Separation

Test Data Summary				
Limit applied: 20dB bandwidth of the hopping channel.				
Antenna Port	Operational Mode	Measured (kHz)	Limit (kHz)	Results
1	GFSK	400.0	≥358.442	Pass
1	OOK	200.2	≥166.558	Pass

Plot(s)

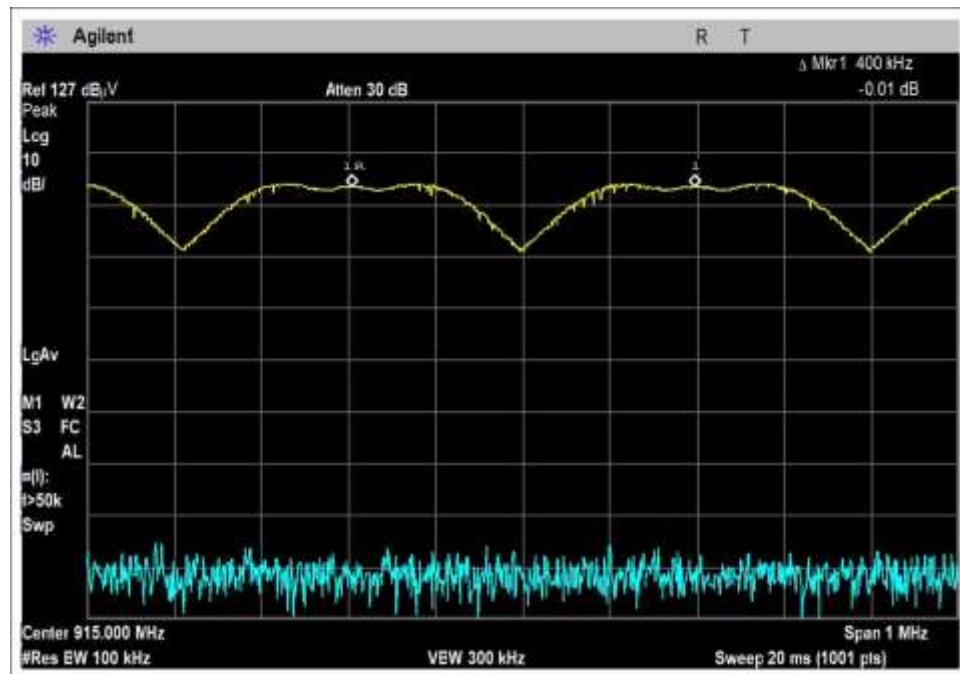

GFSK

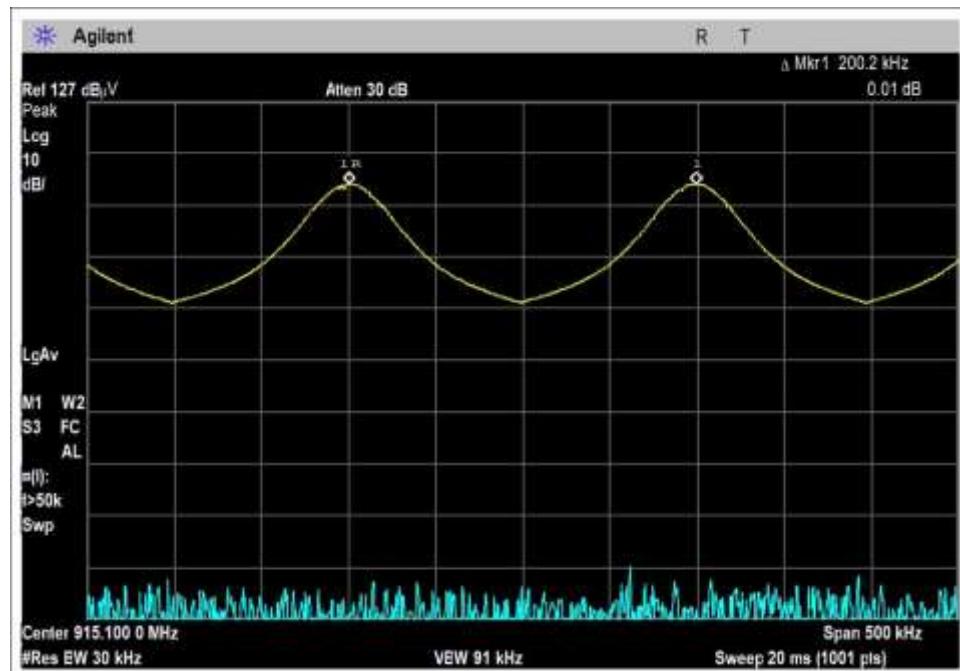


OOK


15.247(a)(1)(iii) Number of Hopping Channels

Test Data Summary				
$Limit = \begin{cases} 50 \text{ Channels} & 20 \text{ dB BW} < 250 \text{ kHz} \\ 25 \text{ Channels} & 20 \text{ dB BW} \geq 250 \text{ kHz} \end{cases}$				
Antenna Port	Operational Mode	Measured (Channels)	Limit (Channels)	Results
1	GFSK	64	≥25	Pass
1	OOK	120	≥50	Pass


Plot(s)

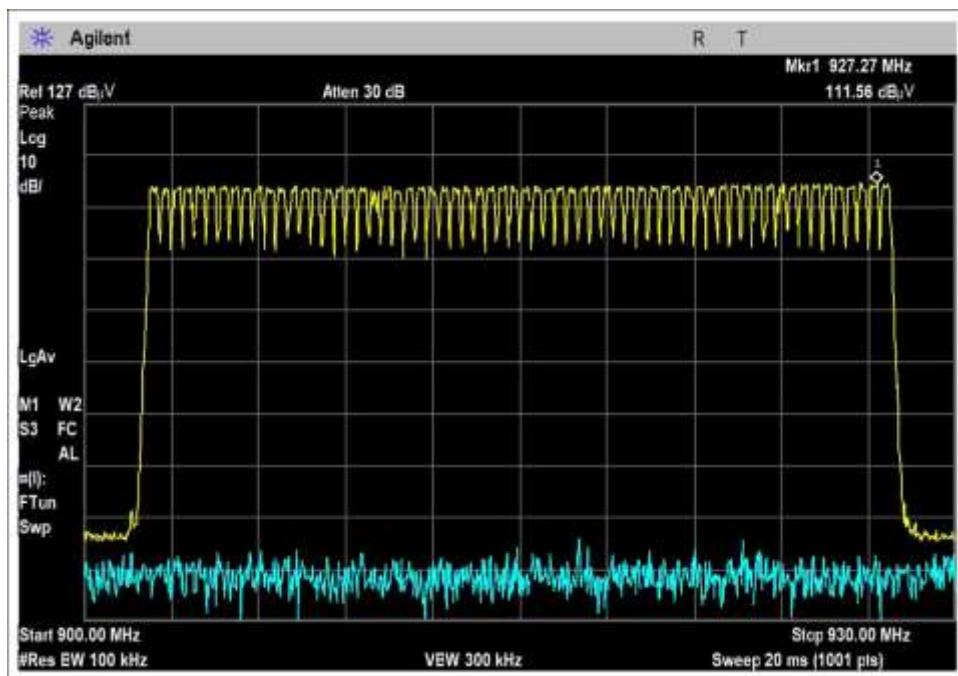

GFSK

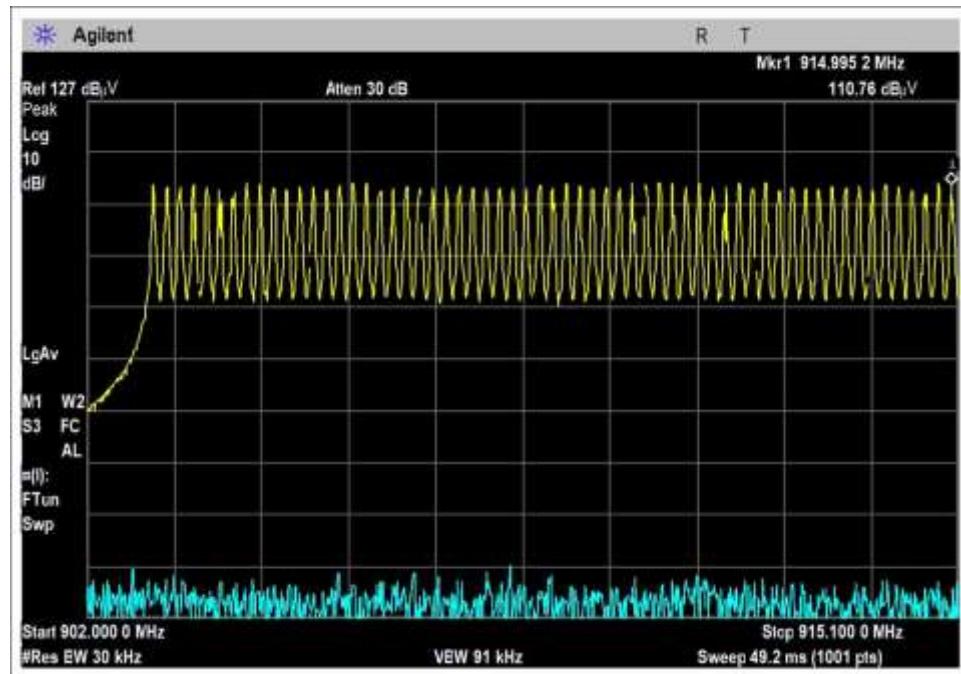

OOK Low Channel

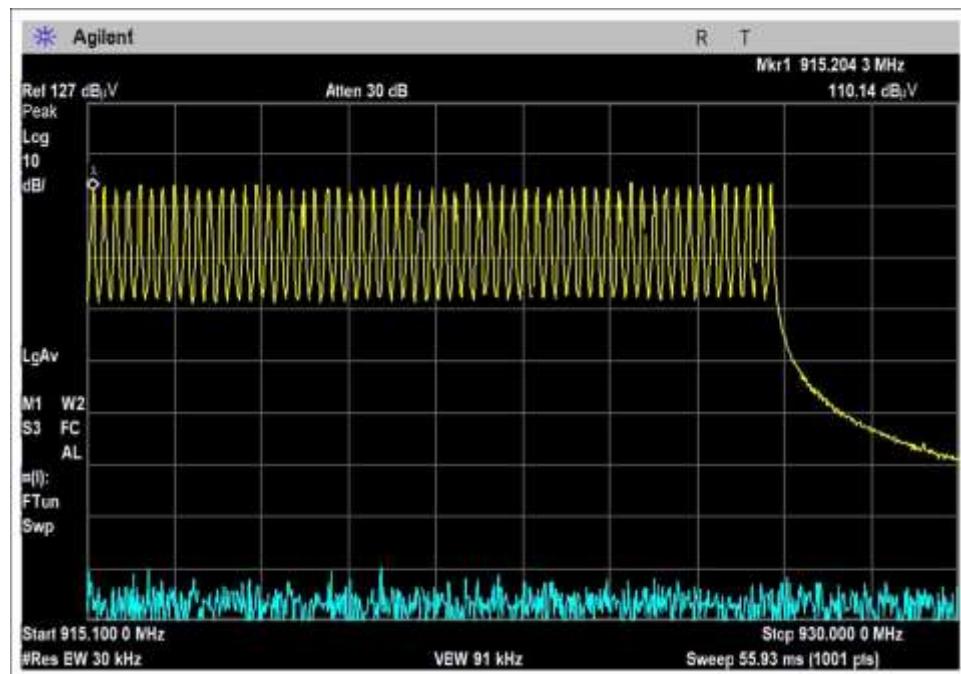

OOK High Channel

Test Setup Photo(s)



15.247(b)(1) Output Power

Test Data Summary - Voltage Variations


This equipment is battery powered. Power output tests were performed using a fresh battery.

Test Data Summary - RF Conducted Measurement


Limit = $\begin{cases} 30\text{dBm Conducted}/36\text{dBm EIRP} & | \geq 50 \text{ Channels} \\ 24\text{dBm Conducted}/30\text{dBm EIRP} & | < 50 \text{ Channels} \text{ (min 25)} \end{cases}$

Frequency (MHz)	Modulation	Ant. Type / Gain (dBi)	Measured (dBm)	Limit (dBm)	Results
902.4	GFSK (Level 3)	PCB/-0.4dBi	14.8	≤30	Pass
915.2	GFSK (Level 3)	PCB/-0.4dBi	15.0	≤30	Pass
927.6	GFSK (Level 3)	PCB/-0.4dBi	15.7	≤30	Pass
903	OOK (Level 3)	PCB/-0.4dBi	14.8	≤30	Pass
915	OOK (Level 3)	PCB/-0.4dBi	15.0	≤30	Pass
926.8	OOK (Level 3)	PCB/-0.4dBi	15.6	≤30	Pass
903	OOK (Level 1)	PCB/-0.4dBi	7.6	≤30	Pass
915	OOK (Level 1)	PCB/-0.4dBi	7.8	≤30	Pass
926.8	OOK (Level 1)	PCB/-0.4dBi	8.4	≤30	Pass


Plots

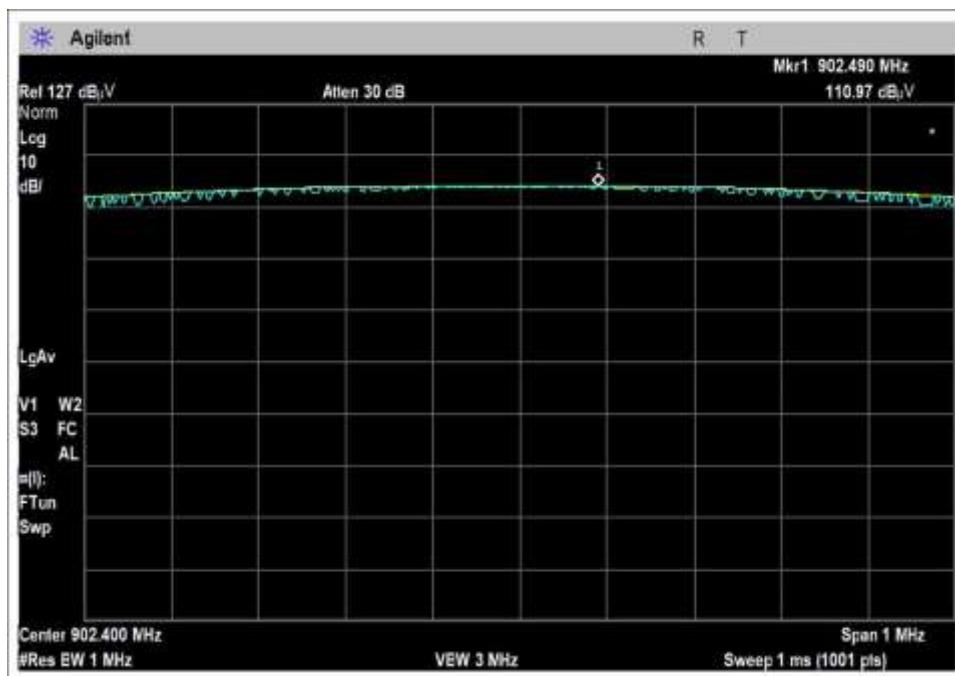


GFSK (Level 3) Low Channel

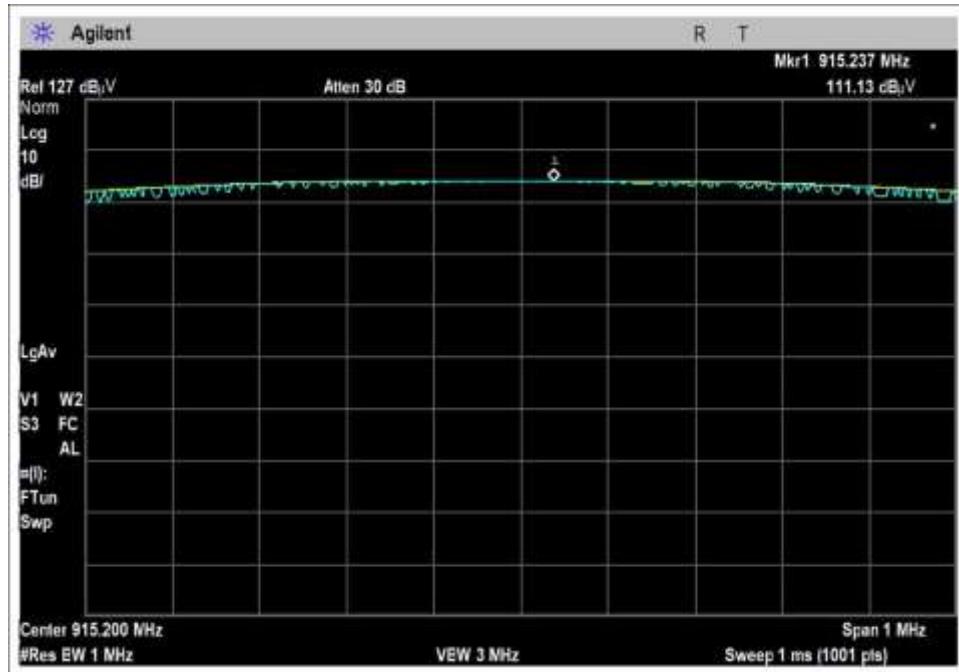


GFSK (Level 3) Middle Channel

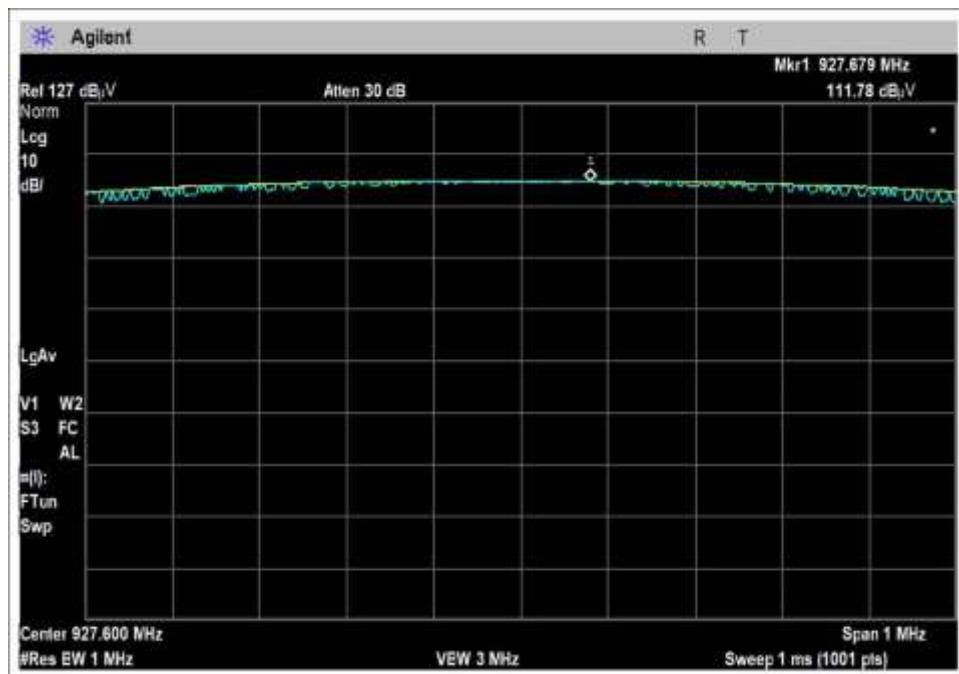


GFSK (Level 3) High Channel

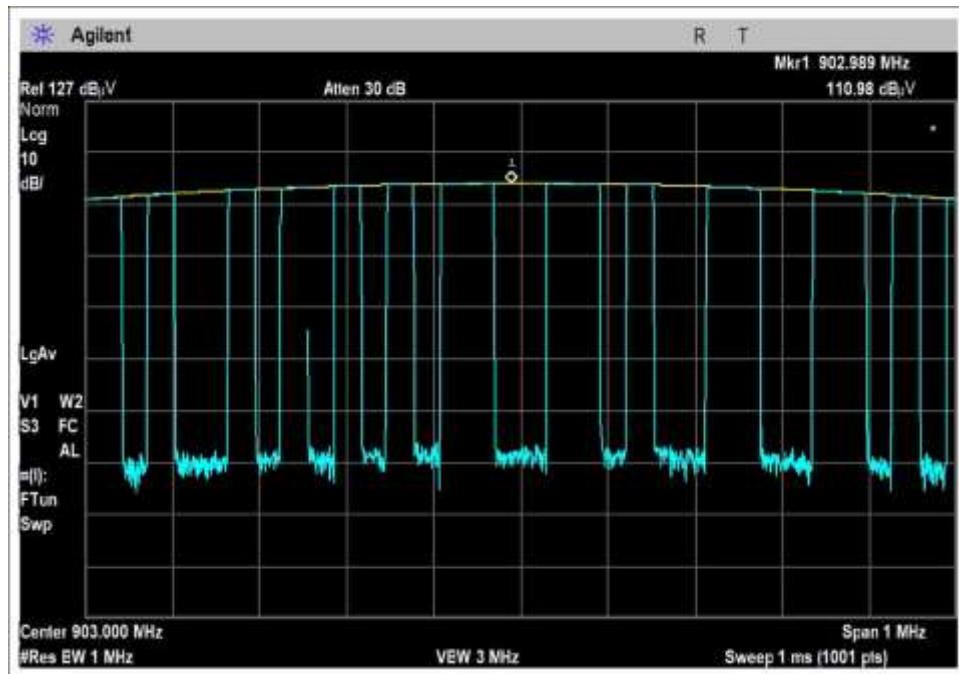


OOK (Level 3) Low Channel

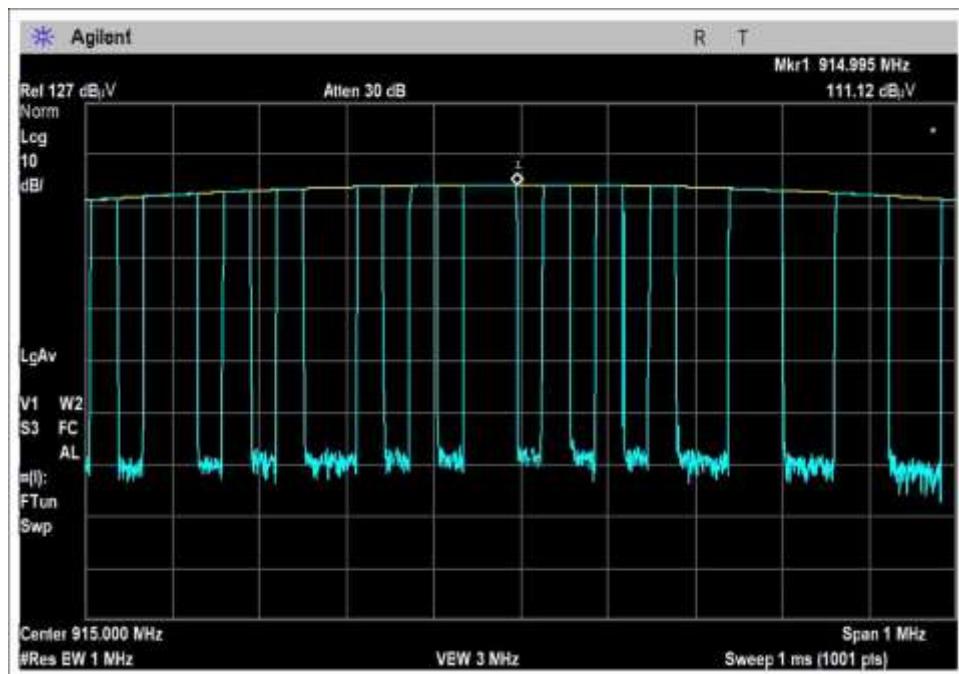


OOK (Level 3) Middle Channel

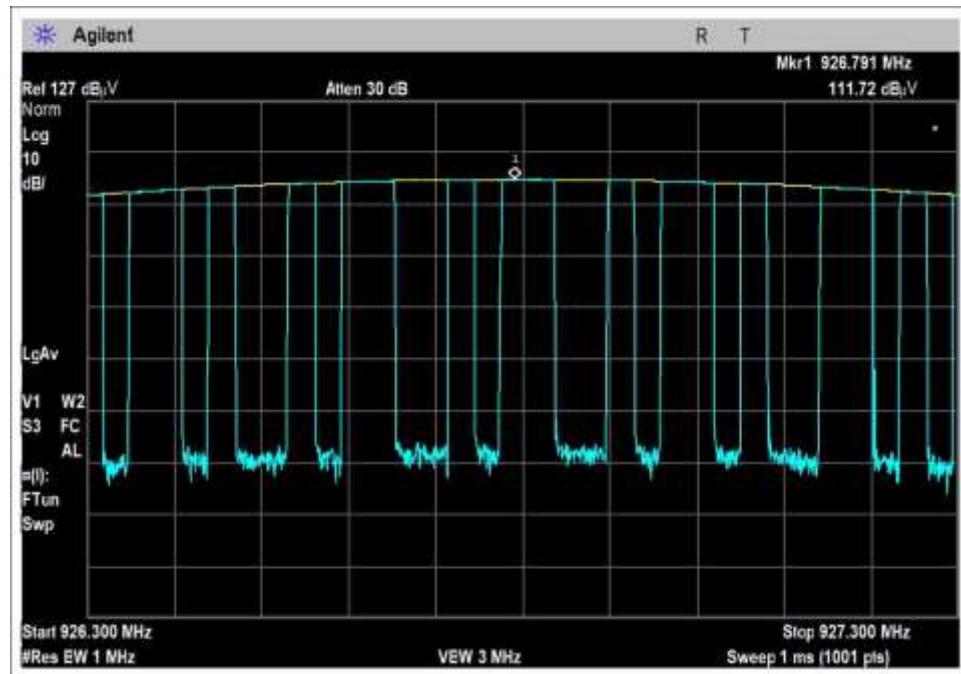


OOK (Level 3) High Channel

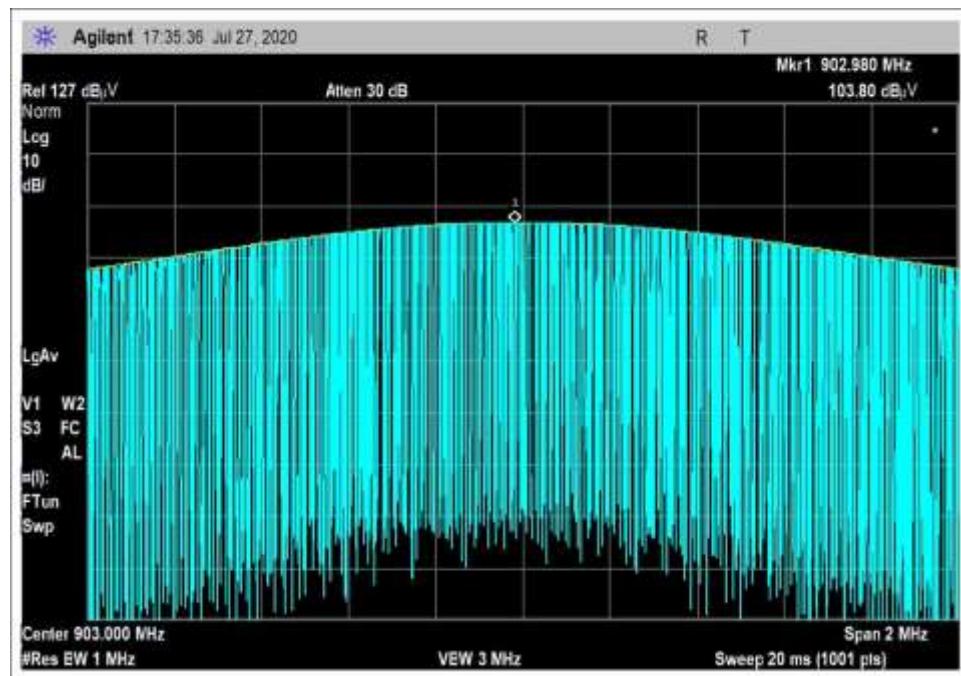

OOK (Level 1) Low Channel

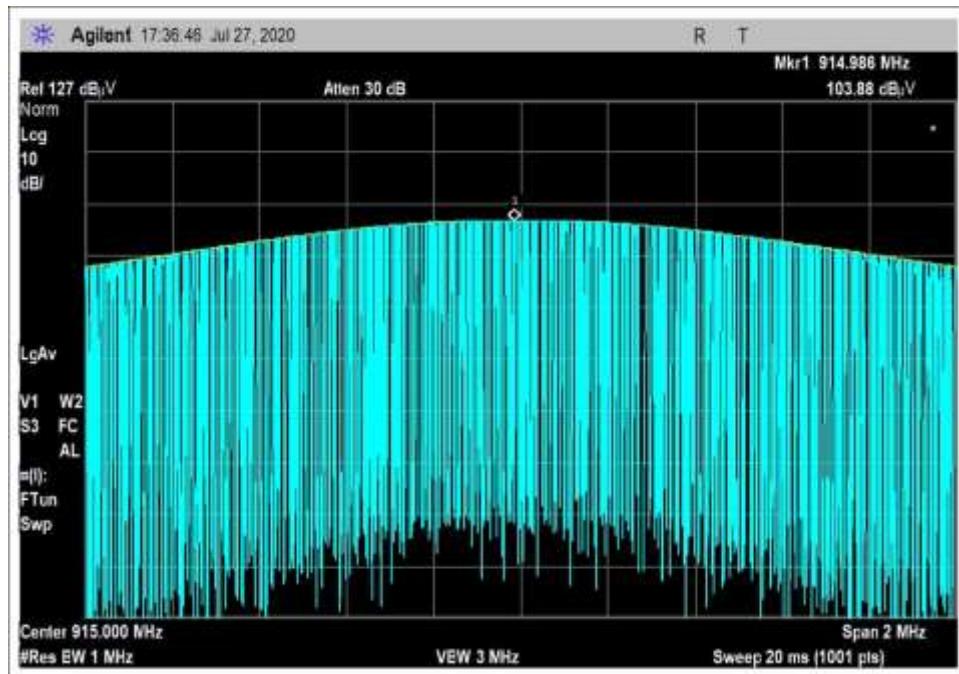

OOK (Level 1) Middle Channel

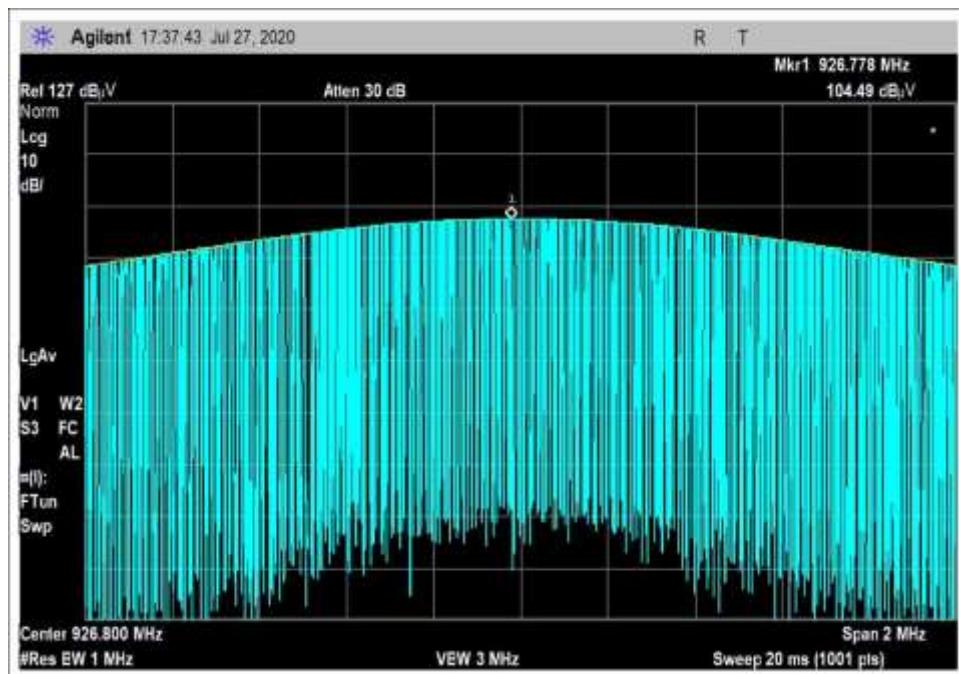

OOK (Level 1) High Channel

Test Setup / Conditions / Data

Test Location: CKC Laboratories • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC (4362)
 Customer: **Itron, Inc.**
 Specification: **15.247(b) Power Output (902-928 MHz FHSS >50 Channels)**
 Work Order #: **107148** Date: 8/16/2022
 Test Type: **Conducted Emissions** Time: 06:56:21
 Tested By: Matt Harrison Sequence#: 1
 Software: EMITest 5.03.20 3.67VDC

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 21°C

Humidity: 40%

Pressure: 102.5kPa


Method: ANSI C63.10 (2013)

Frequency: Fundamental

Setup:

EUT is setup for Conducted Measurements.

It is connected directly to the spectrum analyzer via cable and attenuator.

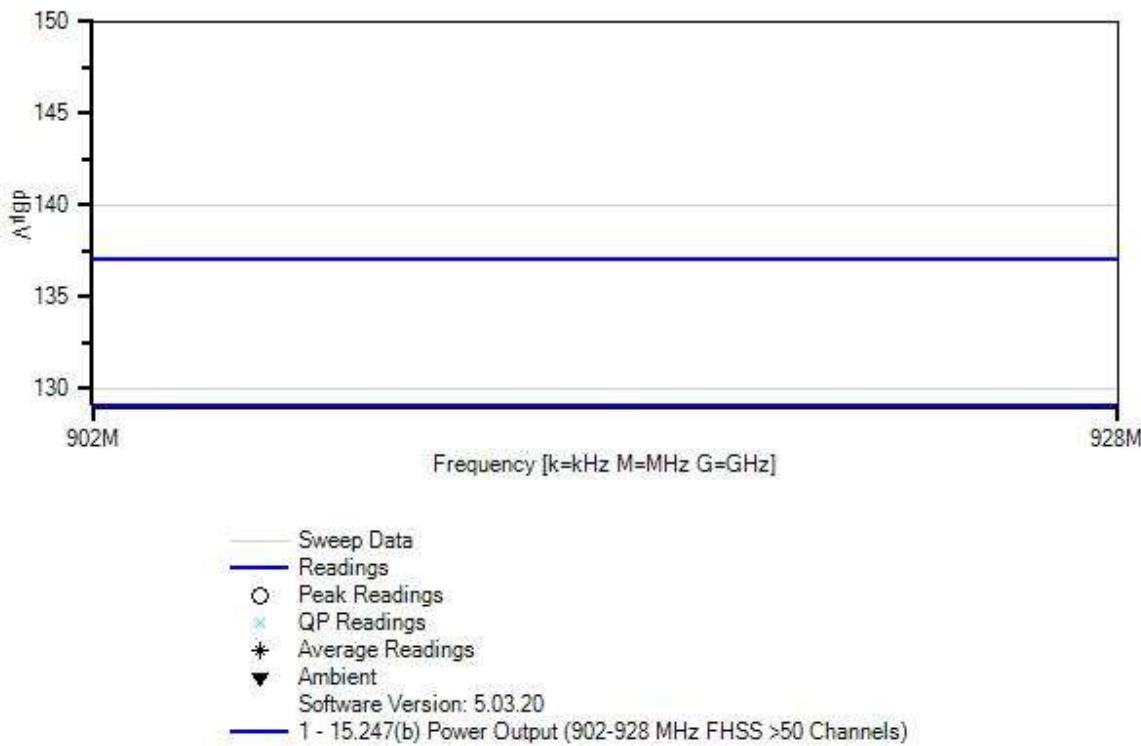Itron, Inc. WO#: 107148 Sequence#: 1 Date: 8/16/2022
 15.247(b) Power Output (902-928 MHz FHSS >50 Channels) Test Lead: 3.67VDC Antenna Port

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05503	Attenuator	766-10	6/8/2021	6/8/2023
T2	ANP06452	Cable	Heliax	1/17/2022	1/17/2024
	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023

Measurement Data:

Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	927.679M	111.8	+10.1	+0.8		+0.0	122.7	137.0	-14.3	Anten
2	915.237M	111.1	+10.1	+0.8		+0.0	122.0	137.0	-15.0	Anten
3	902.490M	111.0	+10.1	+0.7		+0.0	121.8	137.0	-15.2	Anten



Test Location: CKC Laboratories • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC (4362)
Customer: **Itron, Inc.**
Specification: **15.247(b) Power Output (902-928 MHz FHSS >50 Channels)**
Work Order #: **107148** Date: 8/16/2022
Test Type: **Conducted Emissions** Time: 06:40:30
Tested By: Matt Harrison Sequence#: 3
Software: EMITest 5.03.20 3.67VDC

Equipment Tested:


Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 40% Pressure: 102.5kPa
Method: ANSI C63.10 (2013)
Frequency: Fundamental
Setup: EUT is setup for Conducted Measurements. It is connected directly to the spectrum analyzer via cable and attenuator.

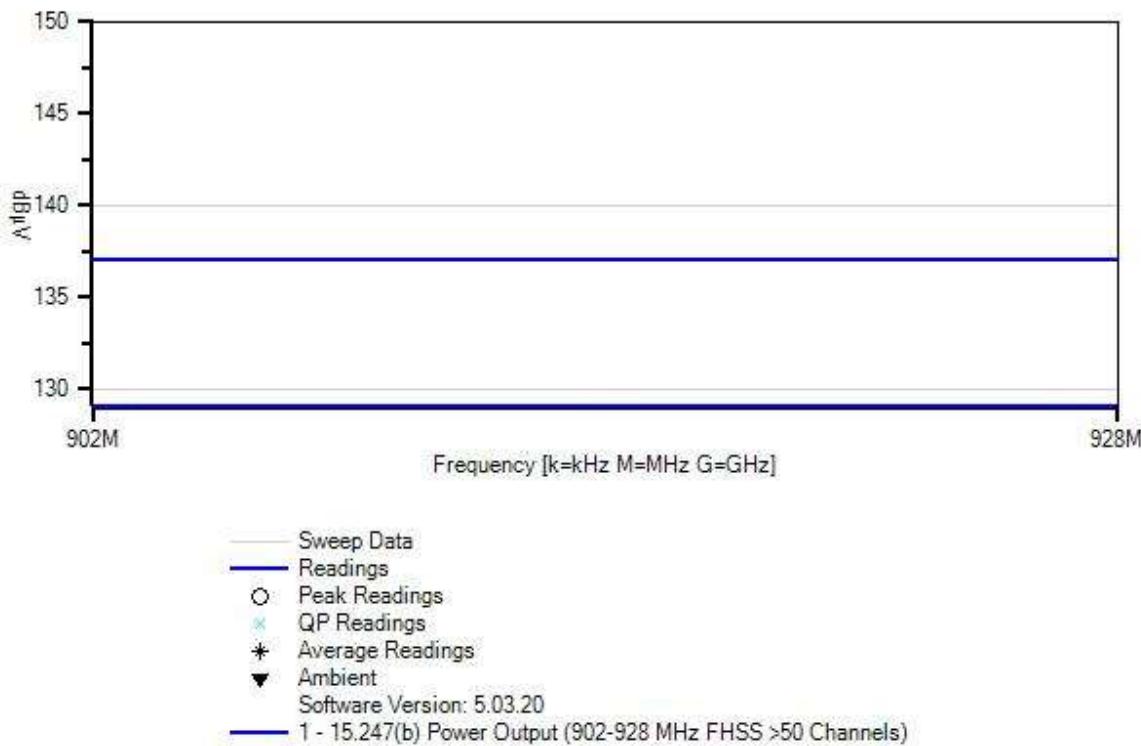Itron, Inc. WO#: 107148 Sequence#: 3 Date: 8/16/2022
 15.247(b) Power Output (902-928 MHz FHSS >50 Channels) Test Lead: 3.67VDC Antenna Port

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05503	Attenuator	766-10	6/8/2021	6/8/2023
T2	ANP06452	Cable	Heliax	1/17/2022	1/17/2024
	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023

Measurement Data: Reading listed by margin.

Test Lead: Antenna Port

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	926.791M	111.7	+10.1	+0.8		+0.0	122.6	137.0	-14.4	Anten
2	914.995M	111.1	+10.1	+0.8		+0.0	122.0	137.0	-15.0	Anten
3	902.989M	111.0	+10.1	+0.7		+0.0	121.8	137.0	-15.2	Anten



Test Location: CKC Laboratories • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC (4362)
Customer: **Itron, Inc.**
Specification: **15.247(b) Power Output (902-928 MHz FHSS >50 Channels)**
Work Order #: **107148** Date: 8/15/2022
Test Type: **Conducted Emissions** Time: 08:43:11
Tested By: Matt Harrison Sequence#: 4
Software: EMITest 5.03.20 3.67VDC

Equipment Tested:


Device	Manufacturer	Model #	S/N
Configuration 1			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 1			

Test Conditions / Notes:

Environmental Conditions: Temperature: 21°C Humidity: 40% Pressure: 102.5kPa
Method: ANSI C63.10 (2013)
Frequency: Fundamental
Setup: EUT is setup for Conducted Measurements. It is connected directly to the spectrum analyzer via cable and attenuator.

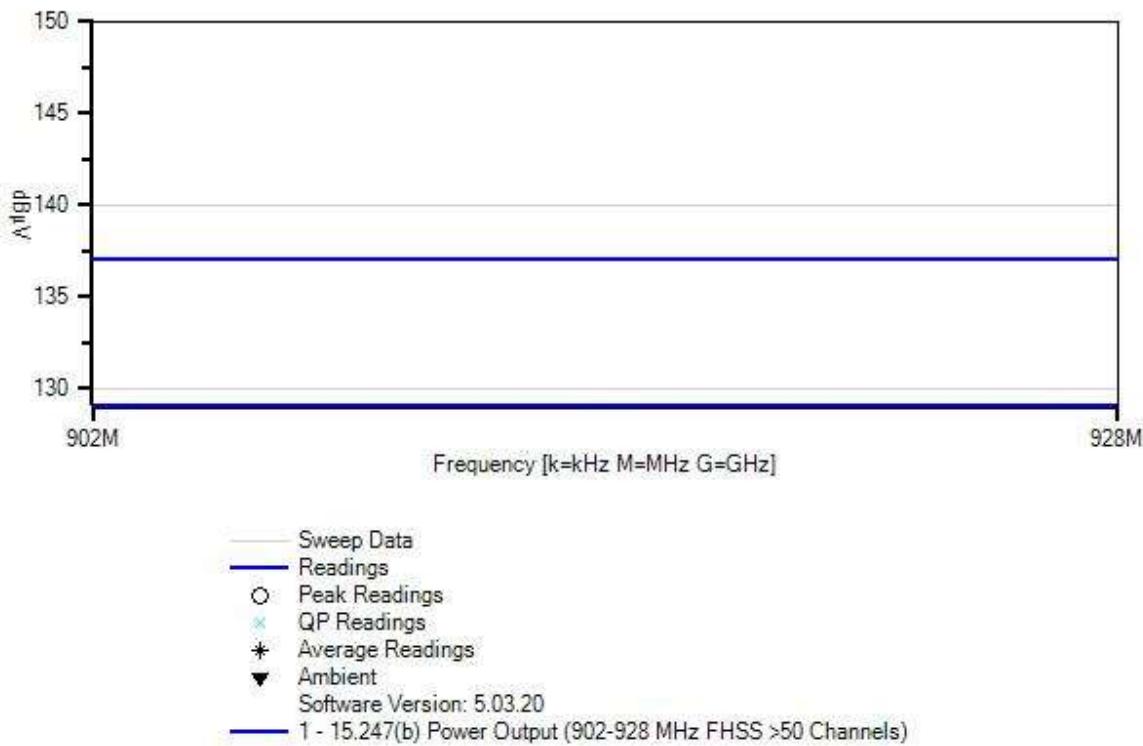
Itron, Inc. WO#: 107148 Sequence#: 4 Date: 8/15/2022
 15.247(b) Power Output (902-928 MHz FHSS >50 Channels) Test Lead: 3.67VDC Antenna Port

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	ANP05503	Attenuator	766-10	6/8/2021	6/8/2023
T2	ANP06452	Cable	Heliax	1/17/2022	1/17/2024
	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023

Measurement Data: Reading listed by margin. Test Lead: Antenna Port

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	dB	Dist Table	Corr dB μ V	Spec dB μ V	Margin dB	Polar Ant
1	926.778M	104.5	+10.1	+0.8		+0.0	115.4	137.0	-21.6	Anten
2	914.986M	103.9	+10.1	+0.8		+0.0	114.8	137.0	-22.2	Anten
3	902.980M	103.8	+10.1	+0.7		+0.0	114.6	137.0	-22.4	Anten

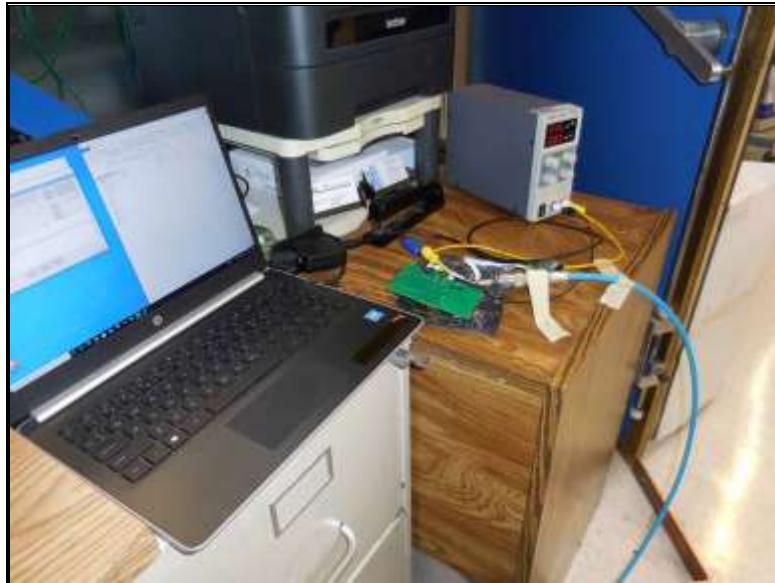Test Setup Photo(s)



15.247(d) Radiated Emissions & Band Edge

Test Setup / Conditions / Data

Test Location: CKC Laboratories • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC (4362)
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **107148** Date: 8/18/2022
 Test Type: **Maximized Emissions** Time: 08:06:09
 Tested By: Matt Harrison/Mike Atkinson Sequence#: 12
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 24°C

Humidity: 46%

Pressure: 101.4kPa

Method: ANSI C63.10 (2013)

Frequency: Fundamental

Setup:

EUT is on foam table.

EUT is transmitting with modulation.

2 orientations investigated per manufacturer installed use case, worst case reported.

Horizontal and vertical antenna polarities investigated above 30MHz,


3 x orthogonal axes investigated below 30MHz, worst case reported.

Note:

Ribbon cable is connected for all measurements on this datasheet except the 4th harmonic where it was removed. This cable was present for ease of testing and representative of worst case, but it is not present on the actual use case.

No emissions observed within 20dB of limit below 30MHz.

Modulation: GFSK Level 3

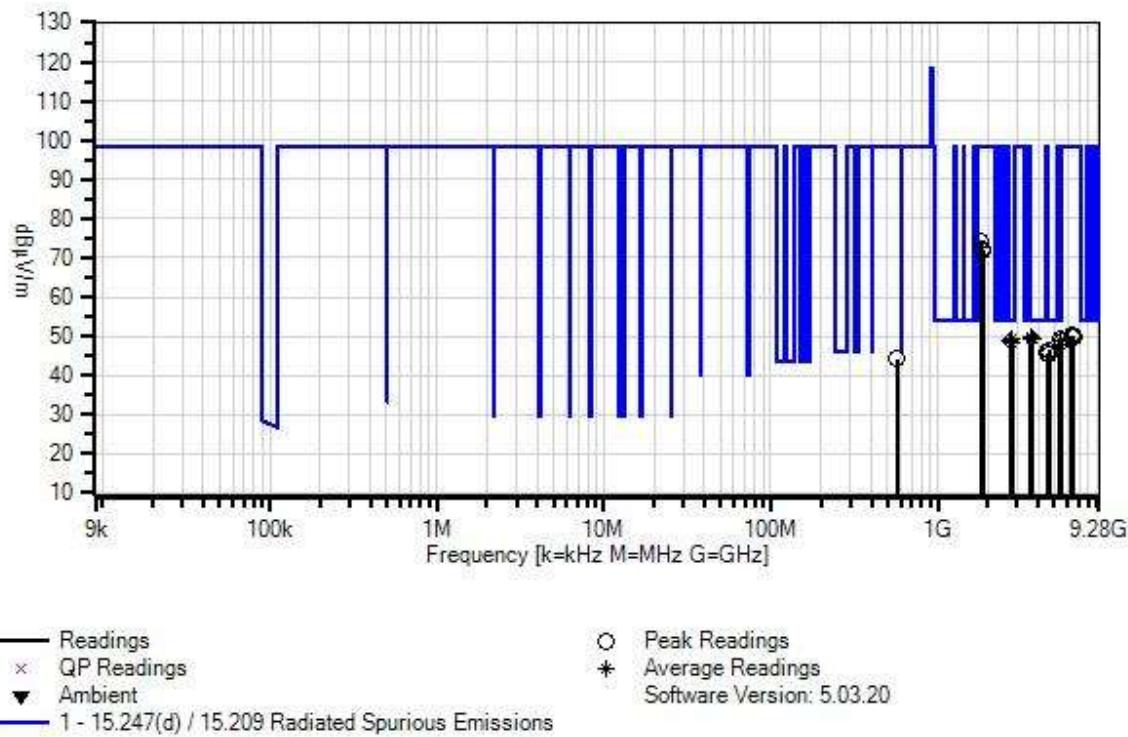Itron, Inc. WO#: 107148 Sequence#: 12 Date: 8/18/2022
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Various

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T2	ANP06540	Cable	Heliax	1/17/2022	1/17/2024
T3	ANP06515	Cable	Heliax	5/23/2022	5/23/2024
T4	ANP05360	Cable	RG214	2/4/2022	2/4/2024
T5	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
	AN00052	Loop Antenna	6502	5/11/2022	5/11/2024
T6	AN03540	Preamp	83017A	5/14/2021	5/14/2023
T7	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
T8	ANP07504	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T9	AN03170	High Pass Filter	HM1155-11SS	9/16/2021	9/16/2023

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters					
#	Freq	Rdng	T1 T5 T9	T2 T6	T3 T7	T4 T8	Dist	Corr	Spec	Margin	Polar	
			MHz	dB μ V	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	3609.600M	47.2	+0.0 +0.0 +0.3	+0.5 -33.8 +0.3	+3.3 +31.7	+0.0 +0.4	+0.0 +0.4	Table	49.6	54.0	-4.4	Vert/
^	3609.600M	48.7	+0.0 +0.0 +0.3	+0.5 -33.8 +0.3	+3.3 +31.7	+0.0 +0.4	+0.0 +0.4	Table	51.1	54.0	-2.9	Vert/
3	2745.600M	49.9	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0 +0.5	Table	49.3	54.0	-4.7	Vert/
^	2745.600M	51.4	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0 +0.5	Table	50.8	54.0	-3.2	Vert/
5	3710.400M	46.7	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.1 +32.0	+0.0 +0.3	+0.0 +0.3	Table	49.1	54.0	-4.9	Vert/
^	3710.400M	48.2	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.1 +32.0	+0.0 +0.3	+0.0 +0.3	Table	50.6	54.0	-3.4	Vert/
7	3660.800M	46.8	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.2 +31.7	+0.0 +0.4	+0.0 +0.4	Table	49.1	54.0	-4.9	Vert/
^	3660.800M	48.3	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.2 +31.7	+0.0 +0.4	+0.0 +0.4	Table	50.6	54.0	-3.4	Vert/
9	2707.200M	49.2	+0.0 +0.0 +0.2	+0.5 -34.1 +0.2	+2.9 +29.5	+0.0 +0.5	+0.0 +0.5	Table	48.7	54.0	-5.3	Vert/
^	2707.200M	50.7	+0.0 +0.0 +0.2	+0.5 -34.1 +0.2	+2.9 +29.5	+0.0 +0.5	+0.0 +0.5	Table	50.2	54.0	-3.8	Vert/
11	5414.435M	41.2	+0.0 +0.0 +0.4	+0.8 -33.6 +0.4	+4.5 +34.7	+0.0 +0.6	+0.0 +0.6	Table	48.6	54.0	-5.4	Vert/
^	5414.435M	42.7	+0.0 +0.0 +0.4	+0.8 -33.6 +0.4	+4.5 +34.7	+0.0 +0.6	+0.0 +0.6	Table	50.1	54.0	-3.9	Vert/
13	2782.800M	48.8	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0 +0.5	Table	48.2	54.0	-5.8	Vert/
^	2782.800M	50.3	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0 +0.5	Table	49.7	54.0	-4.3	Vert/
15	4638.650M	42.2	+0.0 +0.0 +0.4	+0.6 -33.6 +0.4	+4.0 +32.5	+0.0 +0.4	+0.0 +0.4	Table	46.5	54.0	-7.5	Vert/

16	4512.030M	41.5	+0.0	+0.6	+4.2	+0.0	+0.0	45.7	54.0	-8.3	Vert/
			+0.0	-33.6	+32.2	+0.3					
			+0.5								
17	4575.885M	41.2	+0.0	+0.6	+4.1	+0.0	+0.0	45.4	54.0	-8.6	Vert/
			+0.0	-33.6	+32.2	+0.4					
			+0.5								
18	1804.955M	78.0	+0.0	+0.4	+2.3	+0.0	+0.0	74.2	98.5	-24.3	Vert/
			+0.0	-34.7	+27.3	+0.3					
			+0.6								
19	1830.550M	75.6	+0.0	+0.4	+2.3	+0.0	+0.0	72.0	98.5	-26.5	Vert/
			+0.0	-34.7	+27.5	+0.3					
			+0.6								
20	1855.335M	75.2	+0.0	+0.4	+2.3	+0.0	+0.0	71.8	98.5	-26.7	Vert/
			+0.0	-34.7	+27.7	+0.3					
			+0.6								
21	6407.385M	42.2	+0.0	+0.9	+5.1	+0.0	+0.0	50.3	98.5	-48.2	Vert/
			+0.0	-34.0	+35.0	+0.6					
			+0.5								
22	6317.690M	42.2	+0.0	+0.9	+4.7	+0.0	+0.0	50.0	98.5	-48.5	Vert/
			+0.0	-34.0	+35.2	+0.6					
			+0.4								
23	6492.500M	41.3	+0.0	+0.9	+5.4	+0.0	+0.0	49.8	98.5	-48.7	Vert/
			+0.0	-34.0	+34.9	+0.7					
			+0.6								
24	5490.540M	41.8	+0.0	+0.8	+4.8	+0.0	+0.0	49.4	98.5	-49.1	Vert/
			+0.0	-33.6	+34.7	+0.5					
			+0.4								
25	5564.875M	41.2	+0.0	+0.8	+4.7	+0.0	+0.0	48.6	98.5	-49.9	Vert/
			+0.0	-33.6	+34.5	+0.5					
			+0.5								
26	569.300M	15.4	+0.0	+0.2	+1.2	+1.8	+0.0	44.2	98.5	-54.3	Vert/
			+25.6	+0.0	+0.0	+0.0					
			+0.0								



Test Location: CKC Laboratories • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC (4362)
Customer: **Itron, Inc.**
Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
Work Order #: **107148** Date: 8/19/2022
Test Type: **Maximized Emissions** Time: 17:12:12
Tested By: Matt Harrison/Mike Atkinson Sequence#: 16
Software: EMITest 5.03.20

Equipment Tested:


Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Environmental Conditions: Temperature: 24°C Humidity: 46% Pressure: 101.4kPa
Method: ANSI C63.10 (2013)
Frequency: Fundamental
Setup: EUT is on foam table. EUT is transmitting with modulation. 2 orientations investigated per manufacturer installed use case, worst case reported. Horizontal and vertical antenna polarities investigated above 30MHz, 3 x orthogonal axes investigated below 30MHz, worst case reported.
Note: Ribbon cable is connected for all measurements on this datasheet except the 4th harmonic where it was removed. This cable was present for ease of testing and representative of worst case, but it is not present on the actual use case. No emissions observed within 20dB of limit below 30MHz.
Modulation: OOK Level 3

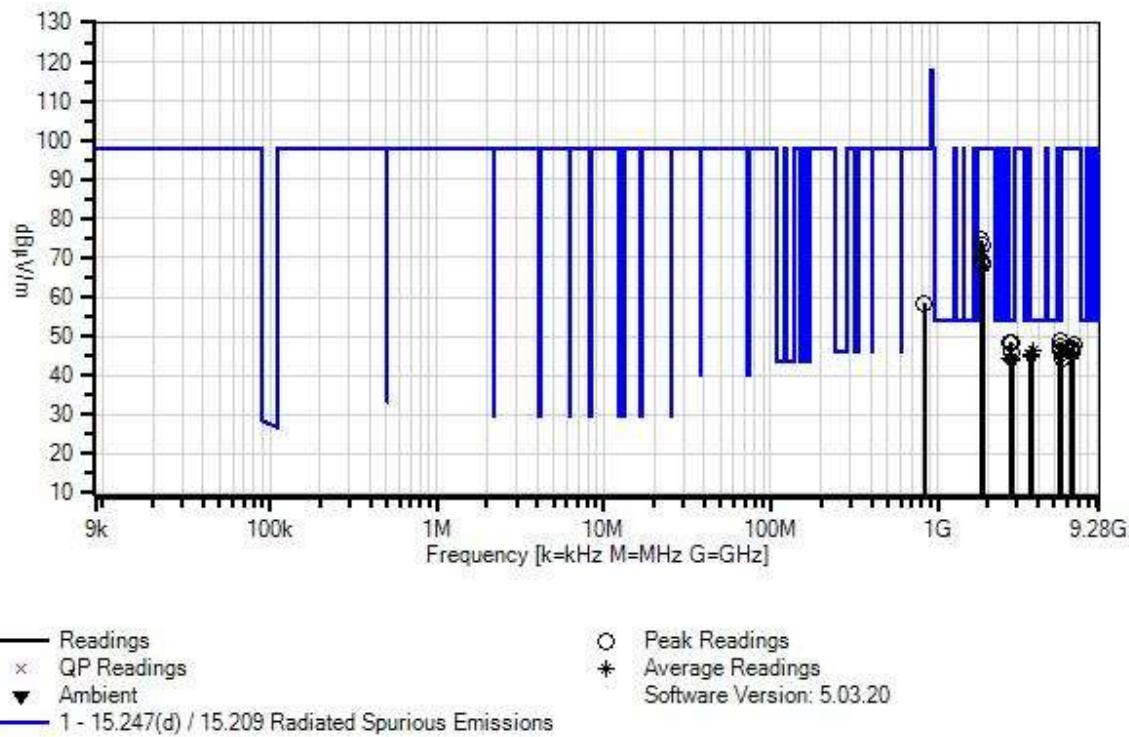Itron, Inc. WO#: 107148 Sequence#: 16 Date: 8/19/2022
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Various

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T2	ANP06540	Cable	Heliax	1/17/2022	1/17/2024
T3	ANP06515	Cable	Heliax	5/23/2022	5/23/2024
T4	ANP05360	Cable	RG214	2/4/2022	2/4/2024
T5	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
	AN00052	Loop Antenna	6502	5/11/2022	5/11/2024
T6	AN03540	Preamp	83017A	5/14/2021	5/14/2023
T7	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
T8	ANP07504	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T9	AN03170	High Pass Filter	HM1155-11SS	9/16/2021	9/16/2023

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters					
#	Freq	Rdng	T1 T5 T9	T2 T6	T3 T7	T4 T8	Dist	Corr	Spec	Margin	Polar	
			MHz	dB μ V	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	5418.060M	41.2	+0.0 +0.0 +0.4	+0.8 -33.6 +0.4	+4.5 +34.7	+0.0 +0.6	+0.0	+0.0	48.6	54.0	-5.4	Horiz
2	2745.050M	49.1	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0	+0.0	48.5	54.0	-5.5	Vert
3	2709.020M	48.6	+0.0 +0.0 +0.2	+0.5 -34.1 +0.2	+2.9 +29.5	+0.0 +0.5	+0.0	+0.0	48.1	54.0	-5.9	Vert
4	5418.020M	40.0	+0.0 +0.0 +0.4	+0.8 -33.6 +0.4	+4.5 +34.7	+0.0 +0.6	+0.0	+0.0	47.4	54.0	-6.6	Vert
5	3707.200M Ave	43.9	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.1 +32.0	+0.0 +0.3	+0.0	+0.0	46.3	54.0	-7.7	Horiz
^	3707.200M	50.4	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.1 +32.0	+0.0 +0.3	+0.0	+0.0	52.8	54.0	-1.2	Horiz
7	2780.380M	46.3	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0	+0.0	45.7	54.0	-8.3	Vert
8	3659.970M Ave	43.2	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.2 +31.7	+0.0 +0.4	+0.0	+0.0	45.5	54.0	-8.5	Horiz
^	3659.970M	49.7	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.2 +31.7	+0.0 +0.4	+0.0	+0.0	52.0	54.0	-2.0	Horiz
10	3611.910M Ave	42.6	+0.0 +0.0 +0.3	+0.5 -33.8 +0.3	+3.3 +31.7	+0.0 +0.4	+0.0	+0.0	45.0	54.0	-9.0	Horiz
^	3611.910M	49.1	+0.0 +0.0 +0.3	+0.5 -33.8 +0.3	+3.3 +31.7	+0.0 +0.4	+0.0	+0.0	51.5	54.0	-2.5	Horiz
12	2745.110M Ave	45.1	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0	+0.0	44.5	54.0	-9.5	Horiz
^	2745.110M	51.6	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0	+0.0	51.0	54.0	-3.0	Horiz

14	2709.010M	44.9	+0.0	+0.5	+2.9	+0.0	+0.0	44.4	54.0	-9.6	Horiz
	Ave		+0.0	-34.1	+29.5	+0.5					
			+0.2								
^	2709.010M	51.4	+0.0	+0.5	+2.9	+0.0	+0.0	50.9	54.0	-3.1	Horiz
			+0.0	-34.1	+29.5	+0.5					
			+0.2								
16	2780.490M	44.3	+0.0	+0.5	+2.9	+0.0	+0.0	43.7	54.0	-10.3	Horiz
	Ave		+0.0	-34.1	+29.3	+0.5					
			+0.3								
^	2780.490M	50.8	+0.0	+0.5	+2.9	+0.0	+0.0	50.2	54.0	-3.8	Horiz
			+0.0	-34.1	+29.3	+0.5					
			+0.3								
18	1806.020M	78.4	+0.0	+0.4	+2.3	+0.0	+0.0	74.6	98.0	-23.4	Vert
			+0.0	-34.7	+27.3	+0.3					
			+0.6								
19	1830.010M	76.8	+0.0	+0.4	+2.3	+0.0	+0.0	73.2	98.0	-24.8	Vert
			+0.0	-34.7	+27.5	+0.3					
			+0.6								
20	1853.560M	76.5	+0.0	+0.4	+2.3	+0.0	+0.0	73.1	98.0	-24.9	Vert
			+0.0	-34.7	+27.7	+0.3					
			+0.6								
21	1805.990M	73.0	+0.0	+0.4	+2.3	+0.0	+0.0	69.2	98.0	-28.8	Horiz
			+0.0	-34.7	+27.3	+0.3					
			+0.6								
22	1830.000M	72.3	+0.0	+0.4	+2.3	+0.0	+0.0	68.7	98.0	-29.3	Horiz
			+0.0	-34.7	+27.5	+0.3					
			+0.6								
23	1853.570M	71.7	+0.0	+0.4	+2.3	+0.0	+0.0	68.3	98.0	-29.7	Horiz
			+0.0	-34.7	+27.7	+0.3					
			+0.6								
24	833.200M	24.5	+0.0	+0.3	+1.5	+2.2	+0.0	58.4	98.0	-39.6	Vert/
			+29.9	+0.0	+0.0	+0.0					
			+0.0								
25	6487.620M	39.4	+0.0	+0.9	+5.4	+0.0	+0.0	47.9	98.0	-50.1	Vert
			+0.0	-34.0	+34.9	+0.7					
			+0.6								
26	5490.110M	40.0	+0.0	+0.8	+4.8	+0.0	+0.0	47.6	98.0	-50.4	Horiz
			+0.0	-33.6	+34.7	+0.5					
			+0.4								
27	6321.020M	39.1	+0.0	+0.9	+4.8	+0.0	+0.0	47.0	98.0	-51.0	Vert
			+0.0	-34.0	+35.2	+0.6					
			+0.4								
28	6405.100M	38.3	+0.0	+0.9	+5.1	+0.0	+0.0	46.4	98.0	-51.6	Vert
			+0.0	-34.0	+35.0	+0.6					
			+0.5								

29	5489.990M	38.7	+0.0	+0.8	+4.8	+0.0	+0.0	46.3	98.0	-51.7	Vert
			+0.0	-33.6	+34.7	+0.5					
			+0.4								
30	6320.910M	38.2	+0.0	+0.9	+4.8	+0.0	+0.0	46.1	98.0	-51.9	Horiz
			+0.0	-34.0	+35.2	+0.6					
			+0.4								
31	5560.810M	38.5	+0.0	+0.8	+4.7	+0.0	+0.0	45.9	98.0	-52.1	Horiz
			+0.0	-33.6	+34.5	+0.5					
			+0.5								
32	6405.110M	37.7	+0.0	+0.9	+5.1	+0.0	+0.0	45.8	98.0	-52.2	Horiz
			+0.0	-34.0	+35.0	+0.6					
			+0.5								
33	5560.760M	36.9	+0.0	+0.8	+4.7	+0.0	+0.0	44.3	98.0	-53.7	Vert
			+0.0	-33.6	+34.5	+0.5					
			+0.5								



Test Location: CKC Laboratories • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC (4362)
Customer: **Itron, Inc.**
Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
Work Order #: **107148** Date: 8/19/2022
Test Type: **Maximized Emissions** Time: 16:06:01
Tested By: Matt Harrison/Mike Atkinson Sequence#: 15
Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			


Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Environmental Conditions: Temperature: 24°C Humidity: 46% Pressure: 101.4kPa
Method: ANSI C63.10 (2013)
Frequency: Fundamental
Setup: EUT is on foam table. EUT is transmitting with modulation. 2 orientations investigated per manufacturer installed use case, worst case reported. Horizontal and vertical antenna polarities investigated above 30MHz, 3 x orthogonal axes investigated below 30MHz, worst case reported.
No emissions observed within 20dB of limit below 30MHz.

Modulation: OOK Level 1

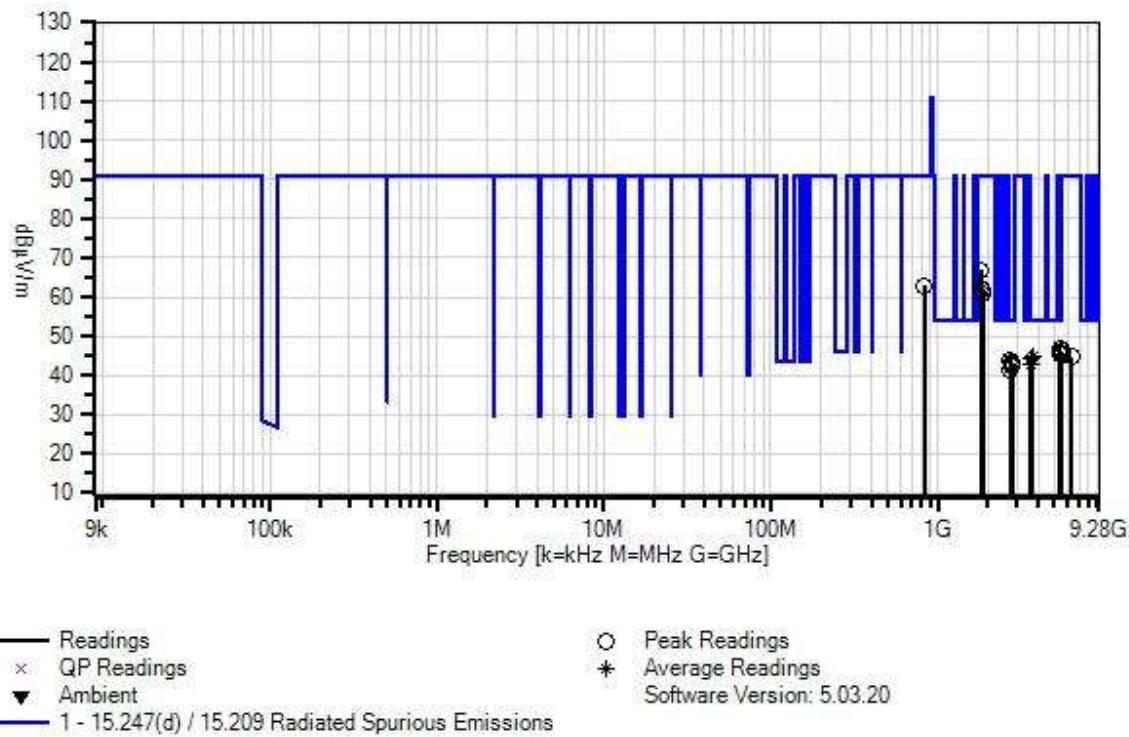Itron, Inc. WO#: 107148 Sequence#: 15 Date: 8/19/2022
 15.247(d) / 15.209 Radiated Spurious Emissions Test Distance: 3 Meters Various

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T2	ANP06540	Cable	Heliax	1/17/2022	1/17/2024
T3	ANP06515	Cable	Heliax	5/23/2022	5/23/2024
T4	ANP05360	Cable	RG214	2/4/2022	2/4/2024
T5	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023
	AN00052	Loop Antenna	6502	5/11/2022	5/11/2024
T6	AN03540	Preamp	83017A	5/14/2021	5/14/2023
T7	AN02374ANSI	Horn Antenna	RGA-60	5/25/2021	5/25/2023
T8	ANP07504	Cable	CLU40-KMKM-02.00F	1/26/2021	1/26/2023
T9	AN03170	High Pass Filter	HM1155-11SS	9/16/2021	9/16/2023

Measurement Data:			Reading listed by margin.				Test Distance: 3 Meters					
#	Freq	Rdng	T1 T5 T9	T2 T6	T3 T7	T4 T8	Dist	Corr	Spec	Margin	Polar	
			MHz	dB μ V	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	5418.080M	39.6	+0.0 +0.0 +0.4	+0.8 -33.6 +0.4	+4.5 +34.7	+0.0 +0.6	+0.0	+0.0	47.0	54.0	-7.0	Vert
2	5418.030M	38.2	+0.0 +0.0 +0.4	+0.8 -33.6 +0.4	+4.5 +34.7	+0.0 +0.6	+0.0	+0.0	45.6	54.0	-8.4	Horiz
3	3707.190M	42.3	+0.0 Ave +0.2	+0.6 -33.8 +0.2	+3.1 +32.0	+0.0 +0.3	+0.0	+0.0	44.7	54.0	-9.3	Horiz
^	3707.190M	48.8	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.1 +32.0	+0.0 +0.3	+0.0	+0.0	51.2	54.0	-2.8	Horiz
5	3659.850M	42.3	+0.0 Ave +0.2	+0.6 -33.8 +0.2	+3.2 +31.7	+0.0 +0.4	+0.0	+0.0	44.6	54.0	-9.4	Horiz
^	3659.850M	48.5	+0.0 +0.0 +0.2	+0.6 -33.8 +0.2	+3.2 +31.7	+0.0 +0.4	+0.0	+0.0	50.8	54.0	-3.2	Horiz
7	2709.030M	44.4	+0.0 +0.0 +0.2	+0.5 -34.1 +0.2	+2.9 +29.5	+0.0 +0.5	+0.0	+0.0	43.9	54.0	-10.1	Horiz
8	2744.830M	44.1	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0	+0.0	43.5	54.0	-10.5	Vert
9	3612.030M	40.7	+0.0 Ave +0.3	+0.5 -33.8 +0.3	+3.3 +31.7	+0.0 +0.4	+0.0	+0.0	43.1	54.0	-10.9	Horiz
^	3612.030M	47.2	+0.0 +0.0 +0.3	+0.5 -33.8 +0.3	+3.3 +31.7	+0.0 +0.4	+0.0	+0.0	49.6	54.0	-4.4	Horiz
11	2745.110M	43.5	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0	+0.0	42.9	54.0	-11.1	Horiz
12	2780.460M	42.8	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0	+0.0	42.2	54.0	-11.8	Vert
13	2780.440M	42.8	+0.0 +0.0 +0.3	+0.5 -34.1 +0.3	+2.9 +29.3	+0.0 +0.5	+0.0	+0.0	42.2	54.0	-11.8	Horiz
14	2709.070M	42.0	+0.0 +0.0 +0.2	+0.5 -34.1 +0.2	+2.9 +29.5	+0.0 +0.5	+0.0	+0.0	41.5	54.0	-12.5	Vert
15	1805.990M	70.7	+0.0 +0.0 +0.6	+0.4 -34.7 +0.6	+2.3 +27.3	+0.0 +0.3	+0.0	+0.0	66.9	91.0	-24.1	Vert

16	833.200M	29.0	+0.0	+0.3	+1.5	+2.2	+0.0	62.9	91.0	-28.1	Vert/
			+29.9	+0.0	+0.0	+0.0					
			+0.0								
17	1806.000M	66.0	+0.0	+0.4	+2.3	+0.0	+0.0	62.2	91.0	-28.8	Horiz
			+0.0	-34.7	+27.3	+0.3					
			+0.6								
18	1853.560M	65.4	+0.0	+0.4	+2.3	+0.0	+0.0	62.0	91.0	-29.0	Horiz
			+0.0	-34.7	+27.7	+0.3					
			+0.6								
19	1830.020M	65.5	+0.0	+0.4	+2.3	+0.0	+0.0	61.9	91.0	-29.1	Horiz
			+0.0	-34.7	+27.5	+0.3					
			+0.6								
20	1830.030M	65.3	+0.0	+0.4	+2.3	+0.0	+0.0	61.7	91.0	-29.3	Vert
			+0.0	-34.7	+27.5	+0.3					
			+0.6								
21	1853.660M	64.4	+0.0	+0.4	+2.3	+0.0	+0.0	61.0	91.0	-30.0	Vert
			+0.0	-34.7	+27.7	+0.3					
			+0.6								
22	5560.800M	38.7	+0.0	+0.8	+4.7	+0.0	+0.0	46.1	91.0	-44.9	Vert
			+0.0	-33.6	+34.5	+0.5					
			+0.5								
23	5490.030M	38.4	+0.0	+0.8	+4.8	+0.0	+0.0	46.0	91.0	-45.0	Horiz
			+0.0	-33.6	+34.7	+0.5					
			+0.4								
24	5490.020M	38.0	+0.0	+0.8	+4.8	+0.0	+0.0	45.6	91.0	-45.4	Vert
			+0.0	-33.6	+34.7	+0.5					
			+0.4								
25	5560.810M	37.9	+0.0	+0.8	+4.7	+0.0	+0.0	45.3	91.0	-45.7	Horiz
			+0.0	-33.6	+34.5	+0.5					
			+0.5								
26	6320.990M	36.9	+0.0	+0.9	+4.8	+0.0	+0.0	44.8	91.0	-46.2	Vert
			+0.0	-34.0	+35.2	+0.6					
			+0.4								

Band Edge

Band Edge Summary

Operating Mode: Single Channel (Low and High)

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dB μ V/m @3m)	Limit (dB μ V/m @3m)	Results
614	GFSK (Level 3)	Int PCB	38.7	<46	Pass
902	GFSK (Level 3)	Int PCB	79.8	<98.5	Pass
928	GFSK (Level 3)	Int PCB	80.4	< 98.5	Pass
960	GFSK (Level 3)	Int PCB	43.1	<54	Pass
614	OOK (Level 3)	Int PCB	38.5	<46	Pass
902	OOK (Level 3)	Int PCB	86.5	<98.0	Pass
928	OOK (Level 3)	Int PCB	85.0	< 98.0	Pass
960	OOK (Level 3)	Int PCB	43.4	<54	Pass
614	OOK (Level 1)	Int PCB	38.8	<46	Pass
902	OOK (Level 1)	Int PCB	79.7	<91.0	Pass
928	OOK (Level 1)	Int PCB	78.4	< 91.0	Pass
960	OOK (Level 1)	Int PCB	42.9	<54	Pass



Band Edge Summary



Operating Mode: Hopping

Frequency (MHz)	Modulation	Ant. Type	Field Strength (dB μ V/m @3m)	Limit (dB μ V/m @3m)	Results
614	GFSK (Level 3)	Int PCB	38.7	<46	Pass
902	GFSK (Level 3)	Int PCB	79.6	<98.5	Pass
928	GFSK (Level 3)	Int PCB	79.8	< 98.5	Pass
960	GFSK (Level 3)	Int PCB	43.1	<54	Pass
614	OOK (Level 3)	Int PCB	38.5	<46	Pass
902	OOK (Level 3)	Int PCB	86.3	<98.0	Pass
928	OOK (Level 3)	Int PCB	84.9	< 98.0	Pass
960	OOK (Level 3)	Int PCB	43.1	<54	Pass
614	OOK (Level 1)	Int PCB	38.7	<46	Pass
902	OOK (Level 1)	Int PCB	79.2	<91.0	Pass
928	OOK (Level 1)	Int PCB	77.8	< 91.0	Pass
960	OOK (Level 1)	Int PCB	43.1	<54	Pass



Band Edge Plots



GFSK (Level 3) Single Channel (Low and High)

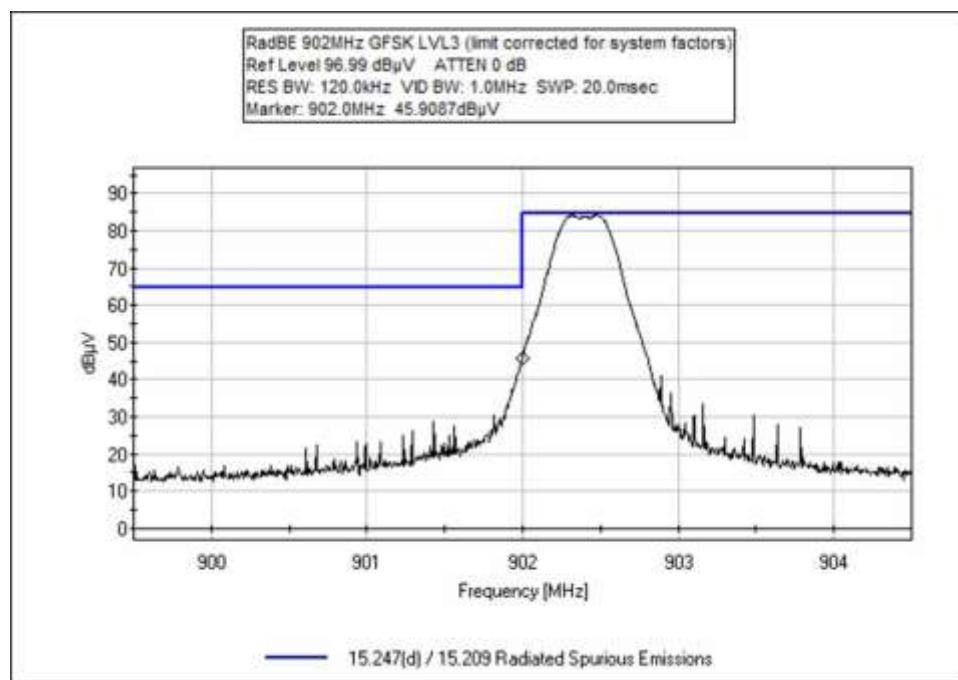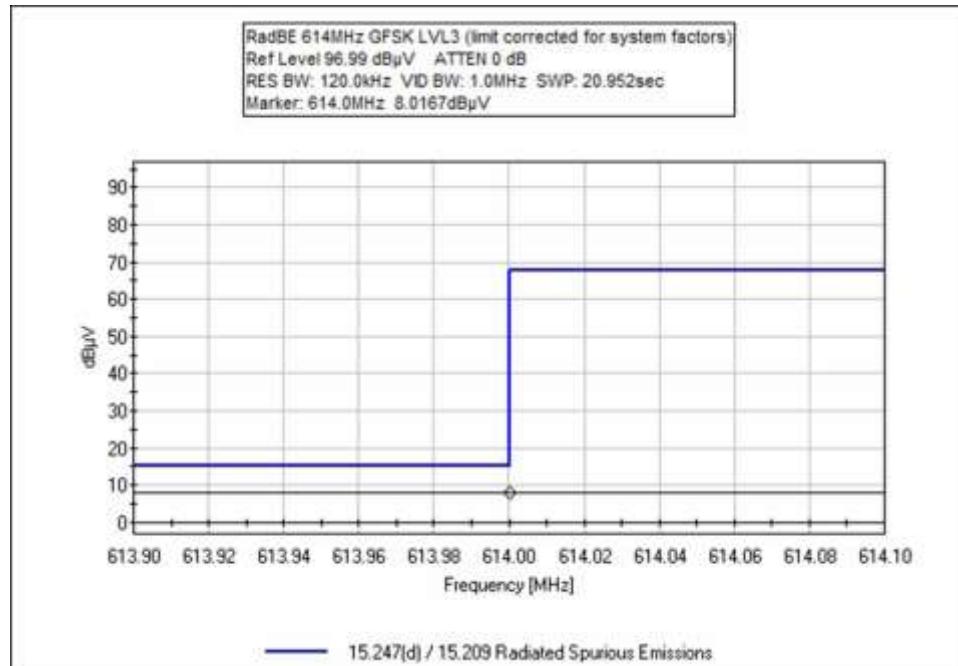

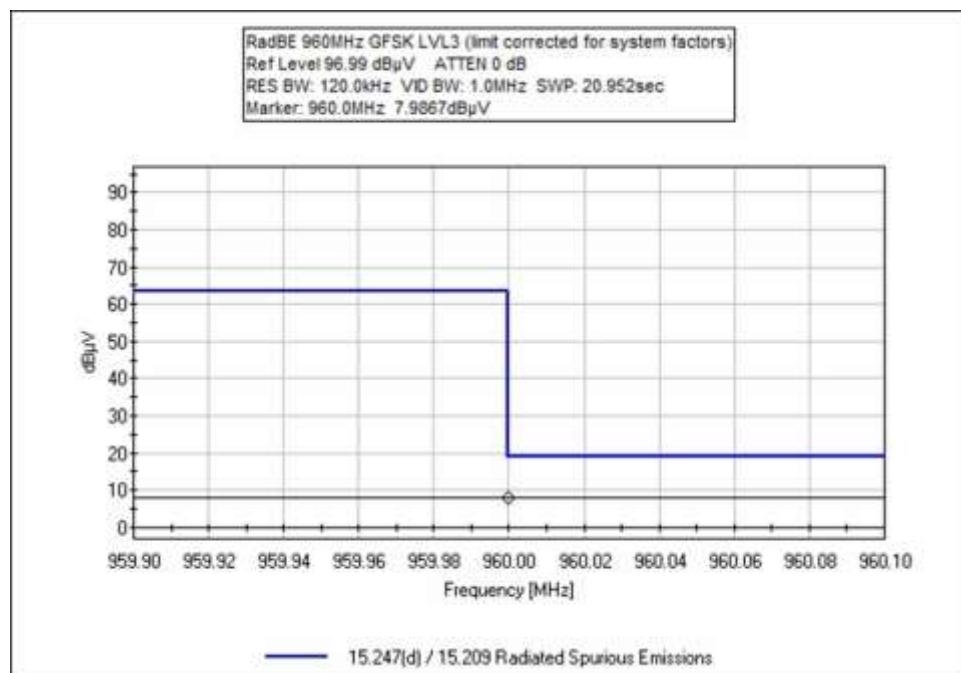
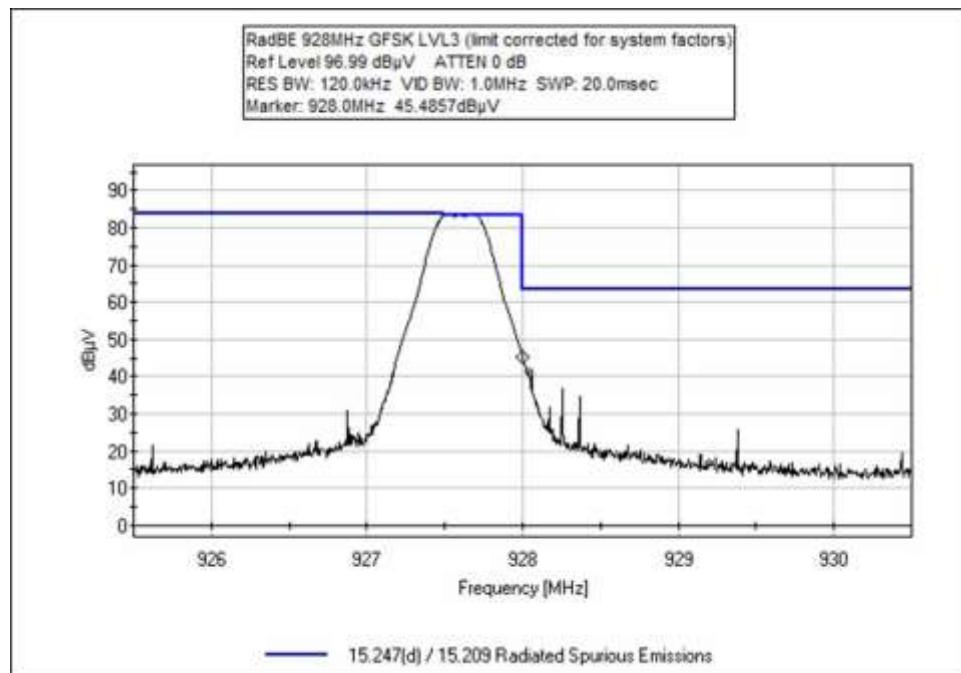




OOK (Level 3) Single Channel (Low and High)

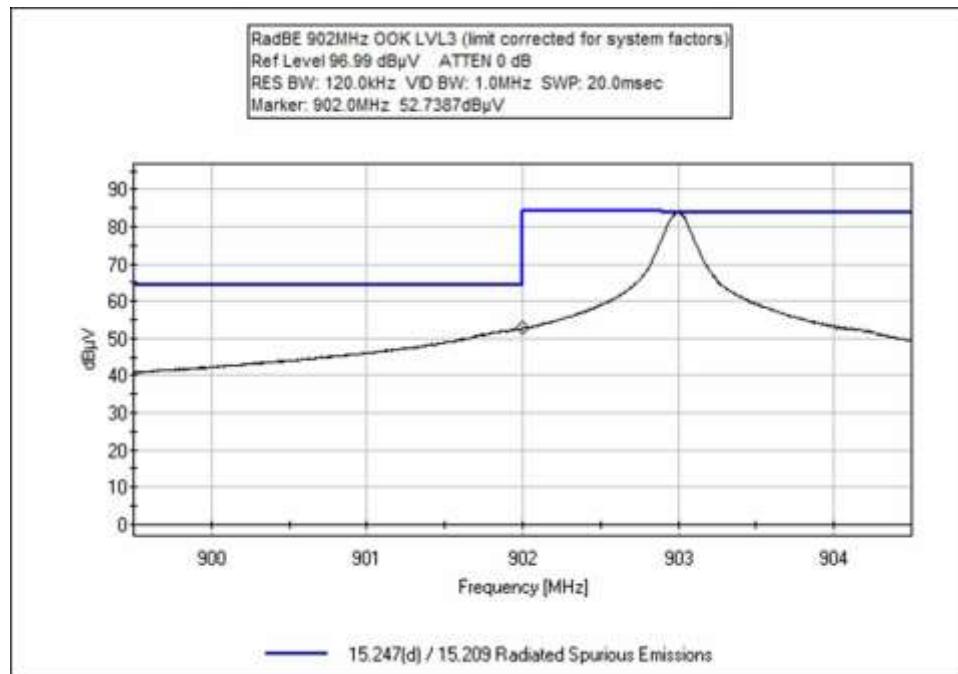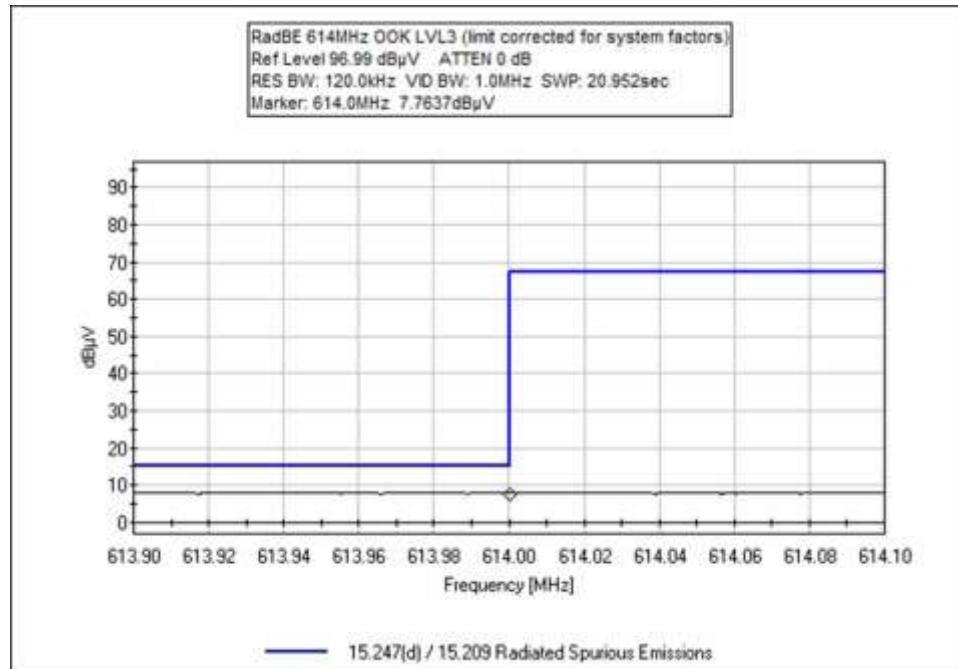

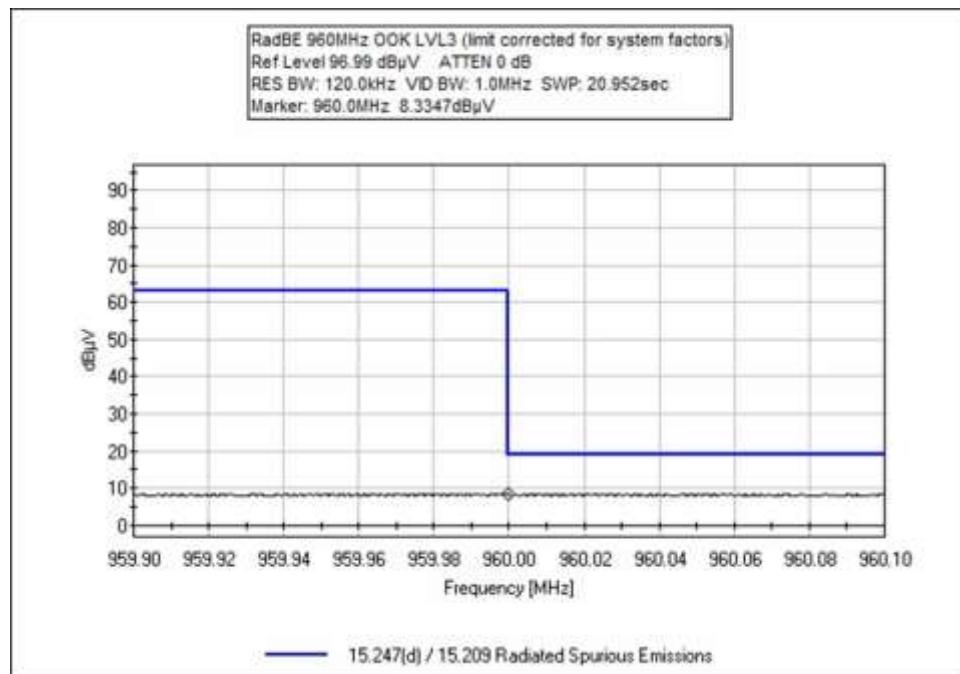
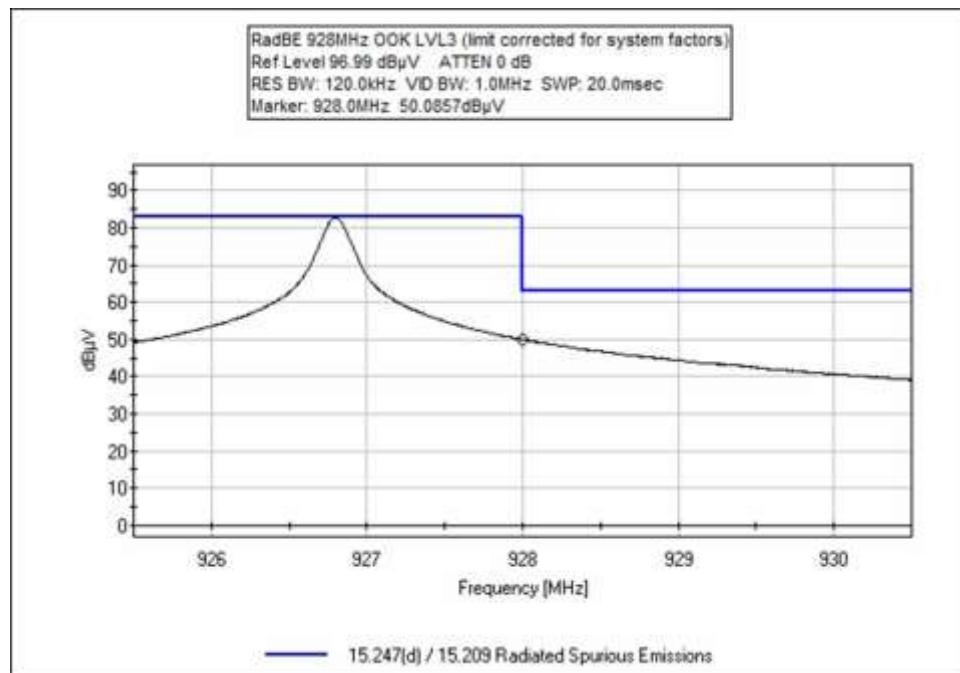




OOK (Level 1) Single Channel (Low and High)

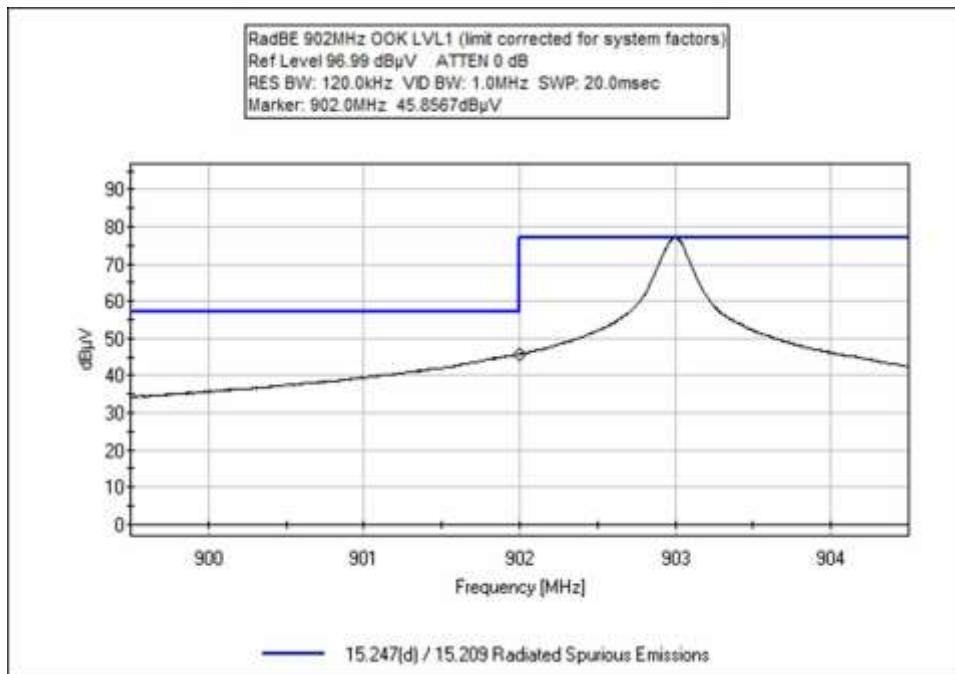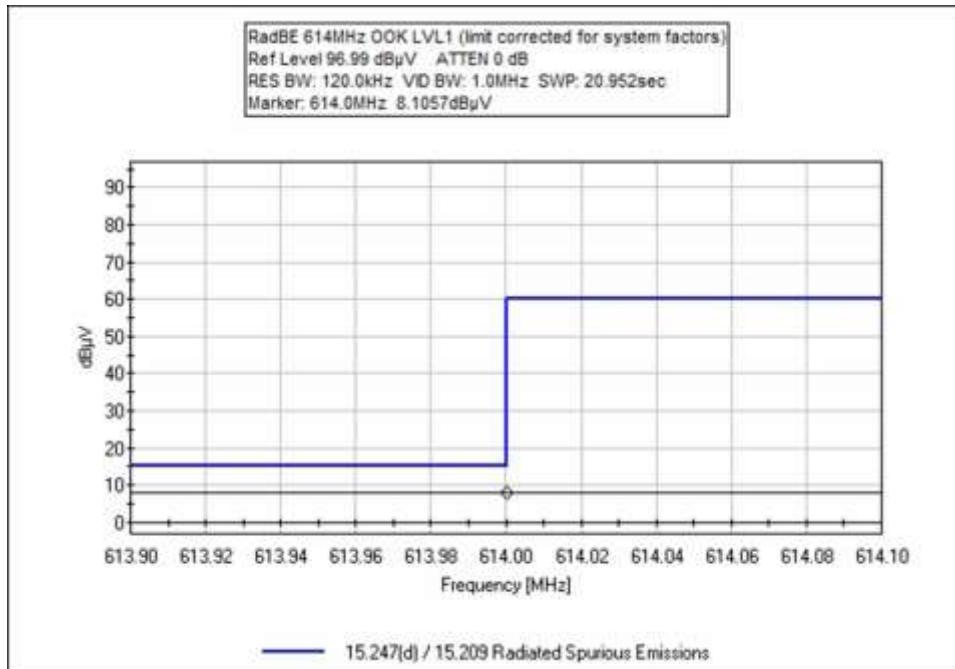

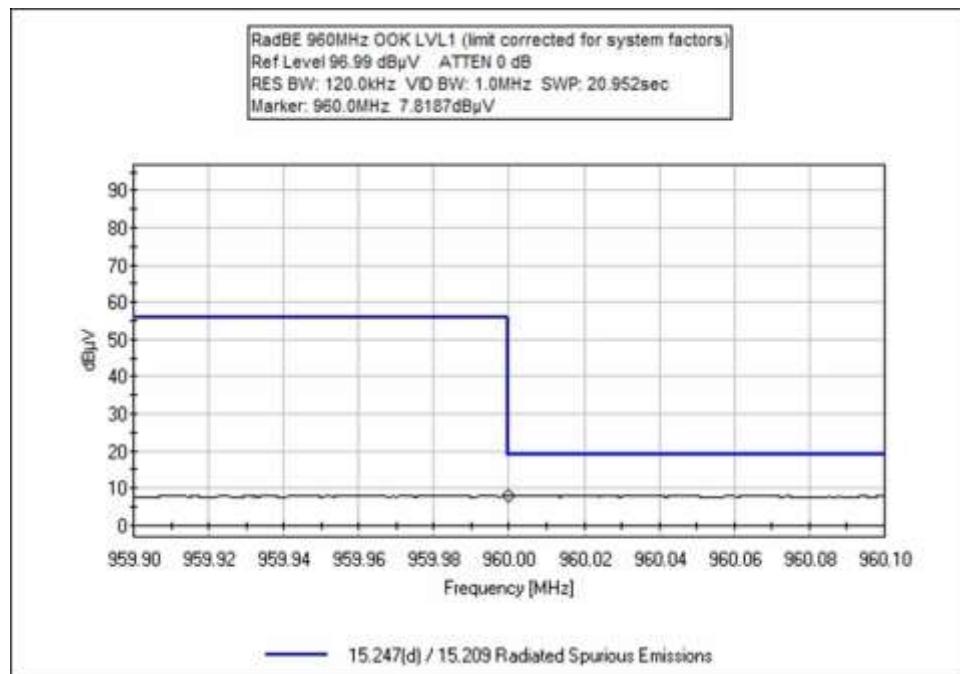
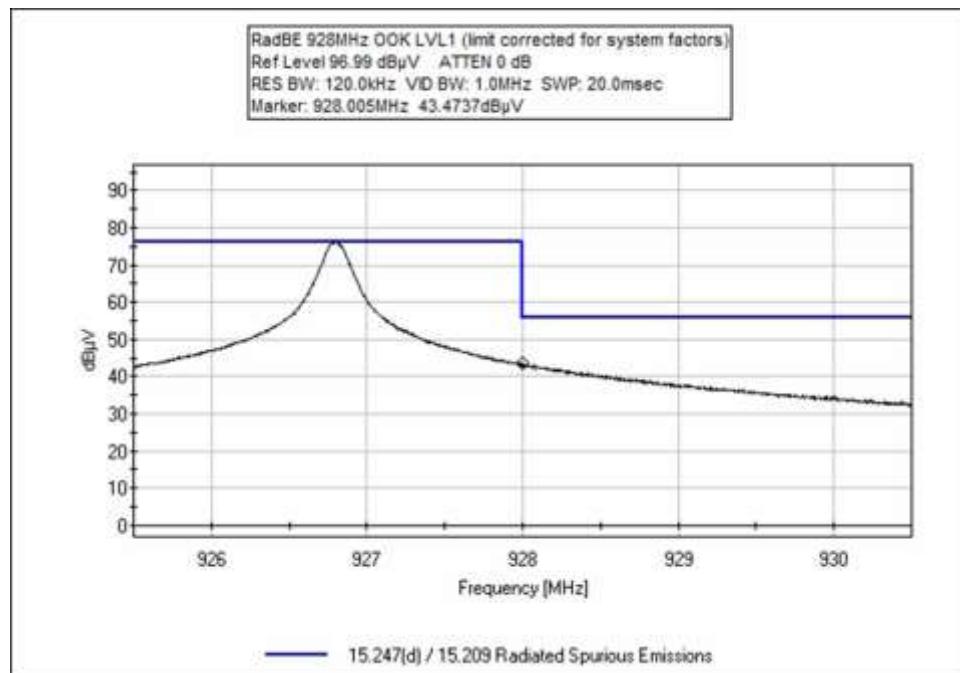




GFSK (Level 3) Hopping

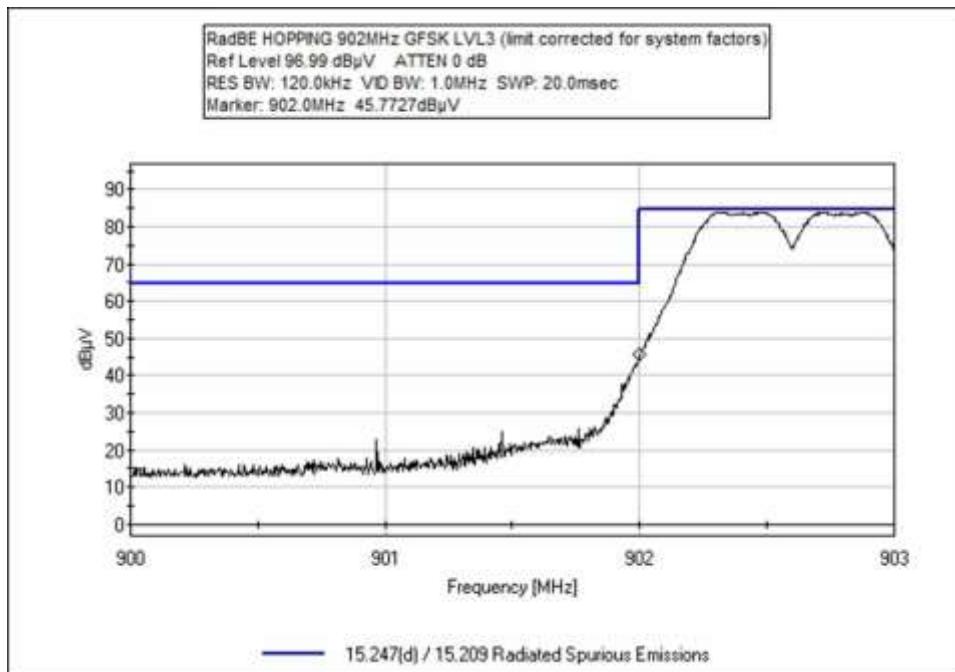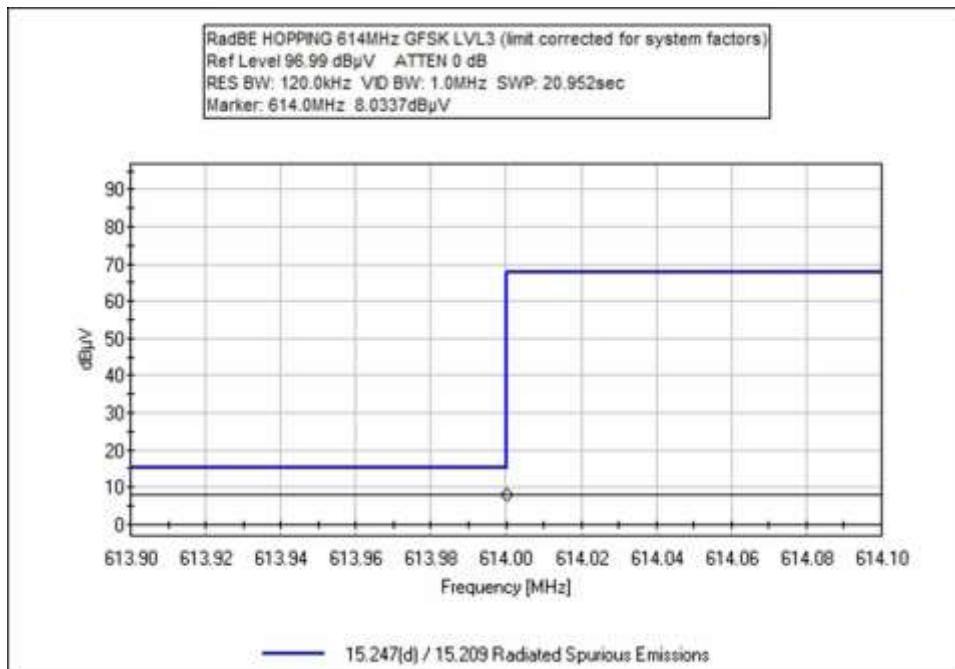

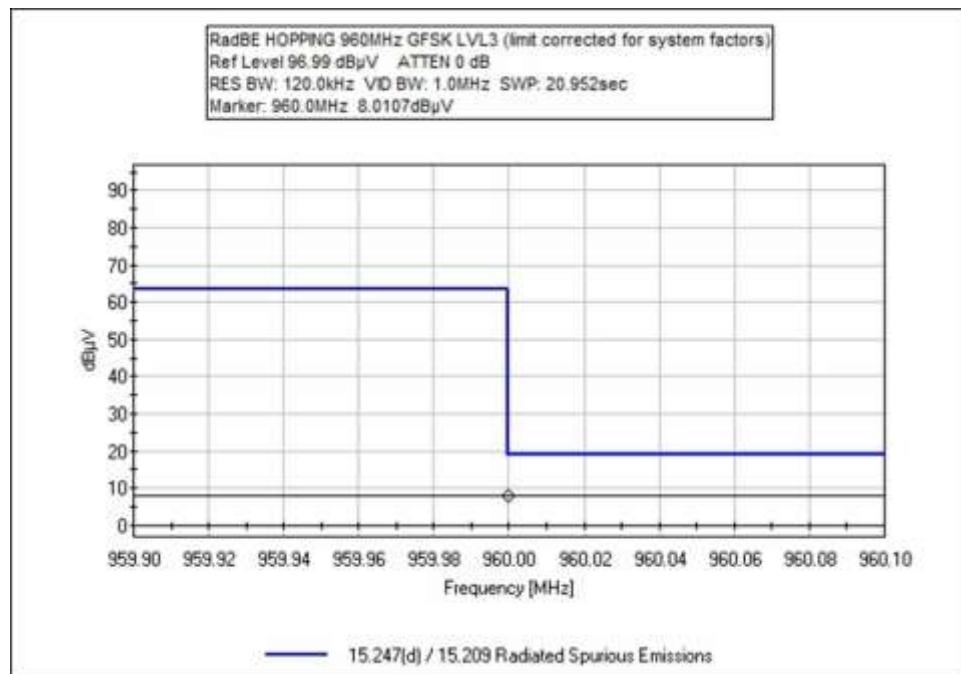
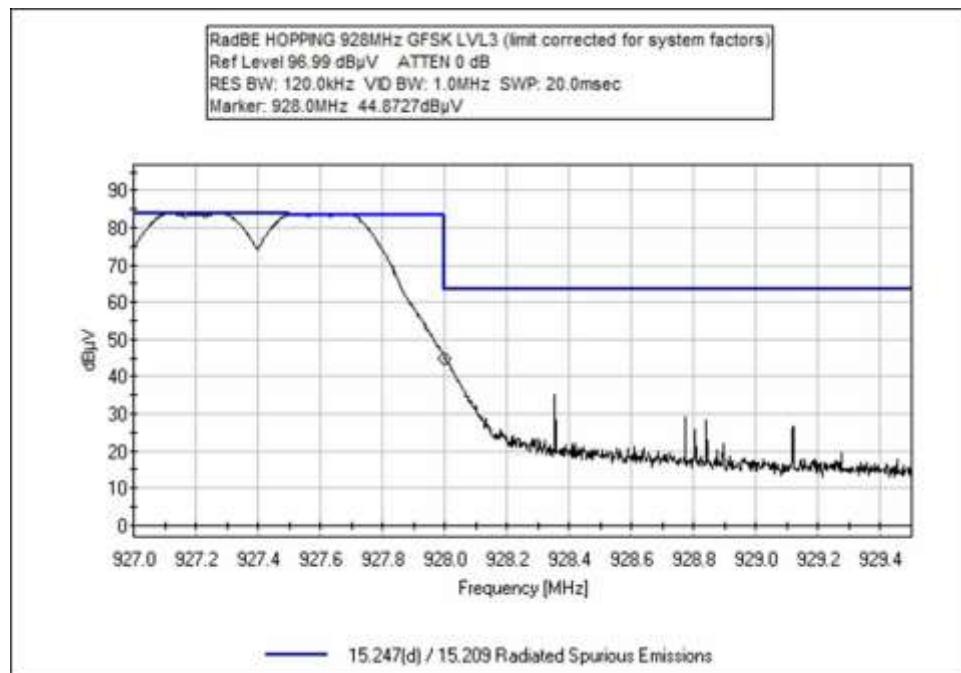




OOK (Level 3) Hopping

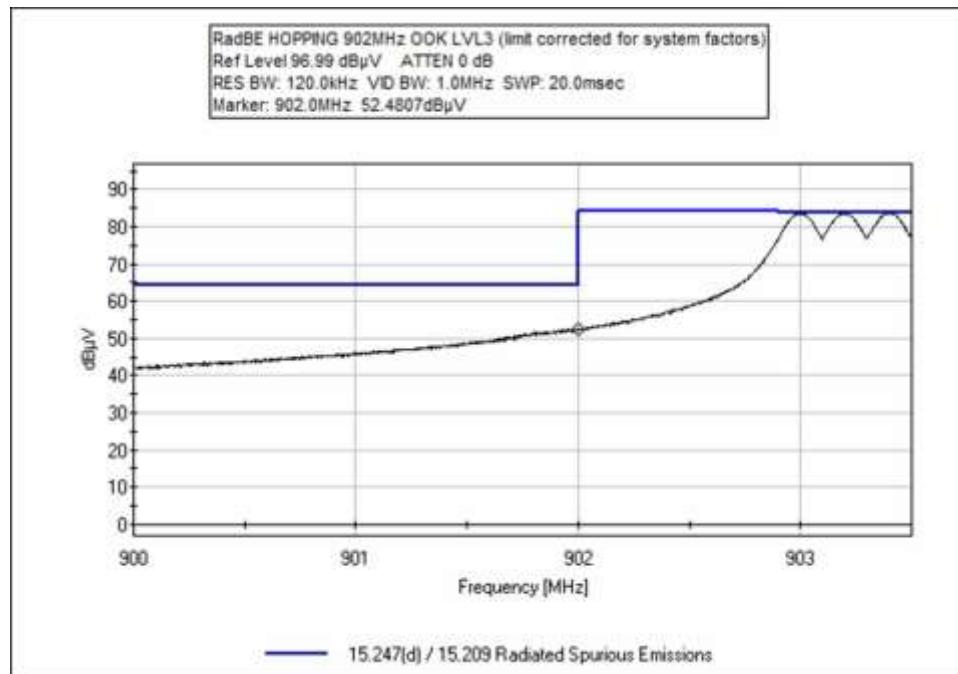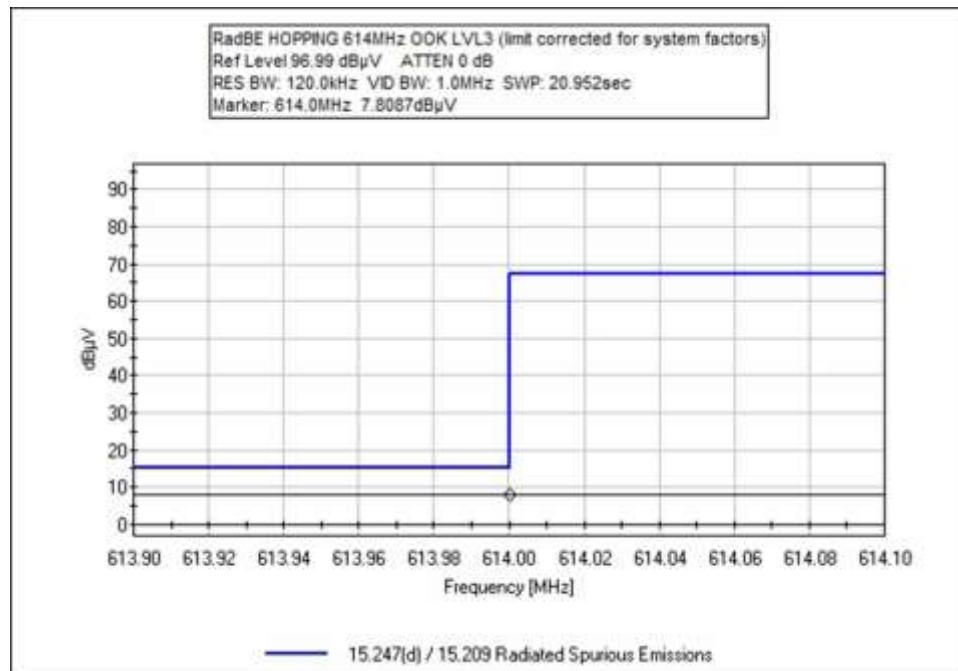

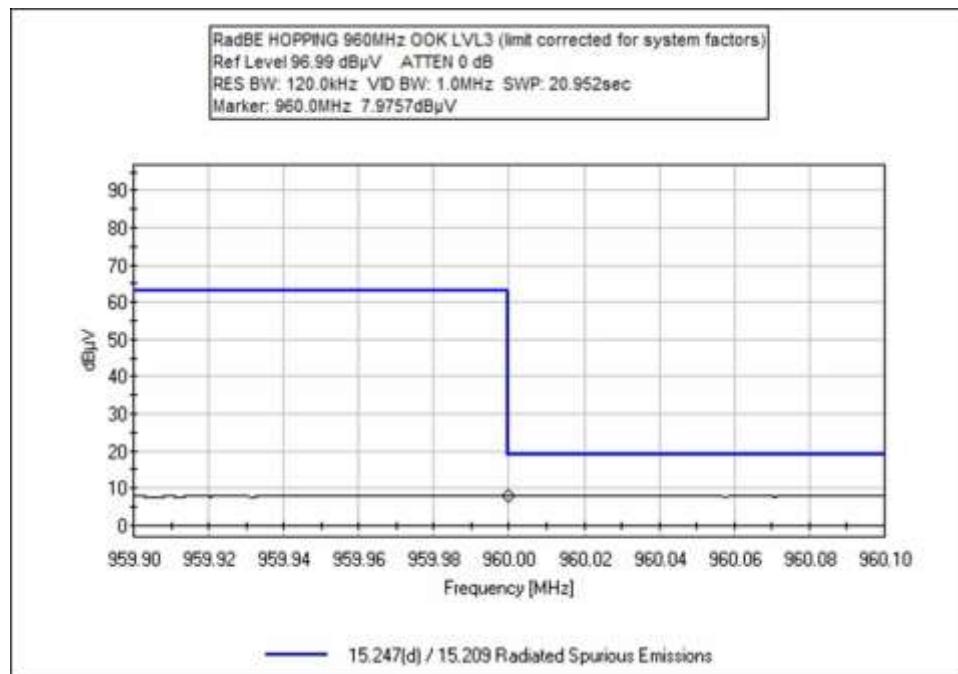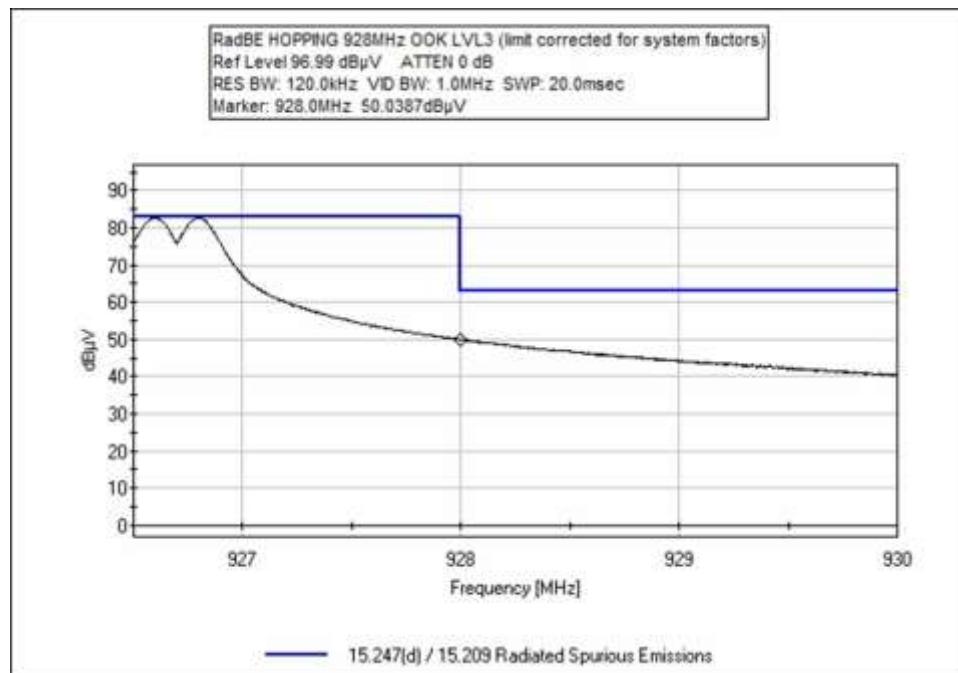

OOK (Level 1) Hopping

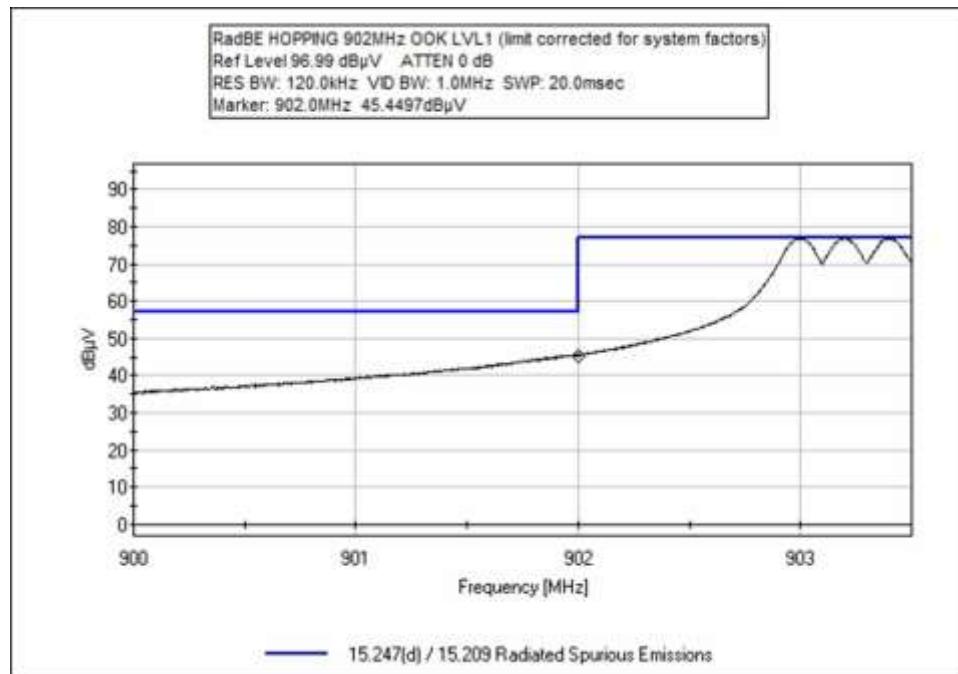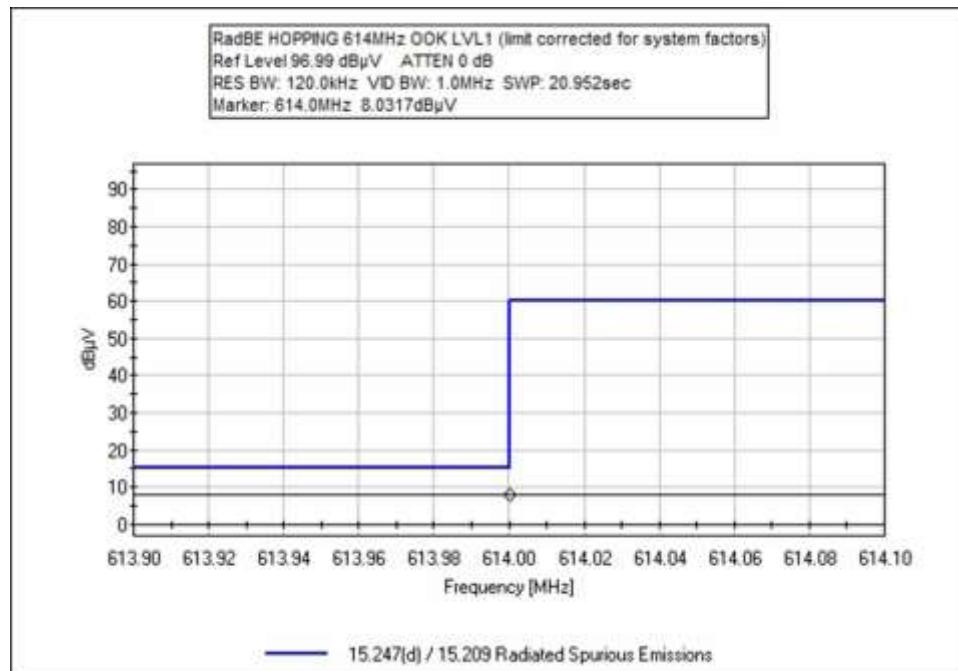

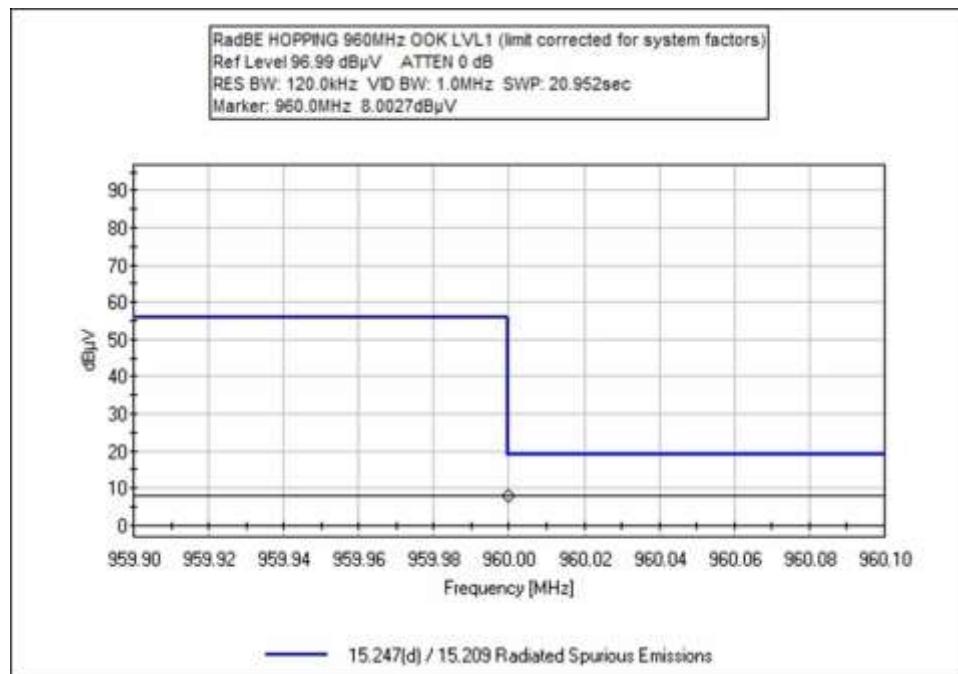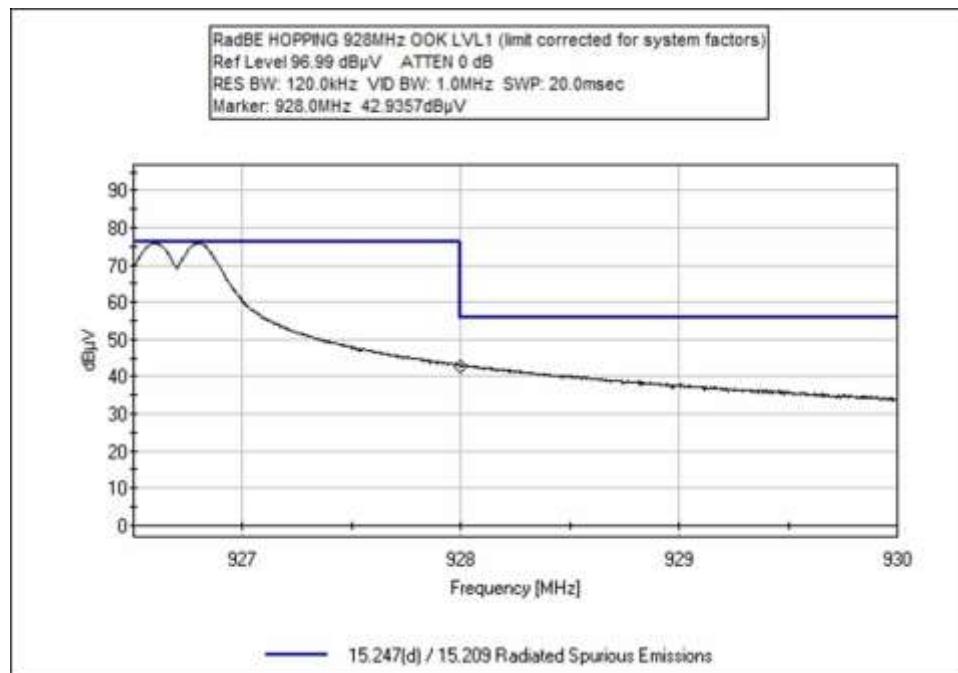

Test Setup / Conditions / Data

Test Location: CKC Laboratories • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC (4362)
 Customer: **Itron, Inc.**
 Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
 Work Order #: **107148** Date: 8/17/2022
 Test Type: **Maximized Emissions** Time: 19:32:51
 Tested By: Michael Atkinson Sequence#: 19
 Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 24°C

Humidity: 46%

Pressure: 101.4kPa

Method: ANSI C63.10 (2013)

Frequency: Band Edge

Setup:

EUT is on foam table.

EUT is transmitting with modulation.

2 orientations investigated per manufacturer installed use case, worst case reported.

Horizontal and vertical antenna polarities investigated, worst case reported.

Modulation: GFSK Level 3

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T1	ANP06540	Cable	Heliax	1/17/2022	1/17/2024
T2	ANP06515	Cable	Heliax	5/23/2022	5/23/2024
T3	ANP05360	Cable	RG214	2/4/2022	2/4/2024
T4	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	T5				Table	dB μ V/m	dB μ V/m		
1	614.000M	8.0	+0.0	+0.3	+1.3	+1.9	+0.0	38.7	46.0	-7.3	Horiz
	QP		+27.2								hopping
2	614.000M	8.0	+0.0	+0.3	+1.3	+1.9	+0.0	38.7	46.0	-7.3	Horiz
	QP		+27.2								SC
3	960.000M	8.0	+0.0	+0.3	+1.7	+2.4	+0.0	43.1	54.0	-10.9	Horiz
	QP		+30.7								SC
4	960.000M	8.0	+0.0	+0.3	+1.7	+2.4	+0.0	43.1	54.0	-10.9	Horiz
	QP		+30.7								hopping
5	928.000M	45.5	+0.0	+0.3	+1.6	+2.4	+0.0	80.4	98.5	-18.1	Horiz
			+30.6								SC
6	928.000M	44.9	+0.0	+0.3	+1.6	+2.4	+0.0	79.8	98.5	-18.7	Horiz
			+30.6								hopping
7	902.000M	45.9	+0.0	+0.3	+1.6	+2.3	+0.0	79.7	98.5	-18.8	Horiz
			+29.6								SC
8	902.000M	45.8	+0.0	+0.3	+1.6	+2.3	+0.0	79.6	98.5	-18.9	Horiz
			+29.6								hopping



Test Location: CKC Laboratories • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC (4362)
Customer: **Itron, Inc.**
Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
Work Order #: **107148** Date: 8/15/2022
Test Type: **Maximized Emissions** Time: 19:44:10
Tested By: Michael Atkinson Sequence#: 9
Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 24°C

Humidity: 46%

Pressure: 101.4kPa

Method: ANSI C63.10 (2013)

Frequency: Fundamental

Setup:

EUT is on foam table.

EUT is transmitting with modulation.

2 orientations investigated per manufacturer installed use case, worst case reported.

Horizontal and vertical antenna polarities investigated, worst case reported.

Modulation: OOK Level 3

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T1	ANP06540	Cable	Heliax	1/17/2022	1/17/2024
T2	ANP06515	Cable	Heliax	5/23/2022	5/23/2024
T3	ANP05360	Cable	RG214	2/4/2022	2/4/2024
T4	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq MHz	Rdng dB μ V	T1 dB	T2 dB	T3 dB	T4 dB	Dist Table	Corr dB μ V/m	Spec dB μ V/m	Margin dB	Polar Ant
1	614.000M QP	7.8	+0.3	+1.3	+1.9	+27.2	+0.0	38.5	46.0	-7.5	Horiz Hopping
2	614.000M QP	7.8	+0.3	+1.3	+1.9	+27.2	+0.0	38.5	46.0	-7.5	Horiz SC
3	960.000M QP	8.3	+0.3	+1.7	+2.4	+30.7	+0.0	43.4	54.0	-10.6	Horiz SC
4	960.000M QP	8.0	+0.3	+1.7	+2.4	+30.7	+0.0	43.1	54.0	-10.9	Horiz Hopping
5	902.000M	52.7	+0.3	+1.6	+2.3	+29.6	+0.0	86.5	98.0	-11.5	Horiz SC
6	902.000M	52.5	+0.3	+1.6	+2.3	+29.6	+0.0	86.3	98.0	-11.7	Horiz Hopping
7	928.000M	50.1	+0.3	+1.6	+2.4	+30.6	+0.0	85.0	98.0	-13.0	Horiz SC
8	928.000M	50.0	+0.3	+1.6	+2.4	+30.6	+0.0	84.9	98.0	-13.1	Horiz Hopping



Test Location: CKC Laboratories • 22116 23rd Drive SE, Suite A • Bothell, WA. 98021 • 1-800-500-4EMC (4362)
Customer: **Itron, Inc.**
Specification: **15.247(d) / 15.209 Radiated Spurious Emissions**
Work Order #: **107148** Date: 8/15/2022
Test Type: **Maximized Emissions** Time: 18:58:05
Tested By: Michael Atkinson Sequence#: 8
Software: EMITest 5.03.20

Equipment Tested:

Device	Manufacturer	Model #	S/N
Configuration 2			

Support Equipment:

Device	Manufacturer	Model #	S/N
Configuration 2			

Test Conditions / Notes:

Environmental Conditions:

Temperature: 24°C

Humidity: 46%

Pressure: 101.4kPa

Method: ANSI C63.10 (2013)

Frequency: Fundamental

Setup:

EUT is on foam table.

EUT is transmitting with modulation.

2 orientations investigated per manufacturer installed use case, worst case reported.

Horizontal and vertical antenna polarities investigated, worst case reported.

Modulation: OOK Level 1

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN02872	Spectrum Analyzer	E4440A	11/29/2021	11/29/2023
T2	ANP06540	Cable	Heliax	1/17/2022	1/17/2024
T3	ANP06515	Cable	Heliax	5/23/2022	5/23/2024
T4	ANP05360	Cable	RG214	2/4/2022	2/4/2024
T5	AN03628	Biconilog Antenna	3142E	6/3/2021	6/3/2023

Measurement Data:

Reading listed by margin.

Test Distance: 3 Meters

#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	dB μ V	dB	dB	dB	dB	Table	dB μ V/m	dB μ V/m	dB	Ant
1	614.000M	8.1	+0.0	+0.3	+1.3	+1.9	+0.0	38.8	46.0	-7.2	Horiz
	QP		+27.2						SC		
2	614.000M	8.0	+0.0	+0.3	+1.3	+1.9	+0.0	38.7	46.0	-7.3	Horiz
	QP		+27.2						Hopping		
3	960.000M	8.0	+0.0	+0.3	+1.7	+2.4	+0.0	43.1	54.0	-10.9	Horiz
	QP		+30.7						Hopping		
4	960.000M	7.8	+0.0	+0.3	+1.7	+2.4	+0.0	42.9	54.0	-11.1	Horiz
	QP		+30.7						SC		
5	902.000M	45.9	+0.0	+0.3	+1.6	+2.3	+0.0	79.7	91.0	-11.3	Horiz
			+29.6						SC		
6	902.000M	45.4	+0.0	+0.3	+1.6	+2.3	+0.0	79.2	91.0	-11.8	Horiz
			+29.6						Hopping		
7	928.005M	43.5	+0.0	+0.3	+1.6	+2.4	+0.0	78.4	91.0	-12.6	Horiz
			+30.6						SC		
8	928.000M	42.6	+0.0	+0.3	+1.6	+2.4	+0.0	77.8	91.0	-13.5	Horiz
			+30.6						Hopping		

Test Setup Photo(s)



Orientation 1



Orientation 2



Below 1GHz



Above 1GHz

SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter
4.73 dB	Radiated Emissions
3.34 dB	Mains Conducted Emissions
3.30 dB	Disturbance Power

Uncertainties reported are worst case for all CKC Laboratories' sites and represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

Unless otherwise indicated, the following configuration parameters are used for equipment setup: The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in dB μ V/m, the spectrum analyzer reading in dB μ V was corrected by using the following formula. This reading was then compared to the applicable specification limit. Individual measurements were compared with the displayed limit value in the margin column. The margin was calculated based on subtracting the limit value from the corrected measurement value; a positive margin represents a measurement exceeding the limit, while a negative margin represents a measurement less than the limit.

SAMPLE CALCULATIONS	
Meter reading	(dB μ V)
+ Antenna Factor	(dB/m)
+ Cable Loss	(dB)
- Distance Correction	(dB)
- Preamplifier Gain	(dB)
= Corrected Reading	(dB μ V/m)

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. Unless otherwise specified, the following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE			
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	9 kHz	150 kHz	200 Hz
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "positive peak" detector mode. Whenever a "quasi-peak" or "average" reading was recorded, the measurement was annotated with a "QP" or an "Ave" on the appropriate rows of the data sheets. In cases where quasi-peak or average limits were employed and data exists for multiple measurement types for the same frequency then the peak measurement was retained in the report for reference, however the numbering for the affected row was removed and an arrow or caret ("^") was placed in the far left-hand column indicating that the row above takes precedence for comparison to the limit. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer or receiver recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature called "peak hold," the measurement device had the ability to measure intermittent or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

Quasi-peak measurements were taken using the quasi-peak detector when the true peak values exceeded or were within 2 dB of a quasi-peak specification limit. Additional QP measurements may have been taken at the discretion of the operator.

Average

Average measurements were taken using the average detector when the true peak values exceeded or were within 2 dB of an average specification limit. Additional average measurements may have been taken at the discretion of the operator. If the specification or test procedure requires trace averaging, then the averaging was performed using 100 samples or as required by the specification. All other average measurements are performed using video bandwidth averaging. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.