



Compliance Testing, LLC
Previously Flom Test Lab
EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268
fax: (480) 926-3598
<http://www.ComplianceTesting.com>
info@ComplianceTesting.com

Test Report

Prepared for: Bird Technologies

Model: 3-26075-XX

Description: 700MHz Public Safety Class B Signal Booster Module

Serial Number: N/A

FCC ID: EZZ26075

To

FCC Part 90

Date of Issue: November 2, 2016

On the behalf of the applicant:

Bird Technologies
30303 Aurora Road
Cleveland, OH 44139

Attention of:

Tim O'Brien, Technical Product Manager
Ph: (440)519-2194
E-Mail: tobrien@bird-technologies.com

Prepared By
Compliance Testing, LLC
1724 S. Nevada Way
Mesa, AZ 85204
(480) 926-3100 phone / (480) 926-3598 fax
www.compliancetesting.com
Project No: p1680006

Alex Macon
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing
All results contained herein relate only to the sample tested



Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	August 16, 2016	Alex Macon	Original Document
2.0	October 24, 2016	Alex Macon	Fixed typo regarding Annex C and added note on page 15. Added clarification note on page 14 regarding 90.543 (e). updated emissions mask details table
3.0	November 2, 2016	Amanda Reed	Changed frequency range 763–775MHz to 764-775MHz



Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	6
Test Result Summary	8
AGC Threshold	9
Out of Band Rejection	10
Conducted Output Power and Amplifier Gain	12
Conducted Spurious Emissions	13
Radiated Spurious Emissions	15
Emission Masks (Occupied Bandwidth)	16
Intermodulation	17
Noise Figure Test	18
Test Equipment Utilized	19



Compliance Testing, LLC

Testing since 1963

ILAC / A2LA

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer joint ISO-ILAC-IAF Communiqué dated January 2009)

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



FCC Site Reg. #349717

IC Site Reg. #2044A-2

Non-accredited tests contained in this report:

N/A



The Applicant has been cautioned as to the following:

15.21: Information to the User

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

15.27(a): Special Accessories

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations Part 90.219, KDB 935210 D05 Booster, and FCC Part 2, where appropriate.

Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing.

In accordance with ANSI/TIA 603C, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temp (°C)	Humidity (%)	Pressure (mbar)
25.7 – 27.1	27.8 – 31.1	964.2 – 967.8

Measurement results, unless otherwise noted, are worst-case measurements.

EUT Description

Model: 3-26075-XX

Description: 700MHz Public Safety Class B Signal Booster Module

Firmware: N/A

Software: N/A

Serial Number: N/A

Additional Information:

The EUT is classified as a Part 90 PS **Class B** industrial signal booster.

The EUT is a Bi-directional Amplifier that operates in the Frequency ranges listed in Table 1.

System Power is 120 VAC @ 60 Hz. The device also has a selection for battery backup at 12 VDC

The emission designators listed in Table 1 are representative emission designators used by transmitters whose signal is amplified by this booster.

Table 1

	Frequency (MHz)	Emission Designators
Downlink	764 – 775	F3E, G1D, G1E, W7W, F2D
Uplink	793 - 805	F3E, G1D, G1E, W7W, F2D

EUT Operation during Tests

30 dB, 50 watt attenuators were installed on both RF ports for all tests.



Compliance Testing, LLC

Testing since 1963

Accessories: None

Cables:

Qty	Description	Length (M)	Shielding Y/N	Shielded Hood Y/N	Termination
1	AC Power Cable	2	N	N	N/A

Modifications: None



Test Result Summary

Specification	Test Name	Pass, Fail, N/A	Comments
KDB 935210 D05	AGC Threshold	Pass	
KDB 935210-D03	Out of Band Rejection	Pass	
2.1046	Output Power (Conducted)	Pass	
90.210 2.1049	Occupied Bandwidth (Emission Masks)	Pass	
2.1051 90.543	Spurious Emissions (Transmitter Conducted)	Pass	
2.1053	Radiated Spurious Emissions	Pass	
KDB 935210-D03	Intermodulation	Pass	
90.219(e)(2)	Noise Figure	Pass	
90.213	Frequency Stability (Temperature Variation)	N/A	EUT does not perform frequency translation
90.213	Frequency Stability (Voltage Variation)	N/A	EUT does not perform frequency translation



AGC Threshold

Engineer: Alex Macon

Test Date: 8/8/16

Test Procedure

A signal generator producing a CW signal was connected to the input of the EUT. A spectrum analyzer was connected to the EUT in order to monitor the output power levels. The input power level was increase in 1 dB increments until the power no longer increased. The input levels were recorded in the table below.

Spectrum Analyzer settings

Power Channel integration

RBW = 1-5% of EBW

Video BW = 3x RBW

Test Setup



Mobile to Base

Tuned Frequency (MHz)	AGC Threshold (dBm)
799	-46.41

Base to Mobile

Tuned Frequency (MHz)	AGC Threshold (dBm)
769	-47.41



Out of Band Rejection

Engineer: Alex Macon

Test Date: 8/8/16


Test Procedure

The EUT was connected to a spectrum analyzer through a 30 dB power attenuator. A signal generator was utilized to produce a swept CW signal with the RF input level set to 3 dB below the AGC Threshold level. The Uplink and Downlink filter response and the -20 dB bandwidth were measured. The marker table function of the spectrum analyzer was used to show the peak amplitude in the passband and the -20 dB bandwidth of the pass band filter.

RBW = 100 KHz


Video BW = 3x RBW

Test Setup






Downlink Authorized Band Plot

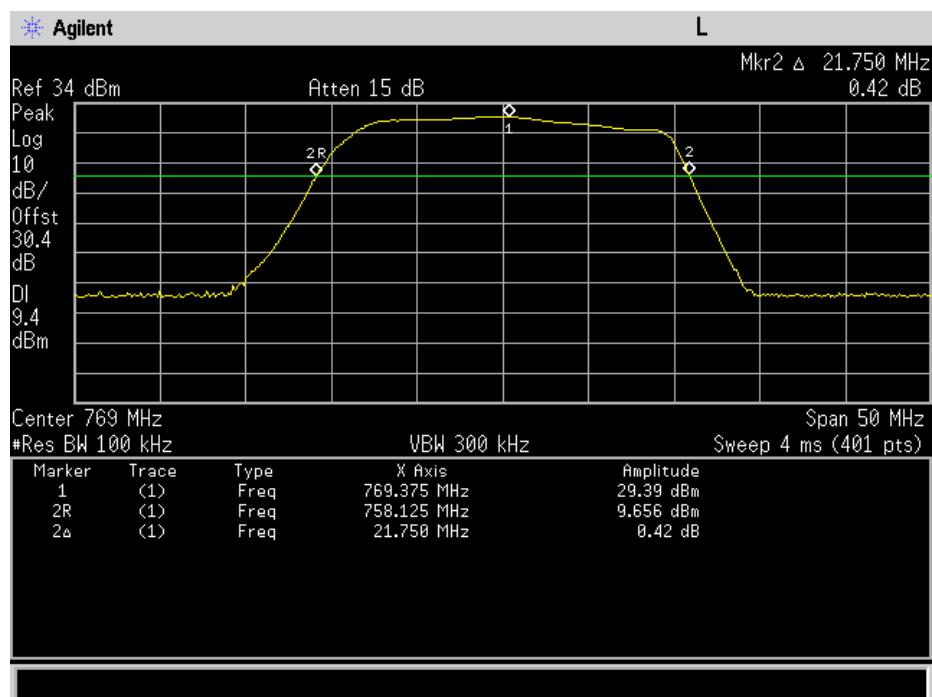

Uplink Authorized Band Plot

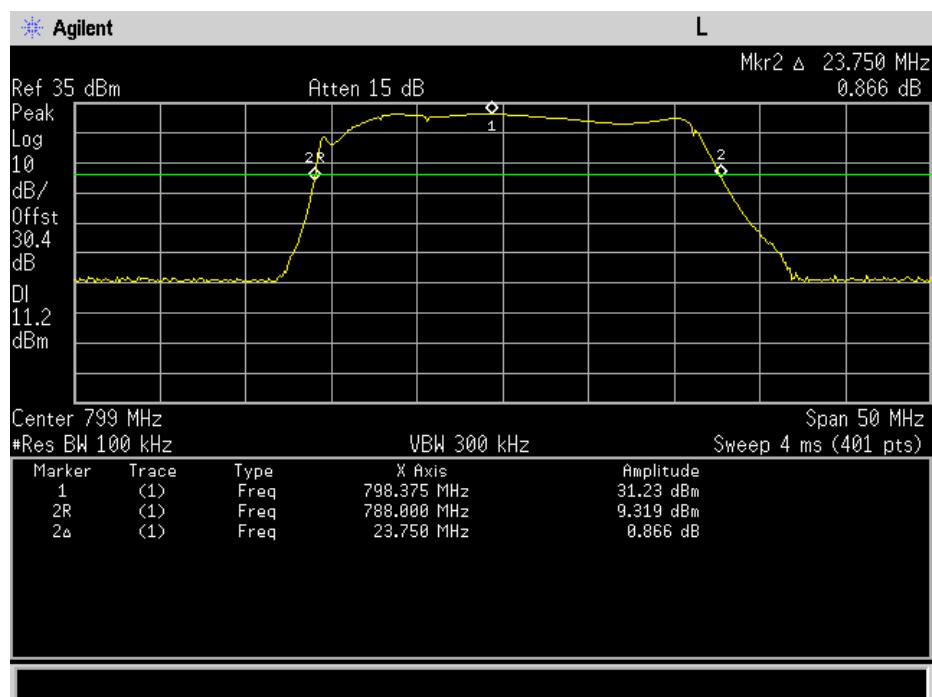



Conducted Output Power and Amplifier Gain

Engineer: Alex Macon

Test Date: 8/8/16

Test Procedure

The Equipment Under Test (EUT) was connected to a spectrum analyzer through a 30 dB Power attenuator. All cable and attenuator losses were input into the spectrum analyzer as a reference level offset to ensure accurate readings were obtained.

A CW signal was utilized, set to the frequency of the peak amplitude measured in the Out of Band Rejection test. The RF input signal level was set to 0.2 dB below the AGC Threshold.


RBW = 100 kHz

Video BW = 3x RBW

The Input and Output power levels were recorded and the gain was calculated using the following formula:

$$\text{Gain (dB)} = \text{Output Power (dBm)} - \text{Input Power (dBm)}$$

Test Setup



Output Power and Gain Test Results

Tuned Frequency (MHz)	Input Power (dBm)	Output Power (dBm)	Gain (dB)
769	-47.61	32.8	80.41
799	-46.61	34.69	81.30

Radiated Output Power

Radiated Power (ERP) is dependent on the cable loss and antennas used when installed.

The user manual specification for Output Power is $33 \text{ dBm} \pm 1 \text{ dB}$.

OLC (Output Level Control)

The user manual contains the following statement:

“Output power is limited by an Output Level Control (OLC) so as not to exceed the 5 Watt ERP FCC specification or not to exceed the user output power limit setting.”



Conducted Spurious Emissions

Engineer: Alex Macon

Test Date: 8/8/16

Test Procedure

The Equipment Under Test (EUT) was connected to a spectrum analyzer through a 30 dB Power attenuator. All cable and attenuator losses were input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings were obtained.

A CW signal was utilized, set to the center frequency of the passband.

The RF input signal level was set to 0.2 dB below the AGC Threshold.

The RBW was set to 100 kHz for measurements below 1 GHz and 1 MHz for measurements above 1 GHz.

The VBW was set to 3 times the RBW.

The frequency range from 30 MHz to the 10th harmonic of the passband frequency was observed and plotted.


The following formula was used for calculating the limits.

$$\text{Conducted Spurious Emissions Limit} = P1 - (43 + 10\log(P2)) = -13 \text{ dBm}$$

P1 = power in dBm

P2 = power in Watts

Test Setup

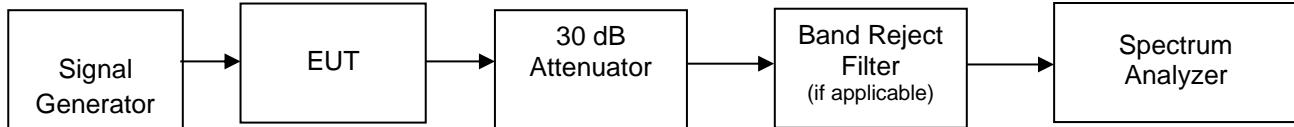

Refer to Annex A for Conducted Spurious Emissions Plots



For the 758-768 MHz and the 788-798 MHz bands of operation, the following additional spurious emissions requirements apply.

90.543 Emission Limitations

90.543(e) For operations in the 758-768 MHz and the 788-798 MHz bands, the power of any emission outside the licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, in accordance with the following:

- (1) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $76 + 10 \log (P)$ dB in a 6.25 kHz band segment, for base and fixed stations.
- (2) On all frequencies between 769-775 MHz and 799-805 MHz, by a factor not less than $65 + 10 \log (P)$ dB in a 6.25 kHz band segment, for mobile and portable stations.
- (3) On any frequency between 775-788 MHz, above 805 MHz, and below 758 MHz, by at least $43 + 10 \log (P)$ dB.
- (4) Compliance with the provisions of paragraphs (e)(1) and (2) of this section is based on the use of measurement instrumentation such that the reading taken with any resolution bandwidth setting should be adjusted to indicate spectral energy in a 6.25 kHz segment.
- (5) Compliance with the provisions of paragraph (e)(3) of this section is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kHz or greater. However, in the 100 kHz bands immediately outside and adjacent to the frequency block, a resolution bandwidth of 30 kHz may be employed.

***Note:** $76 + 10 \log (P)$ dB = 20dBm
 $43 + 10 \log (P)$ dB = -13dBm

Plots were taken in a 10kHz RBW. This is a more stringent measurement and the margin of the emission from the limit would only increase with a RBW correction factor applied.

90.543(f) For operations in the 758-775 MHz and 788-805 MHz bands, all emissions including harmonics in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

Since the limit is referenced to EIRP, the final data is computed using the Conducted Spurious Emission data and adding the BW correction factor (if required). The client has not provided an antenna with this device so a 0dBi antenna is referenced.

Refer to Annex A for the additional Conducted Spurious Emissions Plots for 90.543(e) emission limitations



Radiated Spurious Emissions

Engineer: Alex Macon

Test Date: 8/10/16

Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized. All cable and antenna correction factors were input into the spectrum analyzer ensuring an accurate measurement in ERP/EIRP with the resultant power in dBm. A signal generator was used to provide a CW signal. The EUT output was terminated into a 50 Ohm non-radiating load.

The RBW was set to 100 kHz for measurements below 1 GHz and 1 MHz for measurements above 1 GHz. The VBW was set to 3 times the RBW.


The following formula was used for calculating the limits:

$$\text{Radiated Spurious Emissions Limit} = P1 - (43 + 10\log(P2)) = -13\text{dBm}$$

P1 = power in dBm

P2 = power in Watts

Test Setup

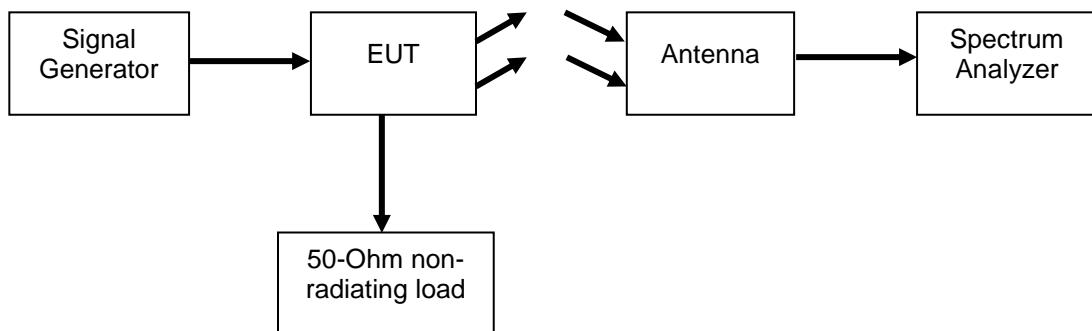

Test Results

No other emissions were detected. All emissions were less than -13 dBm.

*Note: The EUT was tested outside of its form factor in order to obtain the worst case emissions

Refer to Annex B for the Radiated Spurious Emissions Plots



Emission Masks (Occupied Bandwidth)

Engineer: Alex Macon

Test Date: 8/8/16

Test Procedure

The EUT was connected directly to a spectrum analyzer to verify that the EUT meets the required emissions mask. The EUT is a booster amplifier that does not contain a transmitter; representative emission designators used in the industry were used for the emission masks and are listed in Table 1.


The output signal was tested to the required mask.

The input signal was recorded and compared to the output signal.

Emission Masks were measured with the RF Input set to 0.2 dB below AGC and 3.0 dB above the AGC Threshold per the latest edition of KDB 935210 D05.

Emission Mask	Type of Modulation	Audio Frequency (kHz)	Deviation (kHz)
B	FM, C4FM	1.0	5.0
C	FM, C4FM	1.0	2.5

Test Setup

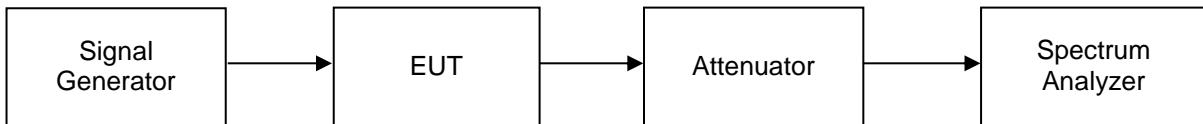

Refer to Annex C for Emission Mask plots



Intermodulation

Engineer: Alex Macon

Test Date: 8/8/16

Test Procedure

The EUT was connected to a spectrum analyzer through a 30 dB power attenuator. Two signal generators were utilized to produce a two tone signal with the 12.5 KHz channel spacing set so the intermodulation products fell within the operational band. Frequency at the maximum power from out of band rejection was utilized.


The Test was performed on both the uplink and downlink.

The RF input signal level was set to 0.2 dB below the AGC Threshold.

RBW = 300 Hz

Video BW = 3x RBW

Test Setup

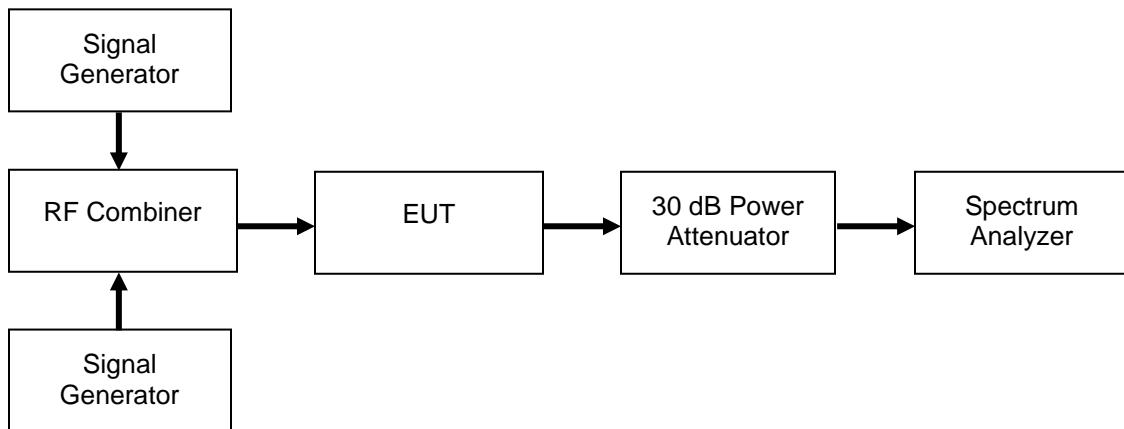

Refer to Annex D for Intermodulation plots



Noise Figure Test

Engineer: Alex Macon

Test Date: 8/10/16

Test Procedure

The test equipment was connected as shown in the test setup.

The noise figure was measured at the passband center frequency.

Noise figure was measured using the high power output.



Frequency (MHz)	Noise Figure (dB)	Limit (dB)	Margin (dB)
769	1.77	9	7.23
799	1.85	9	7.15

**Test Equipment Utilized**

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Bi-Log Antenna	Schaffner	CBL611C	i00267	3/1/16	3/1/18
Horn Antenna	ARA	DRG-118/A	i00271	6/16/16	6/16/18
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	5/26/16	5/26/17
Spectrum Analyzer	Agilent	E4407B	i00331	9/18/15	9/18/16
EMI Analyzer	Agilent	E7405A	i00379	2/11/16	2/11/17
*3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	7/27/14	7/27/16
Noise Figure Meter	HP	8970B	i00444	8/13/15	8/13/17
Noise Source	HP	346A	i00445	8/13/15	8/13/17
Signal Generator	Agilent	E4438C	i00457	9/26/15	9/26/16
Signal Generator	Agilent	E4437B	i00489	3/18/16	3/18/17

*30-day cal extension with lab manager's approval

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT