



**Compliance Testing, LLC**  
Previously Flom Test Lab  
EMI, EMC, RF Testing Experts Since 1963

toll-free: (866) 311-3268  
fax: (480) 926-3598  
<http://www.ComplianceTesting.com>  
[info@ComplianceTesting.com](mailto:info@ComplianceTesting.com)

## Test Report

Prepared for: Bird Technologies

Model: 3-26076-XX

Description: Public Safety Class B Signal Booster

Serial Number: N/A

FCC ID: EZZ26076

To

FCC Part 90

Date of Issue: October 28, 2016

On the behalf of the applicant:

Bird Technologies  
30303 Aurora Road  
Cleveland, OH 44139

Attention of:

Tim O'Brien, Technical Product Manager  
Ph: (440)519-2194  
E-Mail: [tobrien@bird-technologies.com](mailto:tobrien@bird-technologies.com)

Prepared By  
Compliance Testing, LLC  
1724 S. Nevada Way  
Mesa, AZ 85204  
(480) 926-3100 phone / (480) 926-3598 fax  
[www.compliancetesting.com](http://www.compliancetesting.com)  
Project No: p1680008



Alex Macon  
Project Test Engineer

This report may not be reproduced, except in full, without written permission from Compliance Testing  
All results contained herein relate only to the sample tested



### Test Report Revision History

Revision	Date	Revised By	Reason for Revision
1.0	September 23, 2016	Alex Macon	Original Document



## Table of Contents

<u>Description</u>	<u>Page</u>
Standard Test Conditions and Engineering Practices	6
Test Result Summary	8
AGC Threshold	9
Out of Band Rejection	10
Conducted Output Power and Amplifier Gain	11
Conducted Spurious Emissions	12
Radiated Spurious Emissions	13
Emission Masks (Occupied Bandwidth)	14
Intermodulation	15
Noise Figure Test	16
Test Equipment Utilized	17



**ILAC / A2LA**

Compliance Testing, LLC, has been accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer joint ISO-ILAC-IAF Communiqué dated January 2009)

The tests results contained within this test report all fall within our scope of accreditation, unless noted below.

Please refer to <http://www.compliancetesting.com/labscope.html> for current scope of accreditation.

Testing Certificate Number: **2152.01**



**FCC Site Reg. #349717**

**IC Site Reg. #2044A-2**

**Non-accredited tests contained in this report:**

**N/A**



**The Applicant has been cautioned as to the following:**

**15.21: Information to the User**

The user's manual or instruction manual for an intentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**15.27(a): Special Accessories**

Equipment marketed to a consumer must be capable of complying with the necessary regulations in the configuration in which the equipment is marketed. Where special accessories, such as shielded cables and/or special connectors are required to enable an unintentional or intentional radiator to comply with the emission limits in this part, the equipment must be marketed with, i.e. shipped and sold with, those special accessories. However, in lieu of shipping or packaging the special accessories with the unintentional or intentional radiator, the responsible party may employ other methods of ensuring that the special accessories are provided to the consumer, without an additional charge.

Information detailing any alternative method used to supply the special accessories for a grant of equipment authorization or retained in the verification records, as appropriate. The party responsible for the equipment, as detailed in § 2.909 of this chapter, shall ensure that these special accessories are provided with the equipment. The instruction manual for such devices shall include appropriate instructions on the first page of text concerned with the installation of the device that these special accessories must be used with the device. It is the responsibility of the user to use the needed special accessories supplied with the equipment.



## Test and Measurement Data

All tests and measurement data shown were performed in accordance with FCC Rules and Regulations Part 90.219, KDB 935210 D05 Booster, and FCC Part 2, where appropriate.

## Standard Test Conditions and Engineering Practices

Except as noted herein, the following conditions and procedures were observed during the testing.

In accordance with ANSI/TIA 603C, and unless otherwise indicated in the specific measurement results, the ambient temperature of the actual EUT was maintained within the range of 10° to 40°C (50° to 104°F) unless the particular equipment requirements specify testing over a different temperature range. Also, unless otherwise indicated, the humidity levels were in the range of 10% to 90% relative humidity.

Environmental Conditions		
Temp (°C)	Humidity (%)	Pressure (mbar)
25.3	38.4	967.4

Measurement results, unless otherwise noted, are worst-case measurements.

### EUT Description

**Model:** 3-26076-XX

**Description:** Public Safety Class B Signal Booster

Bi-Directional amplifier (BDA), it is used to amplify DL and UL frequencies in the UHF band.

The max composite power of this BDA is 36 dBm; it has up to 80dB gain.

**Firmware:** N/A

**Serial Number:** N/A

### Additional Information:

The EUT is classified as a **Class B** industrial signal booster

The EUT is a UHF Bi-directional Amplifier that operates from 450 – 512 MHz in both directions.

The system uses two identical amplifiers for each path.

The amplifier modules are the same electrically for the uplink and downlink.

System Power is 120 VAC @ 60 Hz.

The following emission designators listed are representative emission designators used by transmitters whose signal is amplified by this booster.

Frequency (MHz)	Emission Designators
450 – 512	F3E, G1D, G1E, W7W, F2D

Refer to the table below for which test frequencies were applied to each port and the direction of the signal path.

Signal Path (Base to Mobile)	Signal Path (Mobile to Base)
Frequency (MHz)	Frequency (MHz)
451	460
502	511



## EUT Operation during Tests

The EUT was tested under normal operating conditions with the front panel attenuators set to 0 dB for all measurements.

### AGC Threshold

Several tests reference the AGC Threshold level.

The AGC Threshold was measured as follows:

- Connect a signal generator to the input of the EUT.
- Connect a spectrum analyzer to the output of the EUT using appropriate attenuation.
- Use a CW signal.
- While monitoring the output of the EUT, increase the input level until the output stops increasing or drops a few 10th's of a dB.
- This is the AGC threshold level of the EUT.
- When the procedure calls out to set the RF Input to just below the AGC Threshold, The AGC Threshold is measured using the procedure listed above, and then the RF Input is backed off 0.2 dB below this threshold level.

**Accessories:** None

### Cables:

Qty	Description	Length (M)	Shielding Y/N	Shielded Hood Y/N	Termination
1	AC Power Cable	2	N	N	N/A

**Modifications:** None

**Test Result Summary**

Specification	Test Name	Pass, Fail, N/A	Comments
KDB 935210 D05	AGC Threshold	Pass	
KDB 935210-D03	Out of Band Rejection	Pass	
2.1046	Output Power (Conducted)	Pass	
90.210 2.1049	Occupied Bandwidth (Emission Masks)	Pass	
2.1051	Spurious Emissions (Transmitter Conducted)	Pass	
2.1053	Radiated Spurious Emissions	Pass	
KDB 935210-D03	Intermodulation	Pass	
90.219(e)(2)	Noise Figure	Pass	
90.213	Frequency Stability (Temperature Variation)	N/A	
90.213	Frequency Stability (Voltage Variation)	N/A	



**AGC Threshold**

**Engineer:** Alex Macon

**Test Date:** 9/23/16

**Test Procedure**

A signal generator producing a CW signal was connected to the input of the EUT. A spectrum analyzer was connected to the EUT in order to monitor the output power levels. The input power level was increase in 1 dB increments until the power no longer increased. The input levels were recorded in the table below.

Spectrum Analyzer settings

Power Channel integration

RBW = 1-5% of EBW

Video BW = 3x RBW

**Test Setup**



**Mobile to Base**

Tuned Frequency (MHz)	AGC Threshold (dBm)
460	-31.0
511	-26.86

**Base to Mobile**

Tuned Frequency (MHz)	AGC Threshold (dBm)
451	-31.48
502	-27.70



**Out of Band Rejection**

**Engineer:** Alex Macon

**Test Date:** 9/23/16

**Test Procedure**

The EUT was connected to a spectrum analyzer through a 30 dB power attenuator. A signal generator was utilized to produce a swept CW signal with the RF input level set to 3 dB below the AGC Threshold level. The Uplink and Downlink filter response and the -20 dB bandwidth were measured. The marker table function of the spectrum analyzer was used to show the peak amplitude in the passband and the -20 dB bandwidth of the pass band filter.

The EUT incorporates multiple cavity filters depending on the end user's band selection. Each cavity filter was swept to complete the out of band rejection criteria.

RBW = 100 KHz

Video BW = 3x RBW

**Test Setup**



Refer to Annex A for Out of Band Rejection plots



## Conducted Output Power and Amplifier Gain

**Engineer:** Alex Macon

**Test Date:** 9/22/16

### Test Procedure

The Equipment Under Test (EUT) was connected to a spectrum analyzer through a 30 dB Power attenuator. All cable and attenuator losses were input into the spectrum analyzer as a reference level offset to ensure accurate readings were obtained.

A CW signal was utilized, set to the frequency of the peak amplitude measured in the Out of Band Rejection test. The RF input signal level was set to 0.2 dB below the AGC Threshold.


RBW = 100 kHz

Video BW = 3x RBW

The Input and Output power levels were recorded and the gain was calculated using the following formula:

$$\text{Gain (dB)} = \text{Output Power (dBm)} - \text{Input Power (dBm)}$$

### Test Setup



### Output Power and Gain Test Results

Tuned Frequency (MHz)	Input Power (dBm)	Output Power (dBm)	Gain (dB)
451	-46.31	34.47	80.78
460	--45.88	35.2	81.08
502	-42.52	34.74	77.26
511	-41.74	34.76	76.5

### Radiated Output Power

*Radiated Power (ERP) is dependent on the cable loss and antennas used when installed.*

*The user manual specification for Composite Output Power is 33 dBm ± 1dB.*

### OLC (Automatic Level Control)

*The user manual contains the following statement:*

*“Output power is limited by an Output Level Control (OLC) so as not to exceed the 5 Watt ERP FCC specification or not to exceed the user output power limit setting.”*



## Conducted Spurious Emissions

**Engineer:** Alex Macon

**Test Date:** 9/22/16

### Test Procedure

The Equipment Under Test (EUT) was connected to a spectrum analyzer through a 30 dB Power attenuator. All cable and attenuator losses were input into the spectrum analyzer as a combination of reference level offset and correction factor as needed to ensure accurate readings were obtained.

A CW signal was utilized, set to the center frequency of the passband.

The RF input signal level was set to 0.2 dB below the AGC Threshold.

The RBW was set to 100 kHz for measurements below 1 GHz and 1 MHz for measurements above 1 GHz.

The VBW was set to 3 times the RBW.

The frequency range from 30 MHz to the 10<sup>th</sup> harmonic of the passband frequency was observed and plotted.


The following formula was used for calculating the limits.

$$\text{Conducted Spurious Emissions Limit} = P1 - (43 + 10\log(P2)) = -13 \text{ dBm}$$

P1 = power in dBm

P2 = power in Watts

### Test Setup

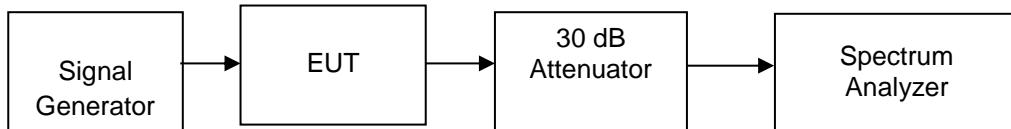

**Refer to Annex B for Conducted Spurious Emissions Plots**



## Radiated Spurious Emissions

**Engineer:** Alex Macon

**Test Date:** 9/23/16

### Test Procedure

The EUT was tested in a semi-anechoic chamber with the turntable set 3m from the receiving antenna. A spectrum analyzer was used to verify that the EUT met the requirements for Radiated Emissions. The EUT was tested by rotating it 360 degrees with the antenna in both the vertical and horizontal orientation while raised from 1 to 4 meters to ensure that the signal levels were maximized. All cable and antenna correction factors were input into the spectrum analyzer ensuring an accurate measurement in ERP/EIRP with the resultant power in dBm. A signal generator was used to provide a CW signal. The EUT output was terminated into a 50 Ohm non-radiating load.

The RBW was set to 100 kHz for measurements below 1 GHz and 1 MHz for measurements above 1 GHz. The VBW was set to 3 times the RBW.


The following formula was used for calculating the limits:

$$\text{Radiated Spurious Emissions Limit} = P1 - (43 + 10\log(P2)) = -13\text{dBm}$$

P1 = power in dBm

P2 = power in Watts

### Test Setup

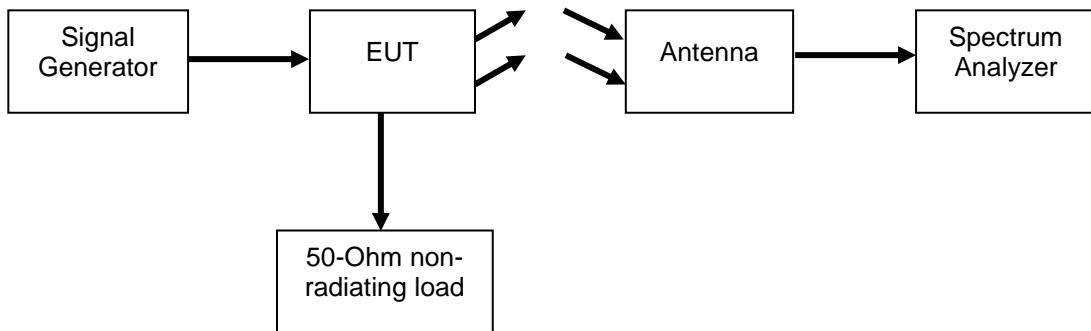


Refer to Annex C for the Radiated Spurious Emissions Plots

**Emission Masks (Occupied Bandwidth)****Engineer:** Alex Macon**Test Date:** 9/22/16**Test Procedure**

The EUT was connected directly to a spectrum analyzer to verify that the EUT meets the required emissions mask. The EUT is a booster amplifier that does not contain a transmitter; representative emission designators used in the industry were used for the emission masks and are listed in Table 1.

Emission Designator	Type of Modulation	Occupied Bandwidth (kHz)	Channel Spacing (kHz)	Audio Frequency (kHz)	Deviation (kHz)	RBW (Hz)
16K0F3E	FM	16.0	25	1.0	5.0	300
11K3F3E	FM	11.3	12.5	1.0	2.5	100
4K00F1E	FM	4	6.25	1.0	1.0	100

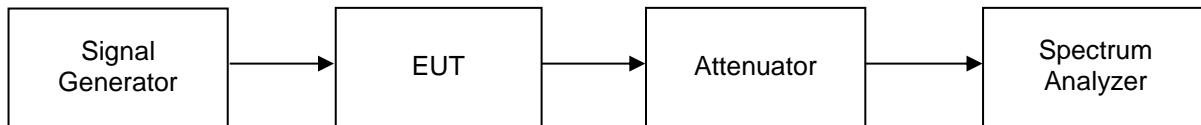**Test Setup****Refer to Annex D for Emission Mask plots**



## Intermodulation

**Engineer:** Alex Macon

**Test Date:** 9/22/16

### Test Procedure

The EUT was connected to a spectrum analyzer through a 30 dB power attenuator. Two signal generators were utilized to produce a two tone signal with the 12.5 KHz channel spacing set so the intermodulation products fell within the operational band. Frequency at the maximum power from out of band rejection was utilized.


The Test was performed on both the uplink and downlink.

The RF input signal level was set to 0.2 dB below the AGC Threshold.

RBW = 300 Hz

Video BW = 3x RBW

### Test Setup

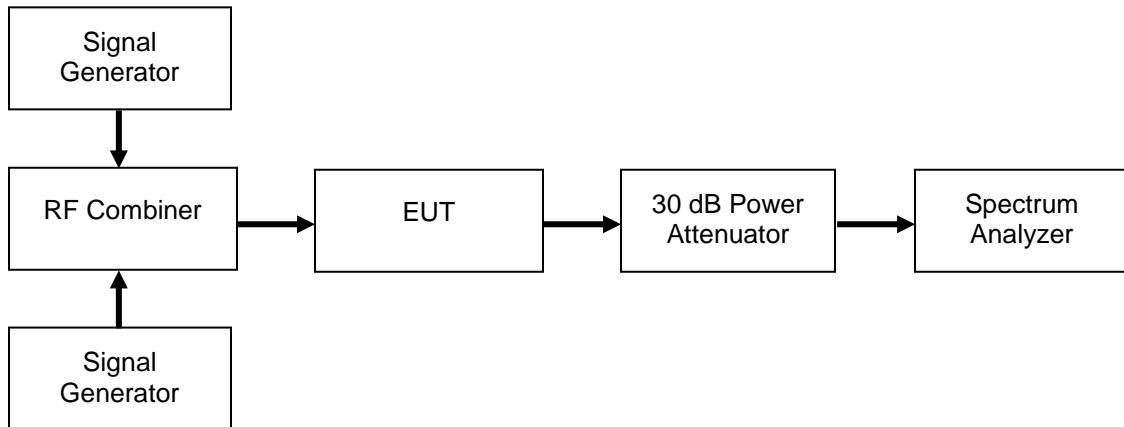

Refer to Annex E for Intermodulation plots



## Noise Figure Test

Engineer: Alex Macon

Test Date: 9/23/16

### Test Procedure

The test equipment was connected as shown in the test setup.

The noise figure was measured at the passband center frequency.

Noise figure was measured using the high power output.



Frequency (MHz)	Noise Figure (dB)	Limit (dB)	Margin (dB)
451	0.89	9	8.11
460	0.93	9	8.07
502	0.92	9	8.08
511	1.01	9	7.99

**Test Equipment Utilized**

Description	Manufacturer	Model #	CT Asset #	Last Cal Date	Cal Due Date
Termination, High Power, 500 watts	Bird	8201	i00134		N/A
Horn Antenna	ARA	DRG-118/A	i00271	6/16/16	6/16/18
Humidity / Temp Meter	Newport	IBTHX-W-5	i00282	5/26/16	5/26/17
Bi-Log Antenna	Schaffner	CBL 6111D	i00349	10/19/15	10/19/17
EMI Analyzer	Agilent	E7405A	i00379	2/11/16	2/11/17
Spectrum Analyzer	Textronix	RSA5126A	i00424	3/28/16	3/28/17
3 Meter Semi-Anechoic Chamber	Panashield	3 Meter Semi-Anechoic Chamber	i00428	7/27/14	7/27/16*
Noise Figure Meter	Agilent	N8973A	i00444	8/13/15	8/13/16
Noise Source	Agilent	N4000A	i00445	8/13/15	8/13/16
Signal Generator	Agilent	E4438C	i00457	9/26/15	9/26/16
Signal Generator	Agilent	E4437B	i00489	3/18/16	3/18/17

\*Calibration extended by 120 days per lab manager

In addition to the above listed equipment standard RF connectors and cables were utilized in the testing of the described equipment. Prior to testing these components were tested to verify proper operation.

END OF TEST REPORT