


Appendix B

Peak Output Power




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 1.45 dBm VBW 1 MHz
20 dBm 2.40183868 GHz SWT 5 ms Unit dBm

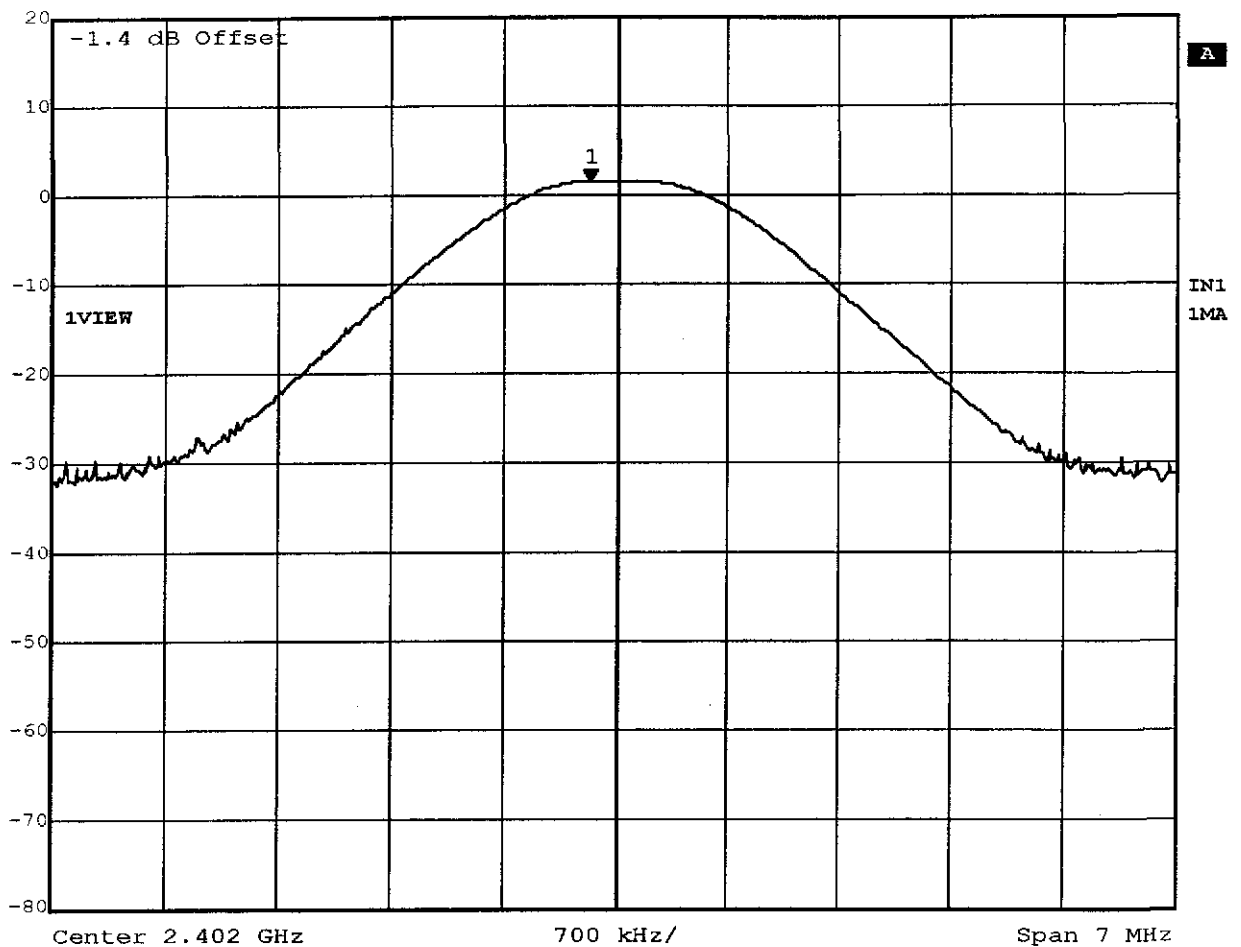

Title: Peak Output Power Conducted Ch.: 0
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 12:43:02




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
Ref Lvl 1.77 dBm VBW 1 MHz
20 dBm 2.44083868 GHz SWT 5 ms Unit dBm

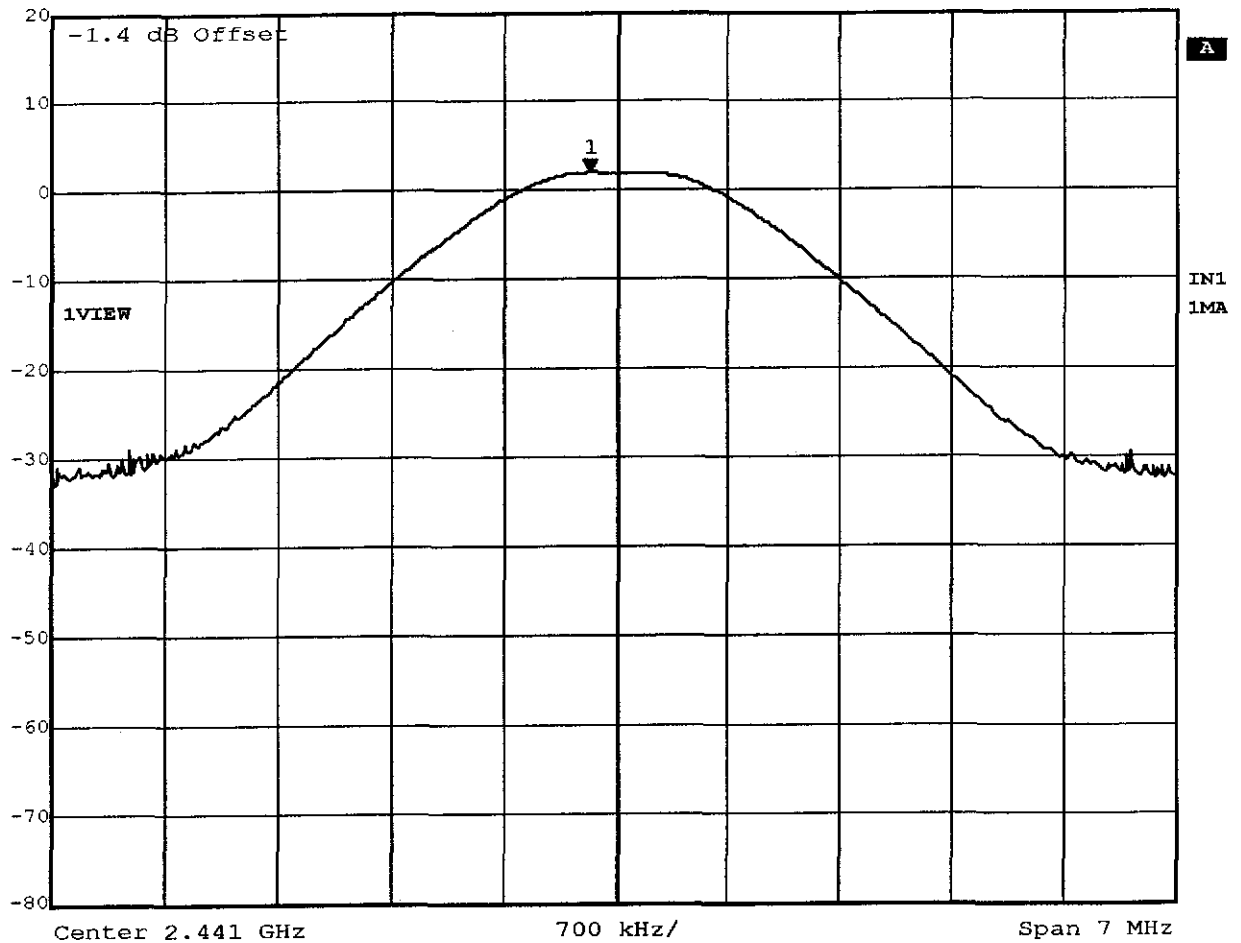

Title: Peak Output Power Conducted Ch.: 39
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 12:41:13




Marker 1 [T1] RBW 1 MHz RF Att 50 dB
1.07 dBm VBW 1 MHz
20 dBm 2.47979659 GHz SWT 5 ms Unit dBm

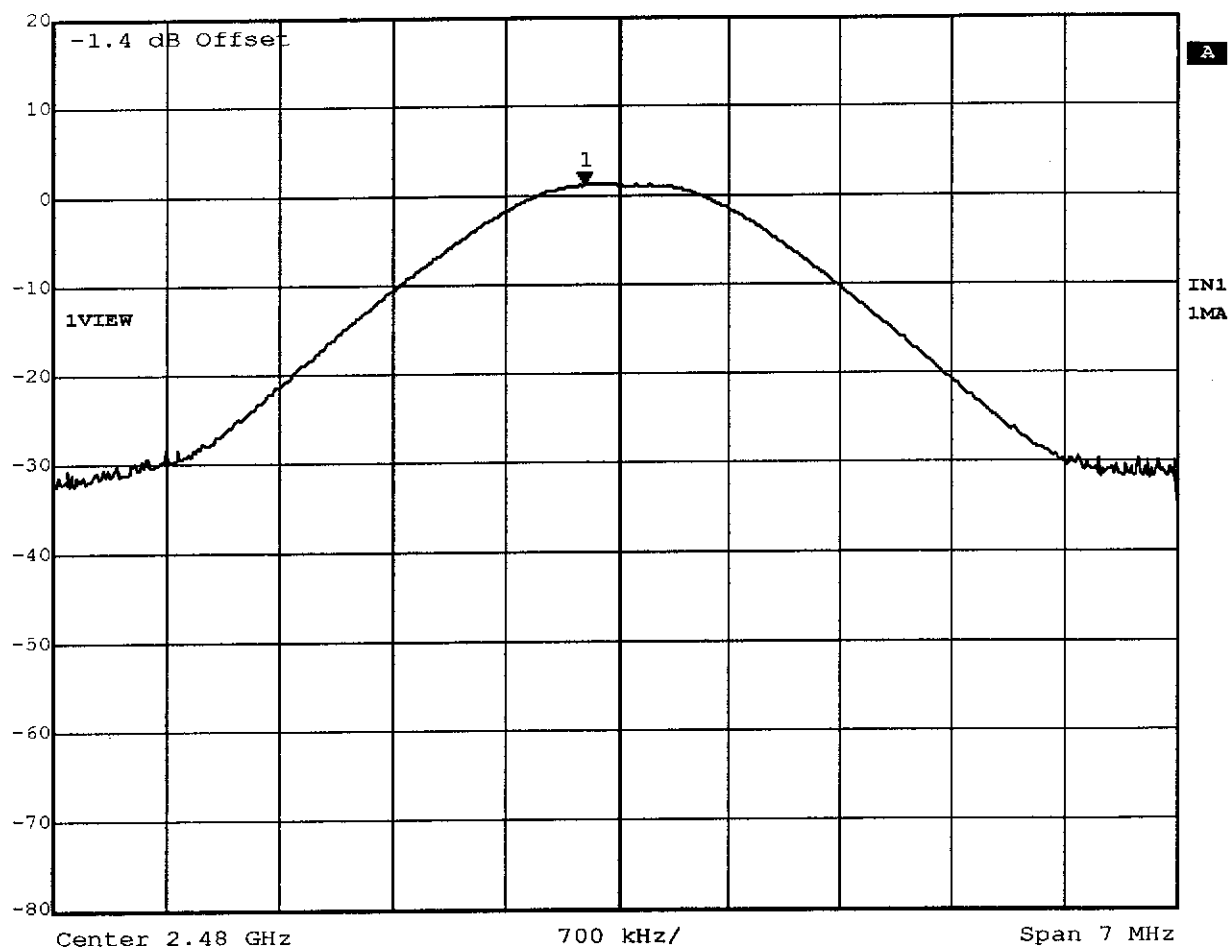

Title: Peak Output Power Conducted Ch.: 78
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 12:36:12


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 0.07dBm, RBW: 5MHz

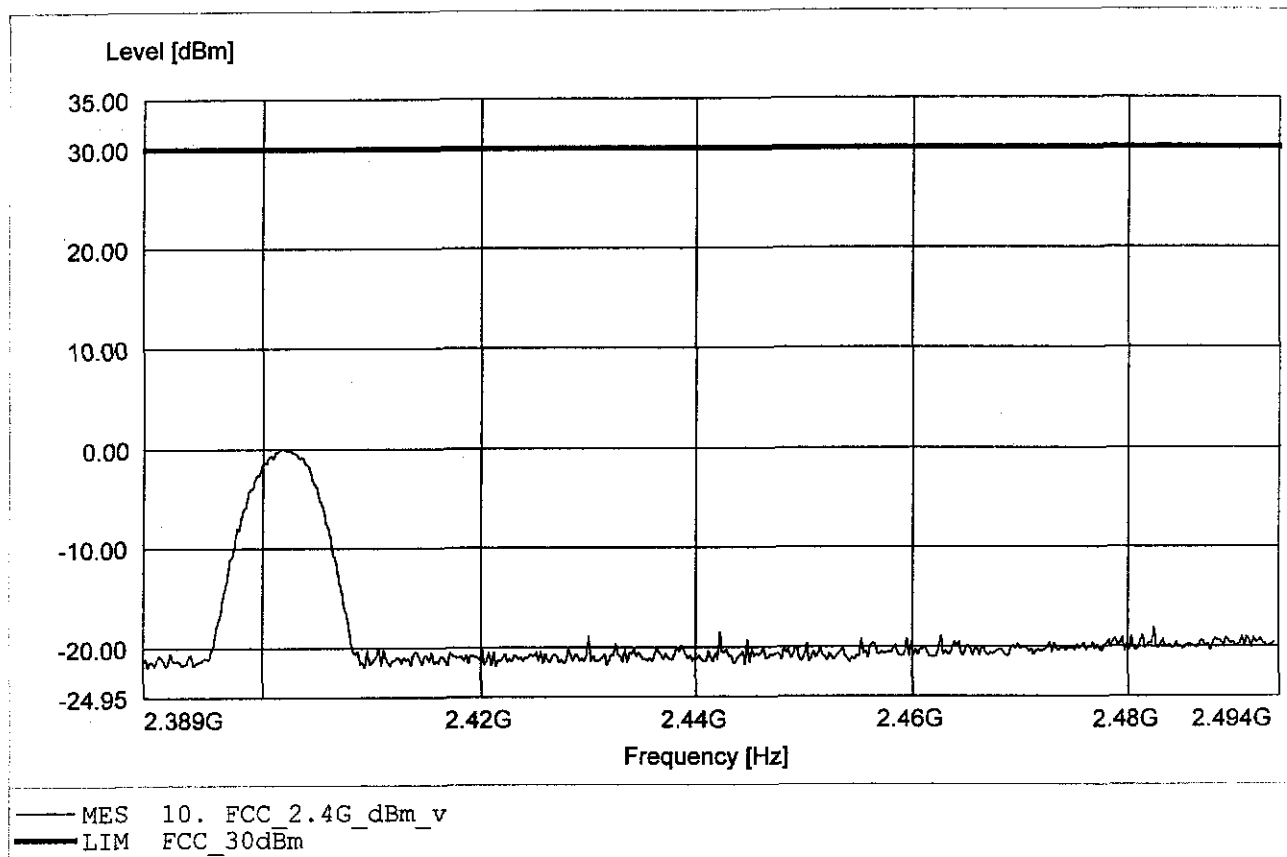


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 0.20dBm, RBW: 5MHz

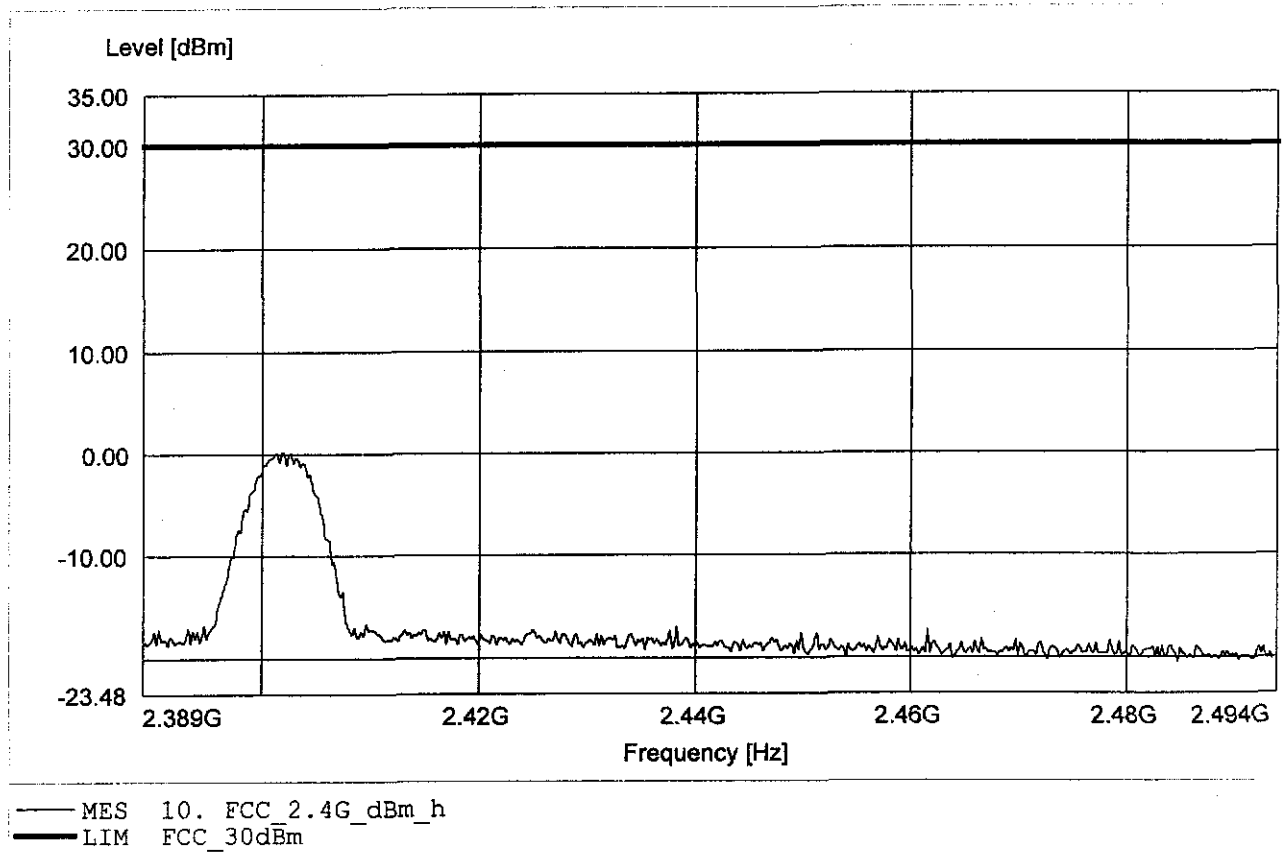


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.66dBm, RBW: 5MHz

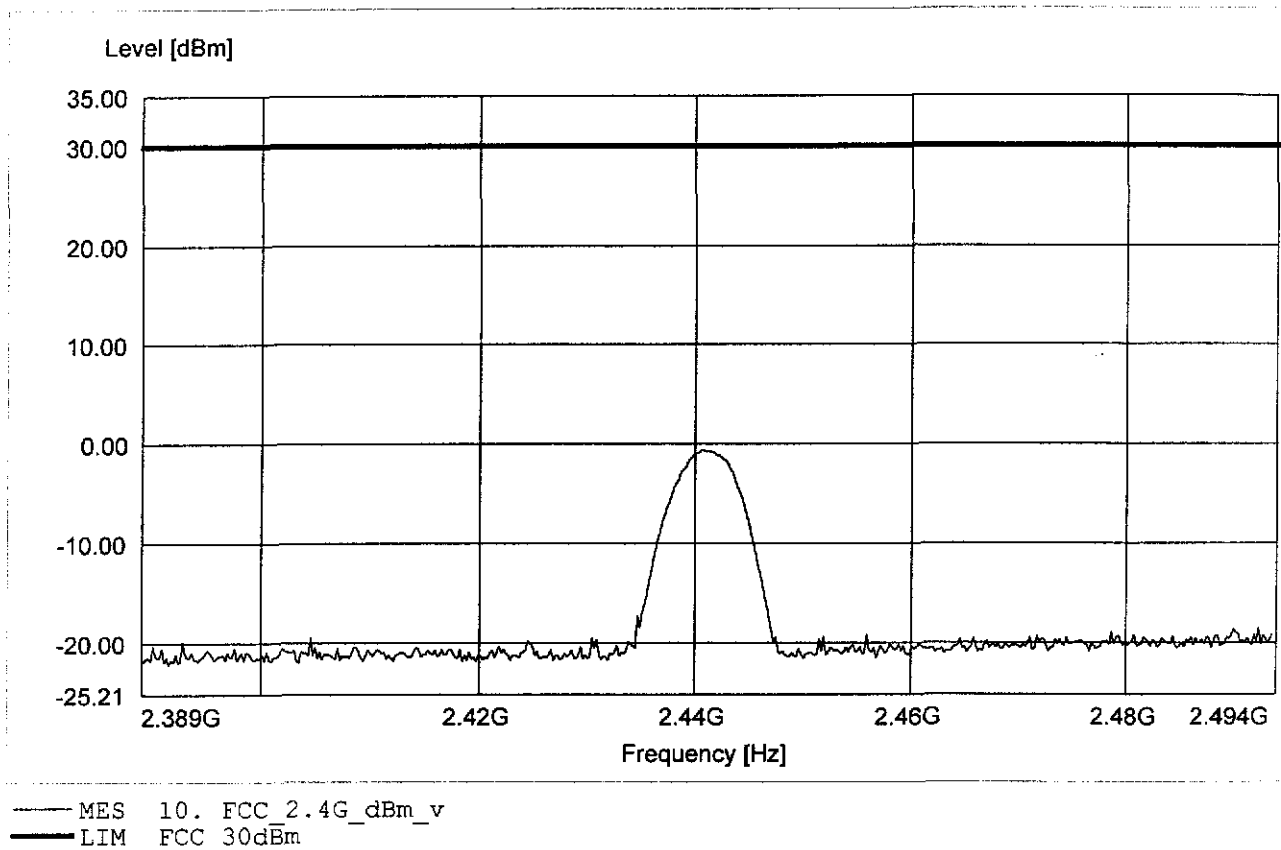


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -2.13dBm, RBW: 5MHz

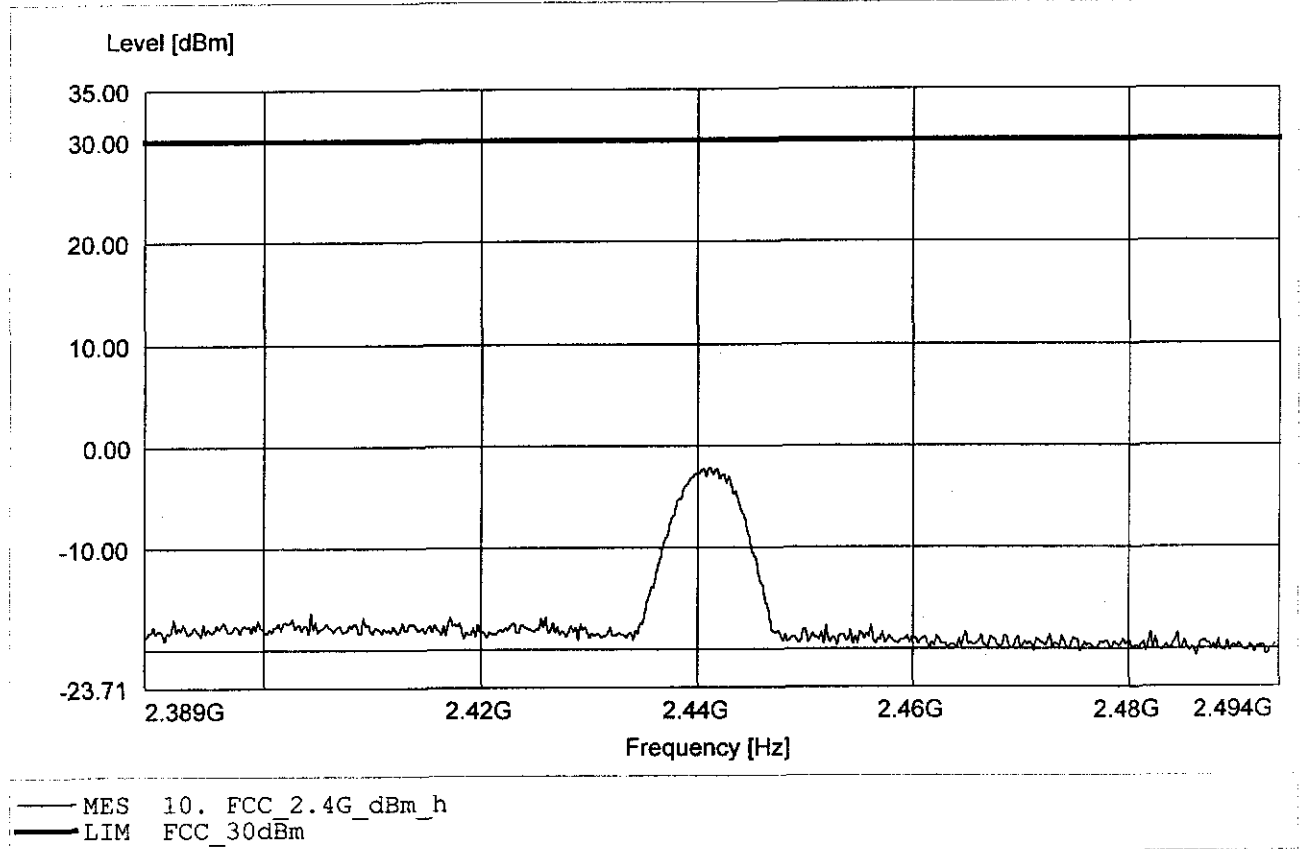


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.481GHz, Pmax: 0.33dBm, RBW: 5MHz

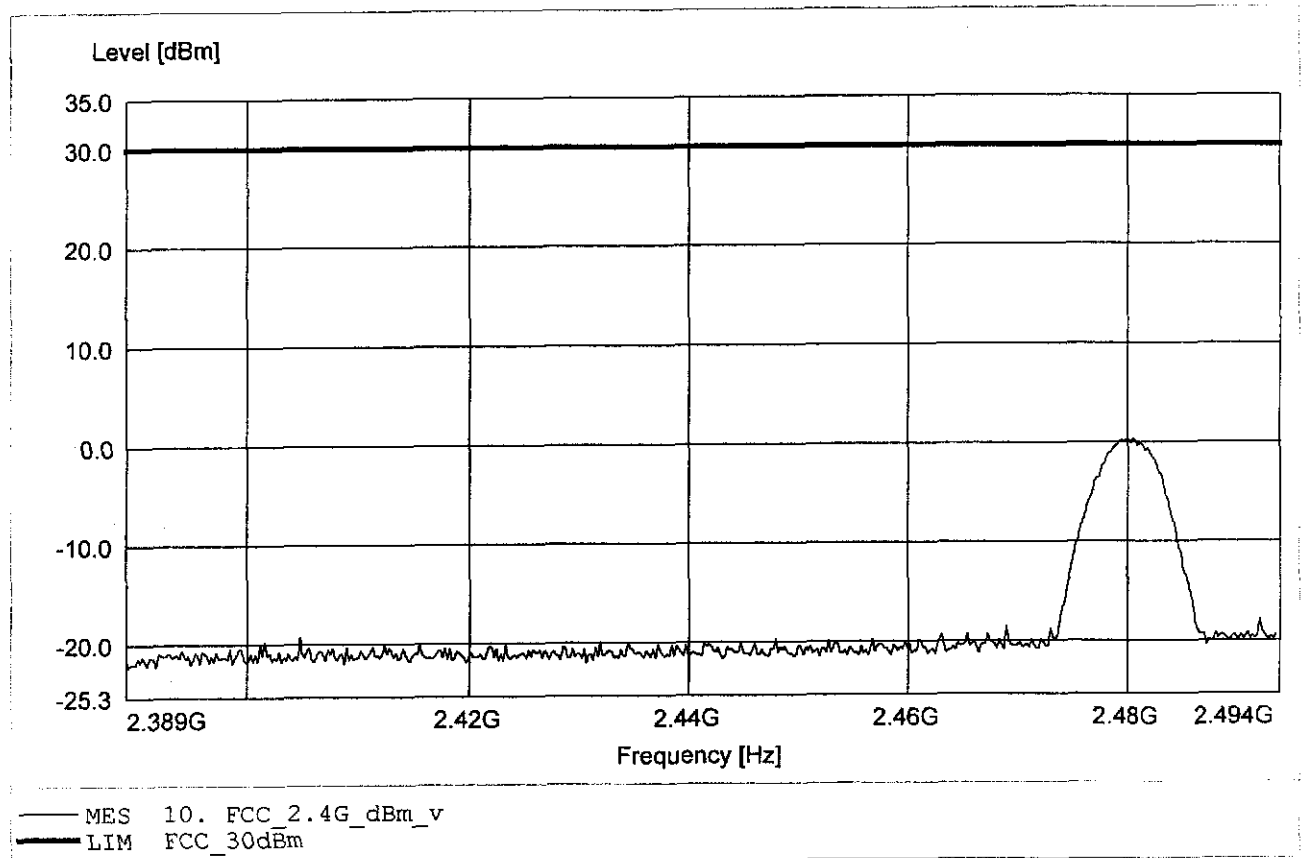


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.479GHz, Pmax: -2.91dBm, RBW: 5MHz

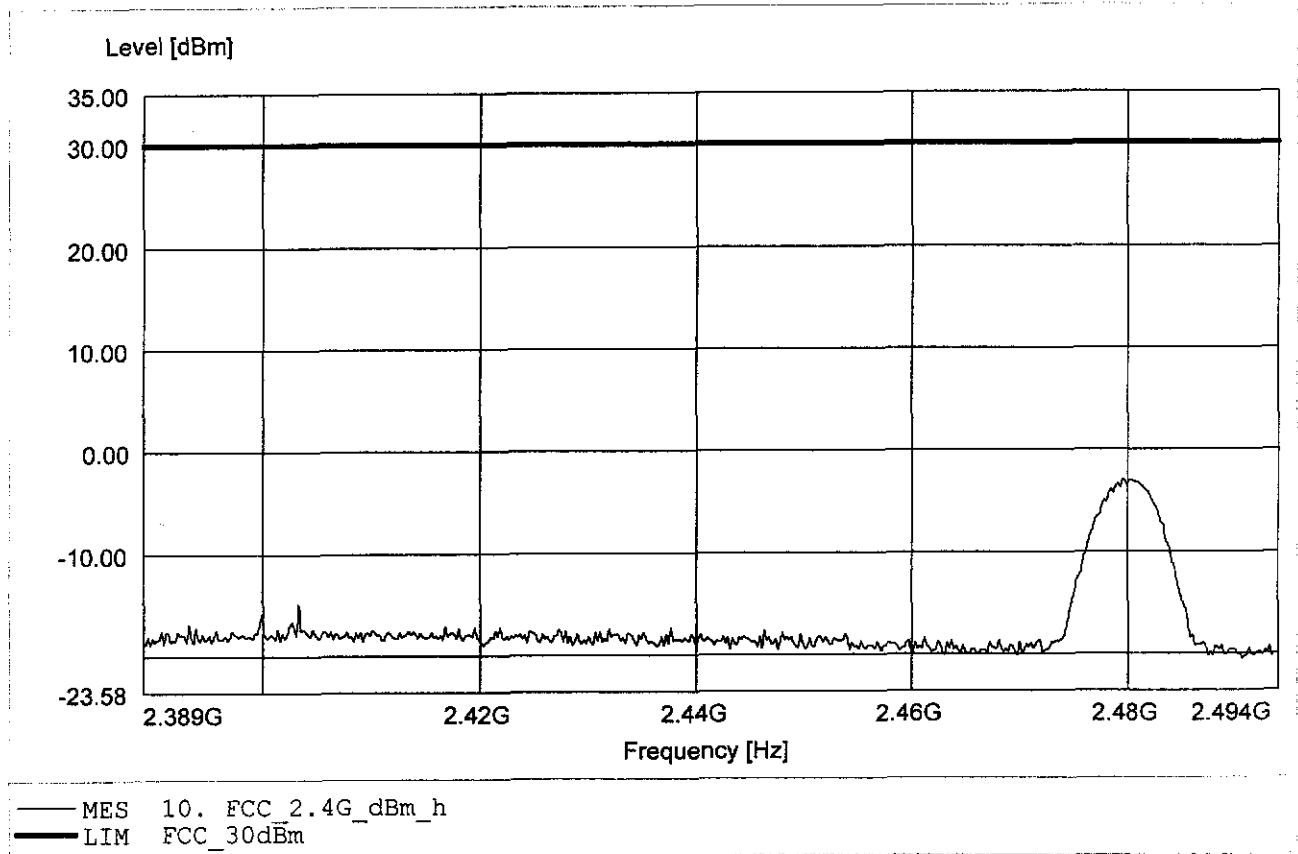


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom - 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -0.52dBm, RBW: 5MHz

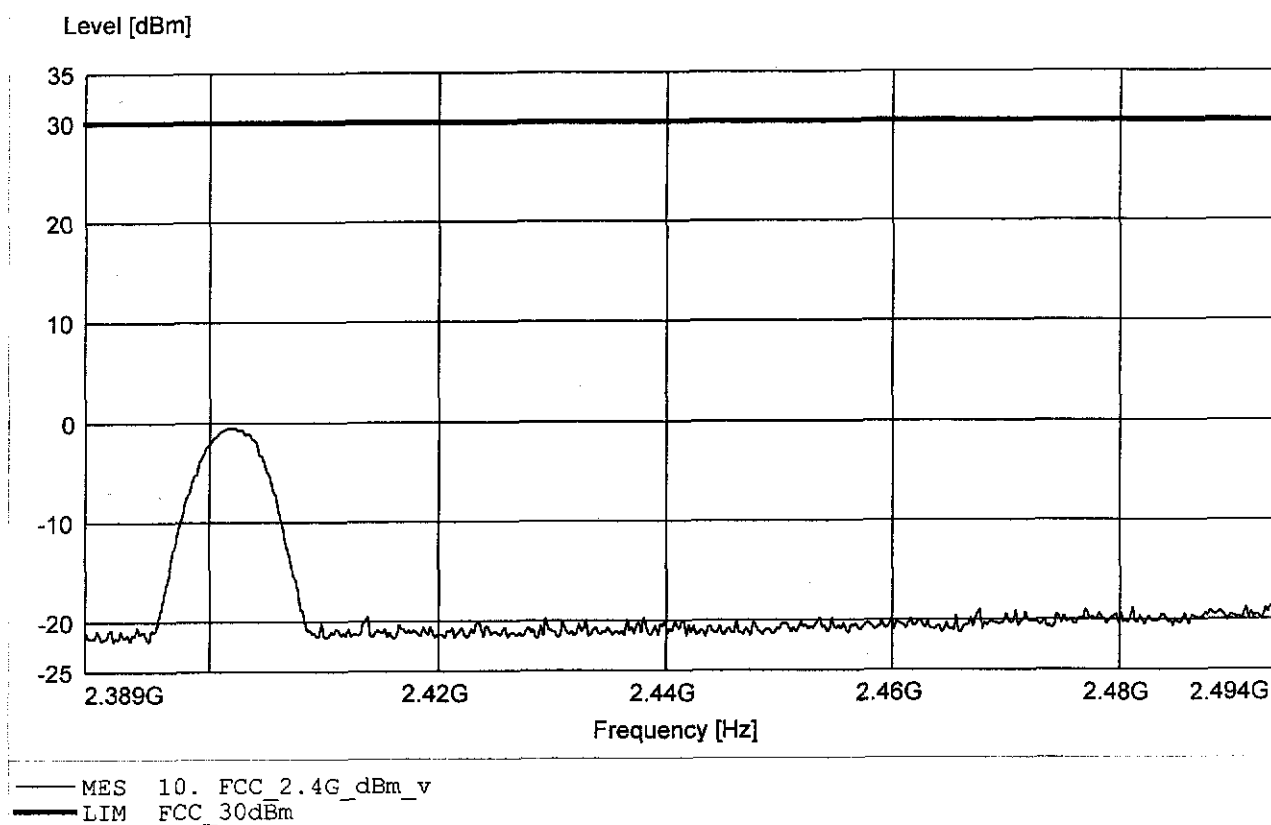


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom - 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 0.45dBm, RBW: 5MHz

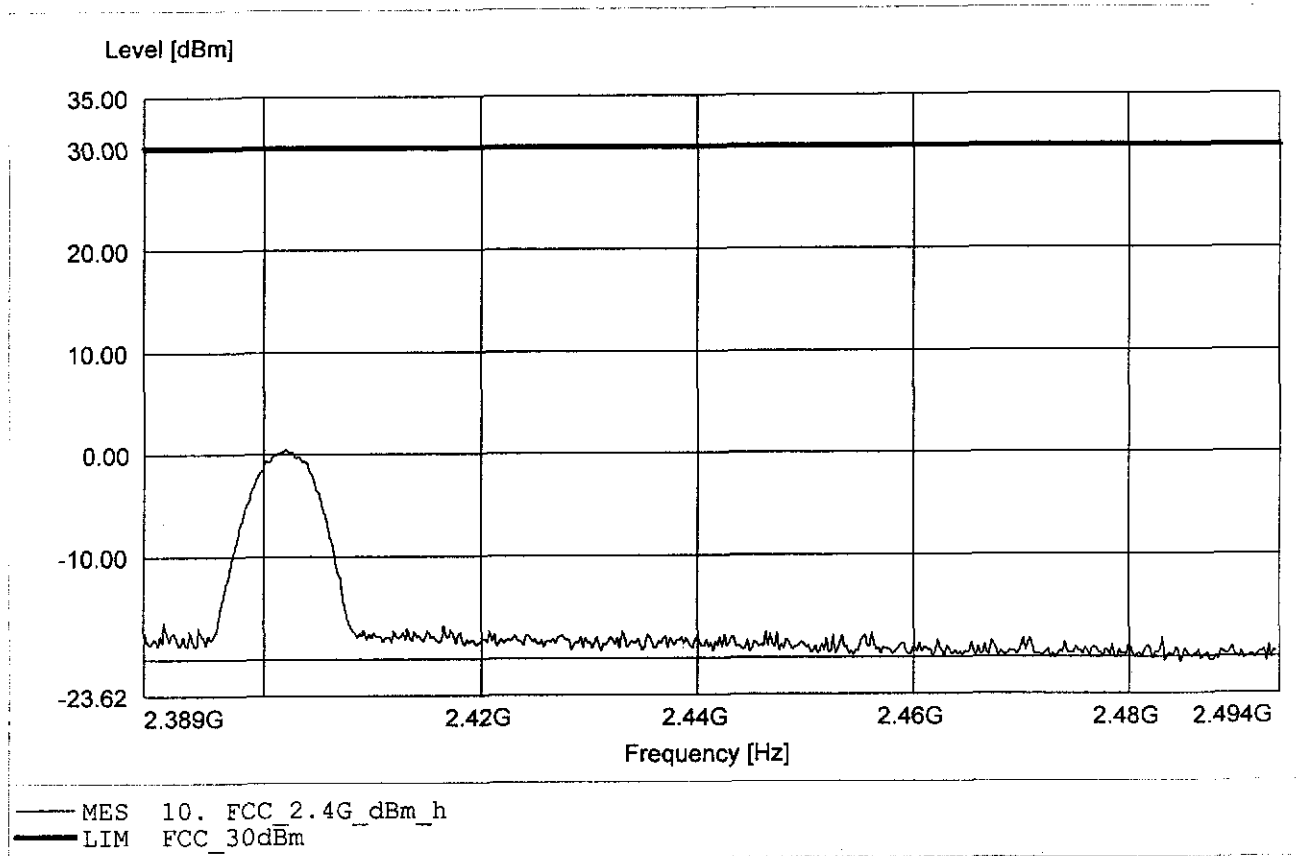


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom - 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.73dBm, RBW: 5MHz

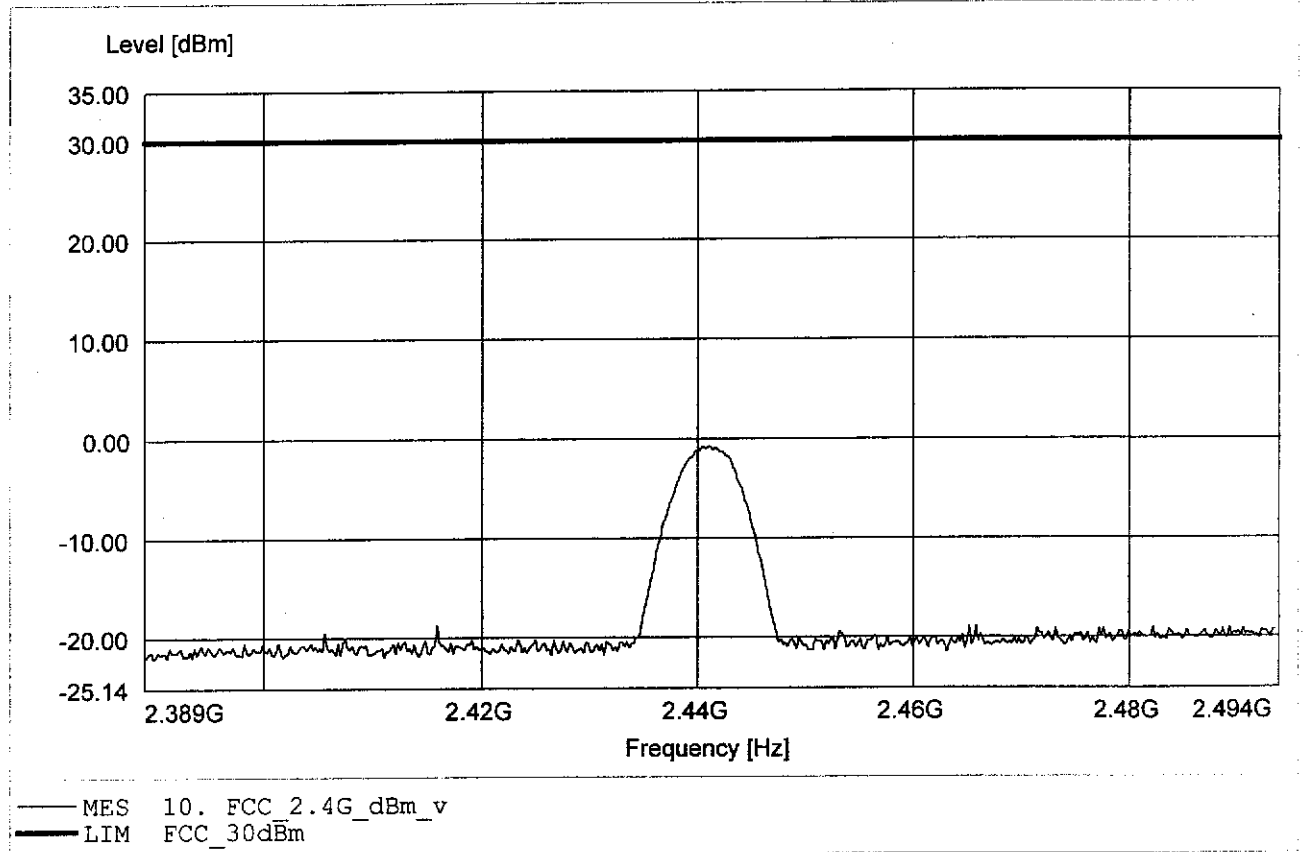


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom - 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -2.32dBm, RBW: 5MHz

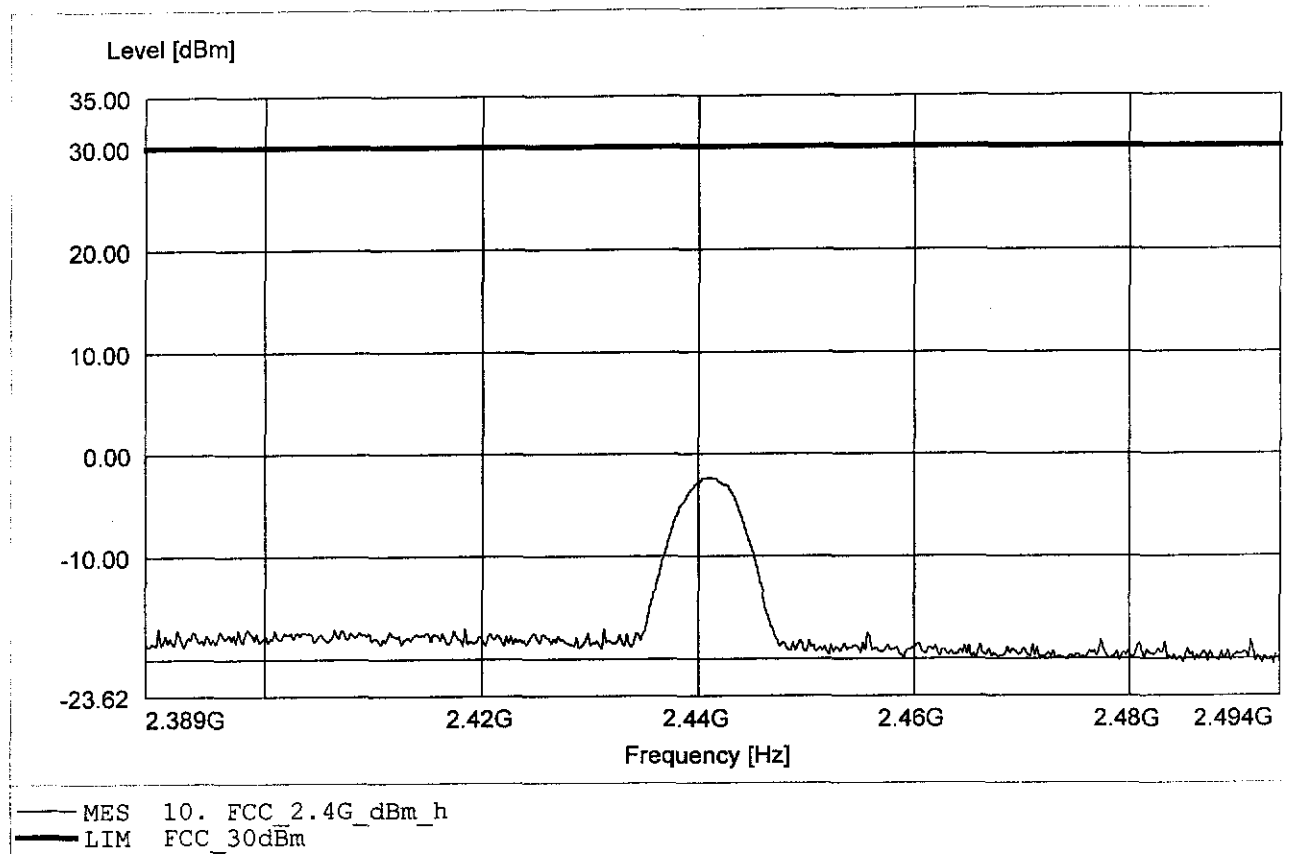


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom - 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 0.32dBm, RBW: 5MHz

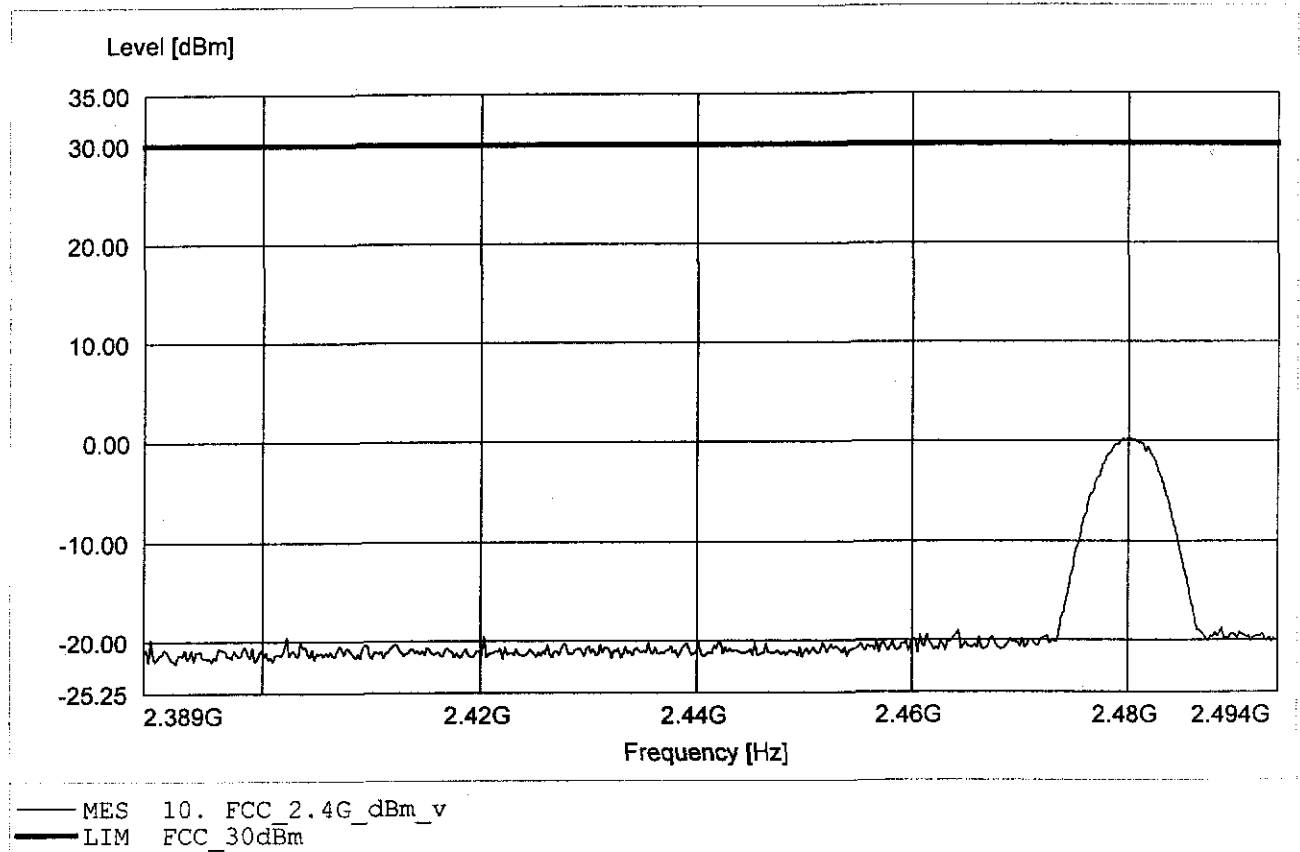


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom - 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -3.05dBm, RBW: 5MHz

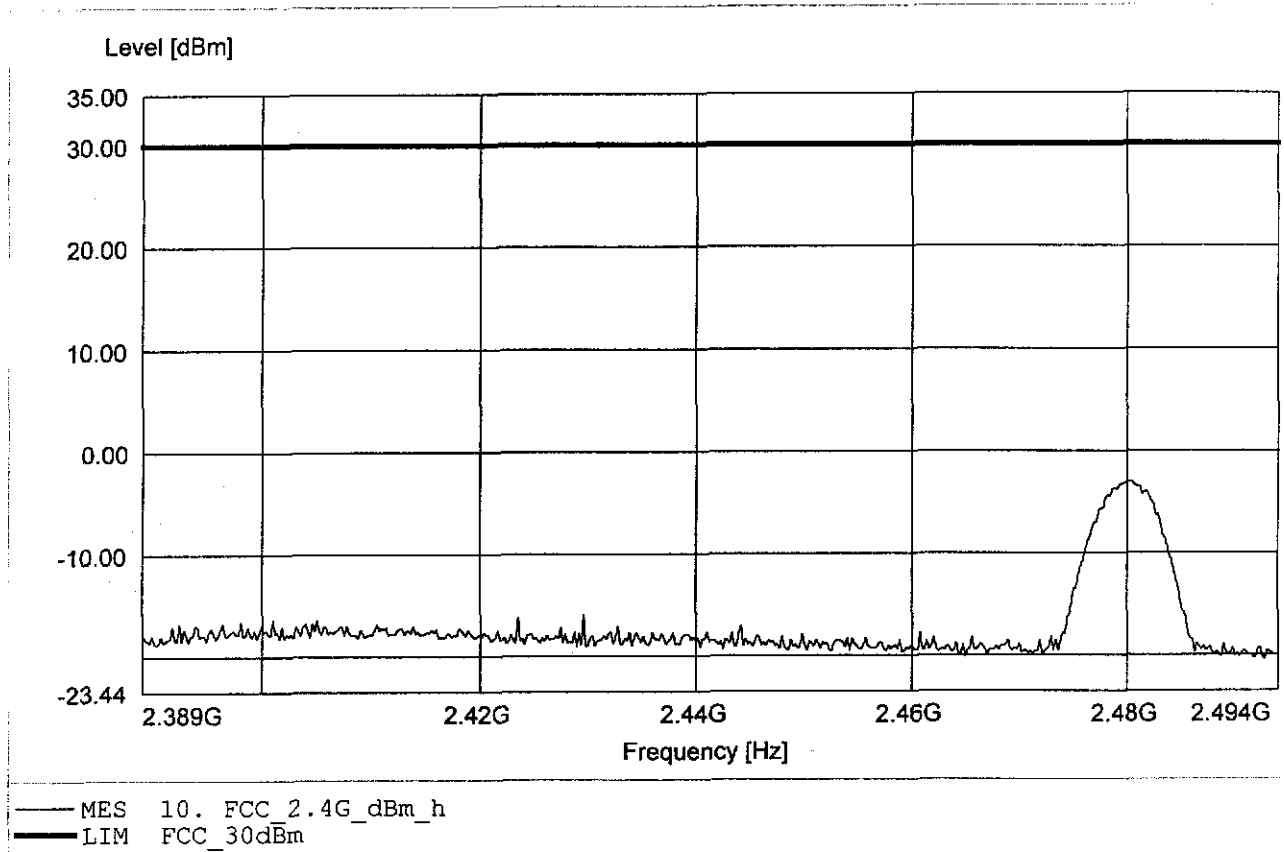


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom + 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: -0.38dBm, RBW: 5MHz

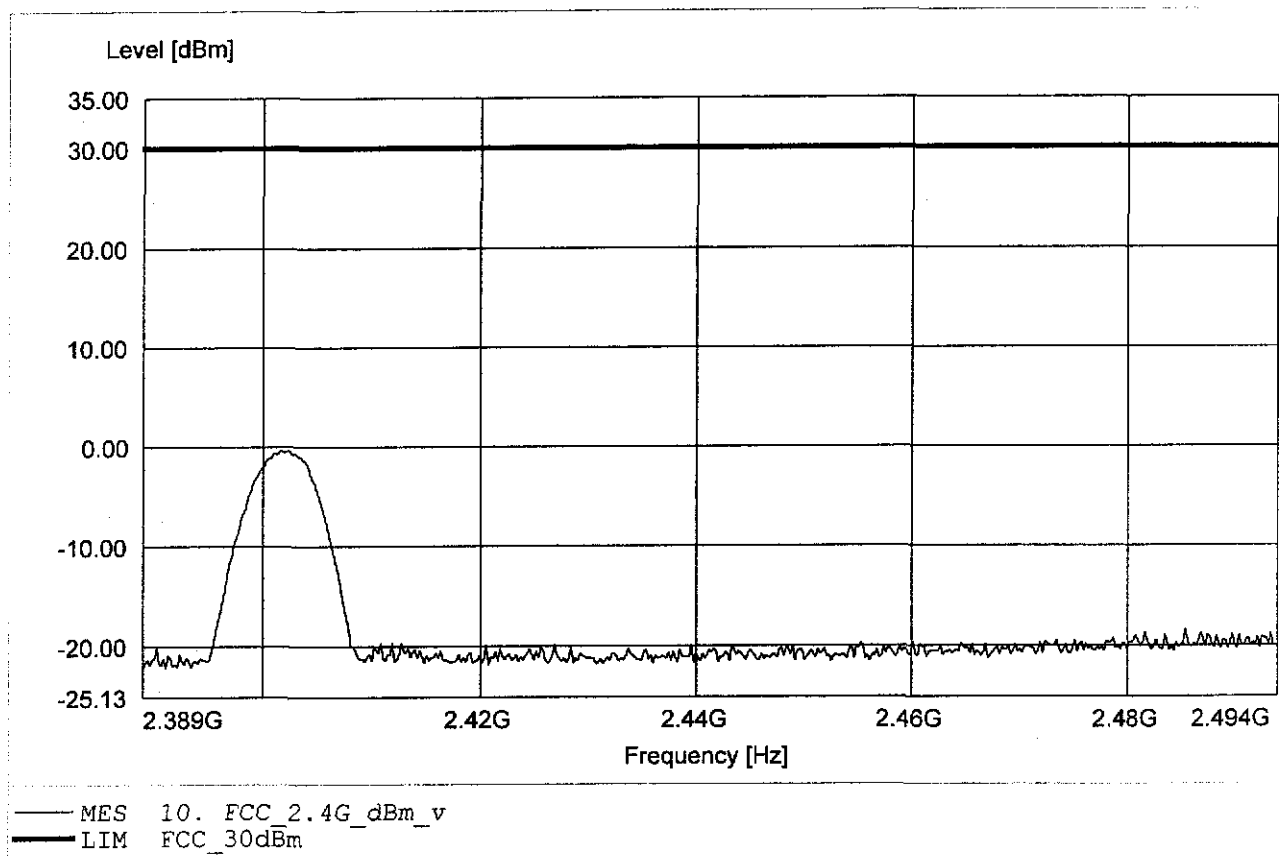


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom + 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.402GHz, Pmax: 0.46dBm, RBW: 5MHz

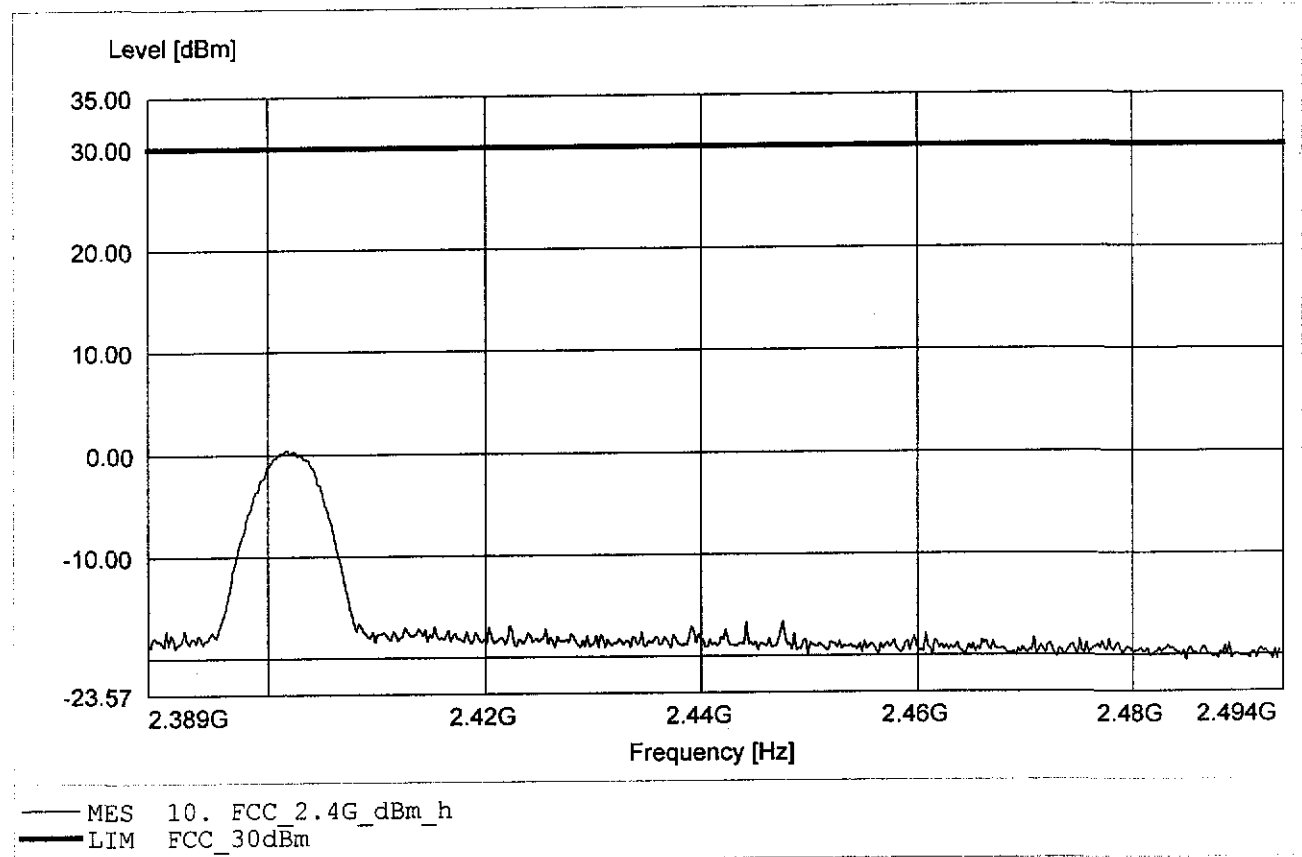


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom + 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -0.72dBm, RBW: 5MHz

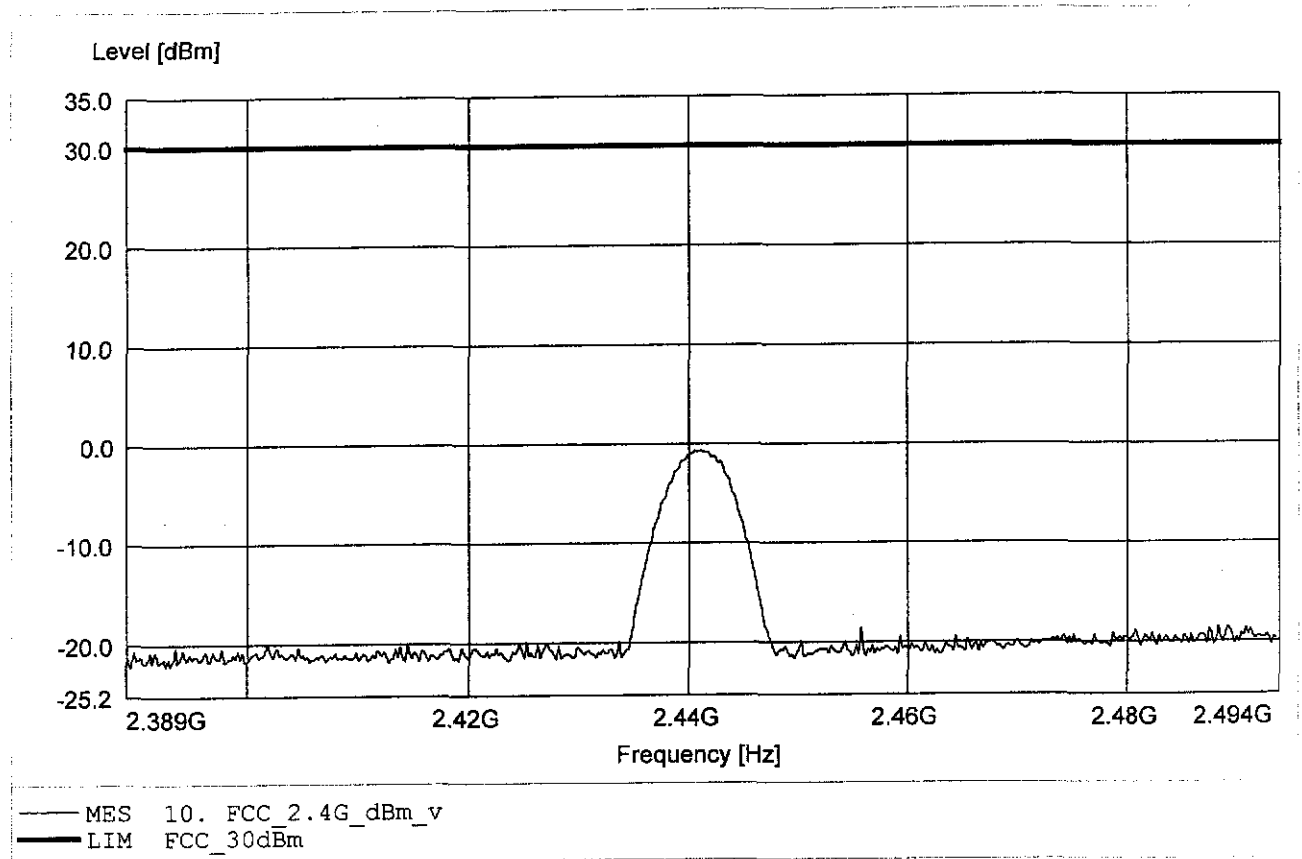


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom + 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.441GHz, Pmax: -2.26dBm, RBW: 5MHz

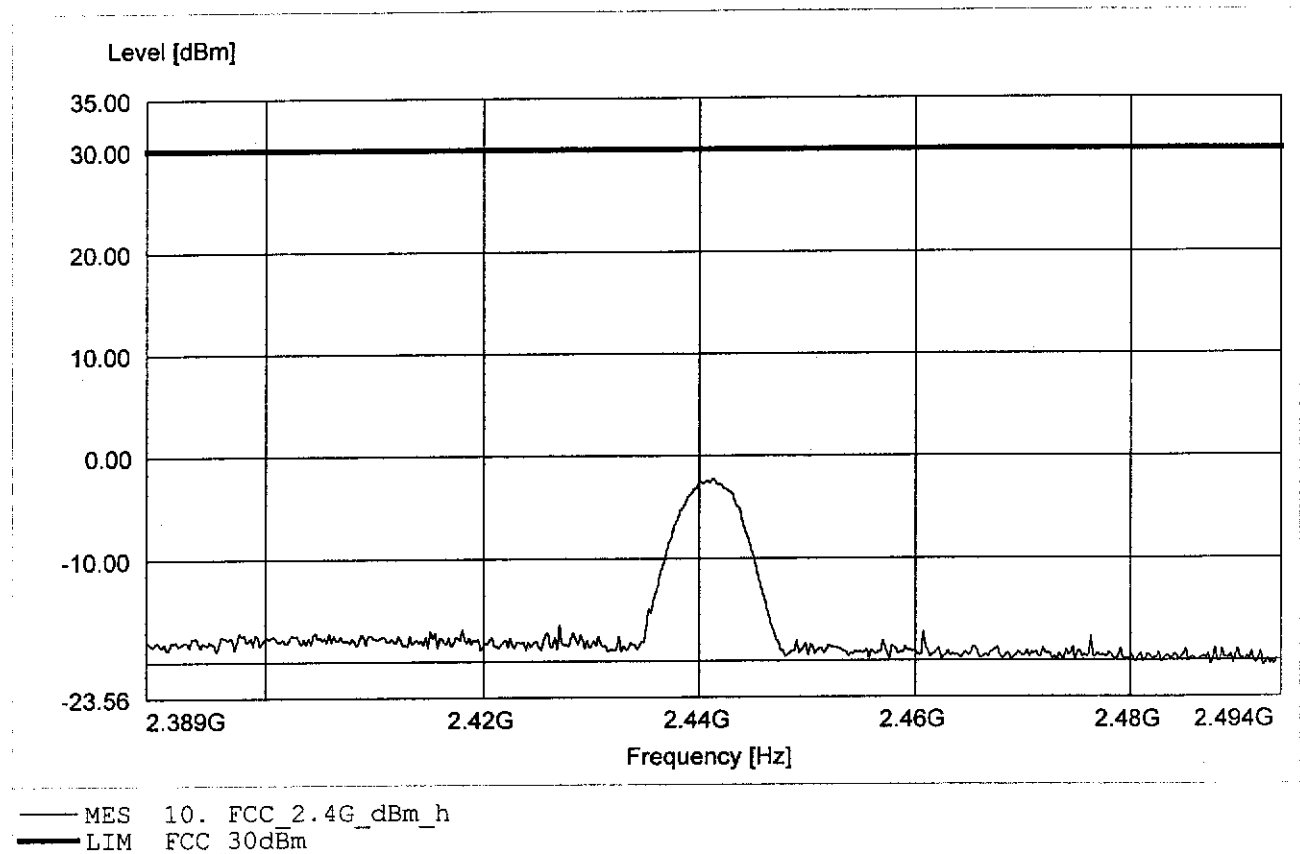


Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom + 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: 0.19dBm, RBW: 5MHz

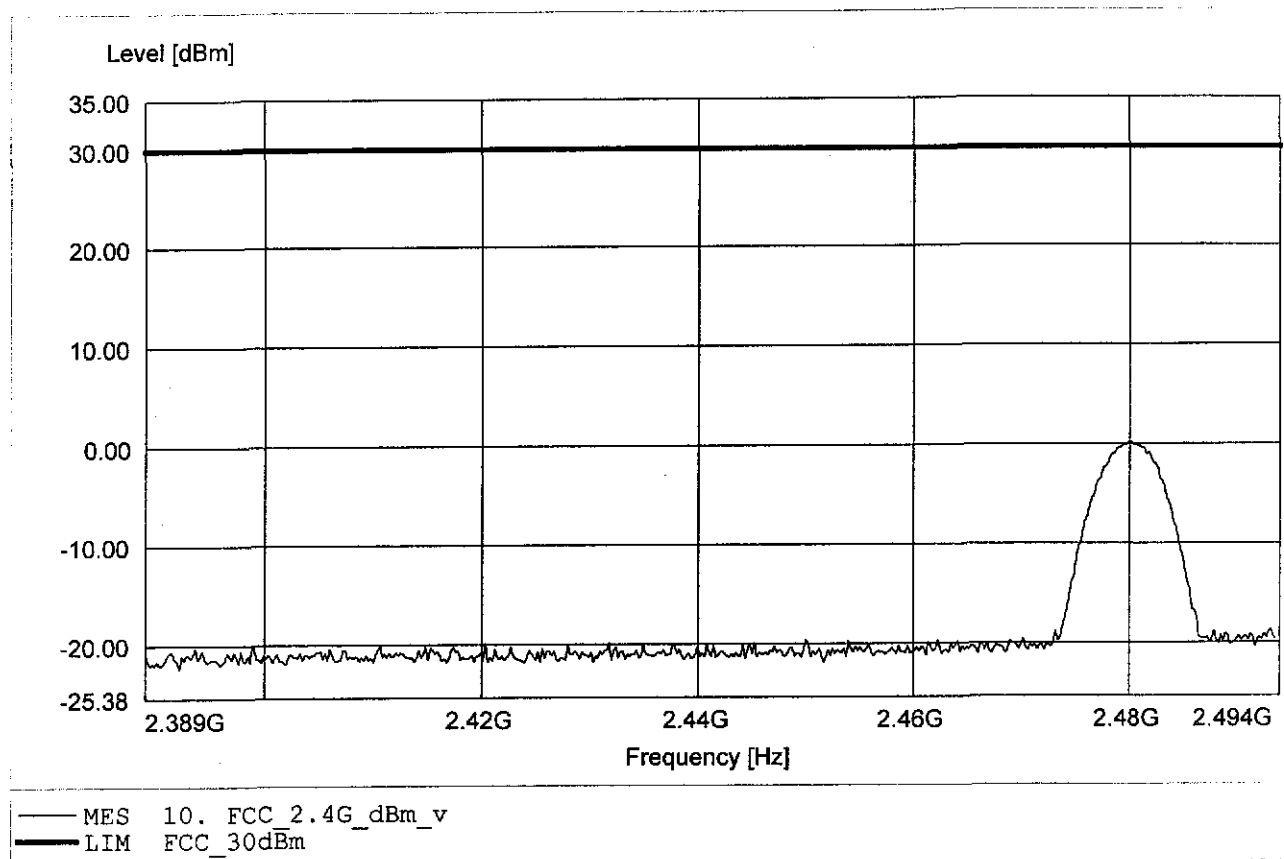

Carrier power (dBm)
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom + 15%
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: BBHA9120D
Comment 2: Freq: 2.480GHz, Pmax: -2.92dBm, RBW: 5MHz

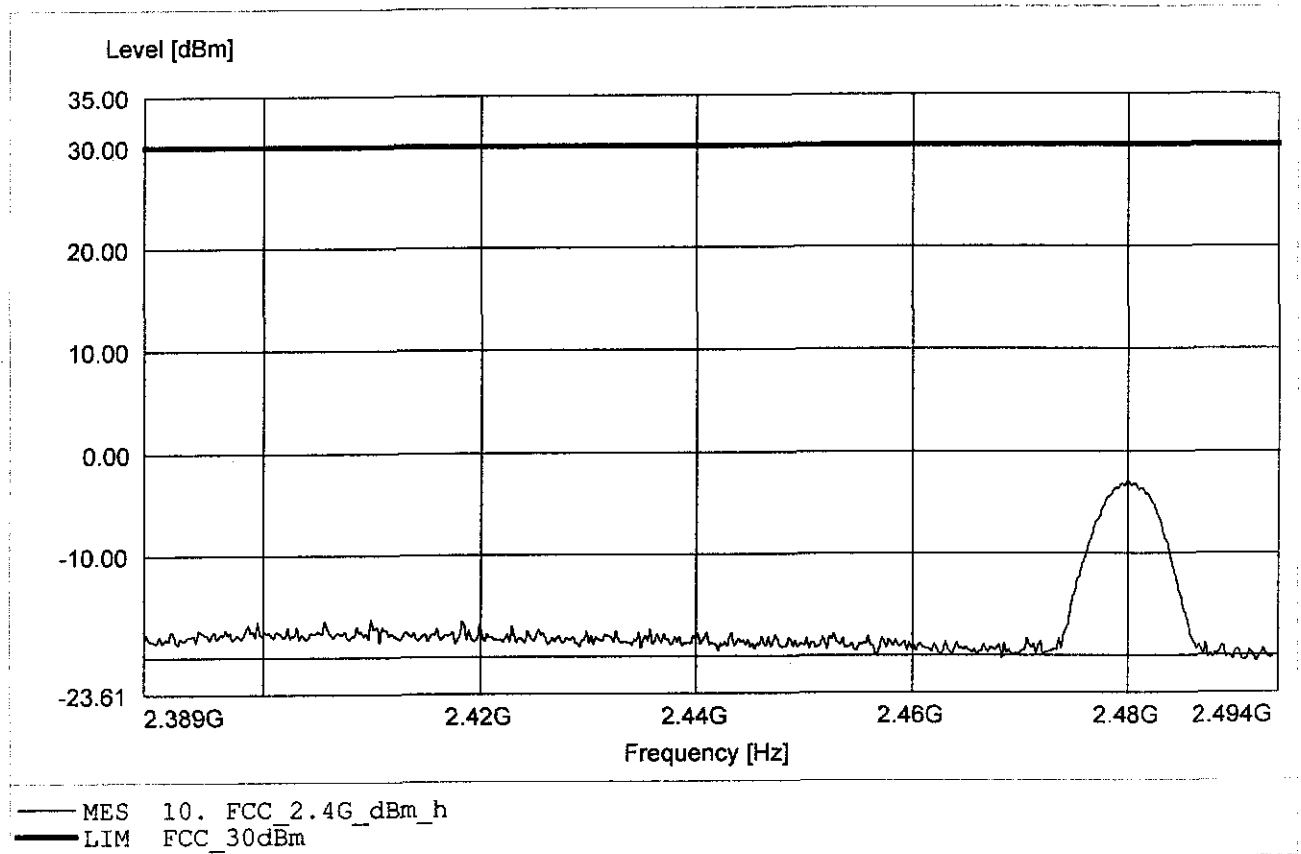


Appendix C

Spurious Emissions radiated - Transmitter operating


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 34.088MHz, Emax: 39.61dBμV/m, RBW: 100kHz

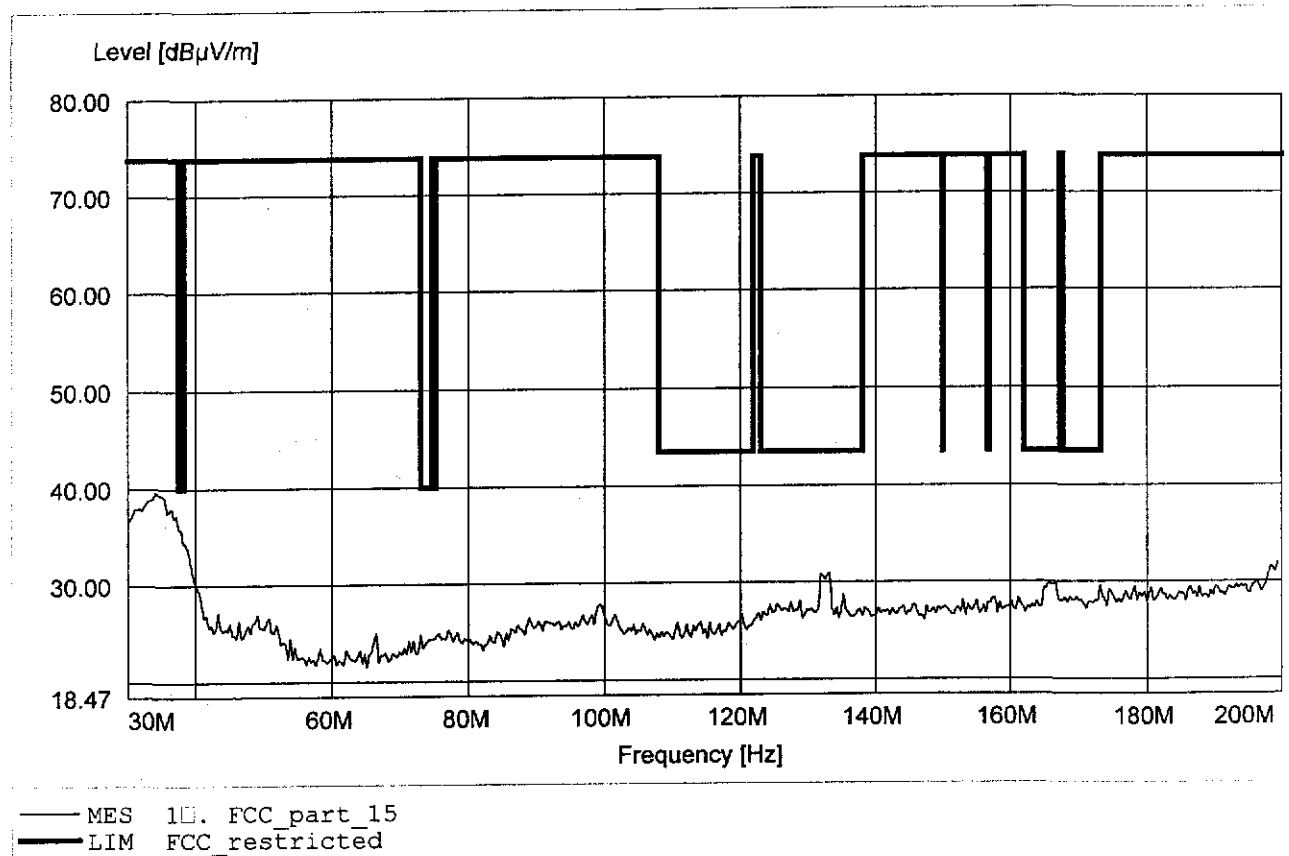


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 31.79dBμV/m, RBW: 100kHz

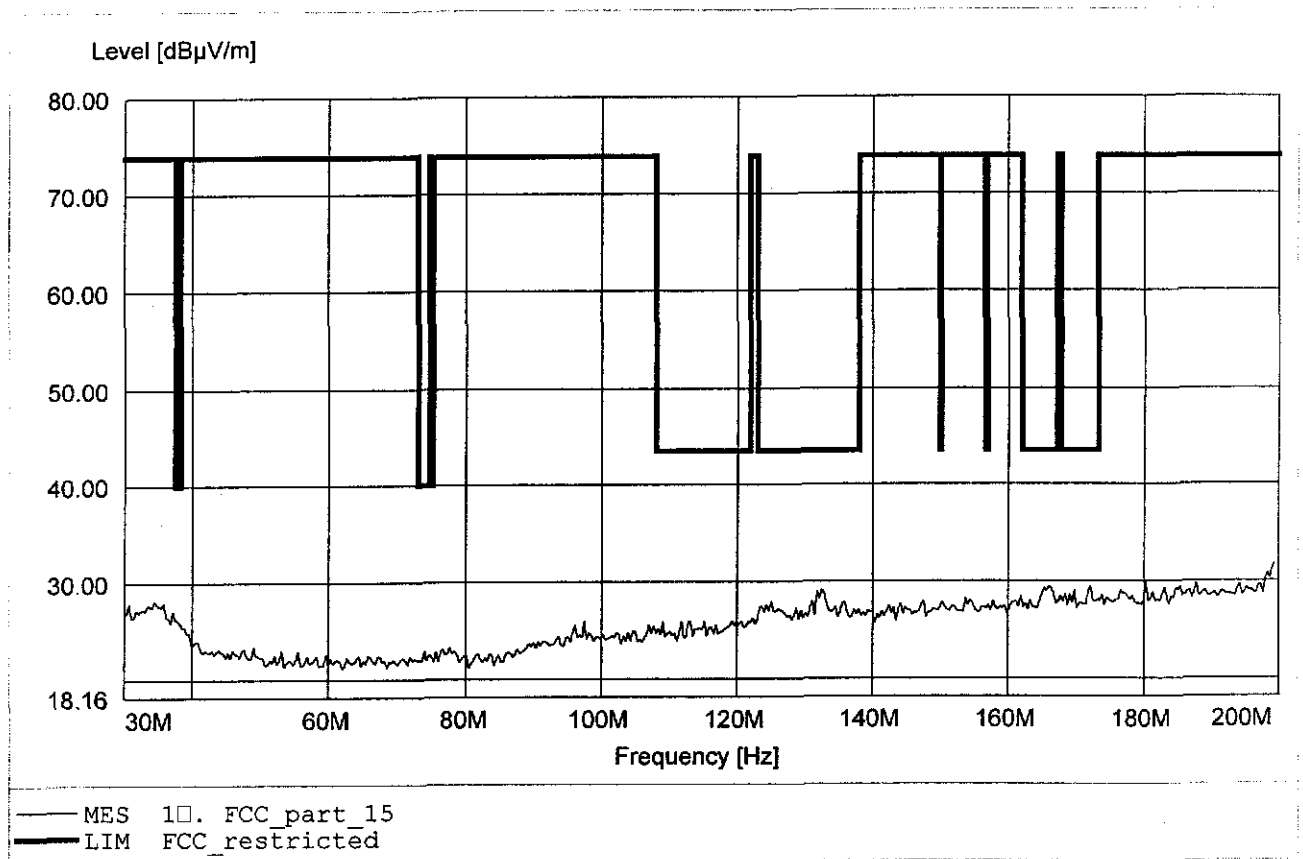


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 599.198MHz, Emax: 32.53dBμV/m, RBW: 100kHz

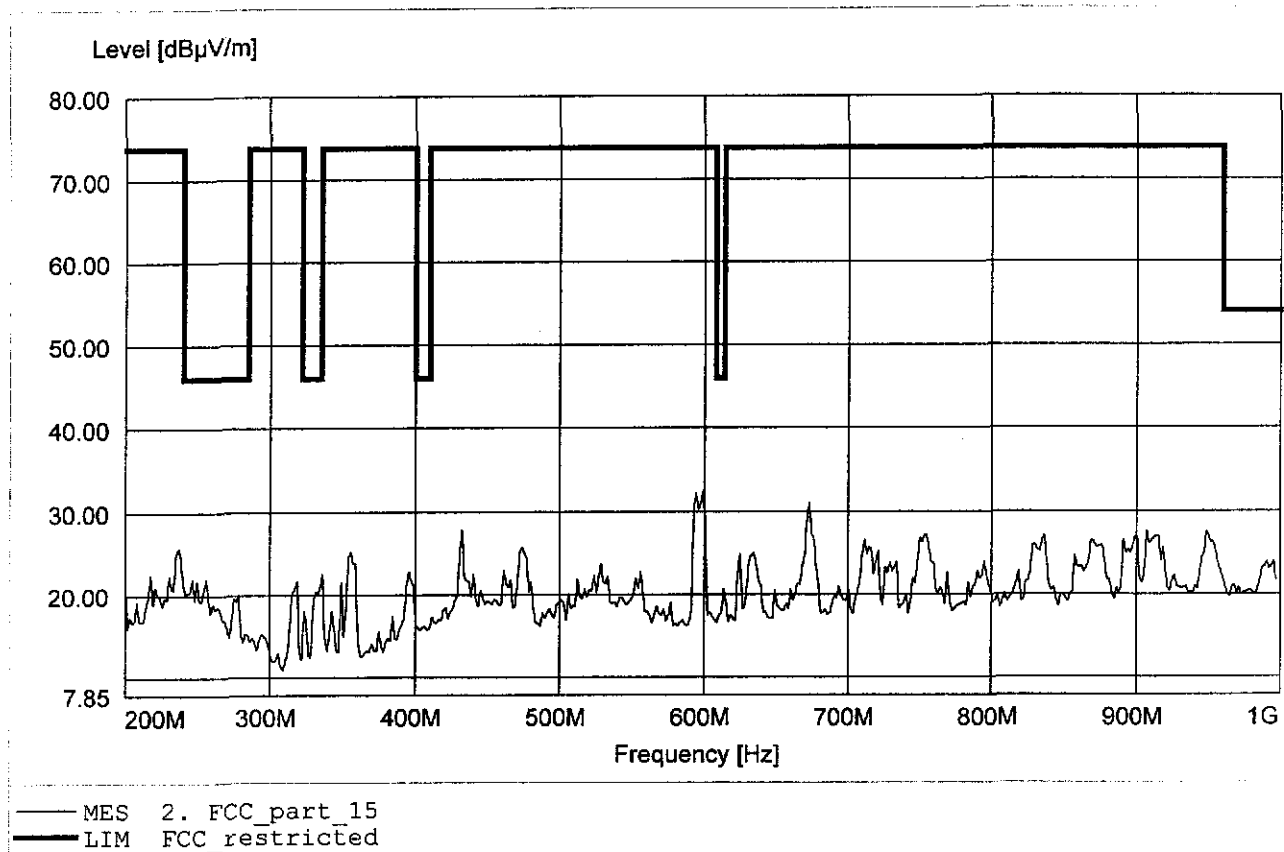


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 890.982MHz, Emax: 28.55dBuV/m, RBW: 100kHz

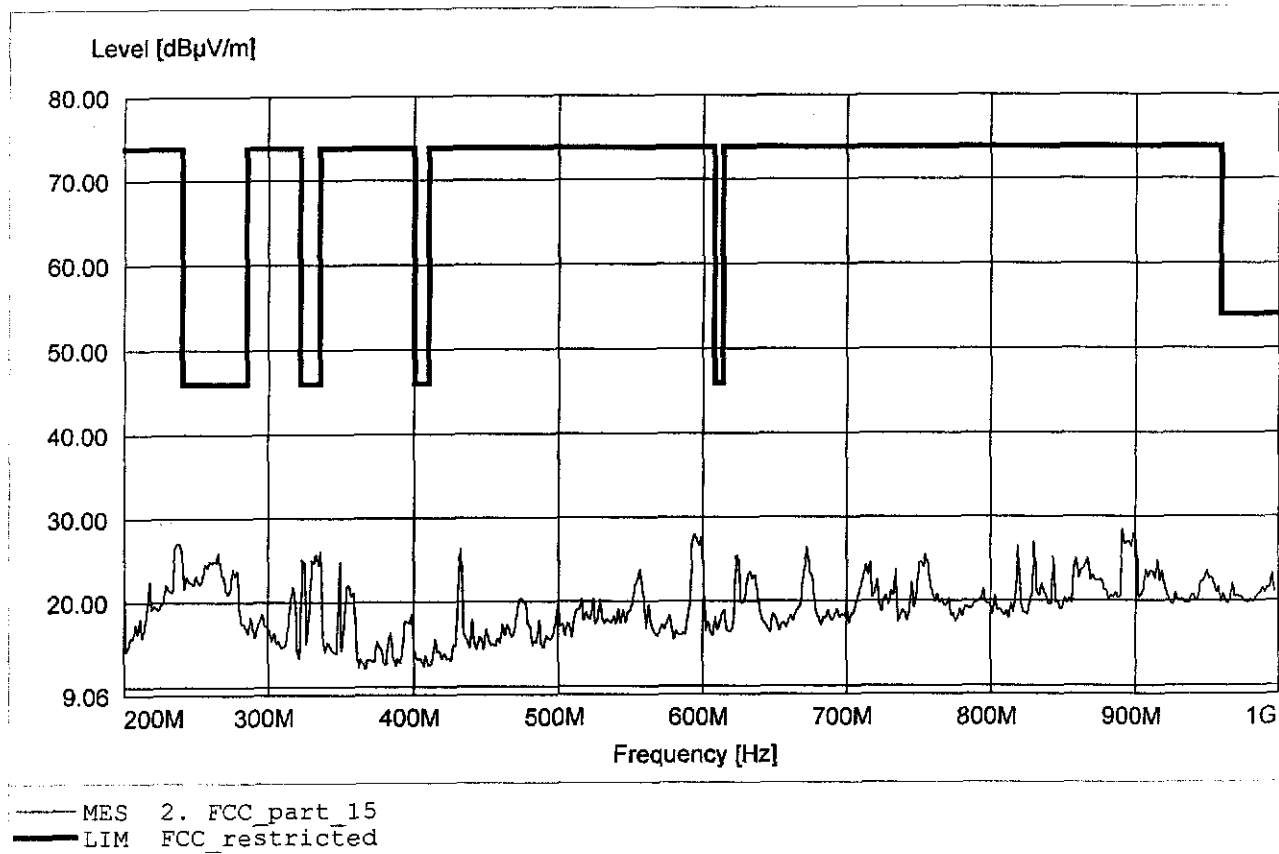


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 58.34dBμV/m, RBW: 1MHz

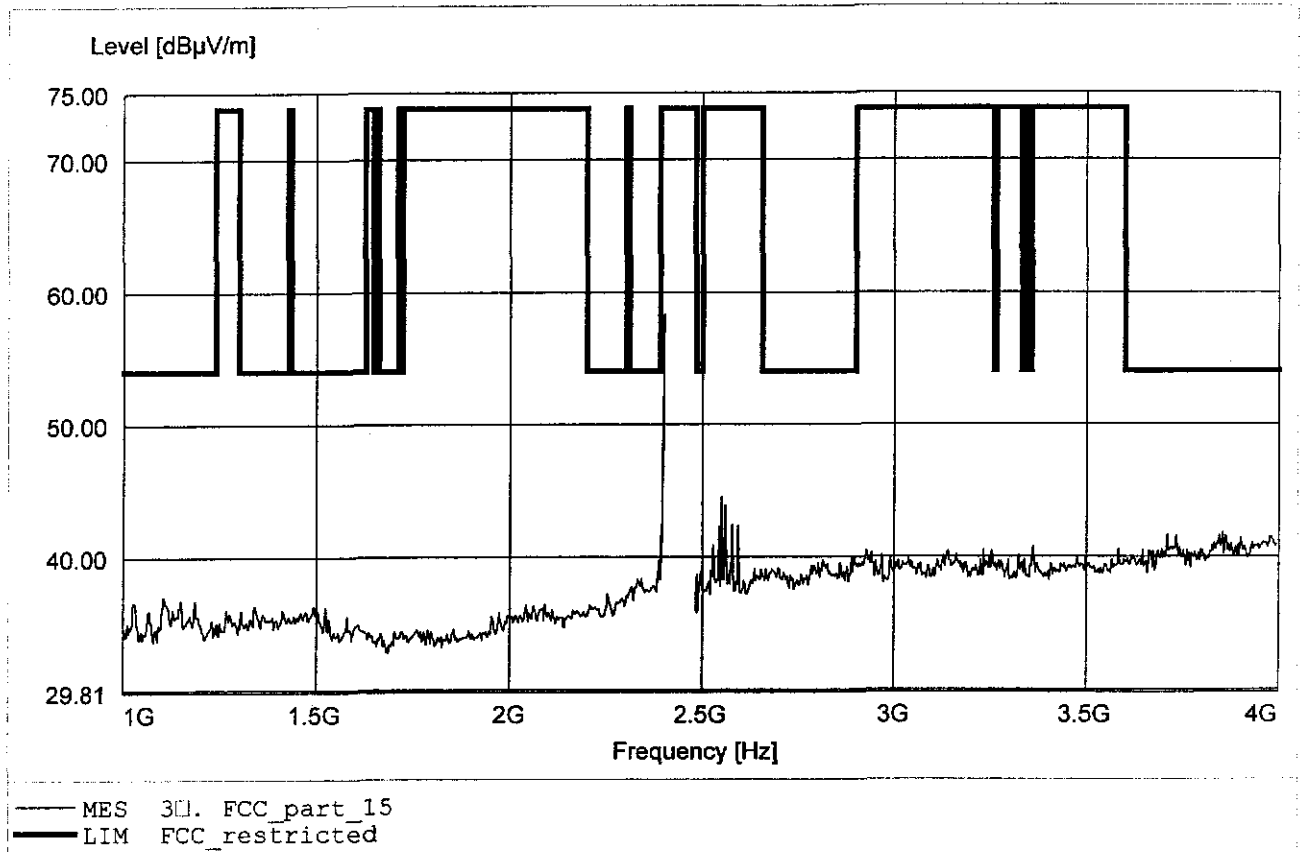


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 58.34dBμV/m, RBW: 1MHz

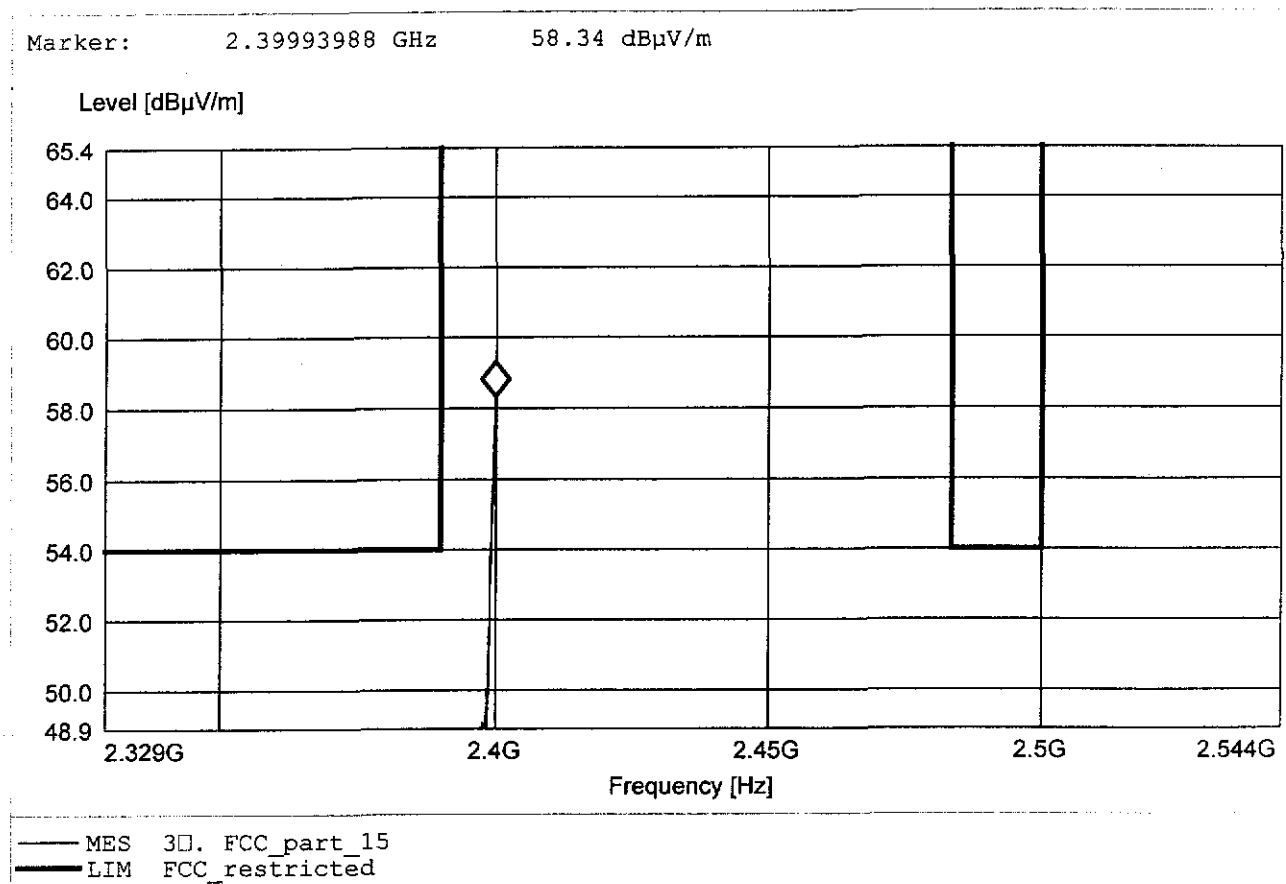


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 39.77dBuV/m, RBW: 1MHz

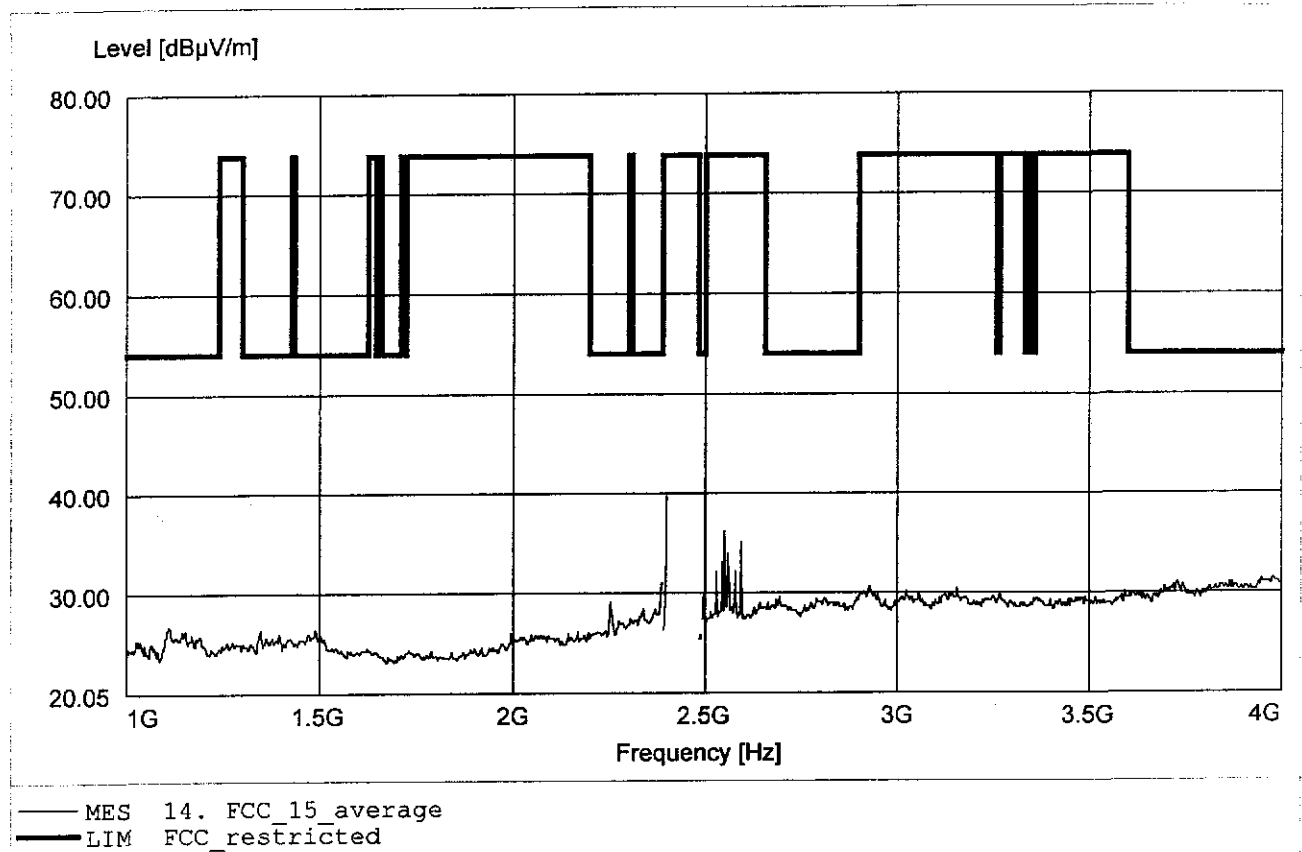

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C


EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 54.94dBμV/m, RBW: 1MHz

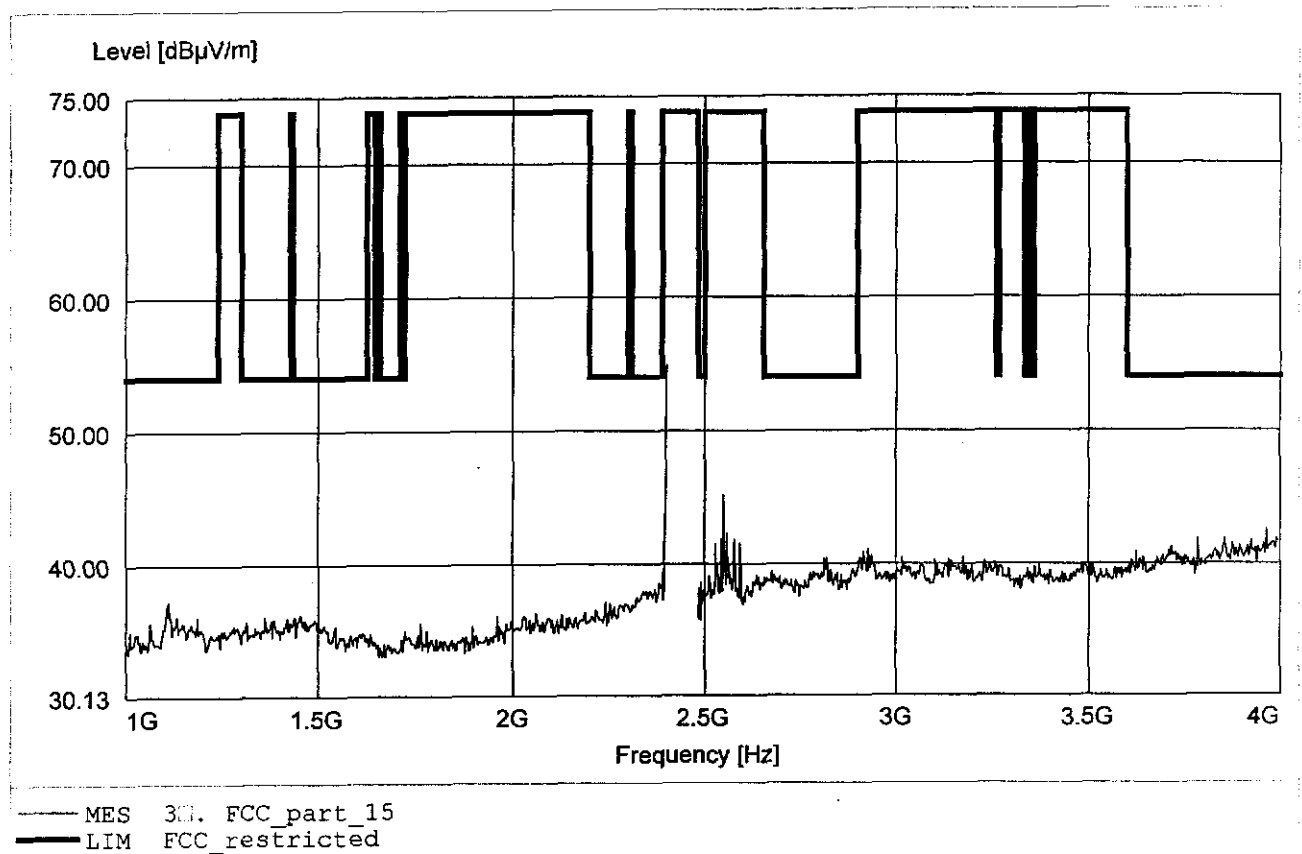

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C


EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.400GHz, Emax: 54.94dBµV/m, RBW: 1MHz

Marker: 2.39991984 GHz 54.94 dBµV/m

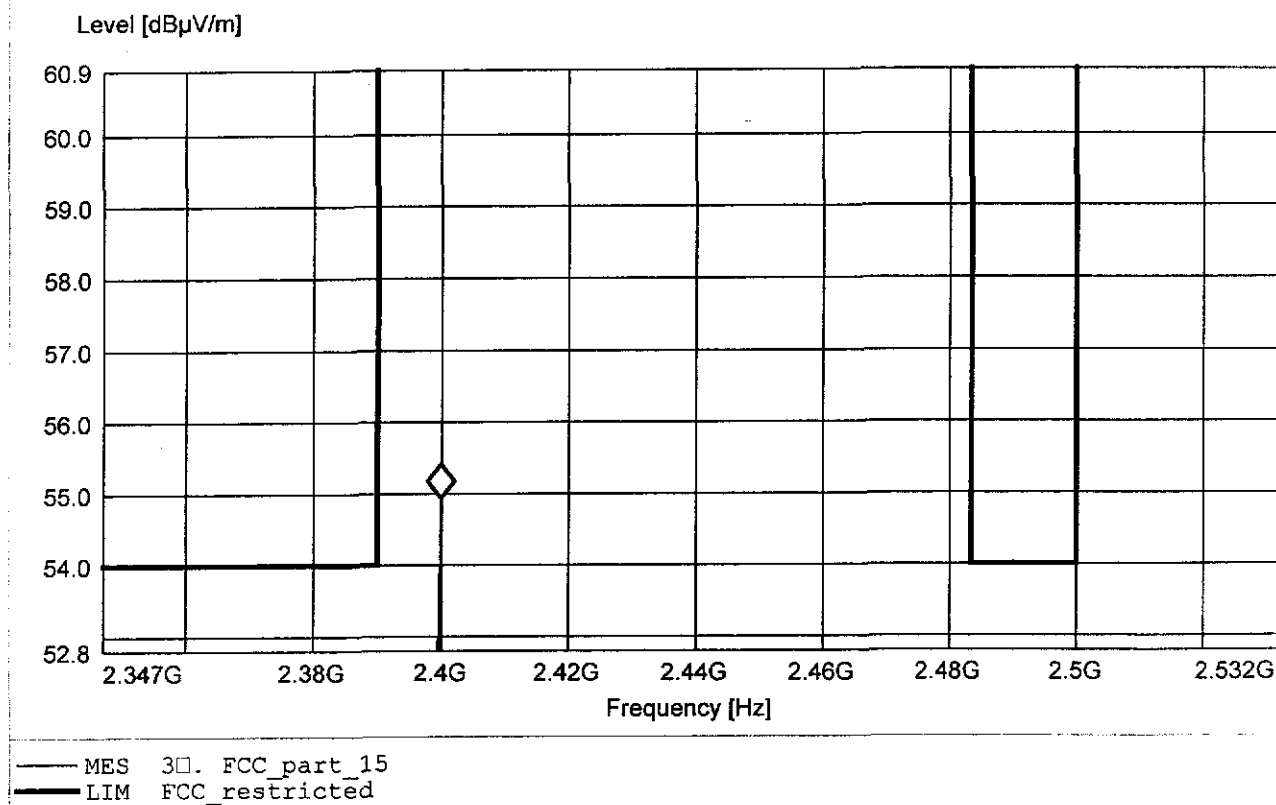


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, average detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.551GHz, Emax: 37.98dBuV/m, RBW: 1MHz

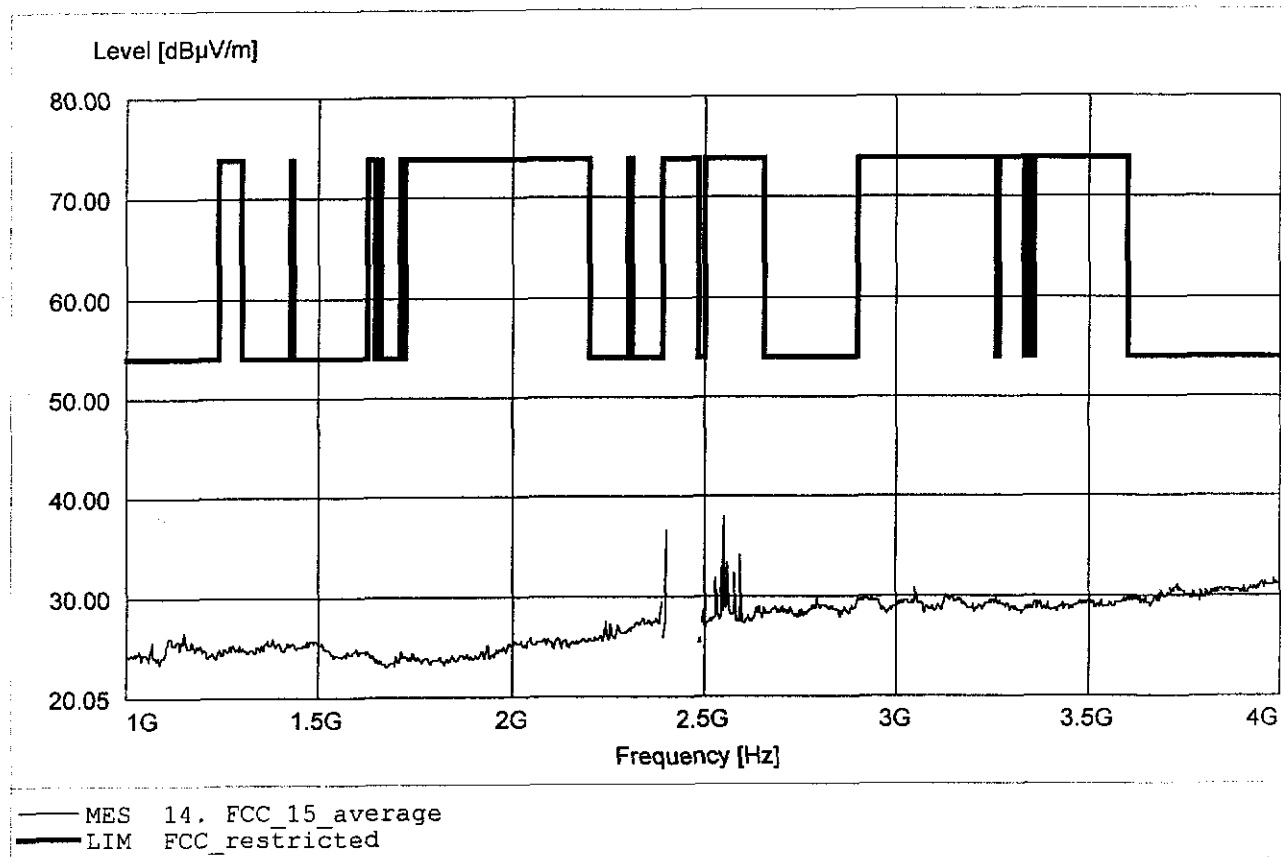


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.992GHz, Emax: 37.88dBμV/m, RBW: 1MHz

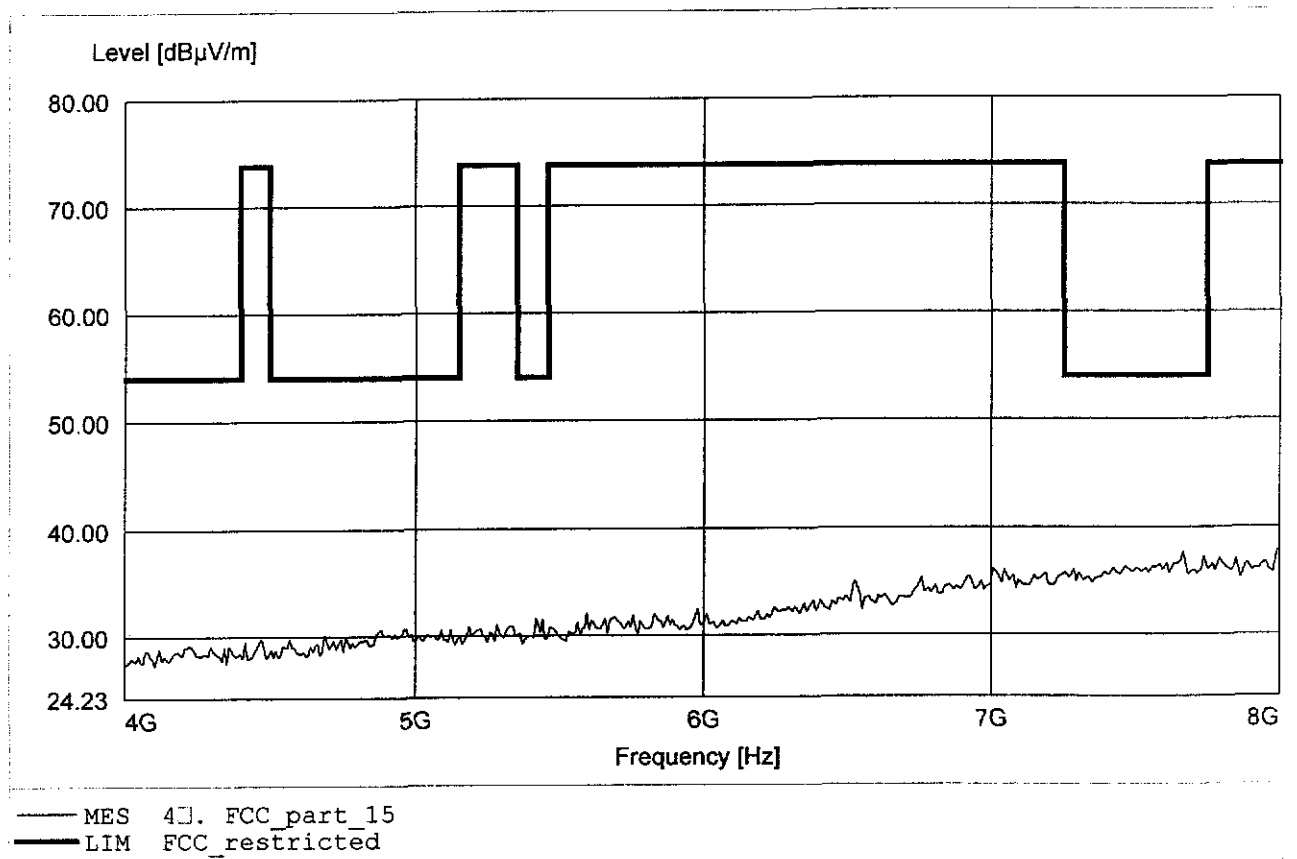


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.439GHz, Emax: 37.53dBμV/m, RBW: 1MHz

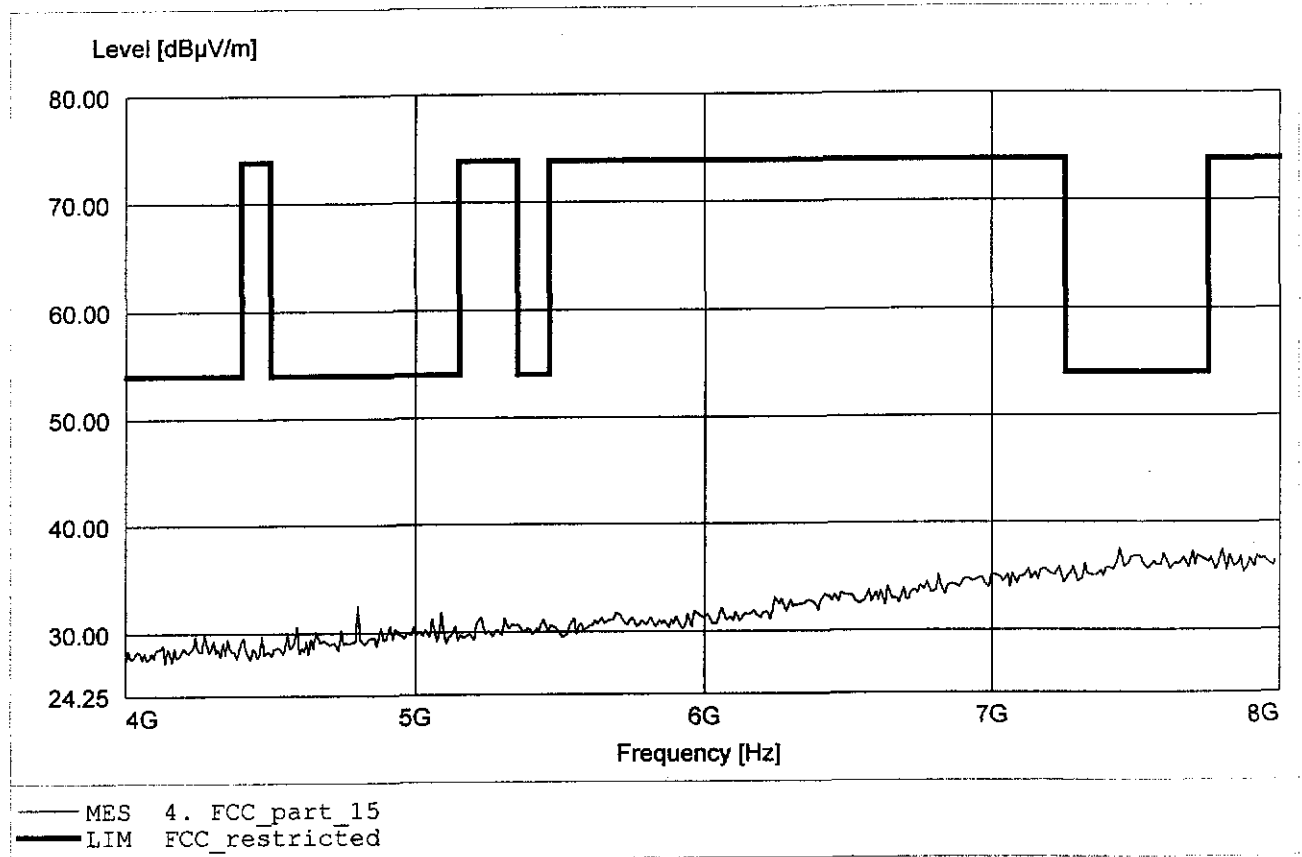


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.230GHz, Emax: 41.08dBμV/m, RBW: 1MHz

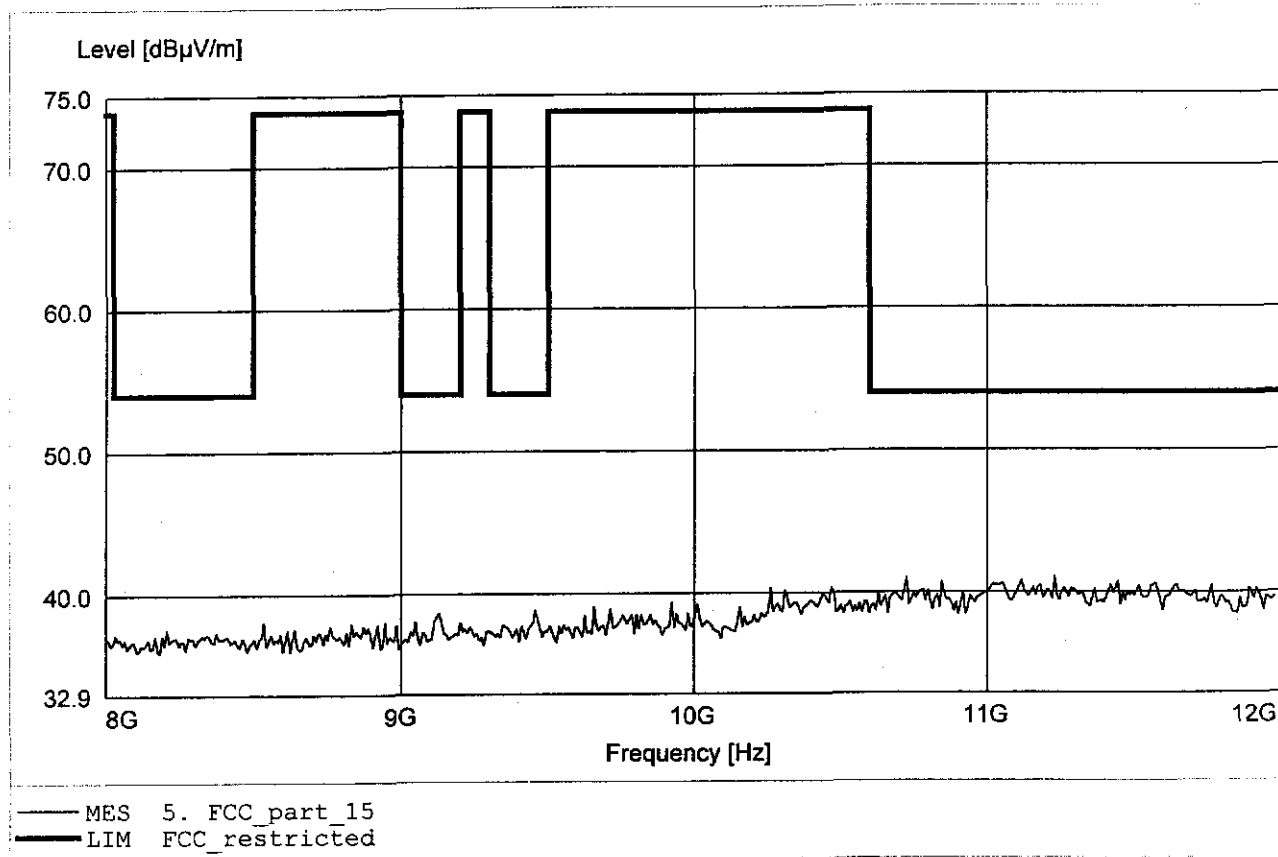


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 10.701GHz, Emax: 41.37dBμV/m, RBW: 1MHz

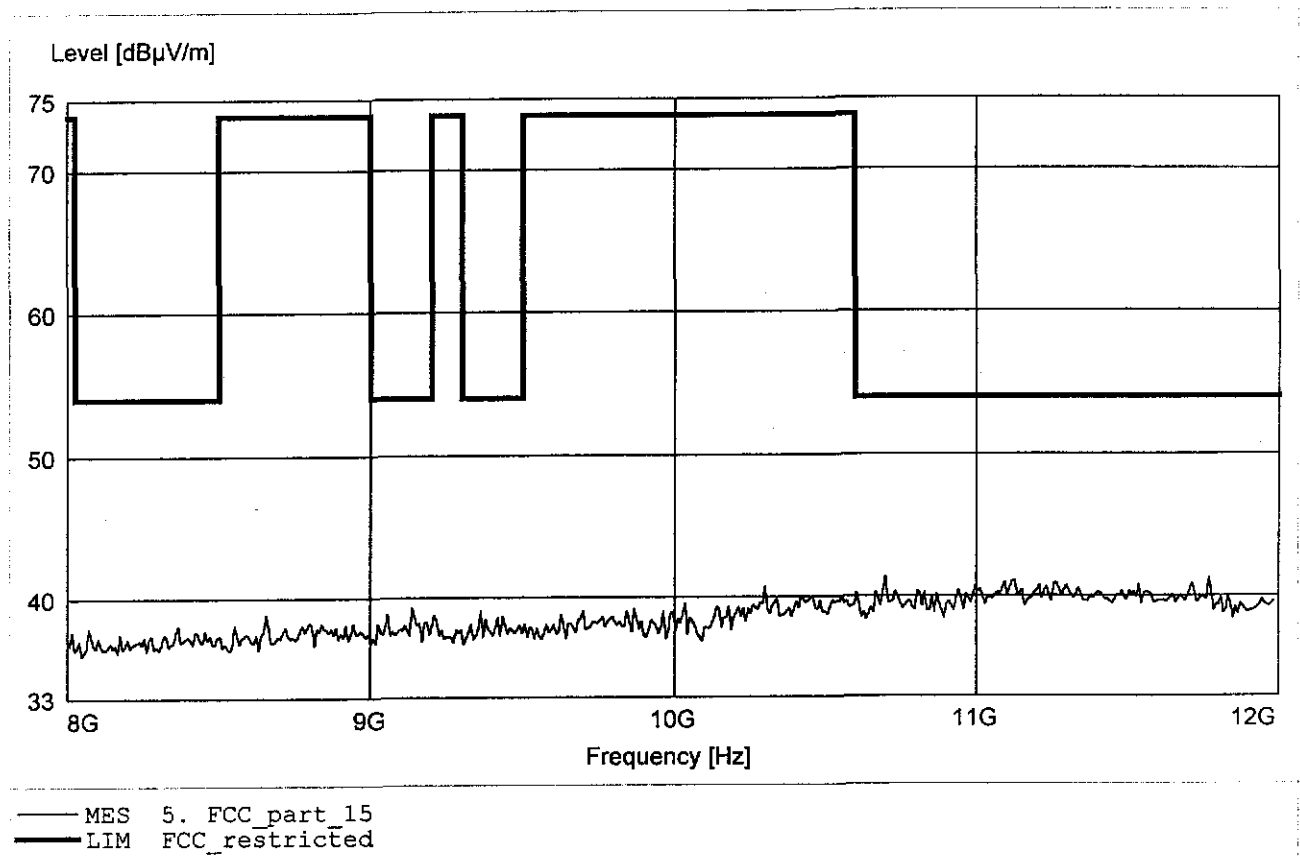


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.174GHz, Emax: 43.87dBuV/m, RBW: 1MHz

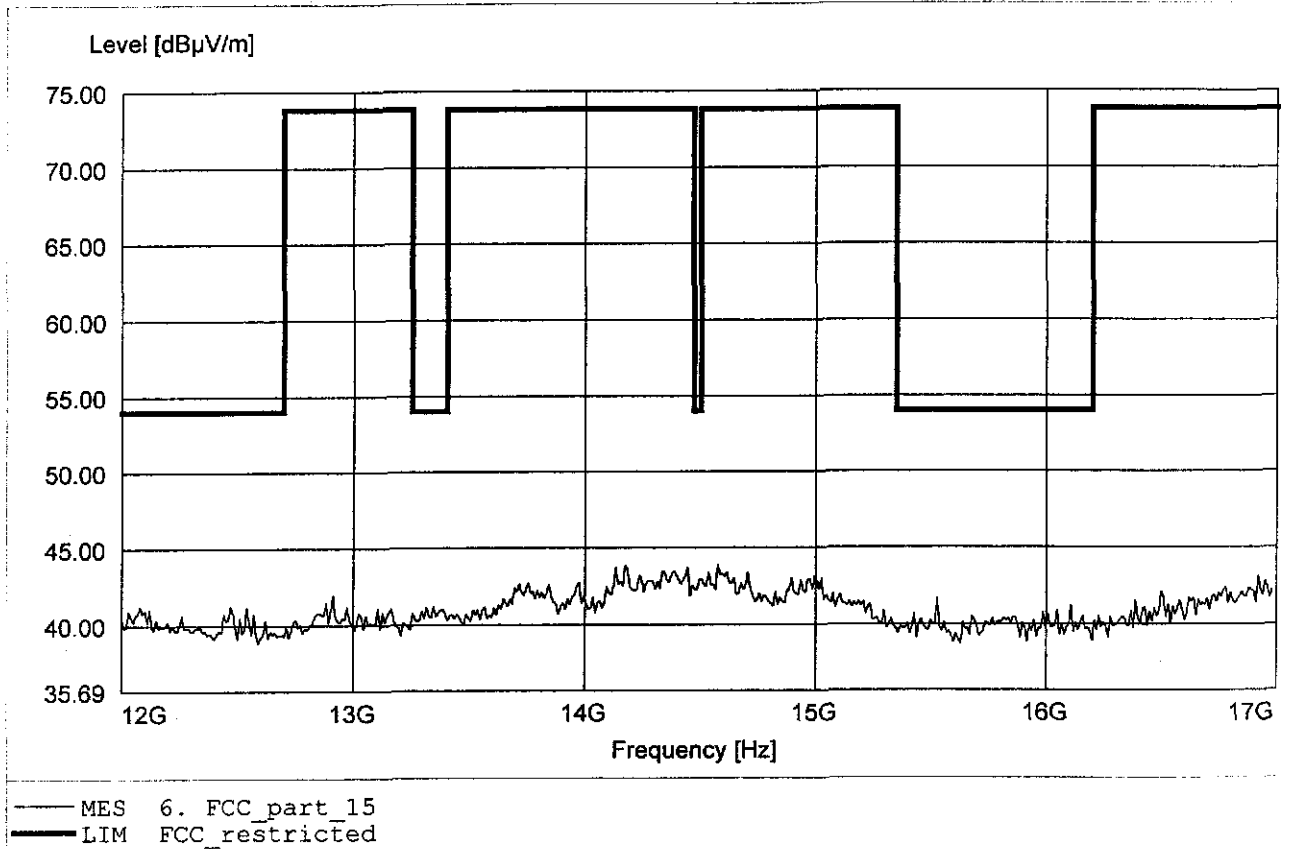


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.134GHz, Emax: 44.34dBuV/m, RBW: 1MHz

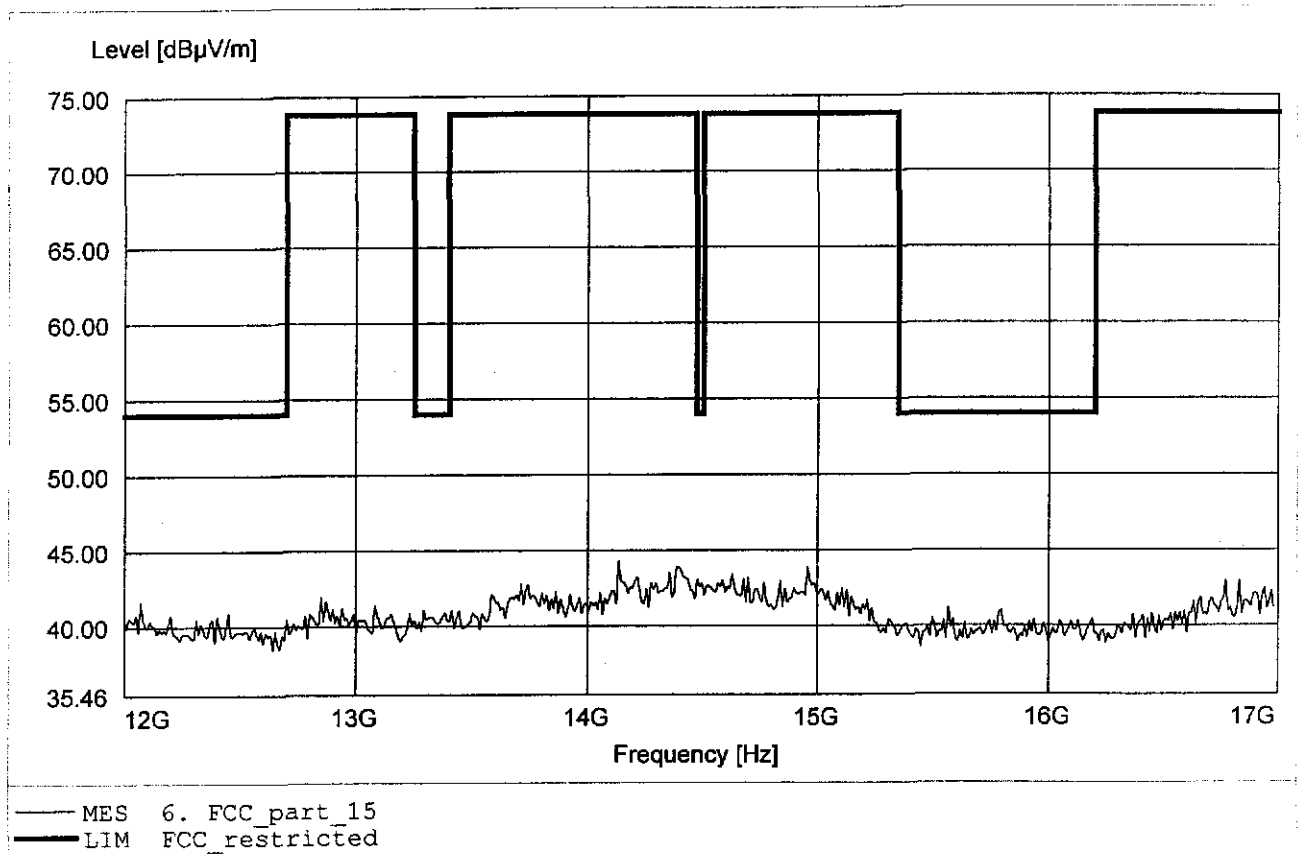


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 26.233GHz, Emax: 43.93dBµV/m, RBW: 1MHz

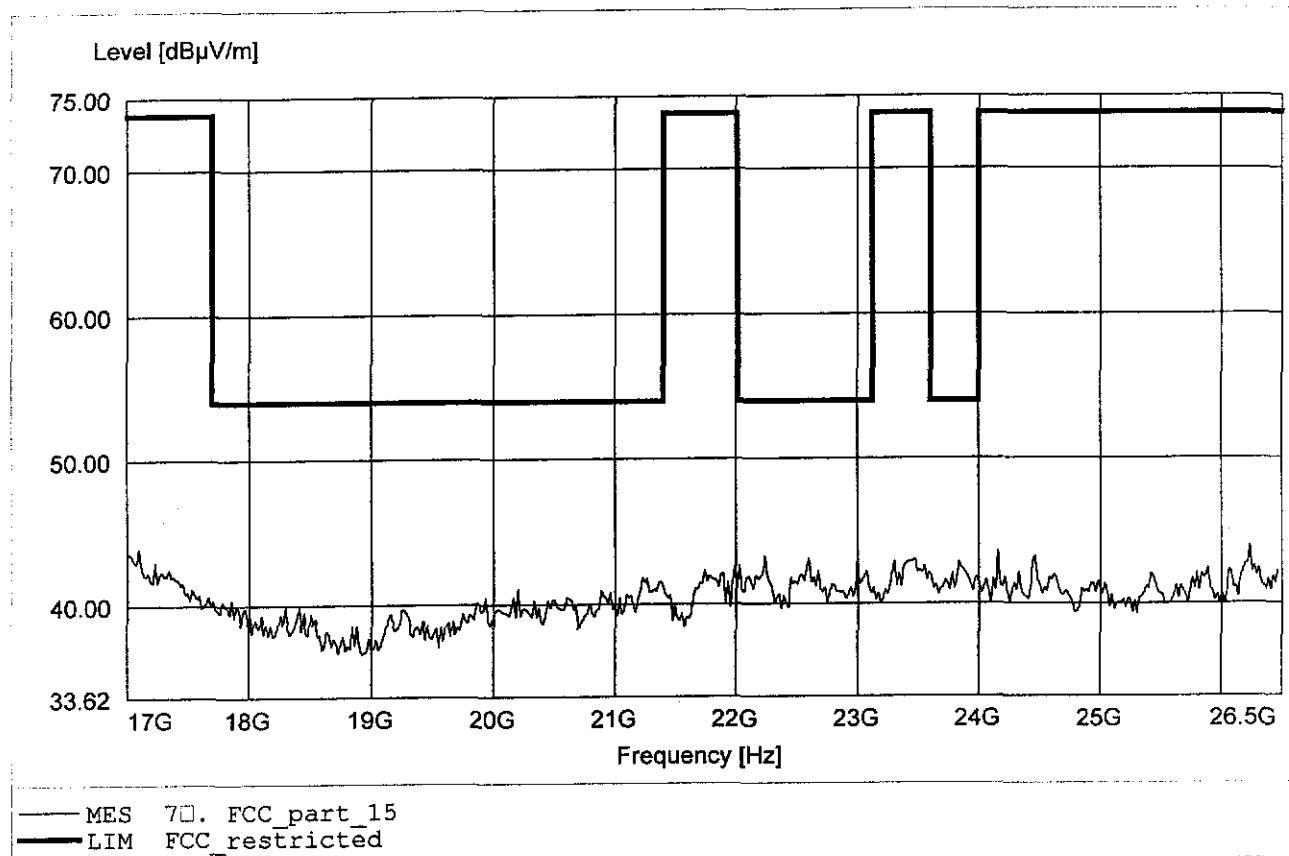


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2402 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.000GHz, Emax: 45.17dBμV/m, RBW: 1MHz

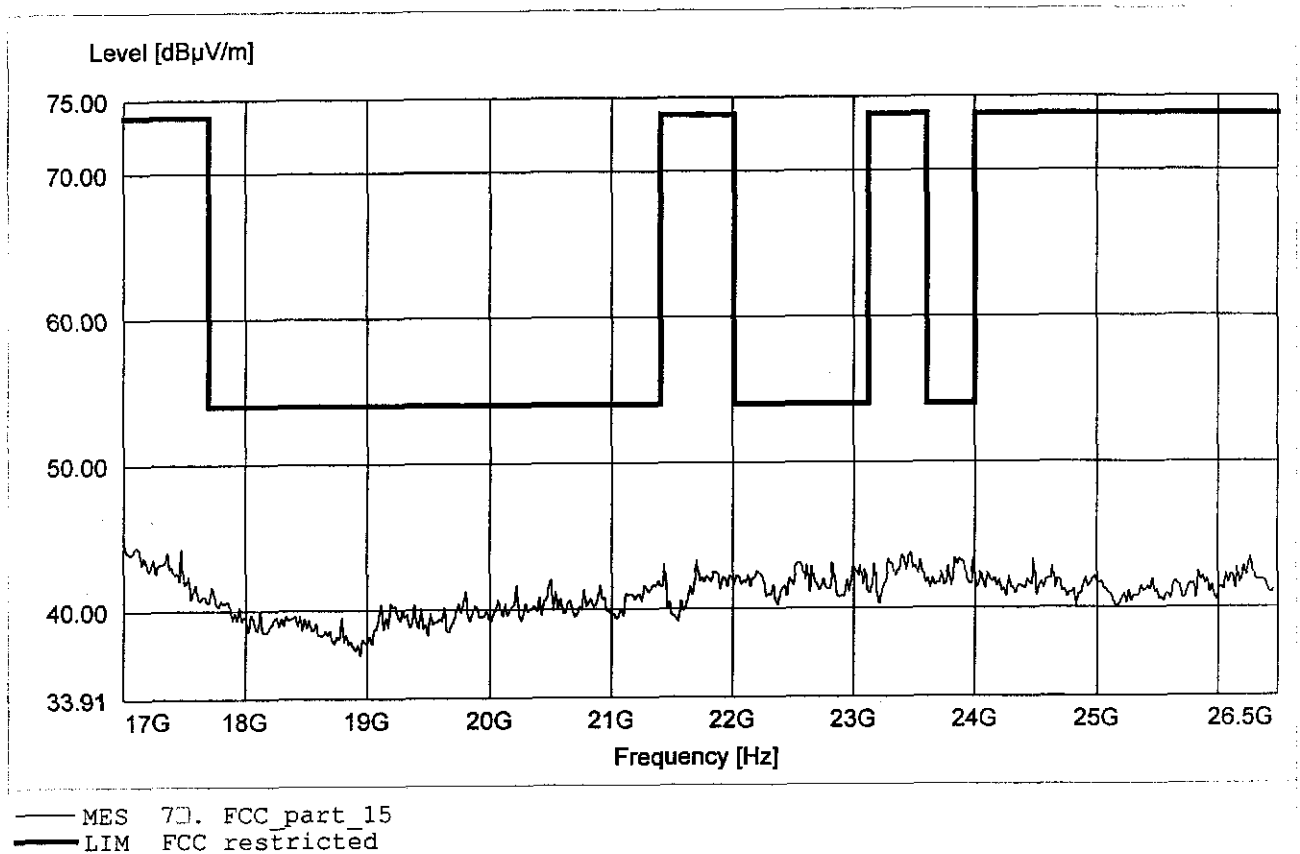


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 35.110MHz, Emax: 39.75dBµV/m, RBW: 100kHz

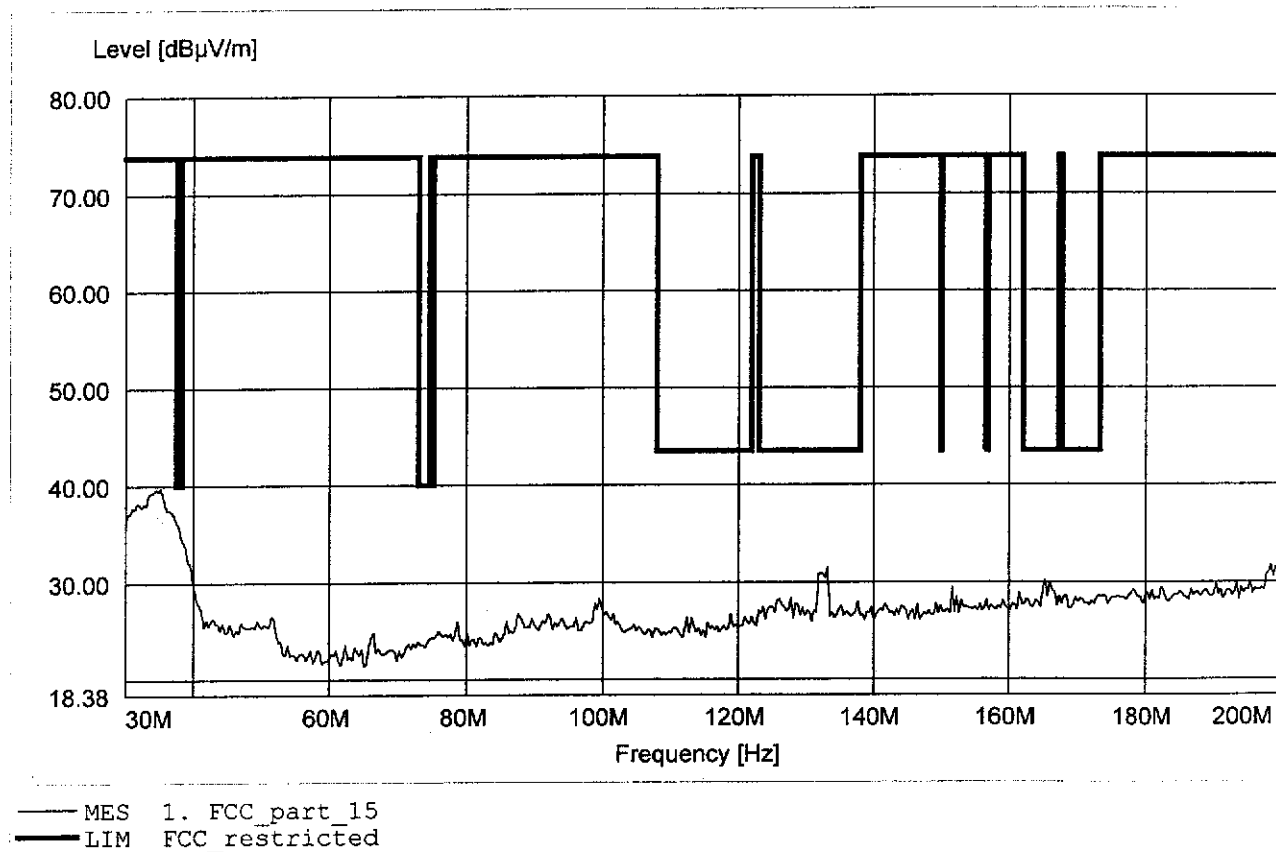


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
 Model: AEUC-201A
 Approval Holder: AUTO ELECTRONIC CORP.
 Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
 Test Site / Operator: ETS / Mr.Hoppe
 Test Specification: according to S15.247
 Comment 1: Dist.: 3m, Ant.: HK 116
 Comment 2: Freq: 198.297MHz, Emax: 32.51dBμV/m, RBW: 100kHz

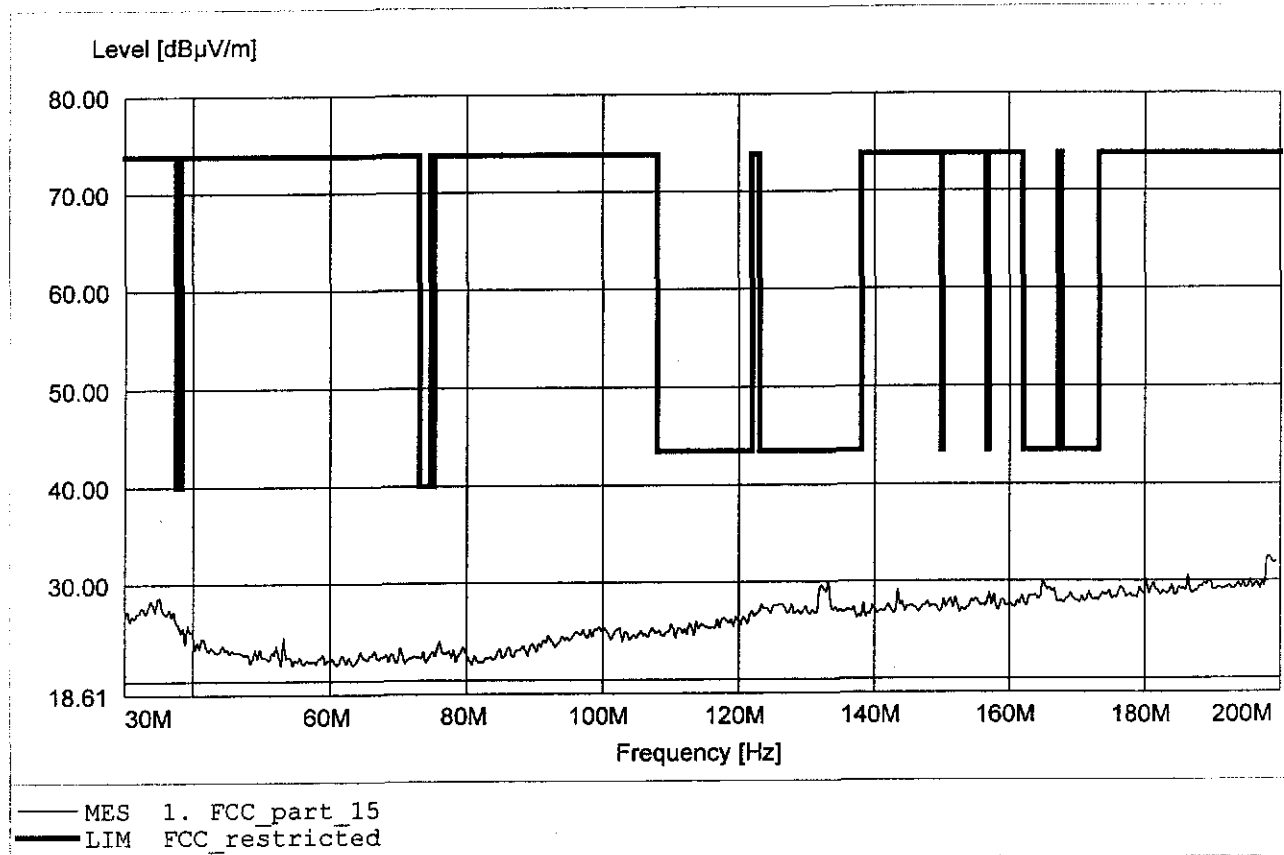


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 33.38dBuV/m, RBW: 100kHz

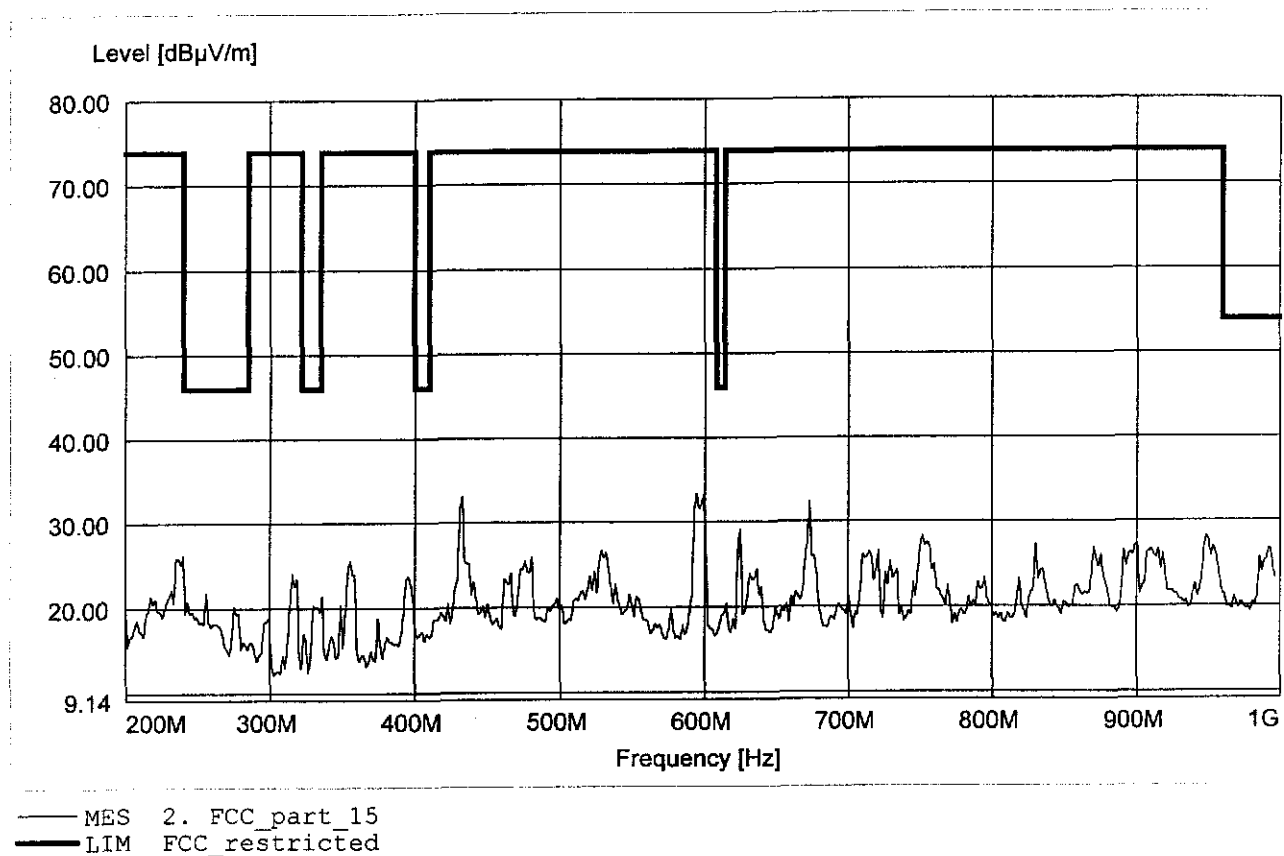


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 890.982MHz, Emax: 29.43dB μ V/m, RBW: 100kHz

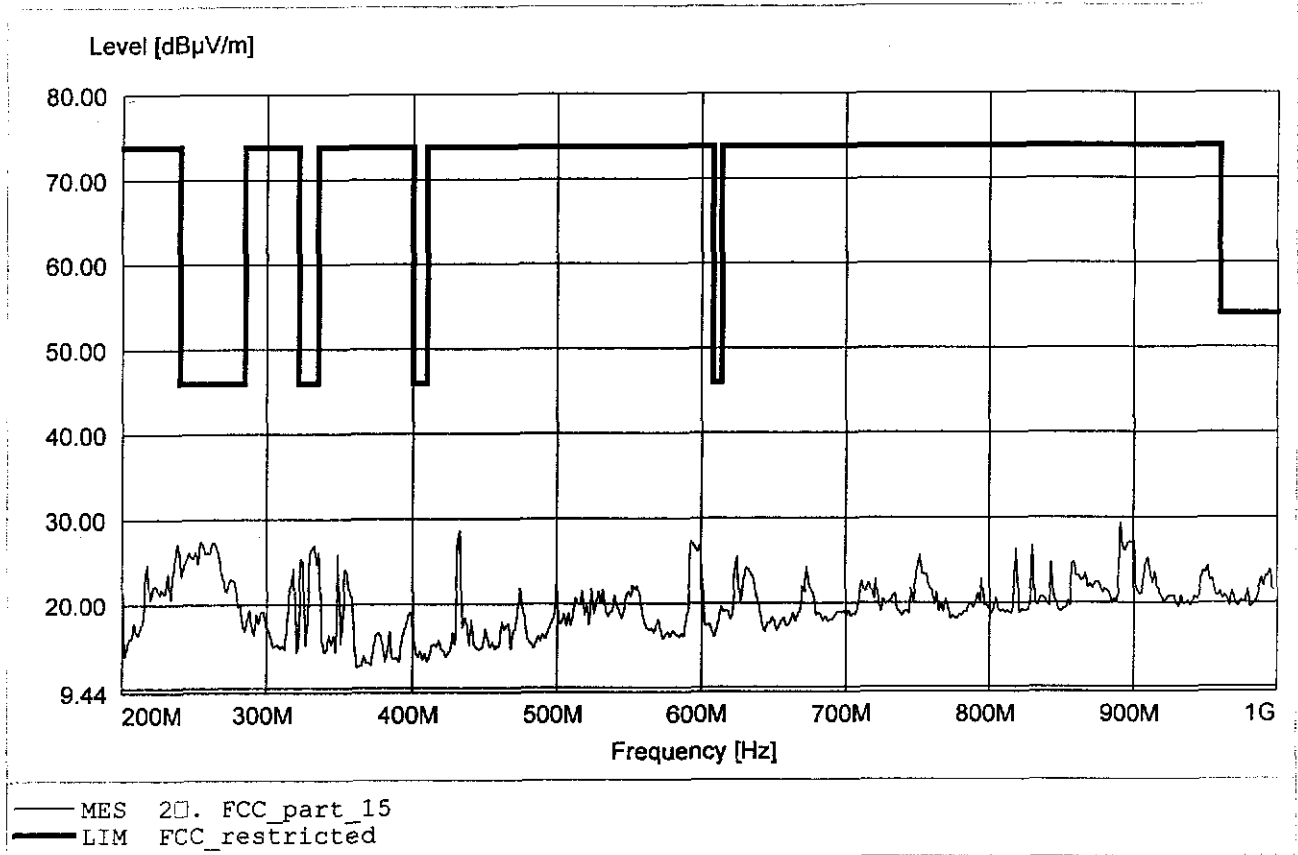


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.593GHz, Emax: 44.62dBμV/m, RBW: 1MHz

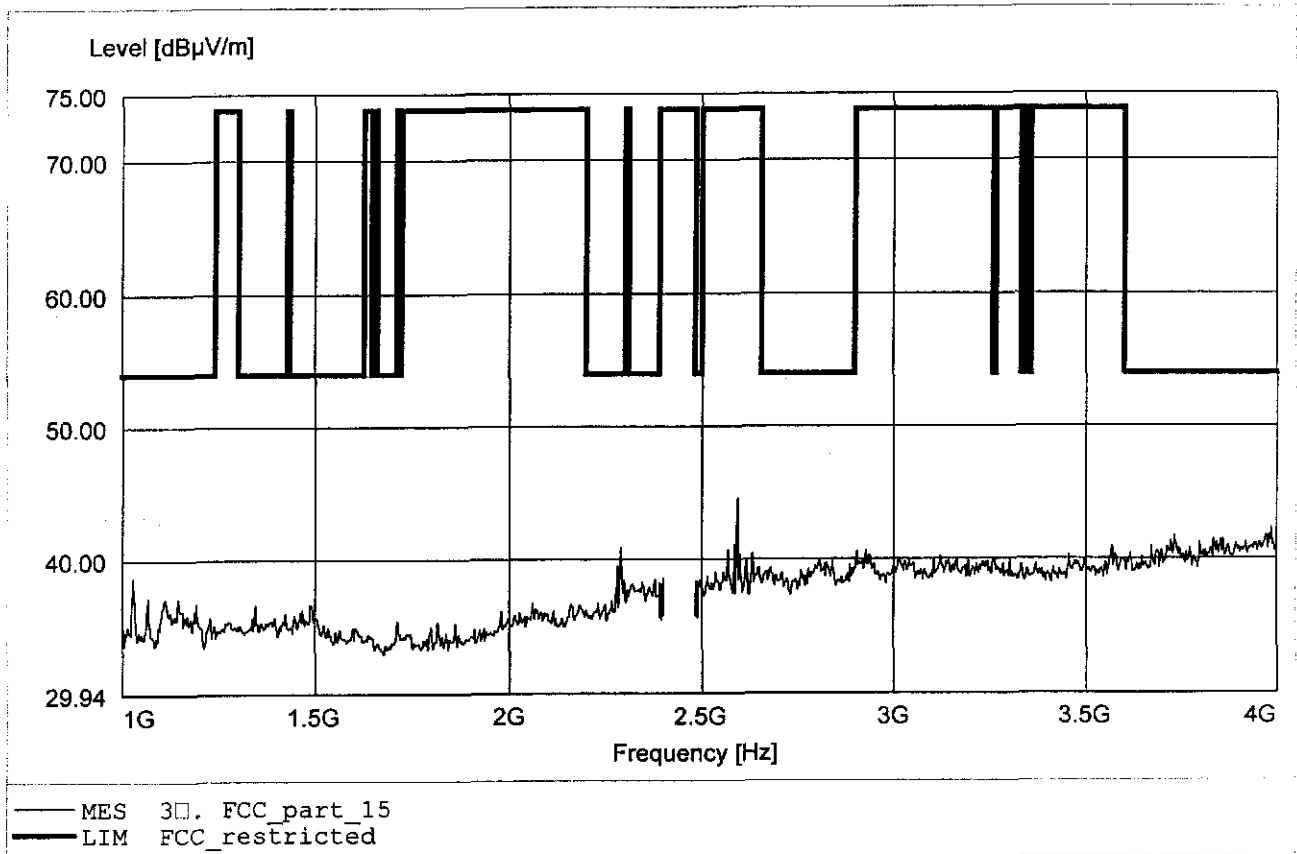


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.593GHz, Emax: 43.25dBuV/m, RBW: 1MHz

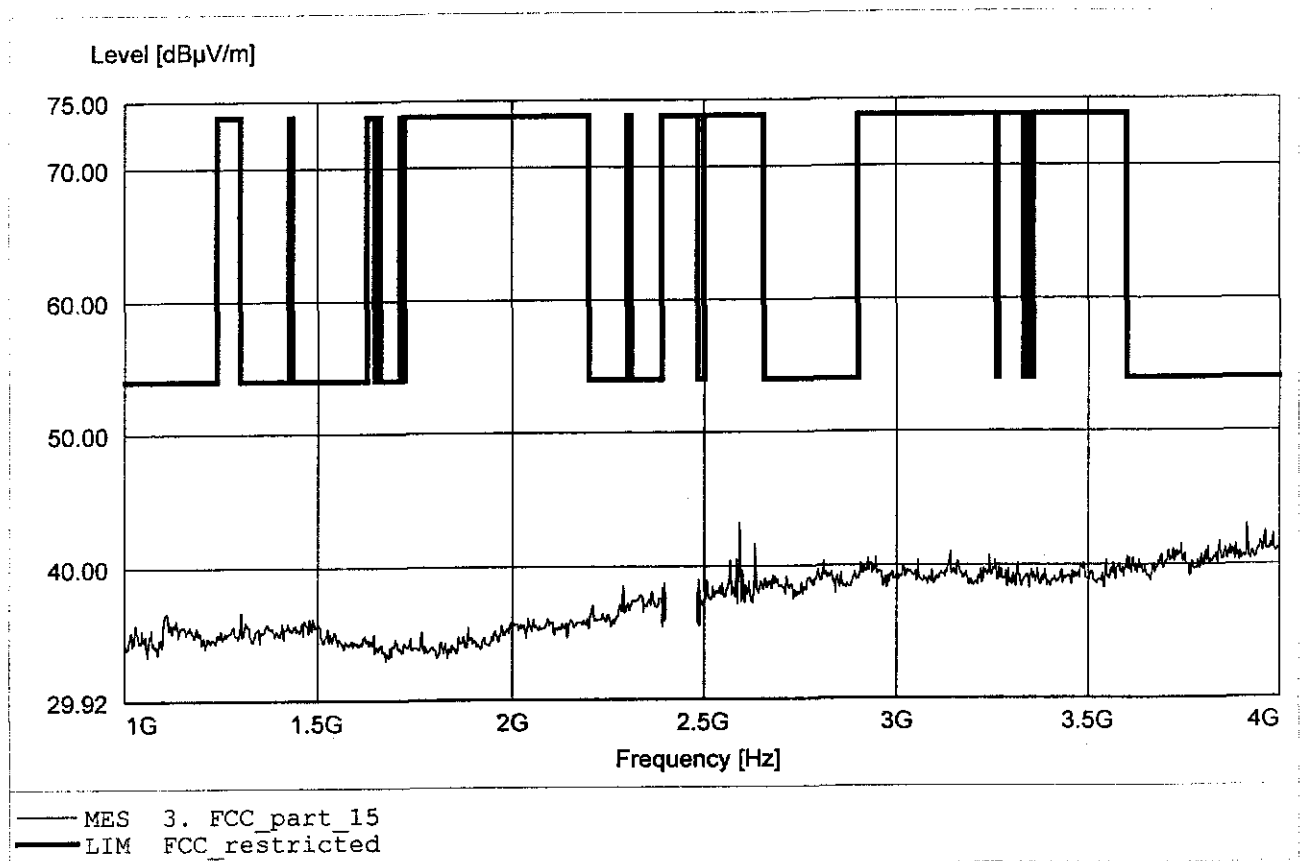


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.631GHz, Emax: 37.58dBμV/m, RBW: 1MHz

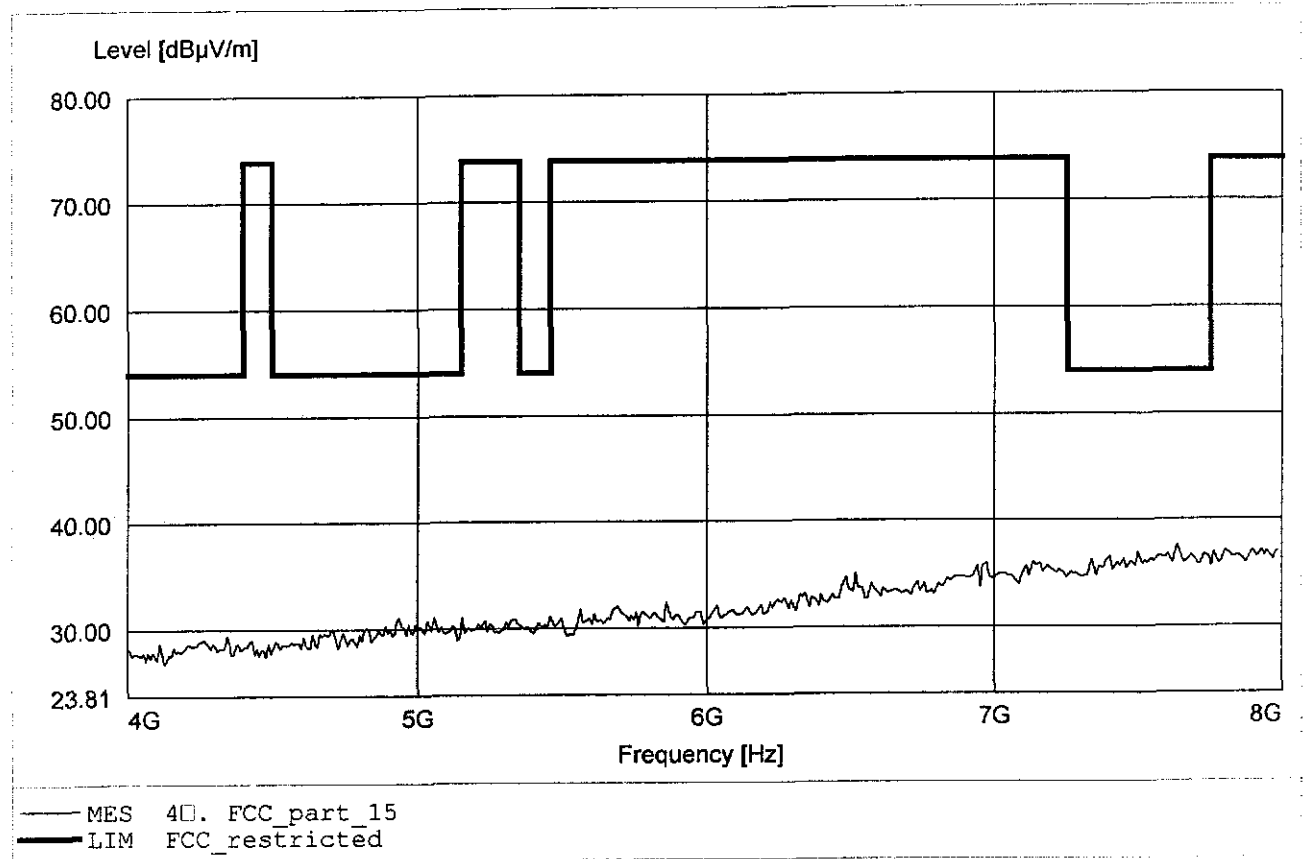


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.944GHz, Emax: 37.93dBμV/m, RBW: 1MHz

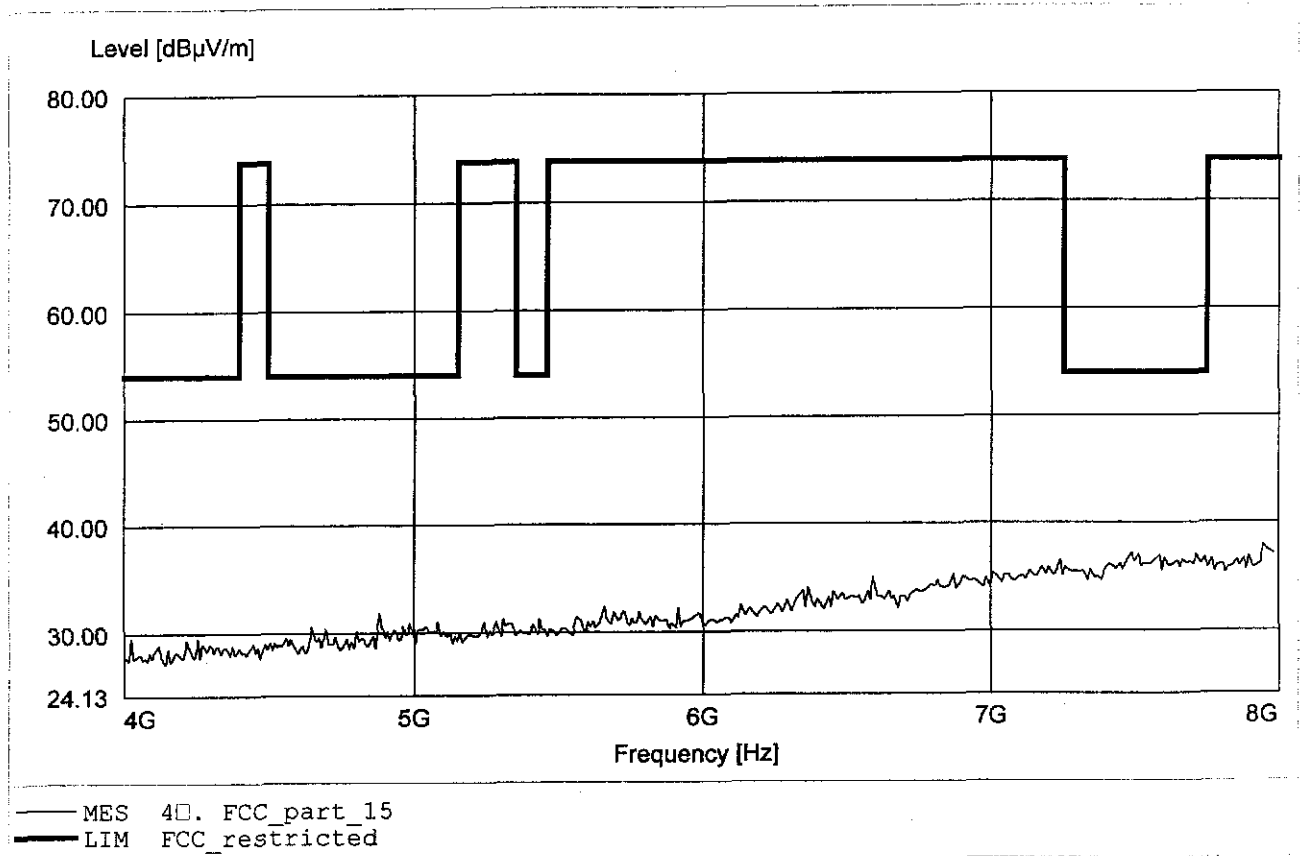


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.166GHz, Emax: 41.82dBμV/m, RBW: 1MHz

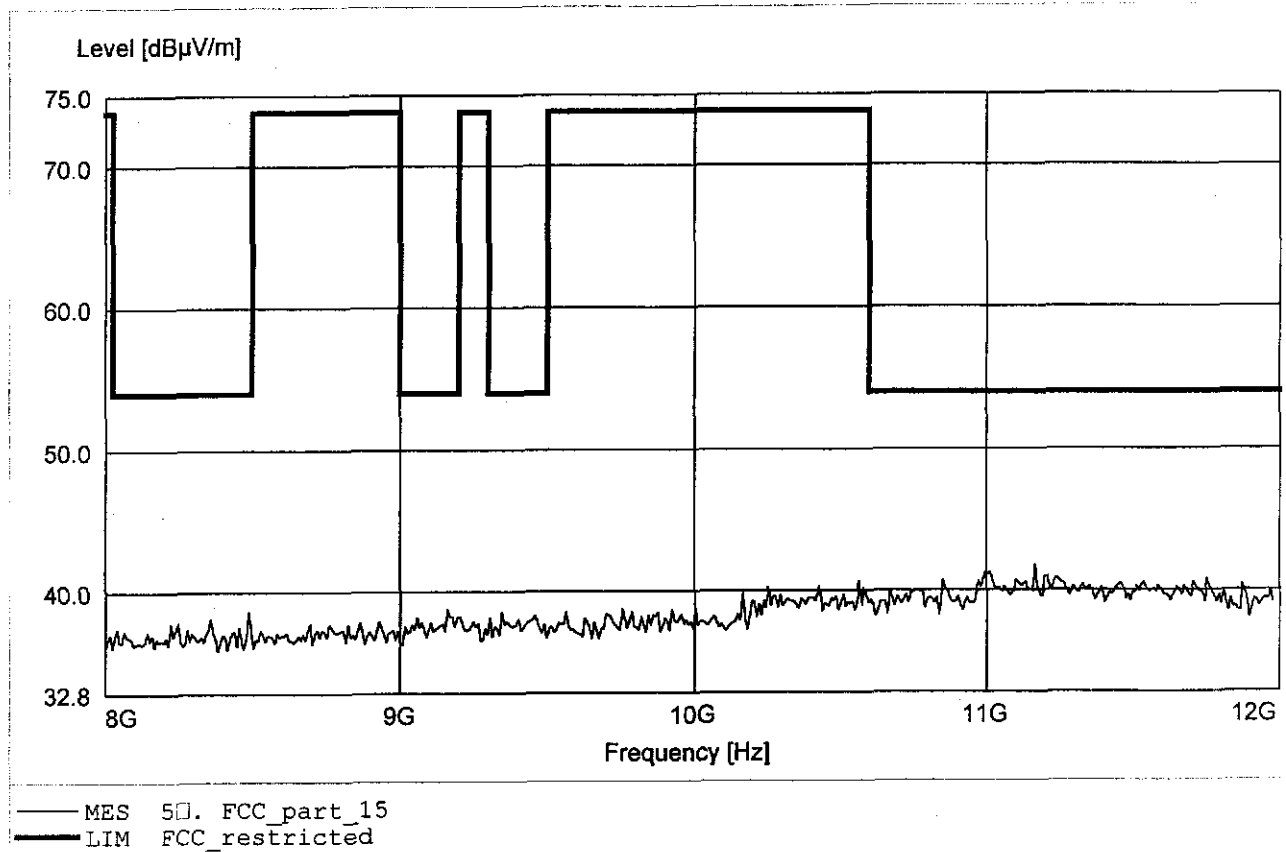


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.255GHz, Emax: 41.08dBμV/m, RBW: 1MHz

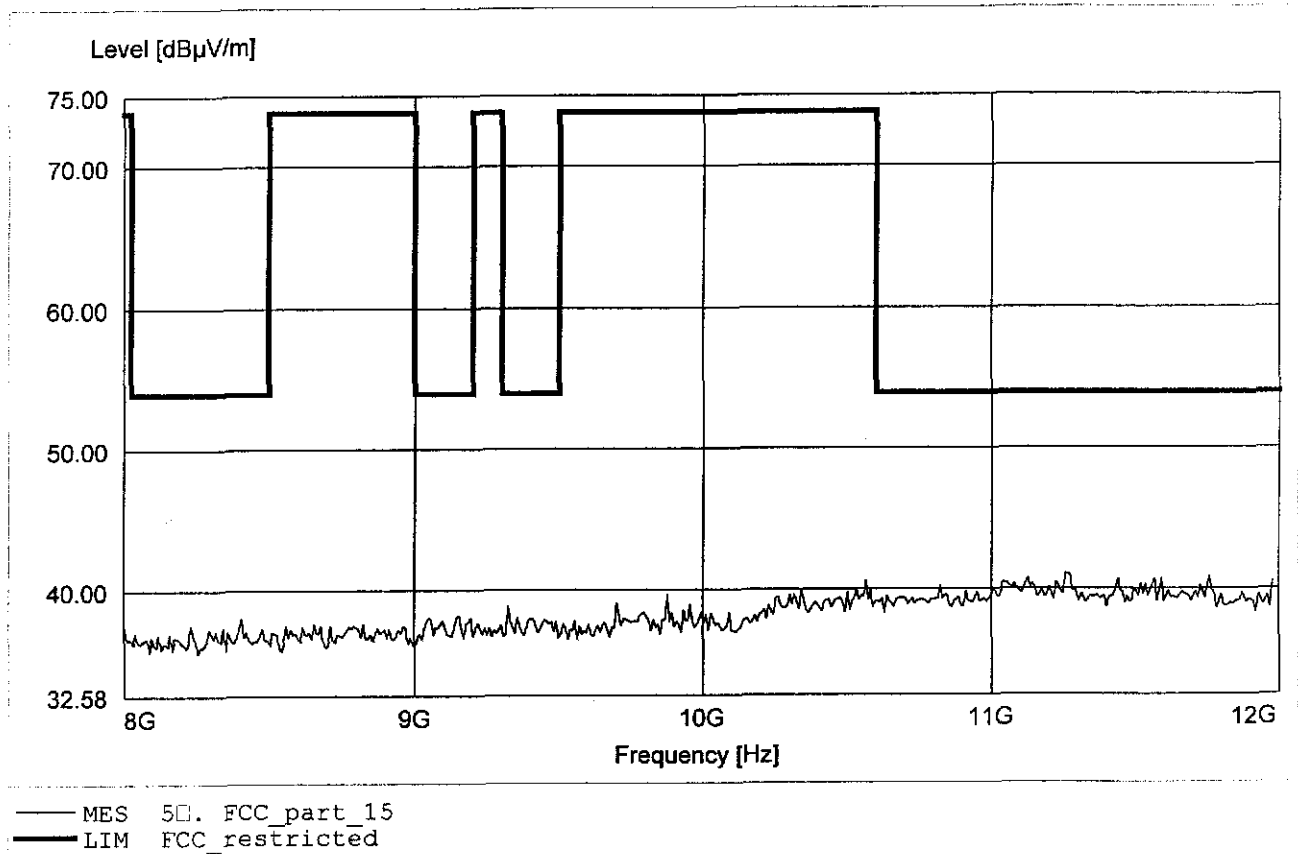


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.174GHz, Emax: 44.11dBμV/m, RBW: 1MHz

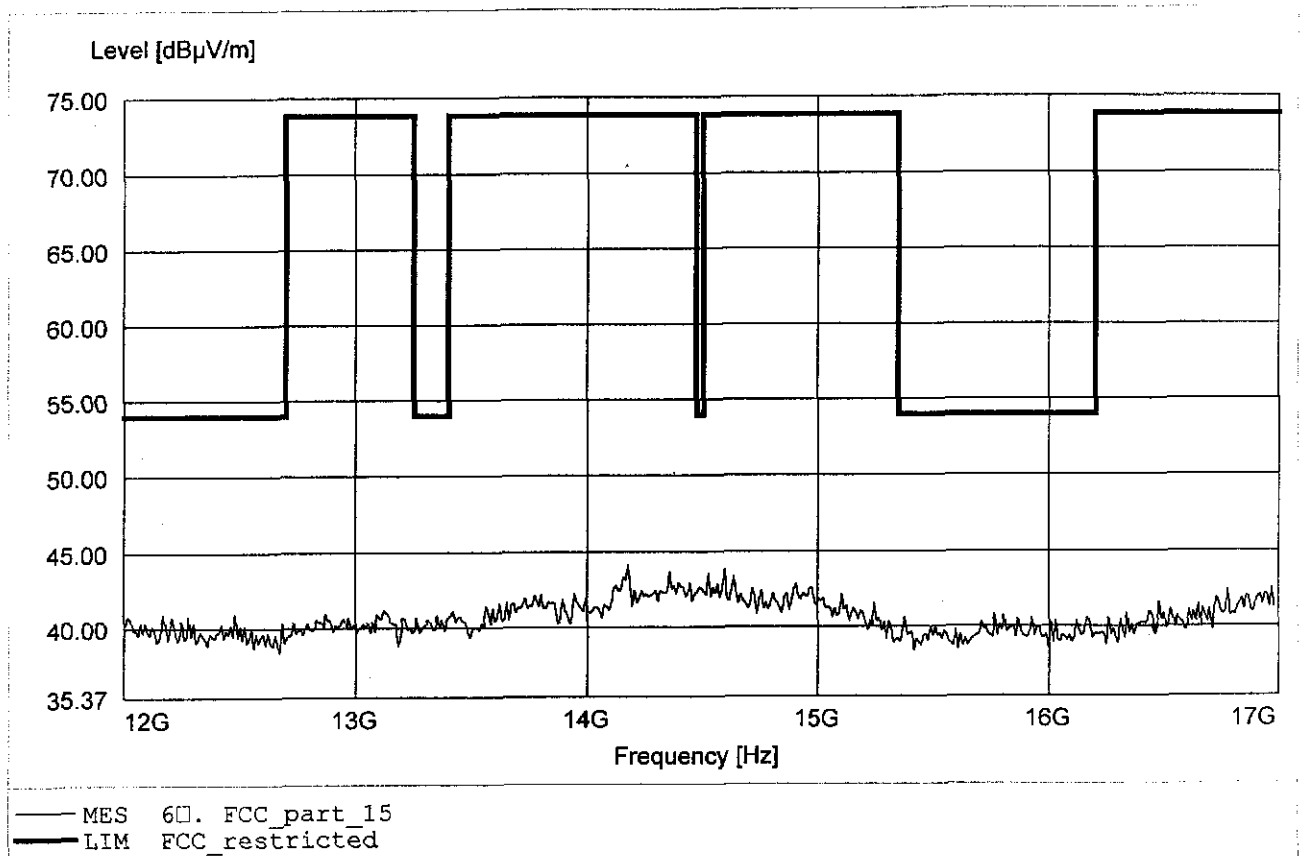


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.184GHz, Emax: 43.65dBμV/m, RBW: 1MHz

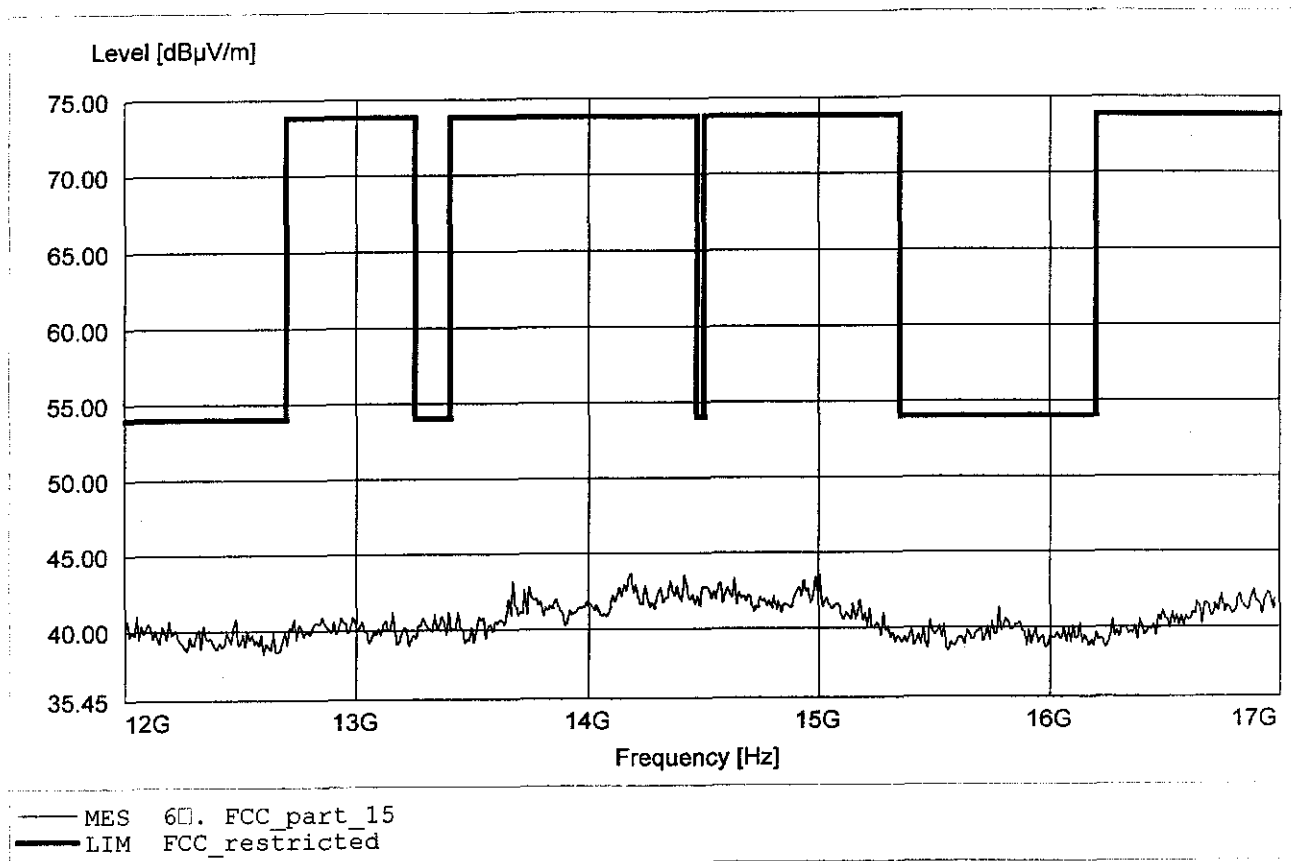


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.114GHz, Emax: 45.05dBμV/m, RBW: 1MHz

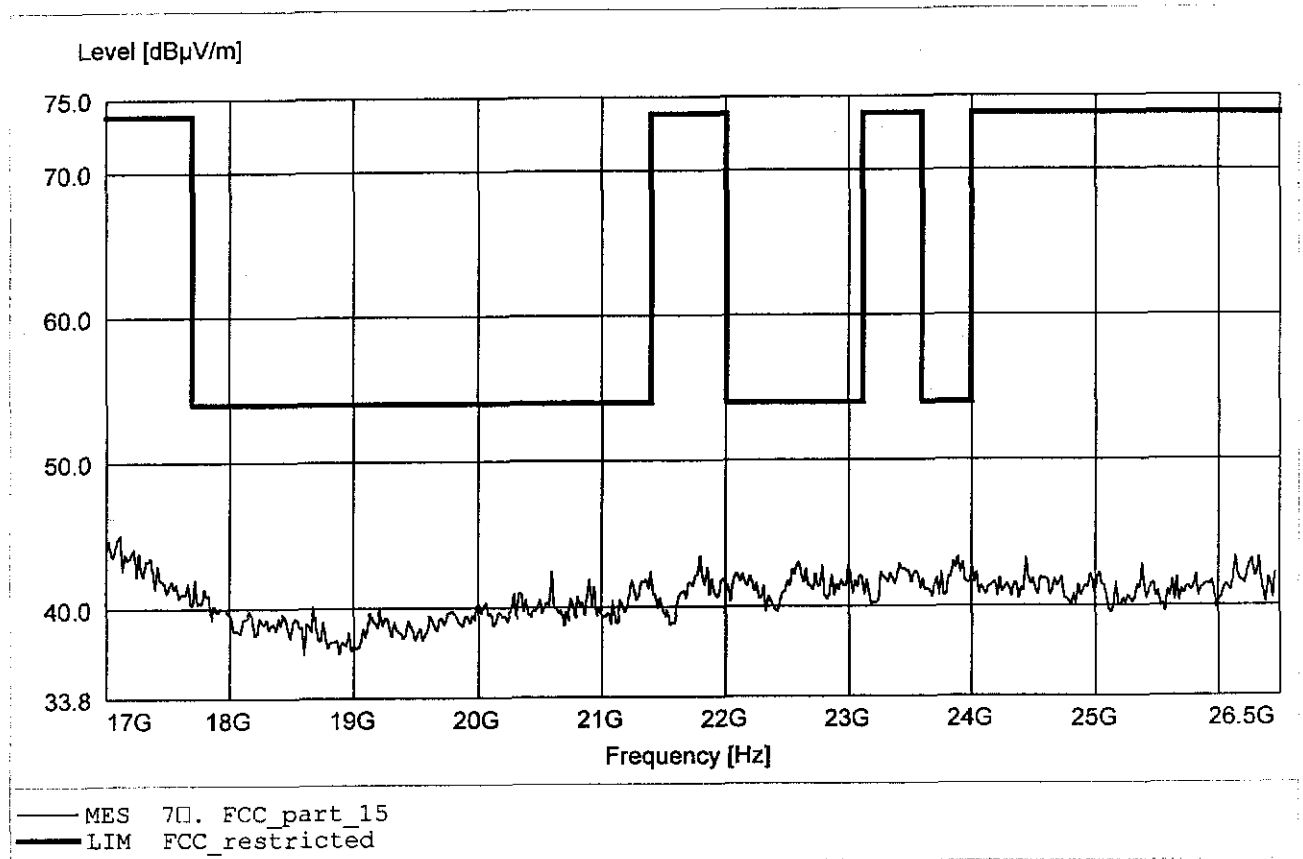


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2441 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 43.87dBμV/m, RBW: 1MHz

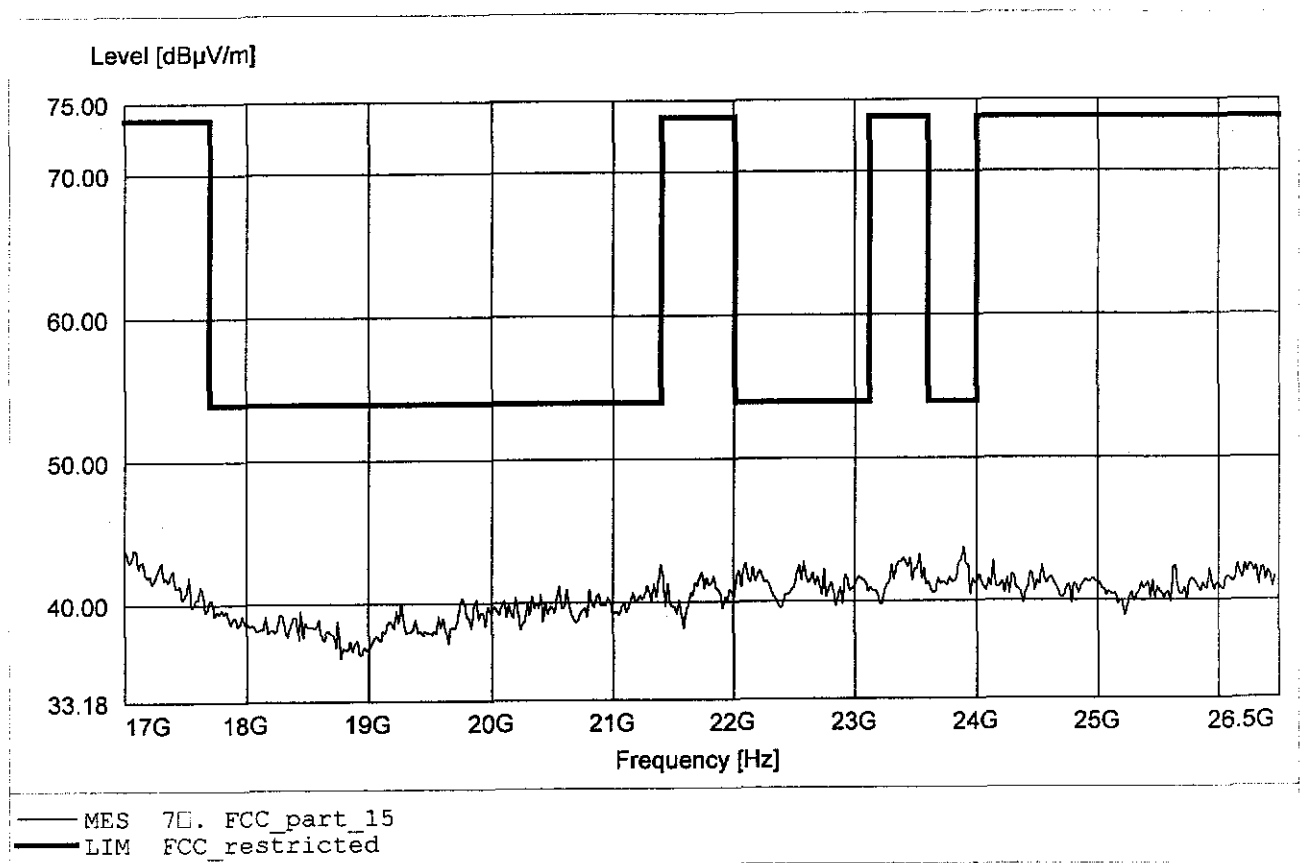


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 35.110MHz, Emax: 39.84dBμV/m, RBW: 100kHz

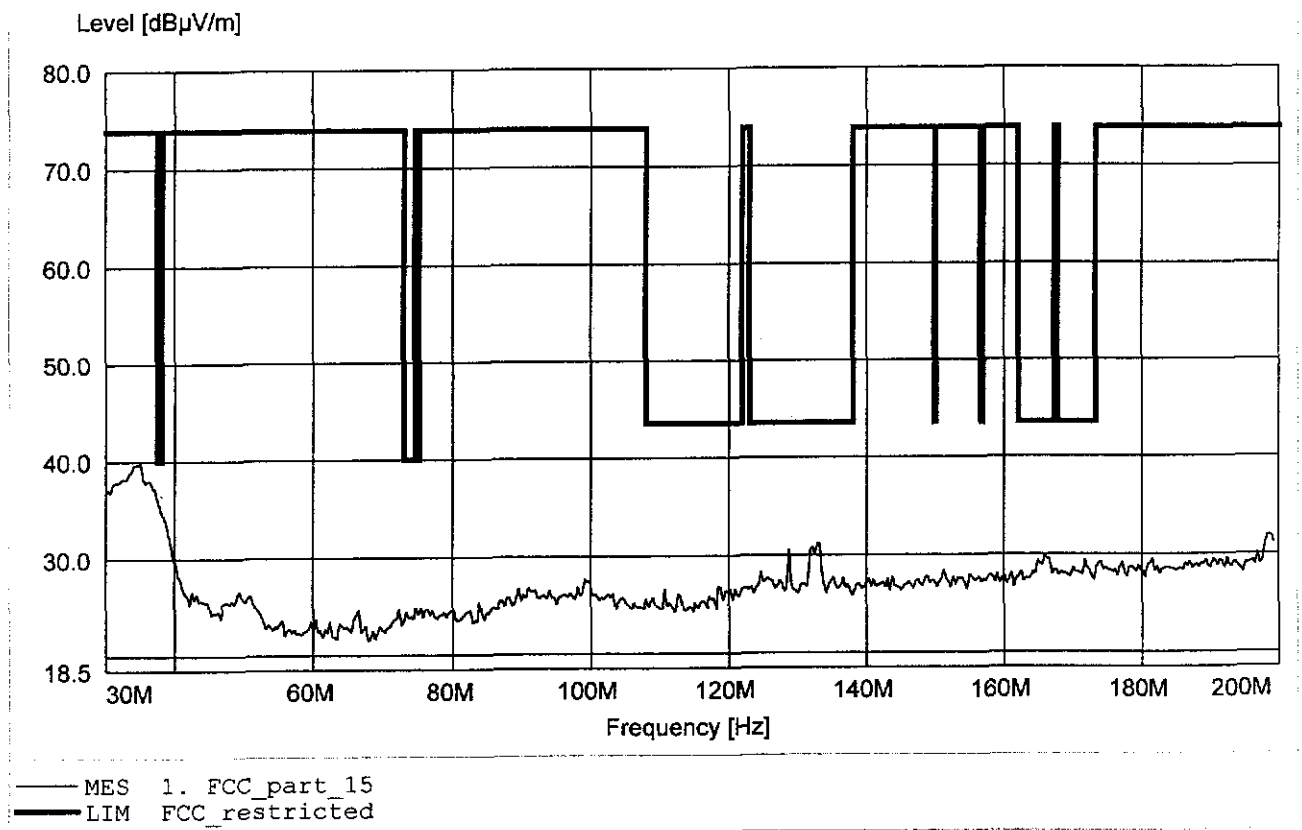


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HK 116
Comment 2: Freq: 199.319MHz, Emax: 32.02dBμV/m, RBW: 100kHz

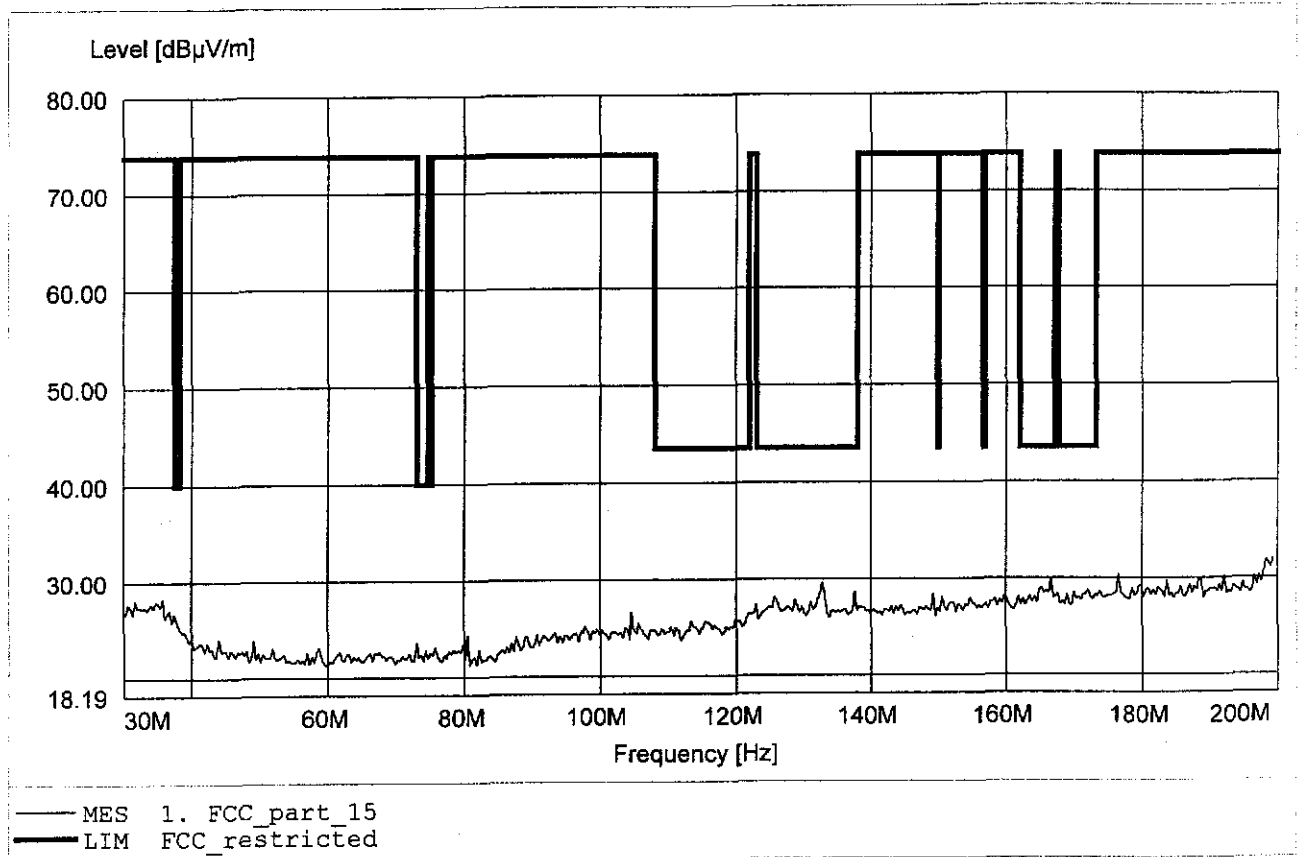


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 33.56dB μ V/m, RBW: 100kHz

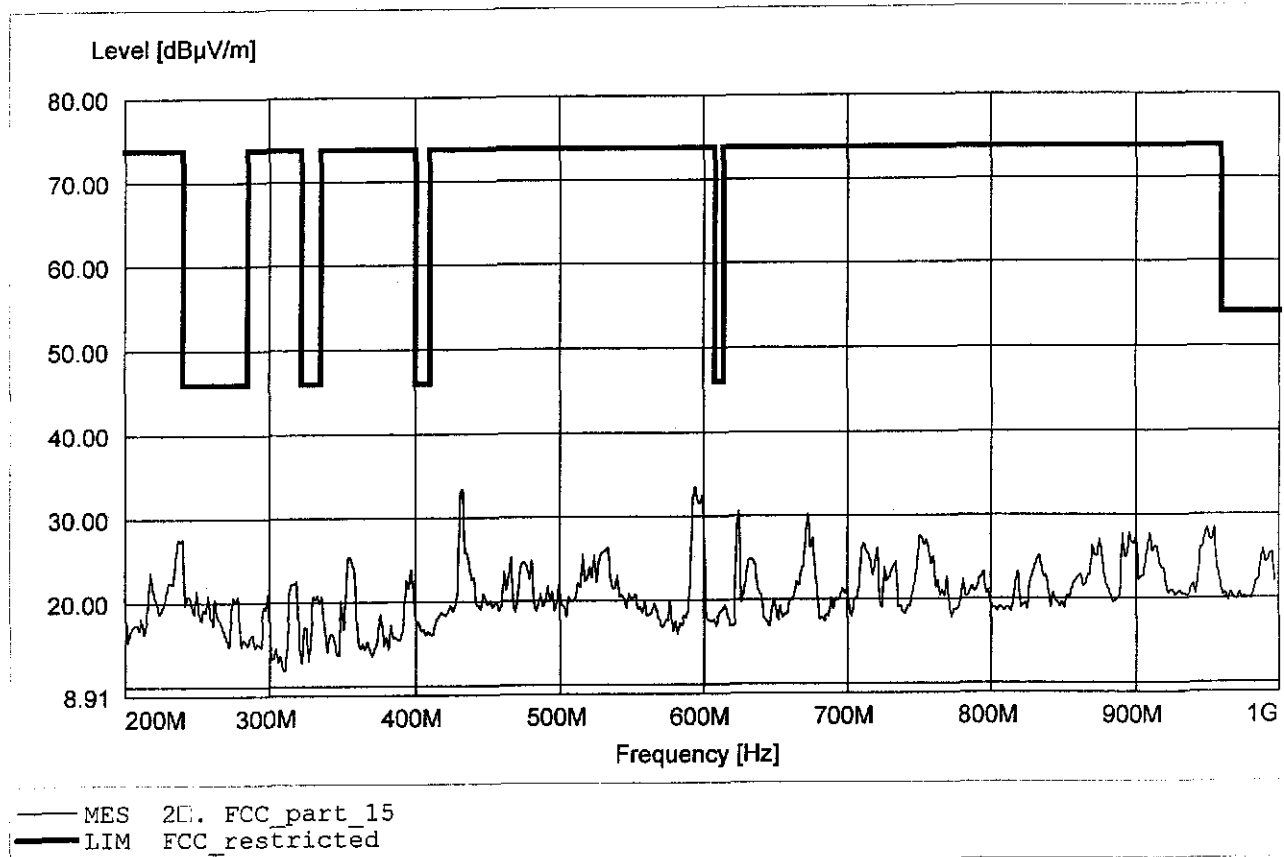


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247
Comment 1: Dist.: 3m, Ant.: HL 223, amplif.
Comment 2: Freq: 594.389MHz, Emax: 30.57dBuV/m, RBW: 100kHz

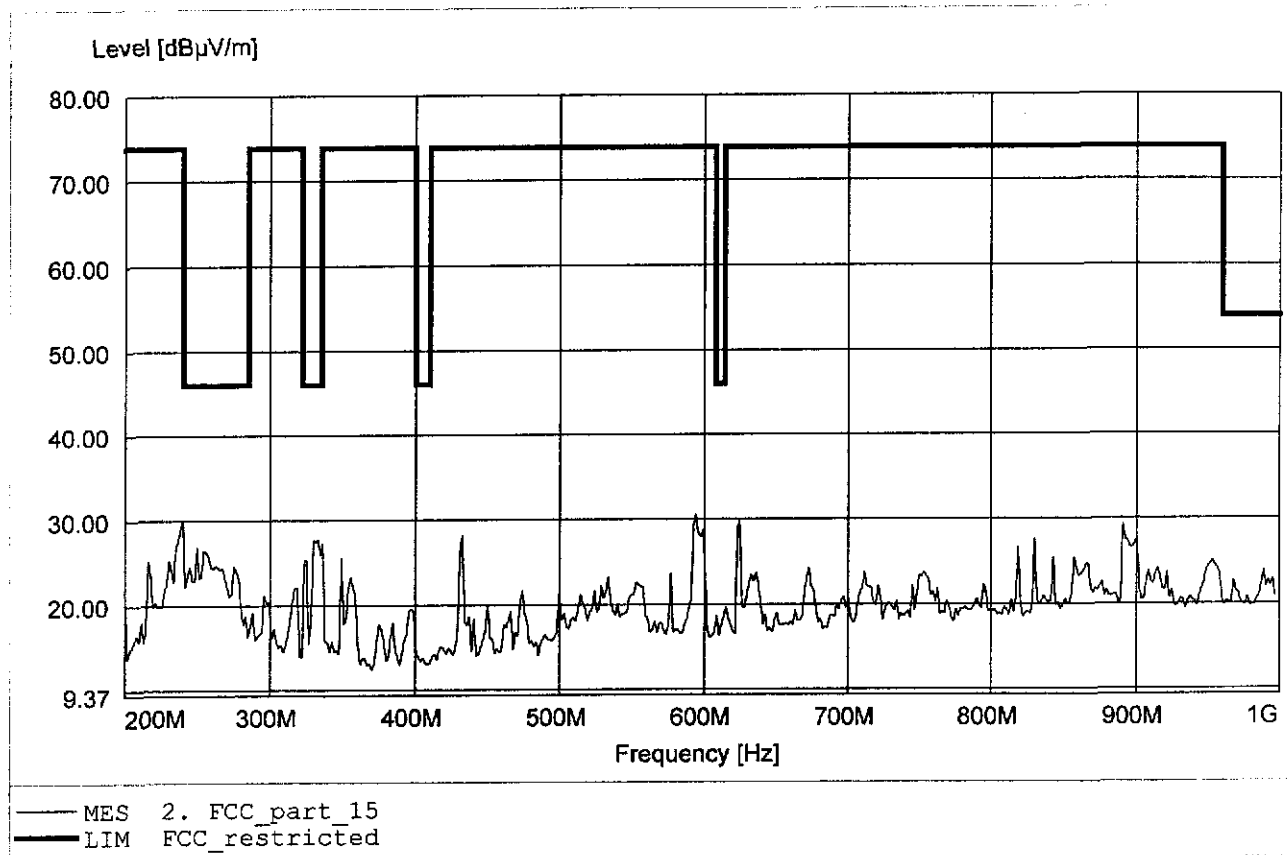


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 51.64dBμV/m, RBW: 1MHz

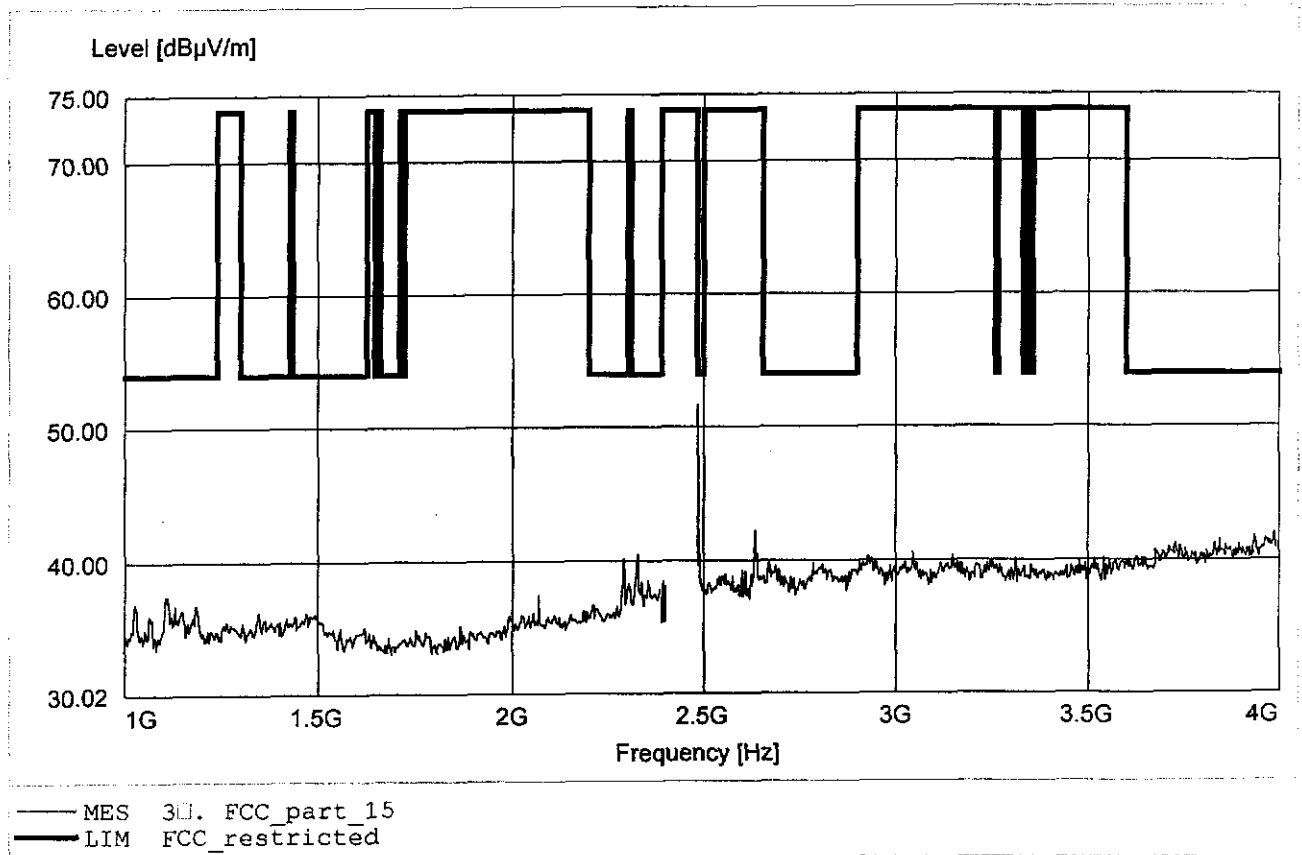


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, amplif.
Comment 2: Freq: 2.484GHz, Emax: 48.87dBμV/m, RBW: 1MHz

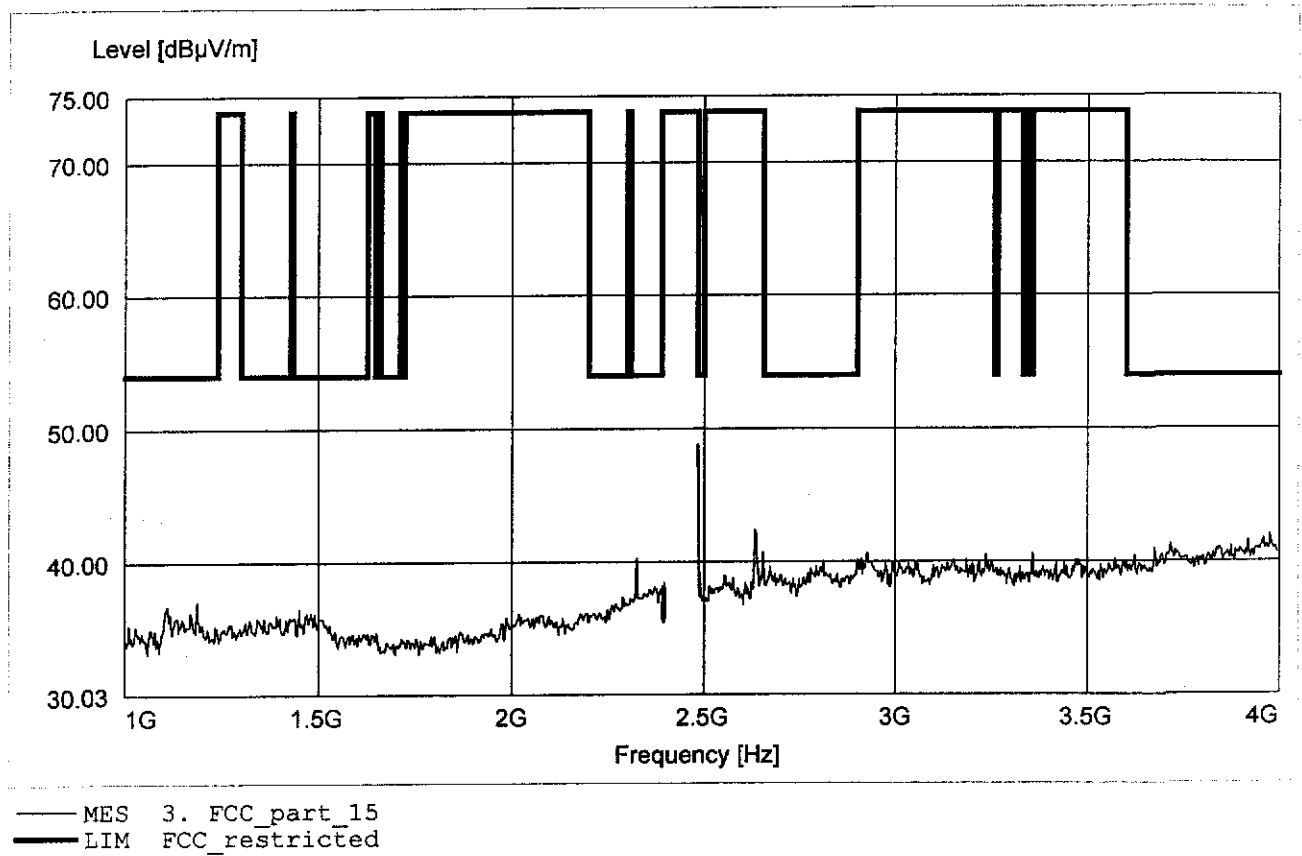


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.511GHz, Emax: 37.61dBμV/m, RBW: 1MHz

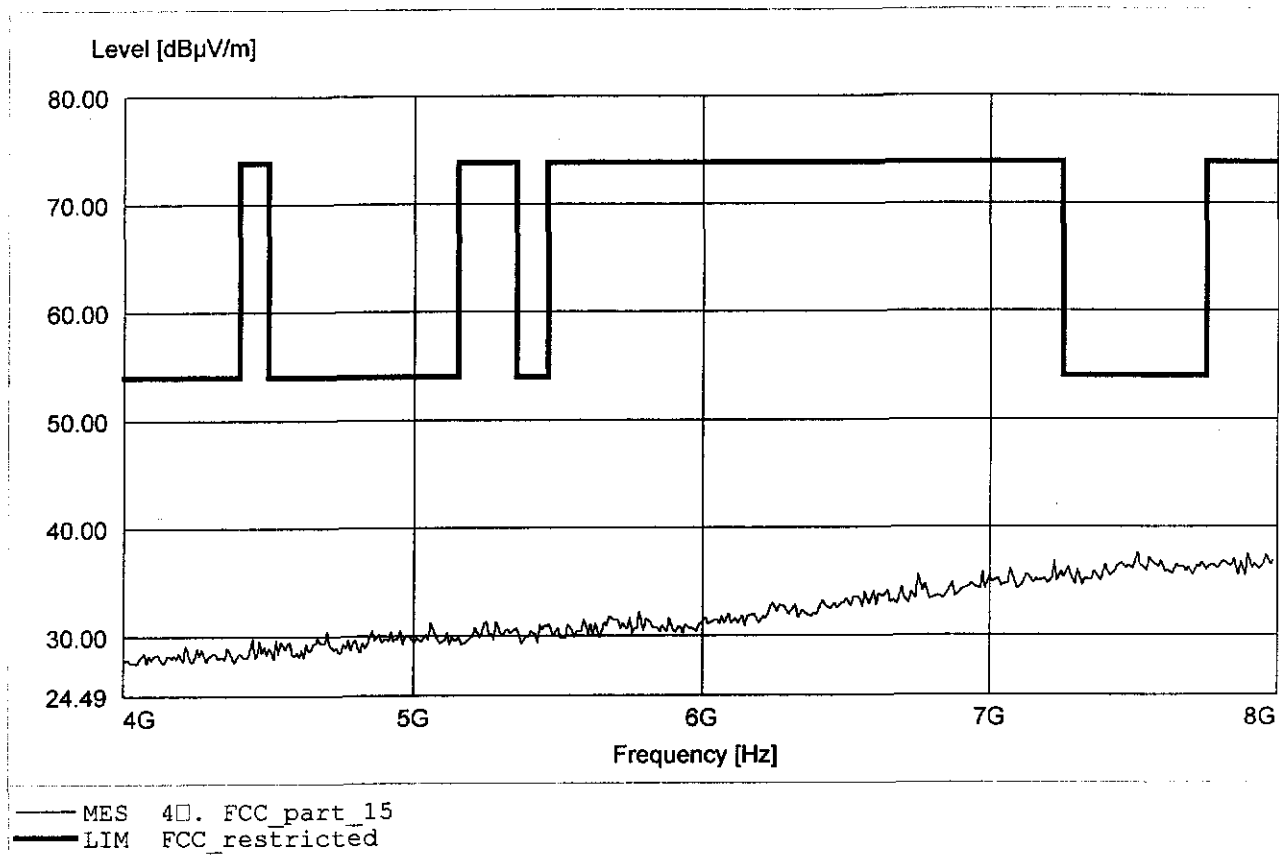


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Thom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 7.559GHz, Emax: 37.51dBμV/m, RBW: 1MHz

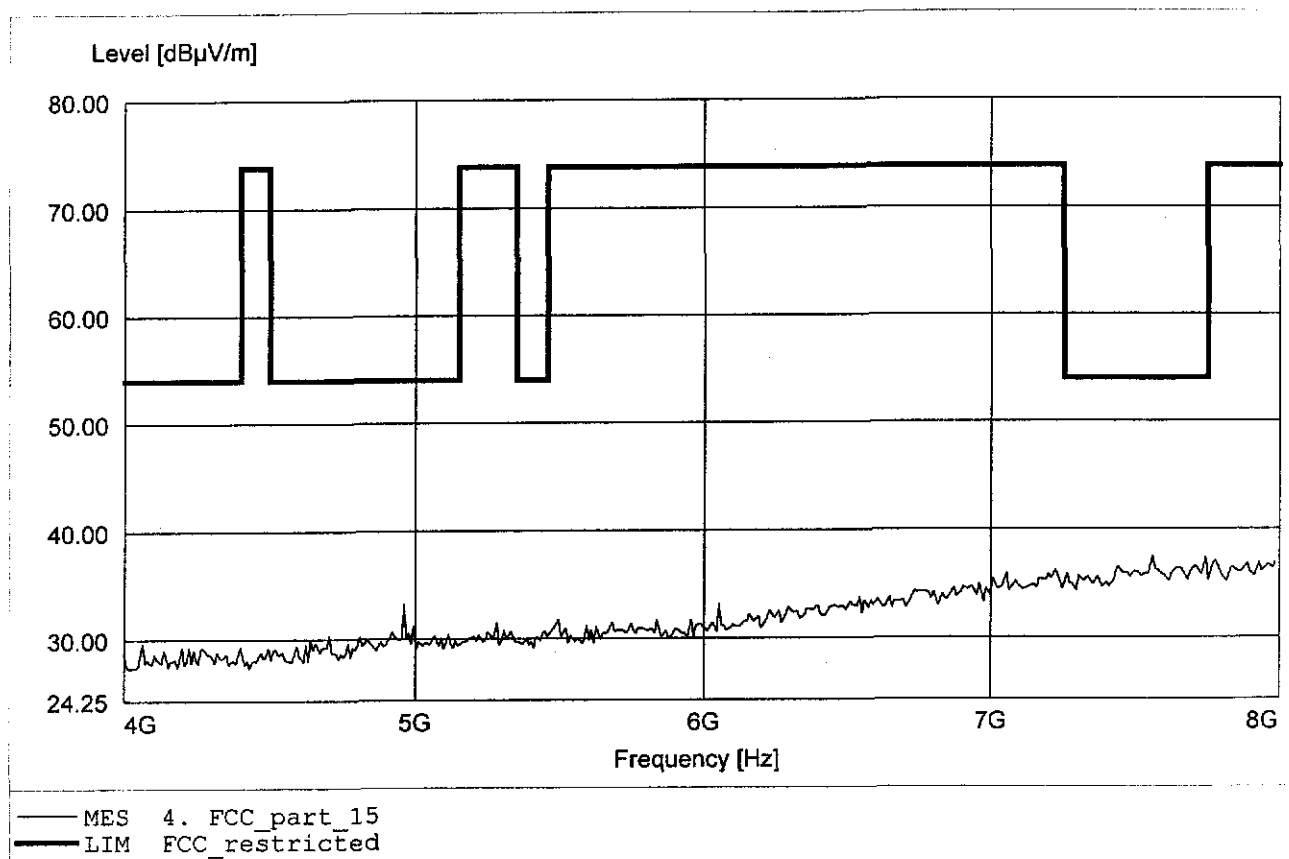


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.559GHz, Emax: 41.36dBμV/m, RBW: 1MHz

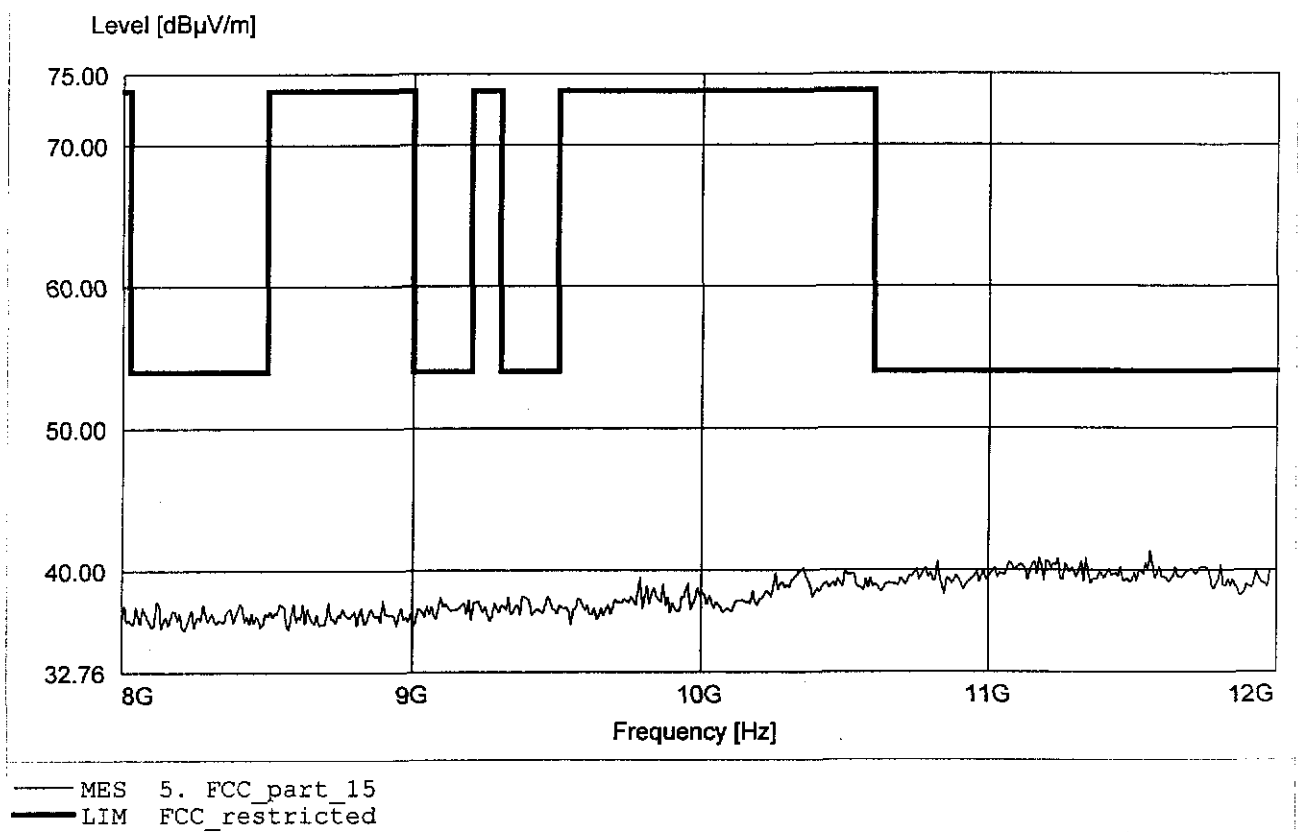


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom: 23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr. Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 11.142GHz, Emax: 41.08dBuV/m, RBW: 1MHz

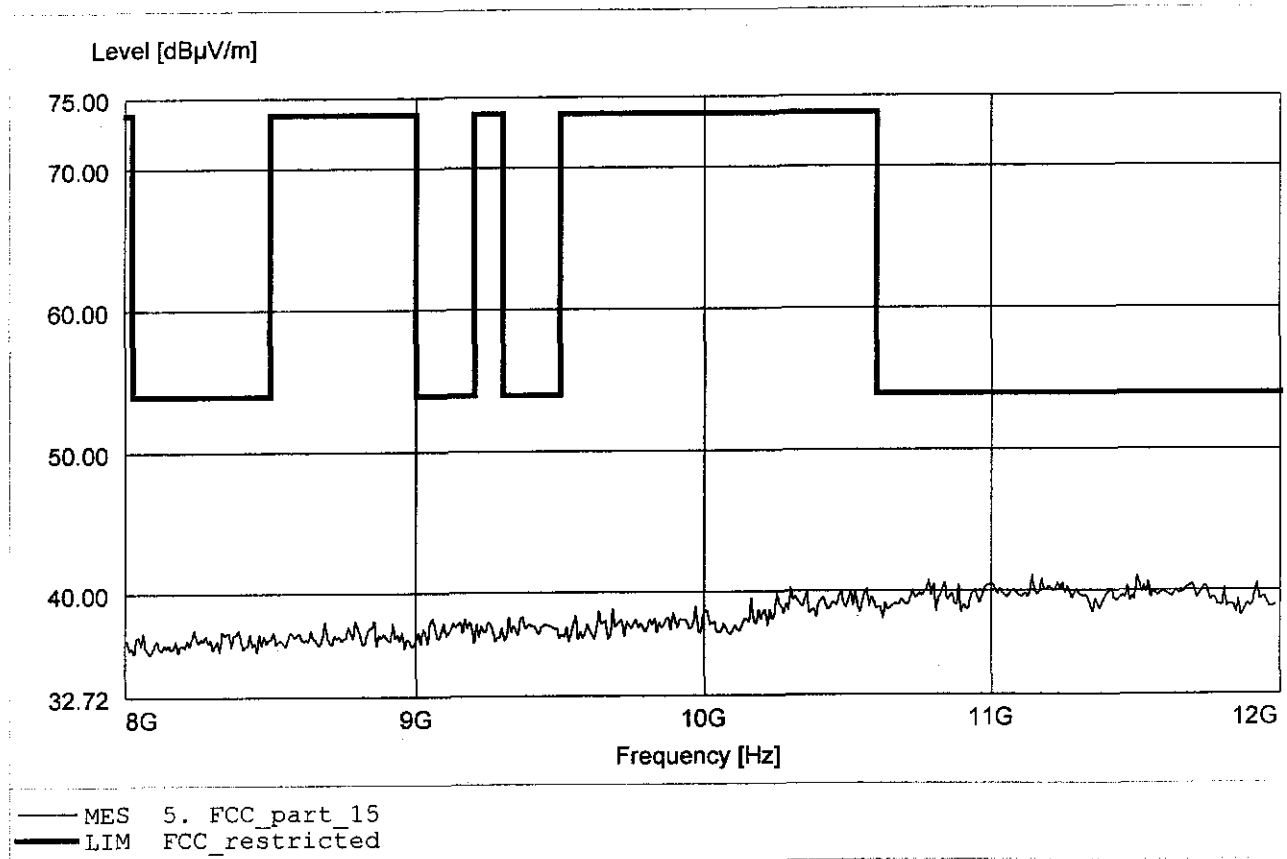


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampli.+HP.
Comment 2: Freq: 14.575GHz, Emax: 44.56dBuV/m, RBW: 1MHz

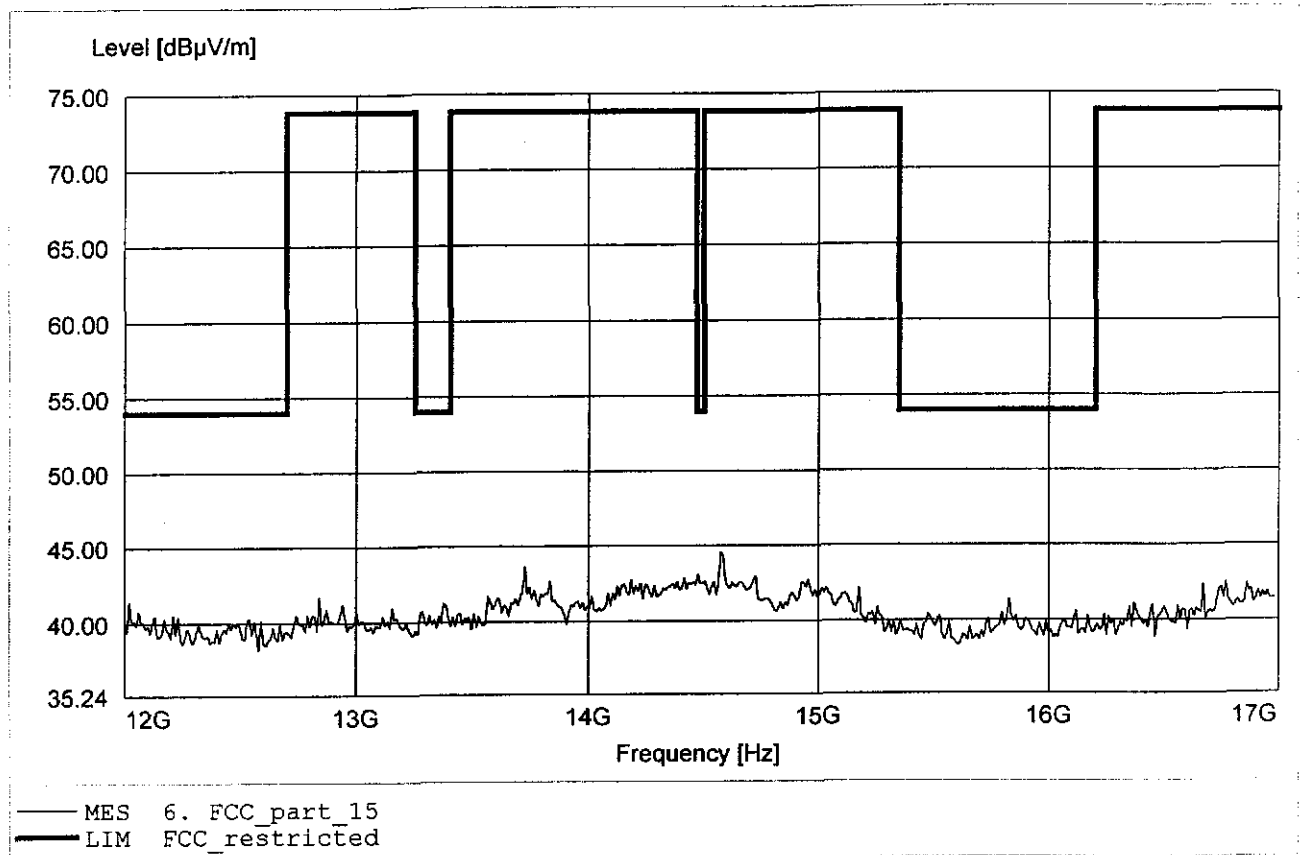


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to S15.247, peak detector
Comment 1: Dist.: 3m, Ant.: BBHA2190D, ampl.+HP.
Comment 2: Freq: 14.535GHz, Emax: 44.17dBμV/m, RBW: 1MHz

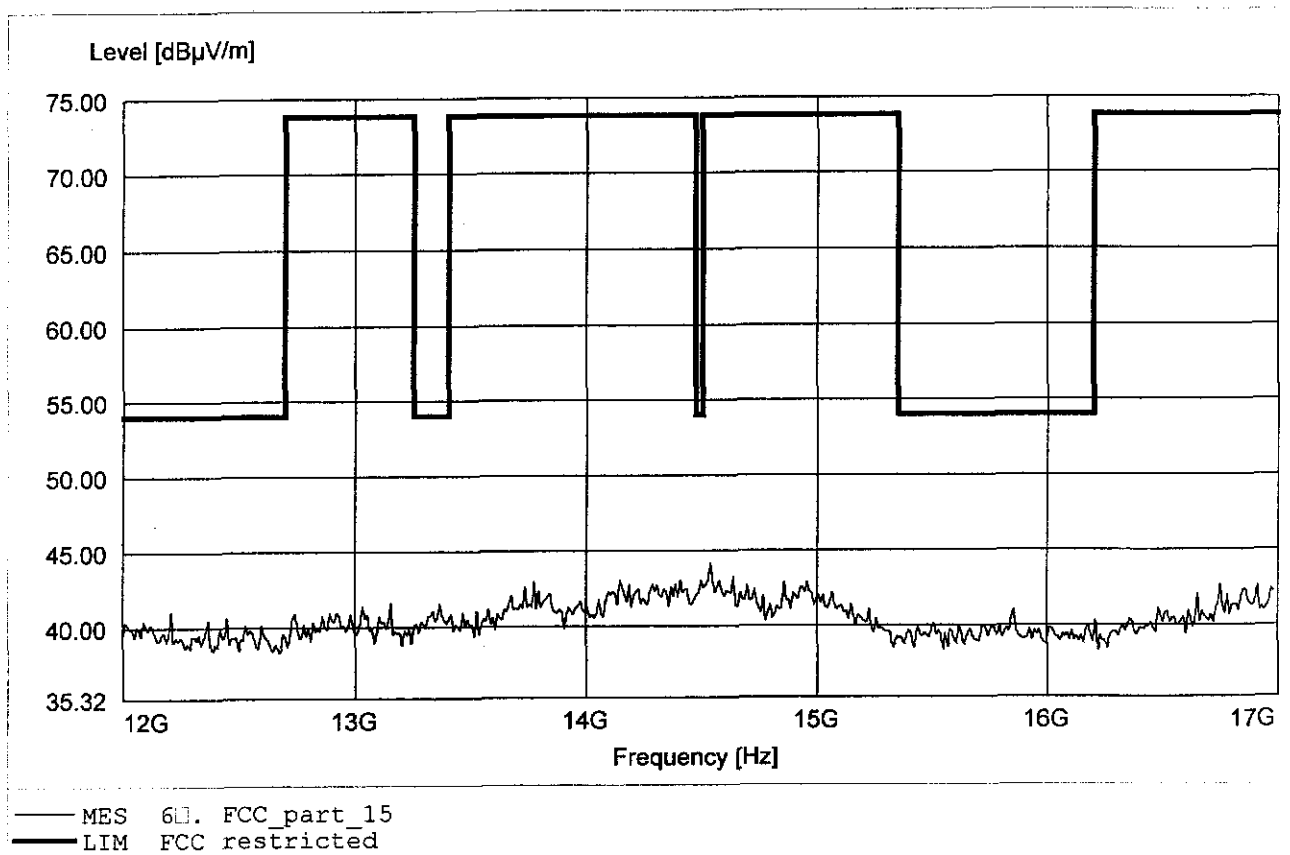


Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.076GHz, Emax: 44.95dBµV/m, RBW: 1MHz

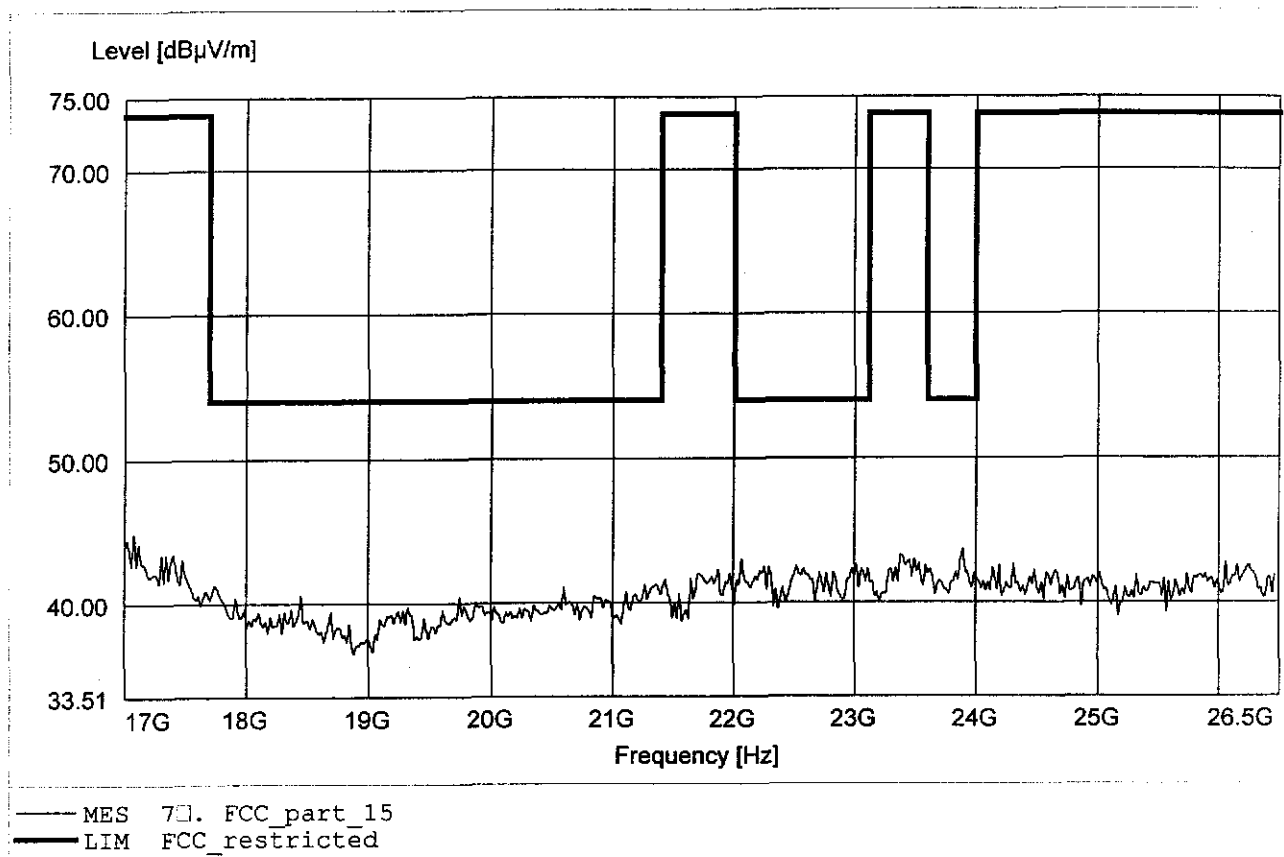

Spurious emissions Field Strength
FCC RULES PART 15, SUBPART C

EUT : Bluetooth USB Dongle with Flash Memory / Pmax / 2480 MHz
Model: AEUC-201A
Approval Holder: AUTO ELECTRONIC CORP.
Operating Condition: Tnom:23°C / Unom: 5.0 V DC (powered by USB port)
Test Site / Operator: ETS / Mr.Hoppe
Test Specification: according to §15.247, peak detector
Comment 1: Dist.: 3m, Ant.: HL025, amplif.
Comment 2: Freq: 17.057GHz, Emax: 44.71dBμV/m, RBW: 1MHz

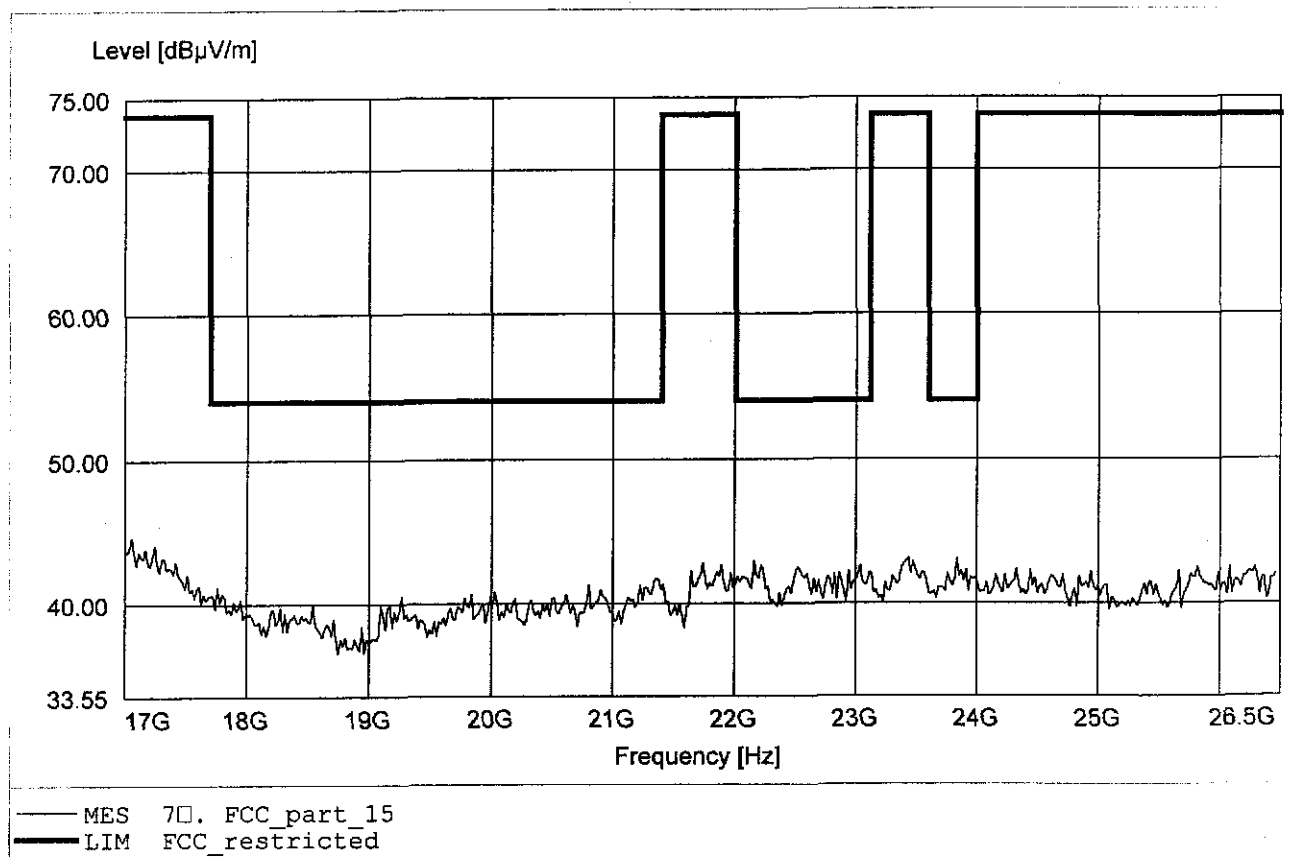

Appendix D


Spurious Emissions conducted - Transmitter operating

Appendix E

Carrier Frequency Separation



Delta 1 [T1] RBW 100 kHz RF Att 40 dB
Ref Lvl 0.04 dB VBW 100 kHz
15 dBm 1.00961924 MHz SWT 5 ms Unit dBm

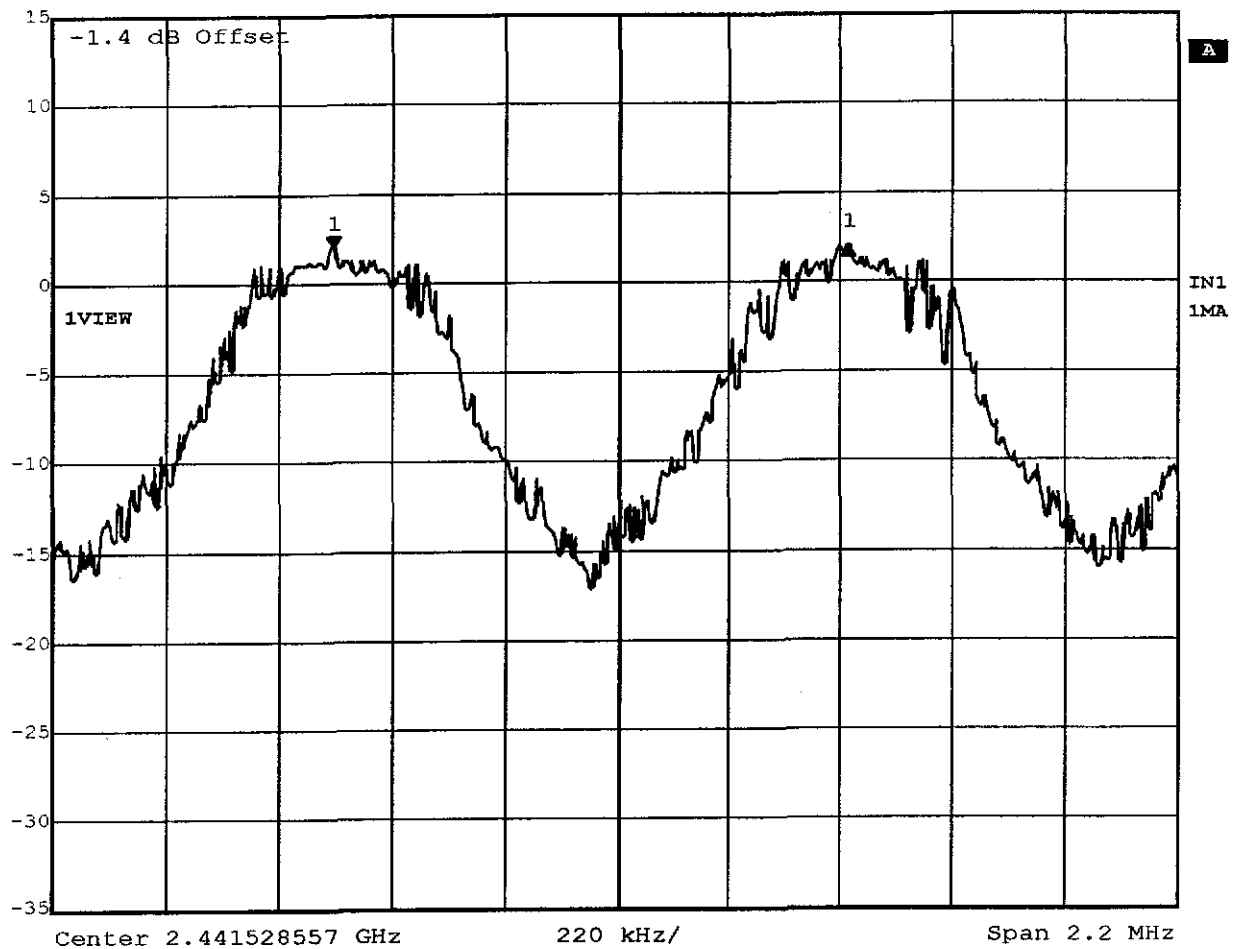


Title: Carrier Frequency Separation
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 14:19:41

Appendix F

Number of Hopping Frequencies




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 1.43 dBm VBW 300 kHz
20 dBm 2.41504910 GHz SWT 5 ms Unit dBm

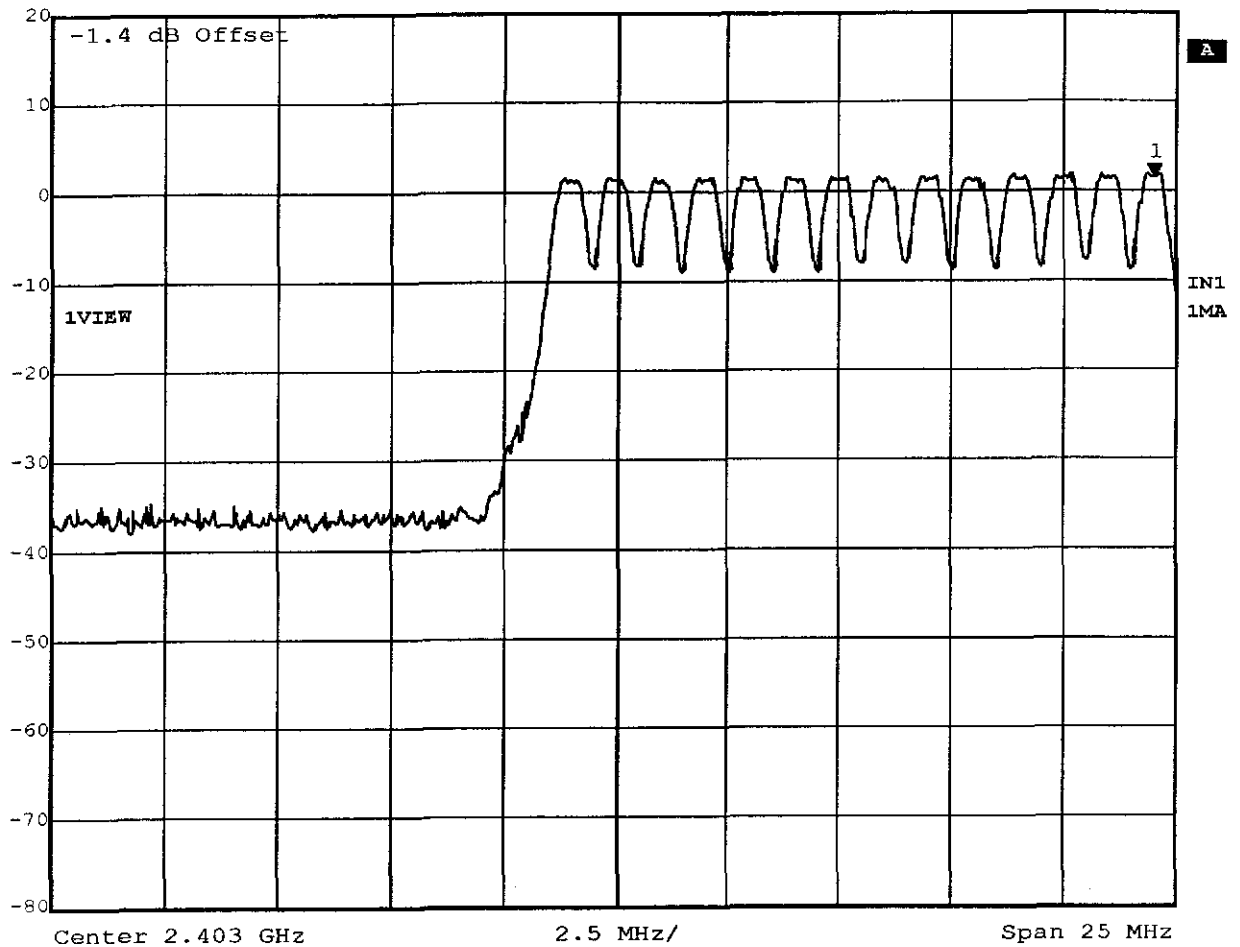

Title: Number of Hopping Frequencies Ch.: 0-13
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 13:17:24




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 1.40 dBm VBW 300 kHz
20 dBm 2.43999900 GHz SWT 5 ms Unit dBm

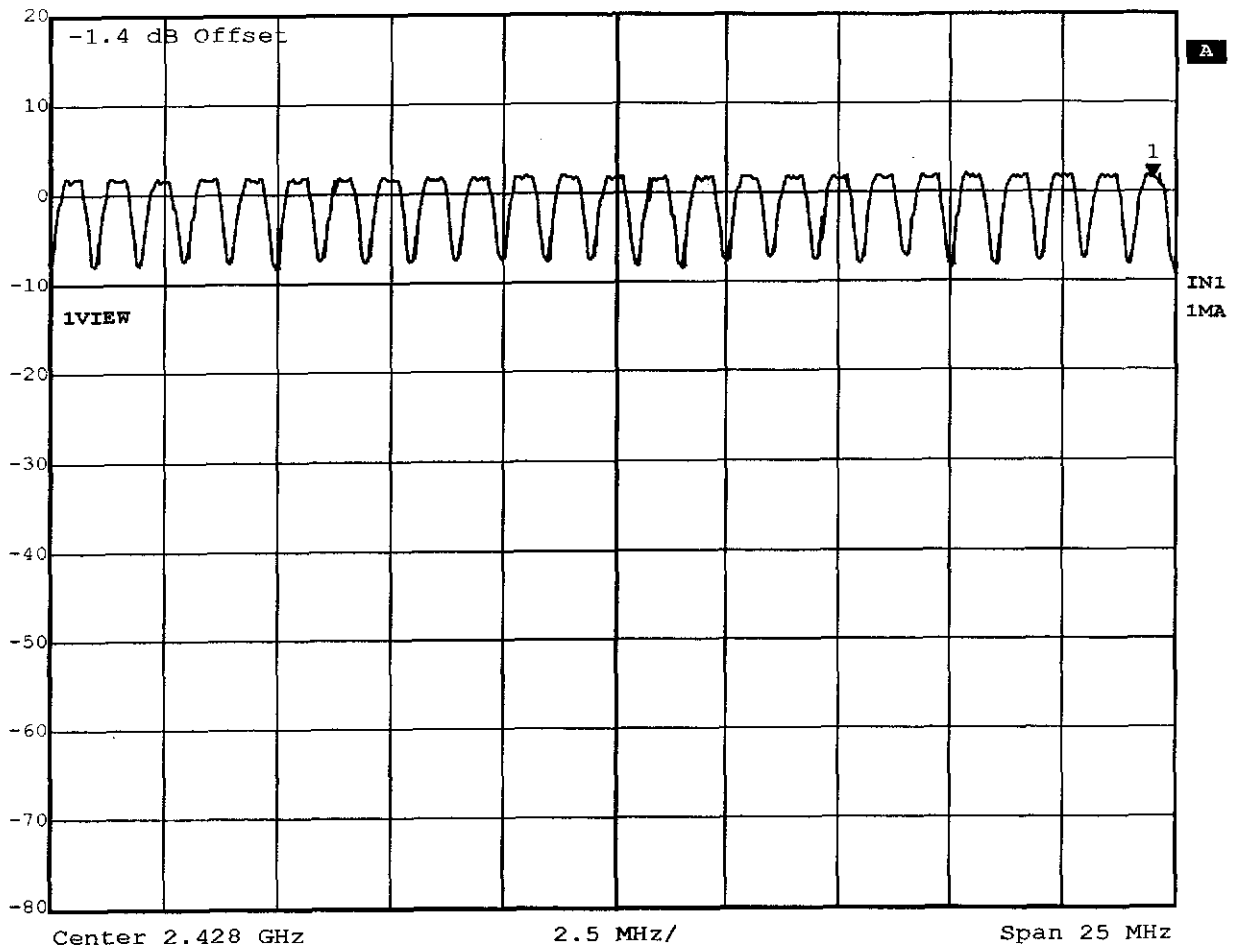

Title: Number of Hopping Frequencies Ch.: 14-38
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201
Date: 29.JAN.2003 13:19:27




Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 0.81 dBm VBW 300 kHz
20 dBm 2.46504910 GHz SWT 5 ms Unit dBm

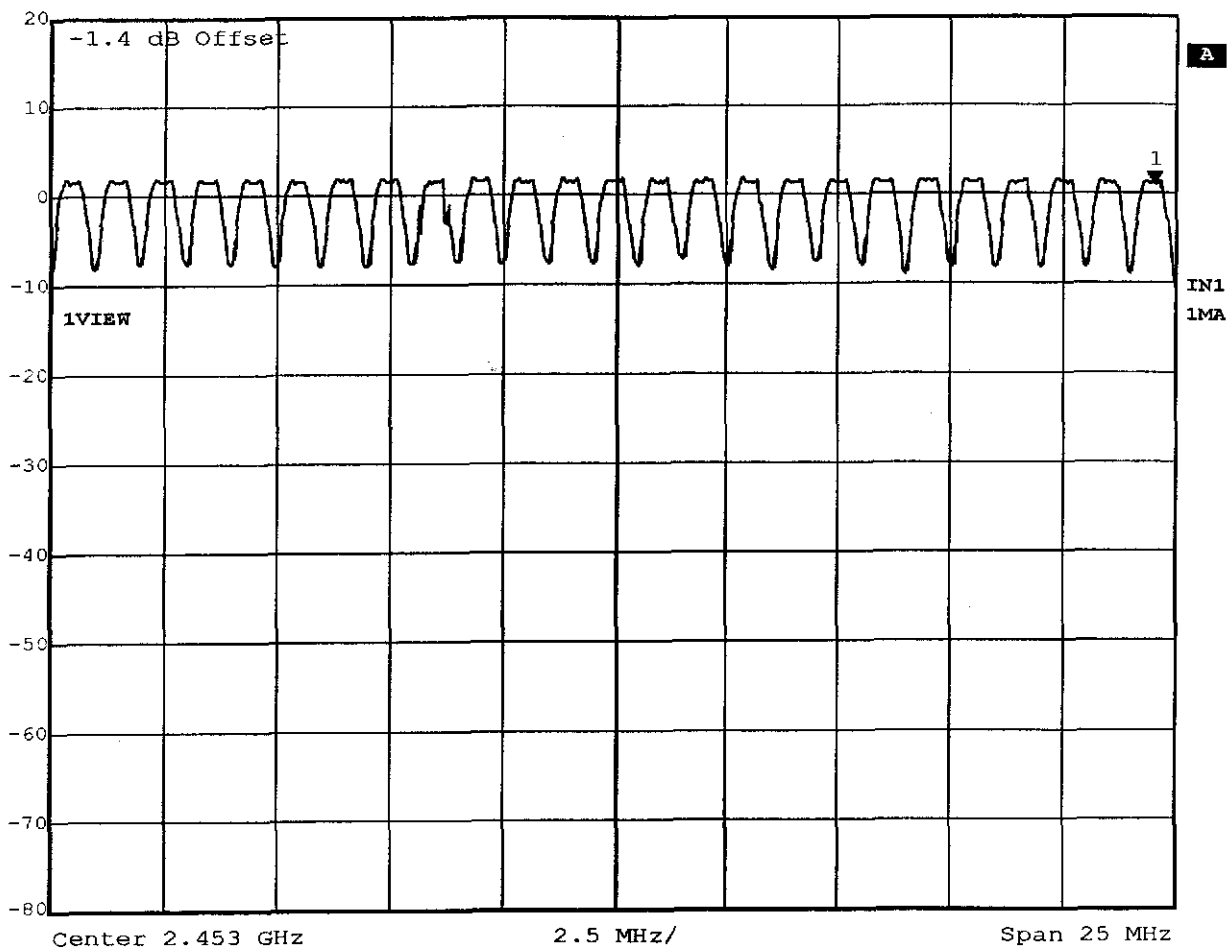

Title: Number of Hopping Frequencies Ch.: 39-63
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201
Date: 29.JAN.2003 13:30:08



Marker 1 [T1] RBW 300 kHz RF Att 50 dB
Ref Lvl 0.98 dBm VBW 300 kHz
20 dBm 2.46600100 GHz SWT 5 ms Unit dBm

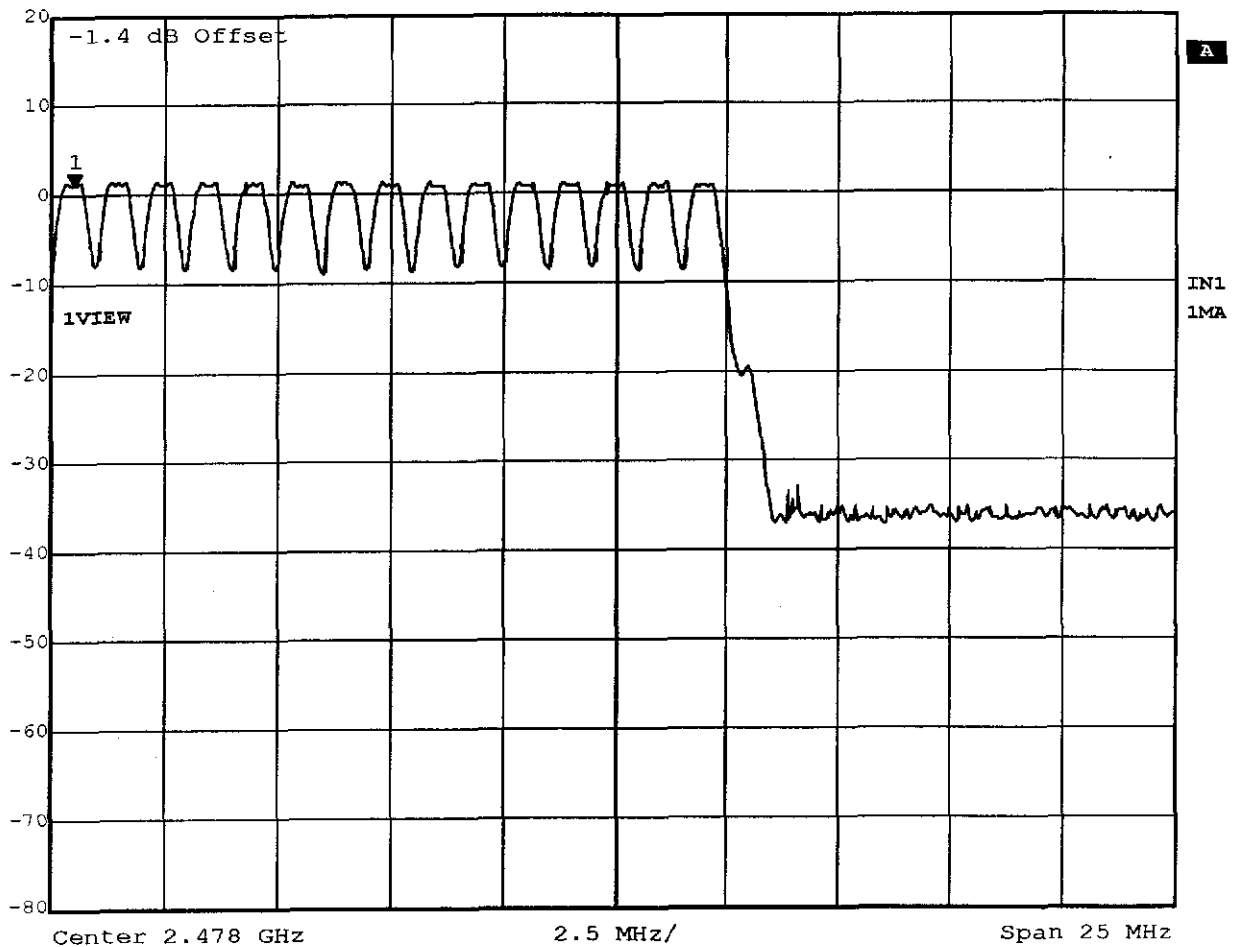


Title: Number of Hopping Frequencies Ch.: 64-78
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 13:33:21



Ref Lvl
20 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

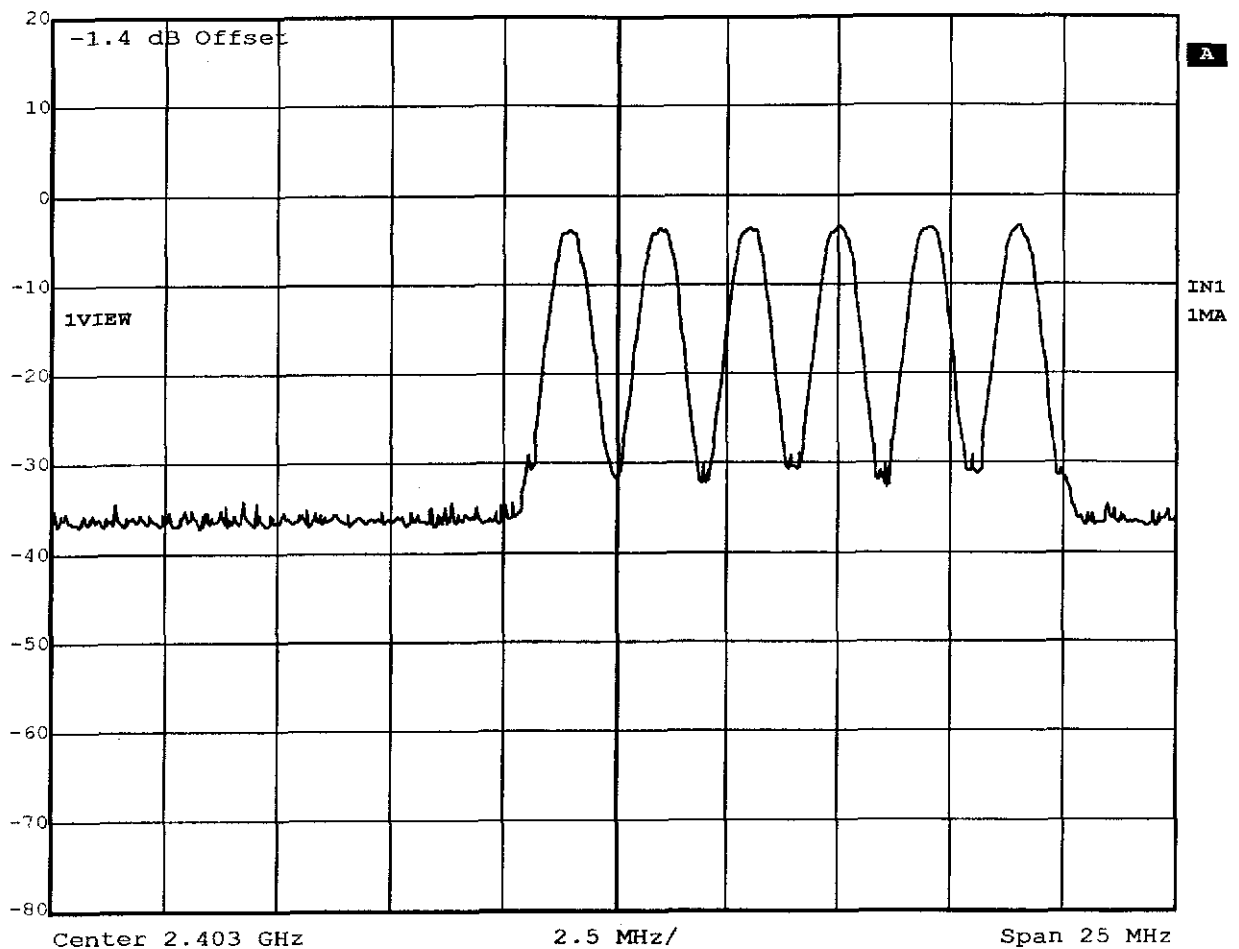


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 14:12:52



Ref Lvl
20 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

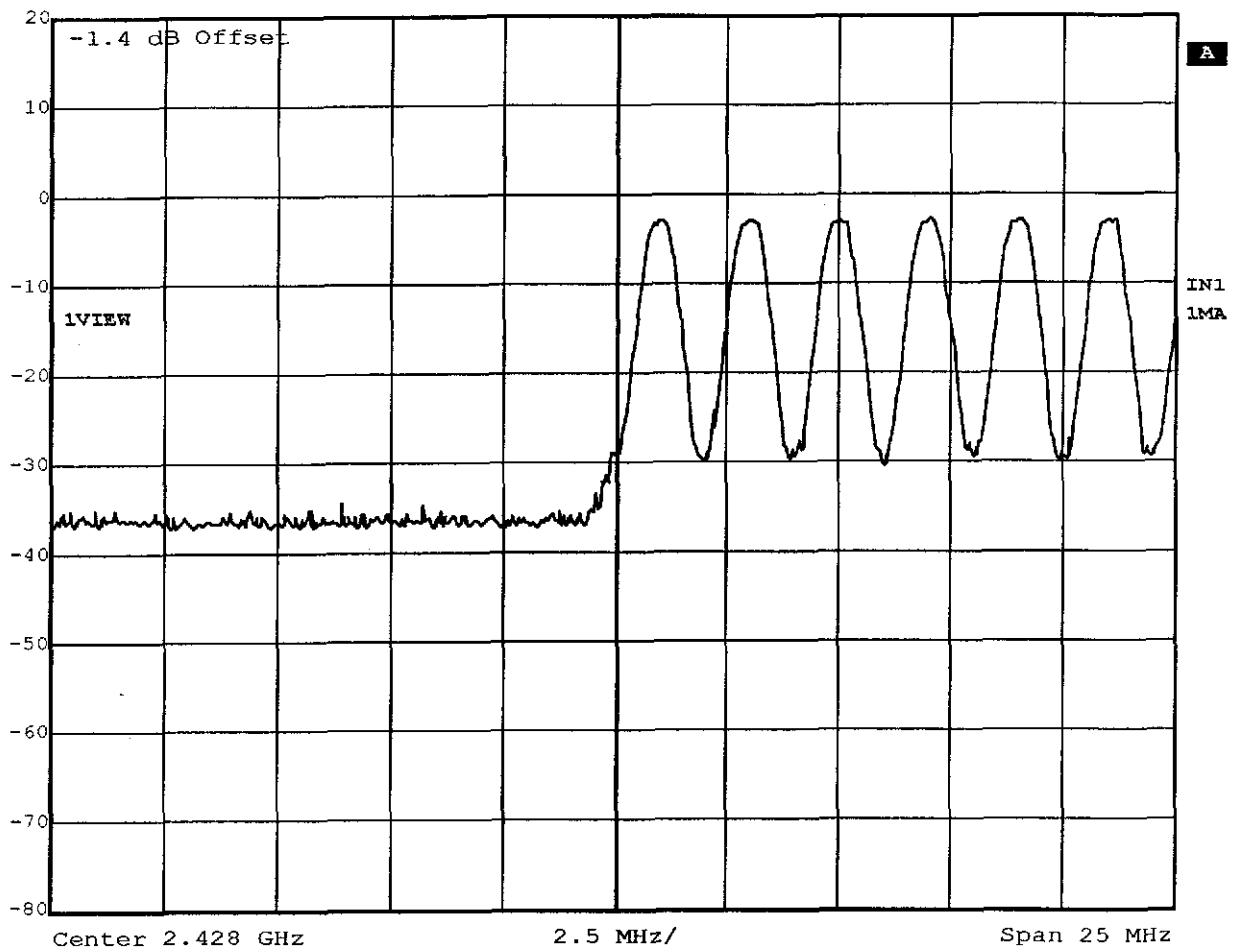


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 14:10:39



Ref Lvl
20 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

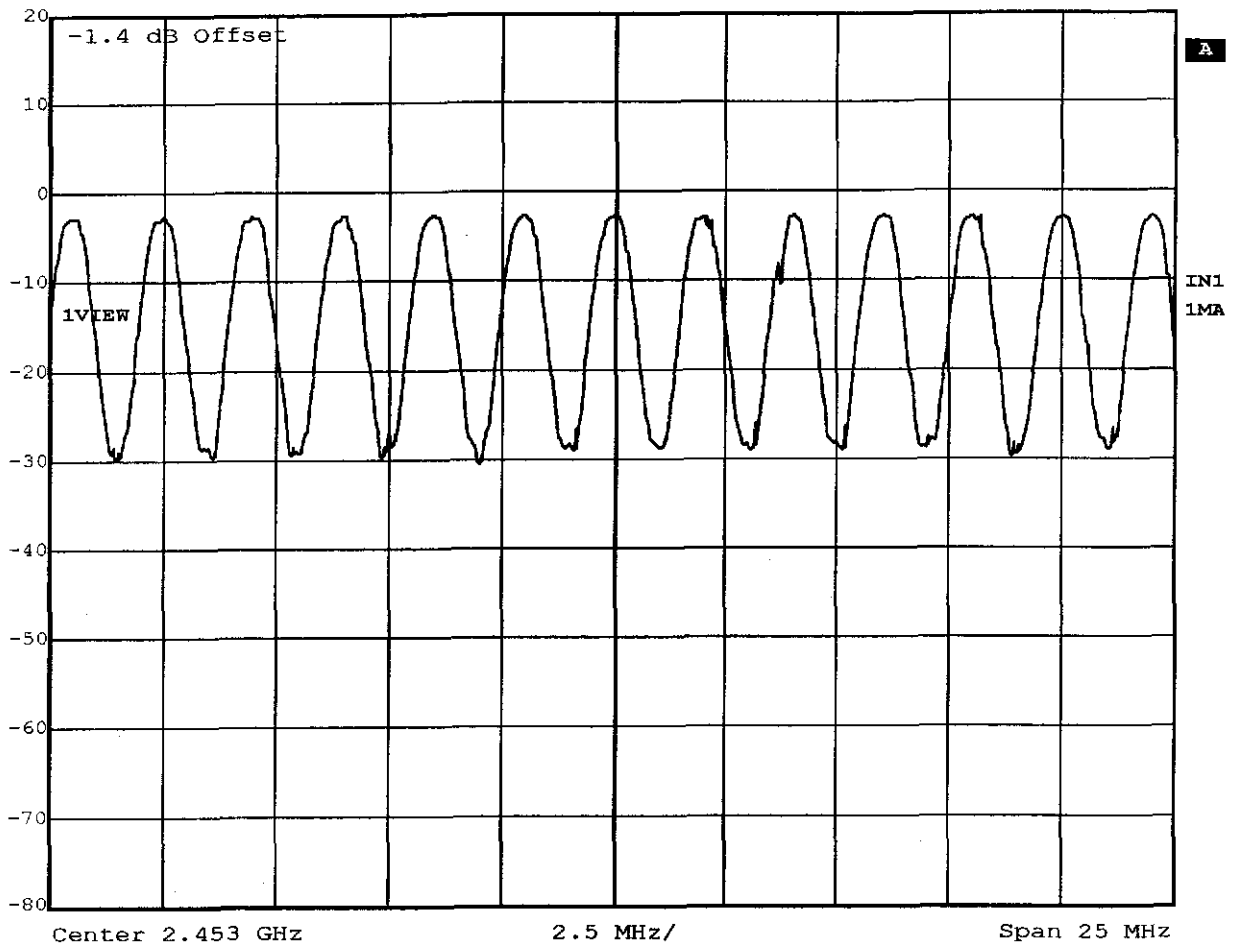


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 14:06:05



Ref Lvl
20 dBm

RBW 300 kHz RF Att 50 dB
VBW 300 kHz
SWT 5 ms Unit dBm

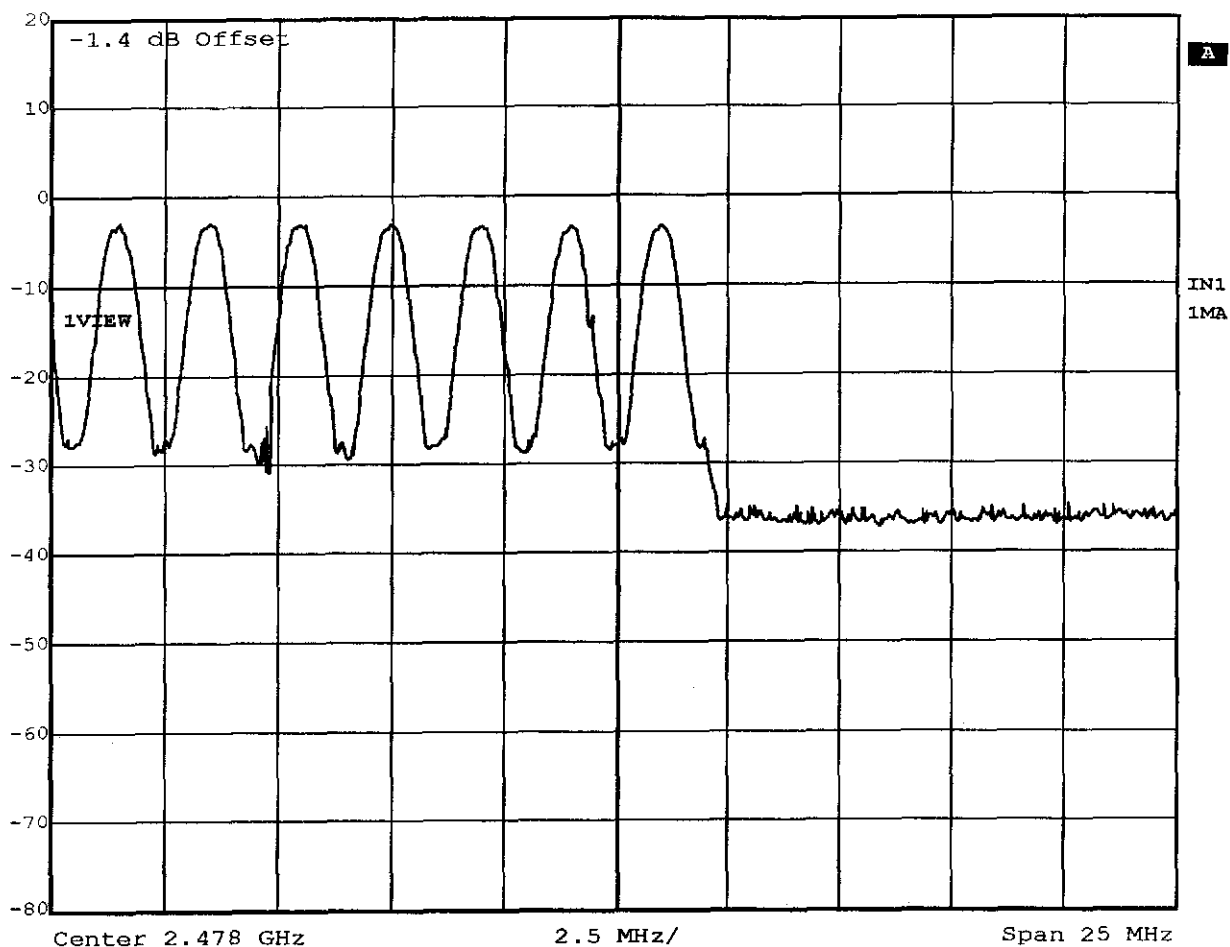


Title: Number of Hopping Frequencies (Master Inquiry Mode)
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 14:08:13

Appendix G

Time of Occupancy (Dwell Time)




Delta 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl -0.26 dB VBW 1 MHz
7 dBm 2.922613 ms SWT 5 ms Unit dBm

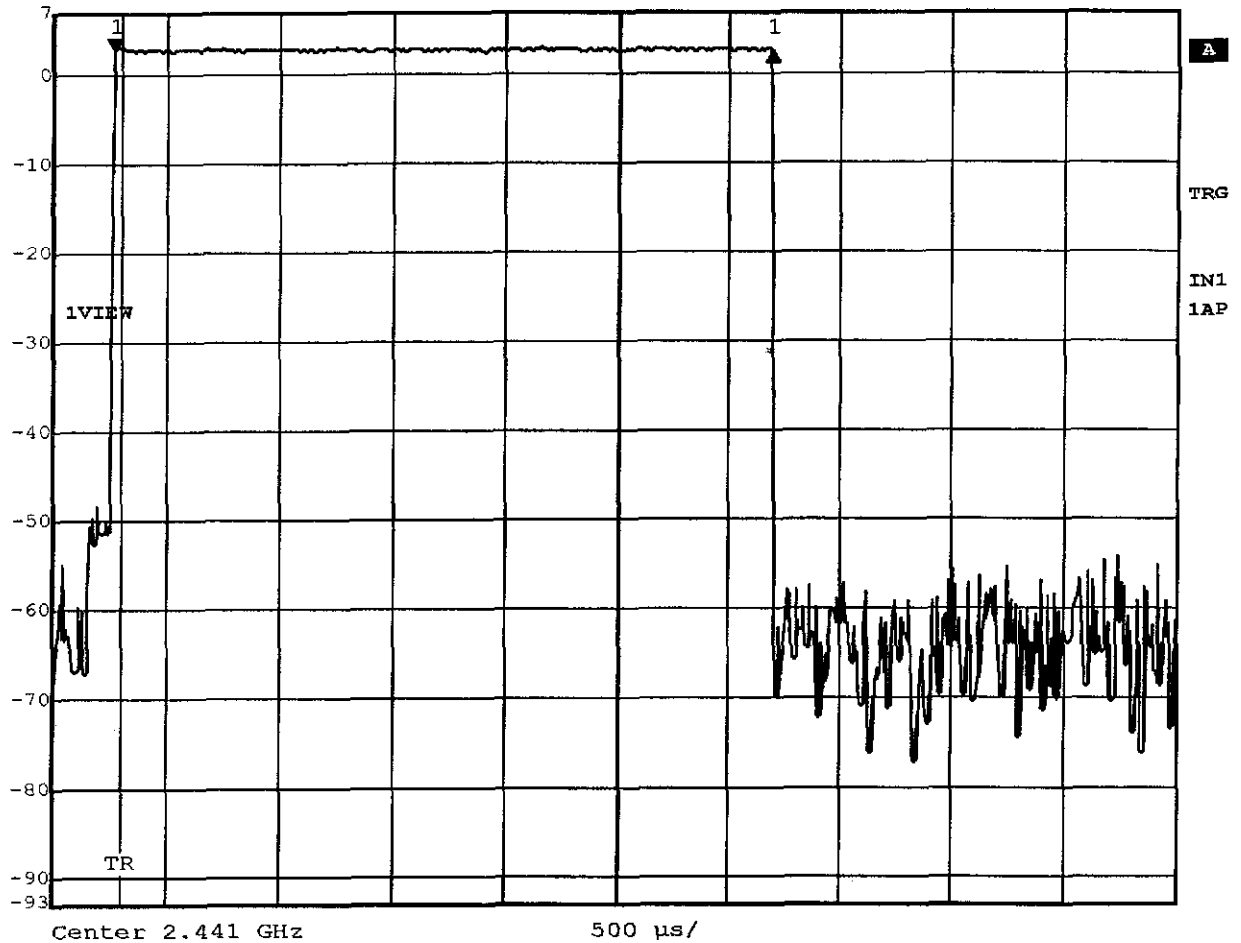

Title: Time of occupancy (Hopping DH5) 64 events*2.923ms=187.07ms
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 30.JAN.2003 13:31:46




Delta 1 [T1] RBW 1 MHz RF Att 30 dB
Ref Lvl 0.14 dB VBW 1 MHz
5 dBm 118.436874 μ s SWT 300 μ s Unit dBm

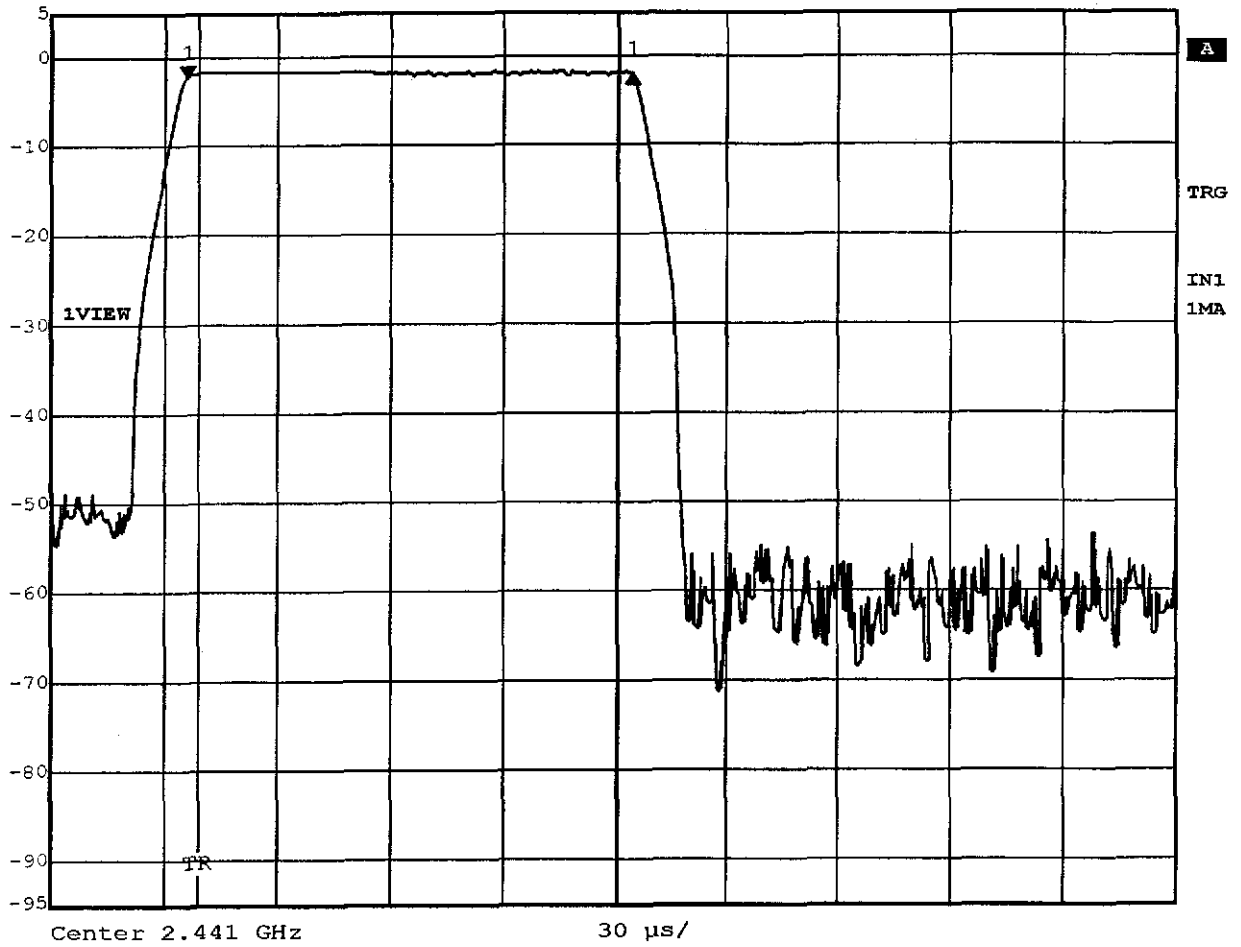

Title: Time of occupancy (Inquiry) 160 events*0.118437ms=18.950ms
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 30.JAN.2003 13:48:05



Delta 2 [T1] RBW 1 MHz RF Att 60 dB
Ref Lvl 0.18 dB VBW 1 MHz
28.6 dBm 6.260521 ms SWT 11 ms Unit dBm

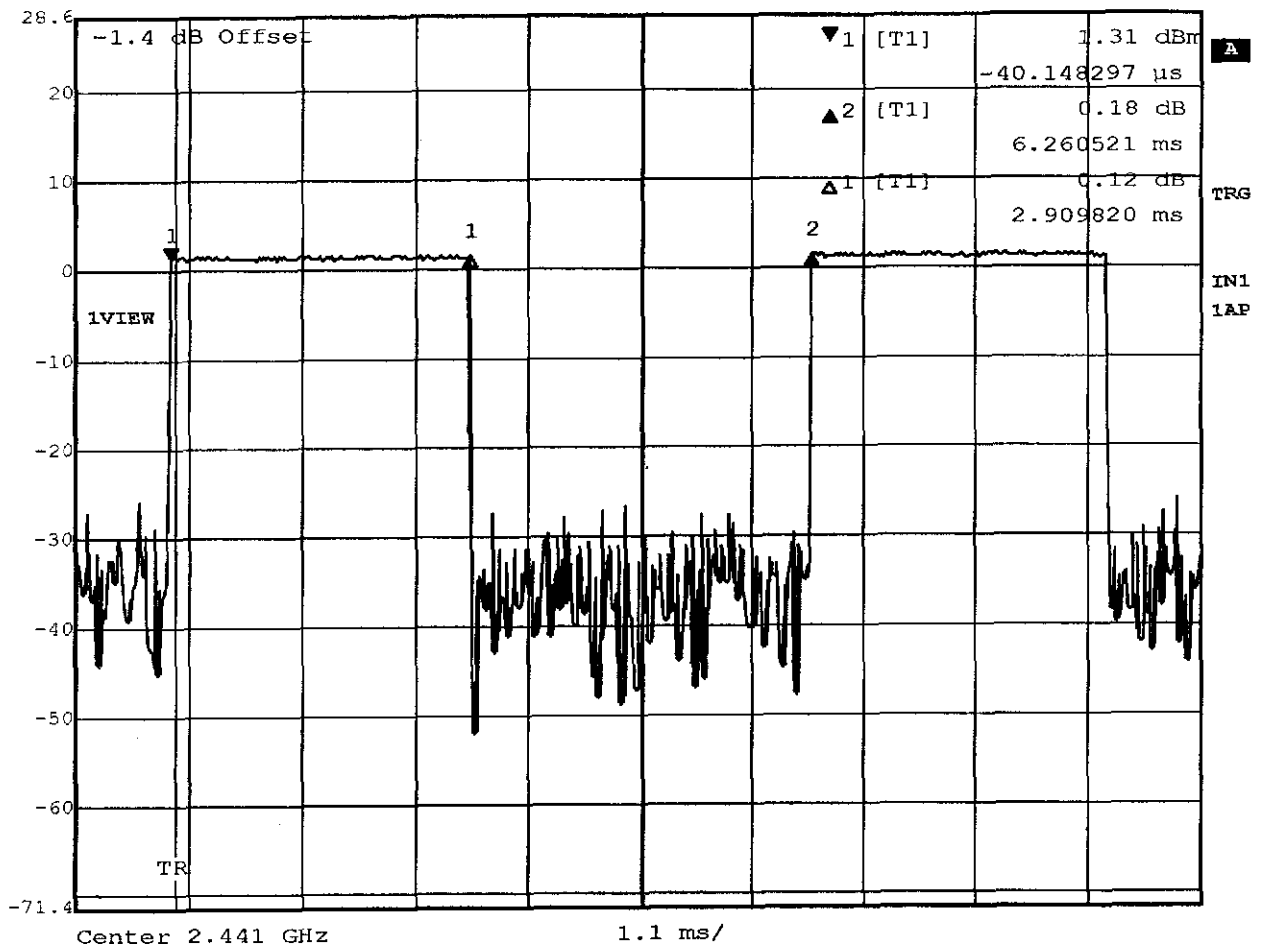


Title: Duty Cycle
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 13:04:33

Appendix H

20dB Bandwidth




Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.08 dB VBW 10 kHz
20 dBm 877.35470942 kHz SWT 56 ms Unit dBm

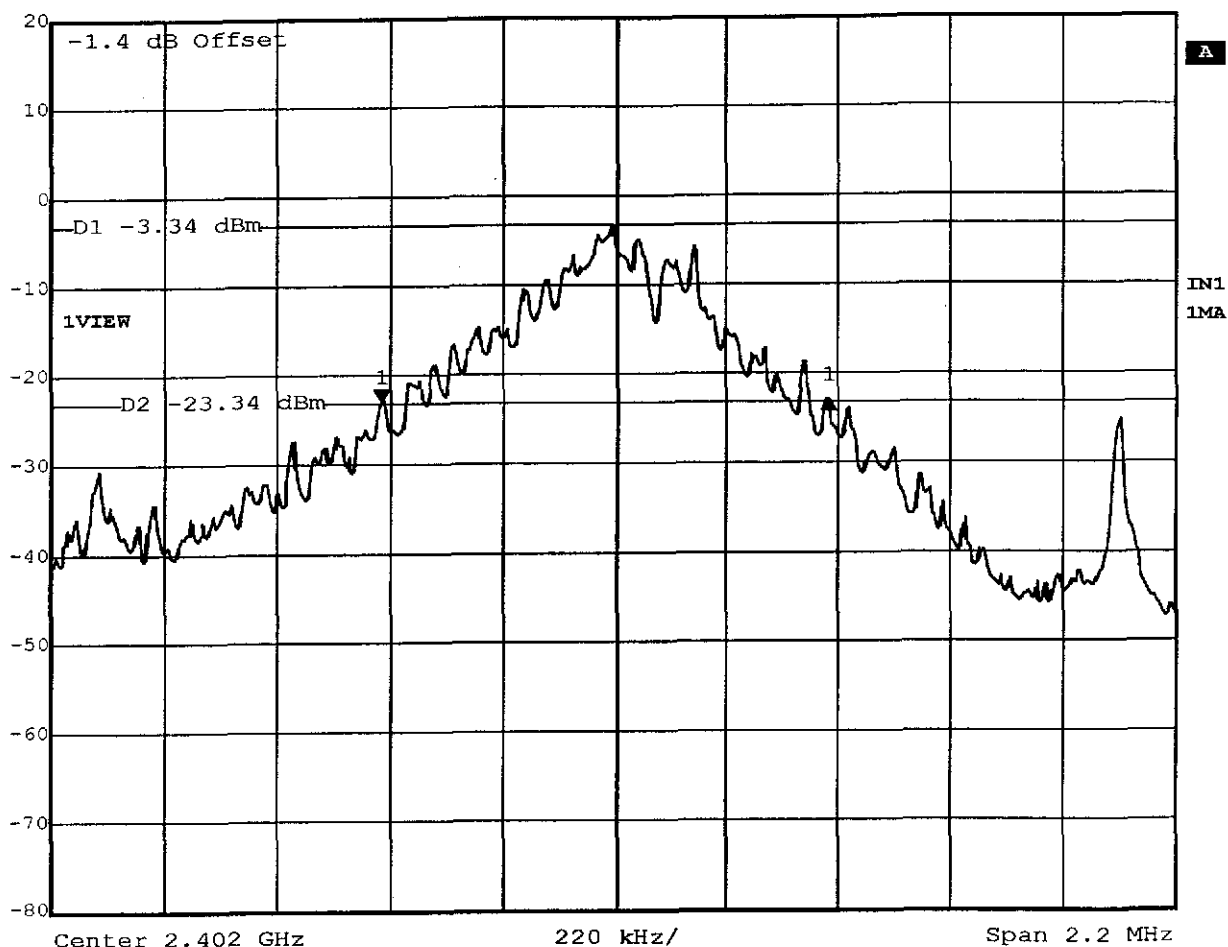

Title: -20 dB Bandwidth Ch.: 0
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 12:46:49



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.11 dB VBW 10 kHz
20 dBm 881.76352705 kHz SWT 56 ms Unit dBm

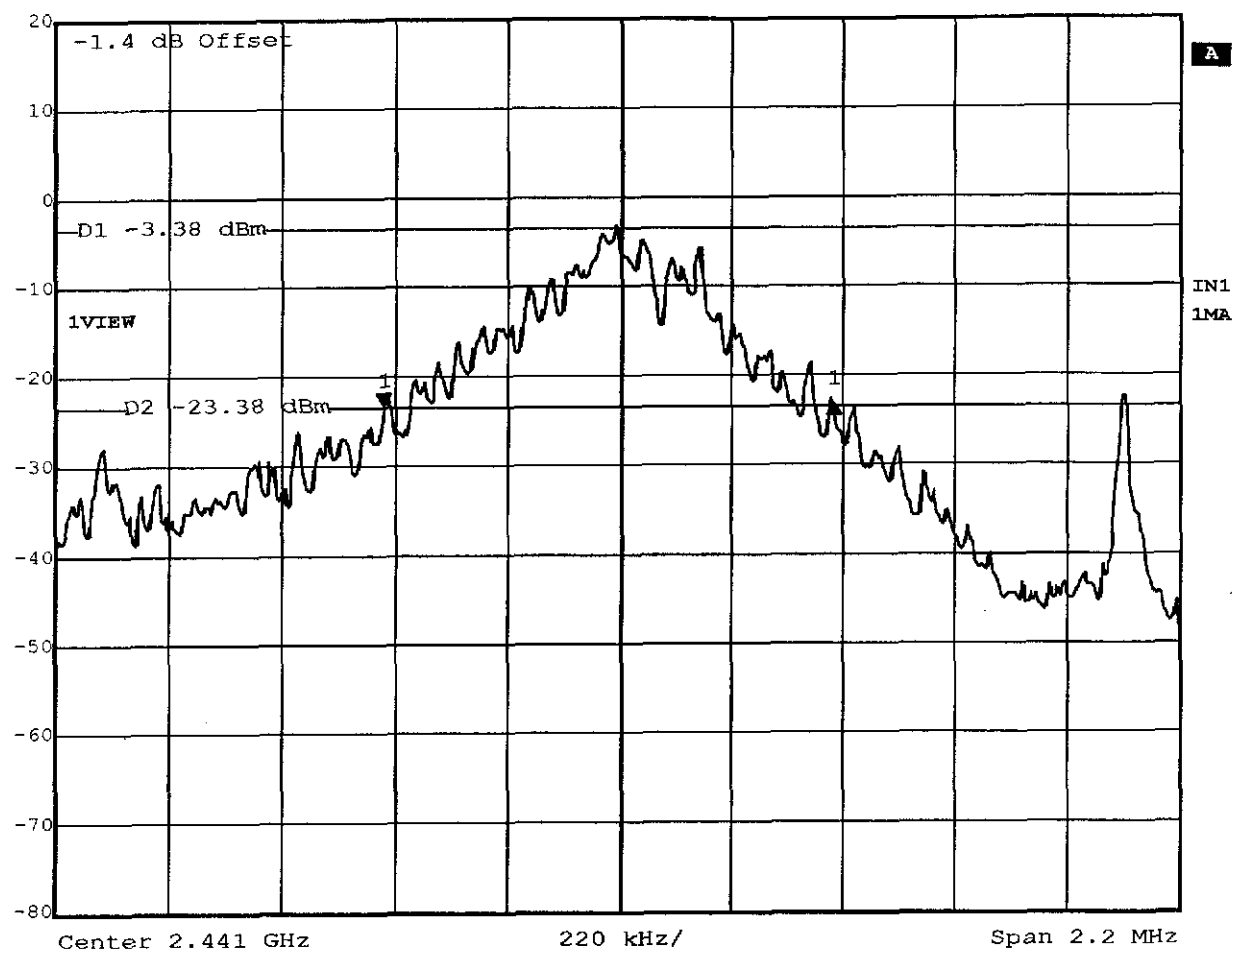


Center 2.441 GHz 220 kHz/ Span 2.2 MHz

Title: -20 dB Bandwidth Ch.: 39
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 12:49:26



Delta 1 [T1] RBW 10 kHz RF Att 50 dB
Ref Lvl -0.16 dB VBW 10 kHz
20 dBm 881.76352706 kHz SWT 56 ms Unit dBm

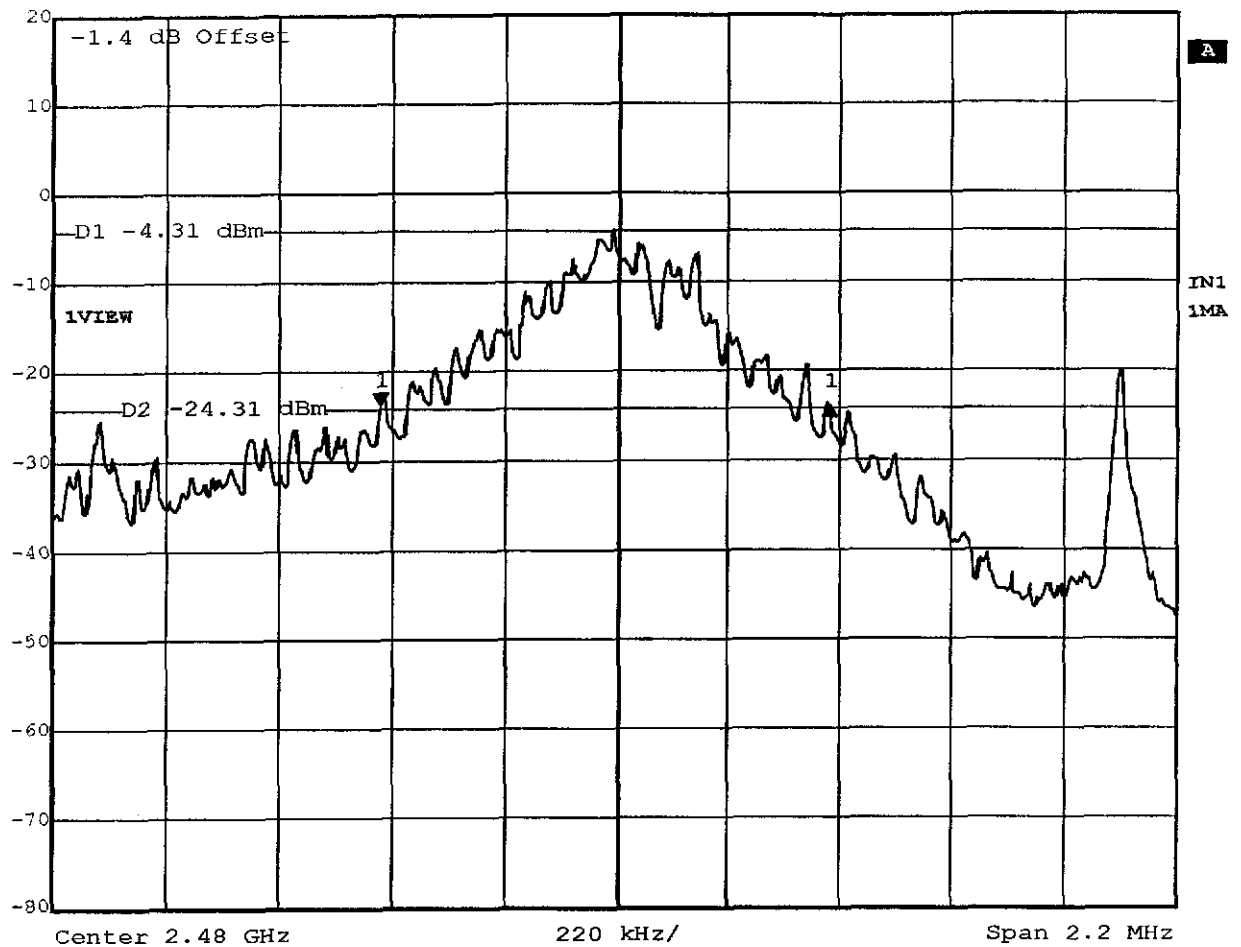

Title: -20 dB Bandwidth Ch.: 78
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 12:51:43




Appendix I

Band-edge Compliance of RF Emissions




Delta 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -38.71 dB VEW 50 kHz
20 dBm -1.99599198 MHz SWT 5 ms Unit dBm

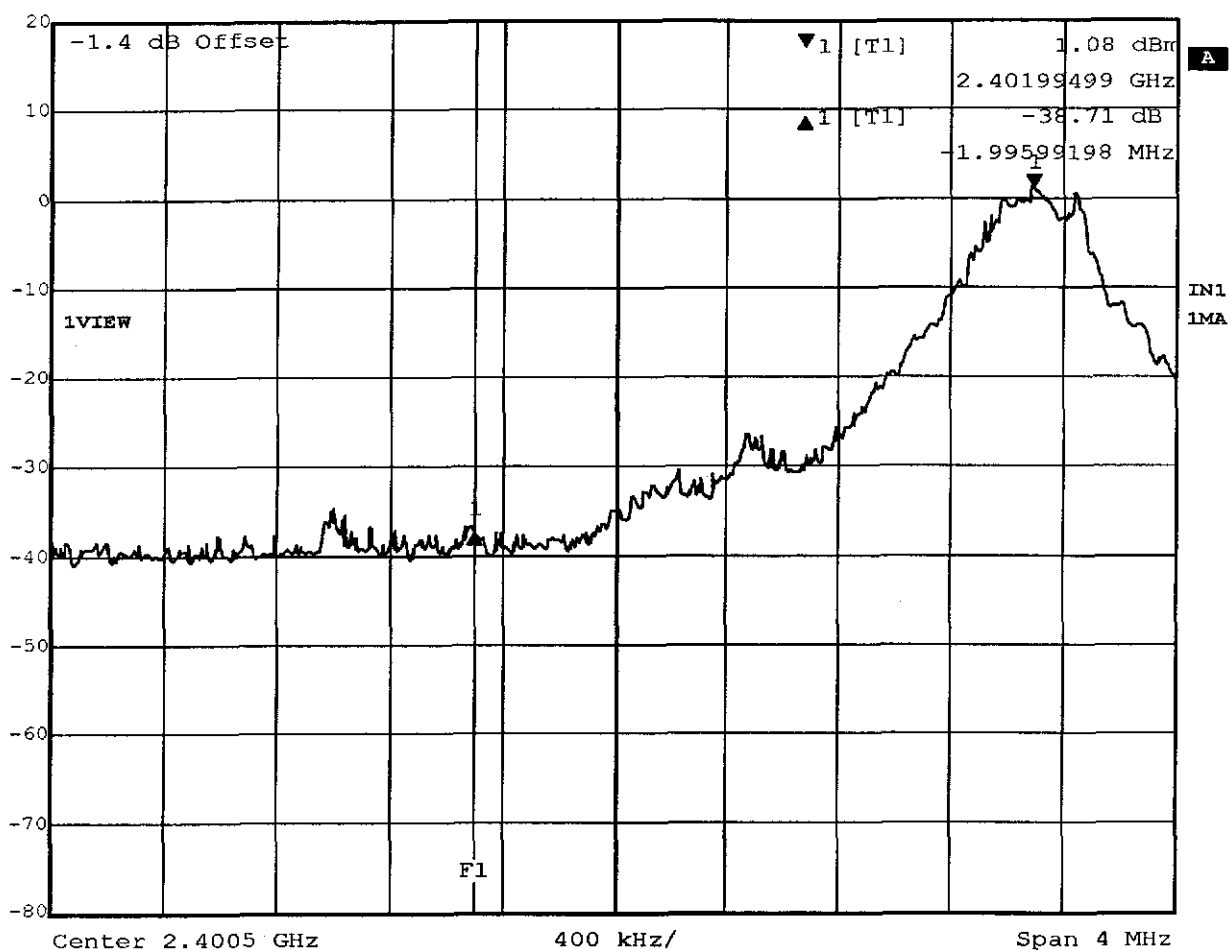

Title: Band-edge Compliance (conducted, single frequency) Ch:0
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 13:00:15




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -0.43 dBm VBW 50 kHz
20 dBm 2.40215531 GHz SWT 5 ms Unit dBm

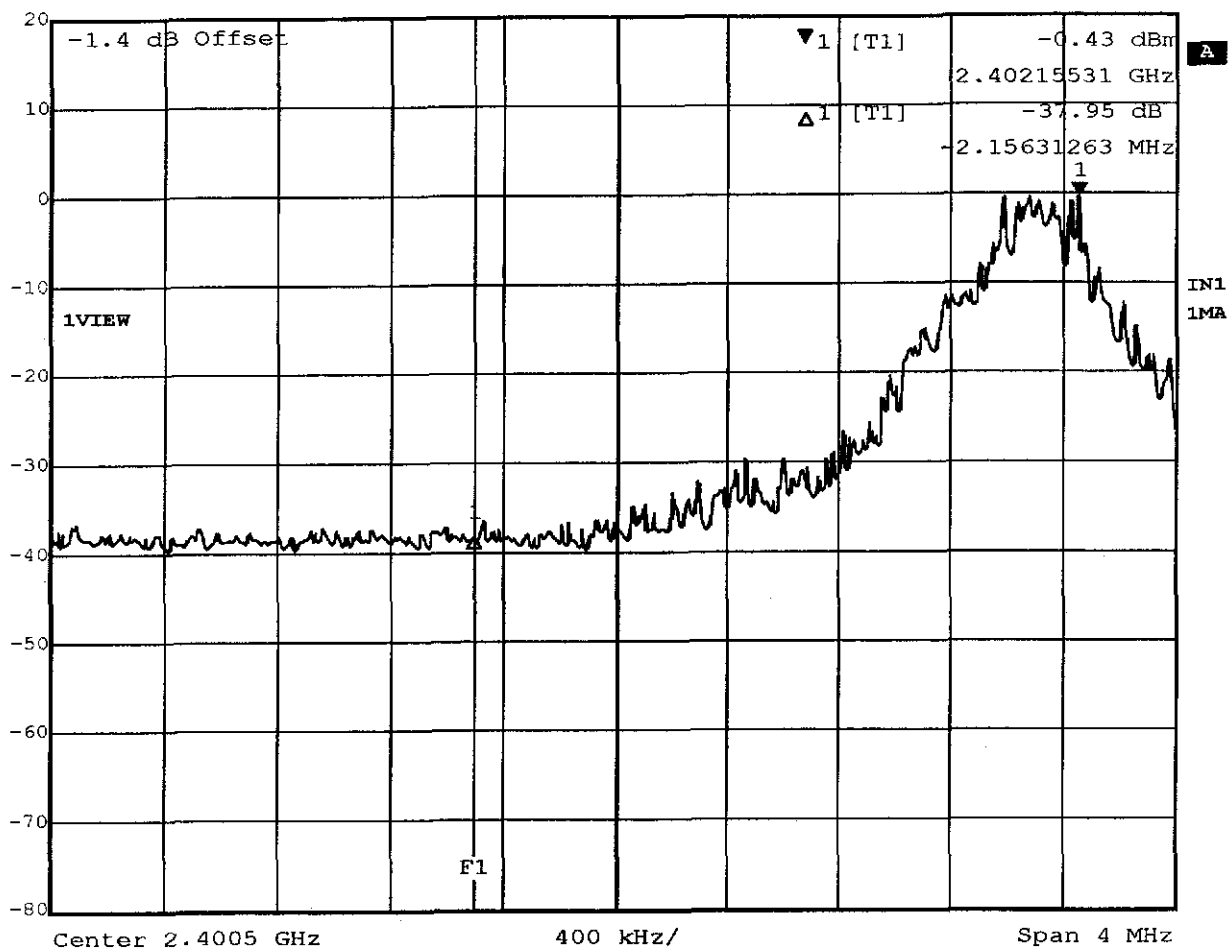

Title: Band-edge Compliance (conducted, hopping mode) Ch:0
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 13:08:35




Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl 0.61 dBm VBW 50 kHz
20 dBm 2.47998469 GHz SWT 5 ms Unit dBm

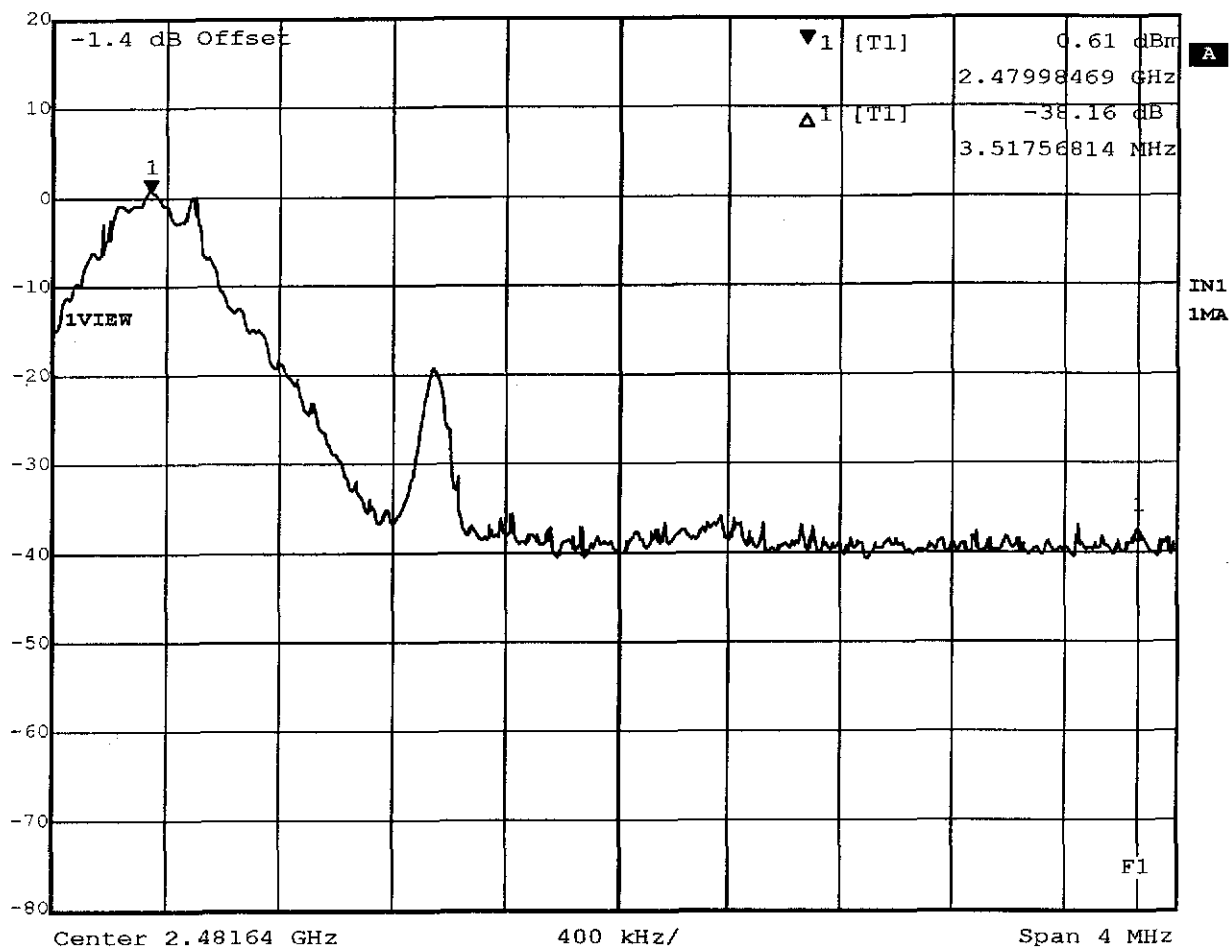

Title: Band-edge Compliance (conducted, single frequency) Ch:78
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 12:57:16



Marker 1 [T1] RBW 50 kHz RF Att 50 dB
Ref Lvl -1.88 dBm VBW 50 kHz
20 dBm 2.47996866 GHz SWT 5 ms Unit dBm

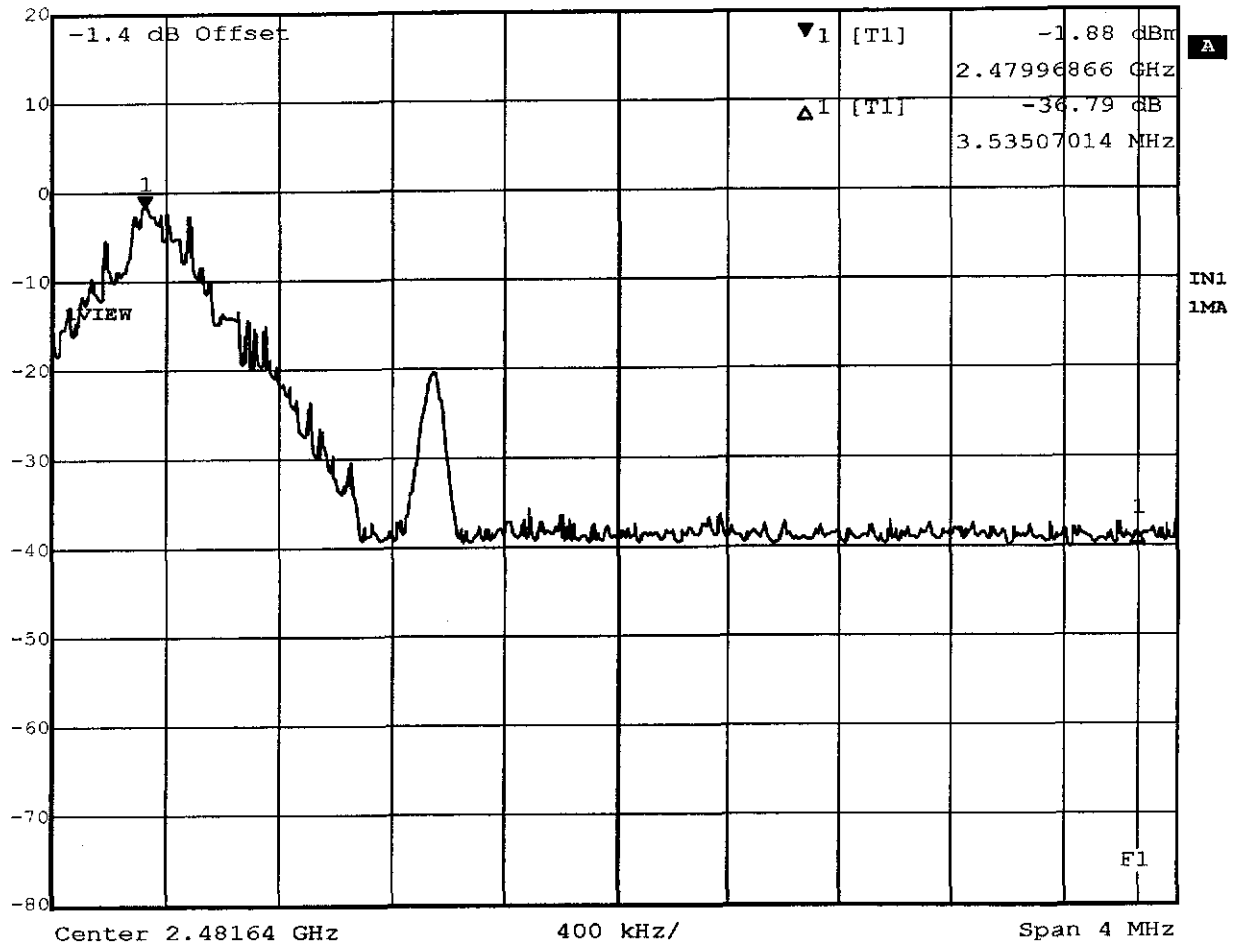

Title: Band-edge Compliance (conducted, hopping mode) Ch:78
Comment A: AUTO ELECTRONIC CORP. Bluetooth USB Dongle AEUC-201A
Date: 29.JAN.2003 13:11:16

Appendix J

Conducted Measurement at (AC) Power Line

EMI voltage test in the ac-mains according to FCC part 15

EUT: BLUETOOTH USB DONGLE with FLASH MEMORY (PORTABLE STORAGE)
Manufacturer: AUTO ELECTRONIC CORP.
Operating Condition: Unom: 120V (AC/DC adaptor), Tnom: 23°C
Test Site: ETS
Operator: Mr. Pflug
Test Specification: V-Network: ESH2-Z5
Comment: model: AEUC-201A brand name: AIRMATE

