



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02102501
Report No.:FCCA02102501
Page: 1 of 13
Date: Oct. 31, 2002

Product Name: Wireless Keyboard
Model Number: FDA-18N1
Applicant: FORWARD ELECTRONICS CO., LTD.
393, CHUNG CHENG RD., SEC. 1, SANHSIA TOWN,
TAIPEI COUNTY, TAIWAN, 237, R.O.C.
Date of Receipt: Oct. 25, 2002
Finished date of Test: Oct. 31, 2002
Applicable Standards: 47 CFR Part 15, Subpart C
ANSI C63.4:1992

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Tested By : James Lee, Date: Oct. 31, 2002
(James Lee)

Checked By : Spring Wang, Date: Oct. 31, 2002
(Spring Wang)

Approved By : Harris W. Lai, Date: Oct. 31, 2002
(Harris W. Lai, Director)

NVLAP[®]

Lab Code: 200099-0

FCC ID : F4Z4K3FDA-18N1



Table of Contents

1.	DOCUMENT POLICY AND TEST STATEMENT.....	3
1.1	DOCUMENT POLICY	3
1.2	TEST STATEMENT.....	3
2.	DESCRIPTION OF EUT AND TEST MODE	4
2.1	GENERAL DESCRIPTION OF EUT	4
2.2	DESCRIPTION OF EUT INTERNAL DEVICE.....	4
2.3	DESCRIPTION OF TEST MODE	4
2.4	DESCRIPTION OF SUPPORT UNIT	5
3.	DESCRIPTION OF APPLIED STANDARDS	6
4.	RADIATED EMISSION TEST	6
4.1	RADIATED EMISSION LIMIT.....	6
4.2	TEST EQUIPMENT.....	7
4.3	TEST SET-UP	8
4.4	TEST PROCEDURE	9
4.5	EUT OPERATING CONDITION	9
4.6	RADIATED EMISSION TEST RESULT.....	10
5	BAND EDGE.....	11
5.2	BAND EDGE LIMIT	11
5.2	TEST EQUIPMENT.....	11
5.3	TEST SET-UP	11
5.3	TEST PROCEDURE.....	11
5.5	EUT OPERATING CONDITION	11
5.6	BAND EDGE TEST RESULT	12
6	TERMS OF ABRIVATION.....	13

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	TEST REPORT	Reference No.:A02102501 Report No.: FCCA02102501 Page: 3 of 13 Date: Oct. 31, 2002
---	--------------------	---

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.
- The report must not be used by the applicant to claim that the product is endorsed by NVLAP.
- The NVLAP logo applies only to the applicable standards specified in this report.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- DC power source, 3V from battery, was used during the test.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02102501
Report No.: FCCA02102501
Page: 4 of 13
Date: Oct. 31, 2002

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless Keyboard
MODEL NO.	FDA-18N1
POWER SUPPLY	DC 3V from Battery
CABLE	N/A
I/O PORT	N/A
FREQUENCY BAND	26.96 ~ 27.28 MHz
CARRIER FREQUENCY	27.145 MHz
NUMBER OF CHANNEL	1
CHANNEL SPACING	39 kHz
RF OUTPUT POWER (EIRP)	-36.9 dBm
I.F. & L.O.	I.F. 0kHz, L.O. 27.145 MHz
MODULATION TYPE	FSK
BIT RATE OF TRANSMISSION	2k bps
ANTENNA TYPE	Mono pole

NOTE : The EUT is the transmitter part of a Mini optical mouse. For more detailed features, please refer to the User's Manual of EUT.

2.2 DESCRIPTION OF EUT INTERNAL DEVICE

DEVICE	BRAND / MAKER	MODEL #	FCC ID/DOC	REMARK
N/A				

2.3 DESCRIPTION OF TEST MODE

N/A (It is only applicable to more than one test mode.)



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02102501
Report No.: FCCA02102501
Page: 5 of 13
Date: Oct. 31, 2002

2.4 DESCRIPTION OF SUPPORT UNIT

The EUT was configured by the requirement of ANSI C63.4. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NOTE : For the actual test configuration, please refer to the photos of testing.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02102501
Report No.: FCCA02102501
Page: 6 of 13
Date: Oct. 31, 2002

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of ITE and according to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C

ANSI C63.4:1992

All tests have been performed and recorded as per the above standards.

4. RADIATED EMISSION TEST

4.1 RADIATED EMISSION LIMIT

All emission from EUT, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strength specified below :

FCC Part 15, Subpart C Section 15.227.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)	
		PEAK	AVERAGE
26.96 - 27.28	3	100.0	80.0

FCC Part 15, Subpart B Section 15.209.

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

NOTE : 1. In the emission tables above , the tighter limit applies at the band edges.

2. Distance refers to the distance between measuring instrument , antemma , and the closest point of any part of the device or system.



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02102501
Report No.: FCCA02102501
Page: 7 of 13
Date: Oct. 31, 2002

4.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 836858/008	DEC. 2002 R&S
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/9701-1124	JUL. 2003 ETC
OATS	3 - 10 M measurement	SRT	SRT-1	MAY 2003

NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



4.3 TEST SET-UP

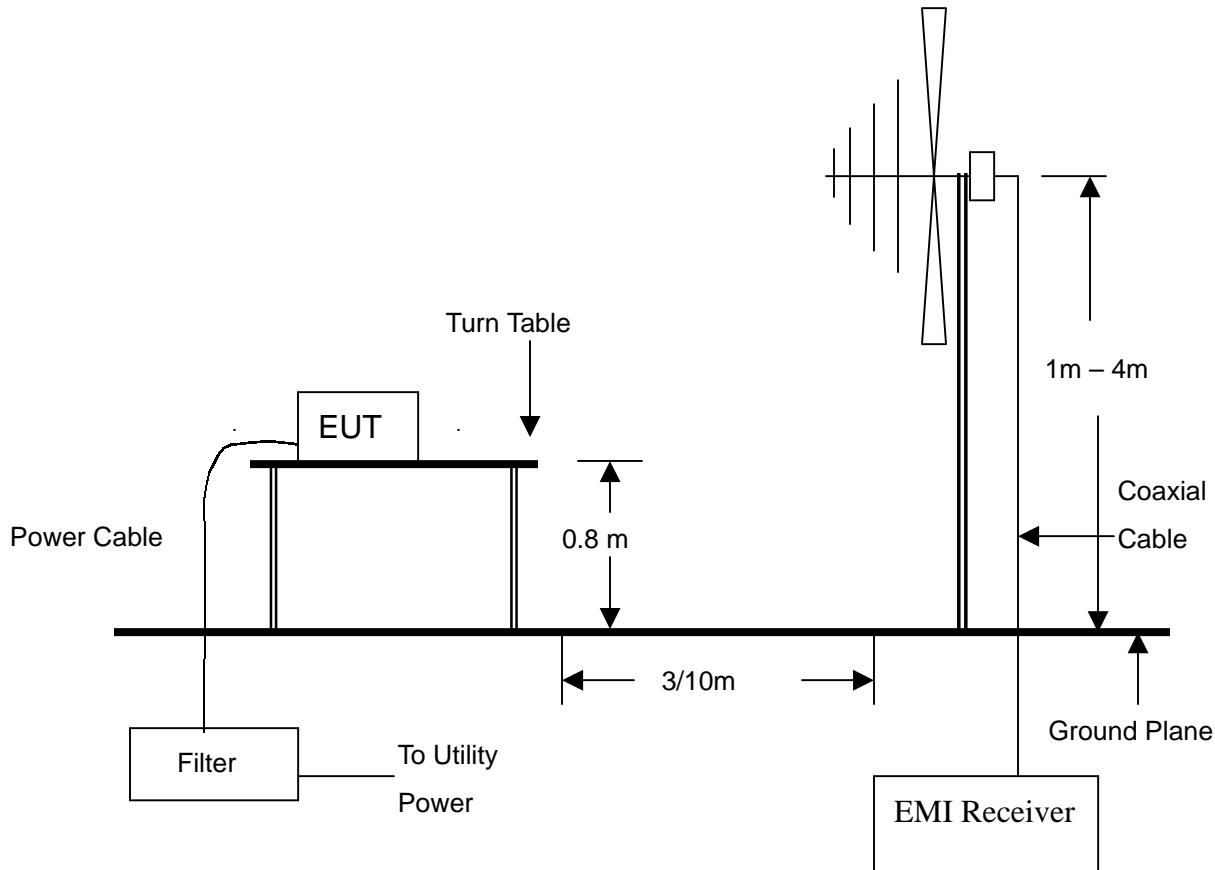

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.

 <p>Spectrum Research & Testing Lab., Inc. No. 101-10, Ling 8, Shan-Tong Li, Chung-Li City, Taoyuan, Taiwan</p>	TEST REPORT	Reference No.:A02102501 Report No.: FCCA02102501 Page: 9 of 13 Date: Oct. 31, 2002
---	--------------------	---

4.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4. The measurements were made at an open area test site with 3 meter measurement distance. The frequency spectrum measured started from 30 MHz. Under 1 GHz, all readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, all readings were peak or average values with 1 MHz resolution bandwidth of the test receiver.

4.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02102501
Report No.: FCCA02102501
Page: 10 of 13
Date: Oct. 31, 2002

4.6 RADIATED EMISSION TEST RESULT

Temperature:	25 °C	Humidity:	65 %RH
Ferquency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	PK, Q.P. , AV.	Tested by	James Lee

Antenna Polarization : Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	EL(m)	AZ(°)
27.1450(F)	1.33	15.30	27.0(AV.)	43.6	80.0	-36.4	3.4	0
27.1450(F)	1.33	15.30	33.6(PK)	50.2	100.0	-49.8	3.4	0
135.7440	1.39	8.30	13.3(Q.P.)	23.0	43.5	-20.5	2.2	83.0
162.8930	1.57	9.28	23.2(Q.P.)	34.1	43.5	-9.4	1.8	0
190.0420	1.59	10.20	22.1(Q.P.)	33.9	43.5	-9.6	1.4	147.0
217.1910	1.73	11.18	16.8(Q.P.)	29.7	46.0	-16.3	1.4	342.0
244.3400	1.98	12.44	13.7(Q.P.)	28.1	46.0	-17.9	1.0	351.0
271.4890	1.93	13.39	9.7(Q.P.)	25.0	46.0	-21.0	1.0	357.0
325.7860	2.08	15.03	15.9(Q.P.)	33.0	46.0	-13.0	1.0	341.0

Antenna Polarization : Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dB μ V)	Emission Level (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	EL(m)	AZ(°)
27.1450(F)	1.33	15.30	31.5(AV.)	48.1	80.0	-31.9	1.0	0
27.1450(F)	1.33	15.30	39.0(PK)	55.6	100.0	-44.4	1.0	0
162.8930	1.57	9.28	13.4(Q.P.)	24.3	43.5	-19.2	2.4	339.0
190.0430	1.59	10.20	12.8(Q.P.)	24.6	43.5	-18.9	2.5	261.0
229.1870	1.85	11.75	6.6(Q.P.)	20.2	46.0	-25.8	3.0	184.0
244.3400	1.98	12.44	8.0(Q.P.)	22.4	46.0	-23.6	1.0	43.0
271.4890	1.93	13.39	5.9(Q.P.)	21.2	46.0	-24.8	1.4	97.0
325.7860	2.08	15.03	6.6(Q.P.)	23.7	46.0	-22.3	1.0	100.0

NOTE :

1. Measurement uncertainty is less than +/- 4dB
2. **: Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss
4. The field strength of other emission frequencies were very low against the limit.
5. (F) : Fundamental frequency of transmitter.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02102501
Report No.: FCCA02102501
Page: 11 of 13
Date: Oct. 31, 2002

5 BAND EDGE

5.2 BAND EDGE LIMIT

The limit is less than 26dB with respect to the amplitude of fundamental frequency.


5.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9 kHz TO 7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	MAR. 2003 ETC

NOTE: 1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

5.3 TEST SET-UP

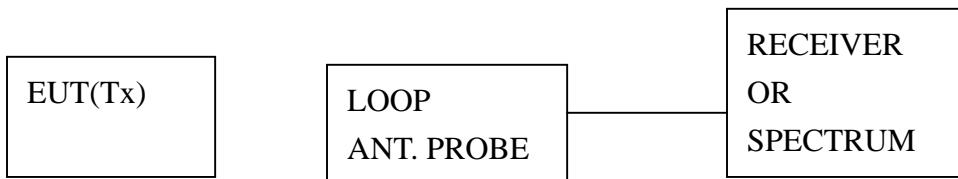

5.3 TEST PROCEDURE

A specific loop antenna was connected to receiver to detect the EUT's power level. The Receiver displayed the EUT's power level and printed out the plot of measurement.

5.5 EUT OPERATING CONDITION

Set the EUT under transmission condition continuously at specific channel frequency.



**Spectrum Research
& Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan


TEST REPORT

Reference No.: A02102501
Report No.: FCCA02102501
Page: 12 of 13
Date: Oct. 31, 2002

5.6 BAND EDGE TEST RESULT

Temperature: 25 °C Humidity: 65 %RH
Receiver Detector: Peak Tested by James Lee
Test Result: Pass

FREQUENCY (MHZ)	RF LEVEL 10kHz BW (dB μ V)	LIMIT (dB μ V)	MARGIN (dB)
27.0358	21.41	29.23	-7.82
27.2256	18.46	29.23	-10.77

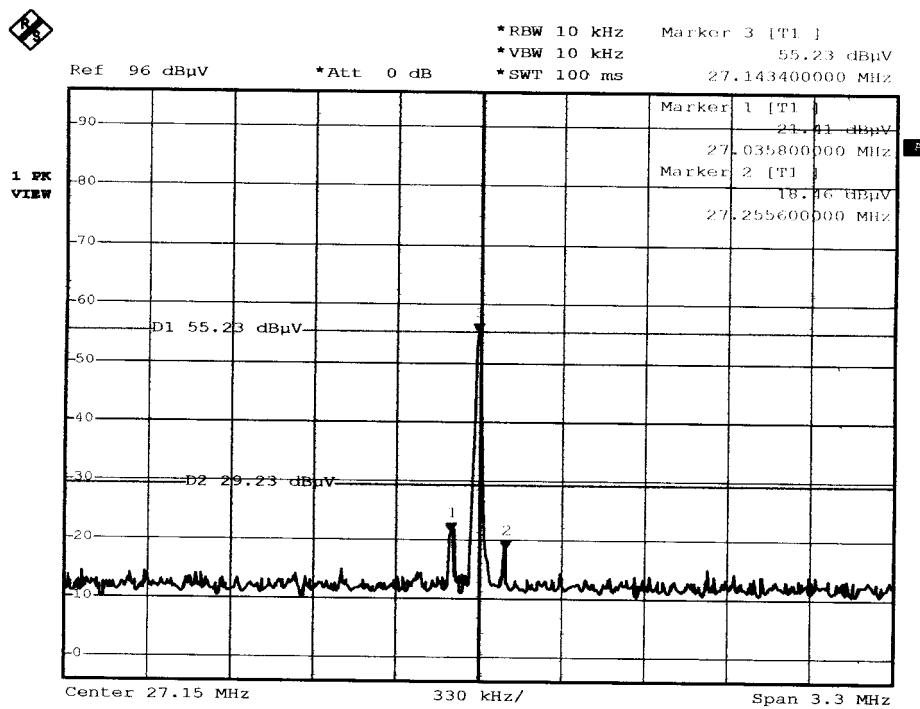

Date: 29.OCT.2002 12:33:21



**Spectrum Research
& Testing Lab., Inc.**

No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.:A02102501
Report No.: FCCA02102501
Page: 13 of 13
Date: Oct. 31, 2002

6 TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
PK	Peak detection
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction