

Digital Security Controls

3301 Langstaff Road

Concord, Ontario Canada L4K 4L2

Tele: 905 760 3000

Toll Free: 888 888 7838

Fax: 905-760-3020

Colour: Pantone Process Black

Material: WHITE UL approved self-adhesive Mylar type material - on a roll

e.g. 2M POLY WH TC/LP50/50# (2F8), or equivalent

Lamination: Top Gloss finish lamination

e.g. 1M CL POLY NTC/P1212/50# (1F1), or equivalent

Adhesive: Permanent adhesive backed with protective liner

Cutting: Tolerance +/- 0.010"

Dashed line indicates cutting - will not print

Square label corners are acceptable.

NOTES:

1. All items must be RoHS compliant.
2. Markings on label must be PERMANENT.
3. Indelible Ink.
4. Conductive inks may not be used.
5. Non-conductive label adhesive shall be used ONLY.

NOTES:

1. All UL and ULC Labels shall be printed on UL approved material. The first time the label is ordered, the artwork must be sent to UL Label Center [email: LabelCenter.US-A@us.ul.com, fax: (847)509-6201] for approval.
2. All UL and ULC Labels shall be printed by a UL Listed printing facility. The issue number (when applicable) shall be requested from the same center as above by the printing facility at the time of printing.

18009414R001

3G2055-E Listing Label

(FCC/IC/UL/ULC)

July 7, 2015

Model: 3G2055-E Res Fire and Burg 3G Alarm Communicator

Type of signalling: PSDN

This device complies with Part 15 Class B of the FCC

rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: F5315L2553GRE

IC:160A-TL2553GRE

For use in dry indoor locations only.

For installation refer to Installation Manual 29009450

IC:160A-TL2553GRE

CAN ICES-3 (B)/NMB-3 (B)

DIGITAL SECURITY CONTROLS, TORONTO, CANADA

SECURITY SIGNALING

UL LISTED

ULC LISTED

FIRE ALARM AND SECURITY SUBASSEMBLY

89SL

18 mm
(0.7")

48 mm (1.9")

Model: 3G2055-E Res Fire and Burg 3G Alarm Communicator

Type of signalling: PSDN

This device complies with Part 15 Class B of the FCC

rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference and (2) this device must accept any interference received, including interference that may cause undesired operation.

FCC ID: F5315L2553GRE

IC:160A-TL2553GRE

For use in dry indoor locations only.

For installation refer to Installation Manual 29009450

IC:160A-TL2553GRE

CAN ICES-3 (B)/NMB-3 (B)

DIGITAL SECURITY CONTROLS, TORONTO, CANADA

SECURITY SIGNALING

UL LISTED


ULC LISTED

FIRE ALARM AND SECURITY SUBASSEMBLY

89SL

18009414R001

Label shown 150% of actual size

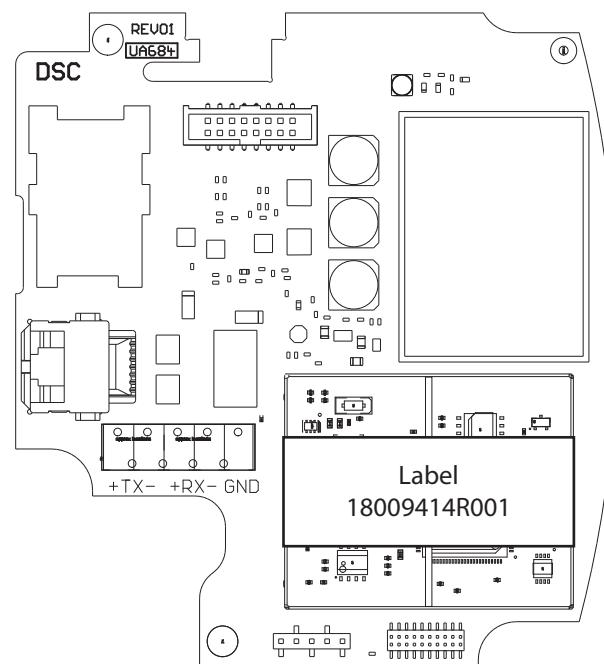

Top of the PCB showing the label location
(80% of actual size)