

RADIO PERFORMANCE TEST REPORT

Test Report No. : OT-247-RWD-005
Reception No. : 2404001329
Applicant : InBody Co., Ltd.
Address : InBody Bldg., 625, Eonju-ro, Gangnam-gu, Seoul 06106 KOREA
Manufacturer : InBody Co., Ltd.
Address : 15, Heugam-gil, Ipjang-myeon, Seobuk-gu, Cheonan-si, Chungcheongnam-do 31025 KOREA
Type of Equipment : Body Composition Analyzer
FCC ID. : F6OH30NWIE
Model Name : H30NWIE
Multiple Model Name : N/A
Serial number : N/A
Total page of Report : 21 pages (including this page)
Date of Incoming : April 30, 2024
Date of issue : July 15, 2024

SUMMARY

The equipment complies with the regulation; **FCC PART 15 SUBPART C Section 15.247**

This test report only contains the result of a single test of the sample supplied for the examination.

It is not a generally valid assessment of the features of the respective products of the mass-production.

This report is not correlated with the "KS Q ISO/IEC 17025 and KOLAS accreditation" of Korean Laboratory Accreditation Scheme.





Tested by
 Yun-Bok, Wi / Engineer
 ONETECH Corp.

Reviewed by
 Tae-Ho, Kim / Chief Engineer
 ONETECH Corp.

Approved by
 Jae-Ho, Lee / Chief Engineer
 ONETECH Corp.

CONTENTS

PAGE

1. VERIFICATION OF COMPLIANCE	5
2. TEST SUMMARY	6
2.1 TEST ITEMS AND RESULTS	6
2.2 ADDITIONS, DEVIATIONS, EXCLUSIONS FROM STANDARDS.....	6
2.3 RELATED SUBMITTAL(S) / GRANT(S)	6
2.4 PURPOSE OF THE TEST	6
2.5 TEST METHODOLOGY.....	6
2.6 TEST FACILITY.....	6
3. GENERAL INFORMATION.....	7
3.1 PRODUCT DESCRIPTION.....	7
3.2 ALTERNATIVE TYPE(S)/MODEL(S); ALSO COVERED BY THIS TEST REPORT.....	7
4. EUT MODIFICATIONS.....	7
5. SYSTEM TEST CONFIGURATION	8
5.1 JUSTIFICATION.....	8
5.2 PERIPHERAL EQUIPMENT	8
5.3 MODE OF OPERATION DURING THE TEST	9
5.4 CONFIGURATION OF TEST SYSTEM.....	10
5.5 ANTENNA REQUIREMENT	10
6. PRELIMINARY TEST	10
6.1 AC POWER LINE CONDUCTED EMISSIONS TESTS.....	10
6.2 GENERAL RADIATED EMISSIONS TESTS	10
7. MINIMUM 6 DB BANDWIDTH	11
7.1 OPERATING ENVIRONMENT	11
7.2 TEST SET-UP	11
7.3 MEASUREMENT UNCERTAINTY	11
7.4 TEST DATE	11
7.5 TEST DATA FOR 1 MBPS	11
8. MAXIMUM PEAK OUTPUT POWER.....	12
8.1 OPERATING ENVIRONMENT	12
8.2 TEST SET-UP	12
8.3 MEASUREMENT UNCERTAINTY	12
8.4 TEST DATE	12

8.5 TEST DATA FOR 1 MBPS	12
9. 100 KHZ BANDWIDTH OUTSIDE THE FREQUENCY BAND.....	13
9.1 OPERATING ENVIRONMENT	13
9.2 TEST SET-UP FOR CONDUCTED MEASUREMENT	13
9.3 TEST SET-UP FOR RADIATED MEASUREMENT.....	13
9.4 MEASUREMENT UNCERTAINTY	13
9.5 TEST DATE	13
9.6 TEST DATA FOR CONDUCTED EMISSION	13
9.7 TEST DATA FOR RADIATED EMISSION.....	14
<i>9.7.1 Radiated Emission which fall in the Restricted Band.....</i>	<i>14</i>
<i>9.7.2 Spurious & Harmonic Radiated Emission.....</i>	<i>15</i>
10. PEAK POWER SPECTRAL DENSITY	16
10.1 OPERATING ENVIRONMENT	16
10.2 TEST SET-UP	16
10.3 MEASUREMENT UNCERTAINTY	16
10.4 TEST DATE	16
10.5 TEST DATA FOR 1 MBPS	16
11. RADIATED EMISSION TEST	17
11.1 OPERATING ENVIRONMENT	17
11.2 TEST SET-UP	17
11.3 MEASUREMENT UNCERTAINTY	18
11.4 TEST DATE	18
11.5 TEST DATA FOR 30 MHz ~ 1 GHz.....	19
<i>11.5.1 Test data for Transmitting Mode.....</i>	<i>19</i>
11.6 TEST DATA FOR BELOW 30 MHz	20
11.7 TEST DATA FOR ABOVE 1 GHz	20
12. LIST OF TEST EQUIPMENT	21

※ Please refer to the Annex section for All test plots

Revision History

Rev. No.	Issue Report No.	Issued Date	Revisions	Section Affected
0	OT-247-RWD-005	July 15, 2024	Initial Release	All

1. VERIFICATION OF COMPLIANCE

Applicant : InBody Co., Ltd.
 Address : InBody Bldg., 625, Eonju-ro, Gangnam-gu, Seoul 06106 KOREA
 Contact Person : Wonjee Jang / Regulatory Affairs
 Telephone No. : +82-2-300-2256
 FCC ID : F6OH30NWIE
 Model Name : H30NWIE
 Brand Name : 
 Serial Number : N/A
 Date : July 15, 2024

EQUIPMENT CLASS	DTS – DIGITAL TRNSMISSION SYSTEM
E.U.T. DESCRIPTION	Body Composition Analyzer
THIS REPORT CONCERNS	Original Grant
MEASUREMENT PROCEDURES	ANSI C63.10: 2013
TYPE OF EQUIPMENT TESTED	Pre-Production
KIND OF EQUIPMENT AUTHORIZATION REQUESTED	Certification
EQUIPMENT WILL BE OPERATED UNDER FCC RULES PART(S)	FCC PART 15 SUBPART C Section 15.247 KDB 558074 D01 15.247 Meas Guidance v05r02
Modifications on the Equipment to Achieve Compliance	None
Final Test was Conducted On	3 m, Semi Anechoic Chamber

-. The above equipment was tested by ONETECH Corp. for compliance with the requirement set forth in the FCC Rules and Regulations. This said equipment in the configuration described in this report, shows the maximum emission levels emanating from equipment are within the compliance requirements.

2. TEST SUMMARY

2.1 Test items and results

SECTION	TEST ITEMS	RESULTS
15.247 (a) (2)	Minimum 6 dB Bandwidth	Met the Limit / PASS
15.247 (b) (3)	Maximum Peak Conducted Output Power	Met the Limit / PASS
15.247 (d)	100 kHz Bandwidth Outside the Frequency Band	Met the Limit / PASS
15.247 (d)	Radiated Emission which fall in the Restricted Band	Met the Limit / PASS
15.247 (e)	Peak Power Spectral Density	Met the Limit / PASS
15.209	Radiated Emission Limits	Met the Limit / PASS
15.207	Conducted Limits	N/A (See Note)
15.203	Antenna Requirement	Met requirement / PASS

Note.: As the EUT is operated by DC battery, this test item is not requirement to be performed.

2.2 Additions, deviations, exclusions from standards

No additions, deviations or exclusions have been made from standard.

2.3 Related Submittal(s) / Grant(s)

Original submittal only

2.4 Purpose of the test

To determine whether the equipment under test fulfills the requirements of the regulation stated in FCC PART 15 SUBPART C Section 15.247.

2.5 Test Methodology

Both conducted and radiated testing was performed according to the procedures in ANSI C63.10: 2013. Radiated testing was performed at a distance of 3 m from EUT to the antenna.

2.6 Test Facility

The Onetech Corp. has been designated to perform equipment testing in compliance with ISO/IEC 17025.

The Electromagnetic compatibility measurement facilities are located at 43-14, Jinsaegol-gil, Chowol-eup, Gwangju-si, Gyeonggi-do, 12735, Korea.

-. Site Filing:

VCCI (Voluntary Control Council for Interference) – Registration No. R-20122/ C-14617/ G-10666/ T-11842

ISED (Innovation, Science and Economic Development Canada) – Registration No. Site# 3736A-3

KOLAS (Korea Laboratory Accreditation Scheme) - Accreditation NO. KT085

FCC (Federal Communications Commission) - Accreditation No. KR0013

RRA (Radio Research Agency) – Designation No. KR0013

3. GENERAL INFORMATION

3.1 Product Description

The InBody Co., Ltd., Model H30NWiE (referred to as the EUT in this report) is a Body Composition Analyzer. The product specification described herein was obtained from product data sheet or user's manual.

DEVICE TYPE	Body Composition Analyzer
OPERATING FREQUENCY	2 402 MHz ~ 2 480 MHz
MODULATION TYPE	GFSK
RF OUTPUT POWER	-2.02 dBm
NUMBER OF CHANNEL	40 Channel
ANTENNA TYPE	Chip Antenna
ANTENNA GAIN	3.70 dBi
Electrical Rating	DC 6.0 V
List of each Osc. or crystal Freq.(Freq. >= 1 MHz)	38.4 MHz

3.2 Alternative type(s)/model(s); also covered by this test report.

-. None

4. EUT MODIFICATIONS

-. None

5. SYSTEM TEST CONFIGURATION

5.1 Justification

This device was configured for testing in a typical way as a normal customer is supposed to be used. During the test, the following components were installed inside of the EUT.

DEVICE TYPE	MANUFACTURER	MODEL/PART NUMBER	FCC ID
Main Board	InBody Co., Ltd.	InBodyH30_MAIN	N/A
Hand Board	InBody Co., Ltd.	InBodyH30_HAND_I2322	N/A
Wi-Fi & Bluetooth Internet of Things Module	Espressif Systems (Shanghai)Co., Ltd.	ESP32-C3-MINI-1	2AC7Z-ESPC3MINI1

5.2 Peripheral equipment

Defined as equipment needed for correct operation of the EUT, but not considered as tested:

Model	Manufacturer	Description	Connected to
H30NWiE	InBody Co., Ltd.	Body Composition Analyzer (EUT)	-
ProBook 450 G7	HP	NoteBook PC	EUT

5.3 Mode of operation during the test

For the testing, software used to control the EUT for staying in continuous transmitting is programmed.

For final testing, the EUT was set at 2 402 MHz, 2 440 MHz, and 2 480 MHz to get a maximum emission levels from the EUT. The EUT was moved throughout the XY, XZ, and YZ planes and the worst case is “XZ” axis, but the worst data was recorded in this report.

-. Channel List (Bluetooth LE)

Channel	Frequency[MHz]	Channel	Frequency[MHz]	Channel	Frequency[MHz]
0	2 402.00	14	2 430.00	28	2 458.00
1	2 404.00	15	2 432.00	29	2 460.00
2	2 406.00	16	2 434.00	30	2 462.00
3	2 408.00	17	2 436.00	31	2 464.00
4	2 410.00	18	2 438.00	32	2 466.00
5	2 412.00	19	2 440.00	33	2 468.00
6	2 414.00	20	2 442.00	34	2 470.00
7	2 416.00	21	2 444.00	35	2 472.00
8	2 418.00	22	2 446.00	36	2 474.00
9	2 420.00	23	2 448.00	37	2 476.00
10	2 422.00	24	2 450.00	38	2 478.00
11	2 424.00	25	2 452.00	39	2 480.00
12	2 426.00	26	2 454.00		
13	2 428.00	27	2 456.00		

-. Duty Cycle

Mode	Tx On Time [ms]	Tx Off Time [ms]	Duty Cycle [%]	Correction Factor [dB]
Bluetooth LE_1 Mbps	2.142	0.358	85.66	0.67

Note – Duty Cycle : (Tx On Time / (Tx On Time + Tx Off Time)) * 100

Correction Factor : $10 * \log(1 / (\text{Duty Cycle} / 100))$

5.4 Configuration of Test System

Line Conducted Test: As the EUT is operated by DC battery, this test item is not requirement to be performed.

Radiated Emission Test: Preliminary radiated emissions test were conducted using the procedure in ANSI C63.10: 2013 to determine the worse operating conditions. Final radiated emission tests were conducted at 3 meter Semi Anechoic Chamber.

The turntable was rotated through 360 degrees and the EUT was tested by positioned three orthogonal planes to obtain the highest reading on the field strength meter. Once maximum reading was determined, the search antenna was raised and lowered in both vertical and horizontal polarization.

5.5 Antenna Requirement

For intentional device, according to section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna Construction:

The antenna of the EUT is a Chip Antenna on the main Board in the EUT, so that it cannot be replaced by the user.

6. PRELIMINARY TEST

6.1 AC Power line Conducted Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
As the EUT is operated by DC battery, this test item is not requirement to be performed.	

6.2 General Radiated Emissions Tests

During Preliminary Test, the following operating mode was investigated.

Operation Mode	The Worse operating condition (Please check one only)
Transmitting Mode	X


7. MINIMUM 6 dB BANDWIDTH

7.1 Operating environment

Temperature : 28 °C
Relative humidity : 60 % R.H.

7.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, and peak detection was used. The 6 dB bandwidth is defined as the total spectrum over which the power is higher than the peak power minus 6 dB.

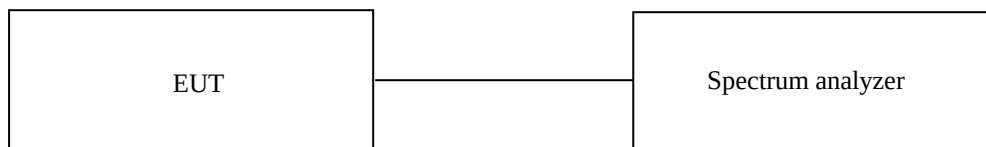

7.3 Measurement uncertainty

The uncertainty for Minimum 6 dB bandwidth is $\pm 6\,924.15\text{ Hz}$

7.4 Test Date

May 07, 2024 ~ May 13, 2024

7.5 Test data for 1 Mbps

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (kHz)	LIMIT (kHz)	MARGIN (kHz)
Low	2 402.00	649.22	500.00	149.22
Middle	2 440.00	644.35	500.00	144.35
High	2 480.00	649.22	500.00	149.22

Remark. Margin = Measured Value - Limit

8. MAXIMUM PEAK OUTPUT POWER


8.1 Operating environment

Temperature : 28 °C
Relative humidity : 60 % R.H.

8.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $\geq$ DTS Bandwidth, the video bandwidth is set to 3 times the resolution bandwidth.

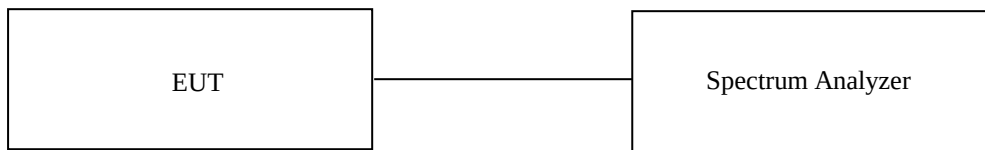

8.3 Measurement uncertainty

The uncertainty for Maximum peak output power is ± 1.55 dB.

8.4 Test Date

May 07, 2024 ~ May 13, 2024

8.5 Test data for 1 Mbps

-. Test Result : Pass

CHANNEL	FREQUENCY (MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
LOW	2 402.00	-2.02	30.00	32.02
MIDDLE	2 440.00	-2.31	30.00	32.31
HIGH	2 480.00	-2.69	30.00	32.69

Remark. Margin = Limit – Measured Value (=Receiver Reading + Cable Loss)


9. 100 kHz BANDWIDTH OUTSIDE THE FREQUENCY BAND

9.1 Operating environment

Temperature : 28 °C
Relative humidity : 60 % R.H.

9.2 Test set-up for conducted measurement

The antenna output of the EUT was connected to the spectrum analyzer. The resolution bandwidth is set to 100 kHz, the video bandwidth is set to 3 times the resolution bandwidth and peak detection was used.

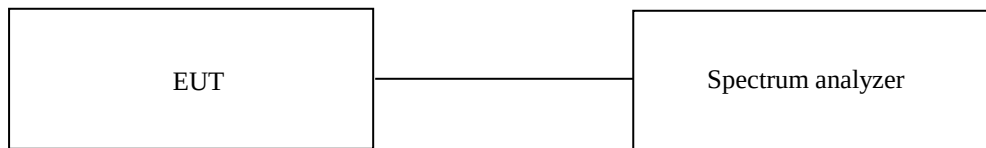

9.3 Test set-up for radiated measurement

The radiated emissions measurements were performed on the 3 m semi anechoic chamber. The EUT was placed on turntable approximately 1.5 m above the ground plane.

The frequency spectrum from 30 MHz to 26.5 GHz was scanned and maximum emission levels at each frequency recorded. The system was rotated 360°, and the antenna was varied in the height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for horizontal and vertical polarization of the receiving antenna.

9.4 Measurement uncertainty

Radiated emission electric field intensity, 9 kHz ~ 30 MHz : ± 4.09 dB
Radiated emission electric field intensity, 30 MHz ~ 1 000 MHz : ± 3.98 dB
Radiated emission electric field intensity, 1 GHz ~ 26.5 GHz : ± 5.56 dB

9.5 Test Date

May 07, 2024 ~ May 13, 2024

9.6 Test data for conducted emission

Please refer to the Annex

9.7 Test data for radiated emission

9.7.1 Radiated Emission which fall in the Restricted Band

9.7.1.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz and Peak Detector for Peak Mode
1 MHz and RMS Detector for Average Mode
- Video bandwidth : 3 MHz for Peak and Average Mode
- Measurement distance : 3 m
- Duty Cycle : 85.66 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	ATT (dB)	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
Test Data for Low Channel											
2 315.56	52.76	Peak	H	27.81	4.62	42.57	6.12	-	48.74	74.00	25.26
2 375.03	41.03	Average	H	27.55	4.65	42.55	6.12	0.67	37.47	54.00	16.53
2 355.54	52.38	Peak	V	27.59	4.63	42.56	6.11	-	48.15	74.00	25.85
2 375.85	40.88	Average	V	27.55	4.65	42.55	6.12	0.67	37.32	54.00	16.68
Test Data for High Channel											
2 499.15	52.67	Peak	H	27.50	4.93	42.50	6.11	-	48.71	74.00	25.29
2 484.45	41.13	Average	H	27.53	4.83	42.51	6.13	0.67	37.78	54.00	16.22
2 487.30	53.14	Peak	V	27.53	4.88	42.51	6.11	-	49.15	74.00	24.85
2 494.24	41.06	Average	V	27.51	4.88	42.50	6.11	0.67	37.73	54.00	16.27

Remark: "H": Horizontal, "V": Vertical

$$\text{Margin (dB)} = \text{Limits (dB}\mu\text{V/m)} - \text{Total Level (dB}\mu\text{V/m)}$$

$$\text{Total Level} = \text{Reading} + \text{Antenna Factor} + \text{Cable Loss} + \text{ATT} + \text{Duty Factor} - \text{AMP Gain}$$

9.7.2 Spurious & Harmonic Radiated Emission

9.7.2.1 Test data for 1 Mbps

- Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- Video bandwidth : 3 MHz for Peak and Average Mode
- Frequency range : 1 GHz ~ 26.5 GHz
- Measurement distance : 3 m
- Duty Cycle : 85.66 %
- Result : PASSED

Frequency (MHz)	Reading (dBμV)	Detector Mode	Ant. Pol. (H/V)	Ant. Factor	Cable Loss	AMP Gain	Duty Factor (dB)	Total (dBμV/m)	Limits (dBμV/m)	Margin (dB)
4 804.00	57.25	Peak	H	31.21	6.60	41.84	-	53.22	74.00	20.78
4 804.00	52.14	Average	H	31.21	6.60	41.84	0.67	48.78	54.00	5.22
4 804.00	55.53	Peak	V	31.21	6.60	41.84	-	51.50	74.00	22.50
4 804.00	49.85	Average	V	31.21	6.60	41.84	0.67	46.49	54.00	7.51
4 880.00	58.66	Peak	H	31.30	6.70	41.82	-	54.84	74.00	19.16
4 880.00	53.83	Average	H	31.30	6.70	41.82	0.67	50.68	54.00	3.32
4 880.00	55.88	Peak	V	31.30	6.70	41.82	-	52.06	74.00	21.94
4 880.00	49.41	Average	V	31.30	6.70	41.82	0.67	46.26	54.00	7.74
4 960.00	57.36	Peak	H	31.22	6.71	41.81	-	53.48	74.00	20.52
4 960.00	52.58	Average	H	31.22	6.71	41.81	0.67	49.37	54.00	4.63
4 960.00	54.63	Peak	V	31.22	6.71	41.81	-	50.75	74.00	23.25
4 960.00	48.32	Average	V	31.22	6.71	41.81	0.67	45.11	54.00	8.89

Remark: "H": Horizontal, "V": Vertical

Margin (dB) = Limits (dBμV/m) - Total Level (dBμV/m)

Total Level = Reading + Antenna Factor + Cable Loss + Duty Factor – AMP Gain

10. PEAK POWER SPECTRAL DENSITY

10.1 Operating environment


Temperature : 28 °C

Relative humidity : 60 % R.H.

10.2 Test set-up

The antenna output of the EUT was connected to the spectrum analyzer.

The resolution bandwidth is set to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$, the video bandwidth is set to 3 times the resolution bandwidth.

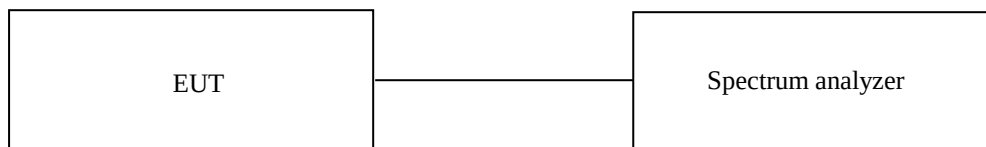

10.3 Measurement uncertainty

The uncertainty for Peak power spectral density is $\pm 1.55 \text{ dB}$.

10.4 Test Date

May 07, 2024 ~ May 13, 2024

10.5 Test data for 1 Mbps

-. Test Result : Pass

-. Operating Condition : Continuous transmitting mode

CHANNEL	FREQUENCY(MHz)	MEASURED VALUE (dBm)	LIMIT (dBm)	MARGIN (dB)
Low	2 402.00	-18.48	8.00	26.48
Middle	2 440.00	-18.81	8.00	26.81
High	2 480.00	-19.19	8.00	27.19

Remark. Margin = Limit – Measured value

11. RADIATED EMISSION TEST

11.1 Operating environment

Temperature : 28 °C

Relative humidity : 60 % R.H.


11.2 Test set-up

The radiated emissions measurements were on the 3 m semi anechoic chamber. The EUT and other support equipment were placed on a non-conductive turntable above the ground plane. The interconnecting cables from outside test site were inserted into ferrite clamps at the point where the cables reach the turntable.


The frequency spectrum from 30 MHz to 26.5 GHz was scanned and emission levels maximized at each frequency recorded. The system was rotated 360°, and the antenna was varied in height between 1.0 m and 4.0 m in order to determine the maximum emission levels. This procedure was performed for both horizontal and vertical polarization of the receiving antenna.

- Test Configuration


1. Below 30 MHz

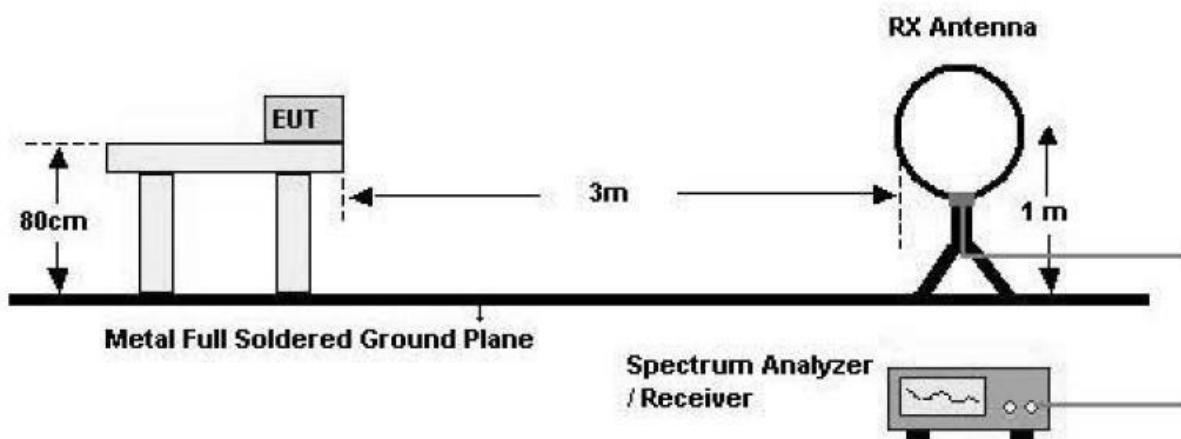

2. 30 MHz - 1 GHz

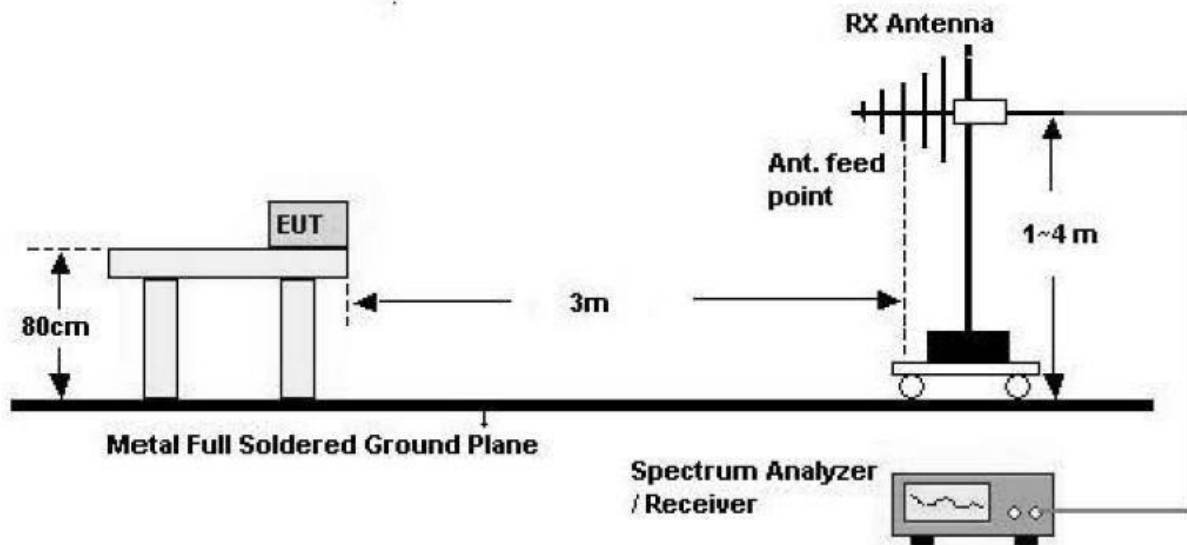

3. Above 1 GHz

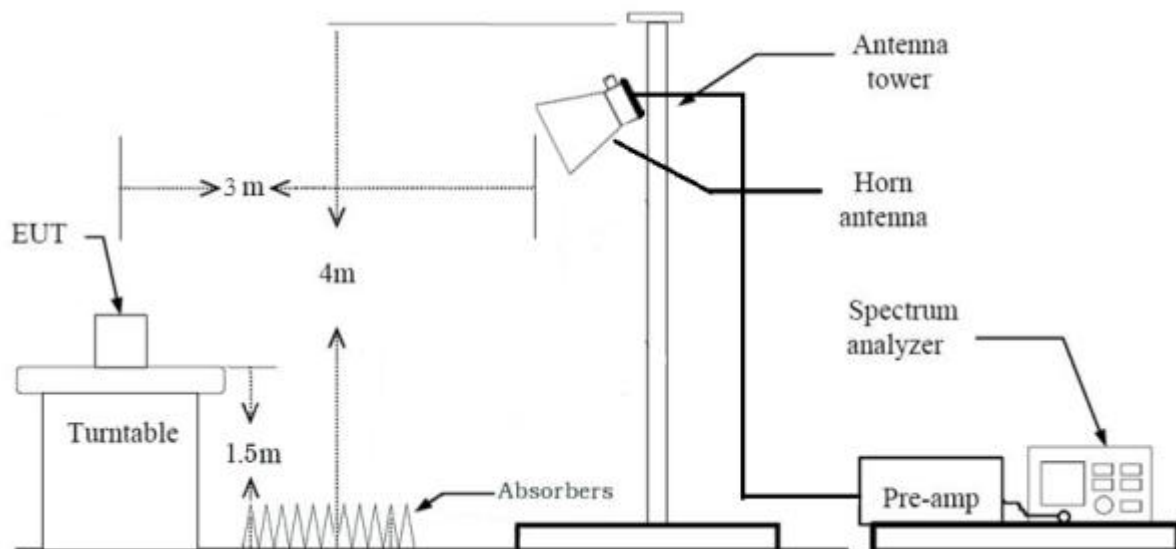

11.3 Measurement uncertainty

Radiated emission electric field intensity, 9 kHz ~ 30 MHz : ± 4.09 dB

Radiated emission electric field intensity, 30 MHz ~ 1 000 MHz : ± 3.98 dB

Radiated emission electric field intensity, 1 GHz ~ 26.5 GHz : ± 5.56 dB

11.4 Test Date

May 07, 2024 ~ May 13, 2024

11.5 Test data for 30 MHz ~ 1 GHz


11.5.1 Test data for Transmitting Mode

Limits apply to : FCC CFR 47, PART 15, SUBPART C, SECTION 15.247

Result : PASSED

EUT : Body Composition Analyzer

Detector : CISPR Quasi-Peak (6 dB Bandwidth: 120 kHz)

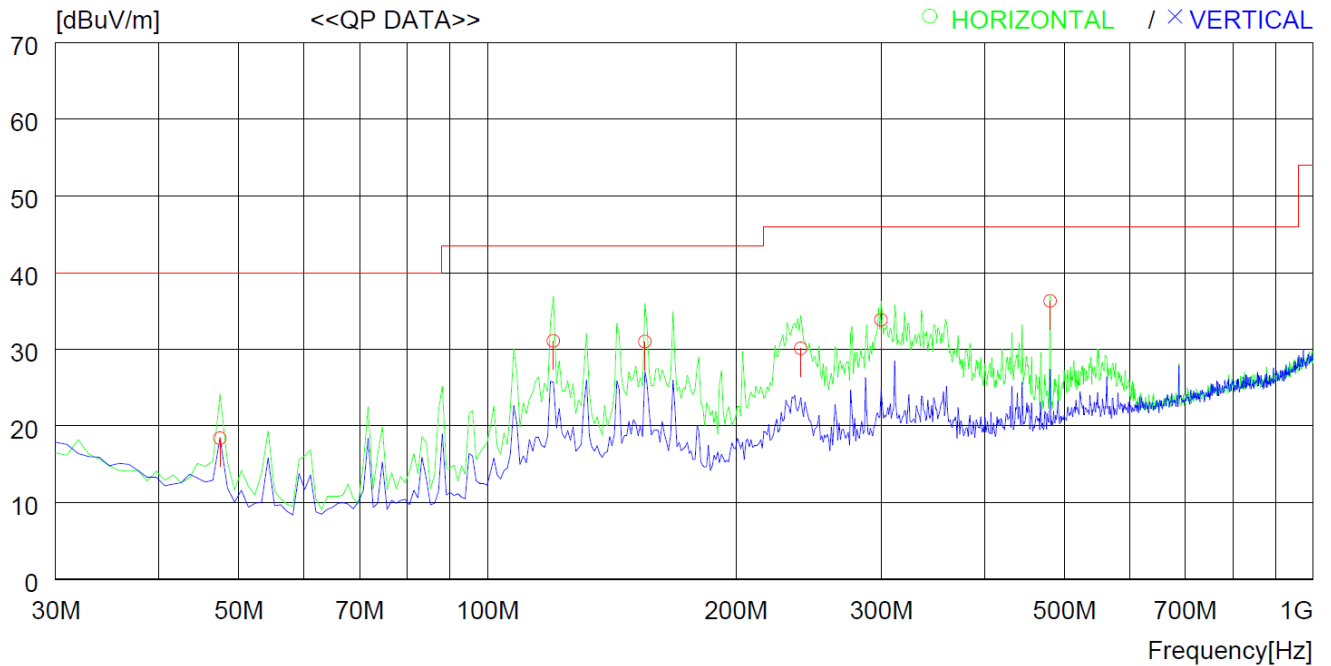

No.	FREQ	READING	ANT	LOSS	GAIN	RESULT	LIMIT	MARGIN	ANTENNA	TABLE
	[MHz]	QP	FACTOR	[dB]	[dB]	[dBuV/m]	[dBuV/m]	[dB]	[cm]	[DEG]
----- Horizontal -----										
1	47.460	35.5	14.0	1.0	32.1	18.4	40.0	21.6	400	46
2	120.210	42.8	18.8	1.6	32.1	31.1	43.5	12.4	300	359
3	155.130	42.9	18.3	1.9	32.1	31.0	43.5	12.5	400	270
4	239.520	42.6	17.3	2.3	32.1	30.1	46.0	15.9	200	224
5	299.660	43.8	19.4	2.7	32.1	33.8	46.0	12.2	100	359
6	480.081	42.4	22.7	3.4	32.2	36.3	46.0	9.7	100	358

11.6 Test data for Below 30 MHz

- . Resolution bandwidth : 200 Hz (from 9 kHz to 0.15 MHz), 9 kHz (from 0.15 MHz to 30 MHz)
- . Frequency range : 9 kHz ~ 30 MHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

11.7 Test data for above 1 GHz

- . Resolution bandwidth : 1 MHz for Peak and Average Mode for the emissions fall in restricted band,
1 MHz for Peak Mode for the emissions outside restricted band
- . Video bandwidth : 3 MHz for Peak and Average Mode
- . Frequency range : 1 GHz ~ 26.5 GHz
- . Measurement distance : 3 m
- . Operating mode : Transmitting mode

Frequency (MHz)	Reading (dBμV)	Ant. Pol. (H/V)	Ant. Height (m)	Angle (°)	Ant. Factor (dB/m)	Cable Loss	Emission Level(dBμV/m)	Limits (dBμV/m)	Margin (dB)
Emission from the EUT more than 20 dB below the limit in each frequency range.									

12. LIST OF TEST EQUIPMENT

Model Number	Manufacturer	Description	Serial Number	Last Cal.(Interval)
FSV40-N	Rohde & Schwarz	Signal Analyzer	101651	Jan. 15, 2024 (1Y)
OPM-303D	ODA	DC Power Supply	oda-01-0923-07199	Jan. 16, 2024 (1Y)
ESU	Rohde & Schwarz	TEST RECEIVER	100261	Mar. 05, 2024 (1Y)
310N	Sonoma Instrument	Pre-Amplifier	392756	Oct. 16, 2023 (1Y)
SCU18	Rohde & Schwarz	Pre-Amplifier	102266	Jul. 11, 2023 (1Y)
SCU40A	Rohde & Schwarz	Pre-Amplifier	100436	Jan. 23, 2024 (1Y)
HPF 3GHz	Rohde & Schwarz	High Pass Filter	N/A	Jan. 15, 2024 (1Y)
WT-A3882-R10	Microwave	Cavity Band Rejection Filter	WT22040502-1	Jan. 16, 2024 (1Y)
DT2000-2t	Innco System	Turn Table	N/A	N/A
MA-4640-XPET	Innco System	Antenna Master	MA4640/652/43100318/P	N/A
CO3000	Innco System	Controller	1026/40960617/P	N/A
HLP-2008	TDK	Hybrid Antenna	131316	Mar. 09, 2024 (2Y)
BBHA9120D	Schwarzbeck	Horn Antenna	9120D-1349	Jul. 04, 2023 (1Y)
BBHA9170	Schwarzbeck	Horn Antenna	BBHA9170178	Jan. 04, 2024 (1Y)
FMZB 1513	Schwarzbeck	Loop Antenna	1513-235	Mar. 20, 2024 (2Y)
8493C	HP	6 dB Attenuator	01925	Jul. 11, 2023 (1Y)