

TEST RESULT SUMMARY

FCC PART 22 SUBPART H

MANUFACTURER'S NAME

ADC Inc.

NAME OF EQUIPMENT

Digivance 800 MHz 20 Watt System (A and B Band)

TYPE OF EQUIPMENT

Transports RF between a remote antenna and a customer provided base station

MODEL NUMBER

DGVL-116100SYS
DGVL-126100SYS

MANUFACTURER'S ADDRESS

PO Box 1101
Minneapolis MN 55440

TEST REPORT NUMBER

NC300779

TEST DATE

26 February & 05 March 2003

According to testing performed at TÜV Product Service Inc, the above-mentioned unit is in compliance with the electromagnetic compatibility requirements defined in FCC Part 22 Subpart H.

It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics. Any modifications necessary for compliance made during testing on the above mentioned date(s) must be implemented in all production units for compliance to be maintained.

TÜV Product Service Inc, as an independent testing laboratory, declares that the equipment tested as specified above conforms to the requirements of FCC Part 22 Subpart H.

Date: 14 March 2003

Location: Taylors Falls MN
USAR. M. Johnson
Test Technician
Not TransferableJ. T. Schneider
Chief Engineer

EMC EMISSION - TEST REPORT

Test Report File No. : **NC300779** Date of issue: 14 March 2003

Model No. : **DGVL-116100SYS**
DGVL-126100SYS

Product Name : Digivance 800 MHz 20 Watt System (A and B Band)

Product Type : Transports RF between a remote antenna and a customer provided base station

Applicant : ADC Inc.

Manufacturer : ADC Inc.

License holder : ADC Inc.

Address : PO Box 1101
Minneapolis MN 55440

Test Result : **Positive Negative**

Test Project Number : **NC300779**

Total pages including Appendices : 131

TÜV Product Service Inc is a subcontractor to TÜV Product Service, GmbH according to the principles outlined in ISO/IEC Guide 25 and EN 45001. TÜV Product Service Inc reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. TÜV Product Service Inc shall have no liability for any deductions, inferences or generalizations drawn by the client or others from TÜV Product Service Inc issued reports. This report is the confidential property of the client. As a mutual protection to our clients, the public and ourselves, extracts from the test report shall not be reproduced except in full without our written approval. This report shall not be used by the client to claim product endorsement by NVLAP or any agency of the US government.

TÜV Product Service Inc and its professional staff hold government and professional organization certifications and are members of AAMI, ACIL, AEA, ANSI, IEEE, NVLAP, and VCCI

D I R E C T O R Y - E M I S S I O N S

	Page(s)
A) Documentation	
Test report	1 – 131
Directory	2
Test Regulations	3
B) Test data	
22.355 Frequency tolerance	5 - 7
22.913 Effective Radiated Power Limit	8 - 9
22.915 Modulation requirements	10
22.917 Emission Limitations for cellular	11 - 102
2.1053 Case radiation	103 – 120
EUT Operating Mode and Configuration Information	121
Deviations, General Remarks and Summary	122
Test Equipment List	123
Test Setup Diagrams and Photo(s)	<u>See Test Setup Exhibit</u>
Product Information Form	A1 – A7

EMISSIONS TEST REGULATIONS :

The emissions tests were performed according to following regulations:

- EN 50081-1 / 1991

- EN 55011 / 1991

- Group 1

- Group 2

- EN 55013 / 1990

- EN 55014 / 1987

- Class A

- Class B

- EN 55014 / A2:1990

- EN 55014 / 1993

- Household appliances and similar

- Portable tools

- Semiconductor devices

- EN 55015 / 1987

- EN 55015 / A1:1990

- EN 55015 / 1993

- EN 55022 / 1987

- FCC Part 22 Subpart H

- Class A

- Class B

- BS

- VCCI

- FCC

- AS 3548 (1992)

- Class A

- Class B

- CISPR 11 (1990)

- Class A

- Class B

- CISPR 22 (1993)

- Class A

- Class B

- Group 1

- Group 2

- Class A

- Class B

- Class A

- Class B

Environmental conditions in the lab:

	<u>Actual</u>
Temperature	: 22 °C
Relative Humidity	: 24 %
Atmospheric pressure	: 99.0 kPa
Power supply system	: 60 Hz - 115 V - 1-phase

Sign Explanations:

- not applicable
 - applicable



22.355 Frequency tolerance

The Frequency Tolerance measurements were performed at the following test location:

- - ADC facility

Frequency tolerance data on next 2 pages



Frequency Tolerance Test for ADC Inc.
Digivance 800 MHz 20 Watt System
Model Numbers DGVL-116100SYS and DGVL-126100SYS.

EUT A-Band

Input Voltage	Carrier Frequency	Measured Frequency	Meets Requirements?
102 VAC	869.200 MHz	869.200 MHz	Yes
120 VAC	869.200 MHz	869.200 MHz	Yes
138 VAC	869.200 MHz	869.200 MHz	Yes
102 VAC	879.000 MHz	879.000 MHz	Yes
120 VAC	879.000 MHz	879.000 MHz	Yes
138 VAC	879.000 MHz	879.000 MHz	Yes
102 VAC	891.300 MHz	891.300 MHz	Yes
120 VAC	891.300 MHz	891.300 MHz	Yes
138 VAC	891.300 MHz	891.300 MHz	Yes
Temperature	Carrier Frequency	Measured Frequency	Meets Requirements?
-30 Deg. C	869.200 MHz	869.200 MHz	Yes
-20 Deg. C	869.200 MHz	869.200 MHz	Yes
-10 Deg. C	869.200 MHz	869.200 MHz	Yes
0 Deg. C	869.200 MHz	869.200 MHz	Yes
10 Deg. C	869.200 MHz	869.200 MHz	Yes
20 Deg. C	869.200 MHz	869.200 MHz	Yes
30 Deg. C	869.200 MHz	869.200 MHz	Yes
40 Deg. C	869.200 MHz	869.200 MHz	Yes
50 Deg. C	869.200 MHz	869.200 MHz	Yes
-30 Deg. C	879.000 MHz	879.000 MHz	Yes
-20 Deg. C	879.000 MHz	879.000 MHz	Yes
-10 Deg. C	879.000 MHz	879.000 MHz	Yes
0 Deg. C	879.000 MHz	879.000 MHz	Yes
10 Deg. C	879.000 MHz	879.000 MHz	Yes
20 Deg. C	879.000 MHz	879.000 MHz	Yes
30 Deg. C	879.000 MHz	879.000 MHz	Yes
40 Deg. C	879.000 MHz	879.000 MHz	Yes
50 Deg. C	879.000 MHz	879.000 MHz	Yes
-30 Deg. C	891.300 MHz	891.300 MHz	Yes
-20 Deg. C	891.300 MHz	891.300 MHz	Yes
-10 Deg. C	891.300 MHz	891.300 MHz	Yes
0 Deg. C	891.300 MHz	891.300 MHz	Yes
10 Deg. C	891.300 MHz	891.300 MHz	Yes
20 Deg. C	891.300 MHz	891.300 MHz	Yes
30 Deg. C	891.300 MHz	891.300 MHz	Yes
40 Deg. C	891.300 MHz	891.300 MHz	Yes
50 Deg. C	891.300 MHz	891.300 MHz	Yes

Note: EUT Host is specified for indoor use only with temperature range of 0 to +50° C and was tested within its range.

Note: EUT STM and LPA are specified with a temperature range of -30 to +50° C and were tested with their range.

Frequency Tolerance Test for ADC Inc.
Digivance 800 MHz 20 Watt System
Model Numbers DGVL-116100SYS and DGVL-126100SYS.

EUT B-Band

Input Voltage	Carrier Frequency	Measured Frequency	Meets Requirements?
102 VAC	880.200 MHz	880.200 MHz	Yes
120 VAC	880.200 MHz	880.200 MHz	Yes
138 VAC	880.200 MHz	880.200 MHz	Yes
102 VAC	887.000 MHz	887.000 MHz	Yes
120 VAC	887.000 MHz	887.000 MHz	Yes
138 VAC	887.000 MHz	887.000 MHz	Yes
102 VAC	893.800 MHz	893.800 MHz	Yes
120 VAC	893.800 MHz	893.800 MHz	Yes
138 VAC	893.800 MHz	893.800 MHz	Yes
Temperature	Carrier Frequency	Measured Frequency	Meets Requirements?
-30 Deg. C	880.200 MHz	880.200 MHz	Yes
-20 Deg. C	880.200 MHz	880.200 MHz	Yes
-10 Deg. C	880.200 MHz	880.200 MHz	Yes
0 Deg. C	880.200 MHz	880.200 MHz	Yes
10 Deg. C	880.200 MHz	880.200 MHz	Yes
20 Deg. C	880.200 MHz	880.200 MHz	Yes
30 Deg. C	880.200 MHz	880.200 MHz	Yes
40 Deg. C	880.200 MHz	880.200 MHz	Yes
50 Deg. C	880.200 MHz	880.200 MHz	Yes
-30 Deg. C	887.000 MHz	887.000 MHz	Yes
-20 Deg. C	887.000 MHz	887.000 MHz	Yes
-10 Deg. C	887.000 MHz	887.000 MHz	Yes
0 Deg. C	887.000 MHz	887.000 MHz	Yes
10 Deg. C	887.000 MHz	887.000 MHz	Yes
20 Deg. C	887.000 MHz	887.000 MHz	Yes
30 Deg. C	887.000 MHz	887.000 MHz	Yes
40 Deg. C	887.000 MHz	887.000 MHz	Yes
50 Deg. C	887.000 MHz	887.000 MHz	Yes
-30 Deg. C	893.800 MHz	893.800 MHz	Yes
-20 Deg. C	893.800 MHz	893.800 MHz	Yes
-10 Deg. C	893.800 MHz	893.800 MHz	Yes
0 Deg. C	893.800 MHz	893.800 MHz	Yes
10 Deg. C	893.800 MHz	893.800 MHz	Yes
20 Deg. C	893.800 MHz	893.800 MHz	Yes
30 Deg. C	893.800 MHz	893.800 MHz	Yes
40 Deg. C	893.800 MHz	893.800 MHz	Yes
50 Deg. C	893.800 MHz	893.800 MHz	Yes

Note: EUT Host is specified for indoor use only with temperature range of 0 to +50° C and was tested within its range.

Note: EUT STM and LPA are specified with a temperature range of -30 to +50° C and were tested with their range.

22.913 Effective Radiated Power Limit

The Effective Radiated Power Limit measurements were tested at the following test location:

- Test not applicable

■ - ADC facility

This measurement was made as a direct conducted emission measurement. The output from the EUT antenna connector was connected directly to the spectrum analyzer, which was set up with a 1 MHz resolution bandwidth. The spectrum analyzer level was offset by 20 dB to compensate for the attenuator placed between the EUT and the analyzer, and by 2 dB for the measured cable loss between the EUT and the analyzer.

ERP data on following pages



Effective Isotropic Radiated Power Test for ADC Inc.
Digivance 800 MHz 20 Watt System
Models DGVL-116100SYS and DGVL-126100SYS.

*Note: The EUT is a fixed repeater and not a base station.

This measurement was made as a direct conducted emission measurement. The output from the EUT antenna connector was connected to the spectrum analyzer. The Carrier Output, below, was conducted using a single CW signal generator. The spectrum analyzer level was offset to compensate for attenuators and cable loss between the EUT and the analyzer.

A CW signal was used at the low, mid and high parts of the selected band. The spectrum analyzer level was offset by 51.8 dB to compensate for attenuators and cable loss between the EUT and the analyzer.

Band A

Carrier Frequency	Carrier Output
869.2 MHz	<u>39.63</u> dBm
879.0 MHz	<u>41.97</u> dBm
891.3 MHz	<u>42.13</u> dBm

Band B

Carrier Frequency	Carrier Output
880.2 MHz	<u>42.80</u> dBm
887.0 MHz	<u>43.30</u> dBm
893.8 MHz	<u>42.47</u> dBm

22.915 Modulation requirements

The Modulation requirement measurements were performed at the following test location :

■ - Test not applicable

- Wild River Lab Large Test Site
- Wild River Lab Small Test Site (Open Area Test Site)
- Oakwood Lab (Open Area Test Site)
- Wild River Lab Screen Room
- New Brighton Lab Shielded Room

The instantaneous frequency deviation measurements and the audio filter characteristics measurements are not applicable to this device – it is an amplifier.

22.917 Emission Limitations for cellular

The Emission limitations for cellular measurements were performed at the following test location:

- - Wild River Lab Large Test Site (Open Area Test Site)**
- - ADC facility**

at a test distance of:

- - 3 meters**
- - 10 meters**

**Inter-Modulation Test for ADC Inc.
Digivance 800 MHz 20 Watt System
Model Numbers DGVL-116100SYS and DGVL-126100SYS.**

The intermodulation product test was performed for each bandwidth setting of the EUT. Two tests were performed with each modulation type. Test 1 was with two signals input into the EUT at lower end channels. Test 2 was with two signals, one at a lower end channel and one at a higher end channel. The modulation types tested were CDMA, TDMA, and FM (1 kHz @ 8 kHz deviation). An investigation was made from 30 MHz to the 10th harmonic of the highest fundamental frequency (~10 GHz).

Results:

Pass (see plots)

Intermodulation

BAND A

Close

FM


*ATTEN 30dB

MKR -19.87dBm

RL 51.8dBm

10dB/

879.08MHz

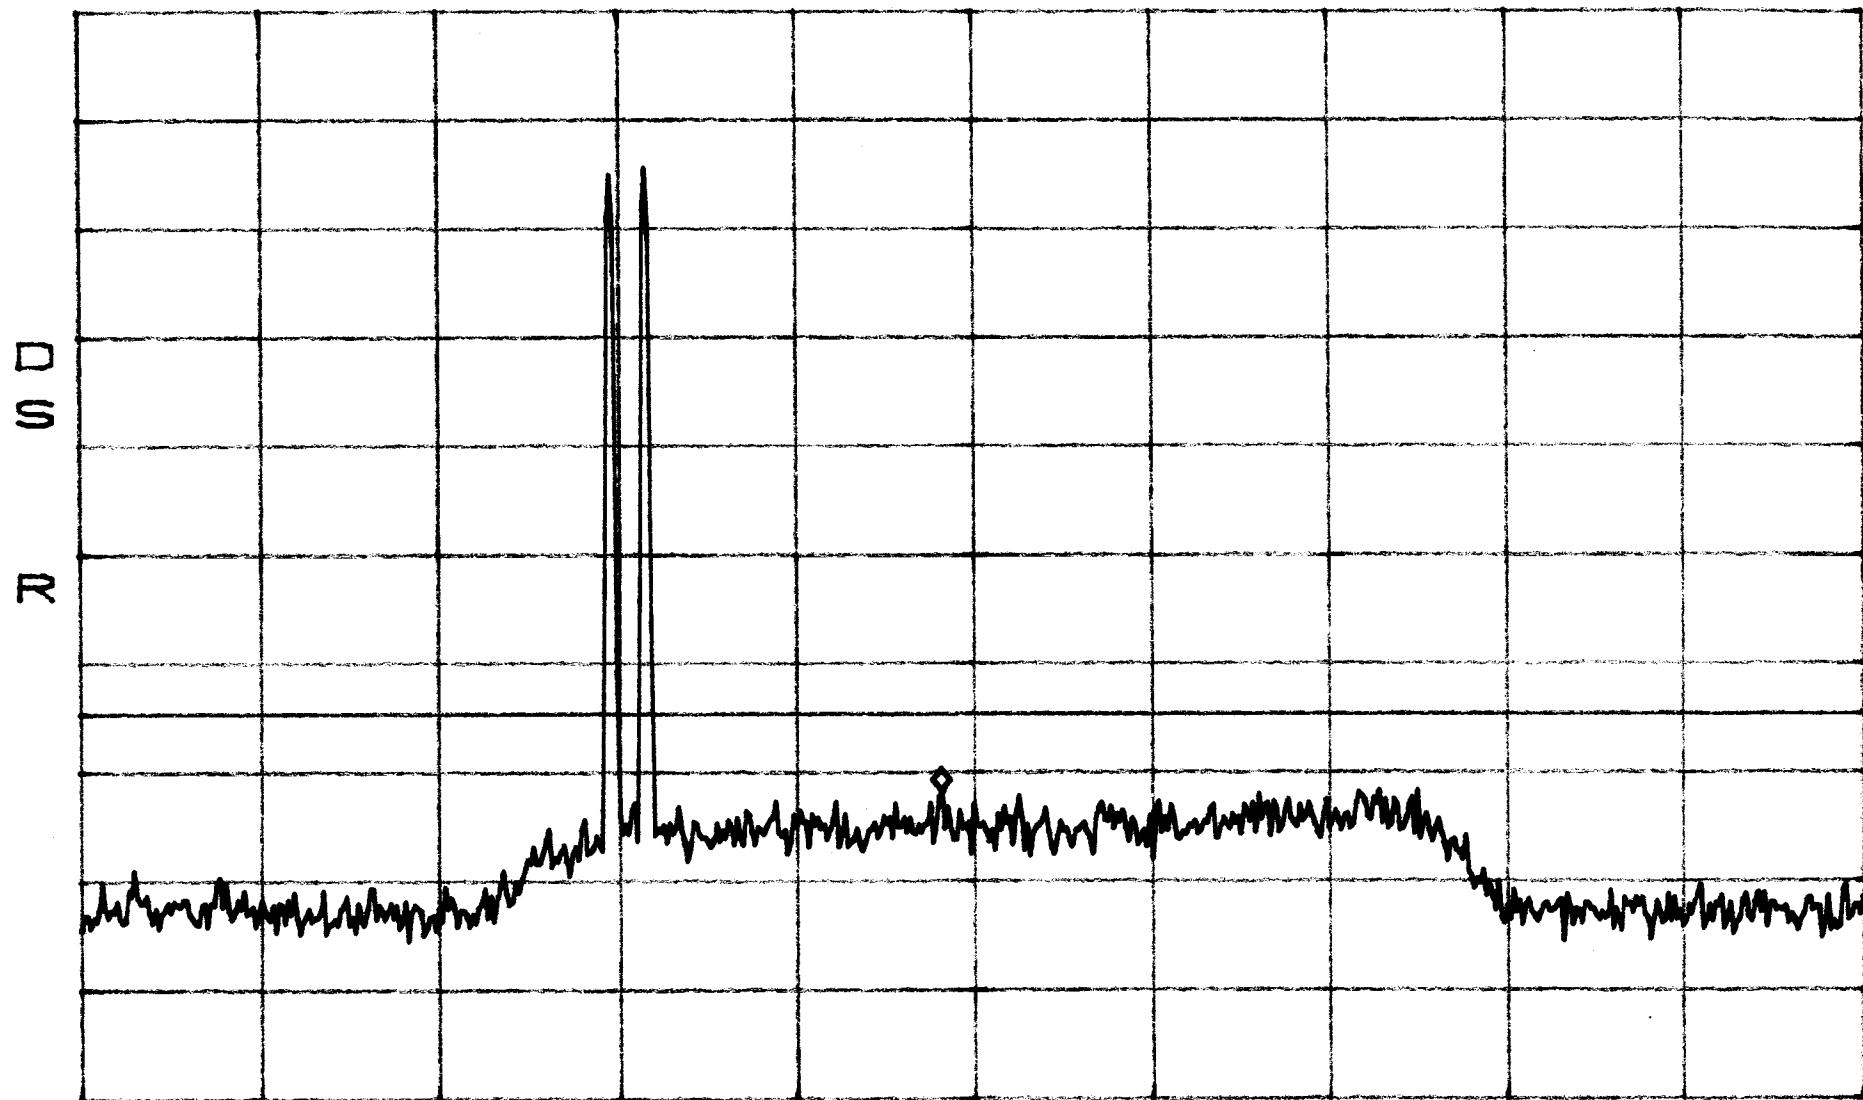

CENTER 880.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms

Intermodulation
Close
FM

BAND A


*ATTEN 30dB

MKR -26.20dBm

RL 51.8dBm

10dB/

780.1MHz

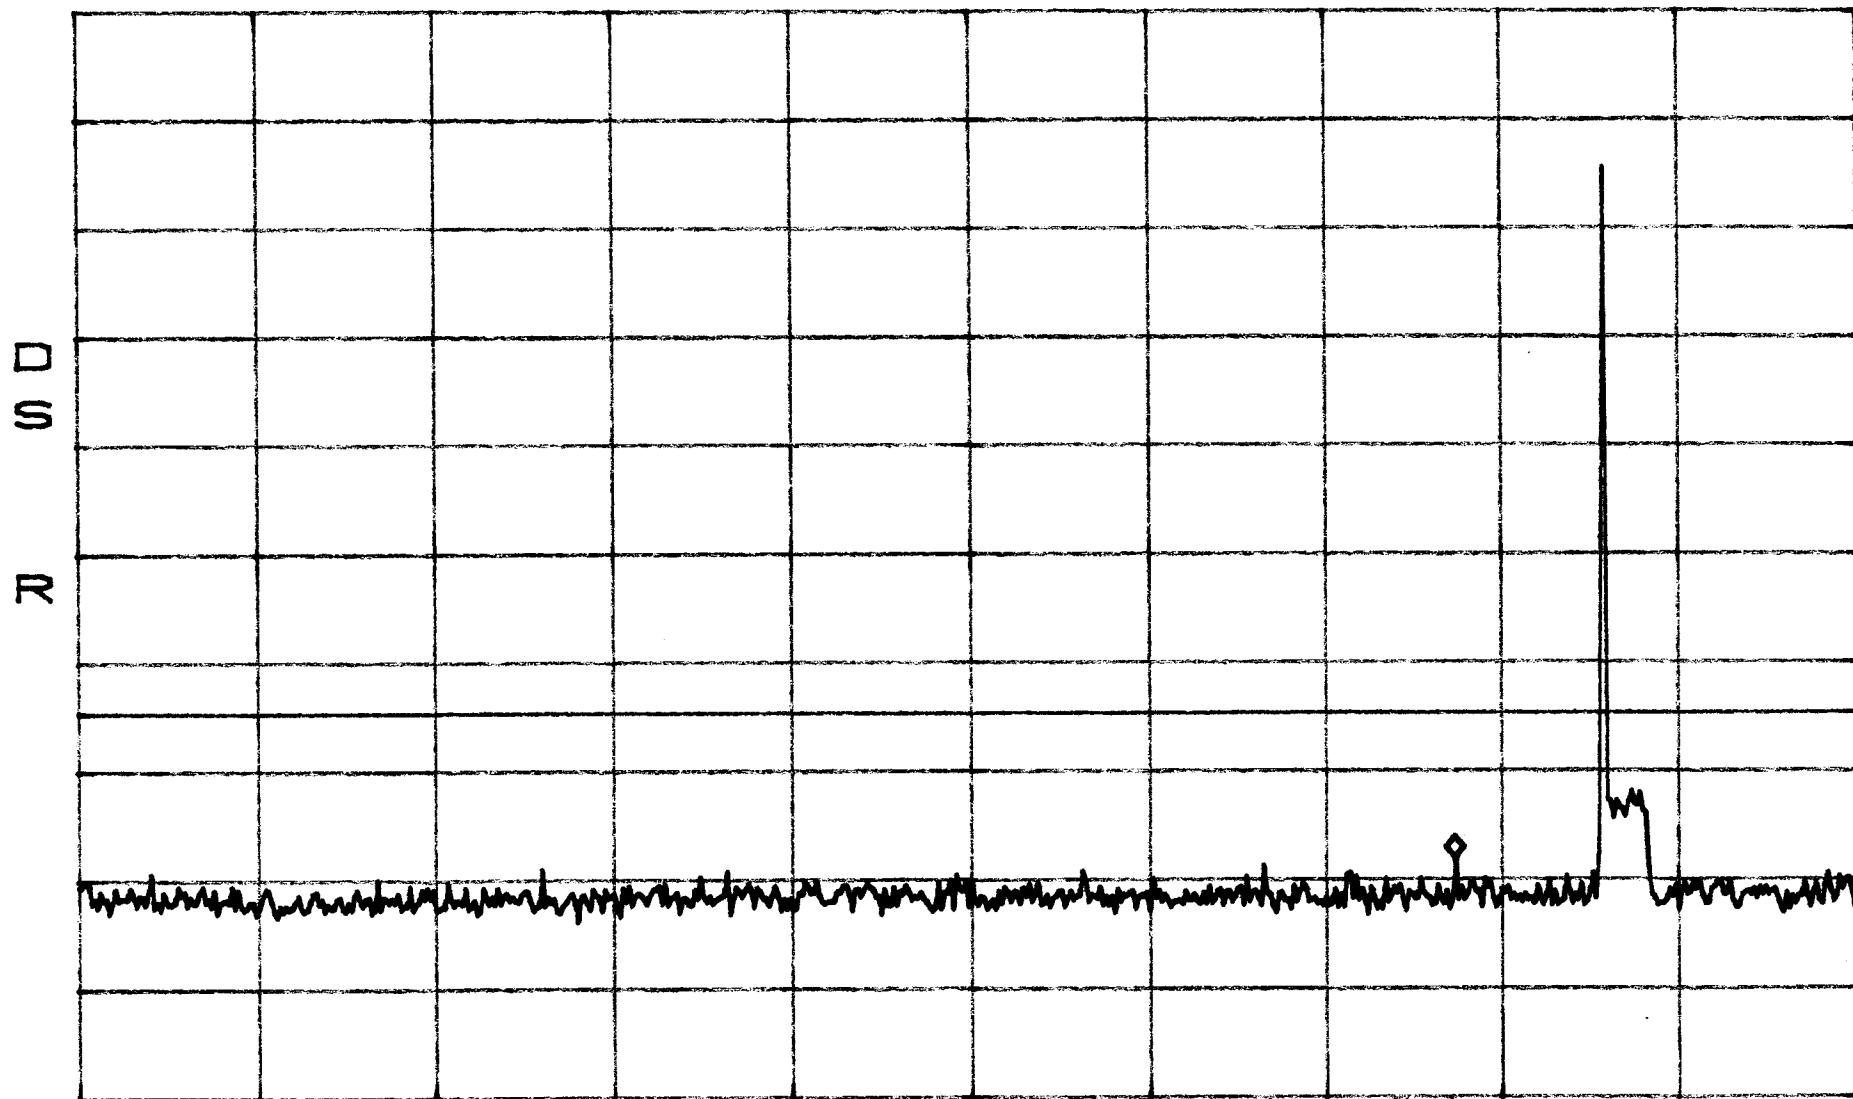

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation
Close
FM

BAND A


*ATTEN 30dB

MKR -21.70dBm

RL 51.8dBm

10dB/

2.185GHz

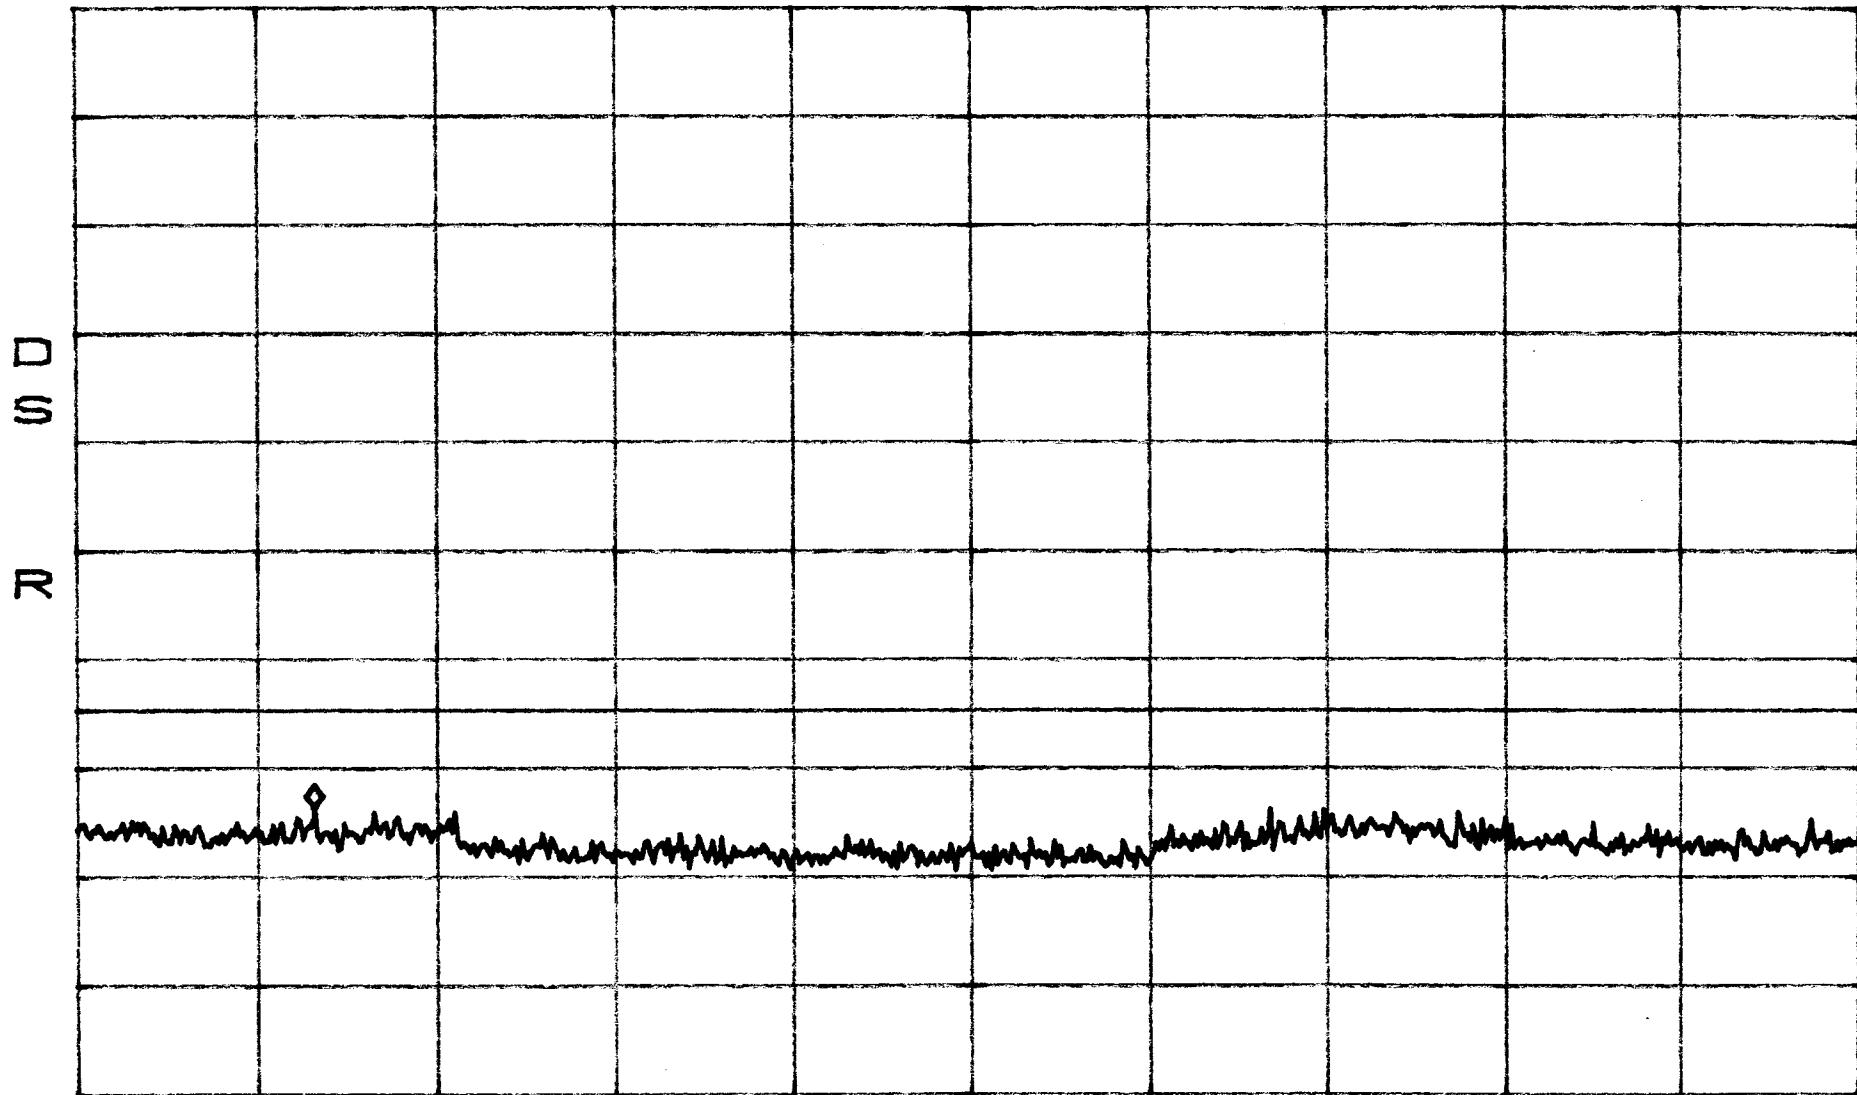

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec

Intermodulation
Apart
FM

BAND A


*ATTEN 30dB

MKR -20.70dBm

RL 51.8dBm

10dB/

881.75MHz

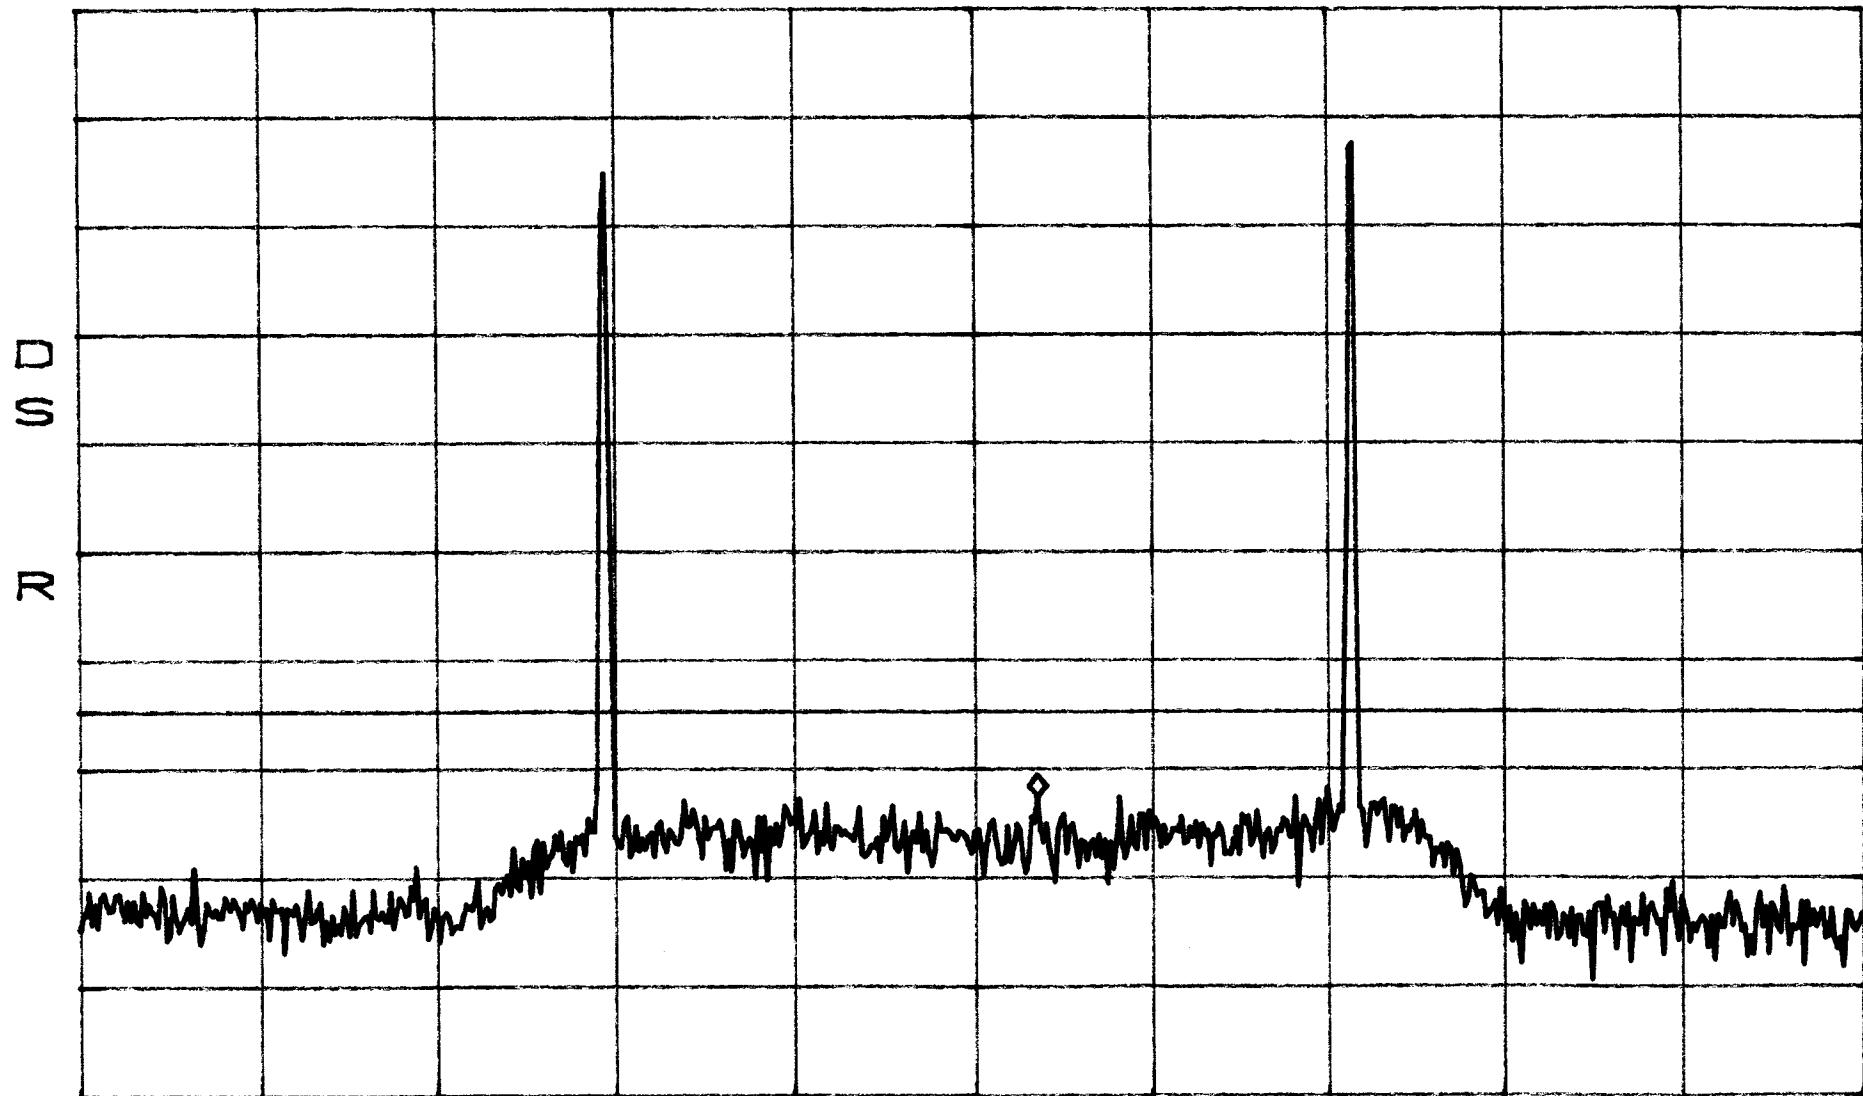

CENTER 880.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms

Intermodulation BAND A
Apart
FM


*ATTEN 30dB

MKR -26. 20dBm

RL 51. 8dBm

10dB/

814. 1MHz

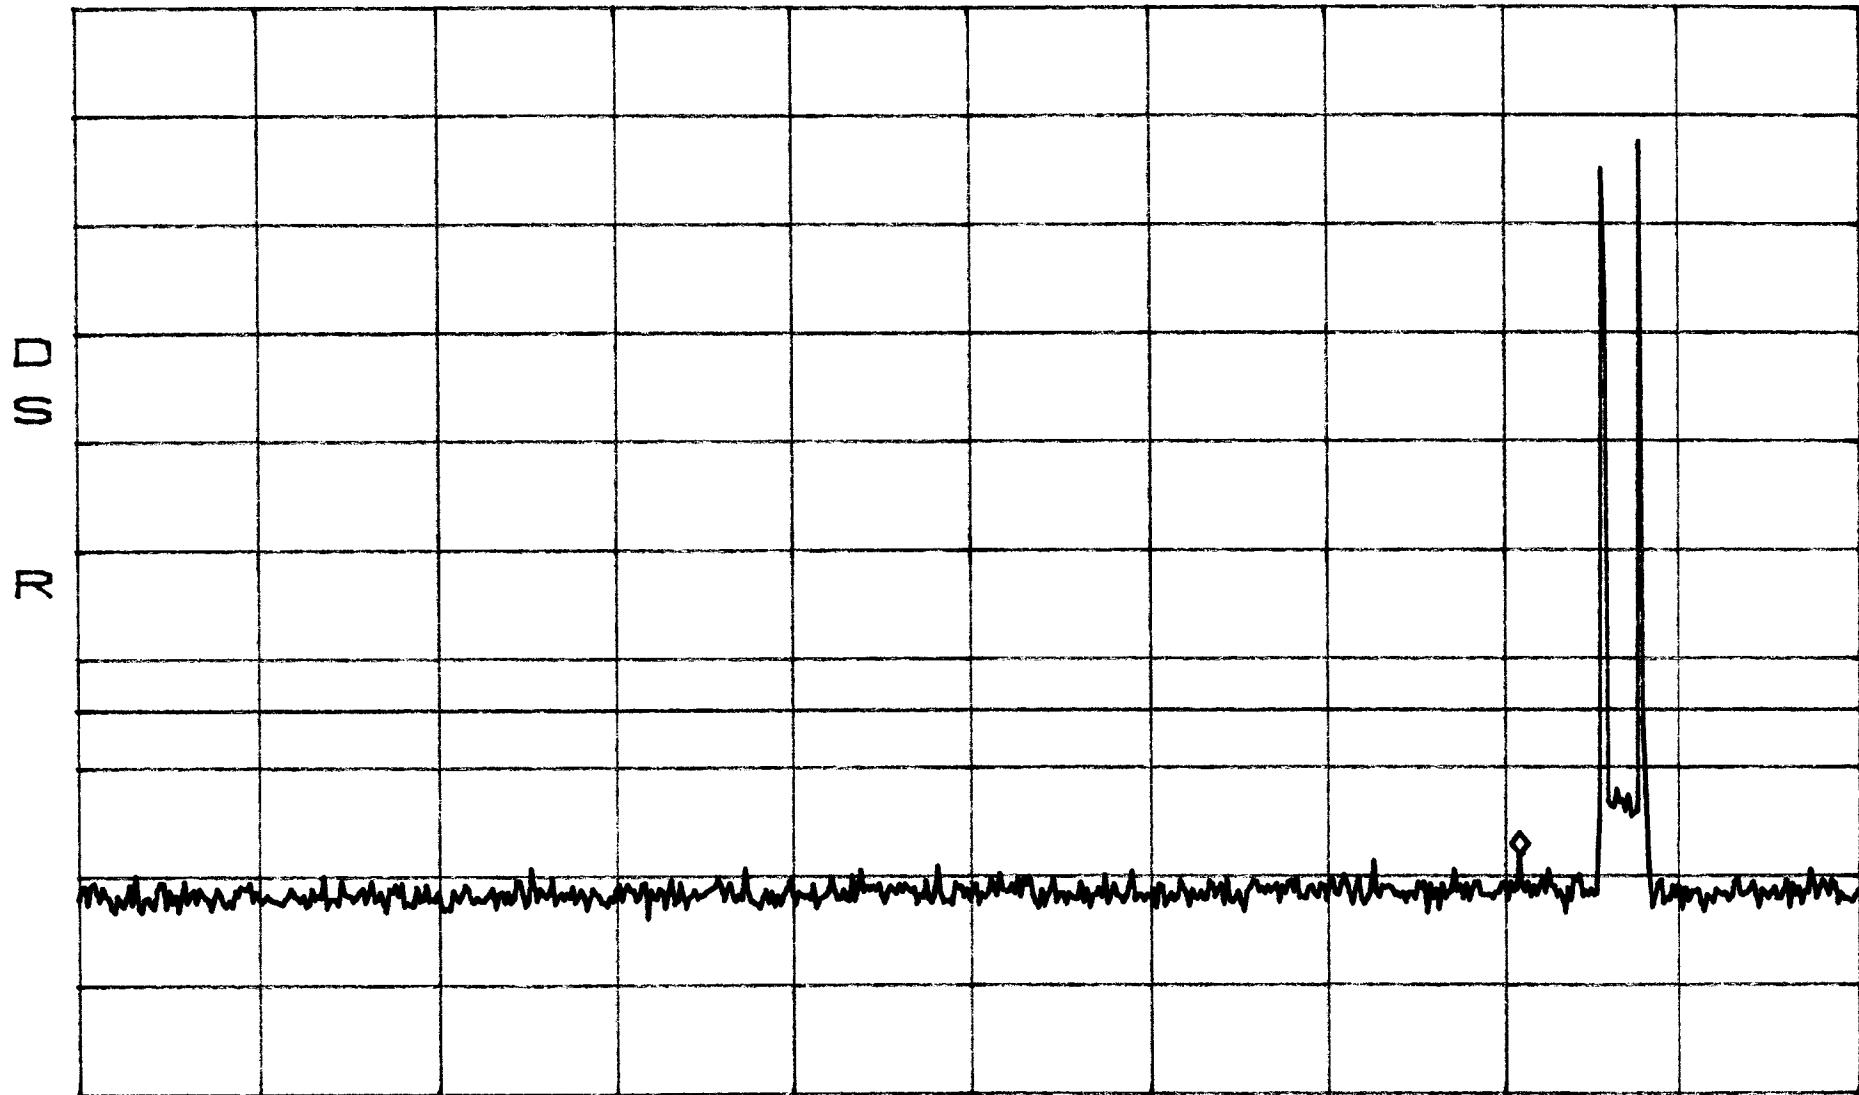

START 30. 0MHz

STOP 1. 0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2. 7sec

Intermodulation
Apart
FM

BAND A


*ATTEN 30dB

MKR -22.37dBm

RL 51.8dBm

10dB/

7.555GHz

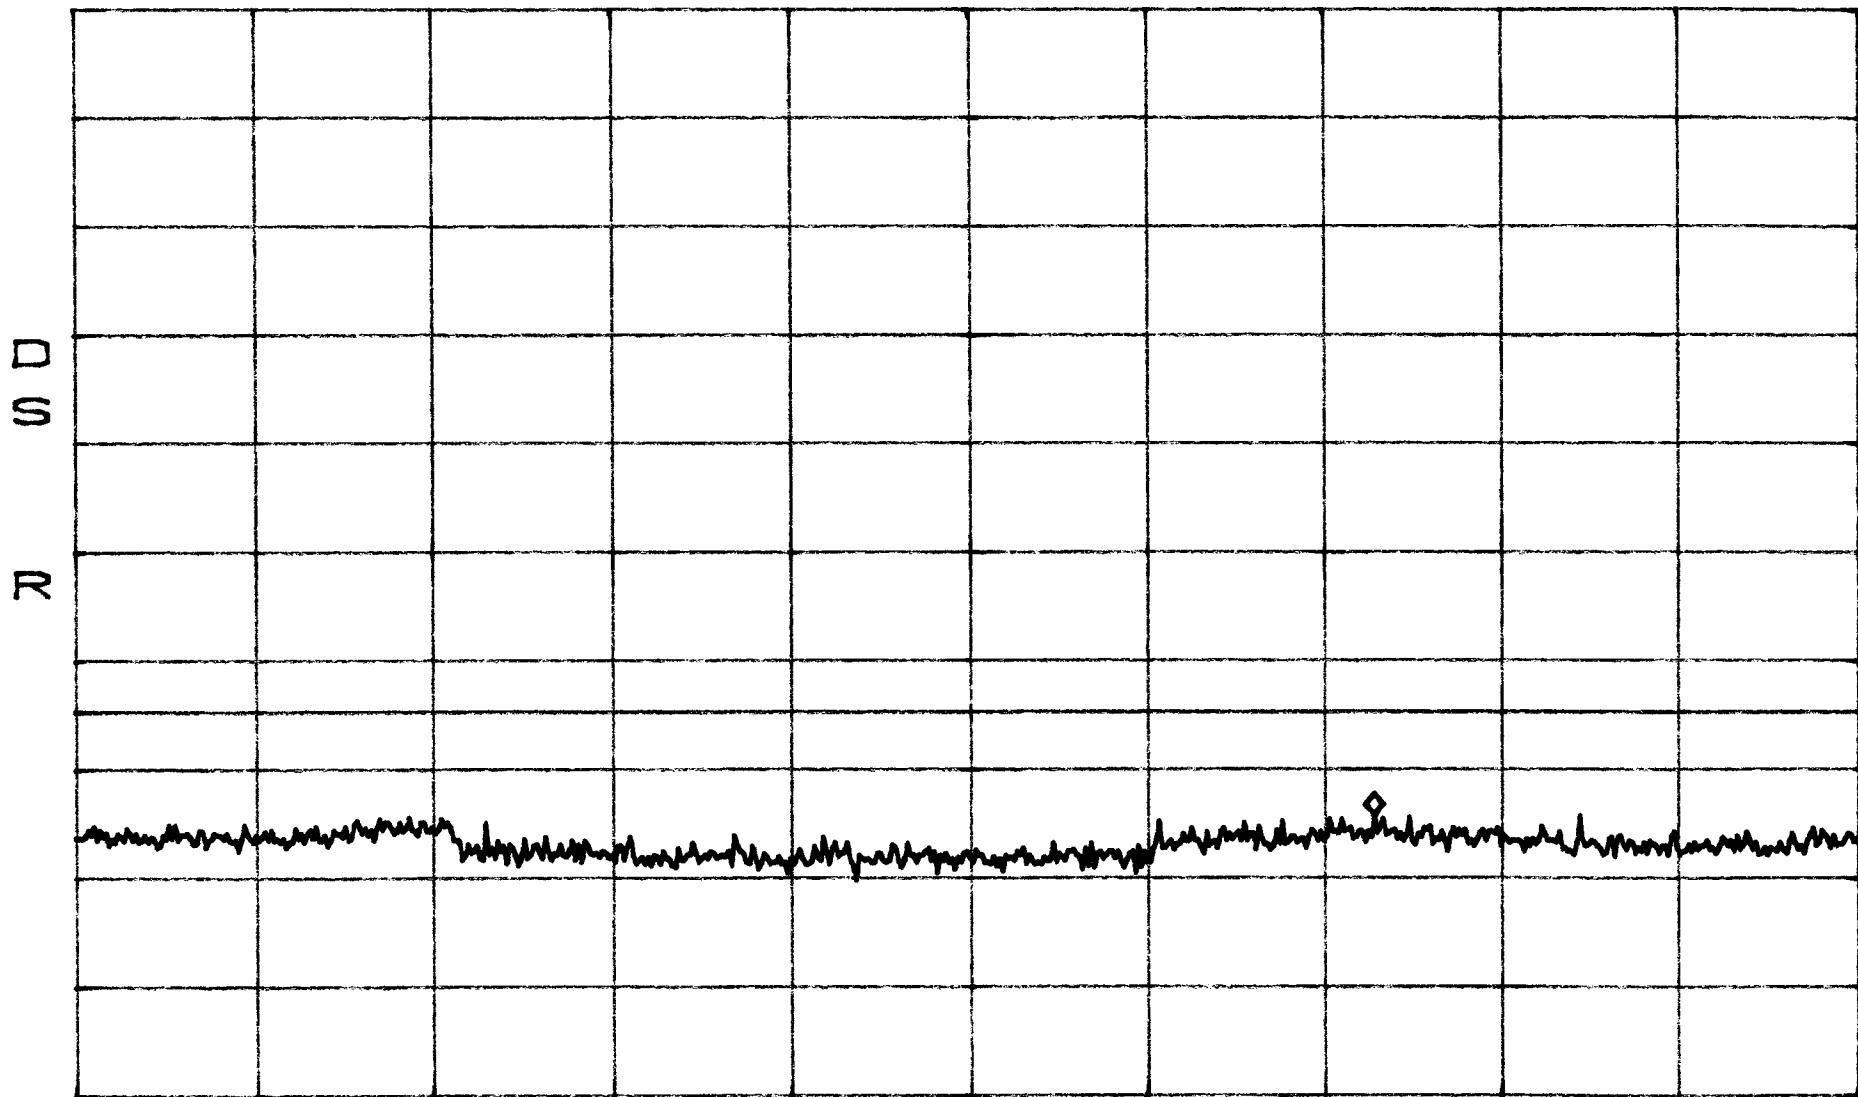

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec

Intermodulation
Close
TDMA

BAND A


*ATTEN 30dB

MKR -19.70dBm

RL 51.8dBm

10dB/

880.42MHz

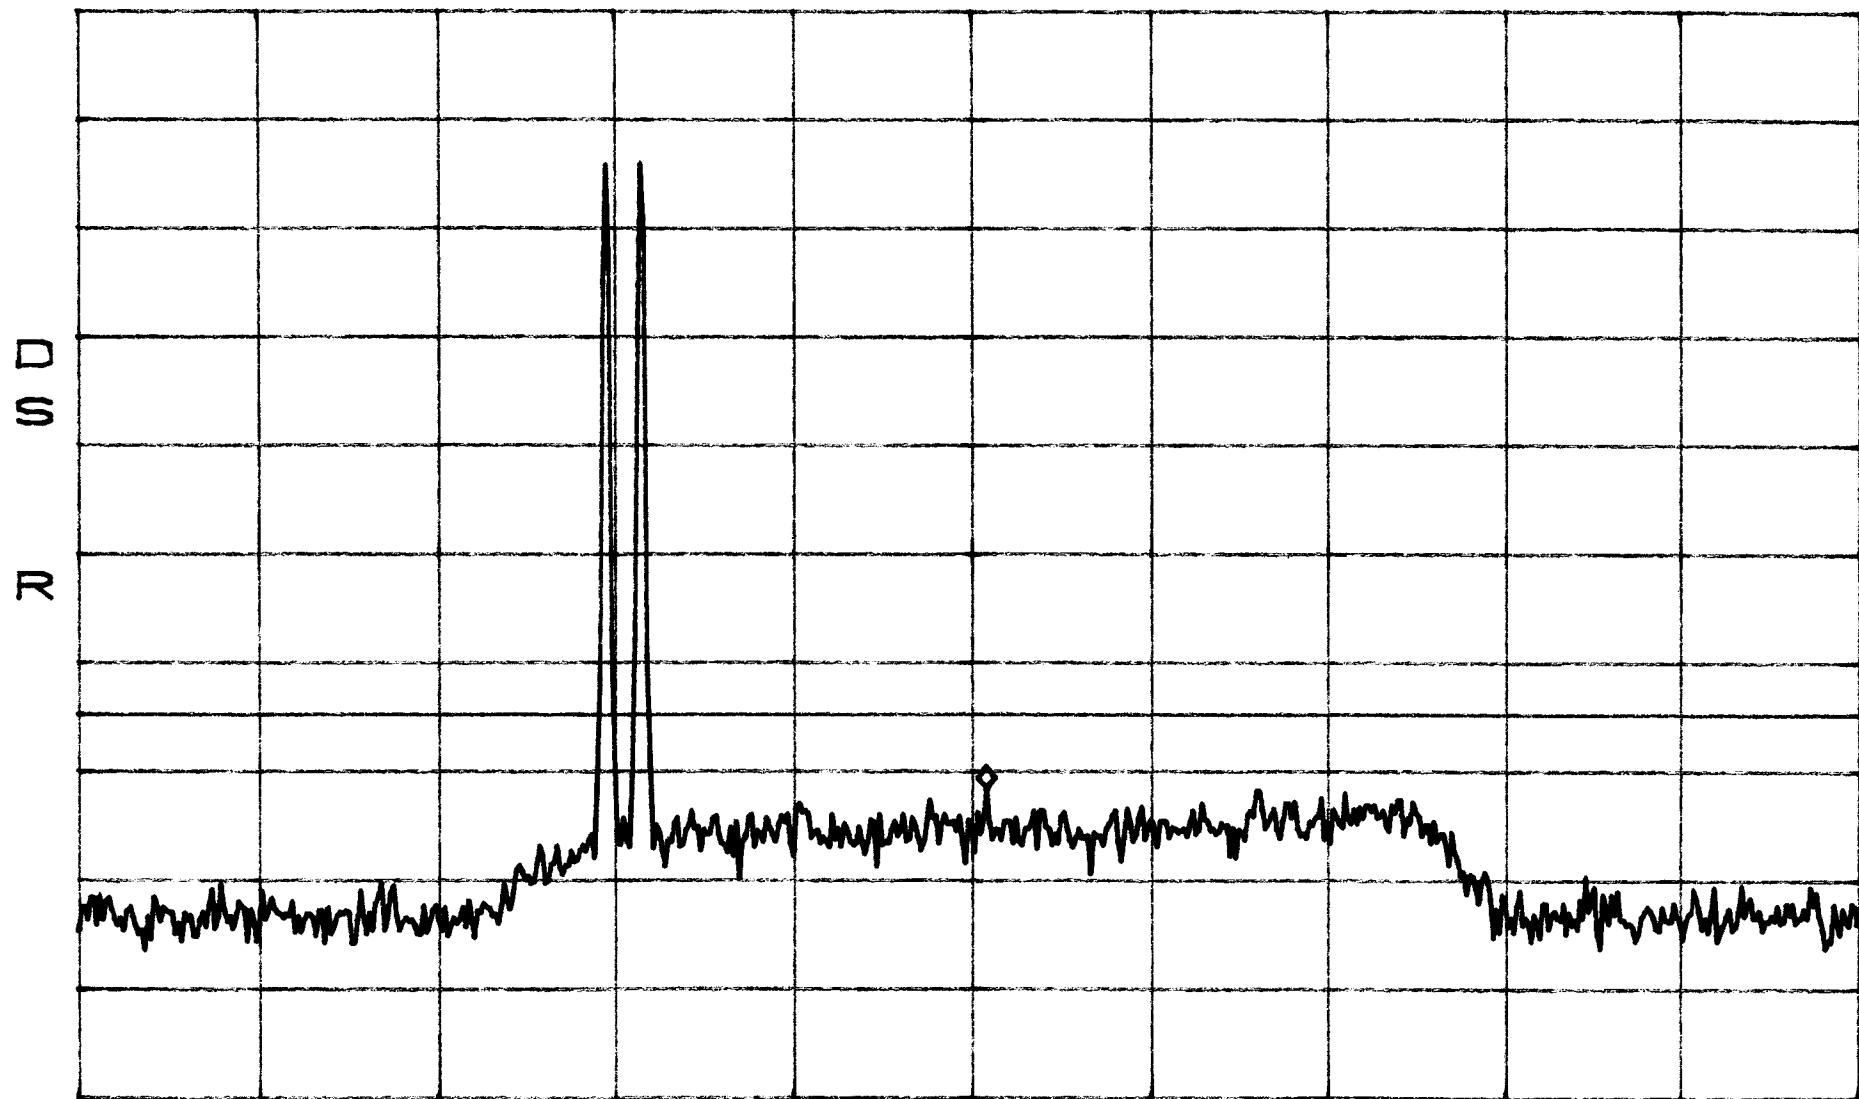

CENTER 880.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms

Intermodulation
Close
TDMA

BAND A


*ATTEN 30dB

MKR -26.37dBm

RL 51.8dBm

10dB/

476.2MHz

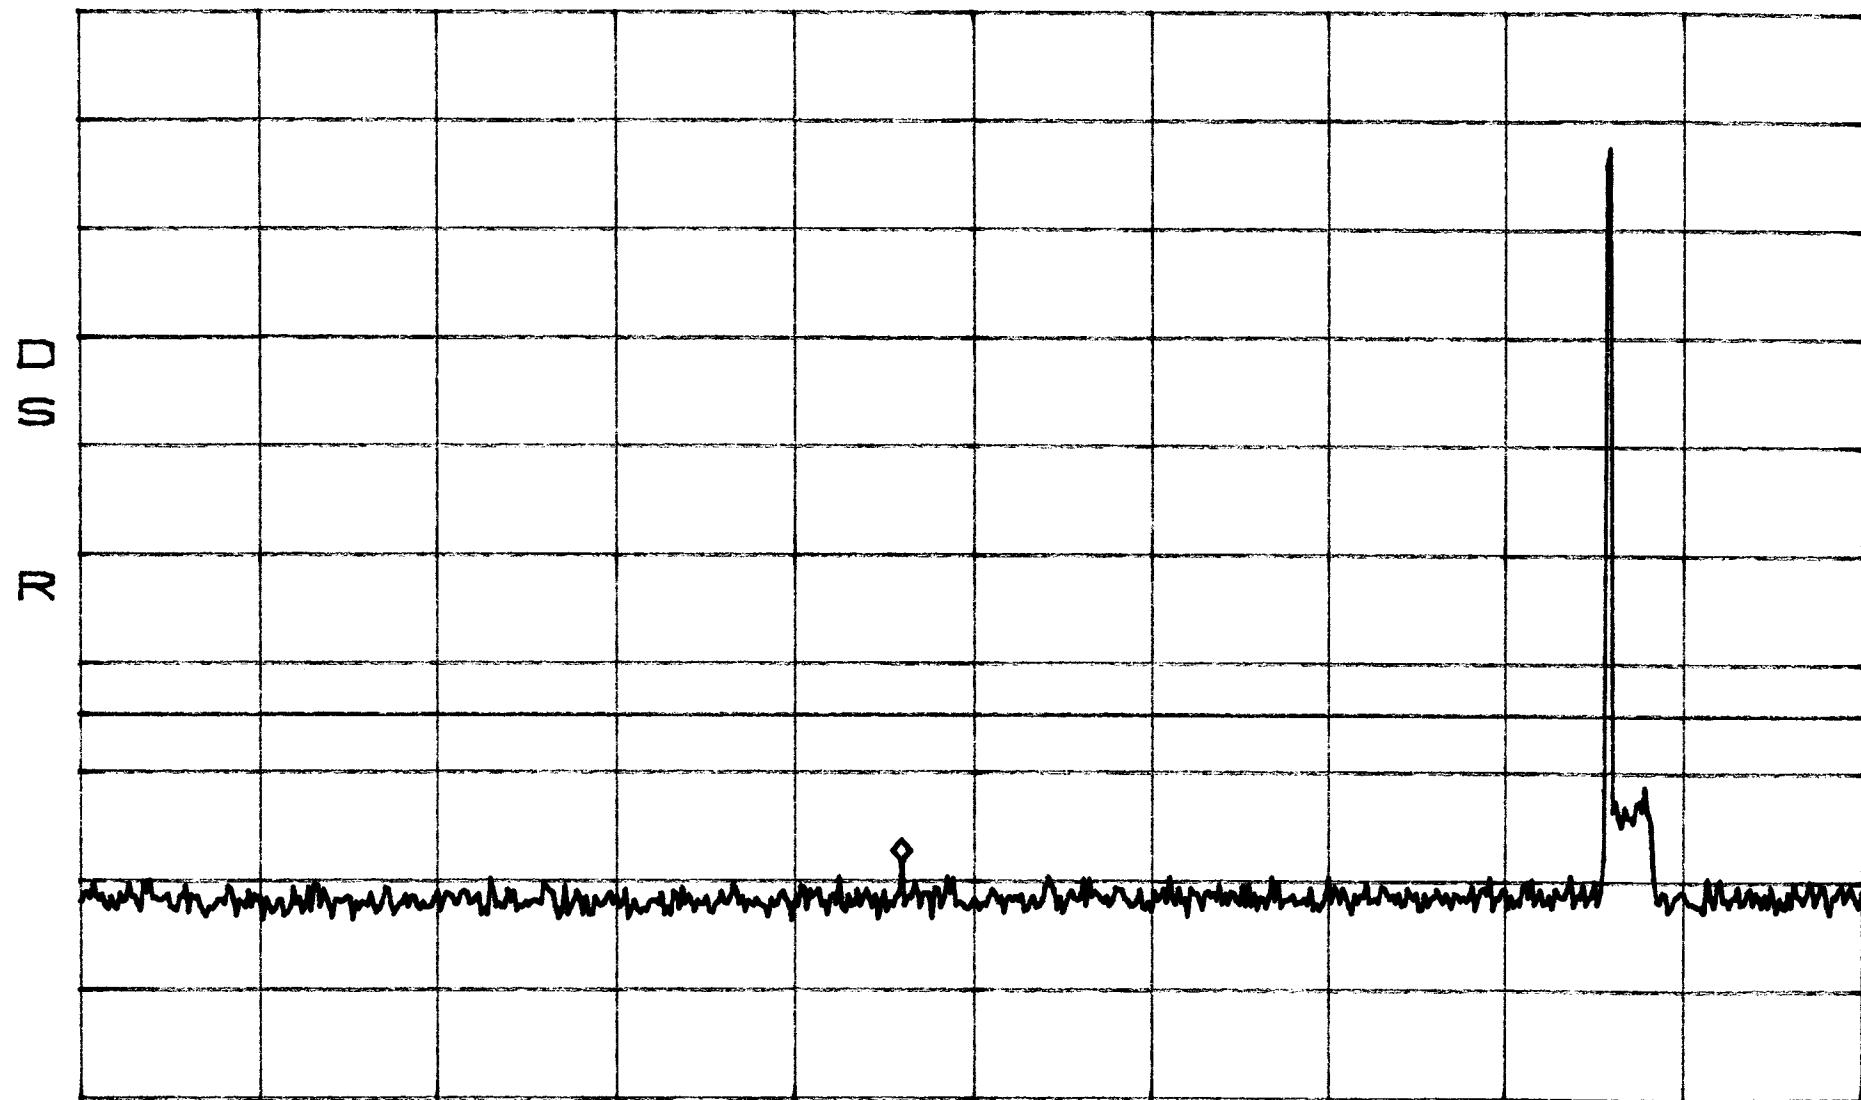

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation
Close
TDMA

BAND A


*ATTEN 30dB

MKR -22.03dBm

RL 51.8dBm

10dB/

7.375GHz

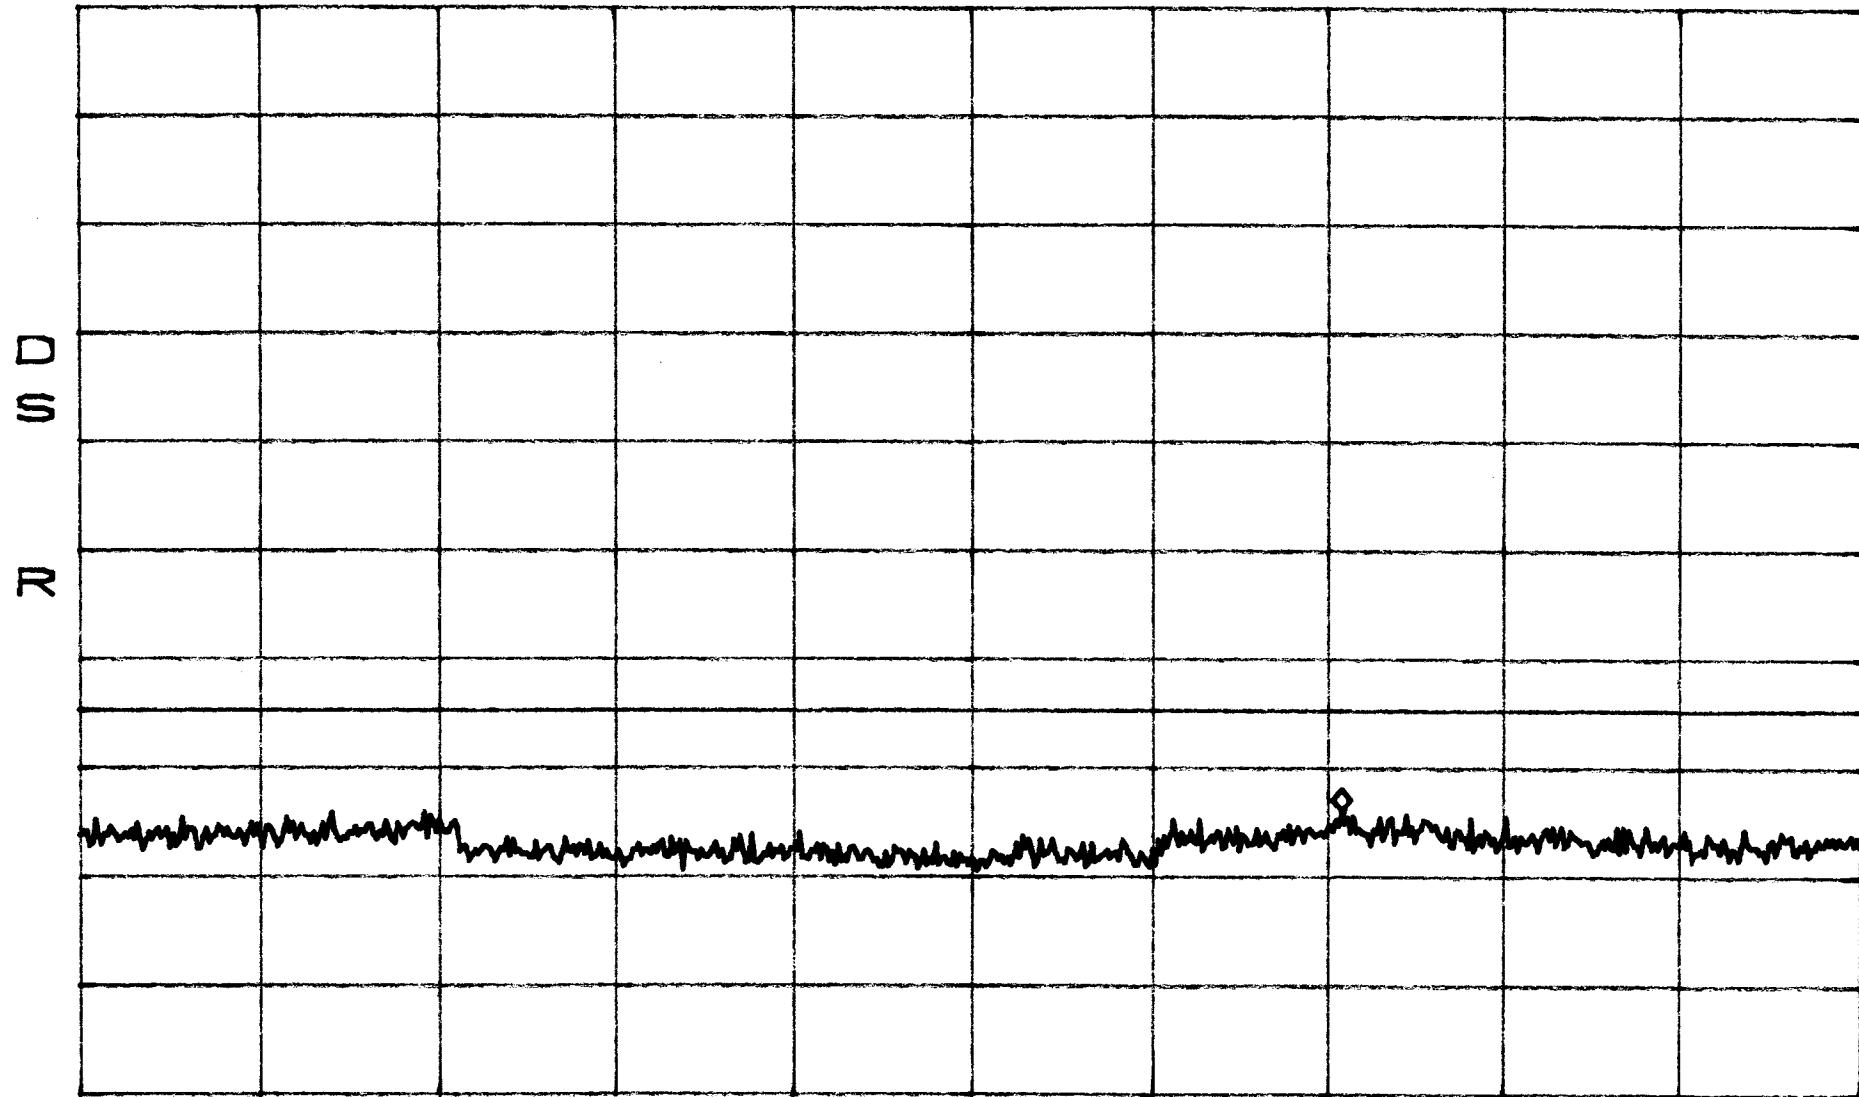

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec

Intermodulation BAND A
Apart
TDMA


*ATTEN 30dB

MKR -19.37dBm

RL 51.8dBm

10dB/

887.50MHz

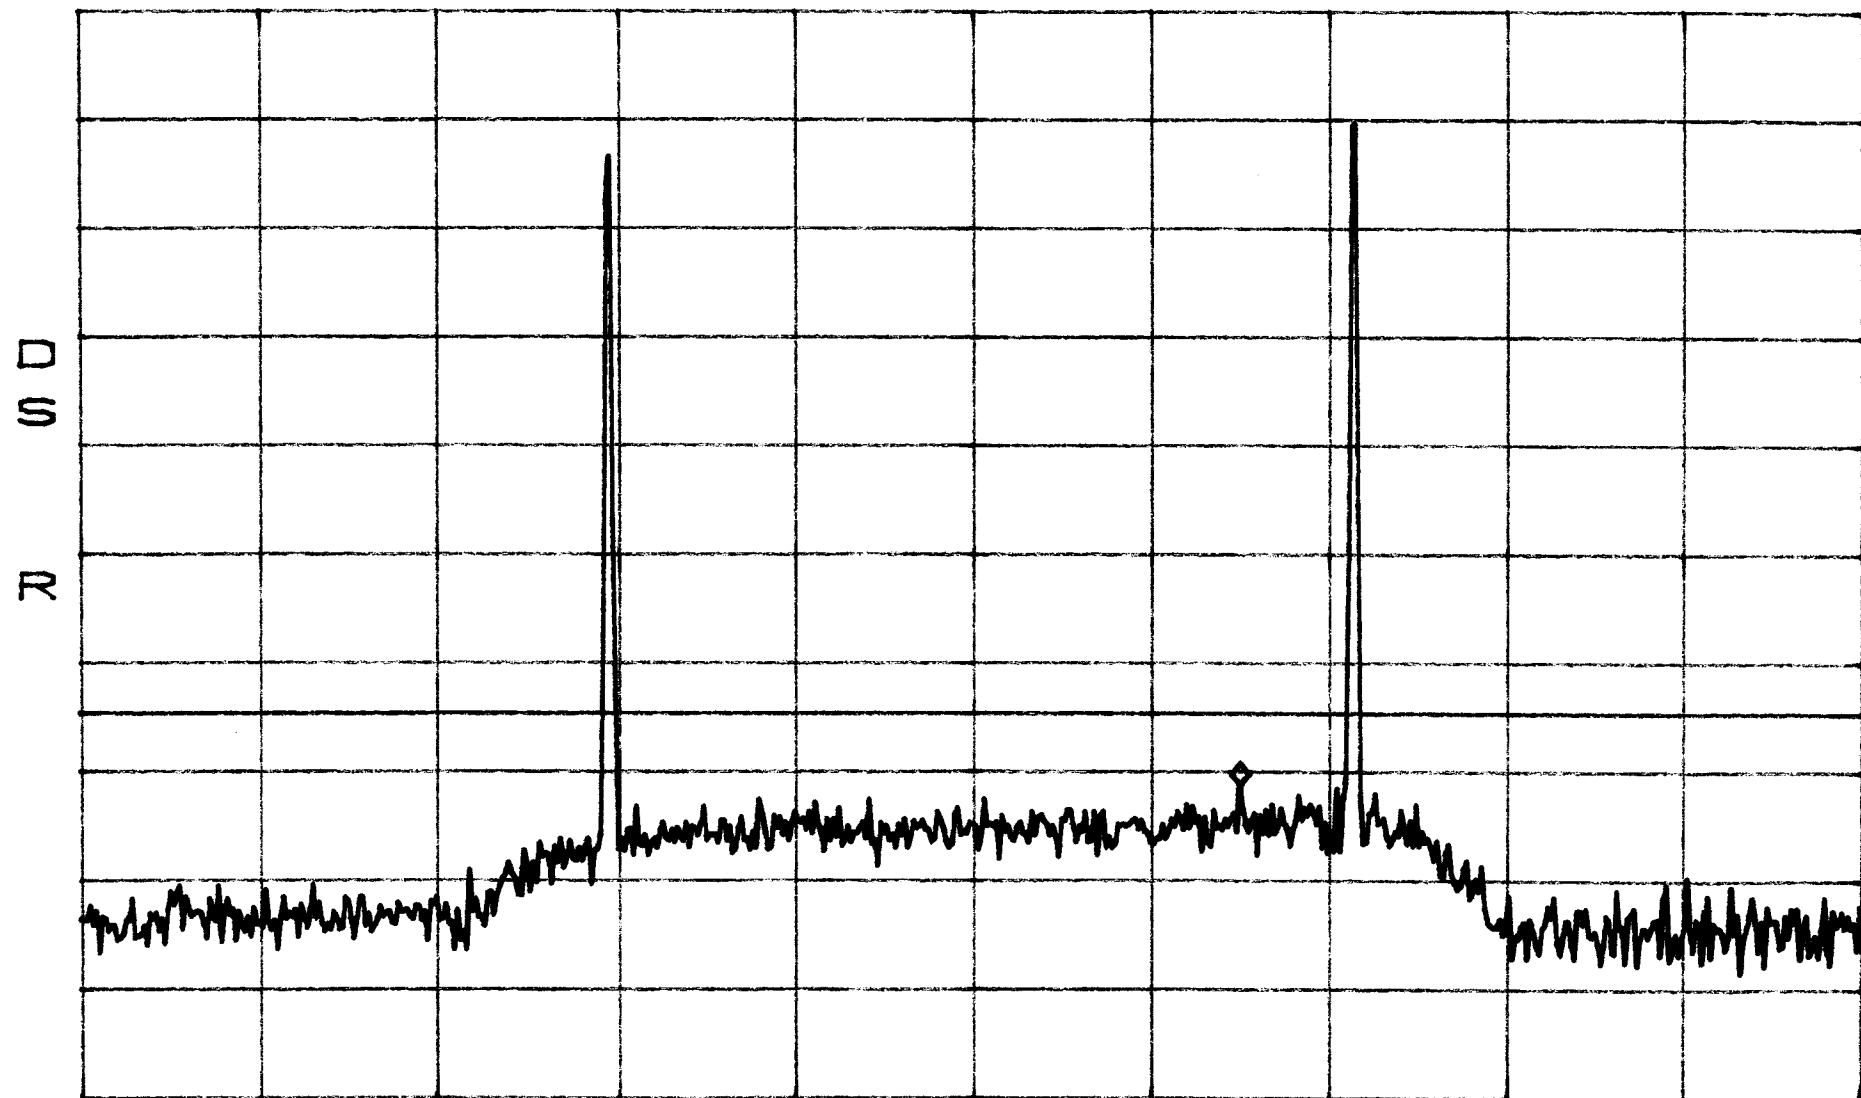

CENTER 880.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms

Intermodulation BAND A
Apart
TDMA


*ATTEN 30dB

RF 51.8dBm

10dB/

MKR -27.03dBm

178.7MHz

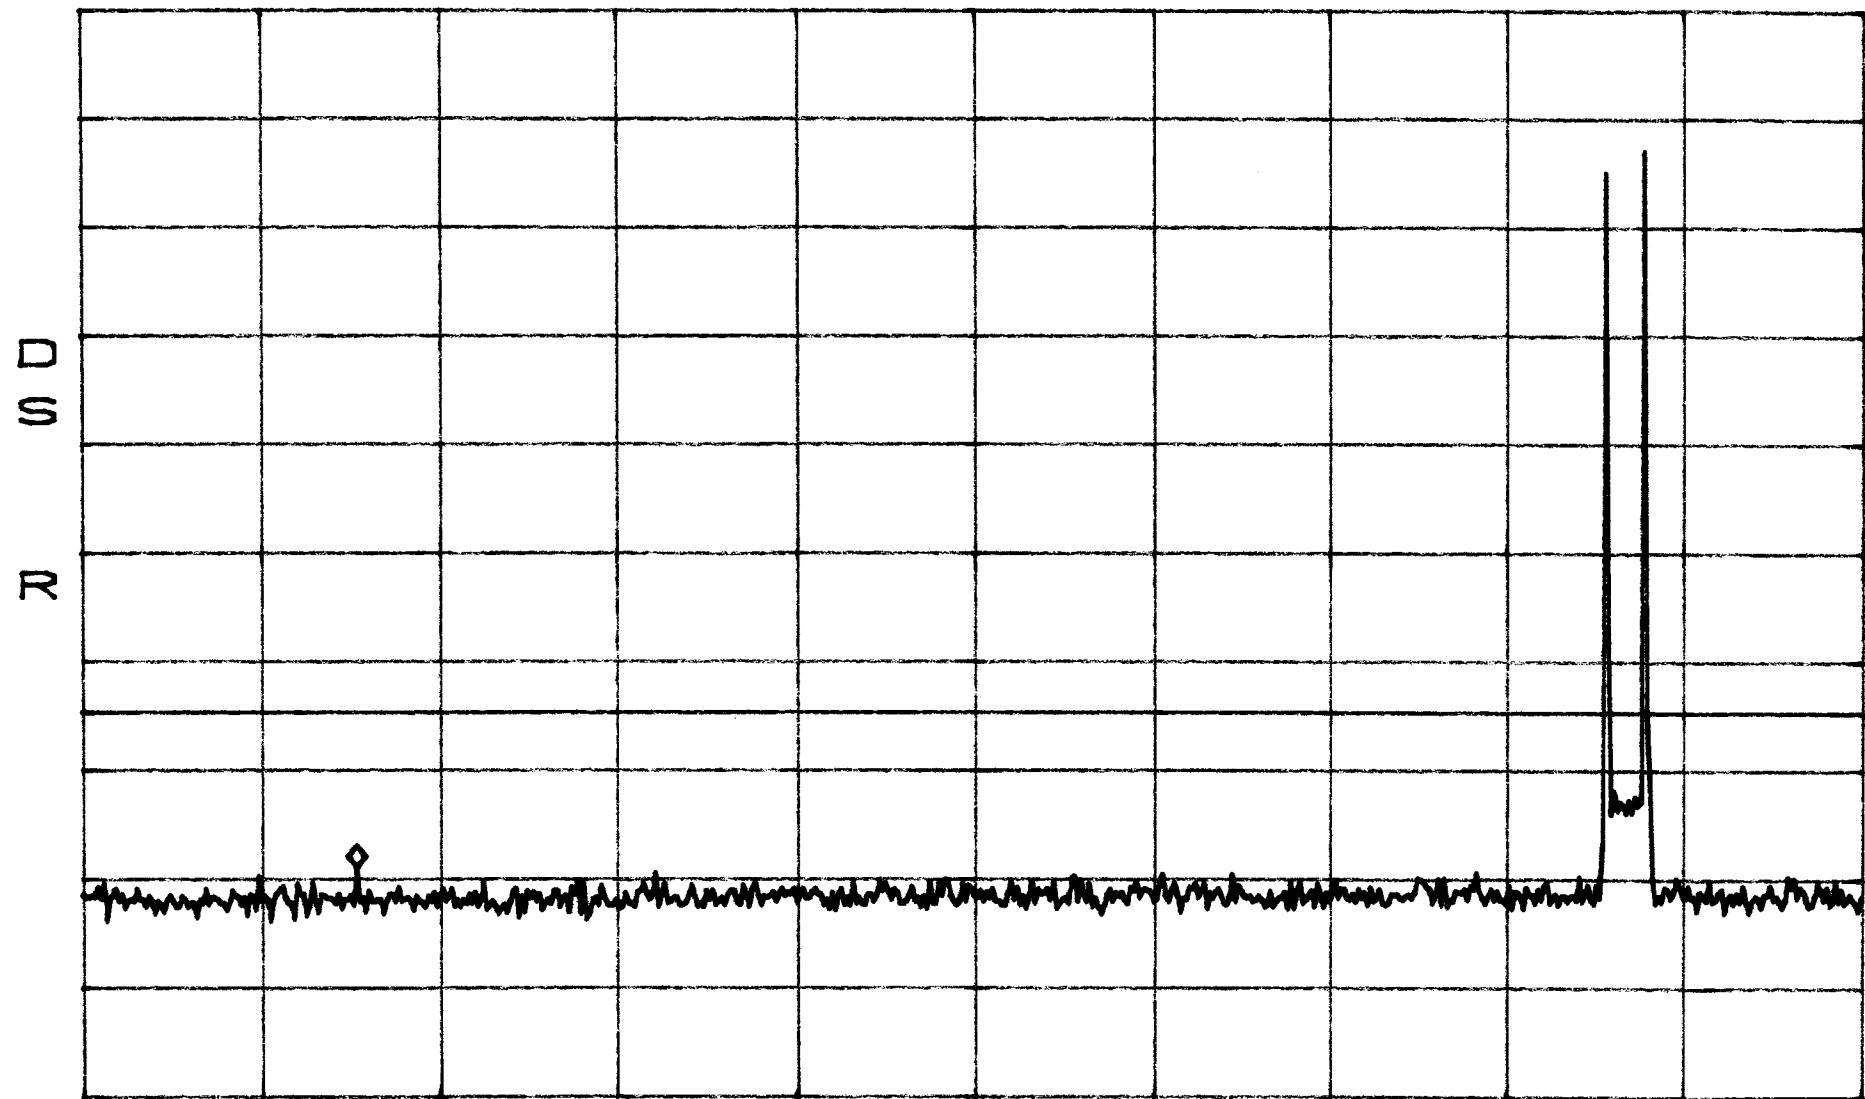

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation BAND A
Apart
TDMA


*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -22.20dBm

2.770GHz

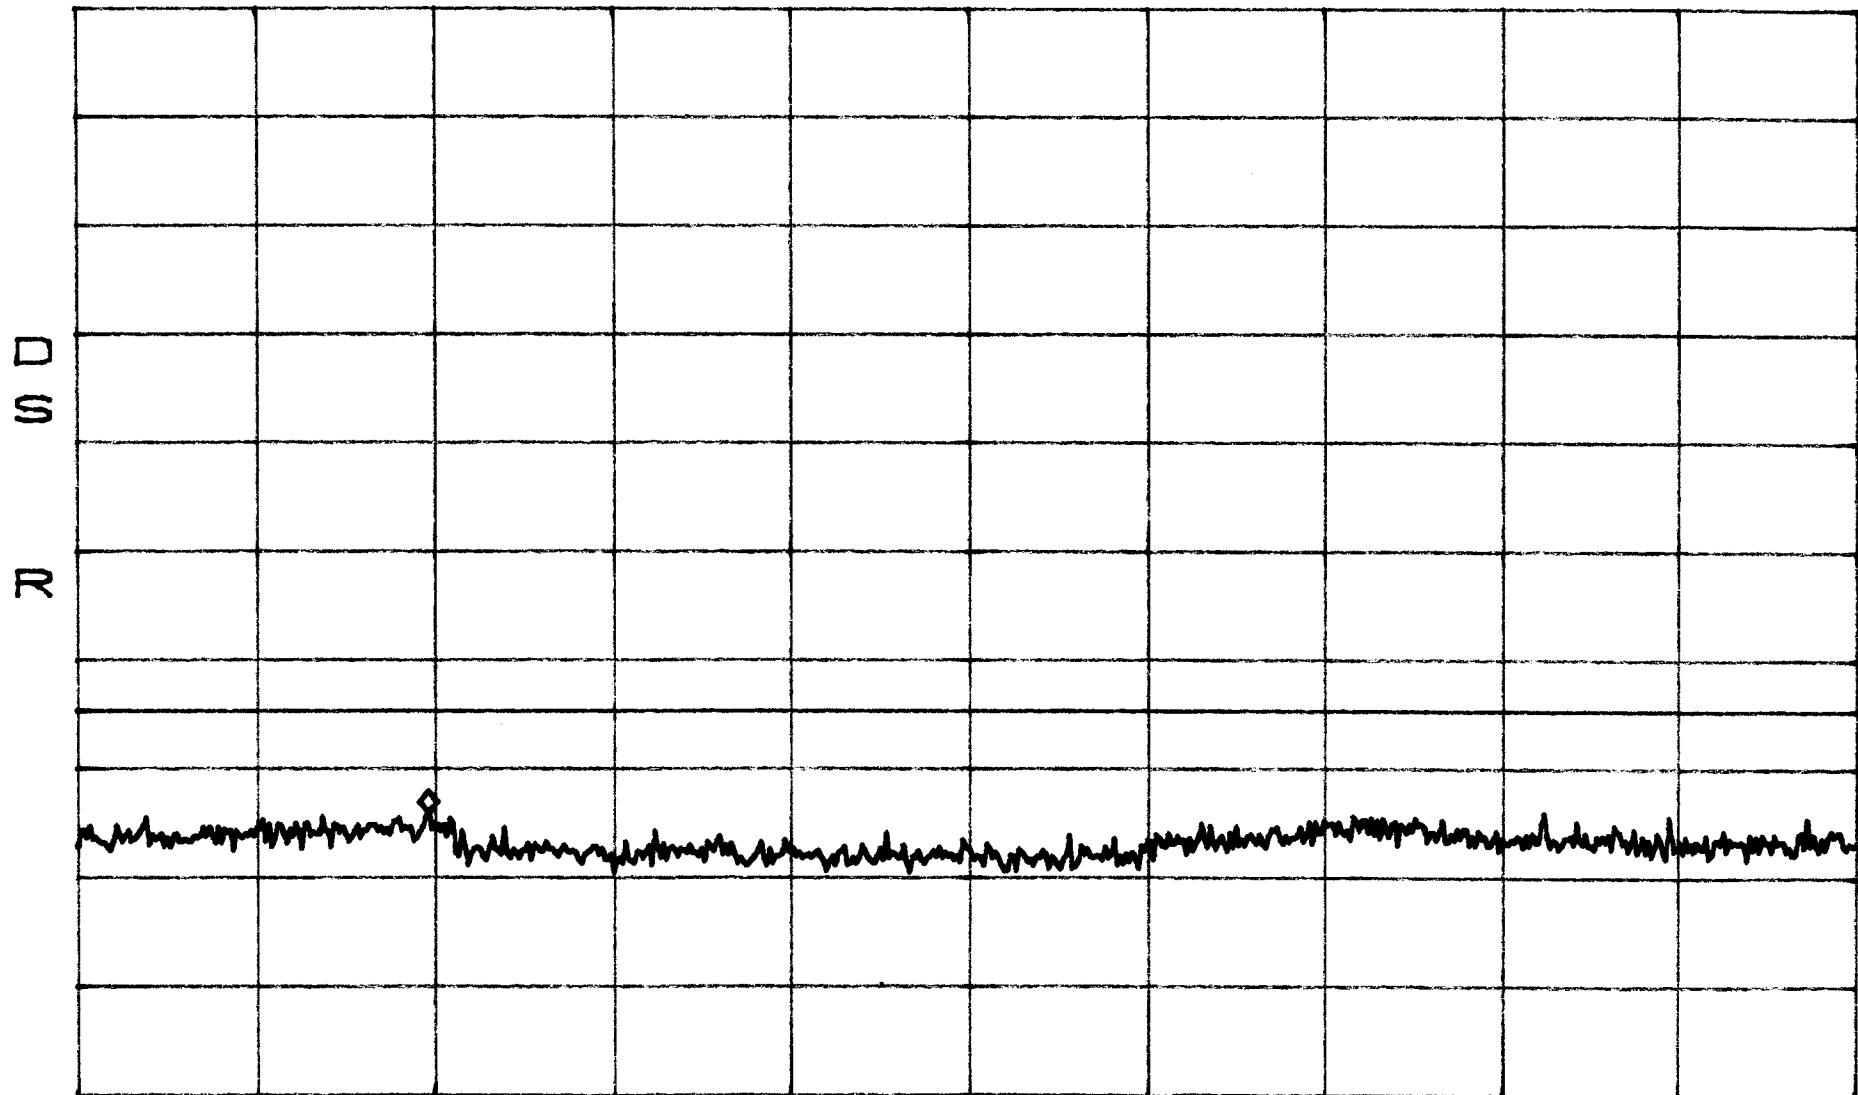

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec

Intermodulation
Close
CDMA

BAND A


*ATTEN 30dB

MKR -19.37dBm

RF 51.8dBm

10dB/

879.25MHz

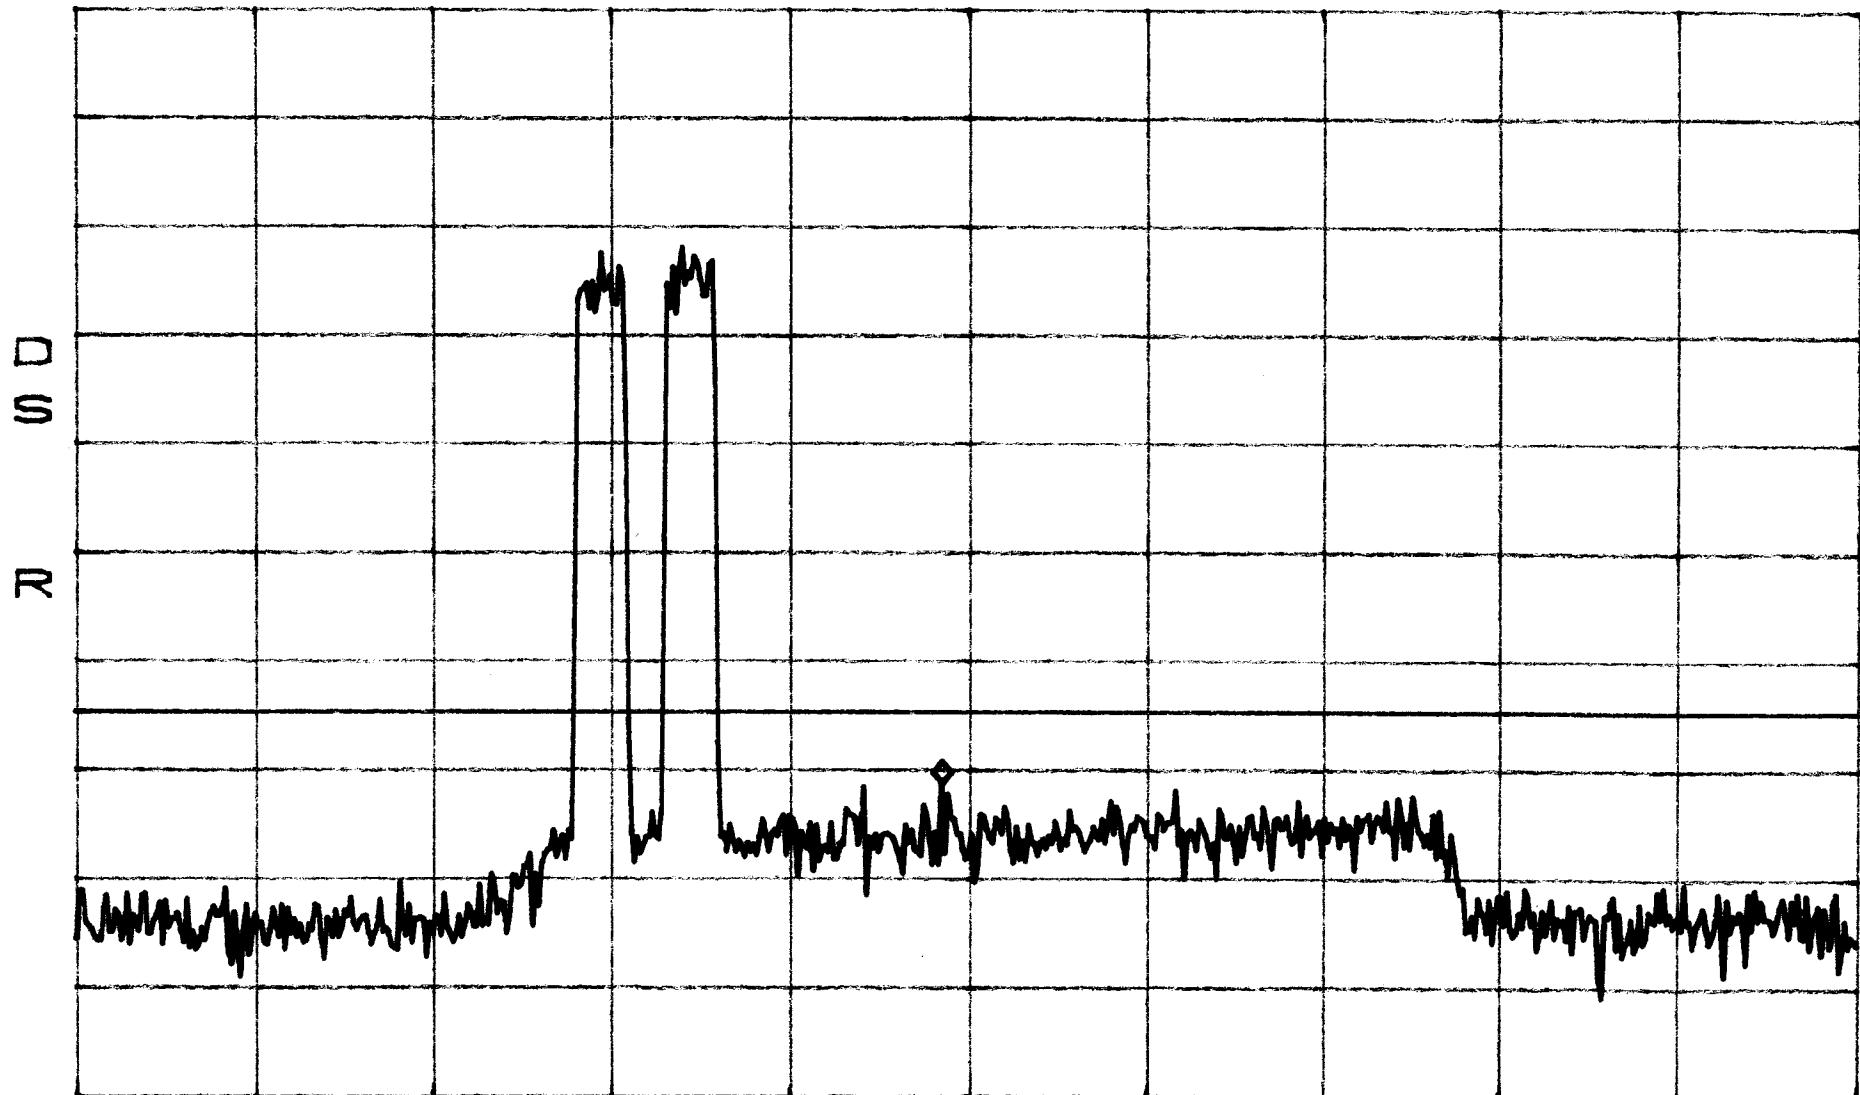

CENTER 880.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms

Intermodulation
Close
CDMA

BAND A


*ATTEN 30dB

MKR -27.37dBm

RL 51.8dBm

10dB/

490.8MHz

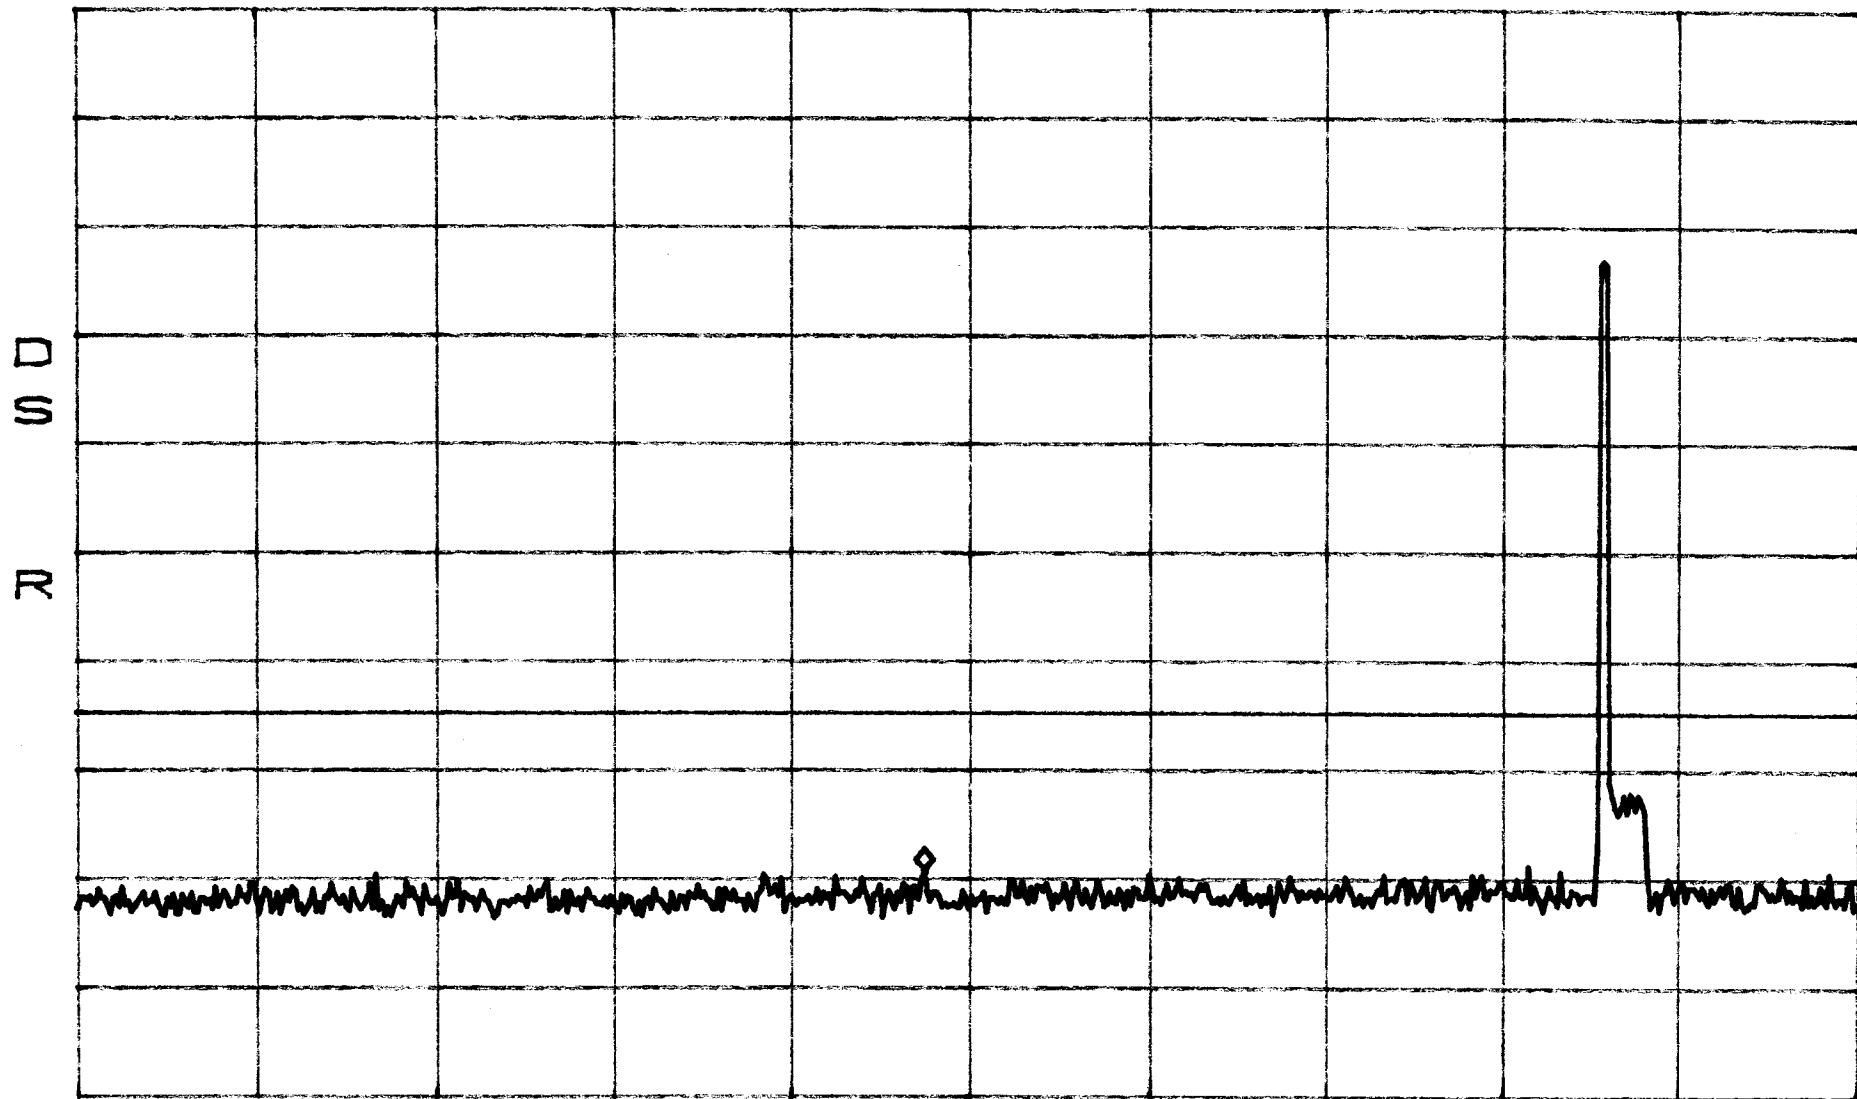

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation
Close
CDMA

BAND A


*ATTEN 30dB

MKR -21.87dBm

RL 51.8dBm

10dB/

1.345GHz

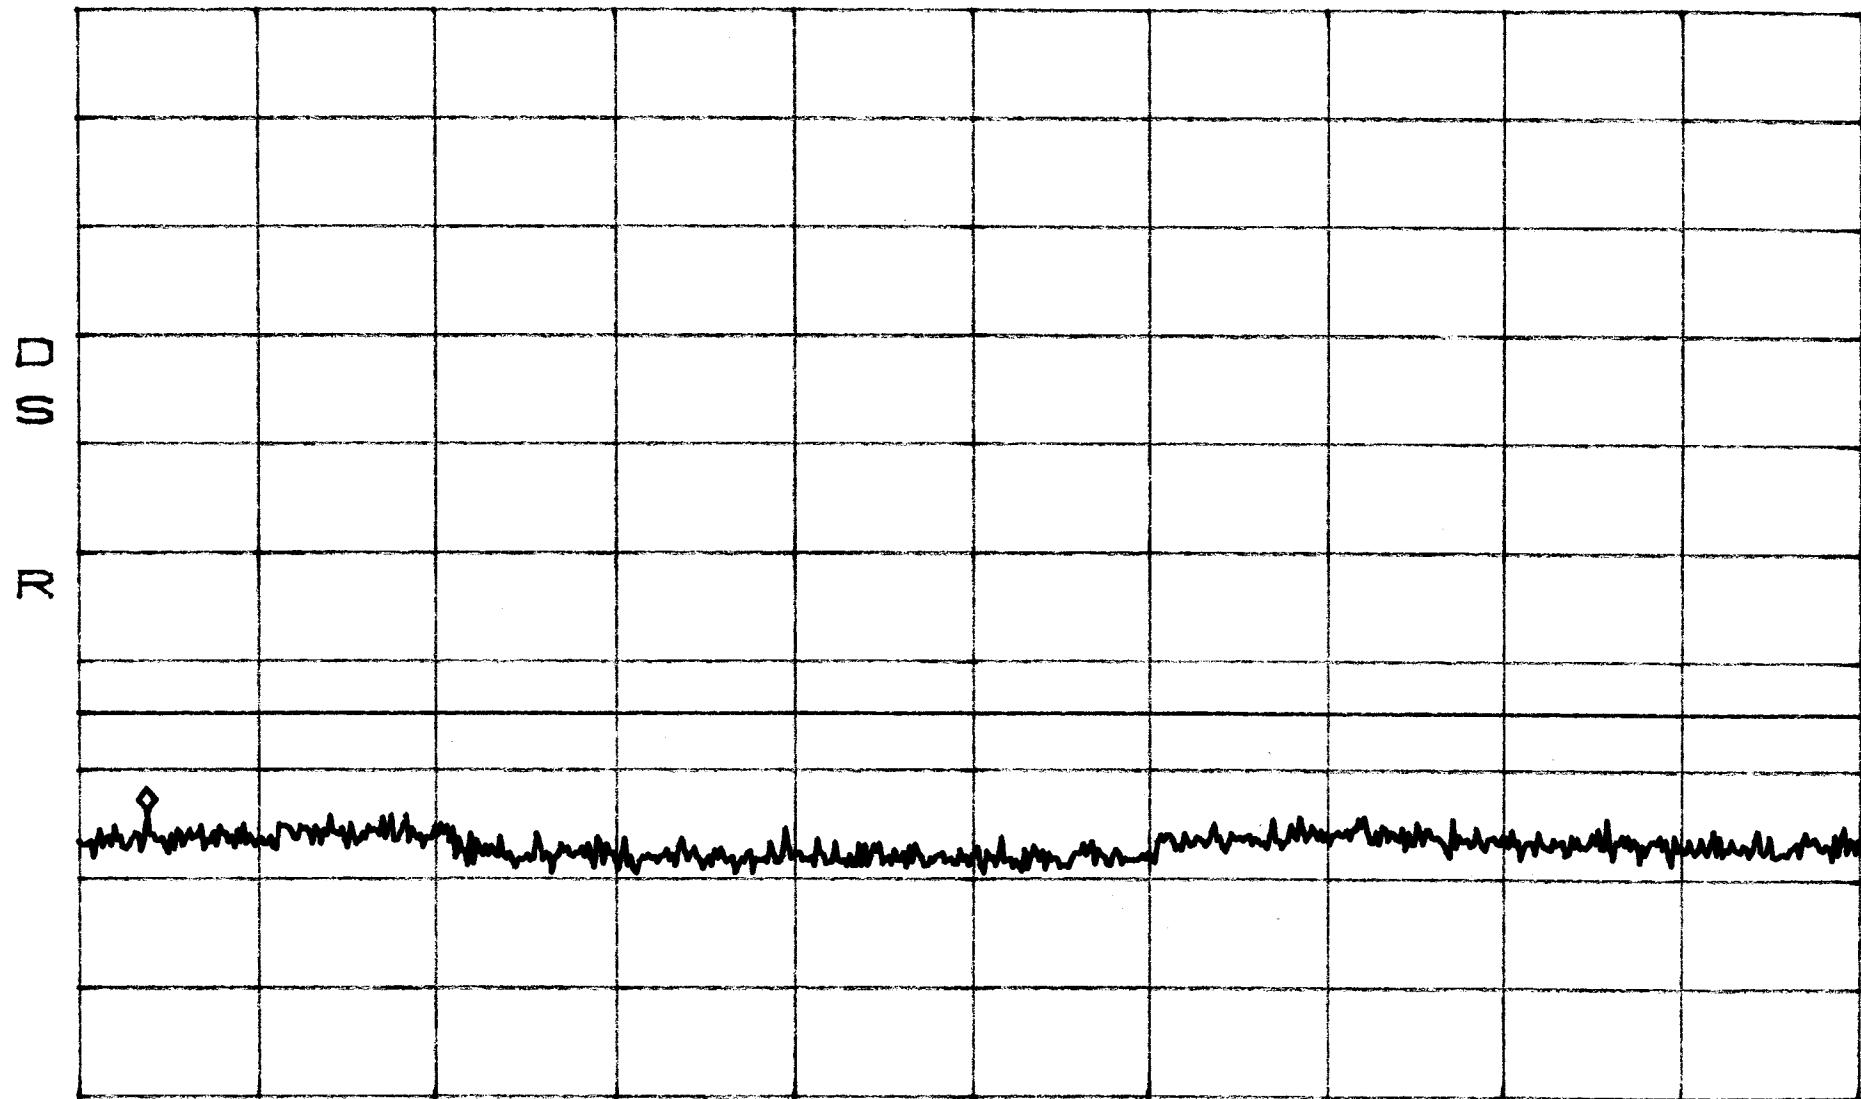

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec

Intermodulation
Apart
CDMA


*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -19.03dBm

881.00MHz

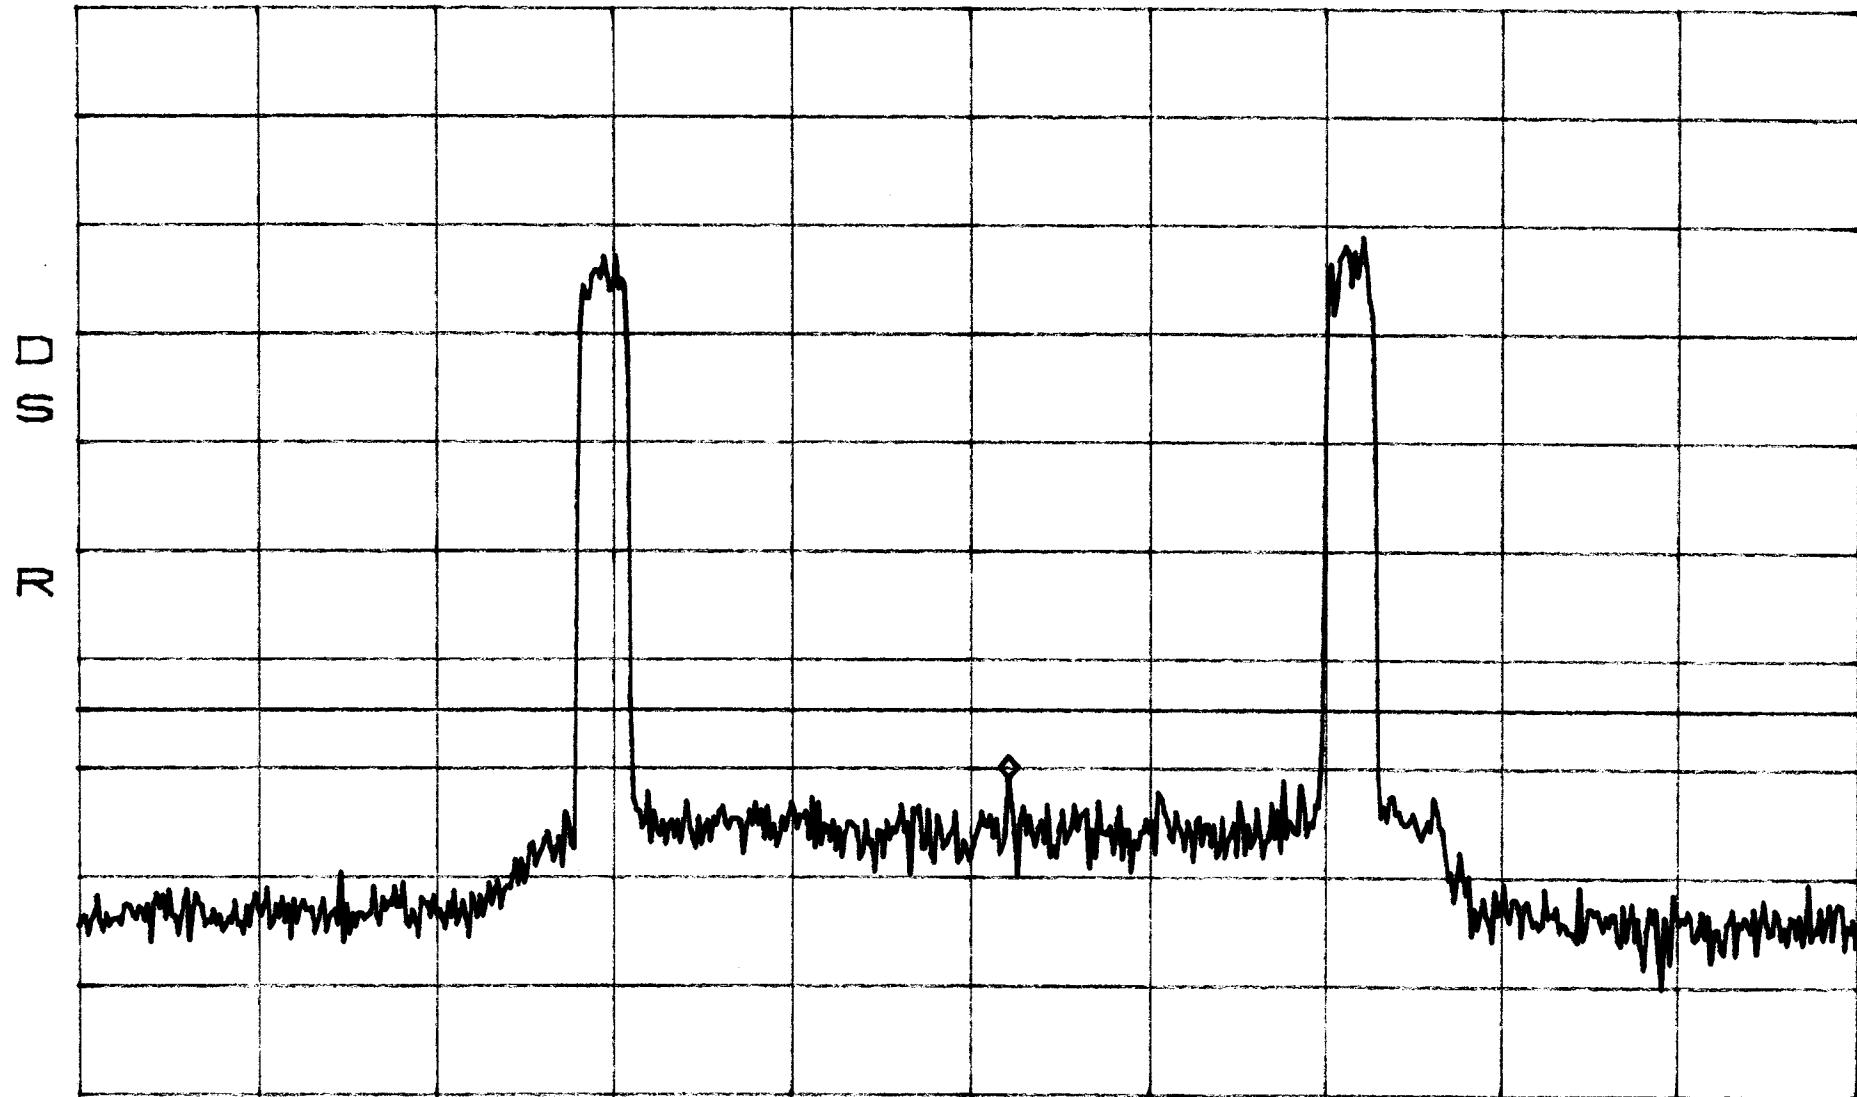

CENTER 880.00MHz

*RBW 30kHz

VBW 30kHz

SPAN 50.00MHz

SWP 140ms

Intermodulation
Apart
CDMA


*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -26.70dBm

422.9MHz

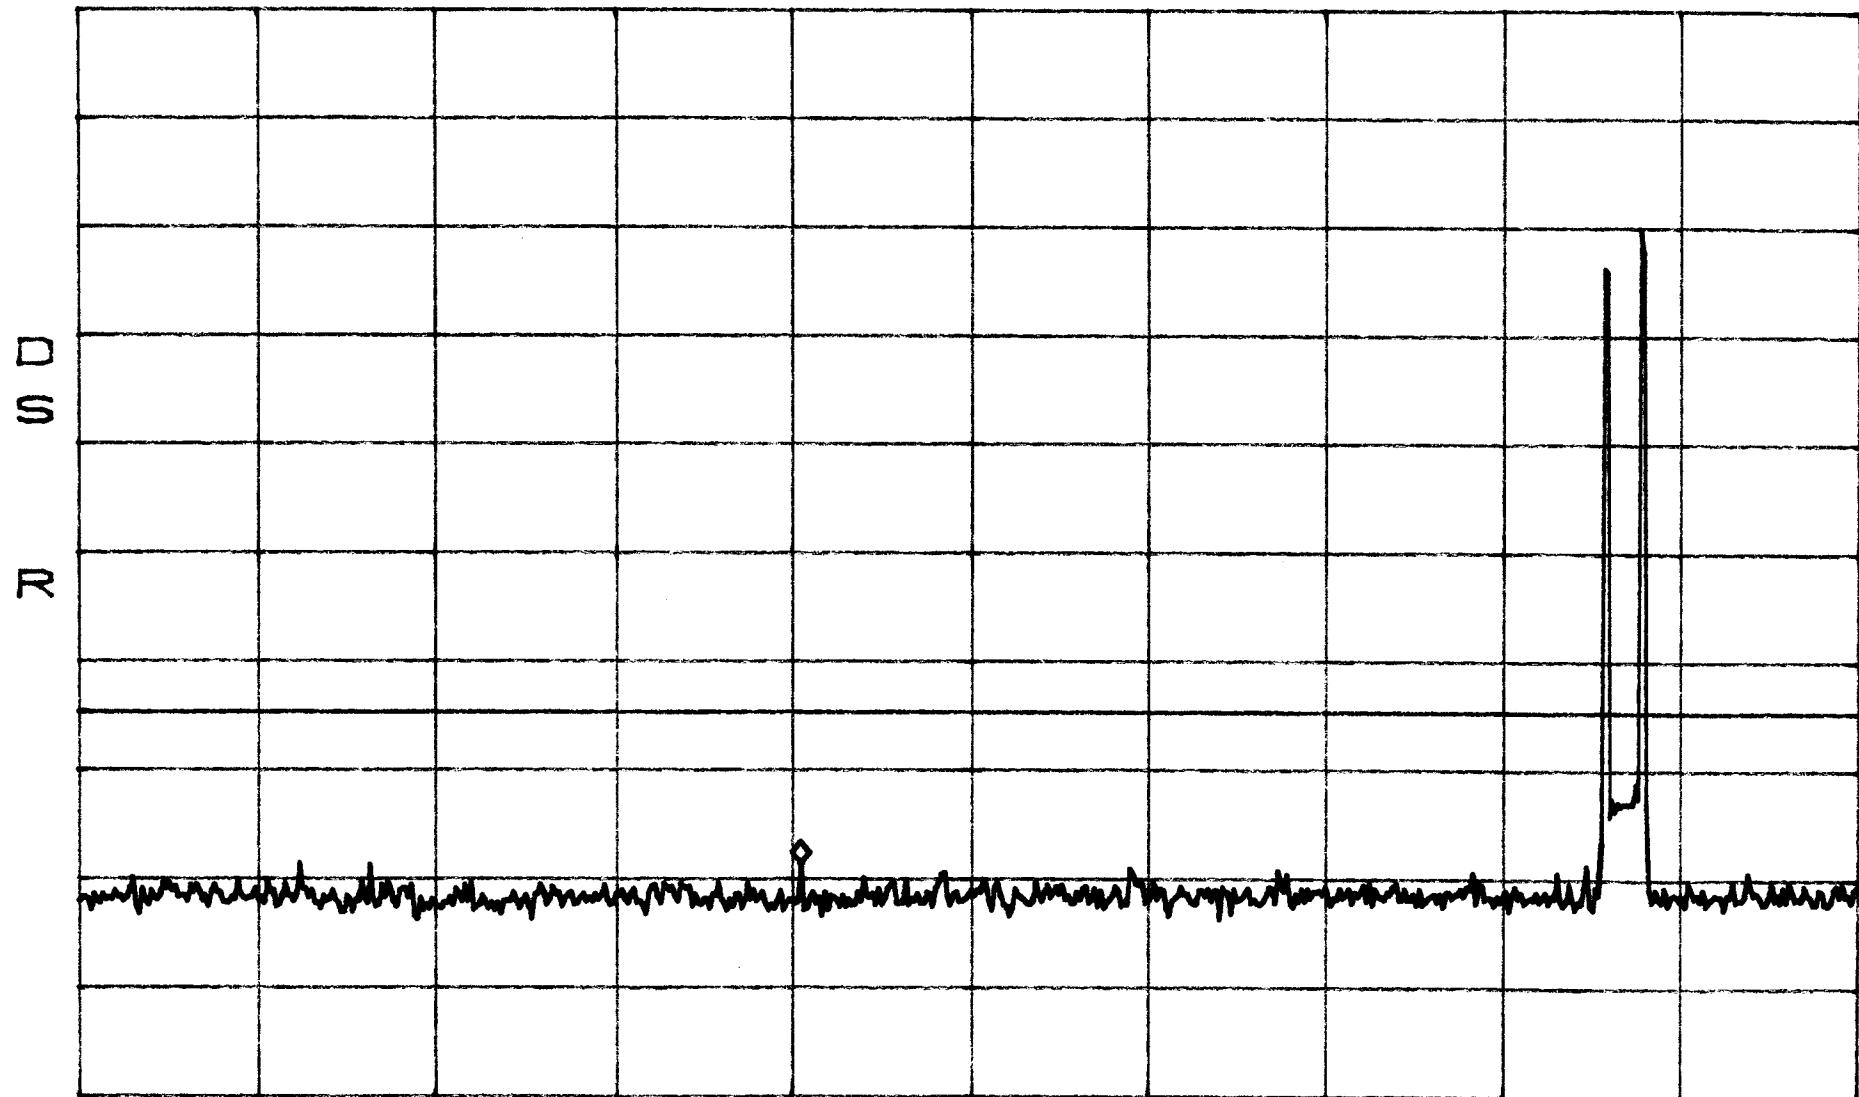

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation BAND A
Apart
CDMA


*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -22.03dBm

7.390GHz

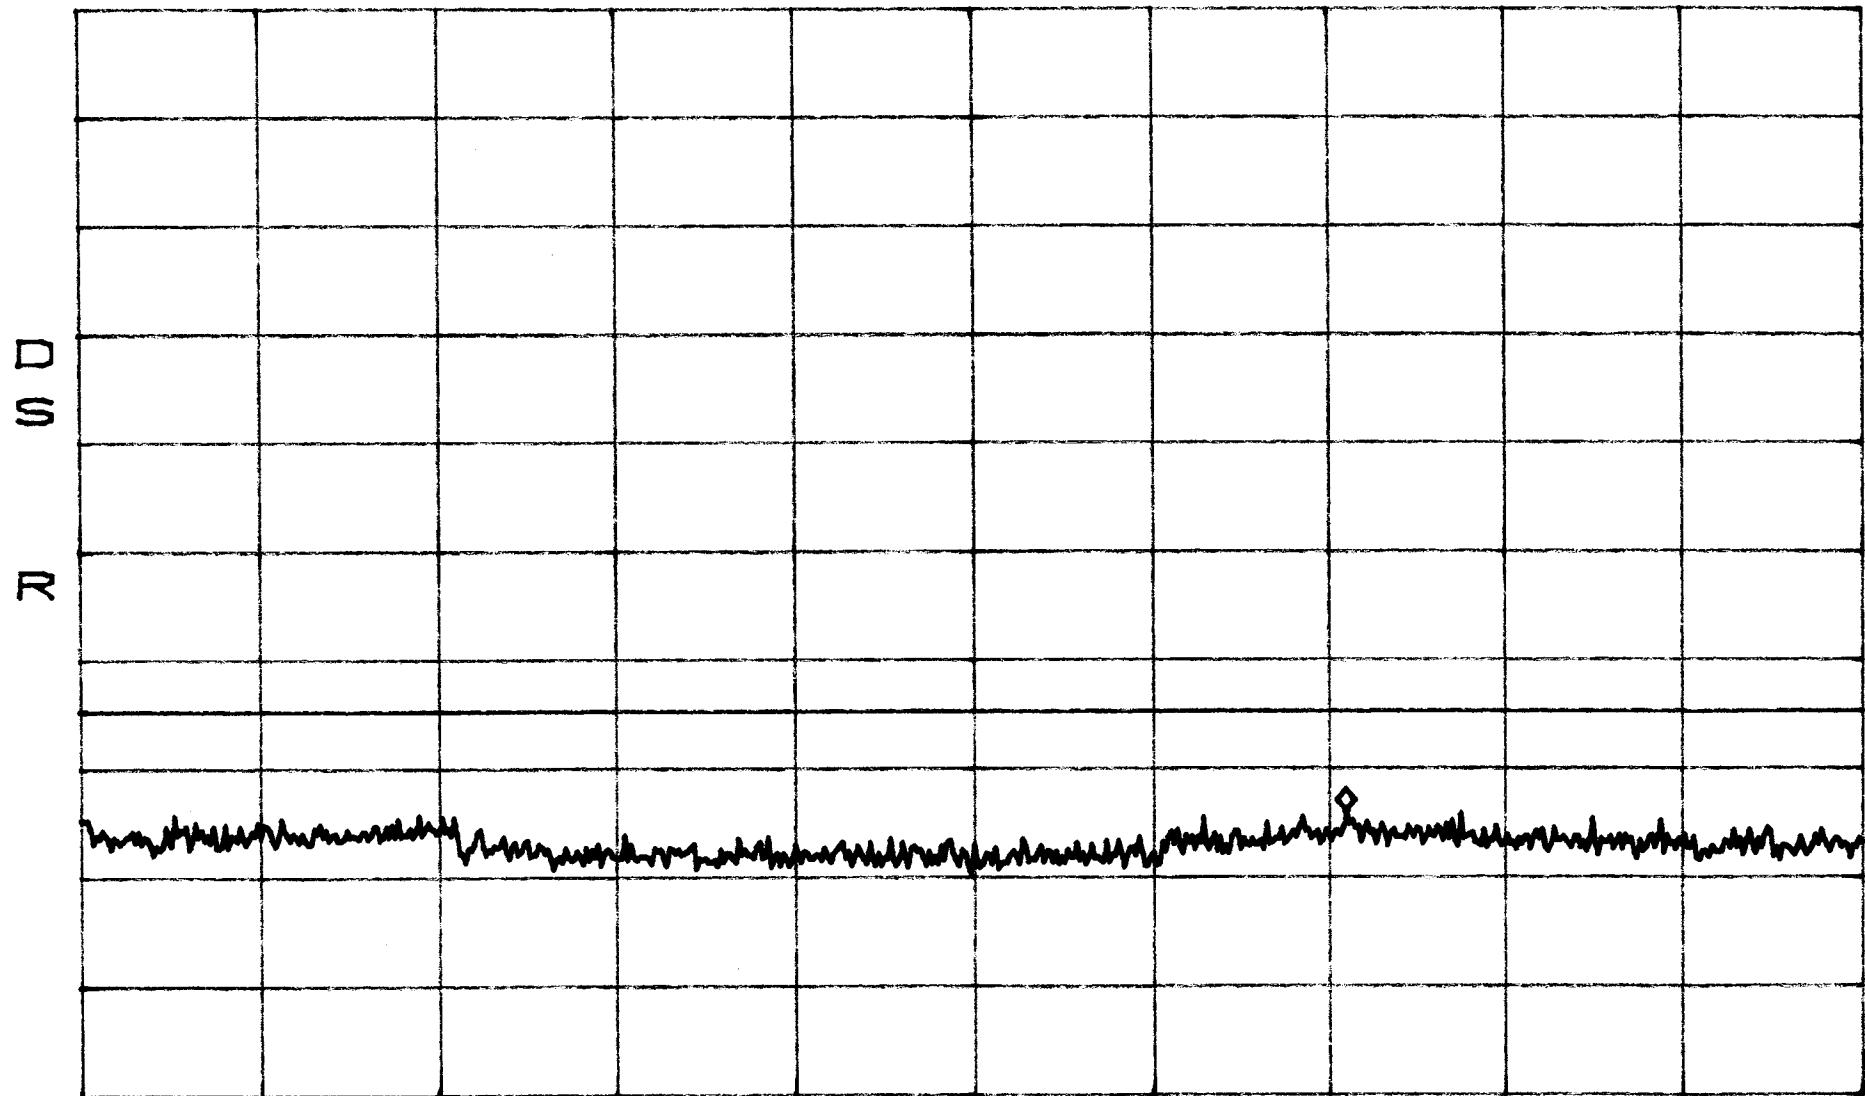

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec

Intermodulation
Close
FM


BAND B

*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -18.03dBm
889.83MHz

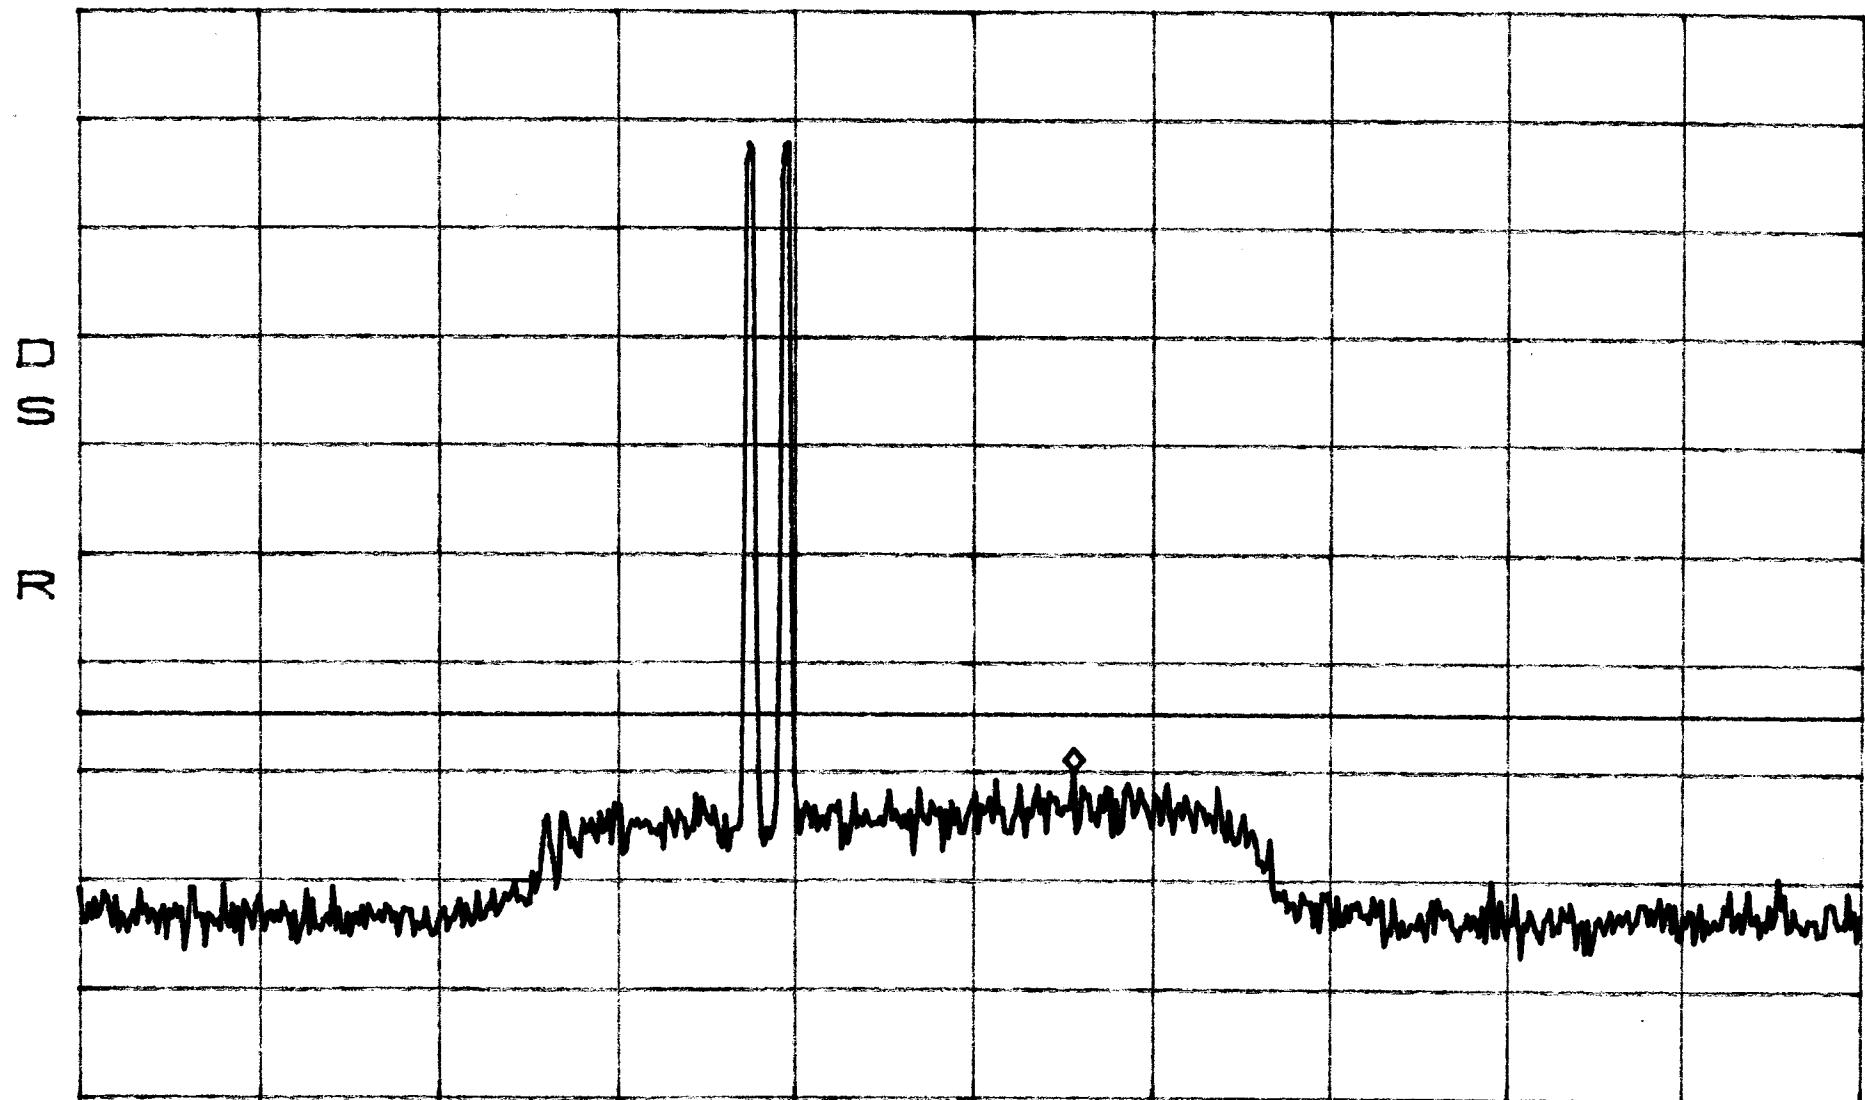

CENTER 887.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms

Intermodulation

BAND B

Close


FM

*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -26.87dBm
434.2MHz

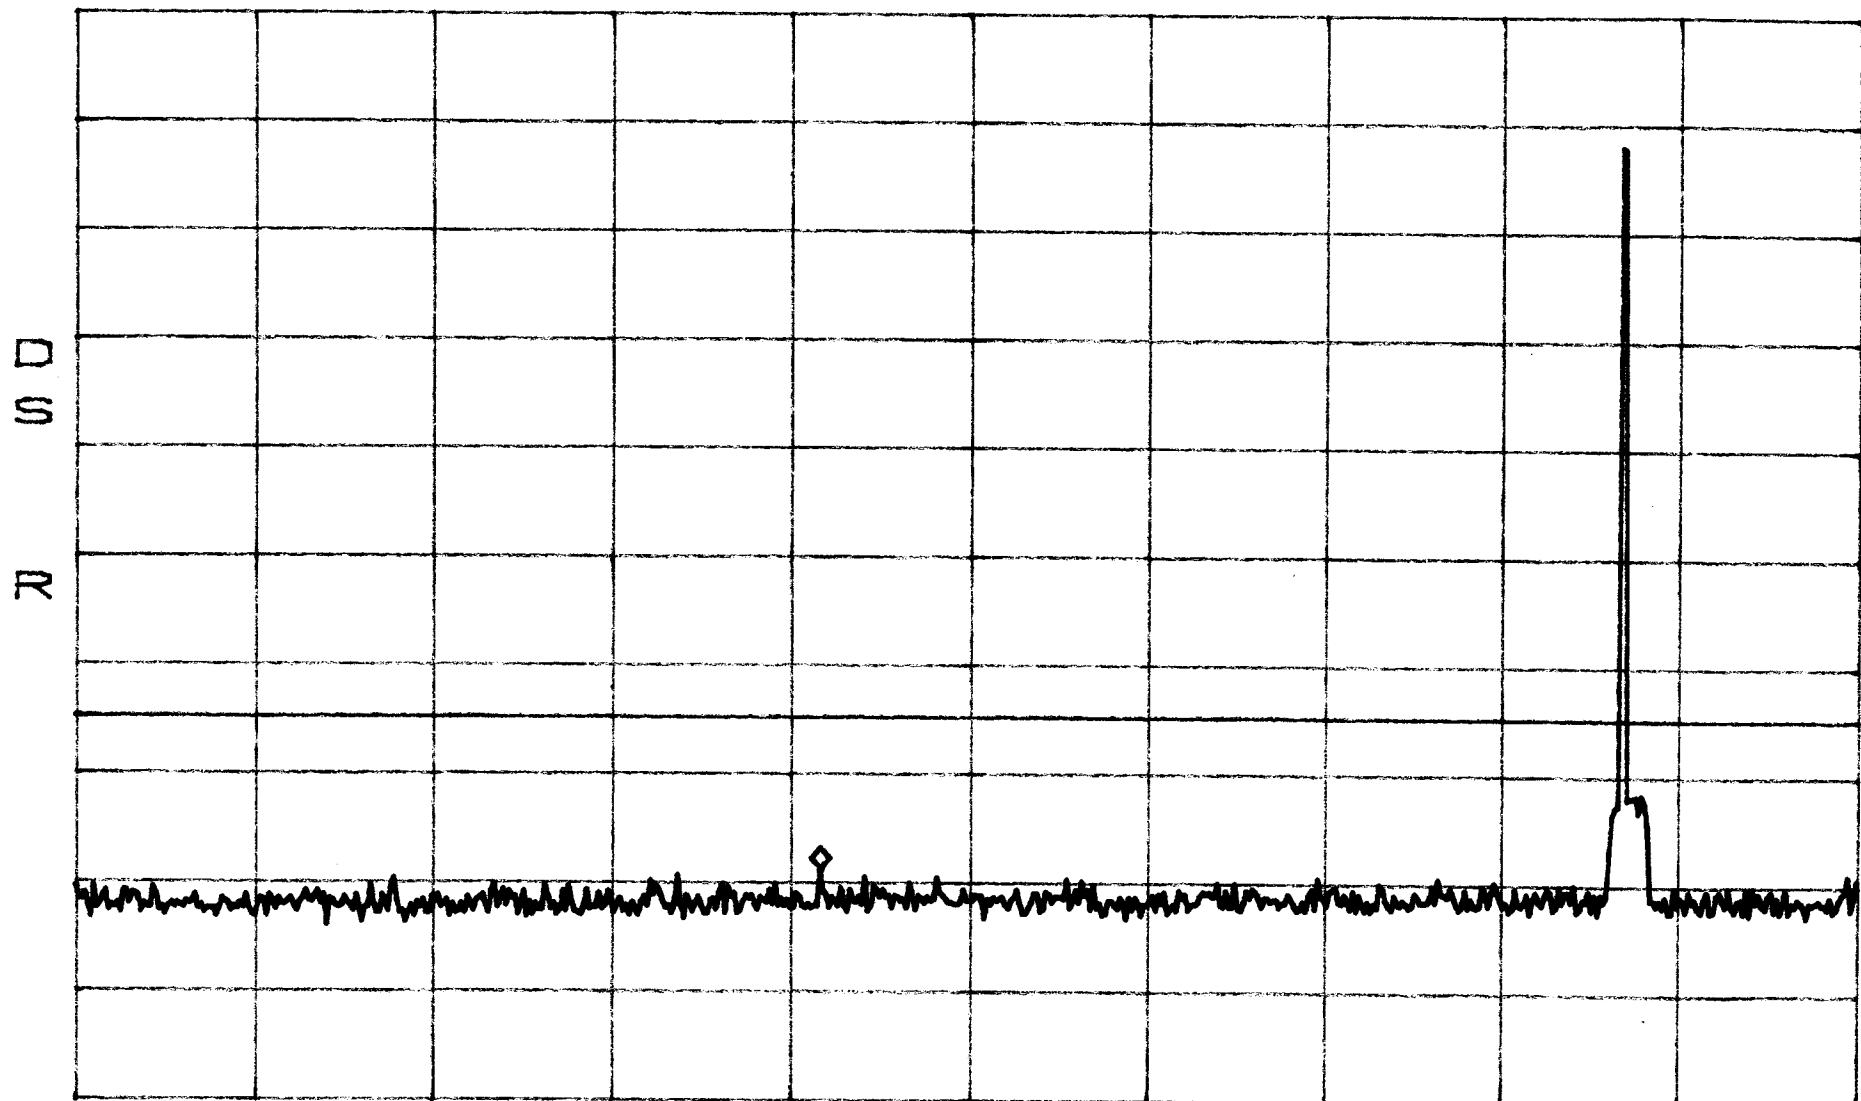

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation
Close
FM

BAND B

*ATTEN 30dB

MKR -20. 53dBm

RL 51. 8dBm

10dB/

2. 080GHz



START 1. 000GHz

STOP 10. 000GHz

*RBW 100kHz

VBW 100kHz

SWP 2. 3sec

Intermodulation
Apart
FM

BAND B


*ATTEN 30dB

MKR -29.03dBm

RF 51.8dBm

10dB/

910.83MHz

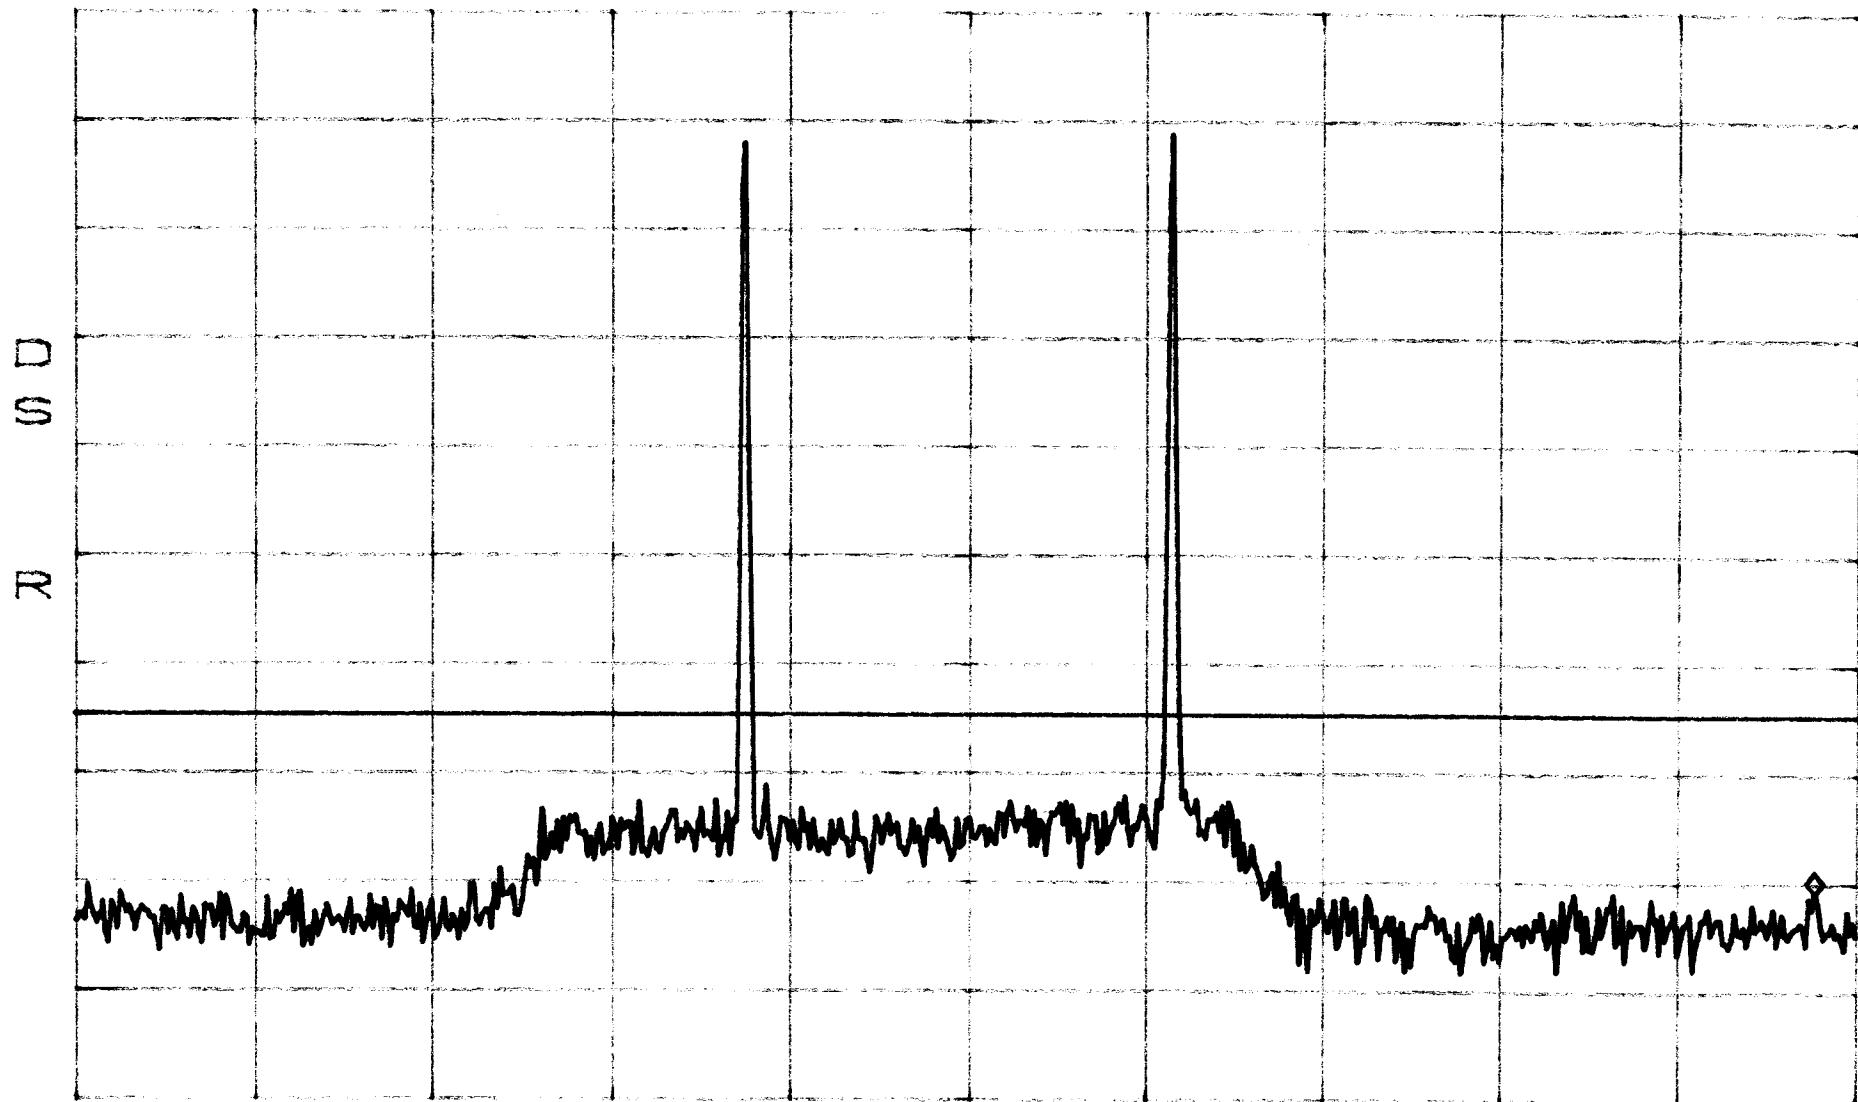

CENTER 887.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms

Intermodulation
Apart
FM

BAND B


*ATTEN 30dB

MKR -26.87dBm

RL 51.8dBm

10dB/

571.6MHz

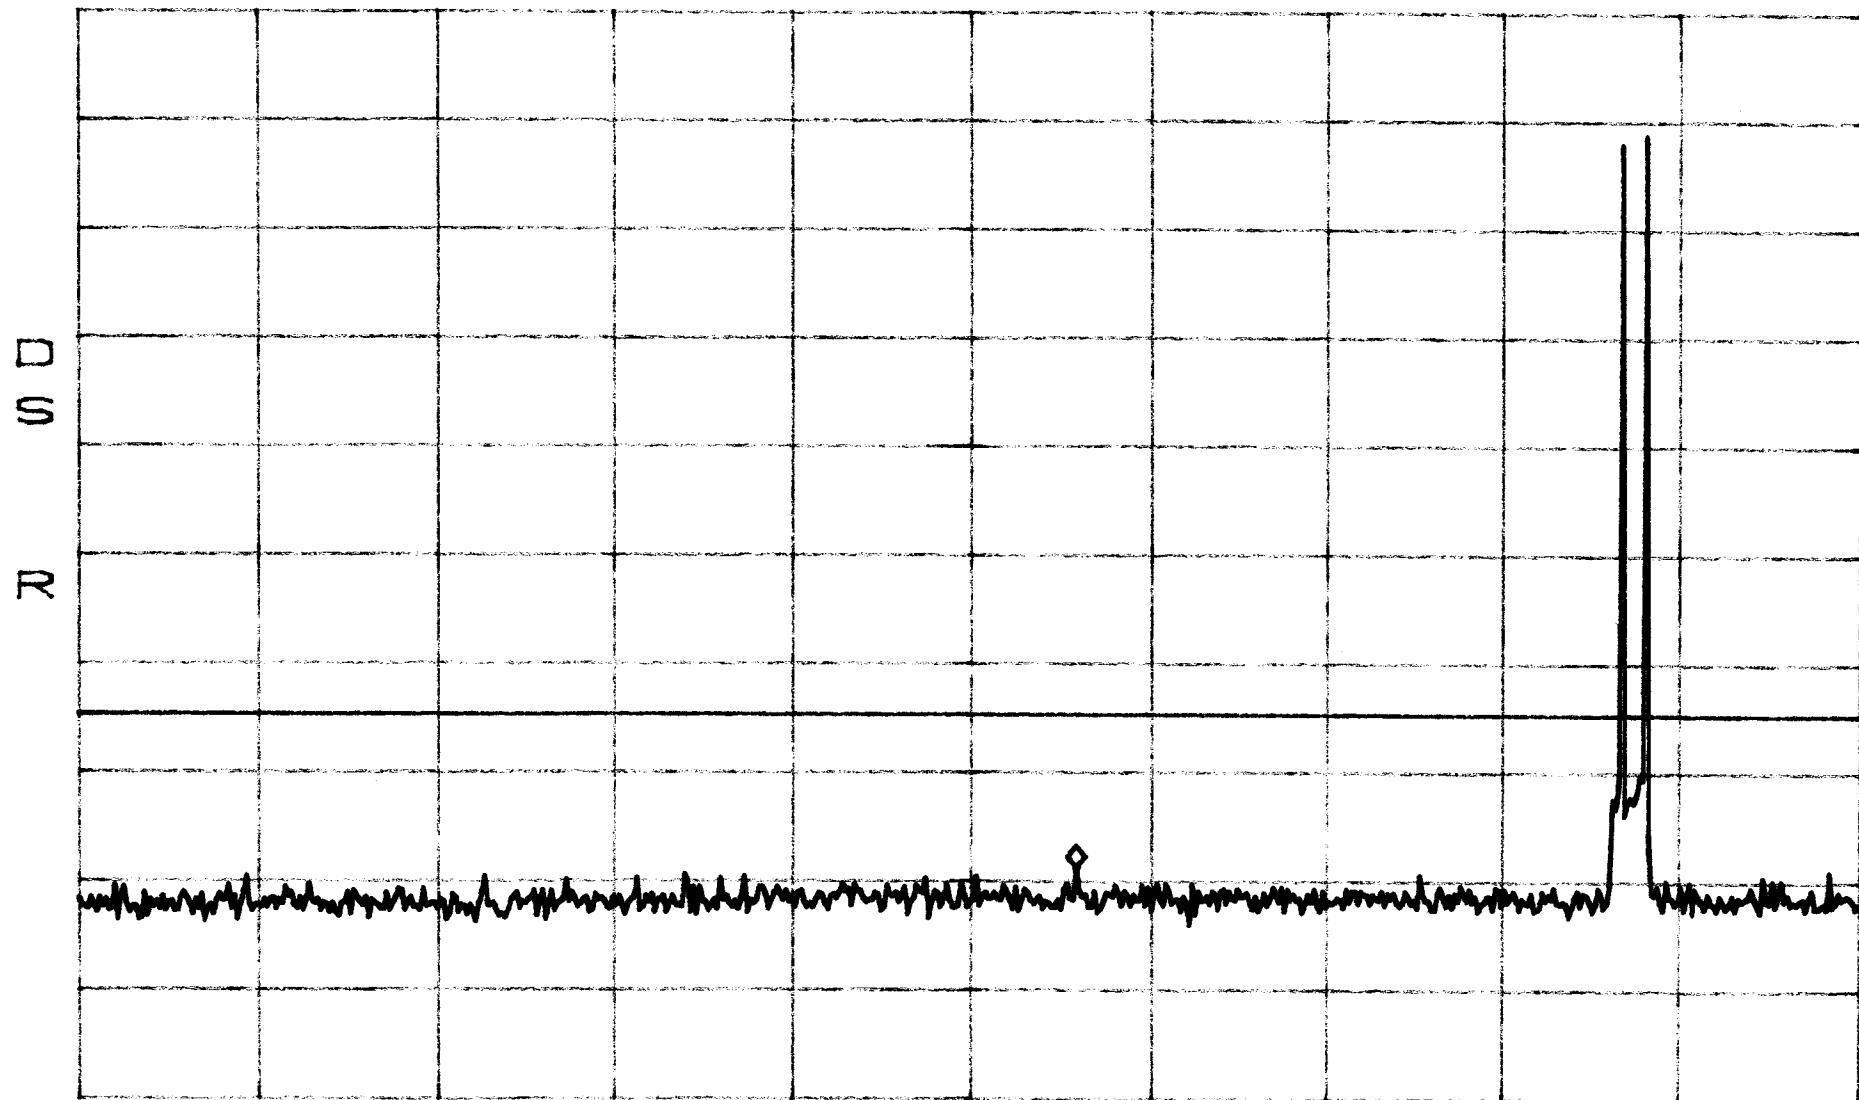

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation BAND B
Apart
FM


*ATTEN 30dB

MKR -22.37dBm

RL 51.8dBm

10dB/

2. 605GHz

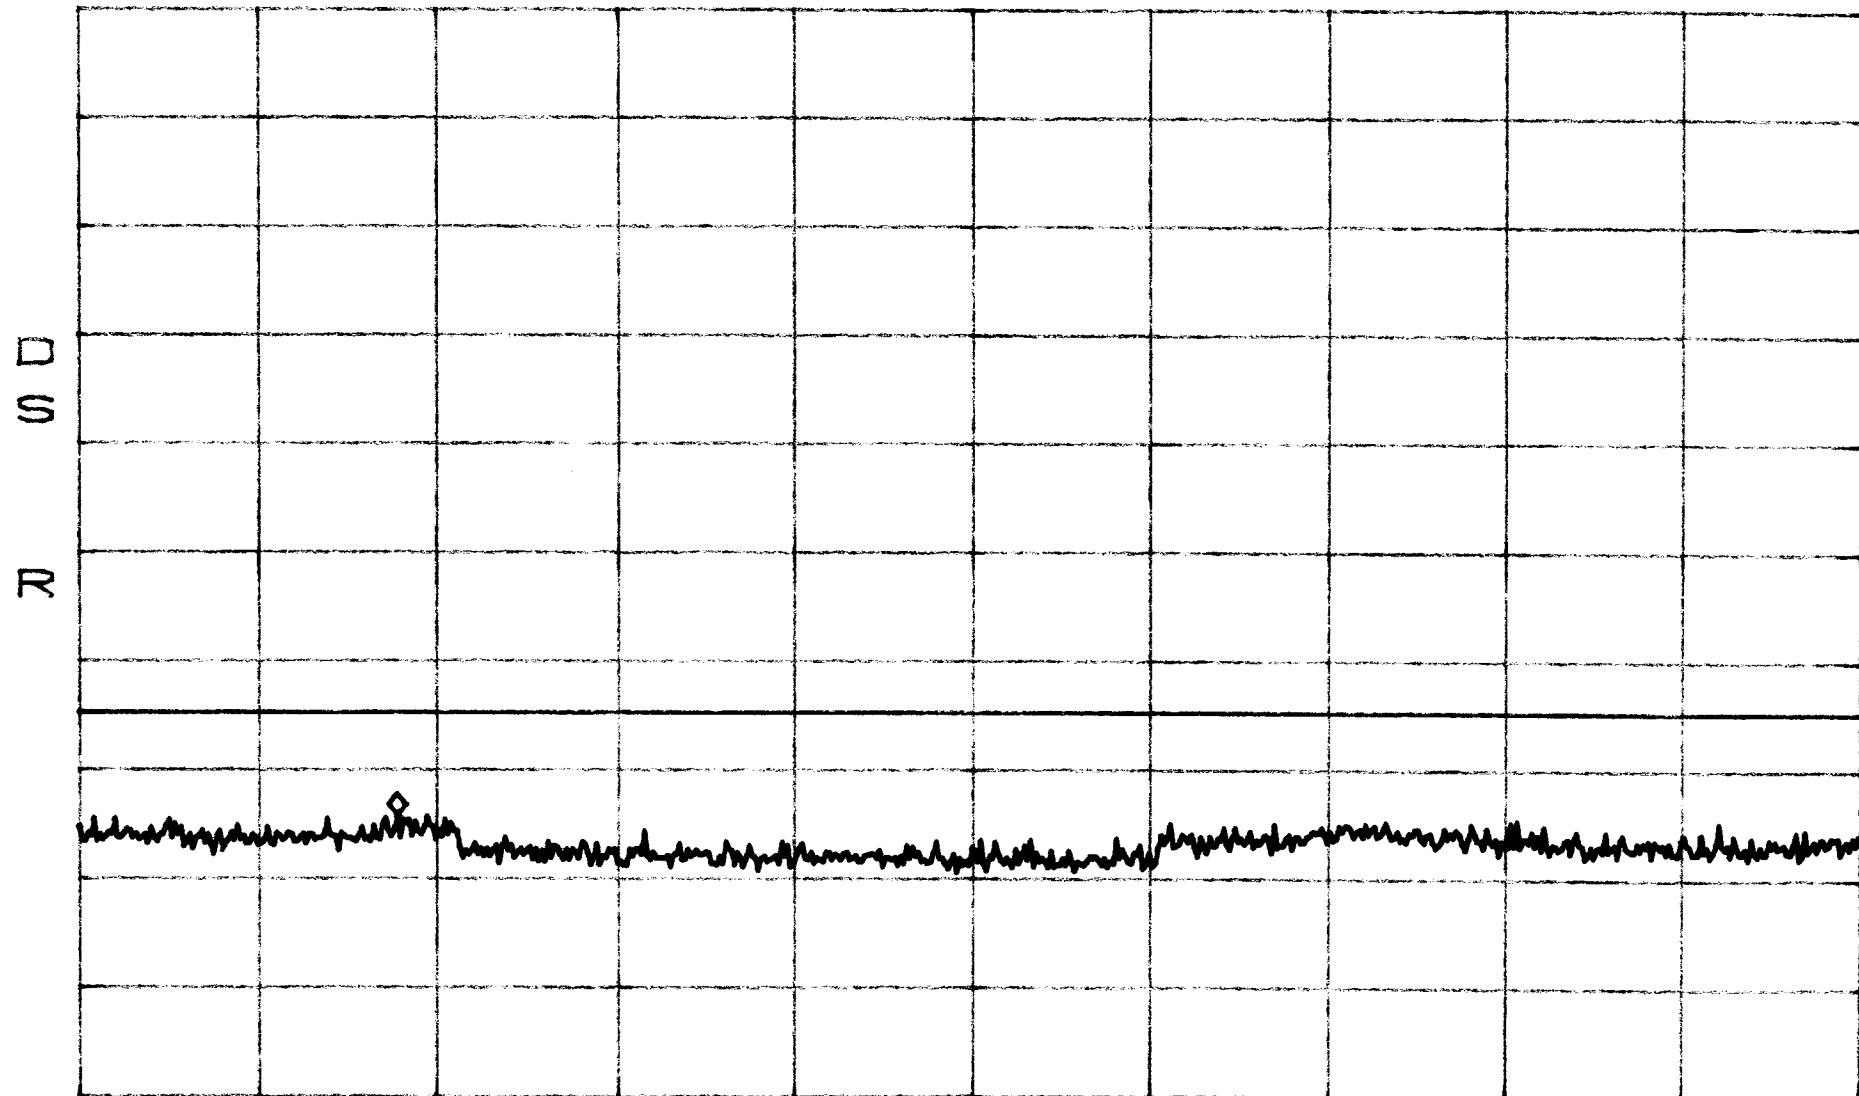

START 1. 000GHz

STOP 10. 000GHz

*RBW 100kHz

VBW 100kHz

SWP 2. 3sec

Intermodulation
Close
TDMA

BAND B


*ATTEN 30dB

MKR -19.37dBm

RL 51.8dBm

10dB/

889.75MHz

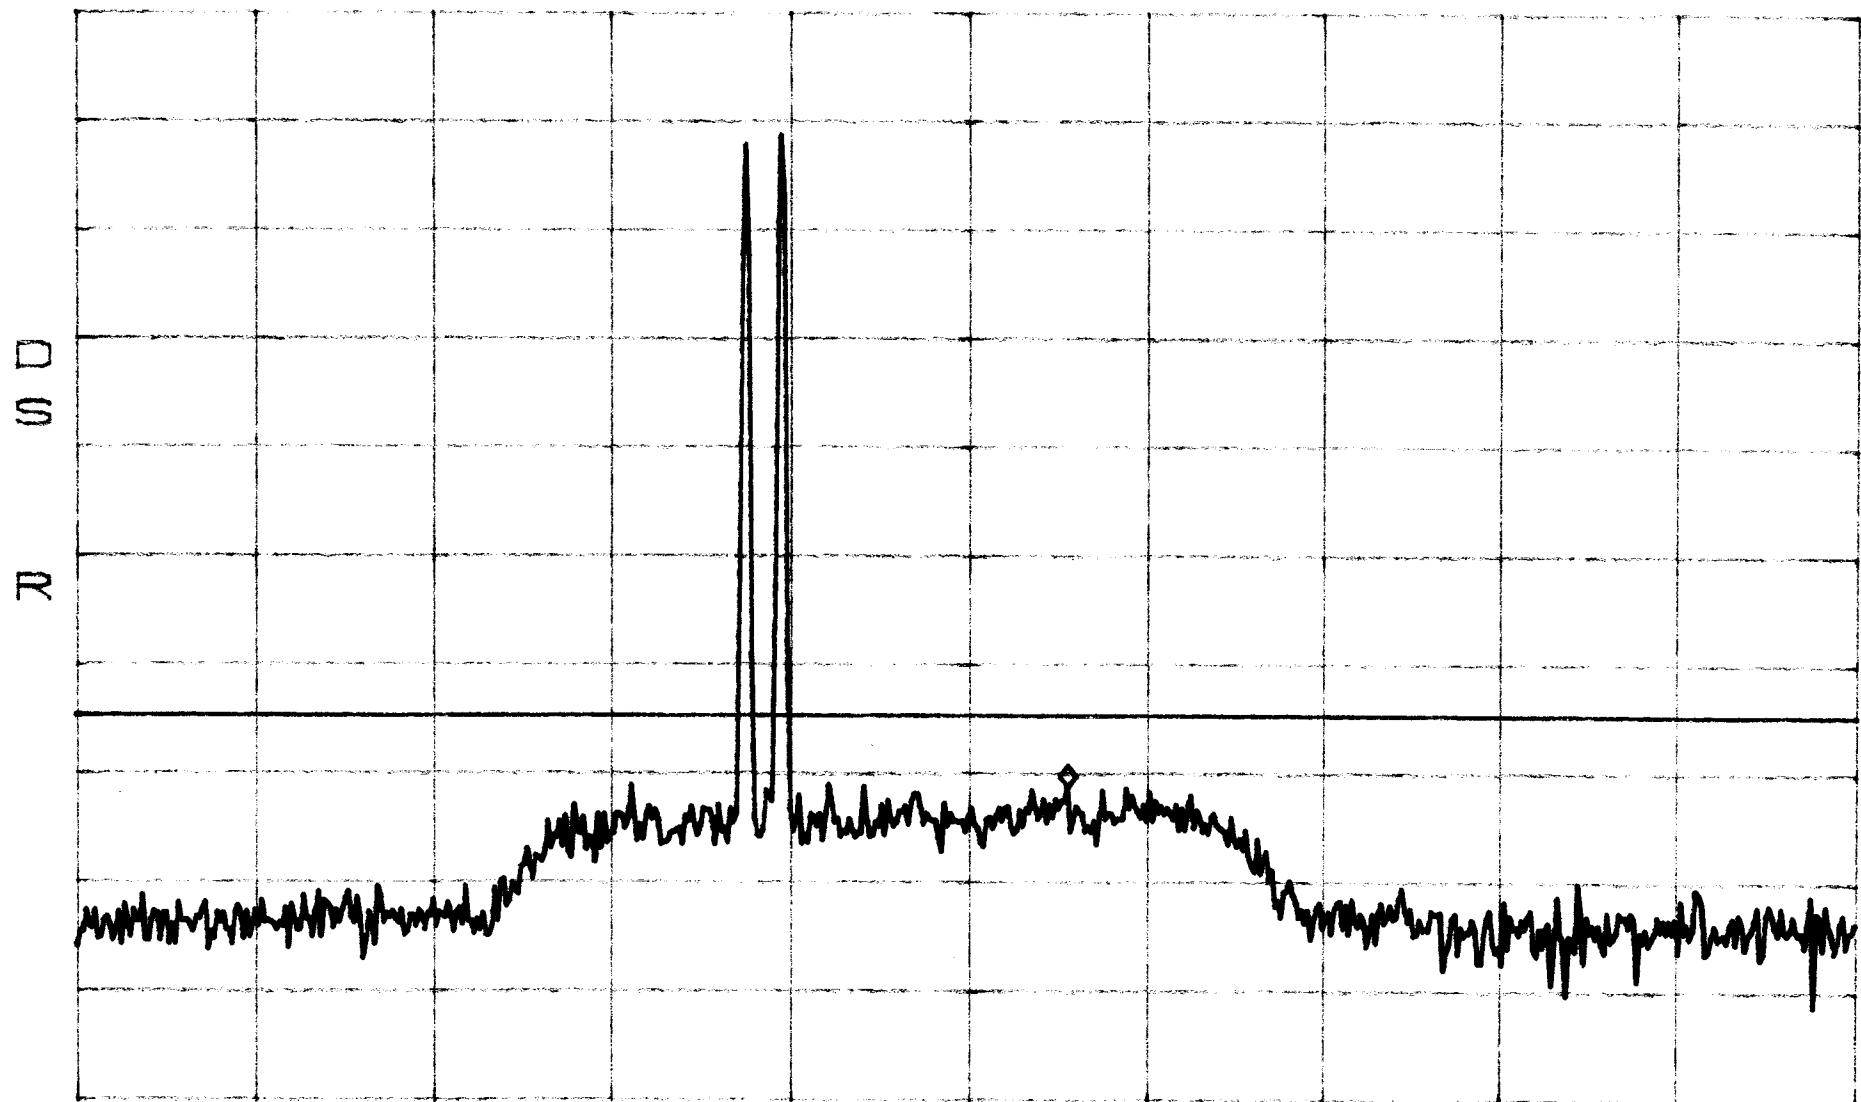

CENTER 887.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms

Intermodulation
Close
TDMA

BAND B


*ATTEN 30dB

MKR -28.37dBm

RF S1. 8dBm

10dB/

304.8MHz

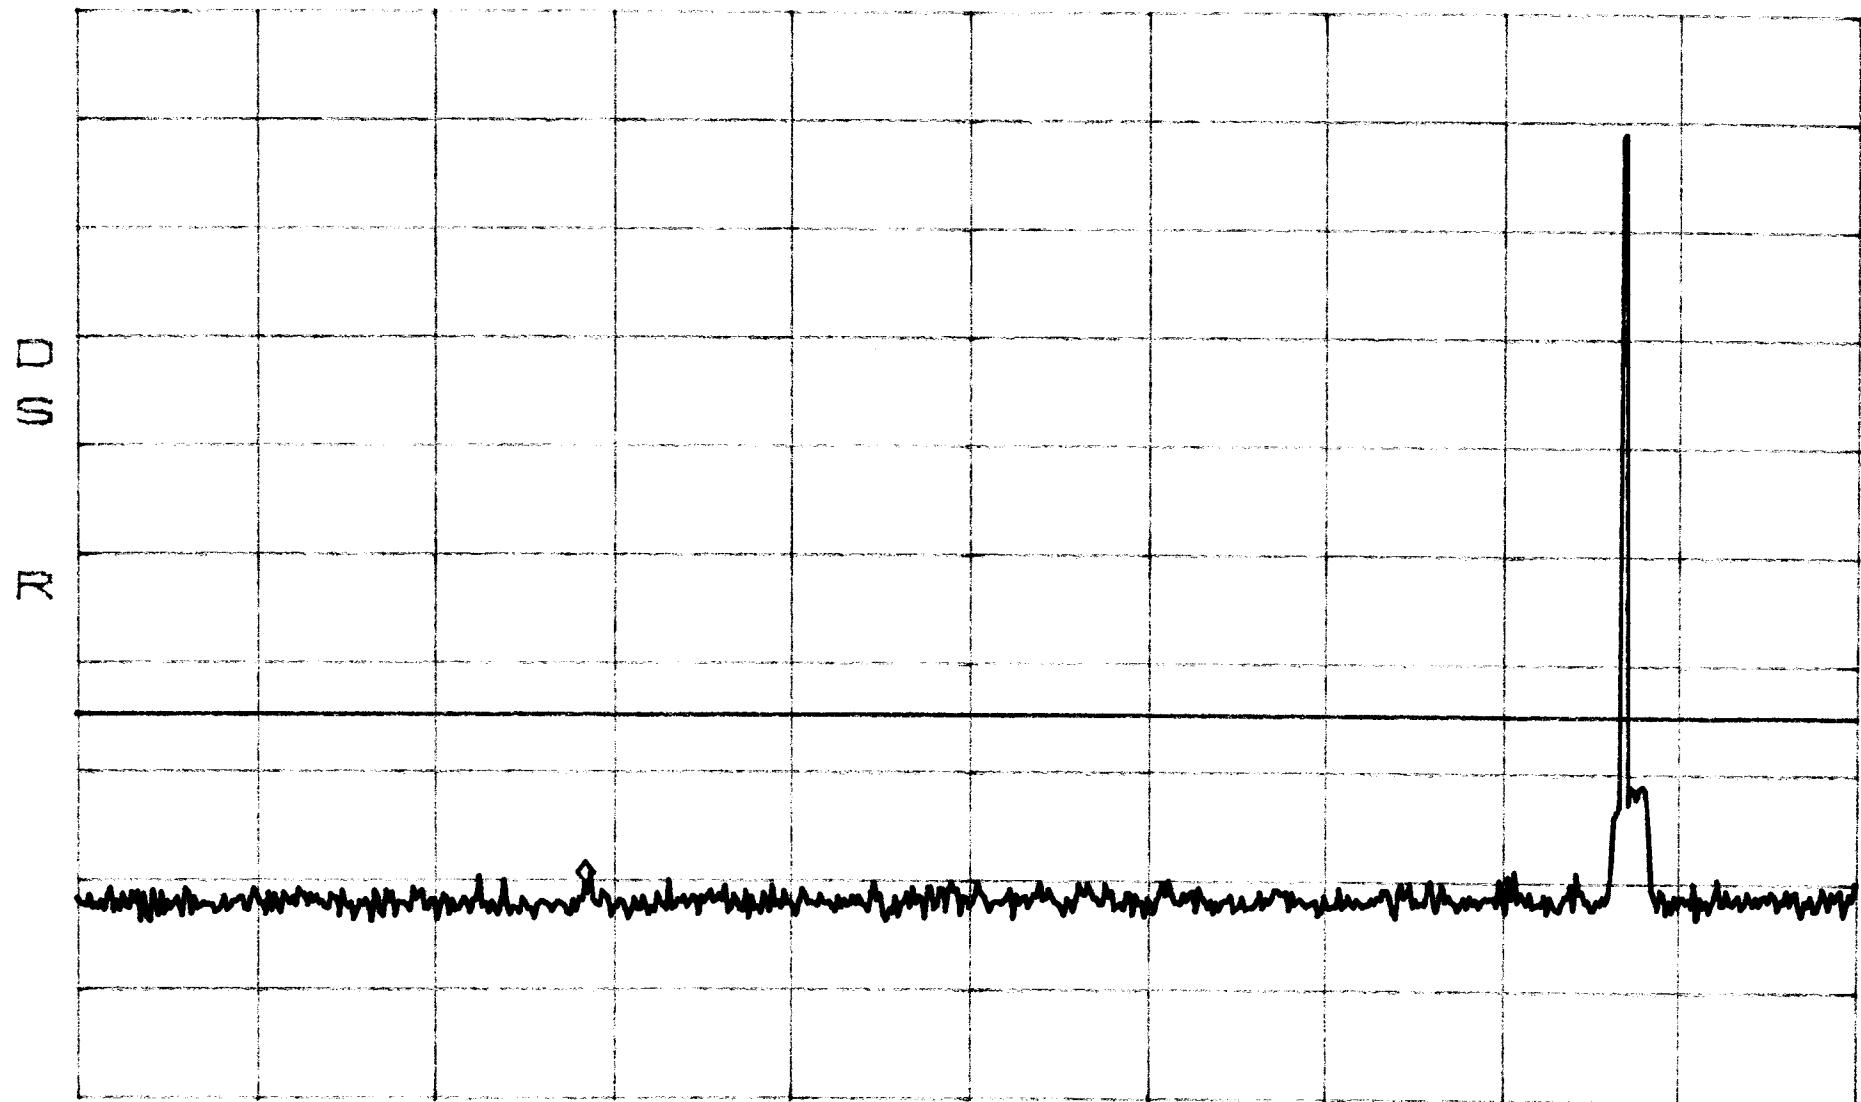

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation
Close
TDMA

BAND B


*ATTEN 30dB

MKR -21.70dBm

RL 51.8dBm

10dB/

1.165GHz

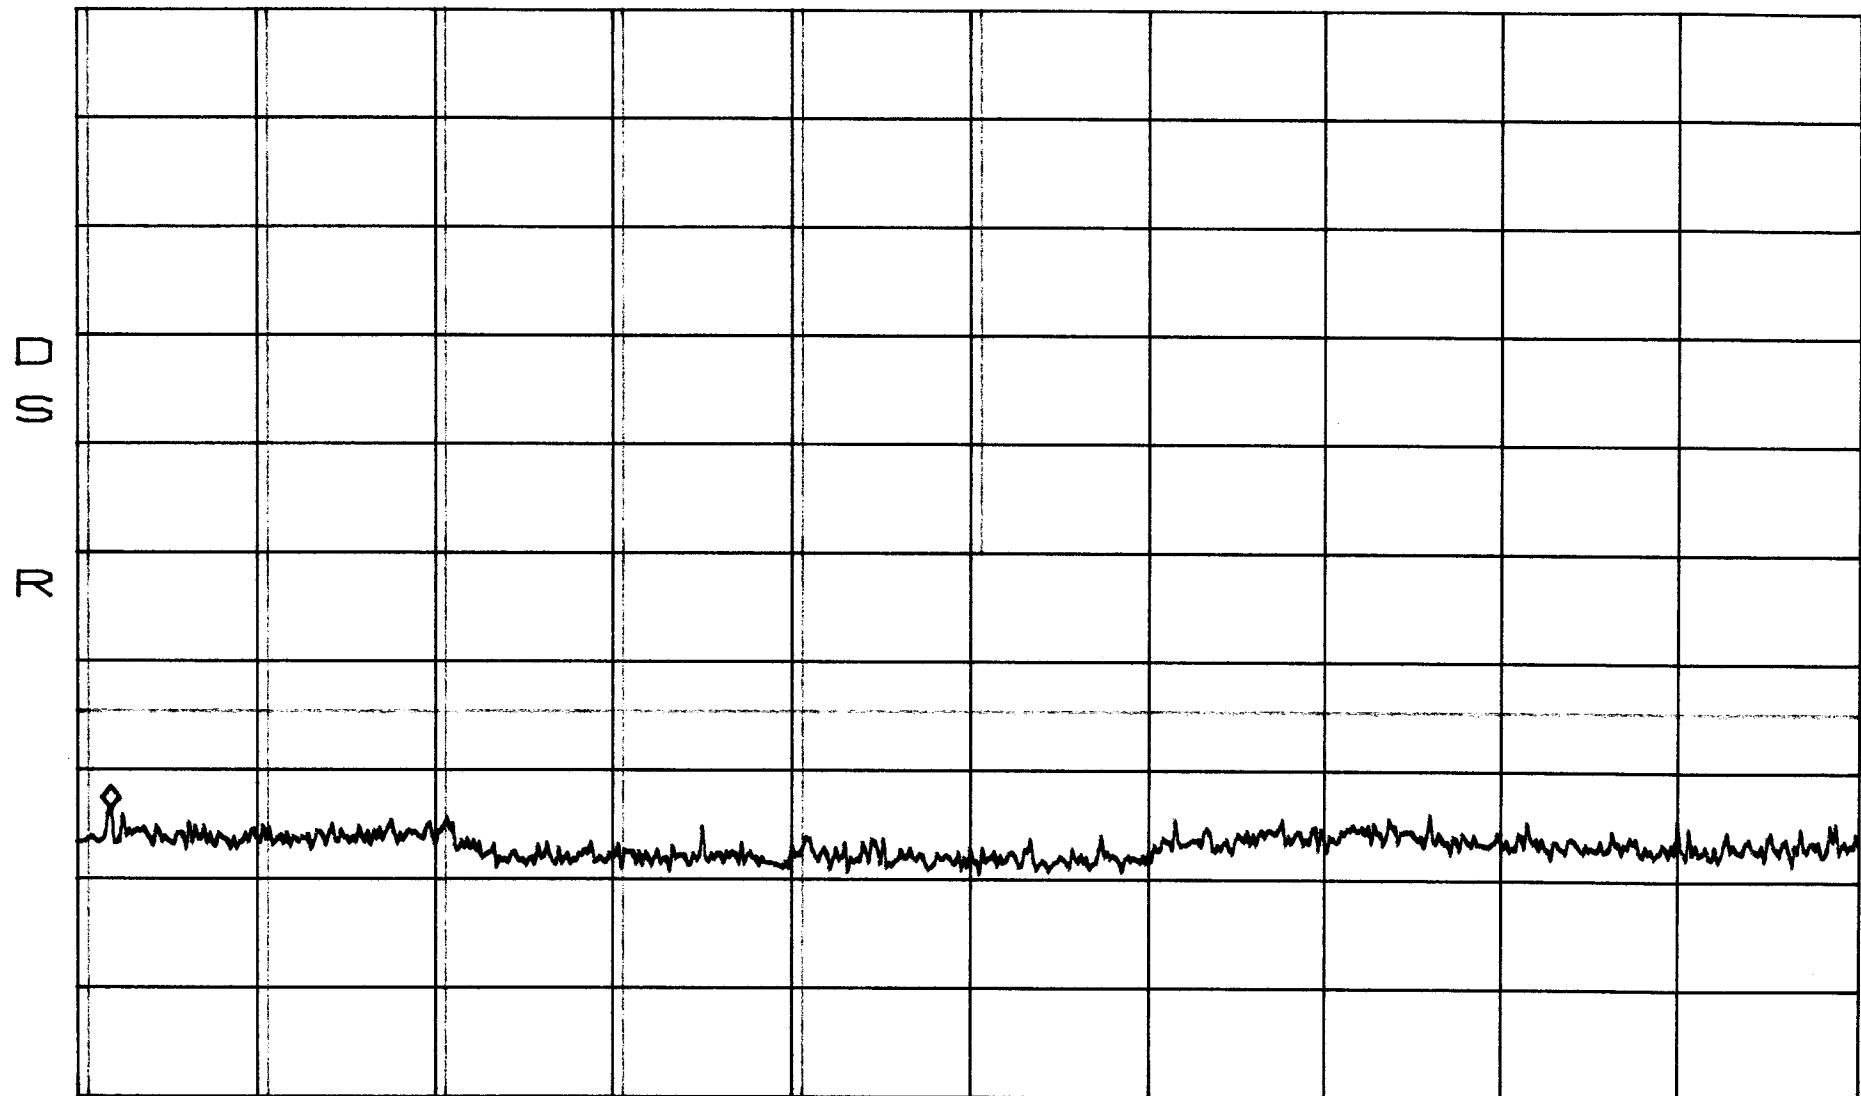

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec


Intermodulation BAND B
Apart
TDMA

*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -18.70dBm
887.08MHz

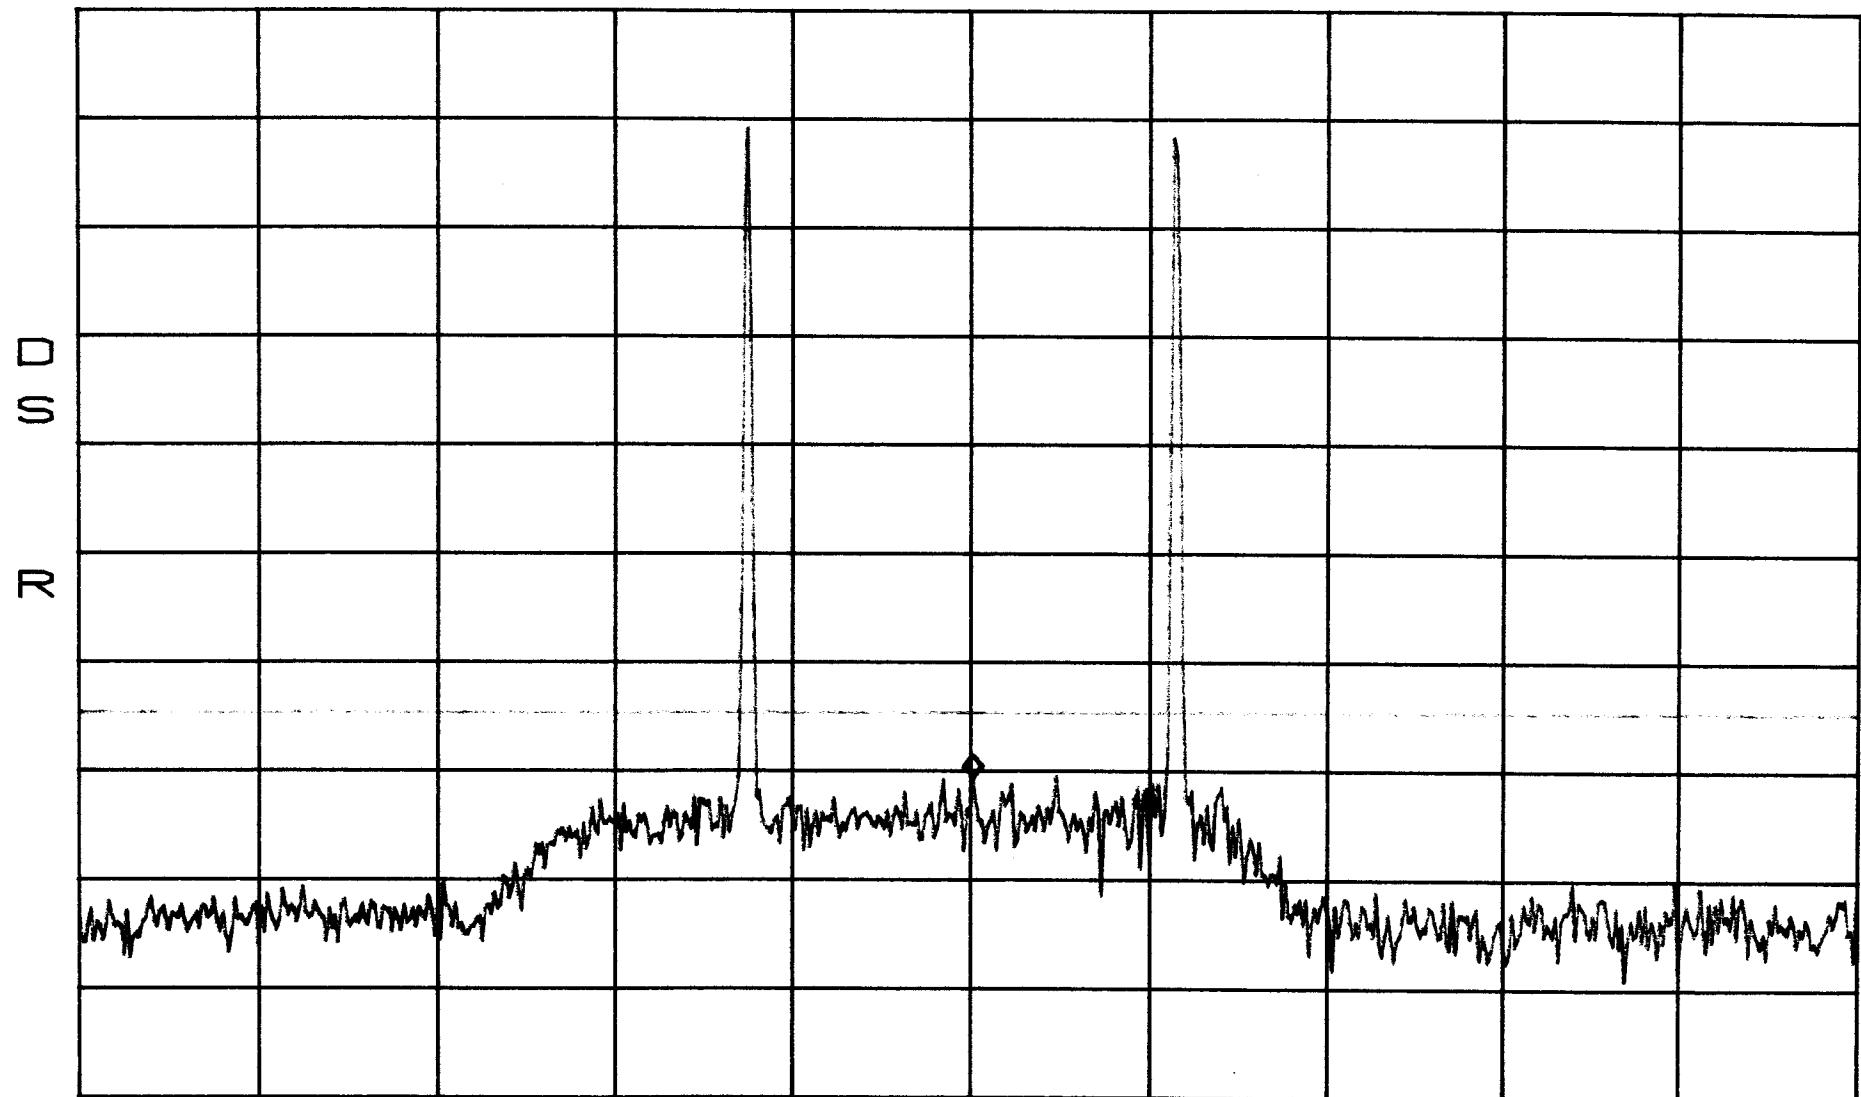

CENTER 887.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms

Intermodulation BAND B
Apart
TDMA


*ATTEN 30dB

MKR -26.53dBm

RL 51.8dBm

10dB/

741.3MHz

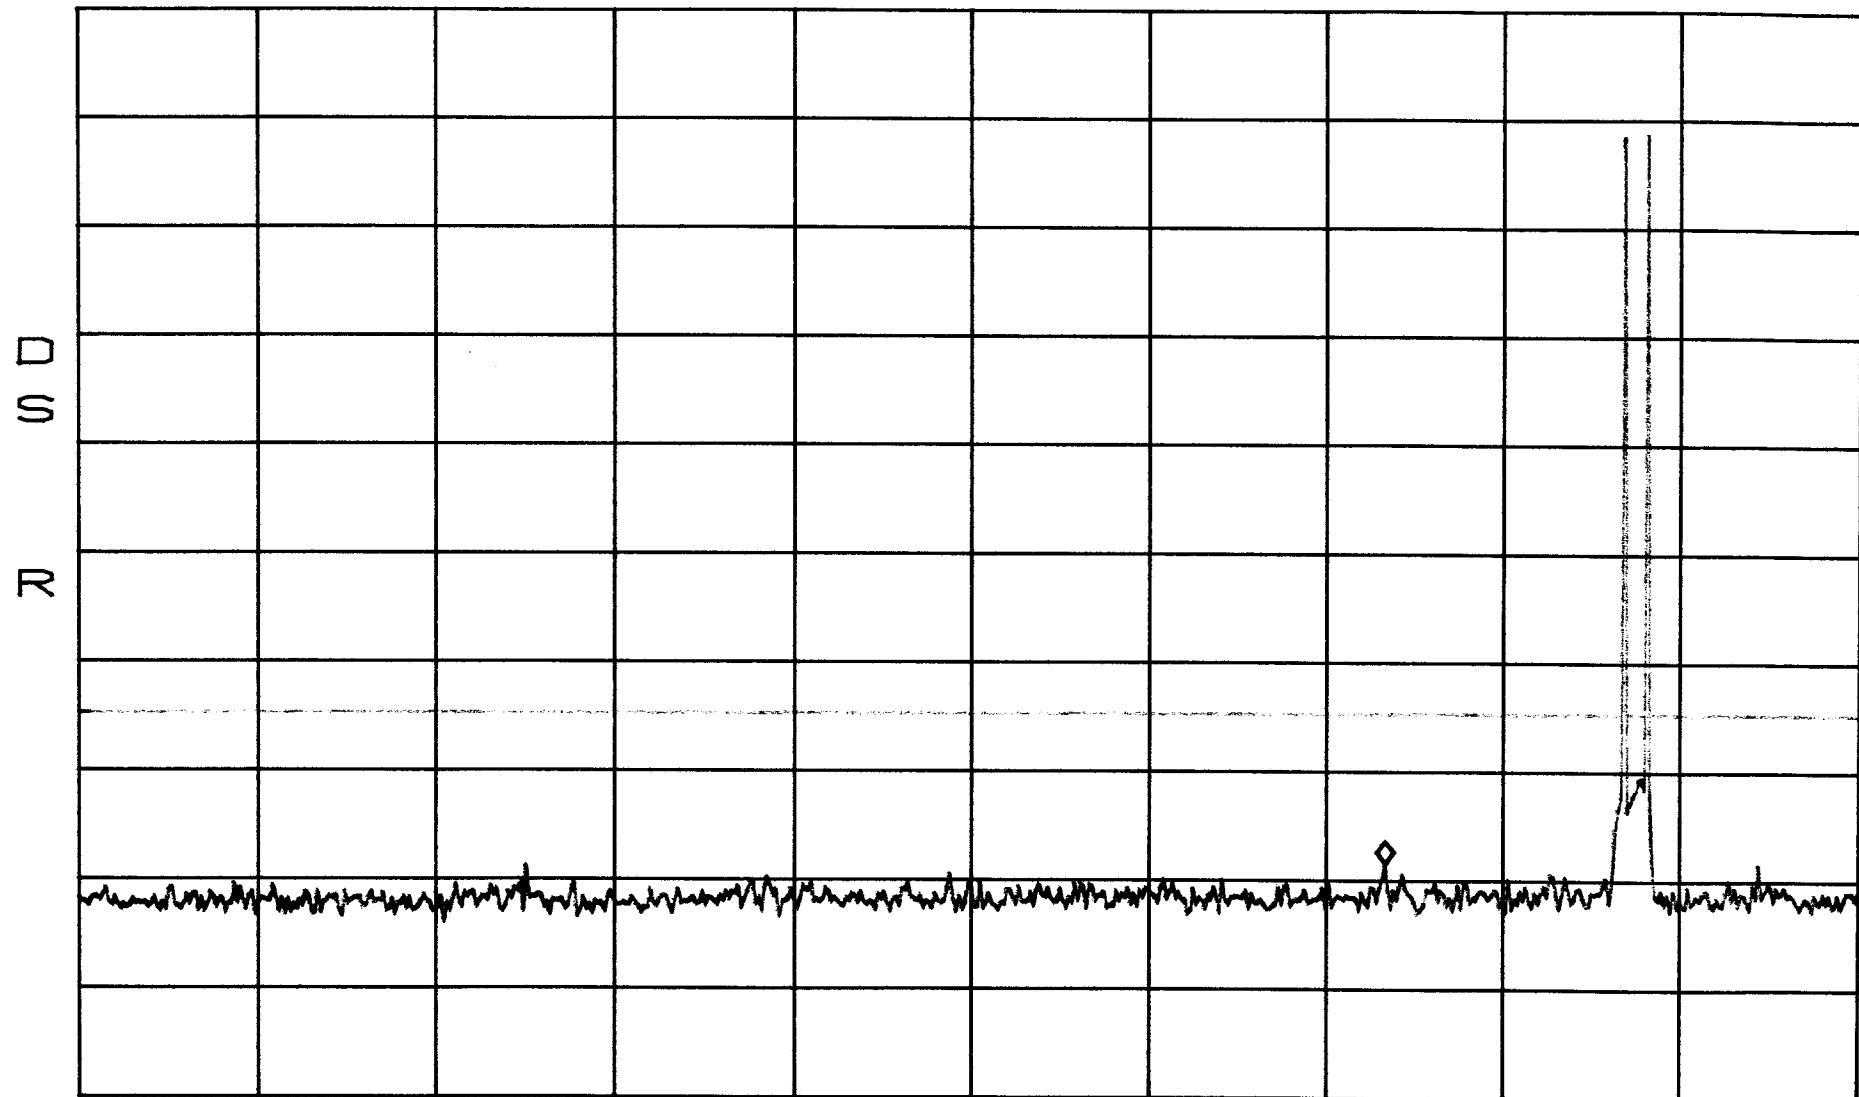

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation BAND B
Apart
TDMA


*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -22.03dBm

1.945GHz

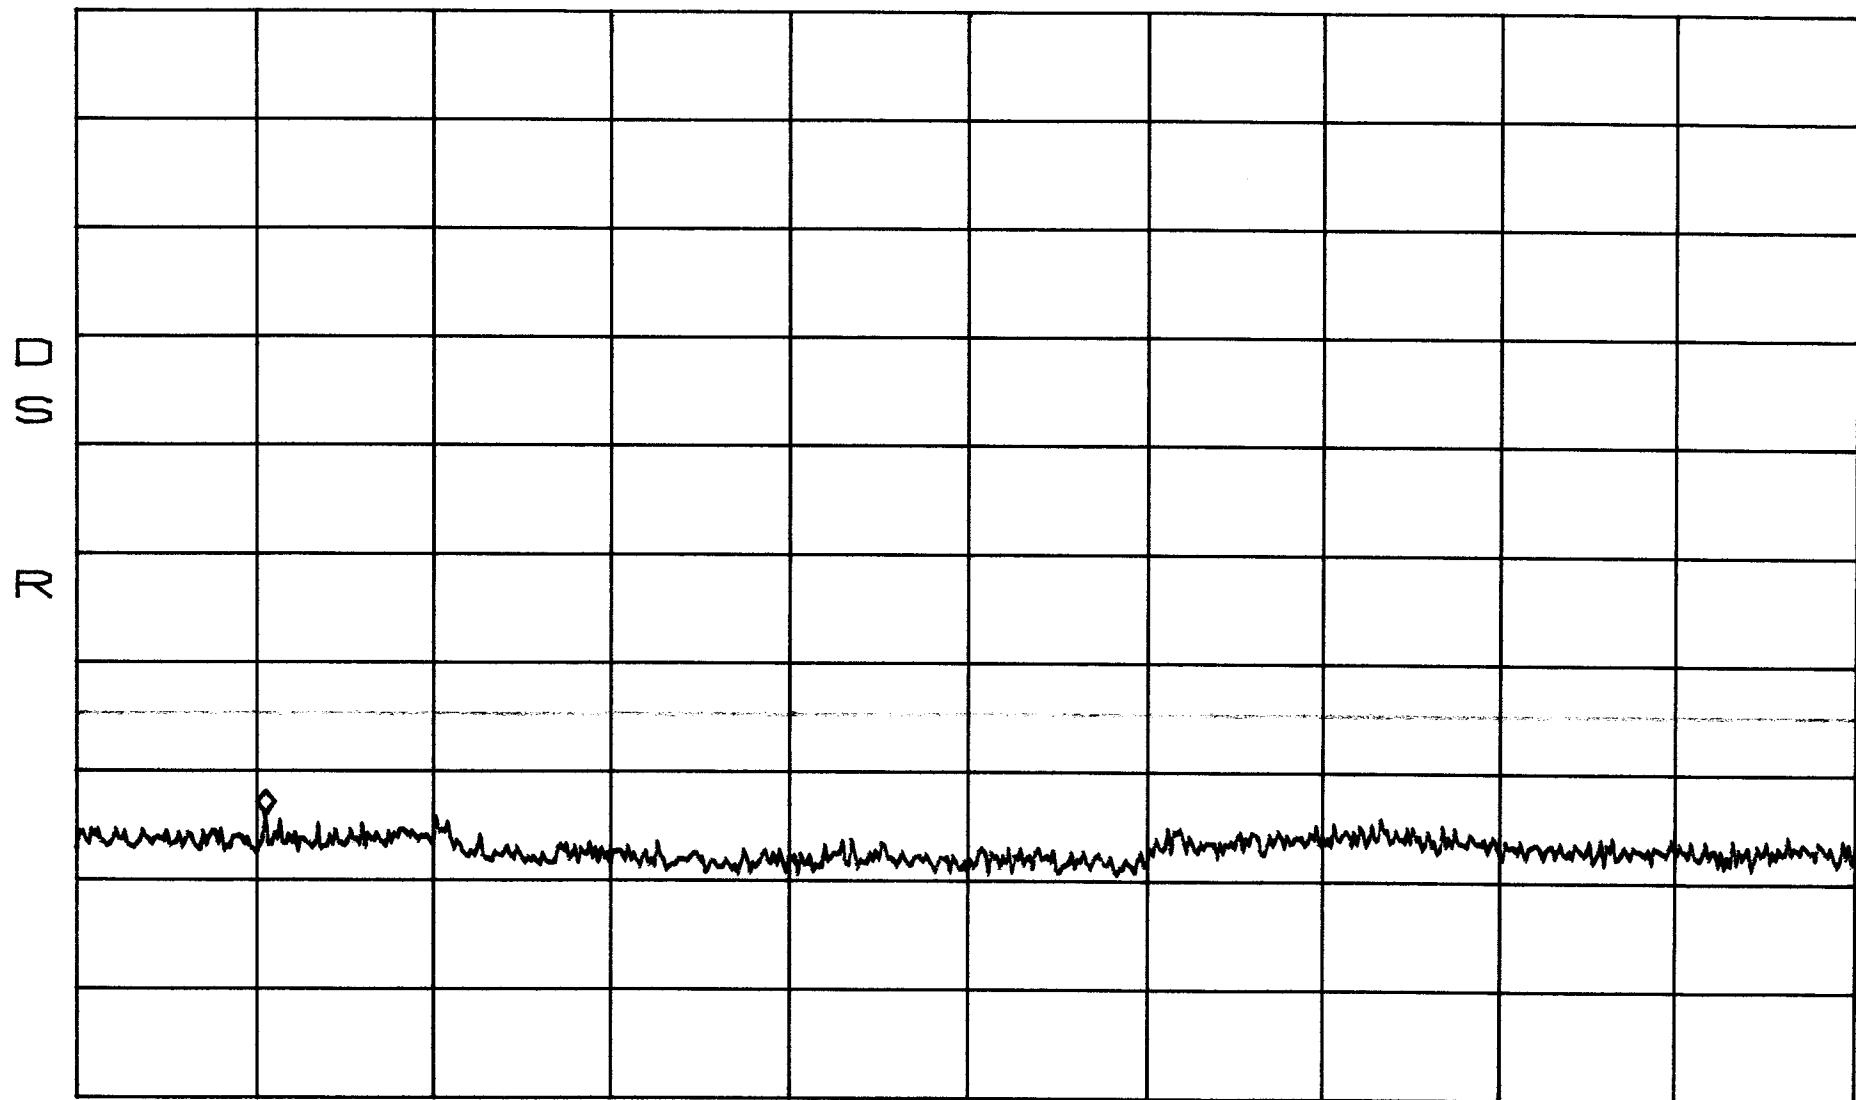

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec

Intermodulation
Close
CDMA

BAND B


*ATTEN 30dB

MKR -14.87dBm

RL 51.8dBm

10dB/

885.08MHz

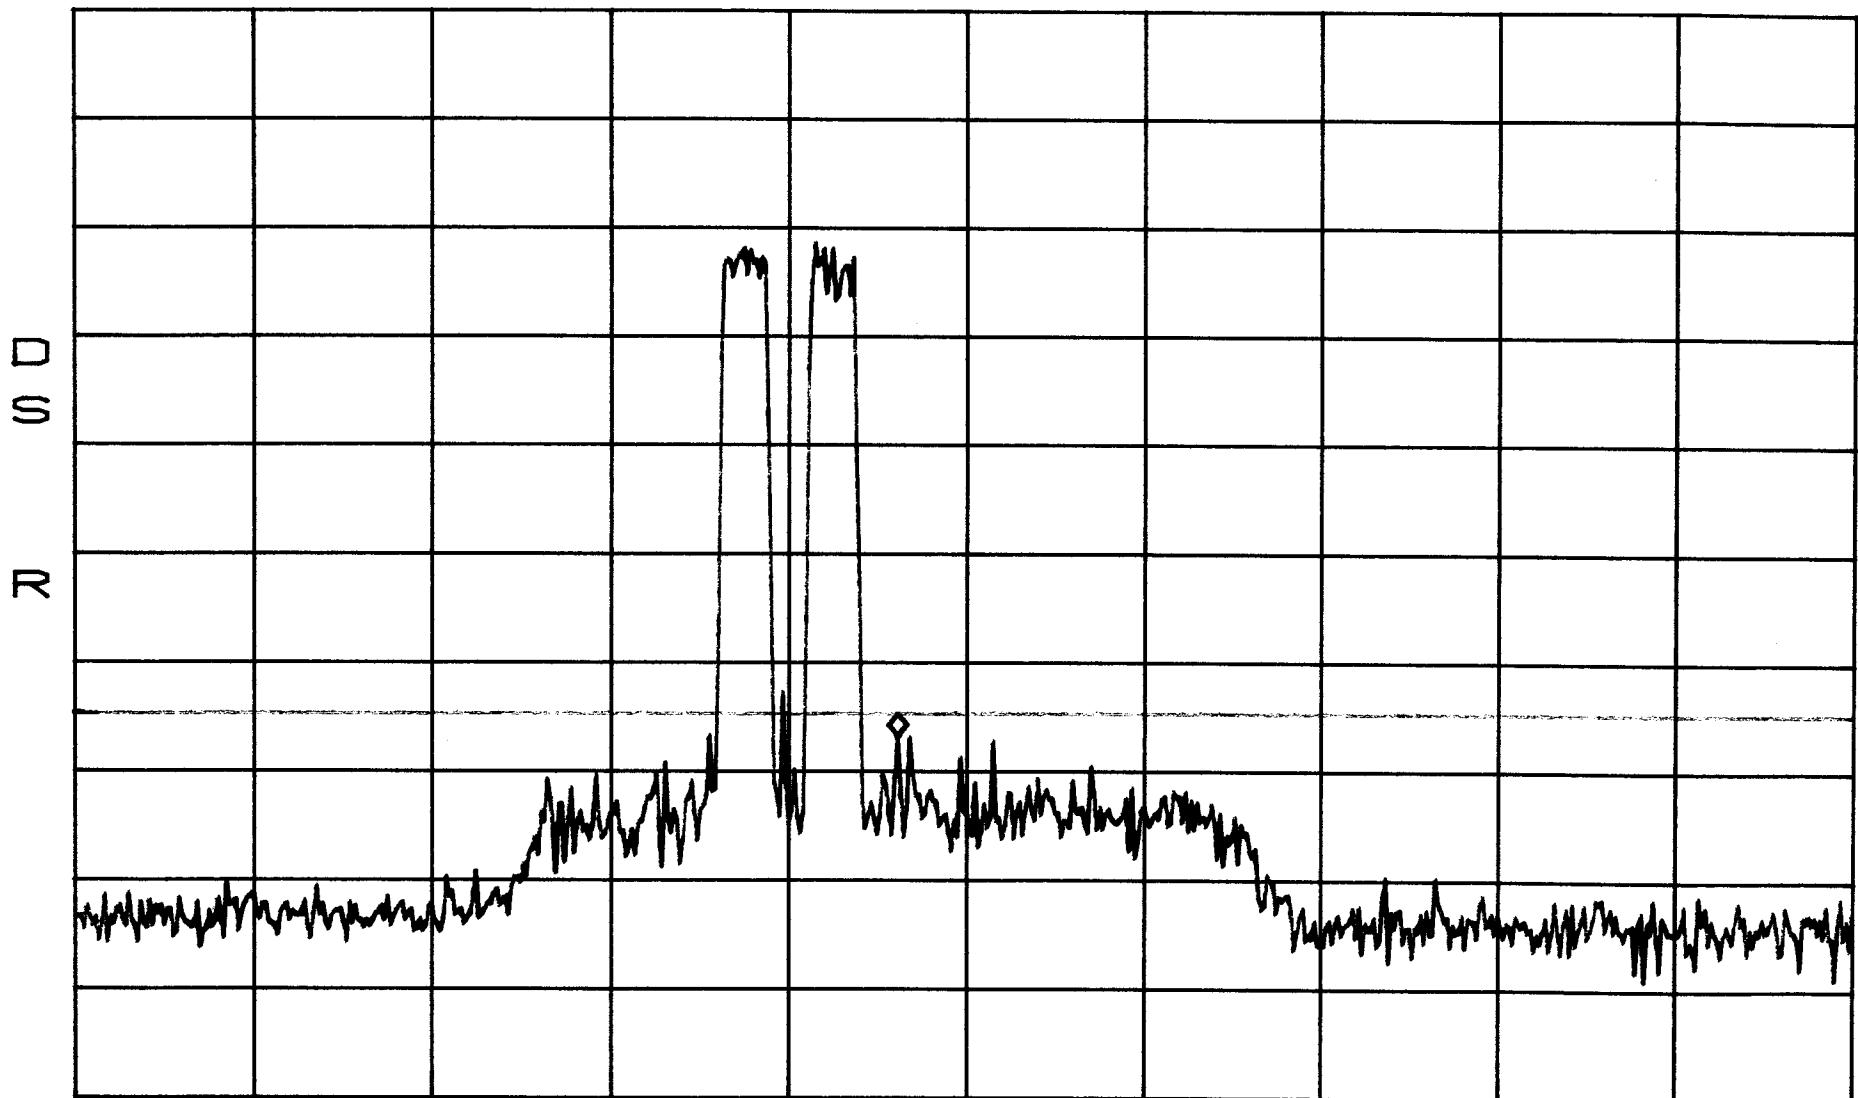

*RBW 30kHz

VBW 30kHz

SPAN 50.00MHz
SWP 140ms

Intermodulation
Close
CDMA

BAND B


*ATTEN 30dB

MKR -26.53dBm

RL 51.8dBm

10dB/

498.8MHz

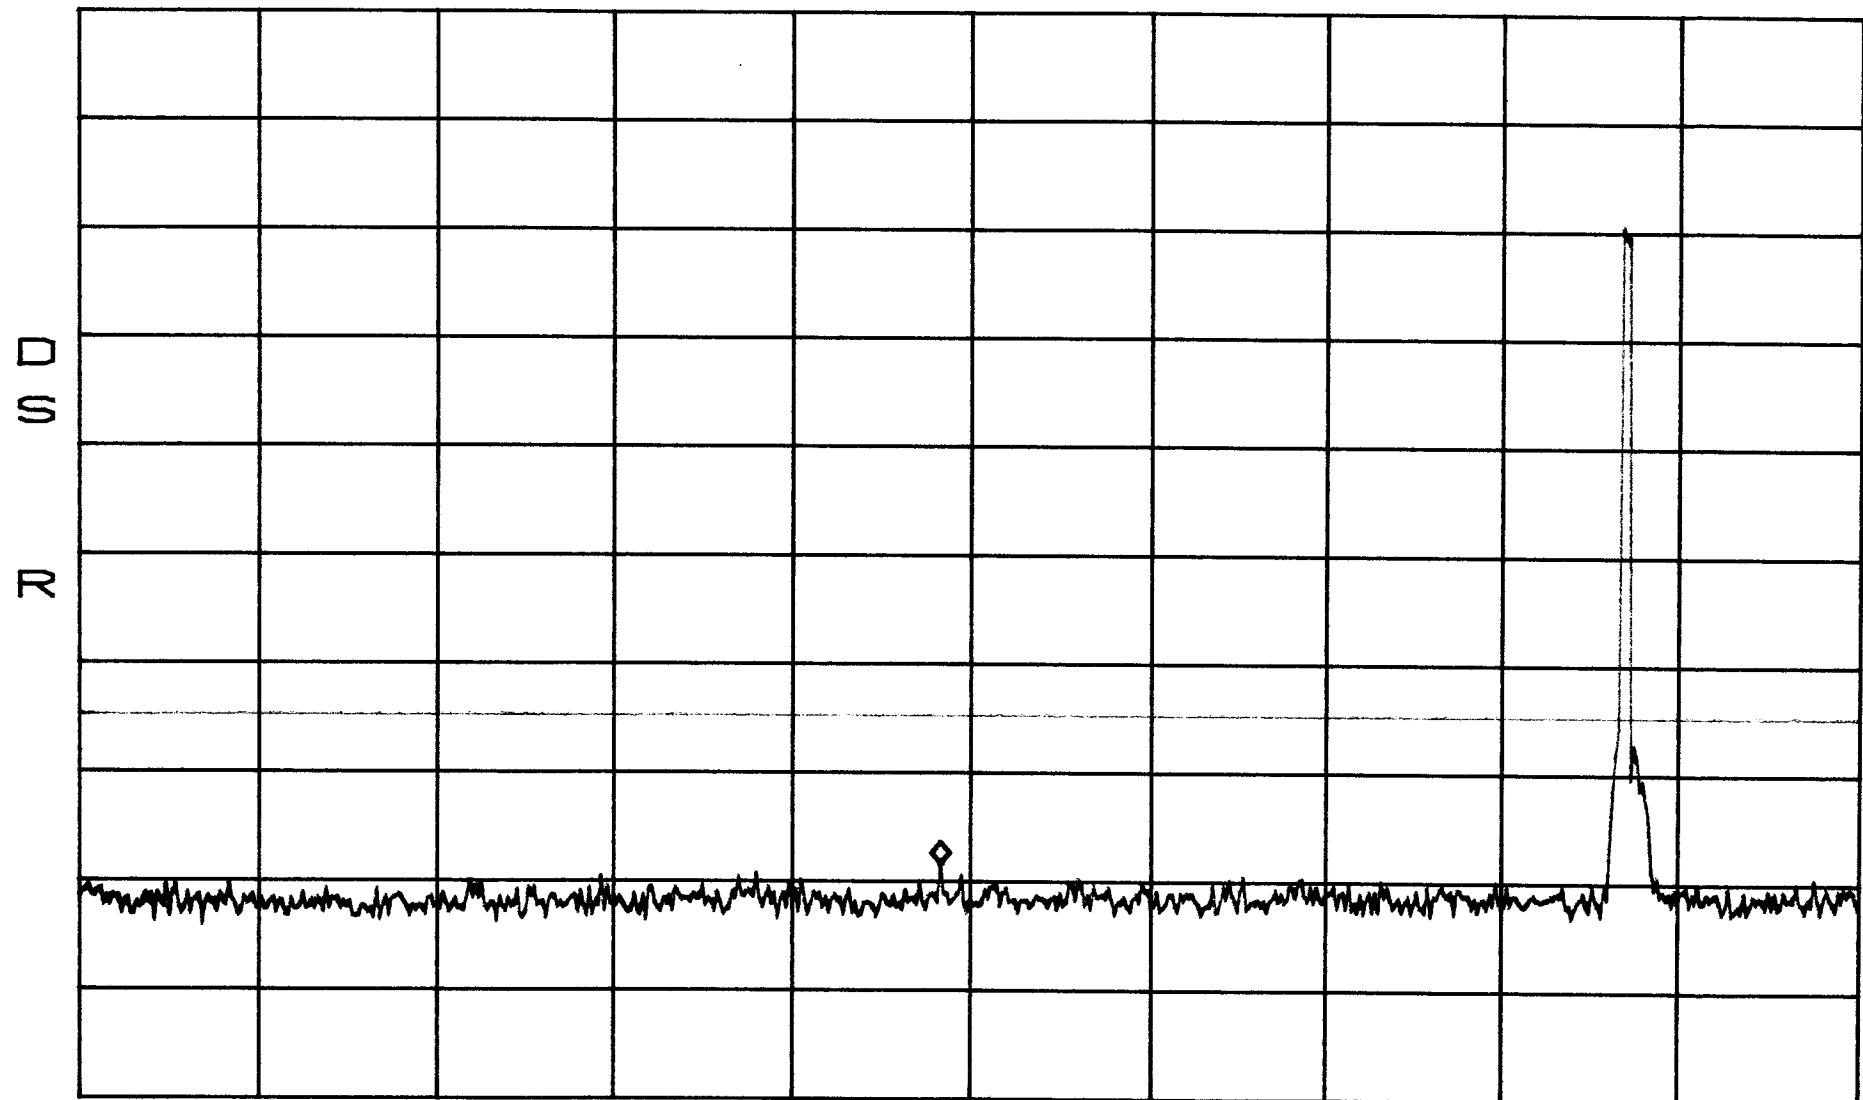

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation
Close
CDMA

BAND B


*ATTEN 30dB

MKR -21.53dBm

RL 51.8dBm

10dB/

2.590GHz

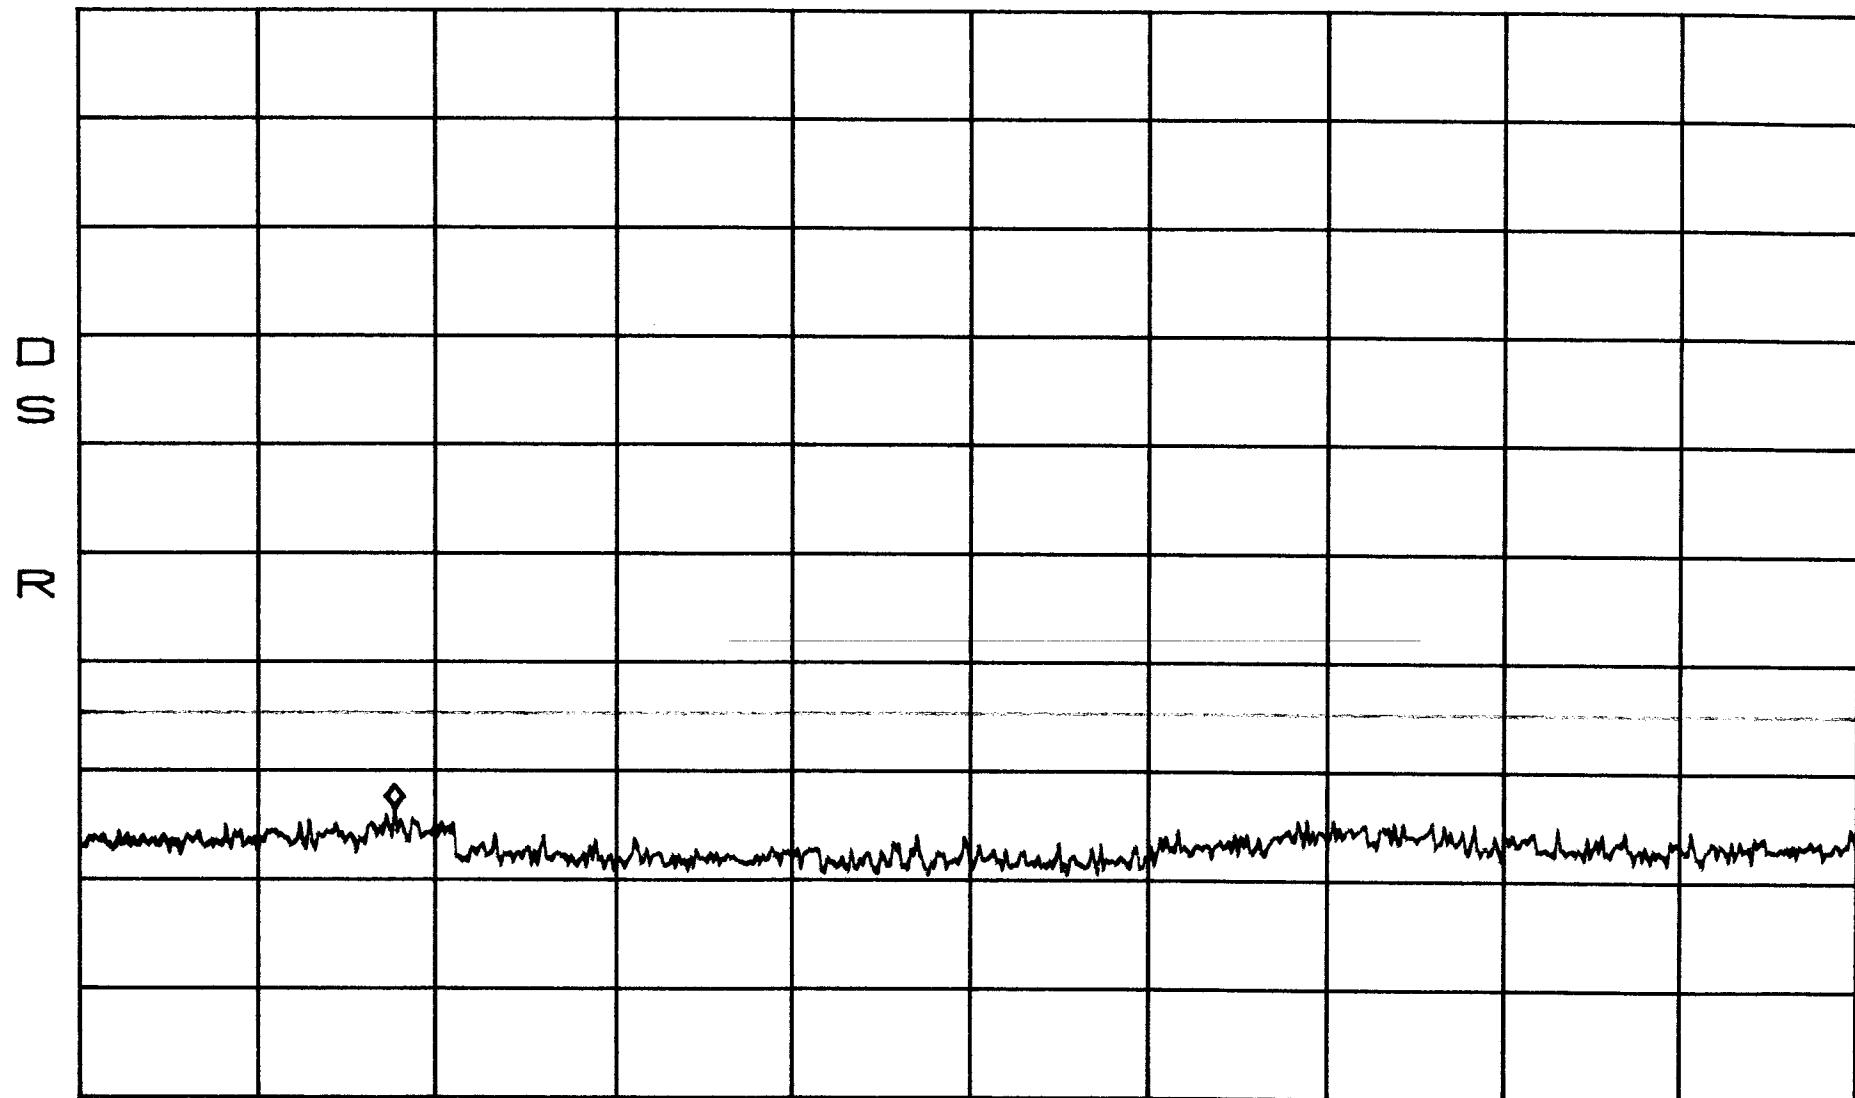

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec

Intermodulation
Apart
CDMA


*ATTEN 30dB

BAND B

RL 51.8dBm

MKR -14.37dBm
879.17MHz

10dB/

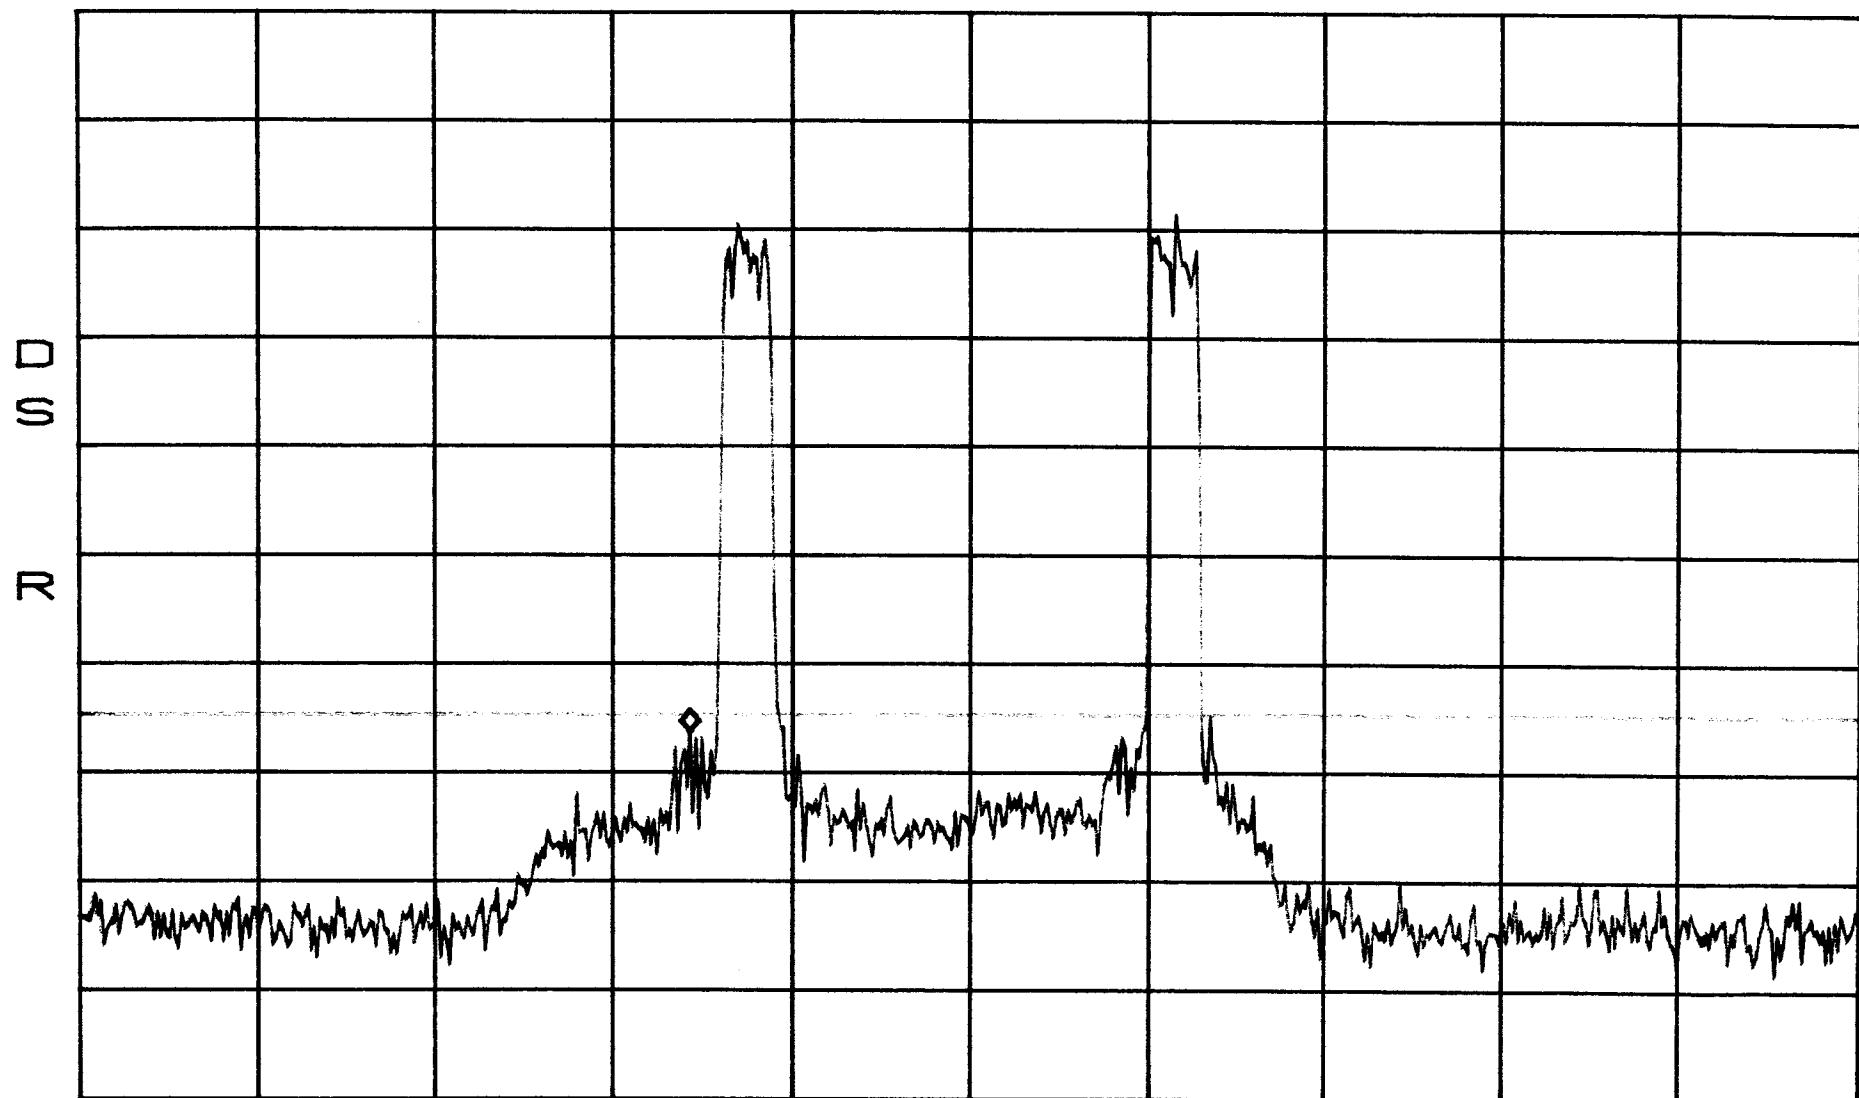

CENTER 887.00MHz

SPAN 50.00MHz

*RBW 30kHz

VBW 30kHz

SWP 140ms


Intermodulation
Apart
CDMA

*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -26.70dBm
343.6MHz

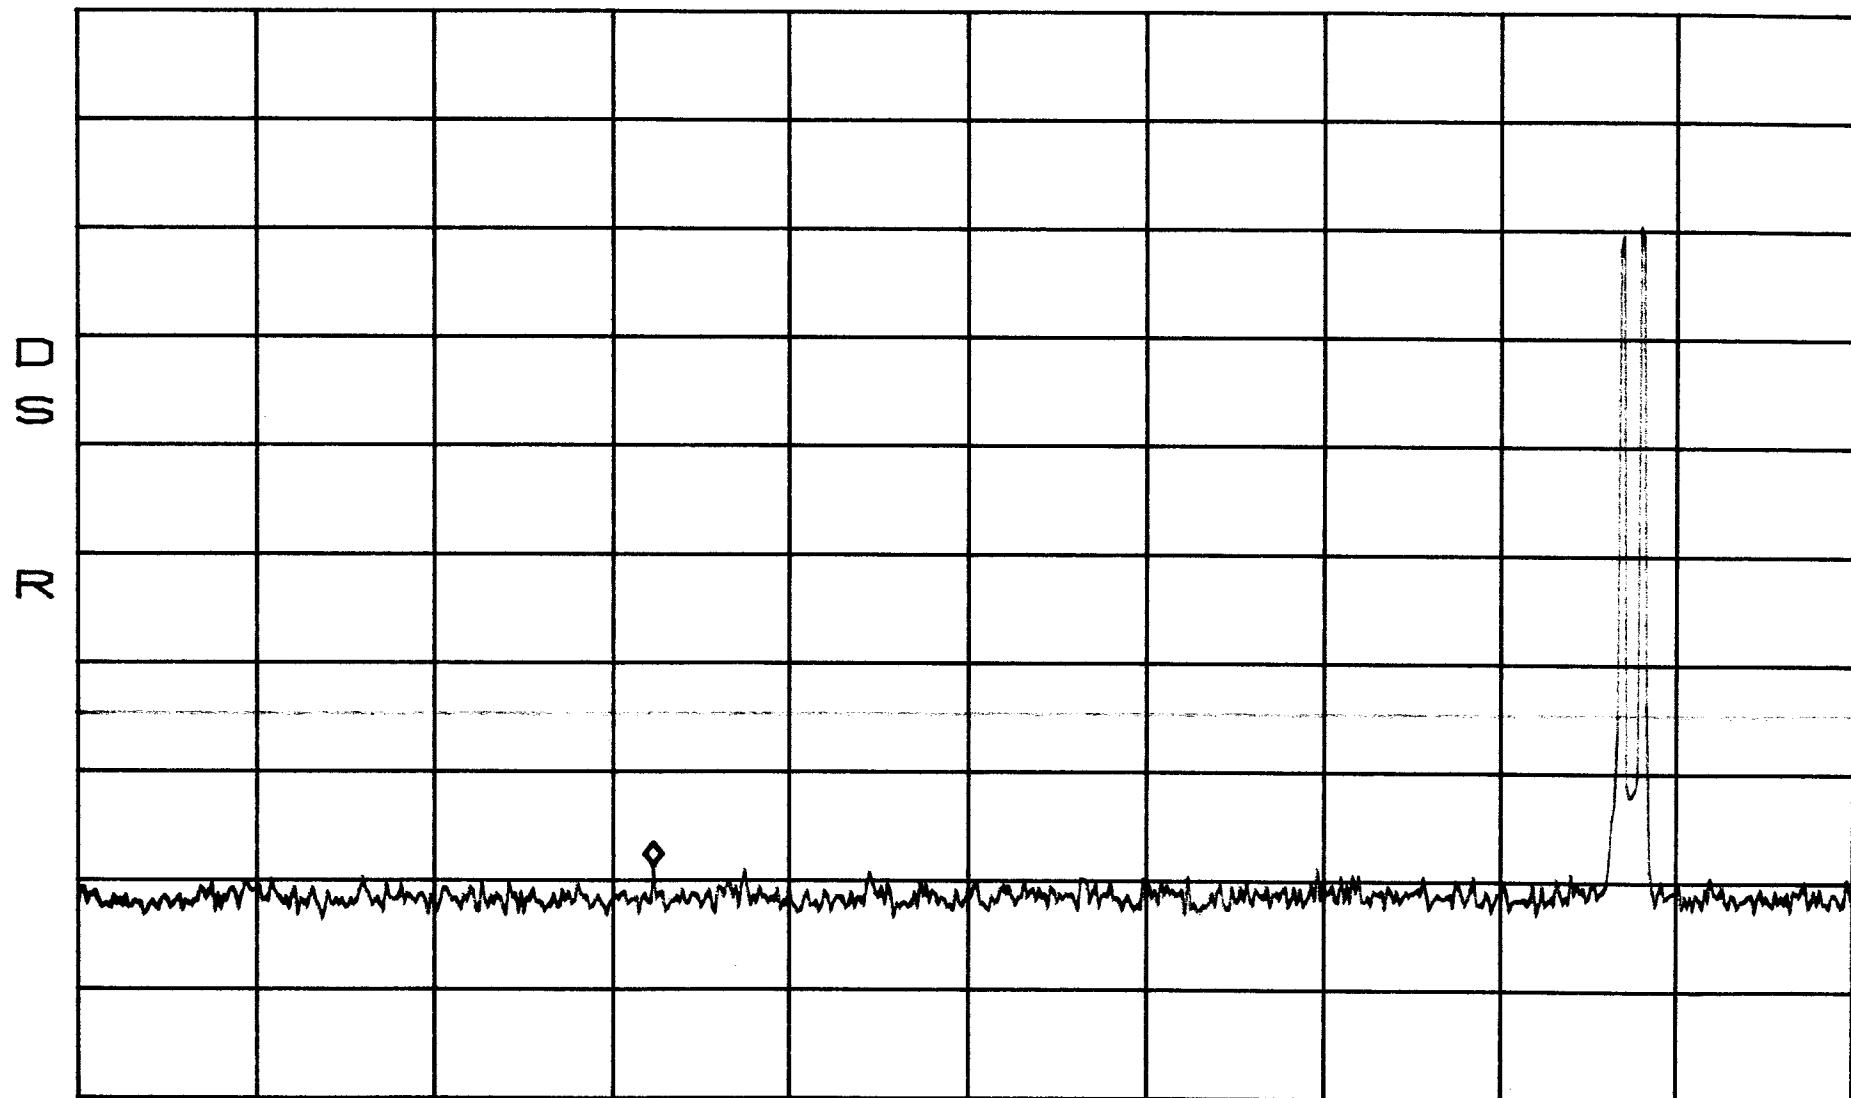

START 30.0MHz

STOP 1.0000GHz

*RBW 30kHz

VBW 30kHz

SWP 2.7sec

Intermodulation
Apart
CDMA


*ATTEN 30dB

BAND B
MKR -22.03dBm

RL 51.8dBm

10dB/

2.635GHz

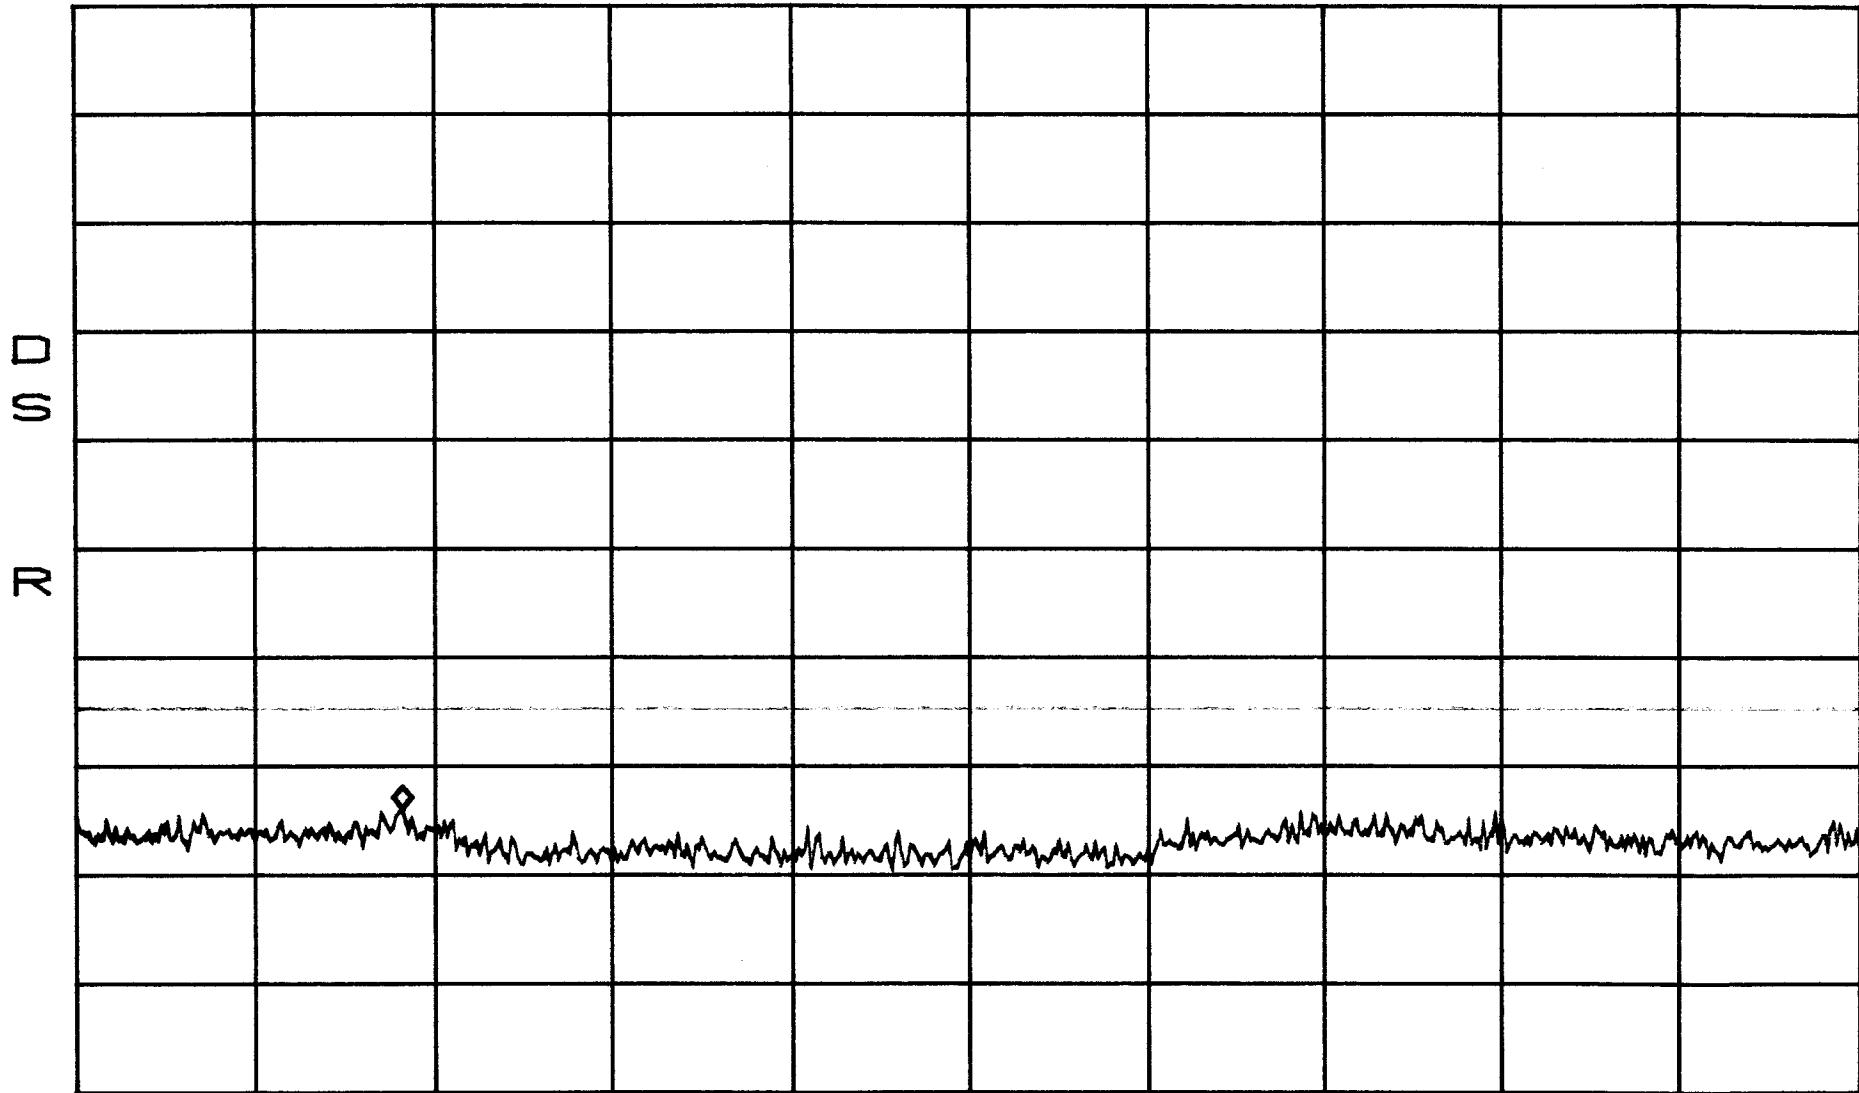

START 1.000GHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.3sec

CDMA Mask Test for ADC Inc.
Digivance 800 MHz 20 Watt System
Model Numbers DGVL-116100SYS and DGVL-126100SYS.

For the CDMA modulation type emission mask test, the average value of the center frequency will be 16.23dB down from the CW peak power. On any frequency removed from the center carrier frequency by up to 750 kHz the emissions are at or below 16.23dB below the peak power. On any frequency between 750 kHz and 1.98 MHz the emissions are below 45dB below the peak power. On any frequency removed from the carrier frequency by more than 1.98 MHz the emissions are below 60dB below the peak power. The test was performed at the low, mid, and high parts of the respective A and B Cellular bands.

Results:

Pass (see plots)

CDMA MASK Band A
Low

*ATTEN 30dB VAVG 100 MKR 24.13dBm
RL 51.8dBm 10dB/ 870.000MHz




CENTER 870.000MHz
*RBW 30kHz

VBW 30kHz

SPAN 5.000MHz
SWP 50ms

CDMA Mask Band A
Mid

*ATTEN 30dB VAVG 100 MKR 25. 13dBm
RL 51. 8dBm 10dB/ 880. 000MHz

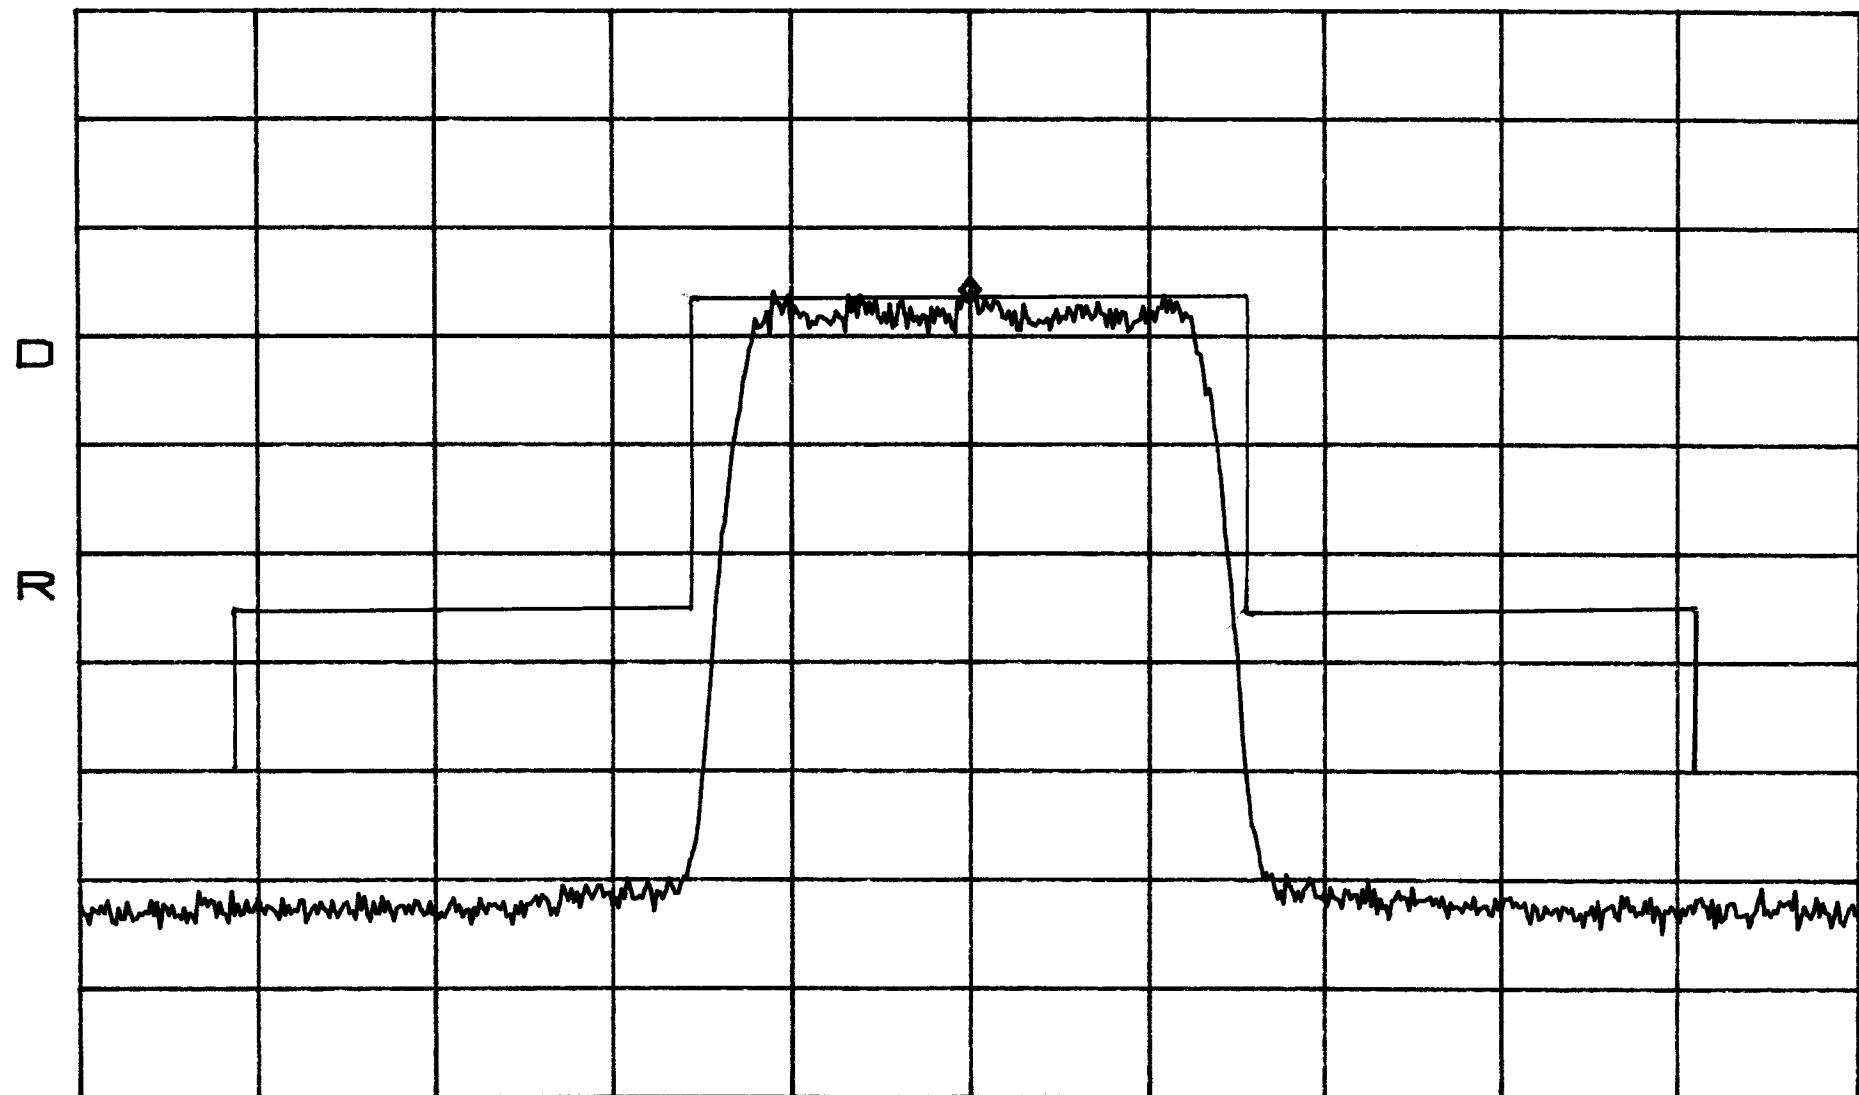

CENTER 880. 000MHz

SPAN 5. 000MHz


*RBW 30kHz

VBW 30kHz

SWP 50ms

CDMA Mask Band A
High

*ATTEN 30dB VAVG 100 MKR 26.47dBm
RL 51.8dBm 10dB/ 891.000MHz

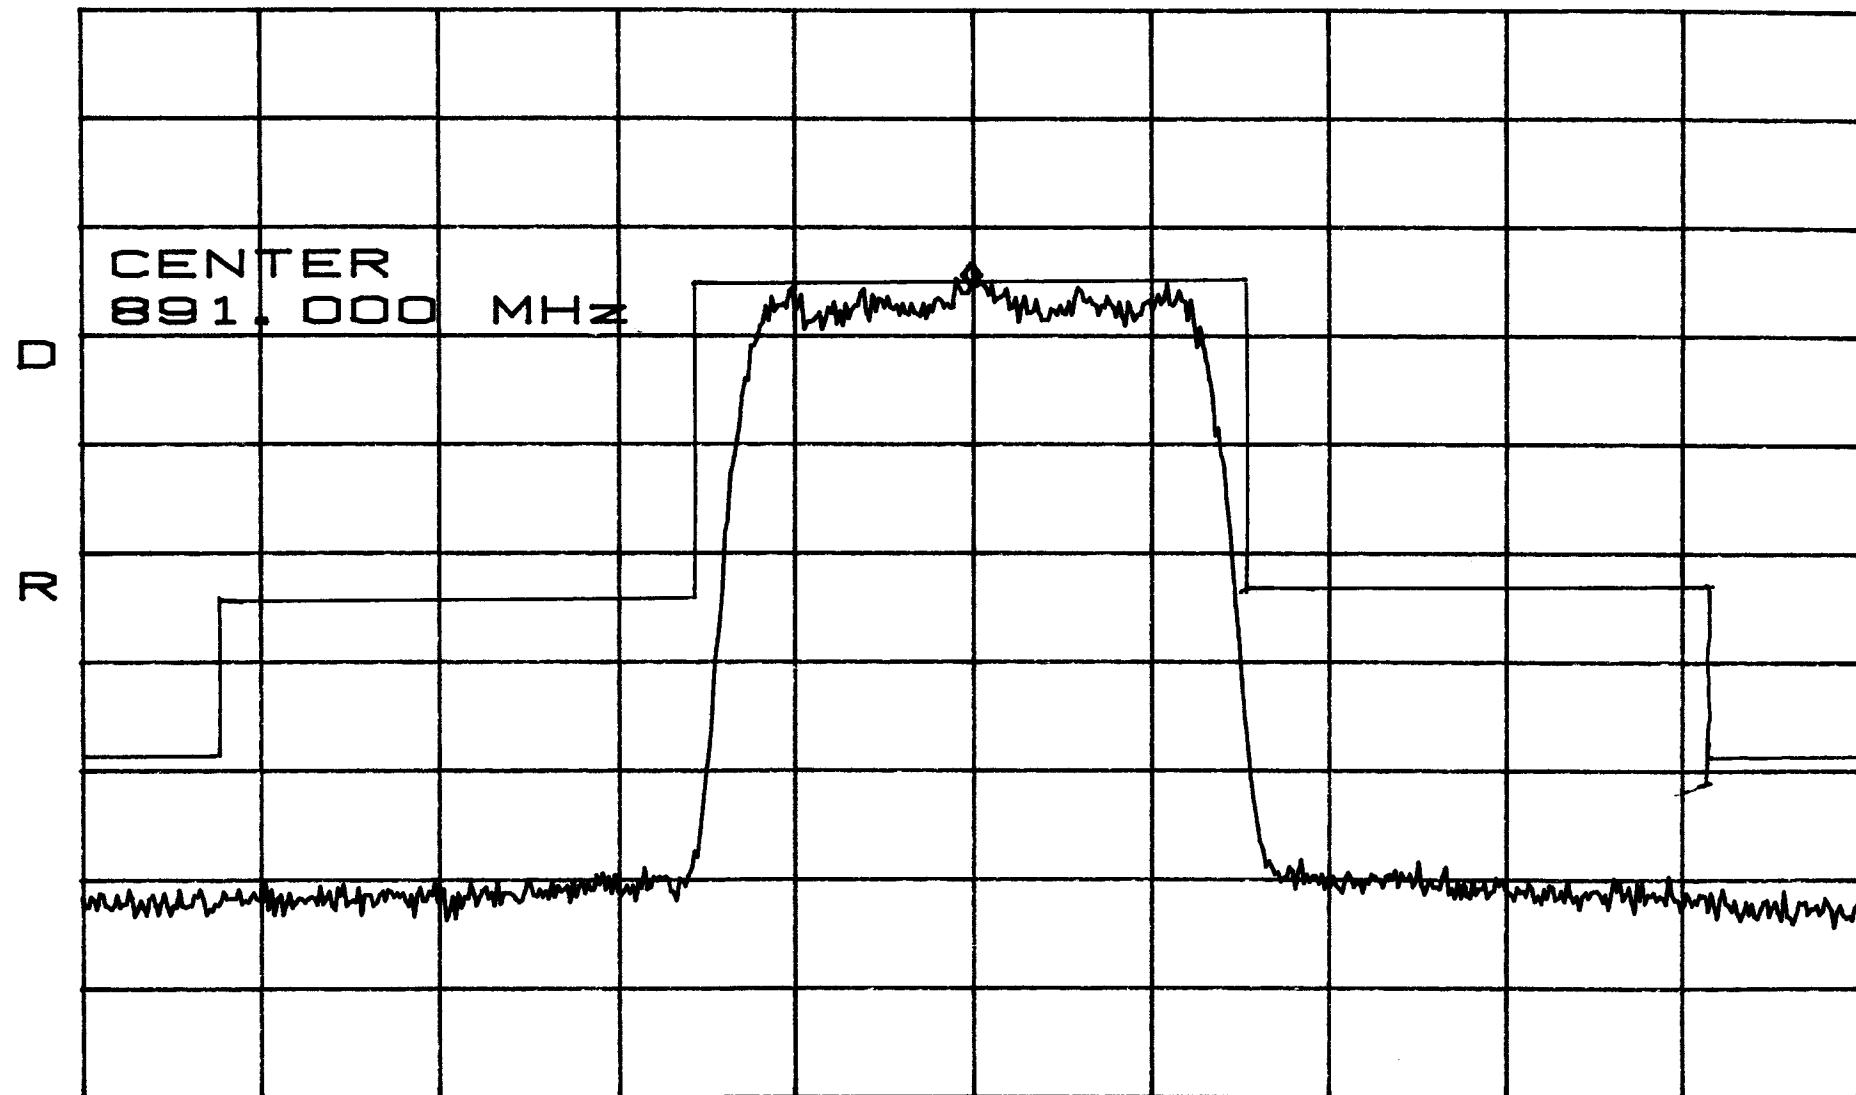

CENTER 891.000MHz

SPAN 5.000MHz

*RBW 30kHz

VBW 30kHz

SWP 50ms

CDMA MASK

BAND B

Low

*ATTEN 30dB VAVG 100 MKR 24.13dBm
RL 51.8dBm 10dB/ 881.000MHz



CENTER 881.000MHz

SPAN 5.000MHz

*RBW 30kHz

VBW 30kHz

SWP 50ms

CDMA MASK

BAND B

Mid

*ATTEN 30dB VAVG 100 MKR 23.97dBm
RL 51.8dBm 10dB/ 887.000MHz



CENTER 887.000MHz

SPAN 5.000MHz


*RBW 30kHz

VBW 30kHz

SWP 50ms

CDMA MASK BAND B
High

*ATTEN 30dB VAVG 100 MKR 25. 30dBm
RL 51. 8dBm 10dB/ 893. 000MHz

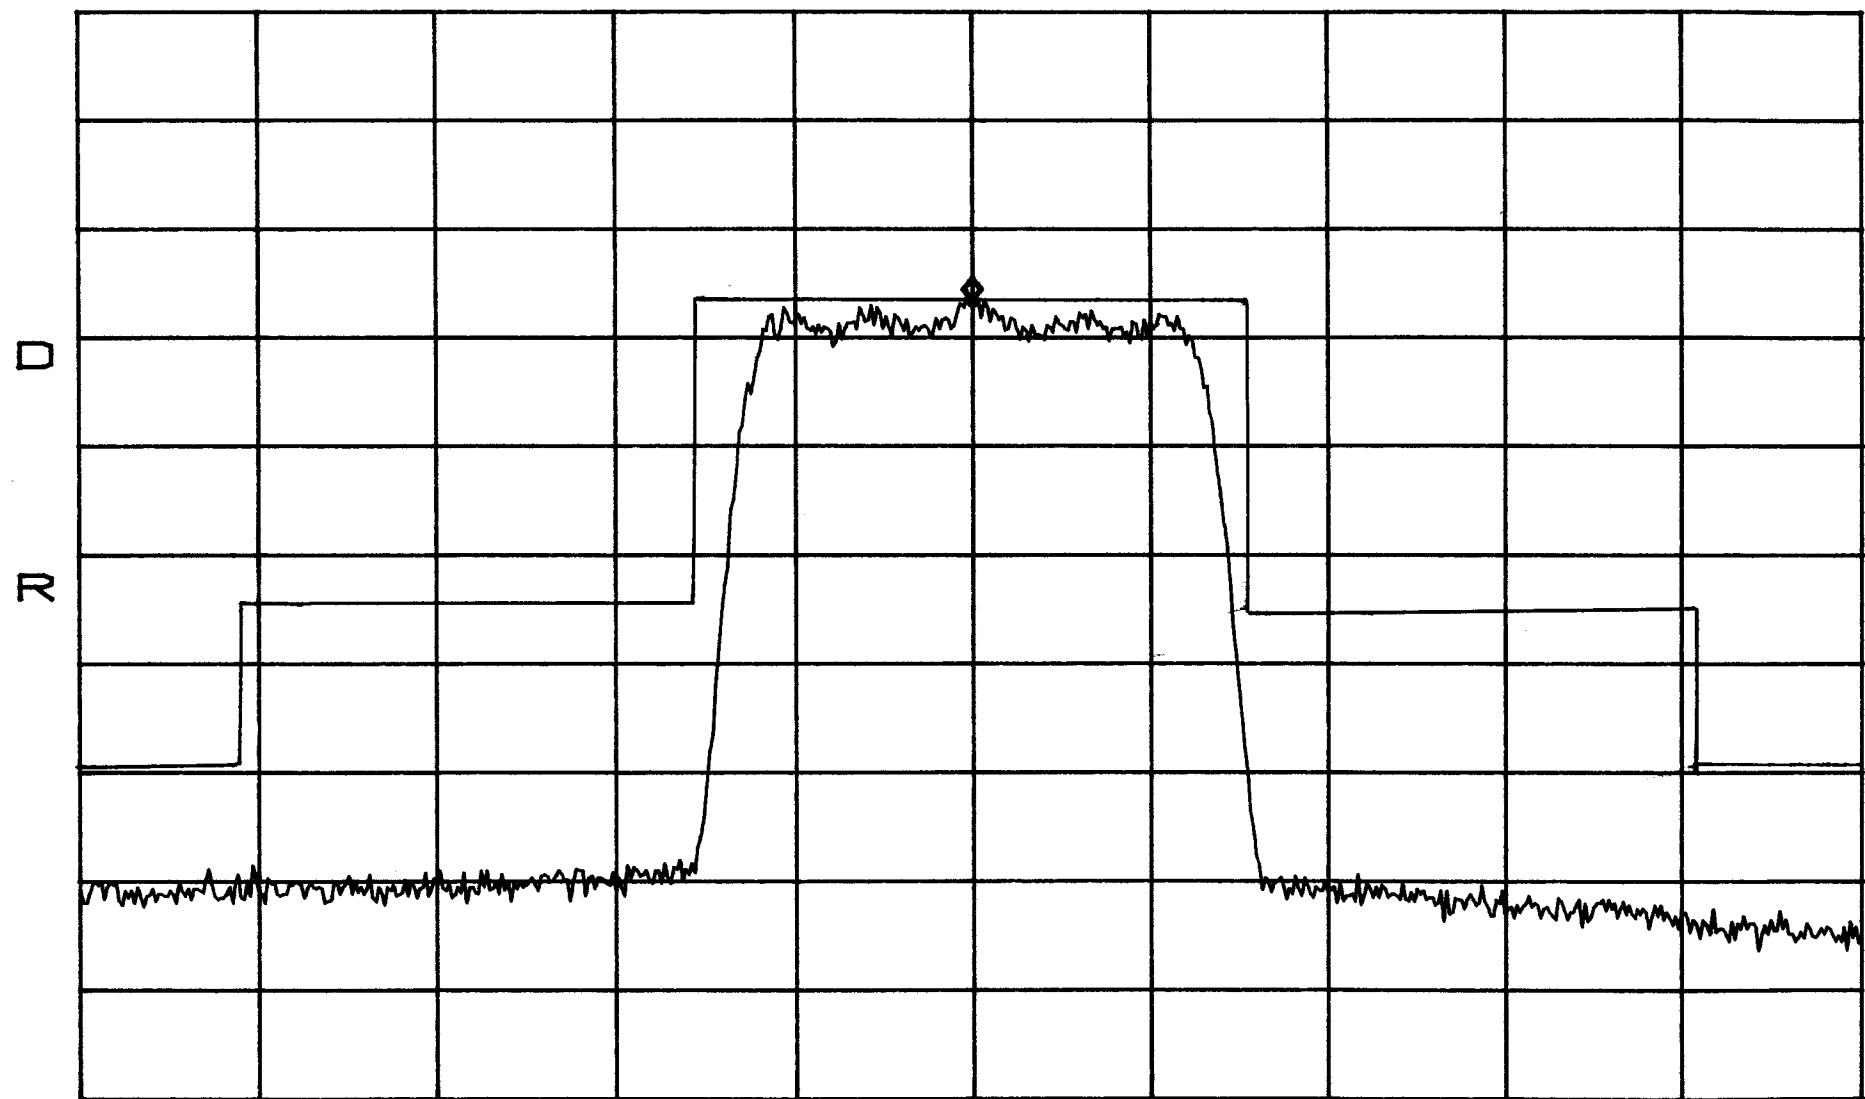

CENTER 893. 000MHz

SPAN 5. 000MHz

*RBW 30kHz

VBW 30kHz

SWP 50ms

**Conducted Emission Limits Test for ADC Inc.
Digivance 800 MHz 20 Watt System
Model Numbers DGVL-116100SYS and DGVL-126100SYS.**

The out of band emissions were measured directly from the EUT antenna output with a spectrum analyzer from 30 MHz to the 10th harmonic of the highest carrier frequency. Test signals used: CW, FM (1 kHz @ 8 kHz deviation), TDMA, and CDMA. The different signals were input one at a time to the EUT. In all cases, the out of band emissions were less than -13dBm from the equation

$$(19\text{dBm} - [43 + 10\log(0.08W)])$$

Band edge compliance is also demonstrated using a FM signal at the upper and lower limits of the band and a resolution bandwidth of 300 Hz.

Results:

Pass (see plots)

Conducted Emissions
Low


*ATTEN 30dB

MKR -19.70dBm

RL 51.8dBm

10dB/

872.20MHz

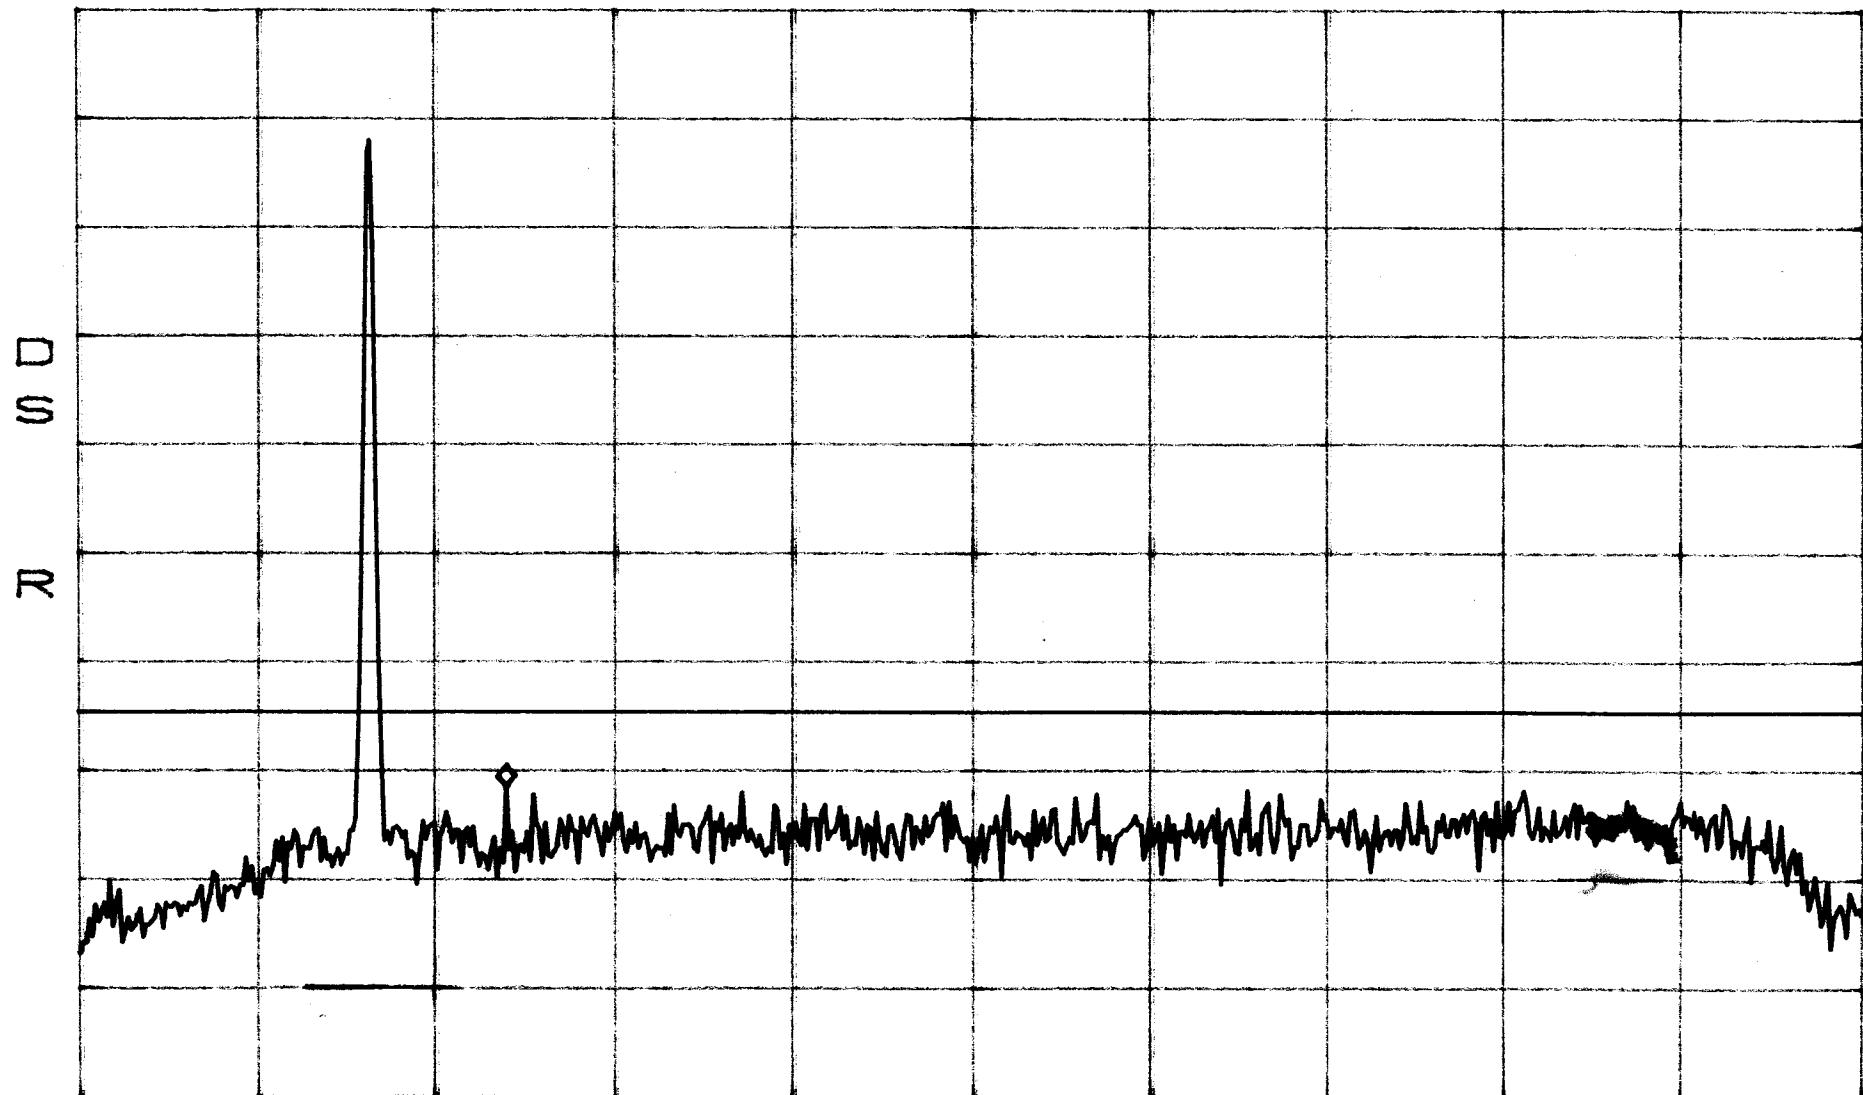

CENTER 880.00MHz

SPAN 30.00MHz

*RBW 30kHz

VBW 30kHz

SWP 84ms

Conducted Emissions
Low


*ATTEN 30dB

MKR -21.20dBm

RL 51.8dBm

10dB/

7.624GHz

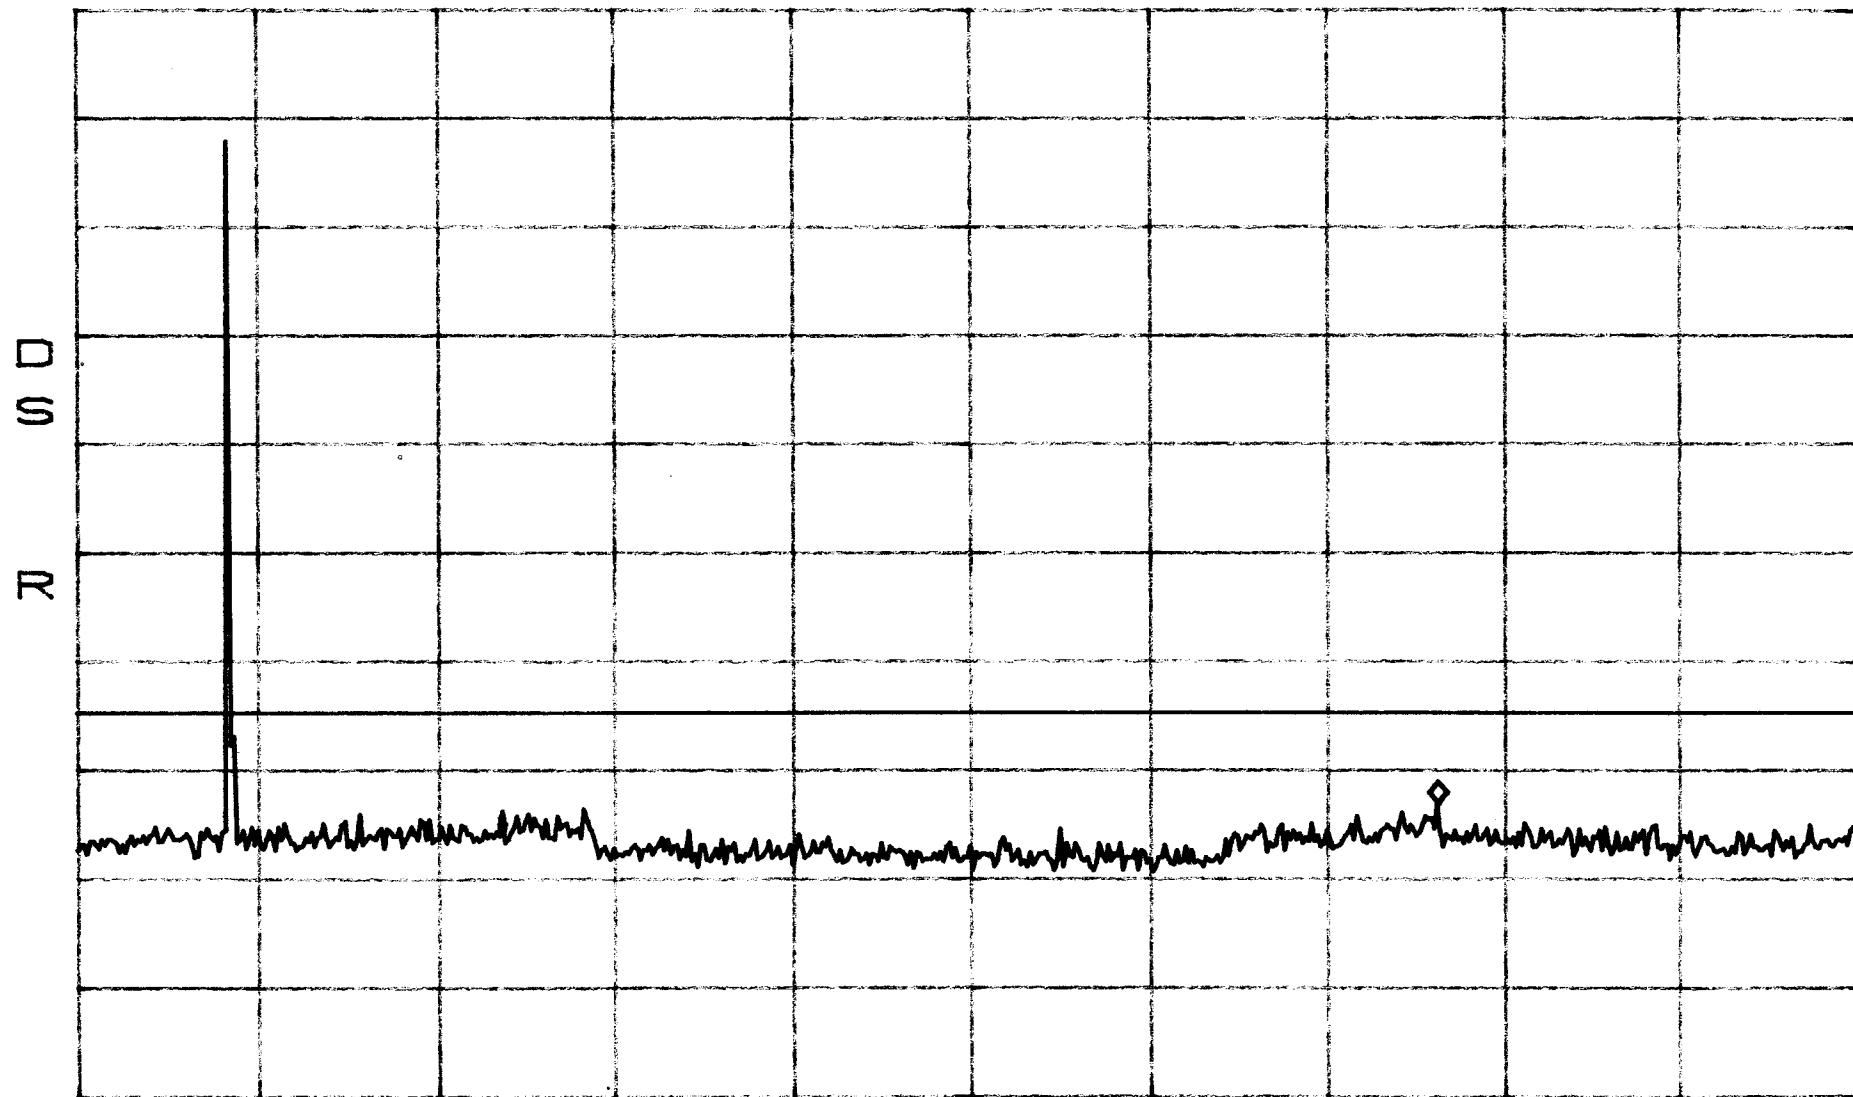

START 30MHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.5sec

Conducted Emissions Band A
Mid


*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -19.37dBm

881.25MHz

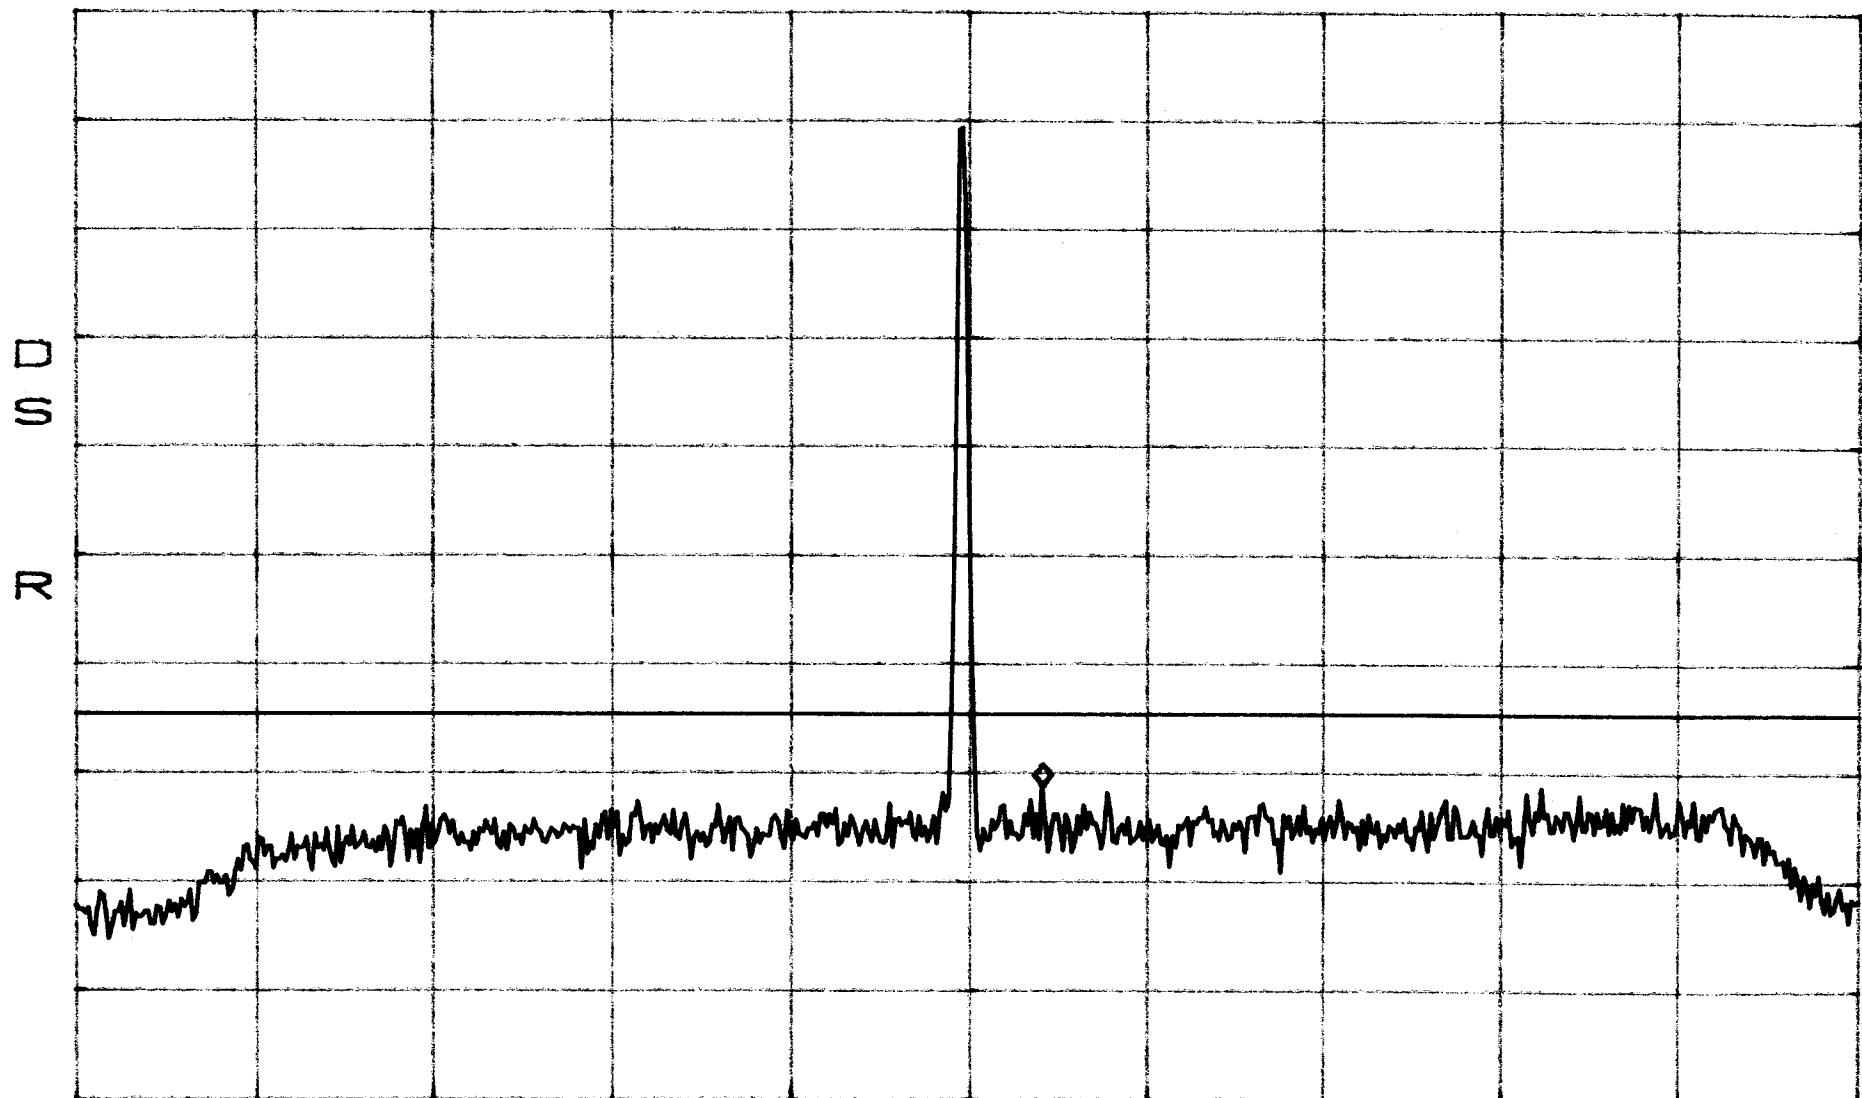

CENTER 880.00MHz

*RBW 30kHz

VBW 30kHz

SPAN 30.00MHz

SWP 84ms

Conducted Emissions Band A
Mid


*ATTEN 30dB

RL 51.8dBm

10dB/

MKR -22.20dBm

2.722GHz

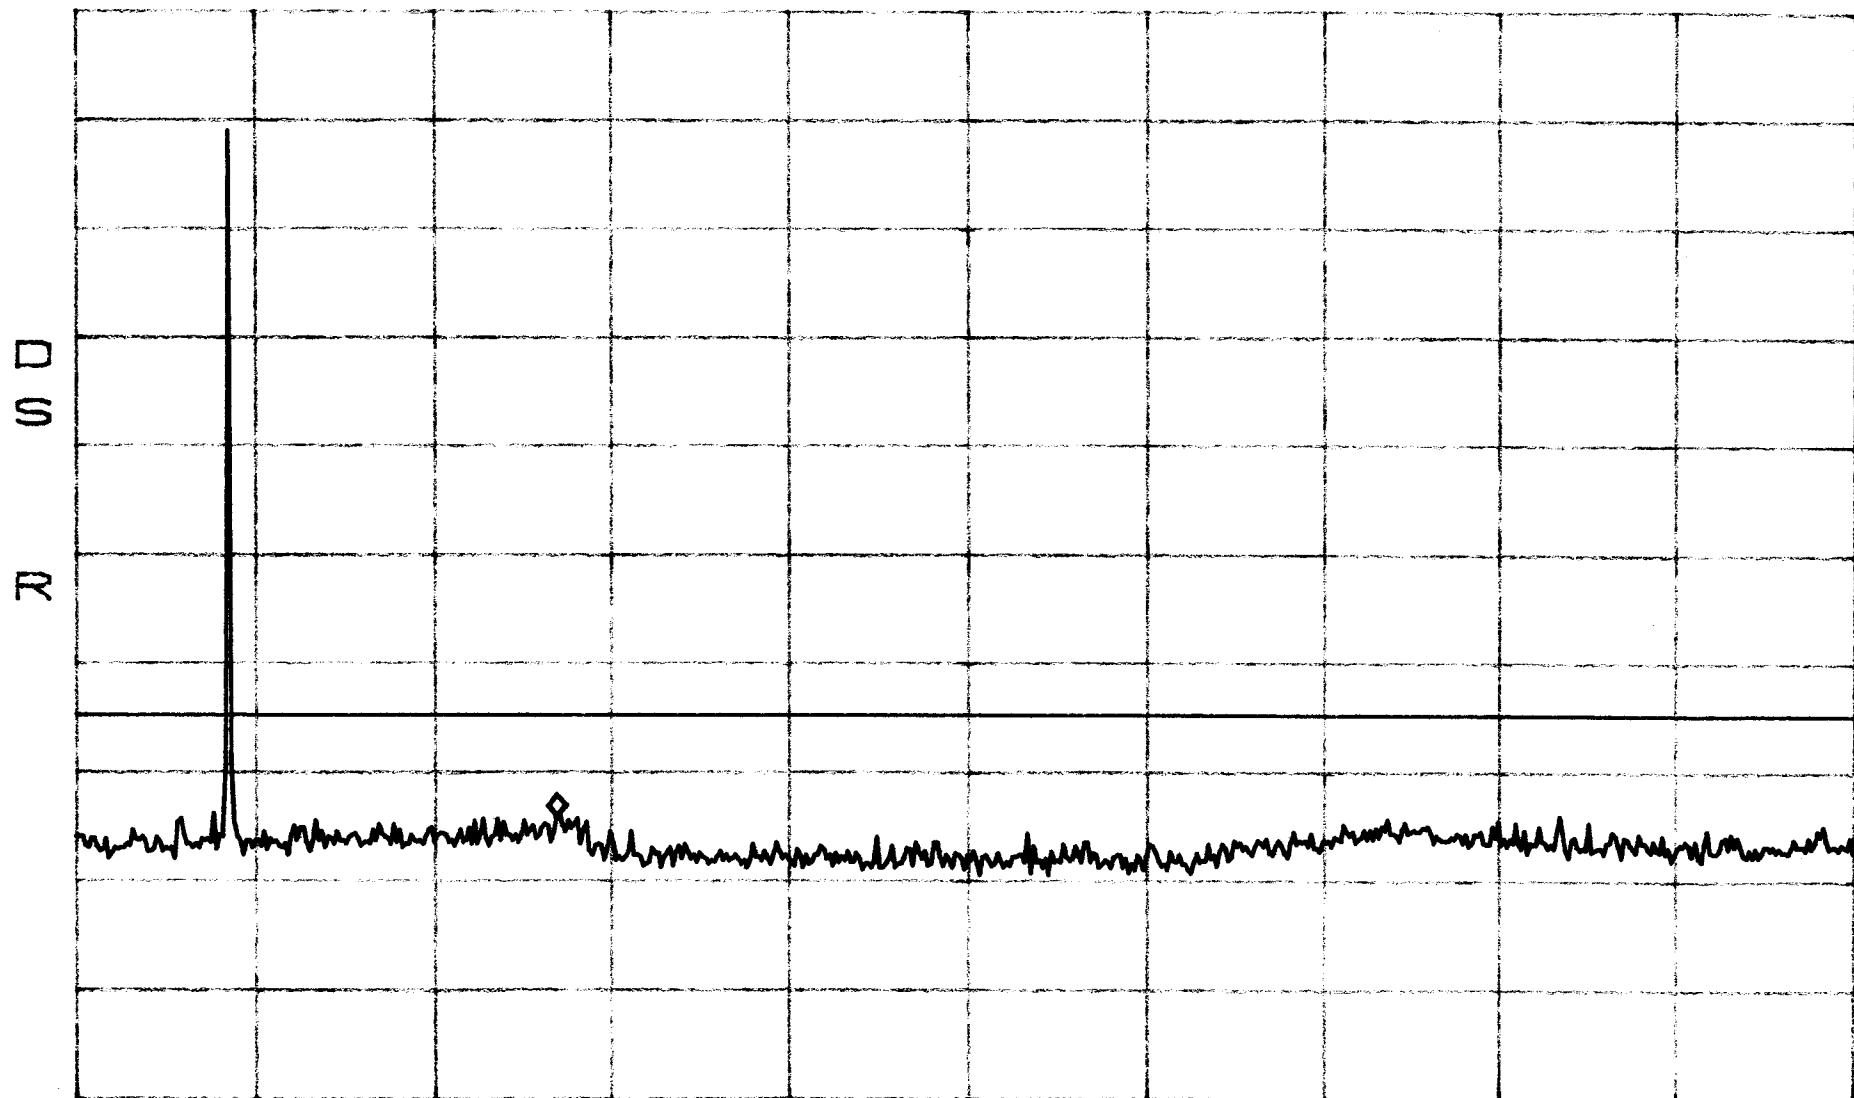

START 30MHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.5sec

Conducted Emissions Band A
High


*ATTEN 30dB

MKR -18.70dBm

RL 51.8dBm

10dB/

889.90MHz

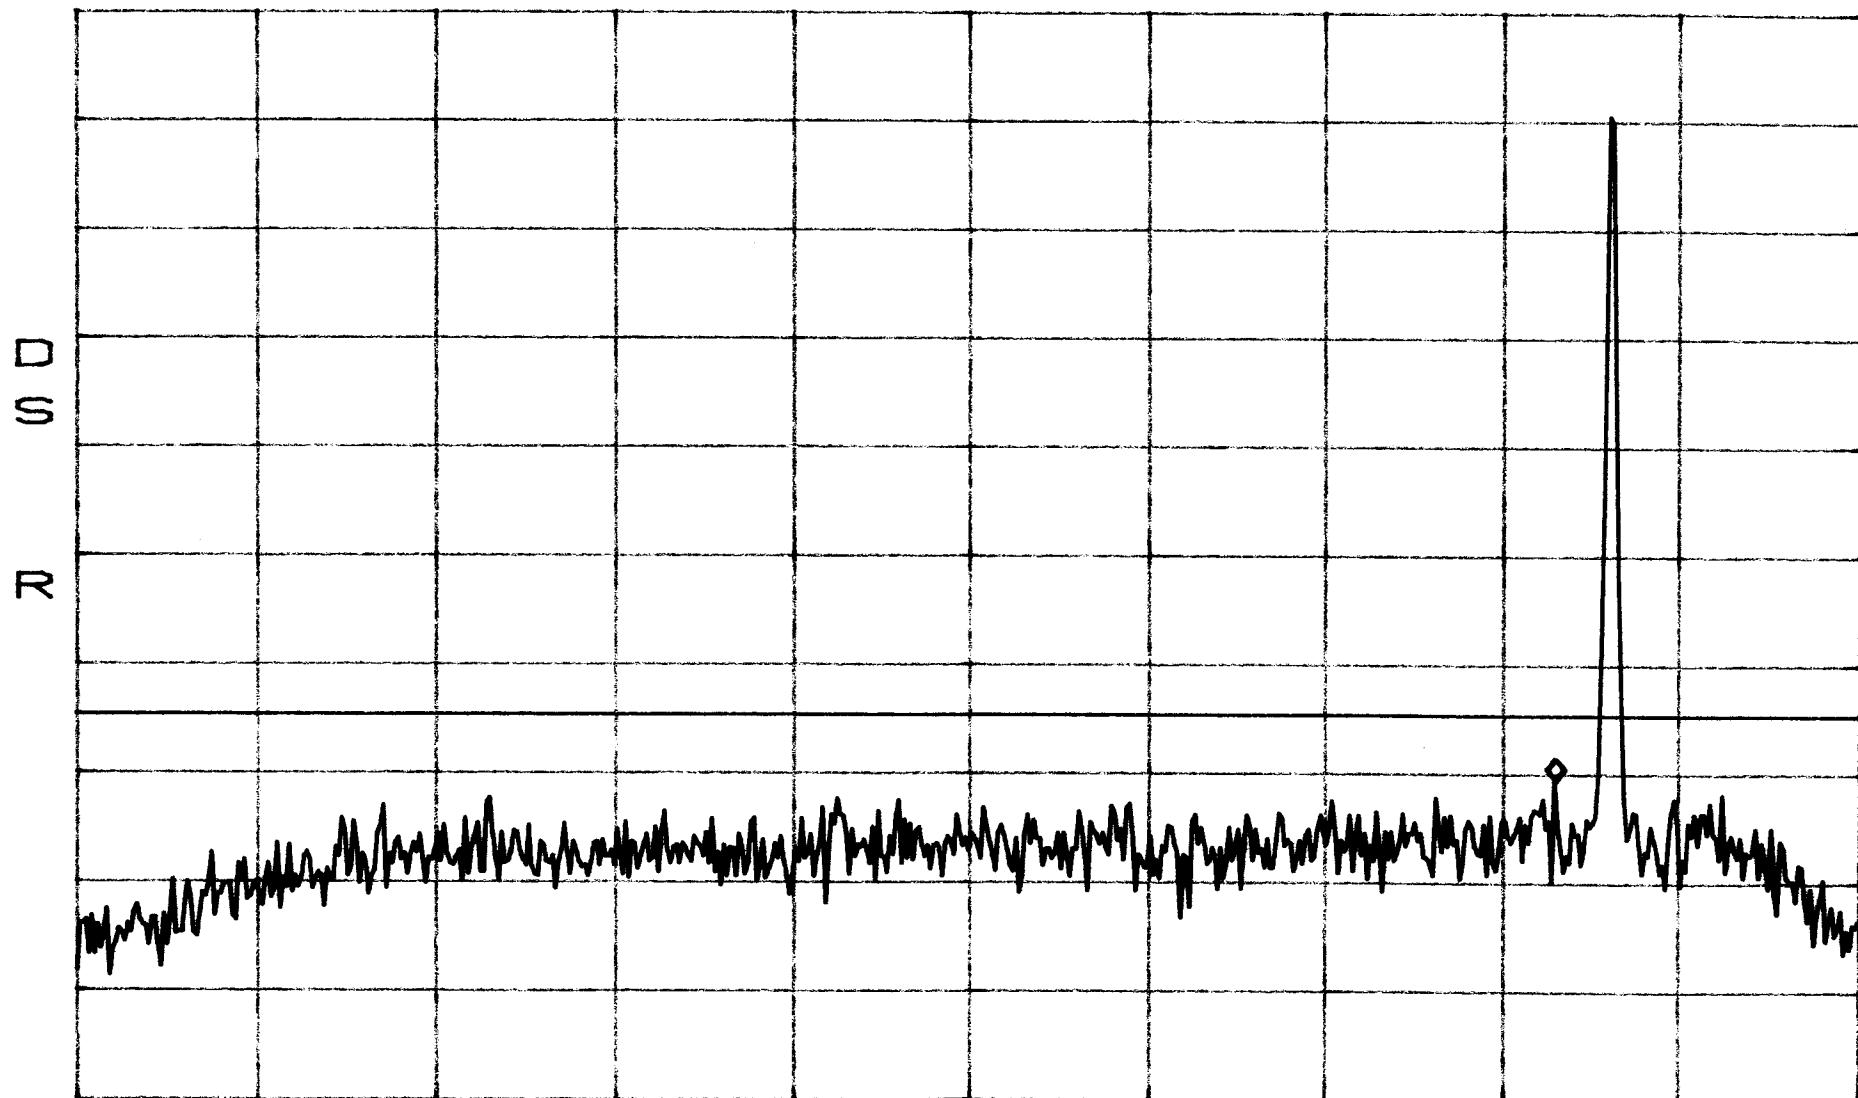

CENTER 880.00MHz

SPAN 30.00MHz

*RBW 30kHz

VBW 30kHz

SWP 84ms

Conducted Emissions Band A
High


*ATTEN 30dB

MKR -21.53dBm

RF 51.8dBm

10dB/

2.772GHz

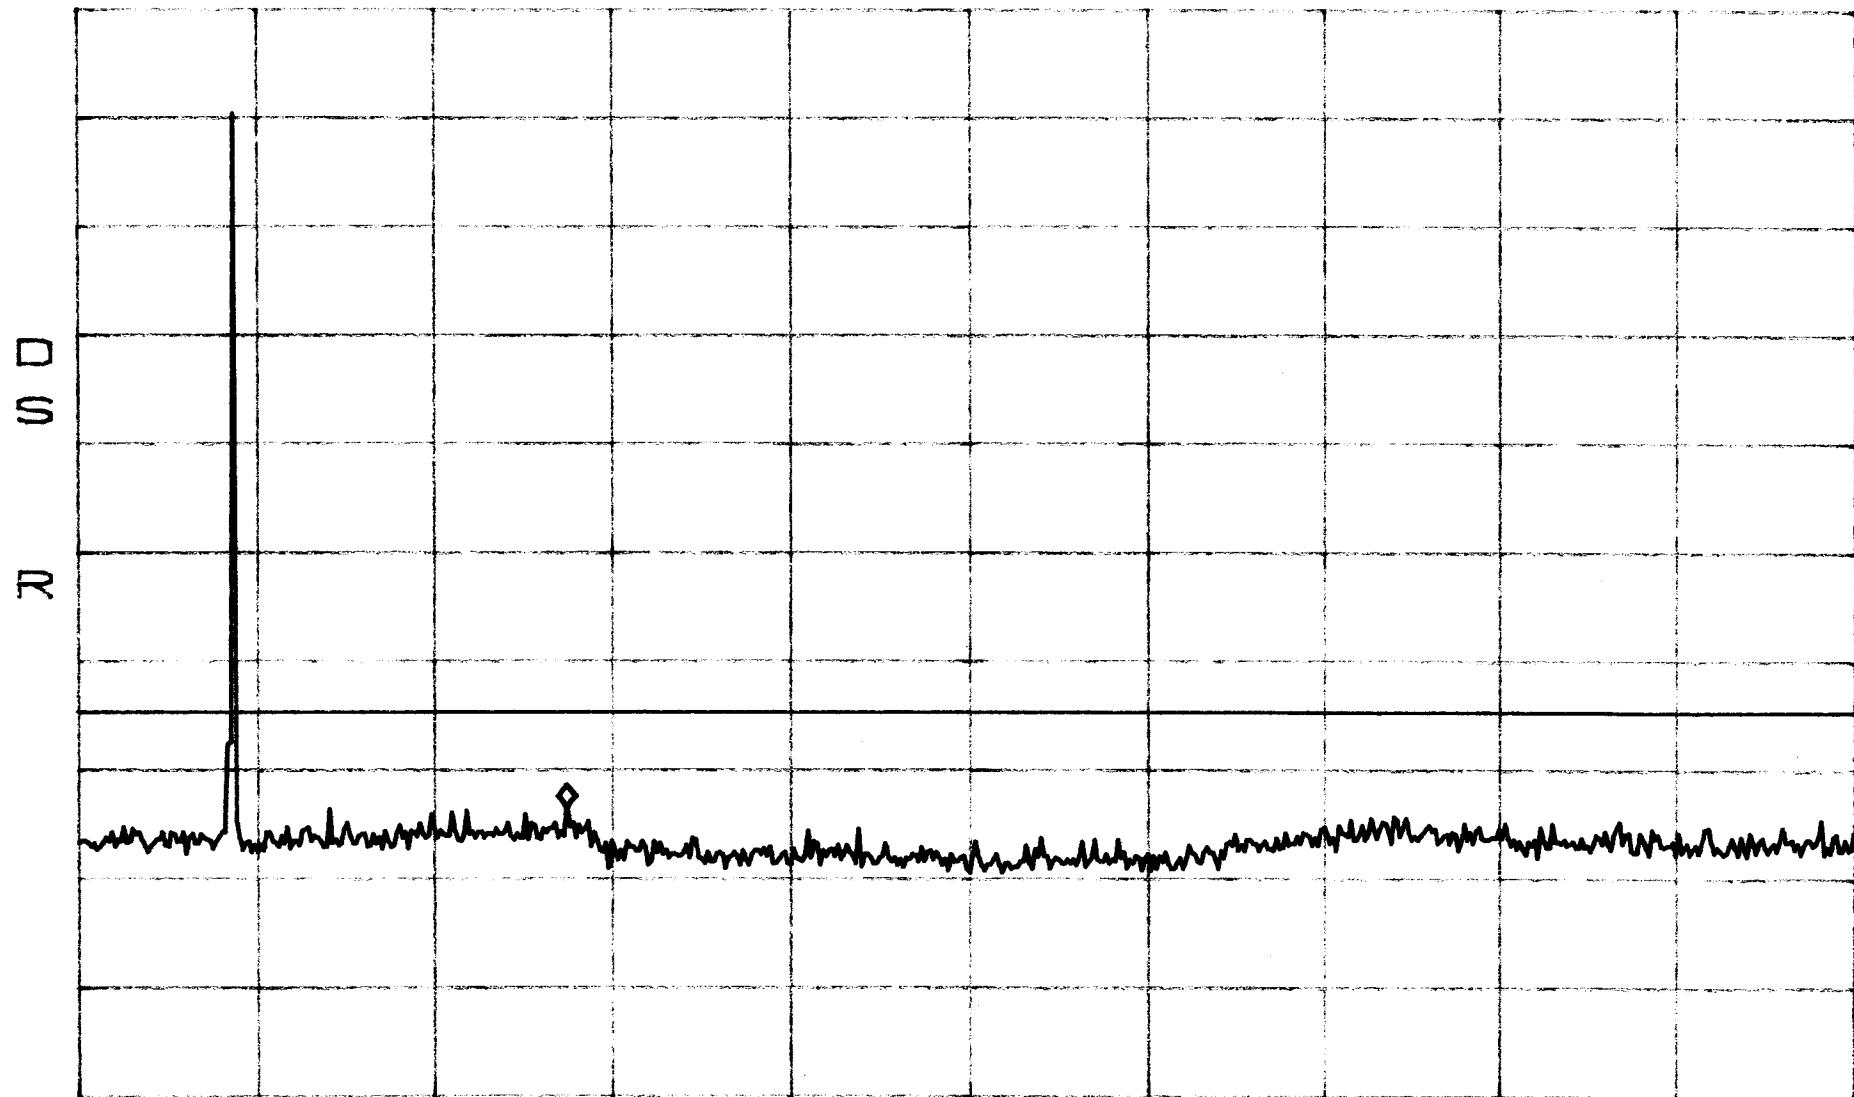

START 30MHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.5sec

Conducted Emissions
Low

Band B


*ATTEN 30dB

MKR -18.87dBm

RL 51.8dBm

10dB/

884.60MHz

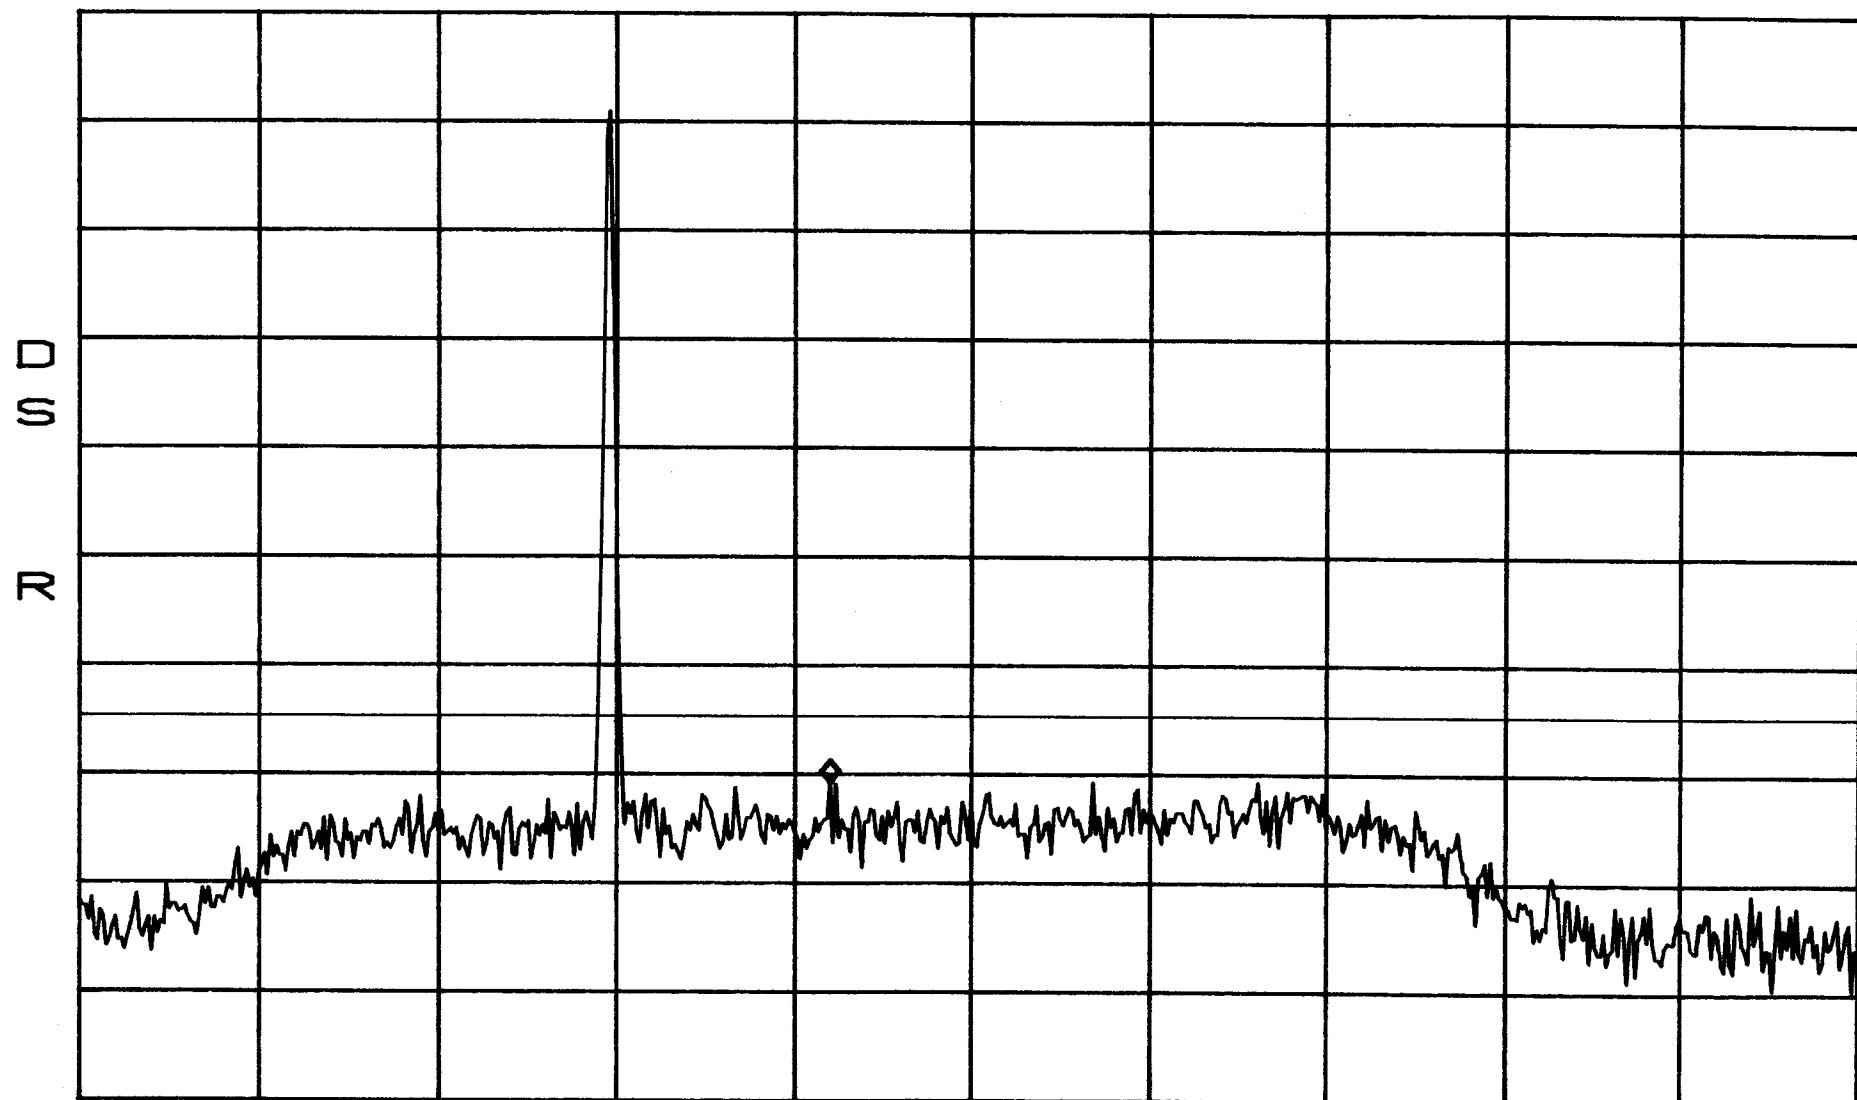

CENTER 887.00MHz

SPAN 30.00MHz

*RBW 30kHz

VBW 30kHz

SWP 84ms

Conducted Emissions
Low Band B


*ATTEN 30dB

MKR -22.20dBm

RL 51.8dBm

10dB/

2.838GHz

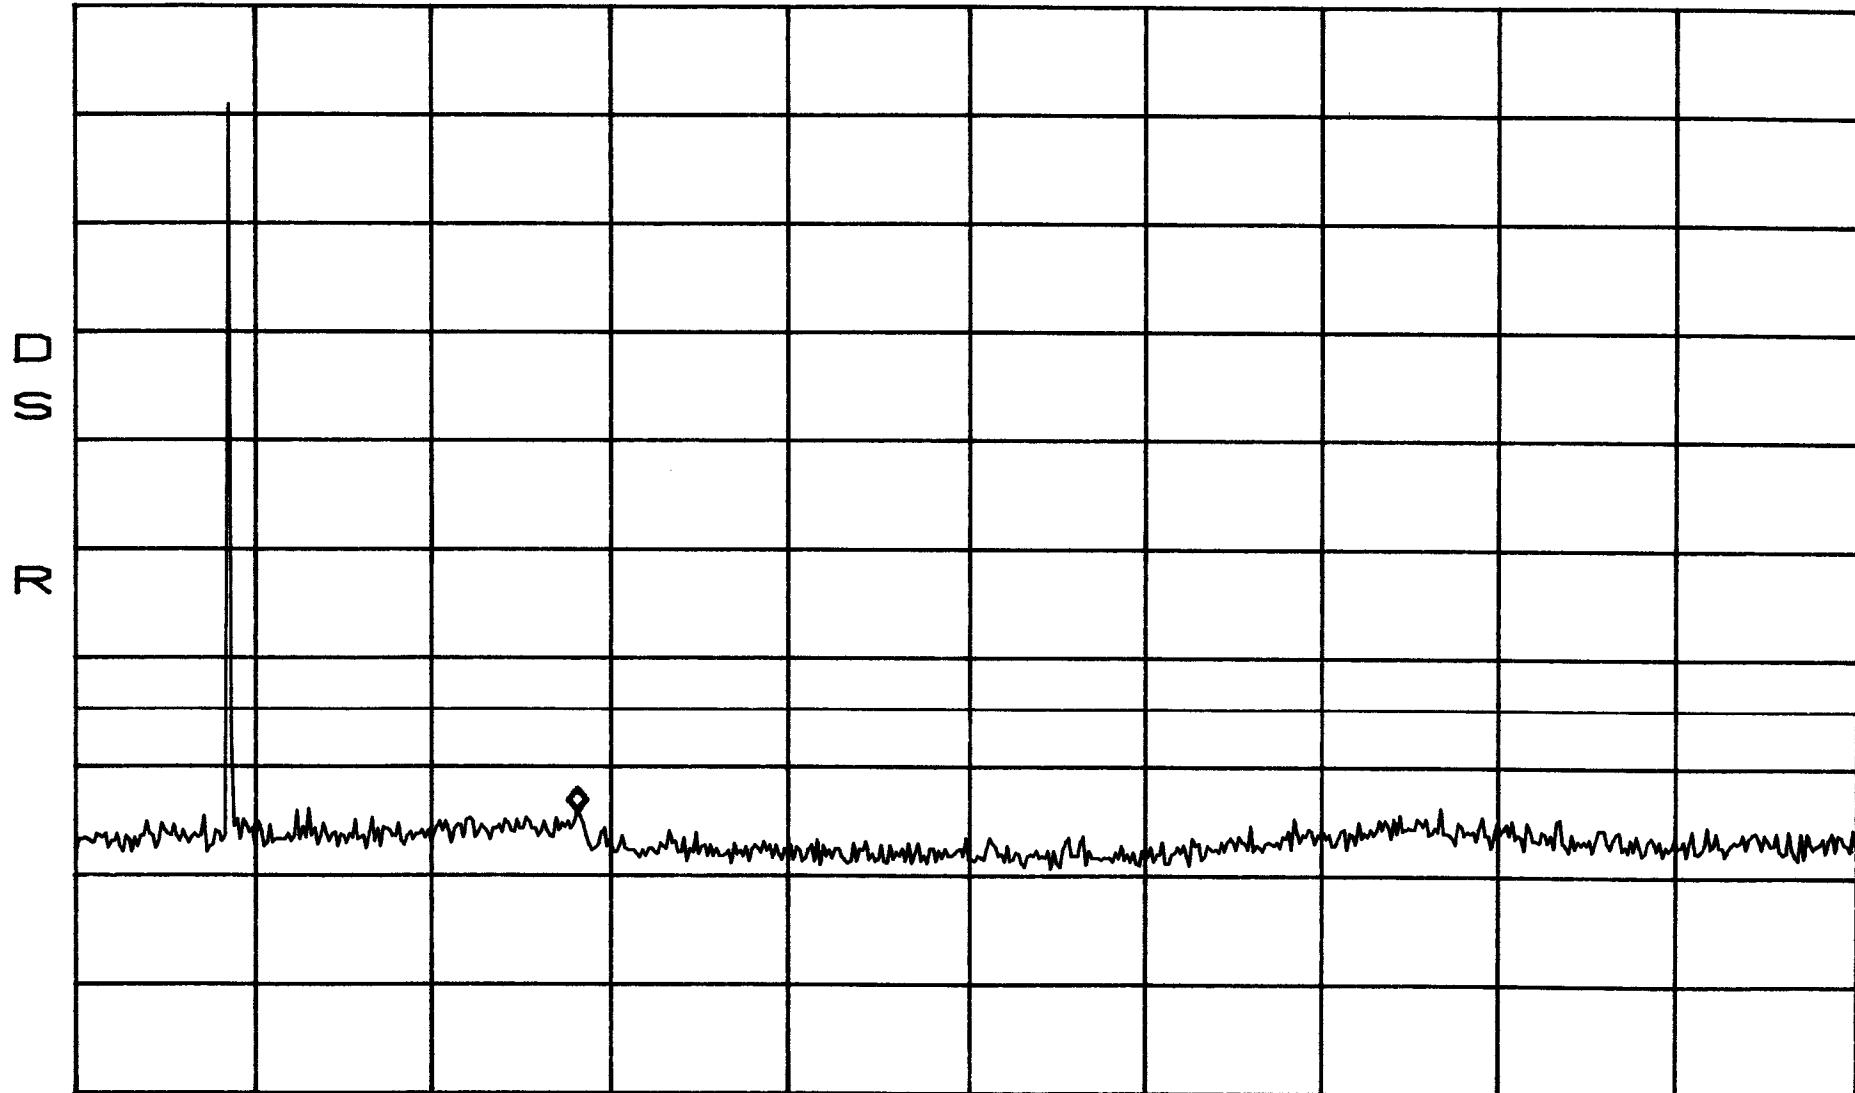

START 30MHz

STOP 10.000GHz

*RBW 100kHz

VBW 100kHz

SWP 2.5sec

Conducted Emissions Band B
Mid


*ATTEN 30dB

MKR -18.20dBm

RL 51.8dBm

10dB/

887.75MHz

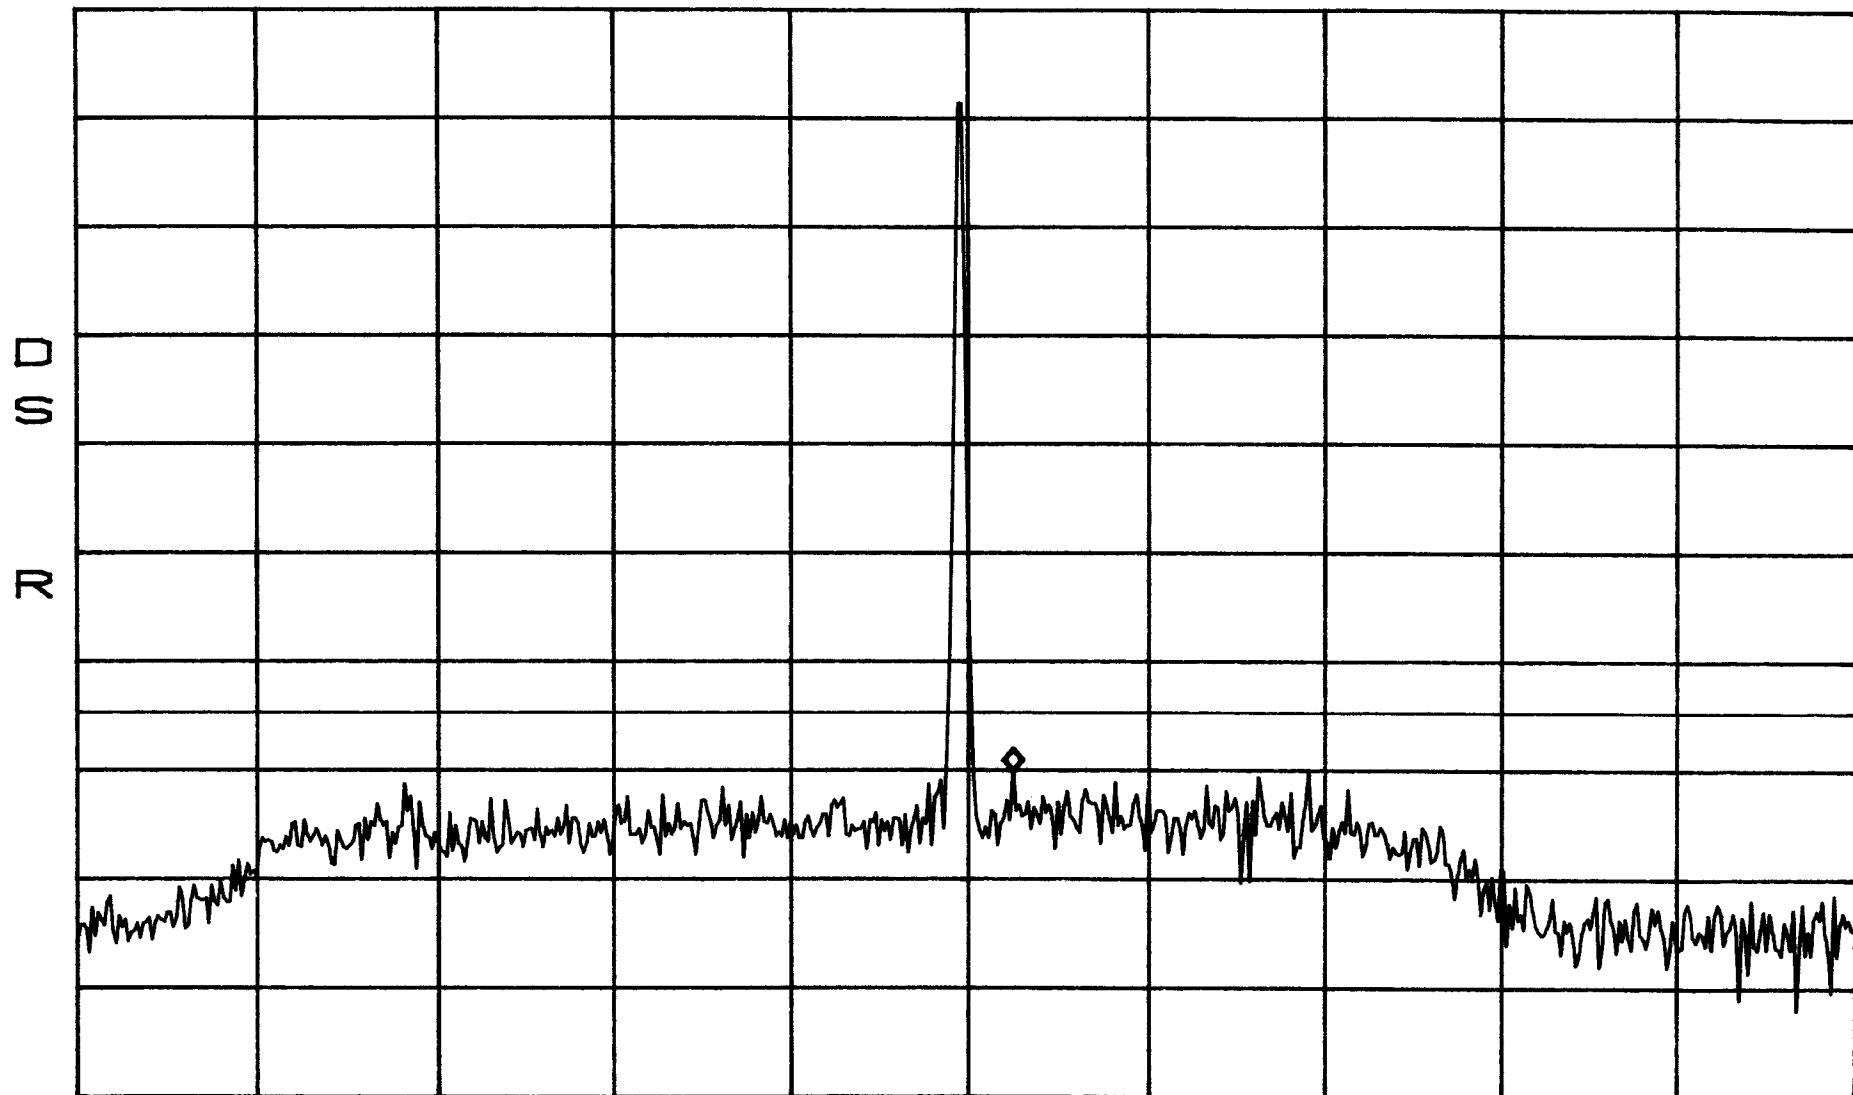

CENTER 887.00MHz

SPAN 30.00MHz

*RBW 30kHz

VBW 30kHz

SWP 84ms

Conducted Emissions Band B
Mid


*ATTEN 30dB

MKR -22.53dBm

RL 51.8dBm

10dB/

7.591GHz

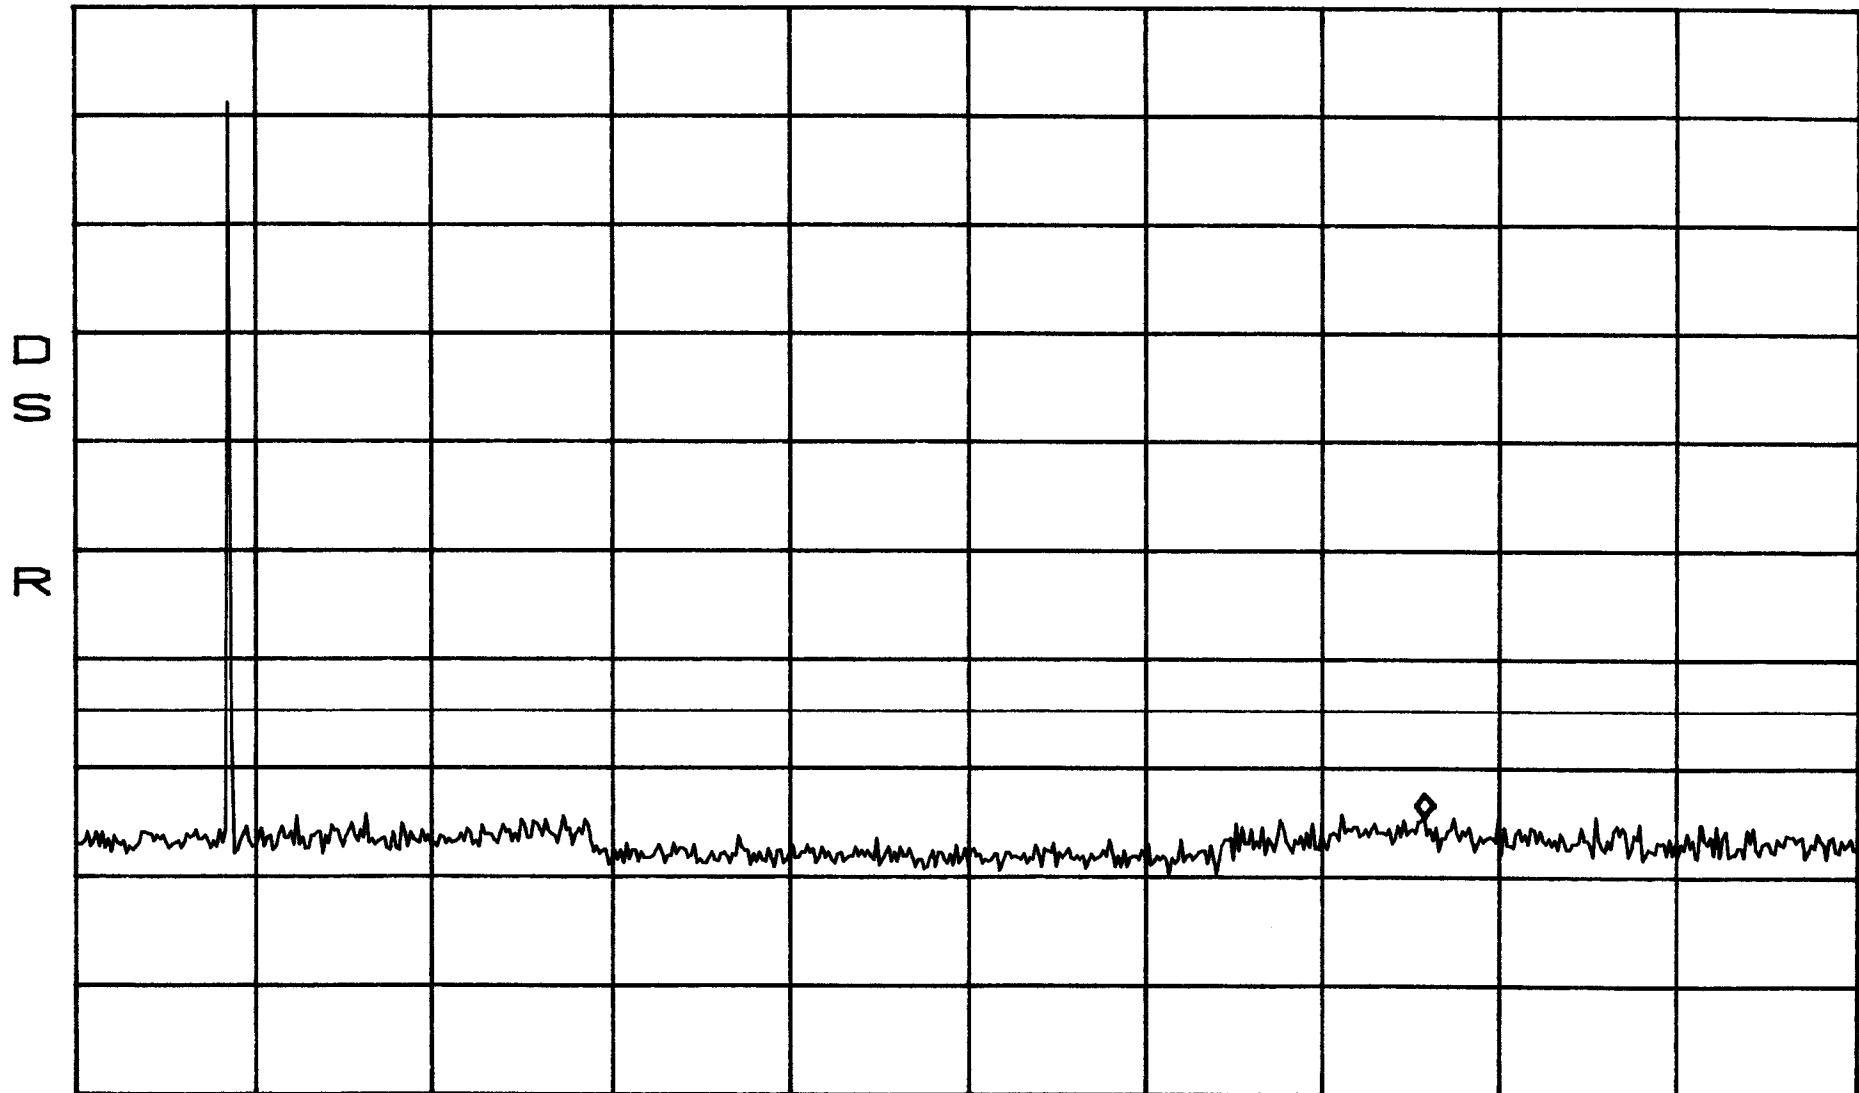

*RBW 100kHz

VBW 100kHz

SWP 2.5sec