



CommScope

Prism 1900/2100AWS3 Dual HDM 20 Watt

FCC 24E:2018

FCC 27:2018

20W Dual SISO Cellular RF Repeater/Industrial Booster

Report # TECO0048



NVLAP Lab Code: 200881-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST



Last Date of Test: February 20, 2018

CommScope

Model: Prism 1900/2100AWS3 Dual HDM 20 Watt

Radio Equipment Testing

Standards

Specification	Method
FCC 24E:2018	ANSI/TIA/EIA-603-D-2010
FCC 27:2018	ANSI C63.26:2015
FCC 2:2018	

Results

Method Clause	Test Description	Applied	Results	Comments
2.2.1	Equivalent Isotropic Radiated Power (EIRP) (1900)	Yes	Pass	
2.2.1	Peak To Average Ratio (1900)	Yes	Pass	
2.2.3	Emissions Bandwidth (1900)	Yes	Pass	
2.2.13	Spurious Conducted Emissions (1900)	Yes	Pass	
2.2.13	Band Edge Compliance (1900)	Yes	Pass	
2.2.13	Band Edge Compliance (2100)	Yes	Pass	
2.2.13	Intermodulation (1900)	Yes	Pass	
2.2.2	Frequency Stability (1900)	Yes	Pass	
2.2.12	Spurious Radiated Emissions (1900)	Yes	Pass	
2.1046	Equivalent Isotropic Radiated Power (EIRP) (2100)	Yes	Pass	
2.1051	Spurious Conducted Emissions (2100)	Yes	Pass	
2.1051	Intermodulation (2100)	Yes	Pass	
2.1055	Frequency Stability (2100)	Yes	Pass	
2.1049	Emissions Bandwidth (2100)	Yes	Pass	
2.1053	Spurious Radiated Emissions (2100)	Yes	Pass	
2.1053	Peak to Average Ratio (2100)	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Matt Nuernberg, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

<u>Test</u>	<u>+ MU</u>	<u>- MU</u>
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

FACILITIES




California	Minnesota	New York	Oregon	Texas	Washington
Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612) 638-5136	Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425) 984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code: 201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

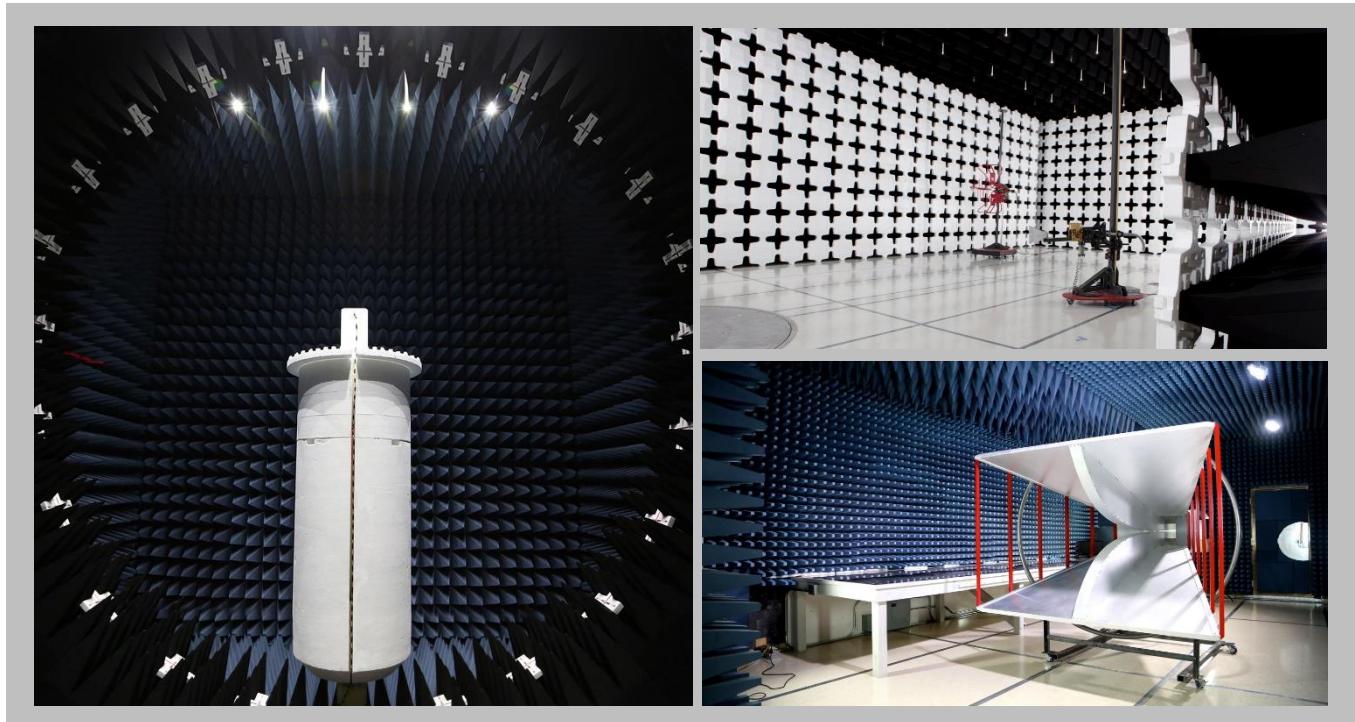


Test Setup Block Diagrams


Antenna Port Conducted Measurements

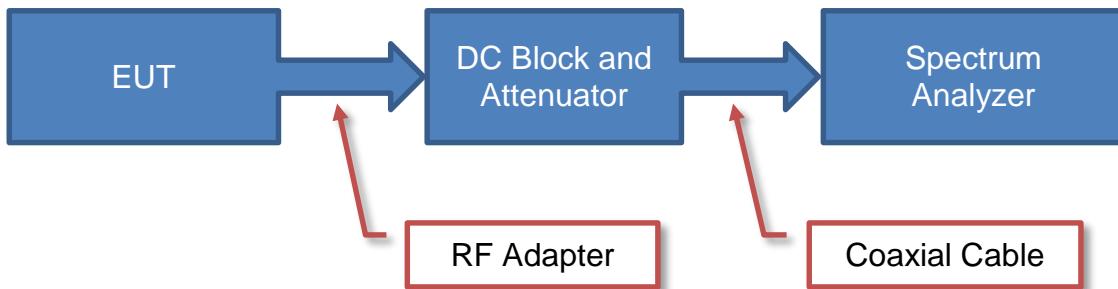

Near Field Test Fixture Measurements

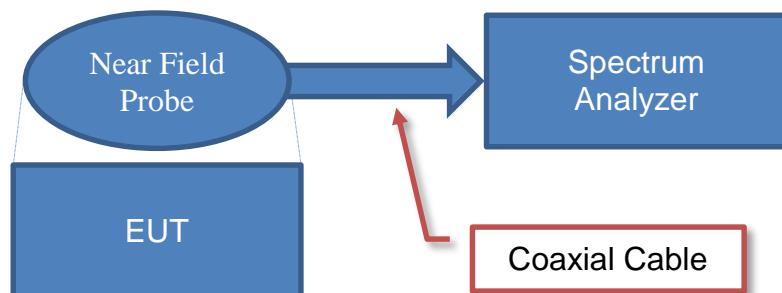

Spurious Radiated Emissions

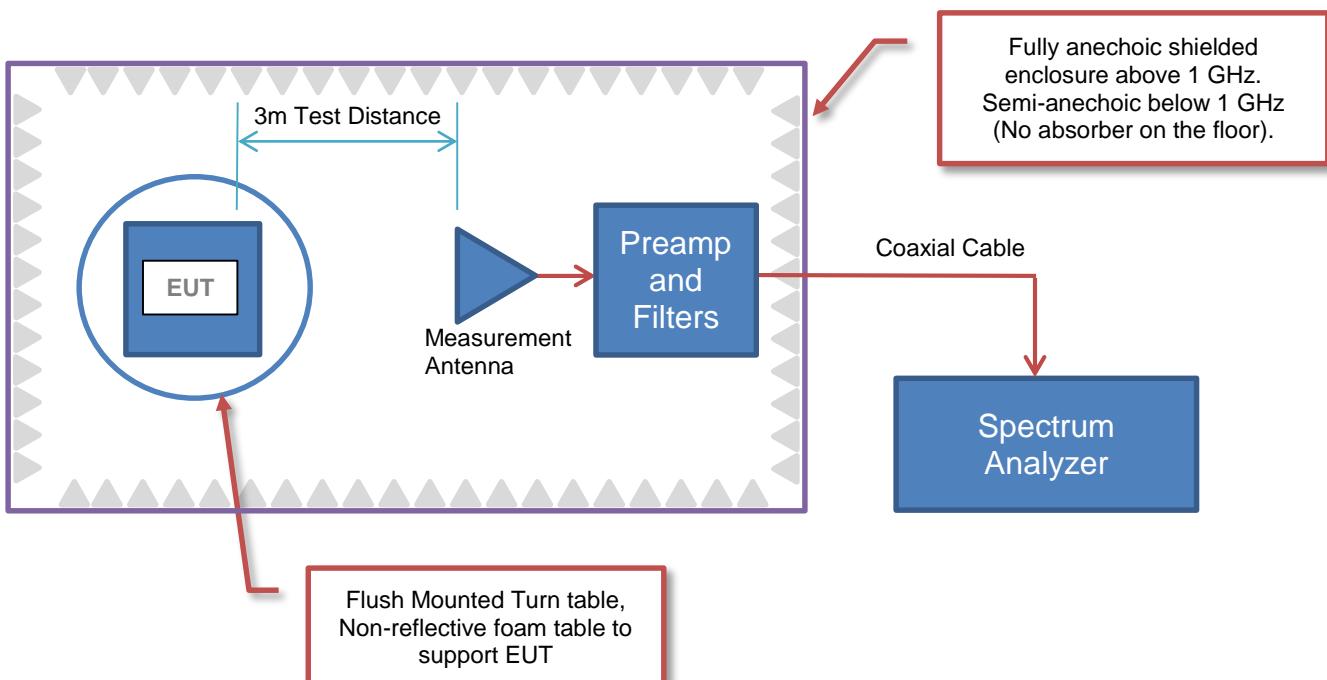

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	CommScope
Address:	501 Shenandoah Drive
City, State, Zip:	Shakopee, MN 55379
Test Requested By:	Joshua Wittman
Model:	Prism 1900/2100AWS3 Dual HDM 20 Watt
First Date of Test:	April 9, 2014
Last Date of Test:	February 20, 2018
Receipt Date of Samples:	April 9, 2014
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

HDM 1900 PCS/2100 AWS3 Cellular RF Repeater/Industrial Booster

Testing Objective:

To demonstrate compliance of the Cellular repeater requirements of FCC Parts 24 & 27

Client Provided Information:

RF module FWP-84MTZ4MMOD evaluated in this test report includes previously FCC certified hardware for the 1900 Band portion of the DUT. This hardware is identical as the 1900 Band hardware tested in the following NWEMC/Element projects:

- TECO0013 - Prism HDM 800/1900
- TECO0017 – Prism 1900/2100 MHz RF Module
- TECO0042 – AWS3 MIMO RF Module

Since the 1900 Band hardware is identical, the conducted measurement data in these projects was used in the FCC evaluation for FWP-84MTZ4MMOD.

CONFIGURATIONS



Configuration TECO0013- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism 1900/2100AWS3 Dual HDM 20 Watt	TE Connectivity / ADC Telecommunications	FWP-441T841MOD	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
RF Signal Generator	Aeroflex	IFR 3413	341006/252
Power Supply	Mean Well	SE-600-48	EB11101765
IO Control Device	TE Connectivity / ADC Telecommunications	SVT-GU-1011	None
30 dB attenuator	Aeroflex	57-30-43	RA434
RF Signal Generator	Aeroflex	IFR 3413	341006/056
30 dB attenuator	Aeroflex	86-30-12 DC -22 GHz	369
Laptop	Lenovo	T500	L3-AFD7K 09/04
Laptop Supply	Lenovo	42T4418	11S42T4418Z1ZGWG19659N

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	> 3m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	AC Mains
Fiber	No	> 3m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	IO Control Device
RF	Yes	0.8m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	30 dB attenuator
RF	Yes	1.8m	No	IO Control Device	RF Signal Generator
AC Power x2	No	1.8m	No	RF Signal Generator	AC Mains
AC Power	No	1.8m	No	Power Supply	AC Mains
DC Power	No	2.8m	Yes	IO Control Device	Power Supply
AC Power	No	1.8m	No	Laptop Supply	AC Mains
DC Power	No	1.8m	Yes	Laptop	Laptop Supply
Ethernet	No	1.5m	No	Laptop	IO Control Device
RF	Yes	0.8m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	30 dB attenuator
RF	Yes	0.9m	No	IO Control Device	RF Signal Generator

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

CONFIGURATIONS



2017-1-25

Configuration TECO0017- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism 1900/2100AWS3 Dual HDM 20 Watt	TE Connectivity / ADC Telecommunications	FWP-84MTA4MMOD	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Signal Generator	Tektronix	Aeroflex IFR 3413	341006/252
Laptop	Dell	Latitude D630	34562243089
IO Control Device	TE Connectivitiy / ADC Telecommunications	SVT-GU-1011	MIN-1301041310-002
Laptop AC Adapter	Dell	PA-1900-02D	CN-09T215-55R-0526
DC Power Supply	Mean Well	SE-600-48	EB11101765
30 dB Attenuator 1	Aeroflex / Weinschel	57-30-43	RA434
30 dB Attenuator 2	Aeroflex / Weinschel	40-0052	N/A

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
Fiber Optic Cable	No	>3m	No	IO Control Device	Prism
AC Power Cable (Laptop)	No	85cm	No	AC Mains	Laptop AC Adapter
DC Power Cable (Laptop)	No	1.8m	No	Laptop AC Adapter	Laptop
Ethernet Cable	No	160cm	No	Laptop	IO Control Device
AC Power Cable (DC Power Supply)	No	225cm	No	AC Mains	DC Power Supply
AC Power Cable (Signal Generator)	No	180cm	No	AC Mains	Signal Generator
DC Power Cable	No	290cm	No	DC Power Supply	IO Control Device
Coaxial Cable	Yes	150cm	No	Signal Generator	IO Control Device
AC Power Cable (Prism)	No	500cm	No	Prism	AC Mains
Coaxial Cable	Yes	0.8m	No	Prism	30 dB Attenuator 1
Coaxial Cable	Yes	0.9m	No	Prism	30 dB Attenuator 2

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

CONFIGURATIONS



Configuration TECO0042- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism 1900/2100AWS3 Dual HDM 20 Watt	CommScope	7761388-00-11	459644002

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Attenuator 1	Inmet Corporation	2N75W-30-296	None
Attenuator 2	Aeroflex / Weinschel	57-30-43	QY541

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Signal Generator 1	Aeroflex	IFR 3413	341007/003
Signal Generator 2	Aeroflex	IFR 3413	341006/056
48V DC Power Supply	TDK-Lambda	SWS300A-48	3LR-140Y11-0106HO411
Laptop	Lenovo	T510	431436U
Power Supply (Laptop)	Lenovo	92P1156	11S92P1156Z1ZDXN8A81AZ
I/O Control Device	CommScope/ADC Telecommunications	1673542-21	MR222P8C

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Mains Cable (Laptop)	No	1.8m	No	AC Mains	Power Supply (Laptop)
DC Power Cable (Laptop)	No	1.8m	Yes	Power Supply (Laptop)	Laptop
DC Power Cable (I/O Control Device)	No	2.8m	Yes	48V DC Power Supply	I/O Control Device
Fiber Optic Cable	No	>3.0m	No	I/O Control Device	Prism 1900/2100AWS3 Dual HDM 20 Watt
AC Mains Cable (AWS3 Dual RF Module)	No	5.0m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	AC Mains
Output Cable 1	No	1.5m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	Attenuator 1
Output Cable 2	No	0.9m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	Attenuator 2
Ethernet Cable	No	1.0m	No	I/O Control Device	Laptop
Coaxial Cable 1	No	1.8m	No	Signal Generator 1	I/O Control Device
Coaxial Cable 2	No	1.8m	No	Signal Generator 2	I/O Control Device
AC Mains Cable (Signal Generator 1)	No	1.8m	No	Signal Generator 1	AC Mains
AC Mains Cable (Signal Generator 2)	No	1.8m	No	Signal Generator 2	AC Mains

CONFIGURATIONS



2017-1-25

Configuration TECO0042- 2

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism 1900/2100AWS3 Dual HDM 20 Watt	CommScope	7761388-00-11	459644002

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Attenuator 1	Inmet Corporation	2N75W-30-296	None
Attenuator 2	Aeroflex	48-30-34	RCU

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Signal Generator 1	Aeroflex	IFR 3413	341007/003
Signal Generator 2	Aeroflex	IFR 3413	341006/056
48V DC Power Supply	TDK-Lambda	SWS300A-48	3LR-140Y11-0106HO411
Laptop	Lenovo	T510	431436U
Power Supply (Laptop)	Lenovo	92P1156	11S92P1156Z1ZDXN8A81AZ
I/O Control Device	CommScope/ADC Telecommunications	1673542-21	MR222P8C

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Mains Cable (Laptop)	No	1.8m	No	AC Mains	Power Supply (Laptop)
DC Power Cable (Laptop)	No	1.8m	Yes	Power Supply (Laptop)	Laptop
DC Power Cable (I/O Control Device)	No	2.8m	Yes	48V DC Power Supply	I/O Control Device
Fiber Optic Cable	No	>3.0m	No	I/O Control Device	Prism 1900/2100AWS3 Dual HDM 20 Watt
AC Mains Cable (AWS3 Dual RF Module)	No	5.0m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	AC Mains
Output Cable 1	No	1.5m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	Attenuator 1
Output Cable 2	No	0.9m	No	Prism 1900/2100AWS3 Dual HDM 20 Watt	Attenuator 2
Ethernet Cable	No	1.0m	No	I/O Control Device	Laptop
Coaxial Cable 1	No	1.8m	No	Signal Generator 1	I/O Control Device
Coaxial Cable 2	No	1.8m	No	Signal Generator 2	I/O Control Device
AC Mains Cable (Signal Generator 1)	No	1.8m	No	Signal Generator 1	AC Mains
AC Mains Cable (Signal Generator 2)	No	1.8m	No	Signal Generator 2	AC Mains

CONFIGURATIONS



Configuration TECO0048- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism 1900/2100AWS3 Dual HDM 20 Watt	CommScope Connectivity LLC	7780060-00-11	4608740003

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Attenuator (1)	Aeroflex	49-30-33	MZ078
Attenuator (2)	Inmet Corp.	75 Watt	2N75W-30-296

Remote Equipment Outside of Test Setup Boundary			
Description	Manufacturer	Model/Part Number	Serial Number
Signal Generator	Aeroflex	IFR 3414	341007/003
Comm Box	ADC	1673542-21	MR222P8C
AC Converter	TDK	SWS300A-48 EHFP	3LR-140Y11-0105H0411
Laptop	Lenovo	SL510	LR-ZZMRO 10/05

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Cable (Comm Box)	No	2m	No	Comm Box	AC Converter
AC Cable (EUT)	No	3m	No	EUT	AC Mains
AC Cable (AC Converter)	No	3m	No	AC Converter	AC Mains
AC Cable (Sig Gen)	No	1.5 m	No	Signal Generator	AC Mains
RF Cable	No	1m	No	Signal Generator	Comm Box
RF Cable	No	1m	No	EUT	Attenuator 1
Fiber Cable	No	10m	No	EUT	Comm Box
RF Cable	No	1m	No	EUT	Attenuator 2
Ethernet Cable	No	1m	No	Laptop	Comm Box

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	4/9/2014	Emissions Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT was taken home by the client following the test.
2	5/23/2017	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	5/23/2017	Equivalent Isotropic Radiated Power (EIRP)	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	5/24/2017	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	5/24/2017	Intermodulation	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	5/24/2017	Peak to Average Ratio	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	5/24/2017	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT was taken home by the client following the test.
8	2/20/2018	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.



TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24

TEST DESCRIPTION

The Average (RMS) output power was measured with the EUT set to the parameters called out in the data sheets. The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Prior to making the measurements the setup, including cables and attenuators were calibrated and added into the reference level offset.

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt	Work Order: TECO0013			
Serial Number: None	Date: 04/09/14			
Customer: TE Connectivity / ADC Telecommunications	Temperature: 24.2°C			
Attendees: None	Humidity: 21%			
Project: None	Barometric Pres.: 1013.5			
Tested by: Trevor Buls	Job Site: MN08			
TEST SPECIFICATIONS				
FCC 24E:2014	Test Method: ANSI/TIA/EIA-603-C-2004			
COMMENTS				
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset. Both antenna ports were terminated but only one port is active				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	1			
Signature				
<i>Trevor Buls</i>				
		Value	Limit	Result
LTE 10 MHz		43.063 dBm	< 1640 W	Pass
		42.809 dBm	< 1640 W	Pass
		41.772 dBm	< 1640 W	Pass

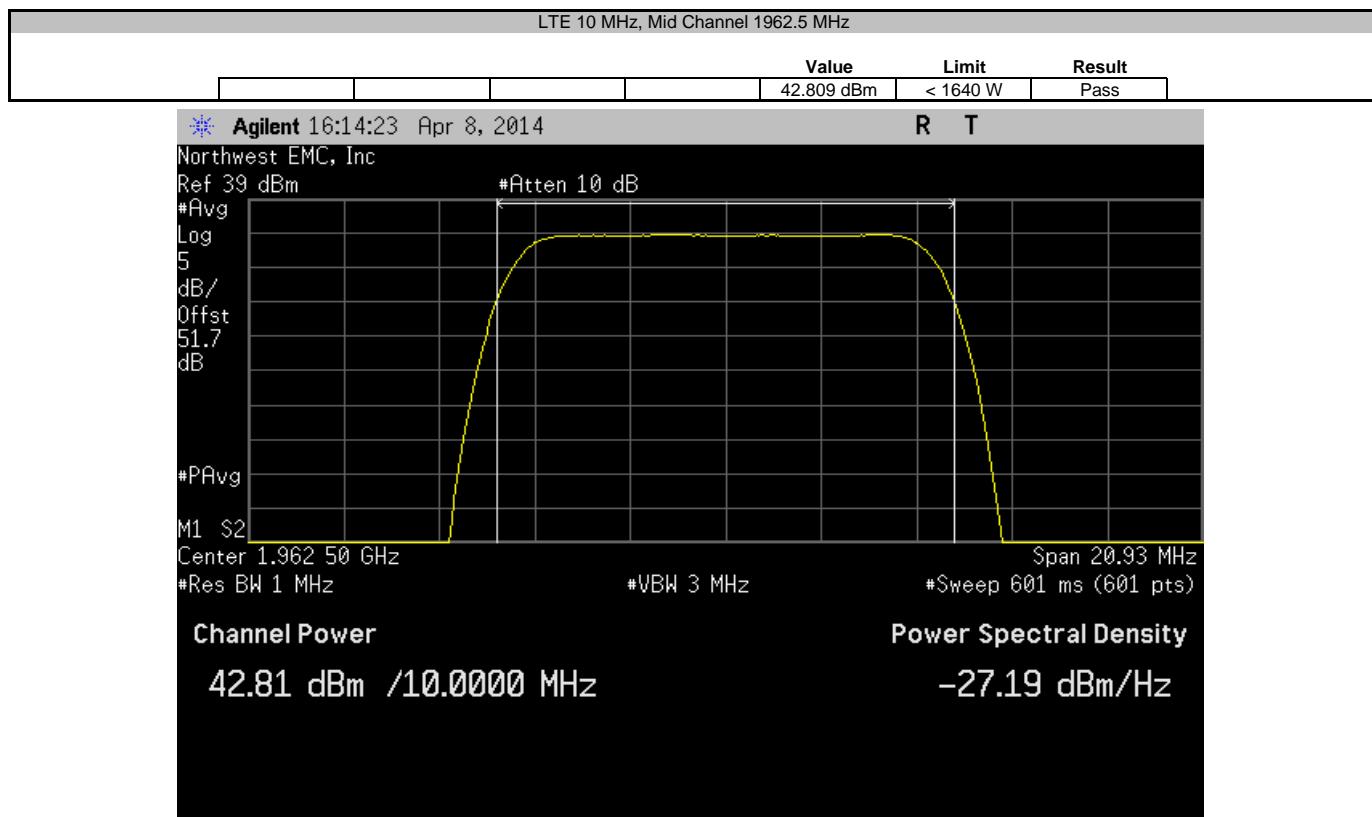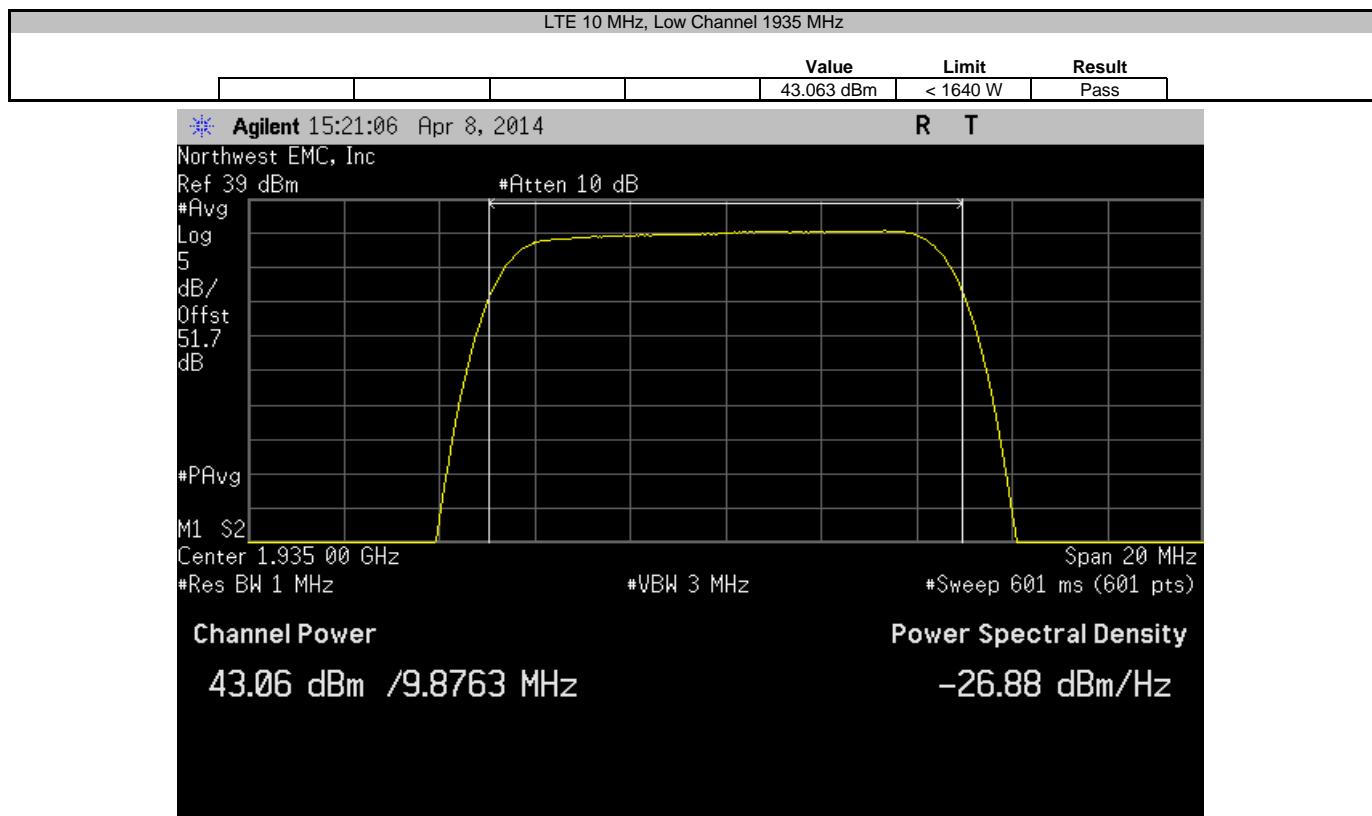

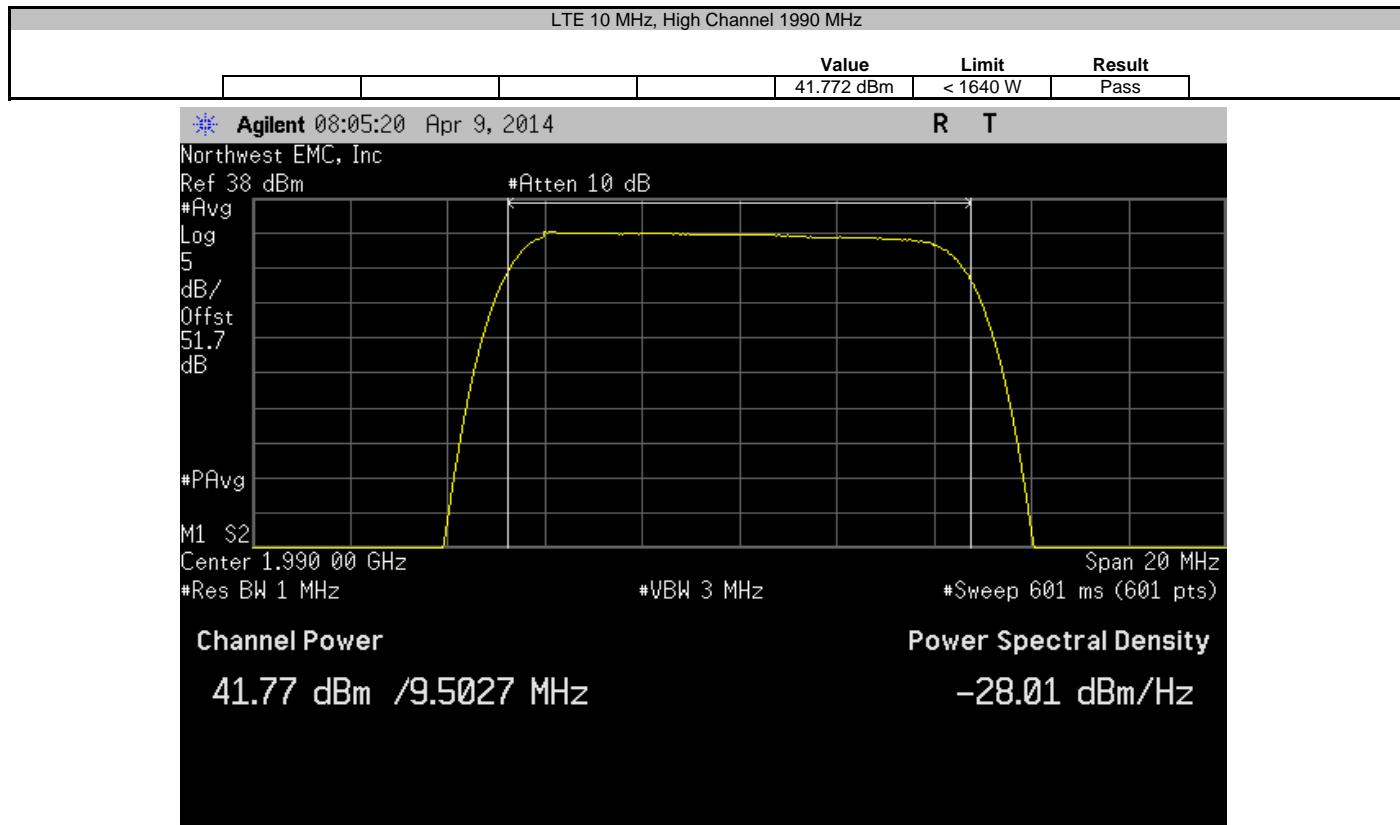

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.



TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION

The Average (RMS) output power was measured with the EUT set to the Parameters called out in the data sheets. The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Prior to making the measurements, the setup, including cables and attenuators were calibrated and added into the reference level offset.

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt	Work Order: TECO0017		
Serial Number: None	Date: 07/15/14		
Customer: TE Connectivity / ADC Telecommunications	Temperature: 23.1°C		
Attendees: Josh Wittman	Humidity: 45%		
Project: None	Barometric Pres.: 1021.6		
Tested by: Trevor Buls	Job Site: MN08		
TEST SPECIFICATIONS			
FCC 24E:2014	Test Method: ANSI/TIA/EIA-603-C-2004		
COMMENTS			
A 30 dB high wattage attenuator was provided by the customer. Both antenna ports were terminated but only one port is active			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1		
Signature 			
WCDMA	Value	Limit	Result
Low Channel 1932.5 MHz	43.33 dBm	< 1640 W	Pass
Mid Channel 1962.5 MHz	43.291 dBm	< 1640 W	Pass
High Channel 1992.5 MHz	43.165 dBm	< 1640 W	Pass

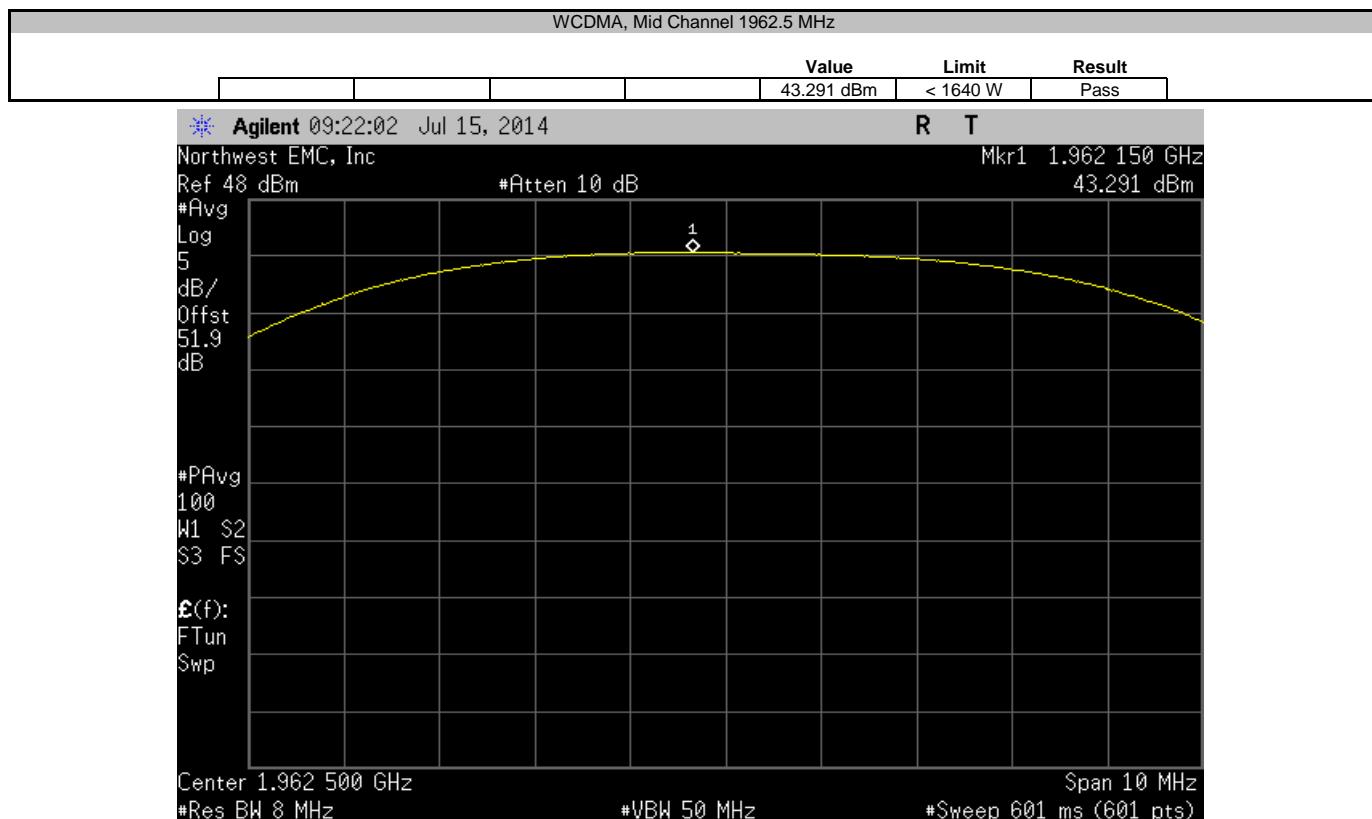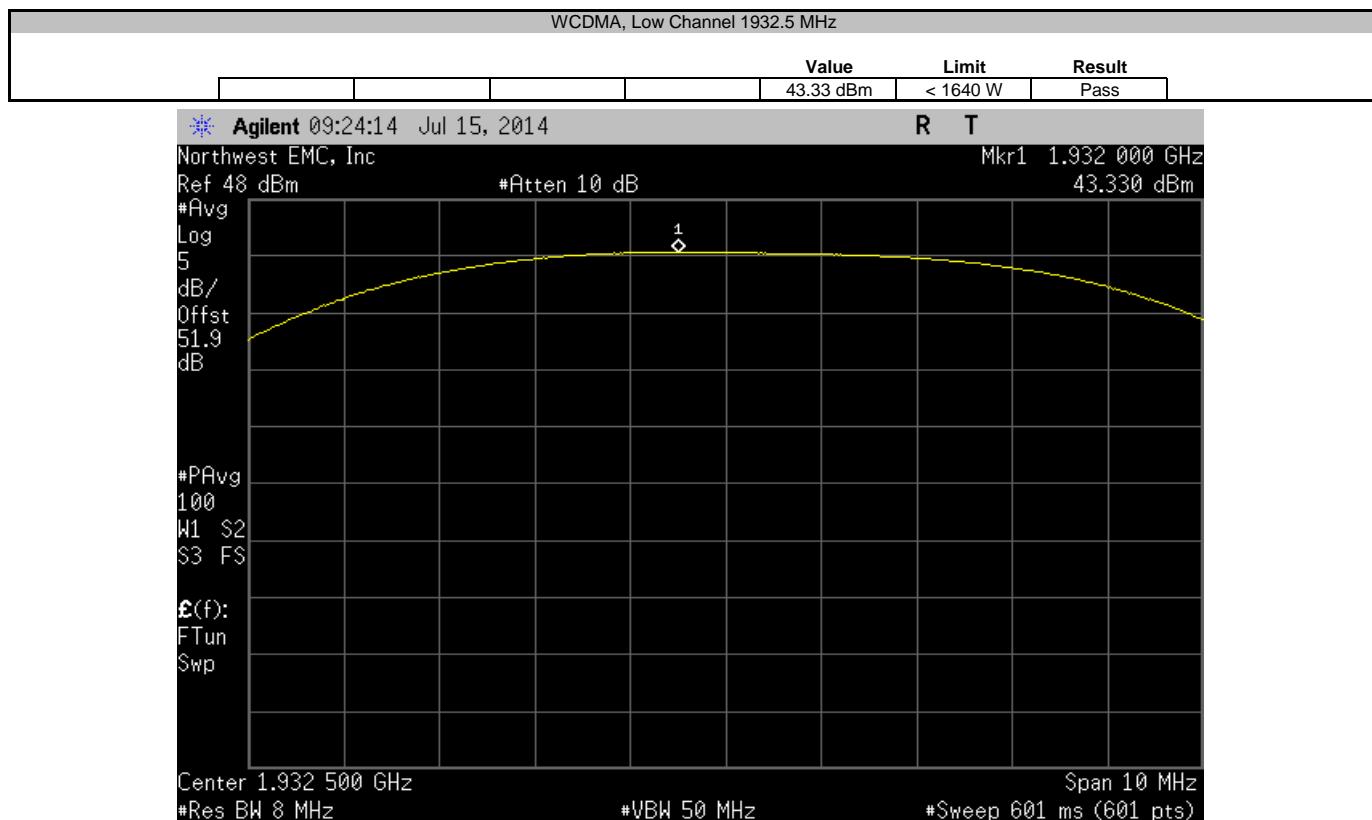

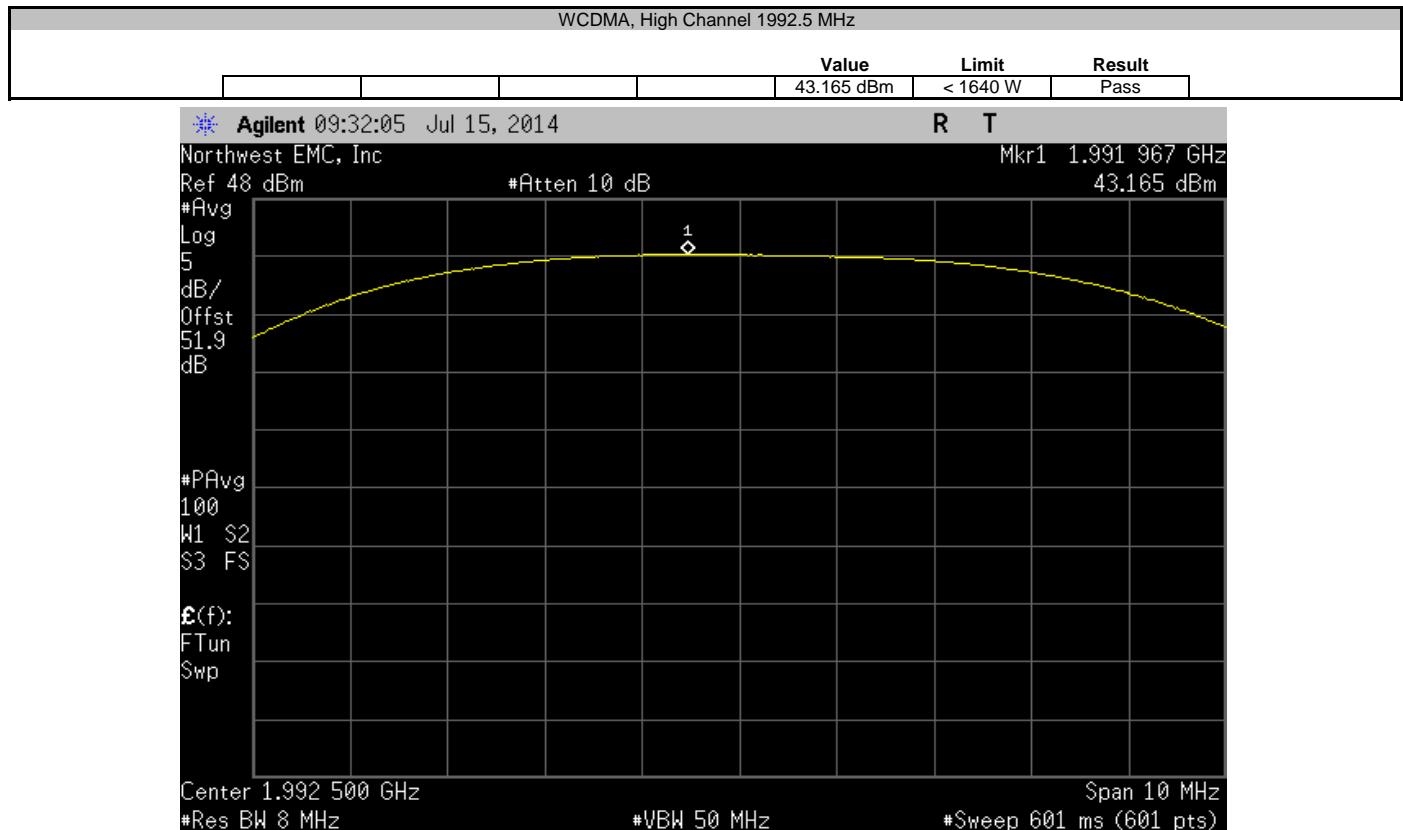

PEAK TO AVERAGE RATIO

1900 LTE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24

TEST DESCRIPTION

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Ratio was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed 13 dBm.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

The spectrum analyzer settings were as follows:

Span set to encompass the entire emission bandwidth, centered on the transmit channel.


The largest difference between the following two screen captures was calculated:

- 1st Screen Capture: The same procedure and settings as was used for conducted Output Power.
- 2nd Screen Capture: Same as Screen capture 1 except using a peak detector and trace max-hold.


PEAK TO AVERAGE RATIO 1900 LTE

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TECO0013																		
Serial Number: None		Date: 04/09/14																		
Customer: TE Connectivity / ADC Telecommunications		Temperature: 24.2°C																		
Attendees: None		Humidity: 21%																		
Project: None		Barometric Pres.: 1013.5																		
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08																		
TEST SPECIFICATIONS																				
FCC 24E:2014 Test Method: ANSI/TIA/EIA-603-C-2004																				
COMMENTS																				
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset. Both antenna ports were terminated but only one port is active																				
DEVIATIONS FROM TEST STANDARD																				
None																				
Configuration #	1	Signature 																		
<table border="1"> <thead> <tr> <th></th> <th>Average Value (dBm)</th> <th>Peak Value (dBm)</th> <th>Delta (dB)</th> <th>Limit (dB)</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Average (RMS)</td> <td>41.84</td> <td>N/A</td> <td>N/A</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>Peak</td> <td>N/A</td> <td>45.22</td> <td>3.38</td> <td>13</td> <td>Pass</td> </tr> </tbody> </table>				Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	Average (RMS)	41.84	N/A	N/A	N/A	N/A	Peak	N/A	45.22	3.38	13	Pass
	Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result															
Average (RMS)	41.84	N/A	N/A	N/A	N/A															
Peak	N/A	45.22	3.38	13	Pass															
LTE 10 MHz																				

LTE 10 MHz, Average (RMS)					
Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	
41.84	N/A	N/A	N/A	N/A	N/A

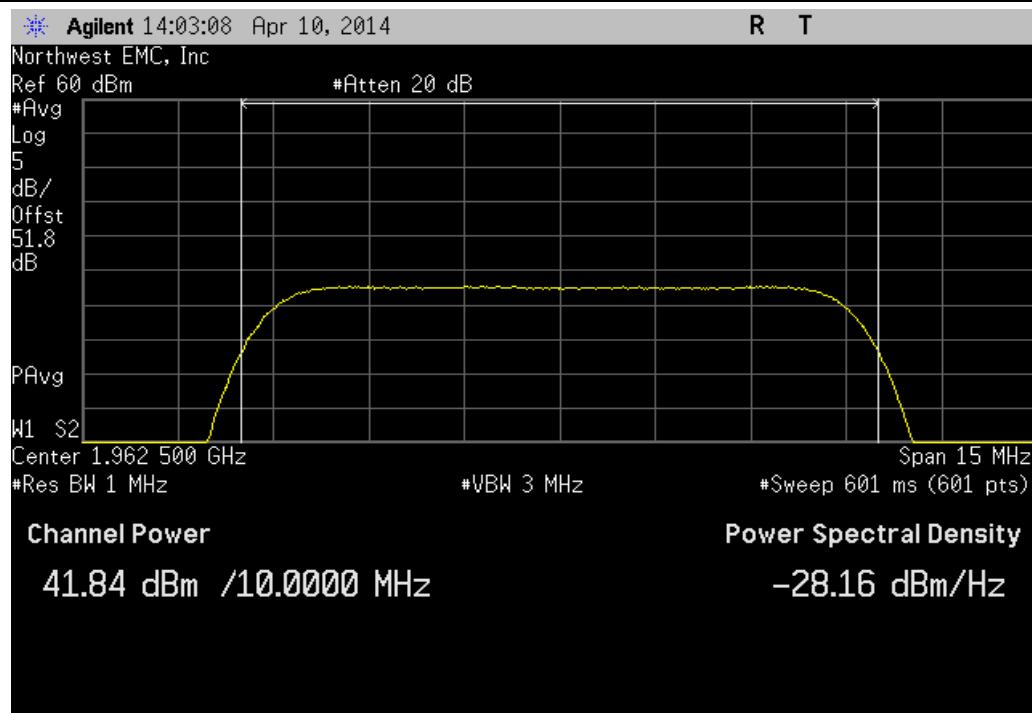

LTE 10 MHz, Peak					
Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	
	45.22	3.38	13	Pass	

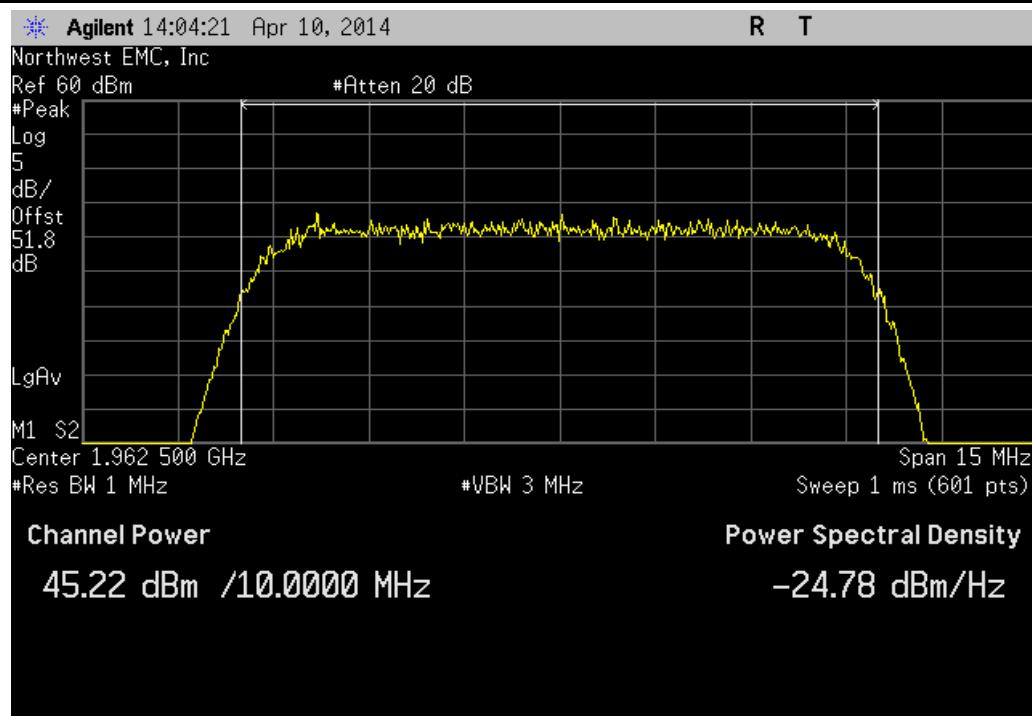

PEAK TO AVERAGE RATIO 1900 WCDMA

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Ratio was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed 13 dBm.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

The spectrum analyzer settings were as follows:

Span set to encompass the entire emission bandwidth, centered on the transmit channel.


The largest difference between the following two screen captures was calculated:

- 1st Screen Capture: The same procedure and settings as was used for conducted Output Power.
- 2nd Screen Capture: Same as Screen capture 1 except using a peak detector and trace max-hold.


PEAK TO AVERAGE RATIO 1900 WCDMA

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TECO0017																		
Serial Number: None		Date: 07/16/14																		
Customer: TE Connectivity / ADC Telecommunications		Temperature: 23.3°C																		
Attendees: None		Humidity: 43%																		
Project: None		Barometric Pres.: 1020.6																		
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08																		
TEST SPECIFICATIONS																				
FCC 24E:2014 Test Method: ANSI/TIA/EIA-603-C-2004																				
COMMENTS																				
A 30 dB high wattage attenuator was provided by the customer. Both antenna ports were terminated but only one port is active																				
DEVIATIONS FROM TEST STANDARD																				
None																				
Configuration #	1	Signature: <i>Trevor Buls</i>																		
<table border="1"> <thead> <tr> <th></th> <th>Average Value (dBm)</th> <th>Peak Value (dBm)</th> <th>Delta (dB)</th> <th>Limit (dB)</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>Average (RMS)</td> <td>43.177</td> <td>N/A</td> <td>N/A</td> <td>N/A</td> <td>N/A</td> </tr> <tr> <td>Peak</td> <td>N/A</td> <td>52.81</td> <td>9.6</td> <td>13</td> <td>Pass</td> </tr> </tbody> </table>				Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	Average (RMS)	43.177	N/A	N/A	N/A	N/A	Peak	N/A	52.81	9.6	13	Pass
	Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result															
Average (RMS)	43.177	N/A	N/A	N/A	N/A															
Peak	N/A	52.81	9.6	13	Pass															
WCDMA																				

WCDMA, Average (RMS)					
Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	
43.177	N/A	N/A	N/A	N/A	N/A

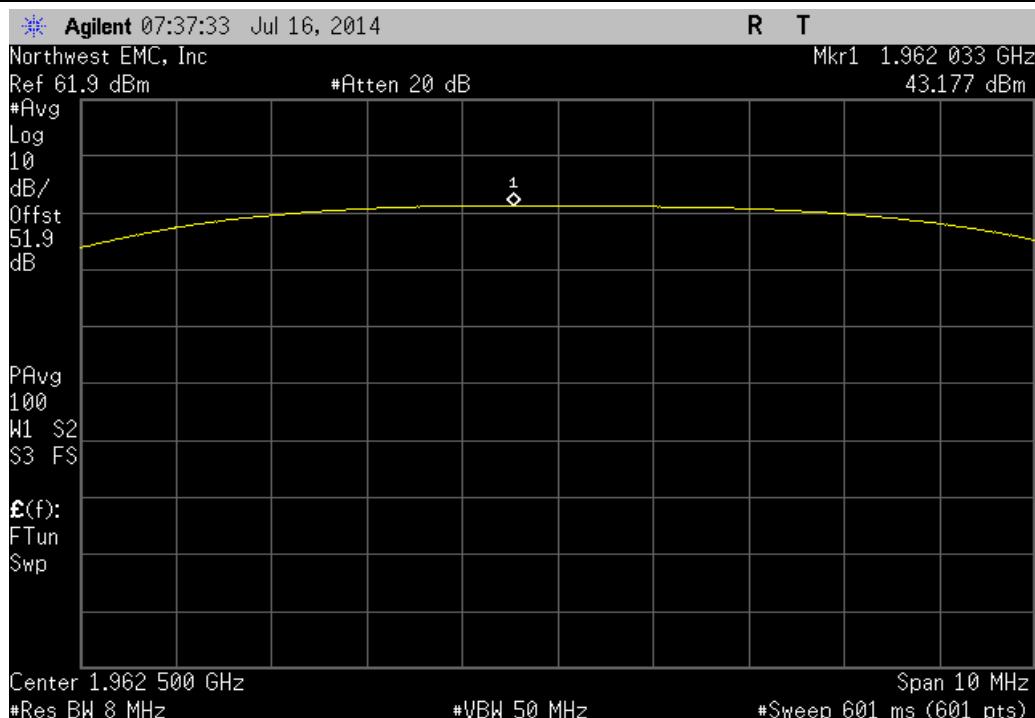

WCDMA, Peak					
Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	
N/A	52.81	9.6	13	Pass	

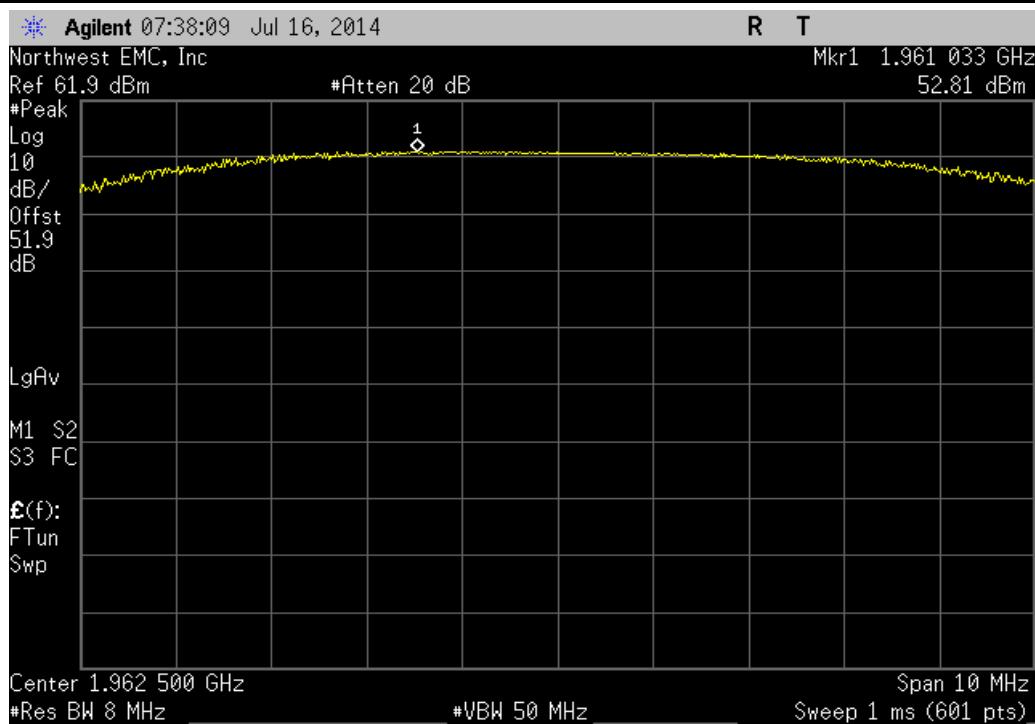

EMISSIONS BANDWIDTH 1900 LTE10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24



TEST DESCRIPTION


The 26 dB occupied bandwidth was measured utilizing the analyzer's peak detector based on the peak output power level measured. A plot was taken to show the occupied bandwidth is contained within the allowable transmit band.


A direct connection was made between the EUT and a spectrum analyzer. The resolution bandwidth was approximately equal to 1% of the 26 dB bandwidth and the video bandwidth was greater than or equal to the resolution bandwidth.

The occupied bandwidth was measured with the EUT configured in the modes called out in the data sheets.

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TECO0013																				
Serial Number: None		Date: 04/09/14																				
Customer: TE Connectivity / ADC Telecommunications		Temperature: 24.2°C																				
Attendees: None		Humidity: 21%																				
Project: None		Barometric Pres.: 1013.5																				
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08																				
TEST SPECIFICATIONS																						
FCC 24E:2014																						
Test Method: ANSI/TIA/EIA-603-C-2004																						
COMMENTS																						
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset. Both antenna ports were terminated but only one port is active																						
DEVIATIONS FROM TEST STANDARD																						
None																						
Configuration #	1	Signature: <i>Trevor Buls</i>																				
<table border="1"> <thead> <tr> <th></th> <th>Value</th> <th>Limit</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>LTE 10 MHz</td> <td>Low Channel 1935 MHz</td> <td>9.876 MHz</td> <td>N/A</td> </tr> <tr> <td></td> <td>Mid Channel 1962.5 MHz</td> <td>9.557 MHz</td> <td>N/A</td> </tr> <tr> <td></td> <td>High Channel 1990 MHz</td> <td>9.503 MHz</td> <td>N/A</td> </tr> <tr> <td>Input Signal - LTE 10 MHz</td> <td>Mid Channel 1962.5 MHz</td> <td>9.466 MHz</td> <td>N/A</td> </tr> </tbody> </table>				Value	Limit	Result	LTE 10 MHz	Low Channel 1935 MHz	9.876 MHz	N/A		Mid Channel 1962.5 MHz	9.557 MHz	N/A		High Channel 1990 MHz	9.503 MHz	N/A	Input Signal - LTE 10 MHz	Mid Channel 1962.5 MHz	9.466 MHz	N/A
	Value	Limit	Result																			
LTE 10 MHz	Low Channel 1935 MHz	9.876 MHz	N/A																			
	Mid Channel 1962.5 MHz	9.557 MHz	N/A																			
	High Channel 1990 MHz	9.503 MHz	N/A																			
Input Signal - LTE 10 MHz	Mid Channel 1962.5 MHz	9.466 MHz	N/A																			

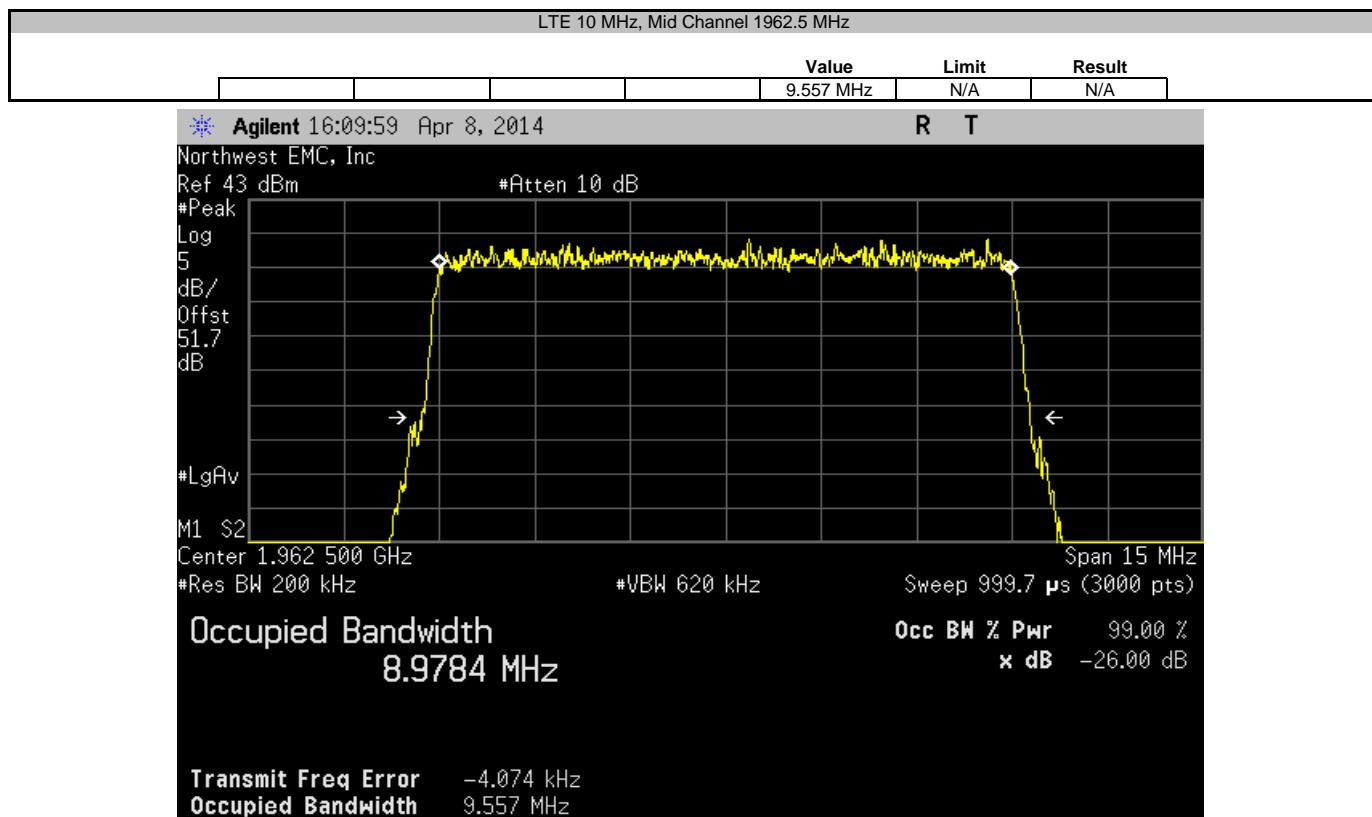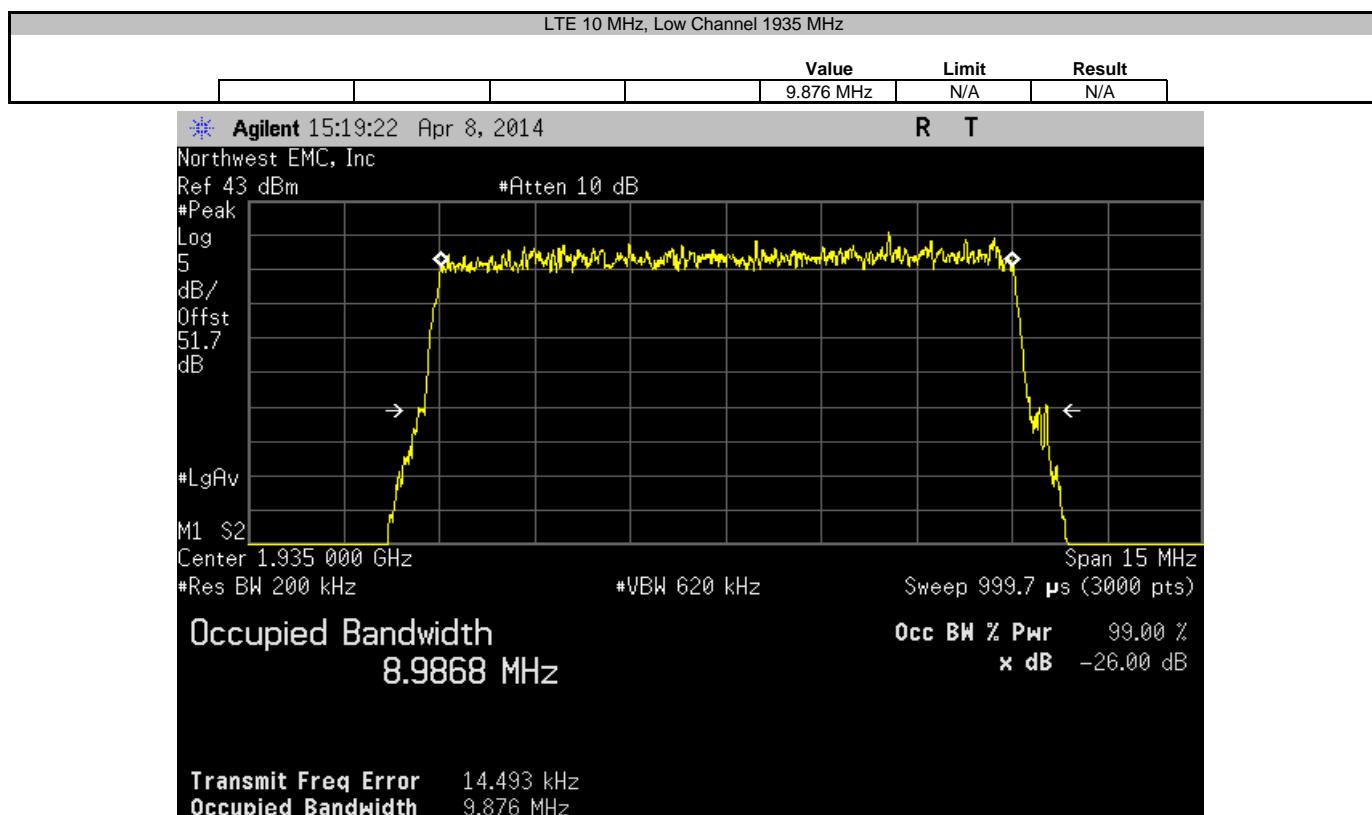

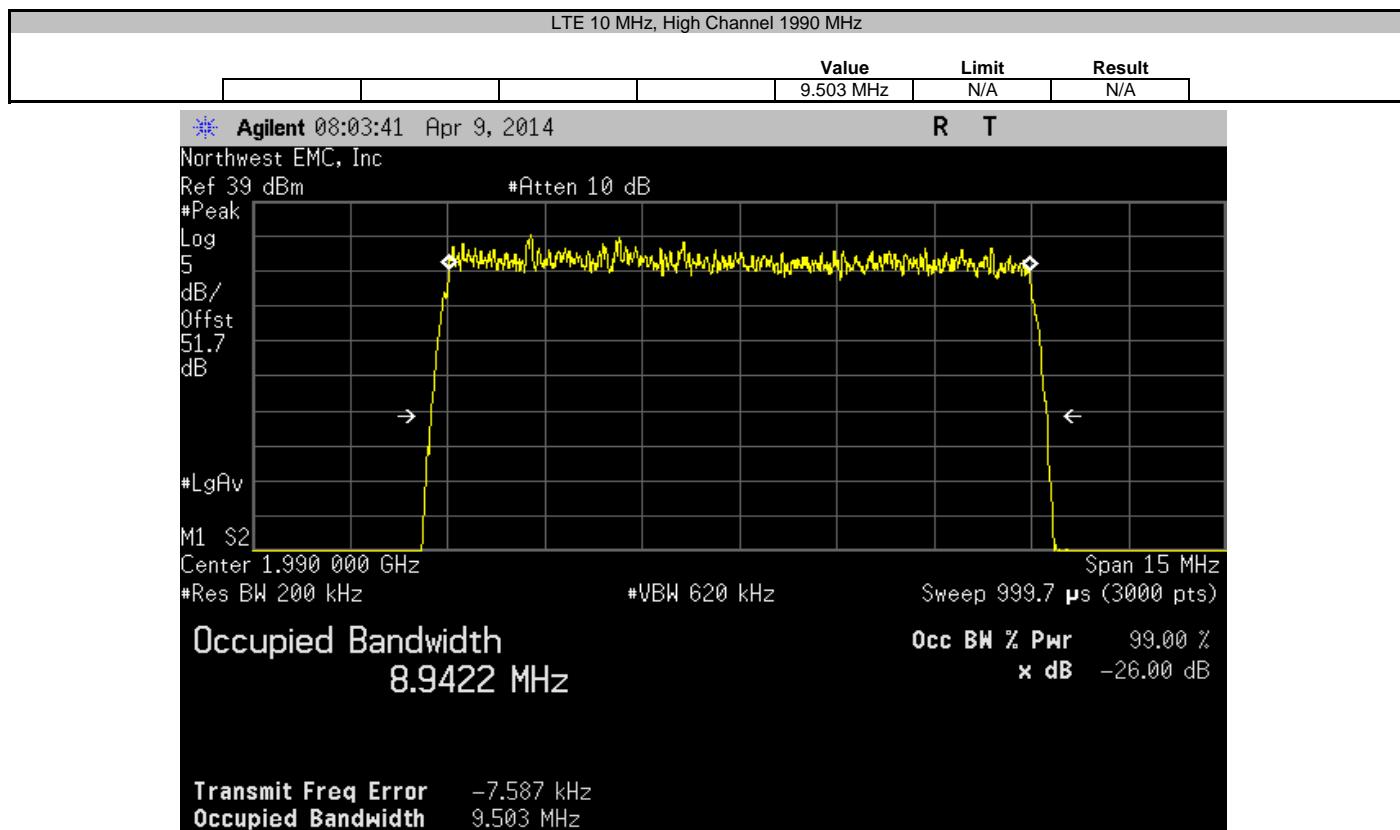

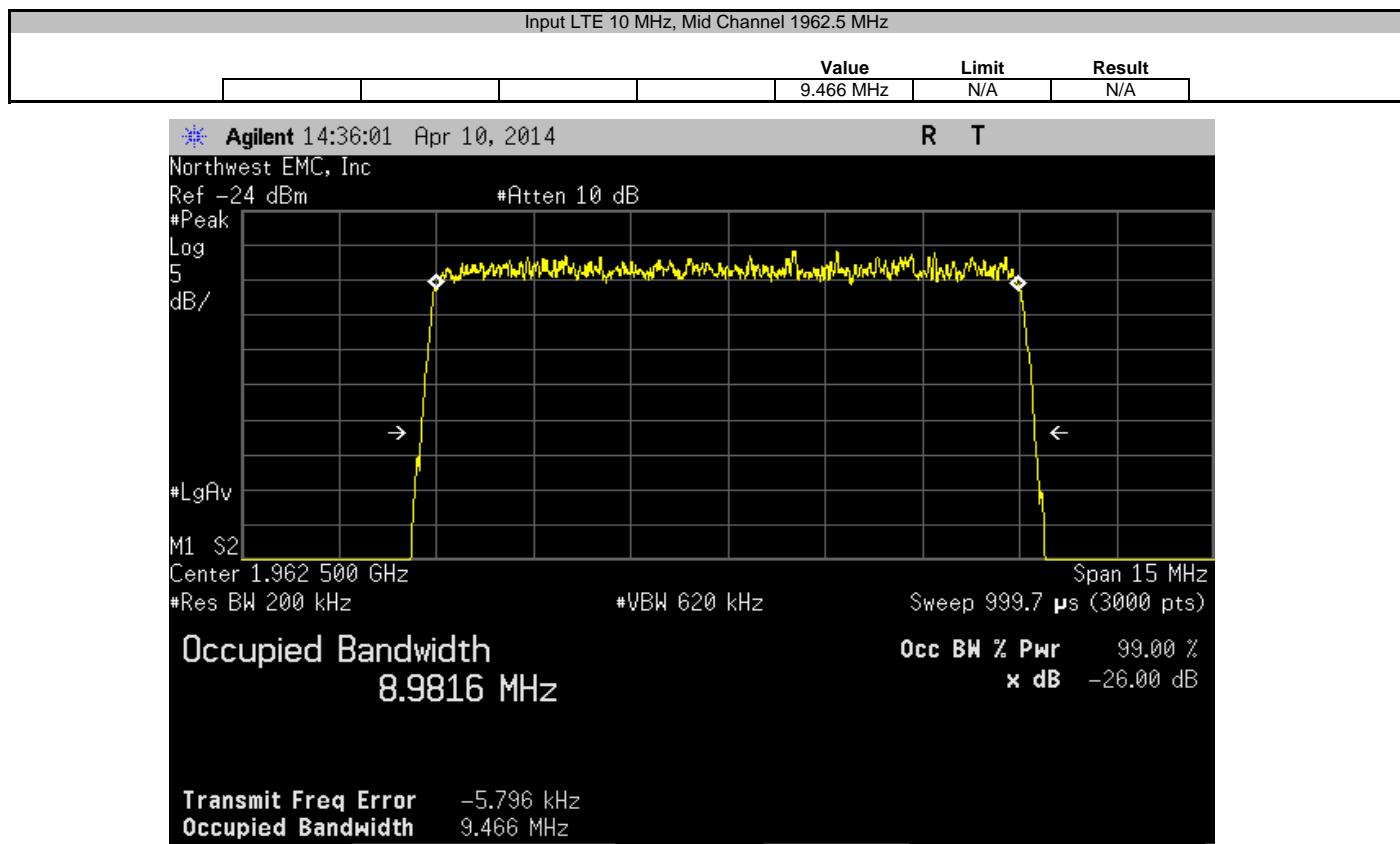

EMISSIONS BANDWIDTH 1900 WCDMA

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12



TEST DESCRIPTION



The occupied bandwidth was measured utilizing the analyzer's peak detector and measuring the carrier's 26 dB occupied bandwidth based on the peak output power level measured. A plot was taken to show the occupied bandwidth is contained within the allowable transmit band.

A direct connection was made between the EUT and a spectrum analyzer. The resolution bandwidth was approximately equal to 1% of the 26dB bandwidth and the video bandwidth was greater than or equal to the resolution bandwidth.

The occupied bandwidth was measured with the EUT configured in the modes called out in the data sheets.

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt	Work Order: TECO0017		
Serial Number: None	Date: 07/15/14		
Customer: TE Connectivity / ADC Telecommunications	Temperature: 23.1°C		
Attendees: Josh Wittman	Humidity: 45%		
Project: None	Barometric Pres.: 1021.6		
Tested by: Trevor Buls	Job Site: MN08		
TEST SPECIFICATIONS			
FCC 24E:2014	Test Method: ANSI/TIA/EIA-603-C-2004		
COMMENTS			
A 30 dB high wattage attenuator was provided by the customer. Both antenna ports were terminated but only one port is active			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	1		
Signature: 			
	Value	Limit	Result
WCDMA			
Low Channel 1932.5 MHz	4.657 MHz	N/A	N/A
Mid Channel 1962.5 MHz	4.686 MHz	N/A	N/A
High Channel 1992.5 MHz	4.66 MHz	N/A	N/A
WCDMA Input Signal			
Mid Channel 1962.5 MHz	4.683 MHz	N/A	N/A

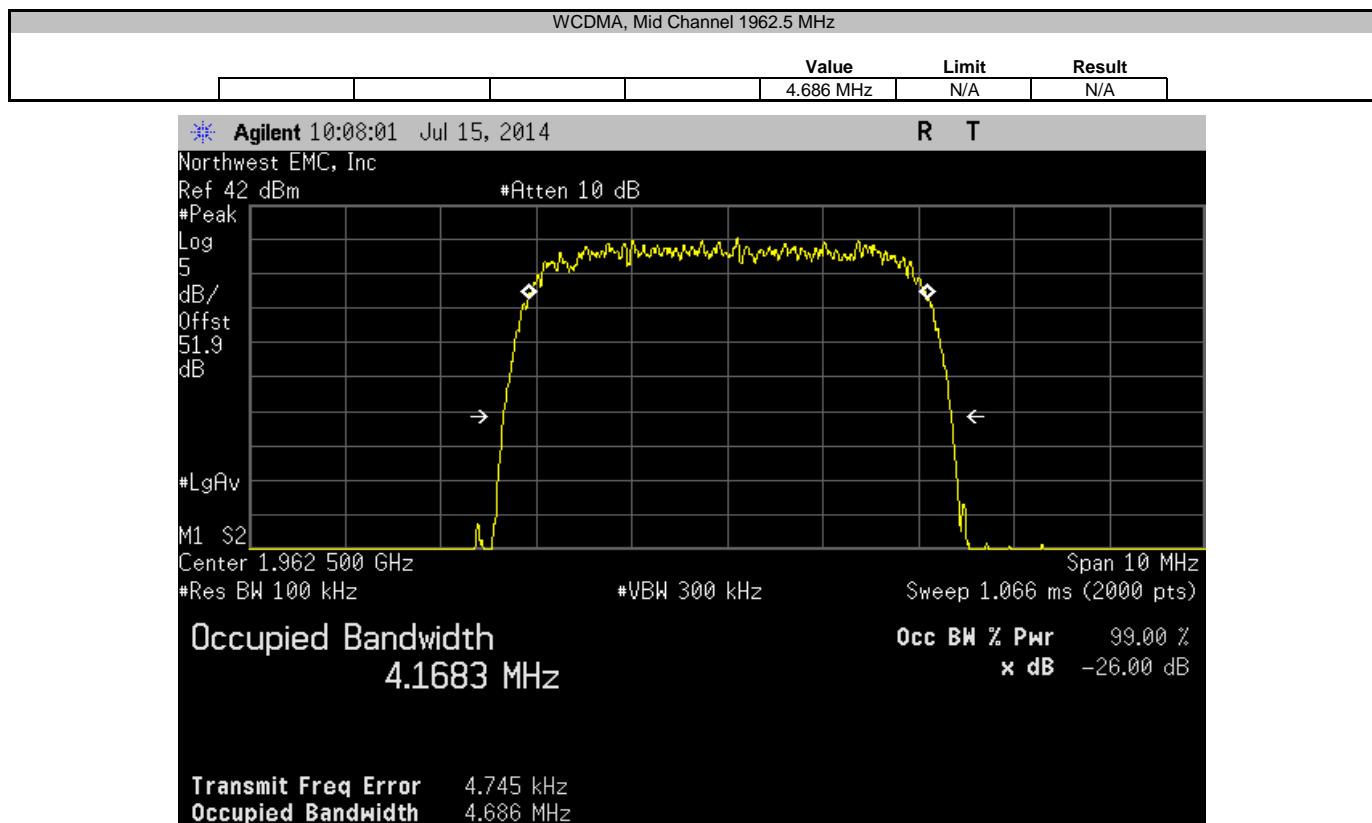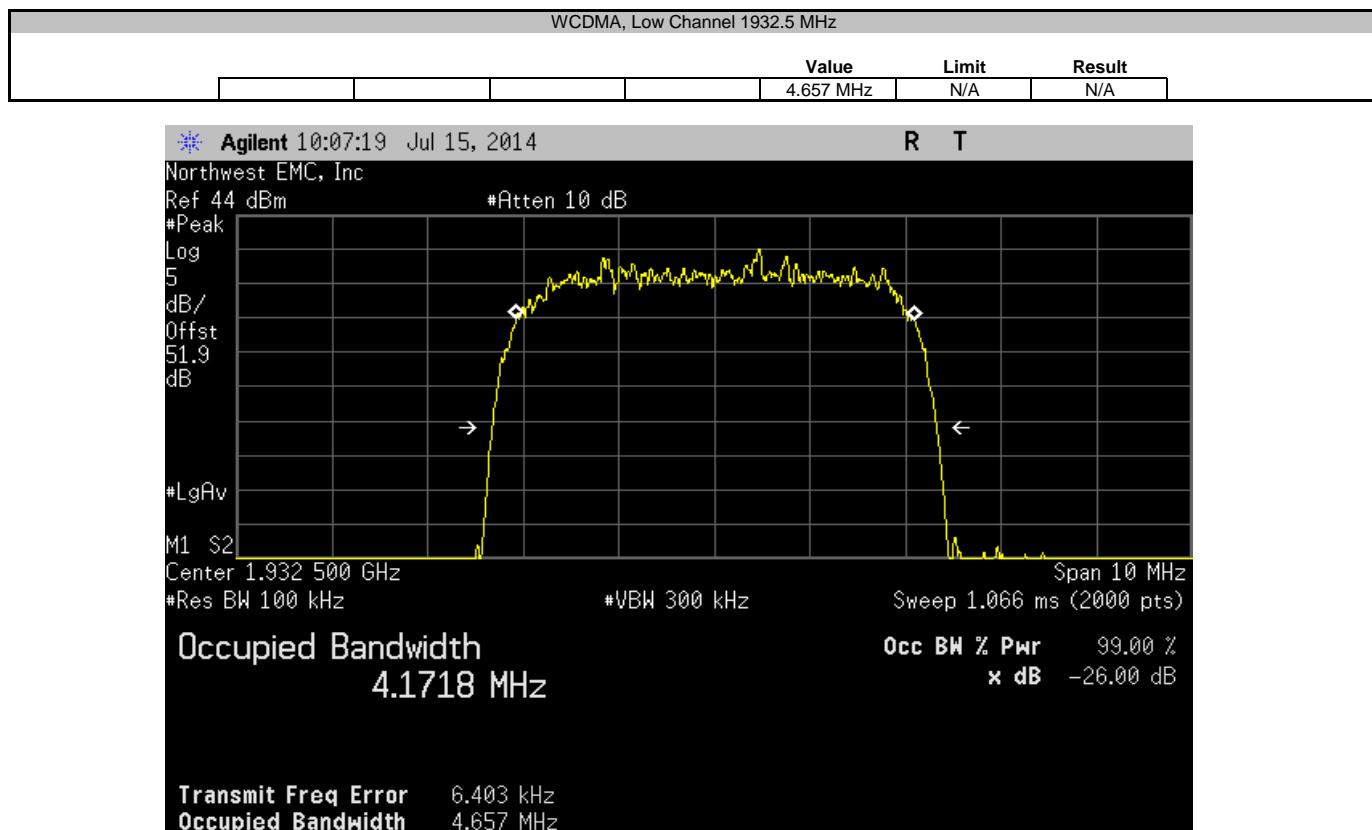

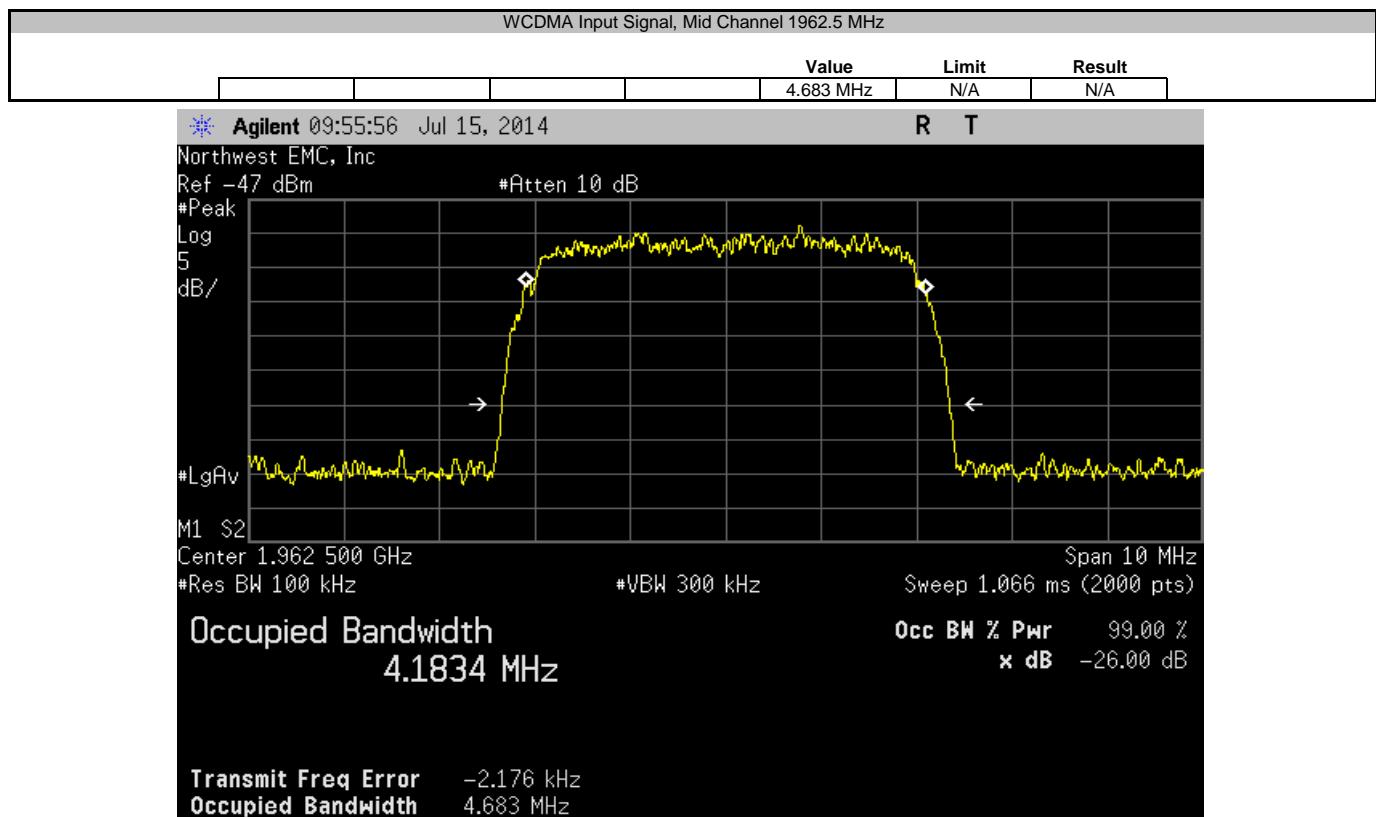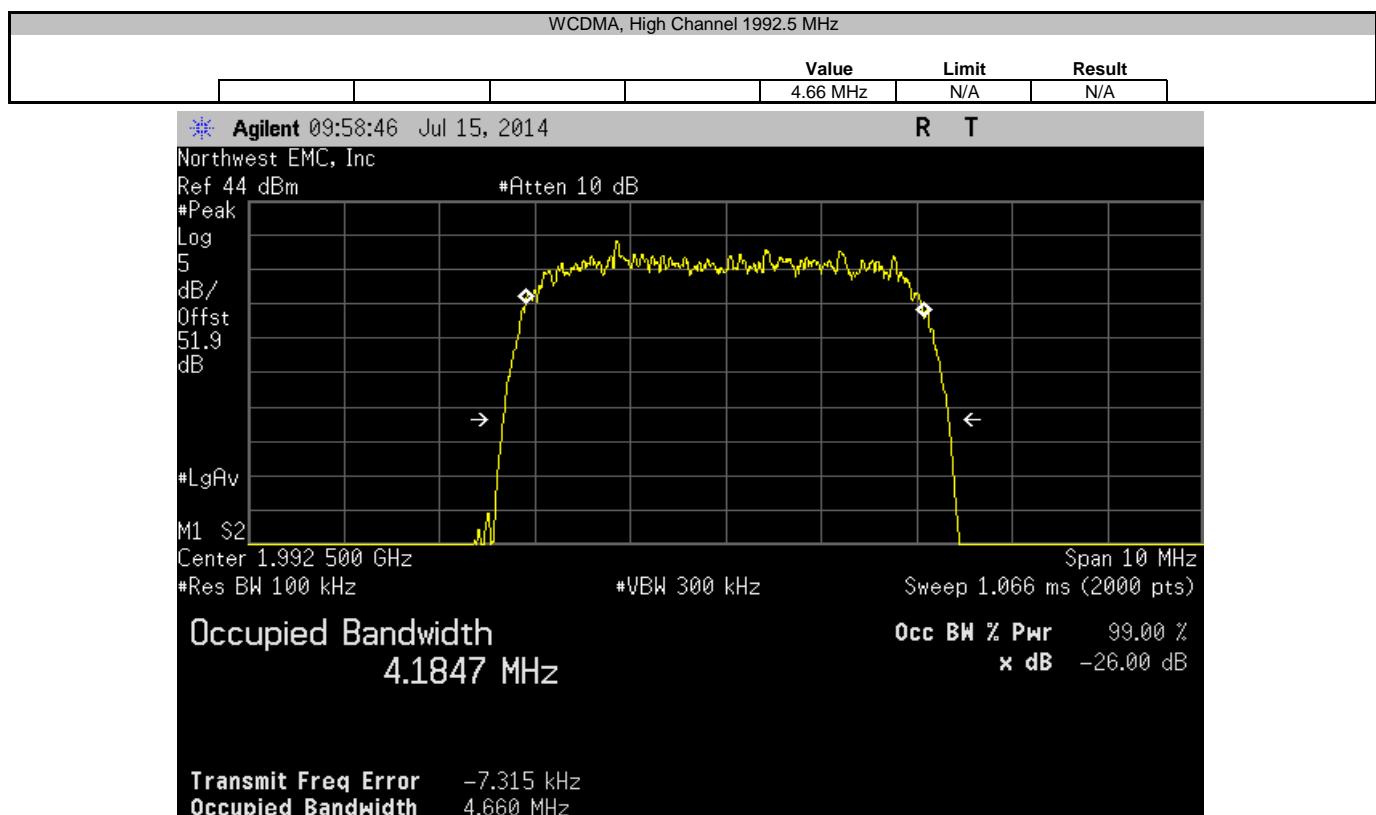

SPURIOUS CONDUCTED EMISSIONS 1900 LTE10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Interval
Low Pass Filter 0-1000 MHz	Micro-Tronics	LPM50004	HGV	10/5/2012	24
High Pass Filter 2.8 GHz	Micro-Tronics	HPM50111	HGY	10/5/2012	24
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24

TEST DESCRIPTION


The antenna port spurious emissions were measured at the RF output terminal of the EUT with external attenuation on the RF input of the spectrum analyzer. Analyzer plots utilizing a 1 MHz resolution bandwidth and no video filtering were made for each modulation type from 30 MHz to 9 GHz. The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to -13 dBm.

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TECO0013			
Serial Number: None		Date: 04/11/14			
Customer: TE Connectivity / ADC Telecommunications		Temperature: 25°C			
Attendees: None		Humidity: 25%			
Project: None		Barometric Pres.: 1017.2			
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08			
TEST SPECIFICATIONS					
FCC 24E:2014					
ANSI/TIA/EIA-603-C-2004					
COMMENTS					
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset. Both antenna ports were terminated but only one port is active					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature 			
		Frequency Range	Value	Limit	Result
LTE 10 MHz					
Mid Channel 1962.5 MHz		30 MHz - 1 GHz	-39.74 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz		1 GHz - 3 GHz	-19.76 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz		3 GHz - 20 GHz	-29.45 dBm	≤ -13 dBm	Pass
Low Channel 1935 MHz		30 MHz - 1 GHz	-39.88 dBm	≤ -13 dBm	Pass
Low Channel 1935 MHz		1 GHz - 3 GHz	-19.51 dBm	≤ -13 dBm	Pass
Low Channel 1935 MHz		3 GHz - 20 GHz	-29.2 dBm	≤ -13 dBm	Pass
High Channel 1990 MHz		30 MHz - 1 GHz	-40.24 dBm	≤ -13 dBm	Pass
High Channel 1990 MHz		1 GHz - 3 GHz	-20.45 dBm	≤ -13 dBm	Pass
High Channel 1990 MHz		3 GHz - 20 GHz	-29.52 dBm	≤ -13 dBm	Pass


LTE 10 MHz, Mid Channel 1962.5 MHz					
Frequency Range		Value	Limit	Result	
	30 MHz - 1 GHz	-39.74 dBm	≤ -13 dBm	Pass	

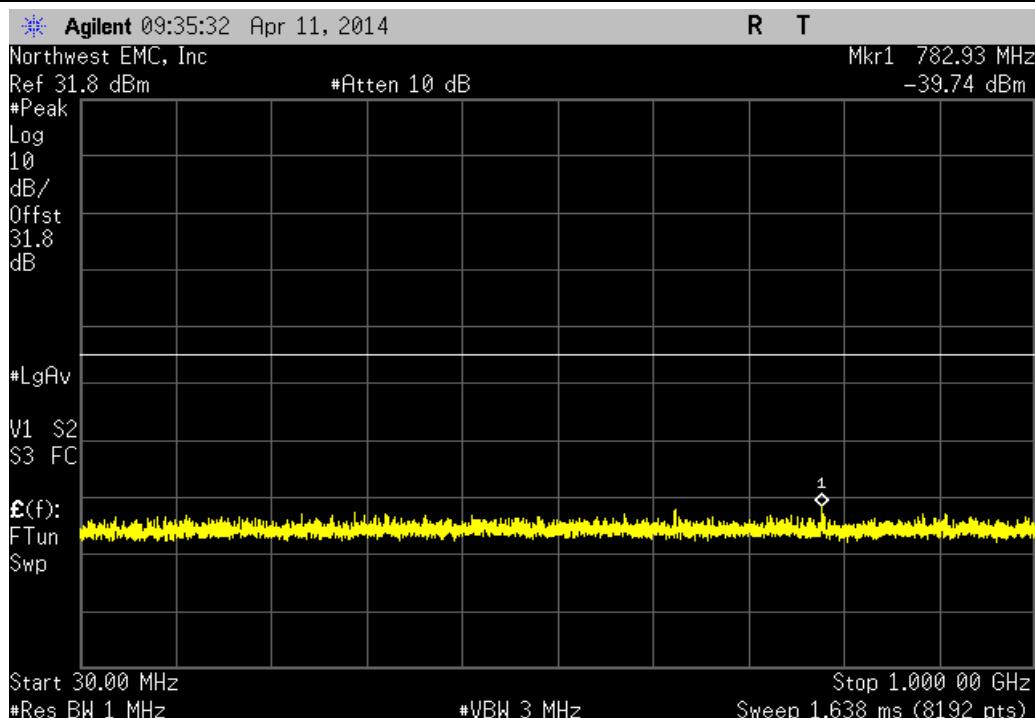


LTE 10 MHz, Mid Channel 1962.5 MHz					
Frequency Range		Value	Limit	Result	
	1 GHz - 3 GHz	-19.76 dBm	≤ -13 dBm	Pass	

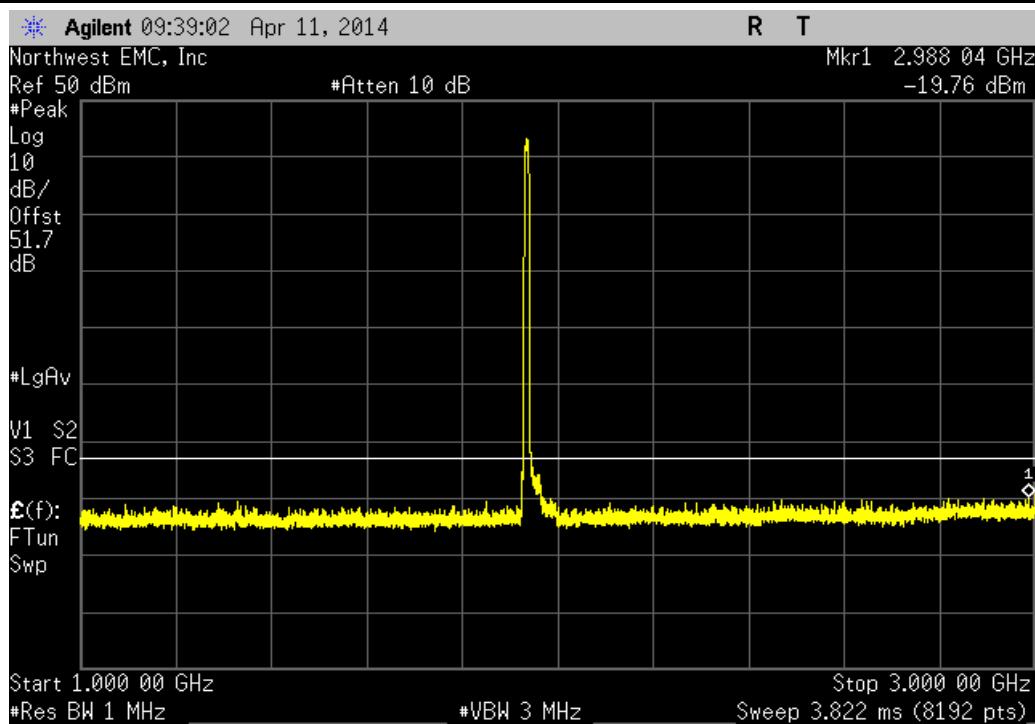


LTE 10 MHz, Mid Channel 1962.5 MHz					
Frequency Range		Value	Limit	Result	
3 GHz - 20 GHz		-29.45 dBm	≤ -13 dBm	Pass	

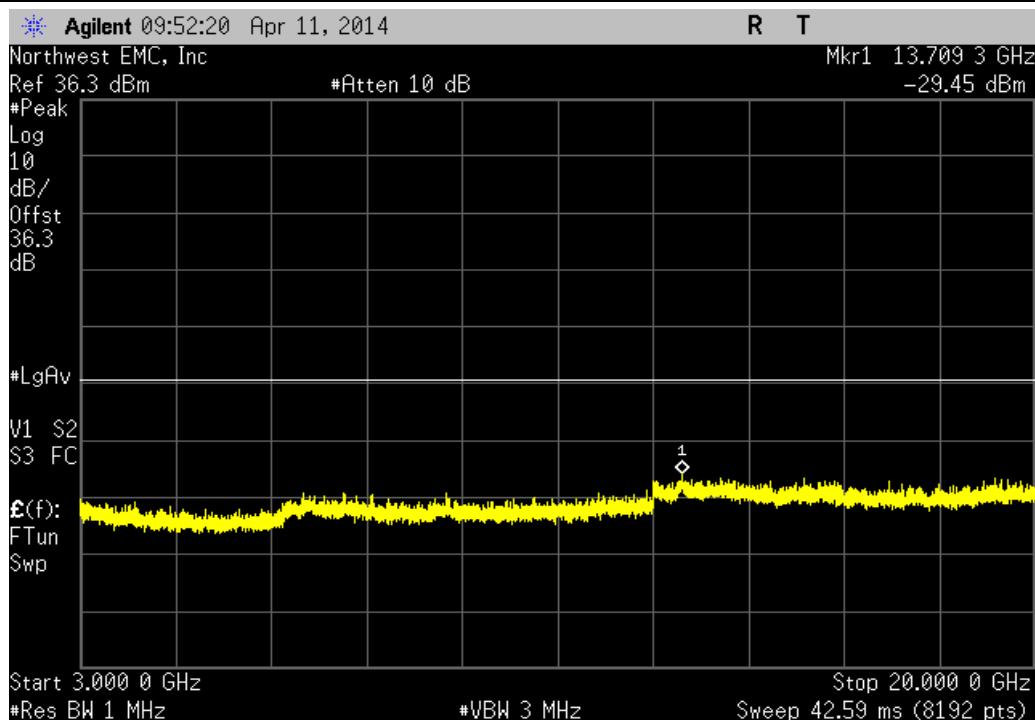


LTE 10 MHz, Low Channel 1935 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-39.88 dBm	≤ -13 dBm	Pass	

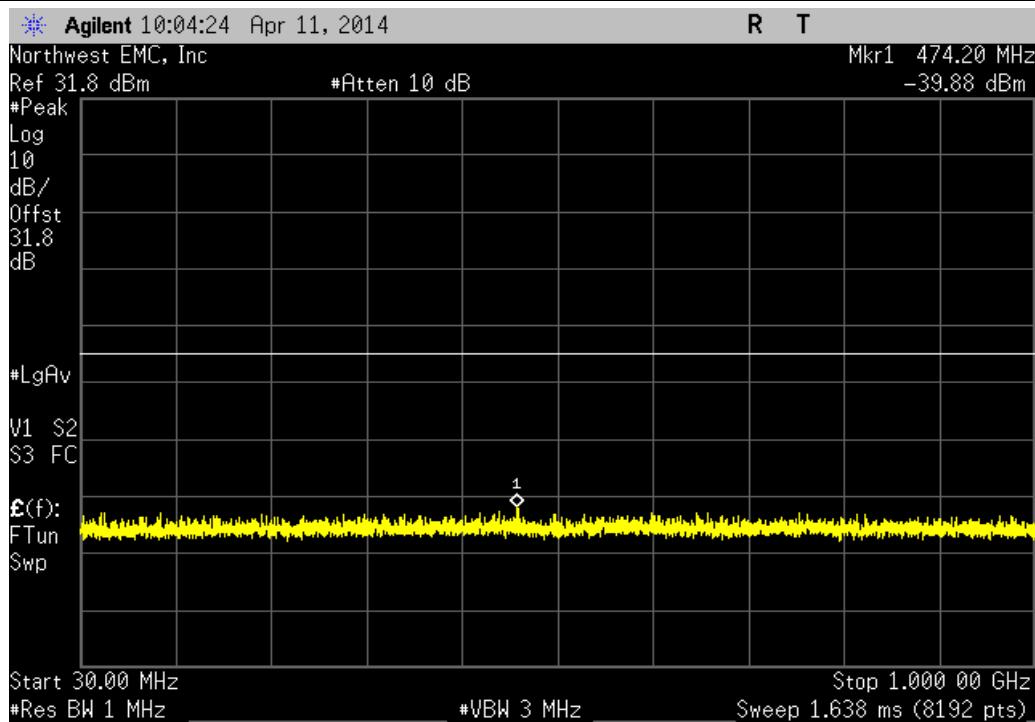



LTE 10 MHz, Low Channel 1935 MHz					
Frequency Range	Value	Limit	Result		
1 GHz - 3 GHz	-19.51 dBm	≤ -13 dBm	Pass		

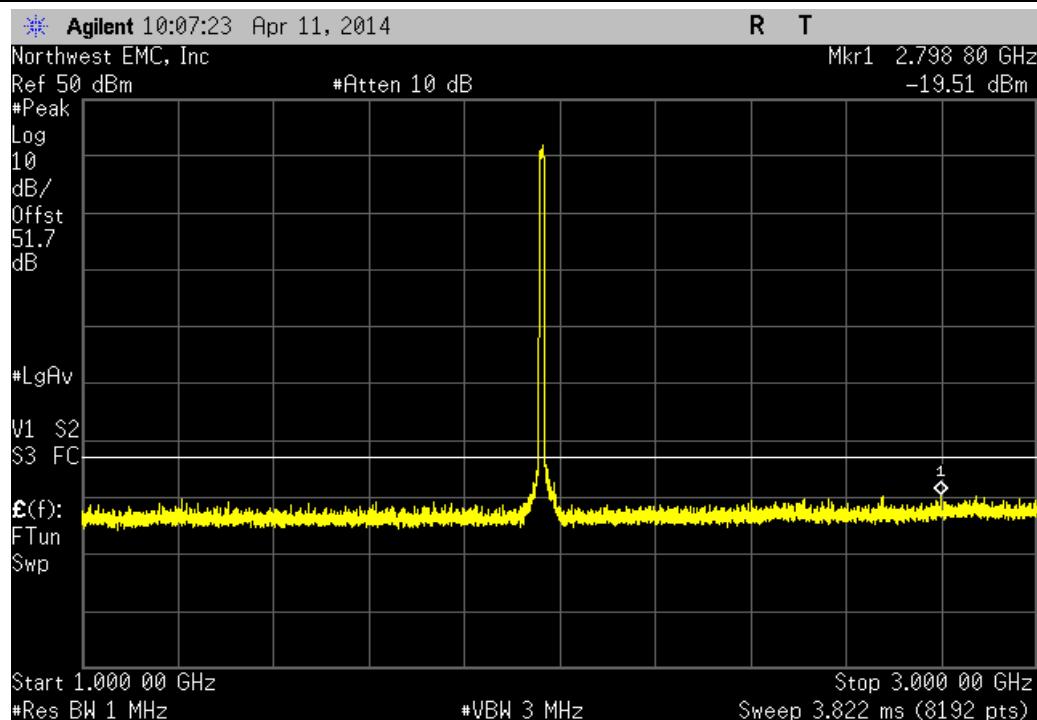


LTE 10 MHz, Low Channel 1935 MHz					
Frequency Range	Value	Limit	Result		
3 GHz - 20 GHz	-29.2 dBm	≤ -13 dBm	Pass		

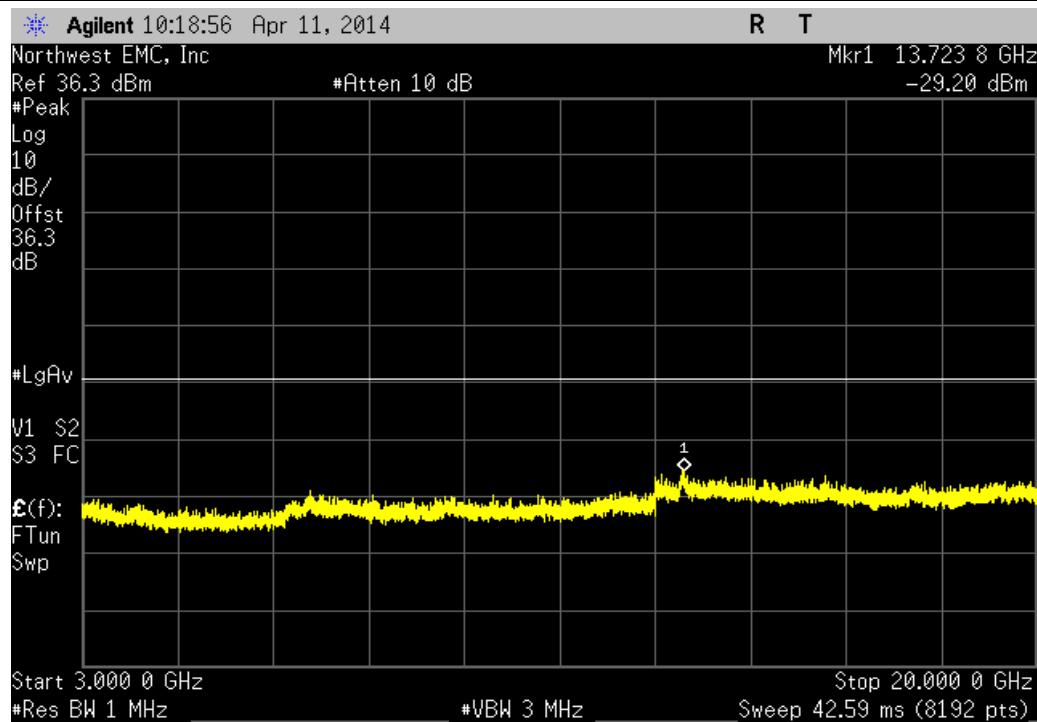

LTE 10 MHz, High Channel 1990 MHz					
Frequency Range		Value	Limit	Result	
	30 MHz - 1 GHz	-40.24 dBm	≤ -13 dBm	Pass	

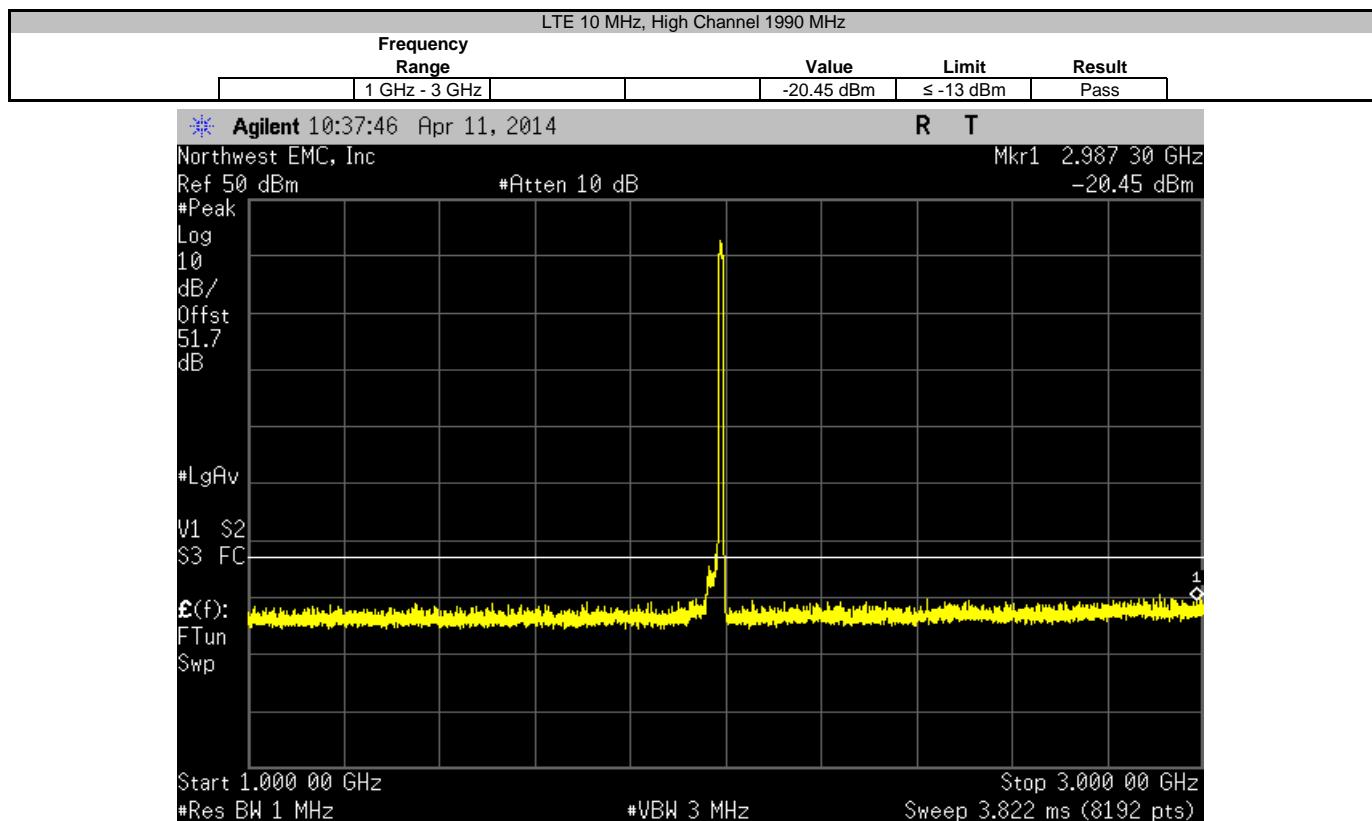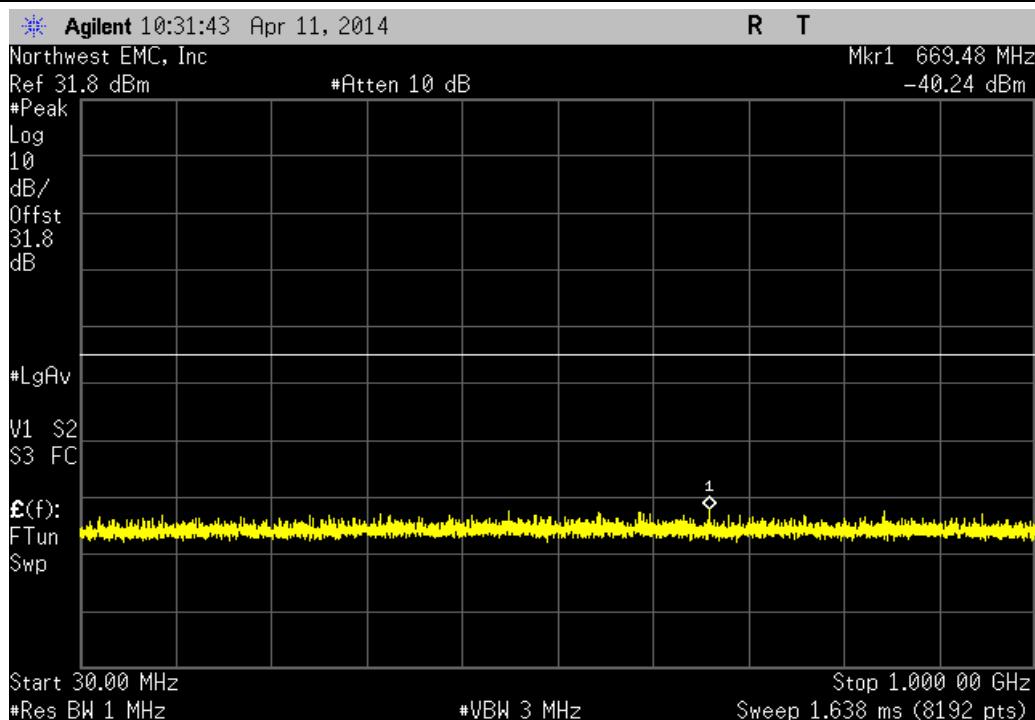

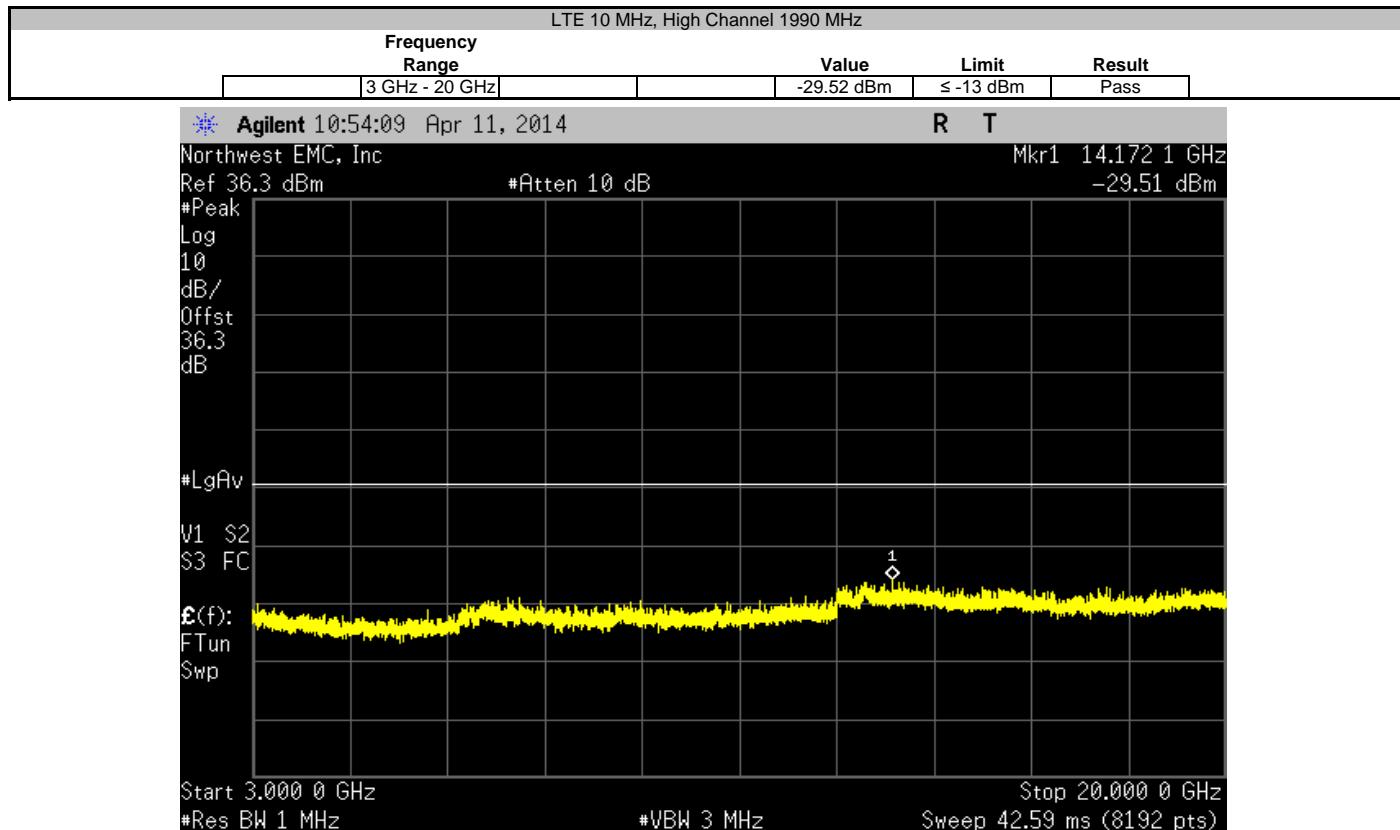

SPURIOUS CONDUCTED EMISSIONS 1900 WCDMA

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Interval
Low Pass Filter 0-1000 MHz	Micro-Tronics	LPM50004	HGV	10/5/2012	24
High Pass Filter 2.8-18 GHz	Micro-Tronics	HPM50111	HGY	10/5/2012	24
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION


The antenna port spurious emissions were measured at the RF output terminal of the EUT with external attenuation on the RF input of the spectrum analyzer. Analyzer plots utilizing a 1 MHz resolution bandwidth and no video filtering were made for each modulation type from 30 MHz to 20 GHz. The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to -13 dBm.

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TECO0017		
Serial Number: None		Date: 07/16/14		
Customer: TE Connectivity / ADC Telecommunications		Temperature: 23.3°C		
Attendees: None		Humidity: 43%		
Project: None		Barometric Pres.: 1020.6		
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08		
TEST SPECIFICATIONS				
FCC 24E:2014		Test Method: ANSI/TIA/EIA-603-C-2004		
COMMENTS				
A 30 dB high wattage attenuator was provided by the customer. Both antenna ports were terminated but only one port is active				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	1	Signature: <i>Trevor Buls</i>		
Frequency Range	Value	Limit	Result	
WCDMA				
Low Channel 1932.5 MHz	30 MHz - 1 GHz	-40.58 dBm	≤ -13 dBm	Pass
Low Channel 1932.5 MHz	1 GHz - 3 GHz	-19.2 dBm	≤ -13 dBm	Pass
Low Channel 1932.5 MHz	3 GHz - 20 GHz	-32.81 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	30 MHz - 1 GHz	-40.4 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	1 GHz - 3 GHz	-19.12 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	3 GHz - 20 GHz	-32.46 dBm	≤ -13 dBm	Pass
High Channel 1992.5 MHz	30 MHz - 1 GHz	-40.2 dBm	≤ -13 dBm	Pass
High Channel 1992.5 MHz	1 GHz - 3 GHz	-20.66 dBm	≤ -13 dBm	Pass
High Channel 1992.5 MHz	3 GHz - 20 GHz	-32.83 dBm	≤ -13 dBm	Pass


WCDMA, Low Channel 1932.5 MHz					
Frequency Range		Value	Limit	Result	
	30 MHz - 1 GHz	-40.58 dBm	≤ -13 dBm	Pass	

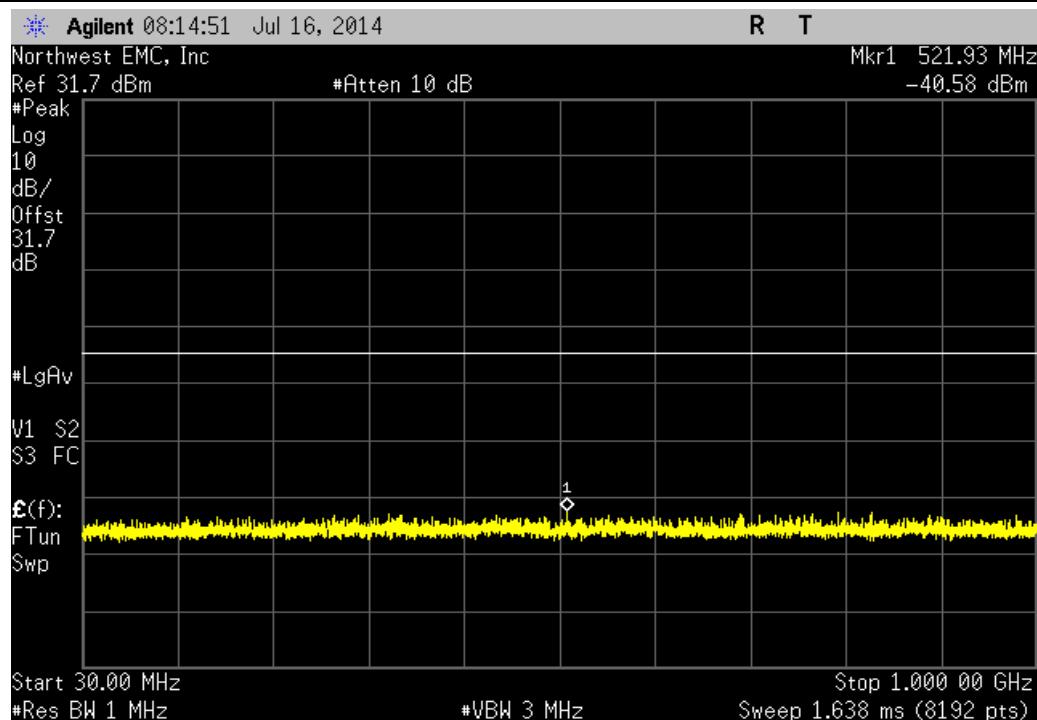


WCDMA, Low Channel 1932.5 MHz					
Frequency Range		Value	Limit	Result	
	1 GHz - 3 GHz	-19.2 dBm	≤ -13 dBm	Pass	

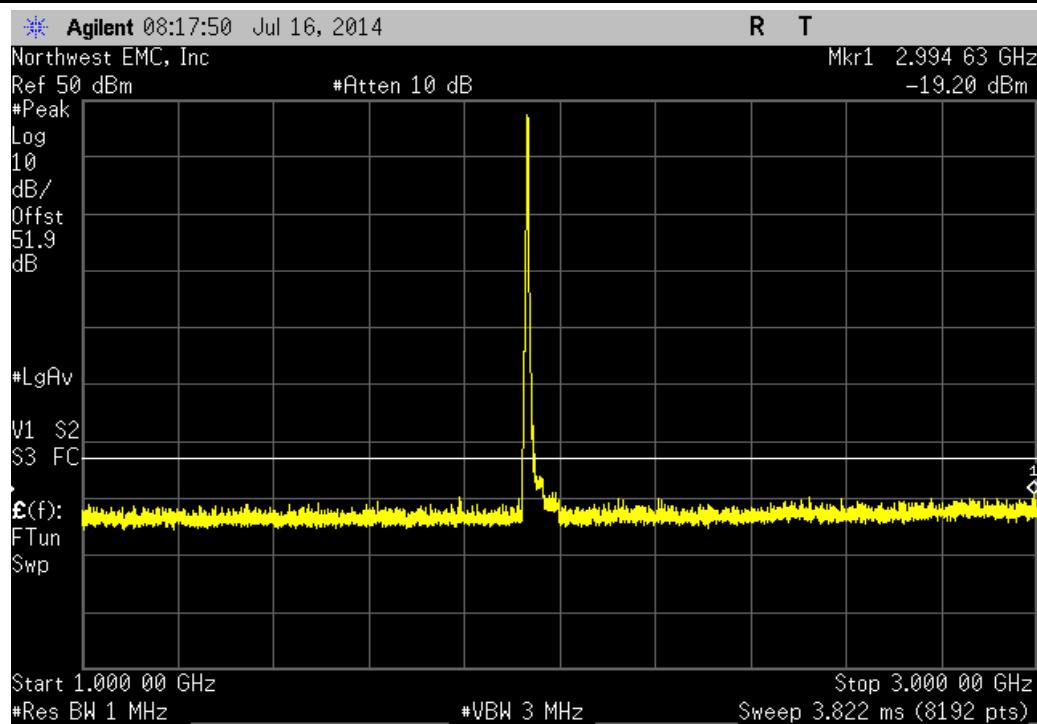



WCDMA, Low Channel 1932.5 MHz					
Frequency Range		Value	Limit	Result	
3 GHz - 20 GHz		-32.81 dBm	≤ -13 dBm	Pass	

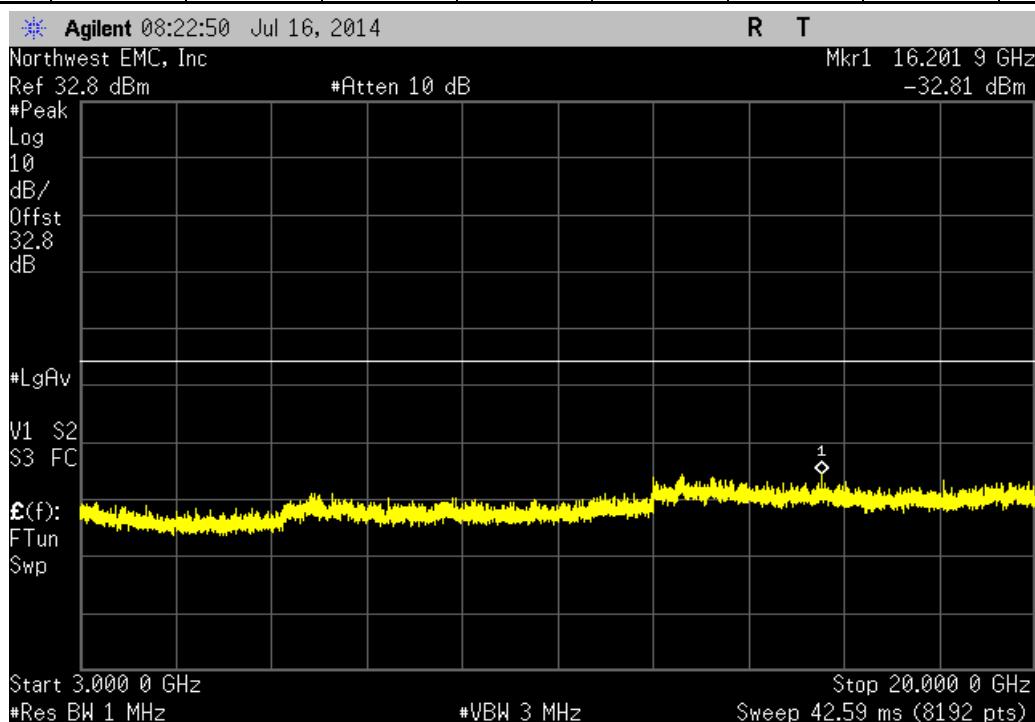



WCDMA, Mid Channel 1962.5 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-40.4 dBm	≤ -13 dBm	Pass	

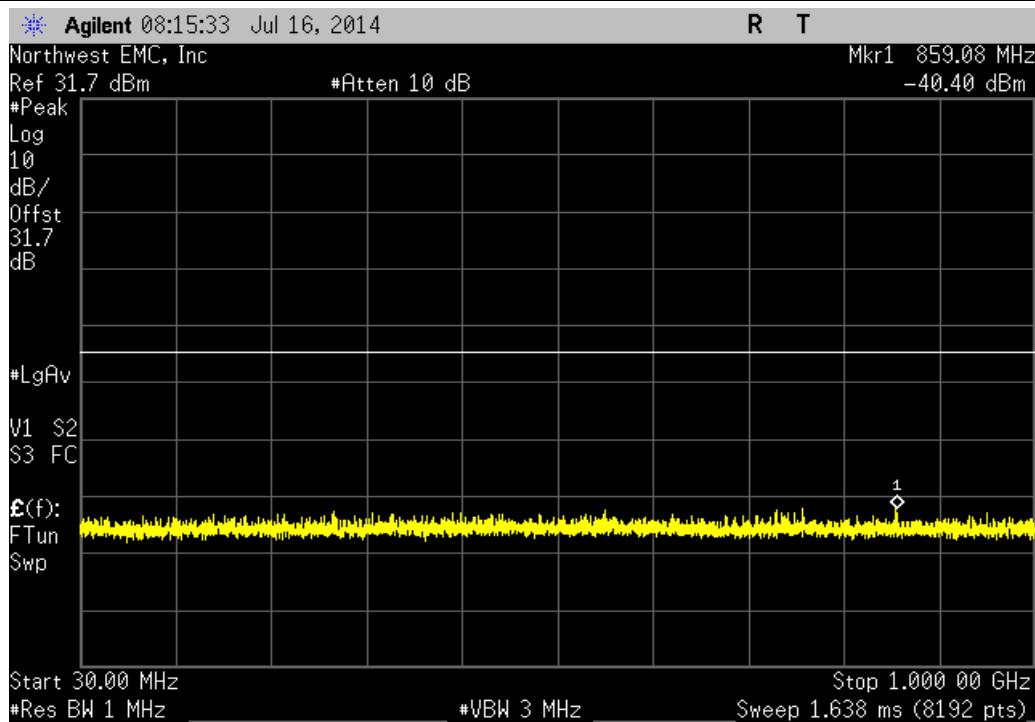


WCDMA, Mid Channel 1962.5 MHz					
Frequency Range	Value	Limit	Result		
1 GHz - 3 GHz	-19.12 dBm	≤ -13 dBm	Pass		

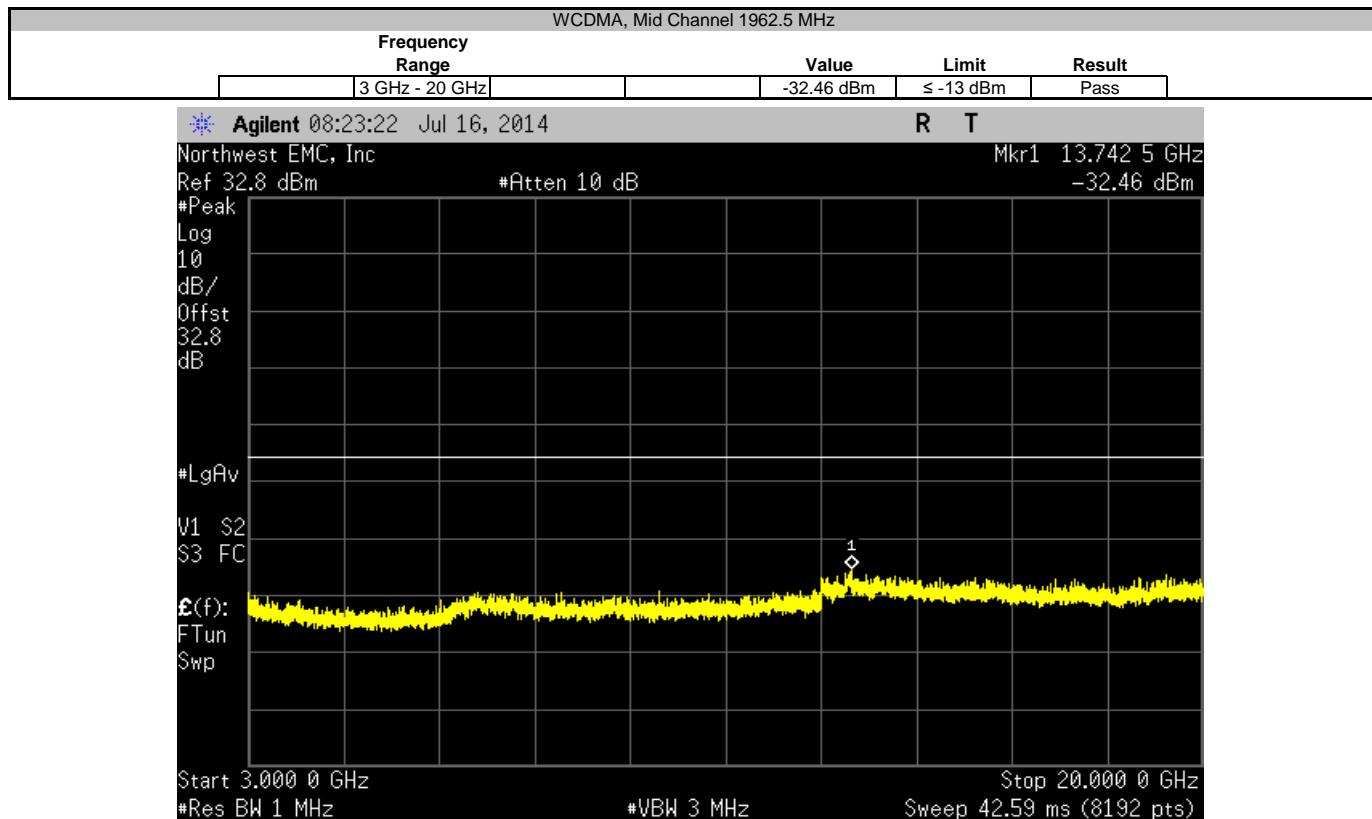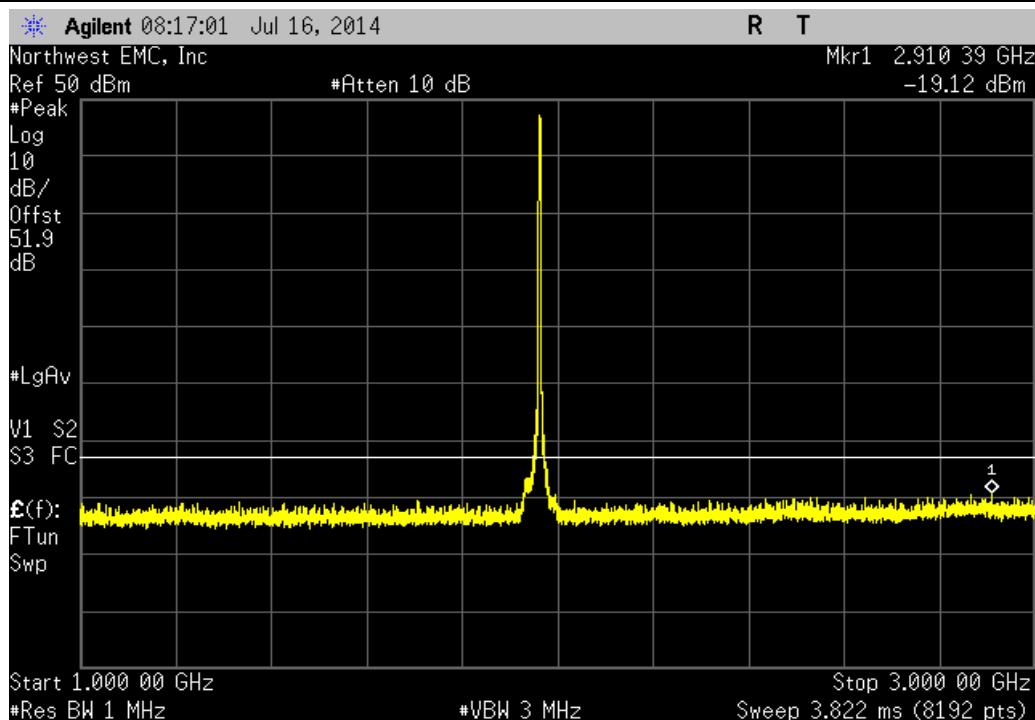

WCDMA, High Channel 1992.5 MHz					
Frequency Range		Value	Limit	Result	
	30 MHz - 1 GHz	-40.2 dBm	≤ -13 dBm	Pass	

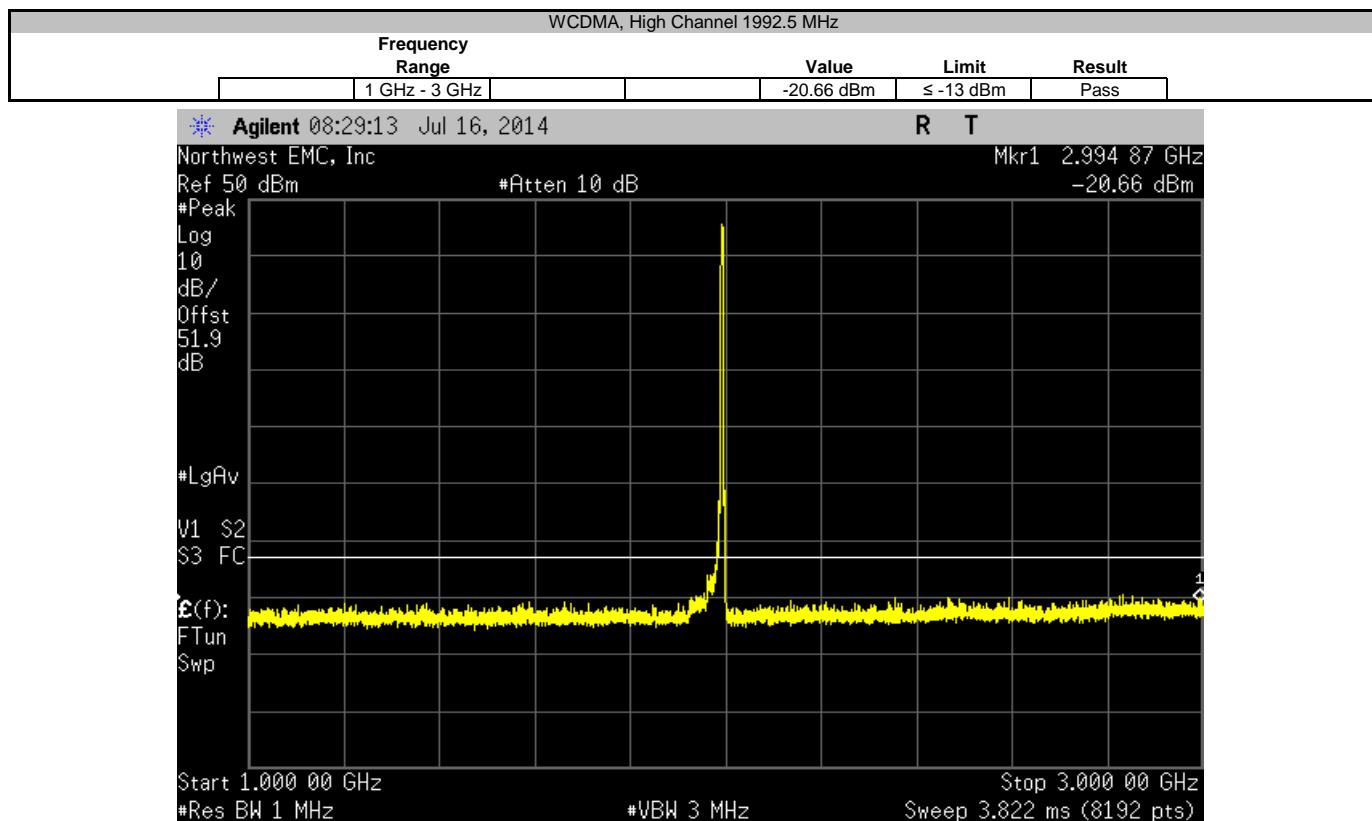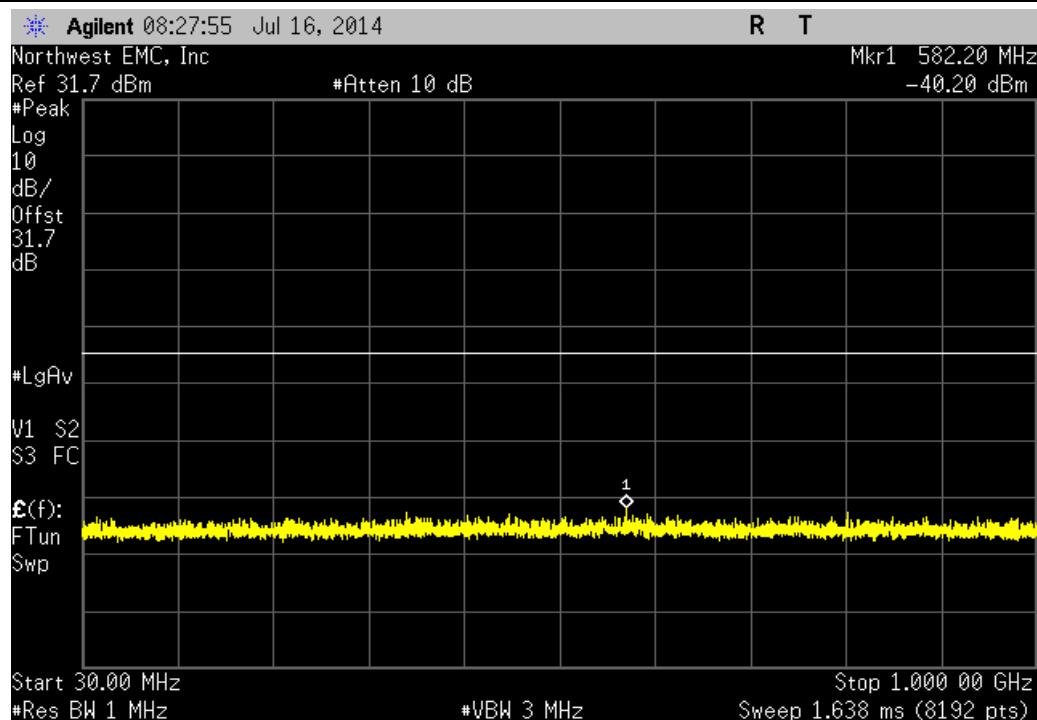

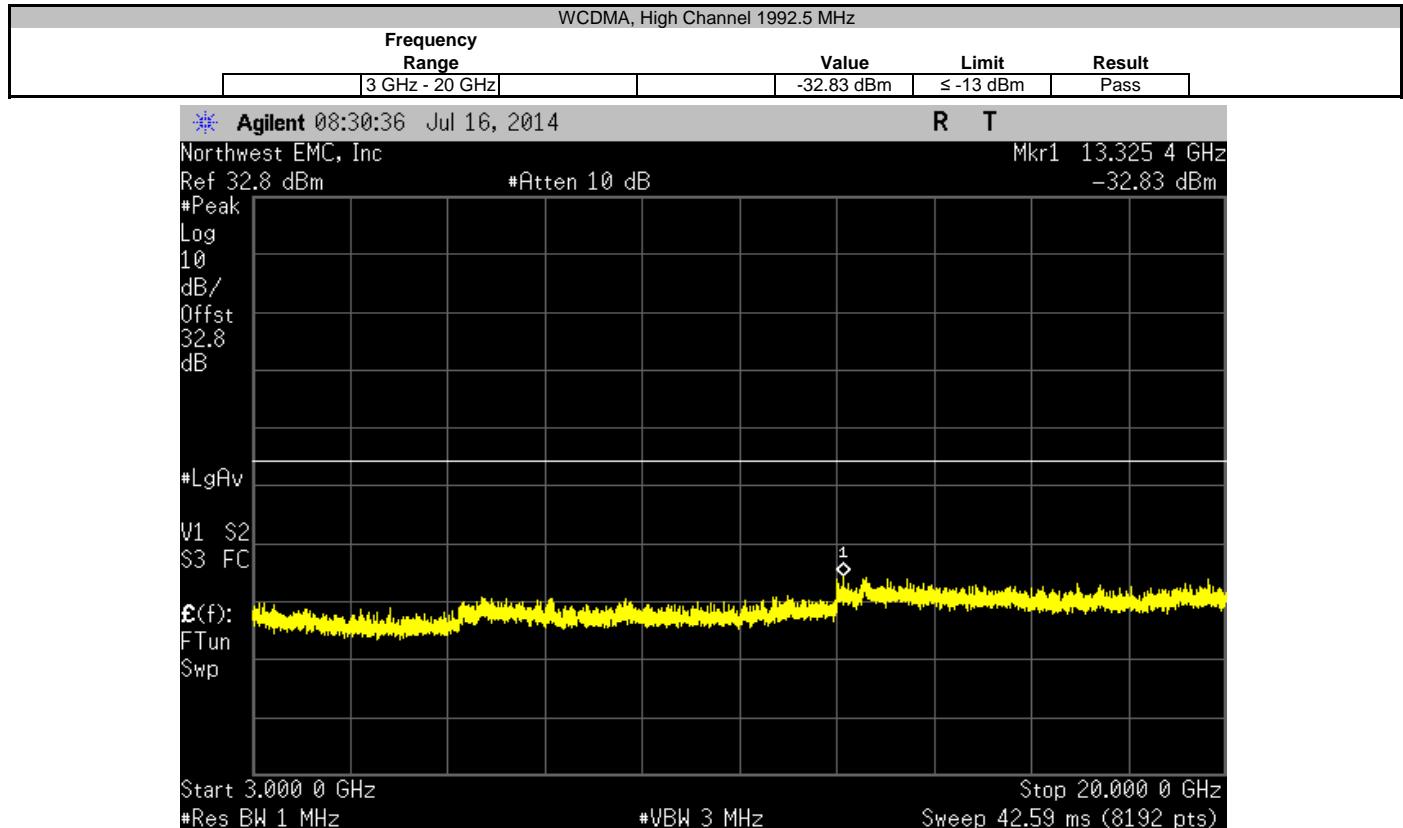

BAND EDGE COMPLIANCE

1900 LTE10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24

TEST DESCRIPTION


The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in the available band. The channels closest to the band edges were selected. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge. The resolution bandwidth was set to approximately 1% of the measured emissions bandwidth. An average RMS detector was used to match the method used during Output Power. The screen capture shows the margin between the measured value and the -13 dBm limit at the band edge.


BAND EDGE COMPLIANCE 1900 LTE10

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt	Work Order: TECO0013			
Serial Number: None	Date: 04/10/14			
Customer: TE Connectivity / ADC Telecommunications	Temperature: 26.5°C			
Attendees: None	Humidity: 21%			
Project: None	Barometric Pres.: 1011.8			
Tested by: Trevor Buls	Job Site: MN08			
TEST SPECIFICATIONS				
FCC 24E:2014	Test Method: ANSI/TIA/EIA-603-C-2004			
COMMENTS				
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset. Both antenna ports were terminated but only one port is active				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	1			
Signature 				
		Value (dBm)	Limit (dBm)	Result
LTE 10 MHz		-16.785	-13	Pass
		-18.474	-13	Pass

LTE 10 MHz, Low Channel			
	Value (dBm)	Limit (dBm)	Result
	-16.785	-13	Pass

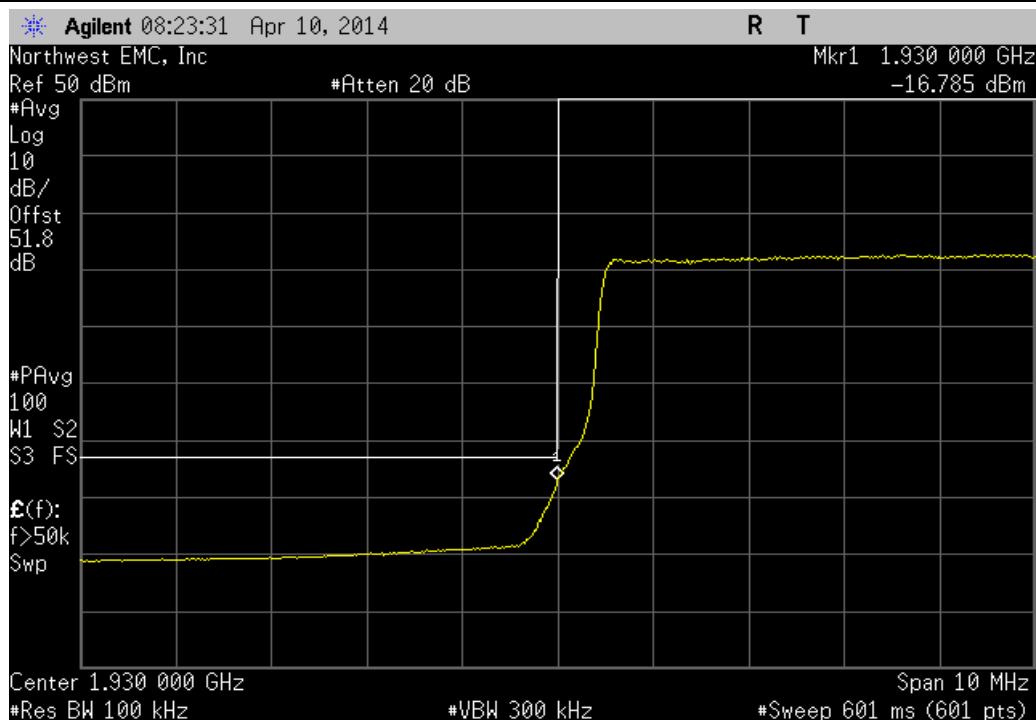

LTE 10 MHz, High Channel			
	Value (dBm)	Limit (dBm)	Result
	-18.474	-13	Pass

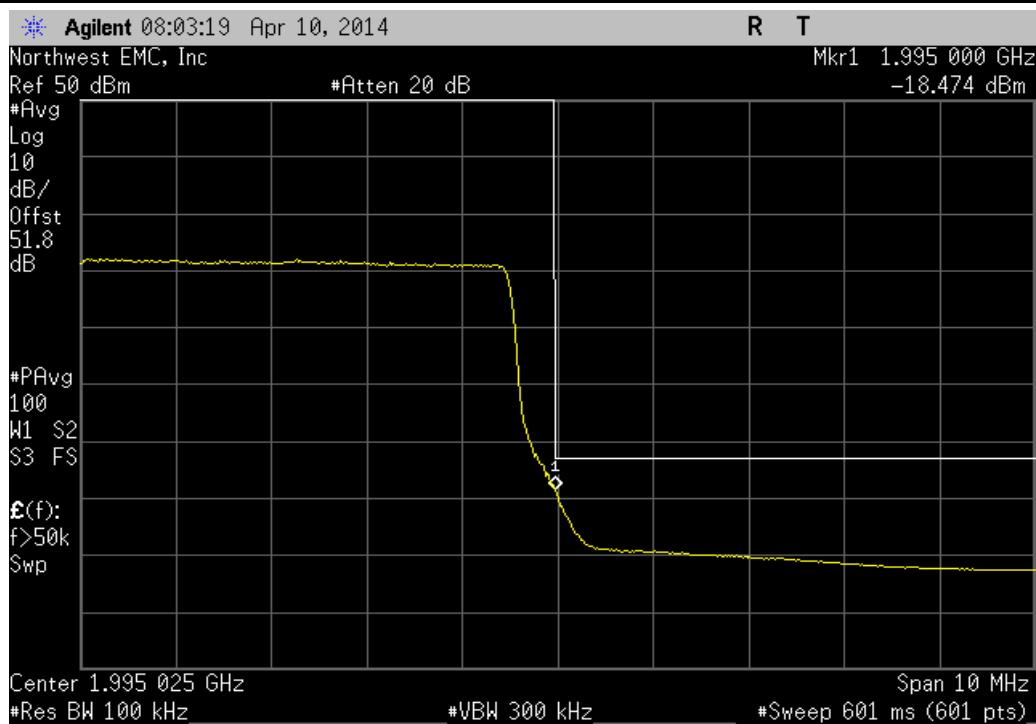

BAND EDGE COMPLIANCE

1900 WCDMA

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12

TEST DESCRIPTION


The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in the available band. The channels closest to the band edges were selected. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge. The resolution bandwidth was set to approximately 1% of the measured emissions bandwidth. An average RMS detector was used to match the method used during Output Power. The screen capture shows the margin between the measured value and the -13 dBm limit at the band edge.


BAND EDGE COMPLIANCE 1900 WCDMA

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TECO0017									
Serial Number: None		Date: 07/16/14									
Customer: TE Connectivity / ADC Telecommunications		Temperature: 23.3°C									
Attendees: None		Humidity: 43%									
Project: None		Barometric Pres.: 1020.6									
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08									
TEST SPECIFICATIONS											
FCC 24E:2014											
Test Method: ANSI/TIA/EIA-603-C-2004											
COMMENTS											
A 30 dB high wattage attenuator was provided by the customer. WCDMA. Both antenna ports were terminated but only one port is active											
DEVIATIONS FROM TEST STANDARD											
None											
Configuration #	1	Signature: 									
<table border="1"> <thead> <tr> <th>Value (dBm)</th> <th>Limit (dBm)</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>-24.299</td> <td>-13</td> <td>Pass</td> </tr> <tr> <td>-25.946</td> <td>-13</td> <td>Pass</td> </tr> </tbody> </table>			Value (dBm)	Limit (dBm)	Result	-24.299	-13	Pass	-25.946	-13	Pass
Value (dBm)	Limit (dBm)	Result									
-24.299	-13	Pass									
-25.946	-13	Pass									
Low Channel											
High Channel											

Low Channel				Value (dBm)	Limit (dBm)	Result
				-24.299	-13	Pass

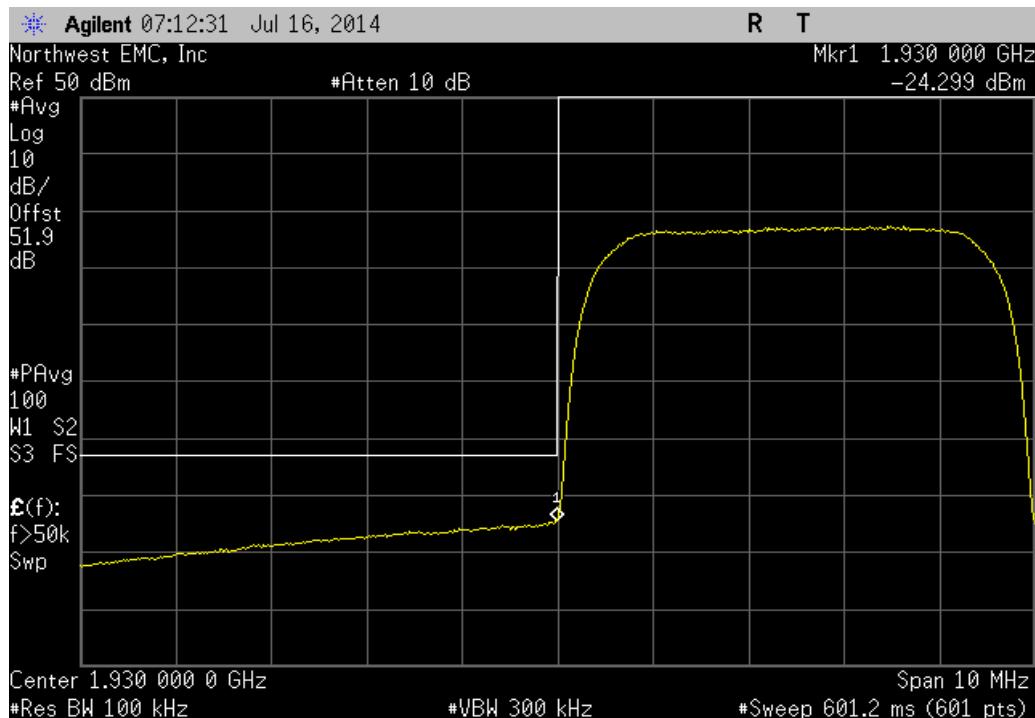

High Channel		Value (dBm)	Limit (dBm)	Result
		-25.946	-13	Pass

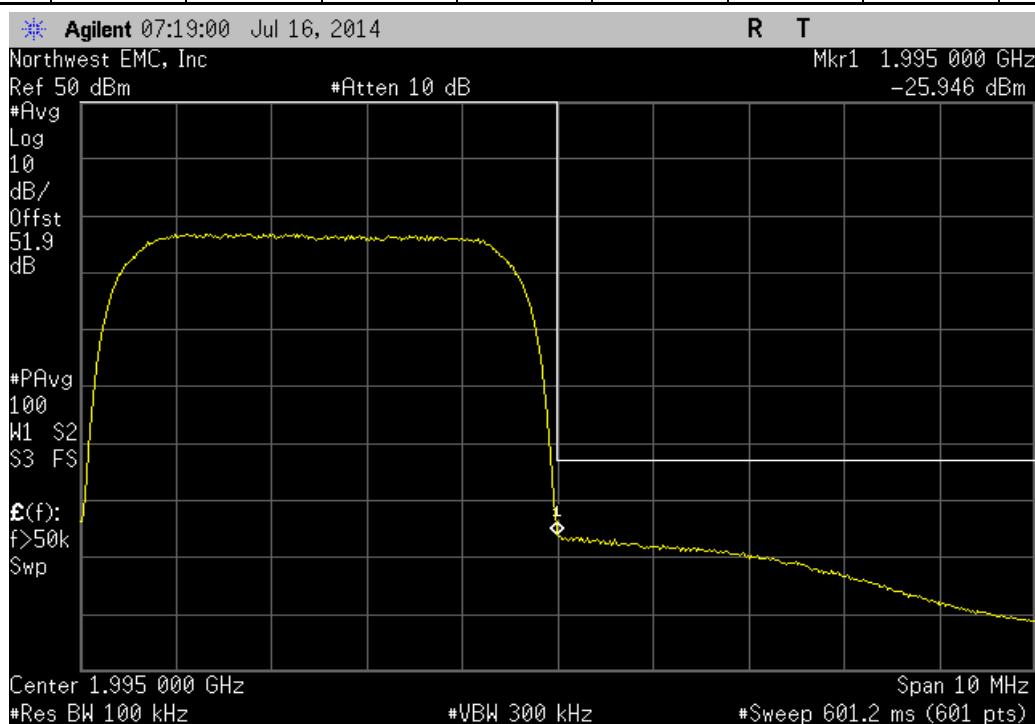

BAND EDGE COMPLIANCE 2100



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in the available band. The channels closest to the band edges were selected. The EUT was transmitting at the data rate(s) listed in the datasheet.

The spectrum was scanned below the lower band edge and above the higher band edge. The resolution bandwidth was set to approximately 1% of the measured emissions bandwidth within the first 1 MHz block adjacent to the transmit band. An average RMS detector was used to match the method used during Output Power. The screen capture shows the margin between the measured value and the limit at the band edge. Failing measurements were re-measured using the channel power integration method as called out in the standard.

BAND EDGE COMPLIANCE 2100



TbTx 2017.01.27

XMI 2017.02.08


EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TEC00042															
Serial Number: 459644002		Date: 05/23/17															
Customer: CommScope		Temperature: 24.2 °C															
Attendees: Josh Wittman		Humidity: 40% RH															
Project: None		Barometric Pres.: 1012 mbar															
Tested by: Dustin Sparks	Power: 110VAC/60Hz	Job Site: MN08															
TEST SPECIFICATIONS																	
FCC 27:2017																	
ANSI/TIA/EIA-603-D-2010																	
COMMENTS																	
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm). Both antenna ports were terminated but only one port is active																	
DEVIATIONS FROM TEST STANDARD																	
None																	
Configuration #	2	Signature:															
<table border="1"> <thead> <tr> <th>Value (dBm)</th> <th>Limit (dBm)</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>-18.37</td> <td>-13</td> <td>Pass</td> </tr> <tr> <td>-21.15</td> <td>-13</td> <td>Pass</td> </tr> <tr> <td>-18.54</td> <td>-13</td> <td>Pass</td> </tr> <tr> <td>-20.78</td> <td>-13</td> <td>Pass</td> </tr> </tbody> </table>			Value (dBm)	Limit (dBm)	Result	-18.37	-13	Pass	-21.15	-13	Pass	-18.54	-13	Pass	-20.78	-13	Pass
Value (dBm)	Limit (dBm)	Result															
-18.37	-13	Pass															
-21.15	-13	Pass															
-18.54	-13	Pass															
-20.78	-13	Pass															
Low Channel (2112.5 MHz) WCDMA High Channel (2177.5 MHz) WCDMA Low Channel (2115 MHz) LTE 10MHz High Channel (2175 MHz) LTE 10MHz																	

BAND EDGE COMPLIANCE 2100




TbTx 2017.01.27 XMII 2017.02.08

Low Channel (2112.5 MHz) WCDMA			
	Value (dBm)	Limit (dBm)	Result
	-18.37	-13	Pass

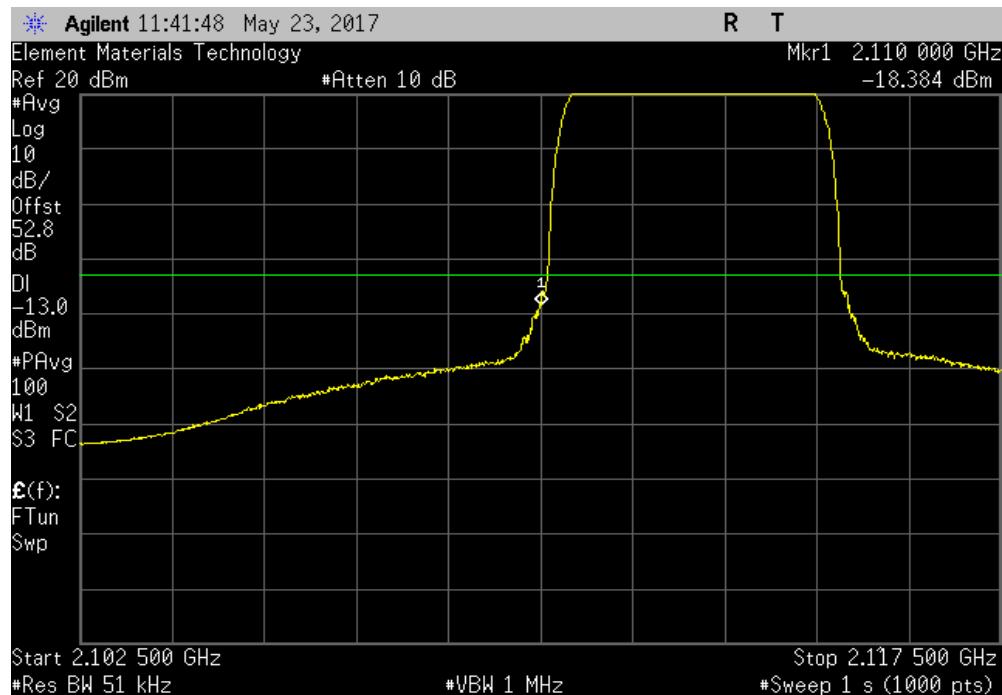

High Channel (2177.5 MHz) WCDMA			
	Value (dBm)	Limit (dBm)	Result
	-21.15	-13	Pass

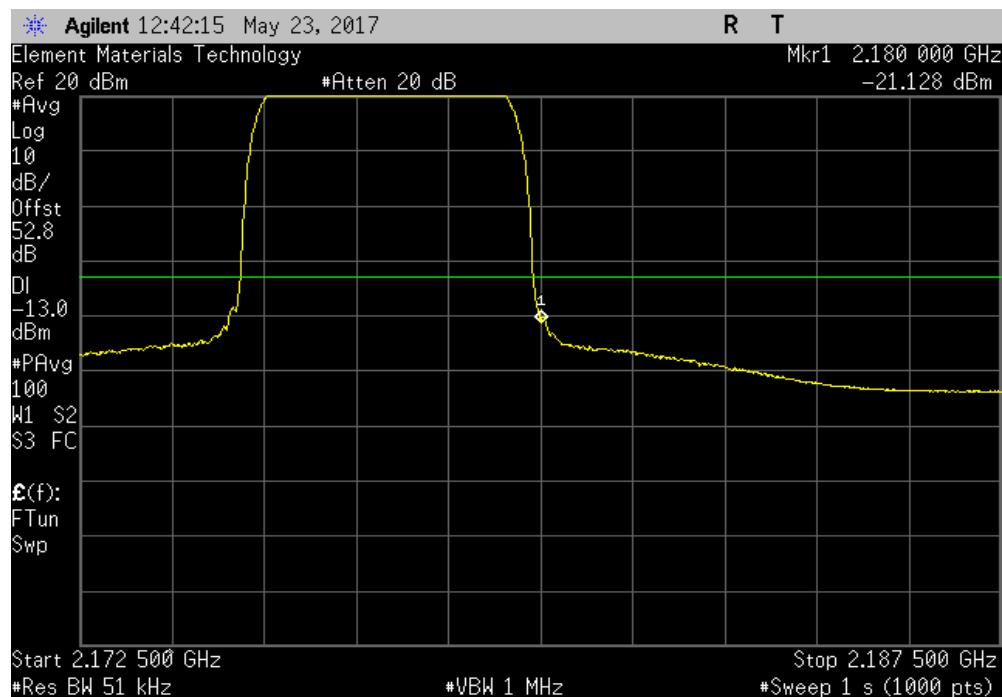


BAND EDGE COMPLIANCE 2100




TbTx 2017.01.27 XMII 2017.02.08

Low Channel (2115 MHz) LTE 10MHz			
	Value (dBm)	Limit (dBm)	Result
	-18.54	-13	Pass

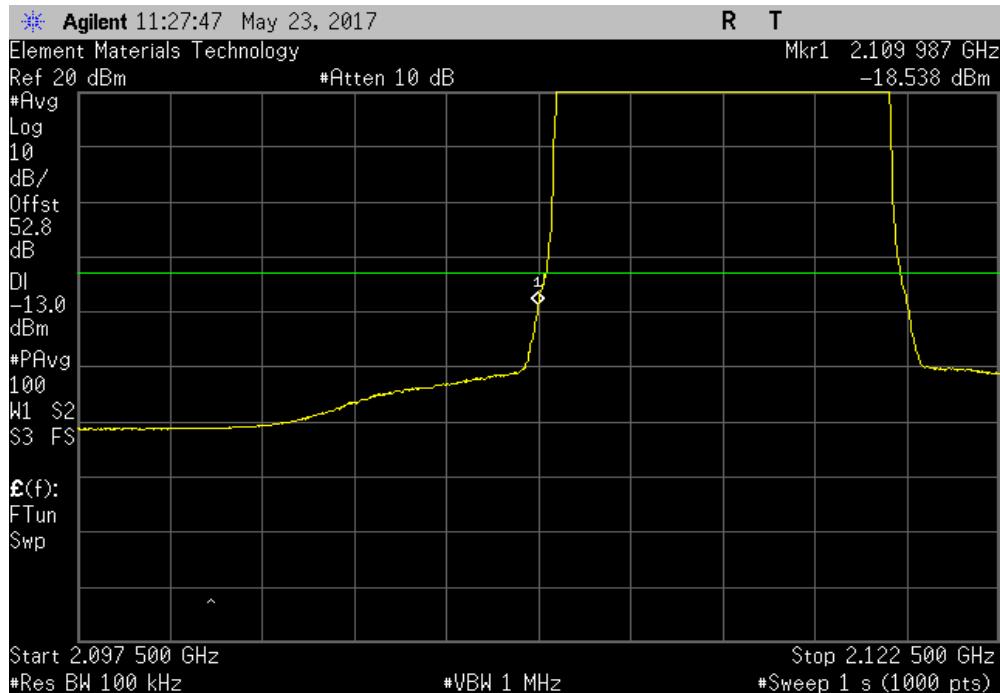

High Channel (2175 MHz) LTE 10MHz			
	Value (dBm)	Limit (dBm)	Result
	-20.78	-13	Pass

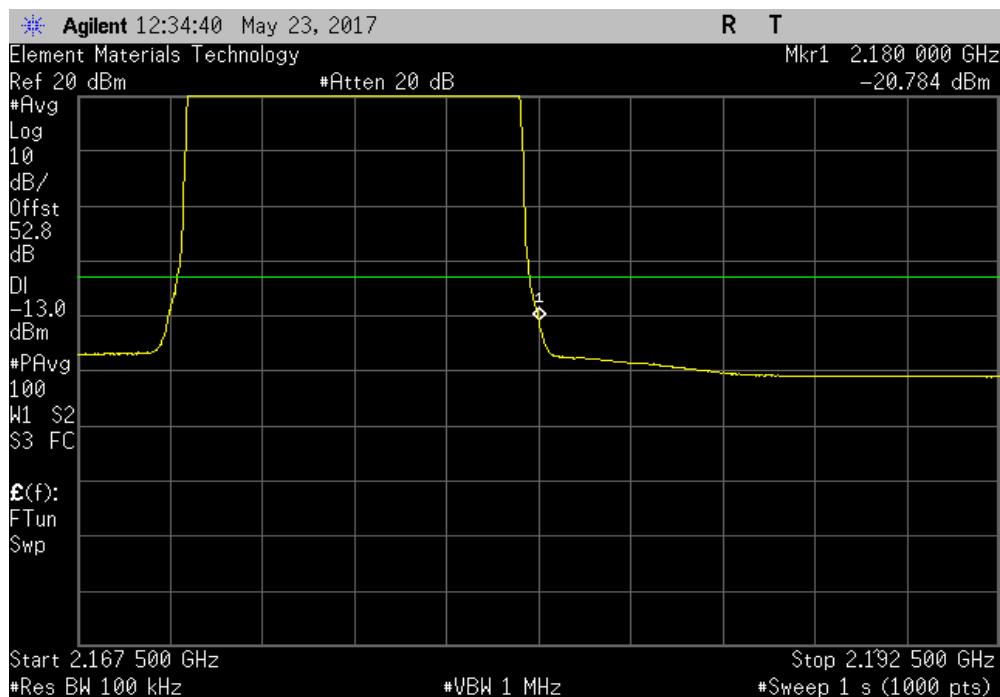

INTERMODULATION 1900

LTE10

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Power Divider/Combiner	Fairview Microwave Inc (SM electronics)	MP8451-2	IAD	NCR	0
Power Divider/Combiner	Fairview Microwave Inc (SM electronics)	MP8451-2	IAC	NCR	0
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24


TEST DESCRIPTION

The EUT was configured with an input of a CW pulse at the bottom of the band, a CW pulse at the bottom of the band, and a modulated pulse near the edge of the band.


The antenna port spurious emissions were measured at the RF output terminal of the EUT with external attenuation on the RF input of the spectrum analyzer. Analyzer plots utilizing a 1MHz resolution bandwidth and no video filtering were made for each modulation type from 30 MHz to 20 GHz. The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to -13 dBm.


EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TECO0013		
Serial Number: None		Date: 04/11/14		
Customer: TE Connectivity / ADC Telecommunications		Temperature: 25°C		
Attendees: None		Humidity: 25%		
Project: None		Barometric Pres.: 1017.2		
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08		
TEST SPECIFICATIONS				
FCC 24E:2014 Test Method: ANSI/TIA/EIA-603-C-2004				
COMMENTS				
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset. Both antenna ports were terminated but only one port is active				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	1	Signature 		
Frequency Range	Value	Limit	Result	
Band ABD				
LTE 10 MHz	30 MHz - 1 GHz	-40.54 dBm	≤ -13 dBm	Pass
LTE 10 MHz	1 GHz - 3 GHz	-19.82 dBm	≤ -13 dBm	Pass
LTE 10 MHz	3 GHz - 20 GHz	-29.52 dBm	≤ -13 dBm	Pass
Band CEFG				
LTE 10 MHz	30 MHz - 1 GHz	-40.53 dBm	≤ -13 dBm	Pass
LTE 10 MHz	1 GHz - 3 GHz	-19.04 dBm	≤ -13 dBm	Pass
LTE 10 MHz	3 GHz - 20 GHz	-28.86 dBm	≤ -13 dBm	Pass

Band ABD, LTE 10 MHz					
Frequency Range		Value	Limit	Result	
	30 MHz - 1 GHz	-40.54 dBm	≤ -13 dBm	Pass	

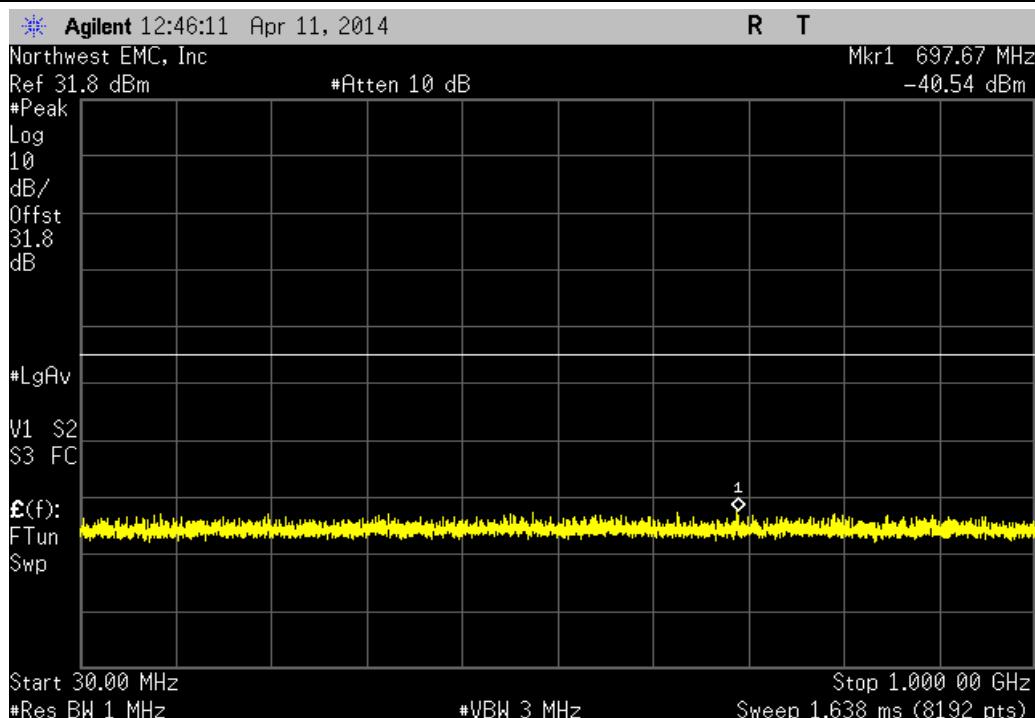


Band ABD, LTE 10 MHz					
Frequency Range		Value	Limit	Result	
	1 GHz - 3 GHz	-19.82 dBm	≤ -13 dBm	Pass	

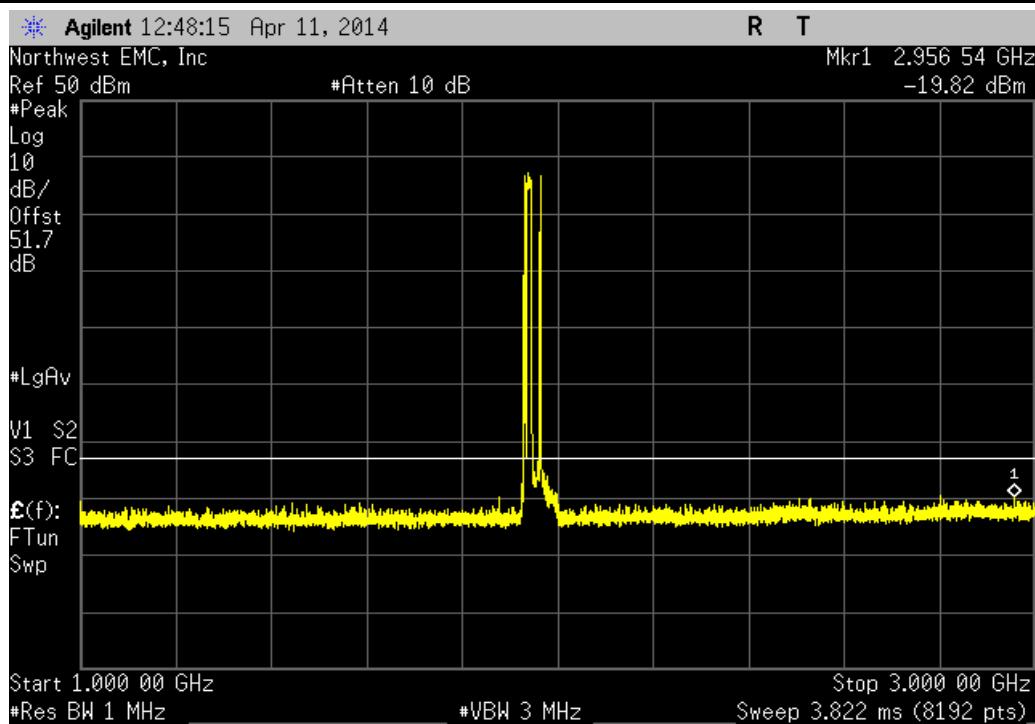


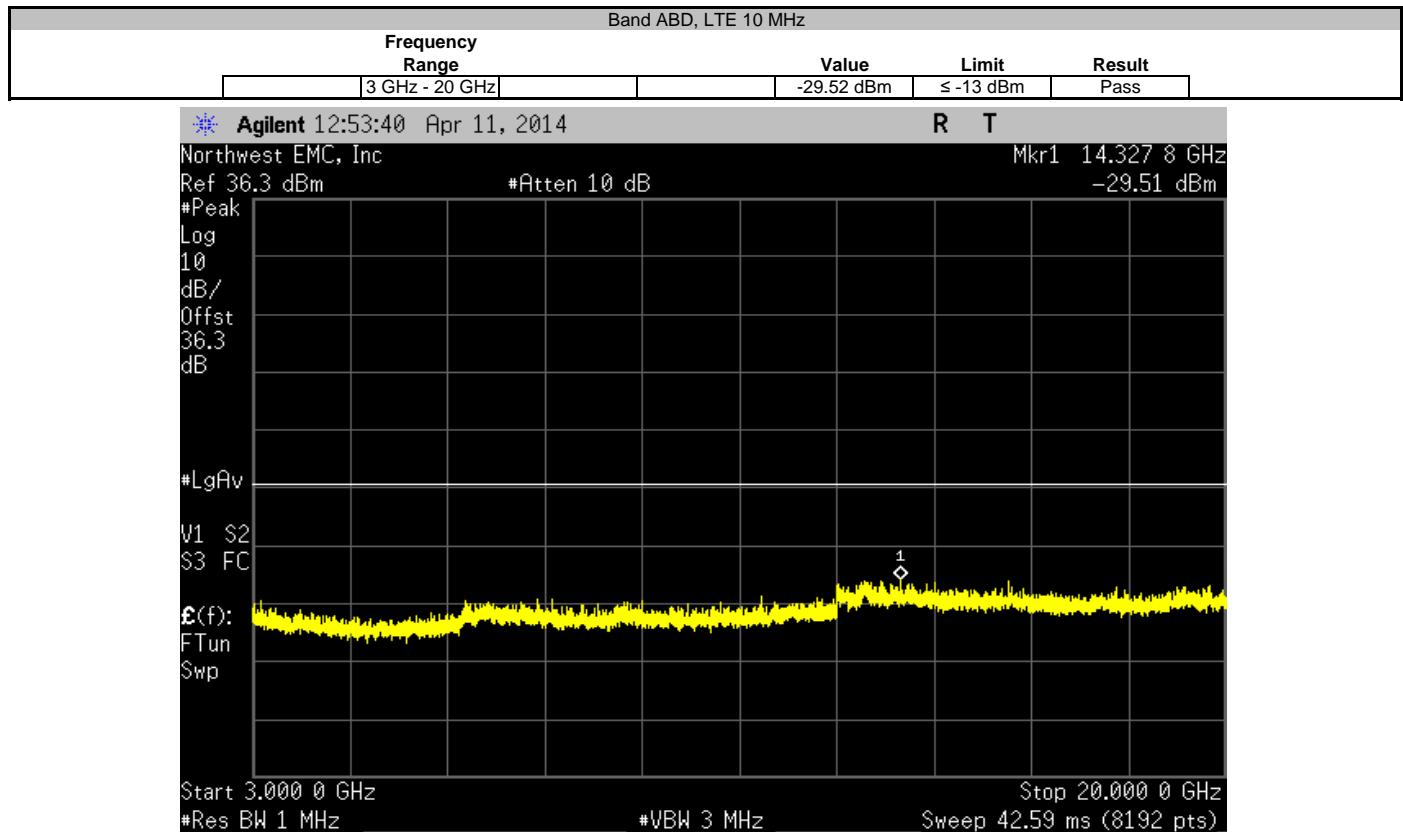


#REF!					
Frequency Range		Value	Limit	Result	
	30 MHz - 1 GHz	-40.48 dBm	≤ -13 dBm	Pass	

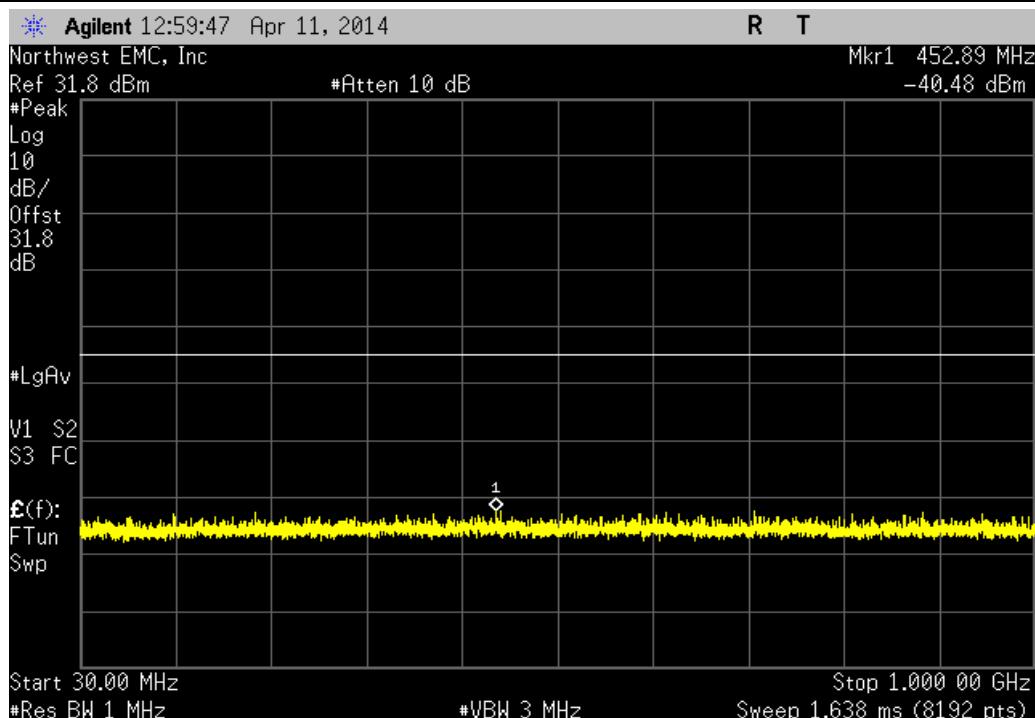


#REF!					
Frequency Range		Value	Limit	Result	
	1 GHz - 3 GHz	-19.51 dBm	≤ -13 dBm	Pass	

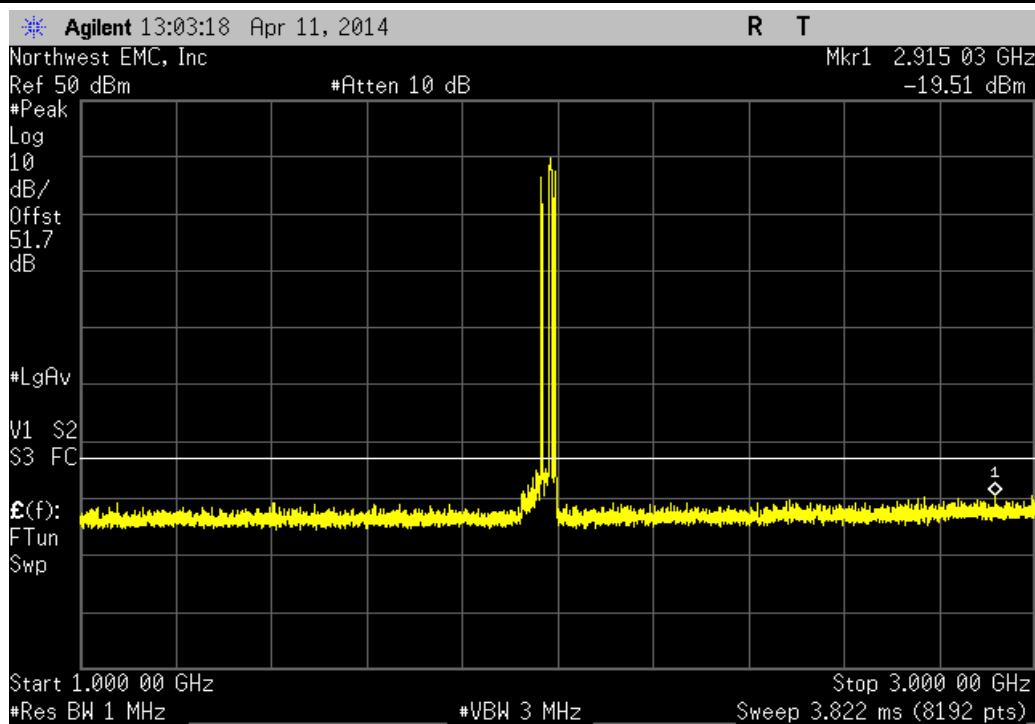


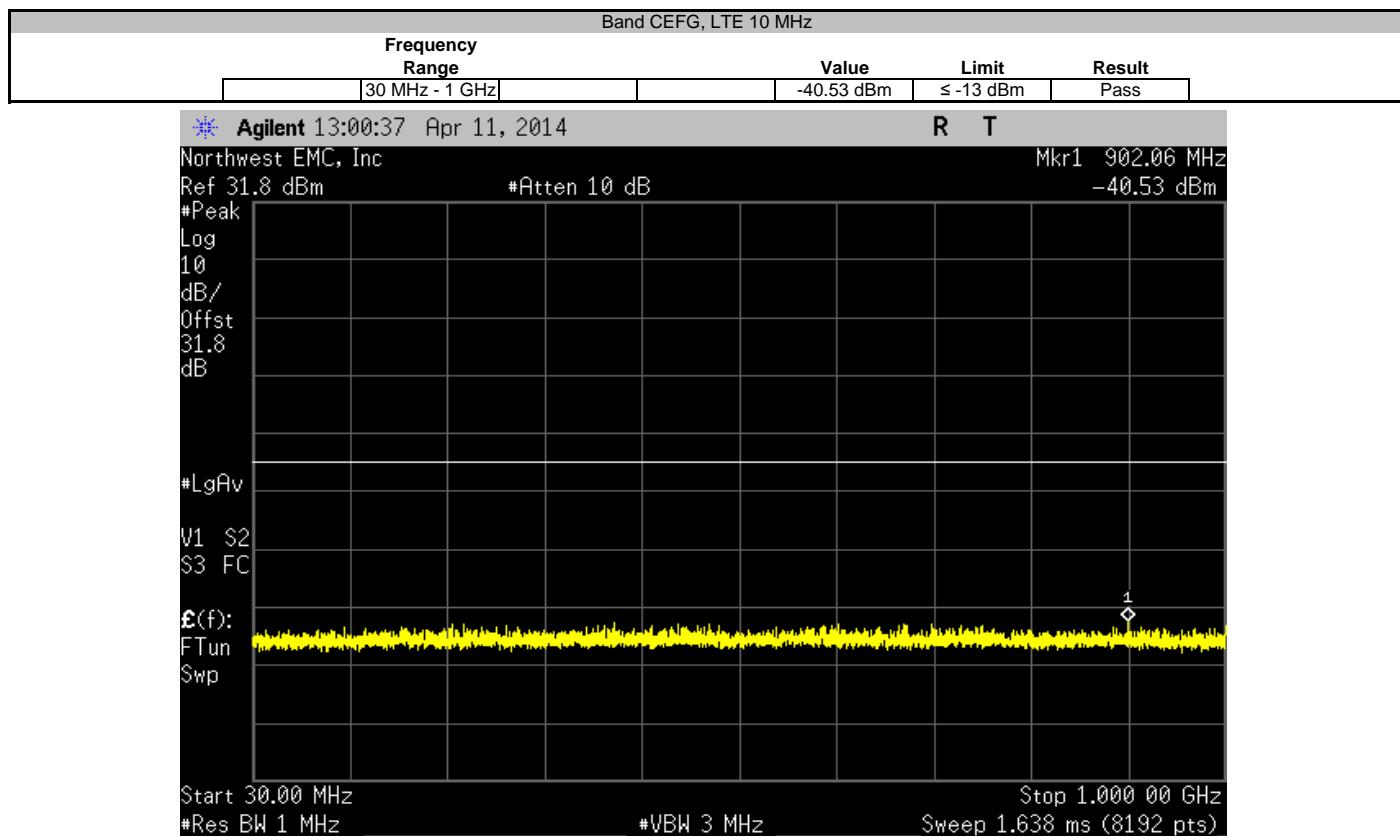

Band CEFG, LTE 10 MHz					
Frequency Range		Value	Limit	Result	
1 GHz - 3 GHz		-19.04 dBm	≤ -13 dBm	Pass	

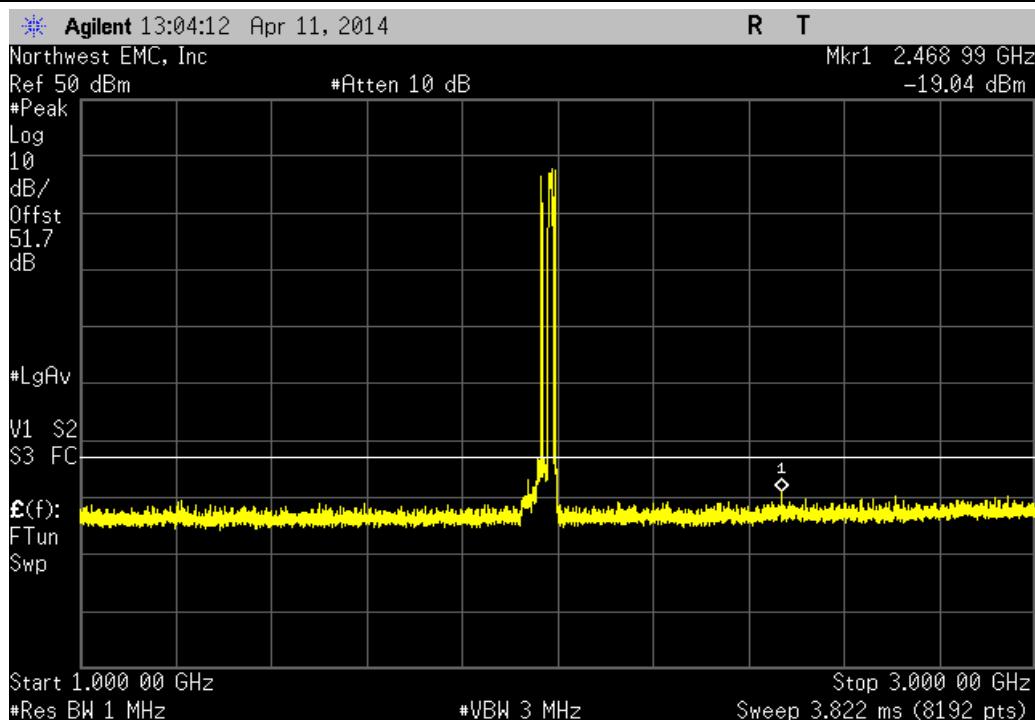

Band CEFG, LTE 10 MHz					
Frequency Range		Value	Limit	Result	
3 GHz - 20 GHz		-28.86 dBm	≤ -13 dBm	Pass	

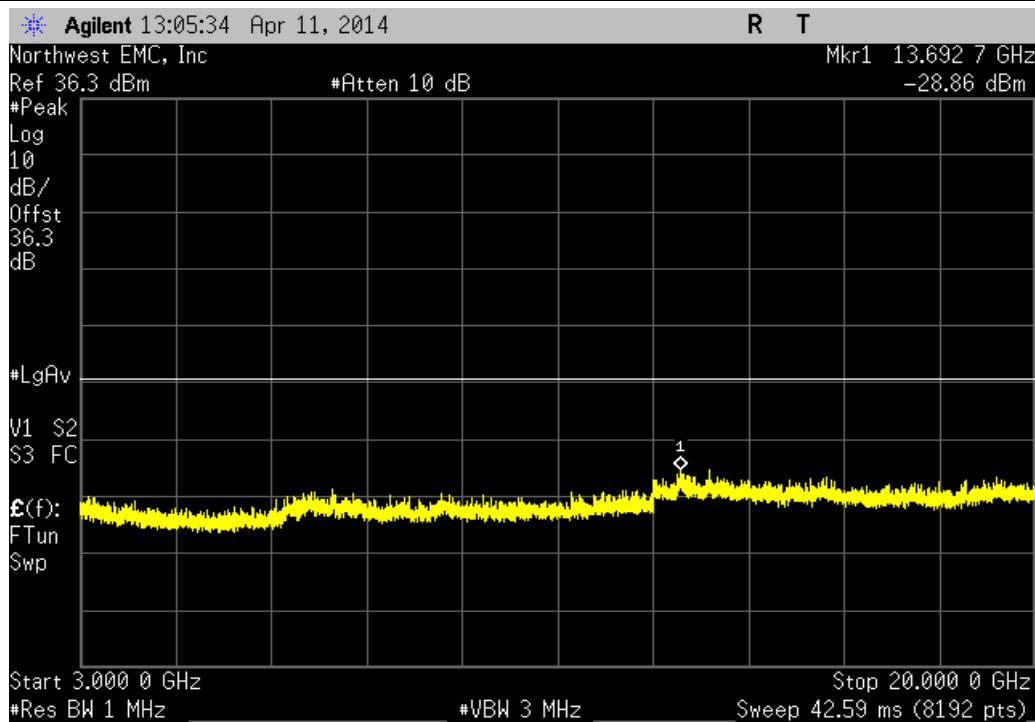

INTERMODULATION 1900

WCDMA

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Power Divider/Combiner	Fairview Microwave	MP0208-2	IAE	NCR	0
Low Pass Filter 0-1000 MHz	Micro-Tronics	LPM50004	HGV	10/5/2012	24
High Pass Filter 2.8-18 GHz	Micro-Tronics	HPM50111	HGY	10/5/2012	24
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	4/28/2014	12


TEST DESCRIPTION

The EUT was configured with an input of a CW pulse at the bottom of the band, a CW pulse at the bottom of the band, and a modulated pulse near the edge of the band.


The antenna port spurious emissions were measured at the RF output terminal of the EUT with external attenuation on the RF input of the spectrum analyzer. Analyzer plots utilizing a 1MHz resolution bandwidth and no video filtering were made for each modulation type from 30 MHz to 20 GHz. The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to -13 dBm.

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TECO0017		
Serial Number: None		Date: 07/16/14		
Customer: TE Connectivity / ADC Telecommunications		Temperature: 23.3°C		
Attendees: None		Humidity: 43%		
Project: None		Barometric Pres.: 1020.6		
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08		
TEST SPECIFICATIONS				
FCC 24E:2014		Test Method: ANSI/TIA/EIA-603-C-2004		
COMMENTS				
A 30 dB high wattage attenuator was provided by the customer. Both antenna ports were terminated but only one port is active				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	1	Signature: <i>Trevor Buls</i>		
Band ABD	Frequency Range	Value	Limit	Result
WCDMA	30 MHz - 1 GHz	-40.52 dBm	≤ -13 dBm	Pass
WCDMA	1 GHz - 3 GHz	-19.64 dBm	≤ -13 dBm	Pass
WCDMA	3 GHz - 20 GHz	-33.1 dBm	≤ -13 dBm	Pass
Band CEFG	Frequency Range	Value	Limit	Result
WCDMA	30 MHz - 1 GHz	-40.53 dBm	≤ -13 dBm	Pass
WCDMA	1 GHz - 3 GHz	-18.97 dBm	≤ -13 dBm	Pass
WCDMA	3 GHz - 20 GHz	-32.69 dBm	≤ -13 dBm	Pass


Band ABD, WCDMA					
Frequency Range		Value	Limit	Result	
	30 MHz - 1 GHz	-40.52 dBm	≤ -13 dBm	Pass	

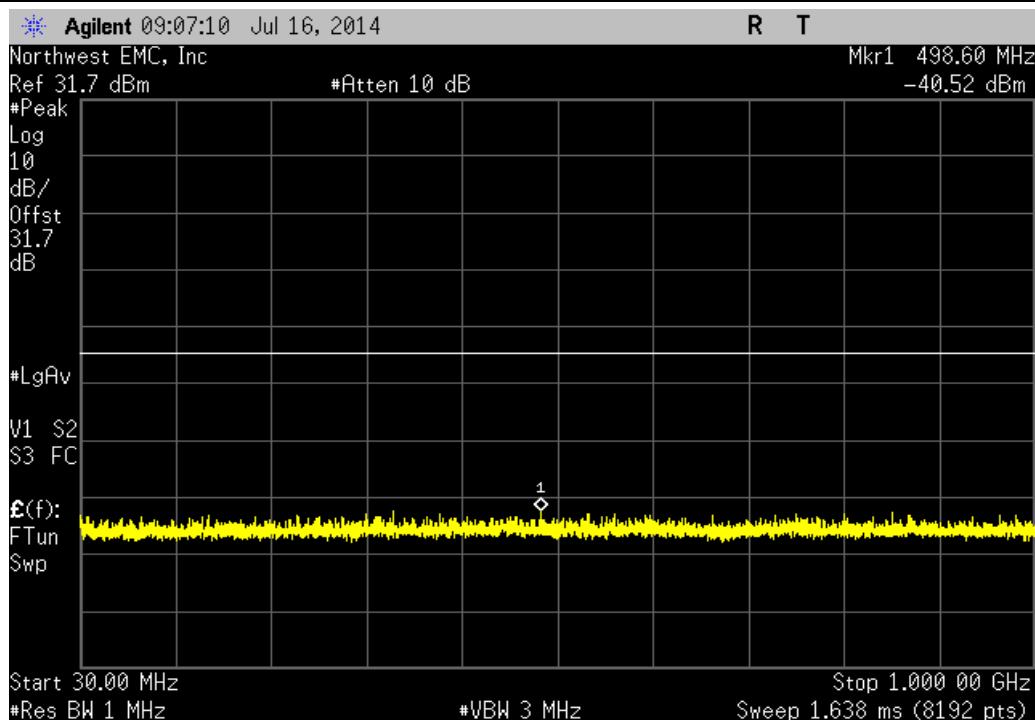


Band ABD, WCDMA					
Frequency Range		Value	Limit	Result	
	1 GHz - 3 GHz	-19.64 dBm	≤ -13 dBm	Pass	


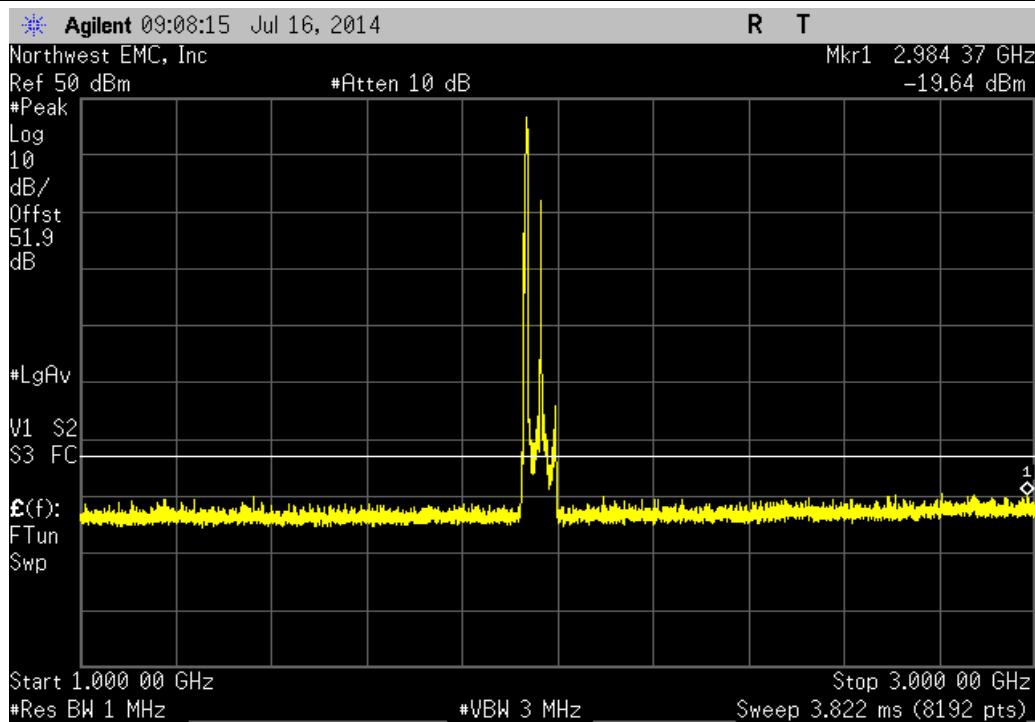


Band ABD, WCDMA					
Frequency Range		Value	Limit	Result	
3 GHz - 20 GHz		-33.1 dBm	≤ -13 dBm	Pass	

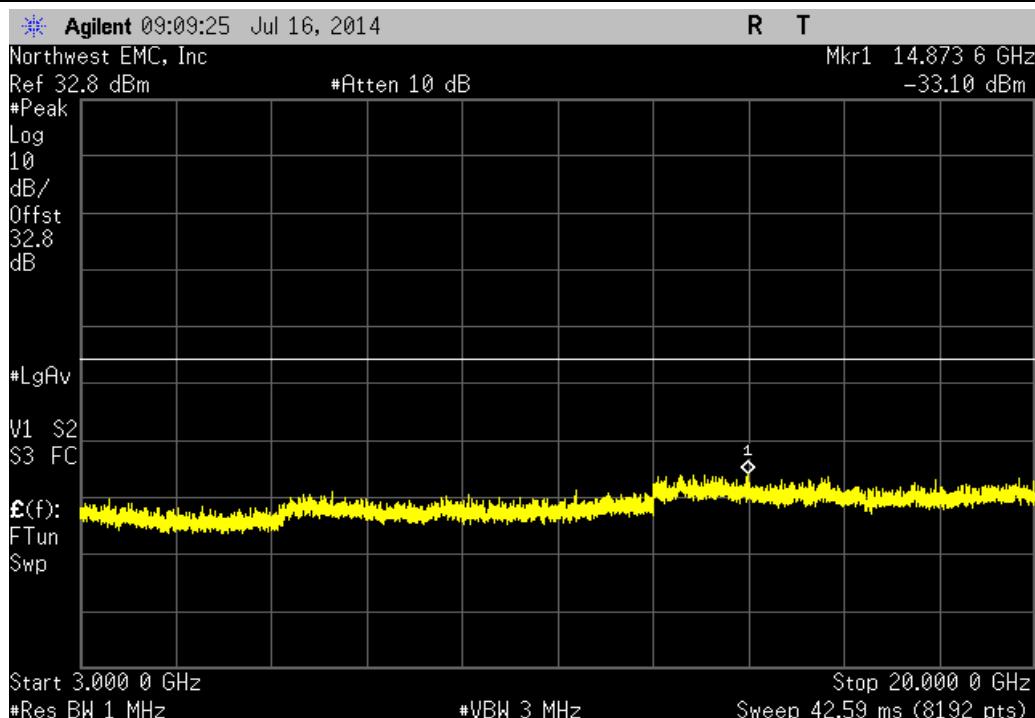

Band CEFG, WCDMA					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-40.53 dBm	≤ -13 dBm	Pass	

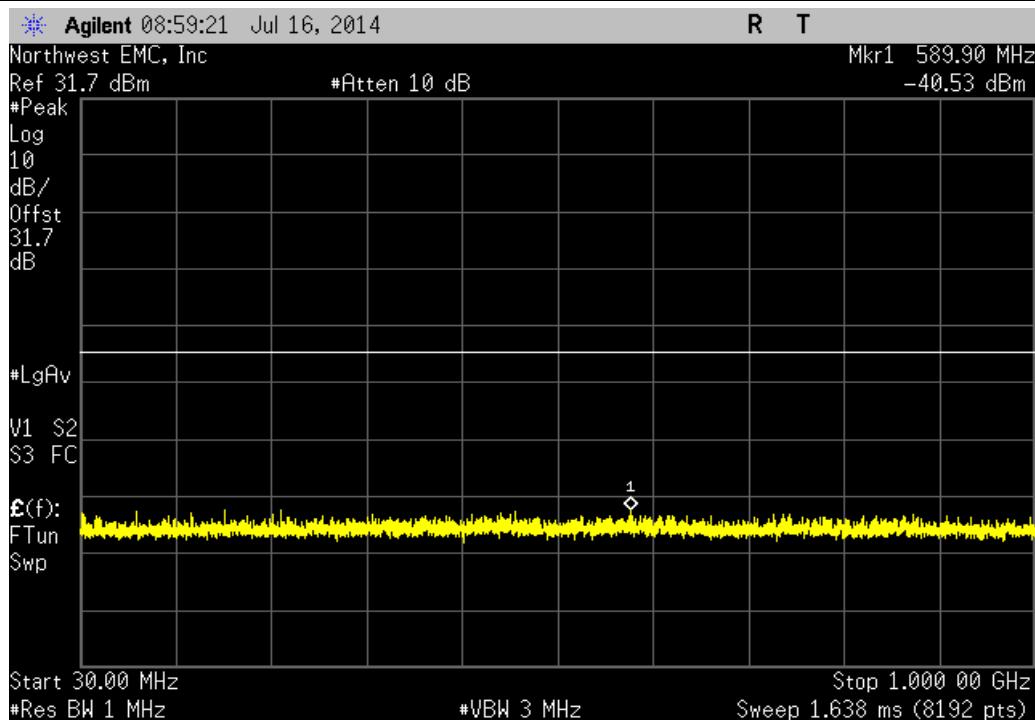

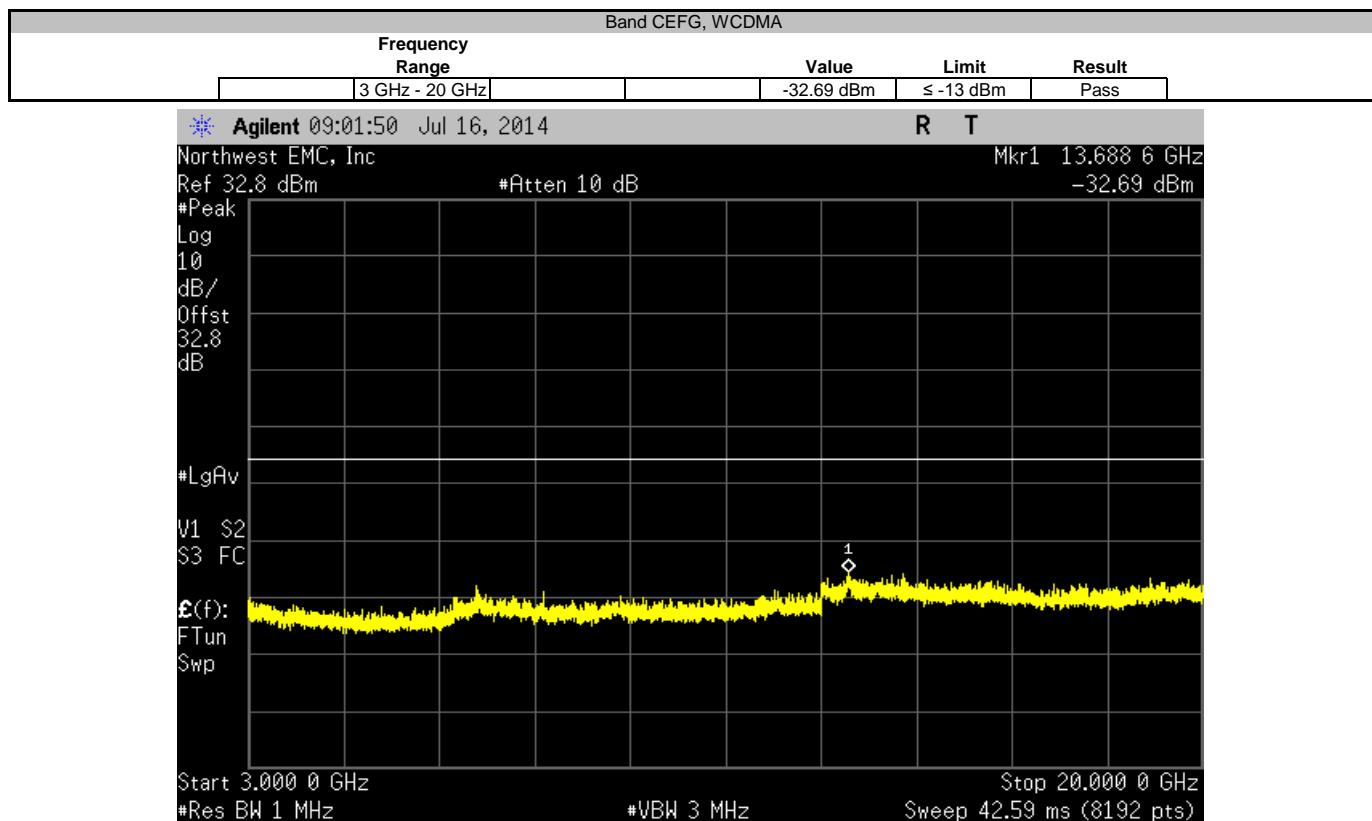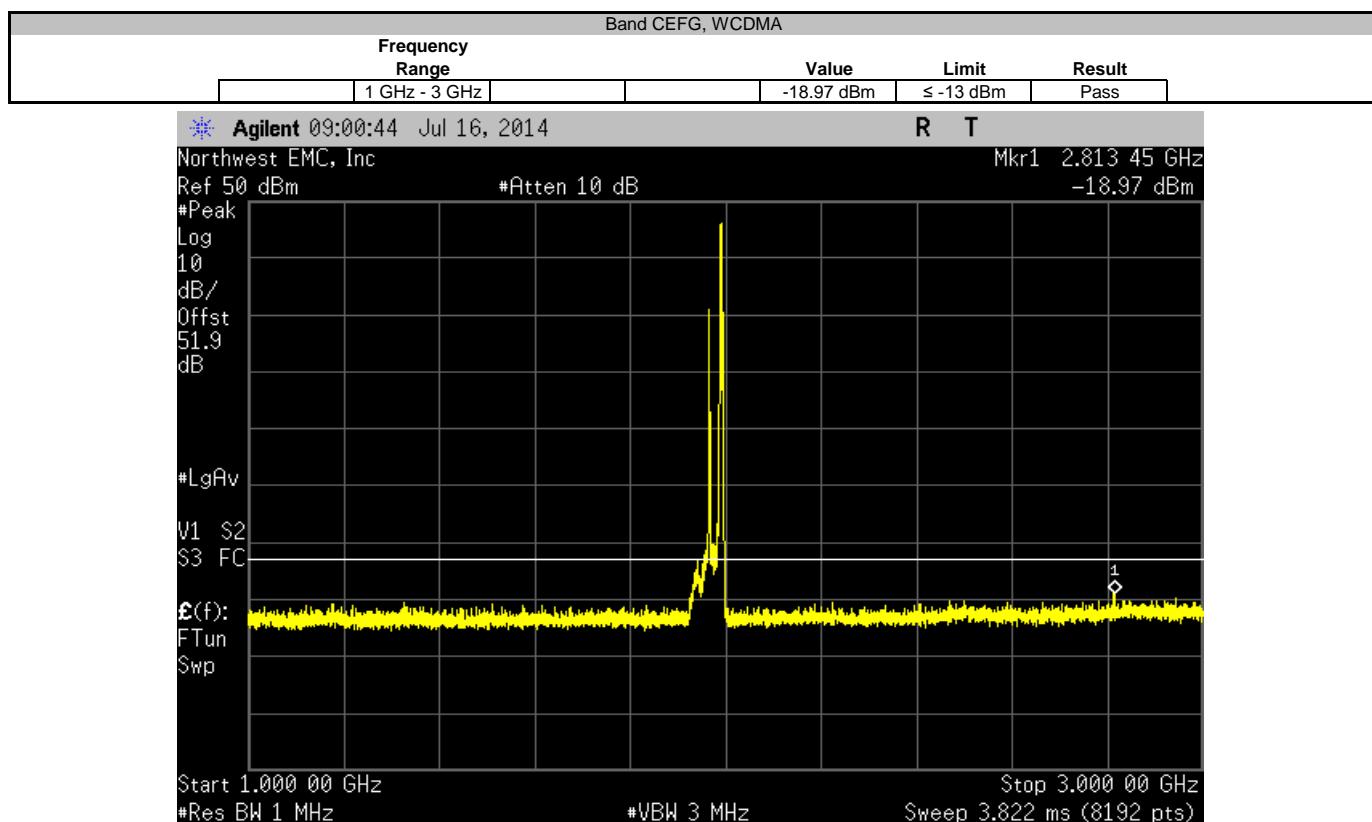

FREQUENCY STABILITY 1900

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Multimeter	Fluke	117	MNN	1/20/2014	36
Variable Transformer	Powerstat	246	XFR	NCR	0
Humidity Temperature Meter	Omega Engineering, Inc.	HH31	DUB	10/25/2011	36
Temp./Humidity Chamber	Cincinnati Sub Zero (CSZ)	ZPH-32-3.5-SCT/AC	TBF	NCR	0
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24


TEST DESCRIPTION

A direct connect measurement was made between the EUT's antenna cable and a spectrum analyzer. The spectrum analyzer is equipped with a precision frequency reference that exceeds the stability requirement of the EUT. Testing was done with an absence of modulation in a CW mode of operation.


The primary supply voltage was varied from 85 % to 115% of the nominal voltage. Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-30 ° to +50° C) and at 10°C intervals.

EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt			Work Order: TECO0013			
Serial Number: None			Date: 04/14/14			
Customer: TE Connectivity / ADC Telecommunications			Temperature: 22.8°C			
Attendees: None			Humidity: 16%			
Project: None			Barometric Pres.: 1020.6			
Tested by: Trevor Buls	Power: 110VAC/60Hz		Job Site: MN08			
TEST SPECIFICATIONS		Test Method				
FCC 24E:2014		ANSI/TIA/EIA-603-C-2004				
COMMENTS						
Customer provided a high wattage 30 dB attenuator. Voltage range varied from 126.5 to 93.5 VAC. Both antenna ports were terminated but only one port is active						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature	<i>Trevor Buls</i>			
		Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result
Voltage: 115%						
Low Channel, 1930.8 MHz	1930.799992	1930.8	0.0041	1	Pass	
	1962.499988	1962.5	0.0061	1	Pass	
	1994.199984	1994.2	0.0080	1	Pass	
Voltage: 100%						
Low Channel, 1930.8 MHz	1930.799992	1930.8	0.0041	1	Pass	
	1962.499988	1962.5	0.0061	1	Pass	
	1994.199984	1994.2	0.0080	1	Pass	
Voltage: 85%						
Low Channel, 1930.8 MHz	1930.799992	1930.8	0.0041	1	Pass	
	1962.499988	1962.5	0.0061	1	Pass	
	1994.199984	1994.2	0.0000	1	Pass	
Temperature: +50°						
Low Channel, 1930.8 MHz	1930.799992	1930.8	0.0041	1	Pass	
	1962.499988	1962.5	0.0061	1	Pass	
	1994.199984	1994.2	0.0080	1	Pass	
Temperature: +40°						
Low Channel, 1930.8 MHz	1930.799992	1930.8	0.0041	1	Pass	
	1962.499987	1962.5	0.0066	1	Pass	
	1994.199984	1994.2	0.0080	1	Pass	
Temperature: +30°						
Low Channel, 1930.8 MHz	1930.799988	1930.8	0.0062	1	Pass	
	1962.499988	1962.5	0.0061	1	Pass	
	1994.199984	1994.2	0.0080	1	Pass	
Temperature: +20°						
Low Channel, 1930.8 MHz	1930.799988	1930.8	0.0062	1	Pass	
	1962.500003	1962.5	0.0015	1	Pass	
	1994.199985	1994.2	0.0075	1	Pass	
Temperature: +10°						
Low Channel, 1930.8 MHz	1930.799989	1930.8	0.0057	1	Pass	
	1962.499988	1962.5	0.0061	1	Pass	
	1994.199984	1994.2	0.0080	1	Pass	
Temperature: 0°						
Low Channel, 1930.8 MHz	1930.799992	1930.8	0.0041	1	Pass	
	1962.499988	1962.5	0.0061	1	Pass	
	1994.2	1994.2	0.0000	1	Pass	
Temperature: -10°						
Low Channel, 1930.8 MHz	1930.799992	1930.8	0.0041	1	Pass	
	1962.499986	1962.5	0.0071	1	Pass	
	1994.199984	1994.2	0.0080	1	Pass	
Temperature: -20°						
Low Channel, 1930.8 MHz	1930.799992	1930.8	0.0041	1	Pass	
	1962.499988	1962.5	0.0061	1	Pass	
	1994.199984	1994.2	0.0080	1	Pass	
Temperature: -30°						
Low Channel, 1930.8 MHz	1930.799992	1930.8	0.0041	1	Pass	
	1962.499988	1962.5	0.0061	1	Pass	
	1994.199984	1994.2	0.0080	1	Pass	


Voltage: 115%, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

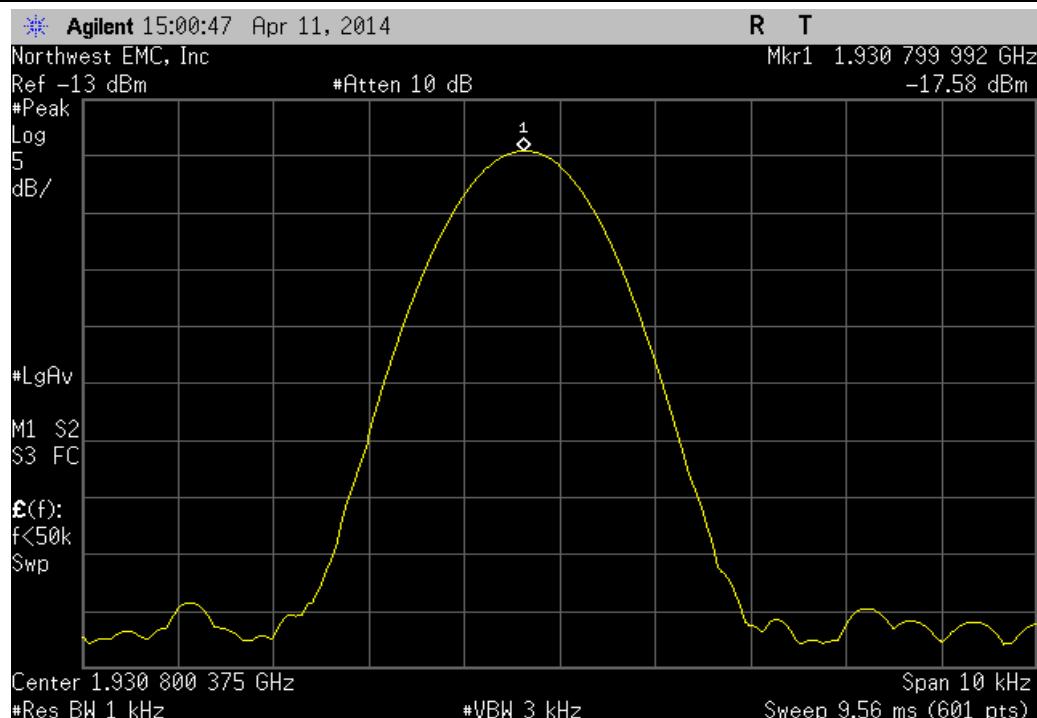


Voltage: 115%, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

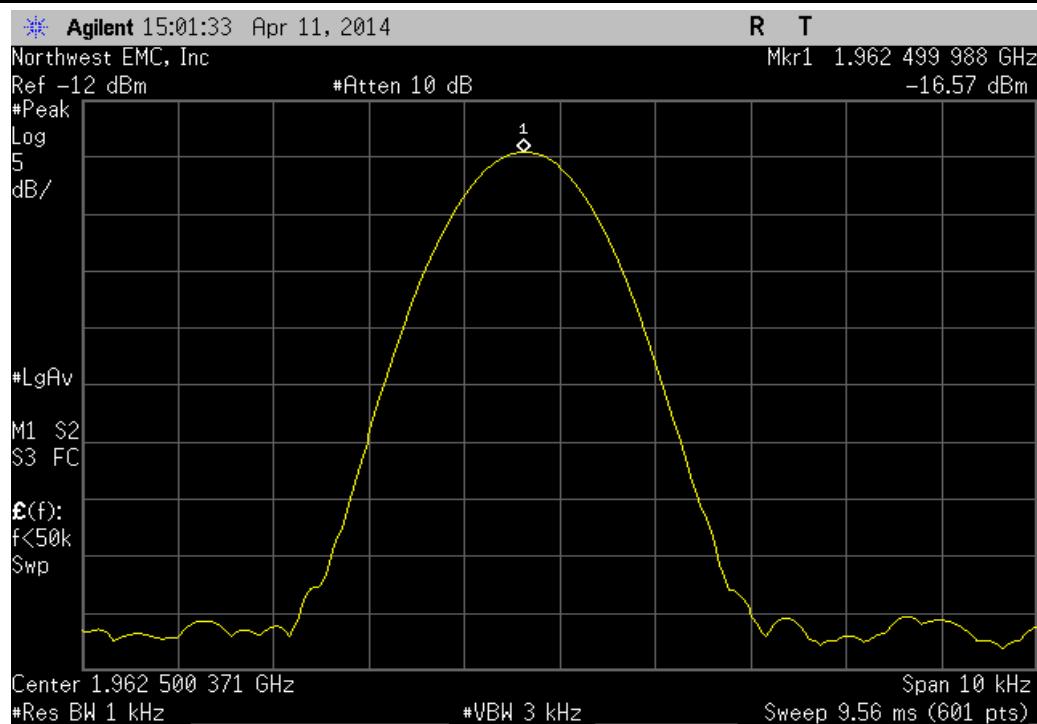


Voltage: 115%, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

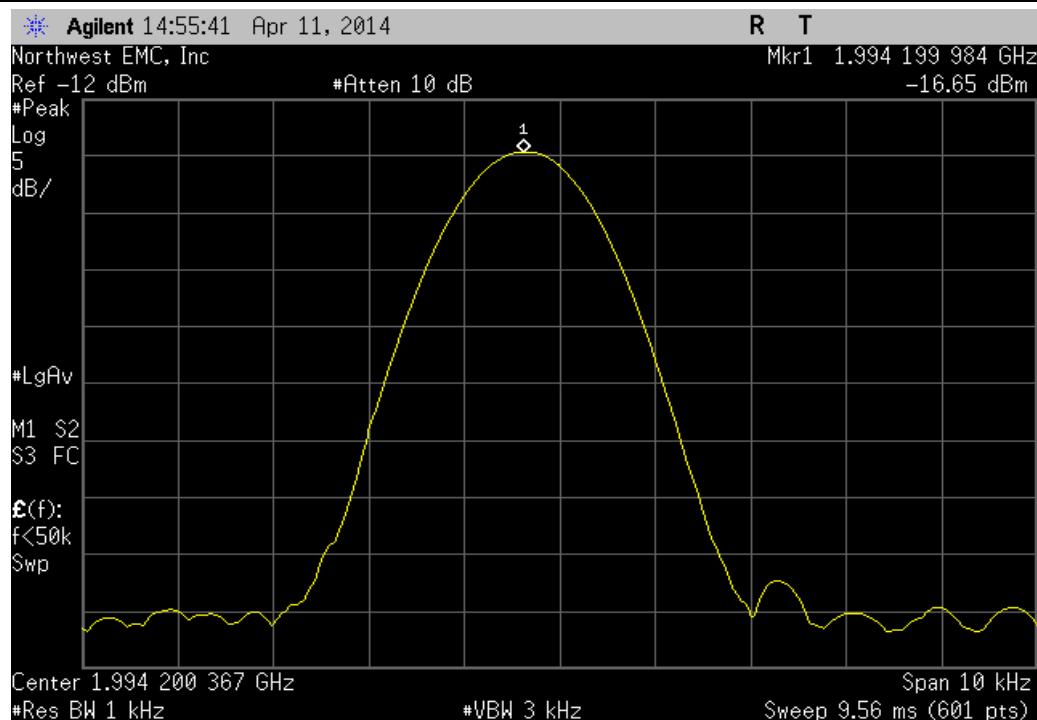


Voltage: 100%, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

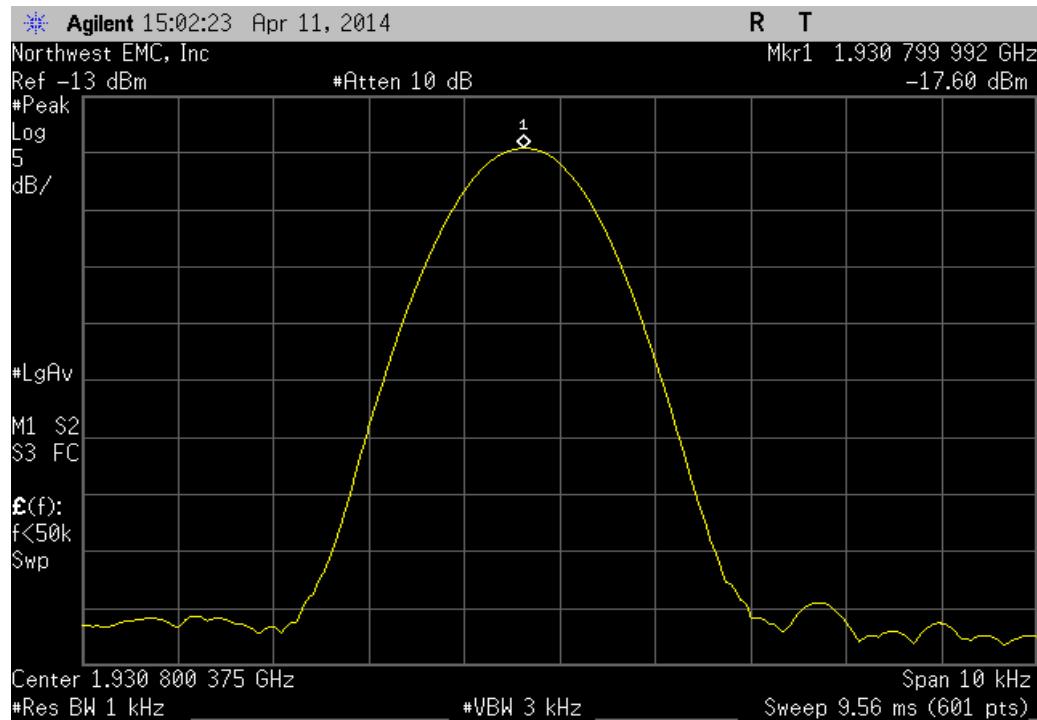


Voltage: 100%, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

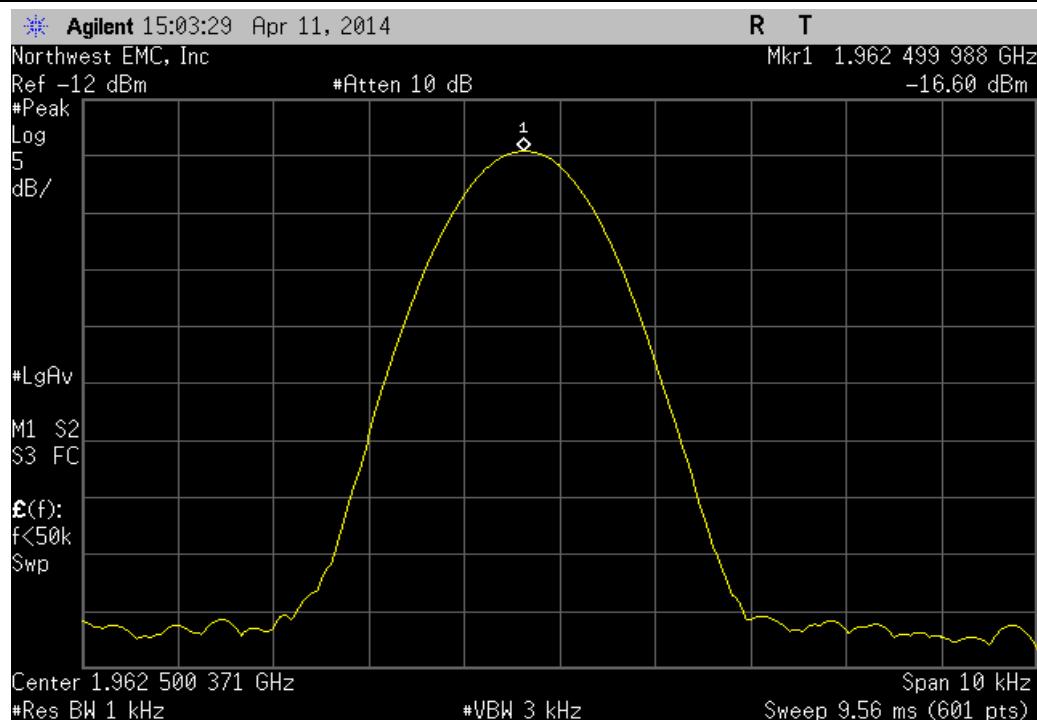


Voltage: 100%, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

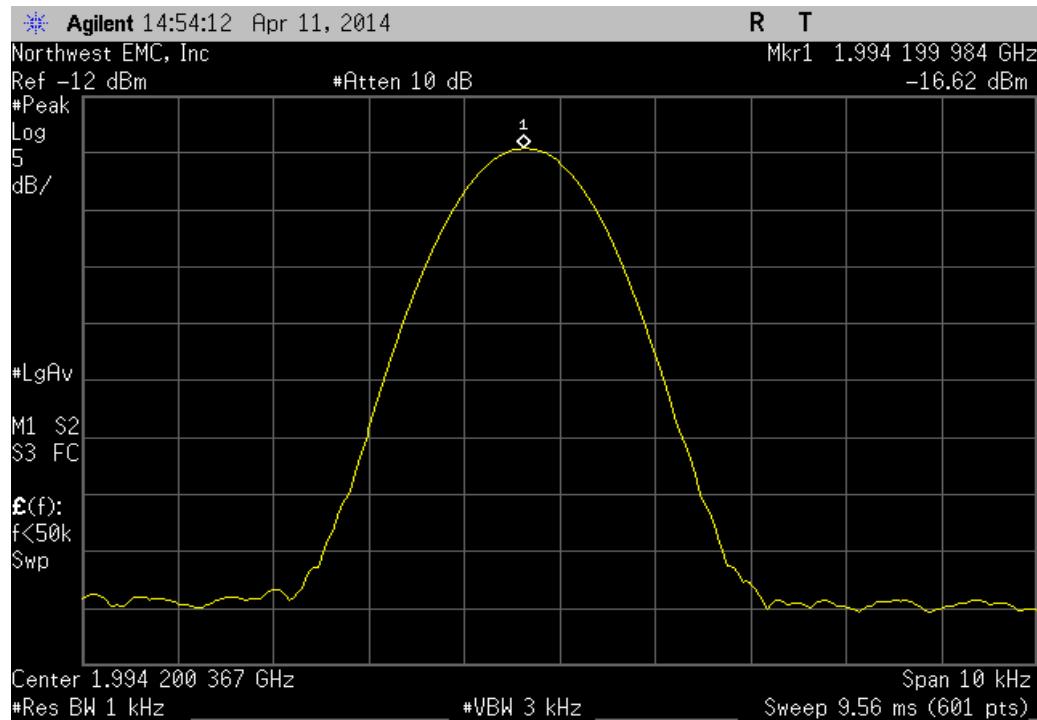


Voltage: 85%, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

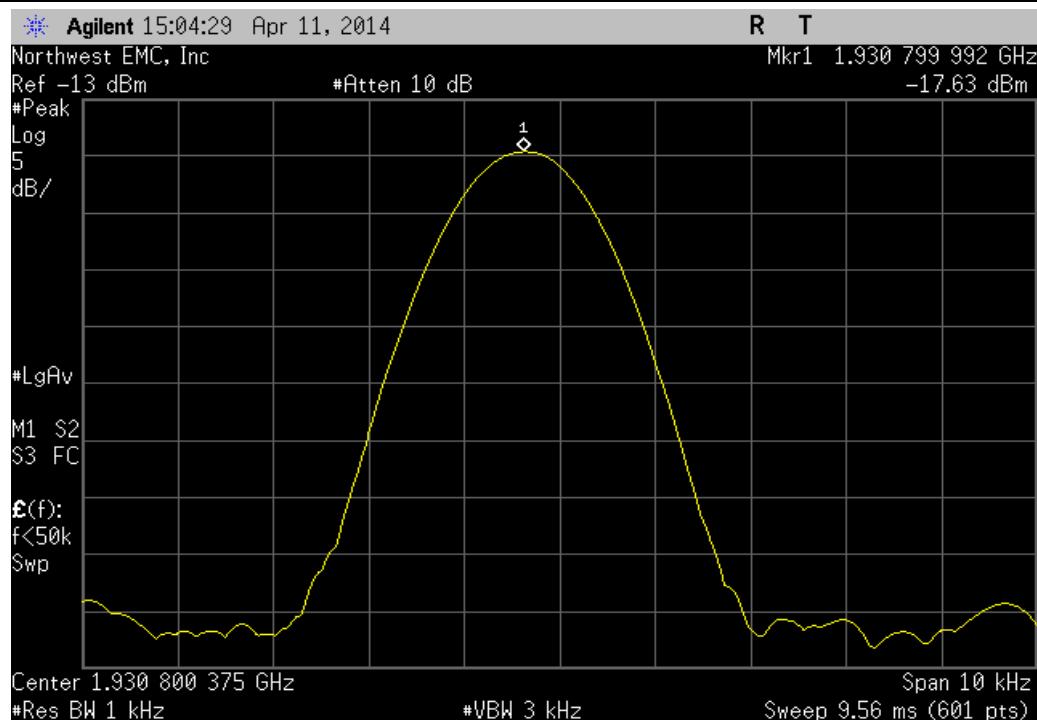


Voltage: 85%, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

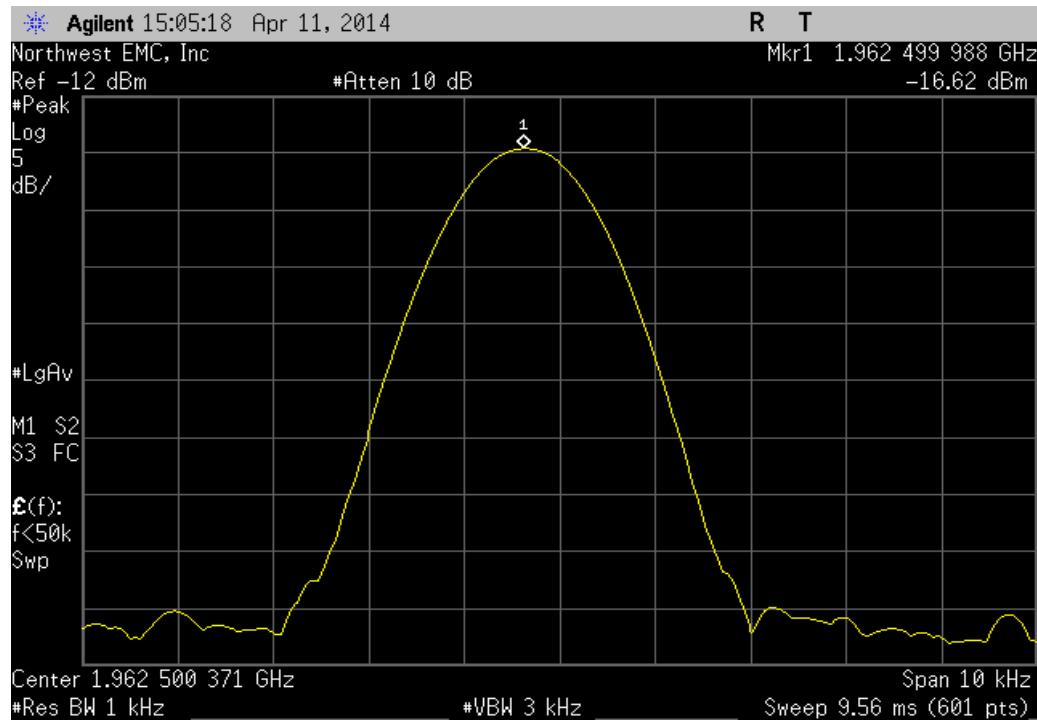


Voltage: 85%, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.2	1994.2	0.0000	1	Pass	

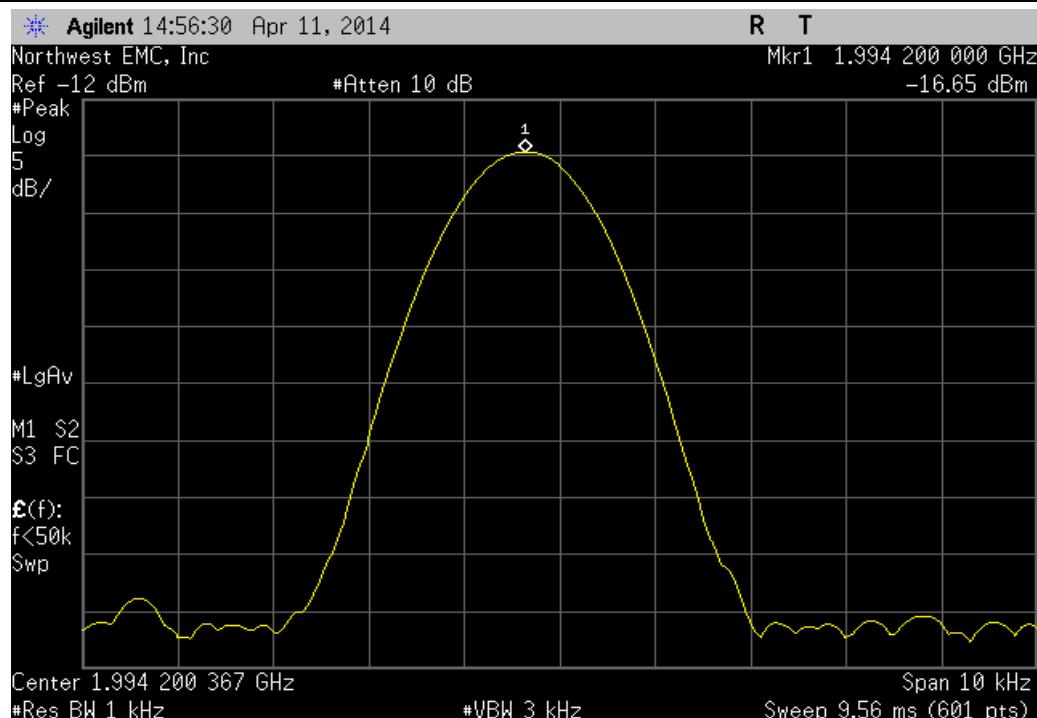


Temperature: +50°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

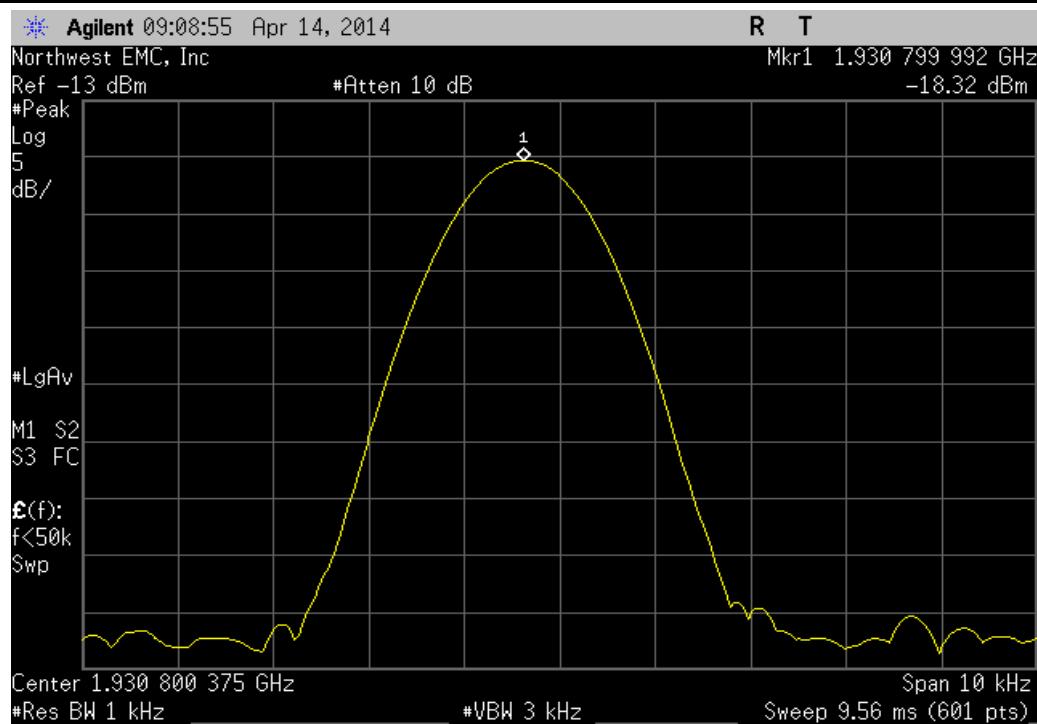


Temperature: +50°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

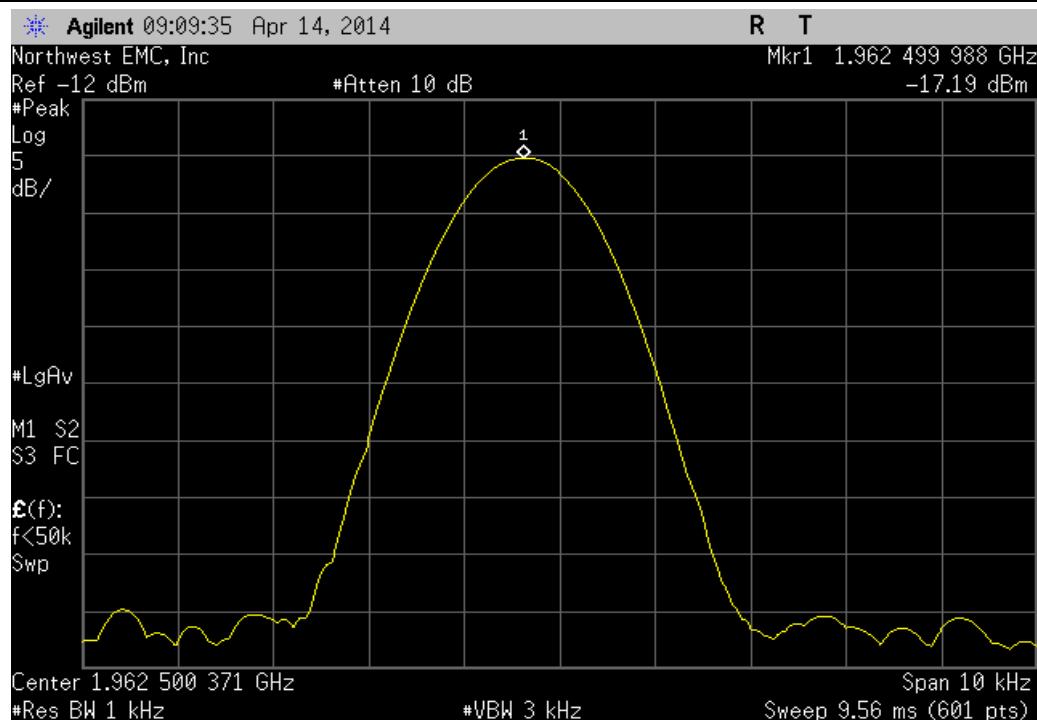


Temperature: +50°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

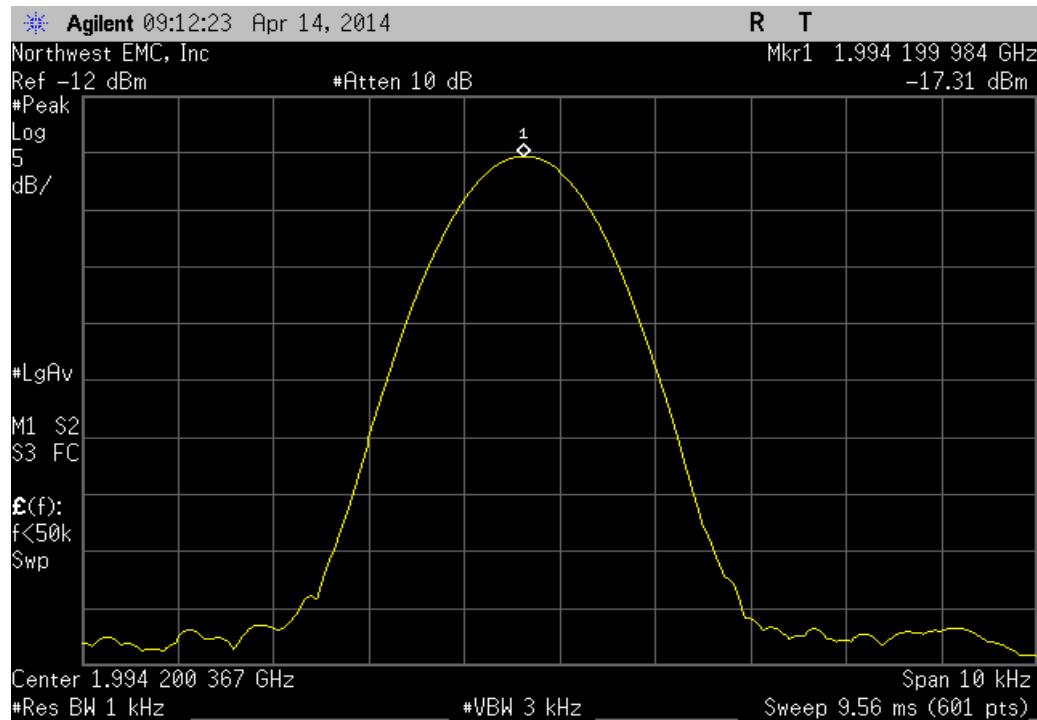


Temperature: +40°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

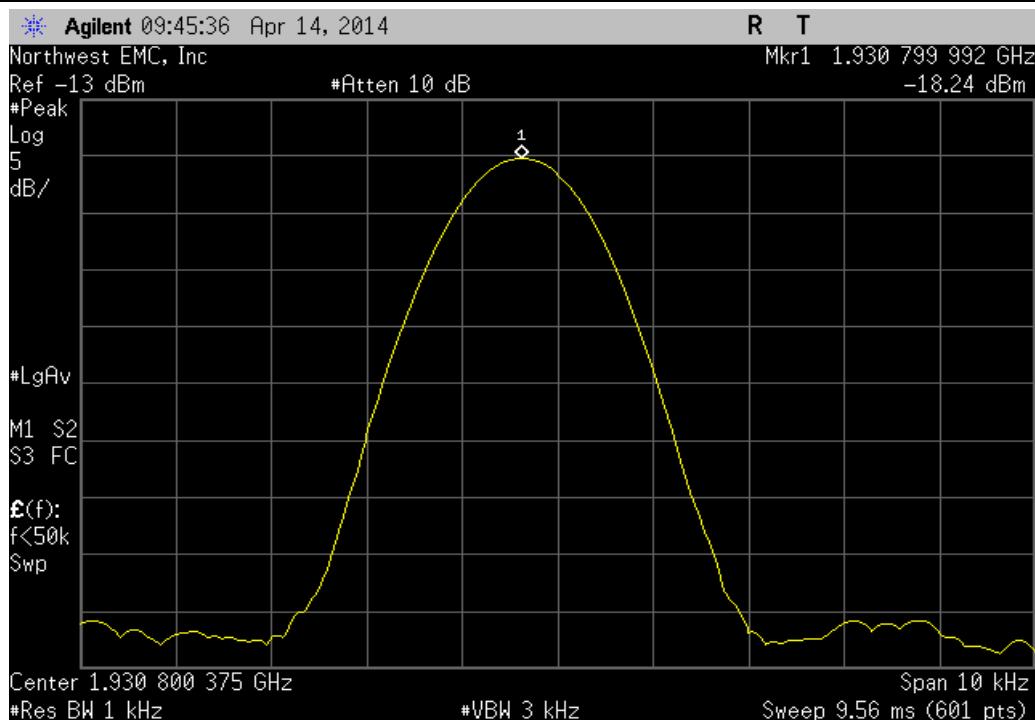


Temperature: +40°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499987	1962.5	0.0066	1	Pass	

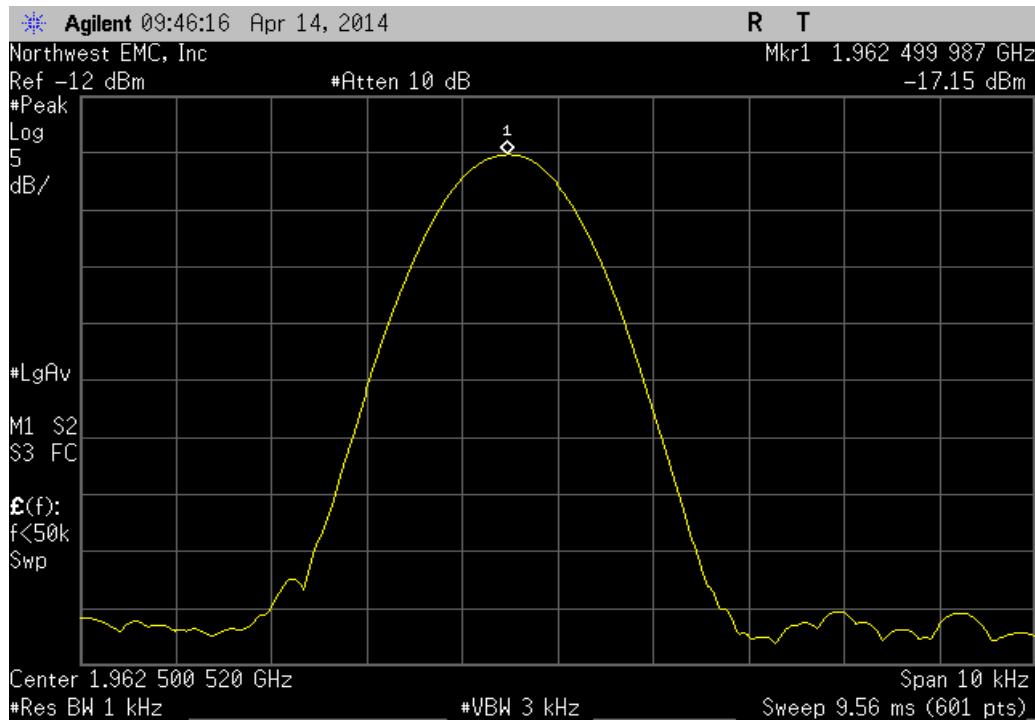


Temperature: +40°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

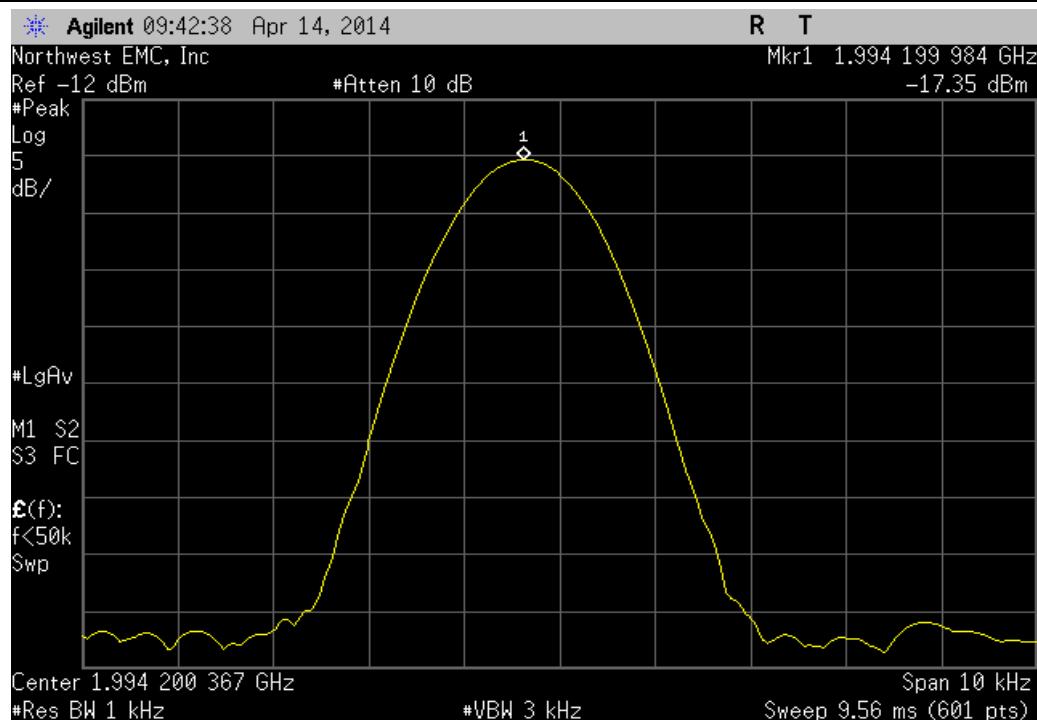


Temperature: +30°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799988	1930.8	0.0062	1	Pass	

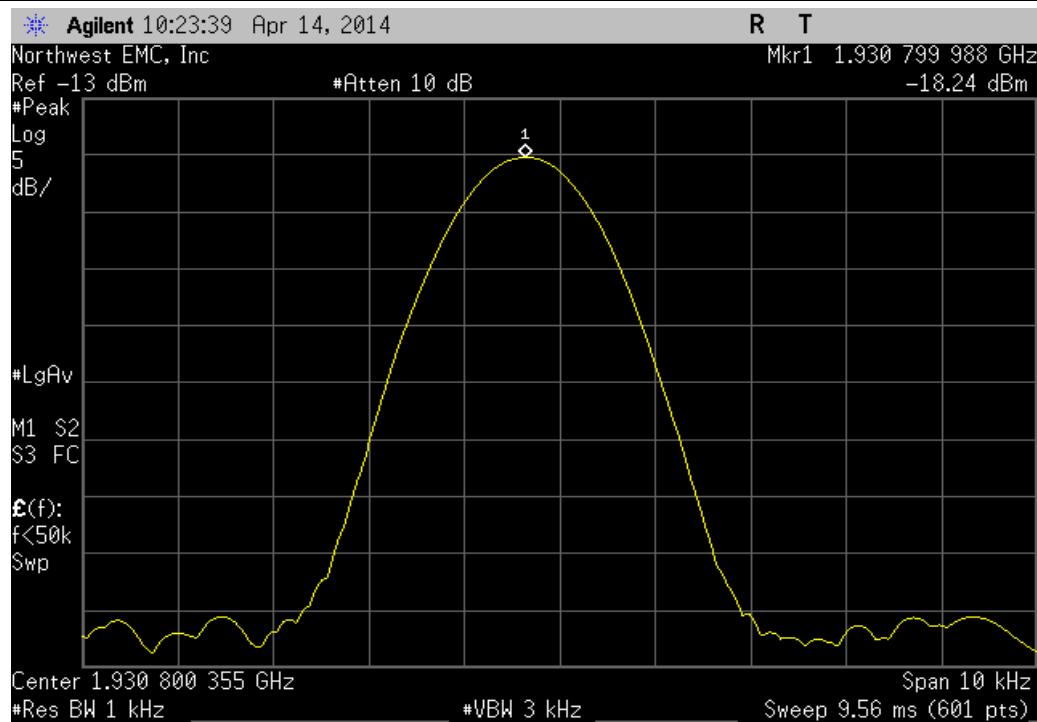


Temperature: +30°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

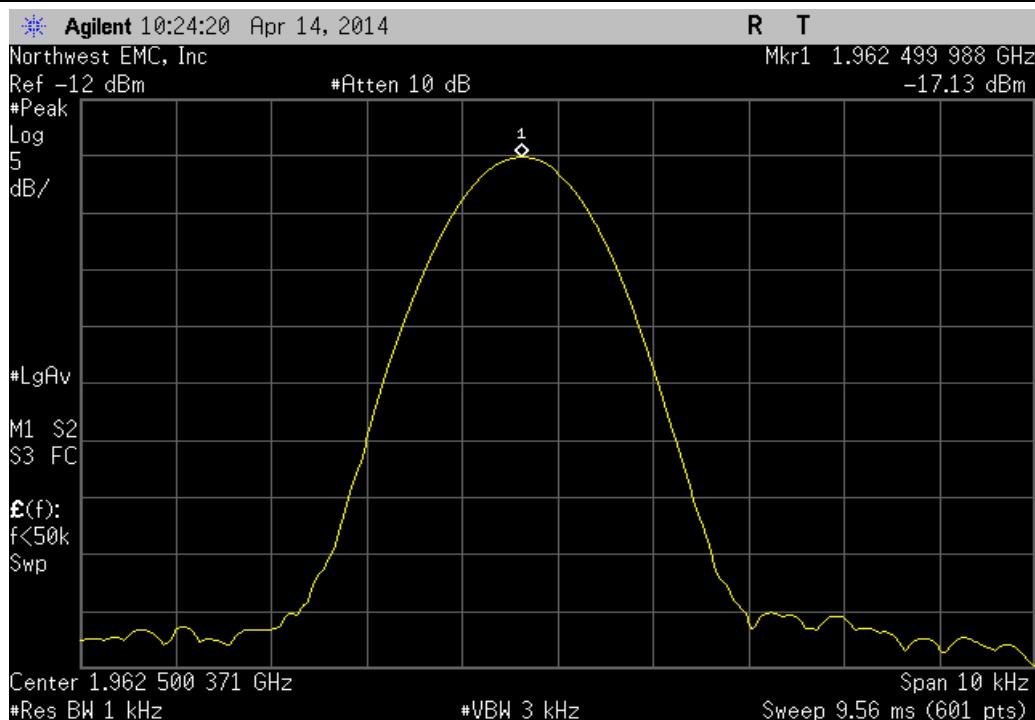


Temperature: +30°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

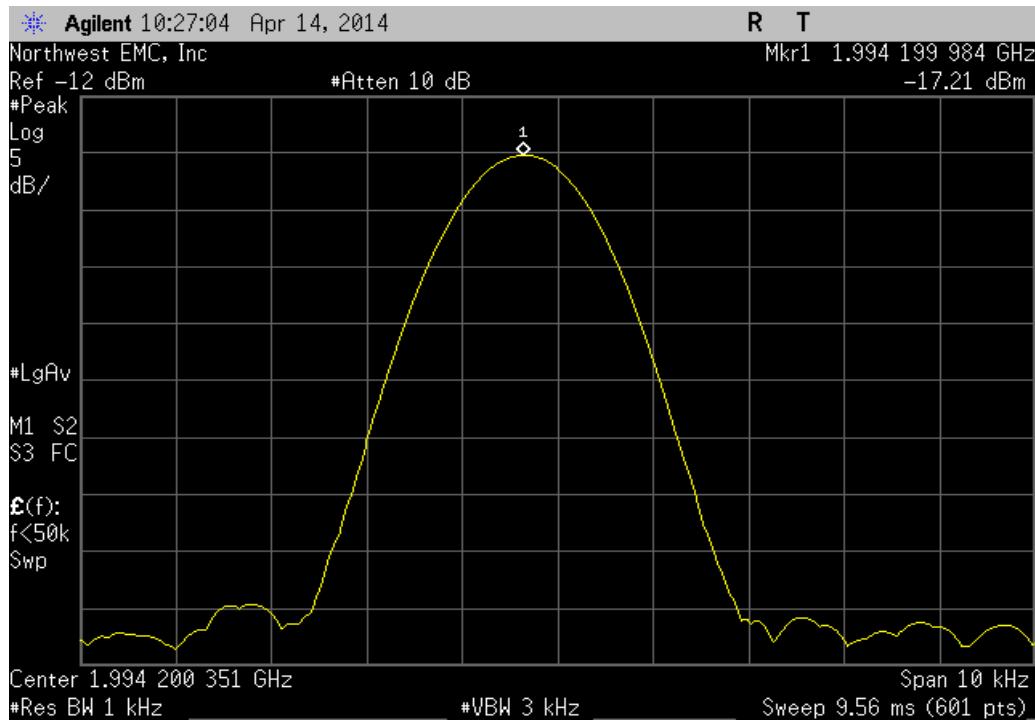


Temperature: +20°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799988	1930.8	0.0062	1	Pass	

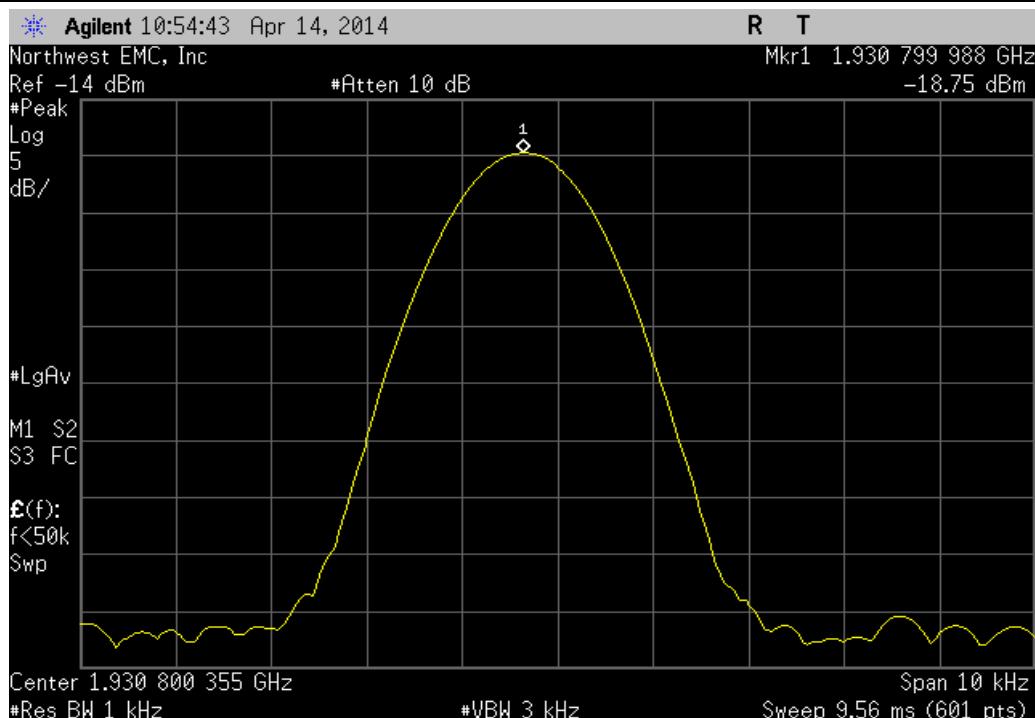


Temperature: +20°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.500003	1962.5	0.0015	1	Pass	

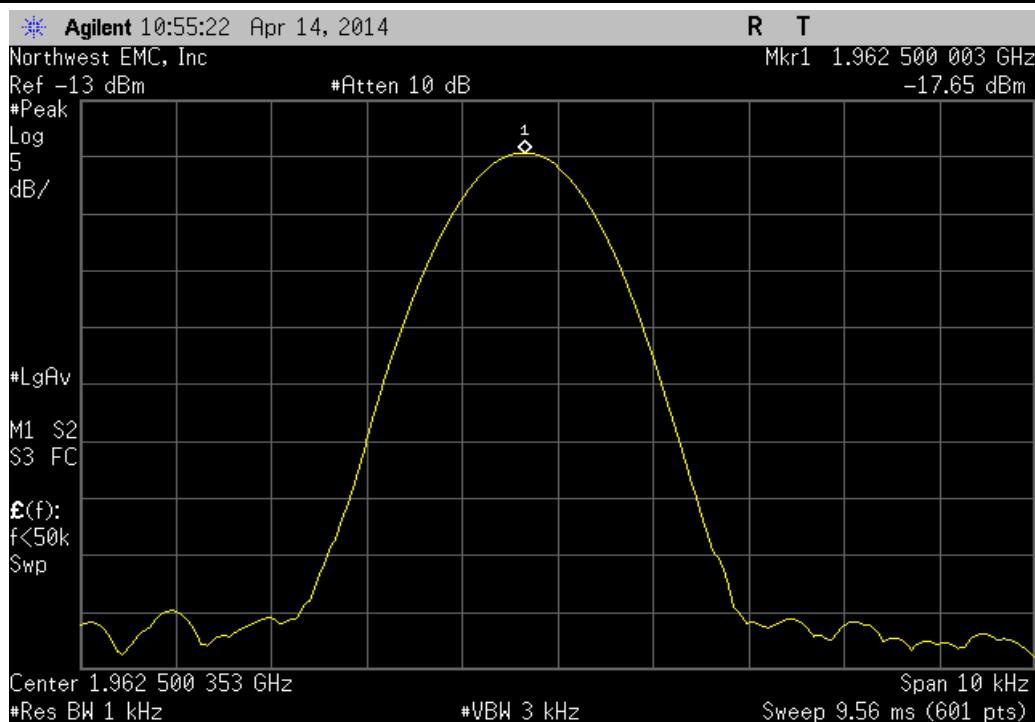


Temperature: +20°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199985	1994.2	0.0075	1	Pass	

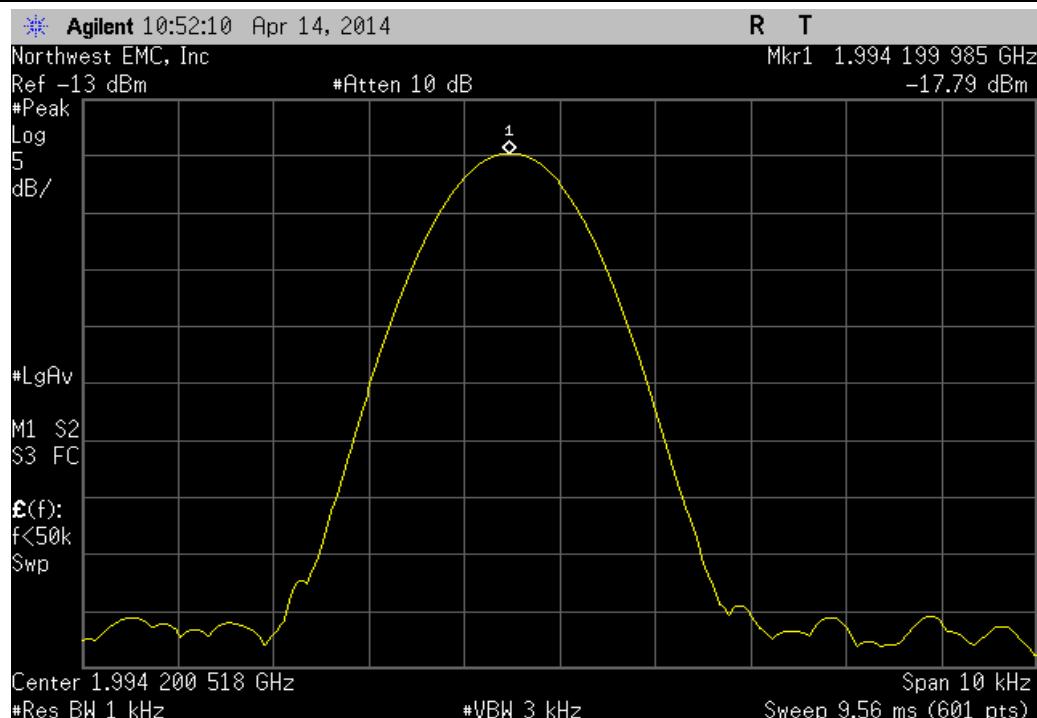


Temperature: +10°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799989	1930.8	0.0057	1	Pass	

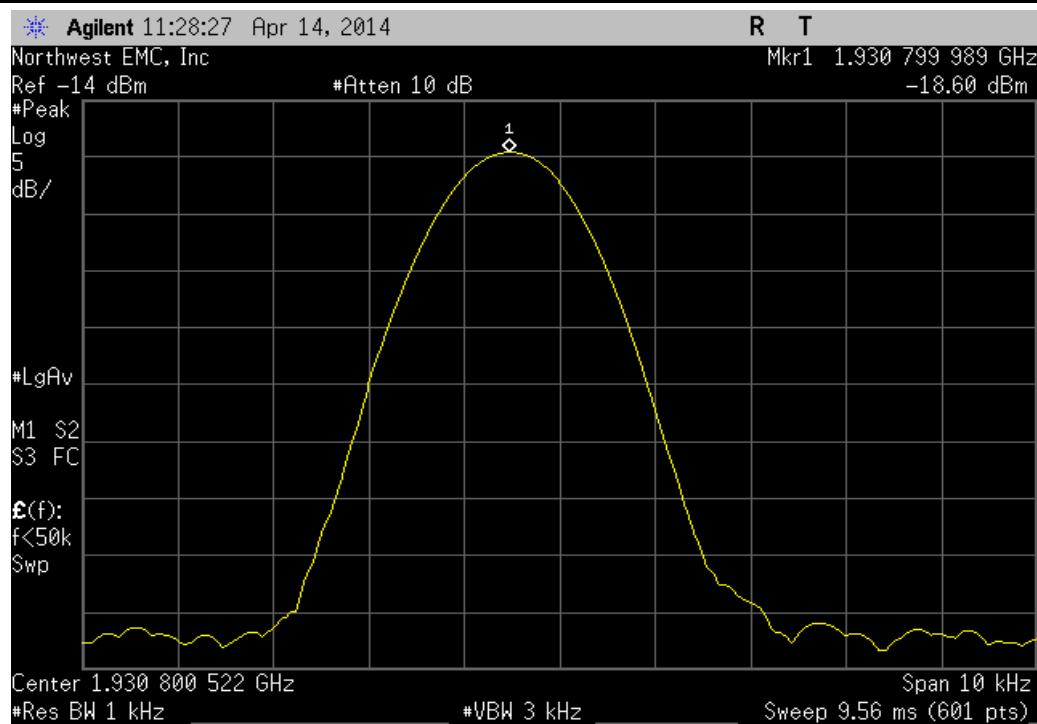


Temperature: +10°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

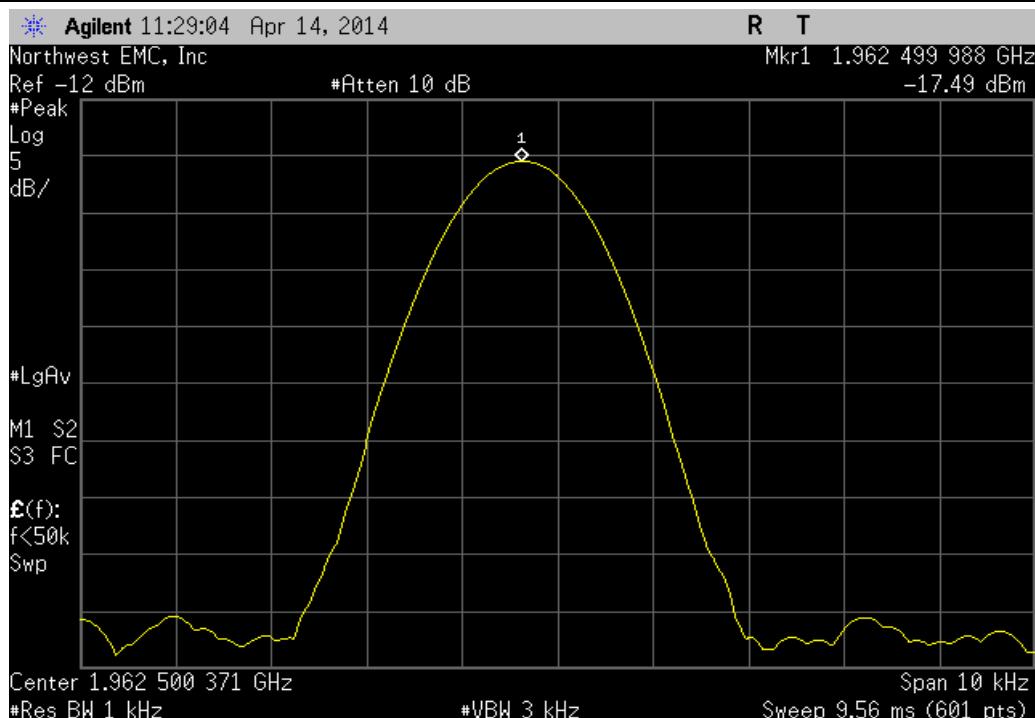


Temperature: +10°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

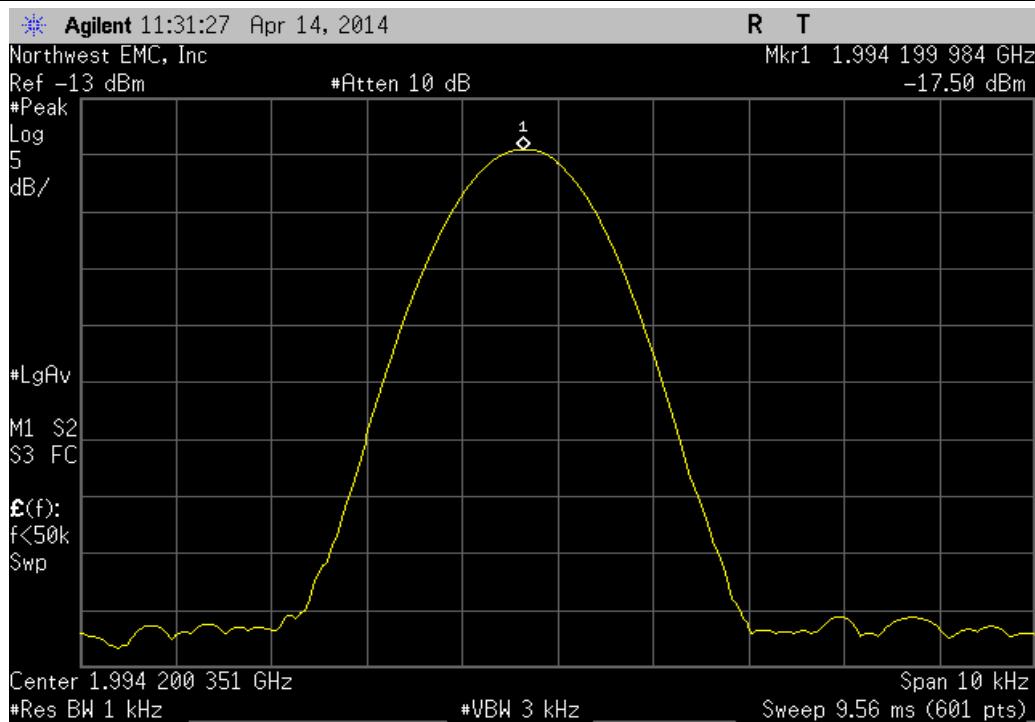


Temperature: 0°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

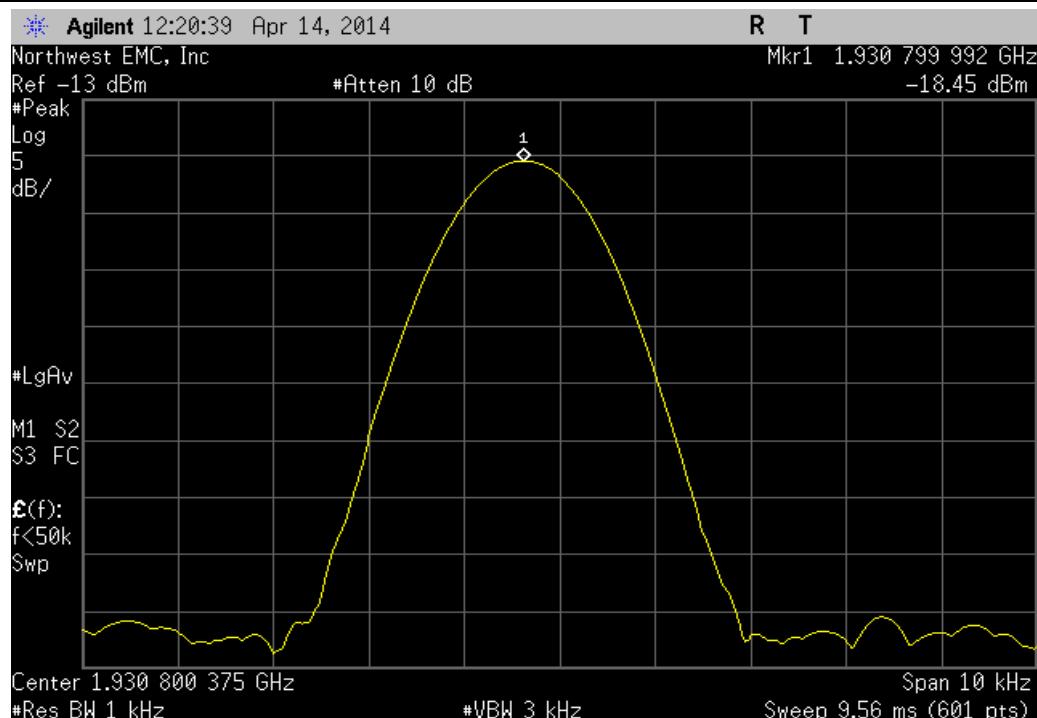


Temperature: 0°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

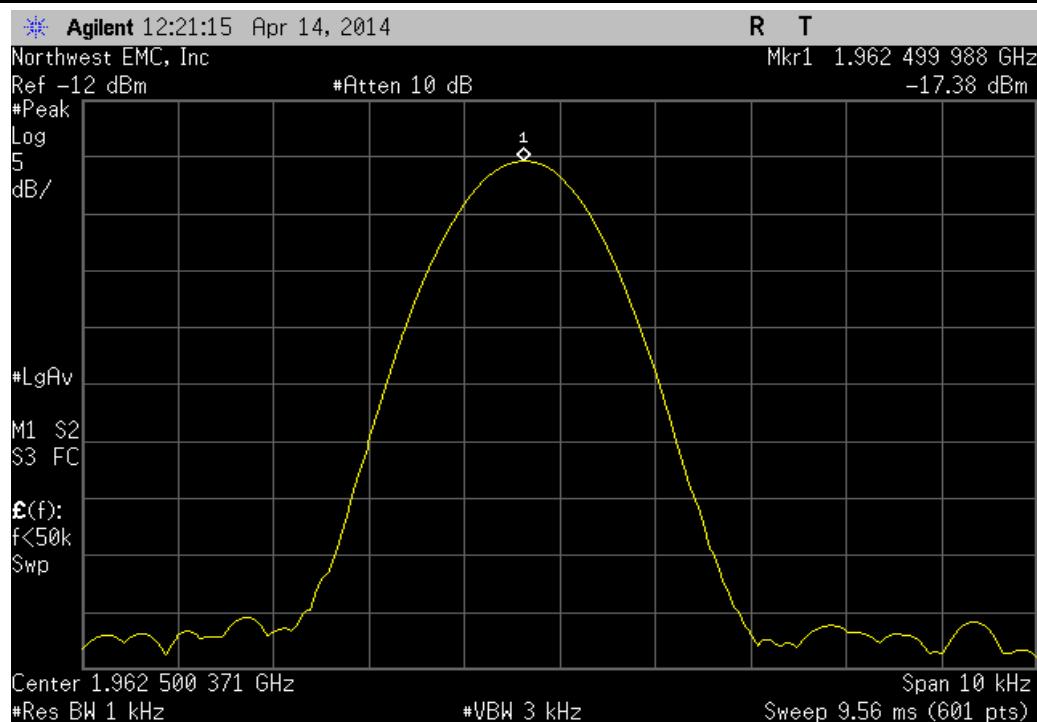


Temperature: 0°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.2	1994.2	0.0000	1	Pass	

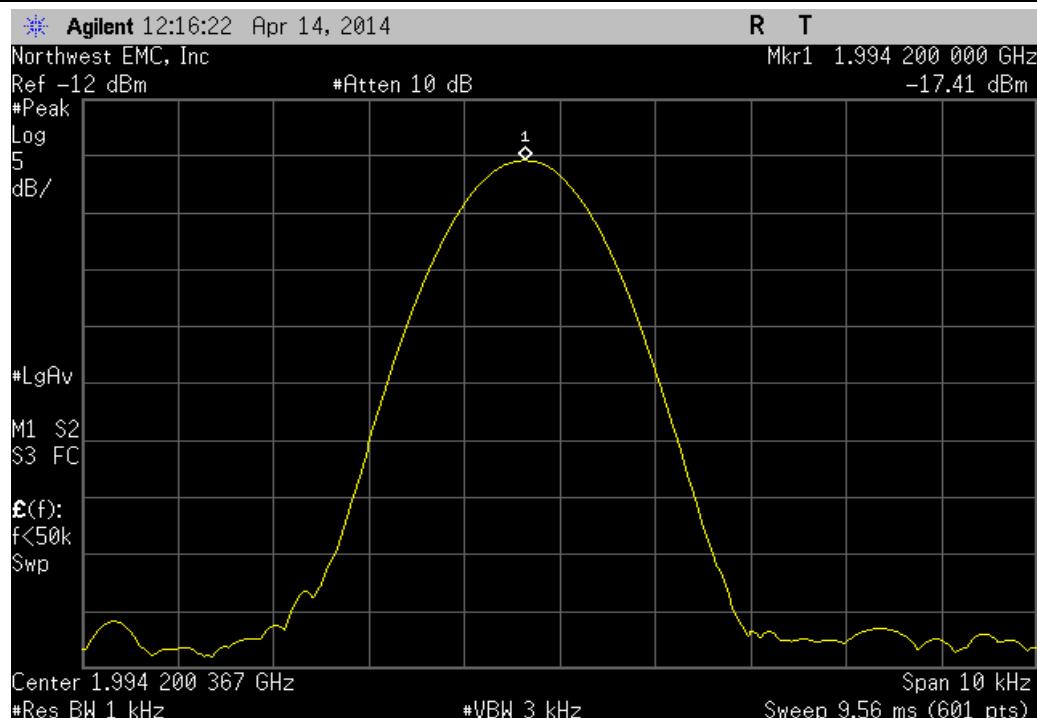


Temperature: -10°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

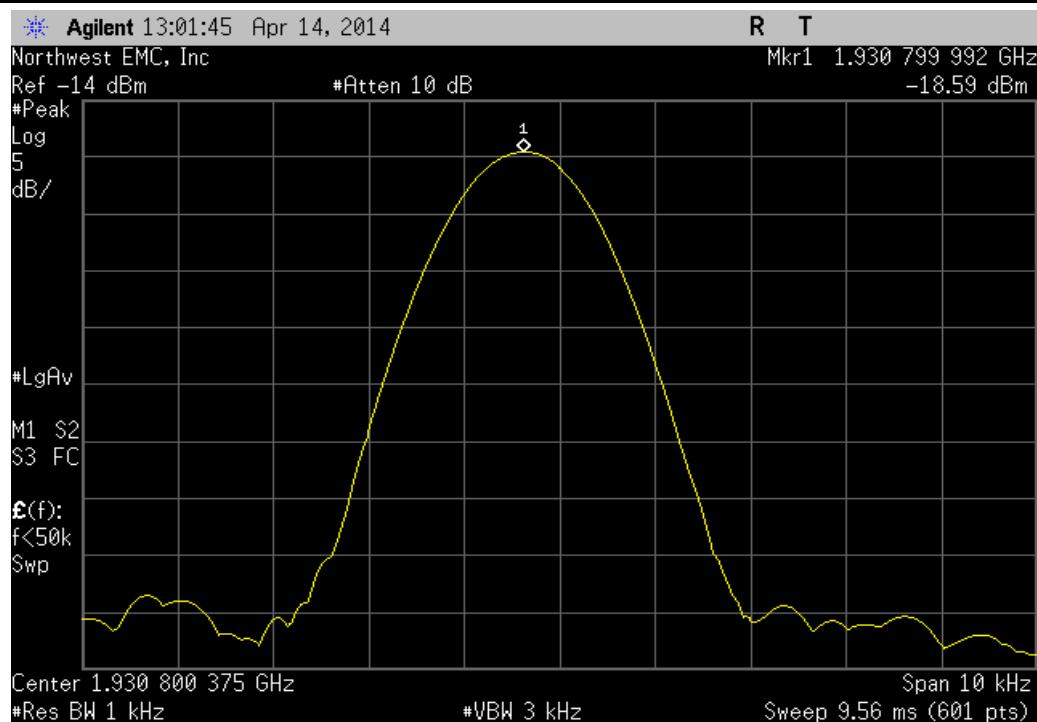


Temperature: -10°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499986	1962.5	0.0071	1	Pass	

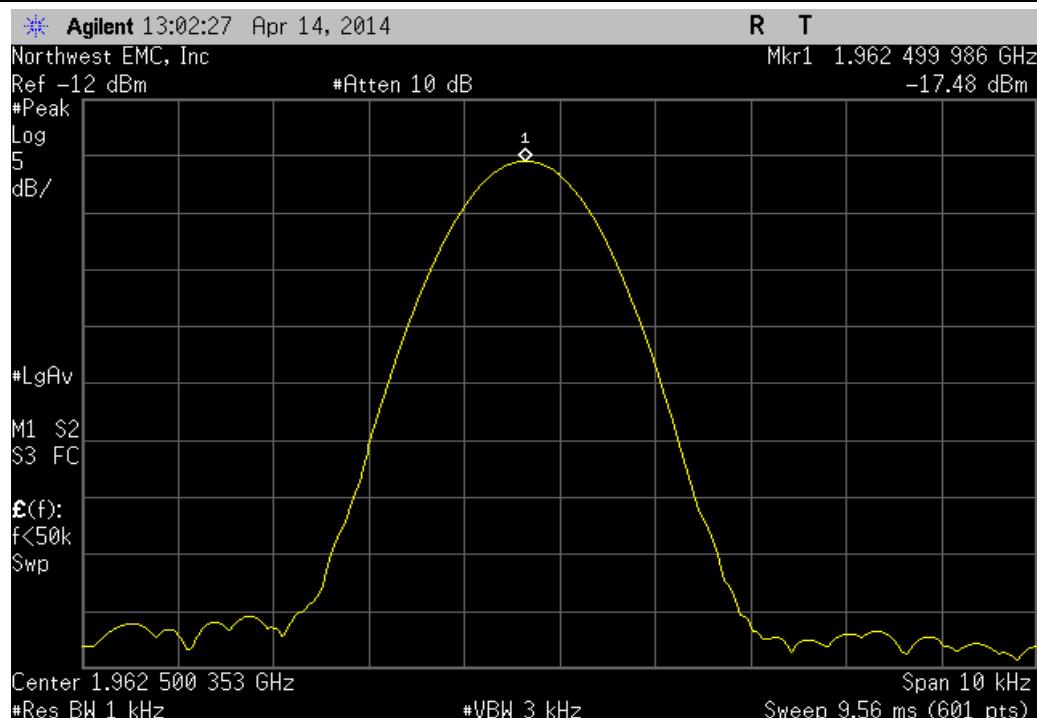


Temperature: -10°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

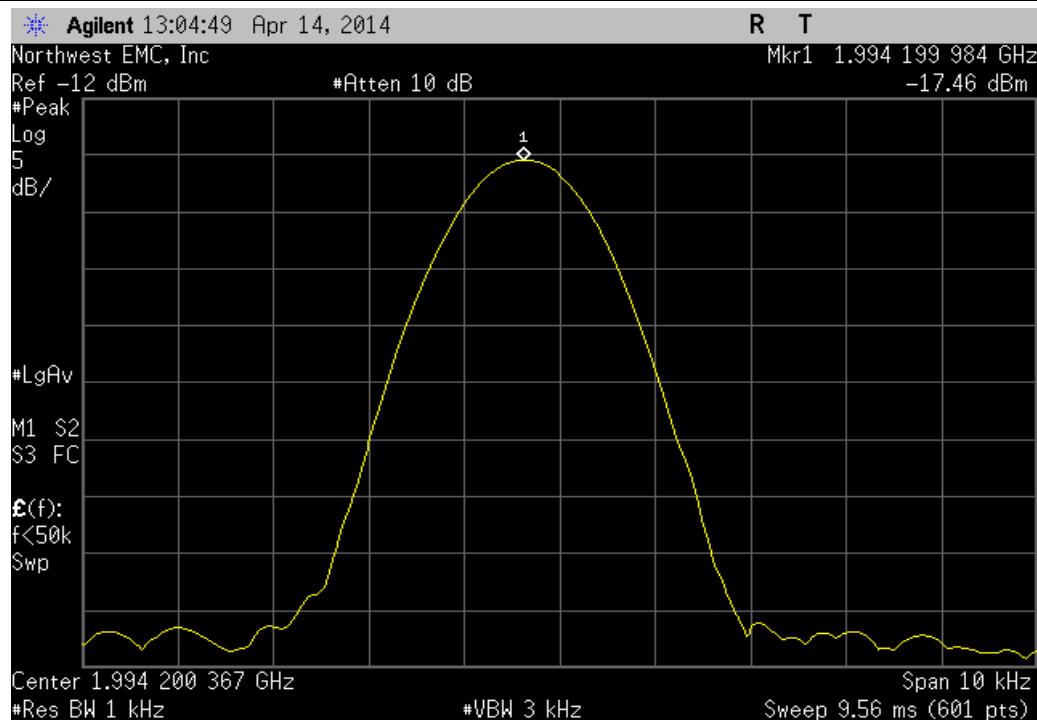


Temperature: -20°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

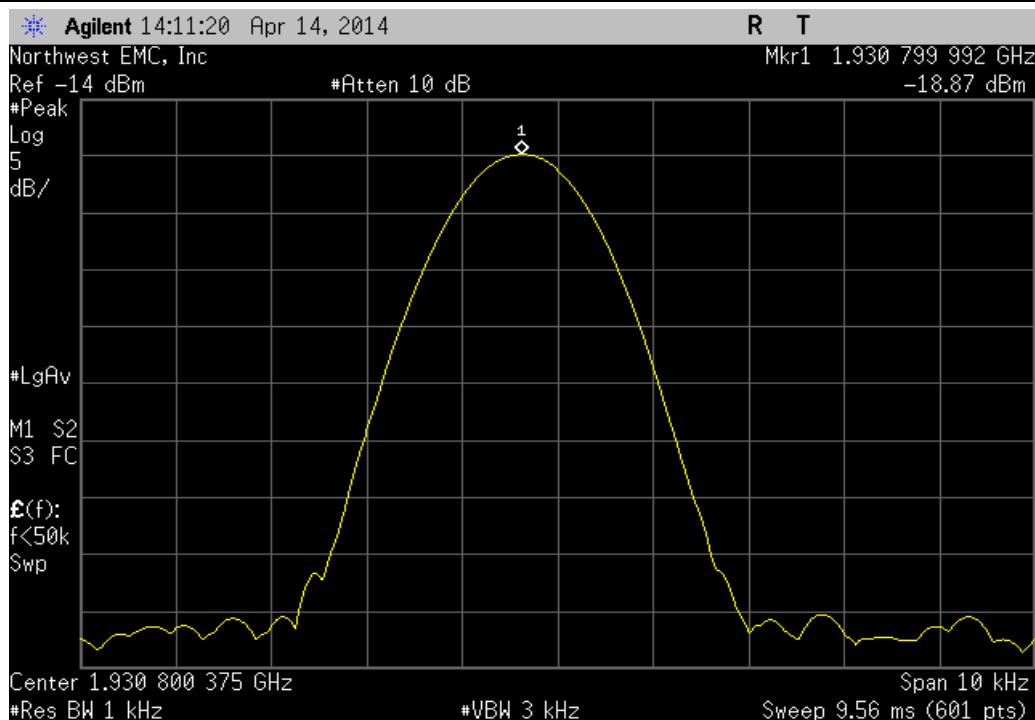


Temperature: -20°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

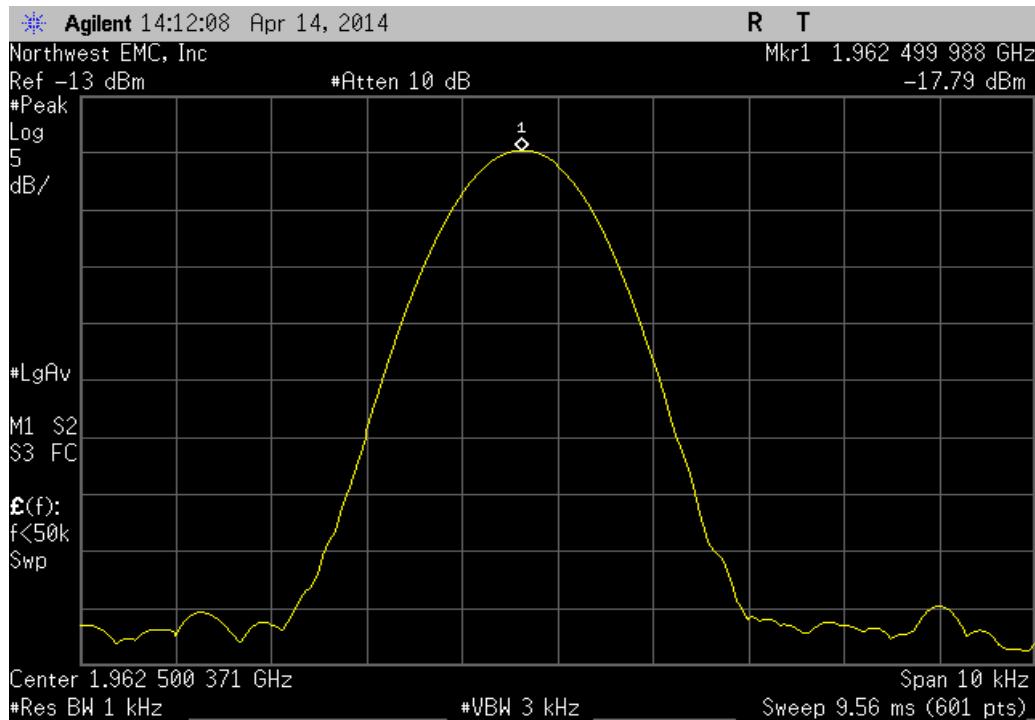


Temperature: -20°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

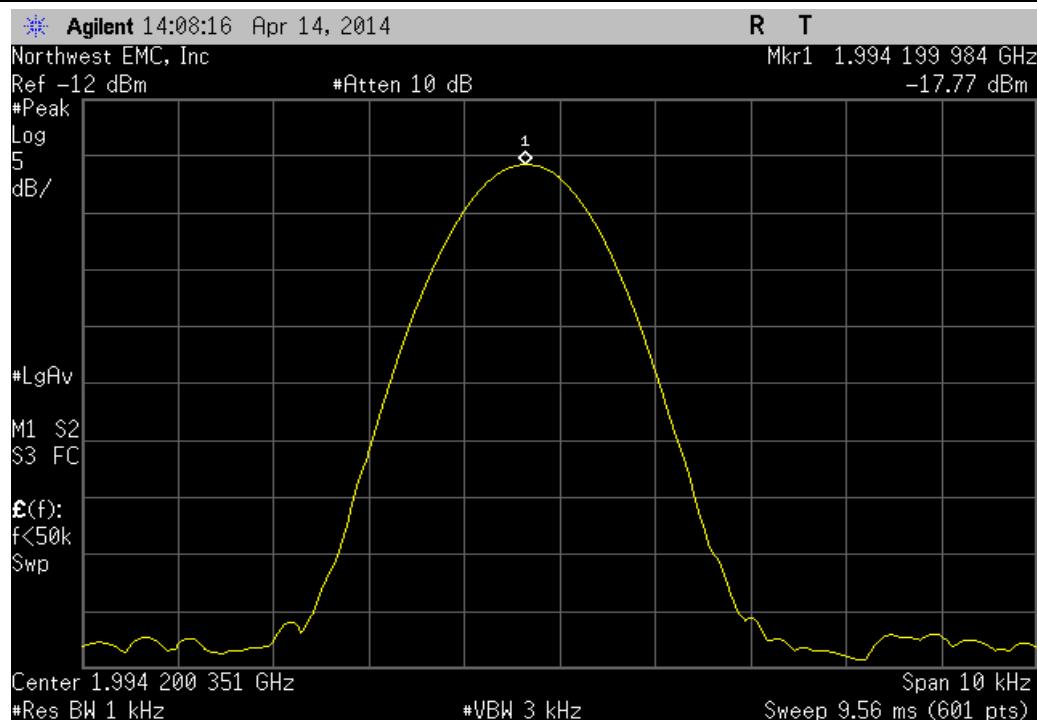


Temperature: -30°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

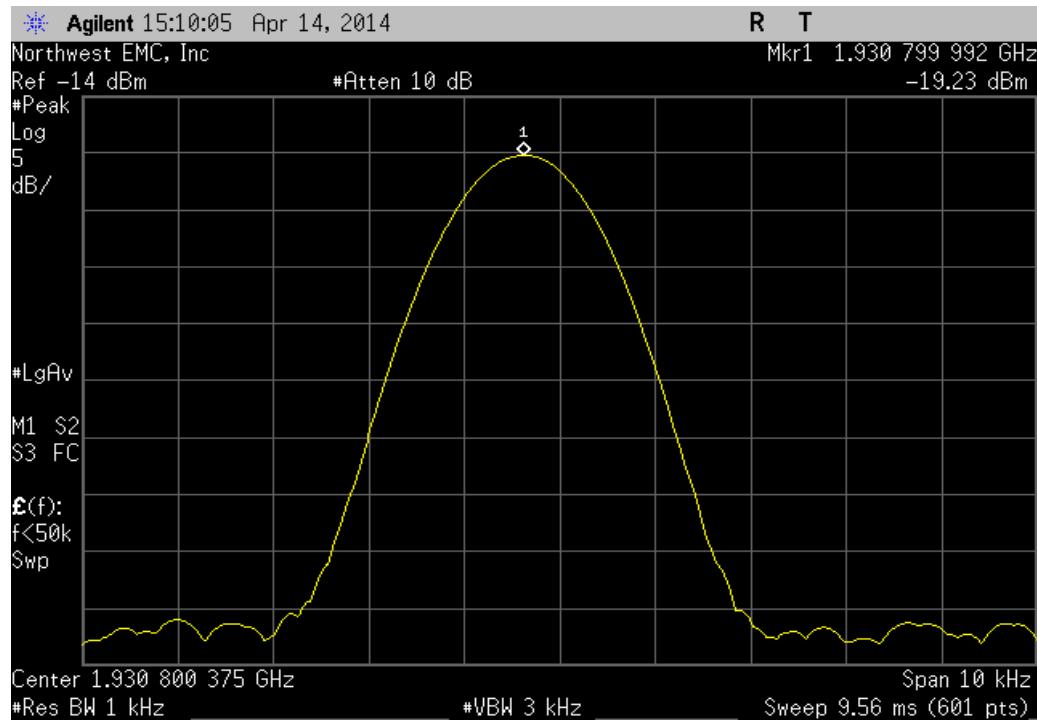

Temperature: -30°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

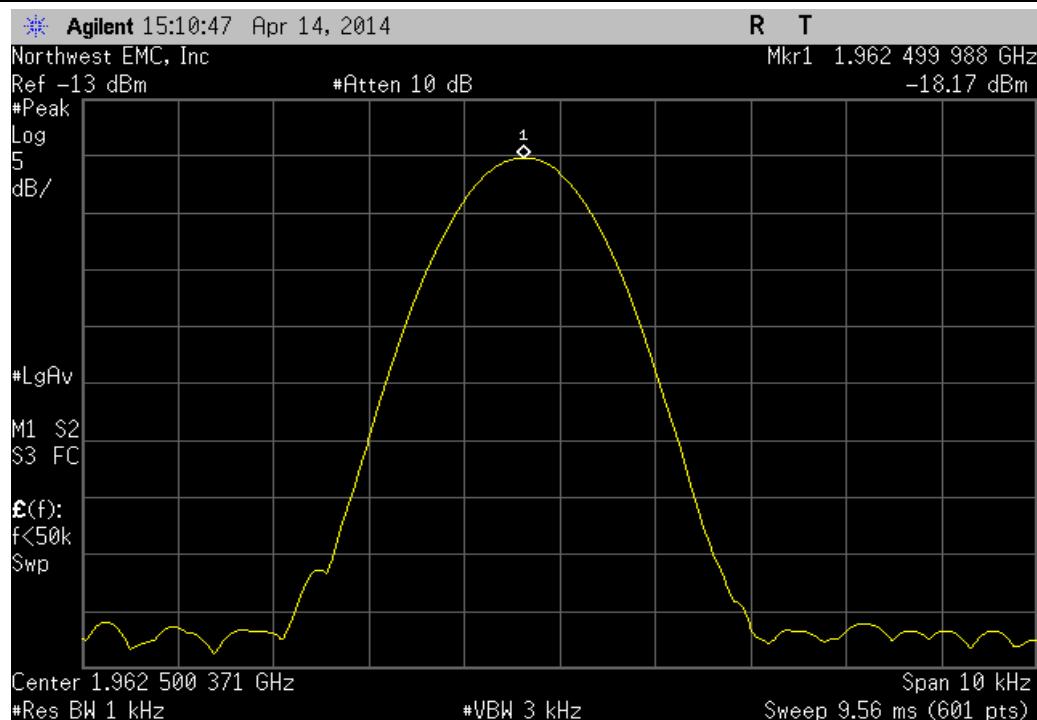

Temperature: -30°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

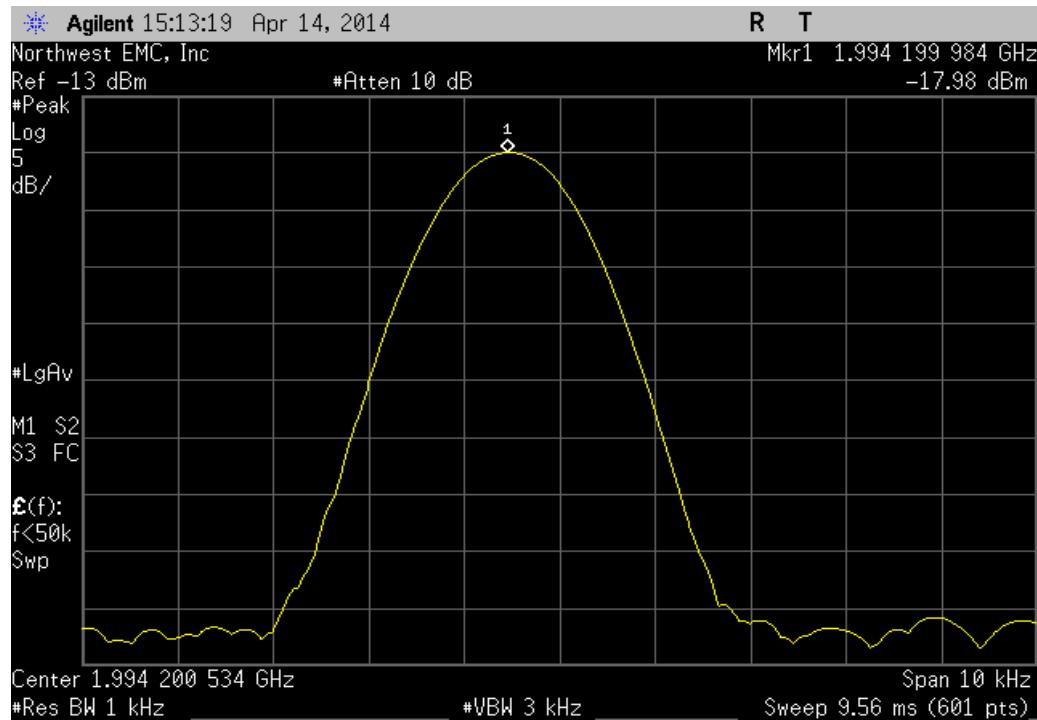

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2017.09.18

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting WCDMA and LTE 5 MHz - low channel (2112.5 MHz), mid channel (2145 MHz), and high channel (2177.5 MHz); LTE 10 MHz - high channel (2175 MHz).

Transmitting WCDMA and LTE 5 MHz - low channel (1932.5 MHz), mid channel (1962.5 MHz), and high channel (1992.5 MHz); LTE 10 MHz - high channel (1990 MHz).

POWER SETTINGS INVESTIGATED

110VAC/60Hz

CONFIGURATIONS INVESTIGATED

TECO0048 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	26500 MHz
-----------------	--------	----------------	-----------

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Power Sensor	Agilent	N8481A	SQN	17-Jul-2017	12 mo
Meter - Power	Agilent	N1913A	SQL	17-Jul-2017	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AIB	25-Aug-2016	24 mo
Generator - Signal	Keysight	N5171B (EXG)	TEY	23-Oct-2016	36 mo
Filter - Band Pass/Notch	K&L Microwave	3TNF-1000/2000-N/N	HGT	7-Aug-2017	12 mo
Attenuator	Fairview Microwave	SA18E-20	TWZ	20-Sep-2017	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	LFN	20-Sep-2017	12 mo
Filter - Low Pass	Micro-Tronics	LPM50004	LFK	20-Sep-2017	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	13-Feb-2018	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	0 mo
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	12-Jul-2017	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	13-Feb-2018	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	13-Feb-2018	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	21-Nov-2017	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AJA	23-Jun-2016	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	9-Nov-2017	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	9-Nov-2017	12 mo
Antenna - Biconilog	Teseq	CBL 6141B	AYD	25-Jan-2018	24 mo
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	16-Mar-2017	12 mo
Amplifier - Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	12-Sep-2017	12 mo
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	11-Sep-2017	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHG	NCR	0 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0

Above 1000	1000.0	N/A	1000.0
------------	--------	-----	--------

TEST DESCRIPTION

The EUT was tested with shielded terminators on the RF output ports instead of antennas for final measurements.

For licensed transmitters, the FCC references TIA/EIA-603 as the measurement procedure standard. TIA/EIA-603 Section 2.2.12 describes a method for measuring radiated spurious emissions that utilizes an antenna substitution method:

At an approved test site, the transmitter is placed on a remotely controlled turntable, and the measurement antenna is placed 3 meters from the transmitter. The turntable azimuth is varied to maximize the level of spurious emissions. The height of the measurement antenna is also varied from 1 to 4 meters. The amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a $\frac{1}{2}$ wave dipole that is successively tuned to each of the highest spurious emissions for emissions below 1 GHz, and a horn antenna for emissions above 1 GHz. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency. The output of the signal generator is recorded, and by factoring in the cable loss to the antenna and its gain; the power (dBm) into an ideal $\frac{1}{2}$ wave dipole antenna is determined for each radiated spurious emission.

SPURIOUS RADIATED EMISSIONS




EmiR5 2017.09.18.2

PSA-ESCI 2017.09.18

Work Order:	TECO0048	Date:	20-Feb-2018	
Project:	None	Temperature:	22.6 °C	
Job Site:	MN05	Humidity:	18% RH	
Serial Number:	4608740003	Barometric Pres.:	1015 mbar	
EUT:	Prism 1900/2100AWS3 Dual HDM 20 Watt		Tested by:	Dustin Sparks
Configuration:	1			
Customer:	CommScope			
Attendees:	Josh Wittman			
EUT Power:	110VAC/60Hz			
Operating Mode:	Transmitting WCDMA and LTE 5 MHz - low channel (1932.5 MHz), mid channel (1962.5 MHz), and high channel (1992.5 MHz); LTE 10 MHz - high channel (1990 MHz).			
Deviations:	None			
Comments:	Both antenna ports were terminated but only one port is active			

Test Specifications	Test Method
FCC 24.238:2018	ANSI C63.26:2015

Run #	11	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass

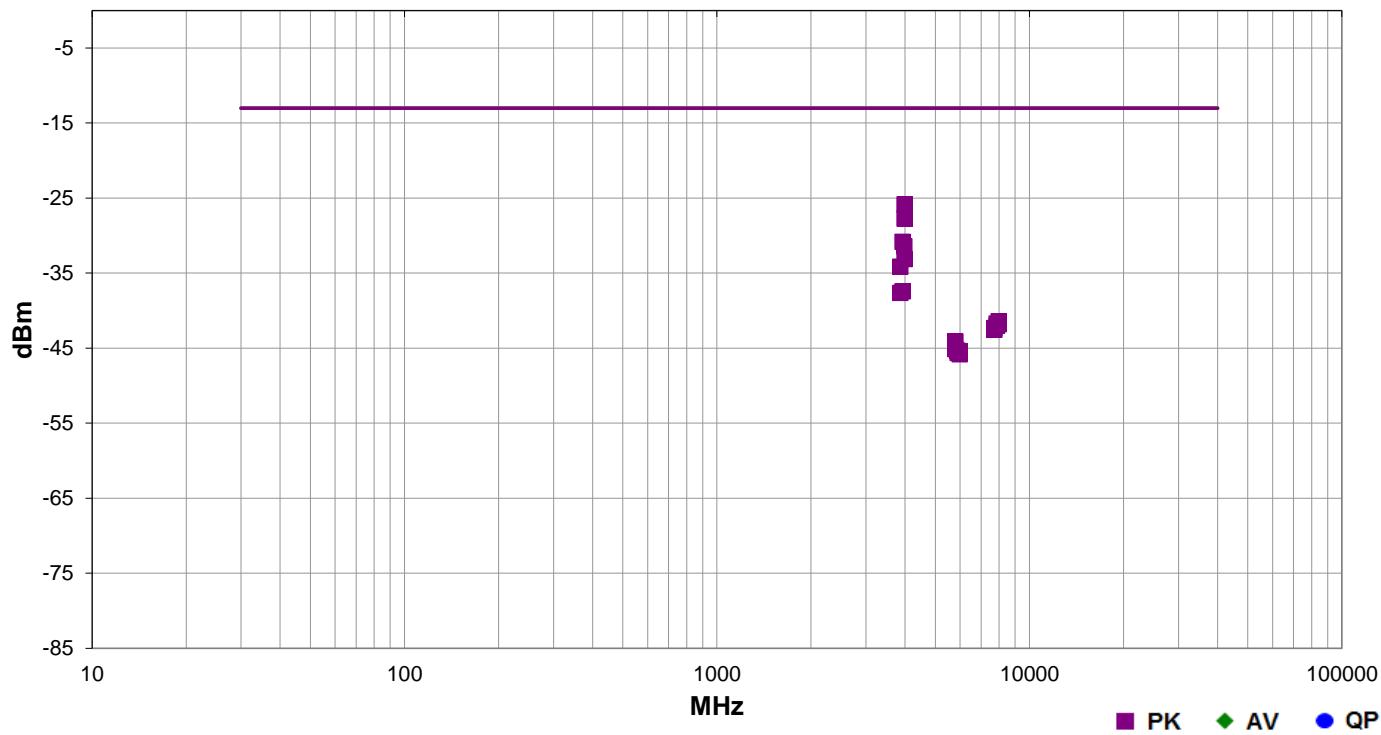

	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
3986.917	1.8	325.0	Horz	PK	2.61E-06	-25.8	-13.0	-12.8	-12.8	High ch, WCDMA
3986.142	1.7	343.0	Horz	PK	1.69E-06	-27.7	-13.0	-14.7	-14.7	High ch, LTE 5 MHz
3926.833	2.1	56.1	Horz	PK	8.26E-07	-30.8	-13.0	-17.8	-17.8	Mid ch, WCDMA
3980.408	1.8	11.1	Horz	PK	7.20E-07	-31.4	-13.0	-18.4	-18.4	High ch, LTE 10 MHz
3982.808	1.0	41.1	Vert	PK	4.87E-07	-33.1	-13.0	-20.1	-20.1	High ch, WCDMA

	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
	3864.800	1.9	64.0	Horz	PK	3.86E-07	-34.1	-13.0	-21.1	Low ch, WCDMA
	3925.008	1.0	240.9	Vert	PK	1.81E-07	-37.4	-13.0	-24.4	Mid ch, WCDMA
	3864.842	1.0	318.9	Vert	PK	1.73E-07	-37.6	-13.0	-24.6	Low ch, WCDMA
	7969.850	1.0	239.0	Horz	PK	7.20E-08	-41.4	-13.0	-28.4	High ch, WCDMA
	7851.725	4.0	124.1	Horz	PK	6.72E-08	-41.7	-13.0	-28.7	Mid ch, WCDMA
	7971.350	1.0	62.1	Vert	PK	6.56E-08	-41.8	-13.0	-28.8	High ch, WCDMA
	7852.317	1.0	98.1	Vert	PK	6.27E-08	-42.0	-13.0	-29.0	Mid ch, WCDMA
	7728.192	1.0	196.1	Vert	PK	5.85E-08	-42.3	-13.0	-29.3	Low ch, WCDMA
	7728.158	1.0	25.0	Horz	PK	5.59E-08	-42.5	-13.0	-29.5	Low ch, WCDMA
	5795.242	1.0	75.0	Horz	PK	3.86E-08	-44.1	-13.0	-31.1	Low ch, WCDMA
	5799.775	3.1	333.9	Vert	PK	3.07E-08	-45.1	-13.0	-32.1	Low ch, WCDMA
	5887.025	1.0	6.0	Vert	PK	2.93E-08	-45.3	-13.0	-32.3	Mid ch, WCDMA
	5979.358	1.0	113.1	Horz	PK	2.86E-08	-45.4	-13.0	-32.4	High ch, WCDMA
	5888.817	1.0	173.1	Horz	PK	2.74E-08	-45.6	-13.0	-32.6	Mid ch, WCDMA
	5978.592	3.6	196.1	Vert	PK	2.61E-08	-45.8	-13.0	-32.8	High ch, WCDMA

SPURIOUS RADIATED EMISSIONS




EmiR5 2017.09.18.2

PSA-ESCI 2017.09.18

Work Order:	TECO0048	Date:	20-Feb-2018	
Project:	None	Temperature:	22.6 °C	
Job Site:	MN05	Humidity:	18% RH	
Serial Number:	None	Barometric Pres.:	1015 mbar	
EUT:	Prism 1900/2100AWS3 Dual HDM 20 Watt		Tested by:	Dustin Sparks
Configuration:	1			
Customer:	CommScope			
Attendees:	Josh Wittman			
EUT Power:	110VAC/60Hz			
Operating Mode:	Transmitting WCDMA - low channel (2112.5 MHz), mid channel (2145 MHz), and high channel (2177.5 MHz); LTE 10 MHz - high channel (2175 MHz).			
Deviations:	None			
Comments:	Both antenna ports were terminated but only one port is active			

Test Specifications	Test Method
FCC 27.53:2018	ANSI C63.26:2015

Run #	24	Test Distance (m)	3	Antenna Height(s)	1 to 4(m)	Results	Pass

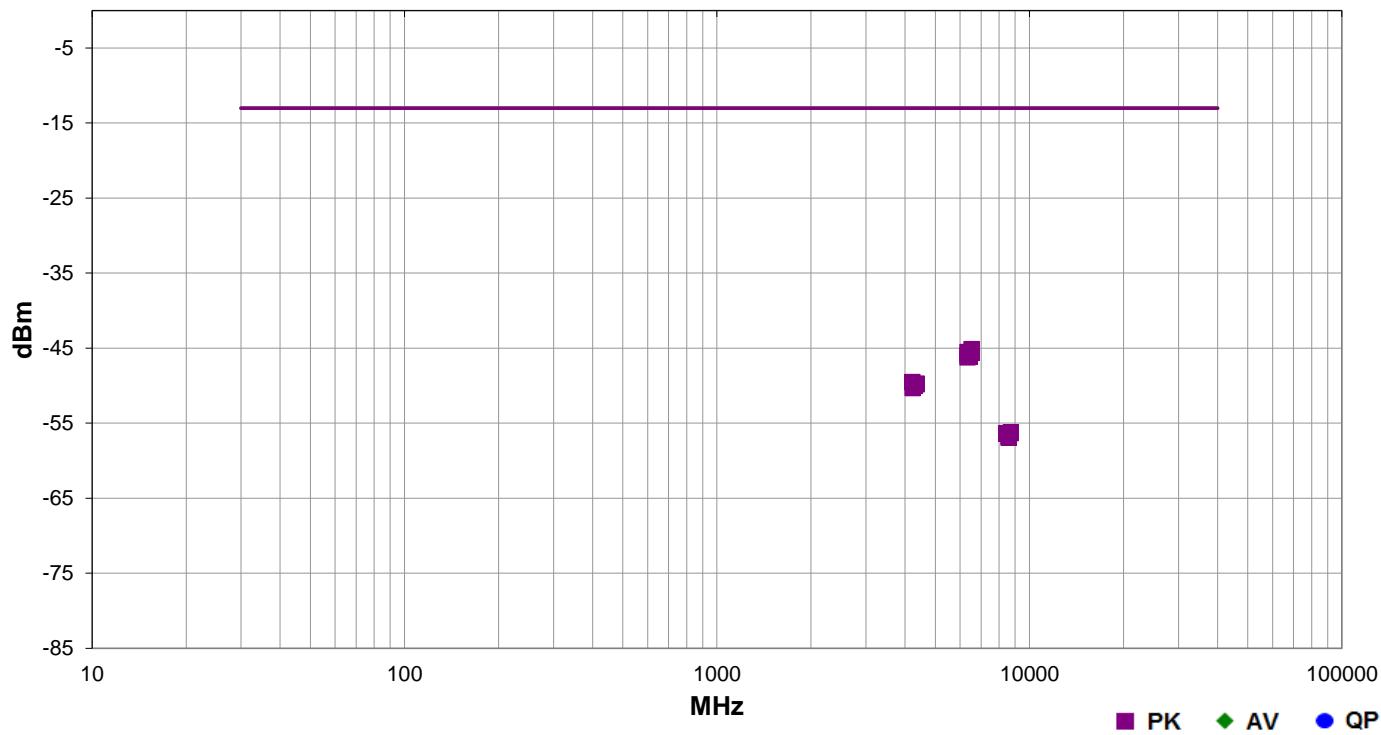

	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
6530.092	2.3	83.1	Vert	PK	3.07E-08	-45.1	-13.0	-32.1	High ch, WCDMA	
6337.250	1.4	134.1	Horz	PK	2.80E-08	-45.5	-13.0	-32.5	High ch, LTE 10 MHz	
6531.908	1.0	239.9	Horz	PK	2.74E-08	-45.6	-13.0	-32.6	High ch, WCDMA	
6436.850	3.2	52.1	Vert	PK	2.55E-08	-45.9	-13.0	-32.9	Mid ch, WCDMA	
6338.083	1.0	226.0	Vert	PK	2.55E-08	-45.9	-13.0	-32.9	Low ch, WCDMA	

	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
	6433.375	1.0	148.1	Horz	PK	2.44E-08	-46.1	-13.0	-33.1	Mid ch, WCDMA
	6337.458	1.0	246.9	Horz	PK	2.38E-08	-46.2	-13.0	-33.2	Low ch, WCDMA
	4225.083	1.9	275.0	Vert	PK	1.11E-08	-49.5	-13.0	-36.5	Low ch, WCDMA
	4357.233	2.7	12.1	Horz	PK	1.06E-08	-49.7	-13.0	-36.7	High ch, WCDMA
	4357.075	1.0	123.1	Vert	PK	1.04E-08	-49.8	-13.0	-36.8	High ch, WCDMA
	4288.817	1.0	24.0	Horz	PK	9.93E-09	-50.0	-13.0	-37.0	Mid ch, WCDMA
	4288.892	1.4	311.0	Vert	PK	9.93E-09	-50.0	-13.0	-37.0	Mid ch, WCDMA
	4227.433	1.0	19.1	Horz	PK	9.27E-09	-50.3	-13.0	-37.3	Low ch, WCDMA
	8711.633	1.0	245.0	Vert	PK	2.38E-09	-56.2	-13.0	-43.2	High ch, WCDMA
	8449.017	1.0	197.0	Vert	PK	2.33E-09	-56.3	-13.0	-43.3	Low ch, WCDMA
	8711.567	1.0	340.9	Horz	PK	2.33E-09	-56.3	-13.0	-43.3	High ch, WCDMA
	8450.425	1.0	113.1	Horz	PK	2.28E-09	-56.4	-13.0	-43.4	Low ch, WCDMA
	8578.833	1.0	205.0	Vert	PK	2.12E-09	-56.7	-13.0	-43.7	Mid ch, WCDMA
	8577.608	1.0	191.1	Horz	PK	2.03E-09	-56.9	-13.0	-43.9	Mid ch, WCDMA

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP) 2100



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Meter - Power	ETS Lindgren	7002-006	SRE	7/21/2016	7/21/2017
Meter - Power	ETS Lindgren	7002-006	SRA	3/20/2017	3/20/2018
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and an RF Power Sensor. The spectrum analyzer and signal generator were used to generate an offset for the cables and attenuators. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The RF output power was measured with the EUT set to the modes called out in the datasheet. The power measurement was made using a direct connection between the RF output of the EUT and an RF Power Sensor which only measures across the high time of the burst of the carrier.

The observed duty cycle was noted but not needed to calculate the EIRP.

EIRP = Max Measured Power + Antenna gain (dBi)

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP) 2100



Tbitx 2017.01.27

XMI 2017.02.08

EUT:	Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order:	TECO0042			
Serial Number:	459644002		Date:	05/23/17			
Customer:	CommScope		Temperature:	22.3 °C			
Attendees:	Josh Wittman		Humidity:	42.7% RH			
Project:	None		Barometric Pres.:	1013 mbar			
Tested by:	Dustin Sparks	Power:	110VAC/60Hz	Job Site:	MN08		
TEST SPECIFICATIONS			Test Method				
FCC 27:2017			ANSI/TIA/EIA-603-D-2010				
COMMENTS							
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm). Limit is 1640W (62.2 dBm). Both antenna ports were terminated but only one port is active							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	1	Signature					
			Avg Cond Pwr Sens(dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Limit (dBm)	Results
Low Channel (2112.5 MHz) WCDMA			43.27	100	0	62.2	Pass
Mid Channel (2145 MHz) WCDMA			43.35	100	0	62.2	Pass
High Channel (2177.5 MHz) WCDMA			43.03	100	0	62.2	Pass
Low Channel (2115 MHz) LTE 10MHz			43.12	99.228	0	62.2	Pass
Mid Channel (2145 MHz) LTE 10MHz			43.47	99.44	0	62.2	Pass
High Channel (2175 MHz) LTE 10MHz			43.33	100	0	62.2	Pass


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)

2100




TbTx 2017.01.27 XMII 2017.02.08

Low Channel (2112.5 MHz) WCDMA						
Avg Cond Pwr Sens(dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Limit (dBm)	Results		
43.27	100	0	62.2	Pass		

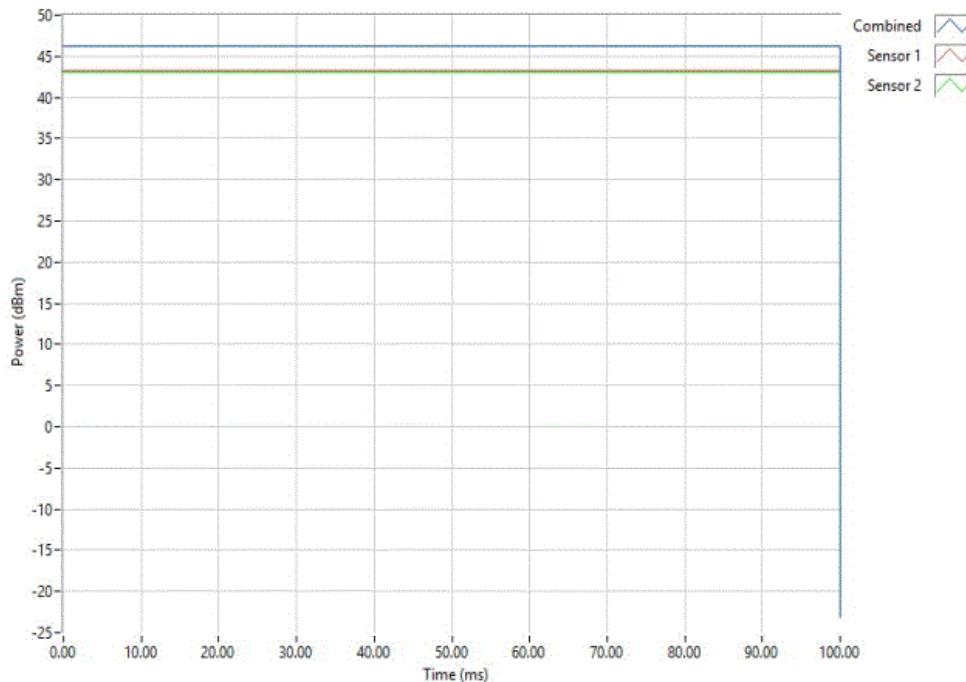

Mid Channel (2145 MHz) WCDMA						
Avg Cond Pwr Sens(dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Limit (dBm)	Results		
43.35	100	0	62.2	Pass		

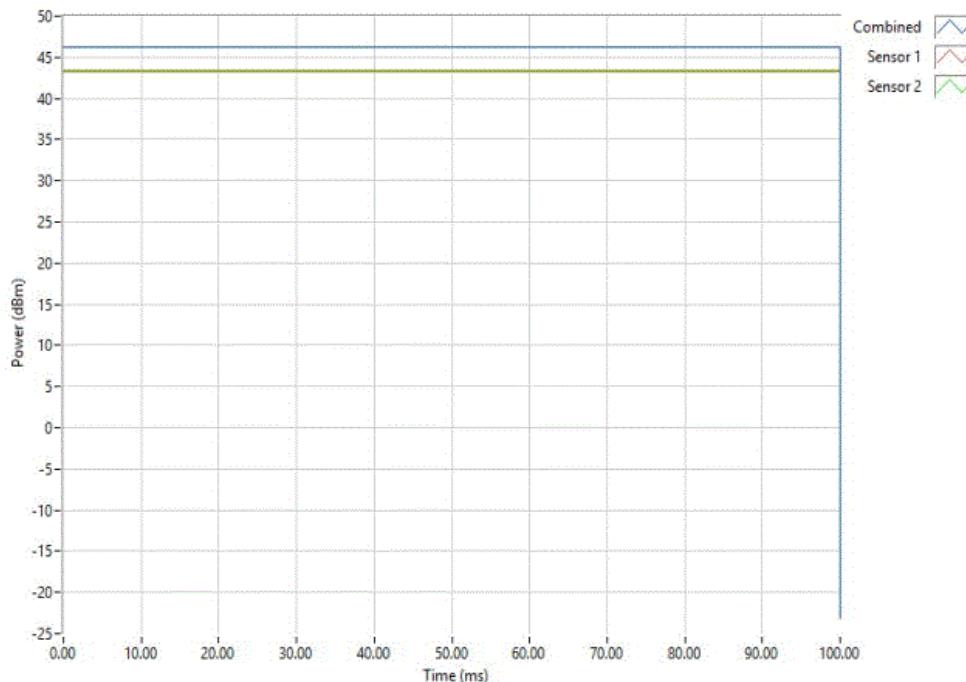


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP) 2100



TbITx 2017.01.27 XMit 2017.02.08

High Channel (2177.5 MHz) WCDMA						
Avg Cond Pwr	Sens(dBm)	Duty	Antenna	Limit	Results	
	43.03	Cycle (%)	Gain (dBi)	(dBm)		
		100	0	62.2	Pass	

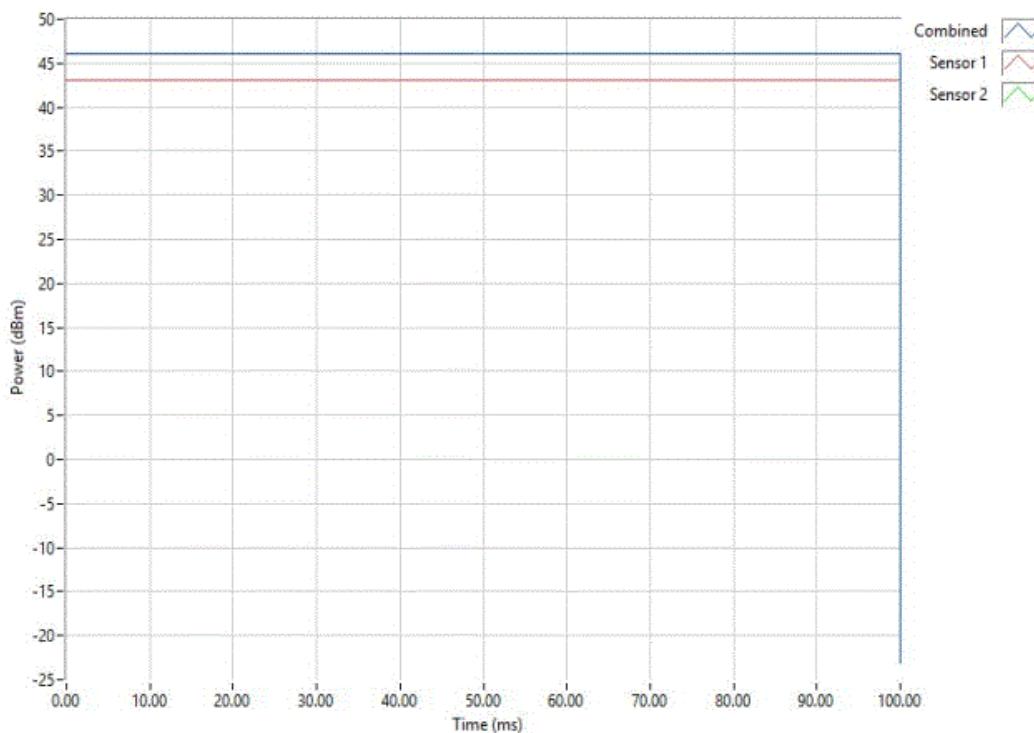


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)

2100



TbTx 2017.01.27 XMII 2017.02.08

Low Channel (2115 MHz) LTE 10MHz						Results
Avg Cond Pwr Sens(dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Limit (dBm)			
43.12	99.228	0	62.2		Pass	

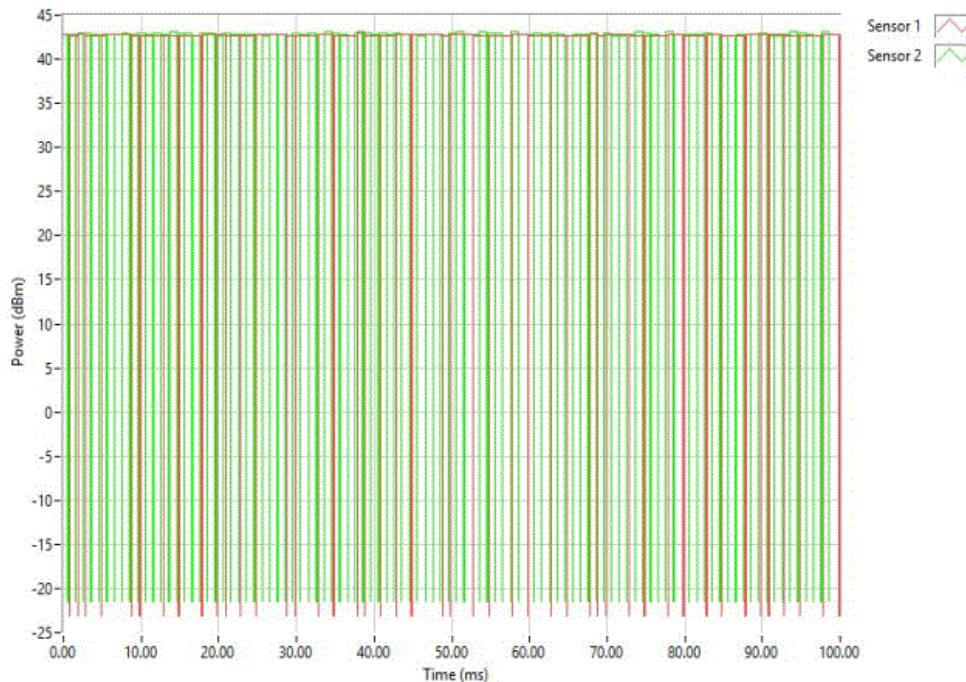

Mid Channel (2145 MHz) LTE 10MHz						Results
Avg Cond Pwr Sens(dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Limit (dBm)			
43.47	99.44	0	62.2		Pass	




EQUIVALENT ISOTROPIC RADIATED POWER (EIRP) 2100



TbTx 2017.01.27 XMII 2017.02.08

High Channel (2175 MHz) LTE 10MHz						
Avg Cond Pwr Sens(dBm)	Duty Cycle (%)	Antenna Gain (dBi)	Limit (dBm)	Results		
43.33	100	0	62.2	Pass		

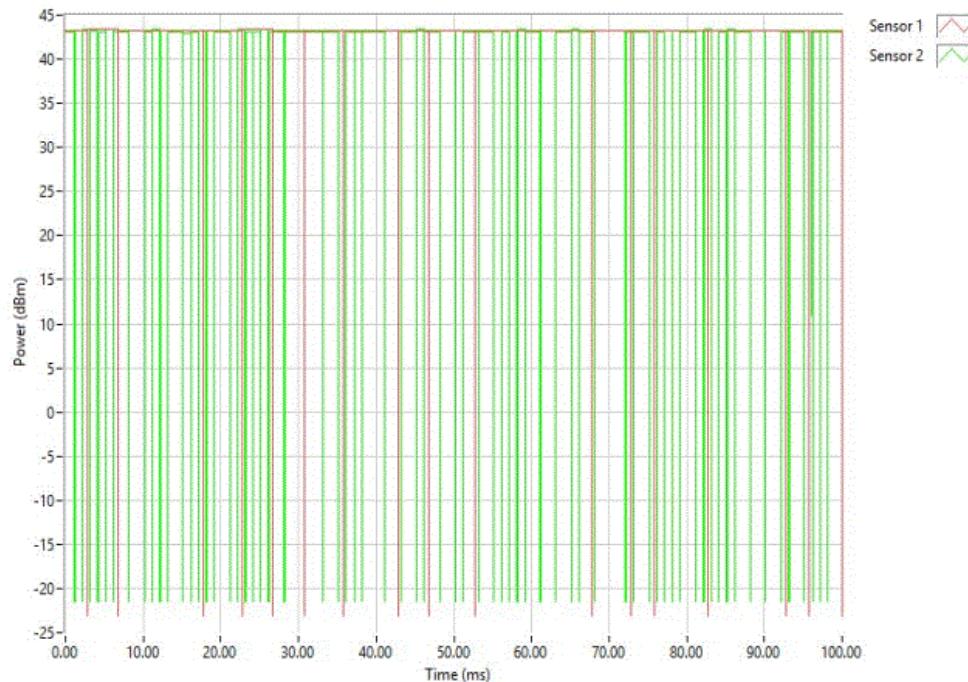

SPURIOUS CONDUCTED EMISSIONS 2100



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Analyzer plots utilizing a 1 MHz resolution bandwidth and no video filtering were made for each mode listed in the datasheet.

An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to the limit. Emissions close to the limit were re-measured using an RMS Average detector to match the method used during output power measurements.

SPURIOUS CONDUCTED EMISSIONS 2100



TbTx 2017.01.27

XMI 2017.02.08


EUT:	Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order:	TECO0042	
Serial Number:	459644002		Date:	05/24/17	
Customer:	CommScope		Temperature:	21.9 °C	
Attendees:	Josh Wittman		Humidity:	43% RH	
Project:	None		Barometric Pres.:	1011 mbar	
Tested by:	Dustin Sparks	Power:	110VAC/60Hz	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 27:2017			ANSI/TIA/EIA-603-D-2010		
COMMENTS					
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm). Both antenna ports were terminated but only one port is active					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	2	Signature			
		Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result
Low Channel (2112.5 MHz) WCDMA		30 MHz - 12.5 GHz	-19.58	-13	Pass
Low Channel (2112.5 MHz) WCDMA		12.5 GHz - 22 GHz	-16.6	-13	Pass
Mid Channel (2145 MHz) WCDMA		30 MHz - 12.5 GHz	-20.63	-13	Pass
Mid Channel (2145 MHz) WCDMA		12.5 GHz - 22 GHz	-17.07	-13	Pass
High Channel (2177.5 MHz) WCDMA		30 MHz - 12.5 GHz	-20.07	-13	Pass
High Channel (2177.5 MHz) WCDMA		12.5 GHz - 22 GHz	-16.83	-13	Pass
Low Channel (2115 MHz) LTE 10MHz		30 MHz - 12.5 GHz	-20.31	-13	Pass
Low Channel (2115 MHz) LTE 10MHz		12.5 GHz - 22 GHz	-16.4	-13	Pass
Mid Channel (2145 MHz) LTE 10MHz		30 MHz - 12.5 GHz	-19.97	-13	Pass
Mid Channel (2145 MHz) LTE 10MHz		12.5 GHz - 22 GHz	-16.43	-13	Pass
High Channel (2175 MHz) LTE 10MHz		30 MHz - 12.5 GHz	-20.49	-13	Pass
High Channel (2175 MHz) LTE 10MHz		12.5 GHz - 22 GHz	-16.41	-13	Pass

SPURIOUS CONDUCTED EMISSIONS 2100




TbTx 2017.01.27 XMII 2017.02.08

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
30 MHz - 12.5 GHz	-19.58	-13	Pass	

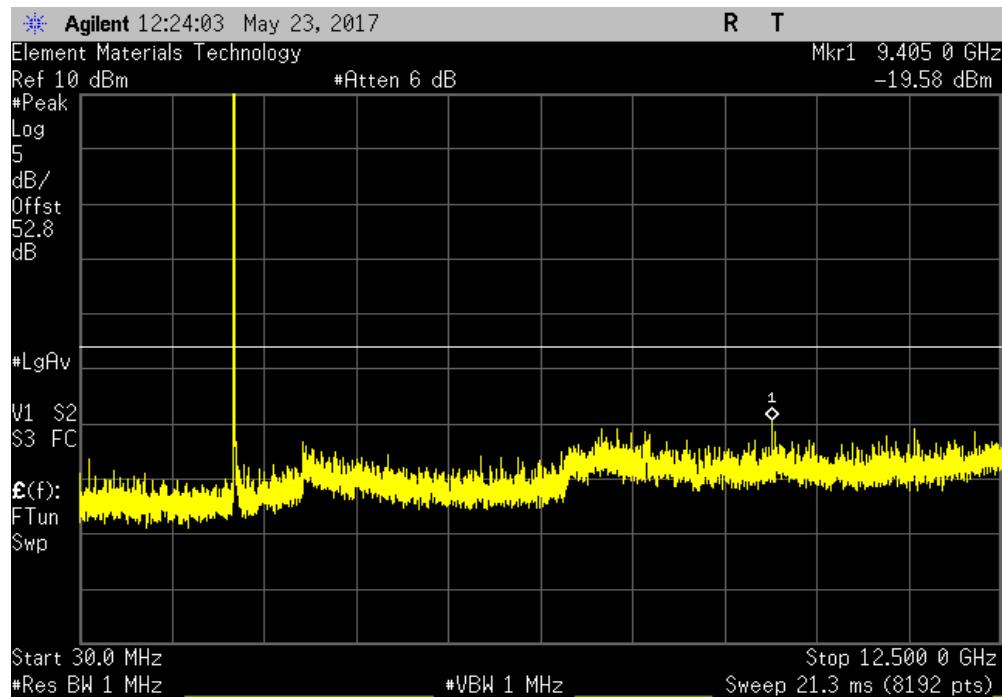

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
12.5 GHz - 22 GHz	-16.6	-13	Pass	

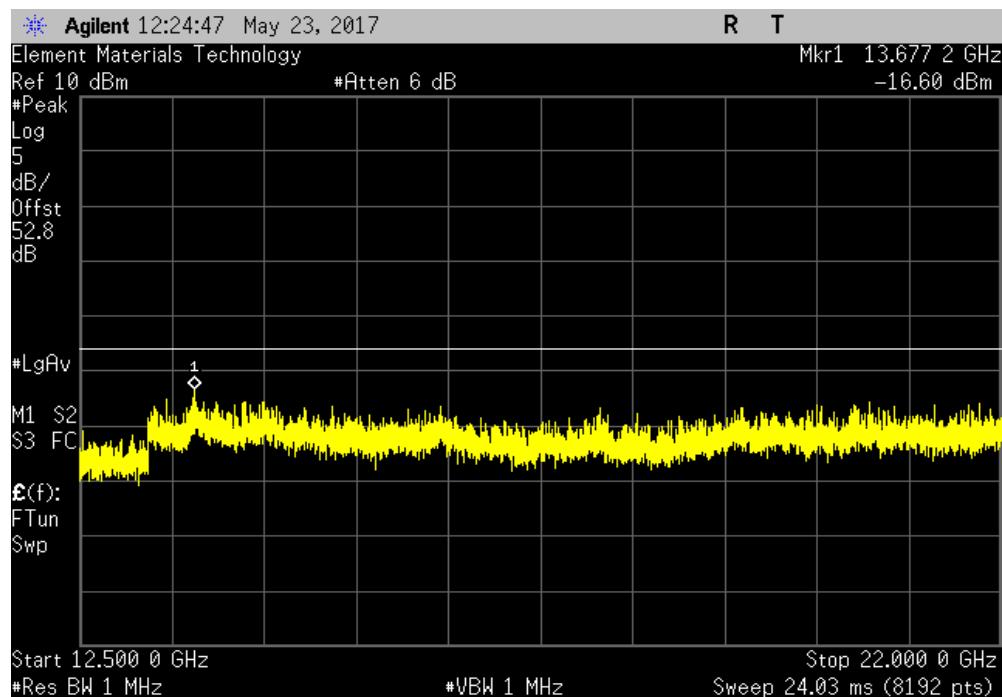


SPURIOUS CONDUCTED EMISSIONS 2100




TbTx 2017.01.27 XM1 2017.02.08

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
[30 MHz - 12.5 GHz]	-20.63	-13	Pass	

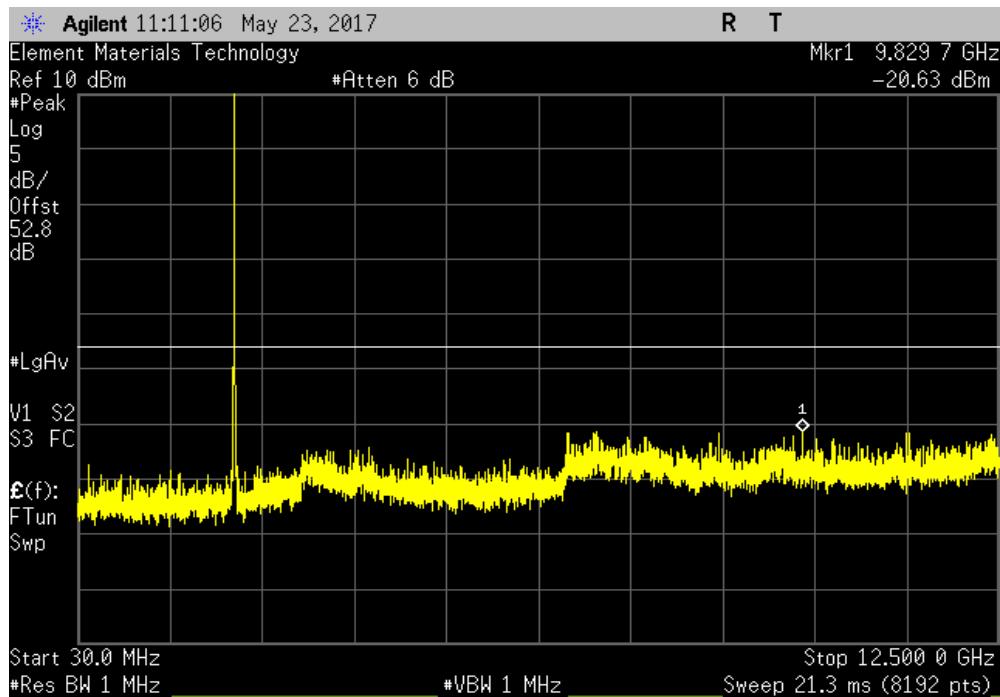

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
[12.5 GHz - 22 GHz]	-17.07	-13	Pass	

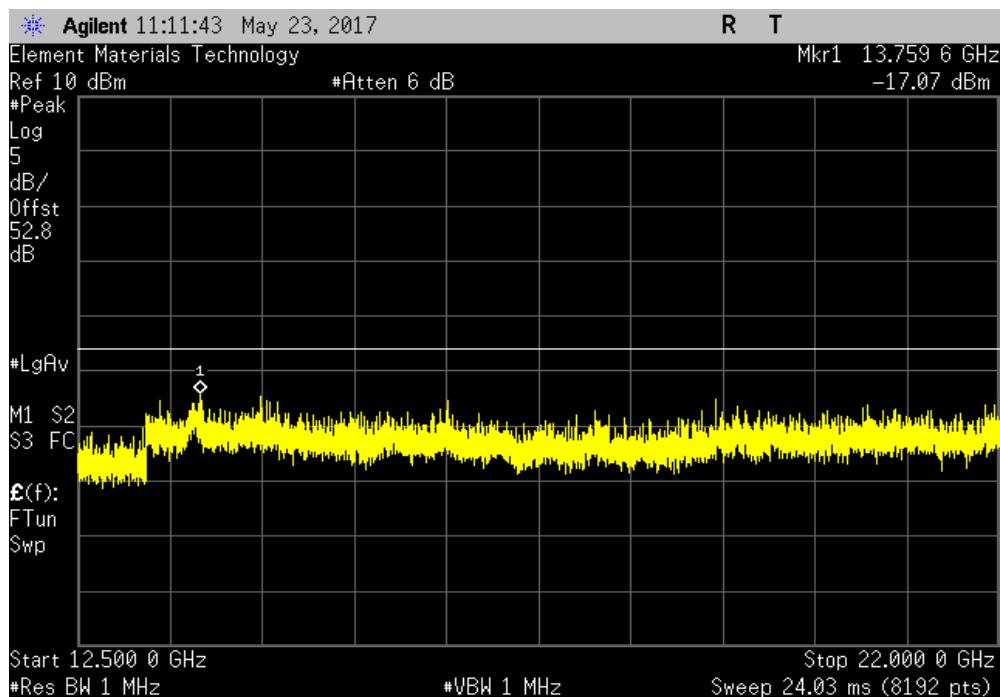


SPURIOUS CONDUCTED EMISSIONS 2100




TbTx 2017.01.27 XMII 2017.02.08

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
30 MHz - 12.5 GHz	-20.07	-13	Pass	

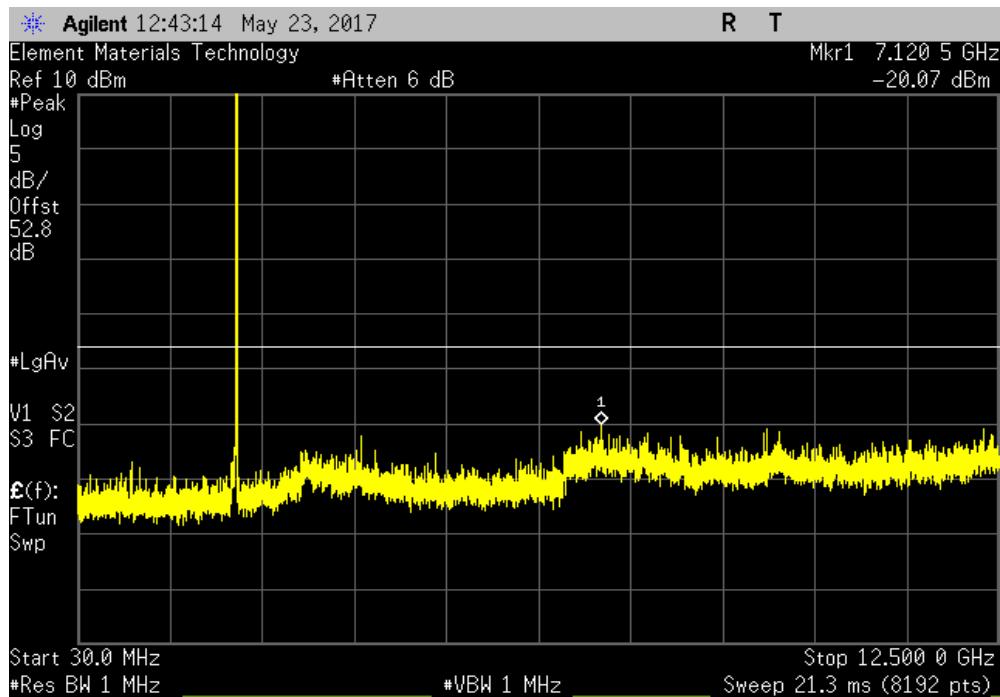

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
12.5 GHz - 22 GHz	-16.83	-13	Pass	

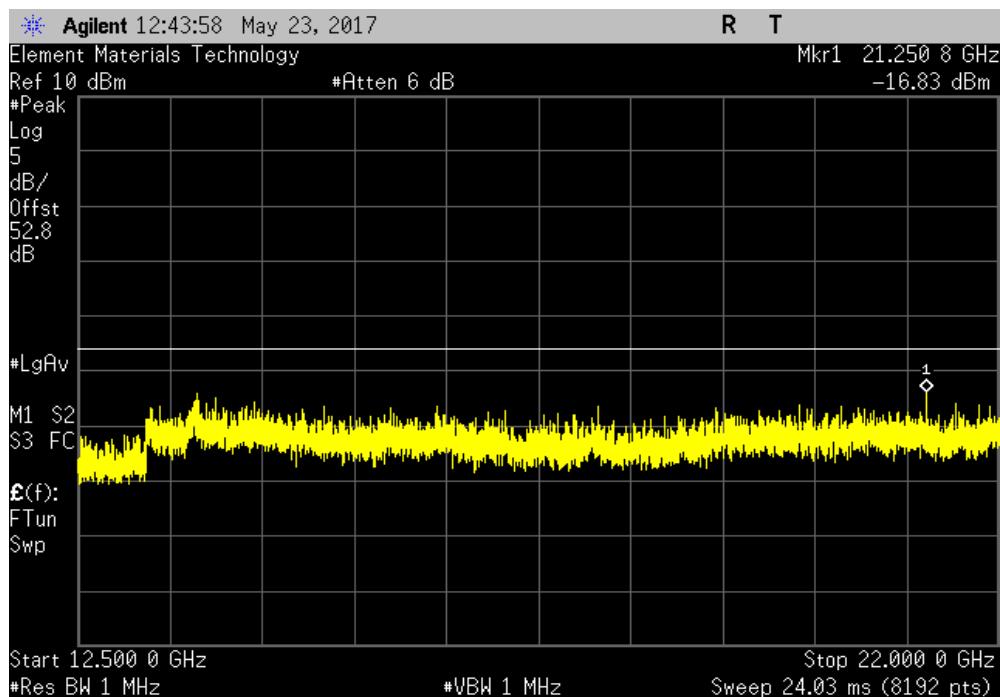


SPURIOUS CONDUCTED EMISSIONS 2100




TbTx 2017.01.27 XMII 2017.02.08

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
30 MHz - 12.5 GHz	-20.31	-13	Pass	

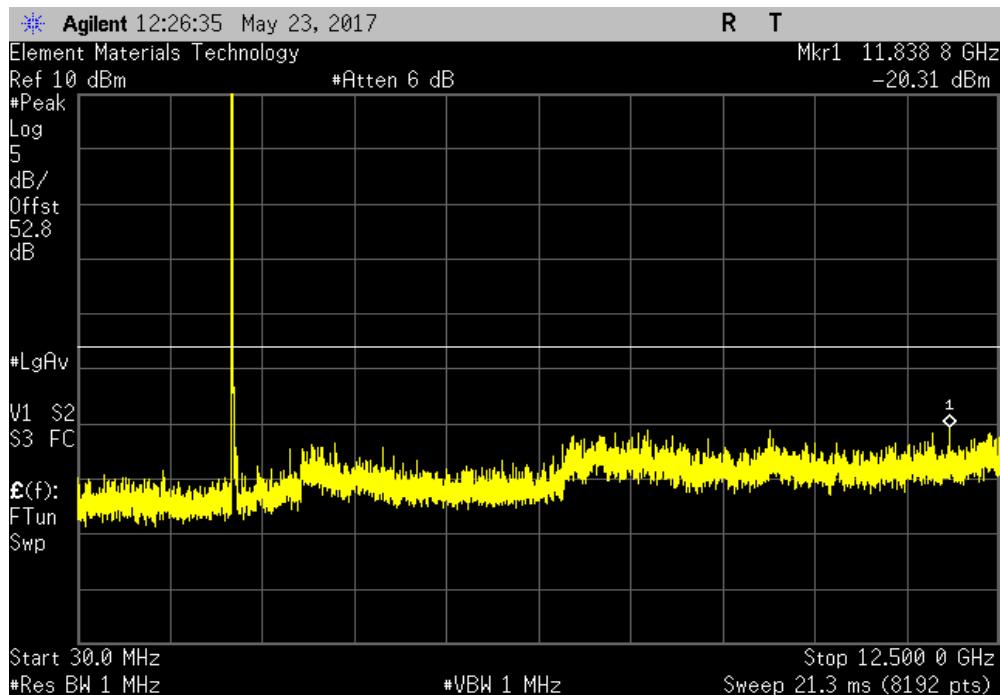

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
12.5 GHz - 22 GHz	-16.4	-13	Pass	

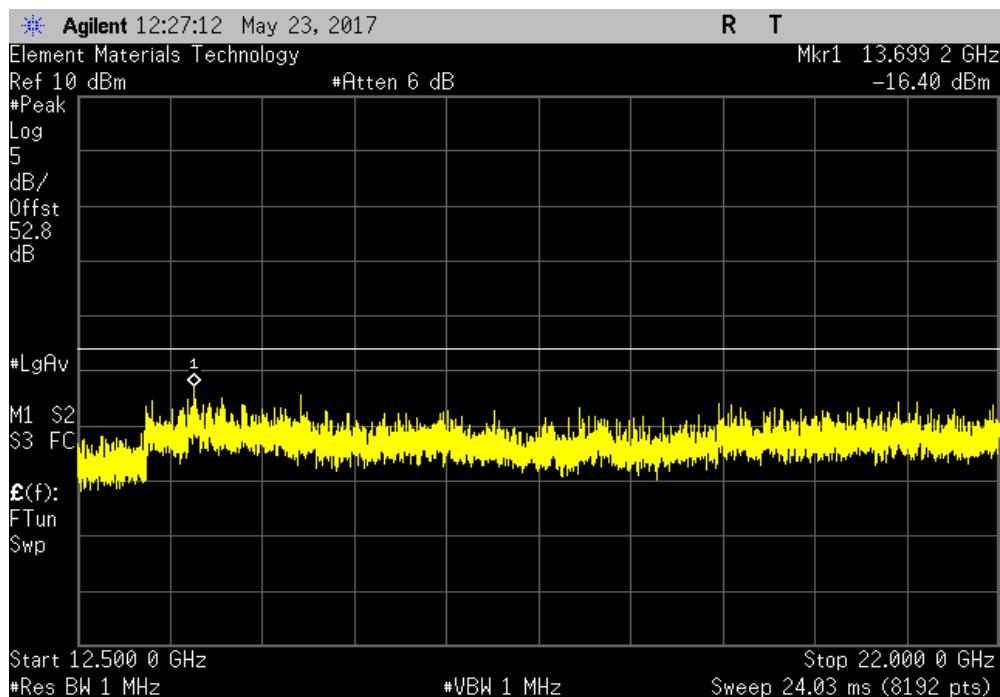


SPURIOUS CONDUCTED EMISSIONS 2100




TbTx 2017.01.27 XMII 2017.02.08

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
30 MHz - 12.5 GHz	-19.97	-13	Pass	

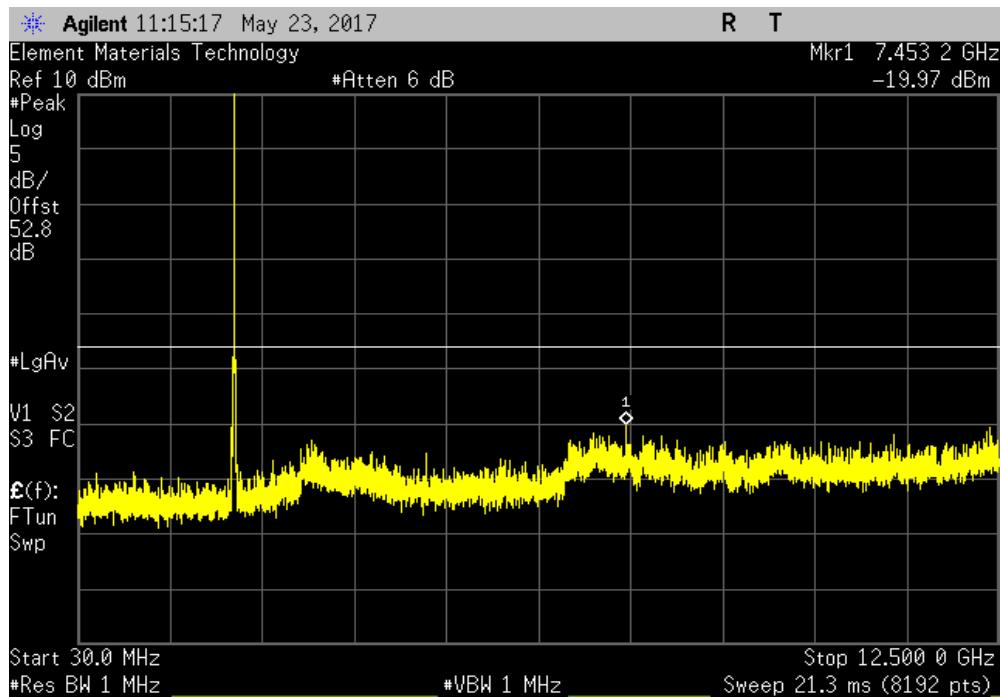

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
12.5 GHz - 22 GHz	-16.43	-13	Pass	

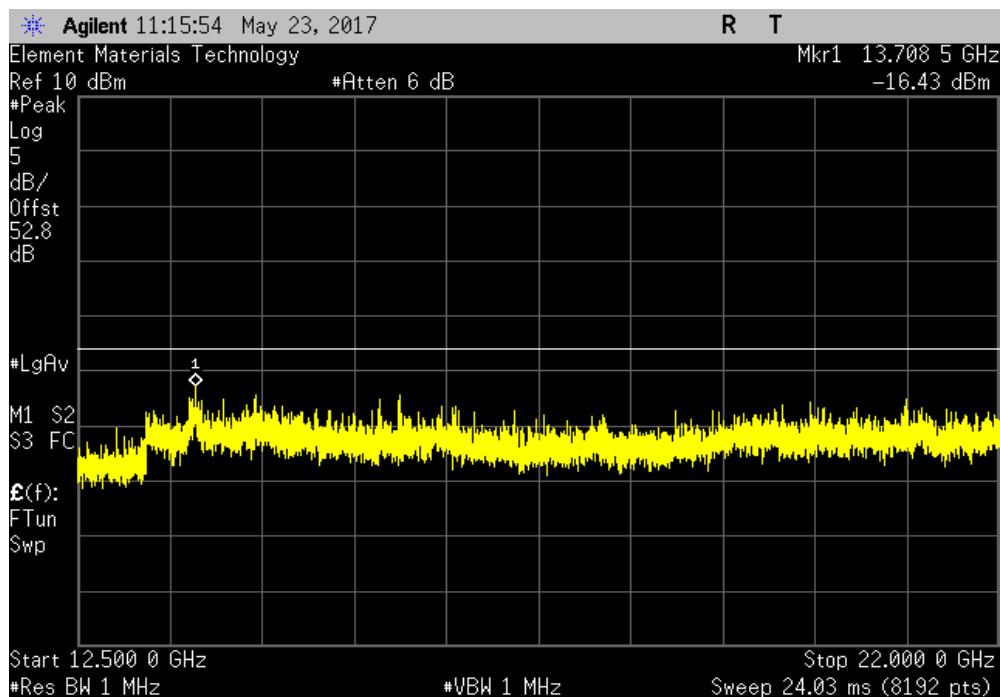


SPURIOUS CONDUCTED EMISSIONS 2100




TbTx 2017.01.27 XMII 2017.02.08

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
30 MHz - 12.5 GHz	-20.49	-13	Pass	

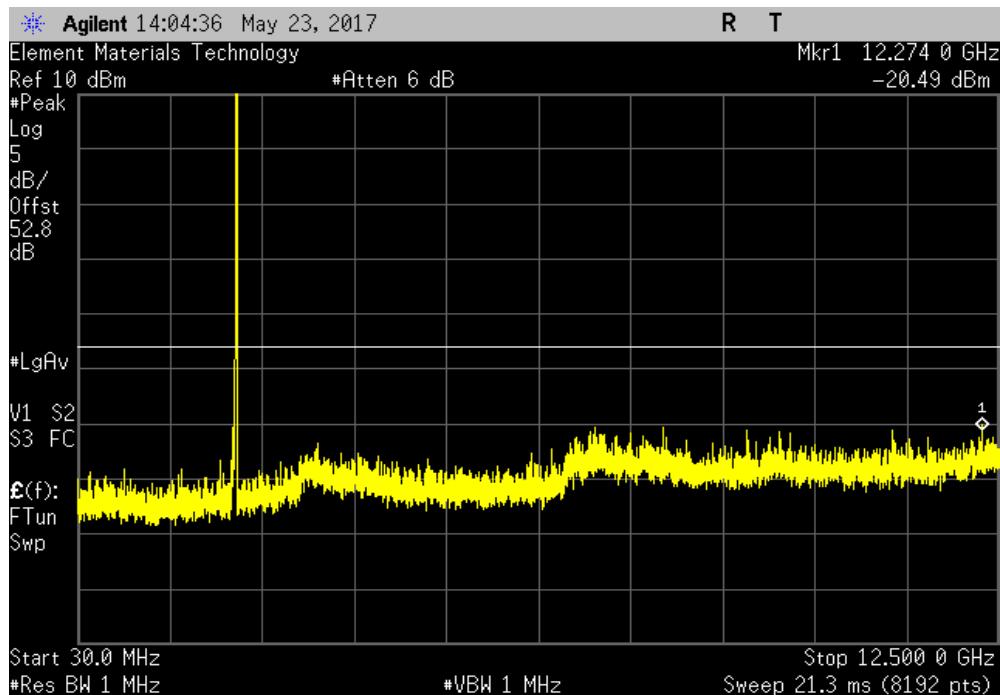

Frequency		Max Value	Limit	Result
Range	(dBm)	≤ (dBm)		
12.5 GHz - 22 GHz	-16.41	-13	Pass	

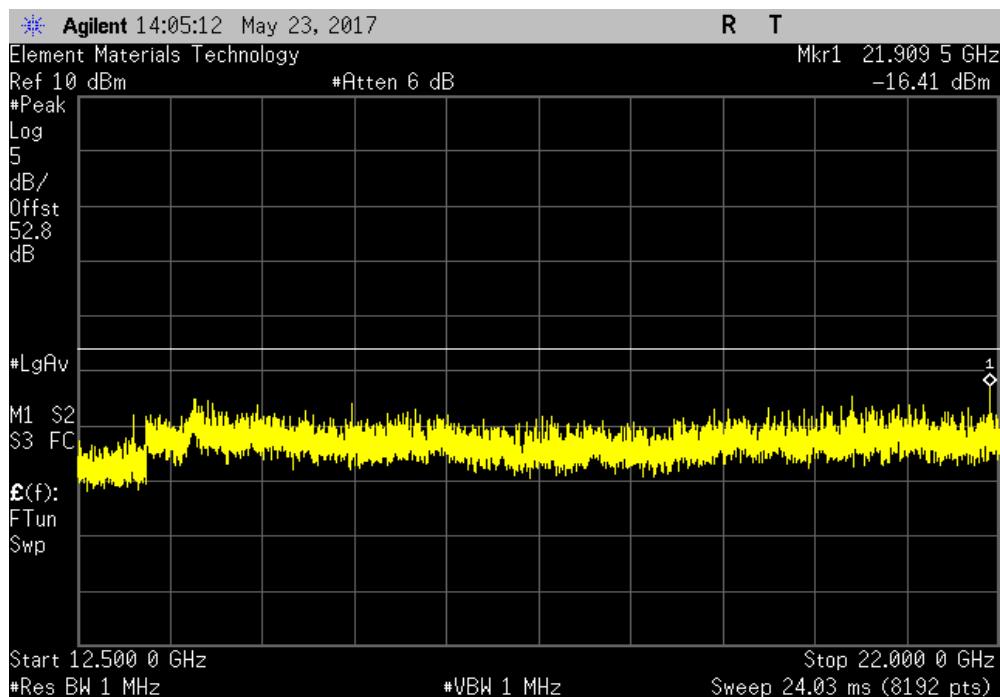

INTERMODULATION 2100



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Power Divider/Combiner	Fairview Microwave	MP0208-2	IAF	NCR	NCR
Power Divider/Combiner	Fairview Microwave	MP0208-2	IAE	NCR	NCR
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

Analyzer plots utilizing a 1MHz resolution bandwidth and no video filtering were made for each modulation type.

An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The EUT was configured with an input of two CW pulses at the edges of the band and a modulated pulse in the band. The purpose of the test is to insure that no additional signals are creating by having multiple carriers in the passband of the EUT.

Analyzer plots utilizing a 1MHz resolution bandwidth and no video filtering were made for each modulation type.

The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to the spurious conducted emissions limits. Measurements close to the limit were re-measured using a RMS average detector.

INTERMODULATION 2100



TbTx 2017.01.27

XMI 2017.02.08


EUT:	Prism 1900/2100AWS3 Dual HDM 20 Watt	Work Order:	TECO0042
Serial Number:	459644002	Date:	05/24/17
Customer:	CommScope	Temperature:	21.6 °C
Attendees:	Josh Wittman	Humidity:	43.6% RH
Project:	None	Barometric Pres.:	1011 mbar
Tested by:	Dustin Sparks	Job Site:	MN08
TEST SPECIFICATIONS		Power:	110VAC/60Hz
FCC 27:2017		Test Method:	ANSI/TIA/EIA-603-D-2010
COMMENTS			
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm) per port. Measurements made outside of the Passband, but within the allowable band were made to show that all Intermodulation emissions were below the spurious limit. Both antenna ports were terminated but only one port is active			
DEVIATIONS FROM TEST STANDARD			
None			
Configuration #	2	Signature	
		Frequency Range	Max Value (dBm)
Low Passband (2110-2145 MHz) WCDMA		30 MHz - 12.5 GHz	-20.3
Low Passband (2110-2145 MHz) WCDMA		12.5 GHz - 22 GHz	-17.23
Low Passband (2110-2145 MHz) WCDMA		Fundamental	-21.76
Mid Passband (2130-2160 MHz) WCDMA		30 MHz - 12.5 GHz	-20.34
Mid Passband (2130-2160 MHz) WCDMA		12.5 GHz - 22 GHz	-16.81
Mid Passband (2130-2160 MHz) WCDMA		Fundamental	-18.36
High Passband (2145-2180 MHz) WCDMA		30 MHz - 12.5 GHz	-20.11
High Passband (2145-2180 MHz) WCDMA		12.5 GHz - 22 GHz	-16.09
High Passband (2145-2180 MHz) WCDMA		Fundamental	-19.6
Low Passband (2110-2145 MHz) LTE 10 MHz		30 MHz - 12.5 GHz	-20.31
Low Passband (2110-2145 MHz) LTE 10 MHz		12.5 GHz - 22 GHz	-17.44
Low Passband (2110-2145 MHz) LTE 10 MHz		Fundamental	-22.58
Mid Passband (2130-2160 MHz) LTE 10 MHz		30 MHz - 12.5 GHz	-20.28
Mid Passband (2130-2160 MHz) LTE 10 MHz		12.5 GHz - 22 GHz	-16.62
Mid Passband (2130-2160 MHz) LTE 10 MHz		Fundamental	-22.61
High Passband (2145-2180 MHz) LTE 10 MHz		30 MHz - 12.5 GHz	-19.87
High Passband (2145-2180 MHz) LTE 10 MHz		12.5 GHz - 22 GHz	-16.55
High Passband (2145-2180 MHz) LTE 10 MHz		Fundamental	-23.38

INTERMODULATION 2100




TbTx 2017.01.27 XMII 2017.02.08

Low Passband (2110-2145 MHz) WCDMA			Max Value (dBm)	Limit ≤ (dBm)	Result
Frequency Range					
30 MHz - 12.5 GHz			-20.3	-13	Pass

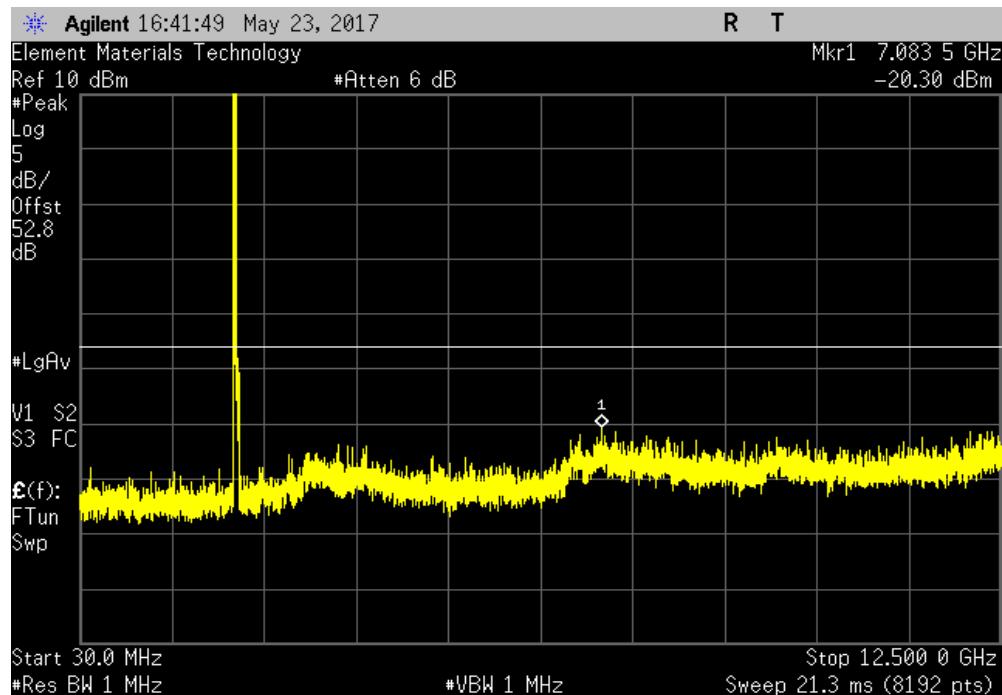

Low Passband (2110-2145 MHz) WCDMA			Max Value (dBm)	Limit ≤ (dBm)	Result
Frequency Range					
12.5 GHz - 22 GHz			-17.23	-13	Pass

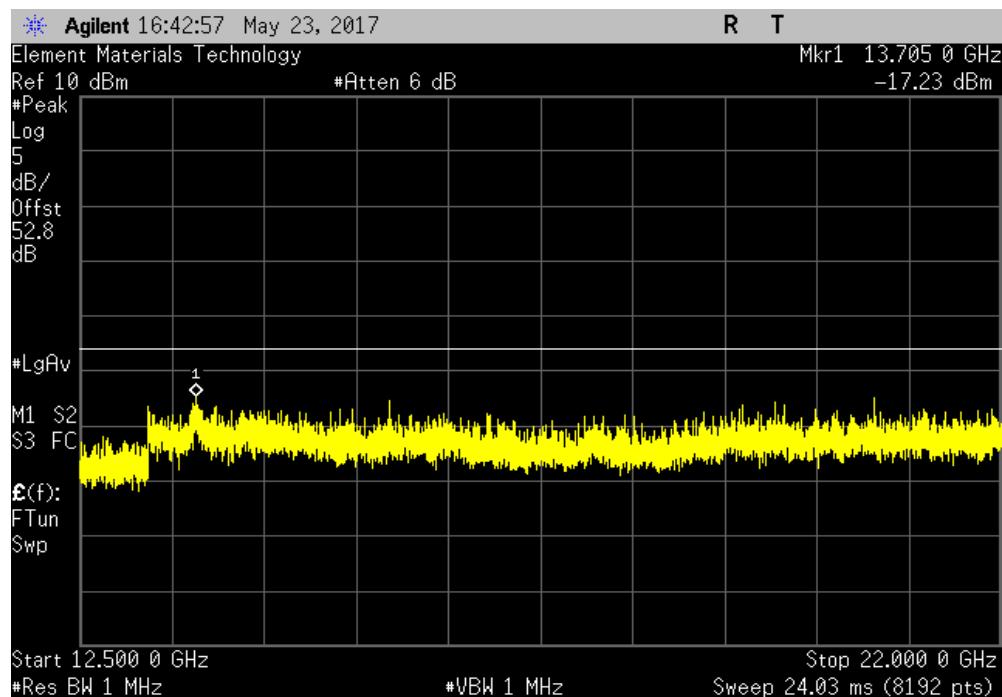


INTERMODULATION 2100




TbTx 2017.01.27 XMII 2017.02.08

Low Passband (2110-2145 MHz) WCDMA			Max Value (dBm)	Limit ≤ (dBm)	Result
Frequency Range	Fundamental		-21.76	-13	Pass

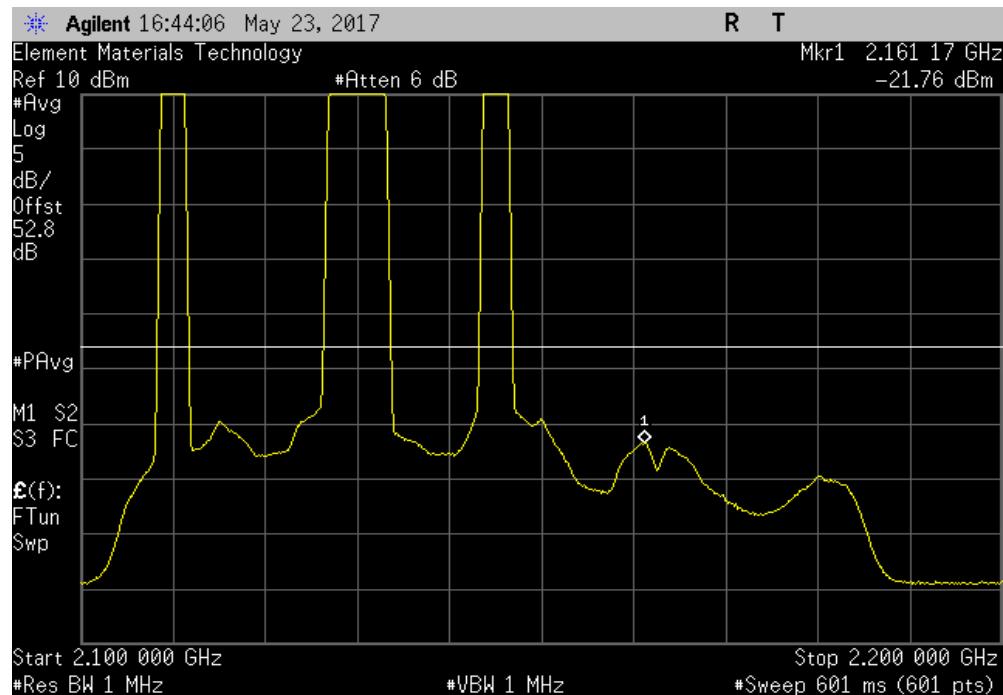

Mid Passband (2130-2160 MHz) WCDMA			Max Value (dBm)	Limit ≤ (dBm)	Result
Frequency Range	30 MHz - 12.5 GHz		-20.34	-13	Pass

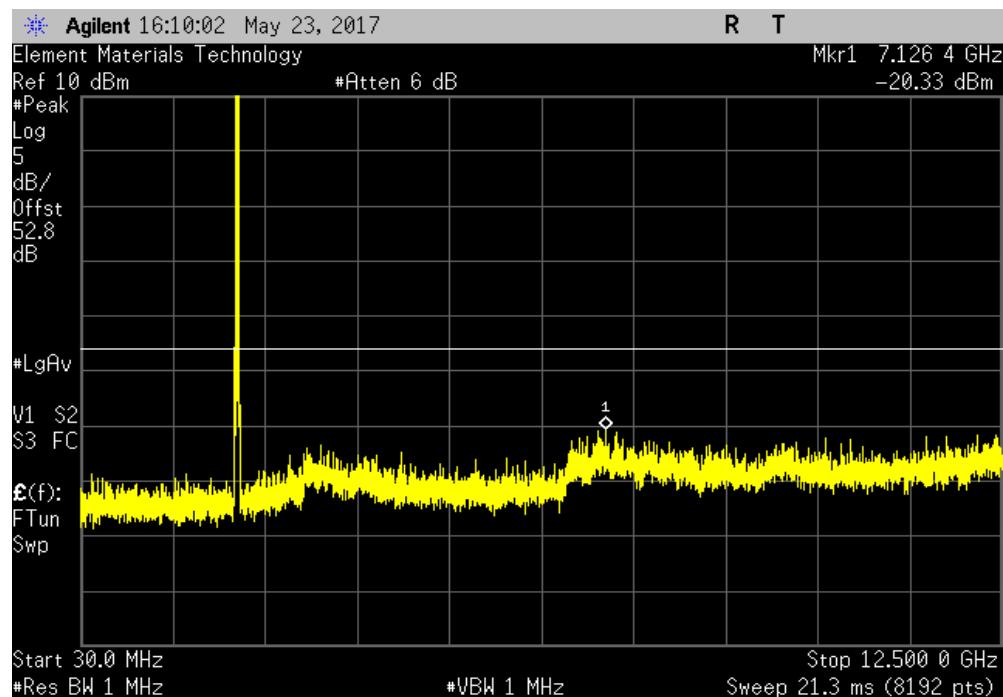


INTERMODULATION 2100




TbTx 2017.01.27 XMII 2017.02.08

Frequency		Max Value (dBm)	Limit ≤ (dBm)	Result
Range	12.5 GHz - 22 GHz			
		-16.81	-13	Pass

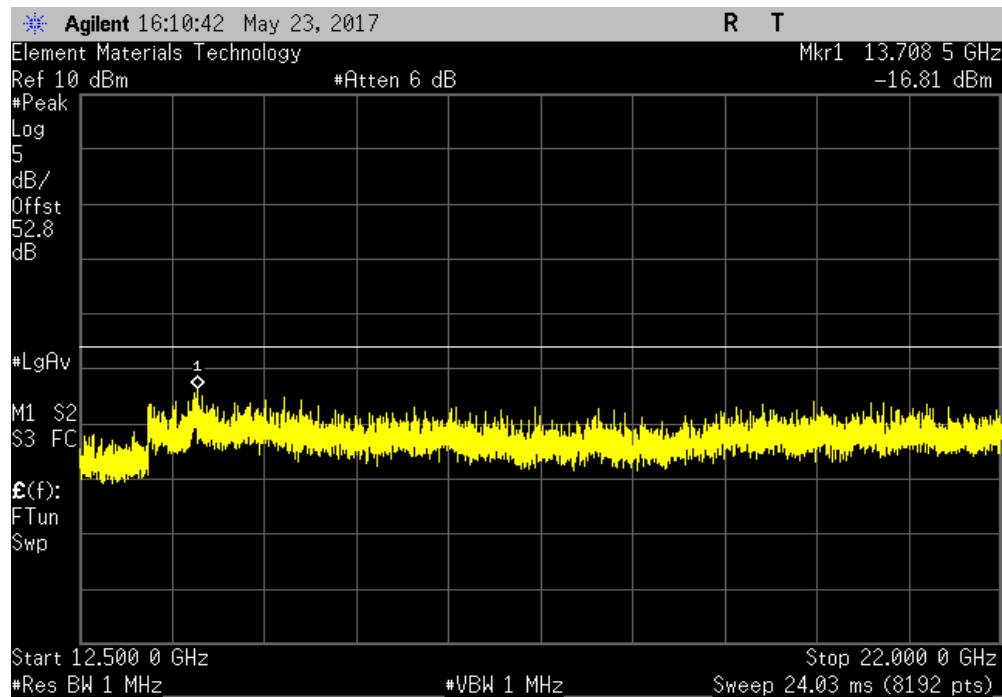

Frequency		Max Value (dBm)	Limit ≤ (dBm)	Result
Range	Fundamental			
		-18.36	-13	Pass

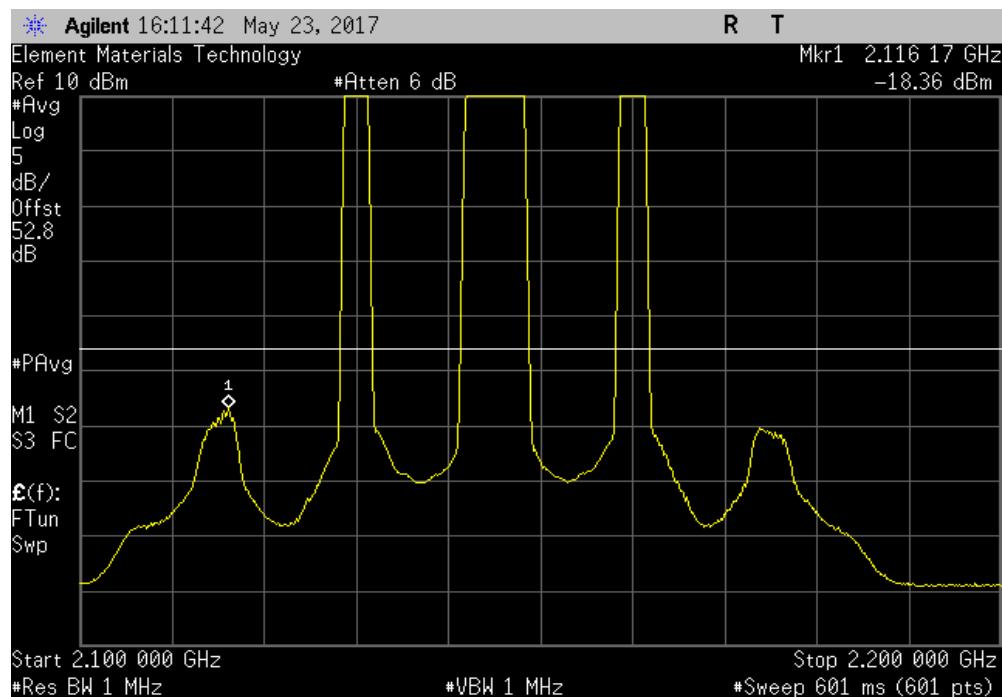


INTERMODULATION 2100




TbTx 2017.01.27 XMII 2017.02.08

Frequency		Max Value (dBm)		Limit \leq (dBm)	Result
Range					
30 MHz - 12.5 GHz		-20.11		-13	Pass

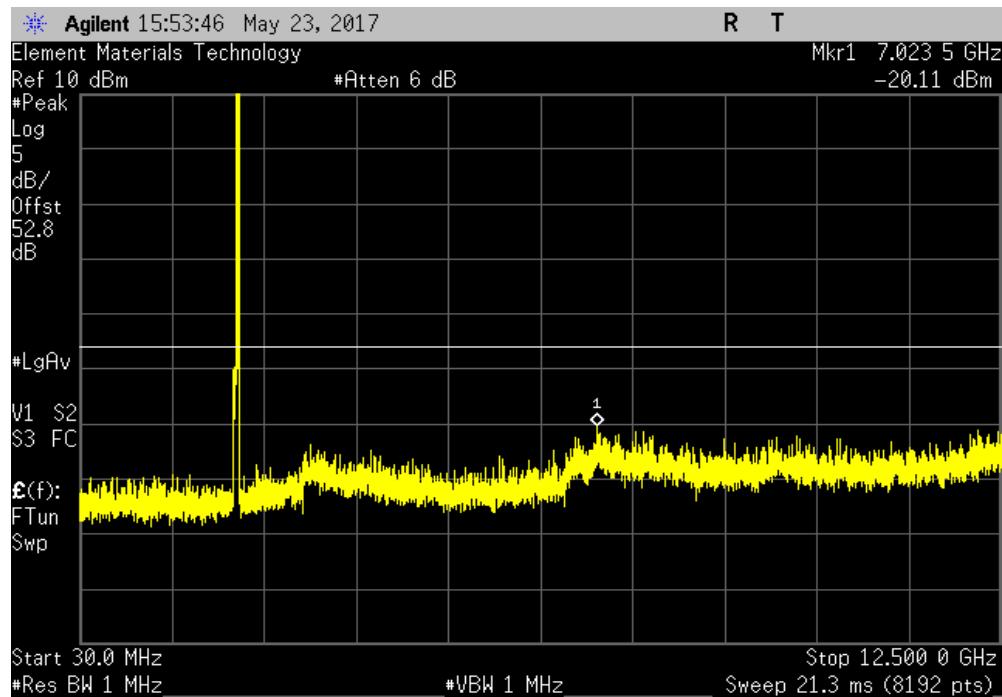

Frequency		Max Value (dBm)		Limit \leq (dBm)	Result
Range					
12.5 GHz - 22 GHz		-16.09		-13	Pass

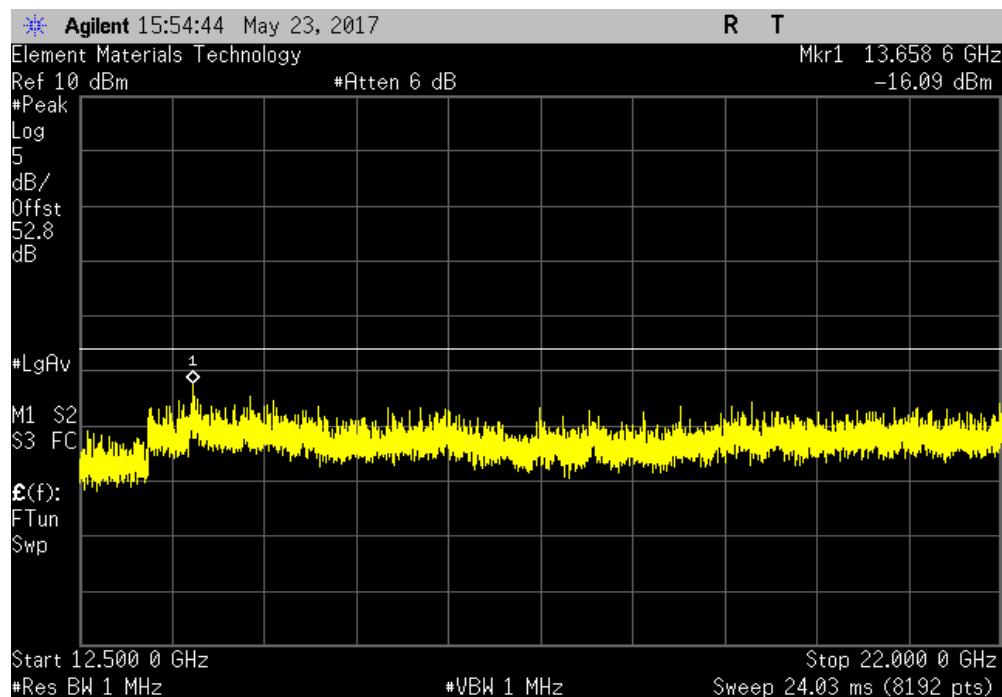


INTERMODULATION 2100




TbTx 2017.01.27 XMII 2017.02.08

High Passband (2145-2180 MHz) WCDMA			Max Value (dBm)	Limit ≤ (dBm)	Result
Frequency Range	Fundamental		-19.6	-13	Pass

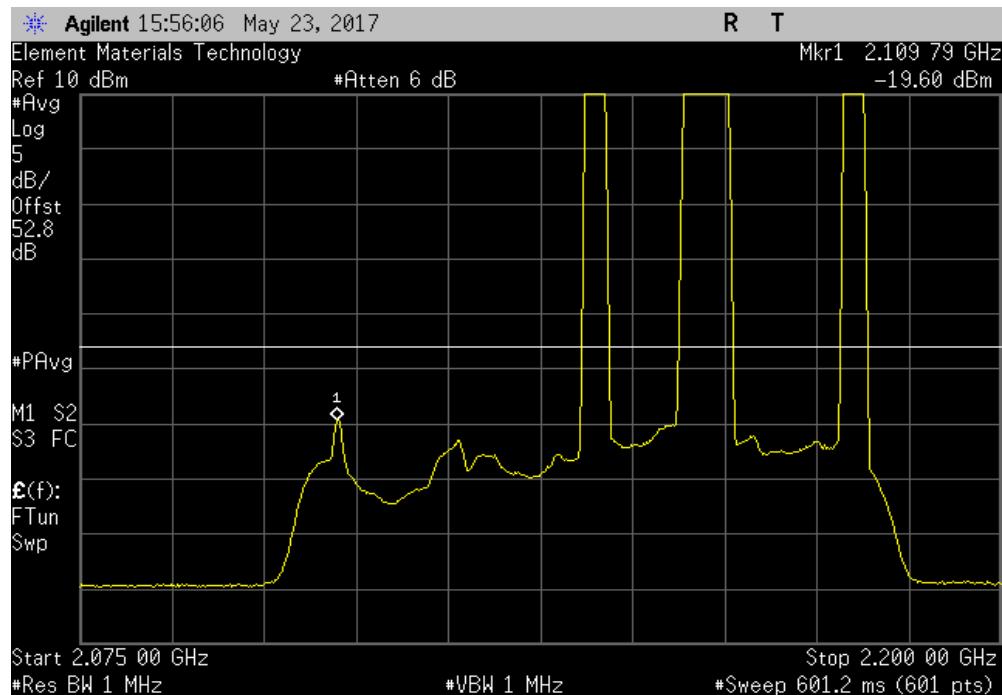

Low Passband (2110-2145 MHz) LTE 10 MHz			Max Value (dBm)	Limit ≤ (dBm)	Result
Frequency Range	30 MHz - 12.5 GHz		-20.31	-13	Pass

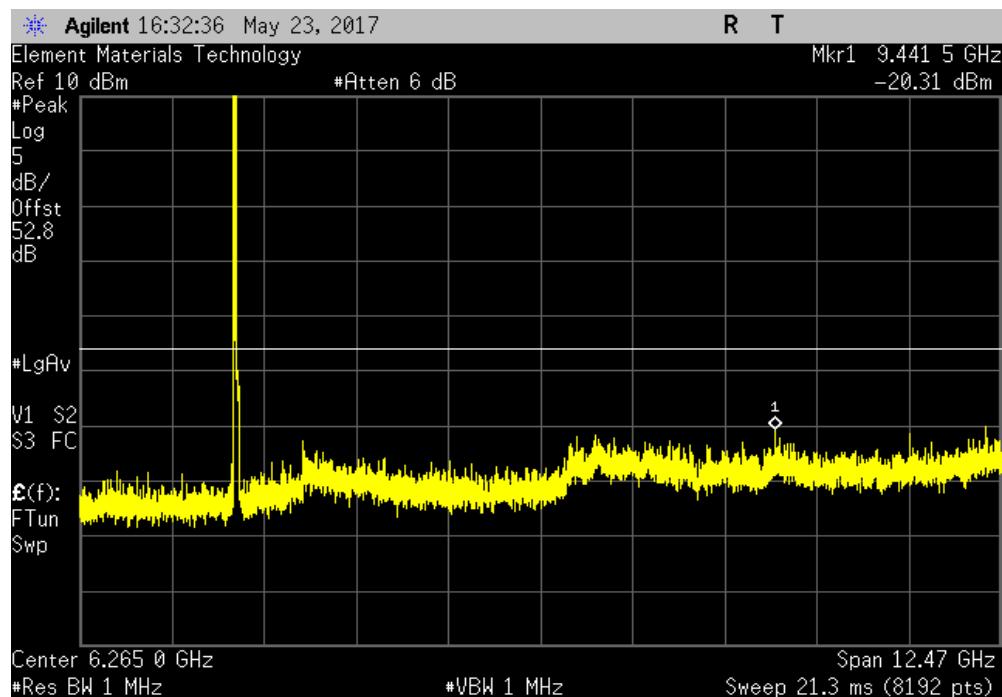


INTERMODULATION 2100




TbTx 2017.01.27 XMII 2017.02.08

Frequency		Max Value	Limit	
Range	(dBm)	≤ (dBm)	Result	
12.5 GHz - 22 GHz	-17.44	-13	Pass	

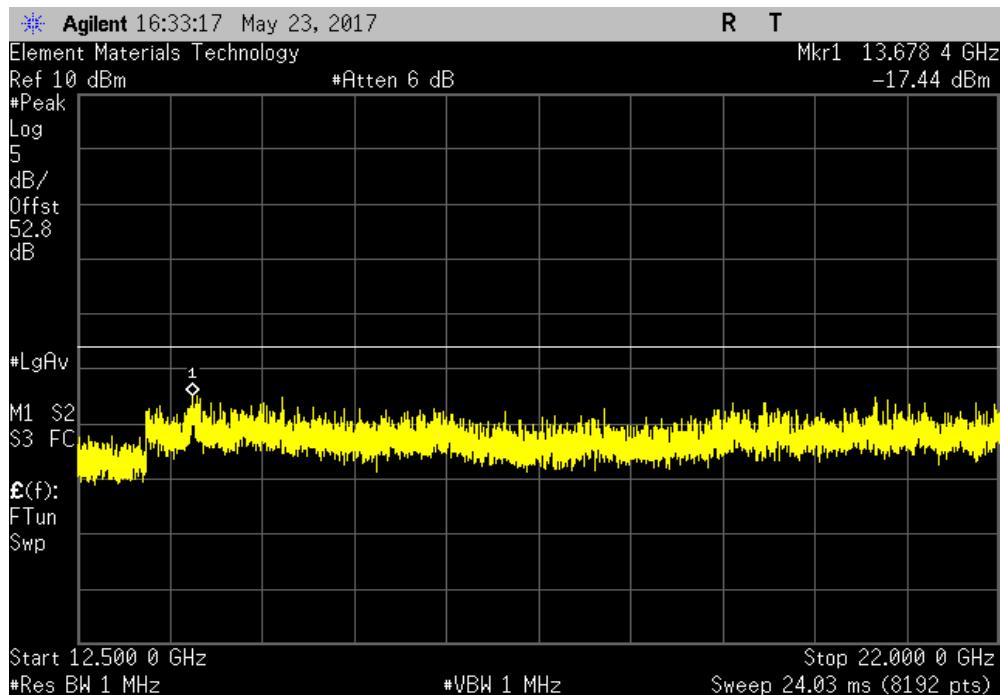

Frequency		Max Value	Limit	
Range	(dBm)	≤ (dBm)	Result	
Fundamental	-22.58	-13	Pass	

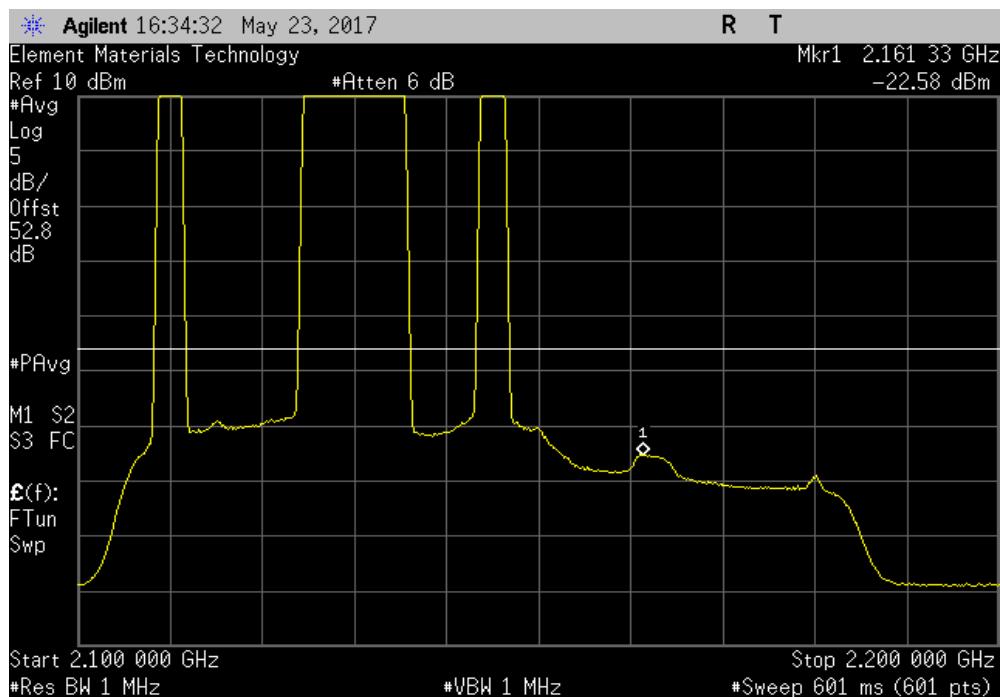


INTERMODULATION 2100




TbTx 2017.01.27 XMII 2017.02.08

Mid Passband (2130-2160 MHz) LTE 10 MHz			
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result
[30 MHz - 12.5 GHz]	-20.28	-13	Pass

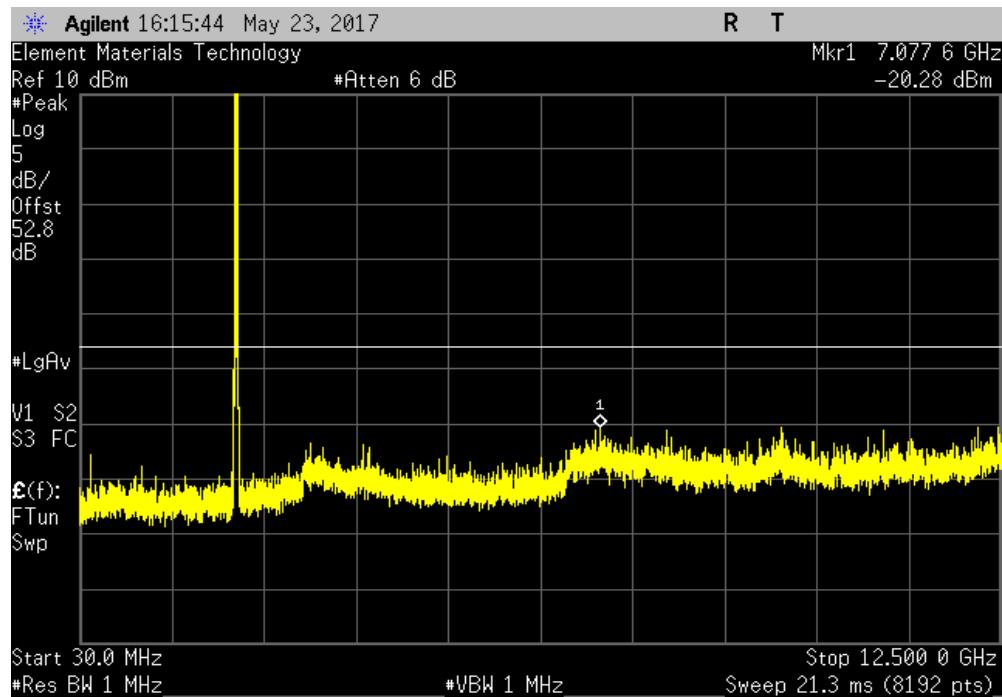

Mid Passband (2130-2160 MHz) LTE 10 MHz			
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result
[12.5 GHz - 22 GHz]	-16.62	-13	Pass

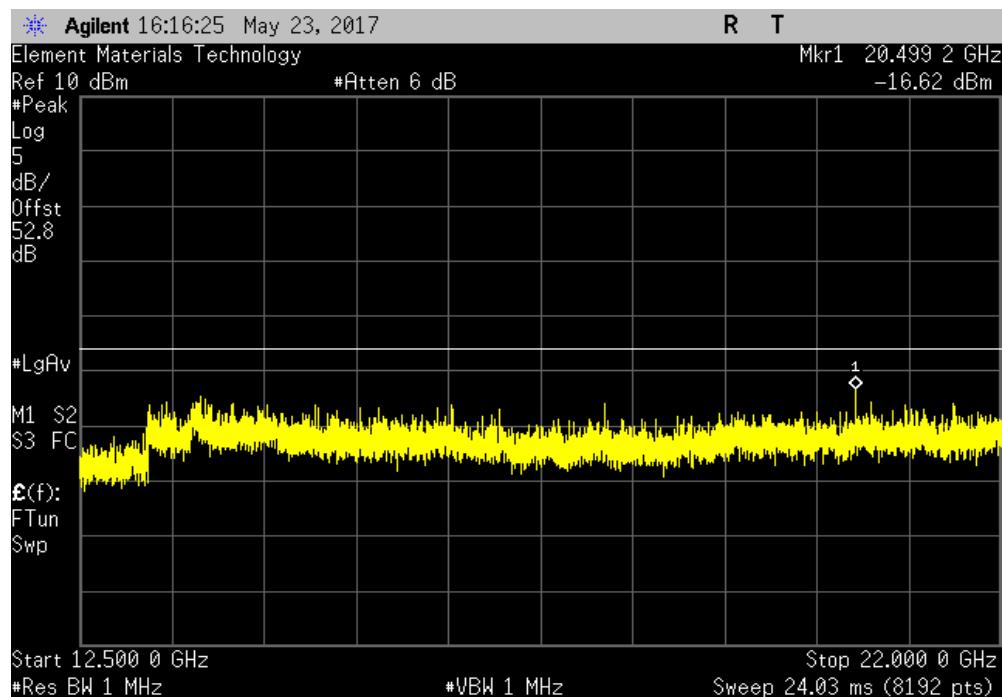


INTERMODULATION 2100




TbTx 2017.01.27 XM1 2017.02.08

Mid Passband (2130-2160 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
Fundamental		-22.61	-13	Pass	

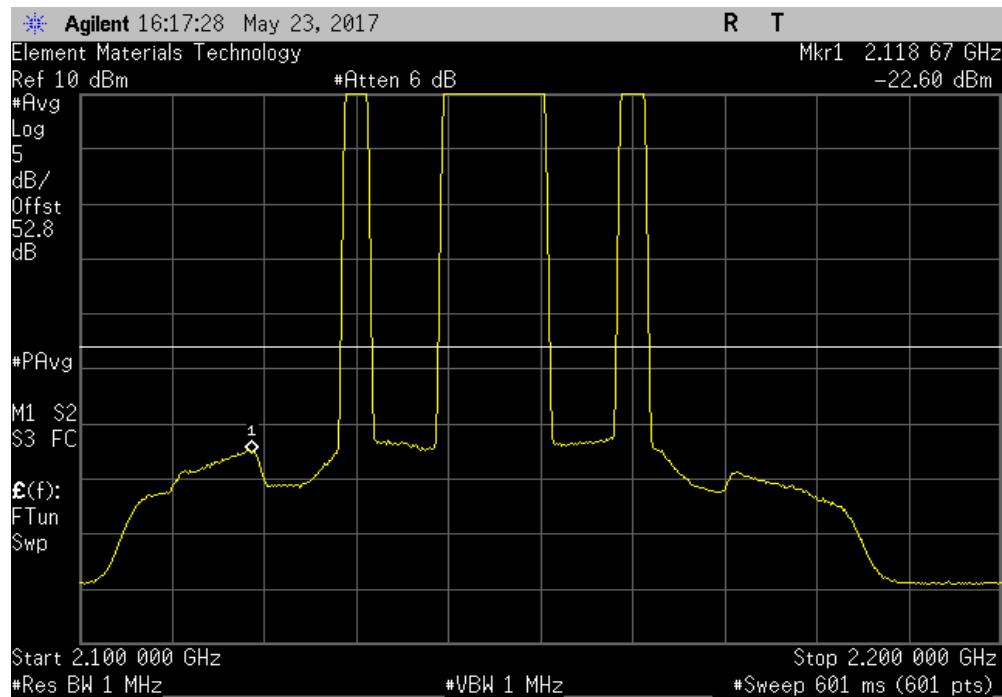

High Passband (2145-2180 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 12.5 GHz		-19.87	-13	Pass	

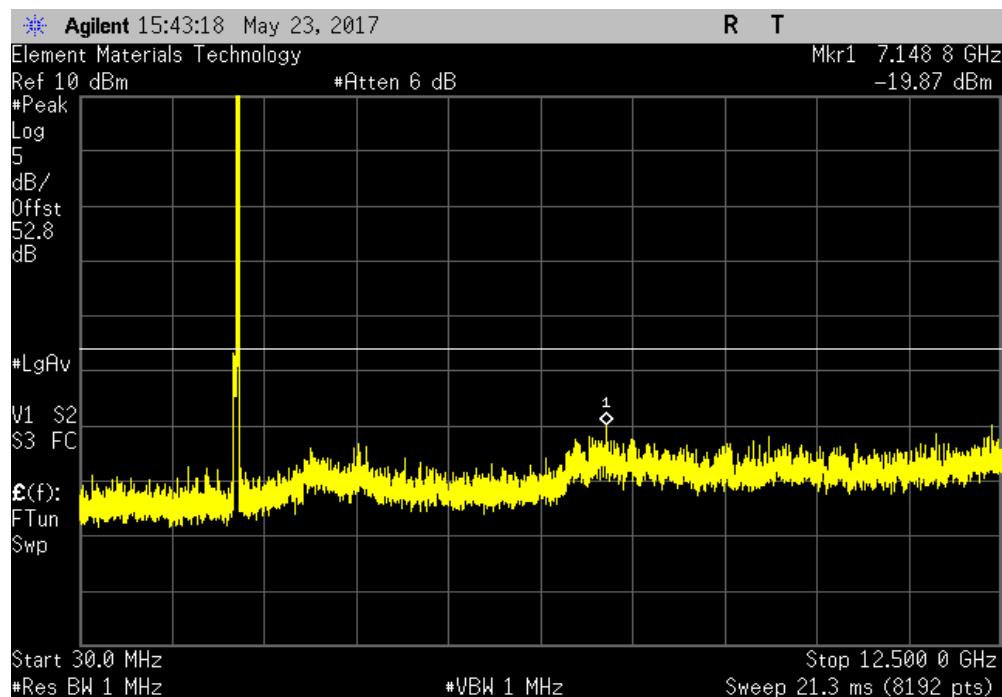


INTERMODULATION 2100




TbTx 2017.01.27 XMII 2017.02.08

High Passband (2145-2180 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
12.5 GHz - 22 GHz		-16.55	-13	Pass	

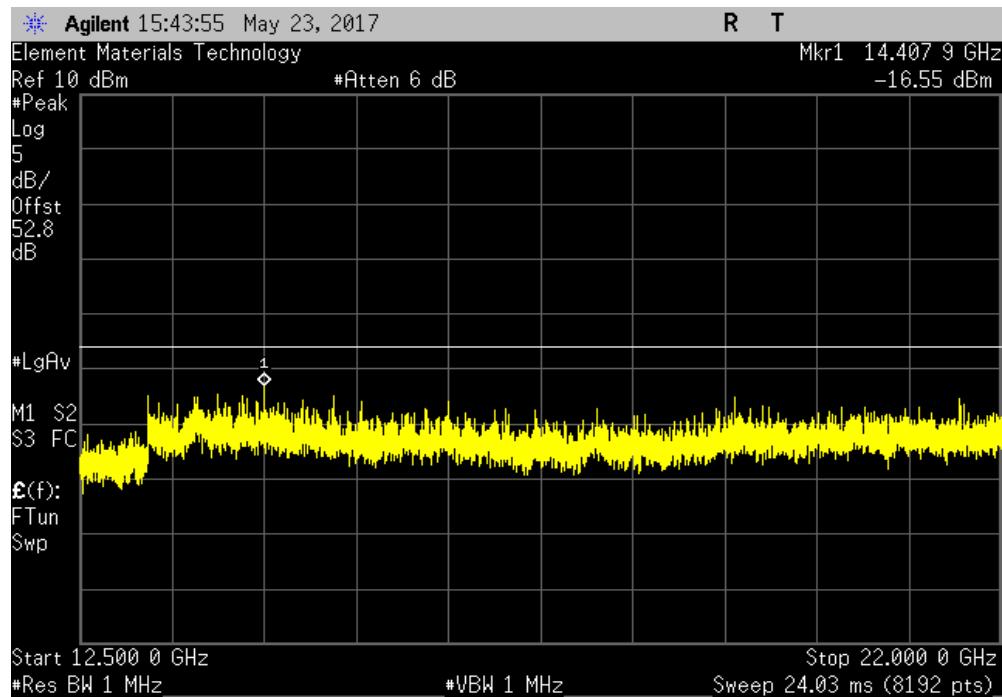

High Passband (2145-2180 MHz) LTE 10 MHz					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
Fundamental		-23.38	-13	Pass	

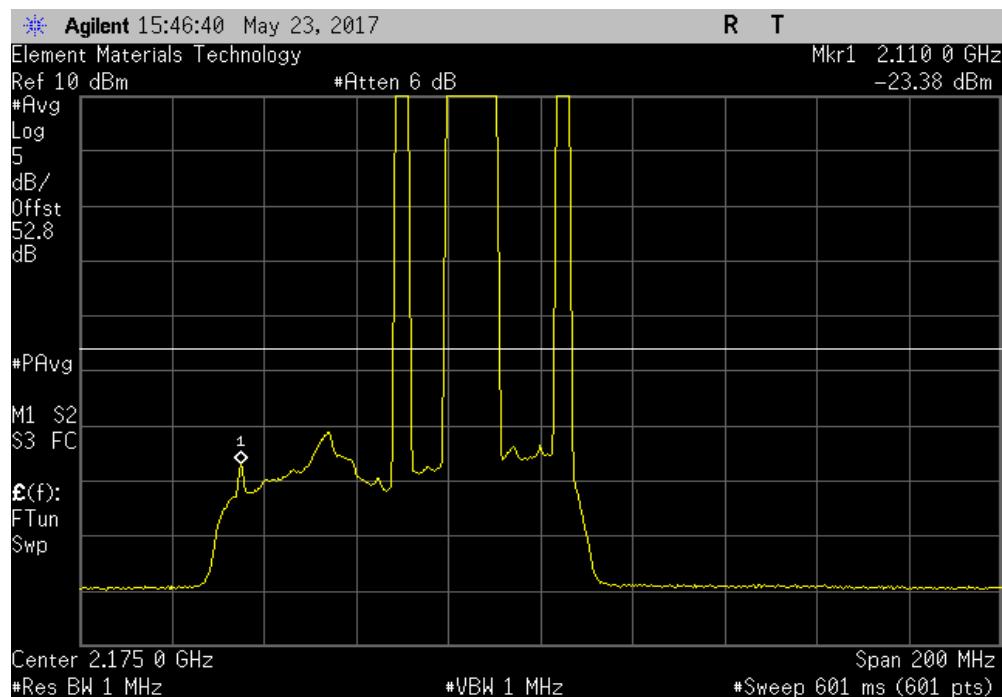

FREQUENCY STABILITY 2100



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Meter - Multimeter	Fluke	117	MLS	1/23/2017	1/23/2020
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Chamber - Temperature/Humidity	Cincinnati Sub Zero (CSZ)	ZPH-32-3.5-	TBF	NCR	NCR
Thermometer	Omega Engineering, Inc.	HH311	DUB	11/3/2014	11/3/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

Measurements were made at the edges of the main transmit bands as called out on the data sheets. Testing was done with an absence of modulation in a CW mode of operation.

The primary supply voltage was varied from 85 % to 115% of the nominal voltage. Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-30 ° to +50° C) and at 10°C intervals.

Per the requirements of FCC Part 27.54:

"The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation."

No specific limits are provided in either FCC 27.54, the product specific rule part, or FCC 2.1055, the equipment authorization procedure for testing frequency stability. While there are no limits called out, any results less than 1ppm will still allow the radio to be operating within the band.

FREQUENCY STABILITY 2100



TbTx 2017.01.27 XMII 2017.02.08


EUT: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order: TEC0042				
Serial Number: 459644002		Date: 05/24/17				
Customer: CommScope		Temperature: 21.5 °C				
Attendees: Josh Wittman		Humidity: 47% RH				
Project: None		Barometric Pres.: 1008 mbar				
Tested by: Dustin Sparks	Power: 120VAC/60Hz	Job Site: MN08				
TEST SPECIFICATIONS		Test Method				
FCC 27:2017		ANSI/TIA/EIA-603-D-2010				
COMMENTS						
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm) per port. Both antenna ports were terminated but only one port is active						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	2	Signature				
		Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
+50°C						
2112.5 MHz		2112.500027	2112.5	0.013	1	Pass
2115 MHz		2115.000047	2115.0	0.022	1	Pass
2145 MHz		2145.000043	2145.0	0.020	1	Pass
2175 MHz		2175.000036	2175.0	0.017	1	Pass
2177.5 MHz		2177.500038	2177.5	0.017	1	Pass
+40°C						
2112.5 MHz		2112.500011	2112.5	0.005	1	Pass
2115 MHz		2115.000025	2115.0	0.012	1	Pass
2145 MHz		2145.000009	2145.0	0.004	1	Pass
2175 MHz		2175.000019	2175.0	0.009	1	Pass
2177.5 MHz		2177.500021	2177.5	0.010	1	Pass
+30°C						
2112.5 MHz		2112.500044	2112.5	0.021	1	Pass
2115 MHz		2115.000046	2115.0	0.022	1	Pass
2145 MHz		2145.000043	2145.0	0.020	1	Pass
2175 MHz		2175.000003	2175.0	0.001	1	Pass
2177.5 MHz		2177.500038	2177.5	0.017	1	Pass
+20°C						
2112.5 MHz		2112.500044	2112.5	0.021	1	Pass
2115 MHz		2115.000042	2115.0	0.020	1	Pass
2145 MHz		2145.000043	2145.0	0.020	1	Pass
2175 MHz		2175.000053	2175.0	0.024	1	Pass
2177.5 MHz		2177.500038	2177.5	0.017	1	Pass
+10°C						
2112.5 MHz		2112.500027	2112.5	0.013	1	Pass
2115 MHz		2115.000046	2115.0	0.022	1	Pass
2145 MHz		2145.000043	2145.0	0.020	1	Pass
2175 MHz		2175.000052	2175.0	0.024	1	Pass
2177.5 MHz		2177.500038	2177.5	0.017	1	Pass
0°C						
2112.5 MHz		2112.500044	2112.5	0.021	1	Pass
2115 MHz		2115.000046	2115.0	0.022	1	Pass
2145 MHz		2145.000043	2145.0	0.020	1	Pass
2175 MHz		2175.000053	2175.0	0.024	1	Pass
2177.5 MHz		2177.500038	2177.5	0.017	1	Pass
-10°C						
2112.5 MHz		2112.500044	2112.5	0.021	1	Pass
2115 MHz		2115.000042	2115.0	0.020	1	Pass
2145 MHz		2145.000001	2145.0	0.005	1	Pass
2175 MHz		2175.000036	2175.0	0.017	1	Pass
2177.5 MHz		2177.500055	2177.5	0.025	1	Pass
-20°C						
2112.5 MHz		2112.500044	2112.5	0.021	1	Pass
2115 MHz		2115.000042	2115.0	0.020	1	Pass
2145 MHz		2145.000009	2145.0	0.004	1	Pass
2175 MHz		2175.000036	2175.0	0.017	1	Pass
2177.5 MHz		2177.500038	2177.5	0.017	1	Pass
-30°C						
2112.5 MHz		2112.500044	2112.5	0.021	1	Pass
2115 MHz		2115.000046	2115.0	0.022	1	Pass
2145 MHz		2145.000043	2145.0	0.020	1	Pass
2175 MHz		2175.000036	2175.0	0.017	1	Pass
2177.5 MHz		2177.500038	2177.5	0.017	1	Pass
Normal Voltage						
2112.5 MHz		2112.500044	2112.5	0.021	1	Pass
2115 MHz		2115.000025	2115.0	0.012	1	Pass
2145 MHz		2145.000043	2145.0	0.020	1	Pass
2175 MHz		2175.000053	2175.0	0.024	1	Pass
2177.5 MHz		2177.500055	2177.5	0.025	1	Pass
Extreme Voltage (102VAC/60Hz)						
2112.5 MHz		2112.500044	2112.5	0.021	1	Pass
2115 MHz		2115.000042	2115.0	0.020	1	Pass
2145 MHz		2145.000043	2145.0	0.020	1	Pass
2175 MHz		2175.000036	2175.0	0.017	1	Pass
2177.5 MHz		2177.500038	2177.5	0.017	1	Pass
Extreme Voltage (138VAC/60Hz)						
2112.5 MHz		2112.500044	2112.5	0.021	1	Pass
2115 MHz		2115.000042	2115.0	0.020	1	Pass
2145 MHz		2145.000043	2145.0	0.020	1	Pass
2175 MHz		2175.000036	2175.0	0.017	1	Pass
2177.5 MHz		2177.500038	2177.5	0.017	1	Pass

FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+50°C, 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500027	2112.5	0.013	1	Pass	

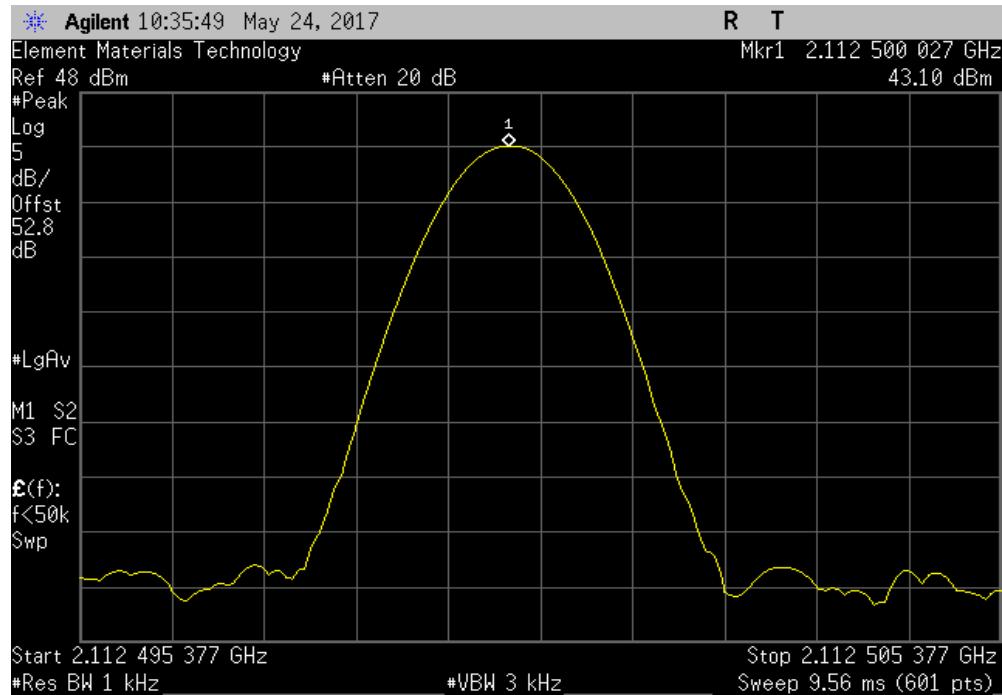

+50°C, 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000047	2115	0.022	1	Pass	

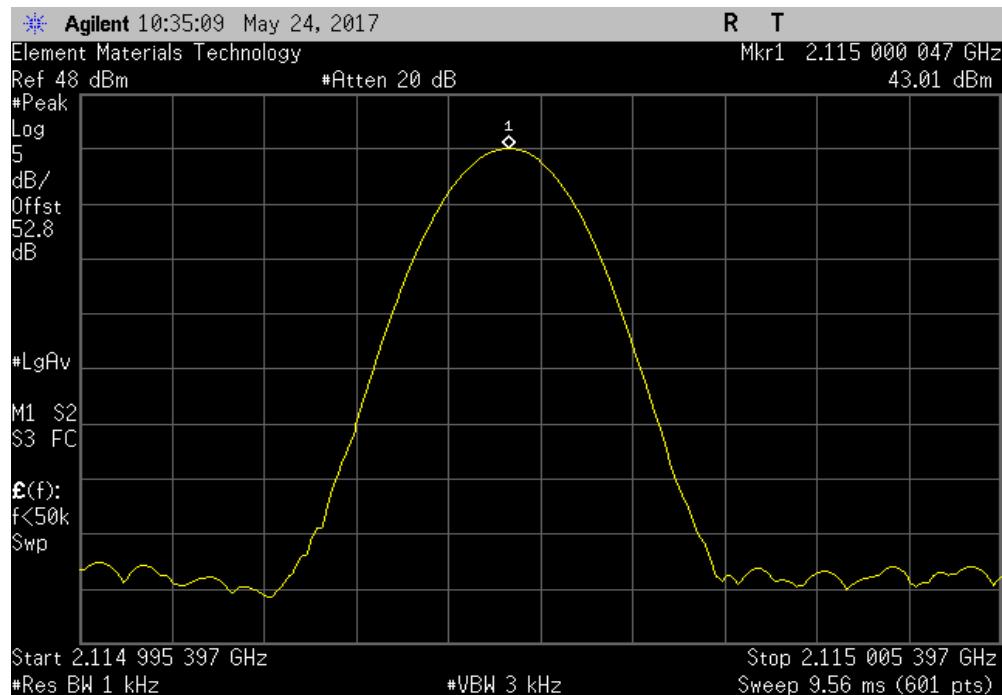


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+50°C, 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.000043	2145	0.020	1	Pass	

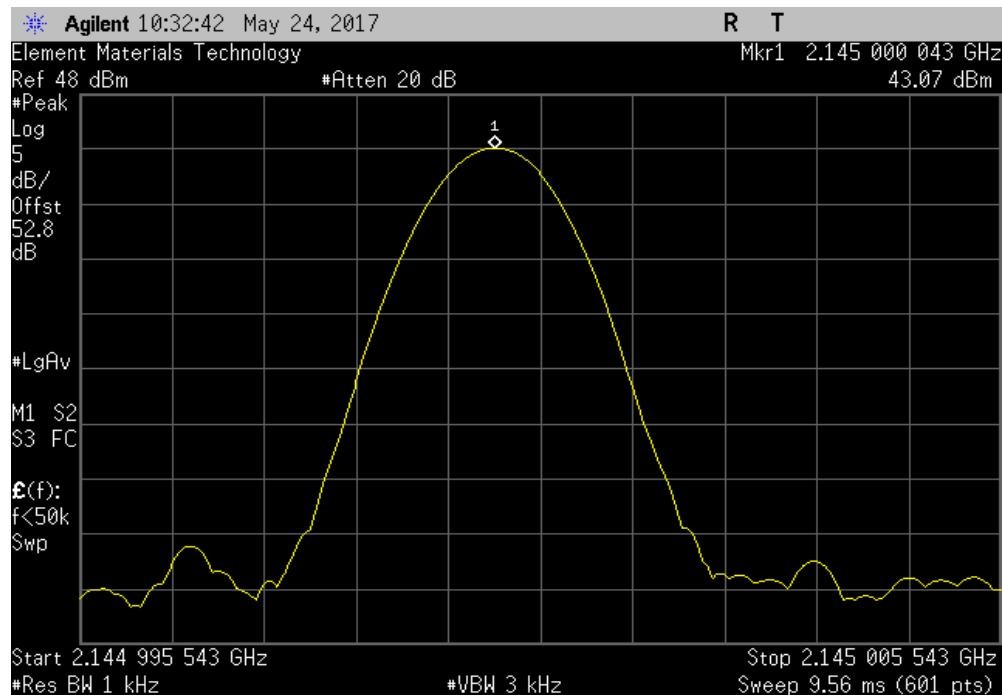

+50°C, 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000036	2175	0.017	1	Pass	

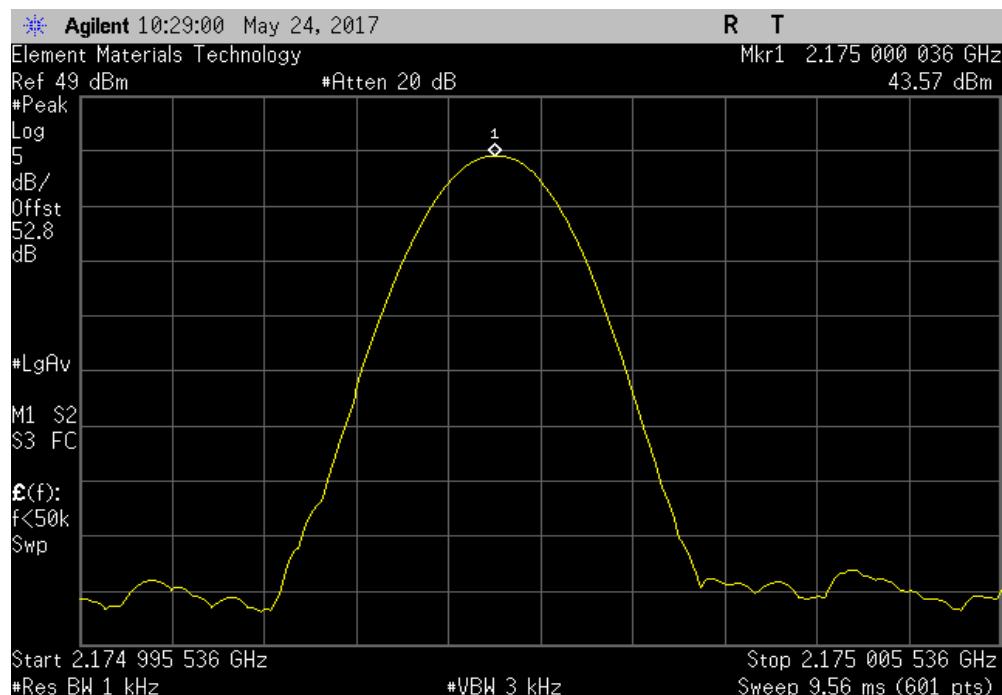


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+50°C, 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500038	2177.5	0.017	1	Pass	

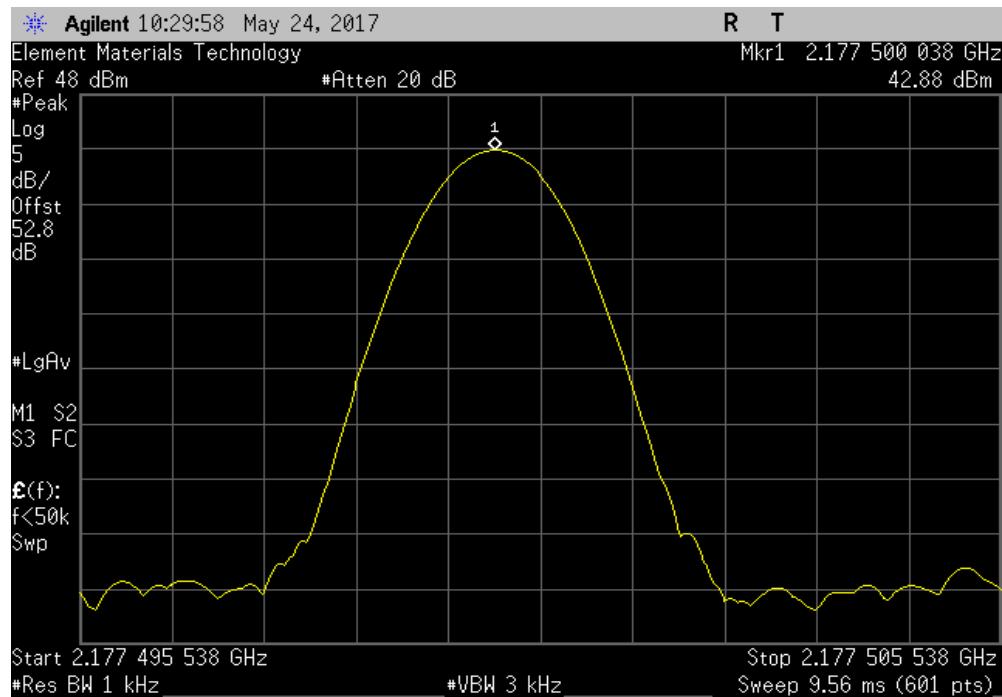

+40°C, 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500011	2112.5	0.005	1	Pass	

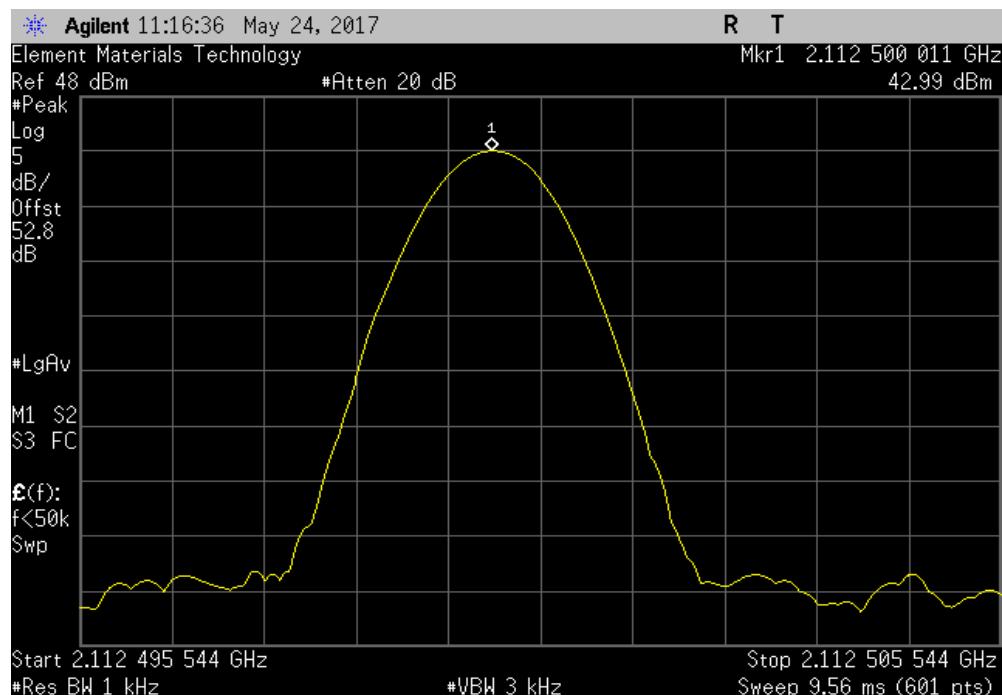


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+40°C, 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000025	2115	0.012	1	Pass	

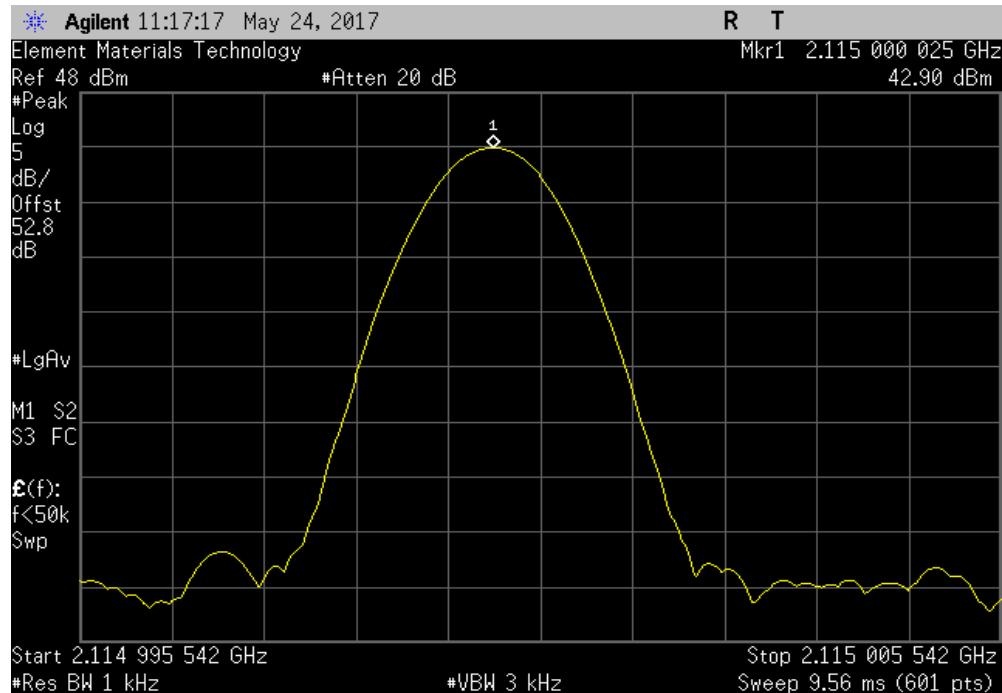

+40°C, 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.000009	2145	0.004	1	Pass	

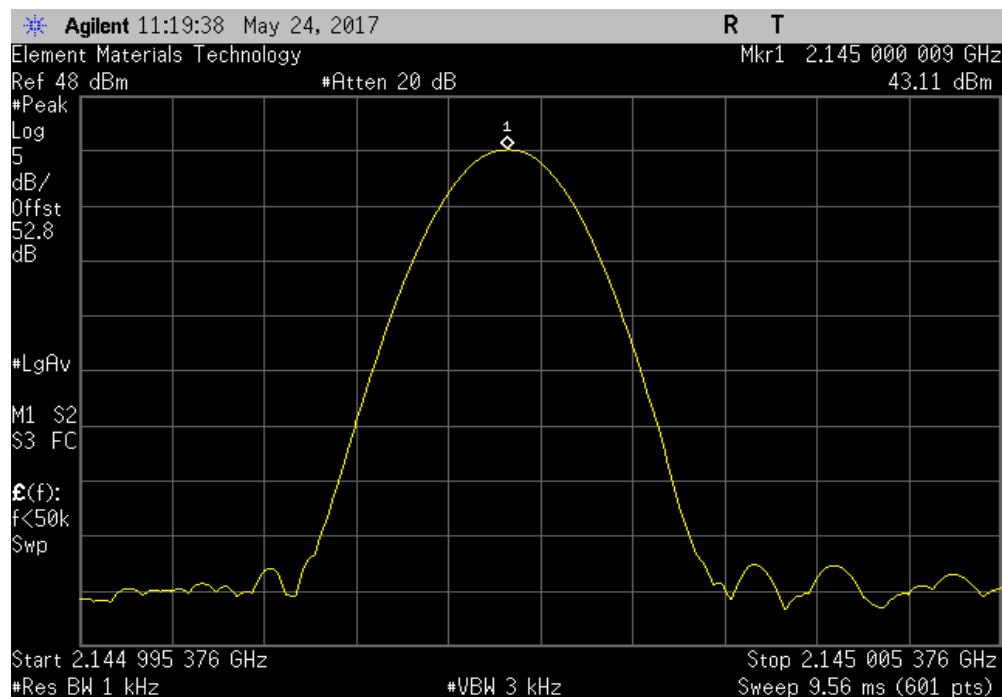


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+40°C, 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000019	2175	0.009	1	Pass	

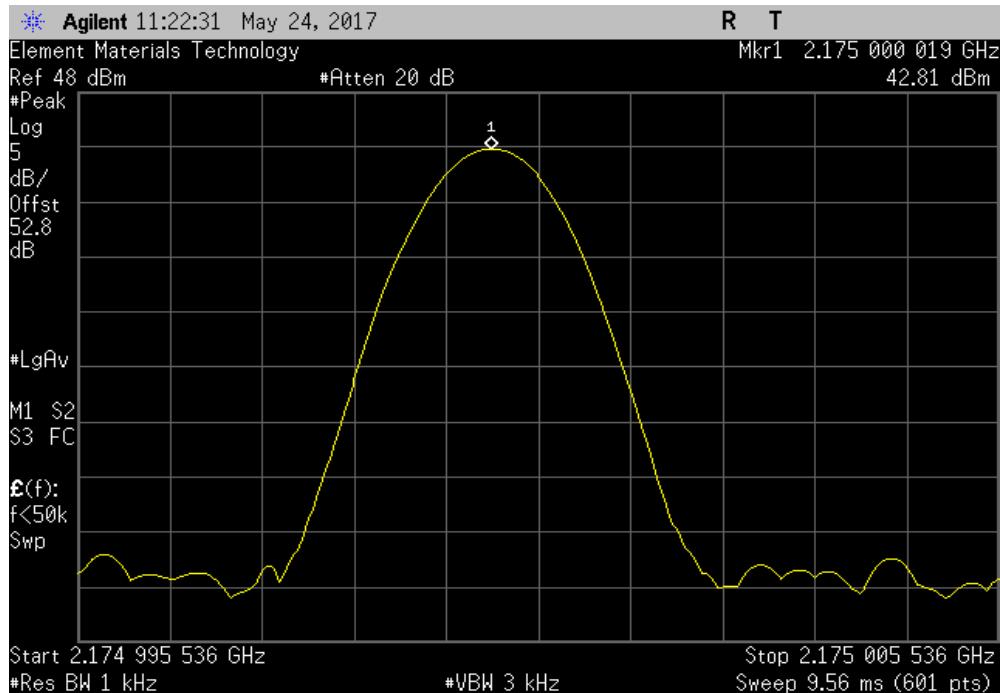

+40°C, 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500021	2177.5	0.010	1	Pass	

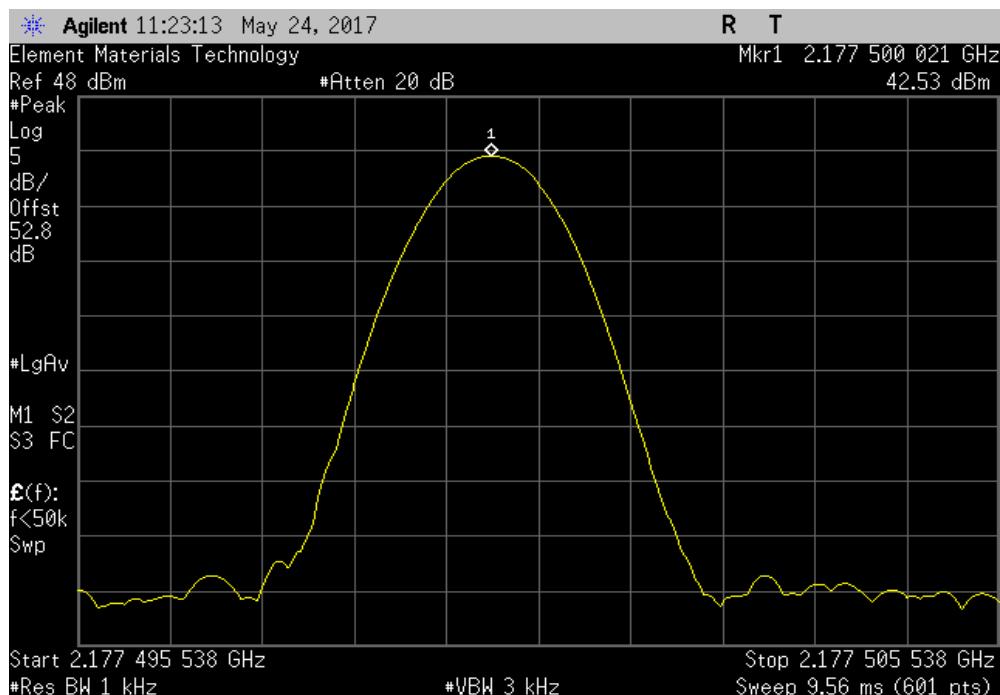


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+30°C, 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500044	2112.5	0.021	1	Pass	

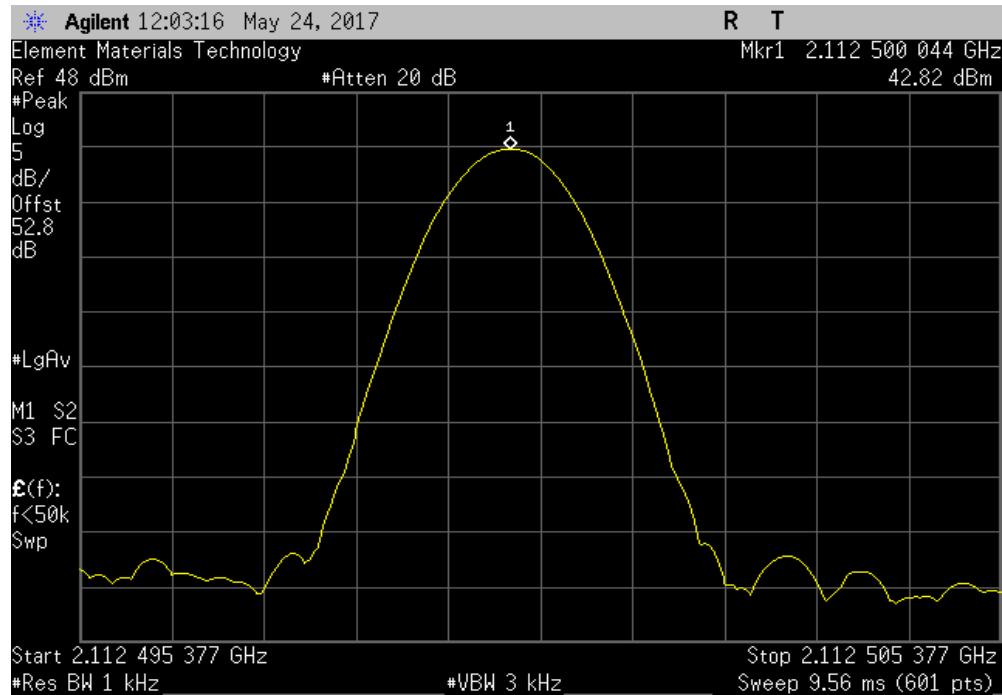

+30°C, 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000046	2115	0.022	1	Pass	

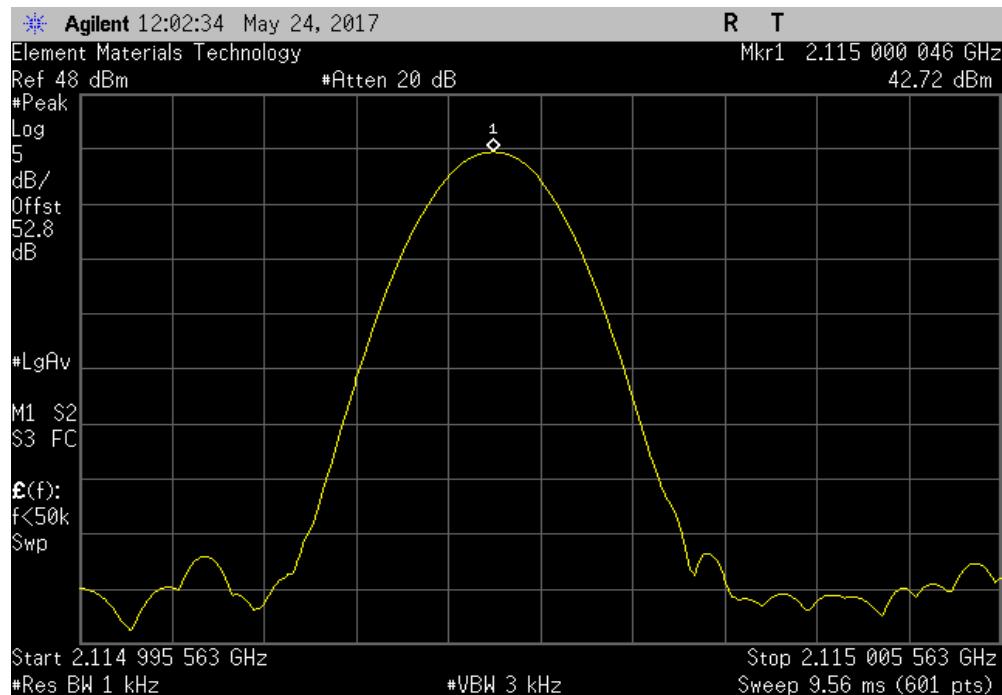


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+30°C, 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.000043	2145	0.020	1	Pass	

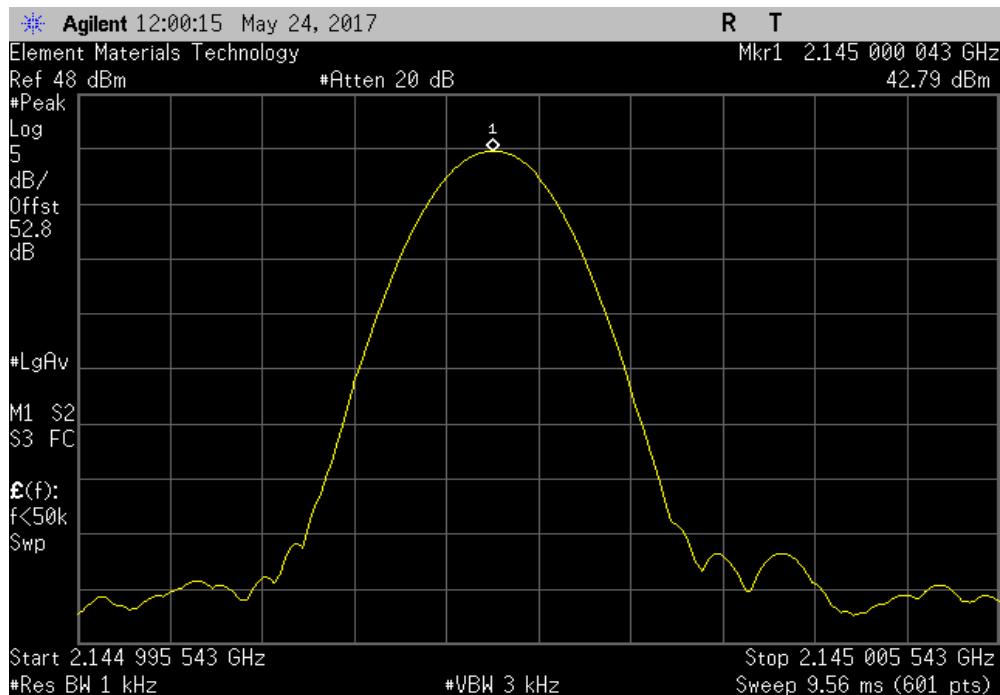

+30°C, 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000003	2175	0.001	1	Pass	

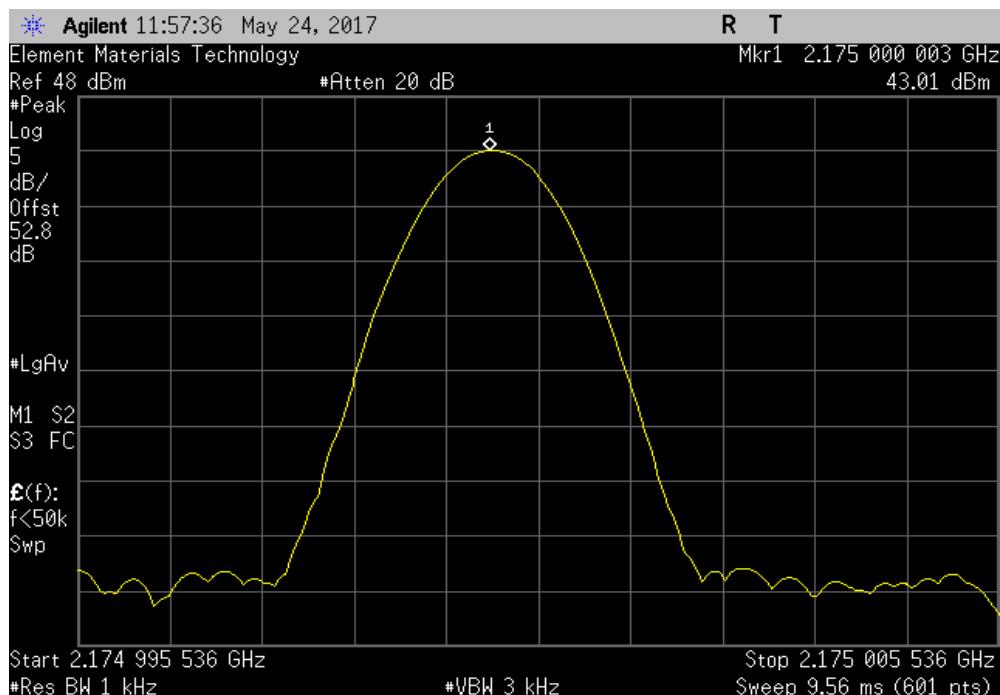


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+30°C, 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500038	2177.5	0.017	1	Pass	

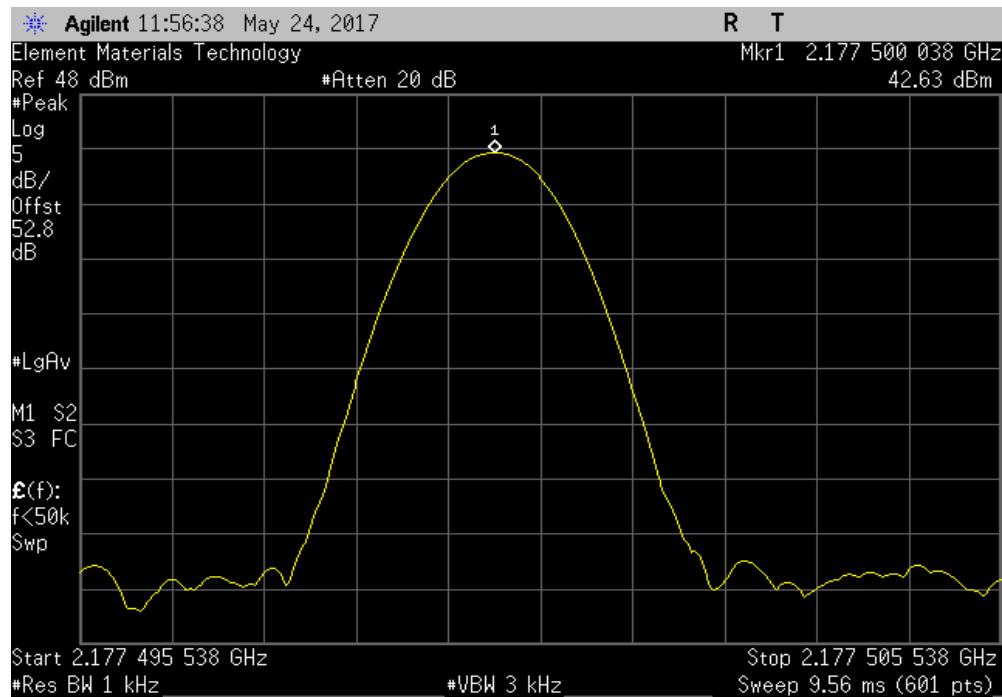

+20°C, 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500044	2112.5	0.021	1	Pass	

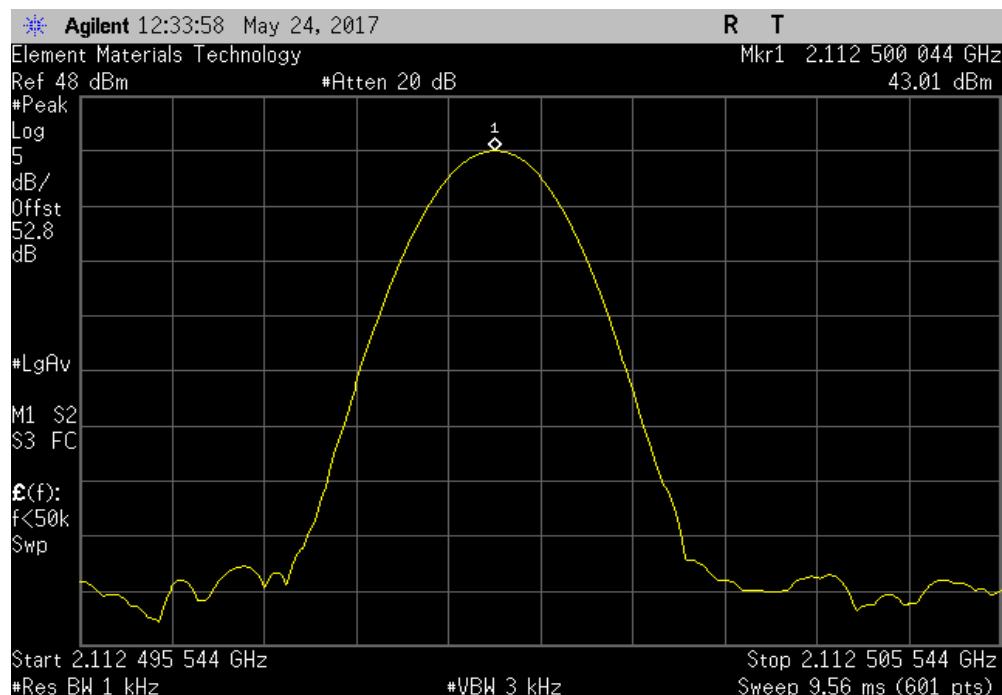


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+20°C, 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000042	2115	0.020	1	Pass	

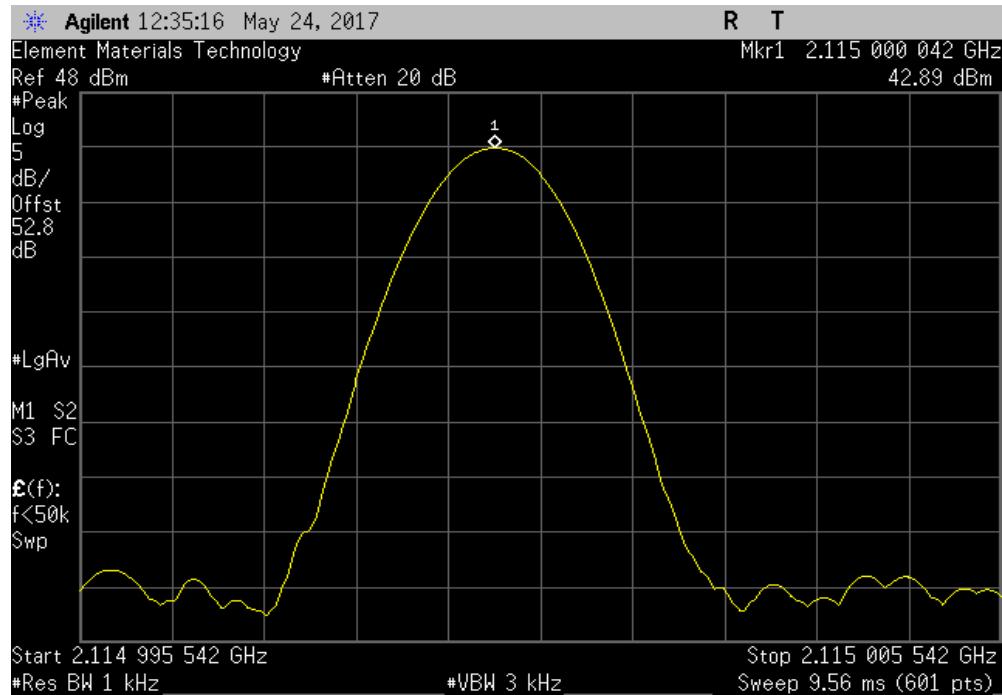

+20°C, 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.000043	2145	0.020	1	Pass	

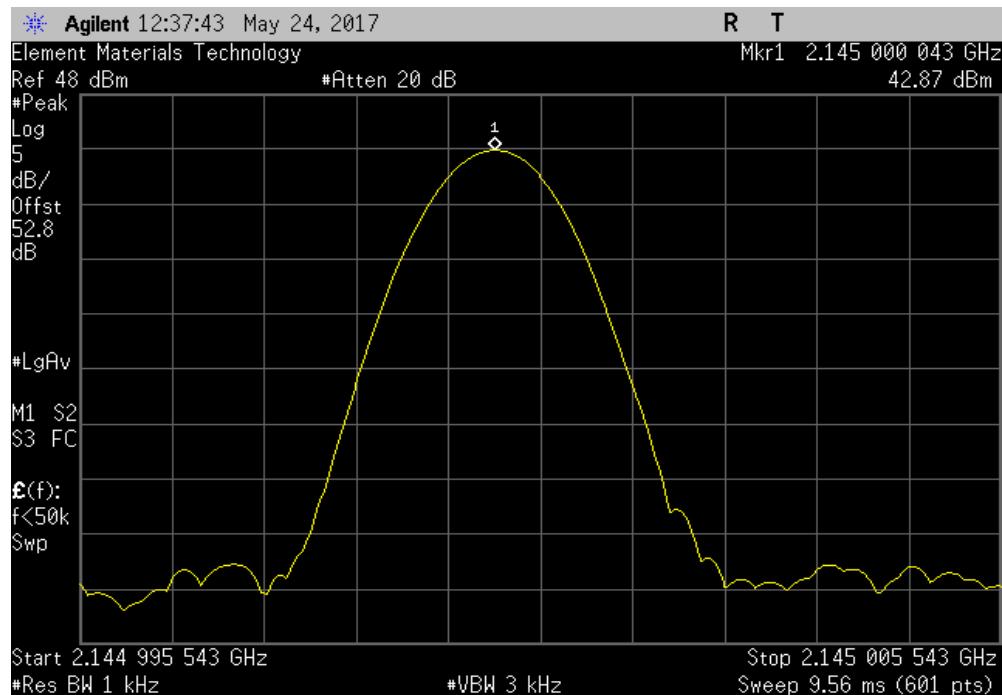


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+20°C, 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000053	2175	0.024	1	Pass	

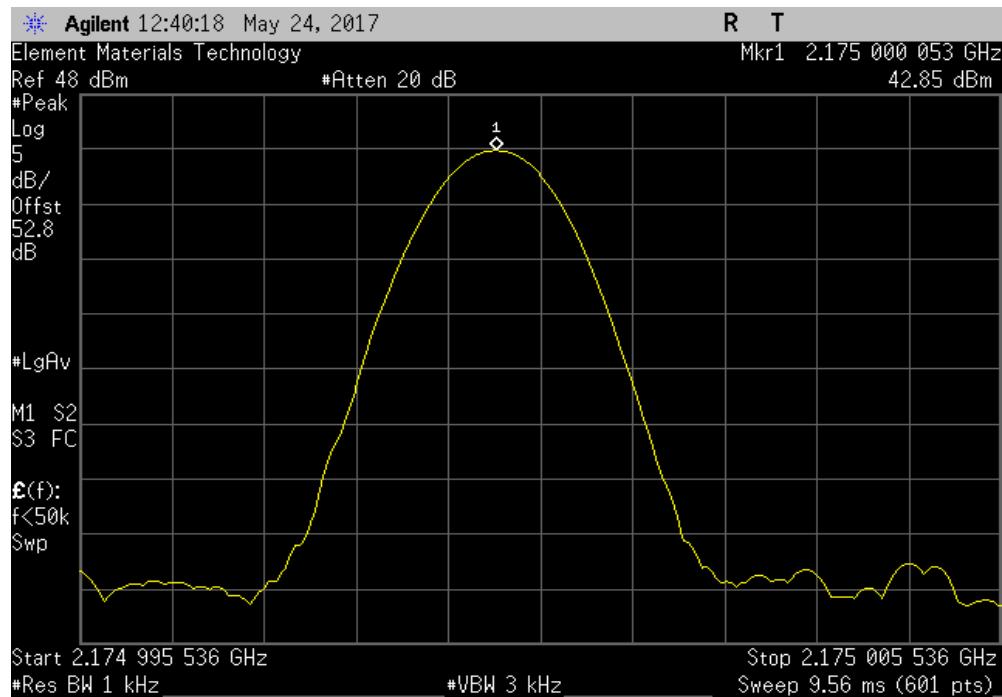

+20°C, 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500038	2177.5	0.017	1	Pass	

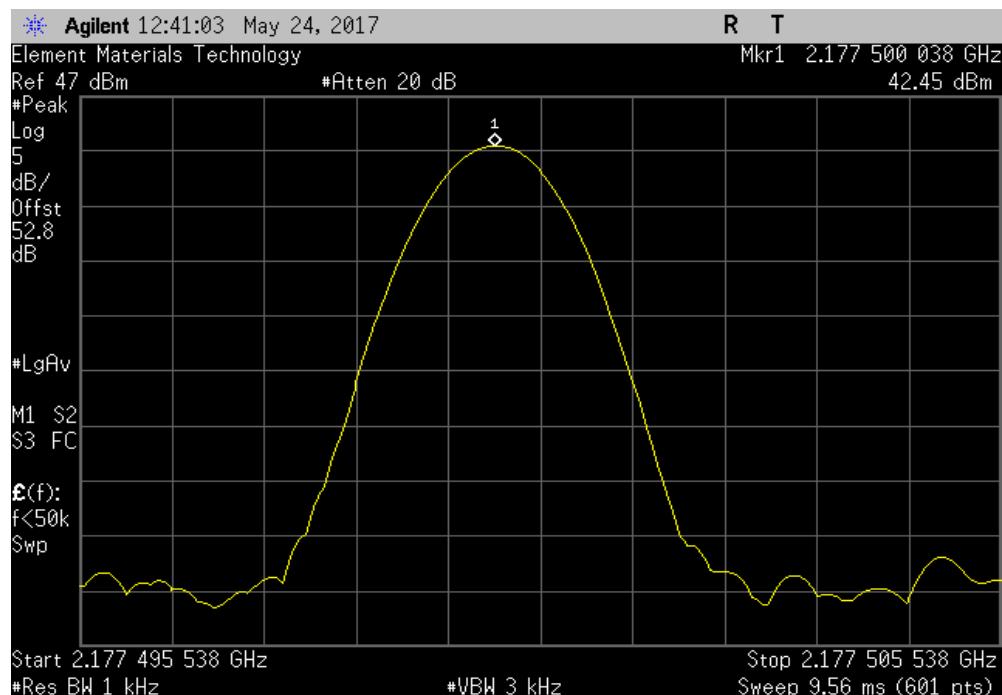


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+10°C, 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500027	2112.5	0.013	1	Pass	

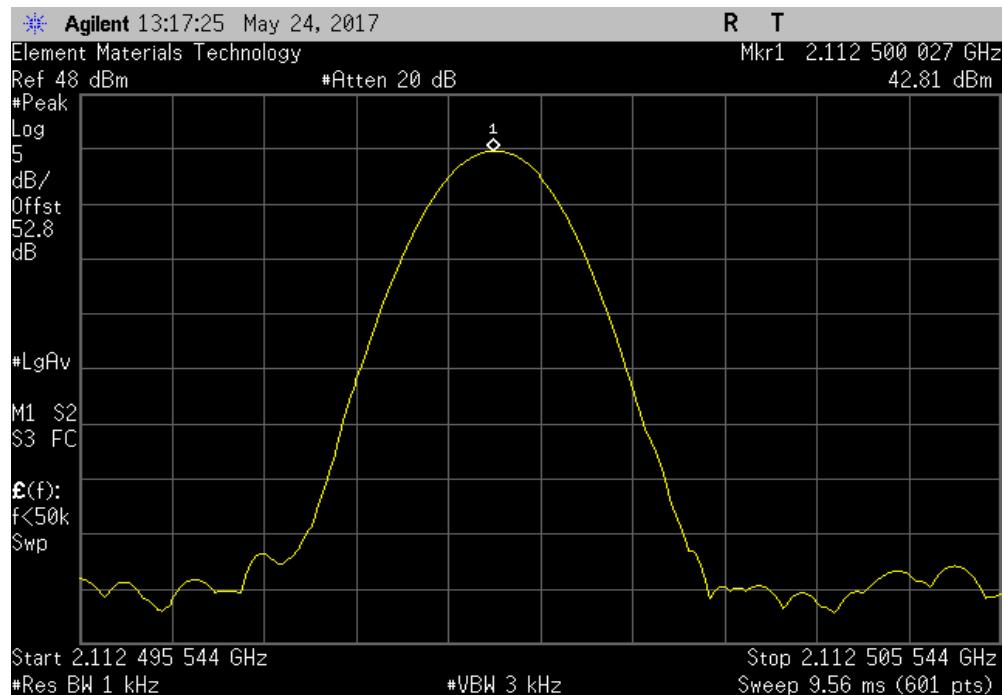

+10°C, 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000046	2115	0.022	1	Pass	

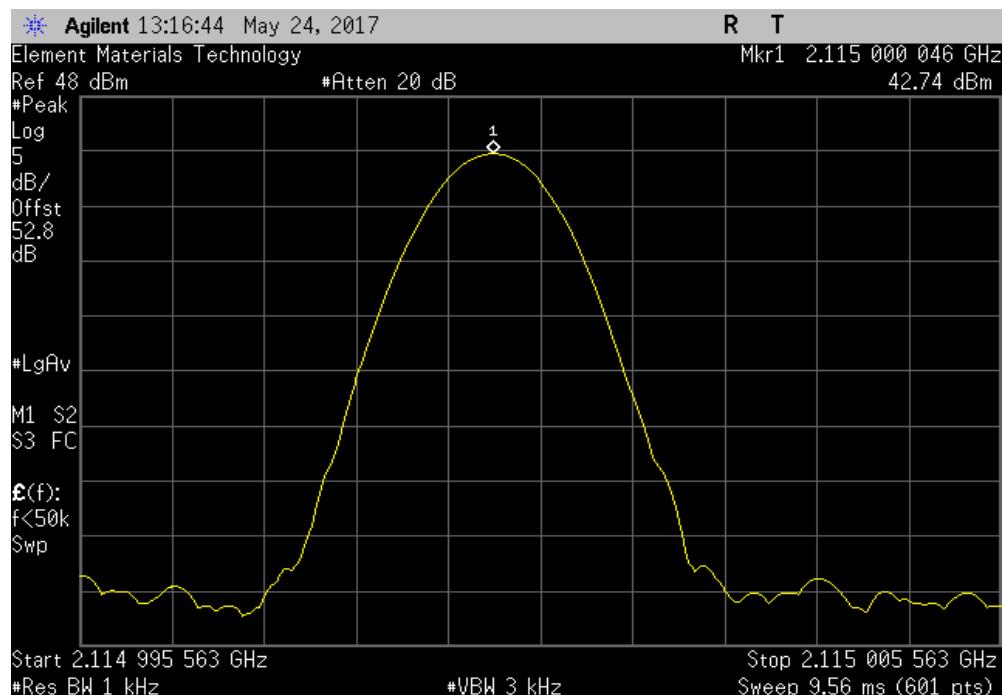


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+10°C, 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.000043	2145	0.020	1	Pass	

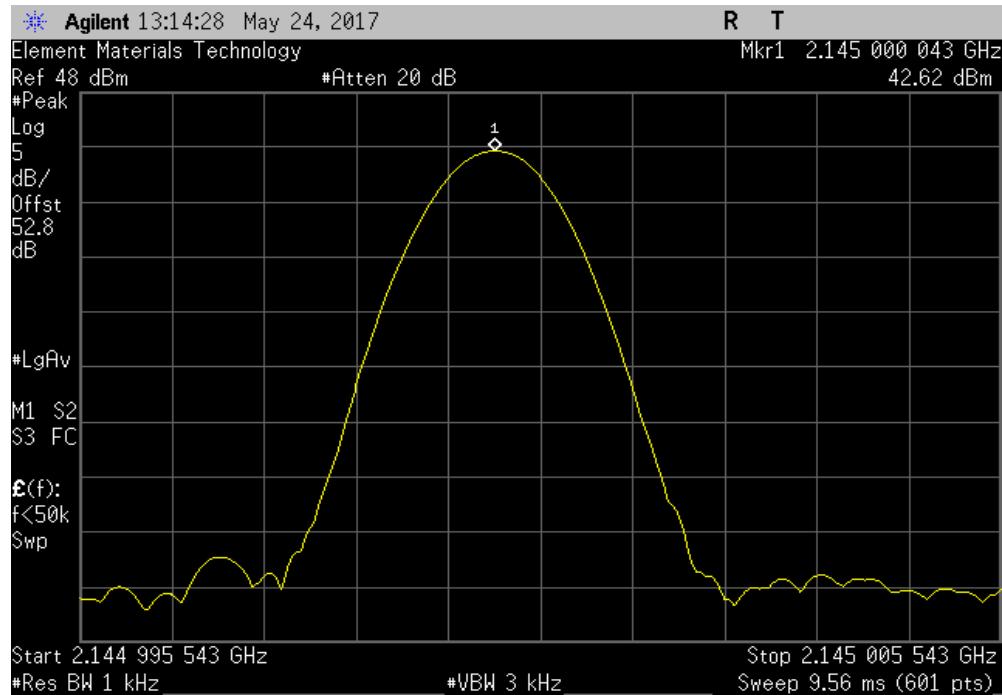

+10°C, 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000052	2175	0.024	1	Pass	

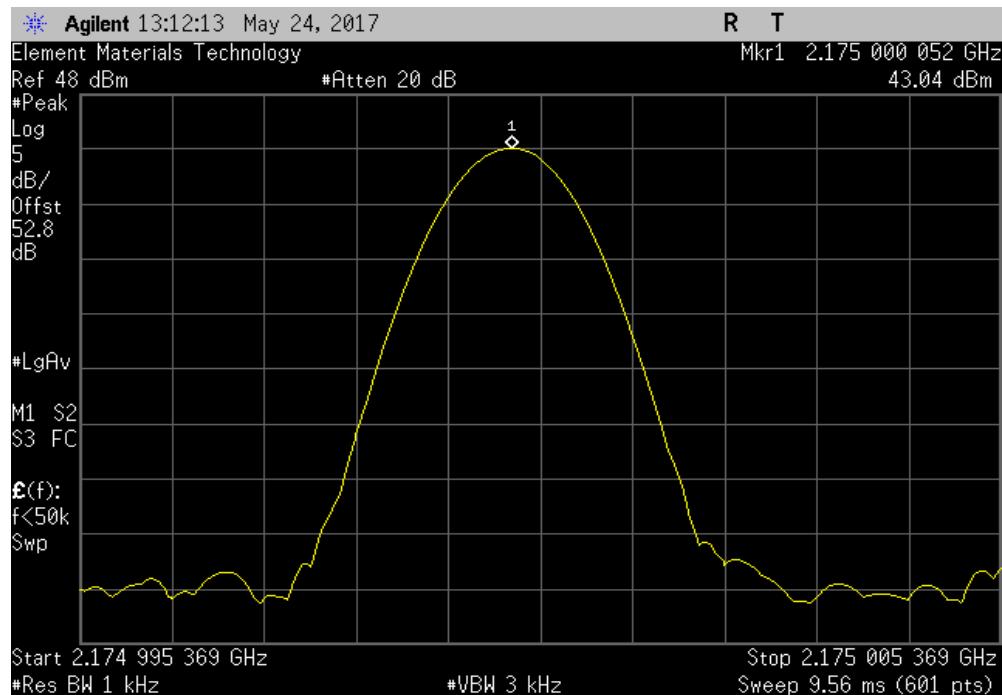


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

+10°C, 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500038	2177.5	0.017	1	Pass	

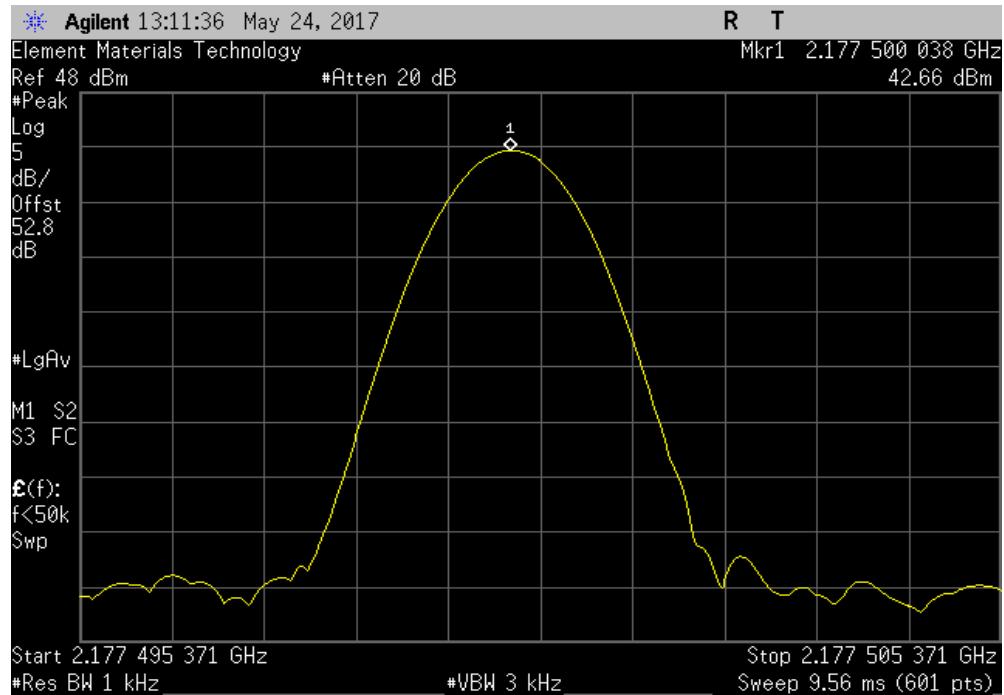

0°C, 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500044	2112.5	0.021	1	Pass	

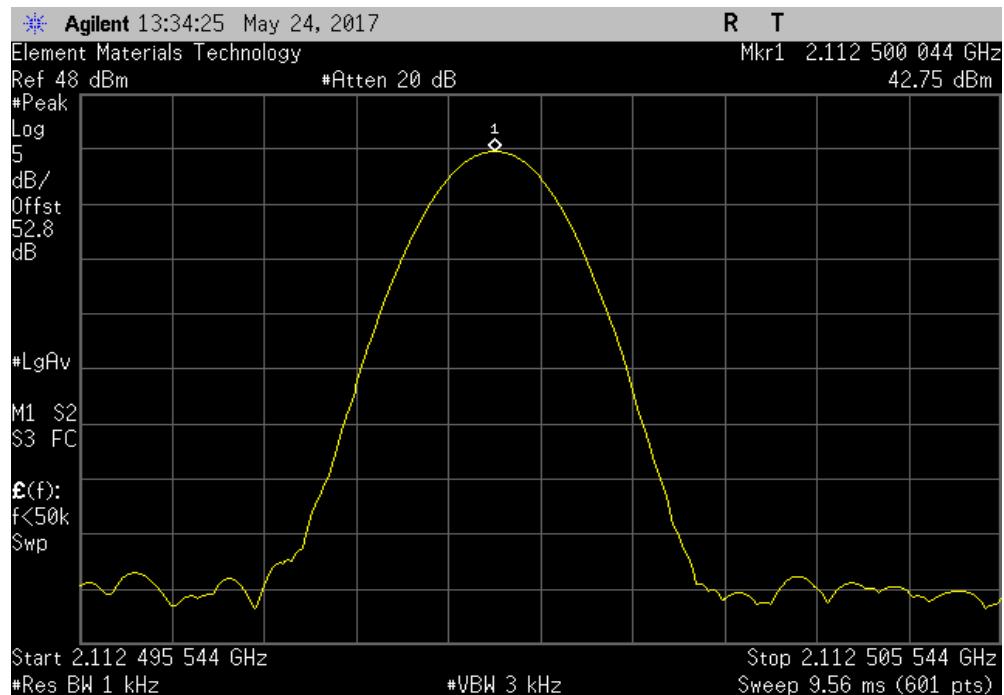


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

0°C, 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000046	2115	0.022	1	Pass	

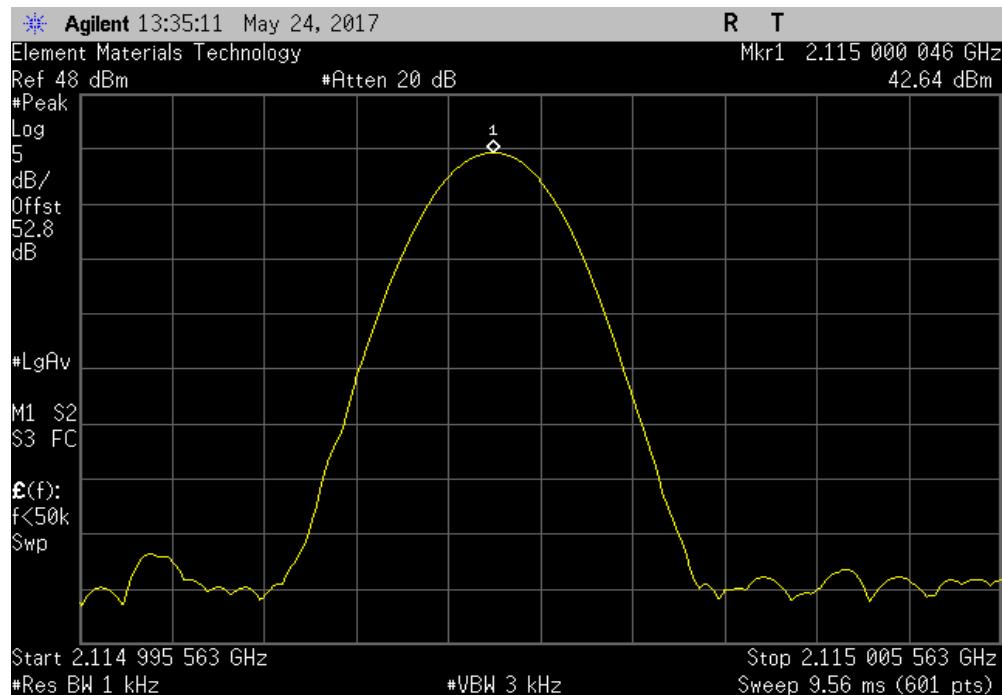

0°C, 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.000043	2145	0.020	1	Pass	

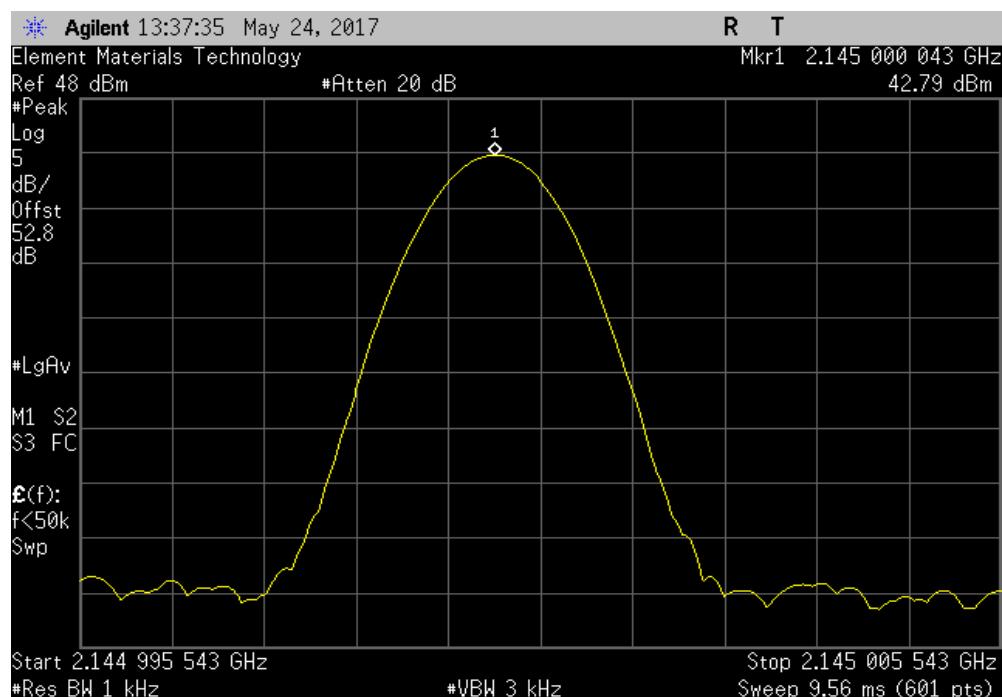


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

0°C, 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000053	2175	0.024	1	Pass	

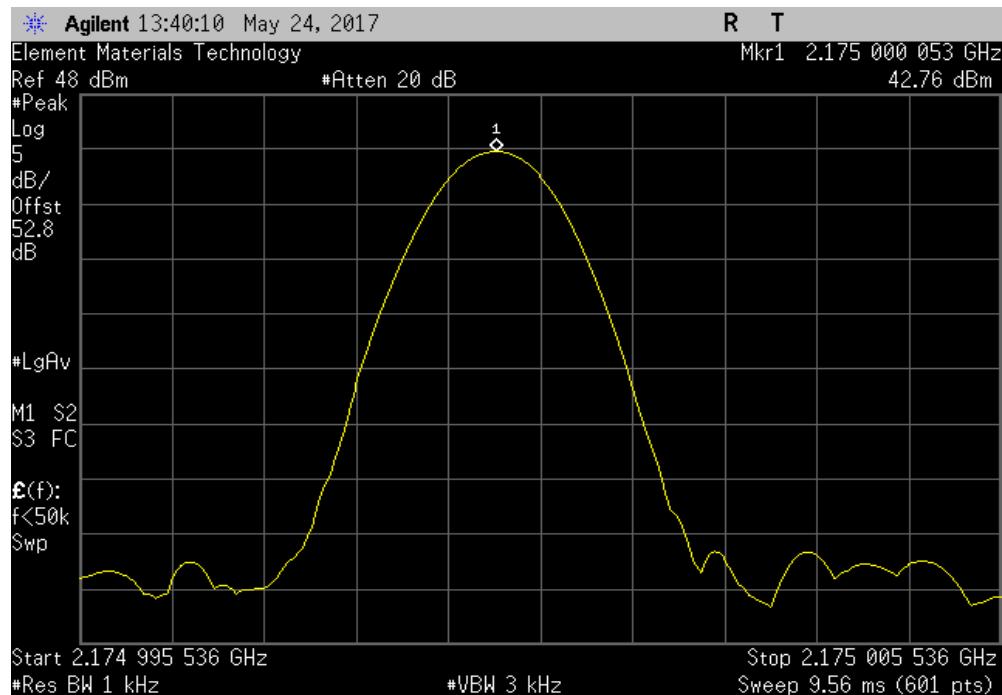

0°C, 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500038	2177.5	0.017	1	Pass	

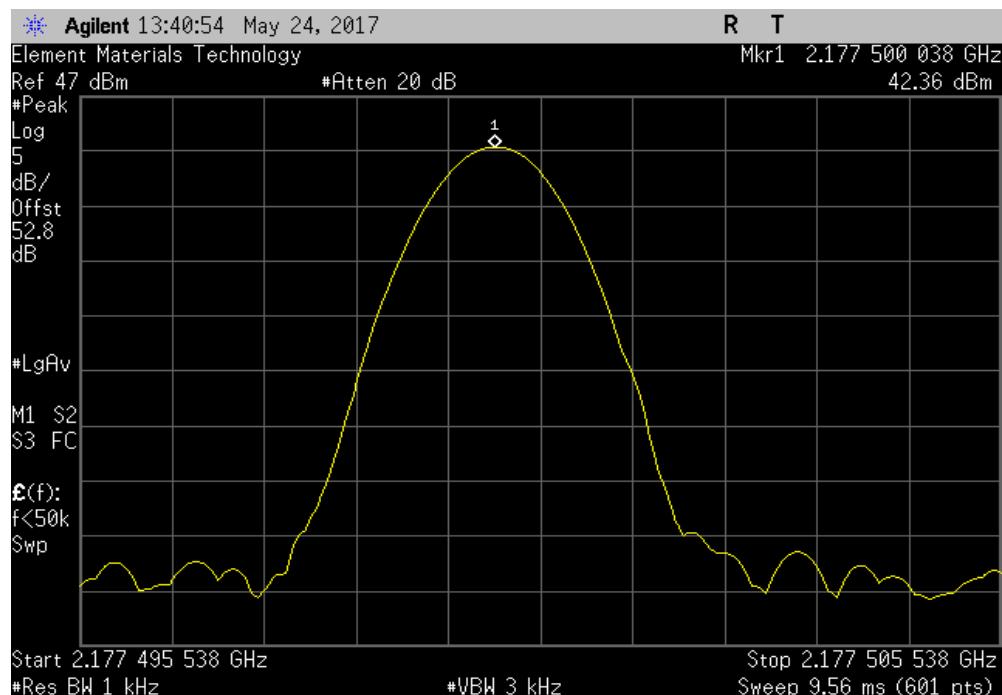


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

-10°C, 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500044	2112.5	0.021	1	Pass	

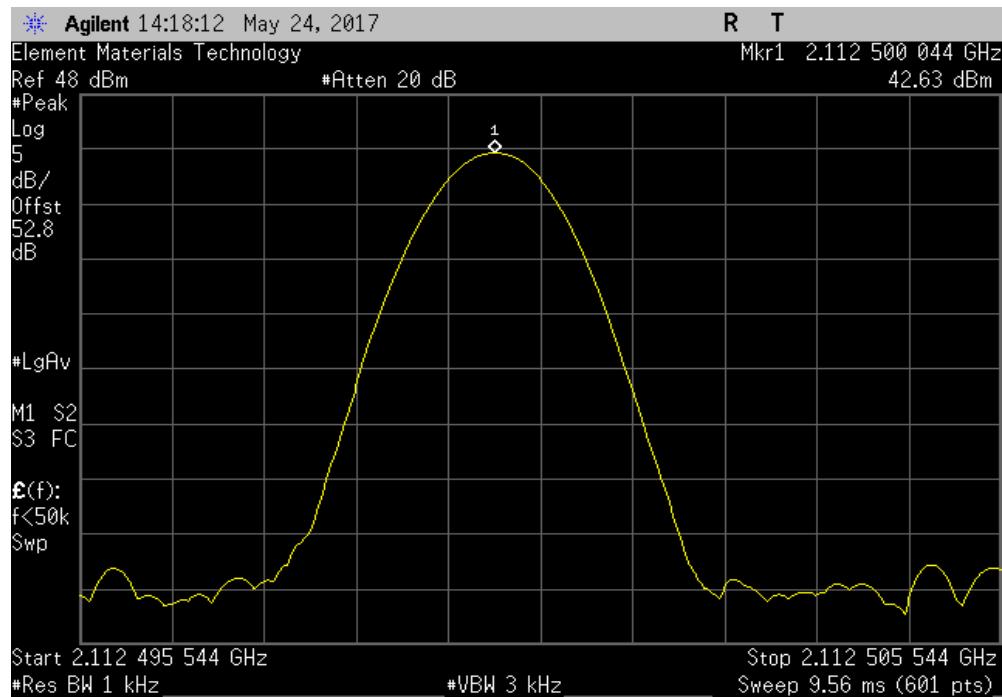

-10°C, 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000042	2115	0.020	1	Pass	

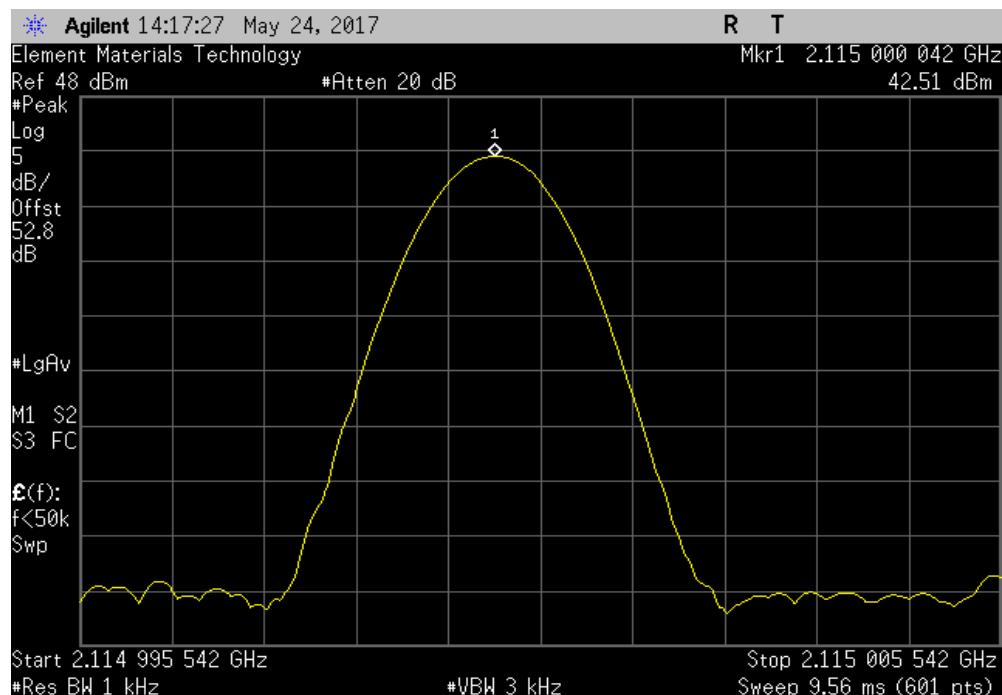


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

-10°C, 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.00001	2145	0.005	1	Pass	

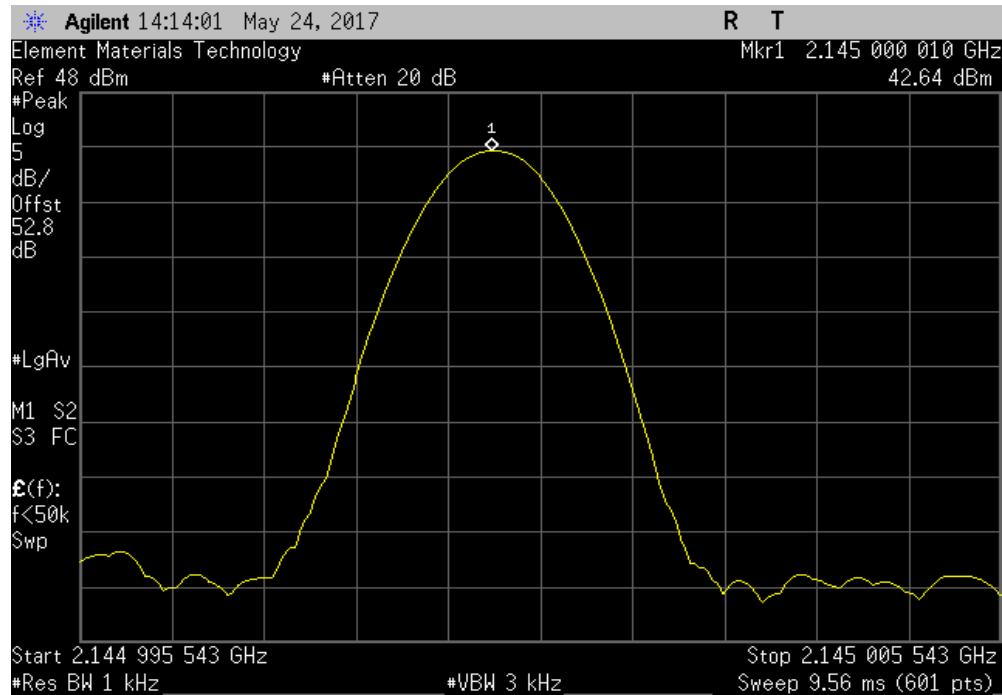

-10°C, 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000036	2175	0.017	1	Pass	

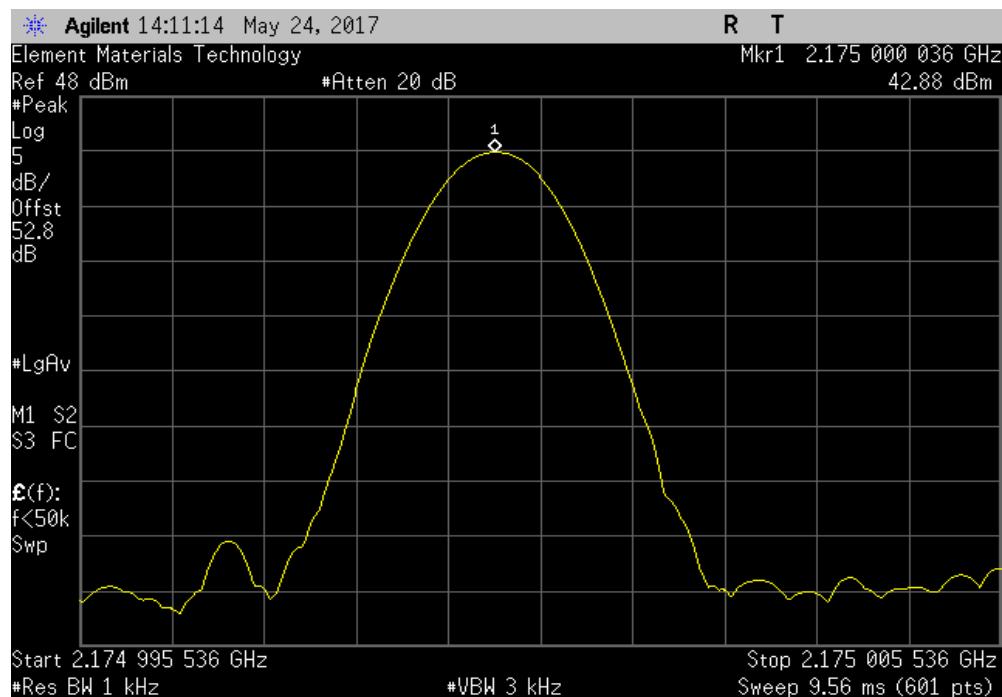


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

-10°C, 2177.5 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2177.500055	2177.5	0.025	1	Pass

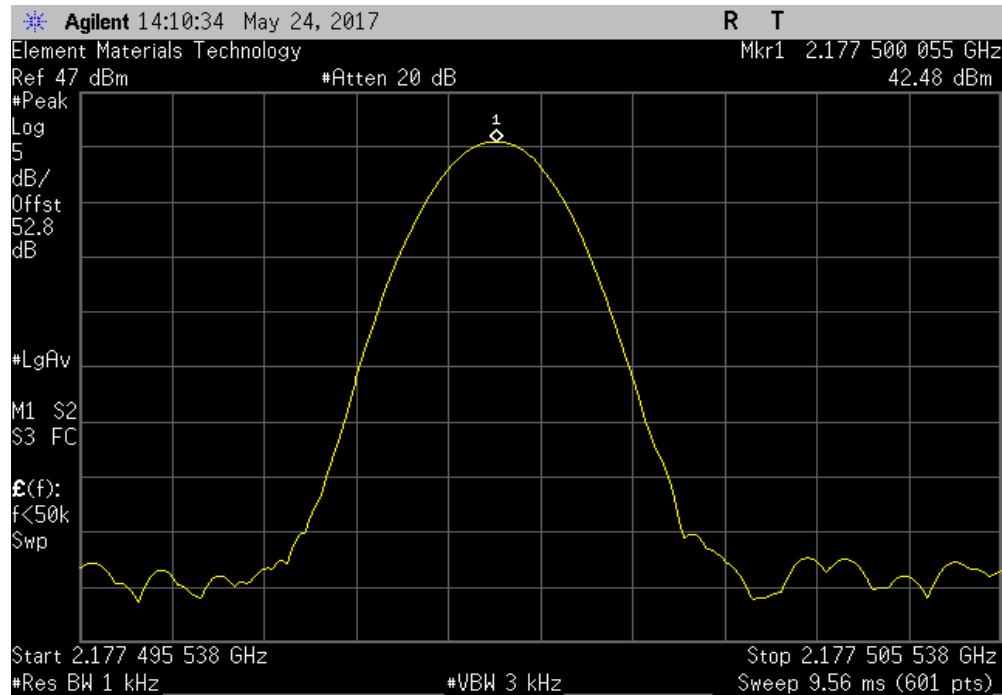

-20°C, 2112.5 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2112.500044	2112.5	0.021	1	Pass

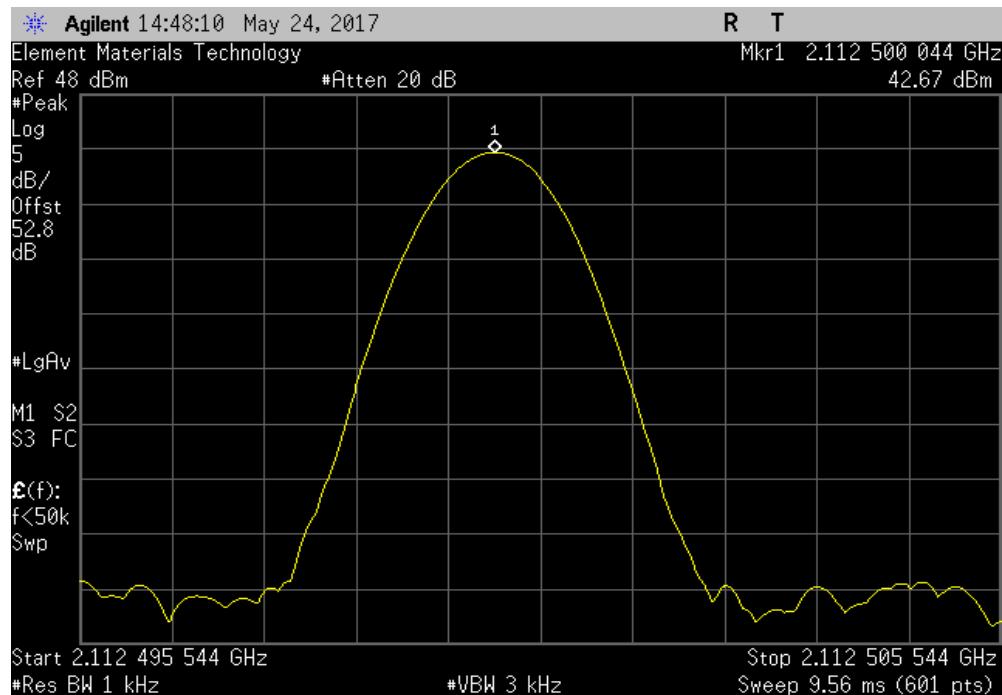


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

-20°C, 2115 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2115.000042	2115	0.020	1	Pass

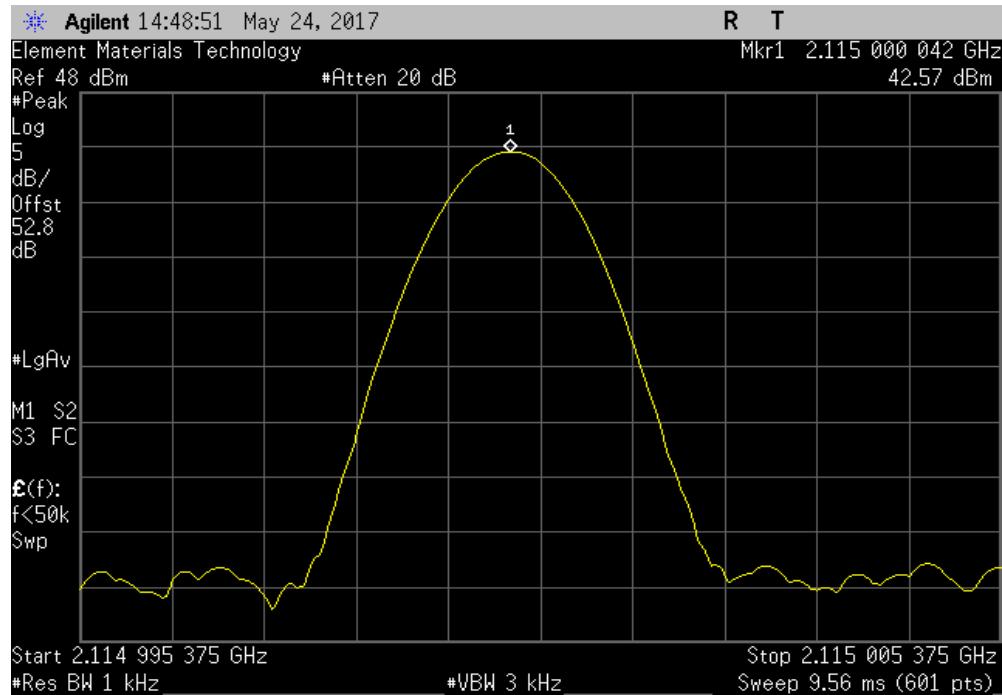

-20°C, 2145 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2145.000009	2145	0.004	1	Pass

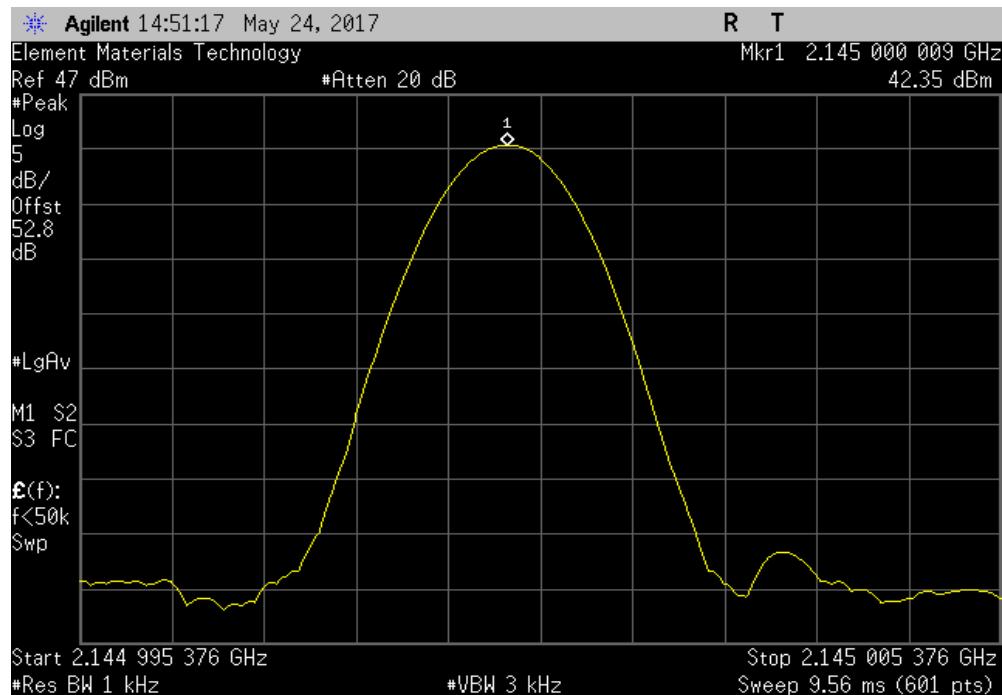


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

-20°C, 2175 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2175.000036	2175	0.017	1	Pass

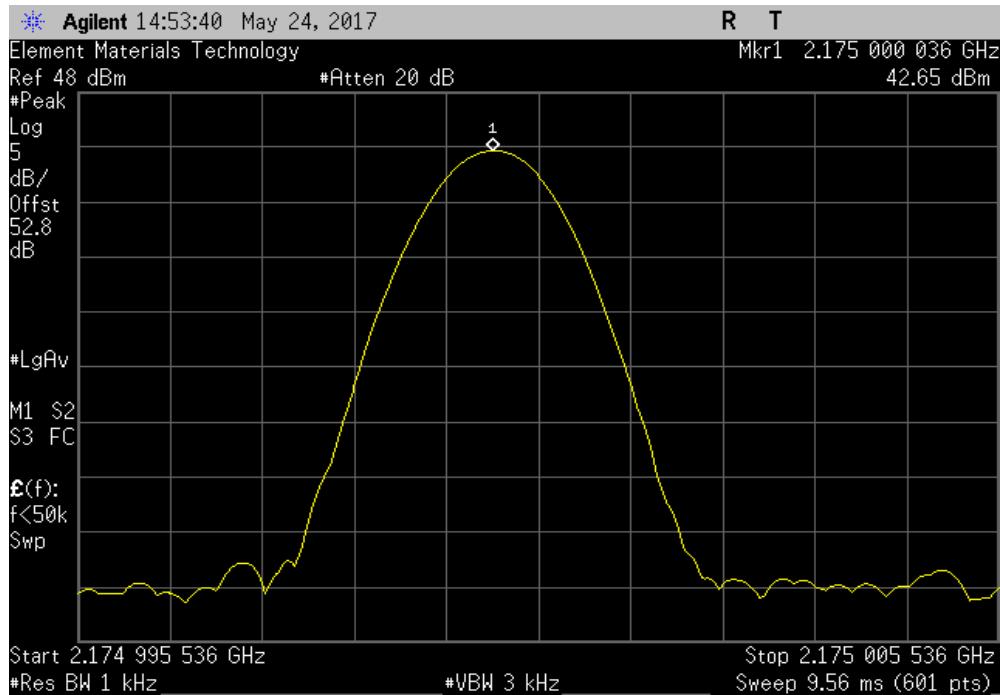

-20°C, 2177.5 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2177.500038	2177.5	0.017	1	Pass

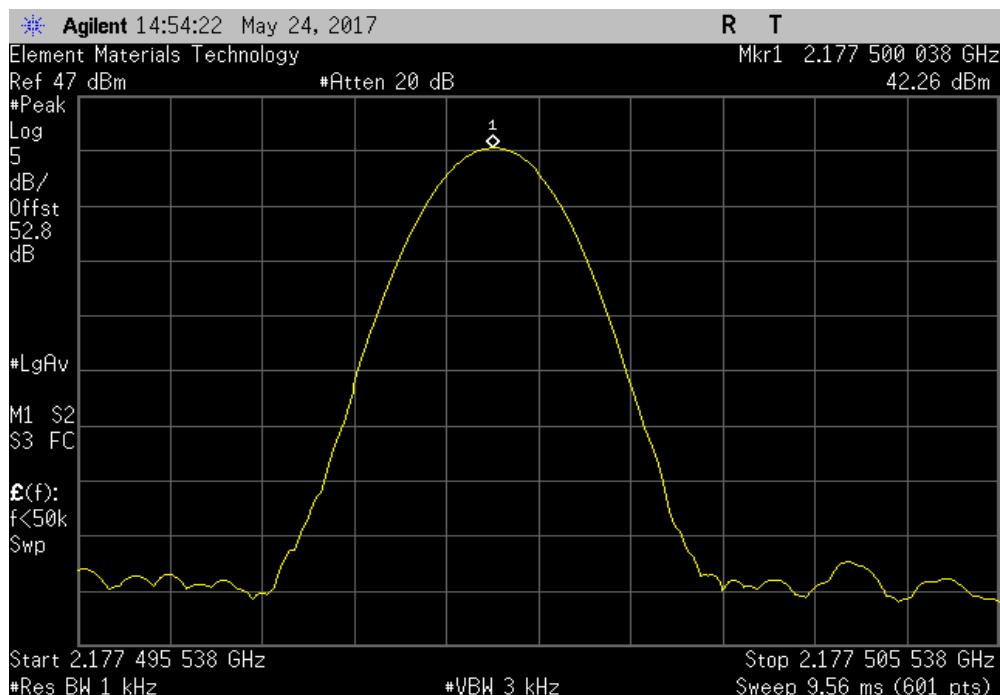


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

-30°C, 2112.5 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2112.500044	2112.5	0.021	1	Pass

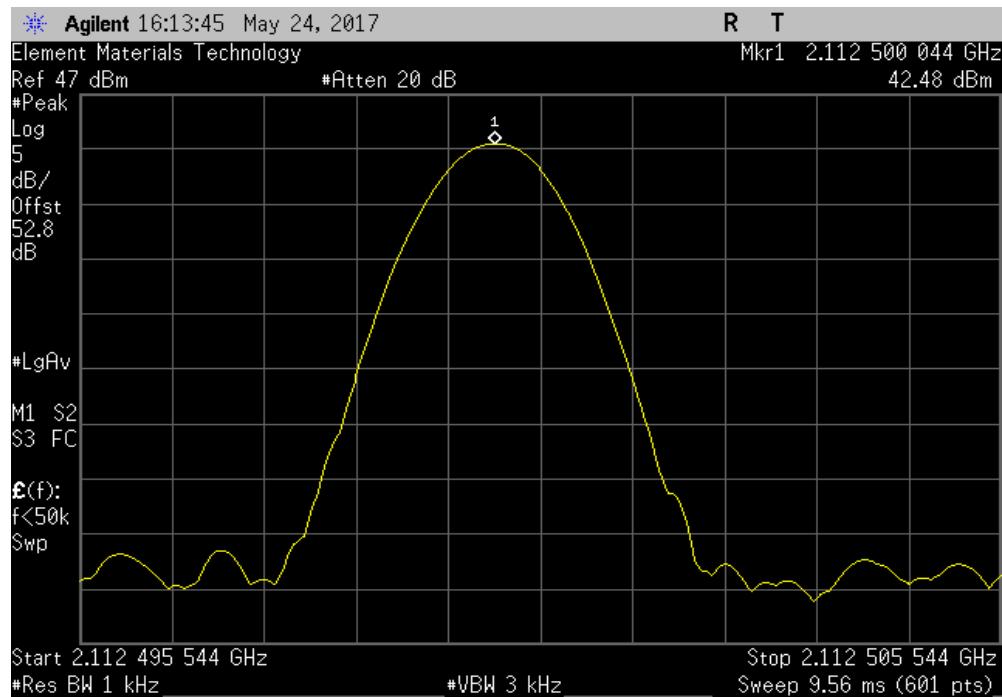

-30°C, 2115 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2115.000046	2115	0.022	1	Pass

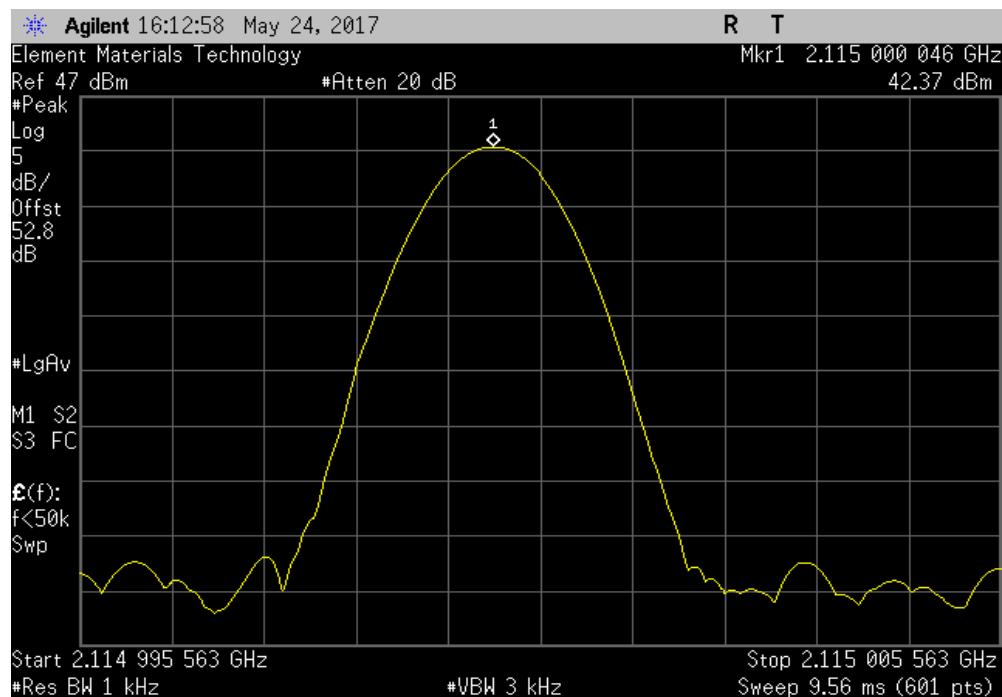


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

-30°C, 2145 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2145.000043	2145	0.020	1	Pass

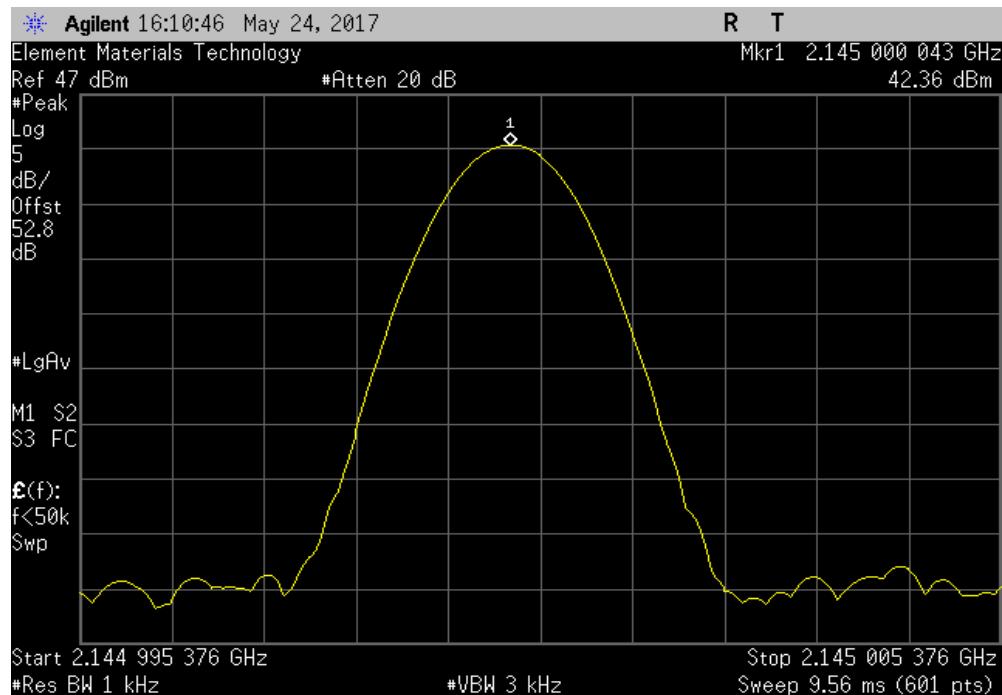

-30°C, 2175 MHz					
	Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
	2175.000036	2175	0.017	1	Pass

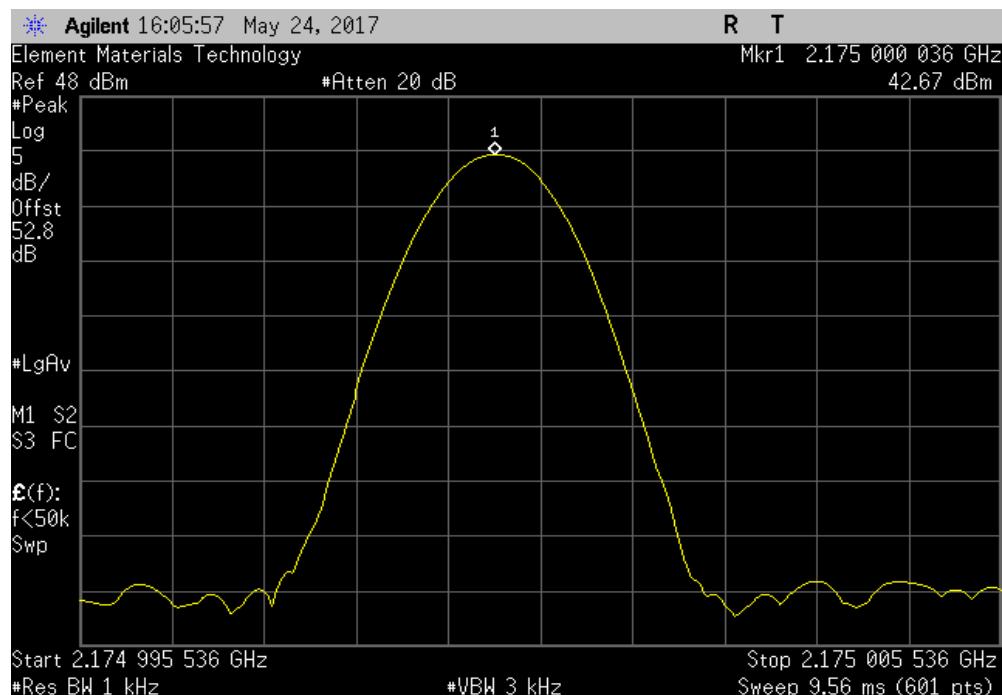


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

-30°C, 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500038	2177.5	0.017	1	Pass	

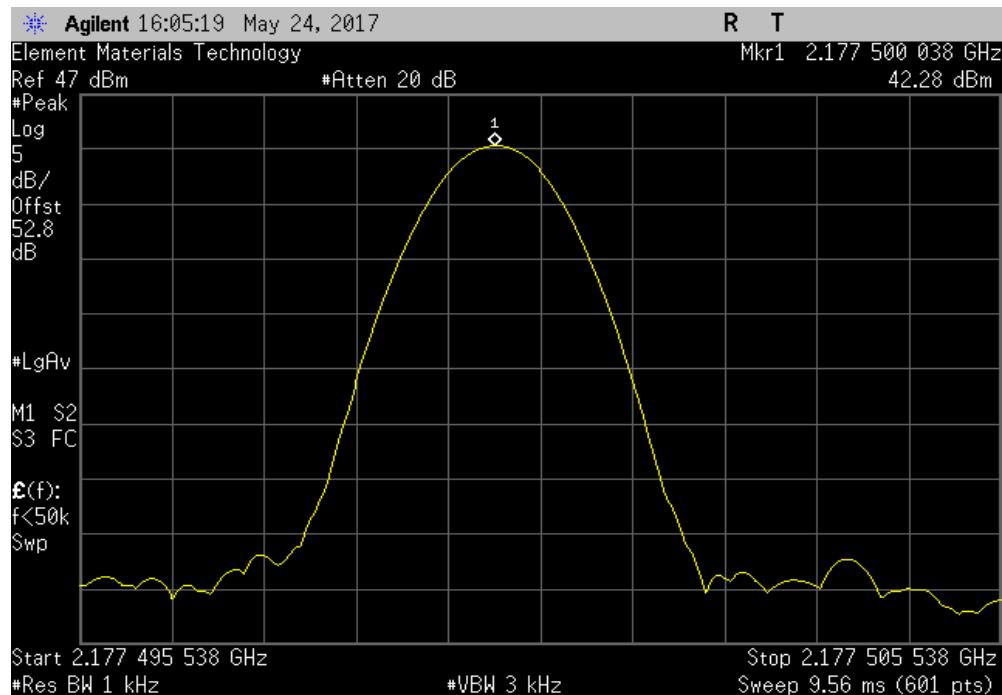

Normal Voltage, 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500044	2112.5	0.021	1	Pass	

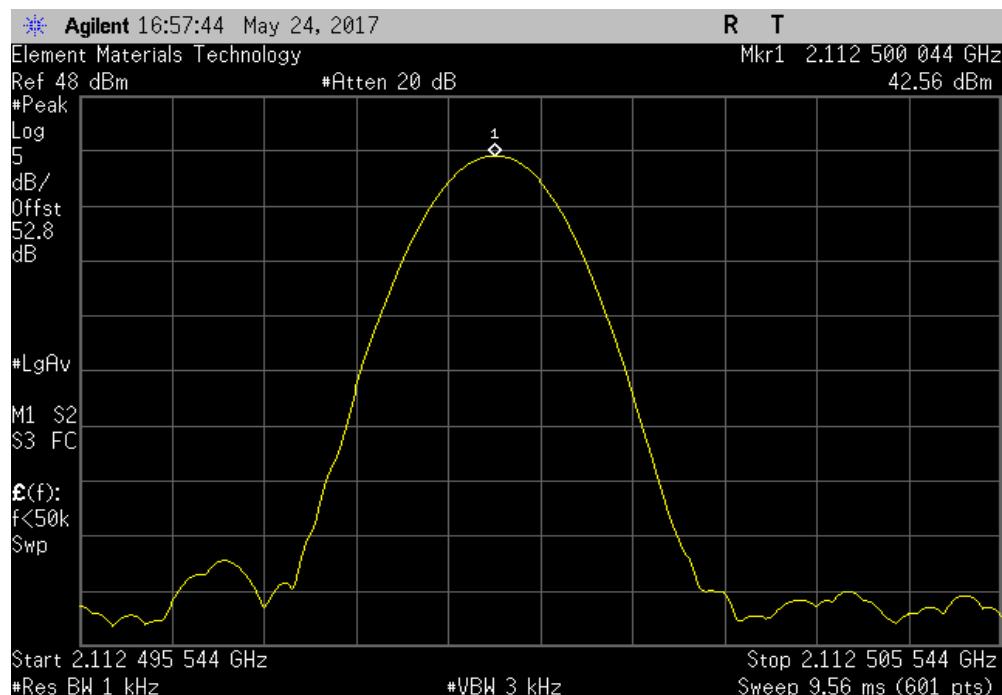


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

Normal Voltage, 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000025	2115	0.012	1	Pass	

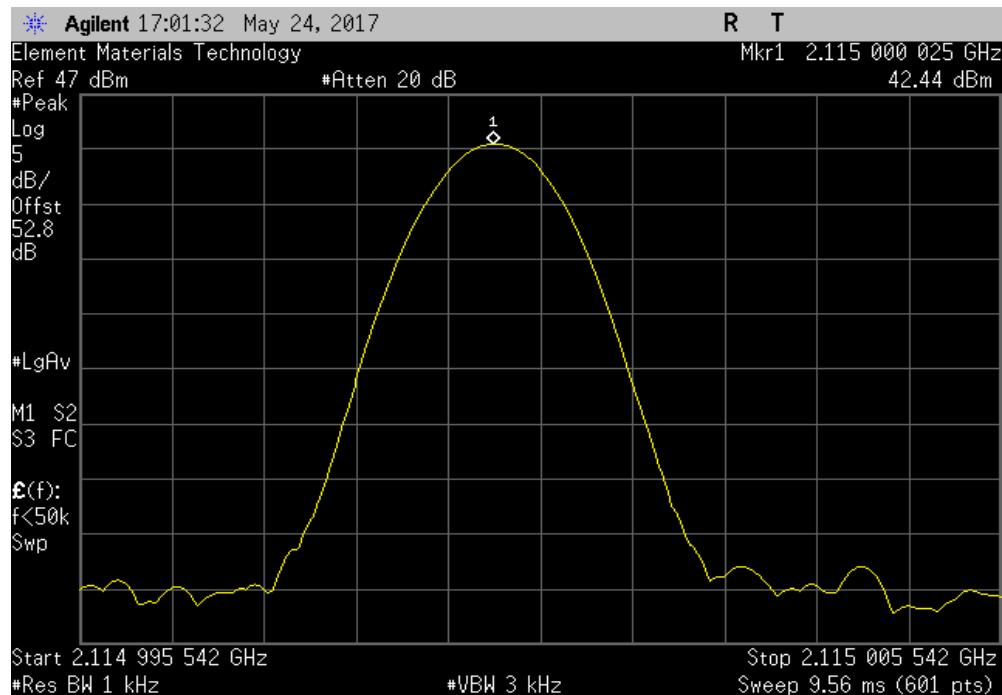

Normal Voltage, 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.000043	2145	0.020	1	Pass	

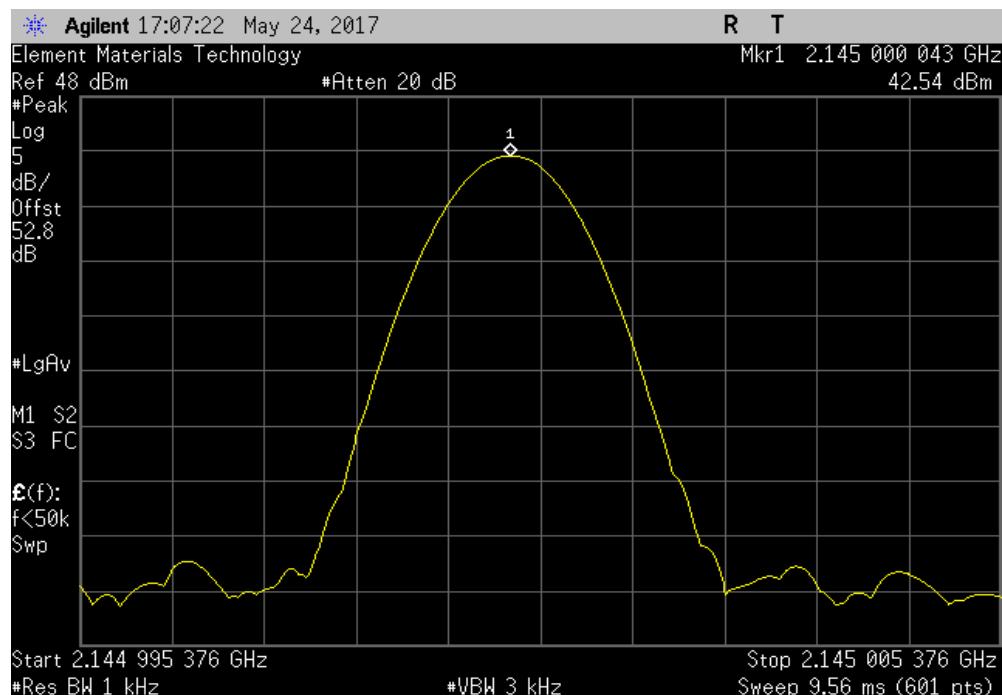


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

Normal Voltage, 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000053	2175	0.024	1	Pass	

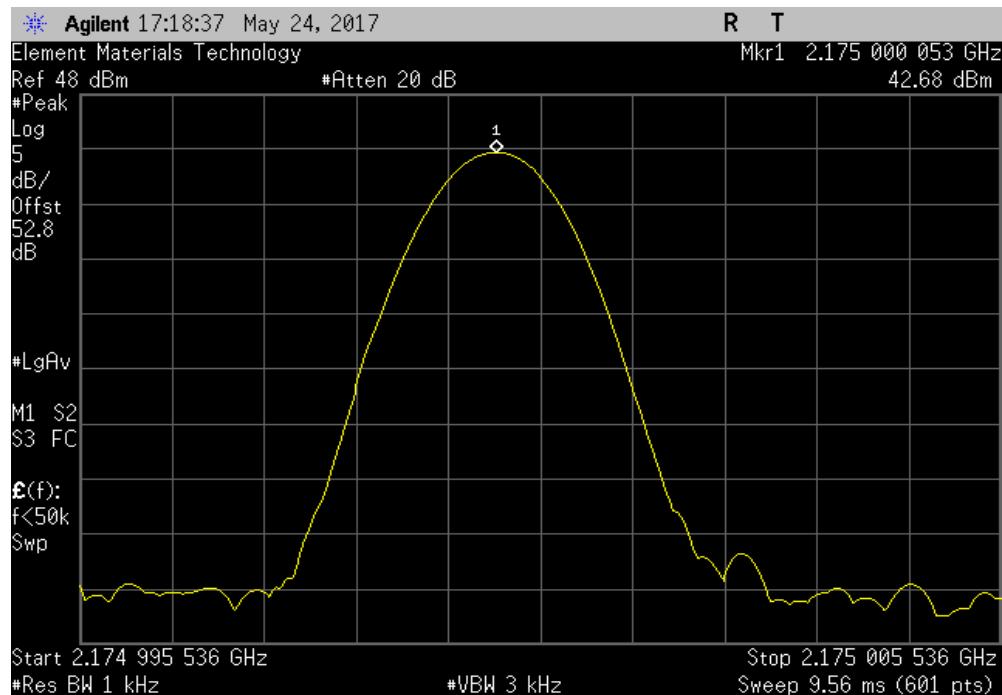

Normal Voltage, 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500055	2177.5	0.025	1	Pass	

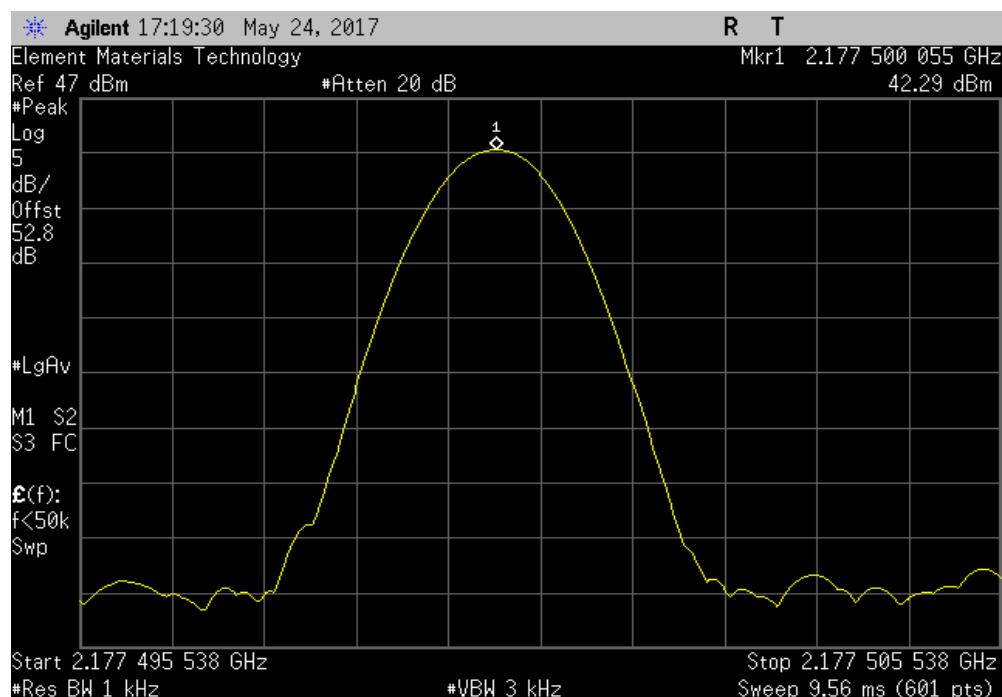


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

Extreme Voltage (102VAC/60Hz), 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500044	2112.5	0.021	1	Pass	

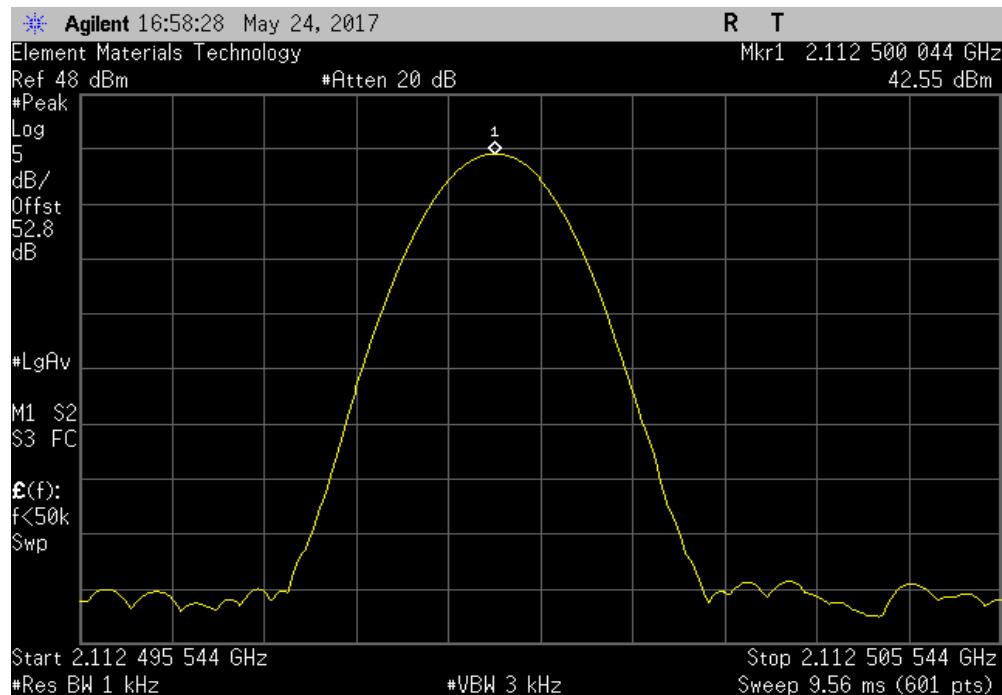

Extreme Voltage (102VAC/60Hz), 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000042	2115	0.020	1	Pass	

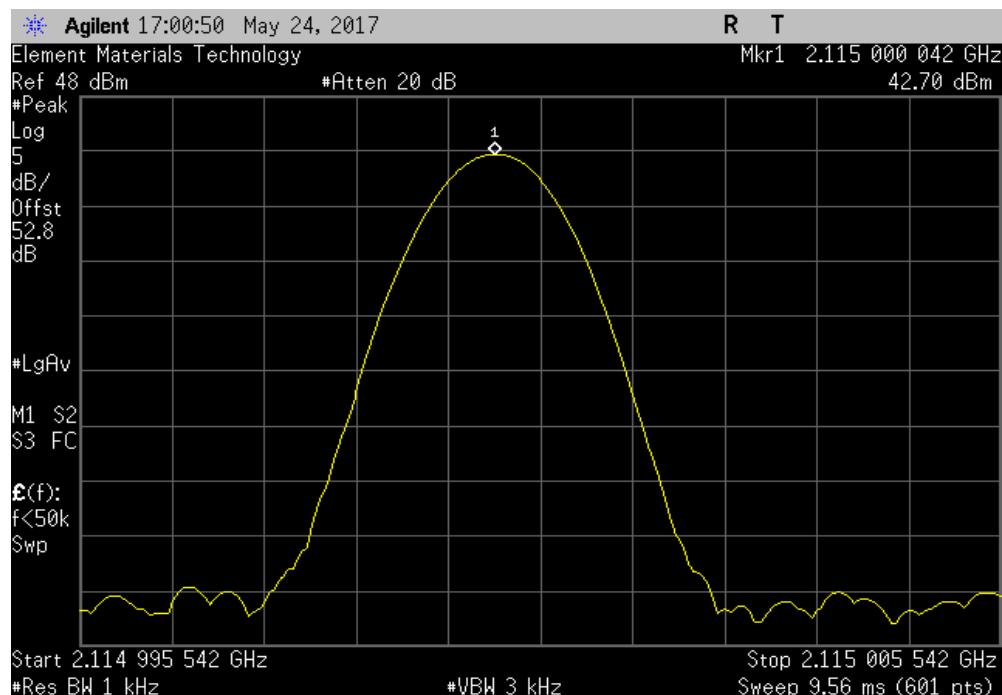


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

Extreme Voltage (102VAC/60Hz), 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.000043	2145	0.020	1	Pass	

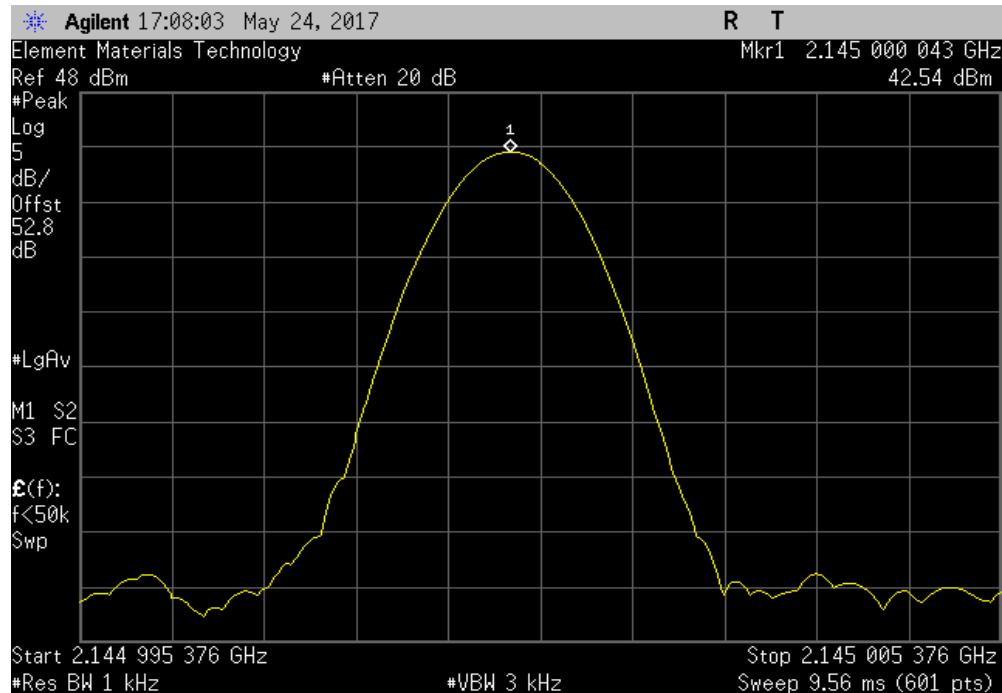

Extreme Voltage (102VAC/60Hz), 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000036	2175	0.017	1	Pass	

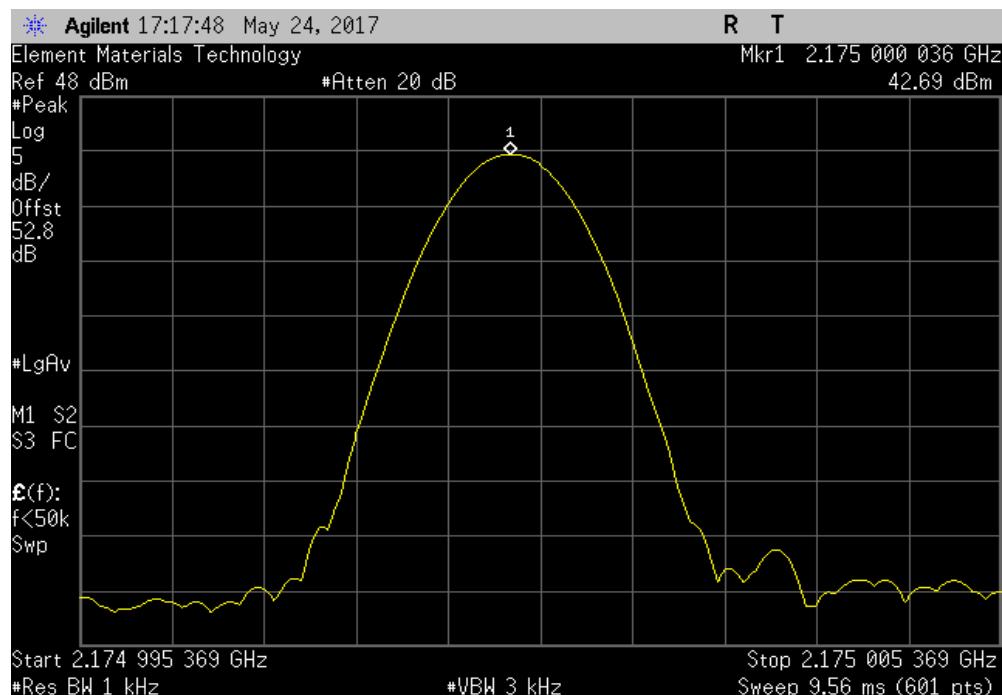


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

Extreme Voltage (102VAC/60Hz), 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500038	2177.5	0.017	1	Pass	

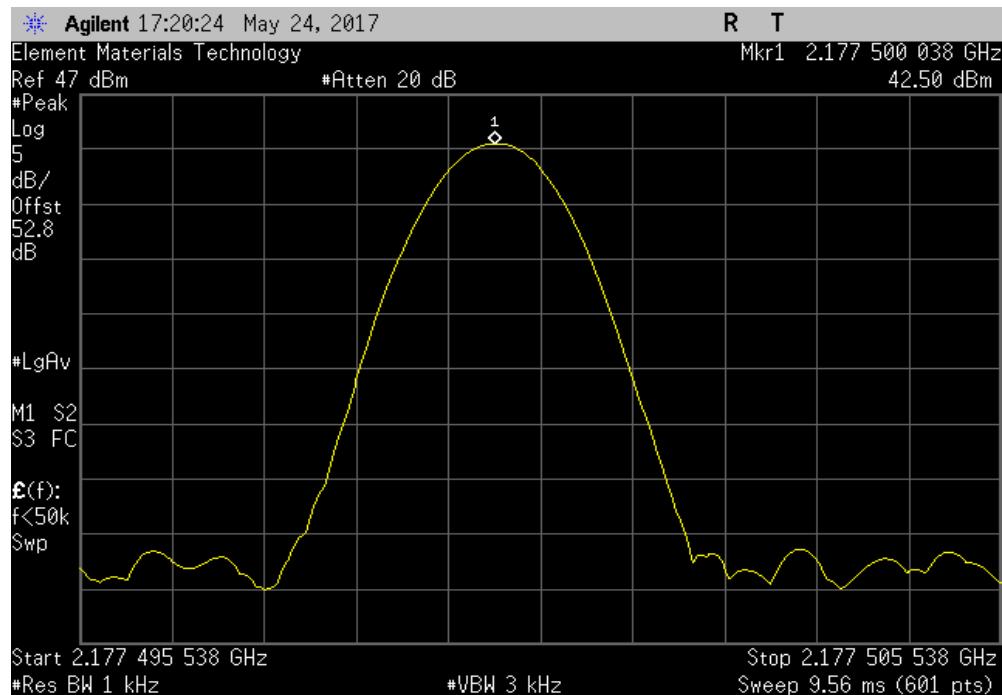

Extreme Voltage (138VAC/60Hz), 2112.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2112.500044	2112.5	0.021	1	Pass	

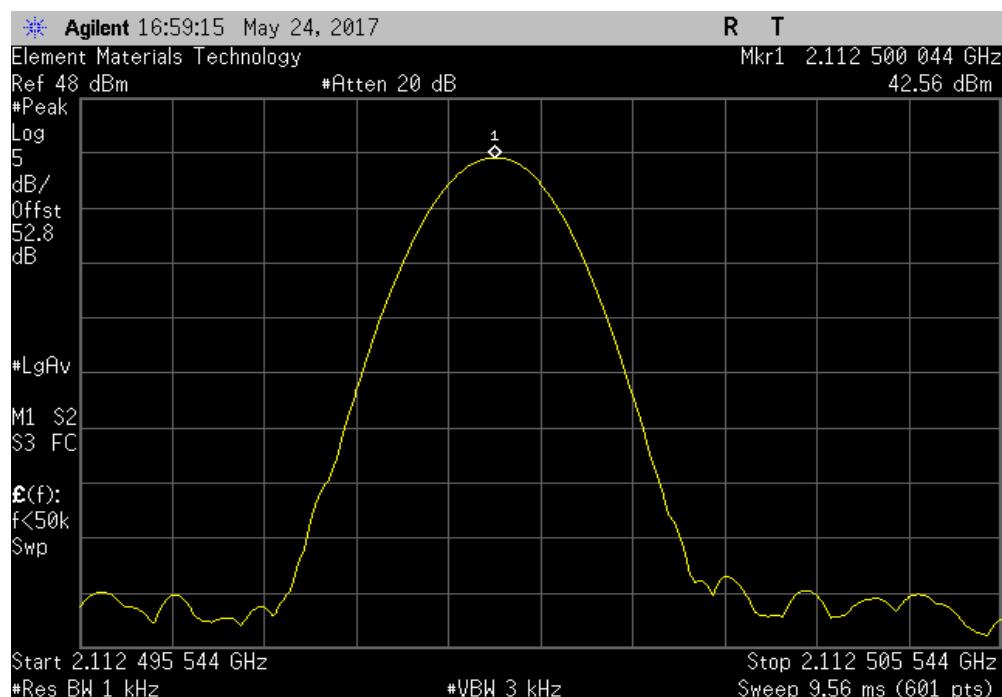


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

Extreme Voltage (138VAC/60Hz), 2115 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2115.000042	2115	0.020	1	Pass	

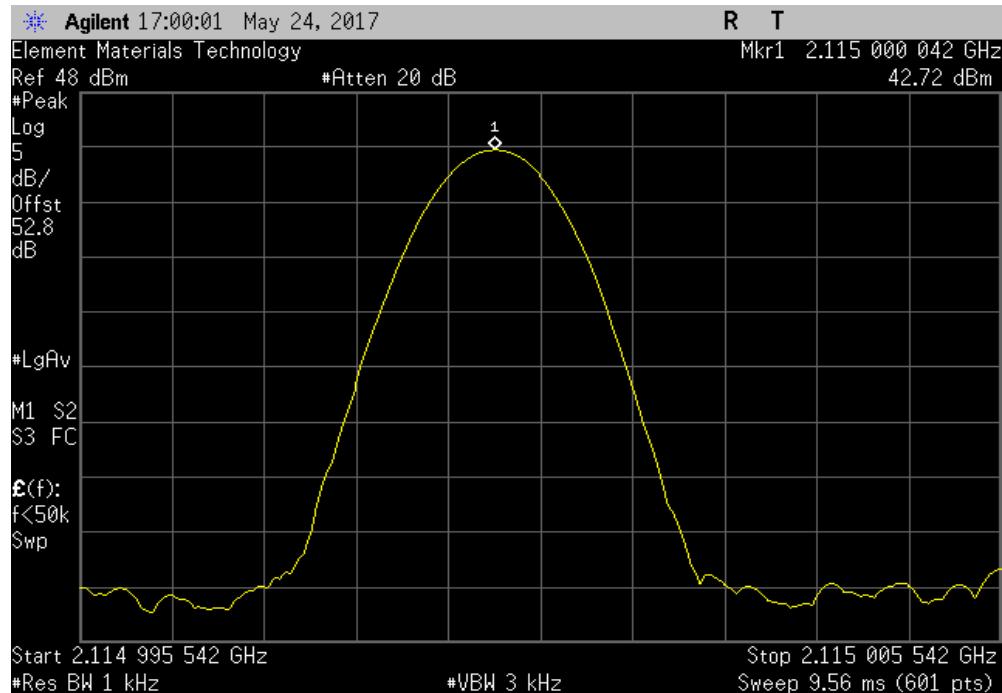

Extreme Voltage (138VAC/60Hz), 2145 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2145.000043	2145	0.020	1	Pass	

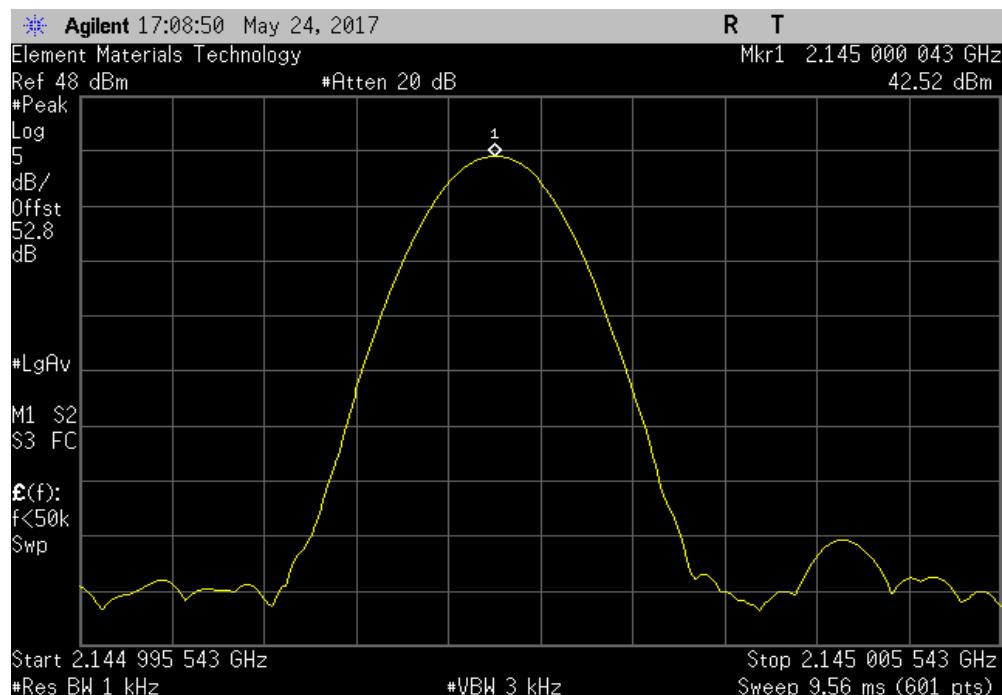


FREQUENCY STABILITY 2100




TbTx 2017.01.27 XMII 2017.02.08

Extreme Voltage (138VAC/60Hz), 2175 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2175.000036	2175	0.017	1	Pass	

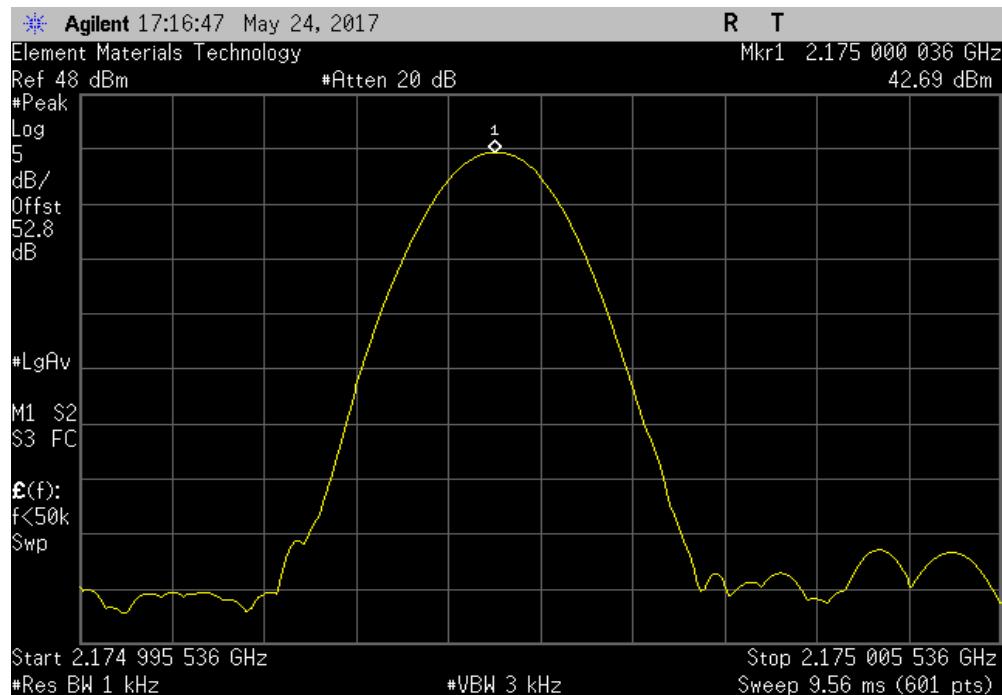

Extreme Voltage (138VAC/60Hz), 2177.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2177.500038	2177.5	0.017	1	Pass	

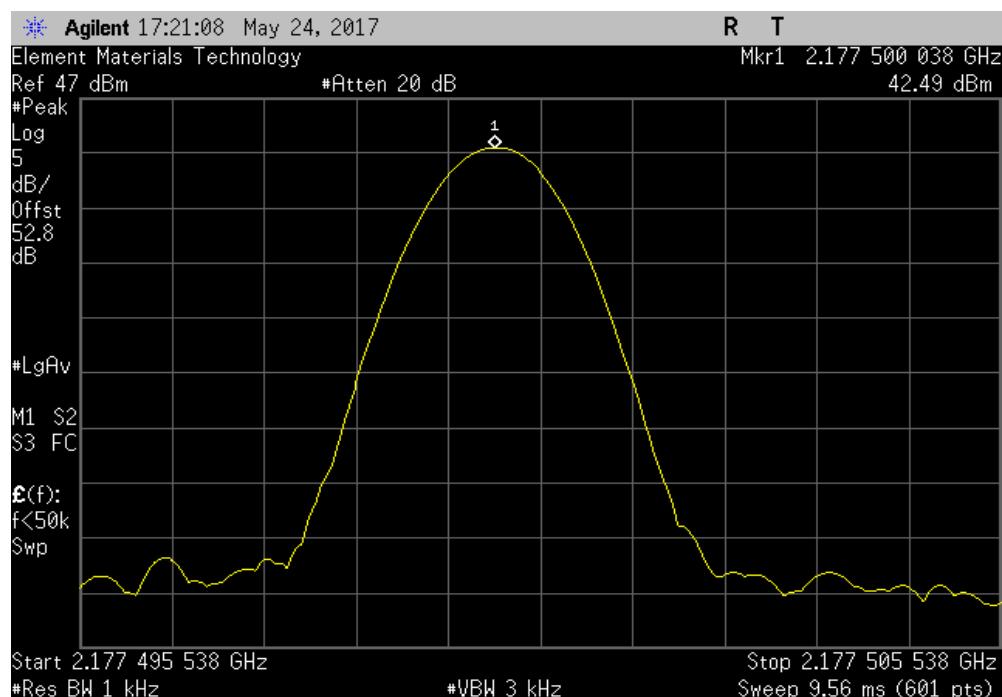

EMISSIONS BANDWIDTH 2100



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The spectrum analyzer settings were as follows:

- RBW = Approx. 1% of the emission bandwidth (B). This was an iterative process to determine the RBW based on the emissions bandwidth (B).
- VBW = > RBW
- A peak detector was used
- Trace max hold.

The spectrum analyzer occupied bandwidth measurement function was then used to measure the 26 dB emission bandwidth.

There is no required limit to be met in the rule part for this test. The purpose of the test is to both report the results and to utilize the emission bandwidth for setting the channel power integration bandwidth during conducted output power testing.

EMISSIONS BANDWIDTH 2100



Tbitx 2017.01.27

XMI 2017.02.08


EUT:	Prism AWS: Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order:	TECO0042	
Serial Number:	459644002		Date:	05/24/17	
Customer:	CommScope		Temperature:	21.6 °C	
Attendees:	Josh Wittman		Humidity:	46.4% RH	
Project:	None		Barometric Pres.:	1008 mbar	
Tested by:	Dustin Sparks	Power:	110VAC/60Hz	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 27:2017			ANSI/TIA/EIA-603-D-2010		
COMMENTS					
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm) per port. Both antenna ports were terminated but only one port is active					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	2	Signature			
			Value	Limit	Result
Low Channel (2112.5 MHz) WCDMA			4.675 MHz	N/A	N/A
Mid Channel (2145 MHz) WCDMA			4.659 MHz	N/A	N/A
Mid Channel (2145 MHz) WCDMA, Input Signal			4.23 MHz	N/A	N/A
High Channel (2177.5 MHz) WCDMA			4.667 MHz	N/A	N/A
Low Channel (2115 MHz) LTE 10 MHz			9.46 MHz	N/A	N/A
Mid Channel (2145 MHz) LTE 10 MHz			9.484 MHz	N/A	N/A
Mid Channel (2145 MHz) LTE 10 MHz, Input Signal			8.99 MHz	N/A	N/A
High Channel (2175 MHz) LTE 10 MHz, Input Signal			9.466 MHz	N/A	N/A

EMISSIONS BANDWIDTH 2100




TbTx 2017.01.27 XMII 2017.02.08

Low Channel (2112.5 MHz) WCDMA		
	Value	Limit
	4.675 MHz	N/A

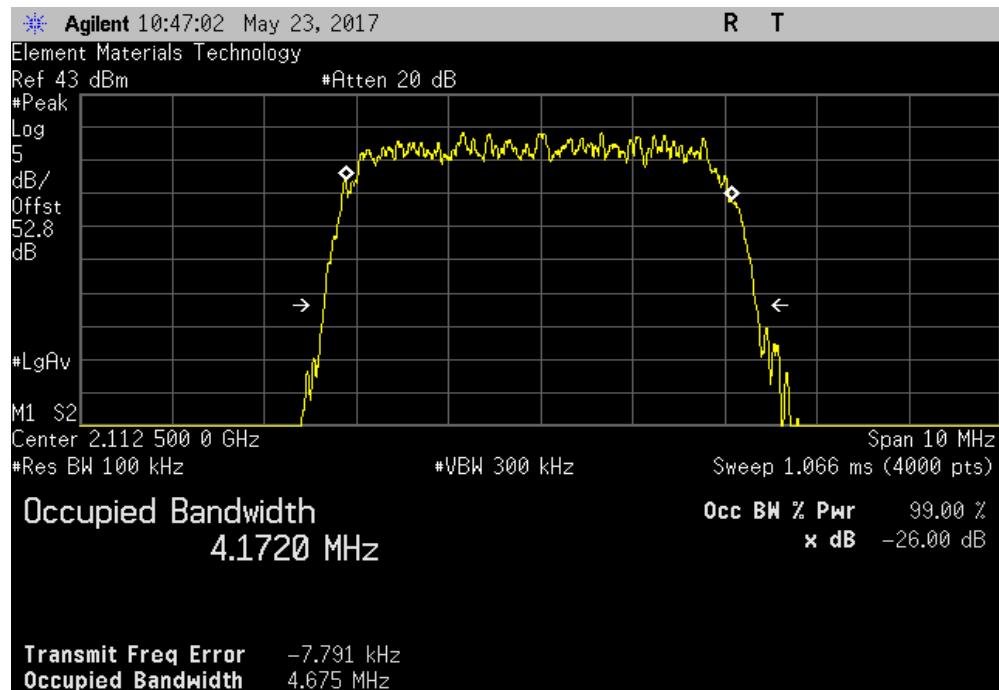

Mid Channel (2145 MHz) WCDMA		
	Value	Limit
	4.659 MHz	N/A

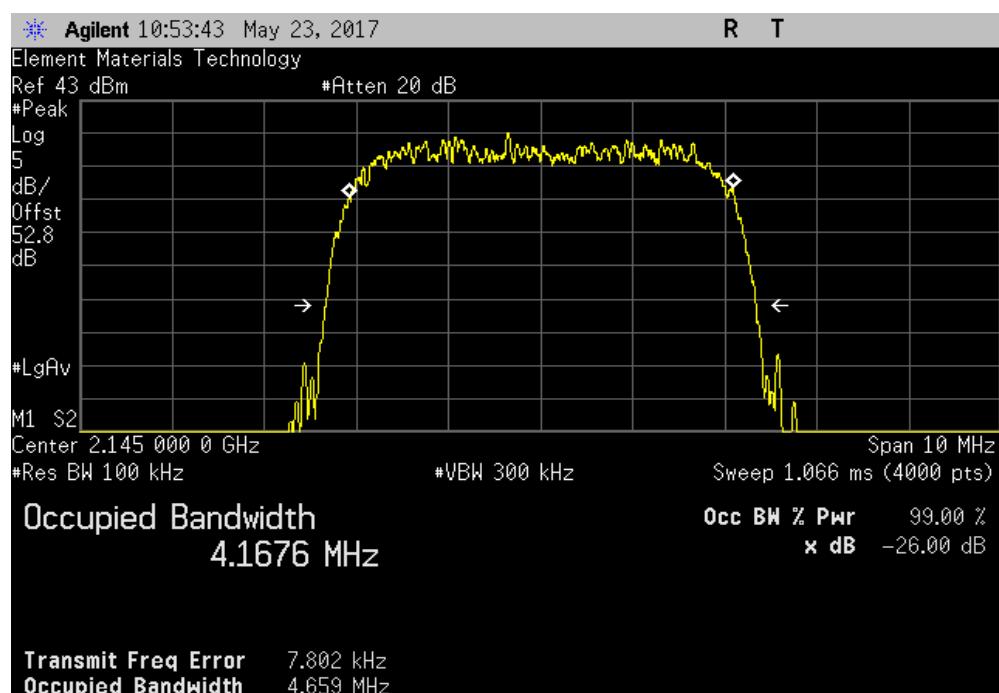


EMISSIONS BANDWIDTH 2100




TbTx 2017.01.27 XMII 2017.02.08

Mid Channel (2145 MHz) WCDMA, Input Signal			
	Value	Limit	Result
	4.23 MHz	N/A	N/A

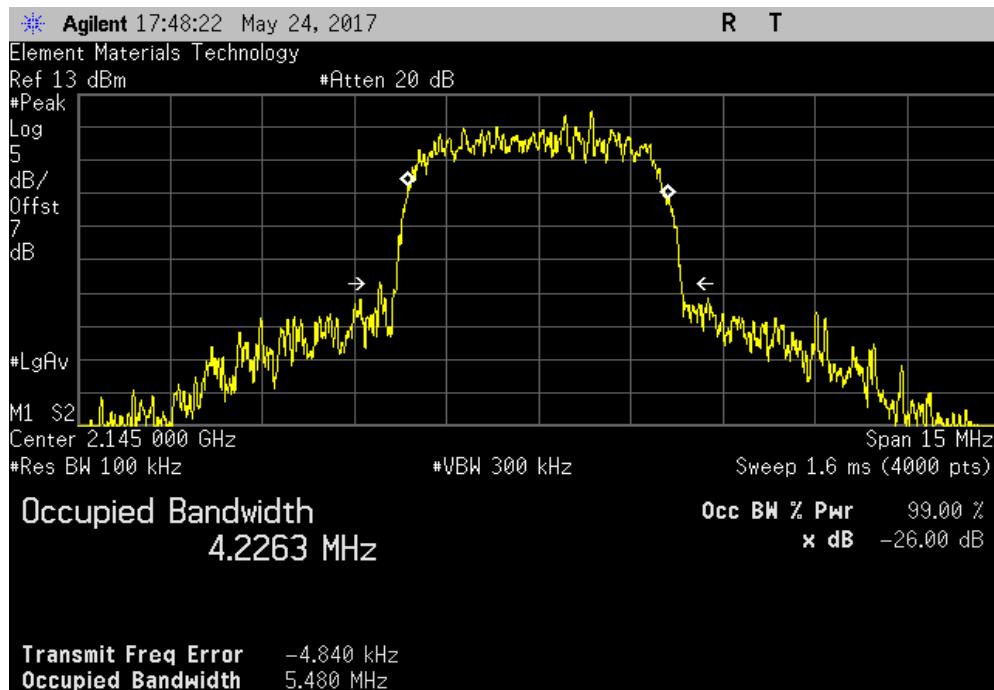

High Channel (2177.5 MHz) WCDMA			
	Value	Limit	Result
	4.667 MHz	N/A	N/A

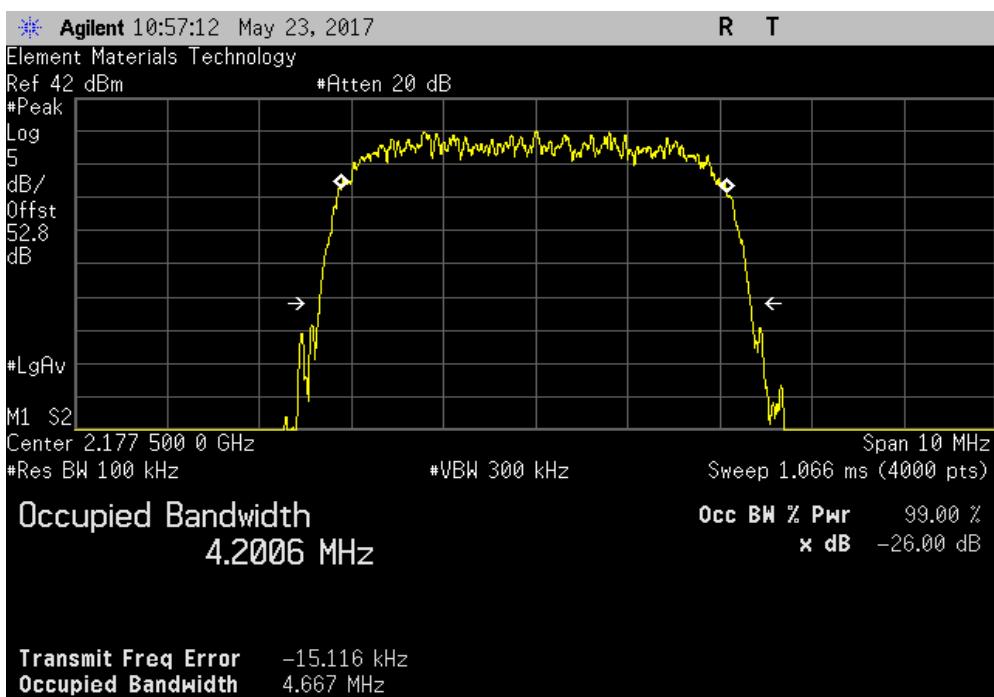


EMISSIONS BANDWIDTH 2100




TbTx 2017.01.27 XMII 2017.02.08

Low Channel (2115 MHz) LTE 10 MHz			
	Value	Limit	Result
	9.46 MHz	N/A	N/A

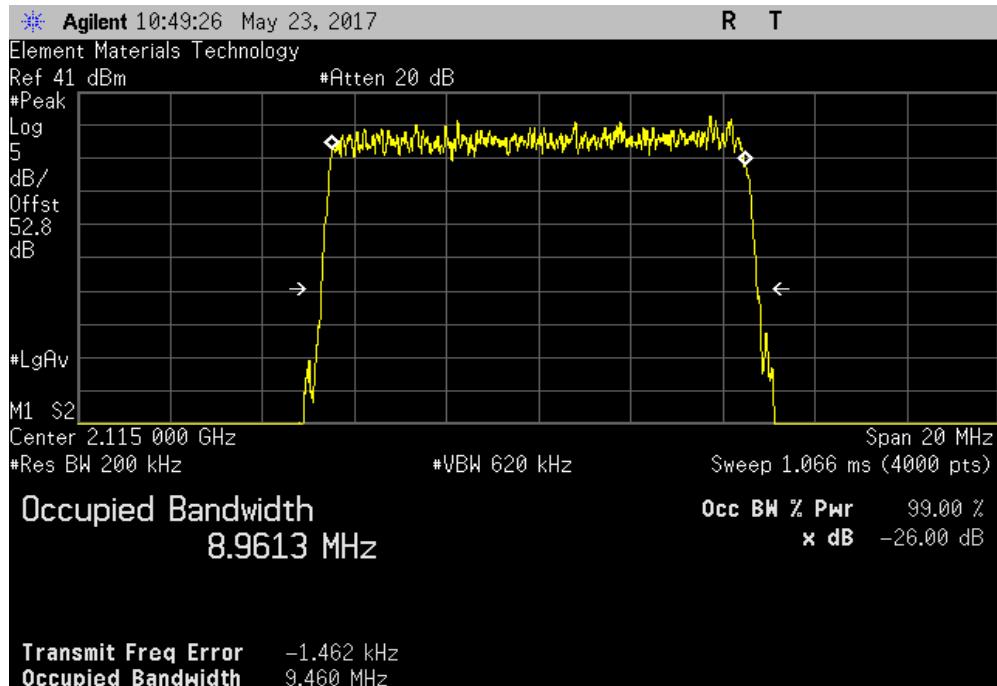

Mid Channel (2145 MHz) LTE 10 MHz			
	Value	Limit	Result
	9.484 MHz	N/A	N/A

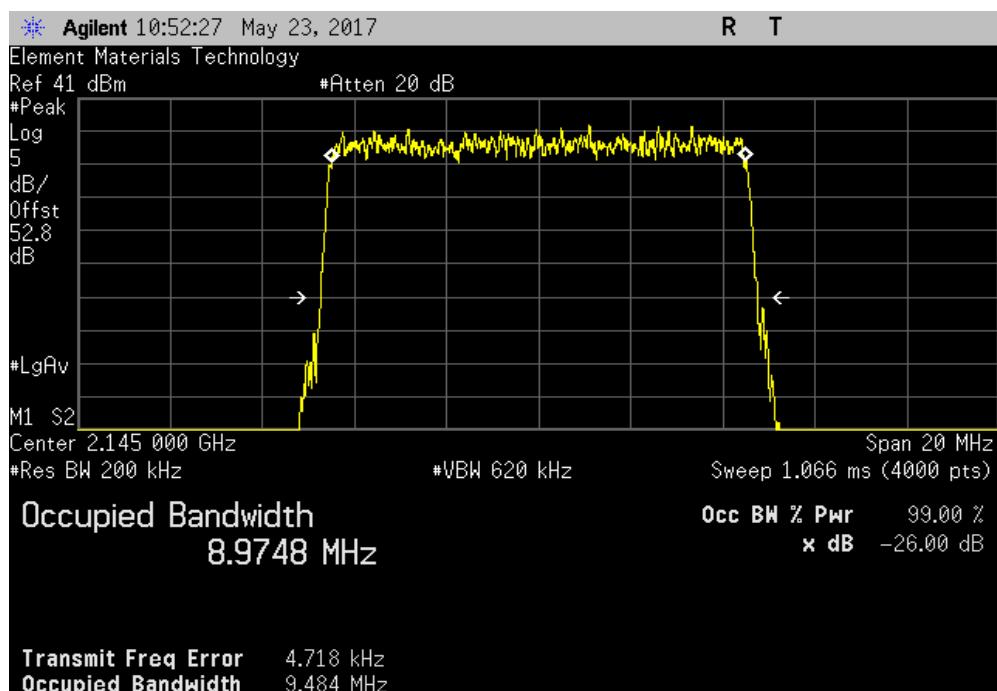


EMISSIONS BANDWIDTH 2100



TbTx 2017.01.27 XMII 2017.02.08


Mid Channel (2145 MHz) LTE 10 MHz, Input Signal

	Value	Limit	Result
	8.99 MHz	N/A	N/A

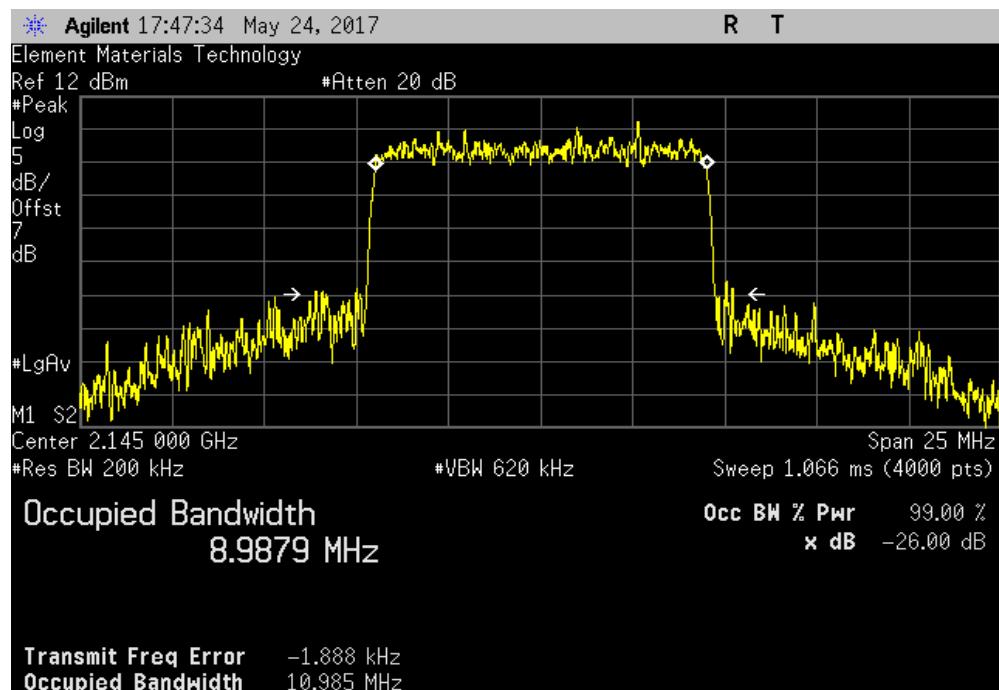

High Channel (2175 MHz) LTE 10 MHz, Input Signal

	Value	Limit	Result
	9.466 MHz	N/A	N/A

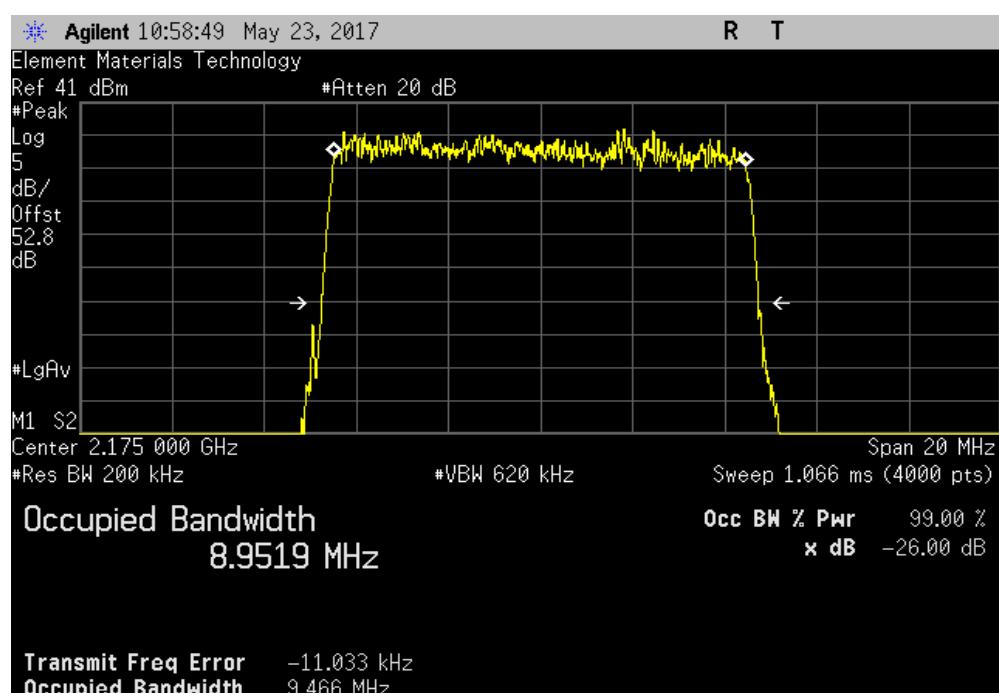

PEAK TO AVERAGE RATIO 2100



XMit 2017.02.08

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Aeroflex	48-30-34	RCU	9/15/2016	9/15/2017
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	10/17/2017
Cable	ESM Cable Corp	TTBJ141 KMKM-72	MNP	NCR	NCR
Attenuator	S.M. Electronics	SA26B-20	RFW	2/14/2017	2/14/2018
Block - DC	Fairview Microwave	SD3379	AMI	9/15/2016	9/15/2017
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	3/16/2017	3/16/2018

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Ratio was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed 13 dB.

The spectrum analyzer settings were as follows:

Span set to encompass the entire emission bandwidth, centered on the transmit channel.

The largest difference between the following two screen captures/traces was calculated:

➤1st Screen Capture/Trace: Peak detector and trace max-hold.

➤2nd Screen Capture/Trace: The same procedure and settings as was used for conducted Output Power.

PEAK TO AVERAGE RATIO 2100



TbTx 2017.01.27

XMI 2017.02.08


EUT:	Prism 1900/2100AWS3 Dual HDM 20 Watt		Work Order:	TECO0042	
Serial Number:	459644002		Date:	05/24/17	
Customer:	CommScope		Temperature:	21.6 °C	
Attendees:	Josh Wittman		Humidity:	47.3% RH	
Project:	None		Barometric Pres.:	1008 mbar	
Tested by:	Dustin Sparks	Power:	110VAC/60Hz	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 27:2017			ANSI/TIA/EIA-603-D-2010		
COMMENTS					
Antenna gain is assumed to be 0 - per customer, the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm). Both antenna ports were terminated but only one port is active					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	2	Signature	<i>Dustin Sparks</i>	Value (dB)	Limit < (dB)
WCDMA	Mid Channel, 2145 MHz			8.869	13
LTE 10MHz	Mid Channel, 2145 MHz			11.986	13
					Pass
					Pass

PEAK TO AVERAGE RATIO 2100



TbTx 2017.01.27 XMII 2017.02.08

WCDMA, Mid Channel, 2145 MHz				Value (dB)	Limit < (dB)	Results
				8.869	13	Pass

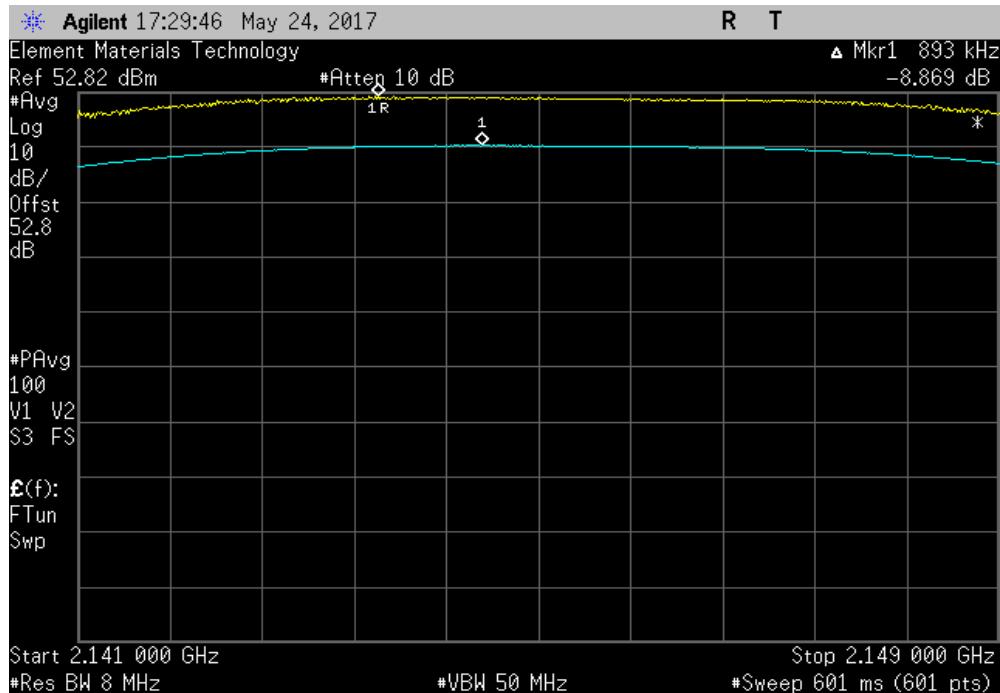

LTE 10MHz, Mid Channel, 2145 MHz				Value (dB)	Limit < (dB)	Results
				11.986	13	Pass

