




CommScope Connectivity LLC

Prism 2500TDD Low Band SISO HDM

FCC 27:2018

20W SISO Cellular Repeater

Report # TECO0047

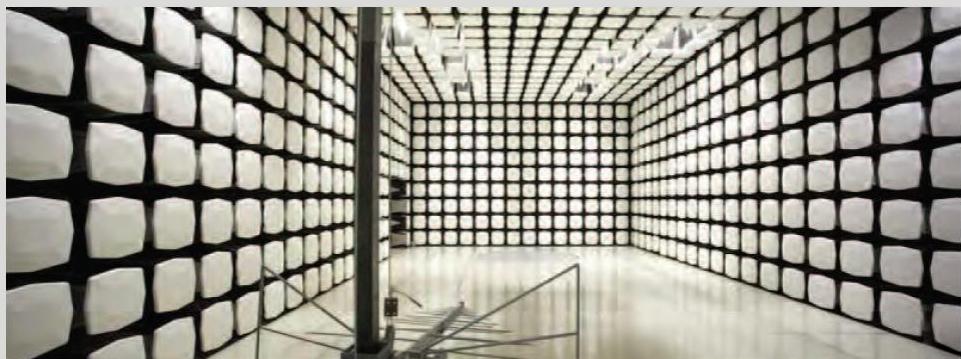

NVLAP Lab Code: 200881-0



This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America. This Report shall not be reproduced, except in full without written approval of the laboratory.

CERTIFICATE OF TEST



Last Date of Test: February 21, 2018
CommScope Connectivity LLC
Model: Prism 2500TDD Low Band SISO HDM

Radio Equipment Testing

Standards

Specification	Method
FCC 27:2015	ANSI/TIA/EIA-603-C-2004
FCC 27:2018	ANSI/TIA/EIA-603-C-2004

Results

Method Clause	Test Description	Applied	Results	Comments
2.2.1	*Equivalent Isotropic Radiated Power (EIRP)	Yes	Pass	
2.2.3	*Emissions Bandwidth	Yes	Pass	
2.2.13	*Spurious Conducted Emissions	Yes	Pass	
2.2.13	*Band Edge Compliance	Yes	Pass	
2.2.13	*Intermodulation	Yes	Pass	
2.2.2	*Frequency Stability	Yes	Pass	
2.2.12	Spurious Radiated Emissions	Yes	Pass	

*Data taken from previous testing. After the test dates, Northwest EMC, Inc. was purchased by Element Materials Technology on July 1, 2016.

Deviations From Test Standards

None

Approved By:

Matt Nuernberg, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information.

REVISION HISTORY



Revision Number	Description	Date	Page Number
00	None		

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission – Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC – Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit:

<http://portlandcustomer.element.com/ts/scope/scope.htm>

<http://gsi.nist.gov/global/docs/cabs/designations.html>


FACILITIES



2017.9.15



California	Minnesota	New York	Oregon	Texas	Washington
Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	Labs MN01-10 9349 W Broadway Ave. Brooklyn Park, MN 55445 (612)-638-5136	Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 554-8214	Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600
NVLAP					
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code: 201049-0	NVLAP Lab Code: 200629-0
Innovation, Science and Economic Development Canada					
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1
BSMI					
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R
VCCI					
A-0029	A-0109	N/A	A-0108	A-0201	A-0110
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA					
US0158	US0175	N/A	US0017	US0191	US0157

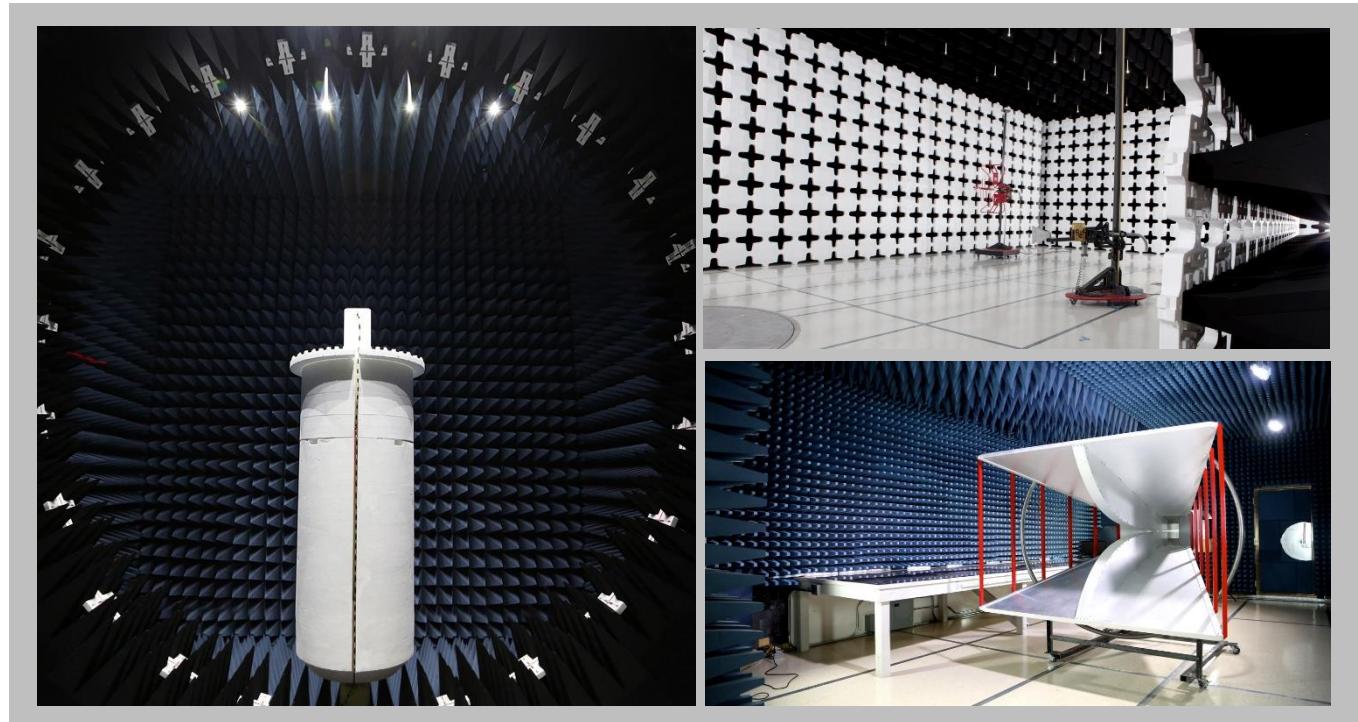

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.


A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.

The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.


Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.2 dB	-5.2 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB

Test Setup Block Diagrams


Antenna Port Conducted Measurements

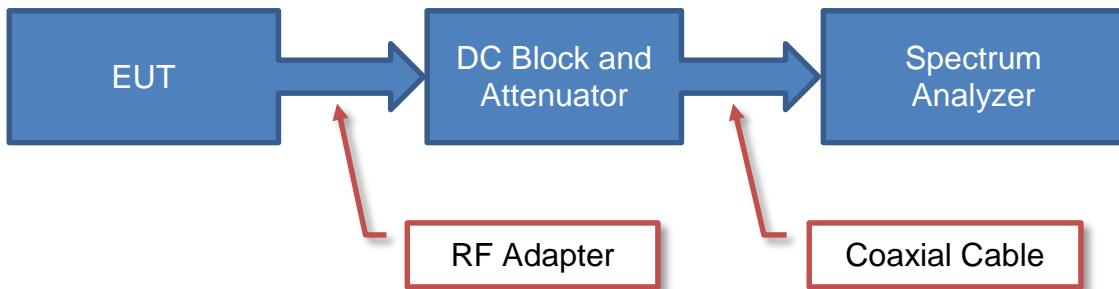

Near Field Test Fixture Measurements

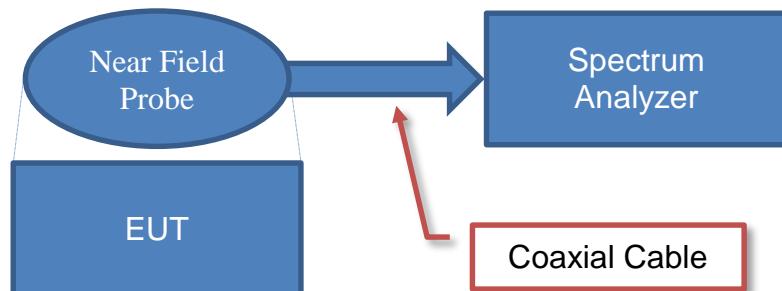

Spurious Radiated Emissions

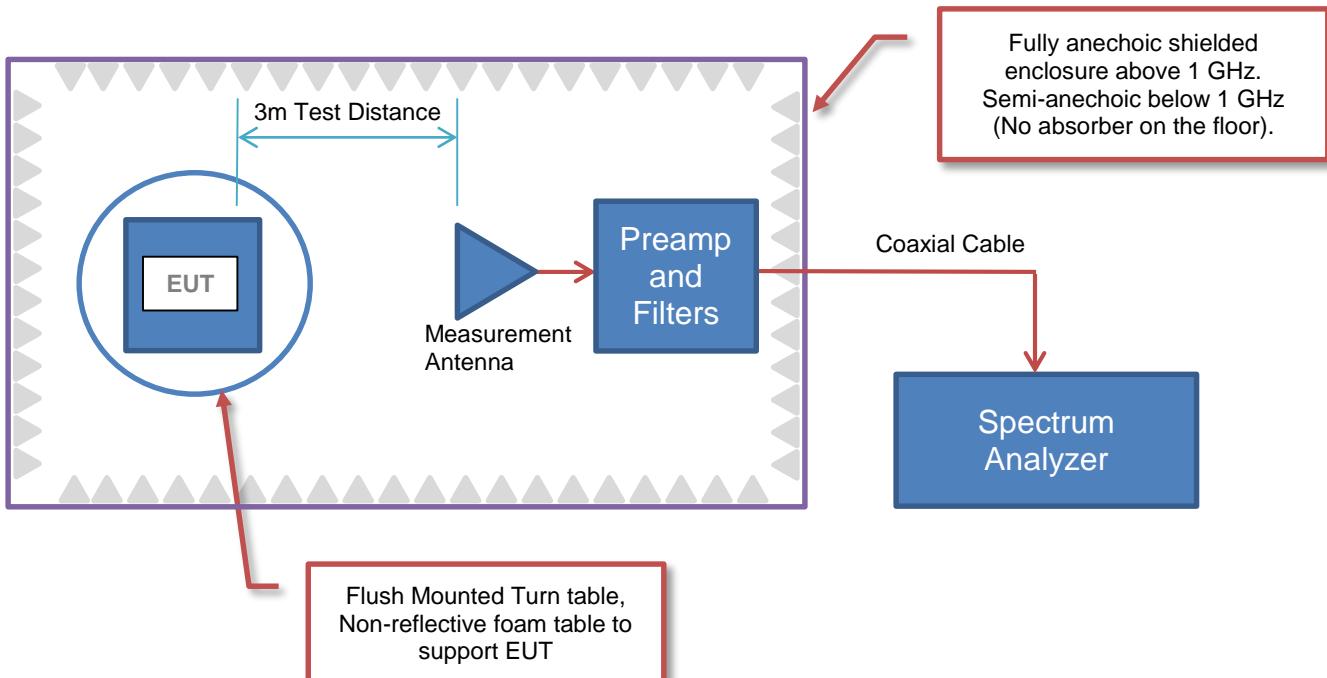



PRODUCT DESCRIPTION

Client and Equipment Under Test (EUT) Information

Company Name:	CommScope Connectivity LLC
Address:	501 Shenandoah Drive
City, State, Zip:	Shakopee, MN 55379
Test Requested By:	Joshua Wittman
Model:	Prism 2500TDD Low Band SISO HDM
First Date of Test:	September 1, 2015
Last Date of Test:	February 21, 2018
Receipt Date of Samples:	September 1, 2015
Equipment Design Stage:	Production
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:
20W SISO Cellular Repeater
Testing Objective:
To demonstrate compliance of the Cellular repeater requirements of FCC 27:2018

CONFIGURATIONS



Configuration TECO0031- 1

Software/Firmware Running during test	
Description	Version
Firmware	9.0.1.0dev3

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism 2500TDD Low Band SISO HDM	CommScope Connectivity LLC	2500TDD 7812305-00	4614200003

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
RF Signal Generator	Agilent	E4438C	1178933
Power Supply	Mean Well	SE-600-48	EB11101765
IO Control Device	CommScope Connectivity LLC	SVT-GU-1011	None
30 dB attenuator	Aeroflex	57-30-43	QY541
Laptop	Lenovo	R61	L3-N9370
Laptop Supply	Lenovo	42T4418	11S42T4418Z1ZGWG1 9659N
30 dB attenuator	Aeroflex	86-30-12DC-22 GHz	369

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	> 3m	No	Prism 2.5 GHz TDD (2496.5-2571.5 MHz) HDM	AC Mains
Fiber	No	> 3m	No	Prism 2.5 GHz TDD (2496.5-2571.5 MHz) HDM	IO Control Device
RF	Yes	0.9m	No	Prism 2.5 GHz TDD (2496.5-2571.5 MHz) HDM	30 dB attenuator
RF x2	Yes	1.8m	No	IO Control Device	Splitter
AC Power	No	1.8m	No	RF Signal Generator	AC Mains
AC Power	No	1.8m	No	Power Supply	AC Mains
DC Power	No	2.8m	Yes	IO Control Device	Power Supply
AC Power	No	1.8m	No	Laptop Supply	AC Mains
DC Power	No	1.8m	Yes	Laptop	Laptop Supply
Ethernet	No	1.5m	No	Laptop	IO Control Device
RF	Yes	1.6m	No	Prism 2.5 GHz TDD (2496.5-2571.5 MHz) HDM	30 dB attenuator
RF	Yes	0.9m	No	Splitter	RF Signal Generator

CONFIGURATIONS



Configuration TECO0047- 1

EUT				
Description	Manufacturer	Model/Part Number	Serial Number	
Prism 2500TDD Low Band SISO HDM	CommScope Connectivity LLC	2500TDD 7812305-00	4614200003	

Peripherals in test setup boundary				
Description	Manufacturer	Model/Part Number	Serial Number	
Attenuator (1)	Aeroflex	49-30-33	MZ078	
Attenuator (2)	Inmet Corp.	75 Watt	2N75W-30-296	

Remote Equipment Outside of Test Setup Boundary				
Description	Manufacturer	Model/Part Number	Serial Number	
Signal Generator	Aeroflex	IFR 3414	341007/003	
Comm Box	ADC	1673542-21	MR222P8C	
AC Converter	TDK	SWS300A-48 EHFP	3LR-140Y11-0105H0411	

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
DC Cable (Comm Box)	No	2 m	No	Comm Box	AC Converter
AC Cable (EUT)	No	3 m	No	EUT	AC Mains
AC Cable (Sig Gen)	No	1.5 m	No	Signal Generator	AC Mains
RF Cable	No	1 m	No	EUT	Attenuator 1
RF Cable	No	1 m	No	EUT	Attenuator 2
Fiber Cable	No	10 m	No	Comm Box	EUT
AC Cable (AC Converter)	No	3 m	No	AC Converter	AC Mains
RF Cable	No	1 m	No	Signal Generator	Comm Box

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	9/1/2015	Equivalent Isotropic Radiated Power (EIRP)	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	The EUT remained at Element following the test.
2	9/1/2015	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	The EUT remained at Element following the test.
3	9/2/2015	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	The EUT remained at Element following the test.
4	9/3/2015	Emissions Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	The EUT remained at Element following the test.
5	9/3/2015	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	The EUT remained at Element following the test.
6	9/3/2015	Intermodulation	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT was taken home by the client before the next scheduled test.
7	2/21/2018	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)

NORTHWEST
EMC

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Meter - Power	ETS Lindgren	7002-006	SRA	4/15/2015	12
Meter - Power	ETS Lindgren	7002-006	SRE	8/4/2015	12
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator	S.M. Electronics	SA26B-20	RFW	3/10/2015	12
Block - DC	Fairview Microwave	SD3379	AMI	10/2/2014	12
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	36
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	4/20/2015	12

TEST DESCRIPTION

The RF output power was measured with the EUT set to the frequencies listed in the datasheet.

The modulated signal was created by an RF signal generator and input into the EUT. The power measurement was made using a direct connection between the RF output of the EUT and an RF Power Sensor which only measures across the high time of the burst of the carrier.

The observed duty cycle was noted but not needed to calculate the EiRP.

EiRP = Max Measured Power + Antenna gain (dBi)

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)


NORTHWEST
EMC

EUT:	Prism 2500TDD Low Band SISO HDM	Work Order:	TECO0031				
Serial Number:	None	Date:	09/01/15				
Customer:	ADC Telecommunications / Commscope	Temperature:	24.9°C				
Attendees:	Josh Wittman	Humidity:	60%				
Project:	None	Barometric Pres.:	982.3				
Tested by:	Trevor Buls	Job Site:	MN08				
TEST SPECIFICATIONS		Test Method					
FCC 27:2015		ANSI/TIA/EIA-603-C-2004					
COMMENTS							
<p>Antenna gain is assumed to be 0, per customer the antenna gain will be reevaluated during installation. System is rated at 20W (+43 dBm) per port. Limit is $33 \text{ dBW} + 10\log(\text{Maximum Bandwidth}/6 \text{ MHz}) \text{ dBW}$. Conversion from dBW to dBm is $\text{dBW} + 30 \text{ dB} = \text{dBm}$. $33 \text{ dBW} + 10\log(20 \text{ MHz}/6 \text{ MHz}) \text{ dBW} + 30\text{dB} = 68.6 \text{ dBm}$. Both antenna ports were terminated but only one port is active</p>							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	1	Signature	Trevor Buls				
		Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results
LTE 20 MHz							
Low Channel, 2506.5 MHz							
Port 0		43.37	69.025	0	43.4	68.6	Pass
Mid Channel, 2534 MHz							
Port 0		44.79	69.023	0	44.8	68.6	Pass
High Channel, 2561.5 MHz							
Port 0		43.37	69.025	0	43.4	68.6	Pass


EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)

NORTHWEST
EMC

LTE 20 MHz, Low Channel, 2506.5 MHz, Port 0					
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results
43.37	69.025	0	43.4	68.6	Pass

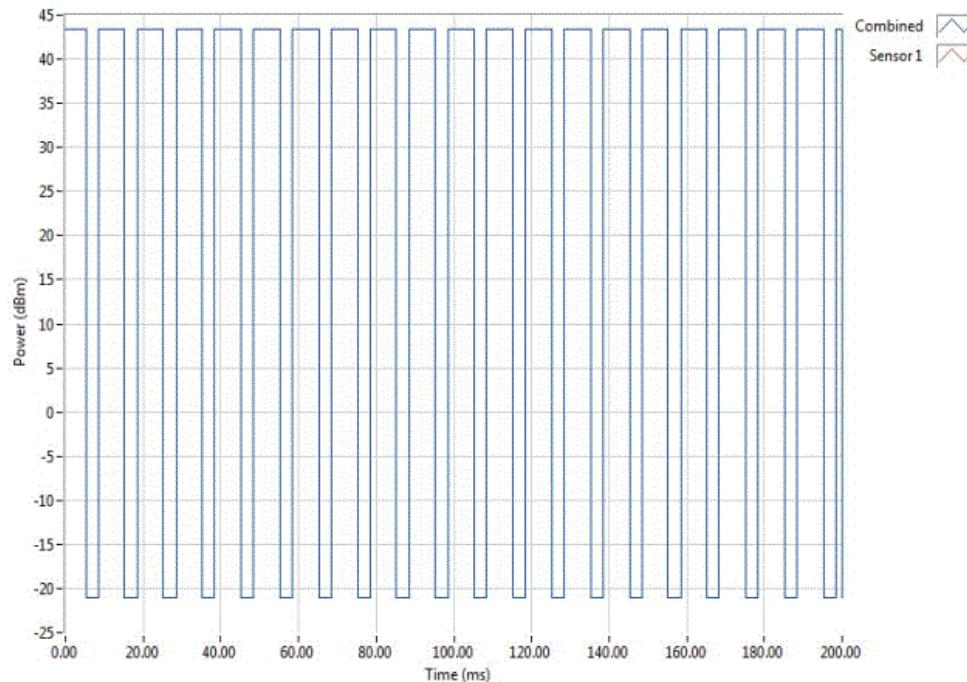


LTE 20 MHz, Mid Channel, 2534 MHz, Port 0					
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results
44.79	69.023	0	44.8	68.6	Pass

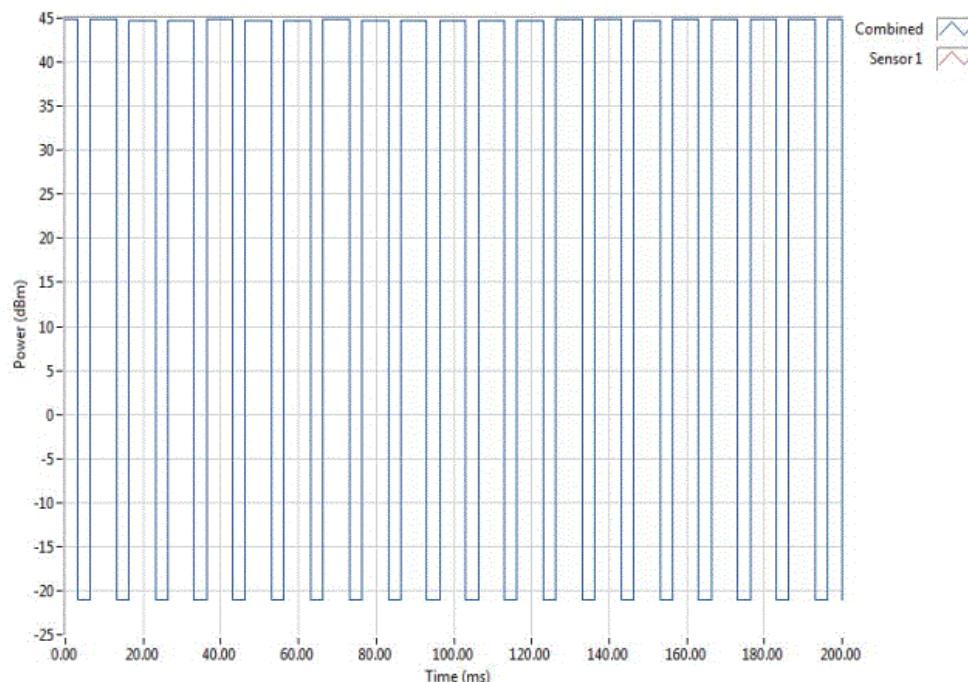

EQUIVALENT ISOTROPIC RADIATED POWER (EIRP)

NORTHWEST
EMC

LTE 20 MHz, Mid Channel, 2534 MHz, Port 0					
Avg Cond Pwr (dBm)	Duty Cycle (%)	Antenna Gain (dBi)	EIRP (dBm)	Limit (dBm)	Results
43.37	69.025	0	43.4	68.6	Pass

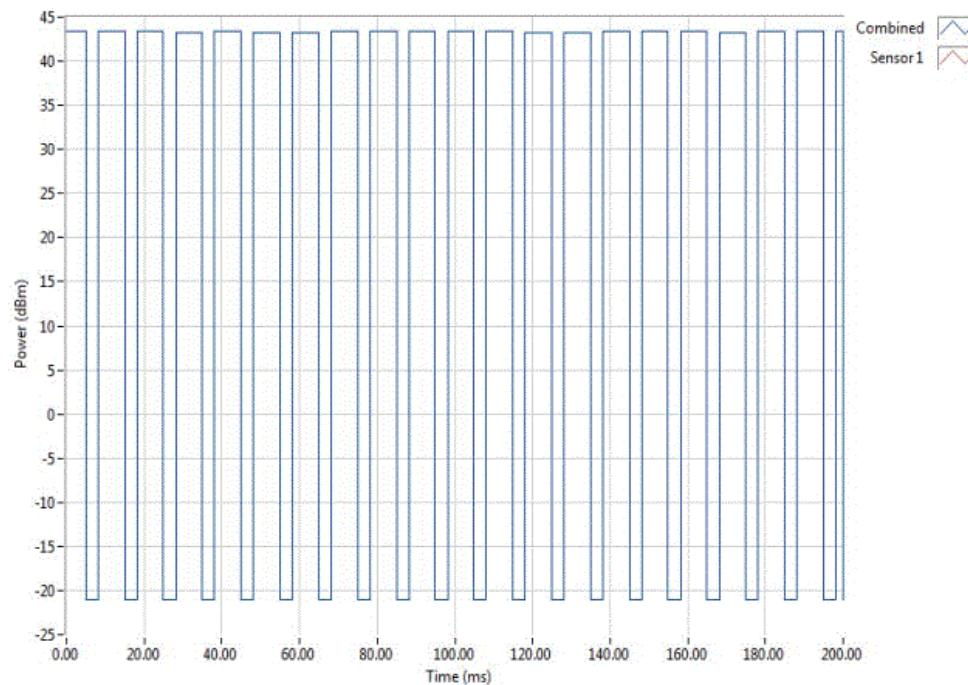

EMISSIONS BANDWIDTH

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator	S.M. Electronics	SA26B-20	RFW	3/10/2015	12
Block - DC	Fairview Microwave	SD3379	AMI	10/2/2014	12
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	36
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	4/20/2015	12

TEST DESCRIPTION

An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

The spectrum analyzer settings were as follows:

- RBW = Approx. 1% of the emission bandwidth (B). This was an iterative process to determine the RBW based on the emissions bandwidth (B).
- VBW = > RBW
- A peak detector was used
- Trace max hold.

The spectrum analyzer occupied bandwidth measurement function was then used to measure the 26 dB emission bandwidth.


There is no required limit to be met in the rule part for this test. The purpose of the test is to both report the results and to utilize the emission bandwidth for setting the channel power integration bandwidth during conducted output power testing.

EMISSIONS BANDWIDTH


EUT:	Prism 2500TDD Low Band SISO HDM		Work Order:	TECO0031	
Serial Number:	None		Date:	09/03/15	
Customer:	ADC Telecommunications / Commscope		Temperature:	24.1°C	
Attendees:	None		Humidity:	59%	
Project:	None		Barometric Pres.:	982.8	
Tested by:	Trevor Buls	Power:	110VAC/60Hz	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 27:2015			ANSI/TIA/EIA-603-C-2004		
COMMENTS					
Both antenna ports were terminated but only one port is active					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	<i>Trevor Buls</i>		
			Value	Limit	Result
LTE 20 MHz					
Low Channel, 2506.5 MHz					
Port 0			19.883 MHz	N/A	N/A
Mid Channel, 2534 MHz					
Port 0			19.853 MHz	N/A	N/A
Input Signal			19.865 MHz	N/A	N/A
High Channel, 2561.5 MHz					
Port 0			19.725 MHz	N/A	N/A

EMISSIONS BANDWIDTH

LTE 20 MHz, Low Channel, 2506.5 MHz, Port 0		
	Value	Limit
	19.883 MHz	N/A

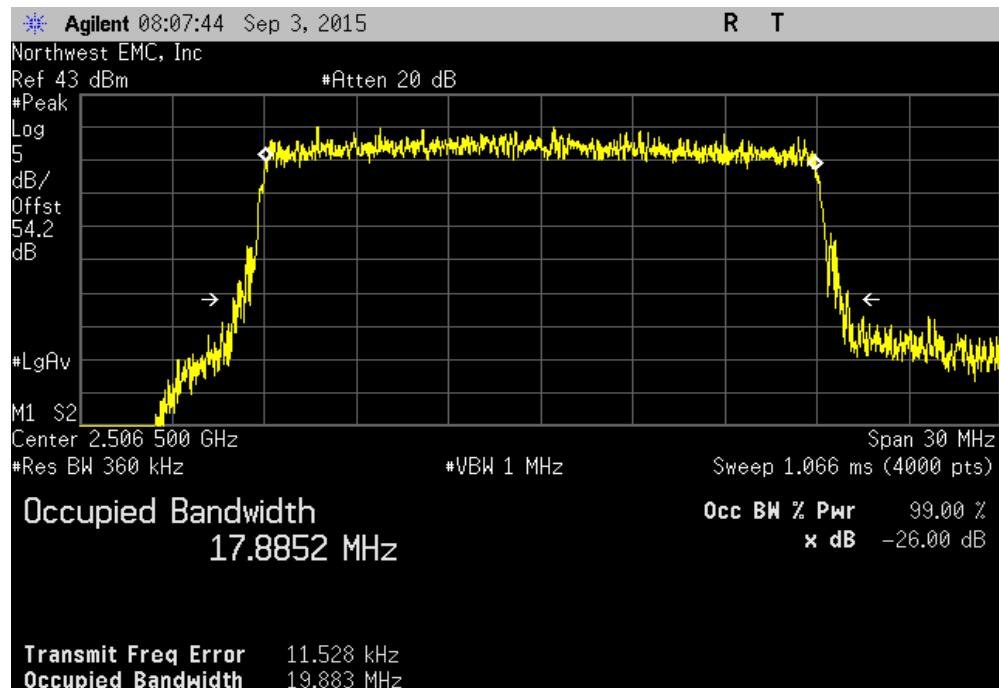


LTE 20 MHz, Mid Channel, 2534 MHz, Port 0		
	Value	Limit
	19.853 MHz	N/A

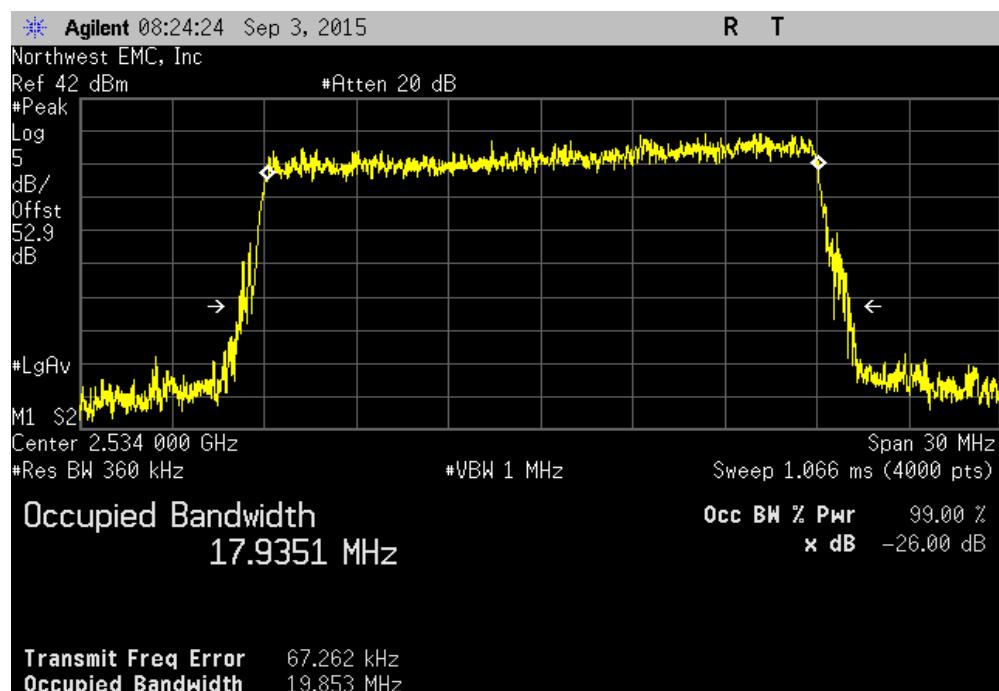


EMISSIONS BANDWIDTH

LTE 20 MHz, Mid Channel, 2534 MHz, Input Signal			
	Value	Limit	Result
	19.865 MHz	N/A	N/A

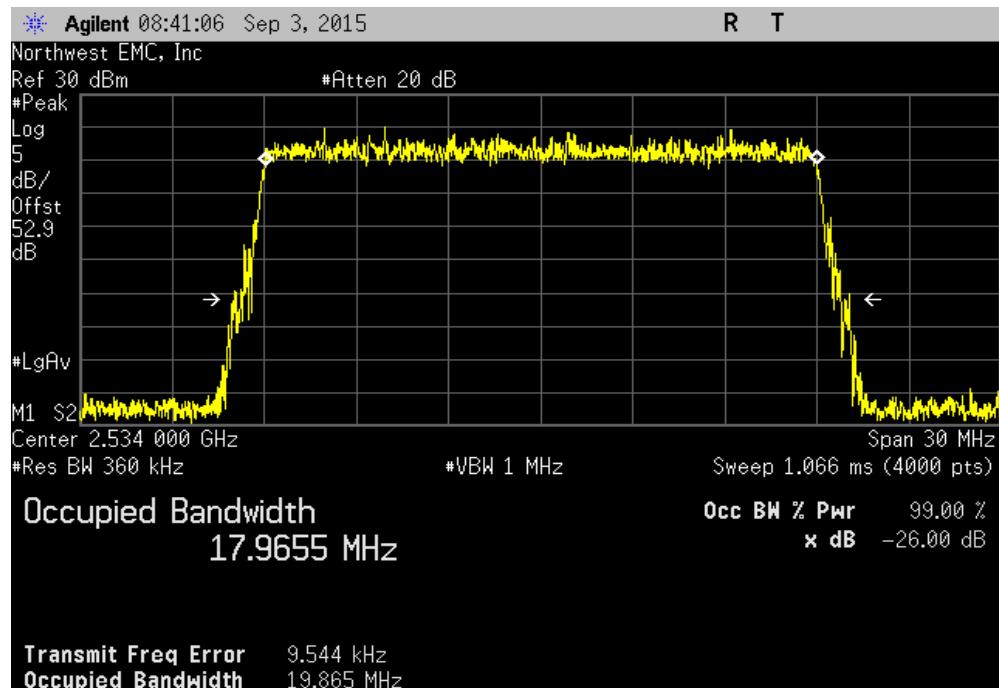

LTE 20 MHz, High Channel, 2561.5 MHz, Port 0			
	Value	Limit	Result
	19.725 MHz	N/A	N/A

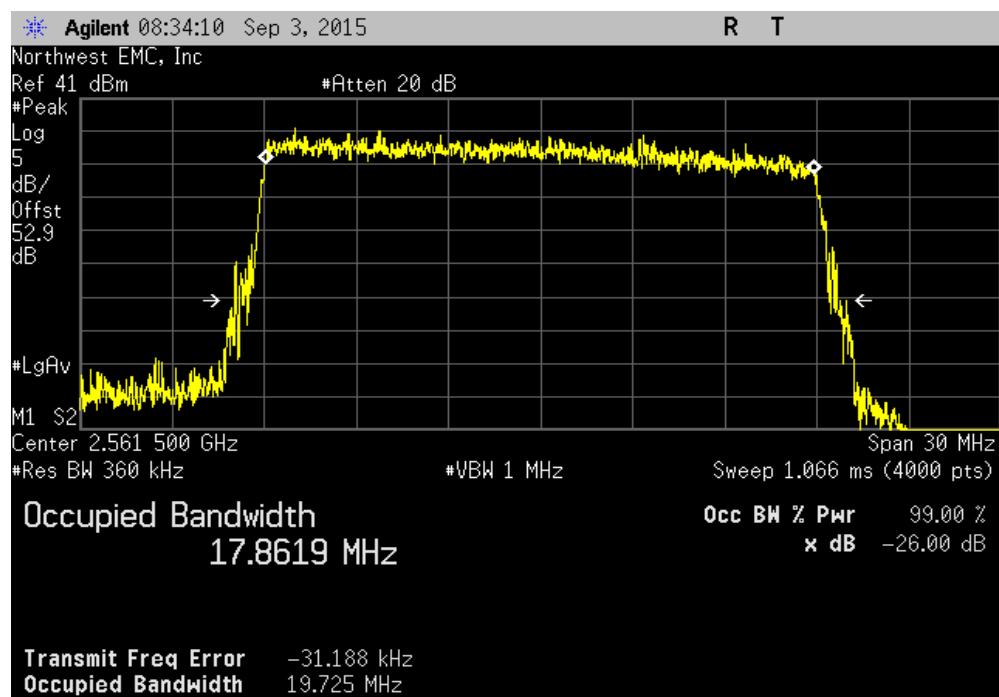

SPURIOUS CONDUCTED EMISSIONS

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Filter - High Pass	K&L Microwave	11SH10-18000/T50000-2.4	HIC	2/16/2015	12
Filter - High Pass	Micro-Tronics	HPM50111	HGY	8/31/2015	12
Filter - Low Pass	Micro-Tronics	LPM50004	HGV	8/31/2015	12
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator	S.M. Electronics	SA26B-20	RFW	3/10/2015	12
Block - DC	Fairview Microwave	SD3379	AMI	10/2/2014	12
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	36
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	4/20/2015	12

TEST DESCRIPTION

An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The antenna port spurious emissions were measured at the RF output terminal of the EUT with external attenuation on the RF input of the spectrum analyzer. Analyzer plots utilizing a 1 MHz resolution bandwidth and no video filtering were made for each mode listed in the datasheet.


The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to the limit. Emissions close to the limit were re-measured using an RMS Average detector to match the method used during output power measurements.

SPURIOUS CONDUCTED EMISSIONS


EUT:	Prism 2500TDD Low Band SISO HDM		Work Order:	TECO0031		
Serial Number:	None		Date:	09/03/15		
Customer:	ADC Telecommunications / Commscope		Temperature:	24.1°C		
Attendees:	None		Humidity:	59%		
Project:	None		Barometric Pres.:	982.8		
Tested by:	Trevor Buls	Power:	110VAC/60Hz		Job Site:	MN08
TEST SPECIFICATIONS			Test Method			
FCC 27:2015			ANSI/TIA/EIA-603-C-2004			
COMMENTS						
Both antenna ports were terminated but only one port is active						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature	Trevor Buls			
		Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result	
LTE 20 MHz						
Low Channel, 2506.5 MHz						
Port 0		30 MHz - 1 GHz	-29.15	-13	Pass	
Port 0		1 GHz - 3 GHz	-18.6	-13	Pass	
Port 0		3 GHz - 18 GHz	-33.04	-13	Pass	
Port 0		18 GHz - 26 GHz	-31.18	-13	Pass	
Mid Channel, 2534 MHz						
Port 0		30 MHz - 1 GHz	-29.62	-13	Pass	
Port 0		1 GHz - 3 GHz	-19.1	-13	Pass	
Port 0		3 GHz - 18 GHz	-33.12	-13	Pass	
Port 0		18 GHz - 26 GHz	-30.98	-13	Pass	
High Channel, 2561.5 MHz						
Port 0		30 MHz - 1 GHz	-29.63	-13	Pass	
Port 0		1 GHz - 3 GHz	-17.79	-13	Pass	
Port 0		3 GHz - 18 GHz	-32.5	-13	Pass	
Port 0		18 GHz - 26 GHz	-31.22	-13	Pass	

SPURIOUS CONDUCTED EMISSIONS

LTE 20 MHz, Low Channel, 2506.5 MHz, Port 0					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz		-29.15	-13	Pass	

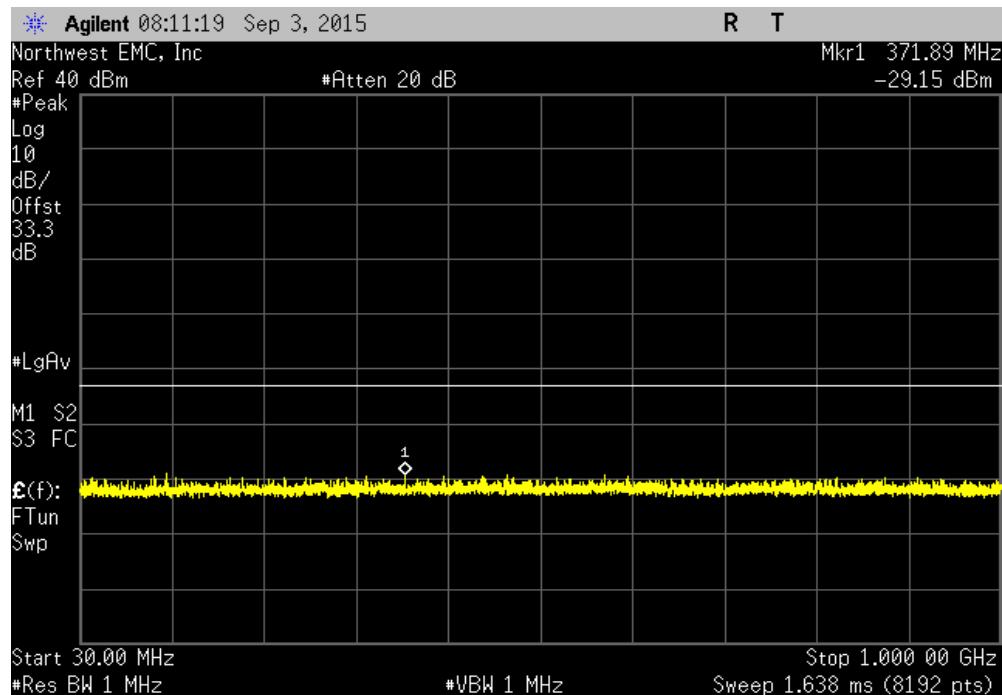


LTE 20 MHz, Low Channel, 2506.5 MHz, Port 0					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 3 GHz		-18.6	-13	Pass	

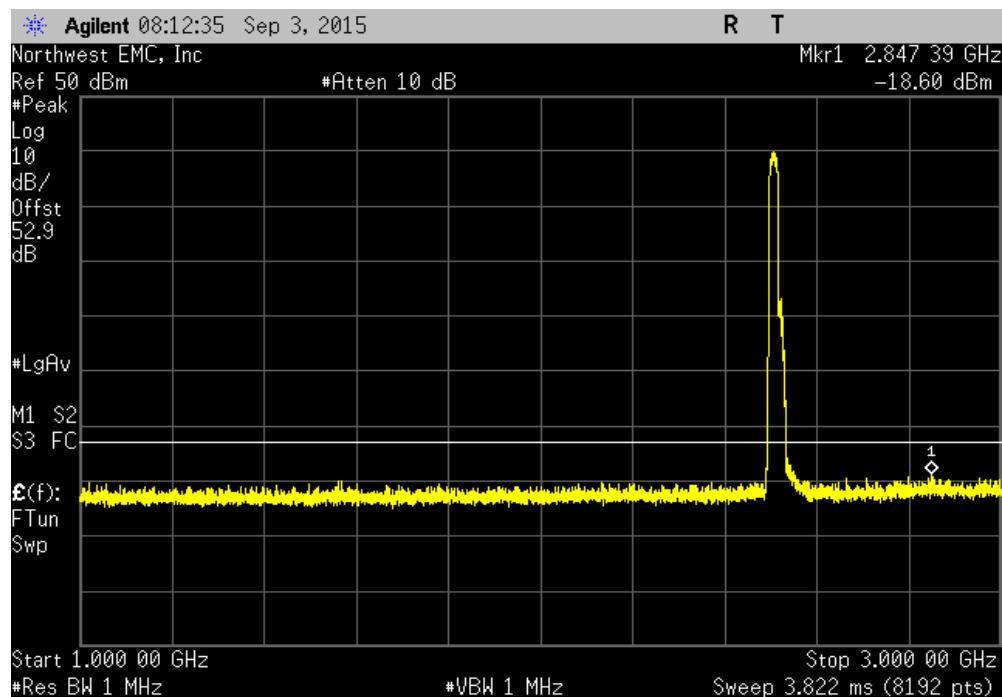


SPURIOUS CONDUCTED EMISSIONS

LTE 20 MHz, Low Channel, 2506.5 MHz, Port 0					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
3 GHz - 18 GHz		-33.04	-13	Pass	

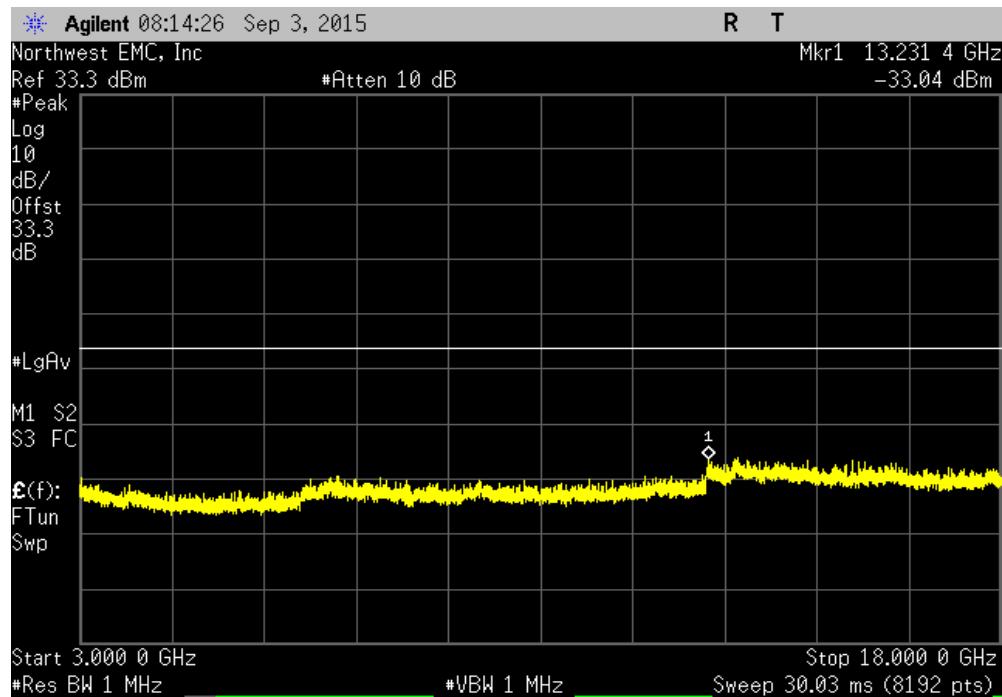


LTE 20 MHz, Low Channel, 2506.5 MHz, Port 0					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
18 GHz - 26 GHz		-31.18	-13	Pass	

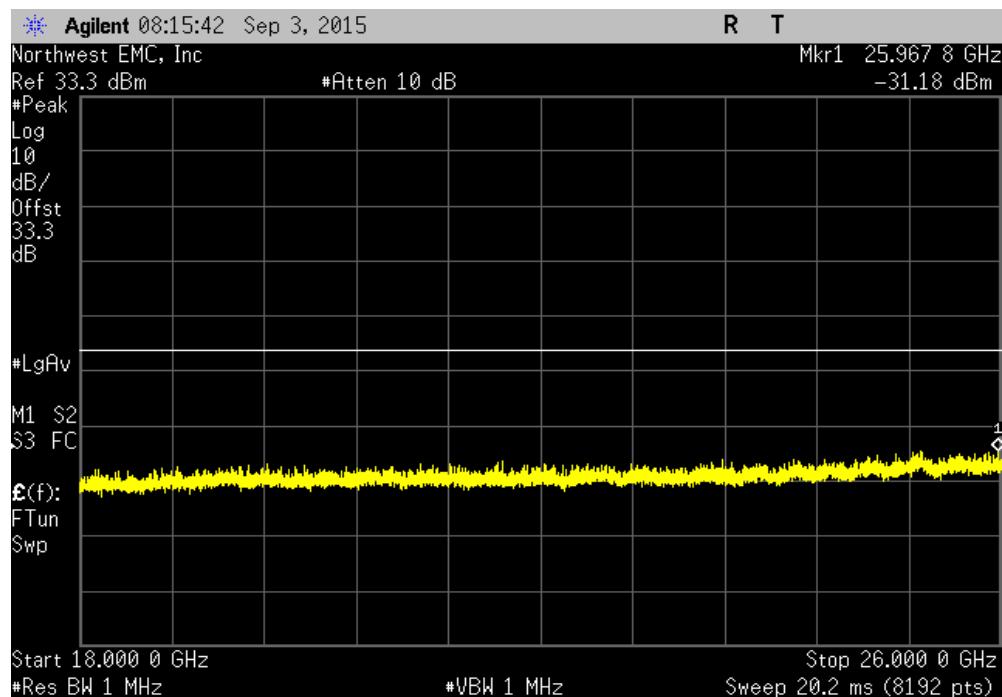


SPURIOUS CONDUCTED EMISSIONS

LTE 20 MHz, Mid Channel, 2534 MHz, Port 0					
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result		
30 MHz - 1 GHz	-29.62	-13	Pass		

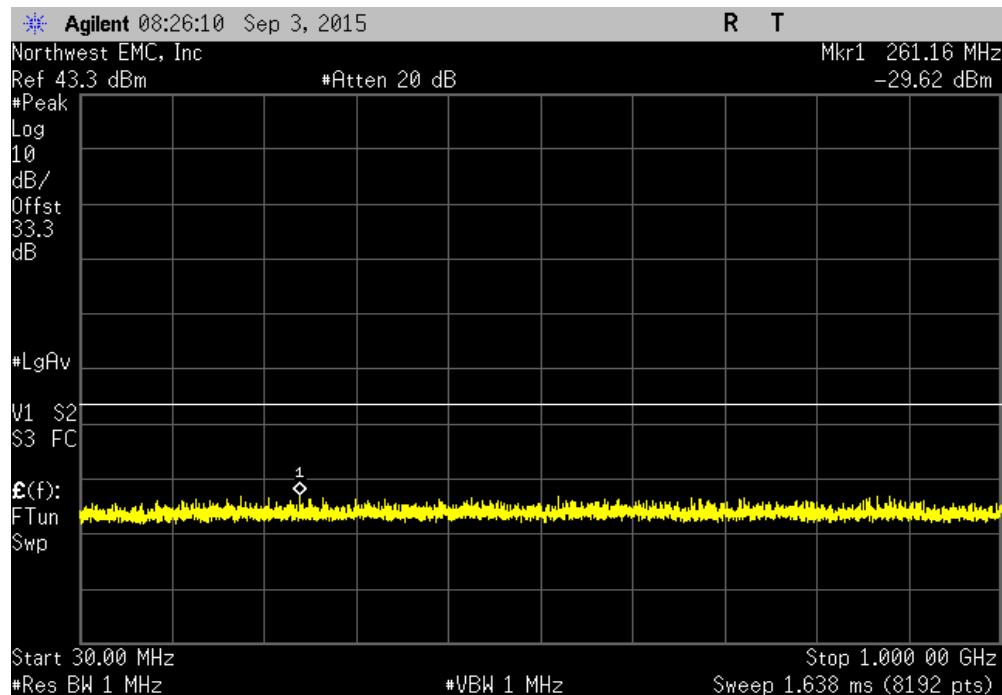


LTE 20 MHz, Mid Channel, 2534 MHz, Port 0					
Frequency Range	Max Value (dBm)	Limit ≤ (dBm)	Result		
1 GHz - 3 GHz	-19.1	-13	Pass		

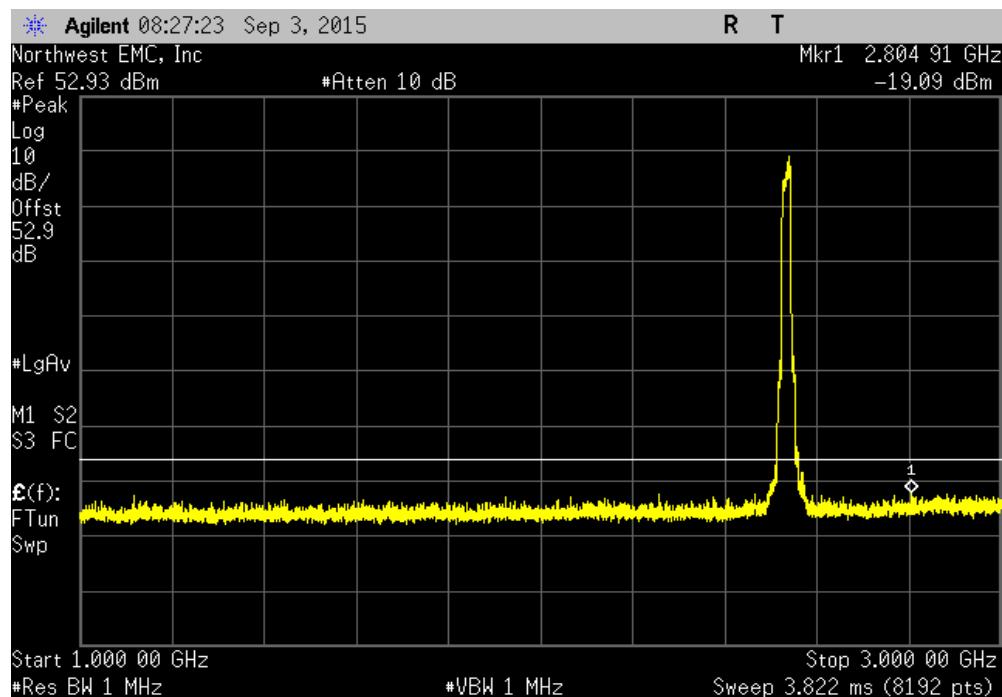


SPURIOUS CONDUCTED EMISSIONS

LTE 20 MHz, Mid Channel, 2534 MHz, Port 0				Result
Frequency Range	Max Value (dBm)	Limit \leq (dBm)		
3 GHz - 18 GHz	-33.12	-13	Pass	

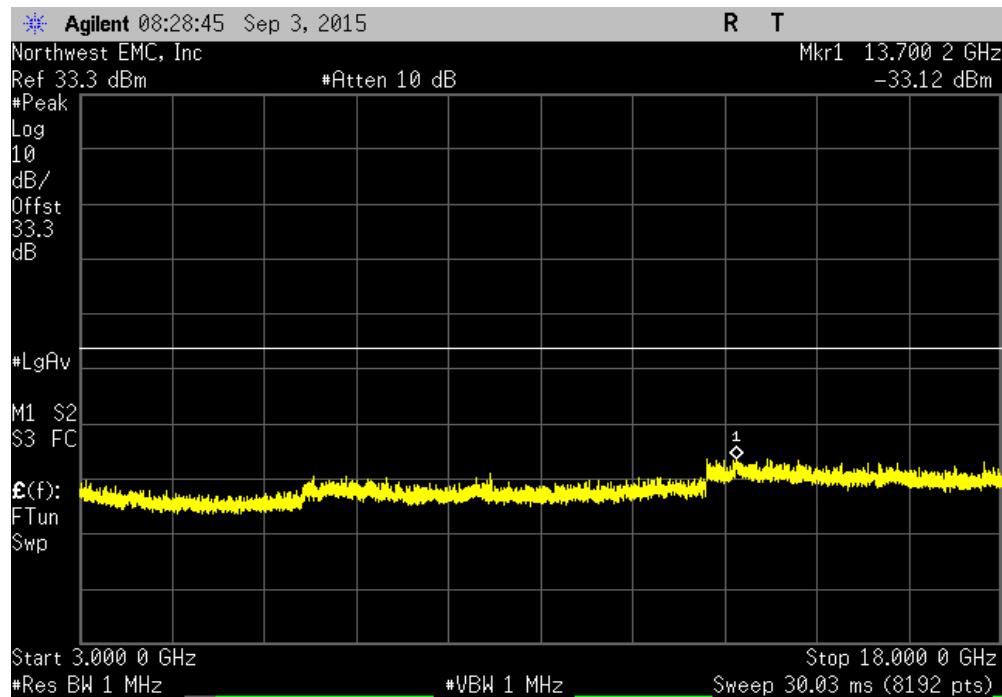


LTE 20 MHz, Mid Channel, 2534 MHz, Port 0				Result
Frequency Range	Max Value (dBm)	Limit \leq (dBm)		
18 GHz - 26 GHz	-30.98	-13	Pass	

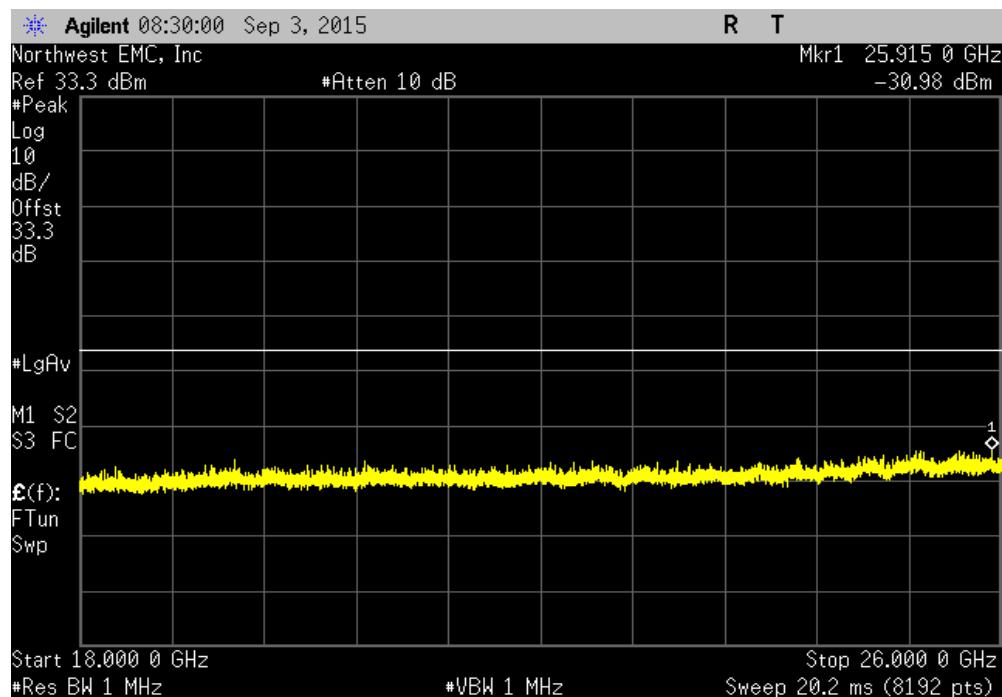


SPURIOUS CONDUCTED EMISSIONS

LTE 20 MHz, High Channel, 2561.5 MHz, Port 0					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz		-29.63	-13	Pass	

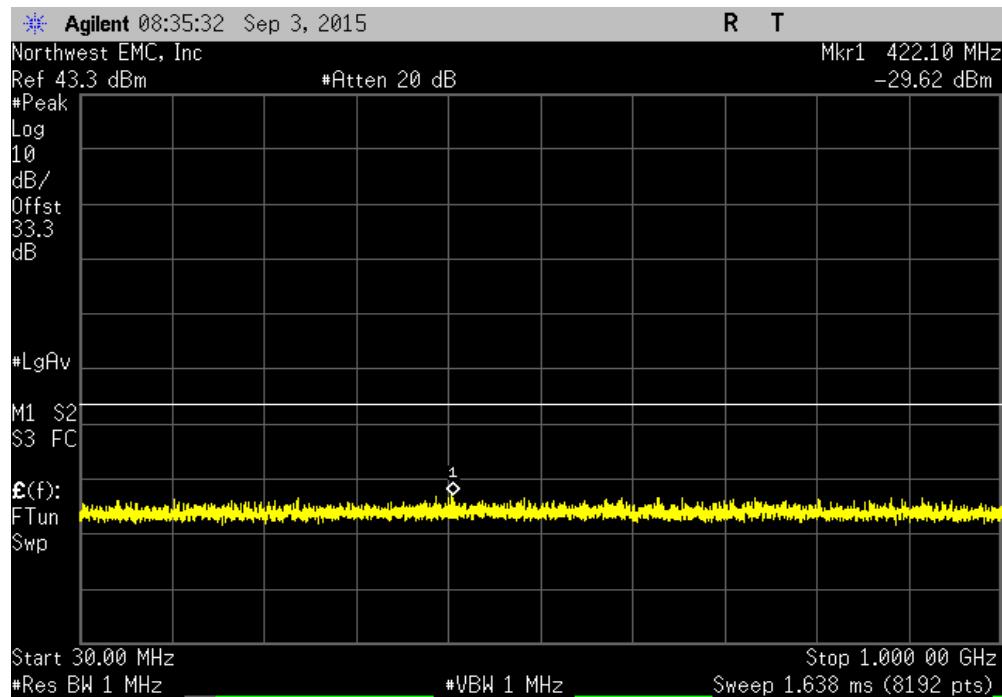


LTE 20 MHz, High Channel, 2561.5 MHz, Port 0					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 3 GHz		-17.79	-13	Pass	

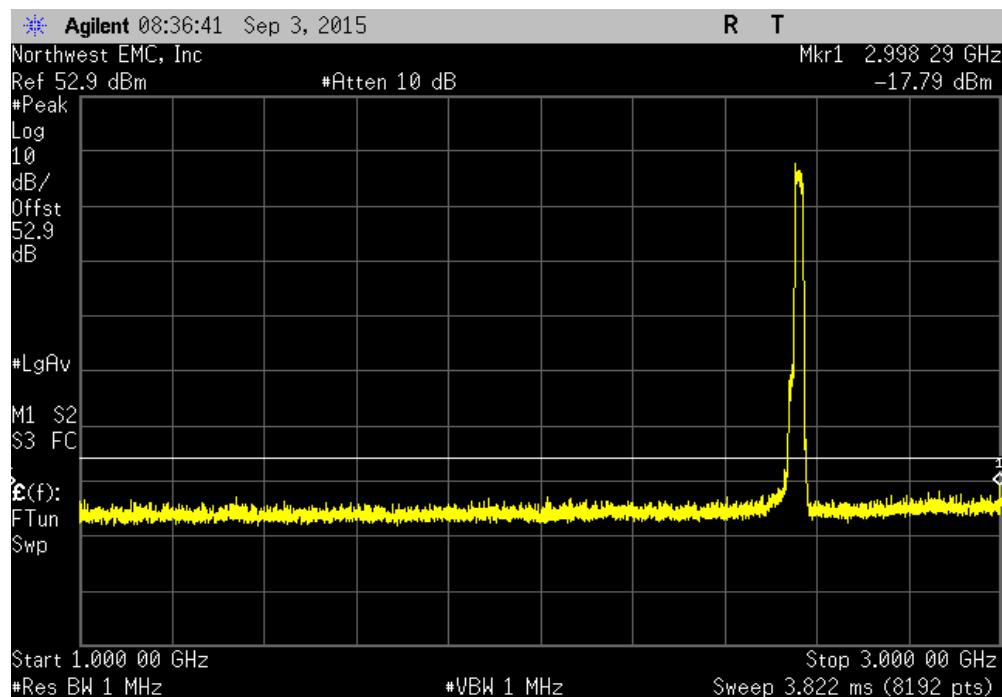


SPURIOUS CONDUCTED EMISSIONS

LTE 20 MHz, High Channel, 2561.5 MHz, Port 0					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
3 GHz - 18 GHz		-32.5	-13	Pass	

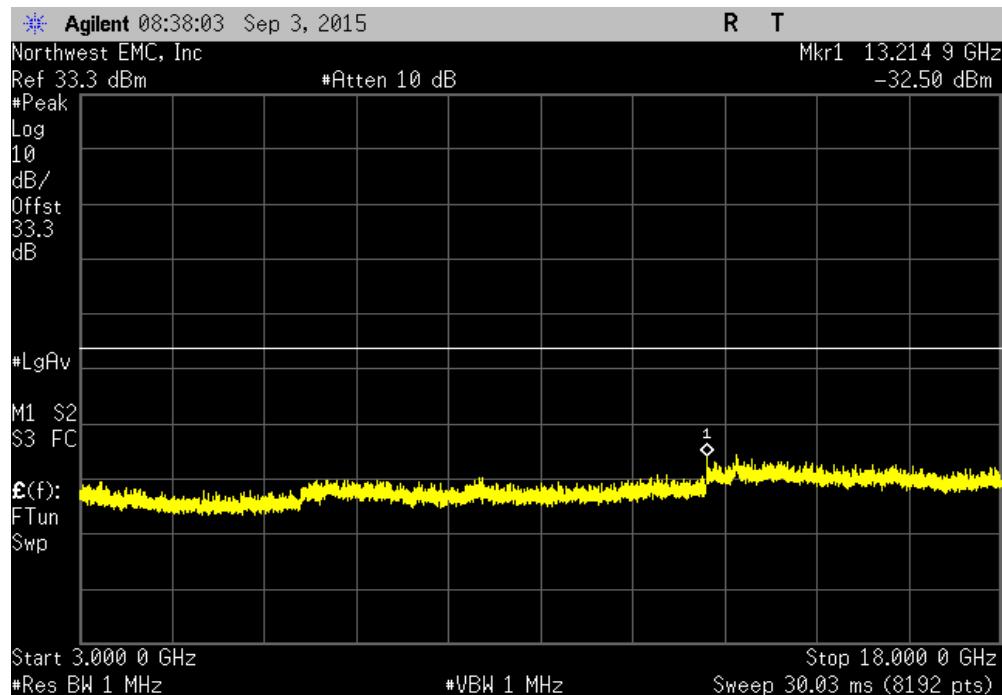

LTE 20 MHz, High Channel, 2561.5 MHz, Port 0					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
18 GHz - 26 GHz		-31.22	-13	Pass	

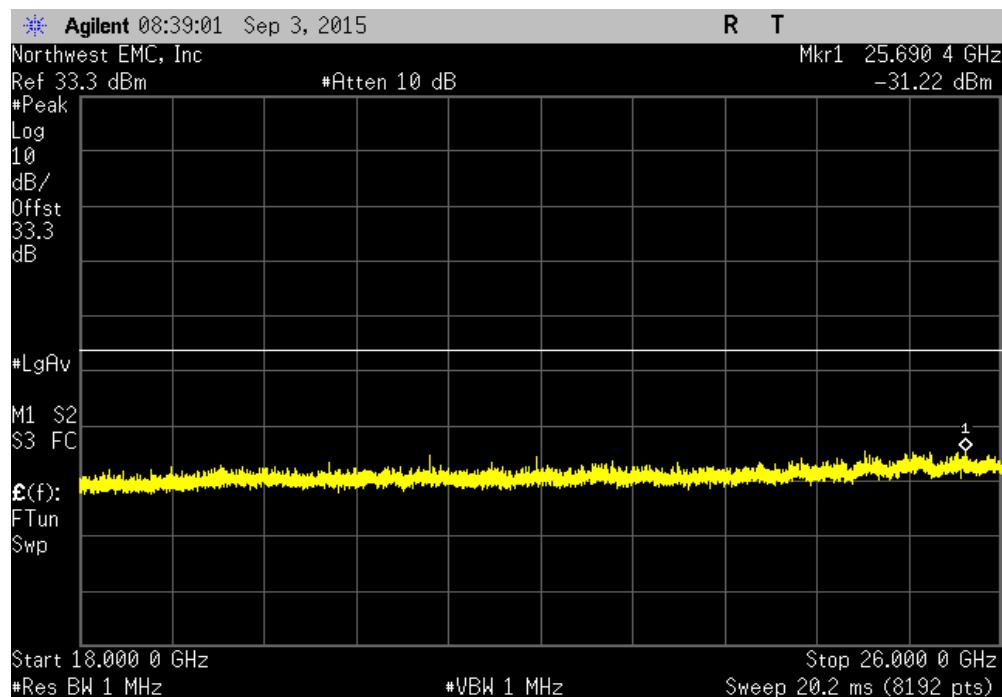

BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator	S.M. Electronics	SA26B-20	RFW	3/10/2015	12
Block - DC	Fairview Microwave	SD3379	AMI	10/2/2014	12
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	36
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	4/20/2015	12

TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in the available band. The channels closest to the band edges were selected. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.


The spectrum was scanned below the lower band edge and above the higher band edge. The resolution bandwidth was set to approximately 1% of the measured emissions bandwidth within the first 1 MHz block adjacent to the transmit band. An average RMS detector was used to match the method used during Output Power. The screen capture shows the margin between the measured value and the limit at the band edge.

BAND EDGE COMPLIANCE


EUT:	Prism 2500TDD Low Band SISO HDM		Work Order:	TECO0031	
Serial Number:	None		Date:	09/01/15	
Customer:	ADC Telecommunications / Commscope		Temperature:	24.9°C	
Attendees:	Josh Wittman		Humidity:	60%	
Project:	None		Barometric Pres.:	982.3	
Tested by:	Trevor Buls	Power:	110VAC/60Hz	Job Site:	MN08
TEST SPECIFICATIONS			Test Method		
FCC 27:2015			ANSI/TIA/EIA-603-C-2004		
COMMENTS					
Both antenna ports were terminated but only one port is active. A Duty Cycle Correction Factor (DCCF) was added to the RMS measurements because the EUT was transmitting at less than 100% Duty Cycle (where applicable).					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	<i>Trevor Buls</i>		
			Avg Power (dBm)	DCCF (dB)	Value (dBm)
Low Channel	Greater than 1 MHz from BE Greater than 1 MHz from BE - Channel Power BE to 1 MHz from BE		N/A -16.37 -15.079	N/A 1.6 1.6	N/A -14.8 -13.5
High Channel	High Band Edge		N/A	N/A	-23.28 -13
					Pass

BAND EDGE COMPLIANCE

Low Channel, Greater than 1 MHz from BE					
Avg Power (dBm)	DCCF (dB)	Value (dBm)	Limit (dBm)	Result	
N/A	N/A	N/A	N/A	N/A	N/A

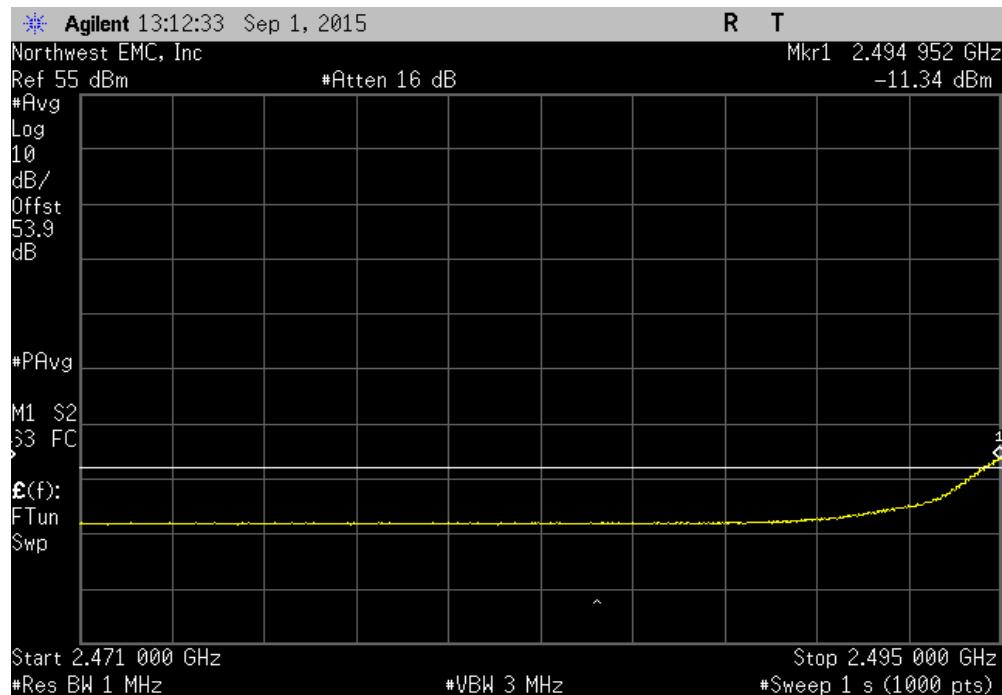


Low Channel, Greater than 1 MHz from BE - Channel Power					
Avg Power (dBm)	DCCF (dB)	Value (dBm)	Limit (dBm)	Result	
-16.37	1.6	-14.77	-13	Pass	

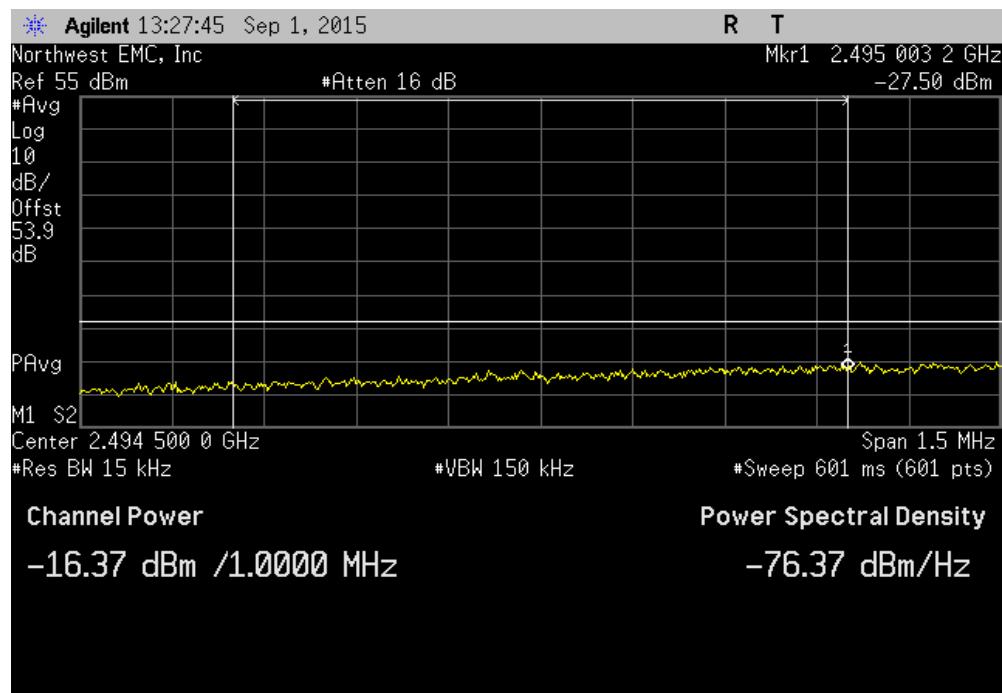


BAND EDGE COMPLIANCE

Low Channel, BE to 1 MHz from BE					
Avg Power (dBm)	DCCF (dB)	Value (dBm)	Limit (dBm)	Result	
-15.079	1.6	-13.5	-13	Pass	

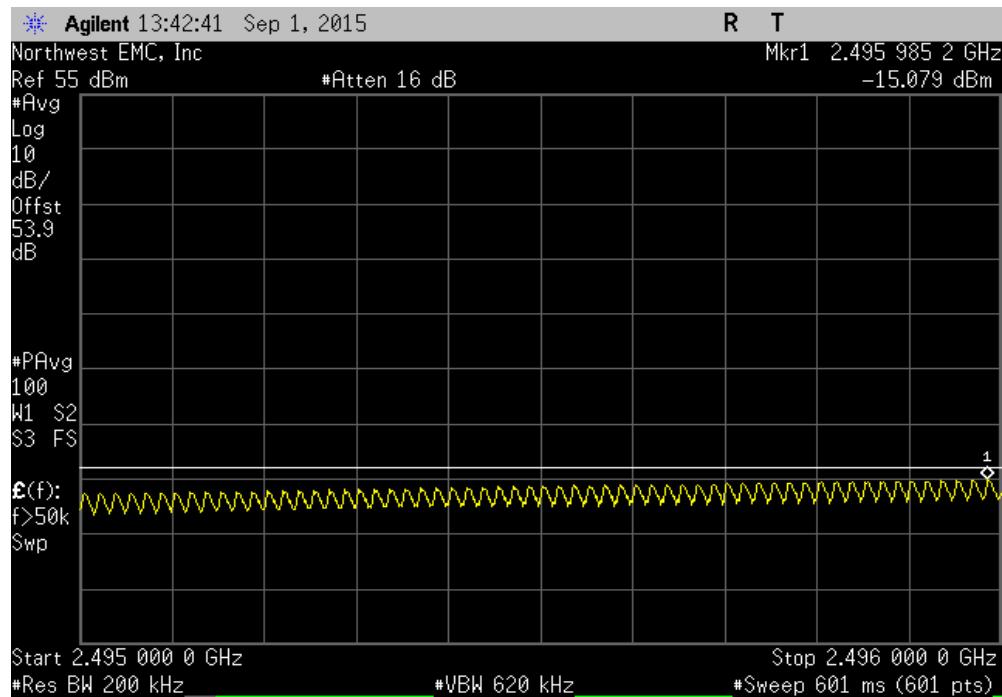

High Channel, High Band Edge					
Avg Power (dBm)	DCCF (dB)	Value (dBm)	Limit (dBm)	Result	
N/A	N/A	-23.28	-13	Pass	

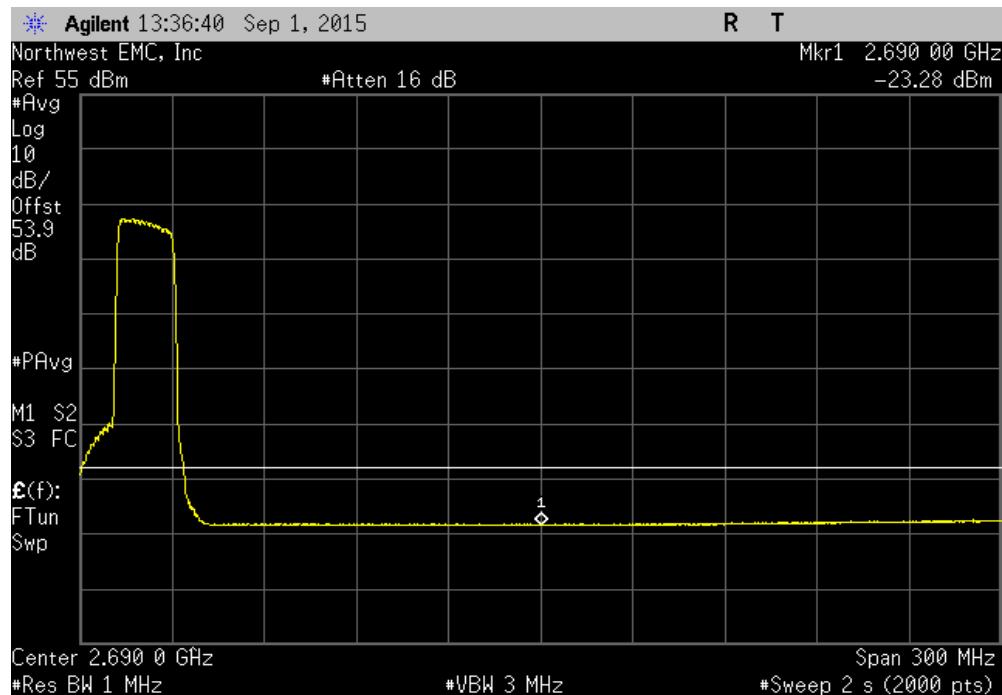

INTERMODULATION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Power Divider/Combiner	Fairview Microwave	MP0208-2	IAF	NCR	0
Power Divider/Combiner	Fairview Microwave	MP0208-2	IAE	NCR	0
Filter - High Pass	K&L Microwave	11SH10-18000/T50000-2.4	HIC	2/16/2015	12
Filter - High Pass	Micro-Tronics	HPM50111	HGY	8/31/2015	12
Filter - Low Pass	Micro-Tronics	LPM50004	HGV	8/31/2015	12
Generator - Signal	Agilent	E4422B	TGQ	3/17/2015	36
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator	S.M. Electronics	SA26B-20	RFW	3/10/2015	12
Block - DC	Fairview Microwave	SD3379	AMI	10/2/2014	12
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	36
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	4/20/2015	12

TEST DESCRIPTION

An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

The EUT was configured with an input of two CW pulses at the edges of the band and a modulated pulse in the band. The purpose of the test is to insure that no additional signals are creating by having multiple carriers in the passband of the EUT.

The antenna port spurious emissions were measured at the RF output terminal of the EUT with external attenuation on the RF input of the spectrum analyzer. Analyzer plots utilizing a 1MHz resolution bandwidth and no video filtering were made for each modulation type.


The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to the spurious conducted emissions limits. Measurements close to the limit were re-measured using a RMS average detector.

INTERMODULATION


EUT:	Prism 2500TDD Low Band SISO HDM	Work Order:	TECO0031		
Serial Number:	None	Date:	09/03/15		
Customer:	ADC Telecommunications / Commscope	Temperature:	24.1°C		
Attendees:	None	Humidity:	59%		
Project:	None	Barometric Pres.:	982.8		
Tested by:	Trevor Buls	Job Site:	MN08		
TEST SPECIFICATIONS		Power:	110VAC/60Hz		
		Test Method:	ANSI/TIA/EIA-603-C-2004		
FCC 27:2015					
COMMENTS					
Both antenna ports were terminated but only one port is active					
DEVIATIONS FROM TEST STANDARD					
None					
Configuration #	1	Signature	Trevor Buls		
		Frequency Range	Max Value (dBm)	Limit \leq (dBm)	Result
Low Passband		Fundamental	-16.83	-13	Pass
Low Passband		30 MHz - 1 GHz	-29.23	-13	Pass
Low Passband		1 GHz - 3 GHz	-18.75	-13	Pass
Low Passband		3 GHz - 18 GHz	-32.68	-13	Pass
Low Passband		18 GHz - 26 GHz	-30.21	-13	Pass
Mid Passband		Fundamental	-30.32	-13	Pass
Mid Passband		30 MHz - 1 GHz	-29.25	-13	Pass
Mid Passband		1 GHz - 3 GHz	-19.59	-13	Pass
Mid Passband		3 GHz - 18 GHz	-33	-13	Pass
Mid Passband		18 GHz - 26 GHz	-31.3	-13	Pass
High Passband		Fundamental	-15.82	-13	Pass
High Passband		30 MHz - 1 GHz	-29.31	-13	Pass
High Passband		1 GHz - 3 GHz	-18.56	-13	Pass
High Passband		3 GHz - 18 GHz	-32.06	-13	Pass
High Passband		18 GHz - 26 GHz	-31.63	-13	Pass

INTERMODULATION

Low Passband					
Frequency Range	Max Value (dBm)	Limit \leq (dBm)	Result		
Fundamental	-16.83	-13	Pass		

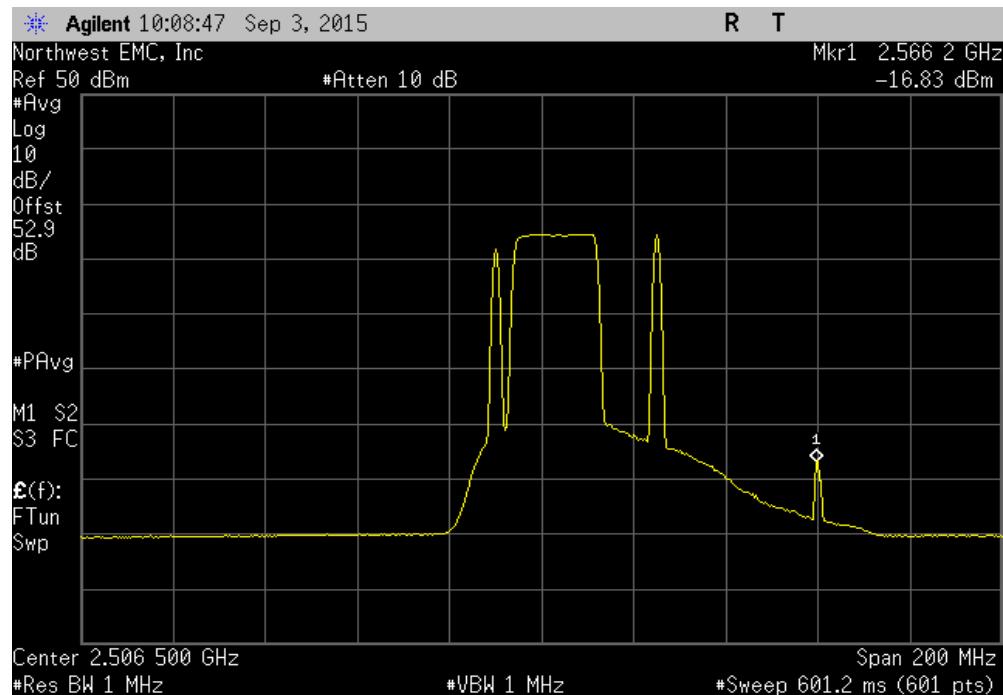


Low Passband					
Frequency Range	Max Value (dBm)	Limit \leq (dBm)	Result		
30 MHz - 1 GHz	-29.23	-13	Pass		

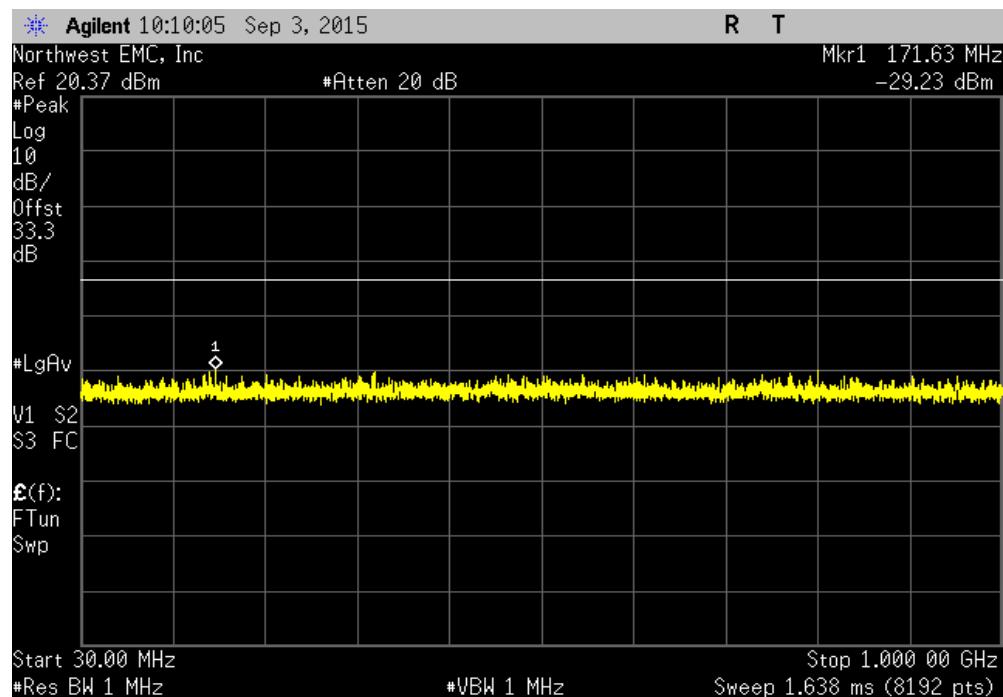


INTERMODULATION

Low Passband					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 3 GHz		-18.75	-13	Pass	

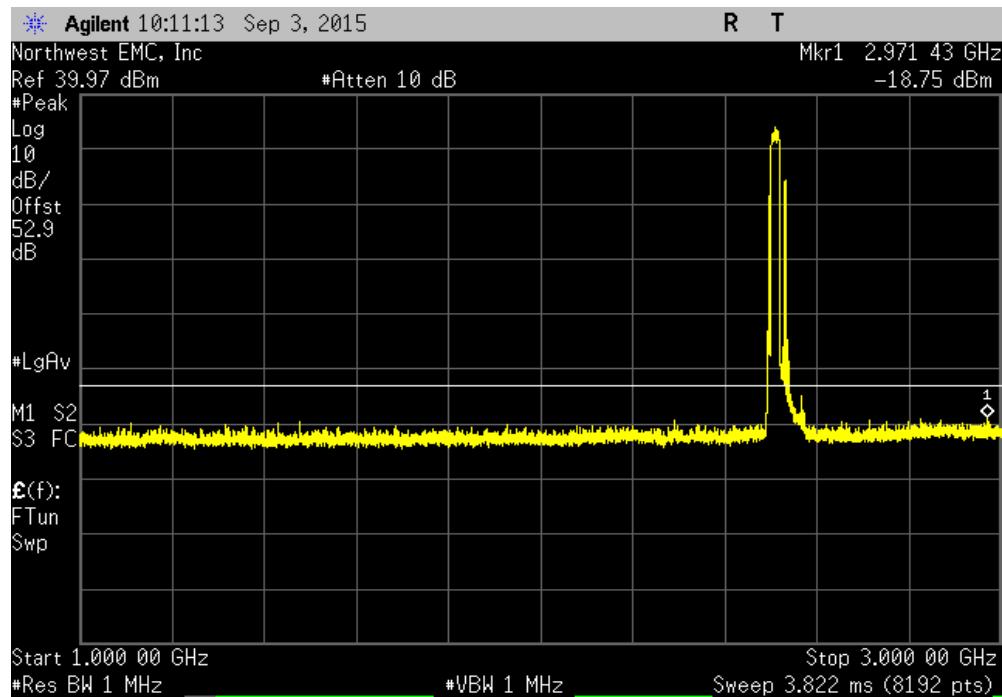


Low Passband					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
3 GHz - 18 GHz		-32.68	-13	Pass	

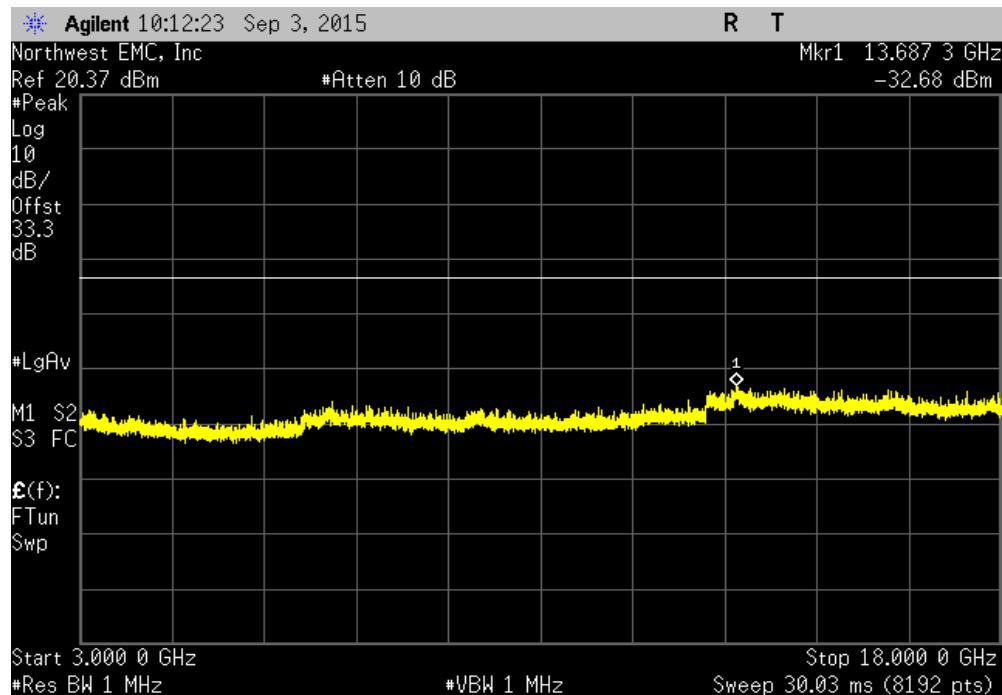


INTERMODULATION

Low Passband			
Frequency Range	Max Value (dBm)	Limit \leq (dBm)	Result
18 GHz - 26 GHz	-30.21	-13	Pass

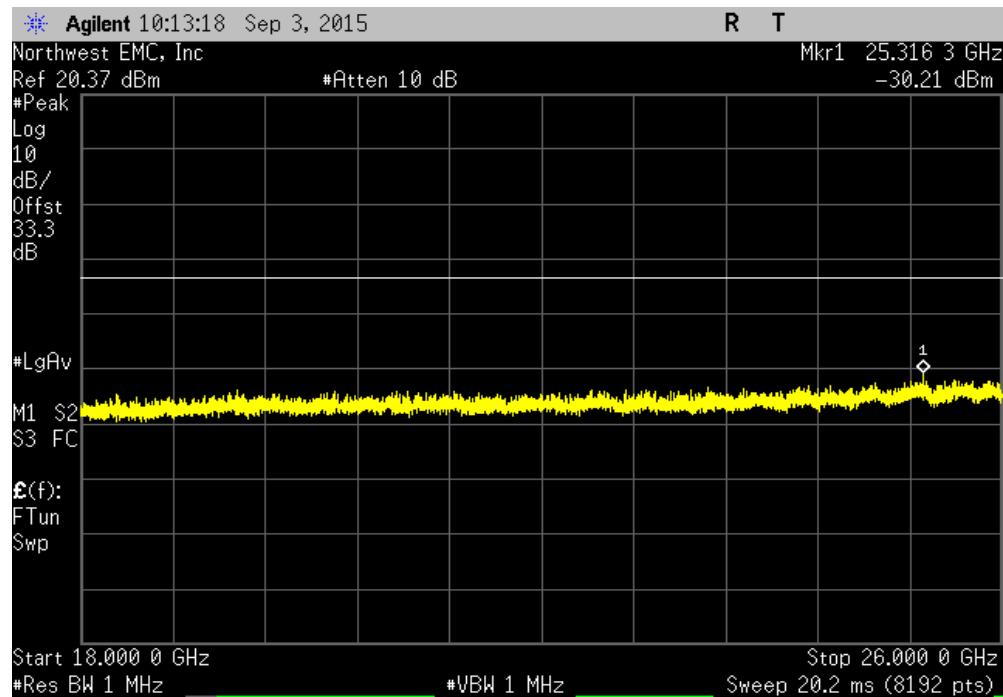


Mid Passband			
Frequency Range	Max Value (dBm)	Limit \leq (dBm)	Result
Fundamental	-30.32	-13	Pass

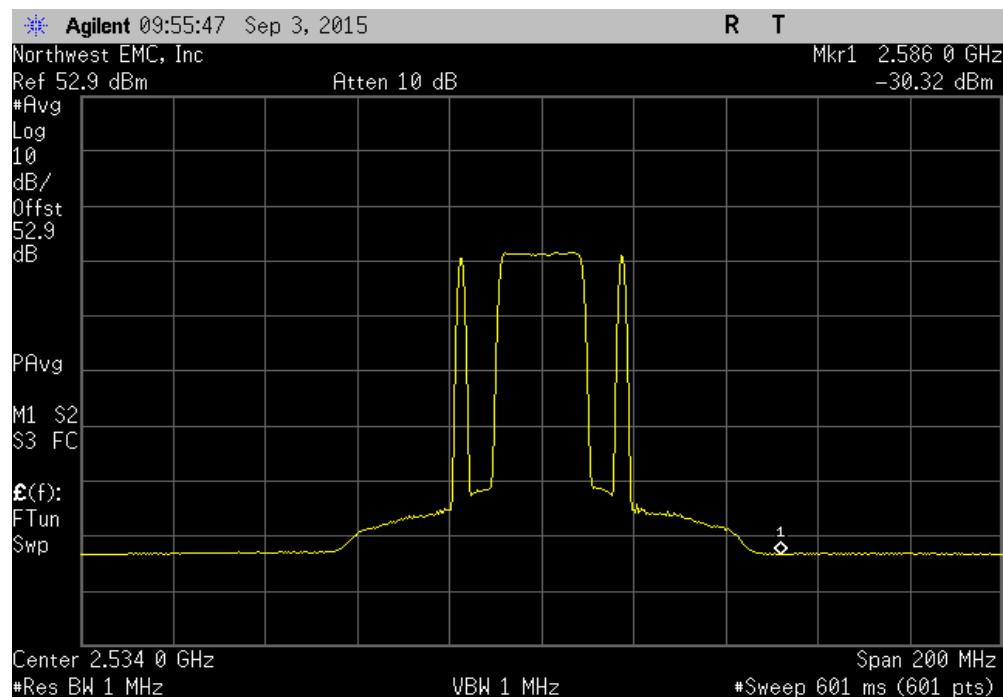


INTERMODULATION

Mid Passband					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
30 MHz - 1 GHz		-29.25	-13	Pass	

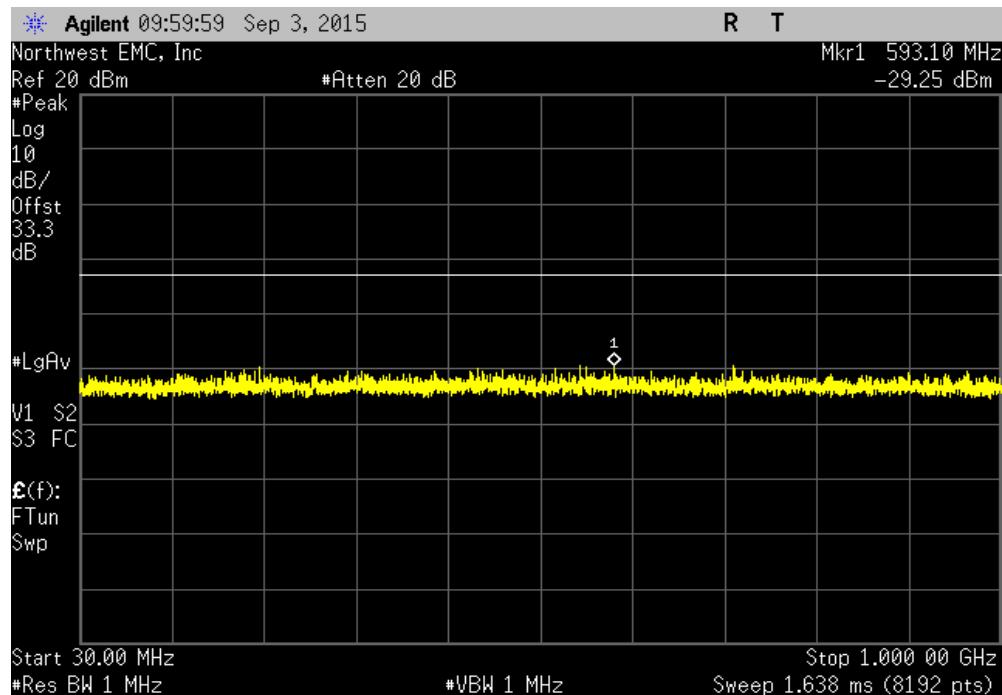


Mid Passband					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 3 GHz		-19.59	-13	Pass	

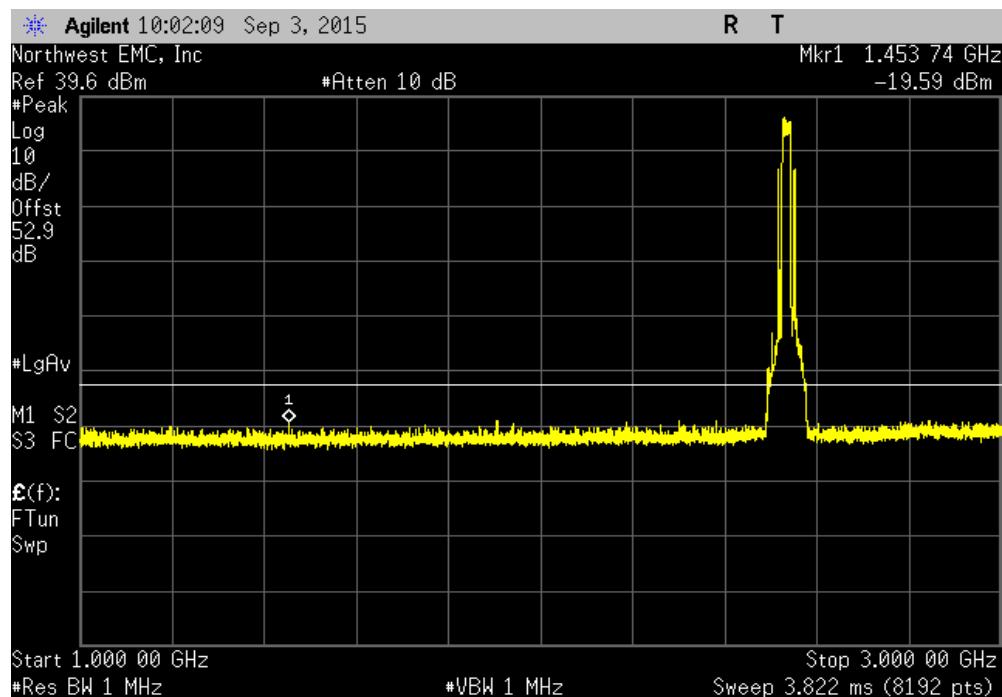


INTERMODULATION

Mid Passband					
Frequency Range		Max Value (dBm)	Limit \leq (dBm)	Result	
3 GHz - 18 GHz		-33	-13	Pass	

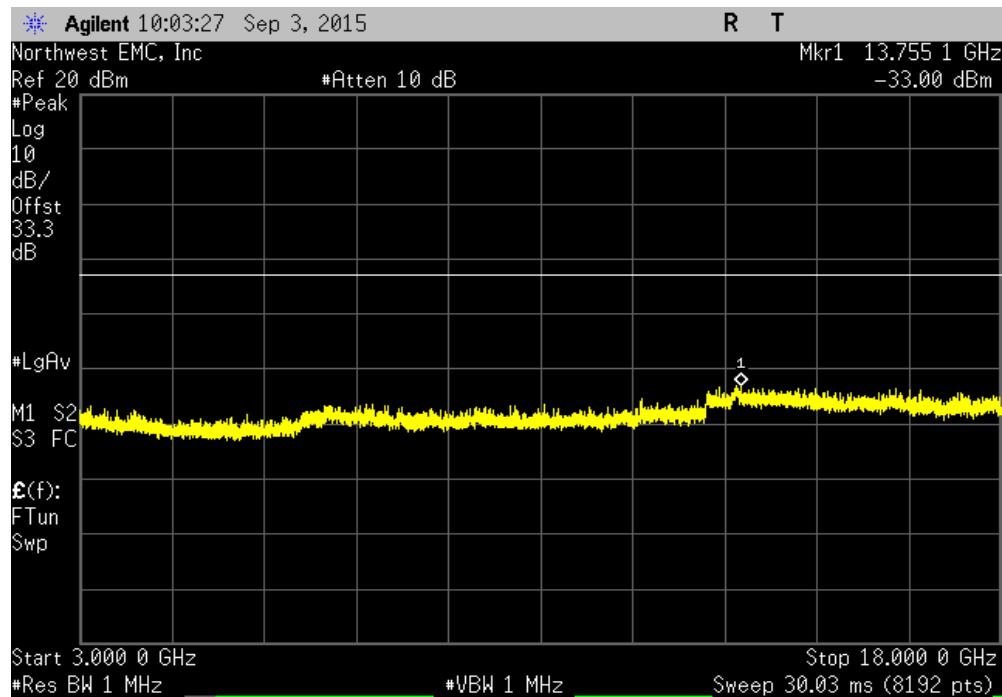


Mid Passband					
Frequency Range		Max Value (dBm)	Limit \leq (dBm)	Result	
18 GHz - 26 GHz		-31.3	-13	Pass	

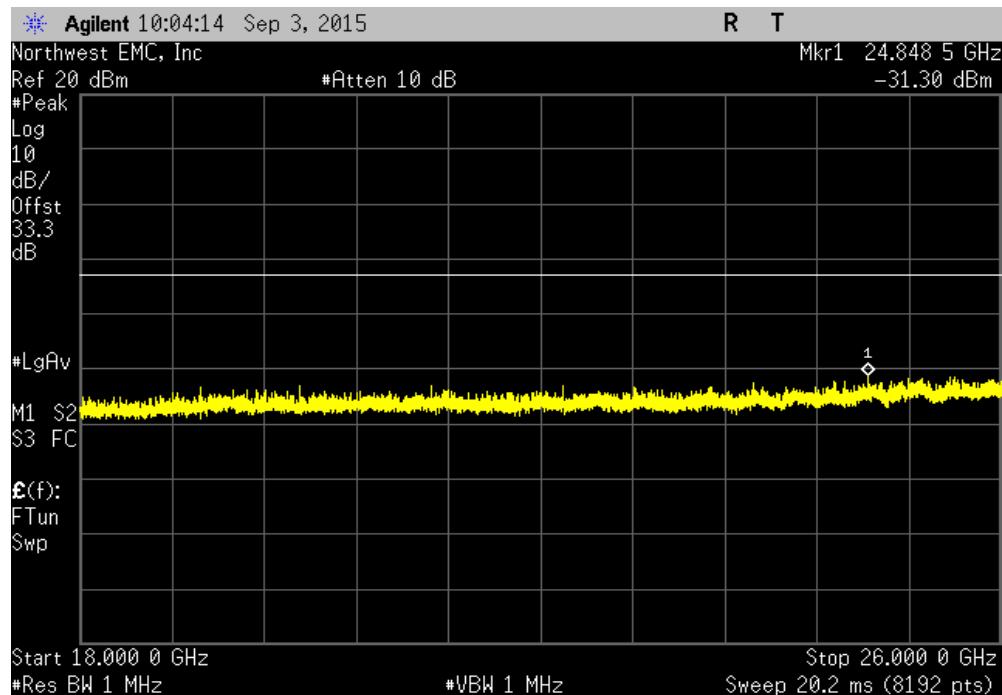


INTERMODULATION

High Passband		Max Value (dBm)	Limit \leq (dBm)	Result
Frequency Range	Fundamental	-15.82	-13	Pass

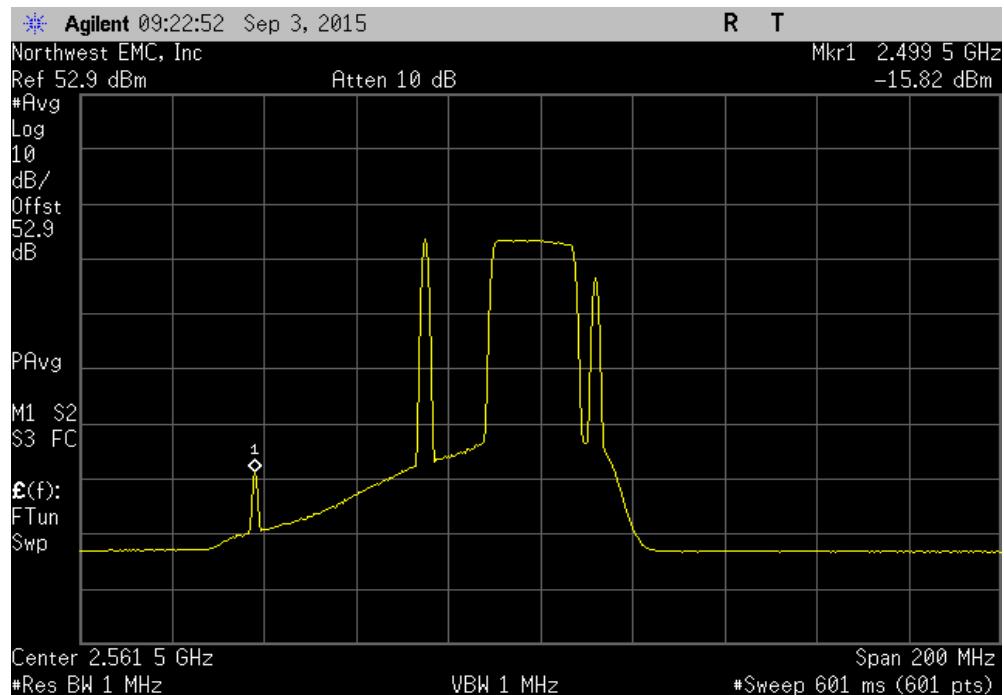


High Passband		Max Value (dBm)	Limit \leq (dBm)	Result
Frequency Range	30 MHz - 1 GHz	-29.31	-13	Pass

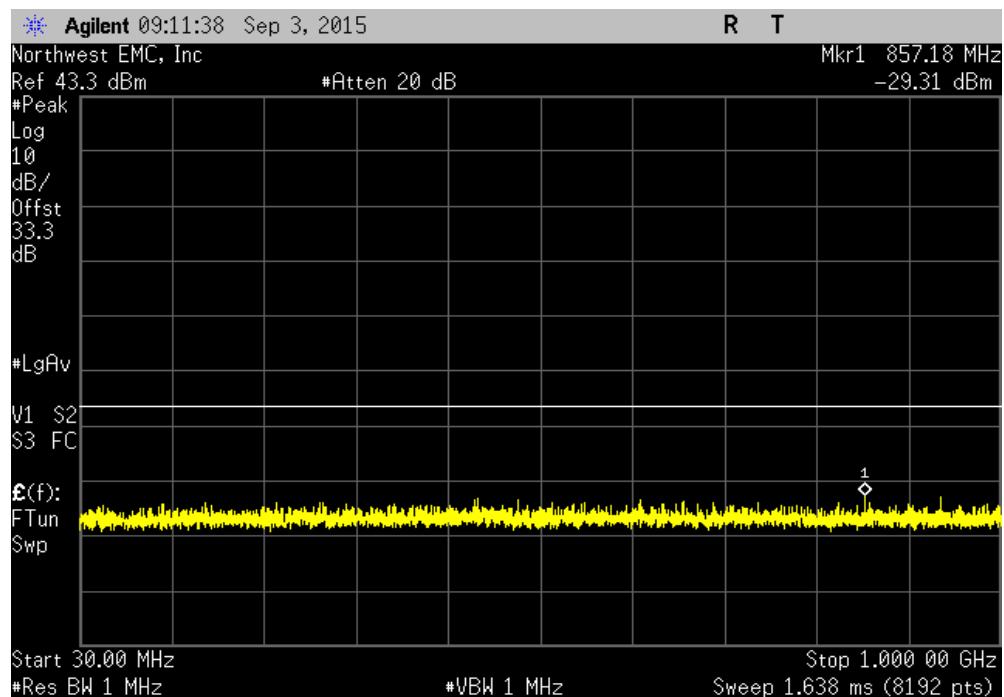


INTERMODULATION

High Passband					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
1 GHz - 3 GHz		-18.56	-13	Pass	

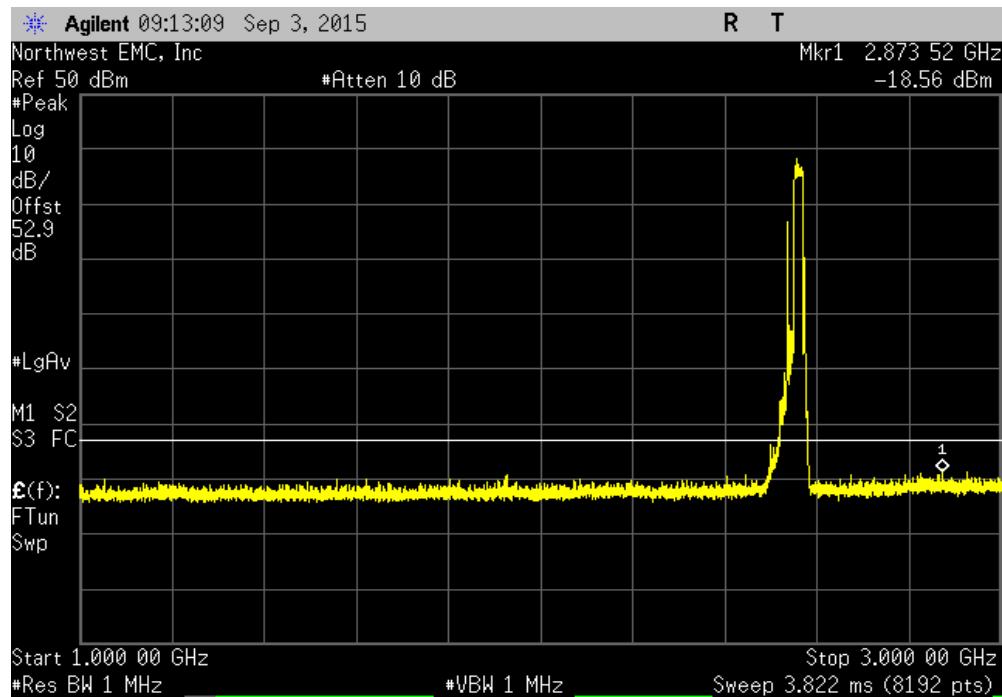


High Passband					
Frequency Range		Max Value (dBm)	Limit ≤ (dBm)	Result	
3 GHz - 18 GHz		-32.06	-13	Pass	

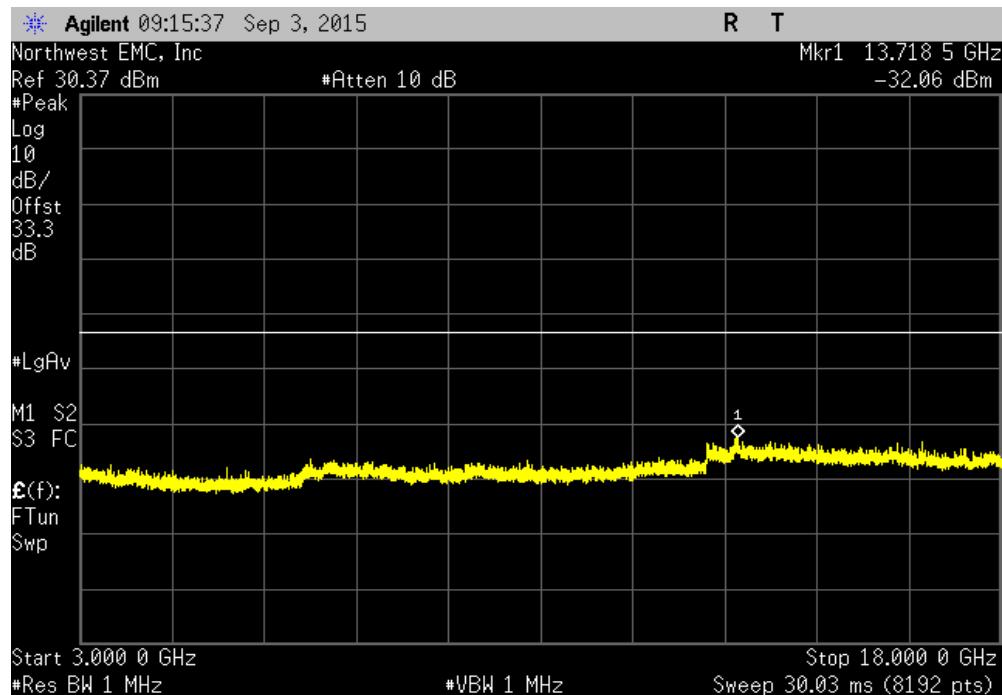

INTERMODULATION

High Passband			
Frequency Range	Max Value (dBm)	Limit \leq (dBm)	Result
18 GHz - 26 GHz	-31.63	-13	Pass

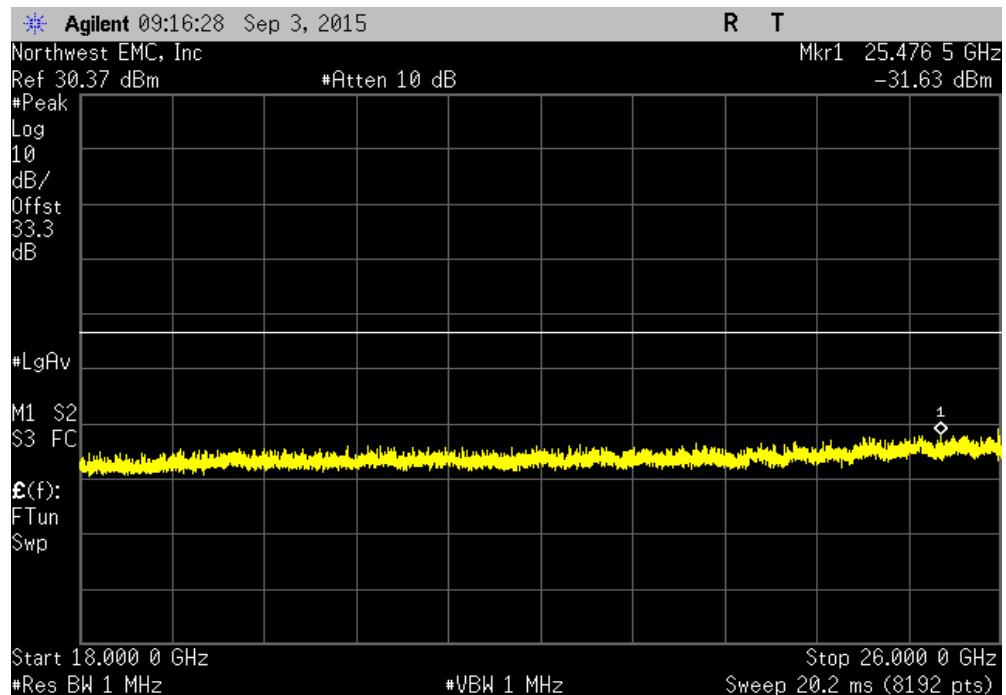

FREQUENCY STABILITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Meter - Multimeter	Fluke	117/EFSP	MLR	5/27/2015	36
Thermometer	Omega Engineering, Inc.	HH311	DUB	11/3/2014	36
Chamber - Temperature/Humidity	Cincinnati Sub Zero (CSZ)	ZPH-32-3.5-SCT/AC	TBF	10/10/2014	12
Transformer	Powerstat	246	XFR	NCR	0
Cable	ESM Cable Corp.	TTBJ141 KMKM-72	MNU	10/2/2014	12
Attenuator	S.M. Electronics	SA26B-20	RFW	3/10/2015	12
Block - DC	Fairview Microwave	SD3379	AMI	10/2/2014	12
Generator - Signal	Agilent	N5183A	TIK	10/17/2014	36
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	4/20/2015	12

TEST DESCRIPTION

An RF signal generator was used to create the modulated signal(s) listed in the datasheets. These signals were input into the EUT.

A direct connect measurement was made between the EUT's antenna cable and a spectrum analyzer. The spectrum analyzer is equipped with a precision frequency reference that exceeds the stability requirement of the EUT.

Measurements were made at the edges of the main transmit bands as called out on the data sheets. Testing was done with an absence of modulation in a CW mode of operation.

The primary supply voltage was varied from 85 % to 115% of the nominal voltage. Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-30 ° to +50° C) and at 10°C intervals.

Per the requirements of FCC Part 27.54:

"The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation."


No specific limits are provided in either FCC 27.54, the product specific rule part, or FCC 2.1055, the equipment authorization procedure for testing frequency stability. While there are no limits called out, any results less than 100ppm will still allow the radio to be operating within the band.

FREQUENCY STABILITY


EUT:	Prism 2500TDD Low Band SISO HDM	Work Order:	TECO0031			
Serial Number:	None	Date:	09/02/15			
Customer:	ADC Telecommunications / Commscope	Temperature:	22.3°C			
Attendees:	None	Humidity:	65%			
Project:	None	Barometric Pres.:	982.6			
Tested by:	Trevor Buls	Power:	110VAC/60Hz			
TEST SPECIFICATIONS		Test Method	ANSI/TIA/EIA-603-C-2004			
FCC 27:2015						
COMMENTS	Both antenna ports were terminated but only one port is active					
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature	Trevor Buls			
		Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results
Voltage: 115%						
Low Channel, 2506.5 MHz				8	100	Pass
Mid Channel, 2534 MHz				39.5	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass
Voltage: 100%						
Low Channel, 2506.5 MHz				8	100	Pass
Mid Channel, 2534 MHz				39.5	100	Pass
High Channel, 2561.5 MHz				31.2	100	Pass
Voltage: 85%						
Low Channel, 2506.5 MHz				8	100	Pass
Mid Channel, 2534 MHz				39.5	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass
Temperature: +50°						
Low Channel, 2506.5 MHz				8	100	Pass
Mid Channel, 2534 MHz				31.6	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass
Temperature: +40°						
Low Channel, 2506.5 MHz				20	100	Pass
Mid Channel, 2534 MHz				31.6	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass
Temperature: +30°						
Low Channel, 2506.5 MHz				0	100	Pass
Mid Channel, 2534 MHz				31.6	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass
Temperature: +20°						
Low Channel, 2506.5 MHz				8	100	Pass
Mid Channel, 2534 MHz				39.5	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass
Temperature: +10°						
Low Channel, 2506.5 MHz				8	100	Pass
Mid Channel, 2534 MHz				39.5	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass
Temperature: 0°						
Low Channel, 2506.5 MHz				20	100	Pass
Mid Channel, 2534 MHz				39.5	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass
Temperature: -10°						
Low Channel, 2506.5 MHz				0	100	Pass
Mid Channel, 2534 MHz				31.6	100	Pass
High Channel, 2561.5 MHz				31.2	100	Pass
Temperature: -20°						
Low Channel, 2506.5 MHz				8	100	Pass
Mid Channel, 2534 MHz				31.6	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass
Temperature: -30°						
Low Channel, 2506.5 MHz				8	100	Pass
Mid Channel, 2534 MHz				31.6	100	Pass
High Channel, 2561.5 MHz				19.5	100	Pass

FREQUENCY STABILITY

Voltage: 115%, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.52	2506.5	8	100	Pass	

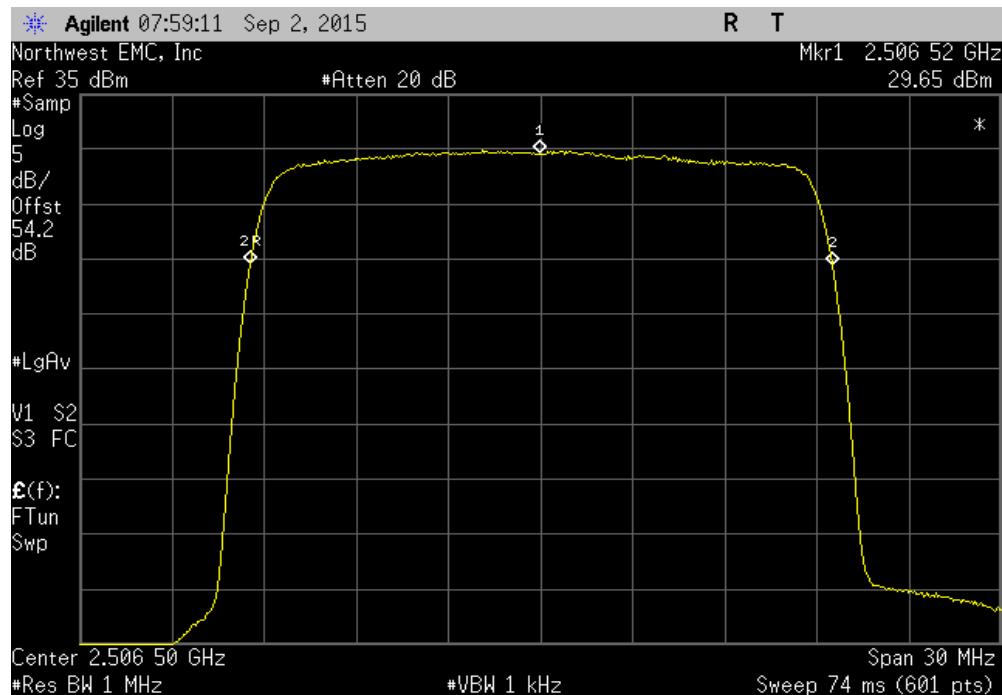


Voltage: 115%, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.1	2534	39.5	100	Pass	

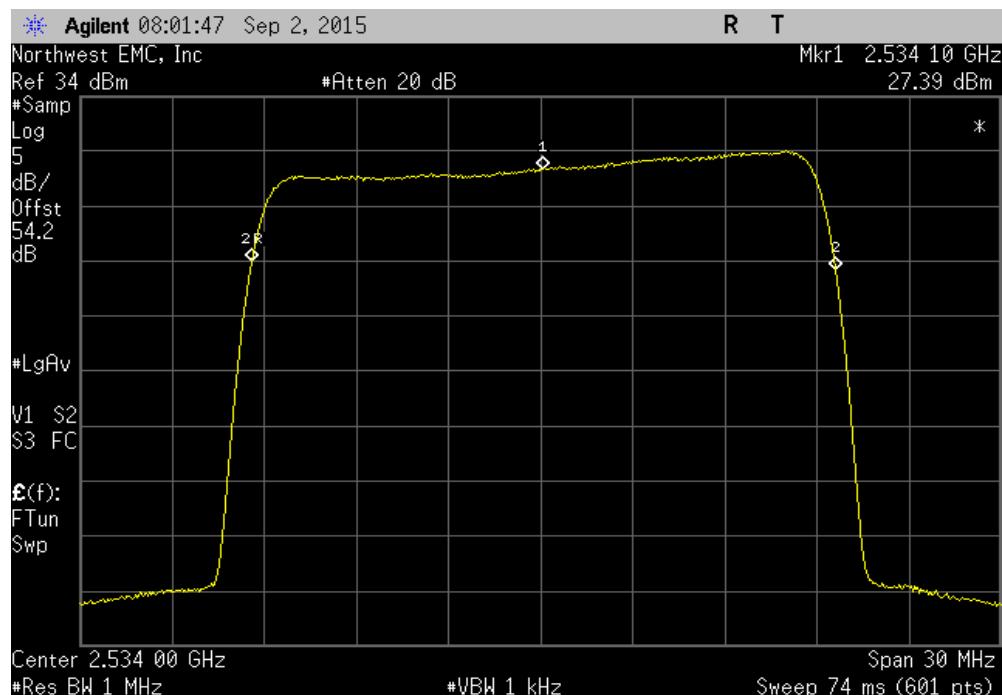


FREQUENCY STABILITY

Voltage: 115%, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

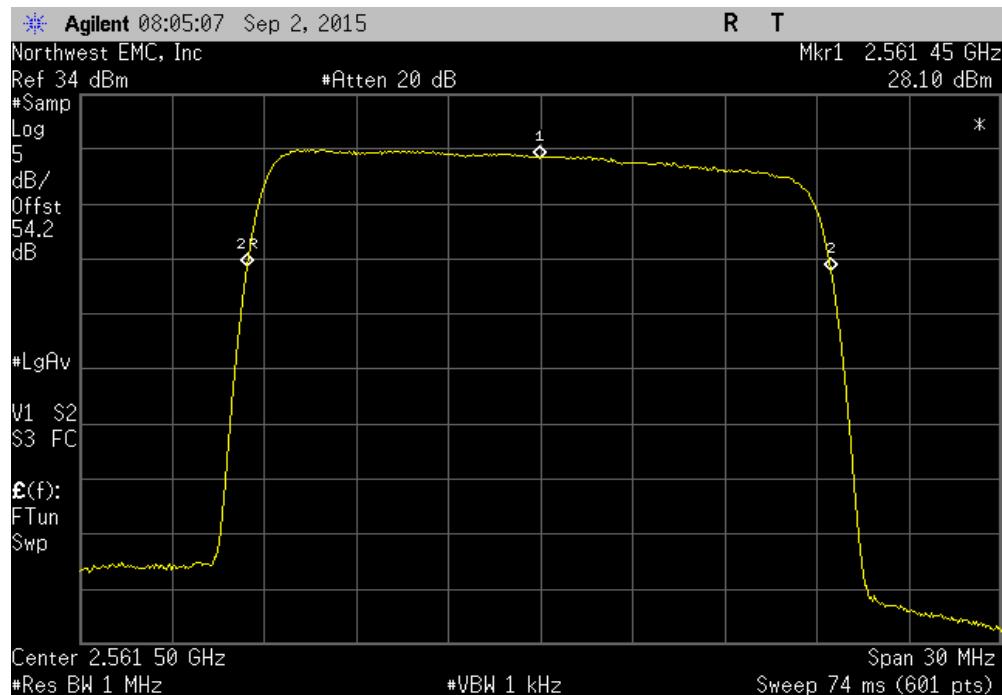


Voltage: 100%, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.52	2506.5	8	100	Pass	

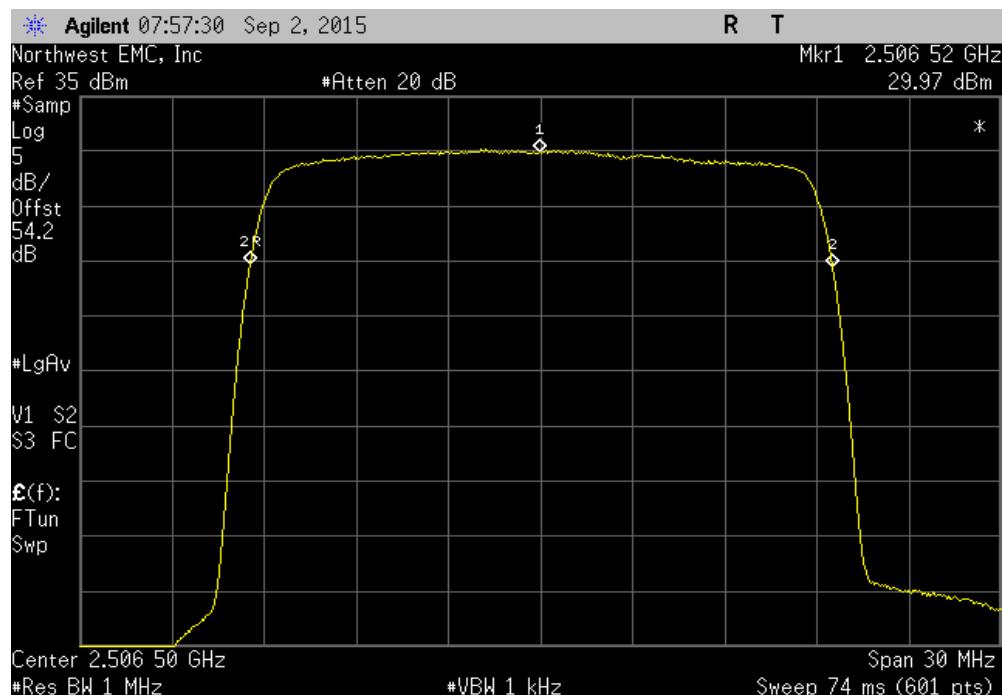


FREQUENCY STABILITY

Voltage: 100%, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.1	2534	39.5	100	Pass	

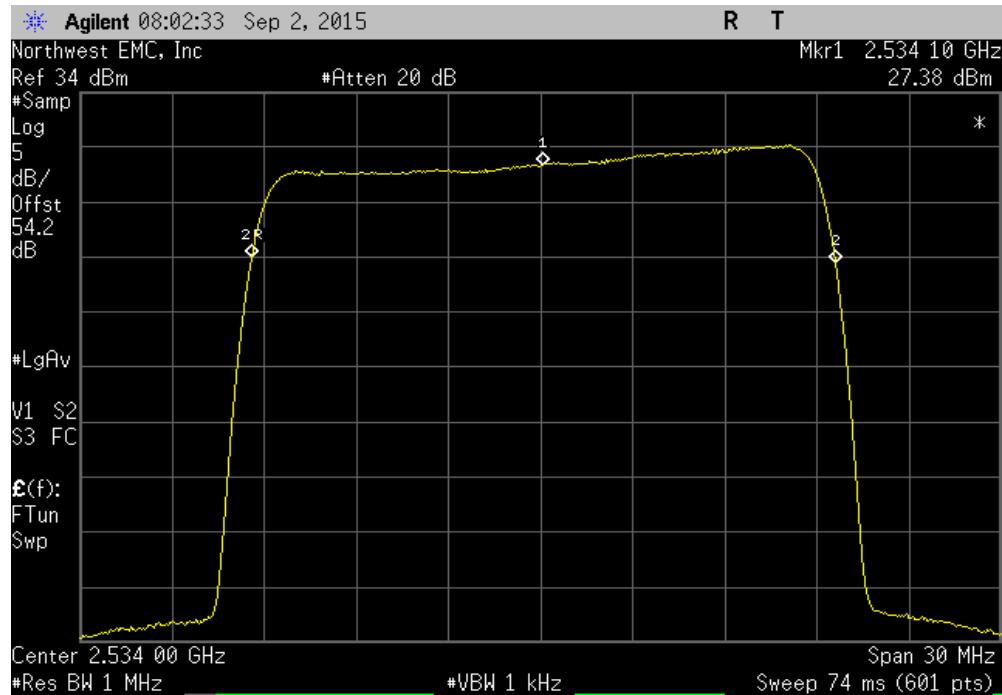


Voltage: 100%, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.42	2561.5	31.2	100	Pass	

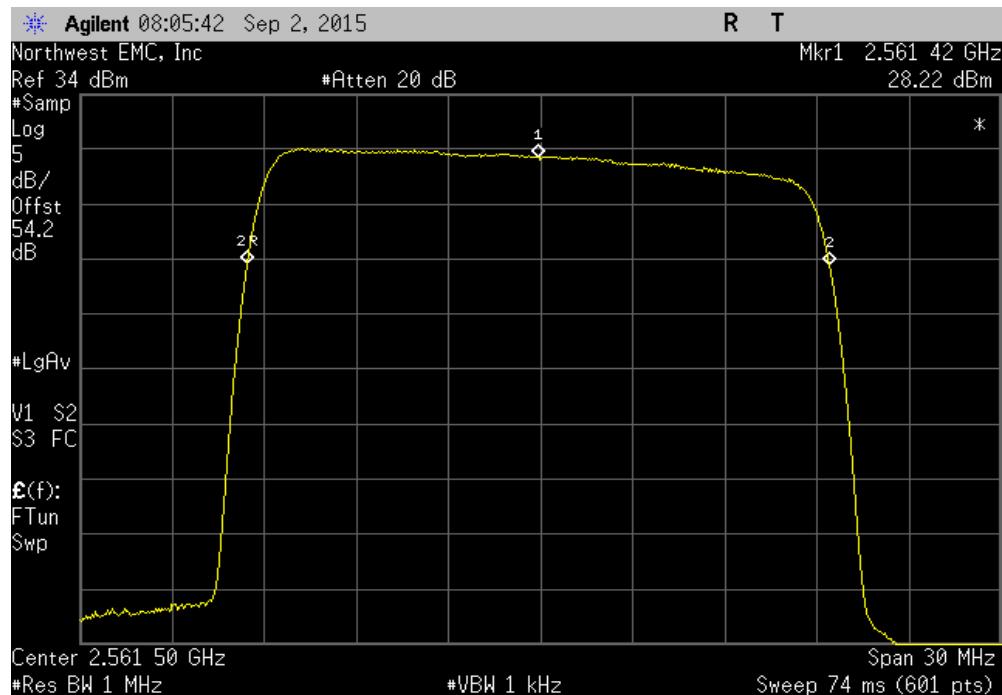


FREQUENCY STABILITY

Voltage: 85%, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.52	2506.5	8	100	Pass	

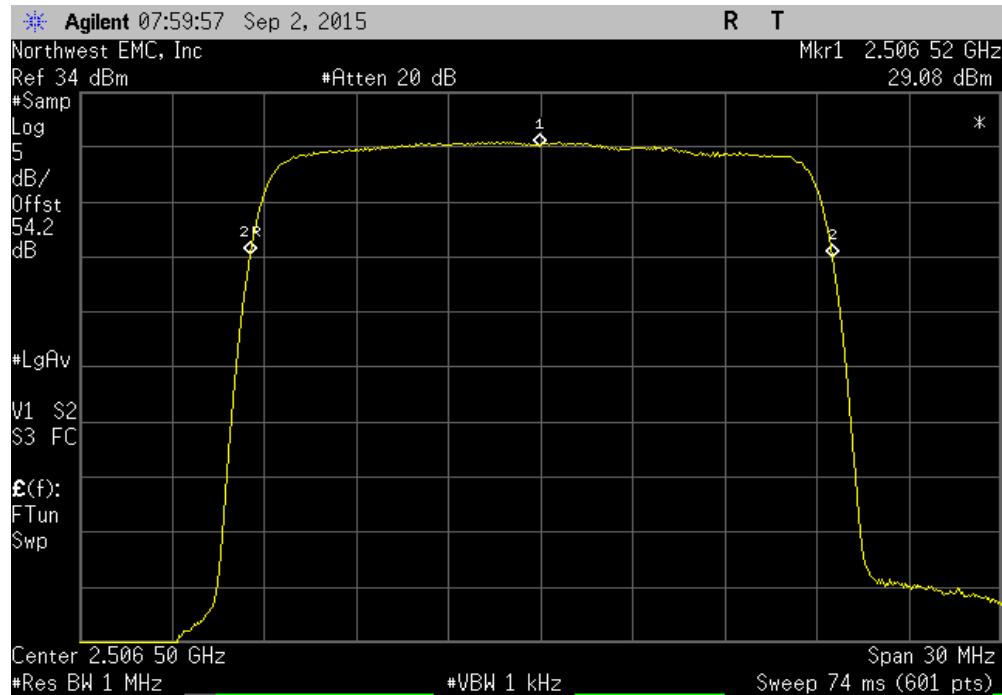


Voltage: 85%, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.1	2534	39.5	100	Pass	

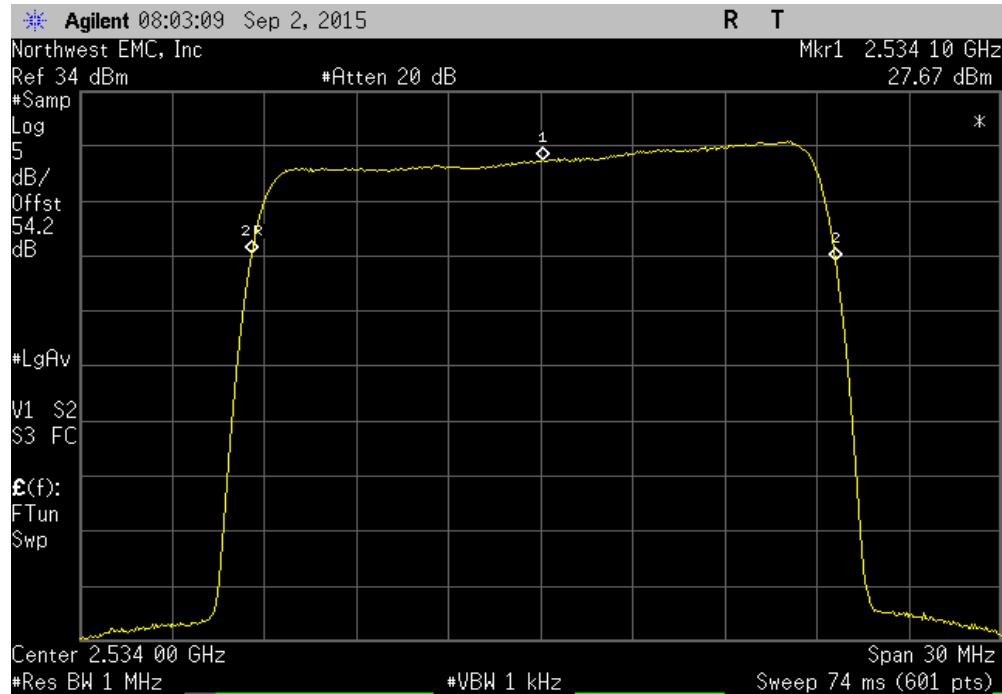


FREQUENCY STABILITY

Voltage: 85%, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

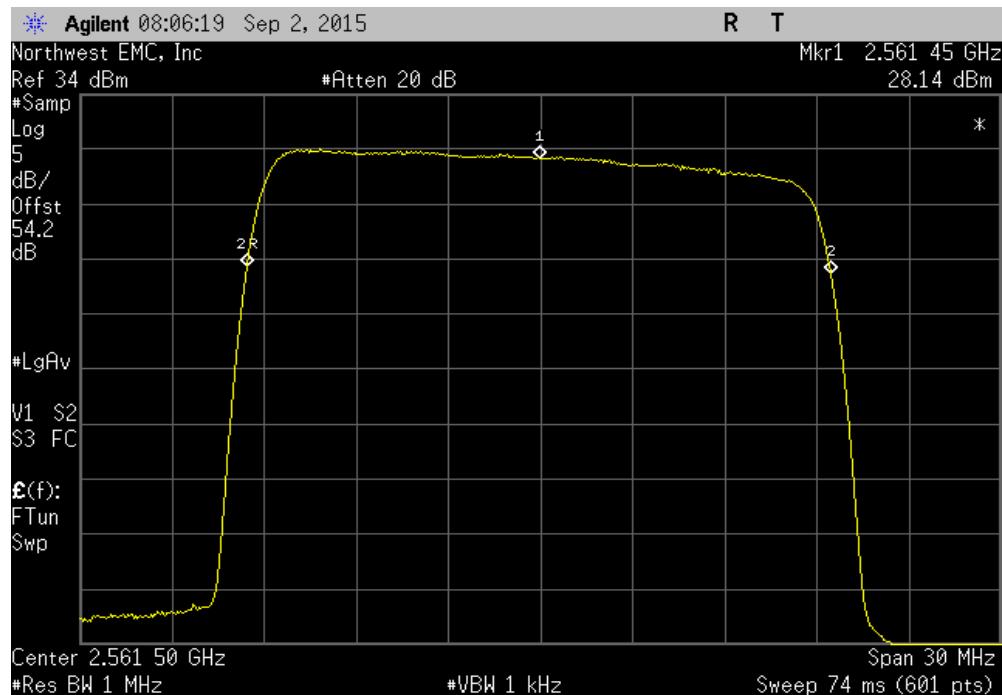


Temperature: +50°, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.52	2506.5	8	100	Pass	

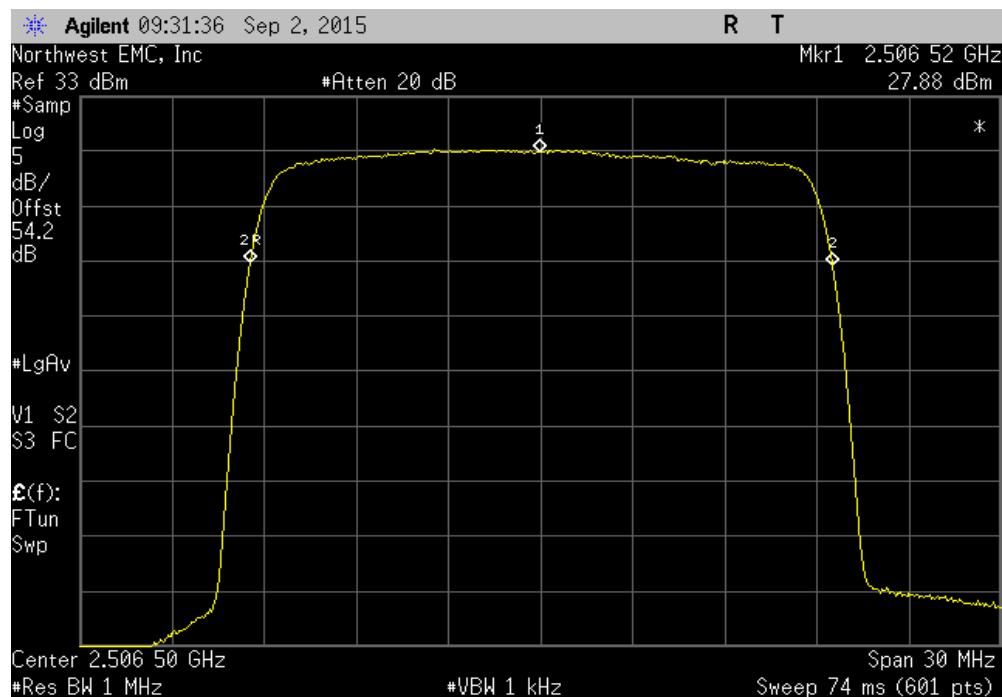


FREQUENCY STABILITY

Temperature: +50°, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.08	2534	31.6	100	Pass	

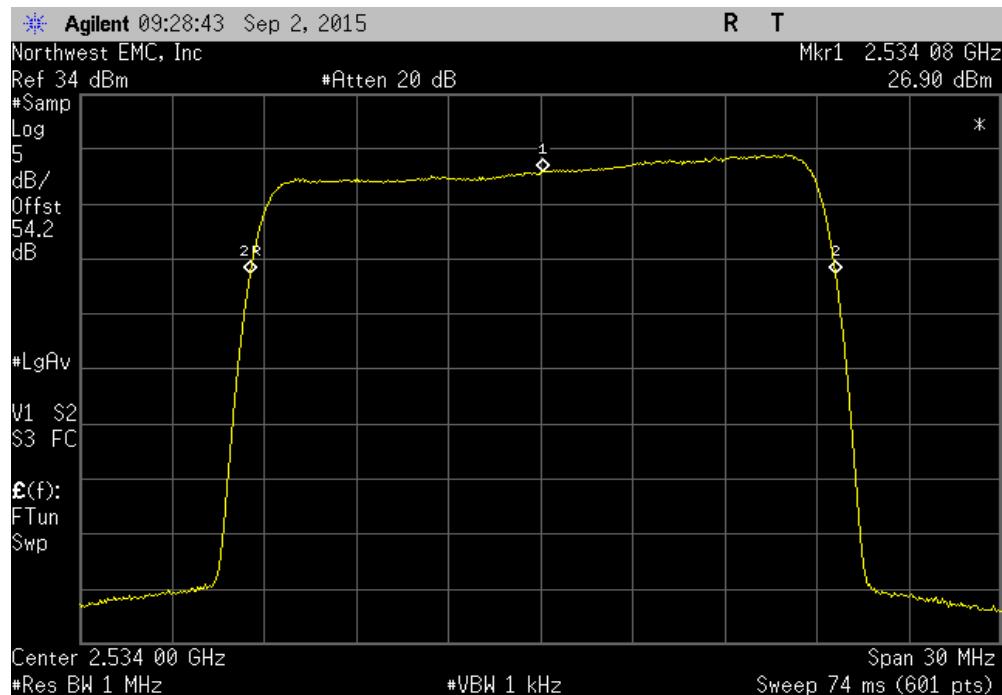


Temperature: +50°, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

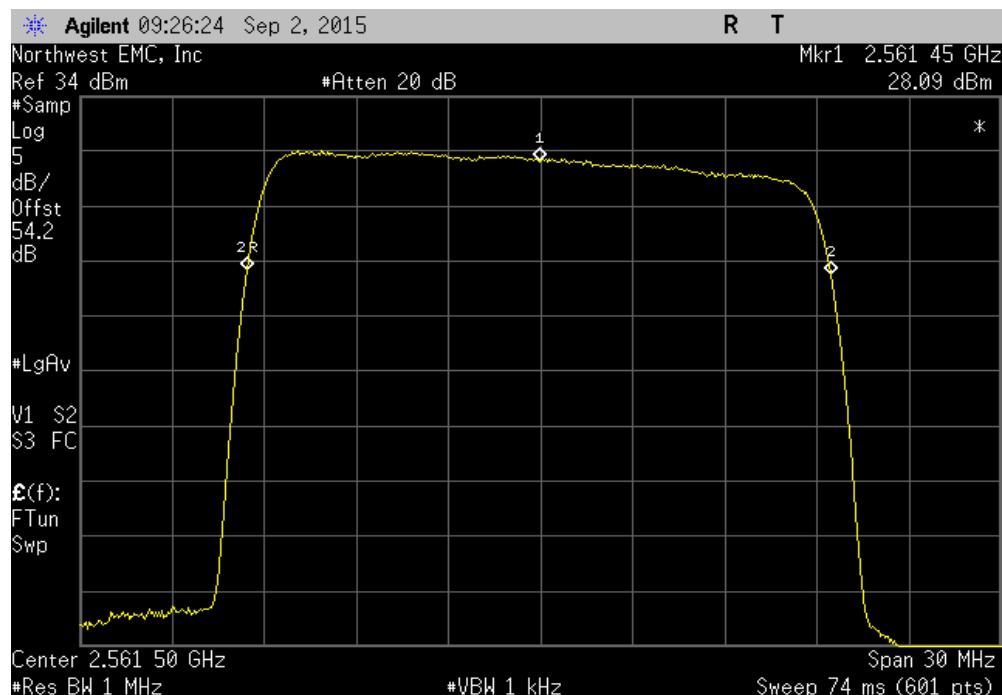


FREQUENCY STABILITY

Temperature: +40°, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.55	2506.5	20	100	Pass	

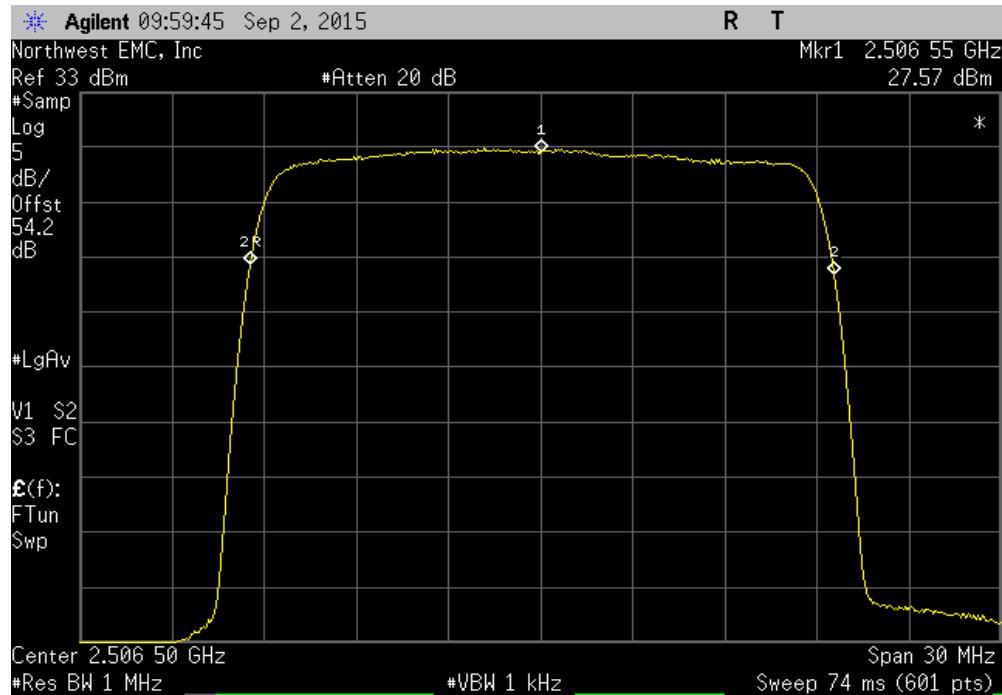


Temperature: +40°, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.08	2534	31.6	100	Pass	

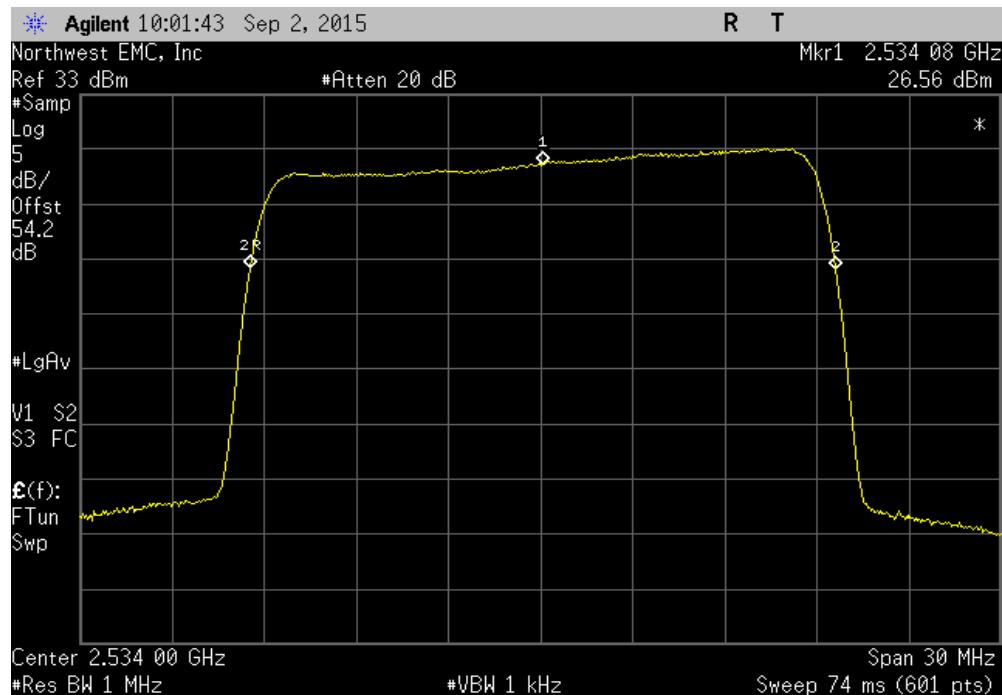


FREQUENCY STABILITY

Temperature: +40°, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

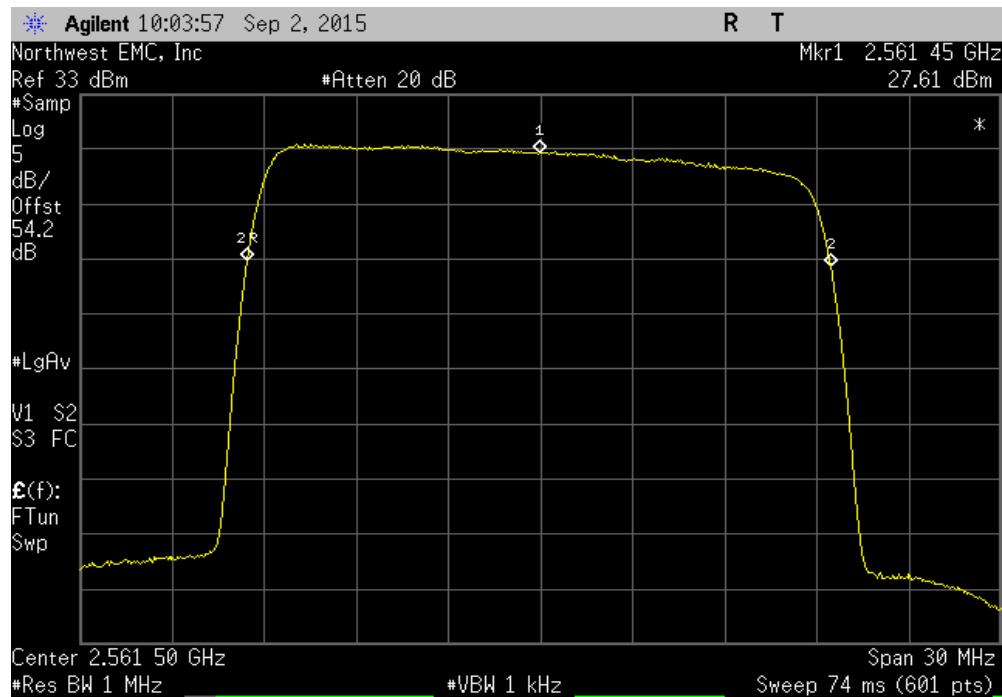


Temperature: +30°, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.5	2506.5	0	100	Pass	

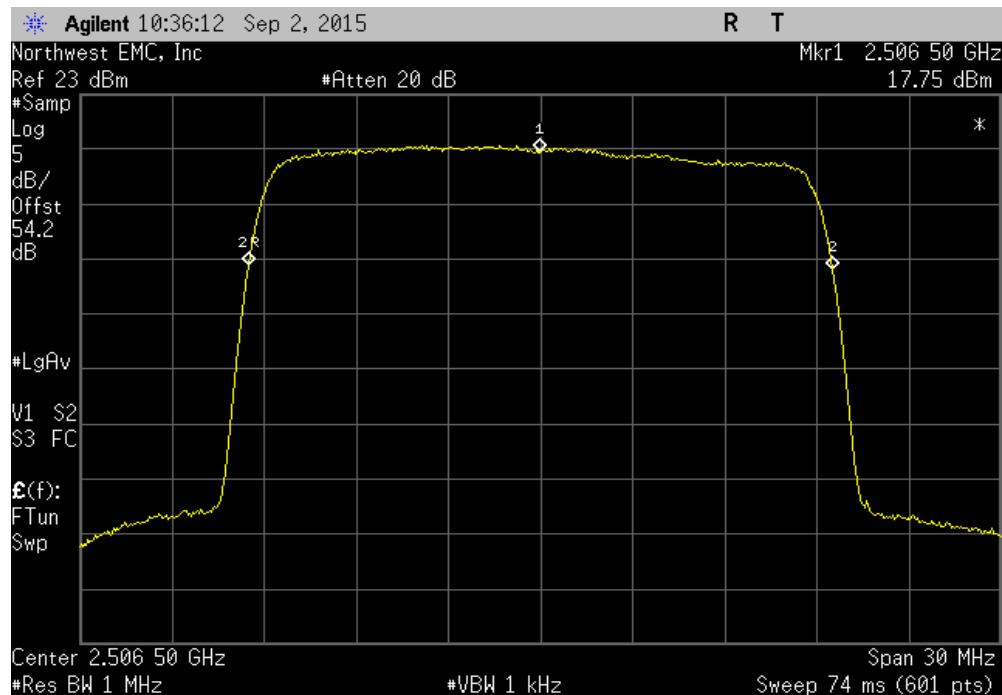


FREQUENCY STABILITY

Temperature: +30°, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.08	2534	31.6	100	Pass	

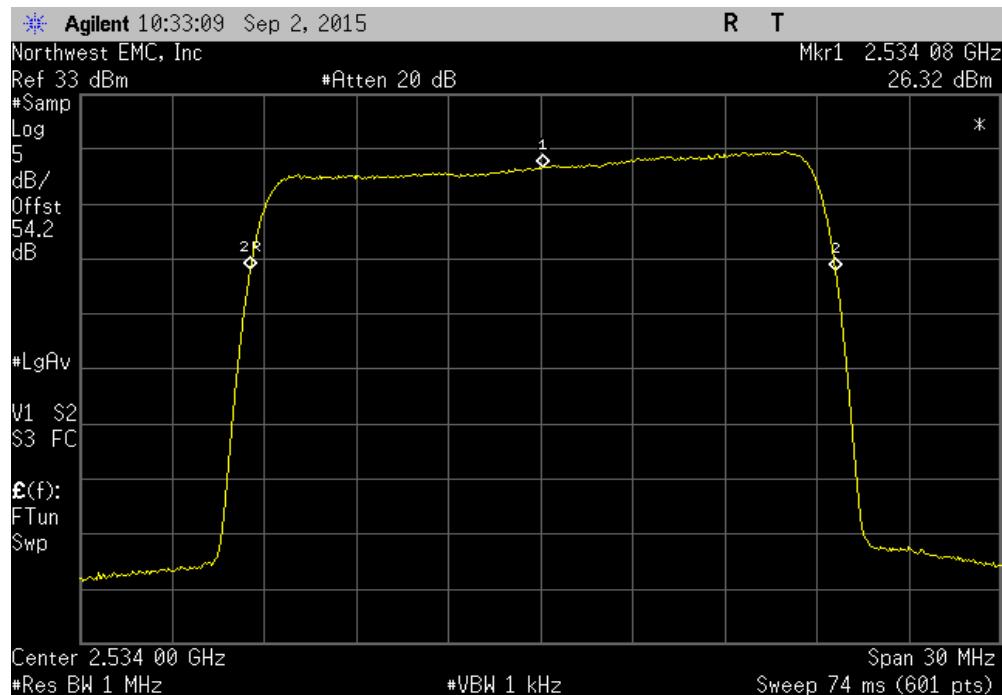


Temperature: +30°, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

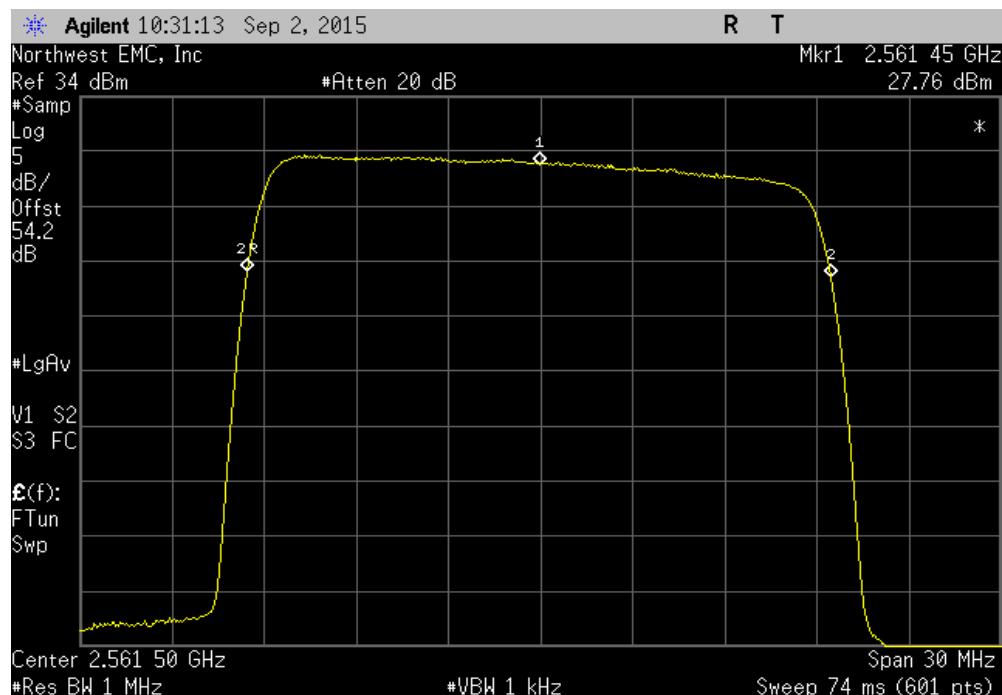


FREQUENCY STABILITY

Temperature: +20°, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.52	2506.5	8	100	Pass	

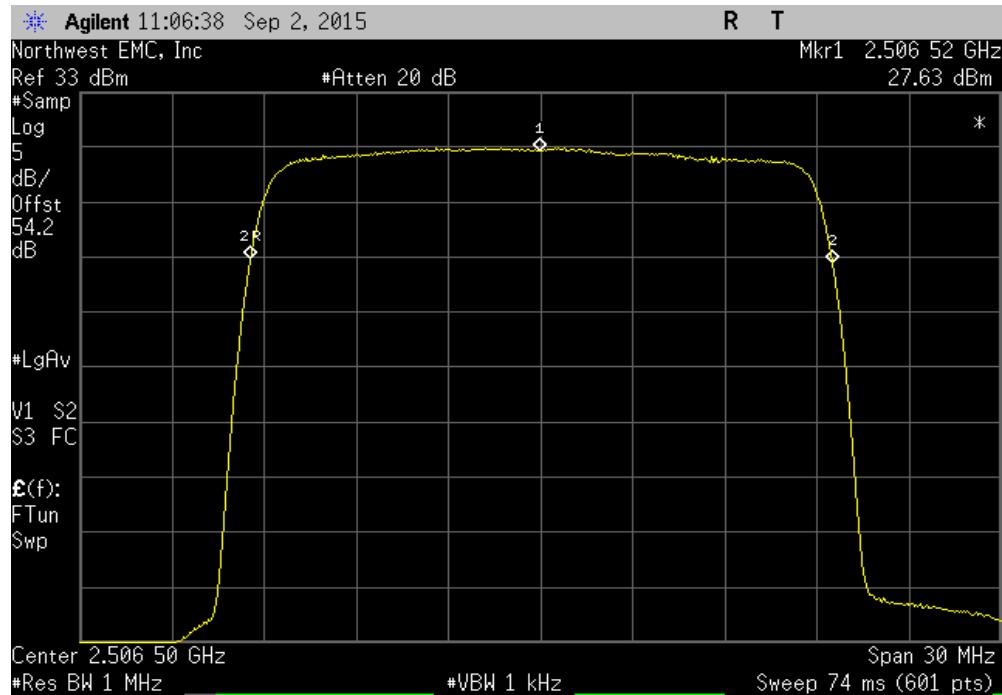


Temperature: +20°, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.1	2534	39.5	100	Pass	

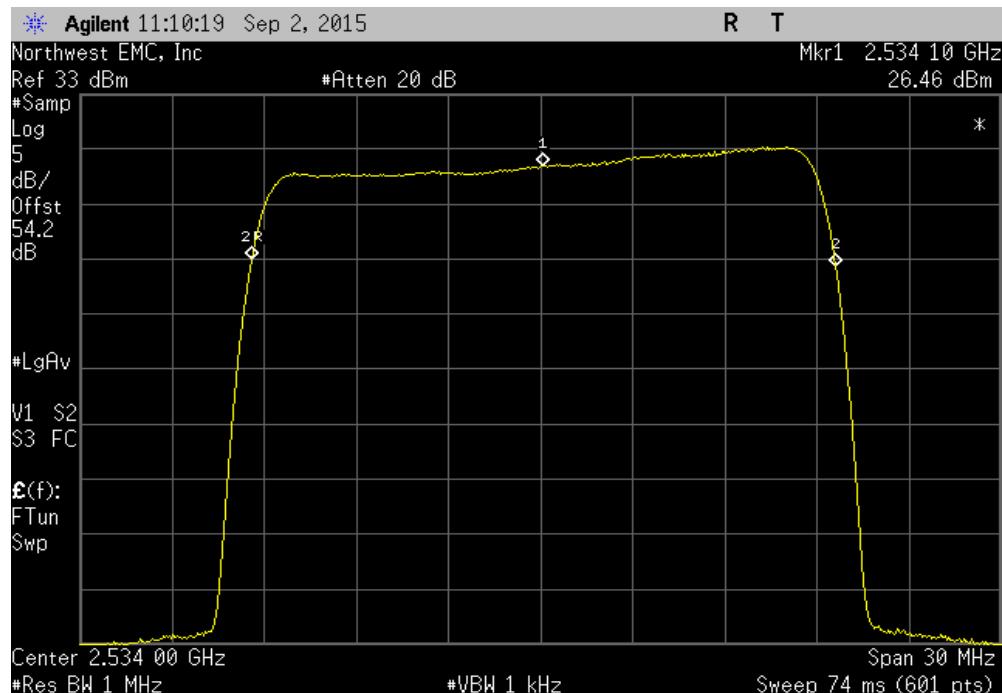


FREQUENCY STABILITY

Temperature: +20°, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

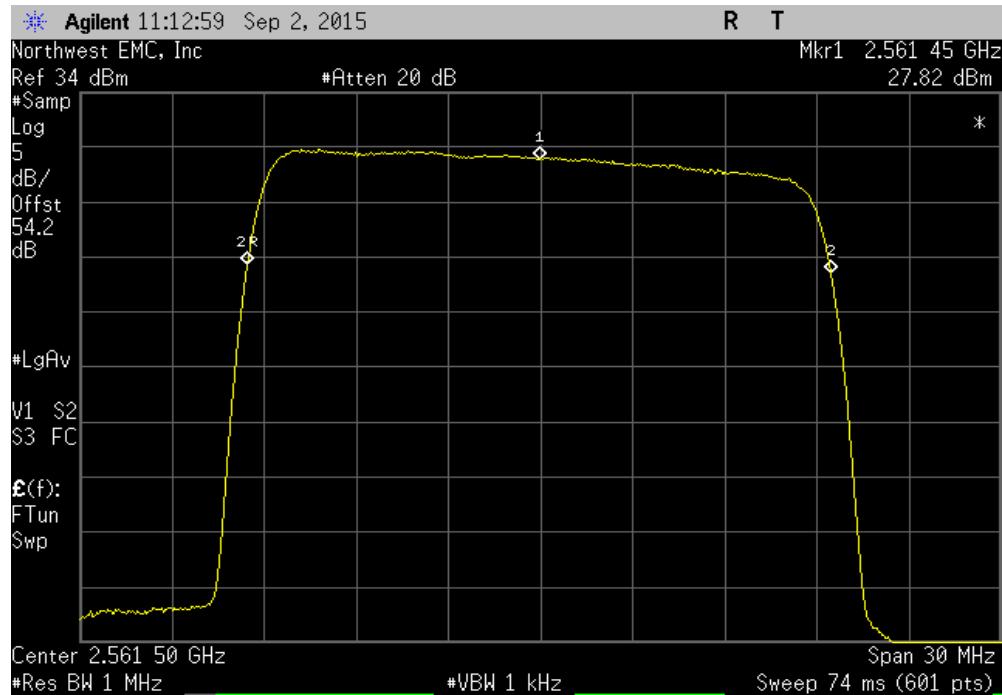


Temperature: +10°, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.52	2506.5	8	100	Pass	

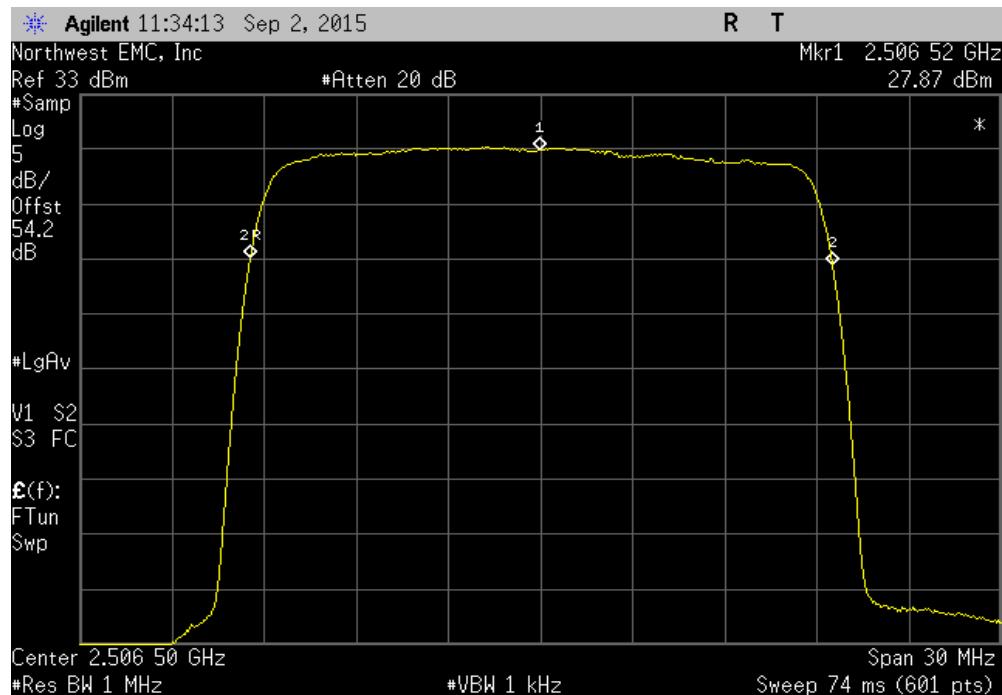


FREQUENCY STABILITY

Temperature: +10°, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.1	2534	39.5	100	Pass	

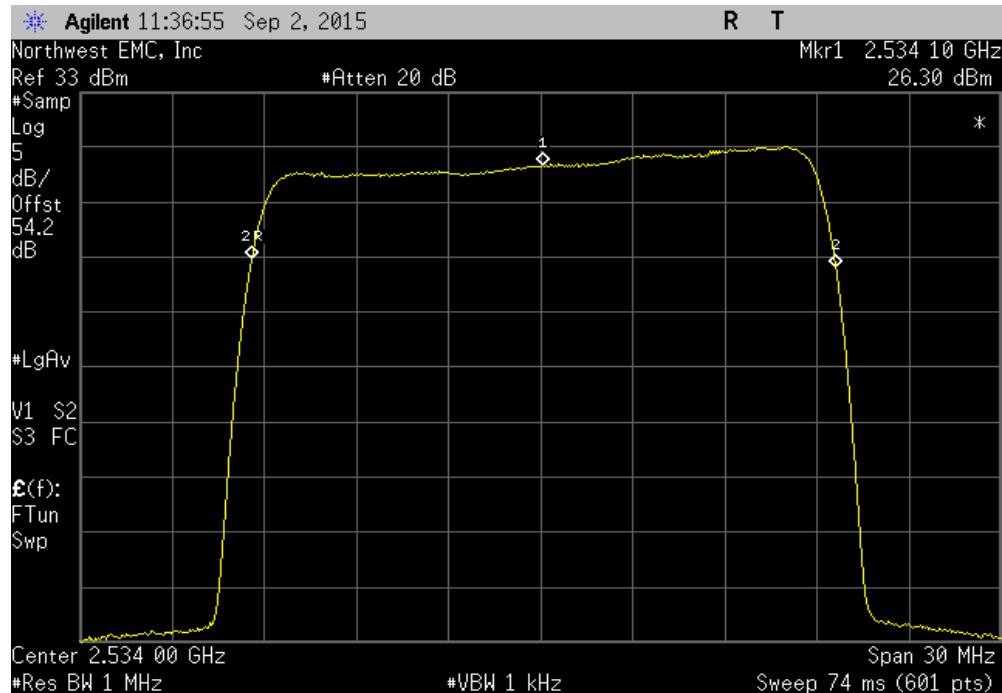


Temperature: +10°, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

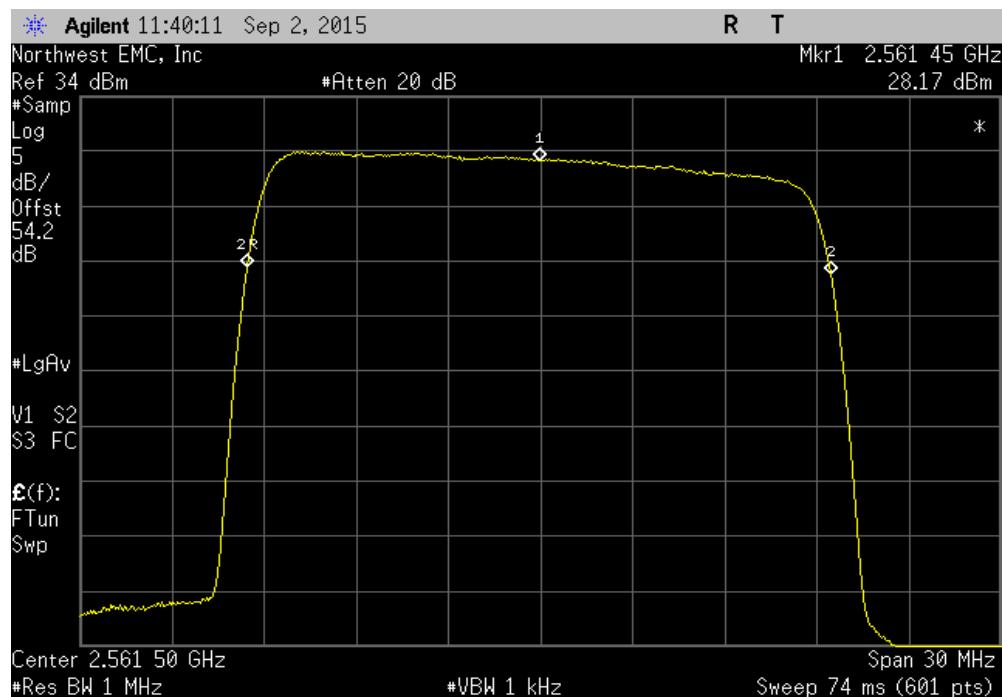


FREQUENCY STABILITY

Temperature: 0°, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.55	2506.5	20	100	Pass	

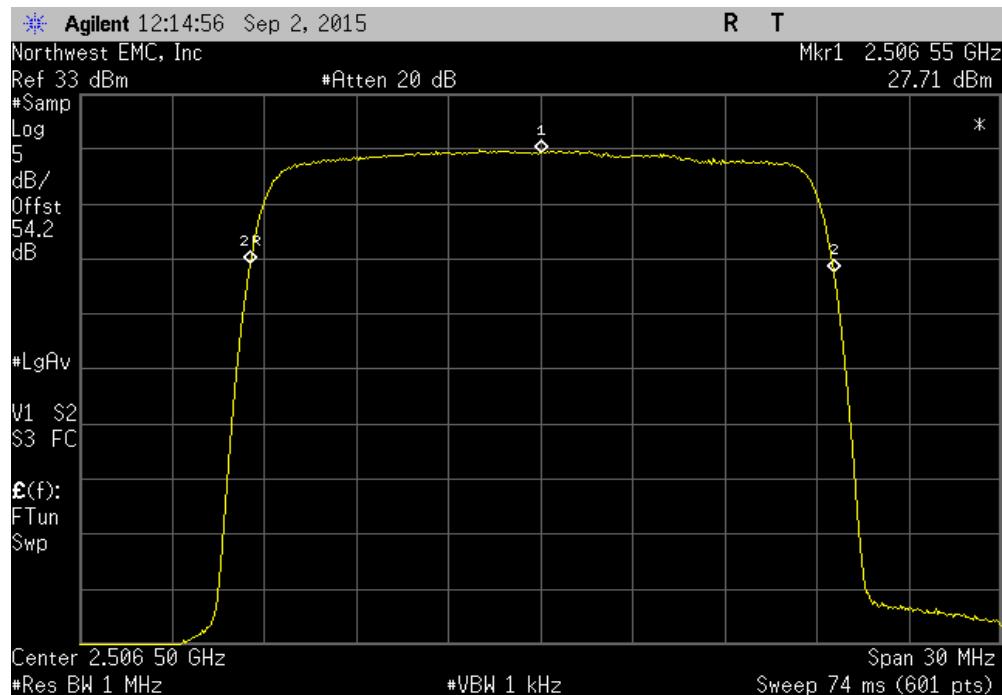


Temperature: 0°, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.1	2534	39.5	100	Pass	

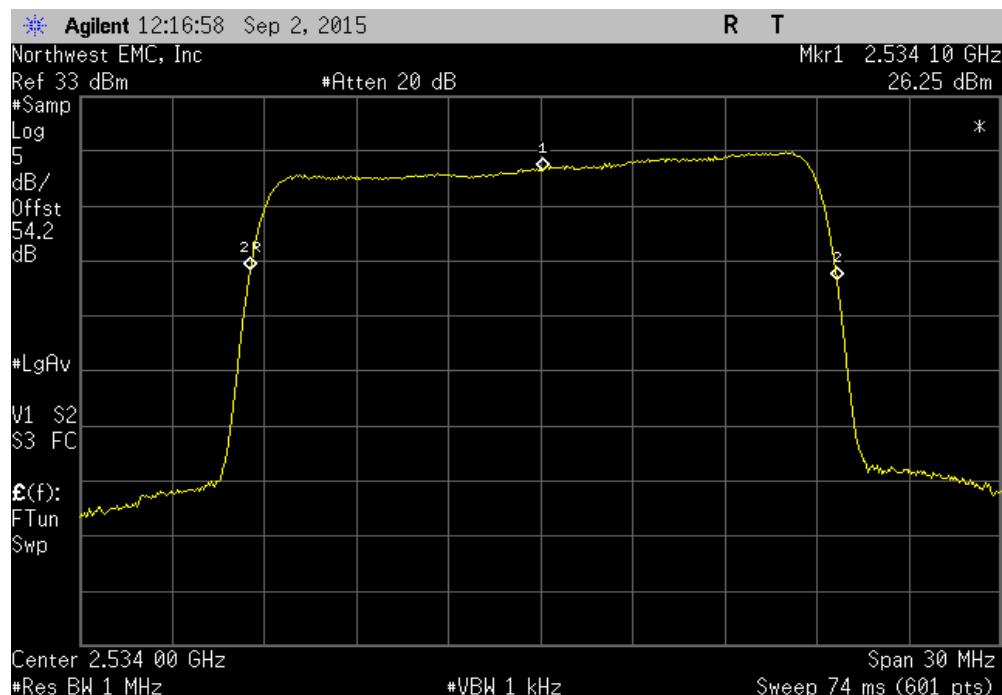


FREQUENCY STABILITY

Temperature: 0°, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

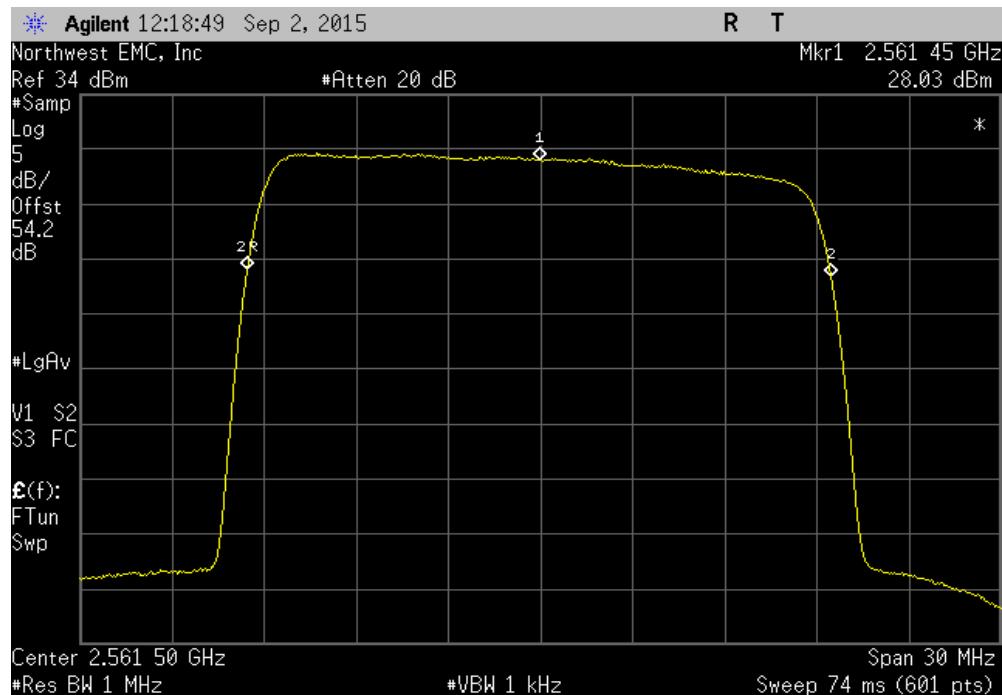


Temperature: -10°, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.5	2506.5	0	100	Pass	

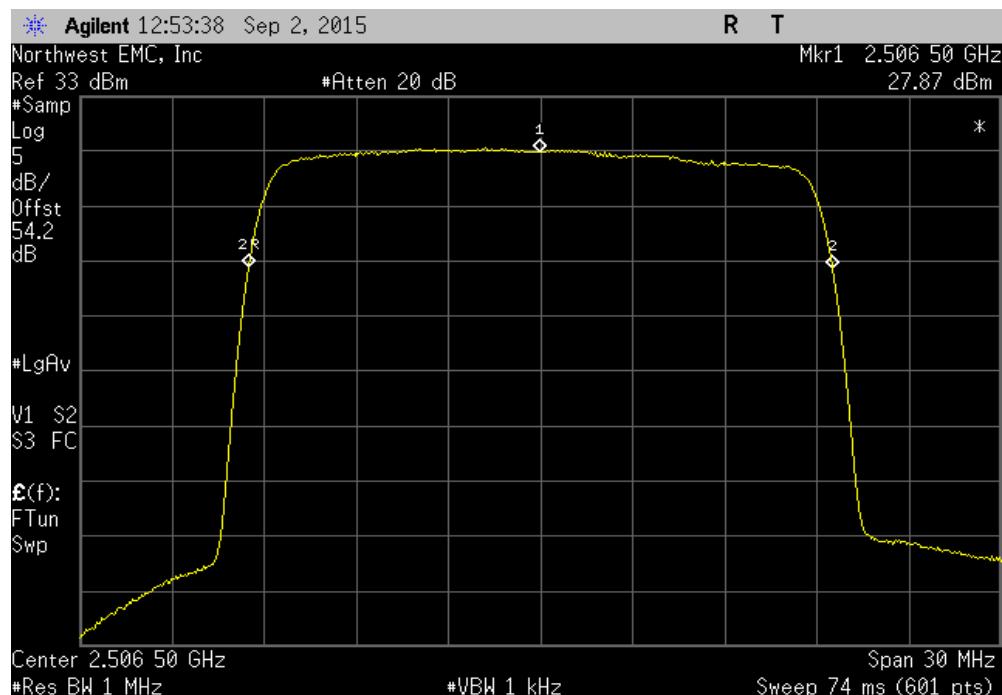


FREQUENCY STABILITY

Temperature: -10°, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.08	2534	31.6	100	Pass	

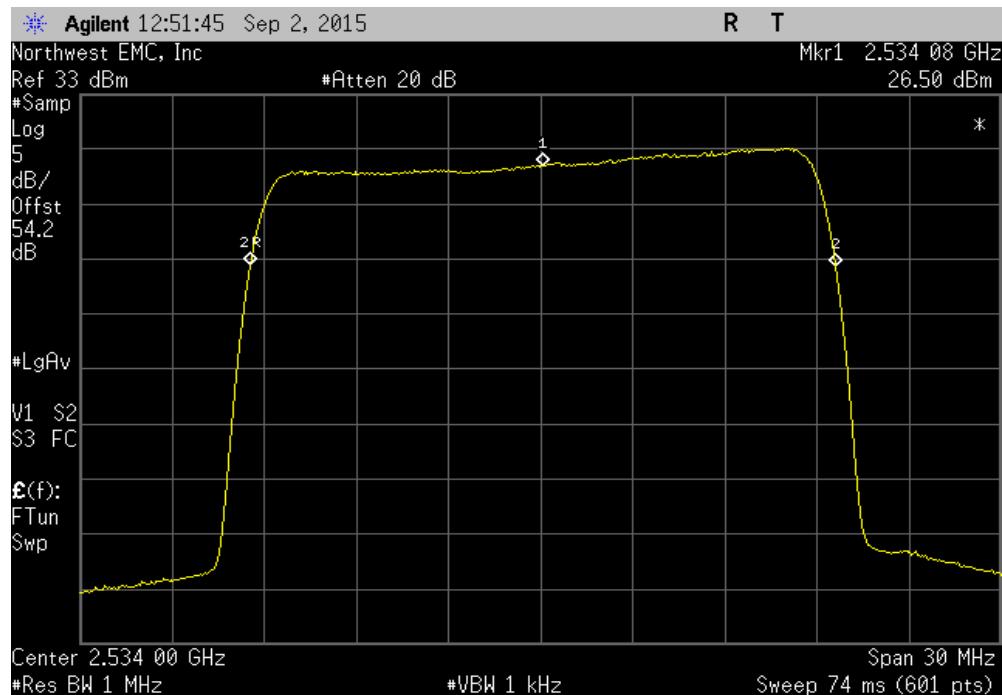


Temperature: -10°, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.42	2561.5	31.2	100	Pass	

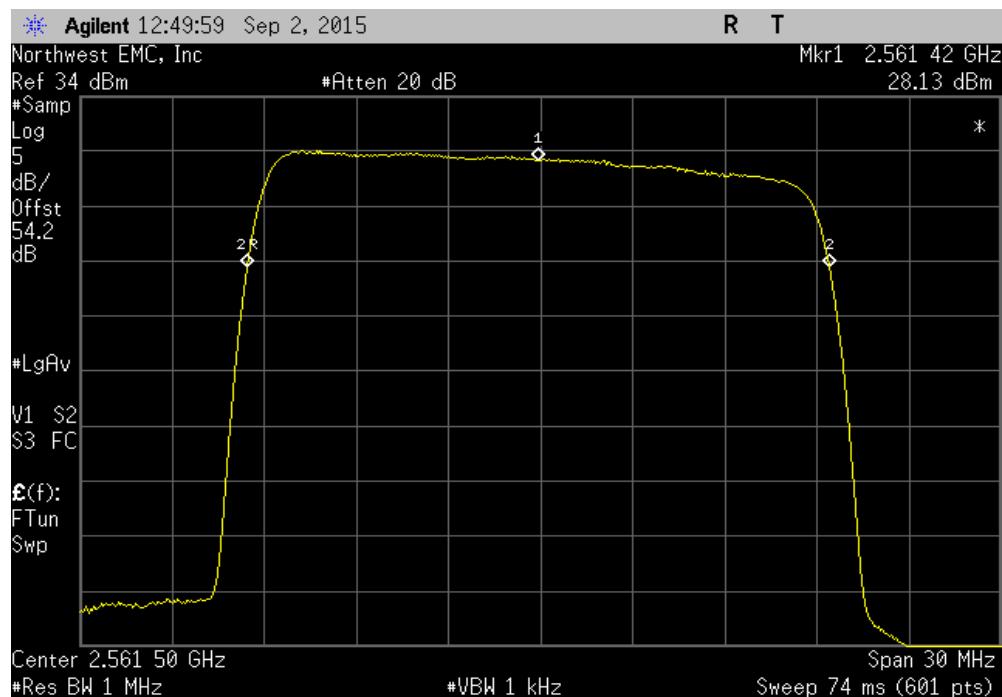


FREQUENCY STABILITY

Temperature: -20°, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.52	2506.5	8	100	Pass	

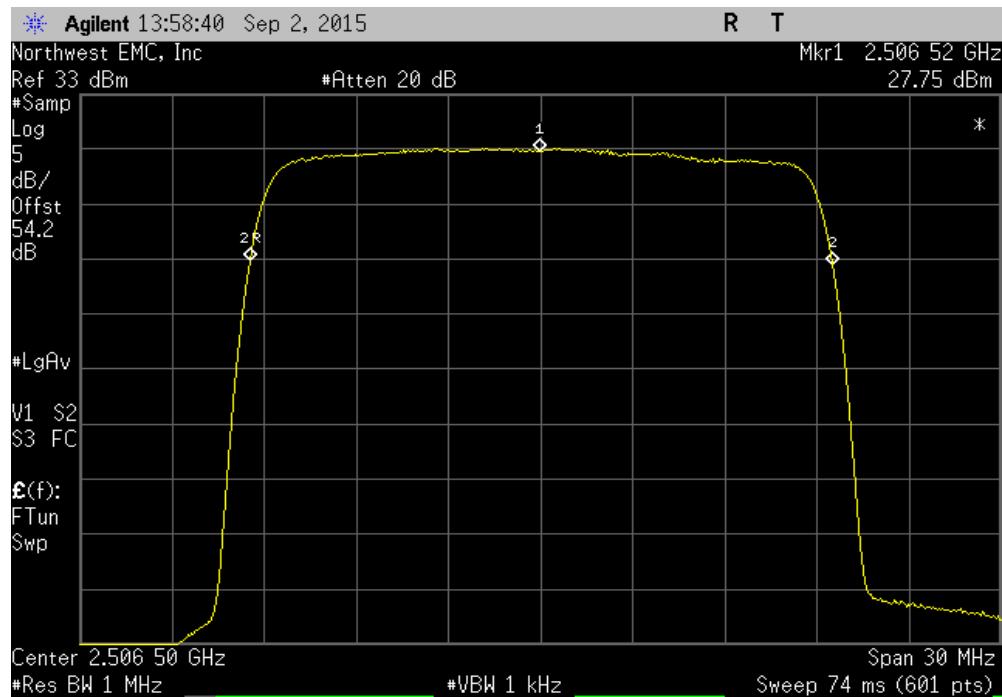


Temperature: -20°, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.08	2534	31.6	100	Pass	

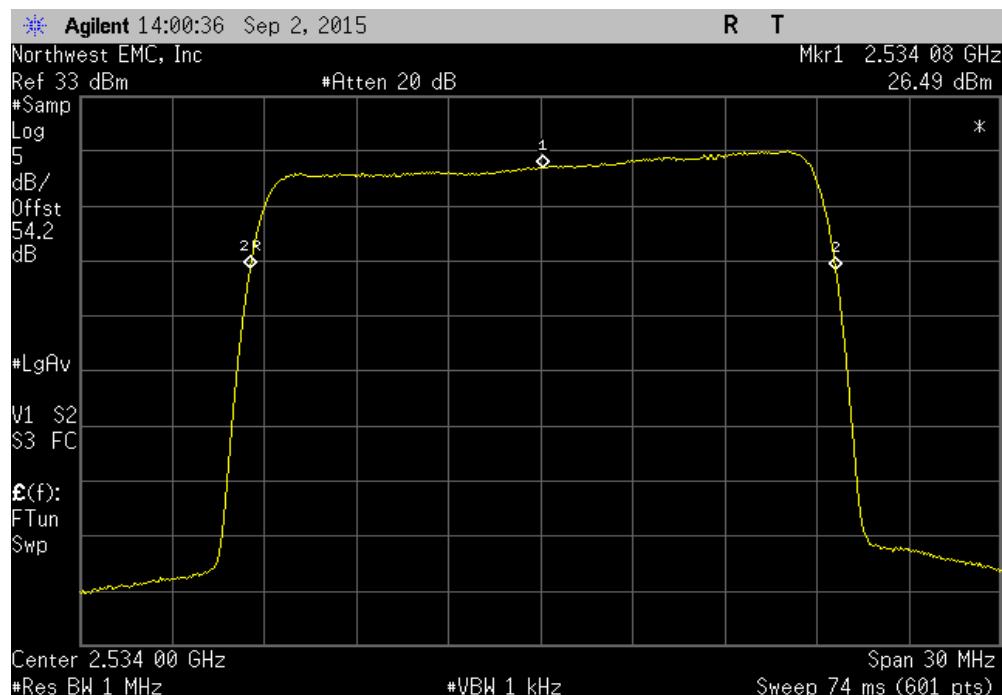


FREQUENCY STABILITY

Temperature: -20°, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

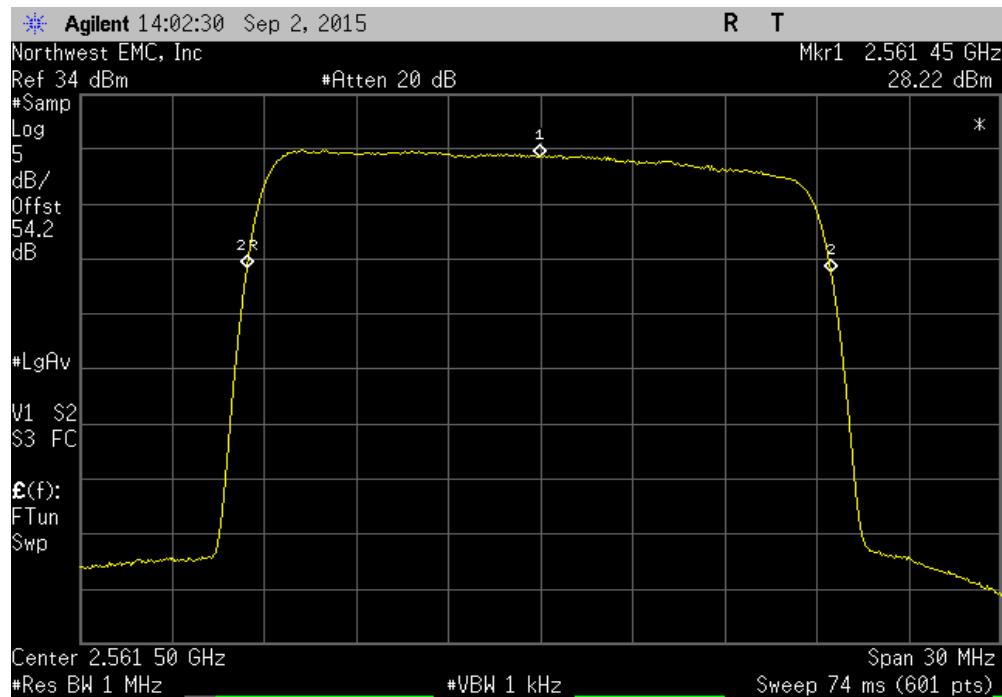


Temperature: -30°, Low Channel, 2506.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2506.52	2506.5	8	100	Pass	

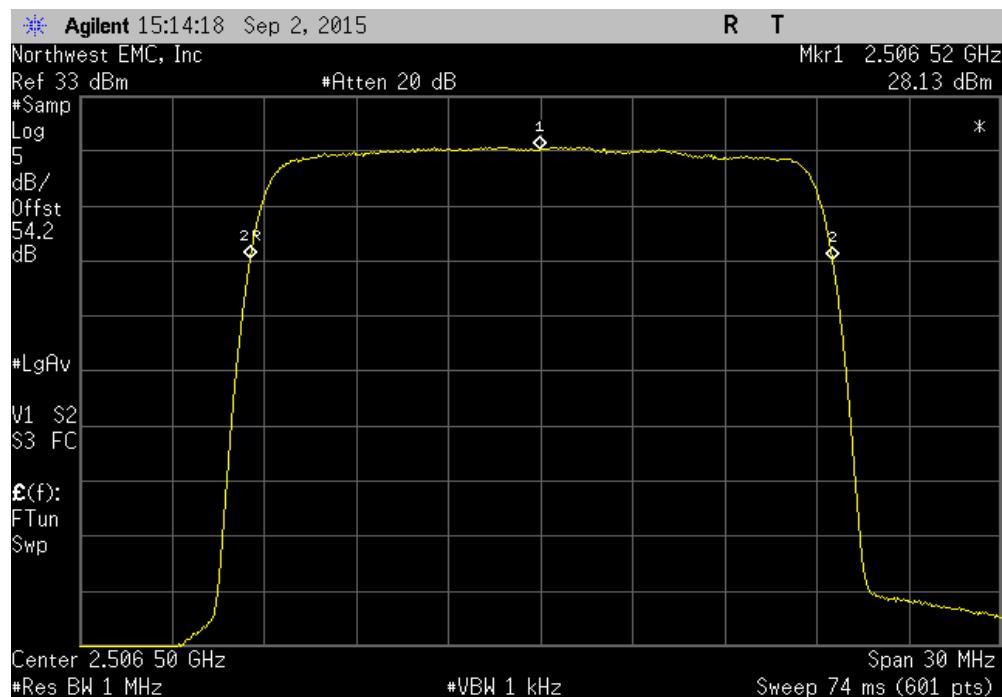


FREQUENCY STABILITY

Temperature: -30°, Mid Channel, 2534 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2534.08	2534	31.6	100	Pass	

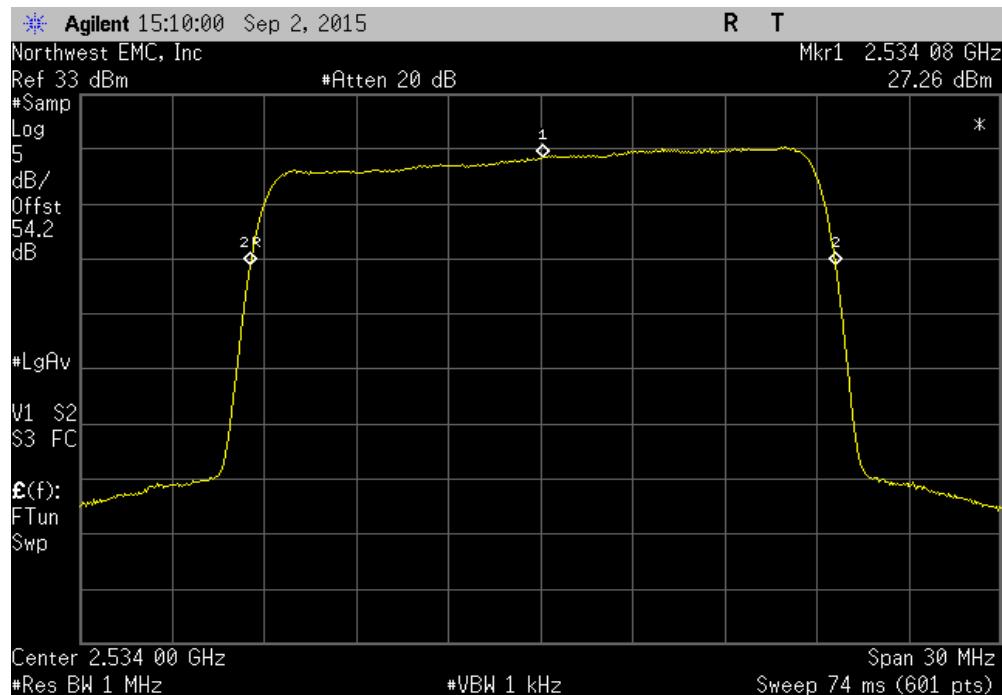

Temperature: -30°, High Channel, 2561.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Results	
2561.45	2561.5	19.5	100	Pass	

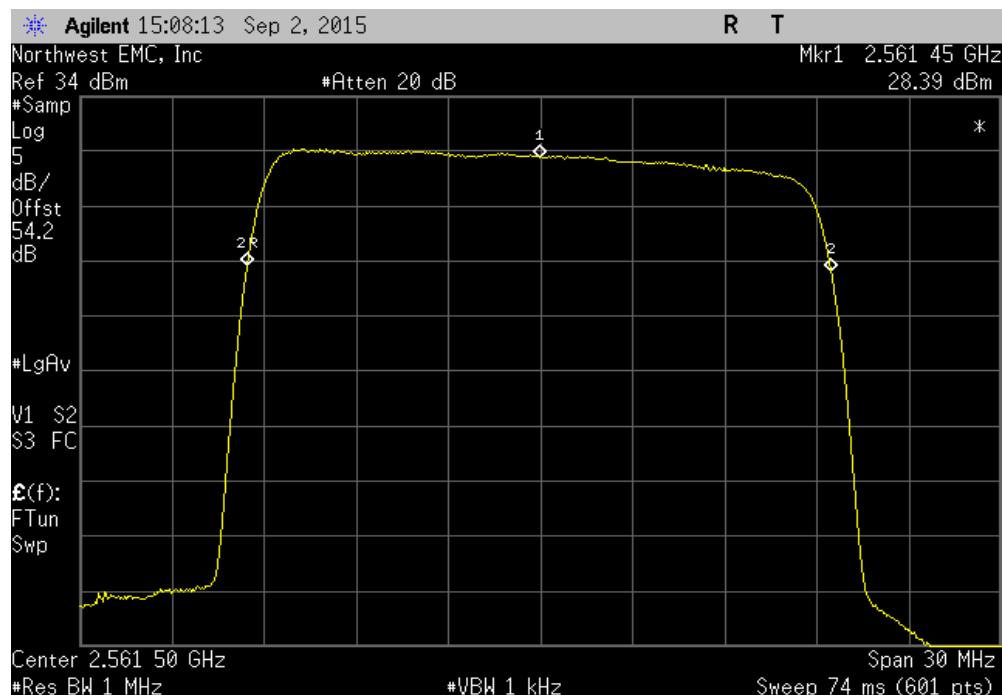

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2017.09.18

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Transmitting LTE-20MHz - low channel (2506.5MHz), mid channel (2534 MHz), high channel (2561.5 MHz)

POWER SETTINGS INVESTIGATED

110VAC/60Hz

CONFIGURATIONS INVESTIGATED

TECO0047 - 1

FREQUENCY RANGE INVESTIGATED

Start Frequency 30 MHz Stop Frequency 265000 MHz

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Analyzer - Spectrum Analyzer	Agilent	E4440A	AAX	16-Mar-2017	12 mo
Amplifier - Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	12-Sep-2017	12 mo
Cable	ESM Cable Corp.	TTB141 KMKM-72	MNU	11-Sep-2017	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-09	AHG	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	13-Feb-2018	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AIQ	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	13-Feb-2018	12 mo
Cable	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	12-Jul-2017	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AXP	NCR	0 mo
Attenuator	JFW Industries	50FH-006-300	TWX	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVT	13-Feb-2018	12 mo
Cable	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	21-Nov-2017	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AJA	23-Jun-2016	24 mo
Amplifier - Pre-Amplifier	Miteq	AM-1616-1000	AVO	9-Nov-2017	12 mo
Cable	ESM Cable Corp.	Bilog Cables	MNH	9-Nov-2017	12 mo
Antenna - Biconilog	Tesed	CBL 6141B	AYD	25-Jan-2018	24 mo

MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

TEST DESCRIPTION

The EUT was tested with shielded terminators on the RF output ports instead of antennas for final measurements.

For licensed transmitters, the FCC references TIA/EIA-603 as the measurement procedure standard. TIA/EIA-603 Section 2.2.12 describes a method for measuring radiated spurious emissions that utilizes an antenna substitution method:

At an approved test site, the transmitter is placed on a remotely controlled turntable, and the measurement antenna is placed 3 meters from the transmitter. The turntable azimuth is varied to maximize the level of spurious emissions. The height of the measurement antenna is also varied from 1 to 4 meters. The amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a $\frac{1}{2}$ wave dipole that is successively tuned to each of the highest spurious emissions for emissions below 1 GHz, and a horn antenna for emissions above 1 GHz. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency. The output of the signal generator is recorded, and by factoring in the cable loss to the antenna and its gain; the power (dBm) into an ideal $\frac{1}{2}$ wave dipole antenna is determined for each radiated spurious emission.


SPURIOUS RADIATED EMISSIONS



EmiR5 2017.09.18.2

PSA-ESCI 2017.09.18

Work Order:	TECO0047	Date:	21-Feb-2018	
Project:	None	Temperature:	21.7 °C	
Job Site:	MN05	Humidity:	15.7% RH	
Serial Number:	4614200003	Barometric Pres.:	1038 mbar	
EUT:	Prism 2500TDD Low Band SISO HDM			Tested by: Chris Patterson
Configuration:	1			
Customer:	CommScope Connectivity LLC			
Attendees:	Josh Wittman			
EUT Power:	110VAC/60Hz			
Operating Mode:	Transmitting LTE-20MHz - low channel (2506.5MHz), mid channel (2534 MHz), high channel (2561.5 MHz)			
Deviations:	None			
Comments:	Both antenna ports were terminated but only one port is active			
Test Specifications		Test Method		
FCC 27.53:2018		ANSI/TIA/EIA-603-C-2004		

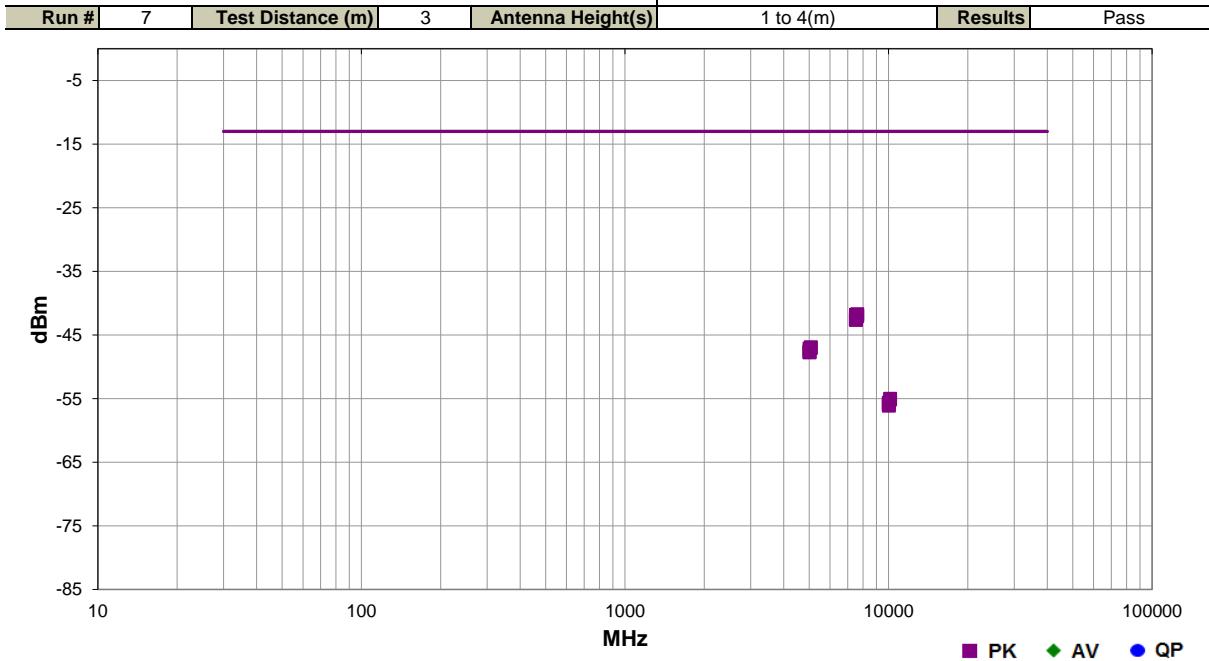

	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
7604.492	1.0	101.1	Horz	PK	6.72E-08	-41.7	-13.0	-28.7	-28.7	Mid Channel, LTE-20MHz
7516.008	1.0	41.1	Vert	PK	6.56E-08	-41.8	-13.0	-28.8	-28.8	High Channel, LTE-20MHz
7603.800	1.0	271.9	Vert	PK	6.27E-08	-42.0	-13.0	-29.0	-29.0	Mid Channel, LTE-20MHz
7515.608	1.0	285.0	Horz	PK	5.59E-08	-42.5	-13.0	-29.5	-29.5	High Channel, LTE-20MHz
7520.342	1.0	42.0	Horz	PK	5.59E-08	-42.5	-13.0	-29.5	-29.5	Low Channel, LTE-20MHz
7521.025	1.0	91.1	Vert	PK	5.46E-08	-42.6	-13.0	-29.6	-29.6	Low Channel, LTE-20MHz
5069.033	1.0	229.9	Horz	PK	2.03E-08	-46.9	-13.0	-33.9	-33.9	Mid Channel, LTE-20MHz
5067.725	2.6	252.0	Vert	PK	1.98E-08	-47.0	-13.0	-34.0	-34.0	Mid Channel, LTE-20MHz
5011.333	3.1	162.0	Vert	PK	1.94E-08	-47.1	-13.0	-34.1	-34.1	High Channel, LTE-20MHz
5011.042	1.0	303.0	Vert	PK	1.77E-08	-47.5	-13.0	-34.5	-34.5	Low Channel, LTE-20MHz
5013.458	1.0	178.1	Horz	PK	1.69E-08	-47.7	-13.0	-34.7	-34.7	High Channel, LTE-20MHz
5012.375	1.0	149.1	Horz	PK	1.69E-08	-47.7	-13.0	-34.7	-34.7	Low Channel, LTE-20MHz
10136.190	1.0	261.0	Horz	PK	3.14E-09	-55.0	-13.0	-42.0	-42.0	Mid Channel, LTE-20MHz
10138.000	1.0	129.0	Vert	PK	3.07E-09	-55.1	-13.0	-42.1	-42.1	Mid Channel, LTE-20MHz
10023.600	1.0	285.0	Horz	PK	2.74E-09	-55.6	-13.0	-42.6	-42.6	High Channel, LTE-20MHz
10025.290	1.6	211.0	Horz	PK	2.67E-09	-55.7	-13.0	-42.7	-42.7	Low Channel, LTE-20MHz
10025.210	1.0	88.1	Vert	PK	2.50E-09	-56.0	-13.0	-43.0	-43.0	High Channel, LTE-20MHz
10024.270	1.0	281.0	Vert	PK	2.44E-09	-56.1	-13.0	-43.1	-43.1	Low Channel, LTE-20MHz