



**TE Connectivity / ADC Telecommunications  
Prism HDM 800 MHz/1900 MHz SISO RF Module**

**FCC 24E:2014**

**Report #: TECO0013.2**



Report Prepared By Northwest EMC Inc.

NORTHWEST EMC – (888) 364-2378 – [www.nwemc.com](http://www.nwemc.com)

California – Minnesota – Oregon – New York – Washington

# CERTIFICATE OF TEST

Last Date of Test: April 16, 2014  
 TE Connectivity / ADC Telecommunications  
 Model: Prism HDM 800 MHz/1900 MHz SISO RF Module

## Emissions

Test Description	Specification	Test Method	Pass/Fail
Output Power	FCC 24E:2013, FCC 2.1046:2013	ANSI/TIA/EIA-603-C-2004	Pass
Band Edge Compliance	FCC 24E:2013, FCC 2.1051:2013	ANSI/TIA/EIA-603-C-2004	Pass
Out of Band Emissions –Conducted	FCC 24E:2013, FCC 2.1051:2013	ANSI/TIA/EIA-603-C-2004	Pass
Intermodulation	FCC 24E:2013, FCC 2.1051:2013	ANSI/TIA/EIA-603-C-2004	Pass
Frequency Stability	FCC 24E:2013, FCC 2.1055:2013	ANSI/TIA/EIA-603-C-2004	Pass
Occupied Bandwidth	FCC 24E:2013, FCC 2.1049:2013	ANSI/TIA/EIA-603-C-2004	Pass
Field Strength of Spurious Emissions	FCC 24E:2013, FCC 2.1053:2013	ANSI/TIA/EIA-603-C-2004	Pass
Peak to Average Ratio	FCC 24E:2013, FCC 2.1046:2013	ANSI/TIA/EIA-603-C-2004	Pass

## Deviations From Test Standards

None

## Approved By:



Tim O'Shea, Operations Manager



NVLAP Lab Code: 200881-0

*This report must not be used to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government of the United States of America.*

*Product compliance is the responsibility of the client, therefore the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. This Report may only be duplicated in its entirety. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test.*

## REVISION HISTORY

Revision Number	Description	Date	Page Number
00	None		

### **Barometric Pressure**

The recorded barometric pressure has been normalized to sea level.

---

## United States

---

**FCC** - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

**A2LA** - Accredited by A2LA to ISO / IEC Guide 65 as a product certifier. This allows Northwest EMC to certify transmitters to FCC and IC specifications.

**NVLAP** - Each laboratory is accredited by NVLAP to ISO 17025

---

## Canada

---

**IC** - Recognized by Industry Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with IC.

---

## European Union

---

**European Commission** - Validated by the European Commission as a Conformity Assessment Body (CAB) under the EMC directive and as a Notified Body under the R&TTE Directive.

---

## Australia/New Zealand

---

**ACMA** - Recognized by ACMA as a CAB for the acceptance of test data.

---

## Korea

---

**KCC / RRA** - Recognized by KCC's RRA as a CAB for the acceptance of test data.

---

## Japan

---

**VCCI** - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

---

## Taiwan

---

**BSMI** - Recognized by BSMI as a CAB for the acceptance of test data.

**NCC** - Recognized by NCC as a CAB for the acceptance of test data.

---

## Singapore

---

**IDA** - Recognized by IDA as a CAB for the acceptance of test data.

---

## Hong Kong

---

**OFTA** - Recognized by OFTA as a CAB for the acceptance of test data.

---

## Vietnam

---

**MIC** - Recognized by MIC as a CAB for the acceptance of test data.

---

## Russia

---

**GOST** - Accredited by Certinform VNIINMASH, CERTINFO, SAMTES, and Federal CHEC to perform EMC and Hygienic testing for Information Technology products to GOST standards.

---

## SCOPE

---

For details on the Scopes of our Accreditations, please visit:

<http://www.nwemc.com/accreditations/>

## Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document WP 342. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty ( $K=2$ ) for each test is listed below. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-1 as applicable), and are available upon request.



The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.12	-0.01
Amplitude Accuracy (dB)	0.49	-0.49
Conducted Power (dB)	0.41	-0.41
Radiated Power via Substitution (dB)	0.69	-0.68
Temperature (degrees C)	0.81	-0.81
Humidity (% RH)	2.89	-2.89
Field Strength (dB)	3.80	-3.80
AC Powerline Conducted Emissions (dB)	2.94	-2.94

# FACILITIES



<b>Oregon</b> Labs EV01-12 22975 NW Evergreen Pkwy Hillsboro, OR 97124 (503) 844-4066	<b>California</b> Labs OC01-13 41 Tesla Irvine, CA 92618 (949) 861-8918	<b>New York</b> Labs NY01-04 4939 Jordan Rd. Elbridge, NY 13060 (315) 685-0796	<b>Minnesota</b> Labs MN01-08 9349 W Broadway Ave. Brooklyn Park, MN 55445 (763) 425-2281	<b>Washington</b> Labs NC01-05, SU02, SU07 19201 120 <sup>th</sup> Ave. NE Bothell, WA 98011 (425) 984-6600
<b>VCCI</b>				
A-0108	A-0029		A-0109	A-0110
<b>Industry Canada</b>				
2834D-1, 2834D-2	2834B-1, 2834B-2, 2834B-3		2834E-1	2834F-1
<b>NVLAP</b>				
NVLAP Lab Code: 200630-0	NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200629-0

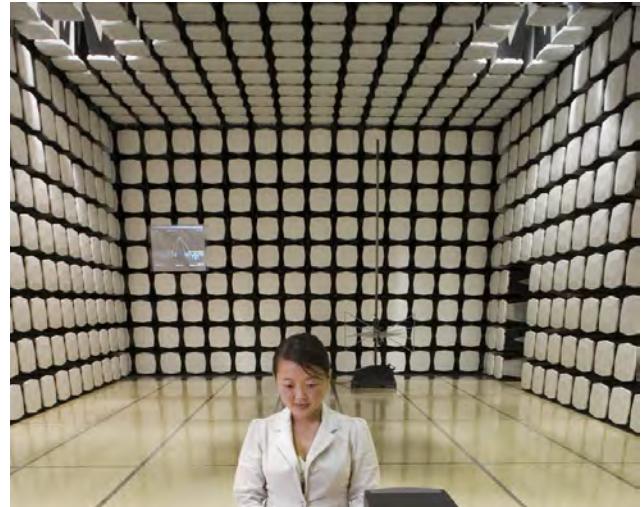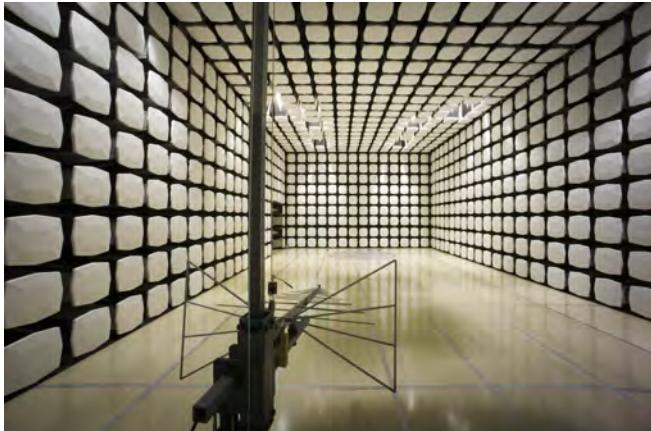

## Client and Equipment Under Test (EUT) Information

<b>Company Name:</b>	TE Connectivity / ADC Telecommunications
<b>Address:</b>	1187 Park Place
<b>City, State, Zip:</b>	Shakopee, MN 55379
<b>Test Requested By:</b>	Joshua Wittman
<b>Model:</b>	Prism HDM 800 MHz/1900 MHz SISO RF Module
<b>First Date of Test:</b>	April 09, 2014
<b>Last Date of Test:</b>	April 16, 2014
<b>Receipt Date of Samples:</b>	April 09, 2014
<b>Equipment Design Stage:</b>	Production
<b>Equipment Condition:</b>	No Damage

## Information Provided by the Party Requesting the Test

### **Functional Description of the EUT (Equipment Under Test):**

Prism HDM 800 MHz/1900 MHz SISO RF Module. The Prism HDM is an industrial signal booster which is used to enhance wireless networks in outdoor locations and large venues.

### **Testing Objective:**

To demonstrate compliance to FCC Part 24.

## Configuration TECO0013- 1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Prism HDM 800 MHz/1900 MHz SISO RF Module	TE Connectivity / ADC Telecommunications	FWP- 441T841MOD	None

Peripherals in test setup boundary			
Description	Manufacturer	Model/Part Number	Serial Number
RF Signal Generator	Aeroflex	IFR 3413	341006/252
Power Supply	Mean Well	SE-600-48	EB11101765
IO Control Device	TE Connectivity / ADC Telecommunications	SVT-GU-1011	None
30 dB attenuator	Aeroflex	57-30-43	RA434
RF Signal Generator	Aeroflex	IFR 3413	341006/056
30 dB attenuator	Aeroflex	86-30-12 DC -22 GHz	369
Laptop	Lenovo	T500	L3-AFD7K 09/04
Laptop Supply	Lenovo	42T4418	11S42T4418Z1ZGWG19659N

Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	> 3m	No	Prism HDM 800 MHz/1900 MHz SISO RF Module	AC Mains
Fiber	No	> 3m	No	Prism HDM 800 MHz/1900 MHz SISO RF Module	IO Control Device
RF	Yes	0.8m	No	Prism HDM 800 MHz/1900 MHz SISO RF Module	30 dB attenuator
RF	Yes	1.8m	No	IO Control Device	RF Signal Generator
AC Power x2	No	1.8m	No	RF Signal Generator	AC Mains
AC Power	No	1.8m	No	Power Supply	AC Mains
DC Power	No	2.8m	Yes	IO Control Device	Power Supply
AC Power	No	1.8m	No	Laptop Supply	AC Mains
DC Power	No	1.8m	Yes	Laptop	Laptop Supply
Ethernet	No	1.5m	No	Laptop	IO Control Device
RF	Yes	0.8m	No	Prism HDM 800 MHz/1900 MHz SISO RF Module	30 dB attenuator
RF	Yes	0.9m	No	IO Control Device	RF Signal Generator

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

## Configuration TECO0013- 2

EUT					
Description		Manufacturer	Model/Part Number	Serial Number	
Prism HDM 800 MHz/1900 MHz SISO RF Module		TE Connectivity / ADC Telecommunications	FWP-441T841MOD	None	
Peripherals in test setup boundary					
Description	Manufacturer	Model/Part Number	Serial Number		
30 dB attenuator	Aeroflex	57-30-43	NL616		
30 dB attenuator	Aeroflex	57-30-43	RA434		
Remote Equipment Outside of Test Setup Boundary					
Description	Manufacturer	Model/Part Number	Serial Number		
RF Signal Generator	Aeroflex	IFR 3413	341006/252		
Power Supply	Mean Well	SE-600-48	EB11101765		
IO Control Device	TE Connectivity / ADC Telecommunications	SVT-GU-1011	None		
RF Signal Generator	Aeroflex	IFR 3413	341006/056		
Laptop	Lenovo	T500	L3-AFD7K 09/04		
Laptop Supply	Lenovo	42T4418	11S42T4418Z1ZGWG19659N		
Cables					
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2
AC Power	No	> 3m	No	Prism HDM 800 MHz/1900 MHz SISO RF Module	AC Mains
Fiber	No	> 3m	No	Prism HDM 800 MHz/1900 MHz SISO RF Module	IO Control Device
RF	Yes	0.8m	No	Prism HDM 800 MHz/1900 MHz SISO RF Module	30 dB attenuator
RF	Yes	1.8m	No	IO Control Device	RF Signal Generator
AC Power x2	No	1.8m	No	RF Signal Generator	AC Mains
AC Power	No	1.8m	No	Power Supply	AC Mains
DC Power	No	2.8m	Yes	IO Control Device	Power Supply
AC Power	No	1.8m	No	Laptop Supply	AC Mains
DC Power	No	1.8m	Yes	Laptop	Laptop Supply
Ethernet	No	1.5m	No	Laptop	IO Control Device
RF	Yes	0.8m	No	Prism HDM 800 MHz/1900 MHz SISO RF Module	30 dB attenuator
RF	Yes	0.9m	No	IO Control Device	RF Signal Generator
Ground	No	1.3m	No	Prism HDM 800 MHz/1900 MHz SISO RF Module	Ground

PA = Cable is permanently attached to the device. Shielding and/or presence of ferrite may be unknown.

## Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	4/9/2014	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
2	4/9/2014	Peak to Average Ratio	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
3	4/9/2014	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
4	4/10/2014	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
5	4/11/2014	Intermodulation	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
6	4/11/2014	Out of Band Emissions- Conducted	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
7	4/14/2014	Frequency Stability	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Northwest EMC following the test.
8	4/16/2014	Field Strength of Spurious Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.



## DUTY CYCLE

### TEST DESCRIPTION

The Duty Cycle (x) were measured for each of the EUT operating modes. The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum. A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

The EUT operates at 100% Duty Cycle.

## OUTPUT POWER

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24


### TEST DESCRIPTION

---


The Average (RMS) output power was measured with the EUT set to the parameters called out in the data sheets. The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. Prior to making the measurements the setup, including cables and attenuators were calibrated and added into the reference level offset.

EUT: Prism HDM 800 MHz/1900 MHz SISO RF Module		Work Order: TECO0013		
Serial Number: None		Date: 04/09/14		
Customer: TE Connectivity / ADC Telecommunications		Temperature: 24.2°C		
Attendees: None		Humidity: 21%		
Project: None		Barometric Pres.: 1013.5		
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08		
TEST SPECIFICATIONS		Test Method		
FCC 24E:2014	ANSI/TIA/EIA-603-C-2004			
COMMENTS				
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset.				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	1	Signature 		
		Value	Limit	Result
CDMA	Low Channel 1930.8 MHz	43.055 dBm	< 1640 W	Pass
	Mid Channel 1962.5 MHz	43.119 dBm	< 1640 W	Pass
	High Channel 1994.8 MHz	42.067 dBm	< 1640 W	Pass
LTE 5 MHz	Low Channel 1932.7 MHz	42.820 dBm	< 1640 W	Pass
	Mid Channel 1962.5 MHz	43.027 dBm	< 1640 W	Pass
	High Channel 1992.4 MHz	42.418 dBm	< 1640 W	Pass
LTE 10 MHz	Low Channel 1935 MHz	43.063 dBm	< 1640 W	Pass
	Mid Channel 1962.5 MHz	42.809 dBm	< 1640 W	Pass
	High Channel 1990 MHz	41.772 dBm	< 1640 W	Pass


CDMA, Low Channel 1930.8 MHz			
	Value	Limit	Result
	43.055 dBm	< 1640 W	Pass

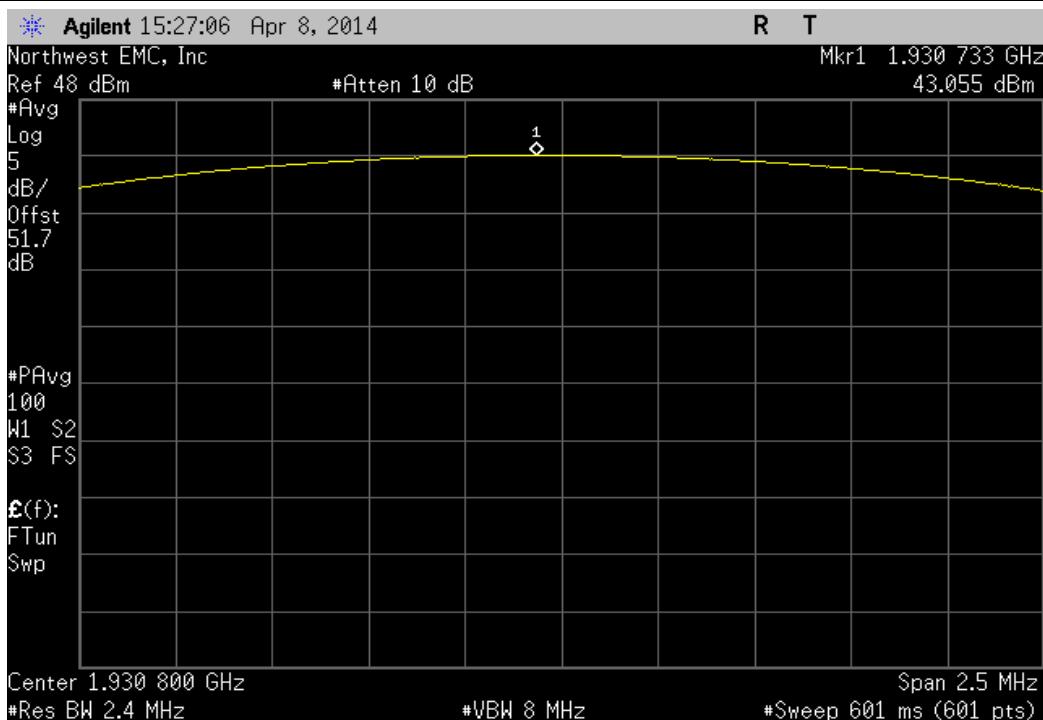


CDMA, Mid Channel 1962.5 MHz			
	Value	Limit	Result
	43.119 dBm	< 1640 W	Pass

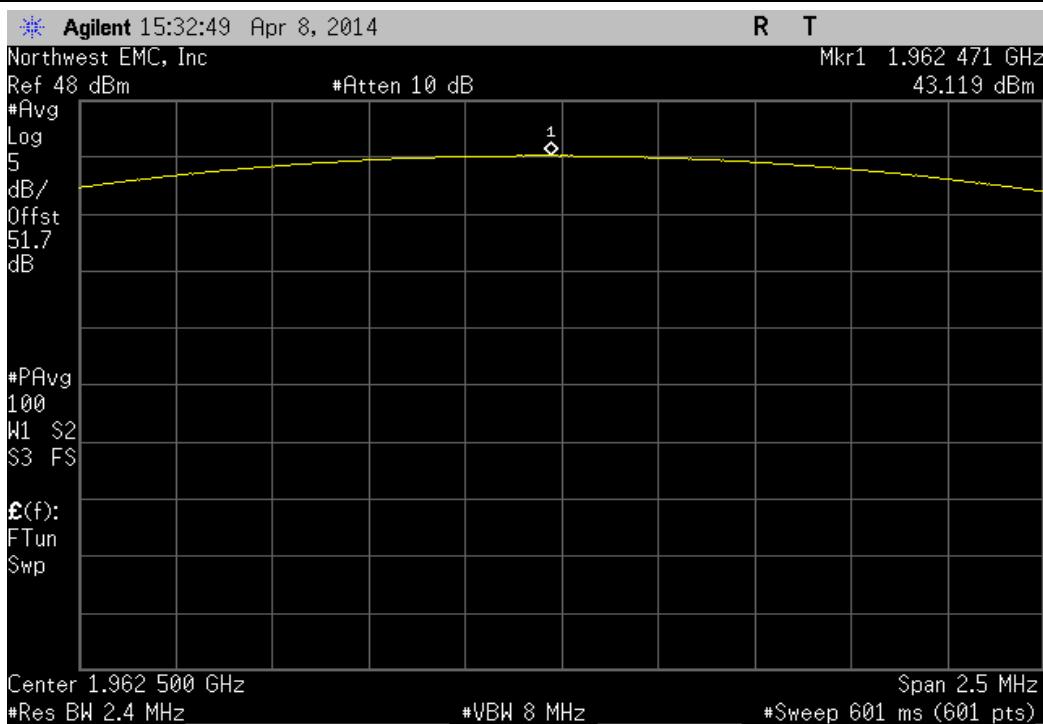


CDMA, High Channel 1994.8 MHz			
	Value	Limit	Result
	42.067 dBm	< 1640 W	Pass

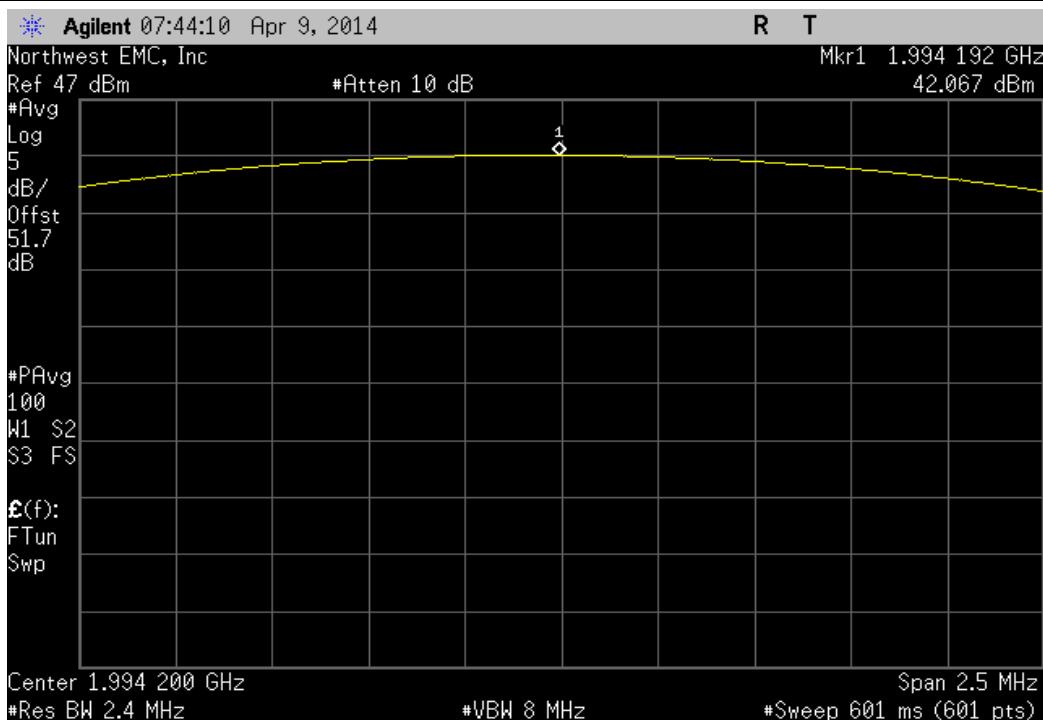


LTE 5 MHz, Low Channel 1932.7 MHz			
	Value	Limit	Result
	42.820 dBm	< 1640 W	Pass


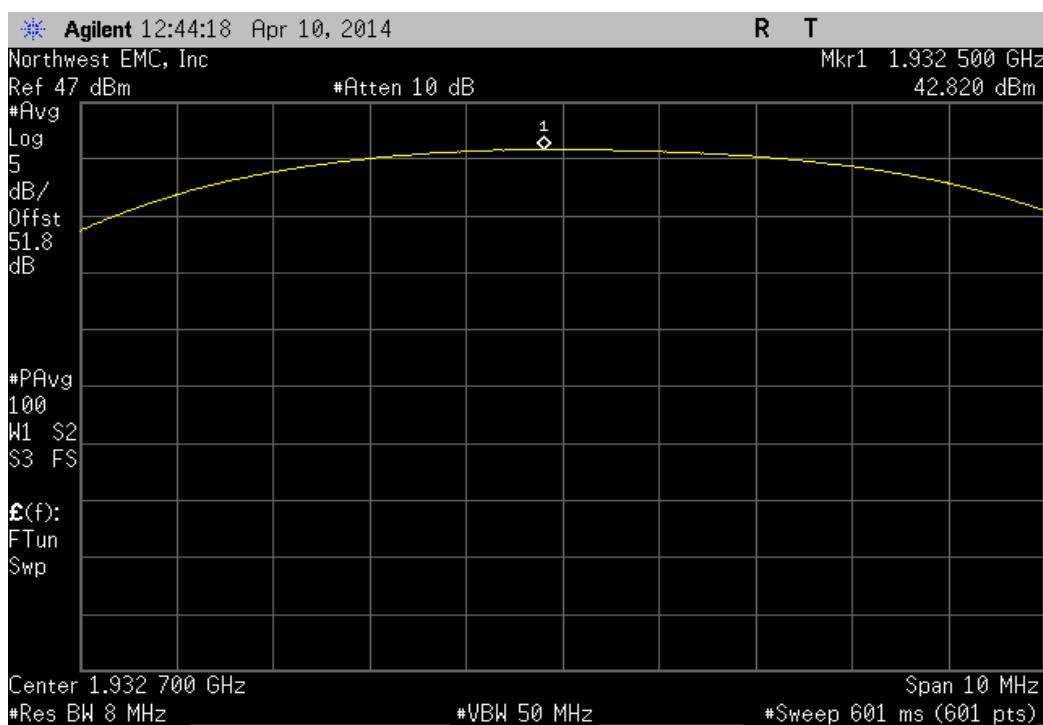



LTE 5 MHz, Mid Channel 1962.5 MHz				Value	Limit	Result
				43.027 dBm	< 1640 W	Pass

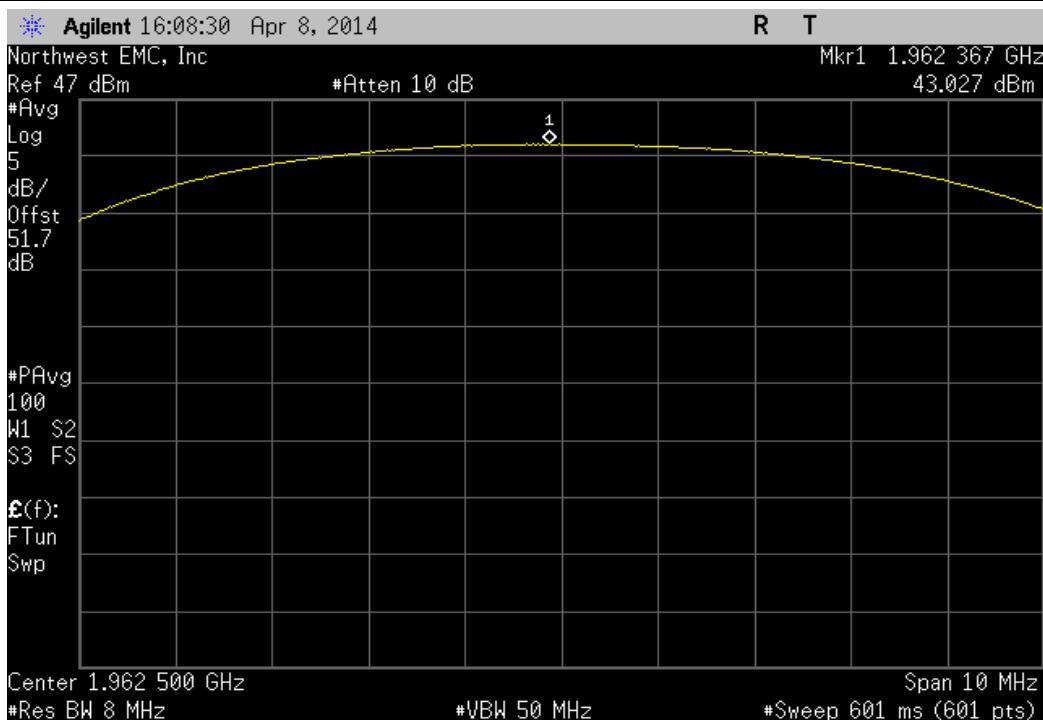

LTE 5 MHz, High Channel 1992.4 MHz				Value	Limit	Result
				42.418 dBm	< 1640 W	Pass

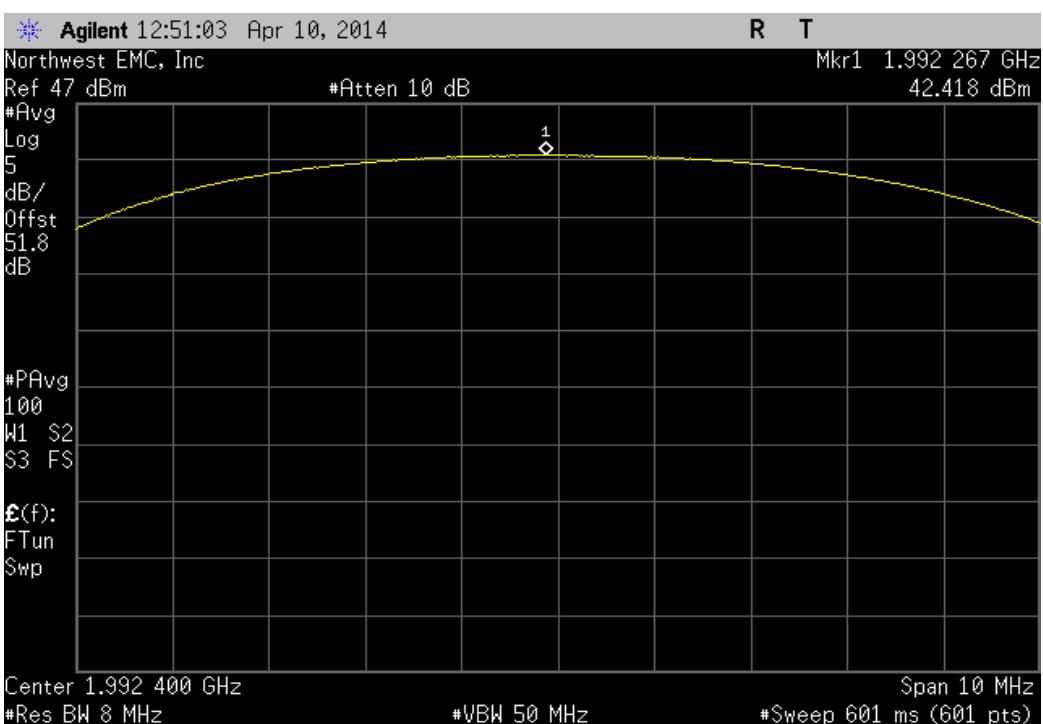

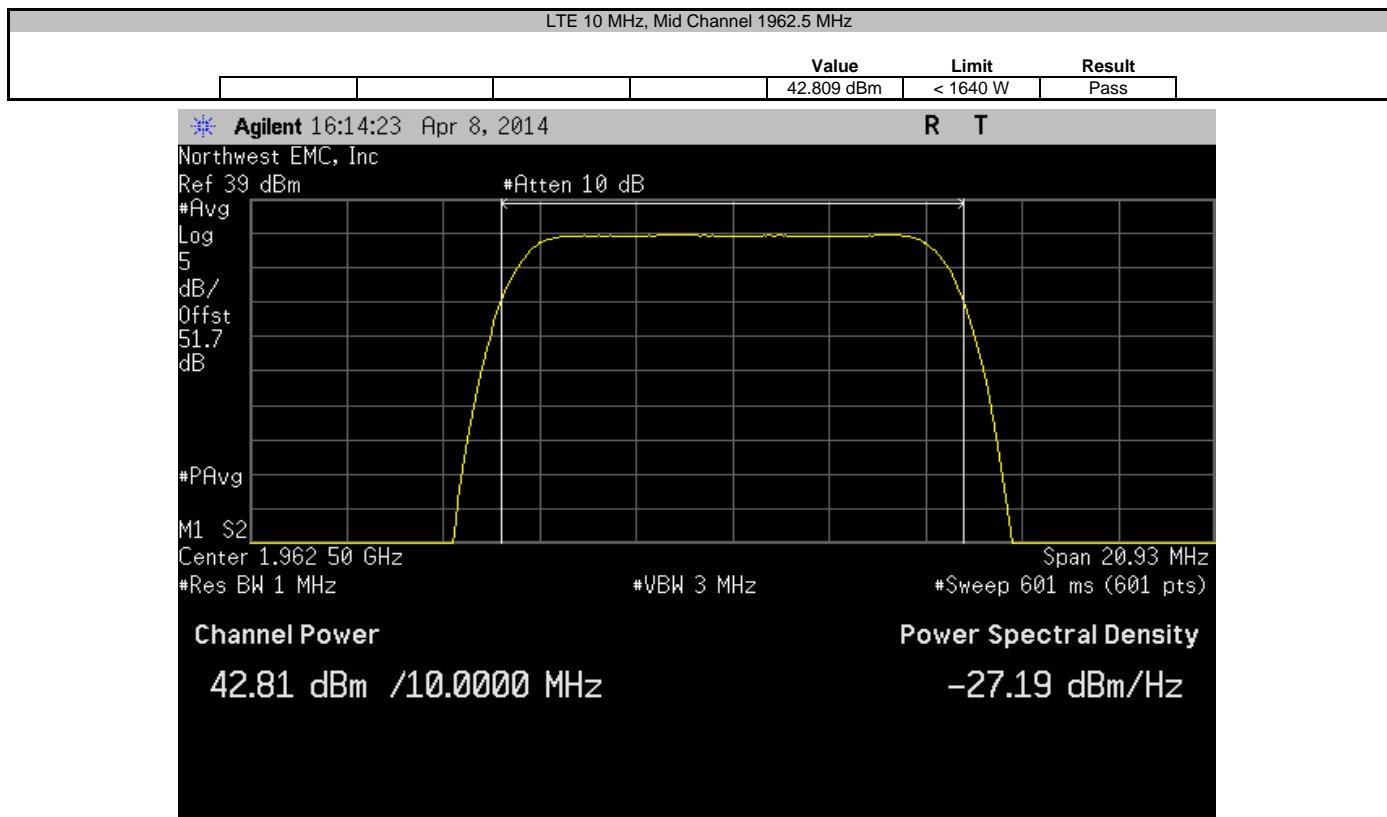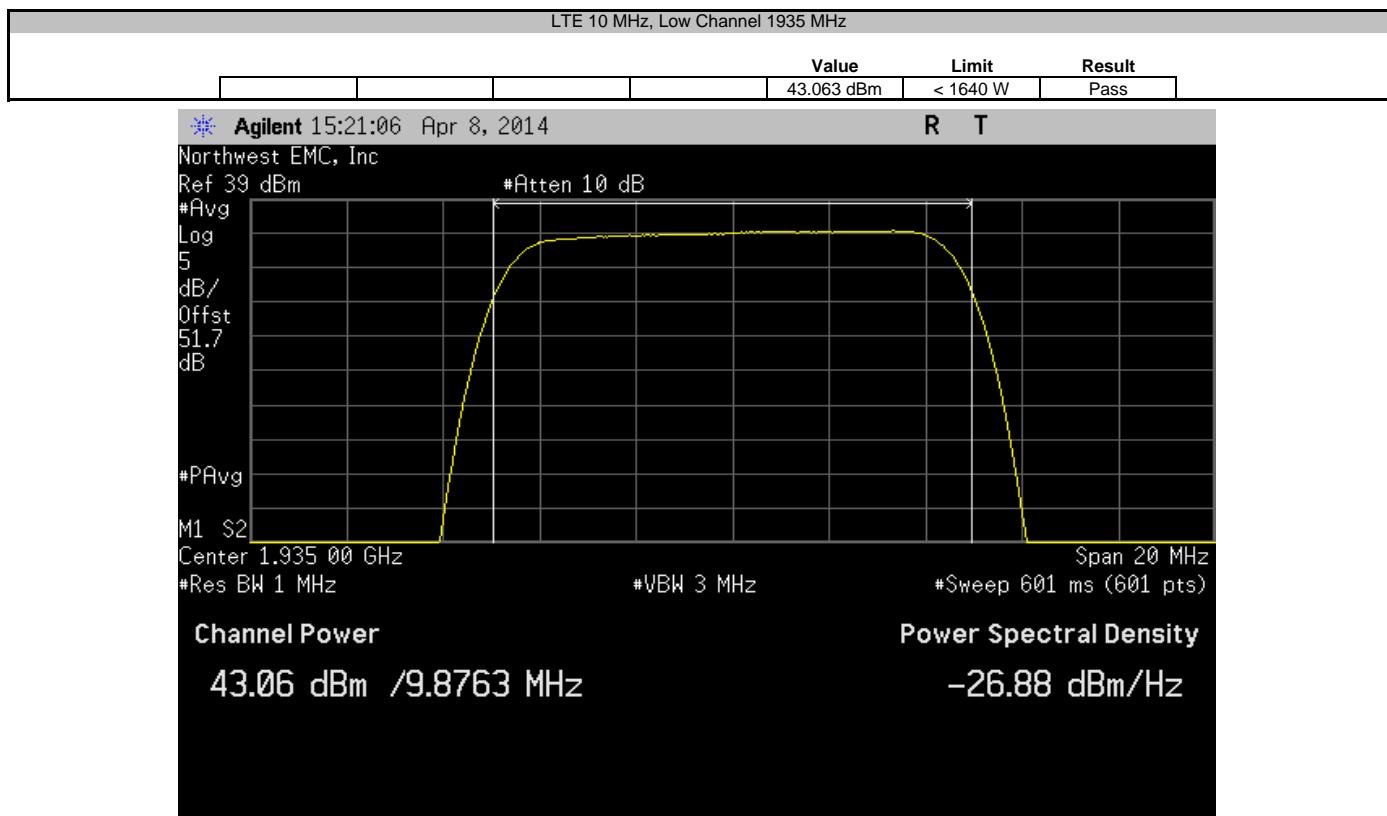

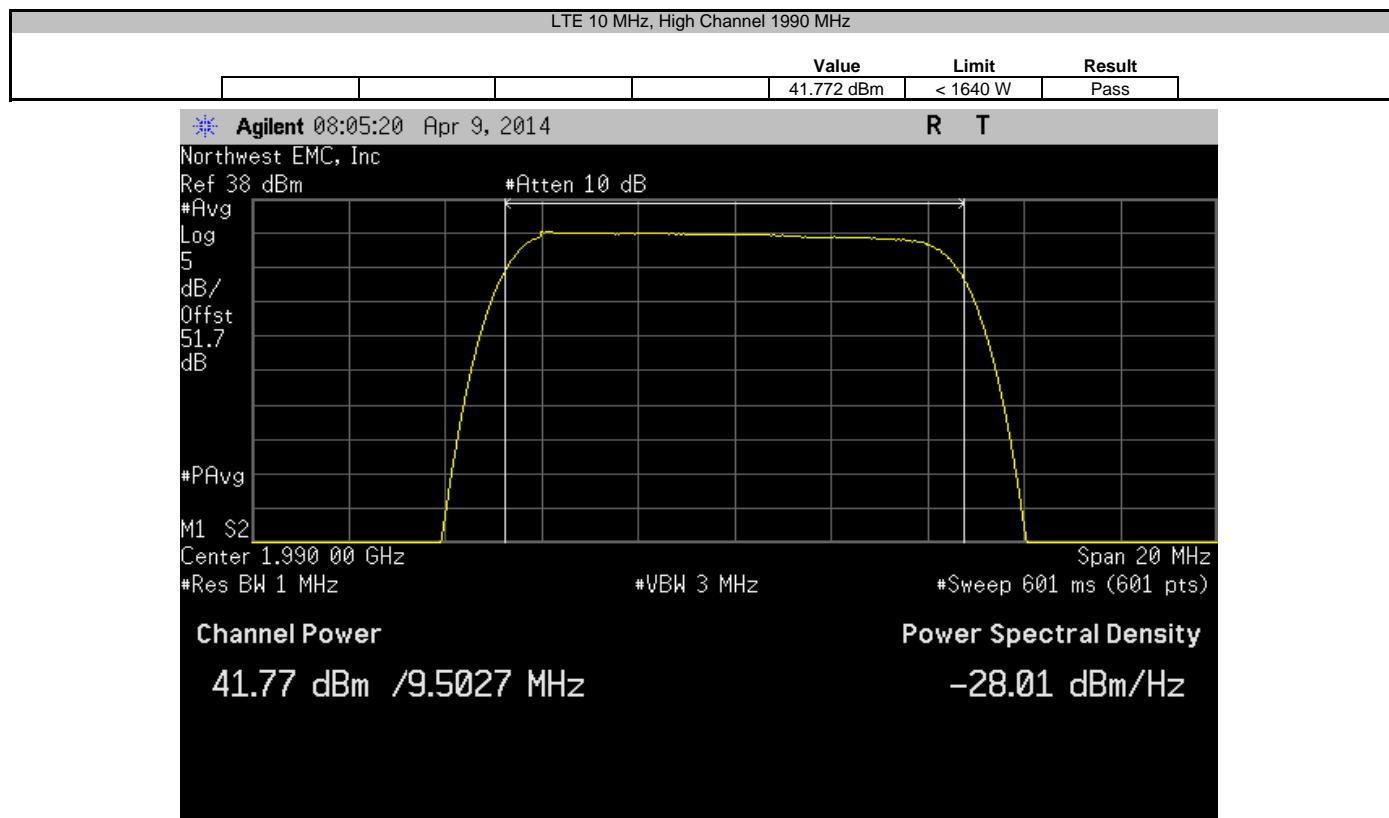

## BAND EDGE COMPLIANCE

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24


### TEST DESCRIPTION

The spurious RF conducted emissions at the edges of the authorized bands were measured with the EUT set to low and high transmit frequencies in the available band. The channels closest to the band edges were selected. The measurement was made using a direct connection between the RF output of the EUT and the spectrum analyzer. The EUT was transmitting at the data rate(s) listed in the datasheet.


The spectrum was scanned below the lower band edge and above the higher band edge. The resolution bandwidth was set to approximately 1% of the measured emissions bandwidth. An average RMS detector was used to match the method used during Output Power. The screen capture shows the margin between the measured value and the -13 dBm limit at the band edge.

EUT: Prism HDM 800 MHz/1900 MHz SISO RF Module		Work Order: TECO0013																
Serial Number: None		Date: 04/10/14																
Customer: TE Connectivity / ADC Telecommunications		Temperature: 26.5°C																
Attendees: None		Humidity: 21%																
Project: None		Barometric Pres.: 1011.8																
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08																
TEST SPECIFICATIONS																		
FCC 24E:2014		Test Method: ANSI/TIA/EIA-603-C-2004																
COMMENTS																		
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset.																		
DEVIATIONS FROM TEST STANDARD																		
None																		
Configuration #	1	Signature 																
<table border="1"> <thead> <tr> <th></th> <th>Value (dBm)</th> <th>Limit (dBm)</th> <th>Result</th> </tr> </thead> <tbody> <tr> <td>CDMA</td> <td>-29.978 -29.485</td> <td>-13 -13</td> <td>Pass Pass</td> </tr> <tr> <td>LTE 5 MHz</td> <td>-13.416 -13.607</td> <td>-13 -13</td> <td>Pass Pass</td> </tr> <tr> <td>LTE 10 MHz</td> <td>-16.785 -18.474</td> <td>-13 -13</td> <td>Pass Pass</td> </tr> </tbody> </table>				Value (dBm)	Limit (dBm)	Result	CDMA	-29.978 -29.485	-13 -13	Pass Pass	LTE 5 MHz	-13.416 -13.607	-13 -13	Pass Pass	LTE 10 MHz	-16.785 -18.474	-13 -13	Pass Pass
	Value (dBm)	Limit (dBm)	Result															
CDMA	-29.978 -29.485	-13 -13	Pass Pass															
LTE 5 MHz	-13.416 -13.607	-13 -13	Pass Pass															
LTE 10 MHz	-16.785 -18.474	-13 -13	Pass Pass															

CDMA, Low Channel				Value (dBm)	Limit (dBm)	Result
				-29.978	-13	Pass

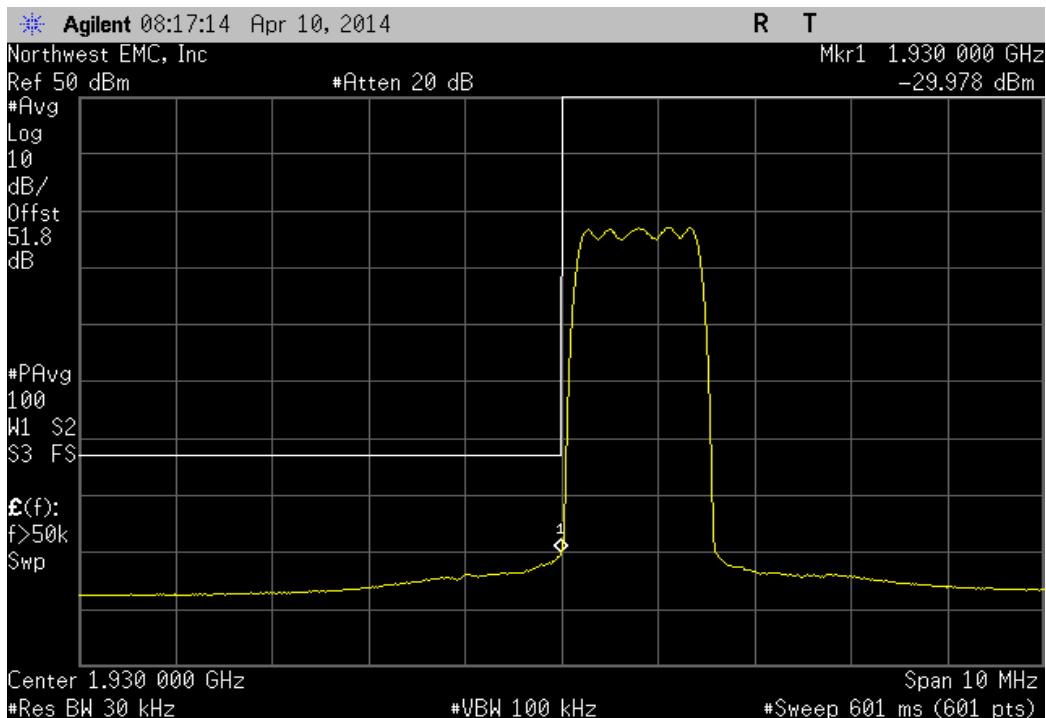


CDMA, High Channel				Value (dBm)	Limit (dBm)	Result
				-29.485	-13	Pass

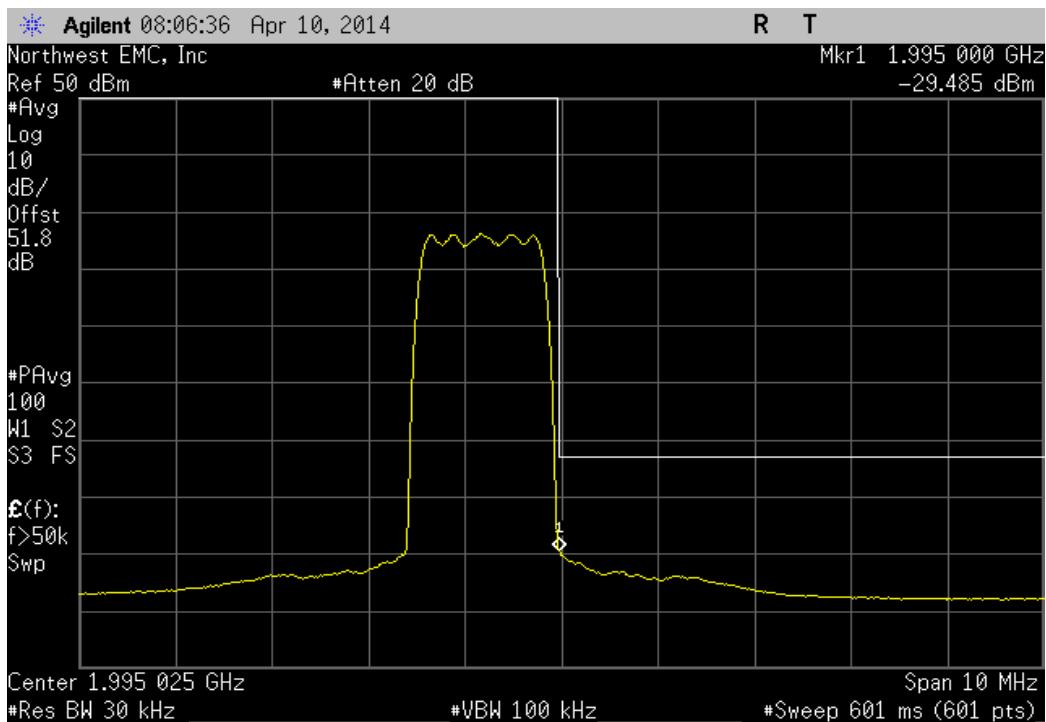


LTE 5 MHz, Low Channel				Value (dBm)	Limit (dBm)	Result
				-13.416	-13	Pass




LTE 5 MHz, High Channel				Value (dBm)	Limit (dBm)	Result
				-13.607	-13	Pass

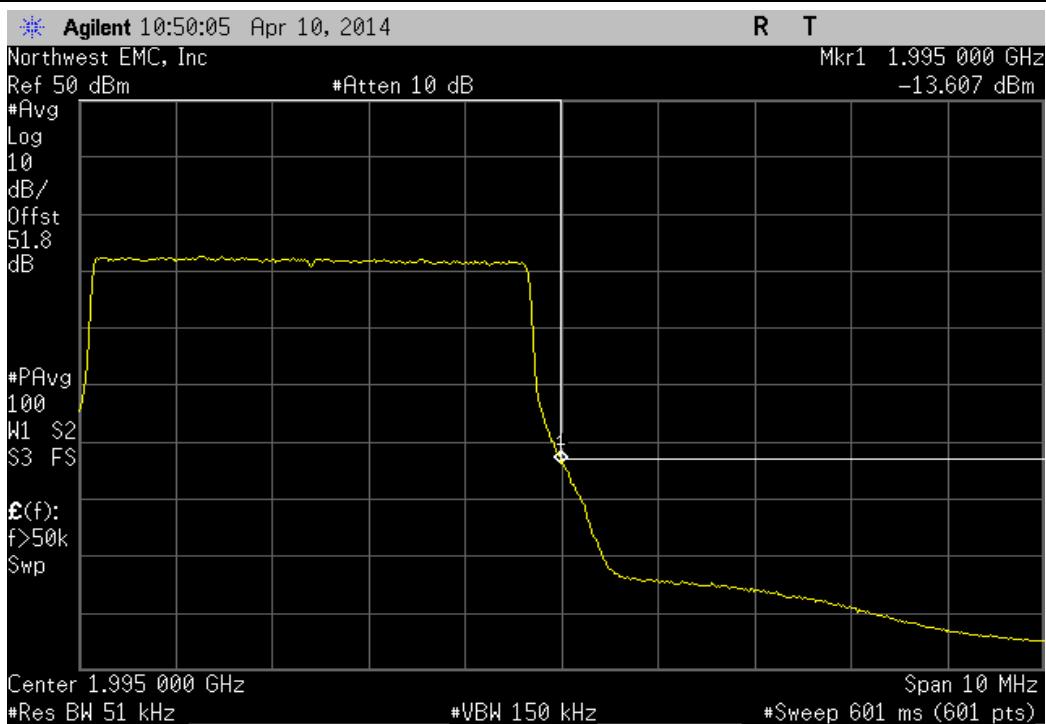

LTE 10 MHz, Low Channel			
		Value (dBm)	Limit (dBm)
		-16.785	-13

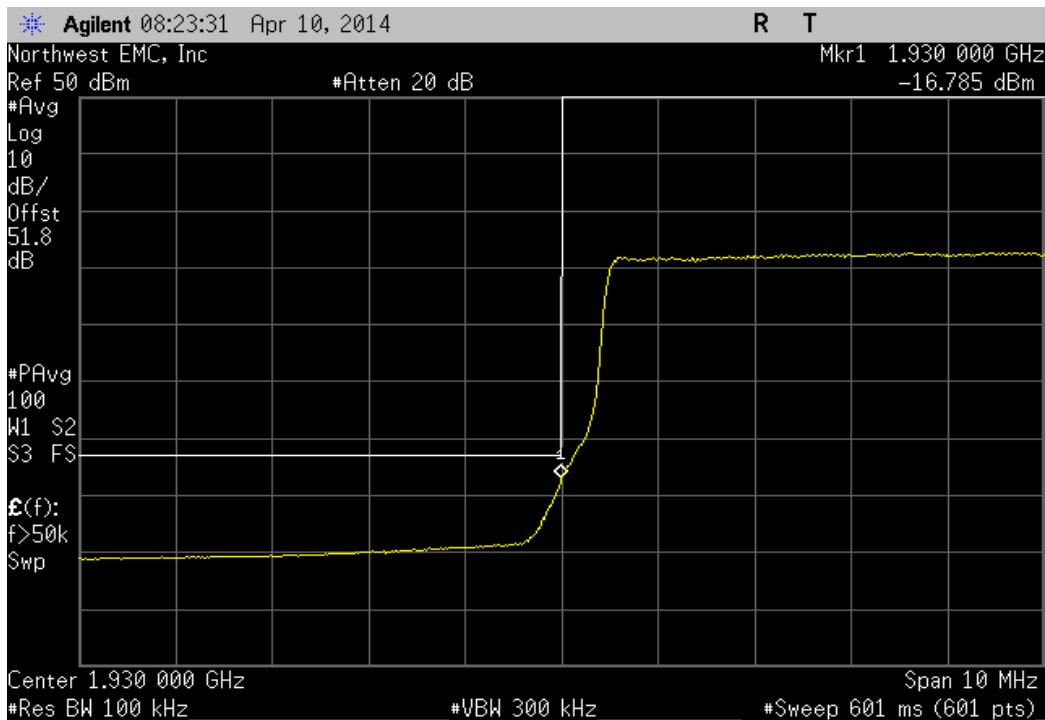

LTE 10 MHz, High Channel			
		Value (dBm)	Limit (dBm)
		-18.474	-13

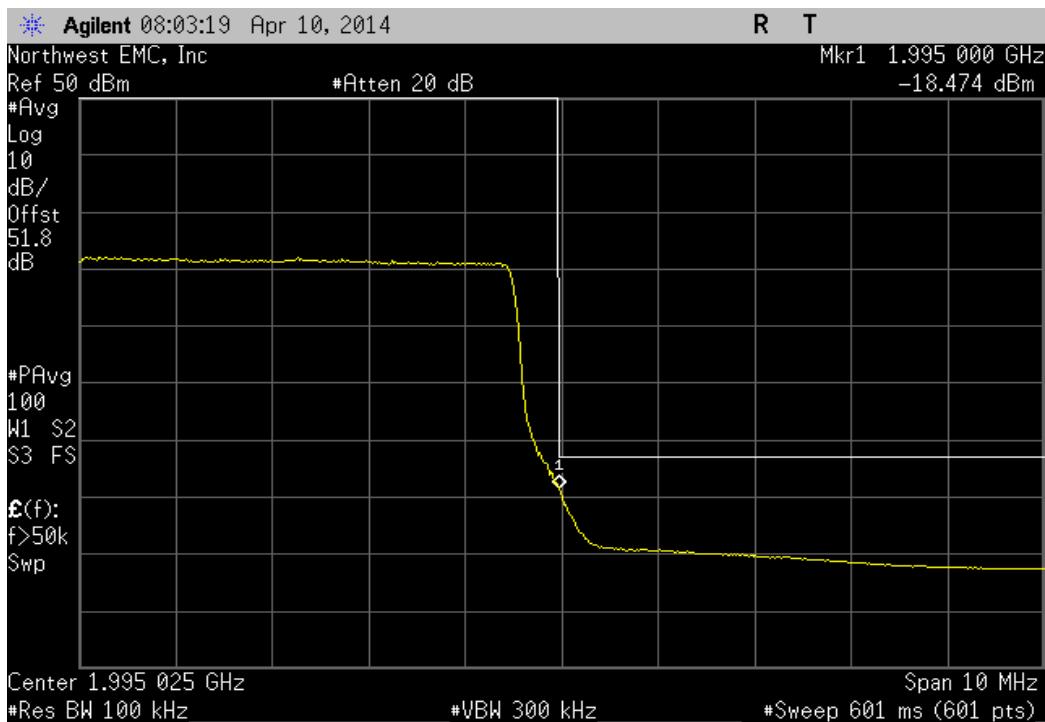

## OUT OF BAND EMISSIONS - CONDUCTED

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT


Description	Manufacturer	Model	ID	Last Cal.	Interval
Low Pass Filter 0-1000 MHz	Micro-Tronics	LPM50004	HGV	10/5/2012	24
High Pass Filter 2.8 GHz	Micro-Tronics	HPM50111	HGY	10/5/2012	24
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24

### TEST DESCRIPTION


The antenna port spurious emissions were measured at the RF output terminal of the EUT with external attenuation on the RF input of the spectrum analyzer. Analyzer plots utilizing a 1 MHz resolution bandwidth and no video filtering were made for each modulation type from 30 MHz to 9 GHz. The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to -13 dBm.

EUT: Prism HDM 800 MHz/1900 MHz SISO RF Module		Work Order: TECO0013		
Serial Number: None		Date: 04/11/14		
Customer: TE Connectivity / ADC Telecommunications		Temperature: 25°C		
Attendees: None		Humidity: 25%		
Project: None		Barometric Pres.: 1017.2		
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08		
TEST SPECIFICATIONS		Test Method		
FCC 24E:2014	ANSI/TIA/EIA-603-C-2004			
COMMENTS				
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset.				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	1	Signature 		
CDMA	Frequency Range	Value	Limit	Result
Low Channel 1930.8 MHz	30 MHz - 1 GHz	-39.8 dBm	≤ -13 dBm	Pass
Low Channel 1930.8 MHz	1 GHz - 3 GHz	-19.36 dBm	≤ -13 dBm	Pass
Low Channel 1930.8 MHz	3 GHz - 20 GHz	-28.86 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	30 MHz - 1 GHz	-38.88 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	1 GHz - 3 GHz	-19.84 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	3 GHz - 20 GHz	-29.15 dBm	≤ -13 dBm	Pass
High Channel 1994.2 MHz	30 MHz - 1 GHz	-40.61 dBm	≤ -13 dBm	Pass
High Channel 1994.2 MHz	1 GHz - 3 GHz	-21.01 dBm	≤ -13 dBm	Pass
High Channel 1994.2 MHz	3 GHz - 20 GHz	-29.34 dBm	≤ -13 dBm	Pass
LTE 5 MHz	Frequency Range	Value	Limit	Result
Mid Channel 1962.5 MHz	30 MHz - 1 GHz	-40.39 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	1 GHz - 3 GHz	-18.53 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	3 GHz - 20 GHz	-28.83 dBm	≤ -13 dBm	Pass
Low Channel 1932.7 MHz	30 MHz - 1 GHz	-40.14 dBm	≤ -13 dBm	Pass
Low Channel 1932.7 MHz	1 GHz - 3 GHz	-18.76 dBm	≤ -13 dBm	Pass
Low Channel 1932.7 MHz	3 GHz - 20 GHz	-29.14 dBm	≤ -13 dBm	Pass
High Channel 1992.4 MHz	30 MHz - 1 GHz	-40.33 dBm	≤ -13 dBm	Pass
High Channel 1992.4 MHz	1 GHz - 3 GHz	-20.35 dBm	≤ -13 dBm	Pass
High Channel 1992.4 MHz	3 GHz - 20 GHz	-28.63 dBm	≤ -13 dBm	Pass
LTE 10 MHz	Frequency Range	Value	Limit	Result
Mid Channel 1962.5 MHz	30 MHz - 1 GHz	-39.74 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	1 GHz - 3 GHz	-19.76 dBm	≤ -13 dBm	Pass
Mid Channel 1962.5 MHz	3 GHz - 20 GHz	-29.45 dBm	≤ -13 dBm	Pass
Low Channel 1935 MHz	30 MHz - 1 GHz	-39.88 dBm	≤ -13 dBm	Pass
Low Channel 1935 MHz	1 GHz - 3 GHz	-19.51 dBm	≤ -13 dBm	Pass
Low Channel 1935 MHz	3 GHz - 20 GHz	-29.2 dBm	≤ -13 dBm	Pass
High Channel 1990 MHz	30 MHz - 1 GHz	-40.24 dBm	≤ -13 dBm	Pass
High Channel 1990 MHz	1 GHz - 3 GHz	-20.45 dBm	≤ -13 dBm	Pass
High Channel 1990 MHz	3 GHz - 20 GHz	-29.52 dBm	≤ -13 dBm	Pass


CDMA, Low Channel 1930.8 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-39.8 dBm	≤ -13 dBm	Pass	

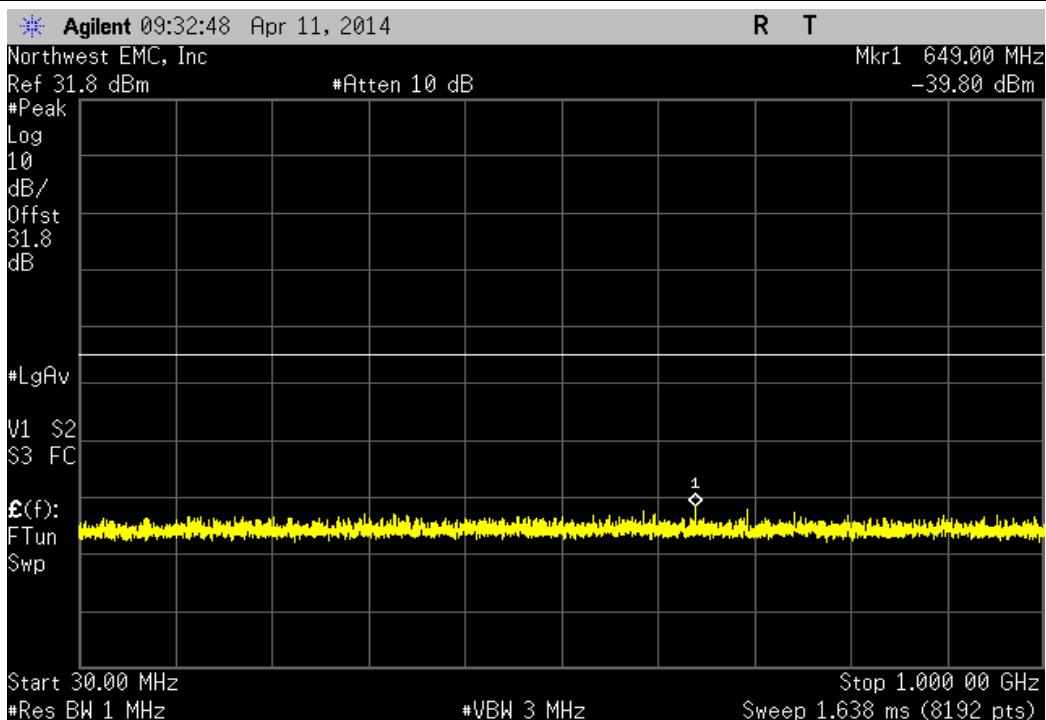


CDMA, Low Channel 1930.8 MHz					
Frequency Range		Value	Limit	Result	
1 GHz - 3 GHz		-19.36 dBm	≤ -13 dBm	Pass	


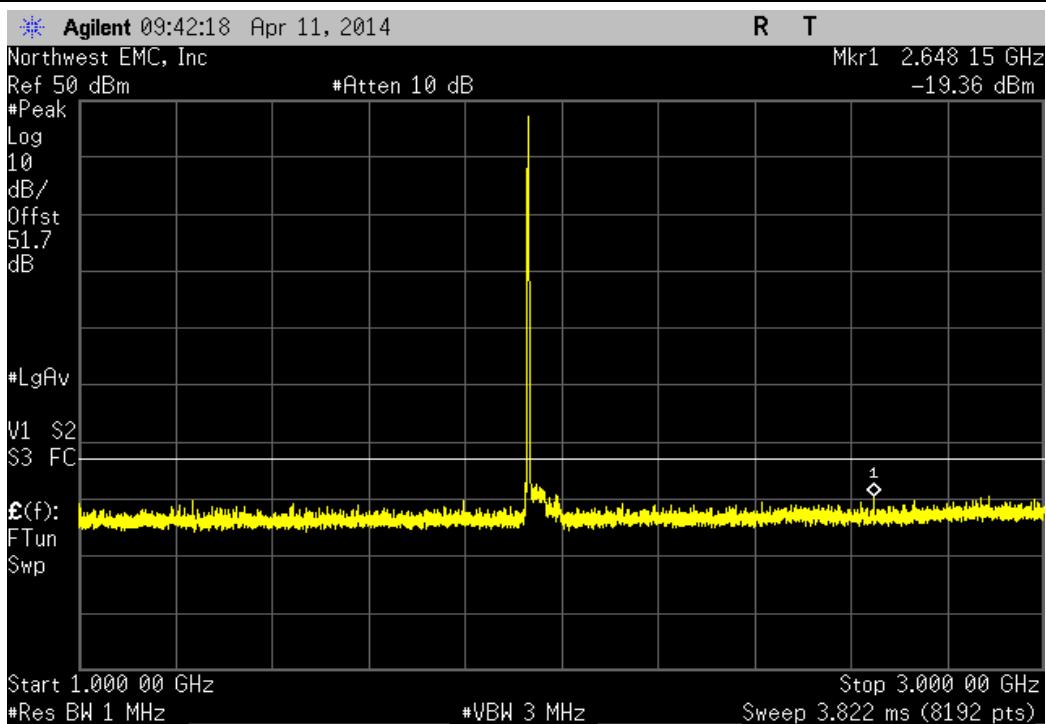


CDMA, Low Channel 1930.8 MHz					
Frequency Range		Value	Limit	Result	
3 GHz - 20 GHz		-28.86 dBm	≤ -13 dBm	Pass	

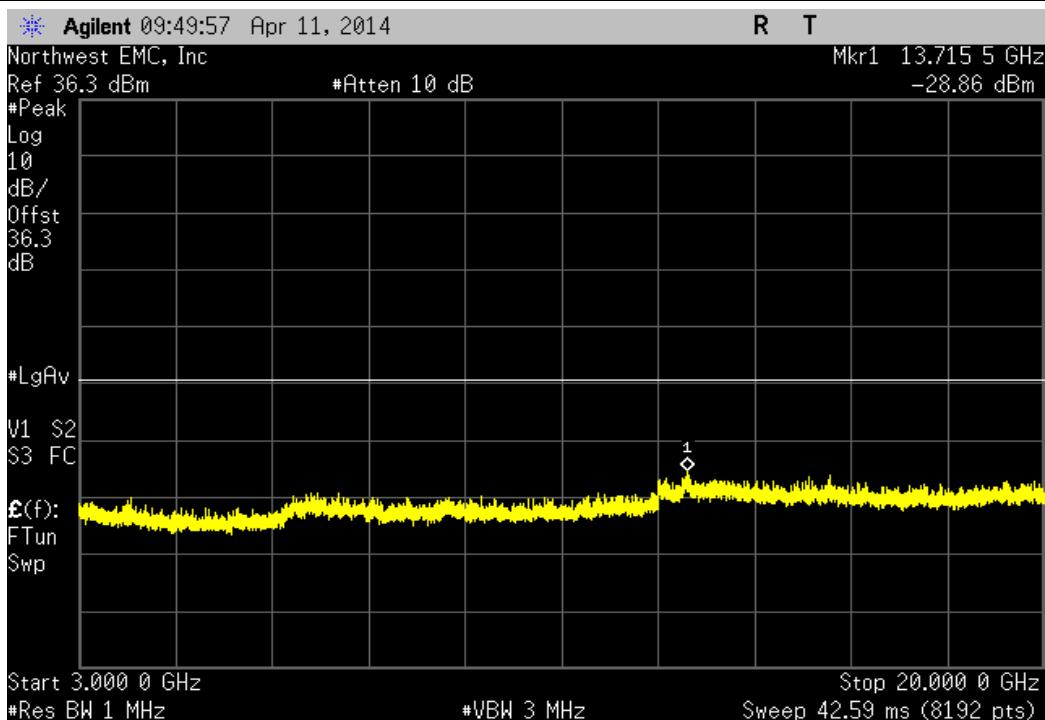


CDMA, Mid Channel 1962.5 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-38.88 dBm	≤ -13 dBm	Pass	

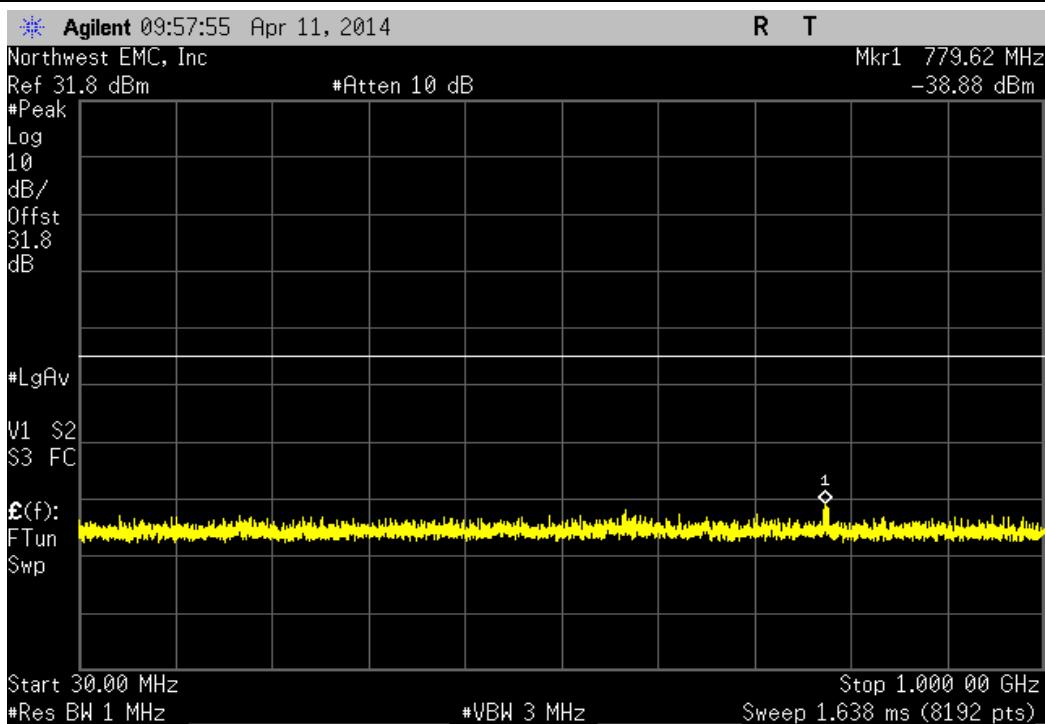


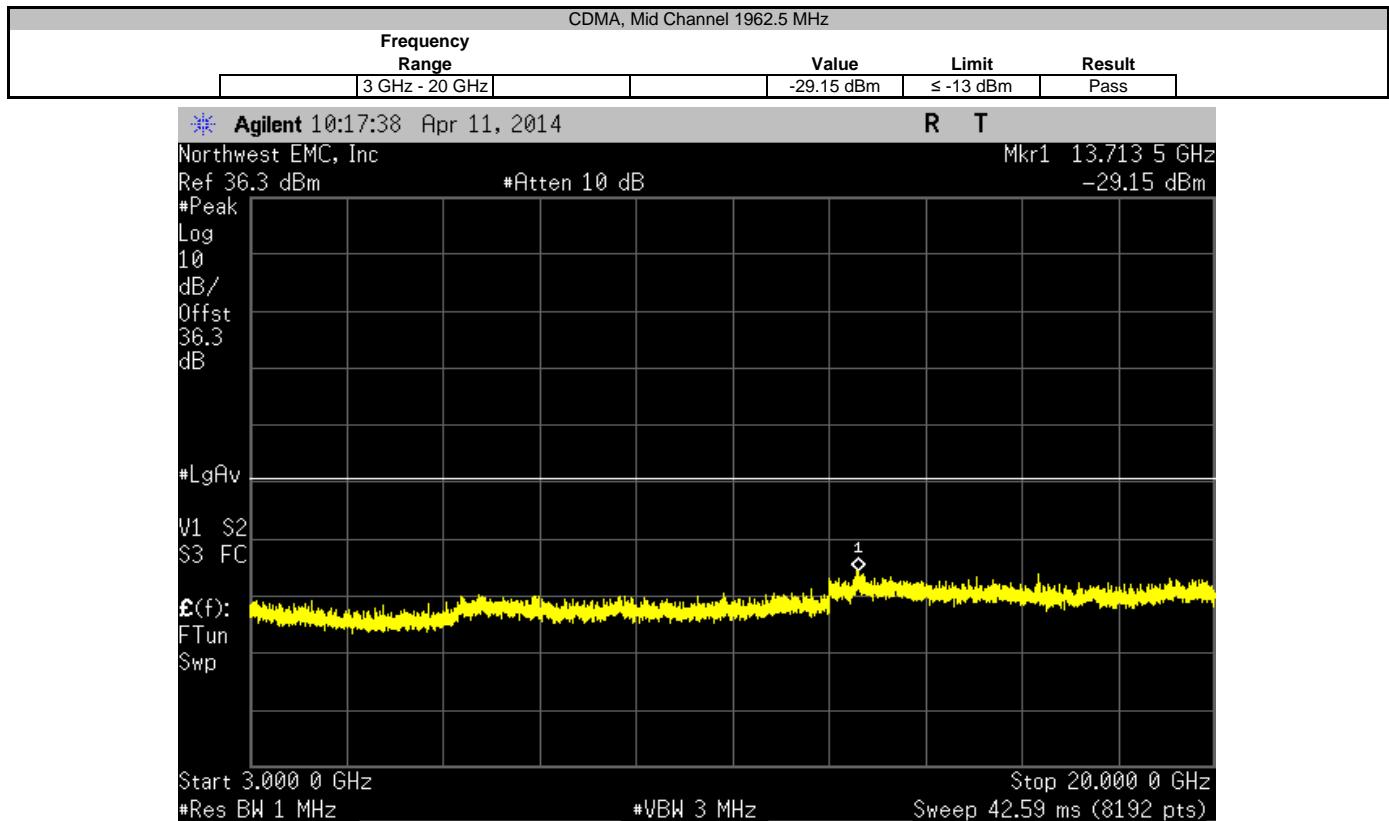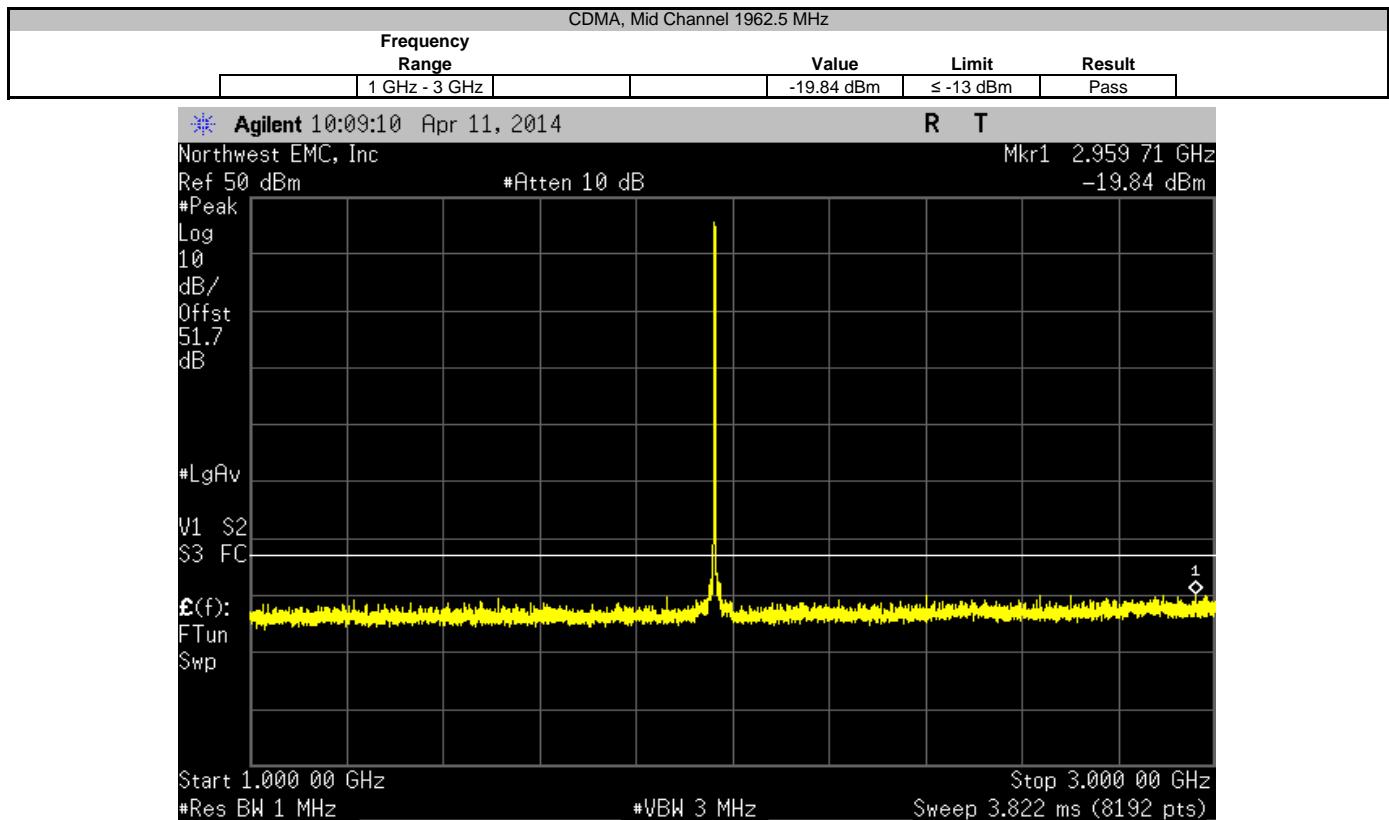


CDMA, High Channel 1994.2 MHz					
Frequency Range		Value	Limit	Result	
	30 MHz - 1 GHz	-40.61 dBm	≤ -13 dBm	Pass	

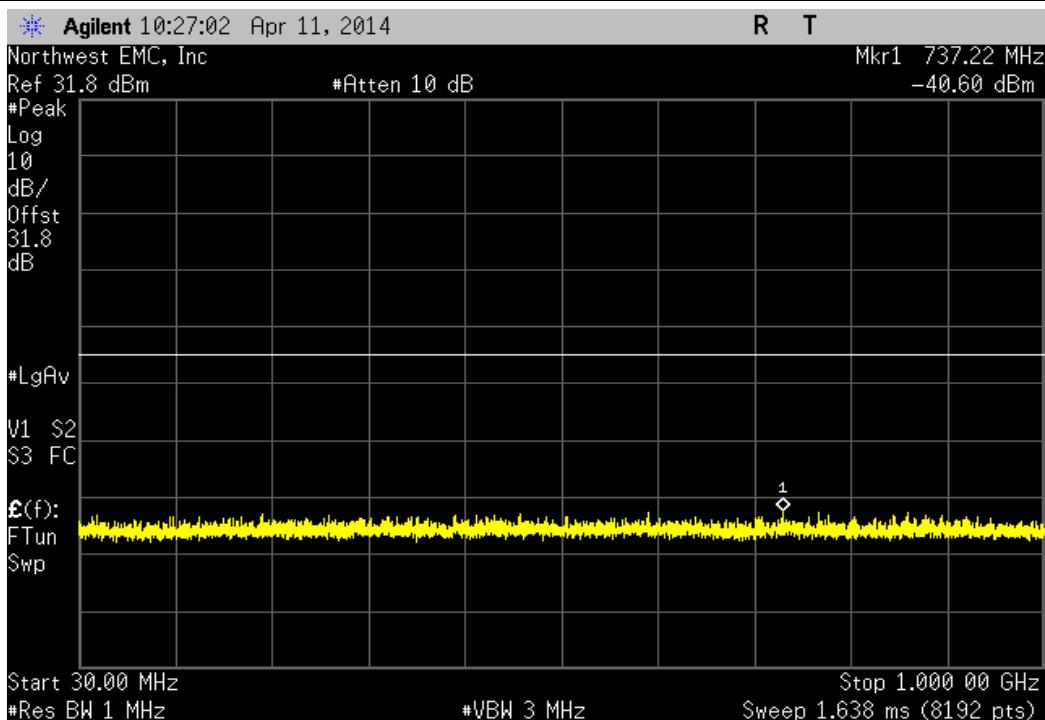


CDMA, High Channel 1994.2 MHz					
Frequency Range		Value	Limit	Result	
	1 GHz - 3 GHz	-21.01 dBm	≤ -13 dBm	Pass	


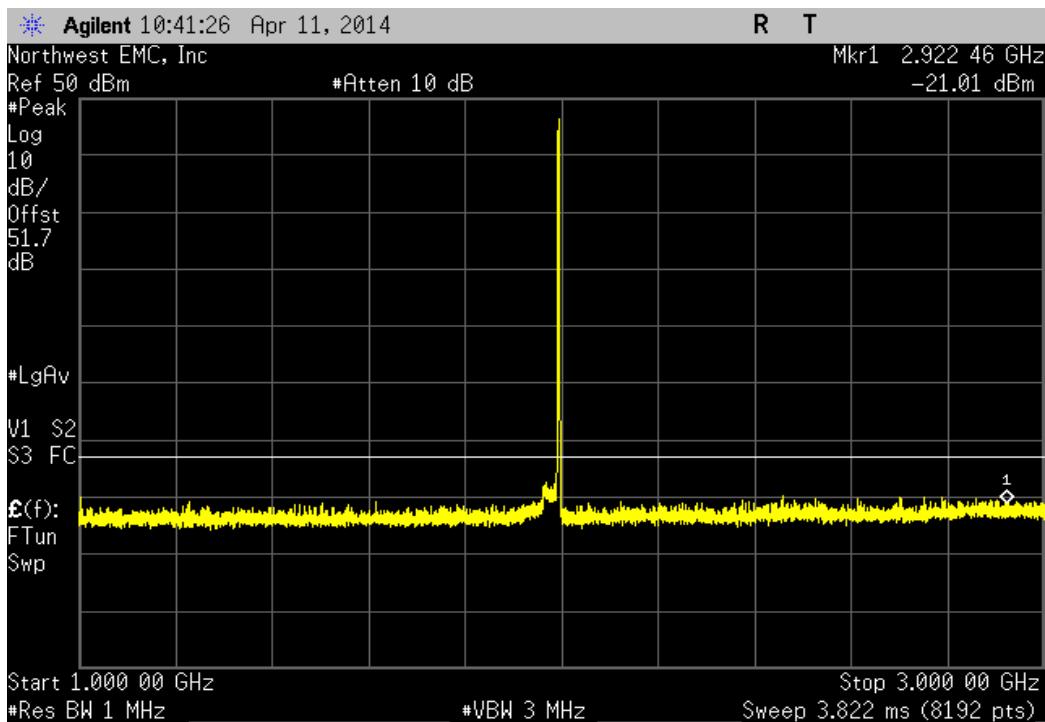




CDMA, High Channel 1994.2 MHz					
Frequency Range		Value	Limit	Result	
3 GHz - 20 GHz		-29.34 dBm	≤ -13 dBm	Pass	


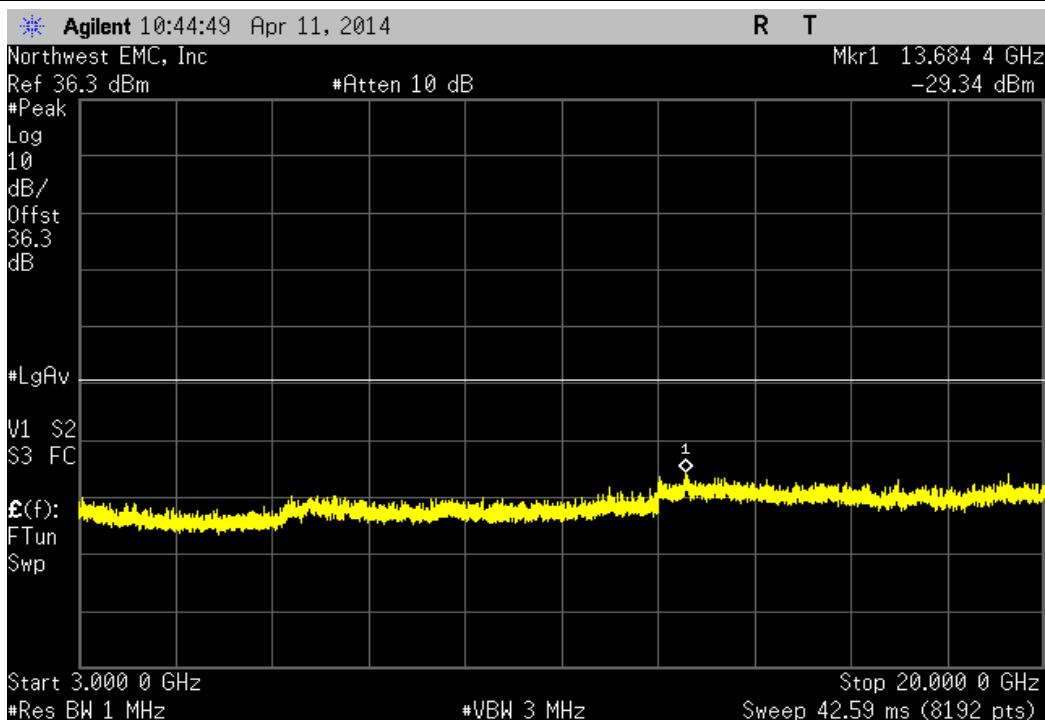




LTE 5 MHz, Mid Channel 1962.5 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-40.39 dBm	≤ -13 dBm	Pass	

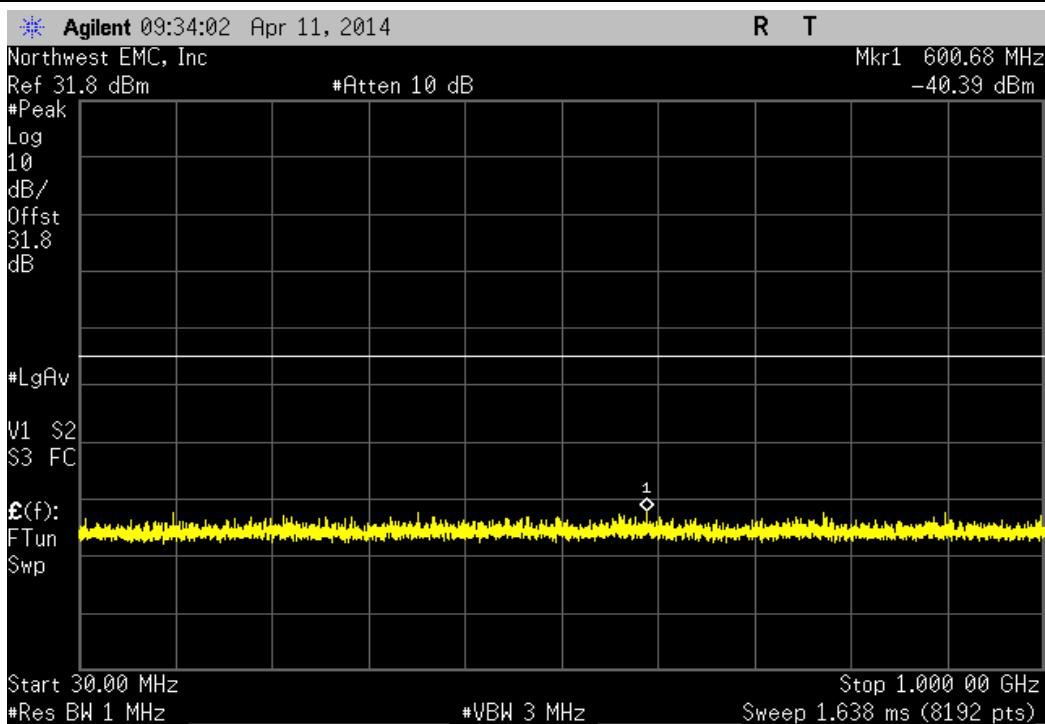

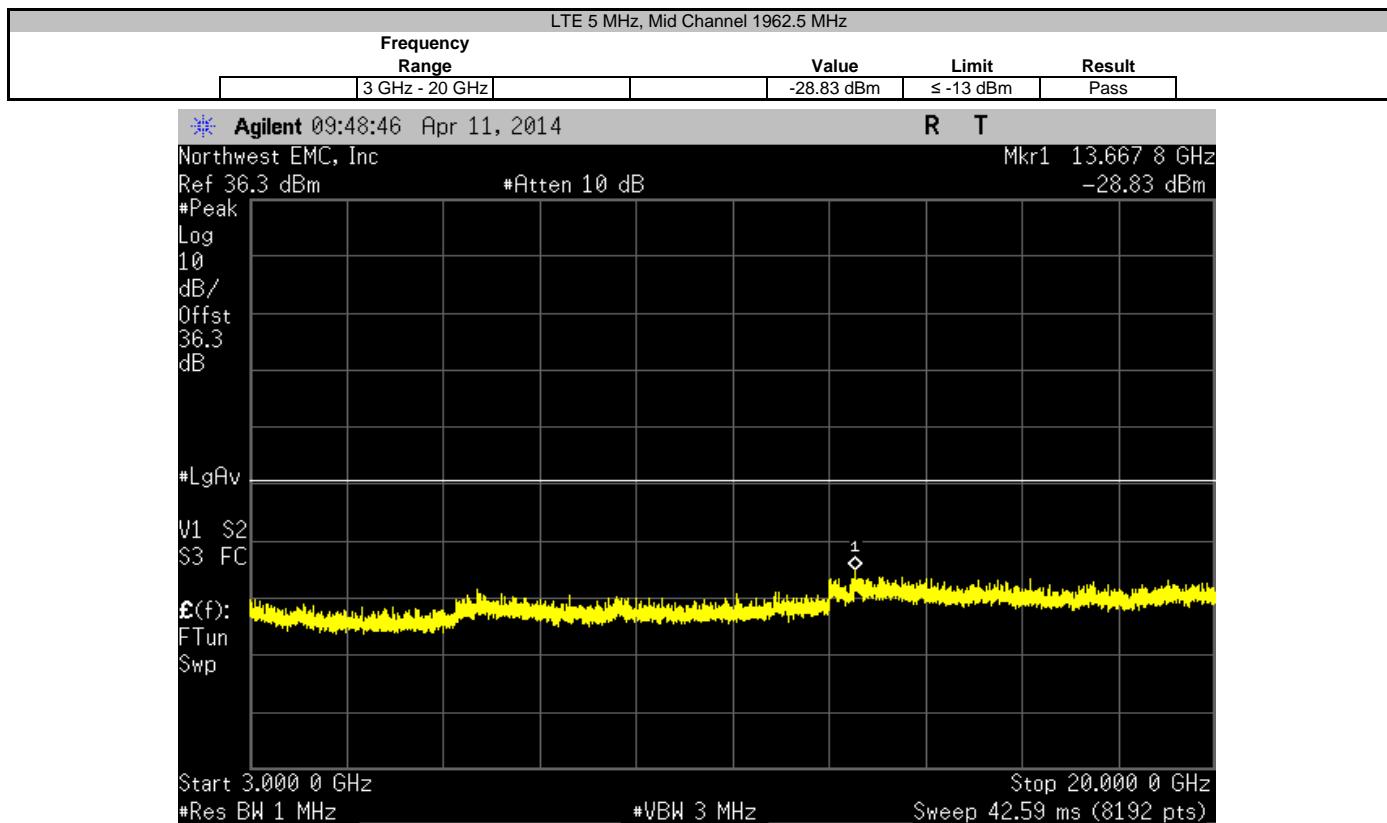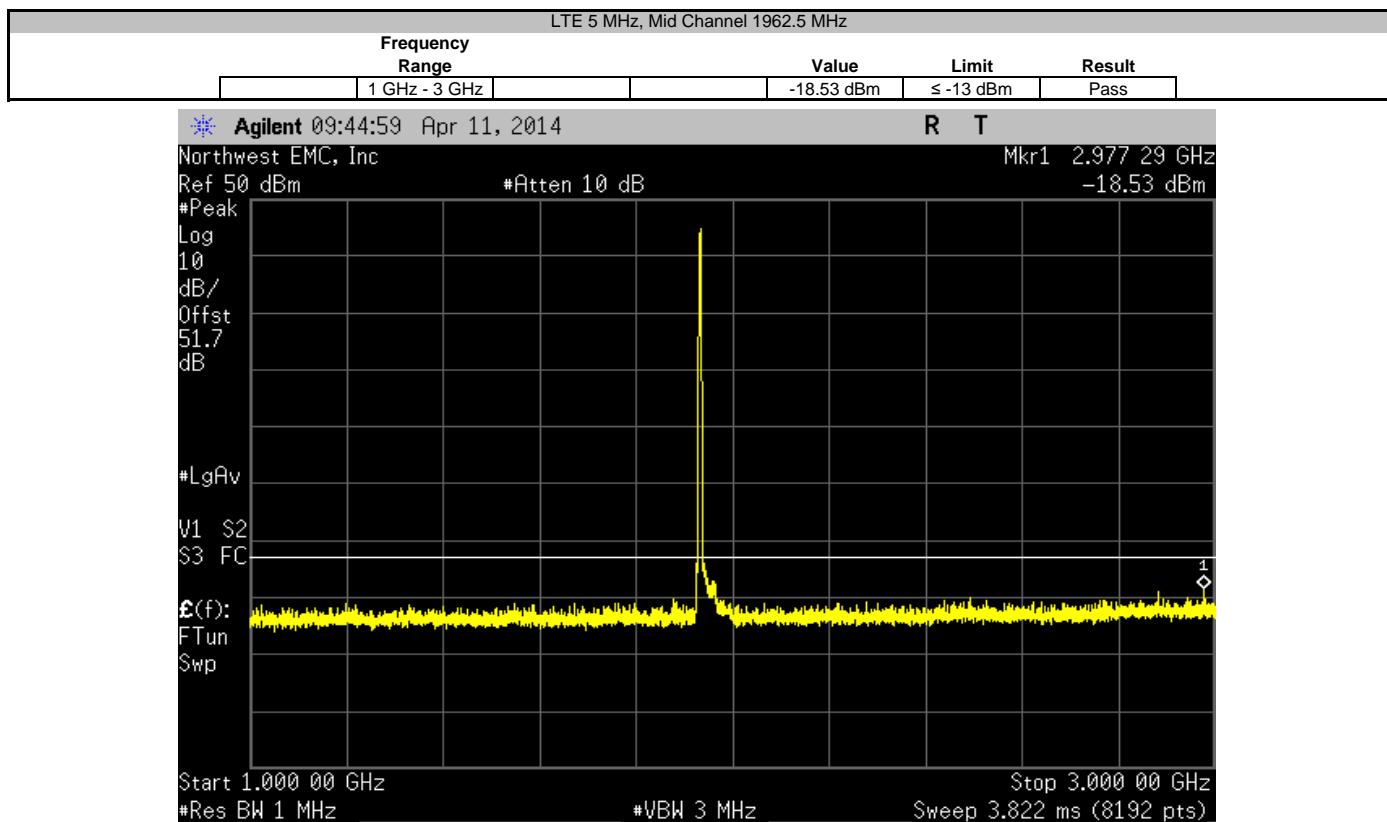


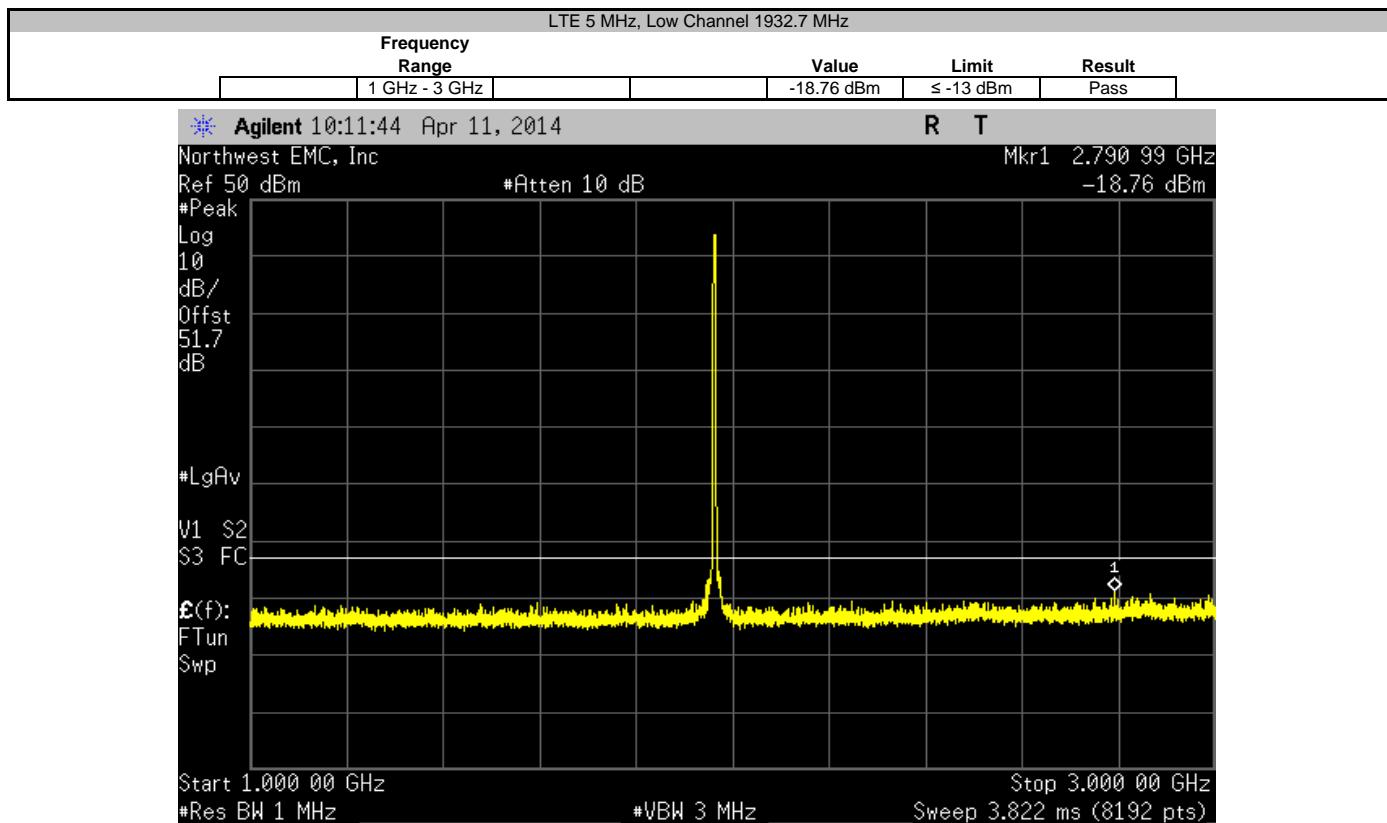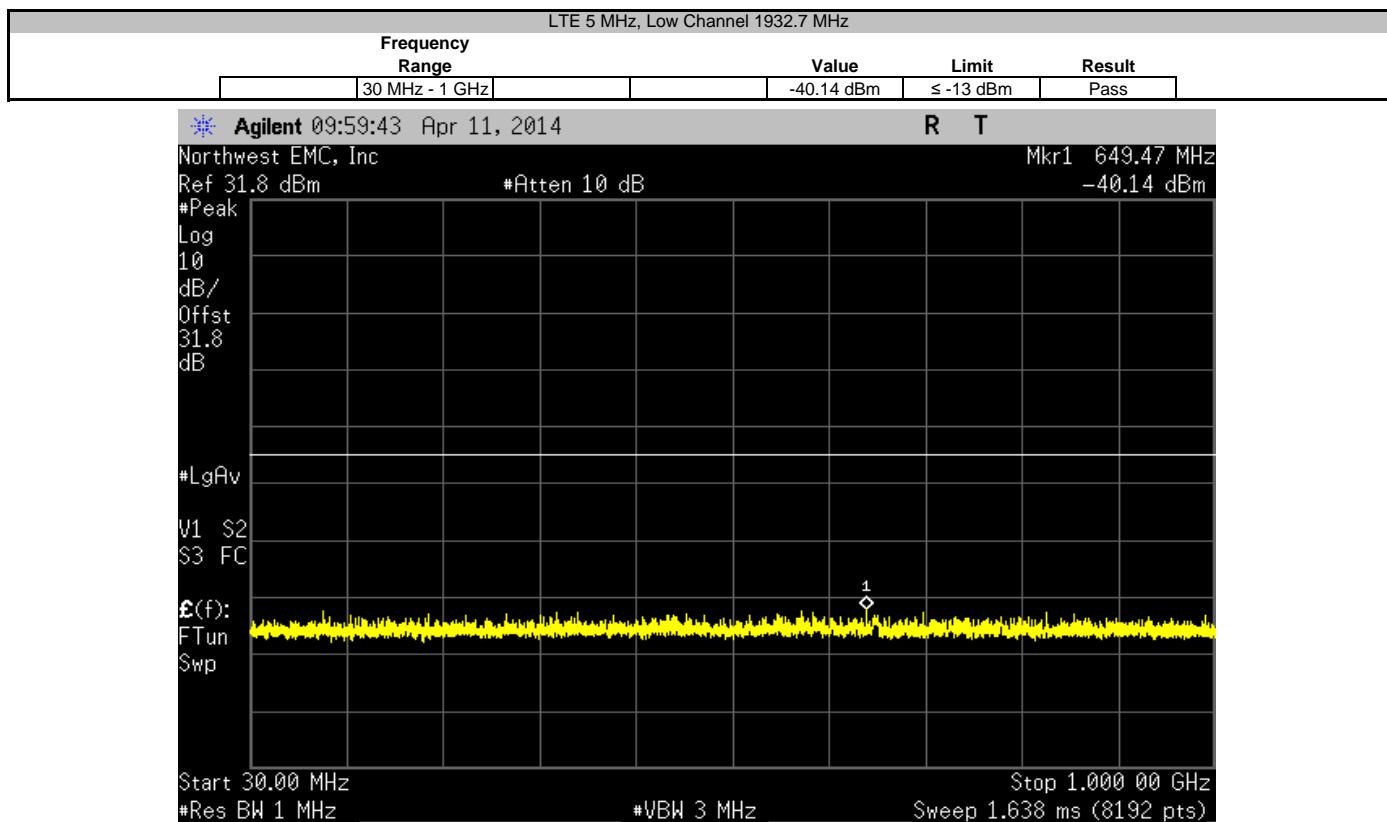

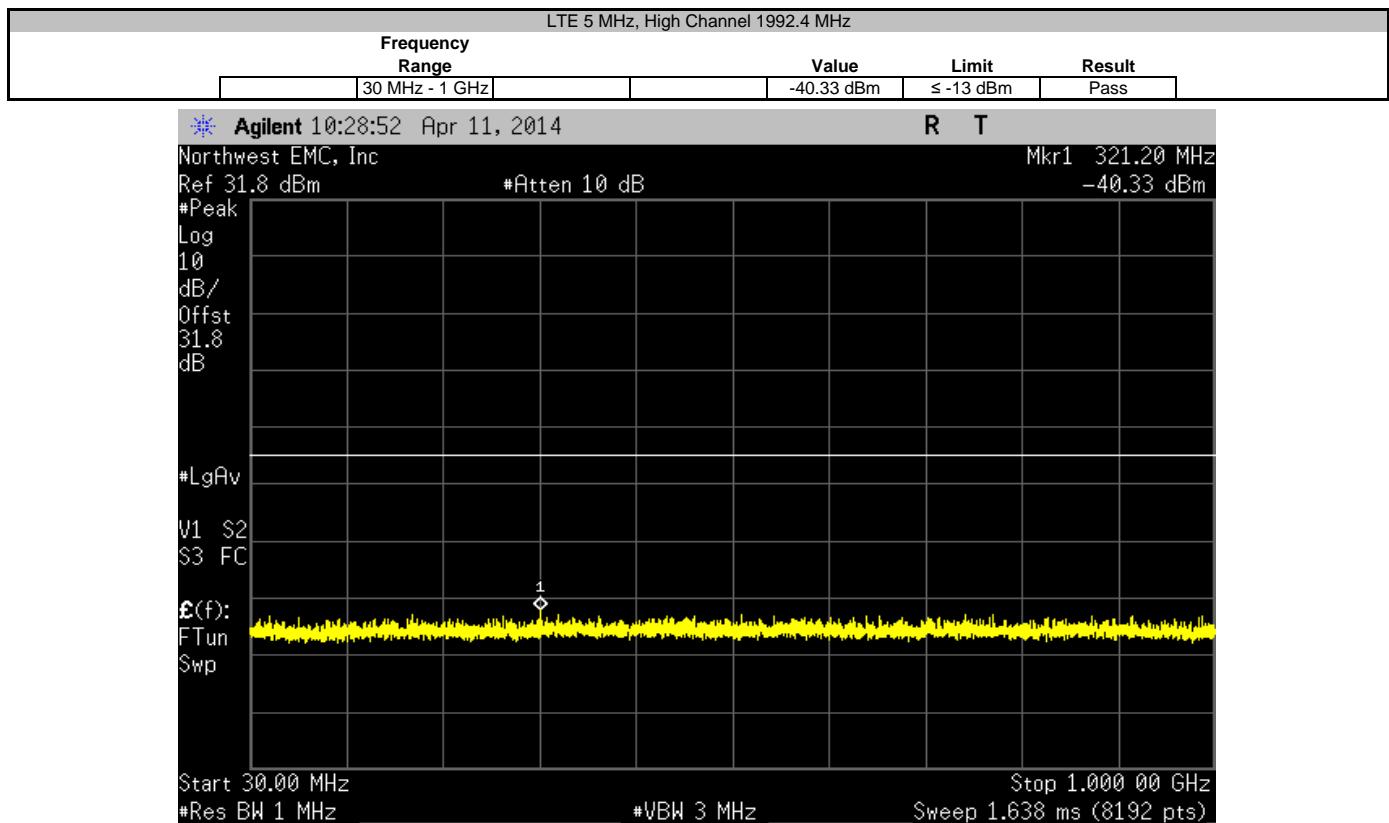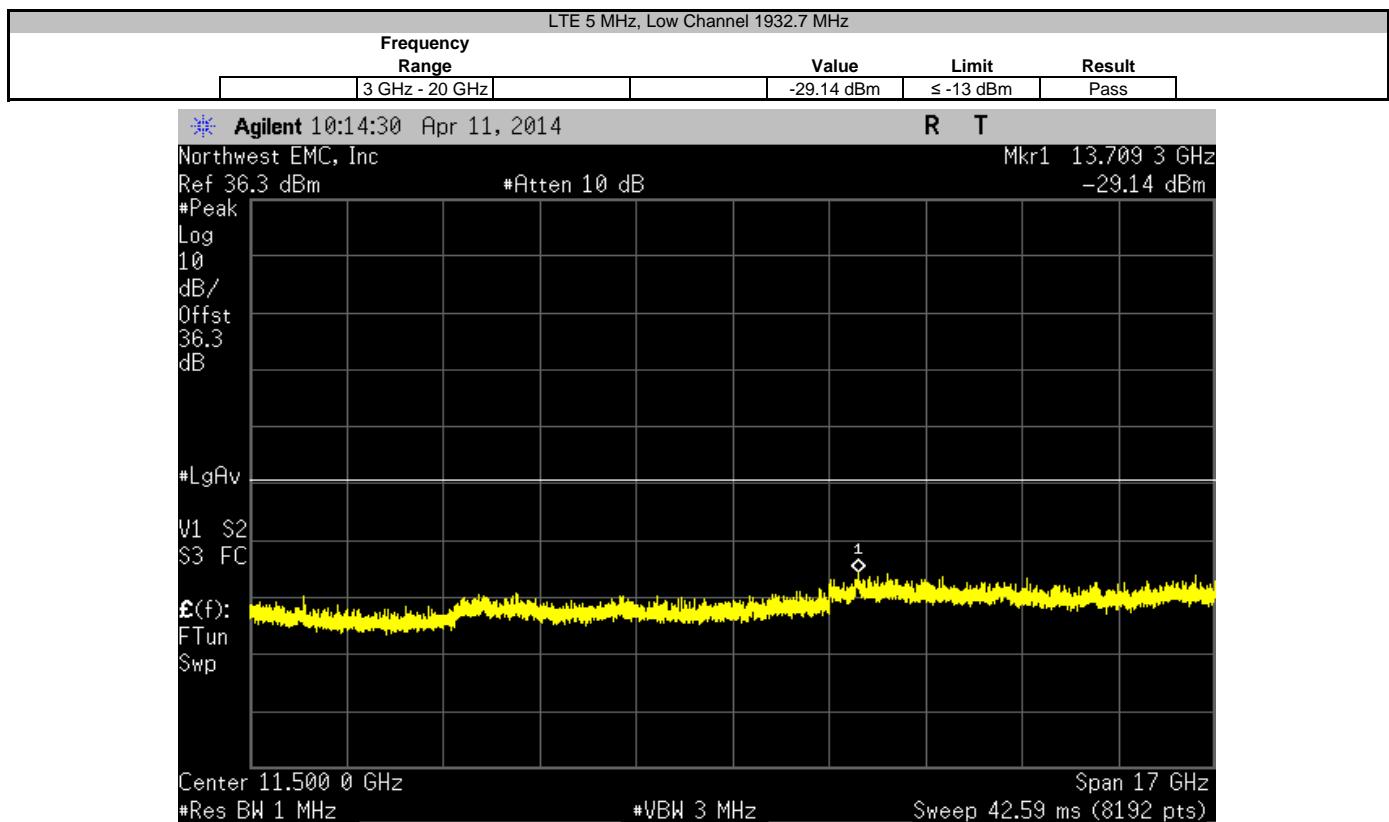


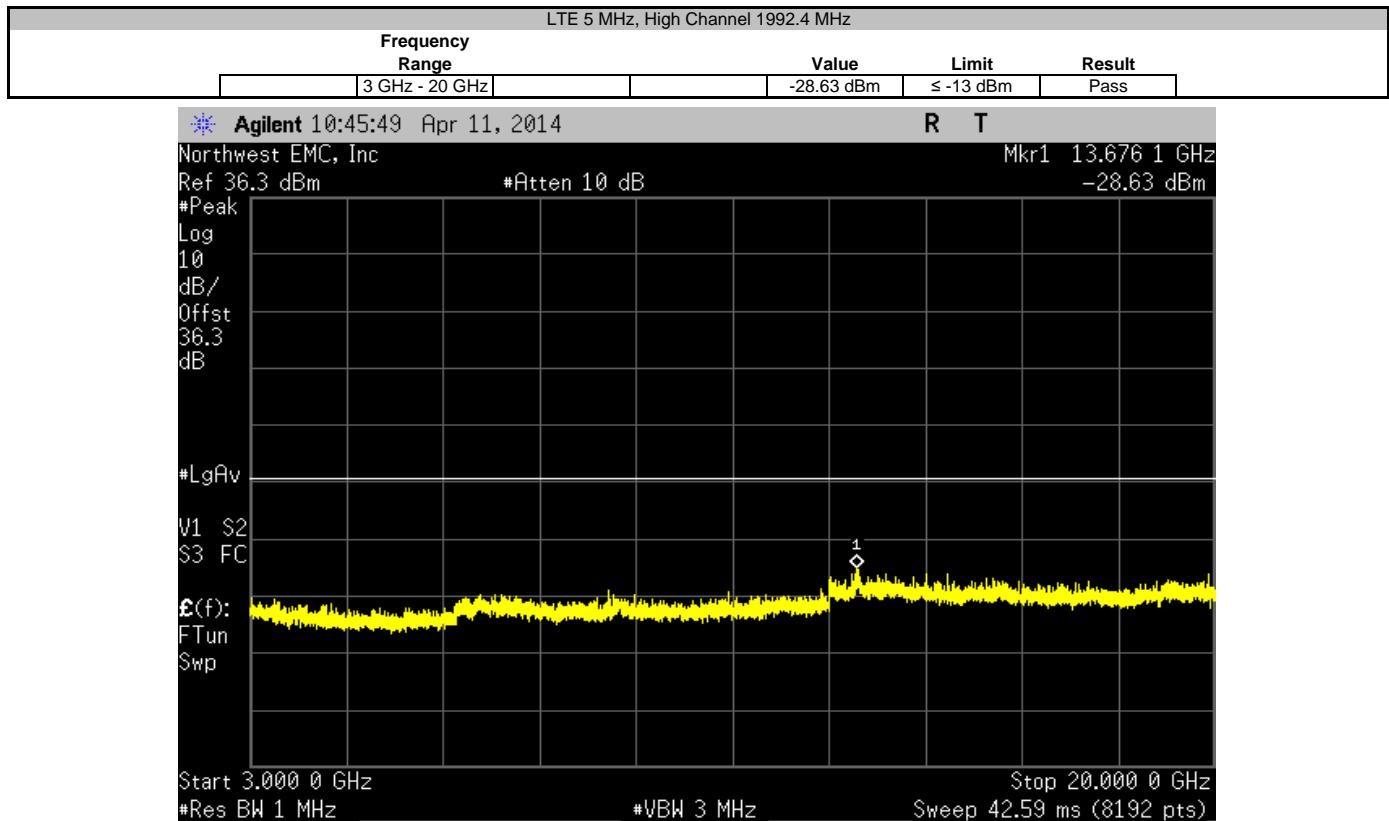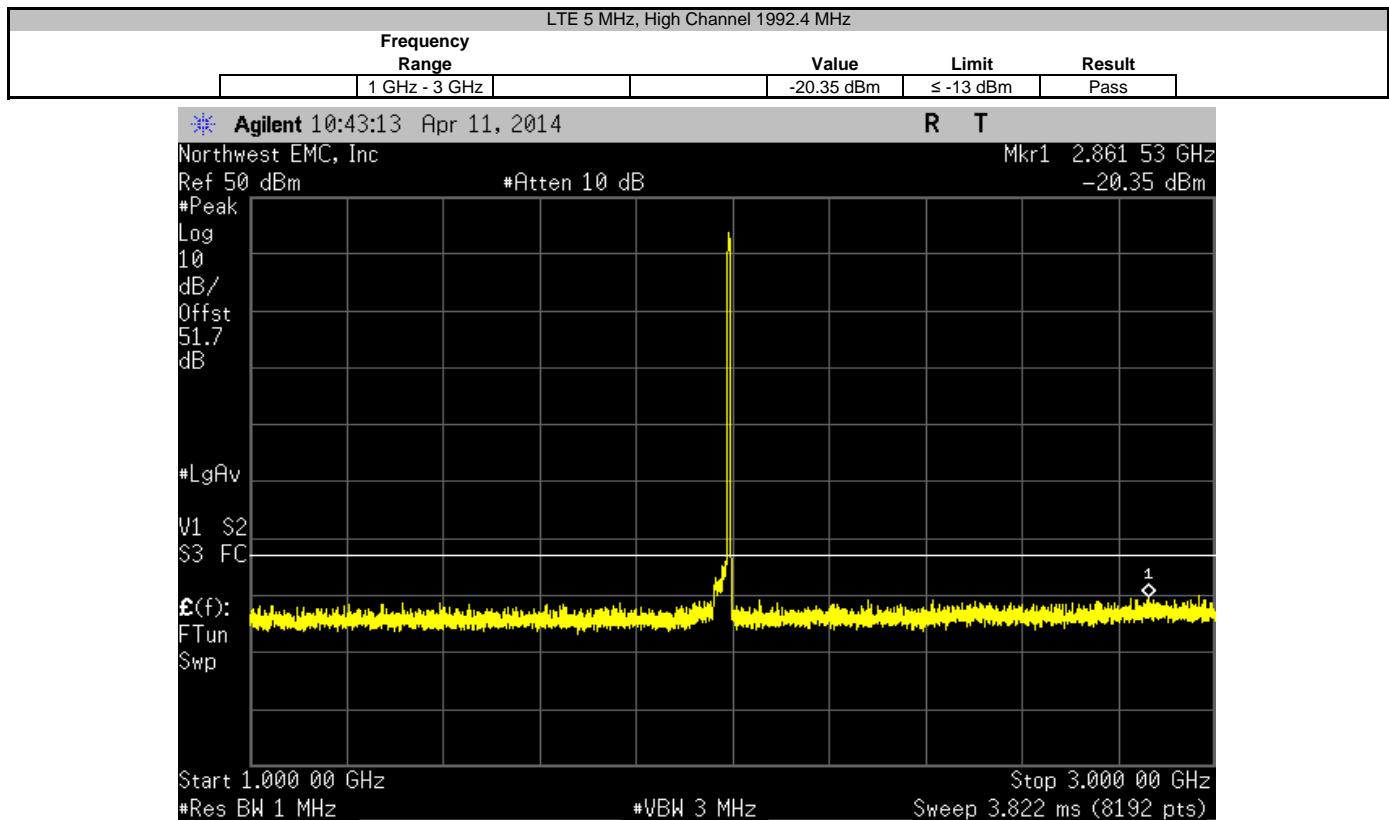


LTE 10 MHz, Mid Channel 1962.5 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-39.74 dBm	≤ -13 dBm	Pass	

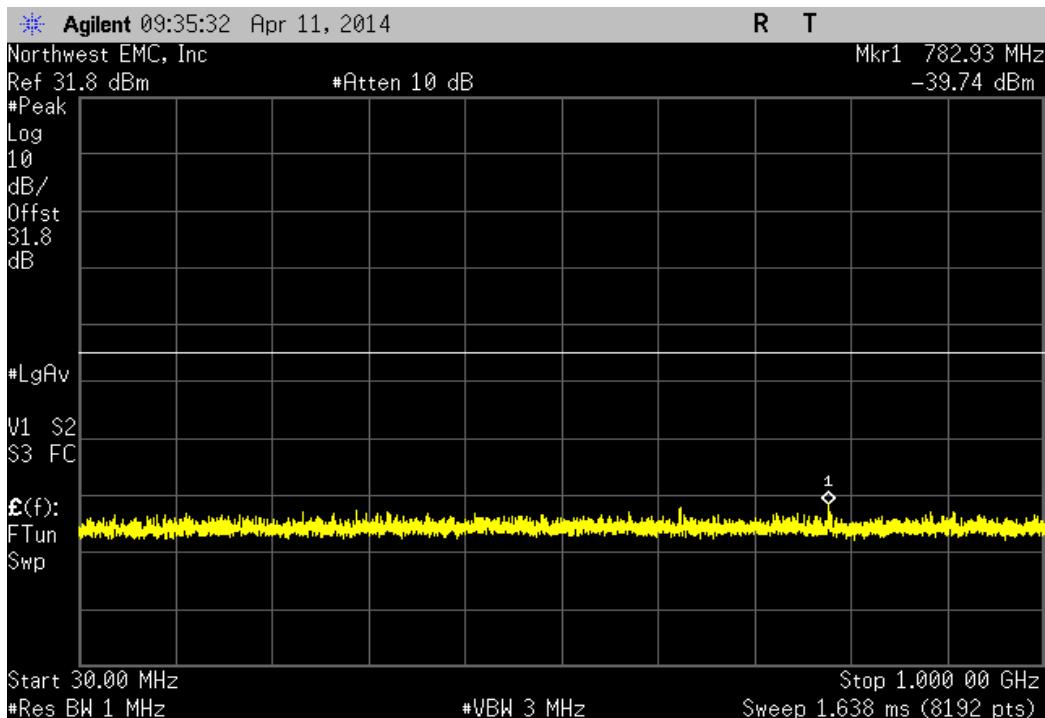


LTE 10 MHz, Mid Channel 1962.5 MHz					
Frequency Range		Value	Limit	Result	
1 GHz - 3 GHz		-19.76 dBm	≤ -13 dBm	Pass	


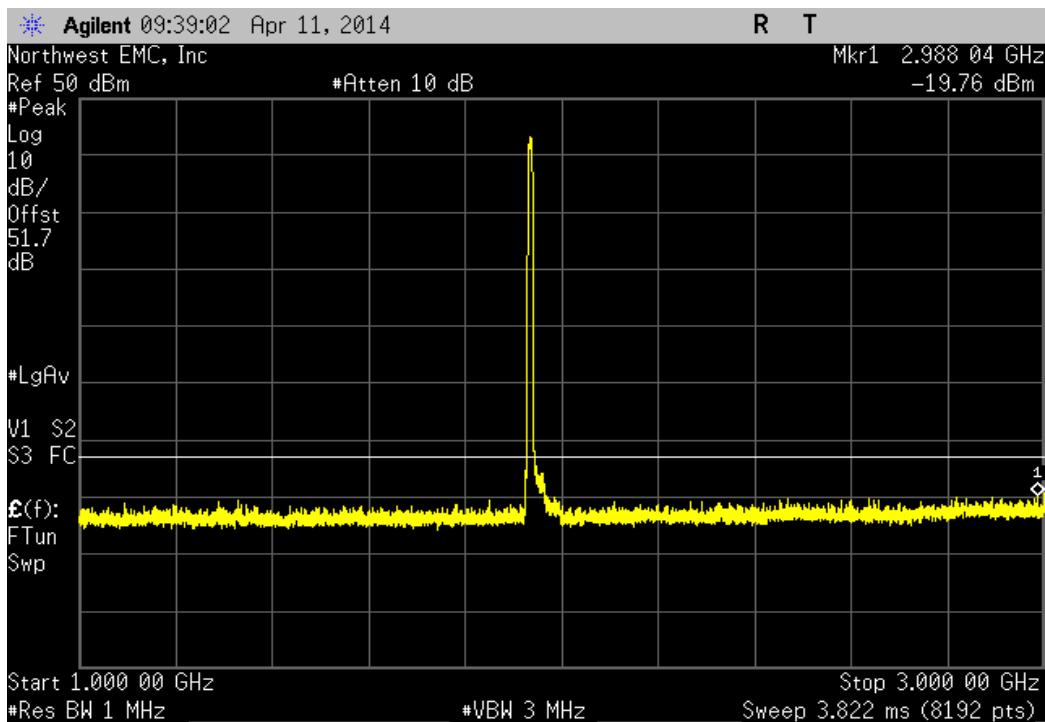


LTE 10 MHz, Mid Channel 1962.5 MHz					
Frequency Range		Value	Limit	Result	
3 GHz - 20 GHz		-29.45 dBm	≤ -13 dBm	Pass	

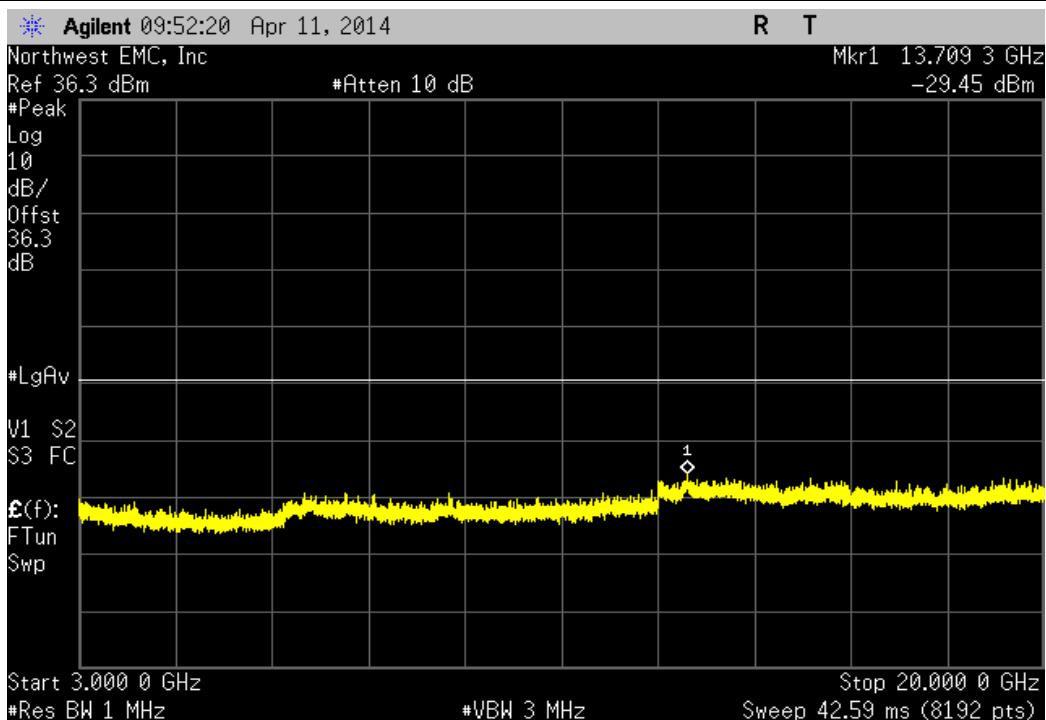


LTE 10 MHz, Low Channel 1935 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-39.88 dBm	≤ -13 dBm	Pass	

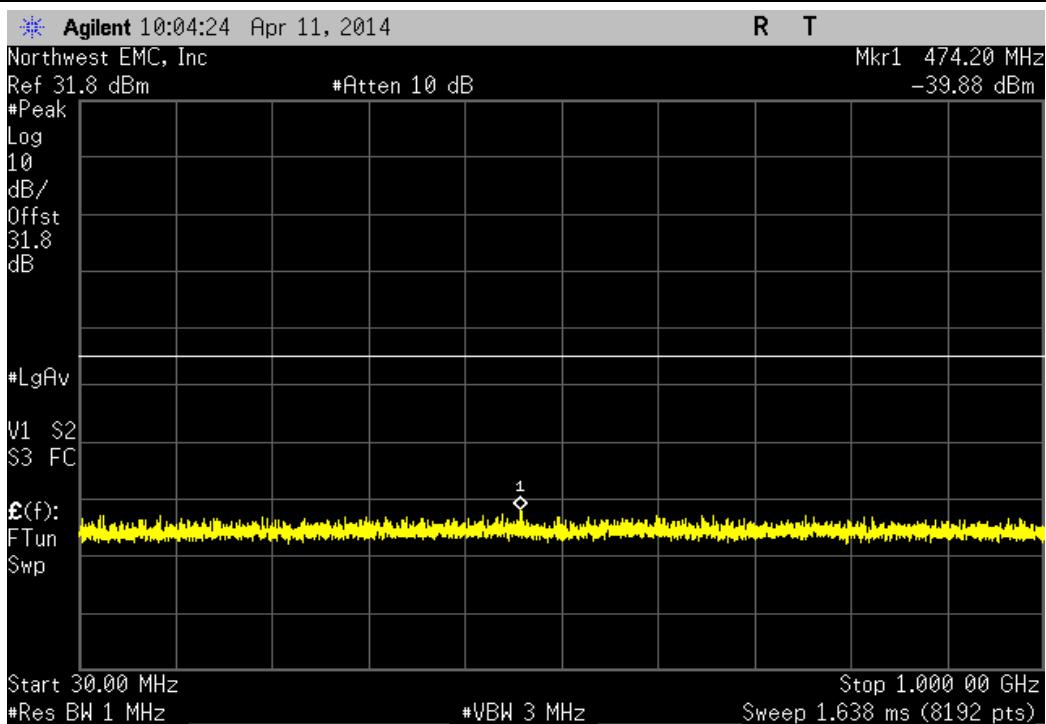


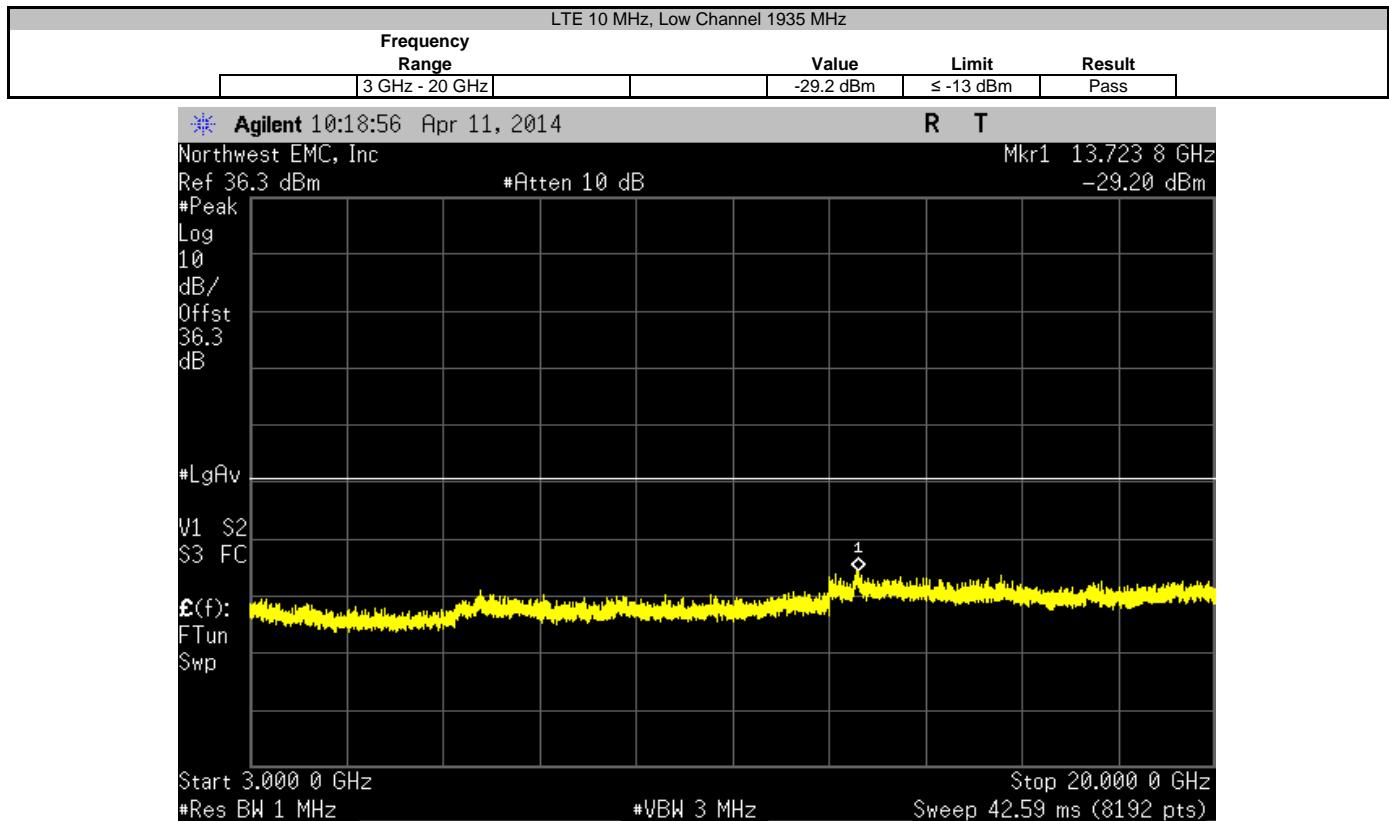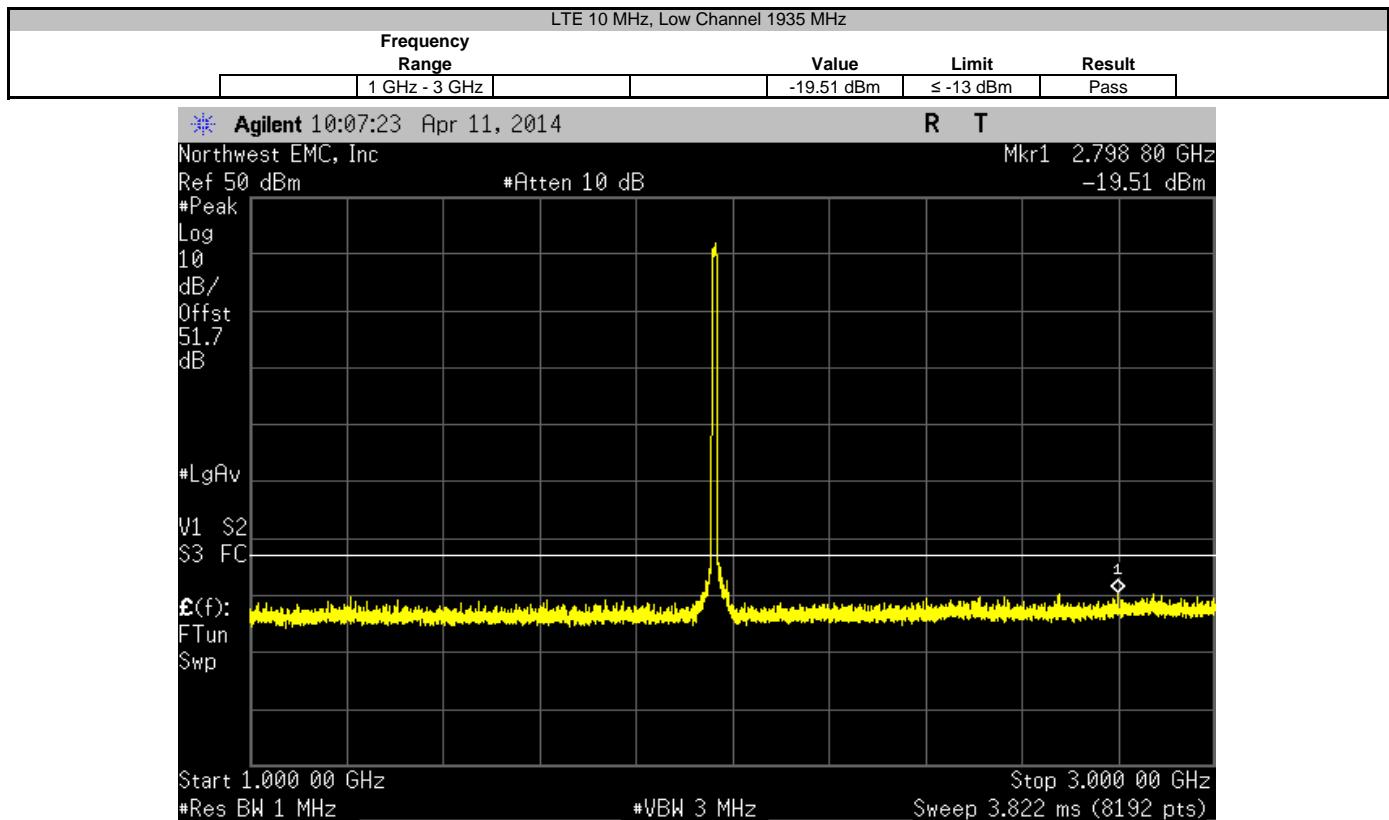


LTE 10 MHz, High Channel 1990 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-40.24 dBm	≤ -13 dBm	Pass	

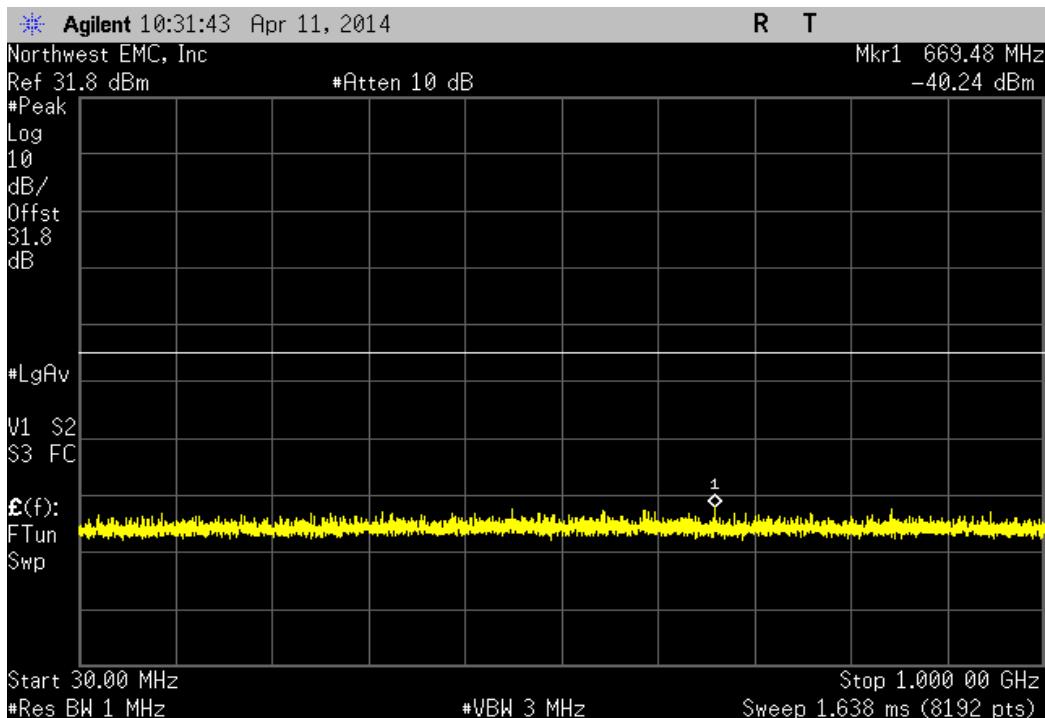

LTE 10 MHz, High Channel 1990 MHz					
Frequency Range		Value	Limit	Result	
1 GHz - 3 GHz		-20.45 dBm	≤ -13 dBm	Pass	

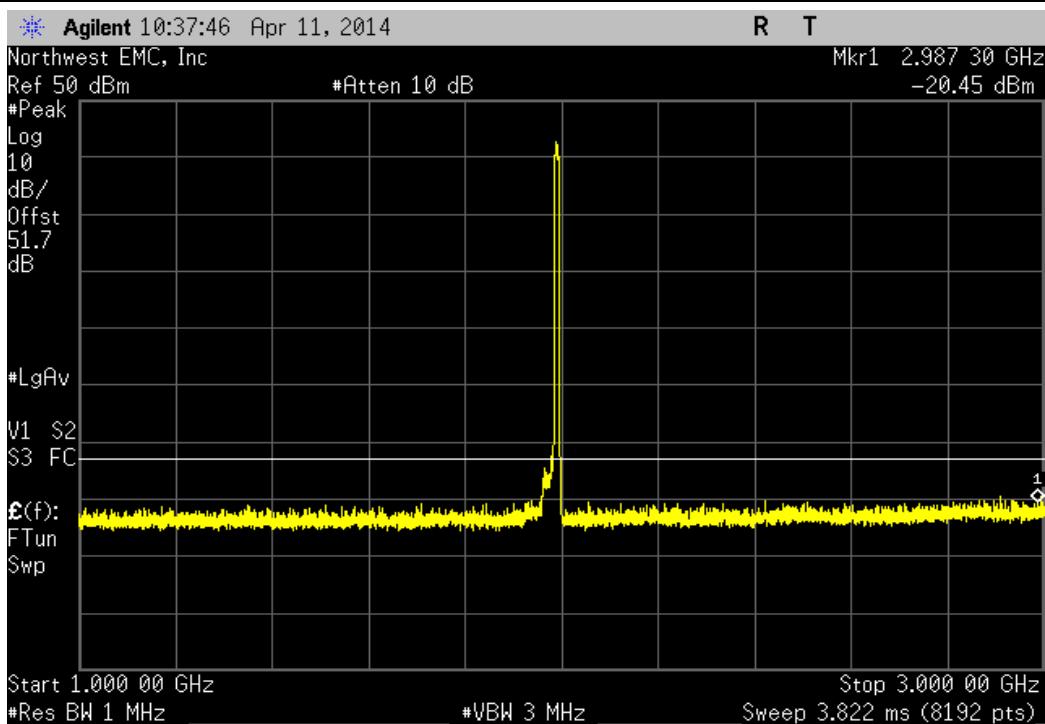

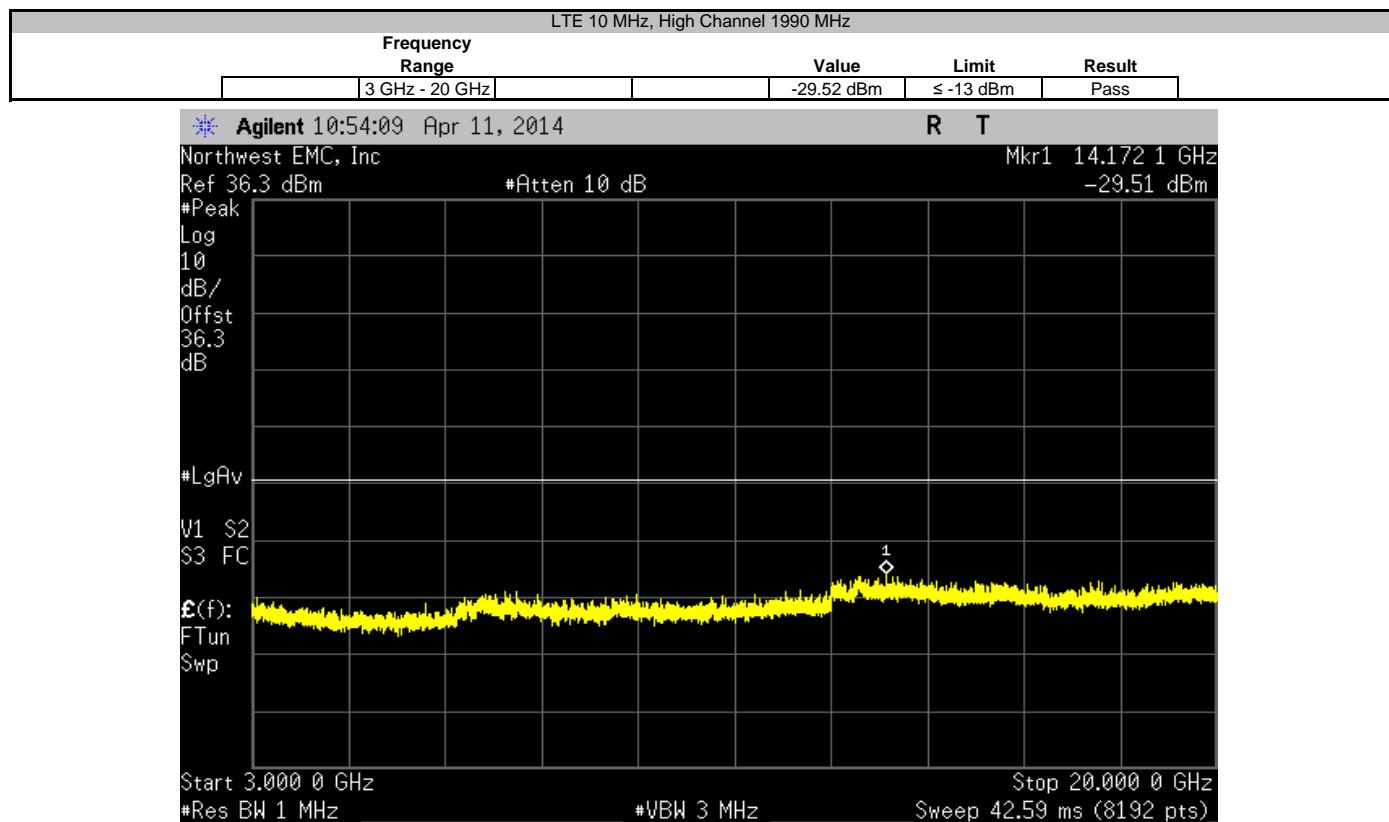

## INTERMODULATION

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT



Description	Manufacturer	Model	ID	Last Cal.	Interval
Power Divider/Combiner	Fairview Microwave Inc (SM electronics)	MP8451-2	IAD	NCR	0
Power Divider/Combiner	Fairview Microwave Inc (SM electronics)	MP8451-2	IAC	NCR	0
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24

### TEST DESCRIPTION


The EUT was configured with an input of a CW pulse at the bottom of the band, a CW pulse at the bottom of the band, and a modulated pulse near the edge of the band.

The antenna port spurious emissions were measured at the RF output terminal of the EUT with external attenuation on the RF input of the spectrum analyzer. Analyzer plots utilizing a 1MHz resolution bandwidth and no video filtering were made for each modulation type from 30 MHz to 20 GHz. The peak conducted power of spurious emissions, up to the 10th harmonic of the transmit frequency, were investigated to ensure they were less than or equal to -13 dBm.


EUT: Prism HDM 800 MHz/1900 MHz SISO RF Module		Work Order: TECO0013		
Serial Number: None		Date: 04/11/14		
Customer: TE Connectivity / ADC Telecommunications		Temperature: 25°C		
Attendees: None		Humidity: 25%		
Project: None		Barometric Pres.: 1017.2		
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08		
TEST SPECIFICATIONS				
FCC 24E:2014	Test Method: ANSI/TIA/EIA-603-C-2004			
COMMENTS				
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset.				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	1	Signature: <i>Trevor Buls</i>		
Band ABD	Frequency Range	Value	Limit	Result
CDMA	30 MHz - 1 GHz	-39.98 dBm	≤ -13 dBm	Pass
CDMA	1 GHz - 3 GHz	-19.37 dBm	≤ -13 dBm	Pass
CDMA	3 GHz - 20 GHz	-29.31 dBm	≤ -13 dBm	Pass
LTE 5 MHz	30 MHz - 1 GHz	-40.76 dBm	≤ -13 dBm	Pass
LTE 5 MHz	1 GHz - 3 GHz	-18.94 dBm	≤ -13 dBm	Pass
LTE 5 MHz	3 GHz - 20 GHz	-29.58 dBm	≤ -13 dBm	Pass
LTE 10 MHz	30 MHz - 1 GHz	-40.54 dBm	≤ -13 dBm	Pass
LTE 10 MHz	1 GHz - 3 GHz	-19.82 dBm	≤ -13 dBm	Pass
LTE 10 MHz	3 GHz - 20 GHz	-29.52 dBm	≤ -13 dBm	Pass
Band CEFG	Frequency Range	Value	Limit	Result
CDMA	30 MHz - 1 GHz	-39.8 dBm	≤ -13 dBm	Pass
CDMA	1 GHz - 3 GHz	-19.64 dBm	≤ -13 dBm	Pass
CDMA	3 GHz - 20 GHz	-29.44 dBm	≤ -13 dBm	Pass
LTE 5 MHz	30 MHz - 1 GHz	-40.48 dBm	≤ -13 dBm	Pass
LTE 5 MHz	1 GHz - 3 GHz	-19.51 dBm	≤ -13 dBm	Pass
LTE 5 MHz	3 GHz - 20 GHz	-29.18 dBm	≤ -13 dBm	Pass
LTE 10 MHz	30 MHz - 1 GHz	-40.53 dBm	≤ -13 dBm	Pass
LTE 10 MHz	1 GHz - 3 GHz	-19.04 dBm	≤ -13 dBm	Pass
LTE 10 MHz	3 GHz - 20 GHz	-28.86 dBm	≤ -13 dBm	Pass

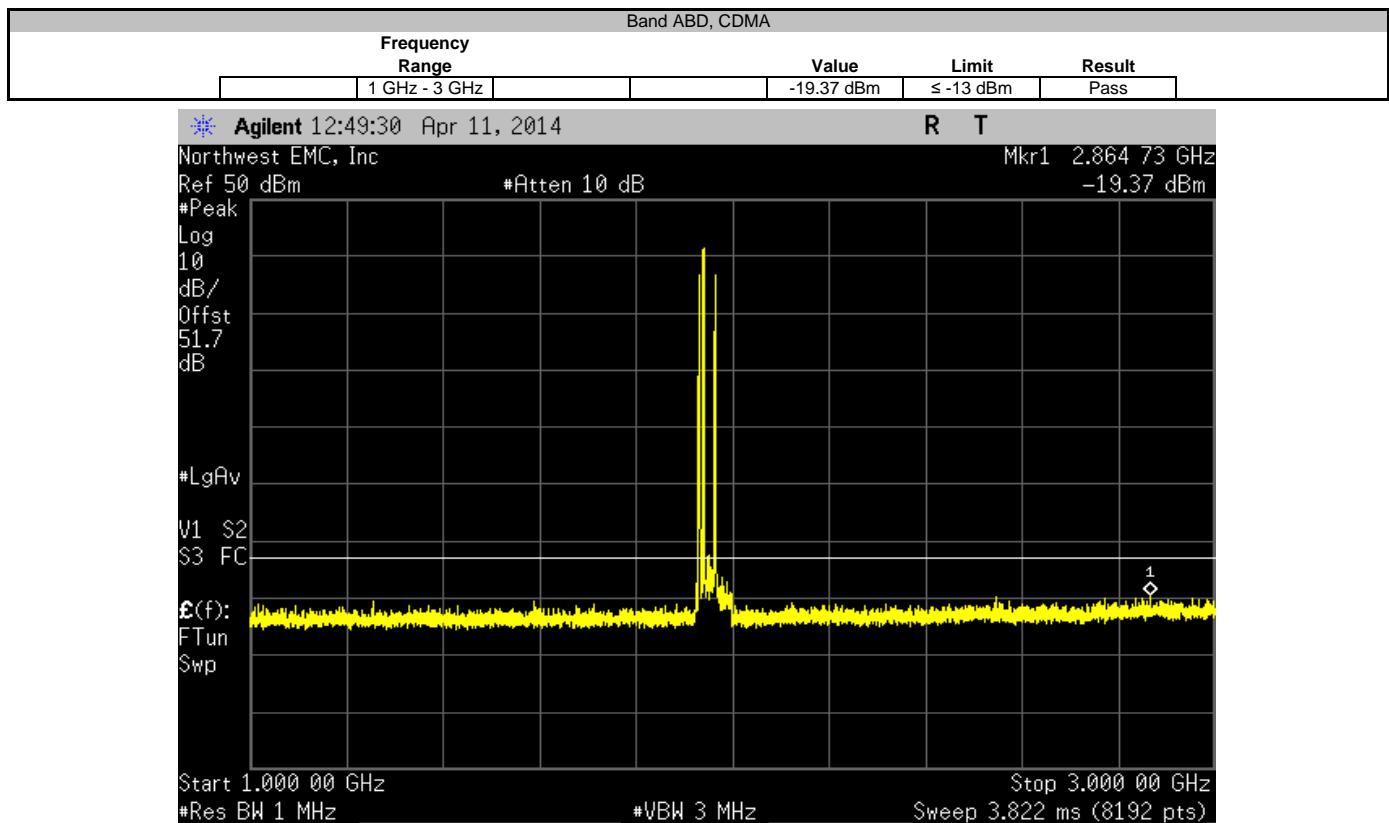
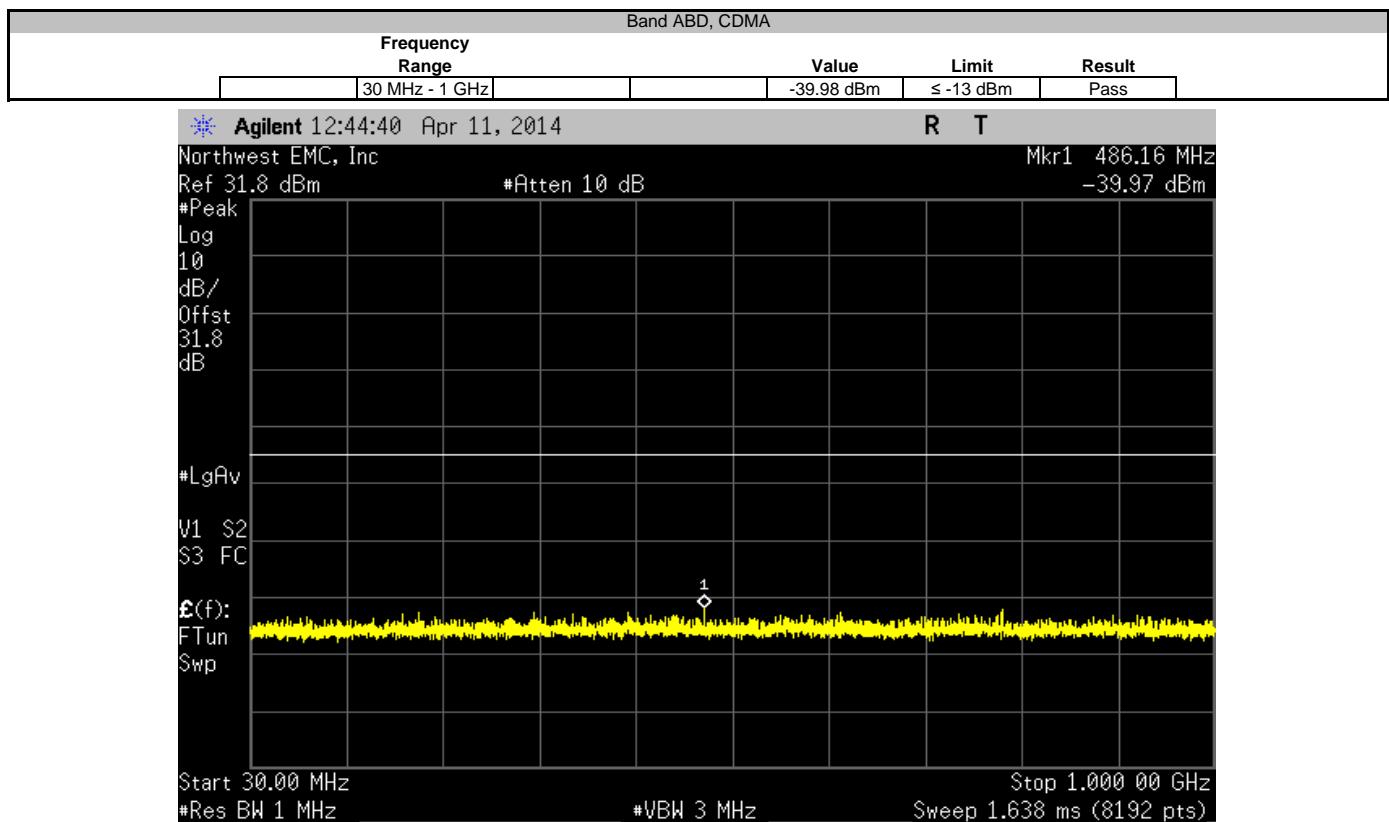


Band ABD, CDMA					
Frequency Range		Value	Limit	Result	
3 GHz - 20 GHz		-29.31 dBm	≤ -13 dBm	Pass	

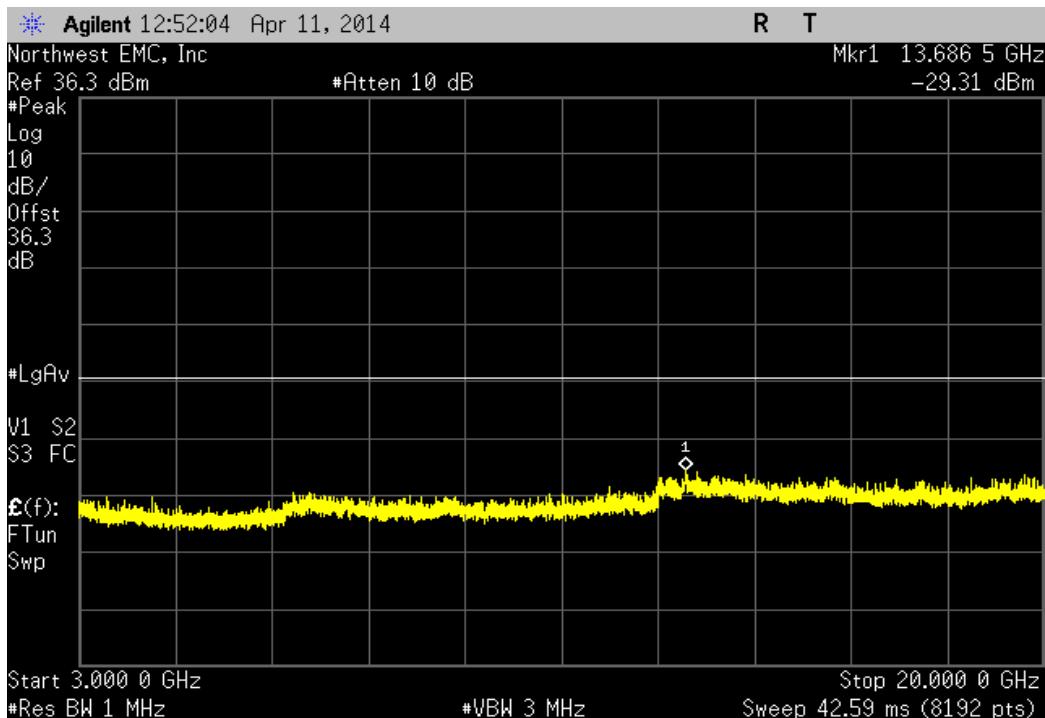


Band ABD, LTE 5 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-40.76 dBm	≤ -13 dBm	Pass	

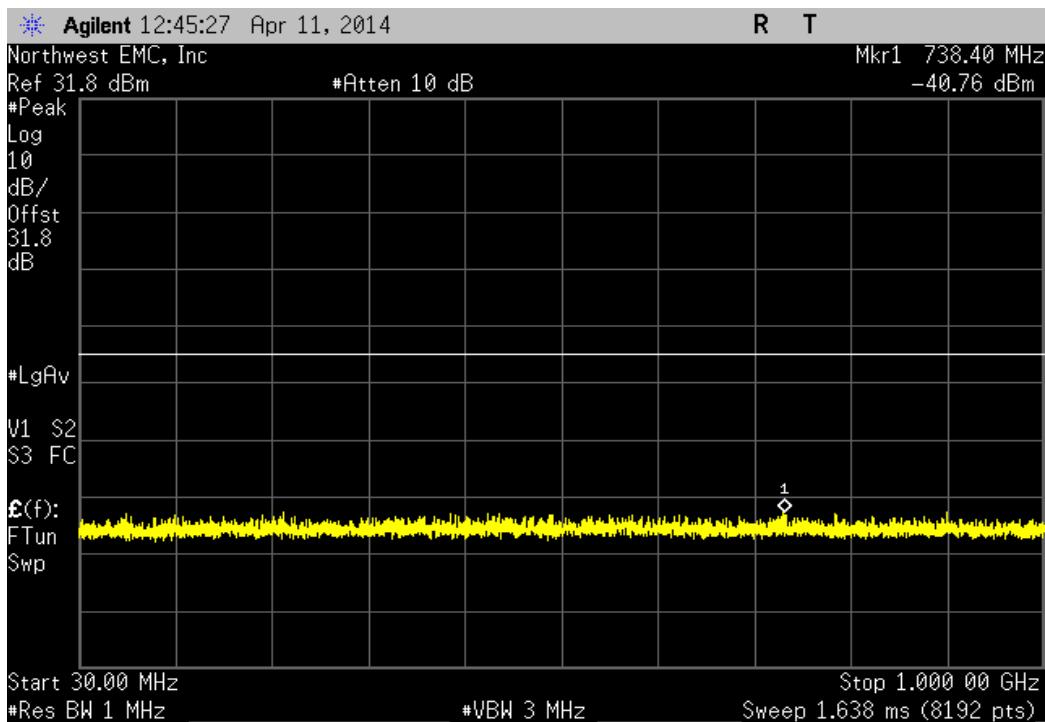


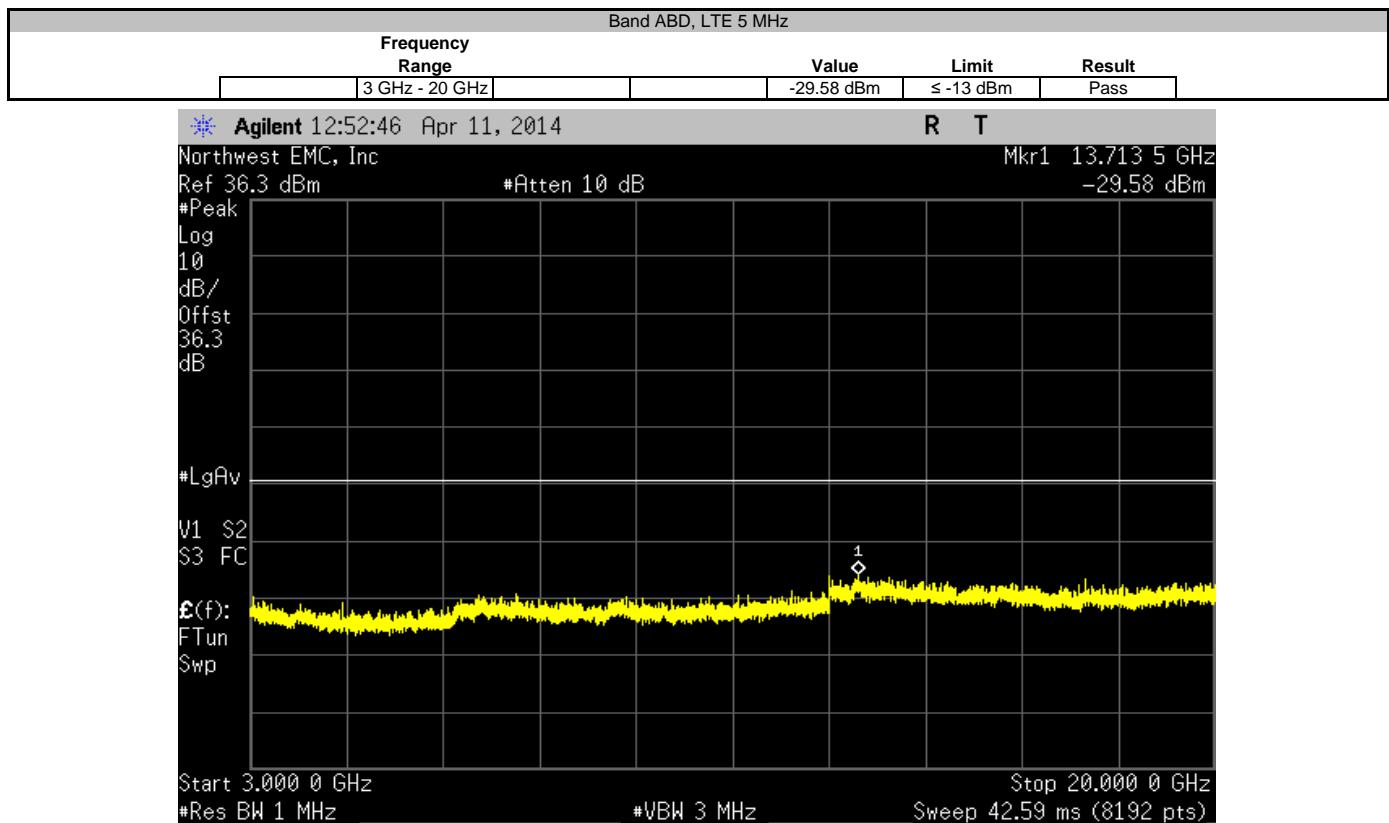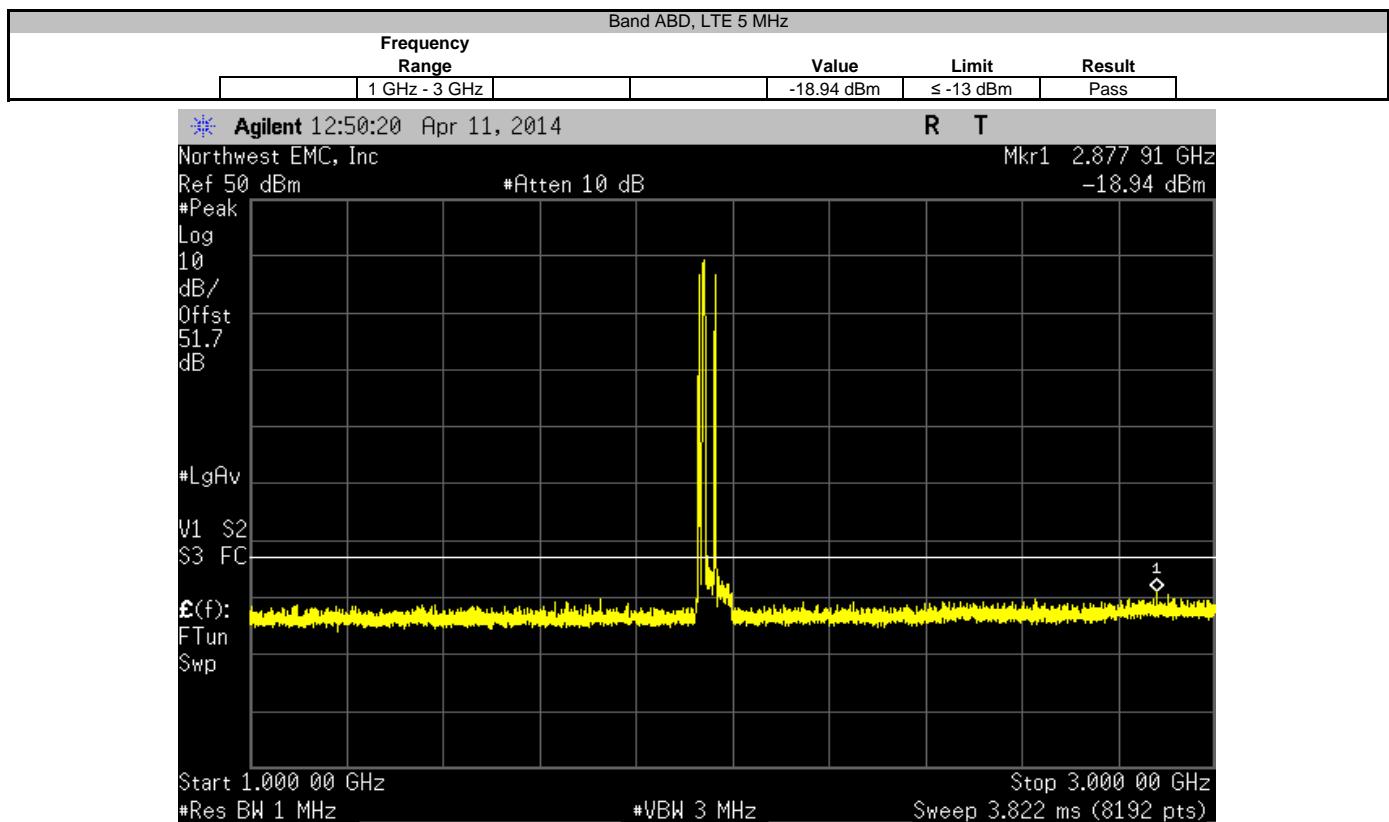


Band ABD, LTE 10 MHz					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-40.54 dBm	≤ -13 dBm	Pass	

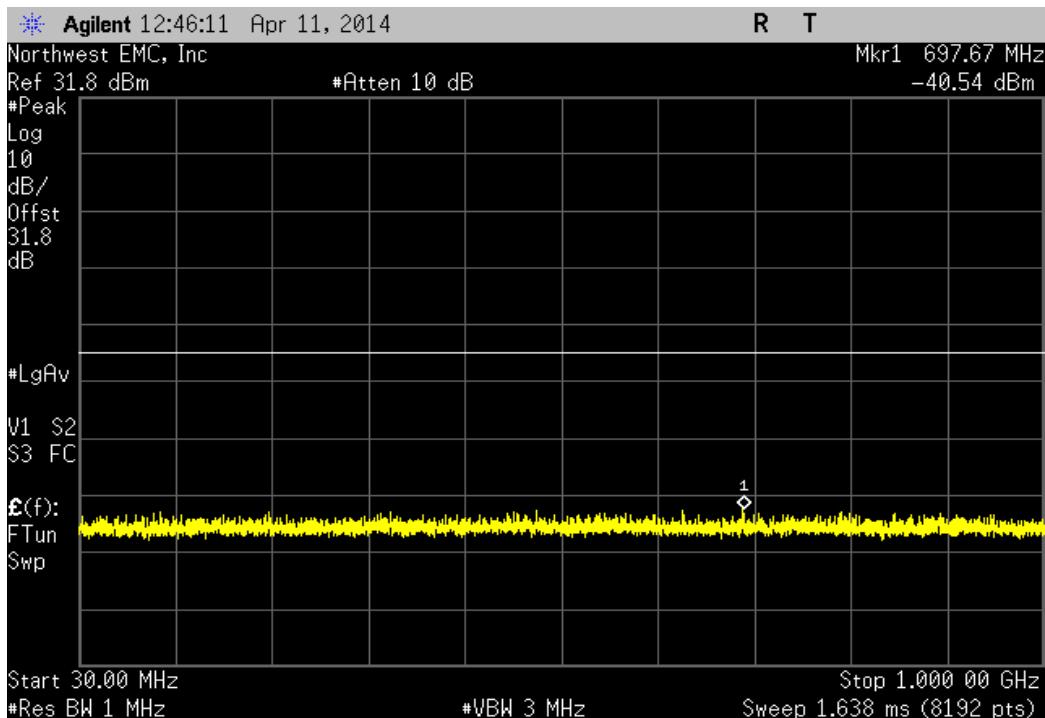


Band ABD, LTE 10 MHz					
Frequency Range		Value	Limit	Result	
1 GHz - 3 GHz		-19.82 dBm	≤ -13 dBm	Pass	


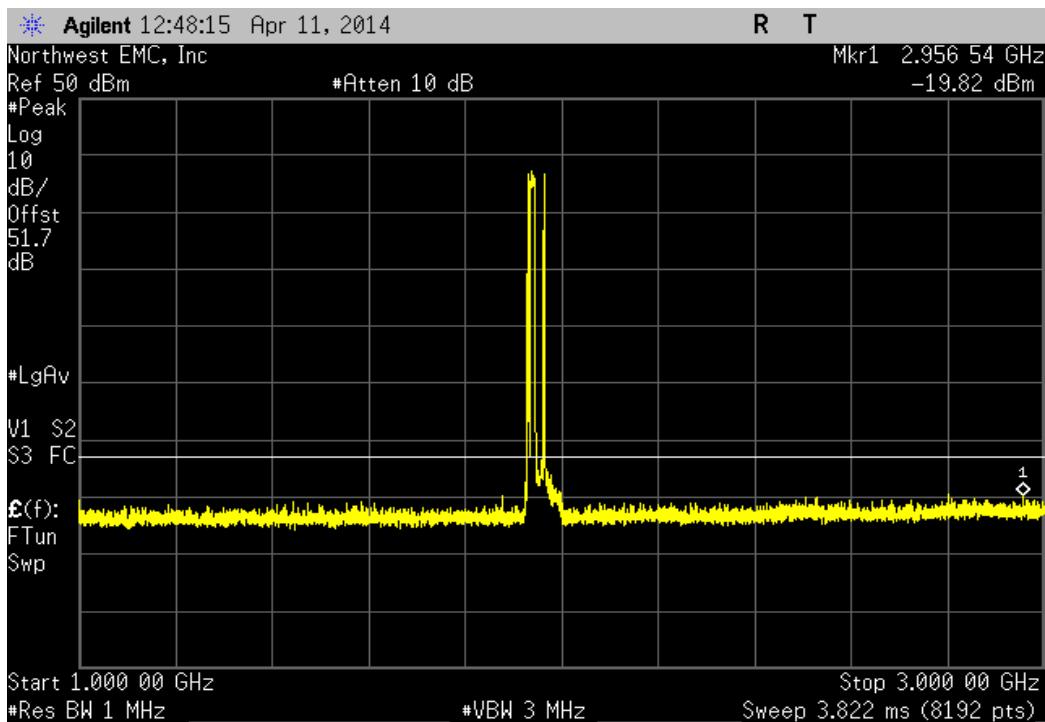




Band ABD, LTE 10 MHz					
Frequency Range		Value	Limit	Result	
3 GHz - 20 GHz		-29.52 dBm	≤ -13 dBm	Pass	


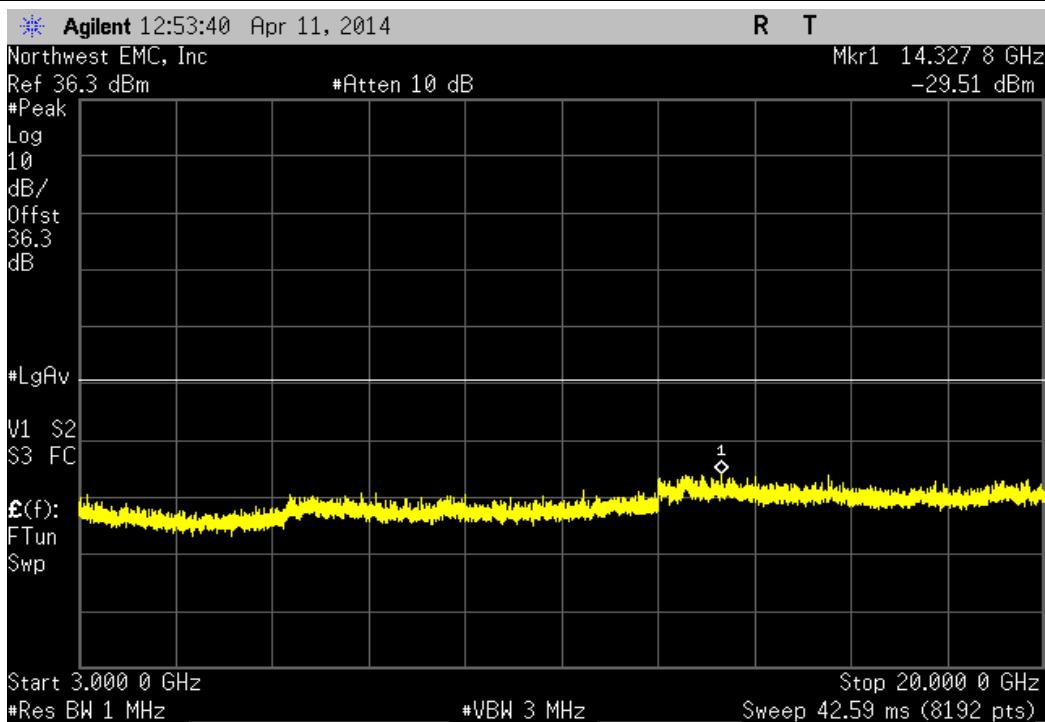




Band CEFG, CDMA					
Frequency Range		Value	Limit	Result	
30 MHz - 1 GHz		-39.8 dBm	≤ -13 dBm	Pass	

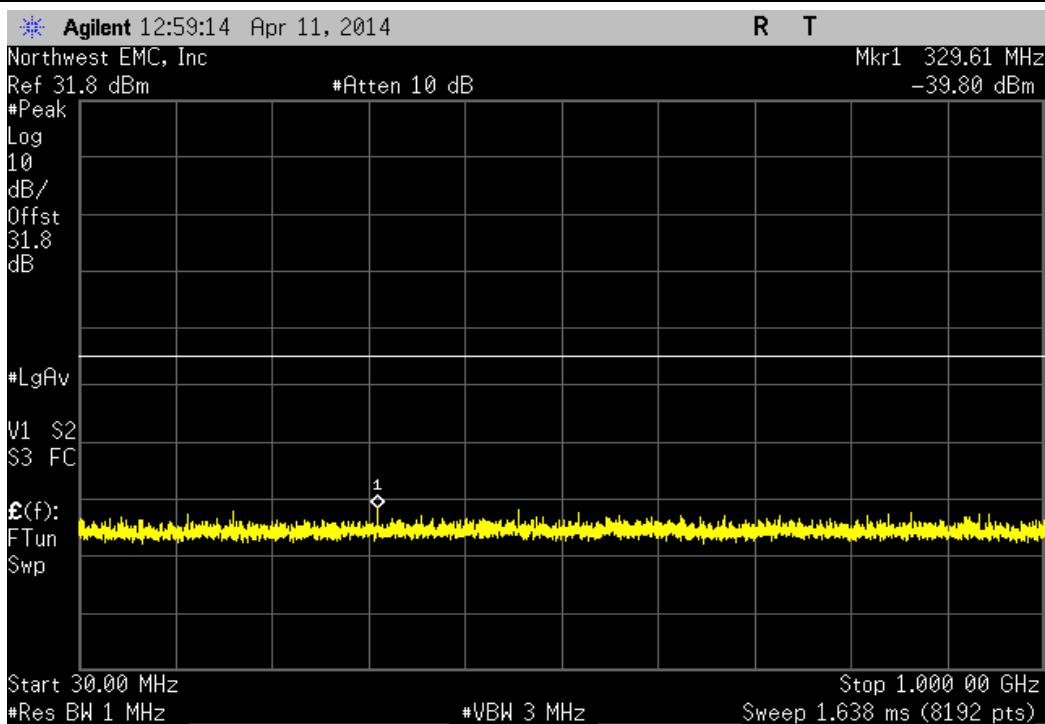

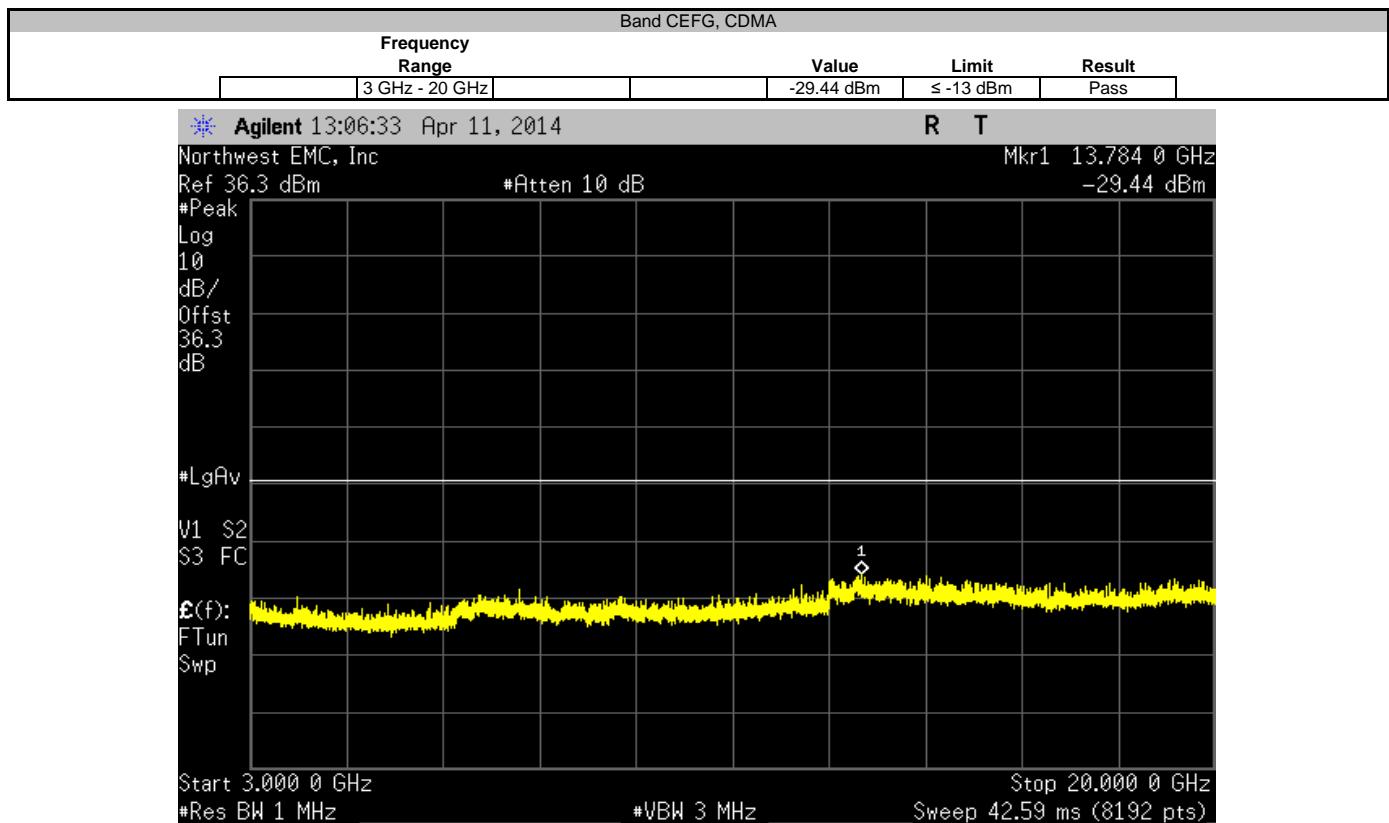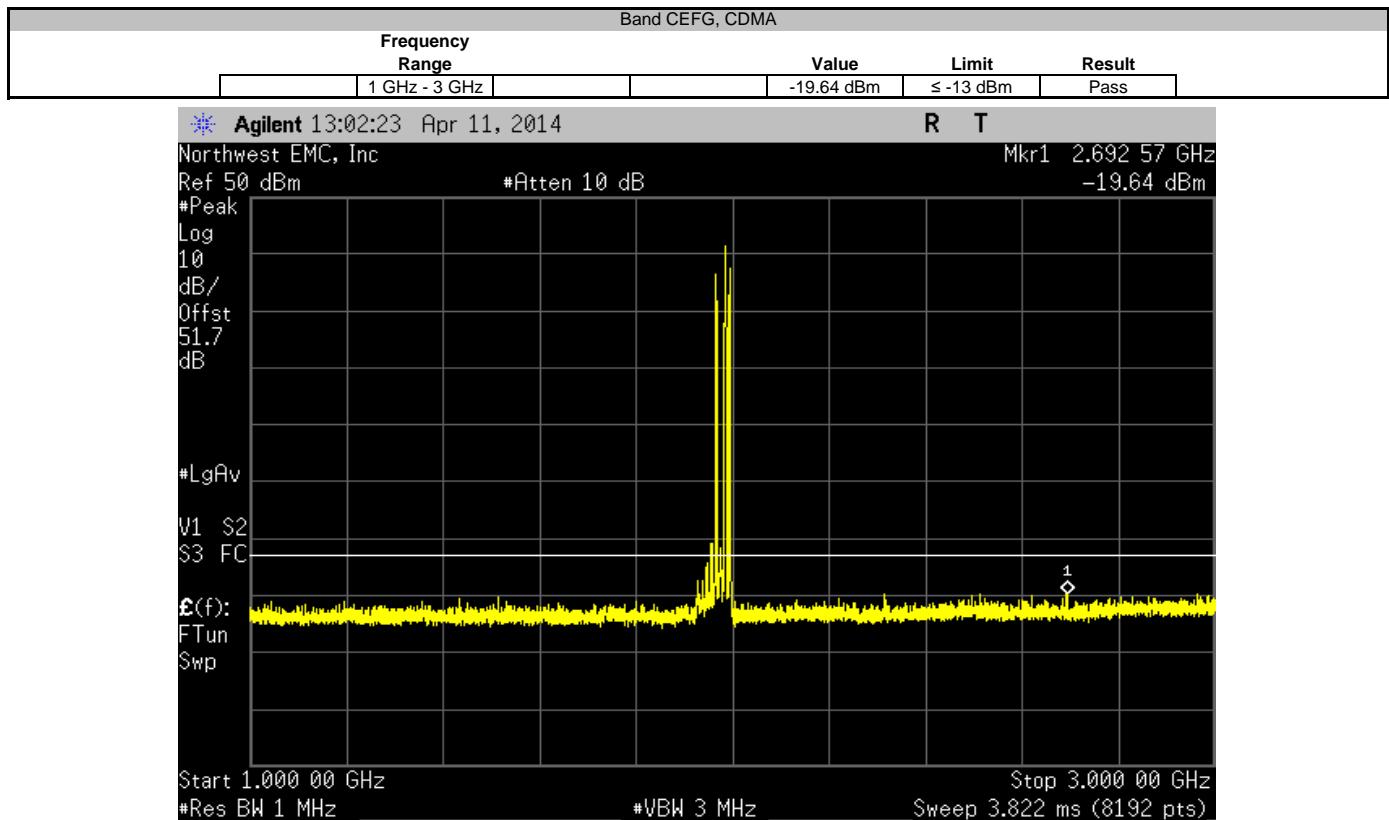

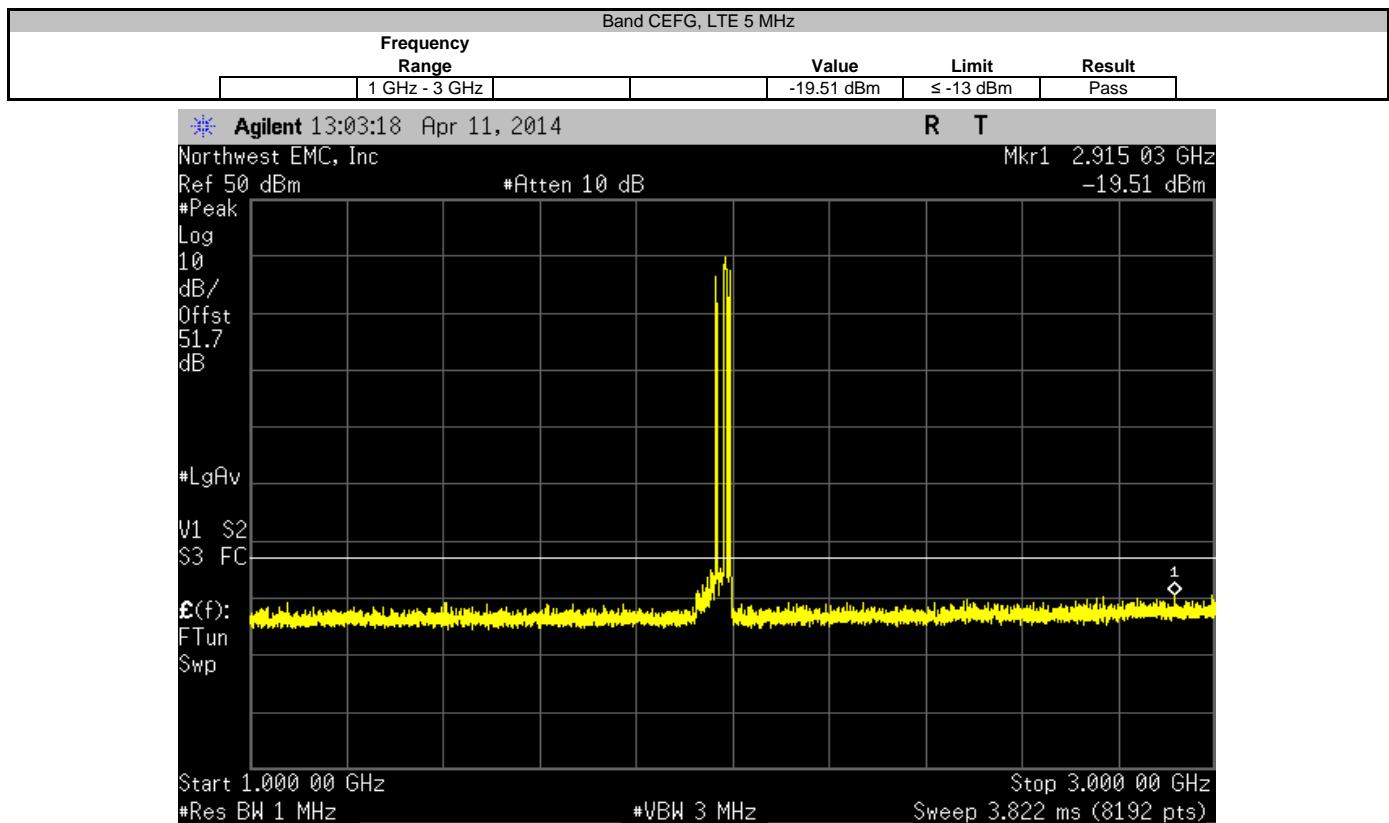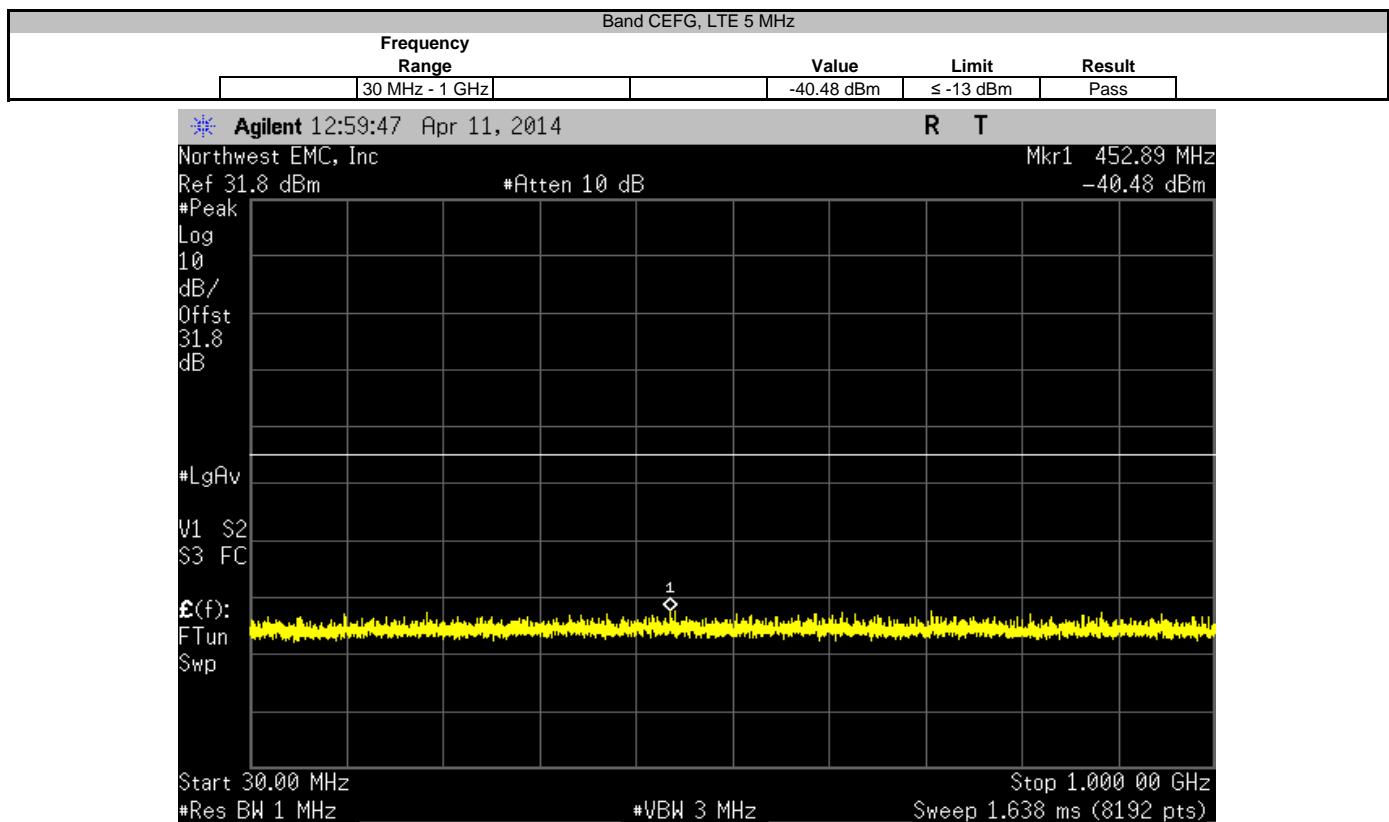

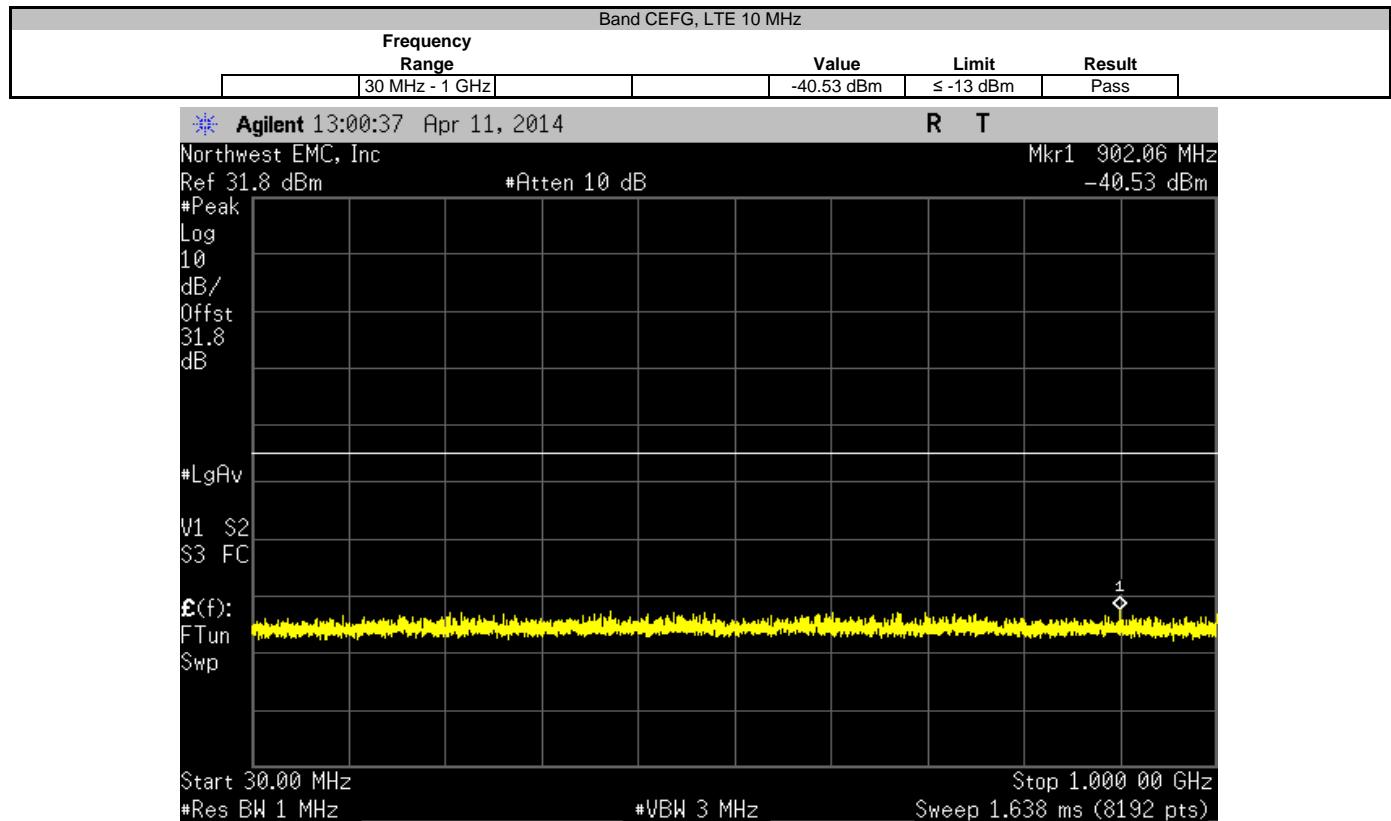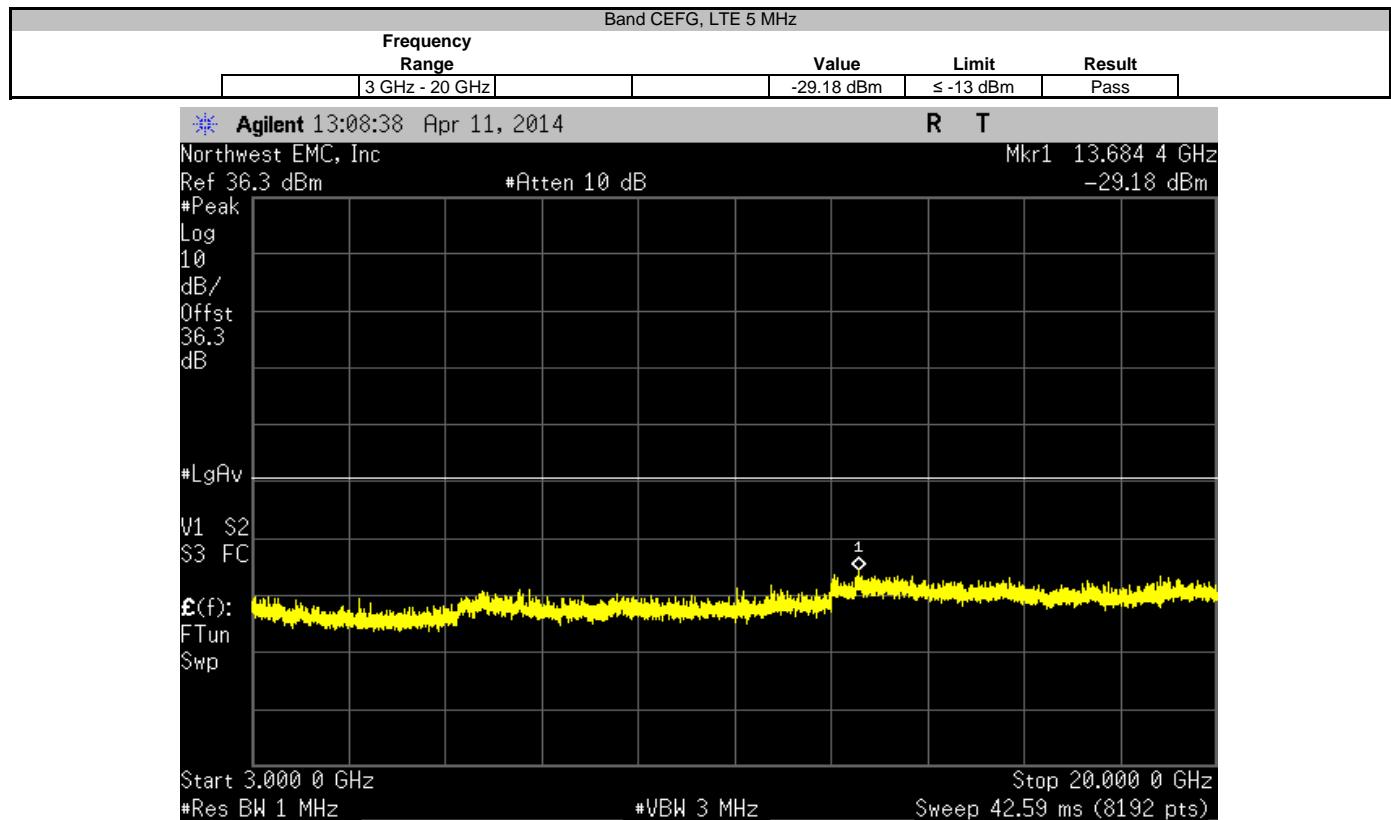

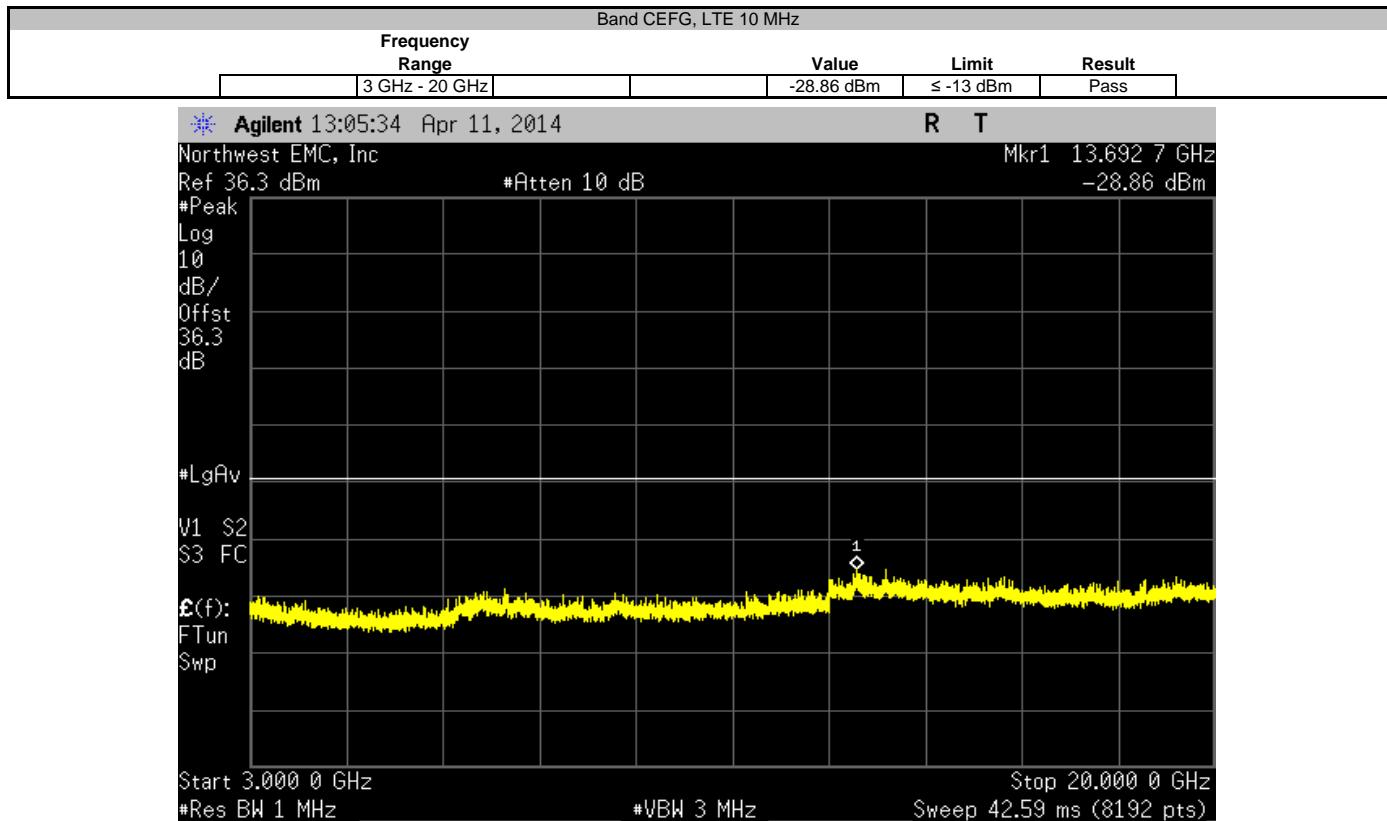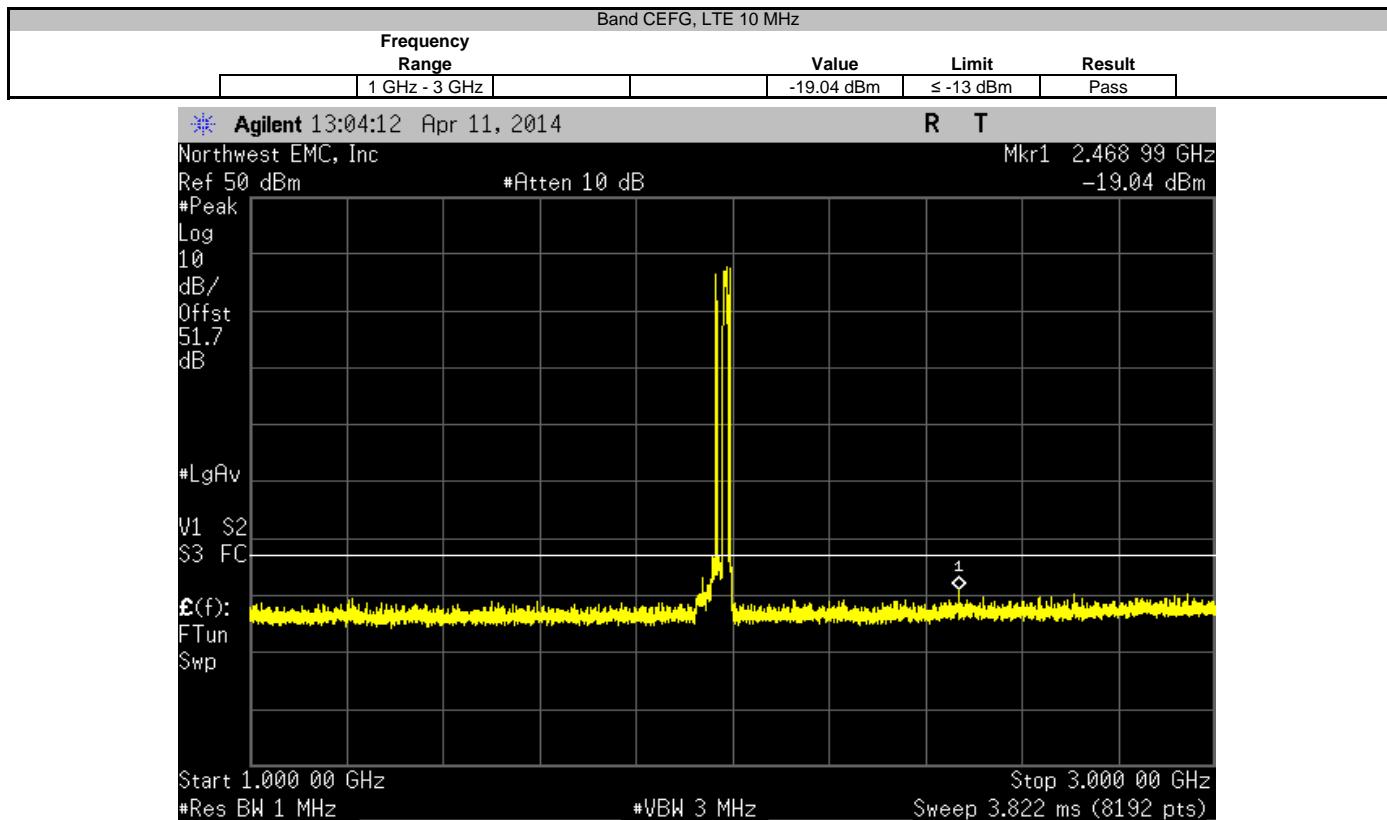

## FREQUENCY STABILITY

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Multimeter	Fluke	117	MNN	1/20/2014	36
Variable Transformer	Powerstat	246	XFR	NCR	0
Humidity Temperature Meter	Omega Engineering, Inc.	HH31	DUB	10/25/2011	36
Temp./Humidity Chamber	Cincinnati Sub Zero (CSZ)	ZPH-32-3.5-SCT/AC	TBF	NCR	0
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24


### TEST DESCRIPTION

A direct connect measurement was made between the EUT's antenna cable and a spectrum analyzer. The spectrum analyzer is equipped with a precision frequency reference that exceeds the stability requirement of the EUT. Testing was done with an absence of modulation in a CW mode of operation.


The primary supply voltage was varied from 85 % to 115% of the nominal voltage. Using a temperature chamber, the transmit frequency was recorded at the extremes of the specified temperature range (-30 ° to +50° C) and at 10°C intervals.

EUT: Prism HDM 800 MHz/1900 MHz SISO RF Module			Work Order: TECO0013				
Serial Number:	None		Date:	04/14/14			
Customer:	TE Connectivity / ADC Telecommunications		Temperature:	22.8°C			
Attendees:	None		Humidity:	16%			
Project:	None		Barometric Pres.:	1020.6			
Tested by:	Trevor Buls	Power:	110VAC/60Hz	Job Site:	MN08		
TEST SPECIFICATIONS			Test Method				
FCC 24E:2014			ANSI/TIA/EIA-603-C-2004				
COMMENTS							
Customer provided a high wattage 30 dB attenuator. Voltage range varied from 126.5 to 93.5 VAC							
DEVIATIONS FROM TEST STANDARD							
None							
Configuration #	1	Signature	<i>Trevor Buls</i>				
			Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result
Voltage: 115%							
Low Channel, 1930.8 MHz			1930.799992	1930.8	0.0041	1	Pass
Mid Channel, 1962.5 MHz			1962.499988	1962.5	0.0061	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0080	1	Pass
Voltage: 100%							
Low Channel, 1930.8 MHz			1930.799992	1930.8	0.0041	1	Pass
Mid Channel, 1962.5 MHz			1962.499988	1962.5	0.0061	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0080	1	Pass
Voltage: 85%							
Low Channel, 1930.8 MHz			1930.799992	1930.8	0.0041	1	Pass
Mid Channel, 1962.5 MHz			1962.499988	1962.5	0.0061	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0000	1	Pass
Temperature: +50°							
Low Channel, 1930.8 MHz			1930.799992	1930.8	0.0041	1	Pass
Mid Channel, 1962.5 MHz			1962.499988	1962.5	0.0061	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0080	1	Pass
Temperature: +40°							
Low Channel, 1930.8 MHz			1930.799992	1930.8	0.0041	1	Pass
Mid Channel, 1962.5 MHz			1962.499987	1962.5	0.0066	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0080	1	Pass
Temperature: +30°							
Low Channel, 1930.8 MHz			1930.799988	1930.8	0.0062	1	Pass
Mid Channel, 1962.5 MHz			1962.499988	1962.5	0.0061	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0080	1	Pass
Temperature: +20°							
Low Channel, 1930.8 MHz			1930.799988	1930.8	0.0062	1	Pass
Mid Channel, 1962.5 MHz			1962.500003	1962.5	0.0015	1	Pass
High Channel, 1994.2 MHz			1994.199985	1994.2	0.0075	1	Pass
Temperature: +10°							
Low Channel, 1930.8 MHz			1930.799989	1930.8	0.0057	1	Pass
Mid Channel, 1962.5 MHz			1962.499988	1962.5	0.0061	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0080	1	Pass
Temperature: 0°							
Low Channel, 1930.8 MHz			1930.799992	1930.8	0.0041	1	Pass
Mid Channel, 1962.5 MHz			1962.499988	1962.5	0.0061	1	Pass
High Channel, 1994.2 MHz			1994.2	1994.2	0.0000	1	Pass
Temperature: -10°							
Low Channel, 1930.8 MHz			1930.799992	1930.8	0.0041	1	Pass
Mid Channel, 1962.5 MHz			1962.499986	1962.5	0.0071	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0080	1	Pass
Temperature: -20°							
Low Channel, 1930.8 MHz			1930.799992	1930.8	0.0041	1	Pass
Mid Channel, 1962.5 MHz			1962.499988	1962.5	0.0061	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0080	1	Pass
Temperature: -30°							
Low Channel, 1930.8 MHz			1930.799992	1930.8	0.0041	1	Pass
Mid Channel, 1962.5 MHz			1962.499988	1962.5	0.0061	1	Pass
High Channel, 1994.2 MHz			1994.199984	1994.2	0.0080	1	Pass


Voltage: 115%, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

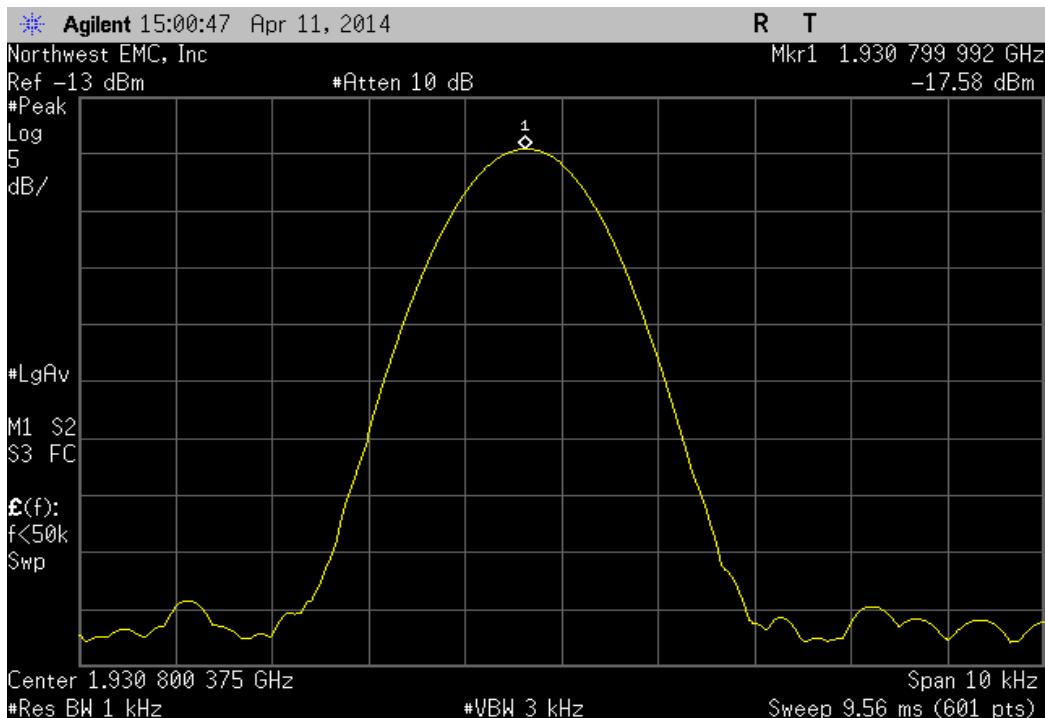


Voltage: 115%, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.49998	1962.5	0.0061	1	Pass	

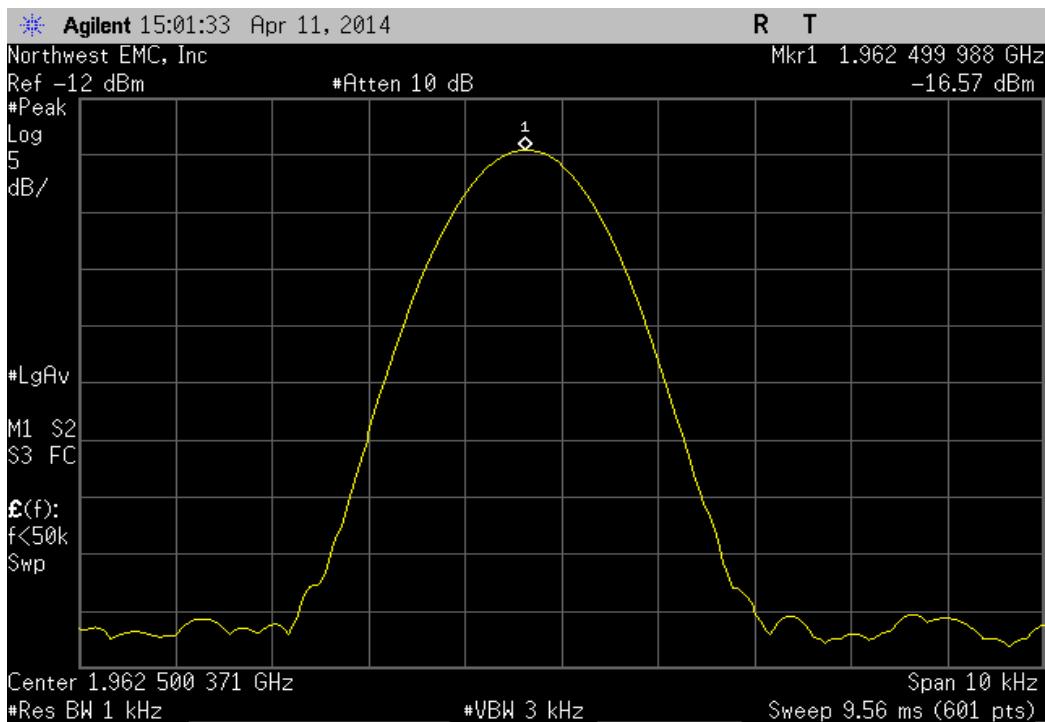


Voltage: 115%, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

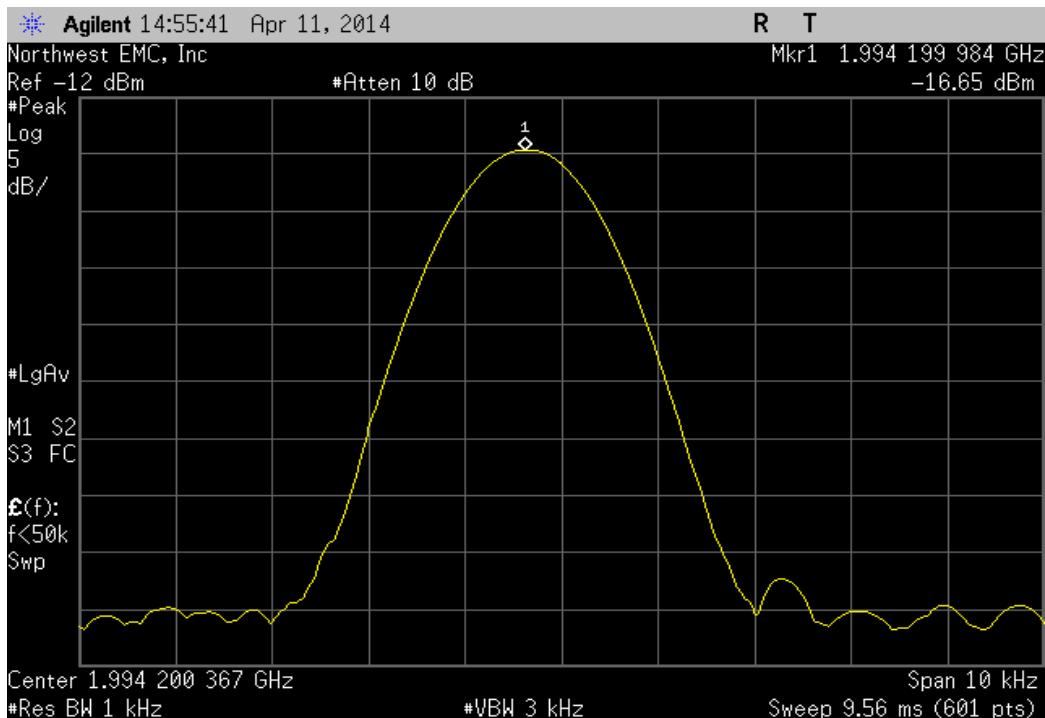


Voltage: 100%, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

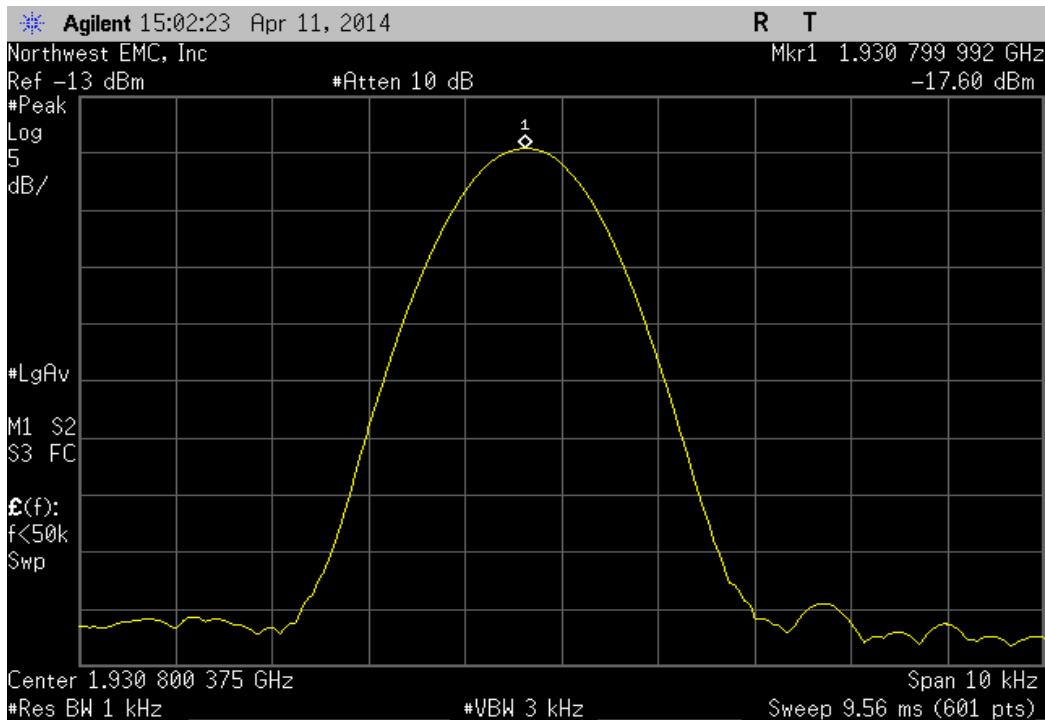


Voltage: 100%, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

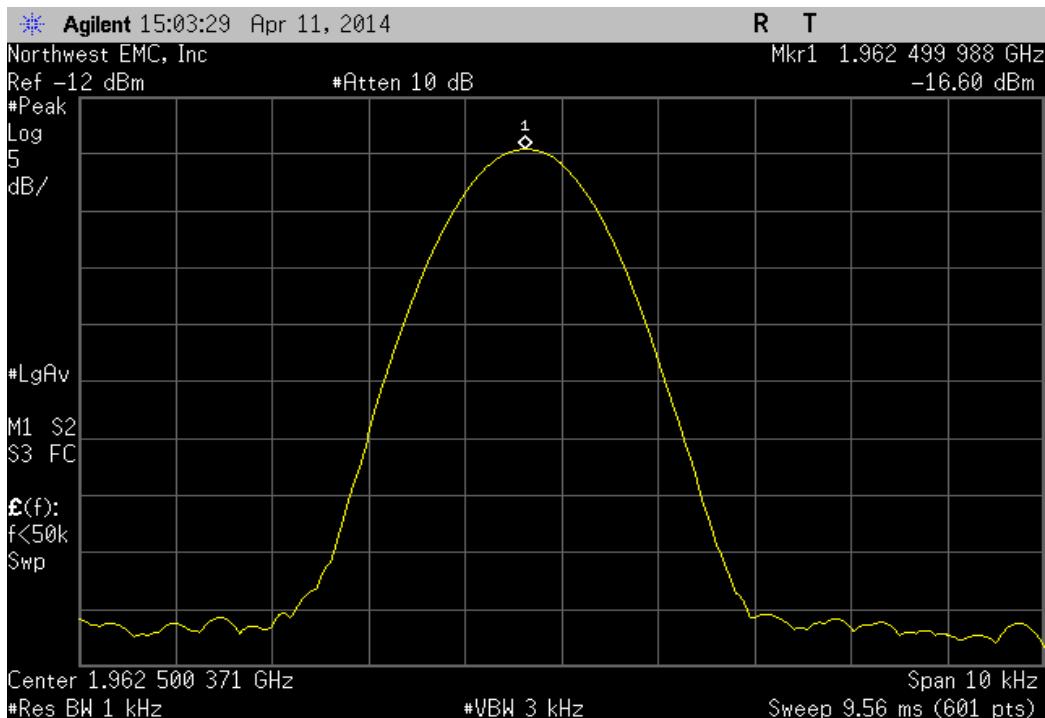


Voltage: 100%, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

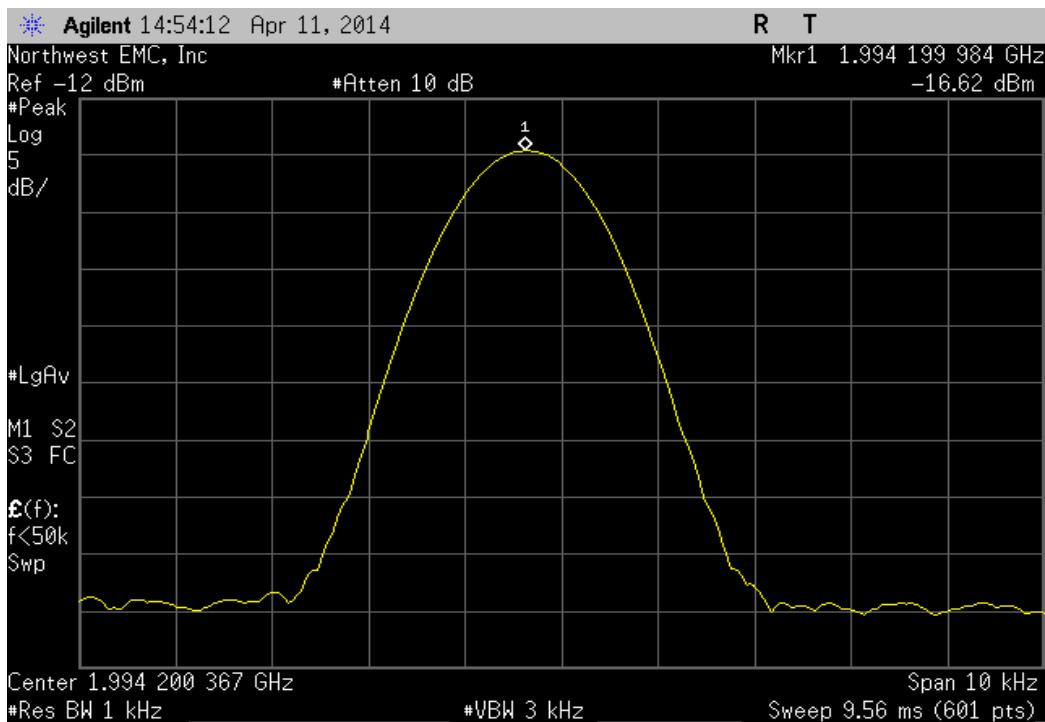


Voltage: 85%, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

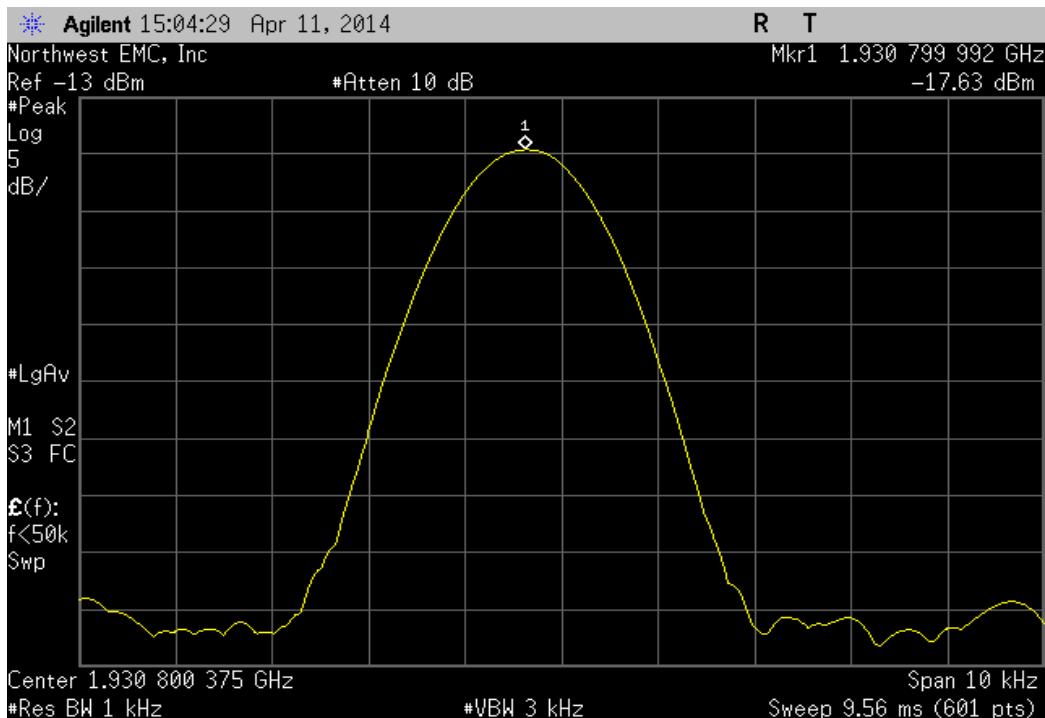


Voltage: 85%, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.49998	1962.5	0.0061	1	Pass	

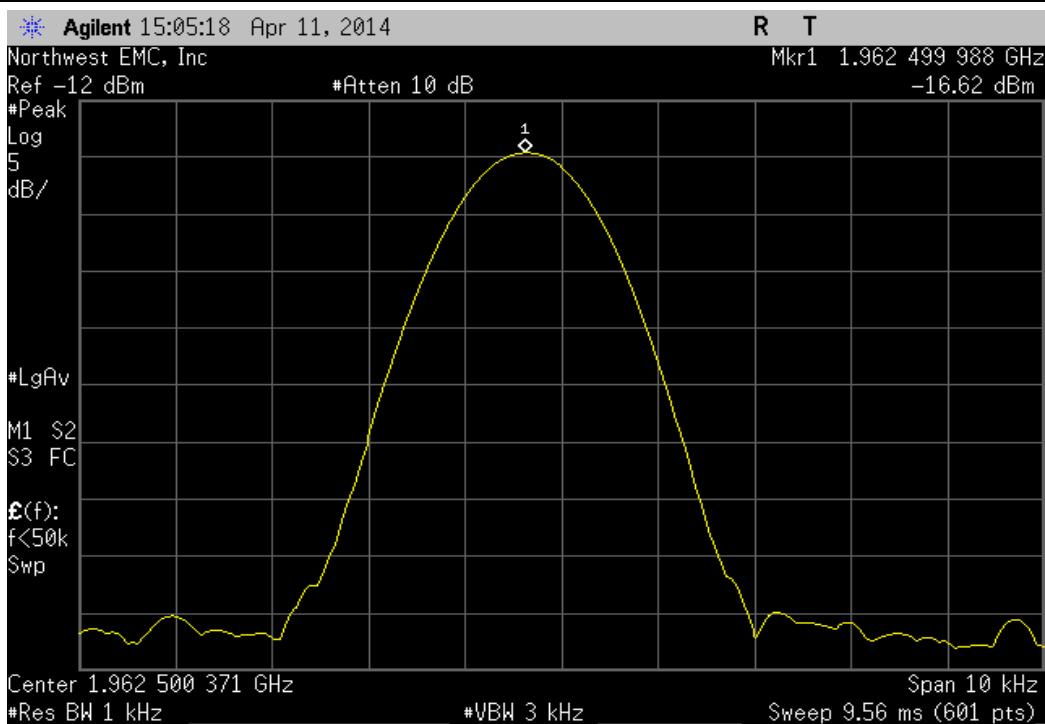


Voltage: 85%, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.2	1994.2	0.0000	1	Pass	

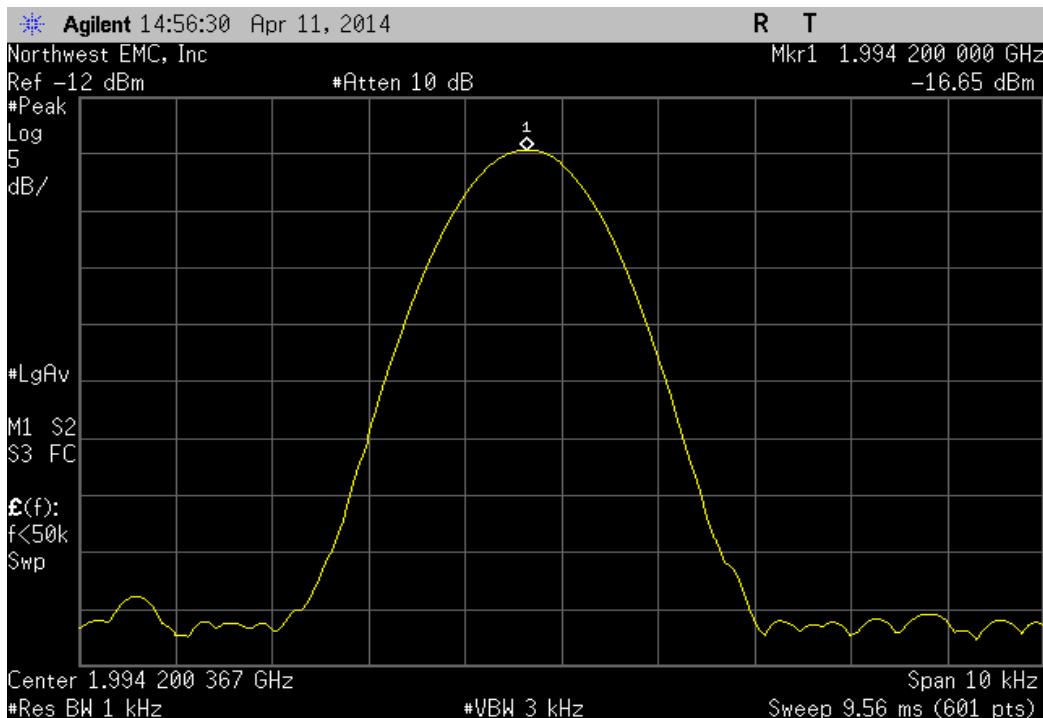


Temperature: +50°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

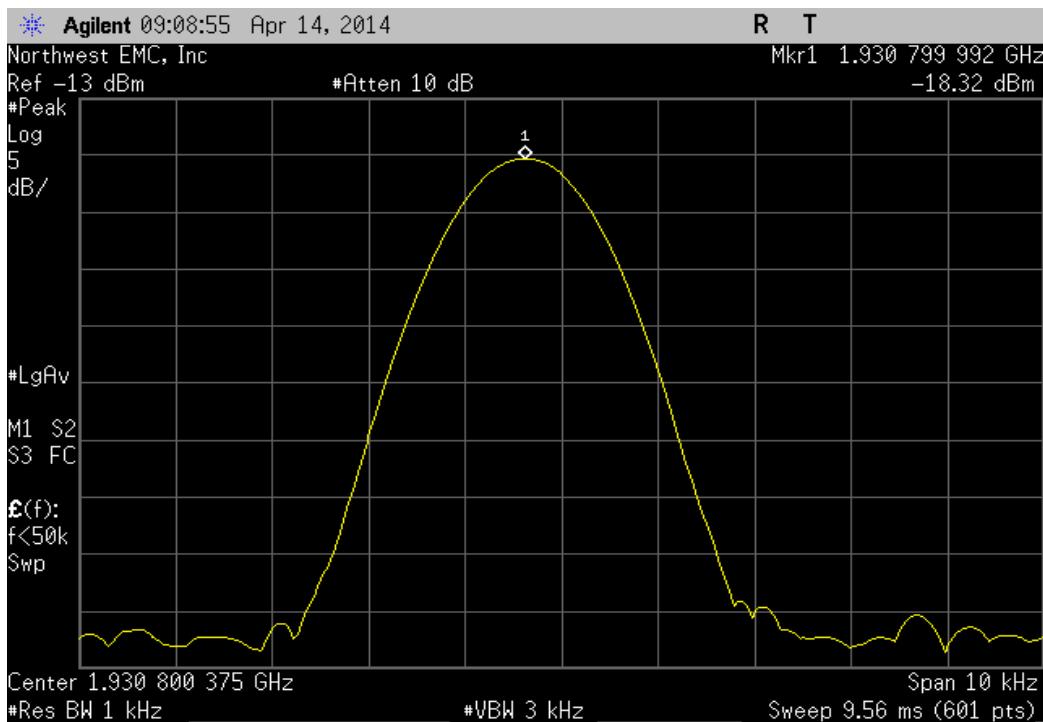


Temperature: +50°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

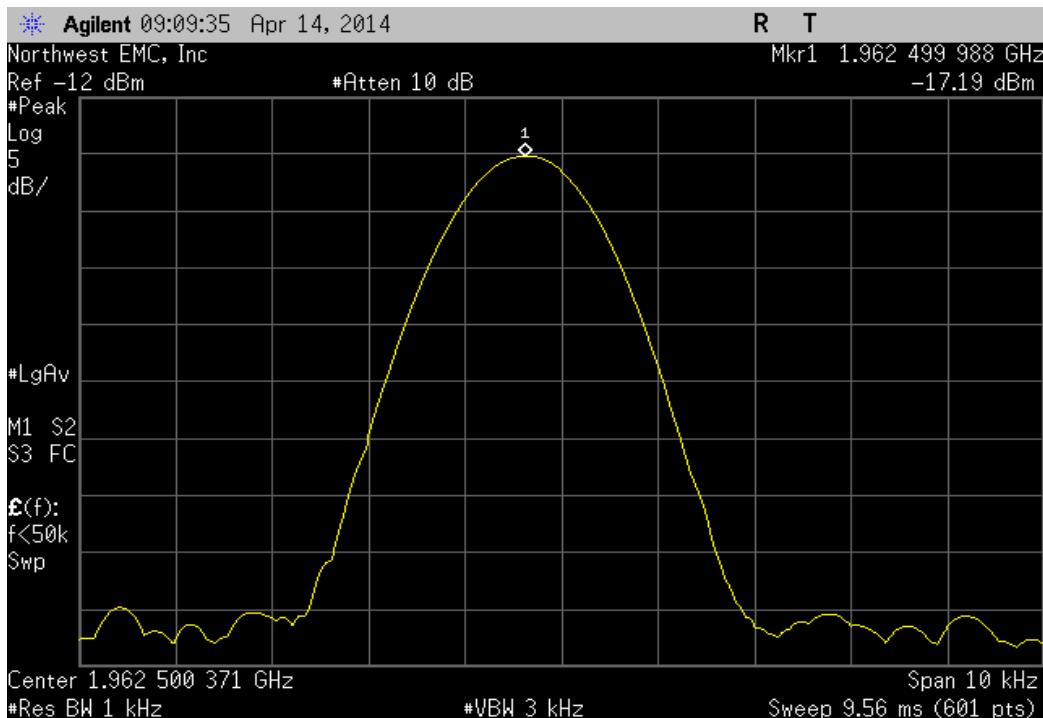


Temperature: +50°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

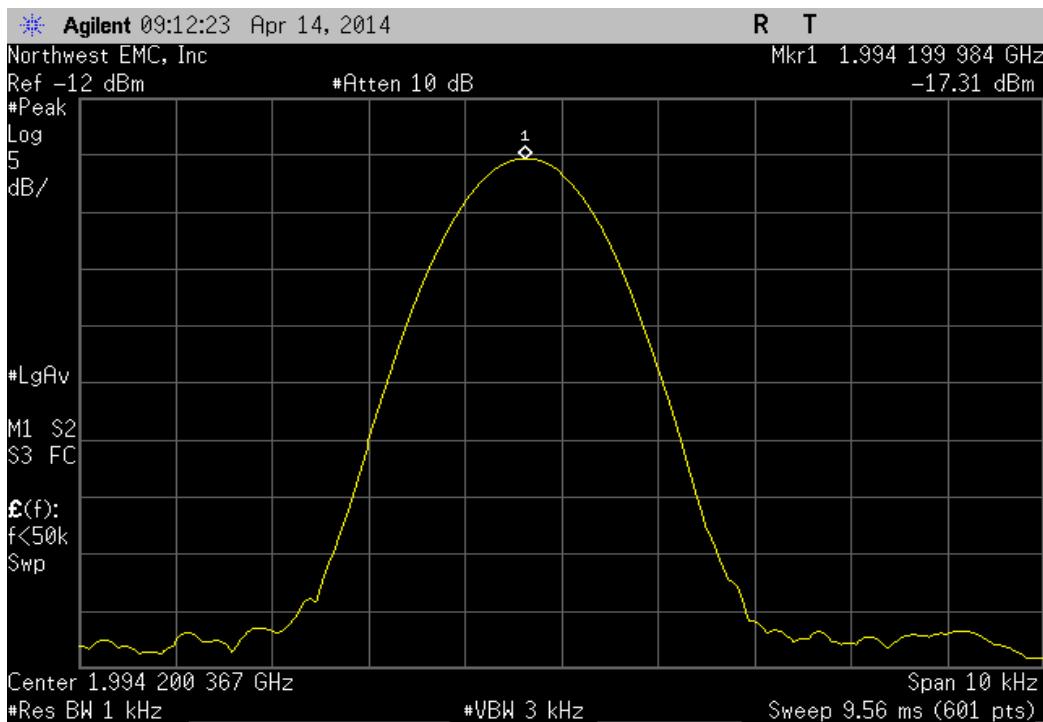


Temperature: +40°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

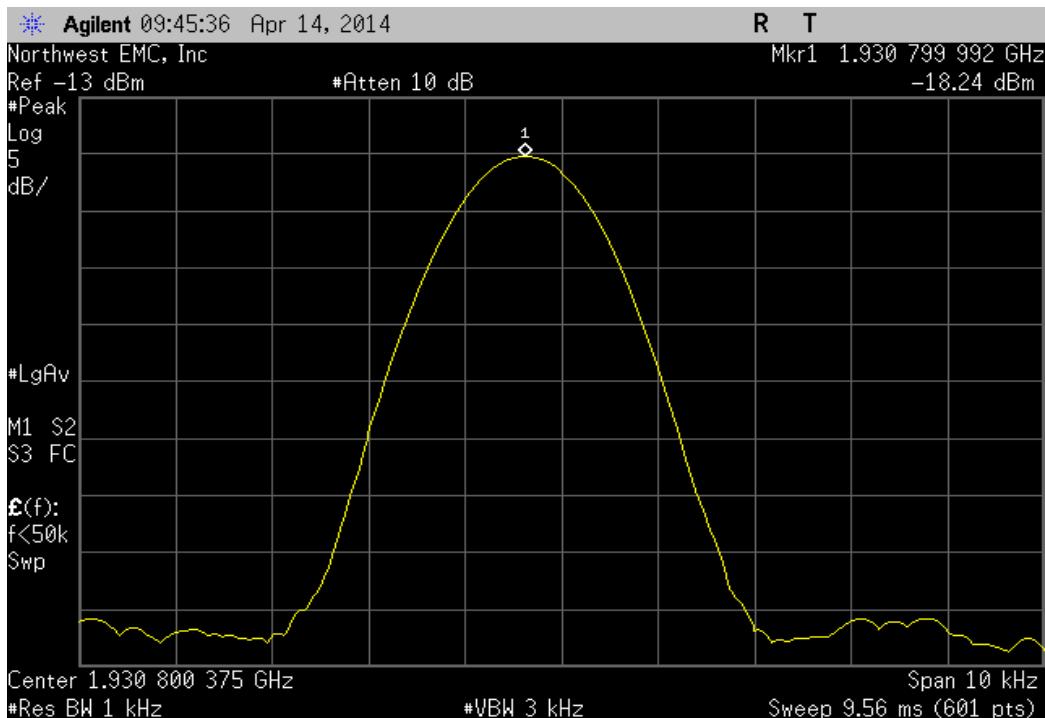


Temperature: +40°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499987	1962.5	0.0066	1	Pass	

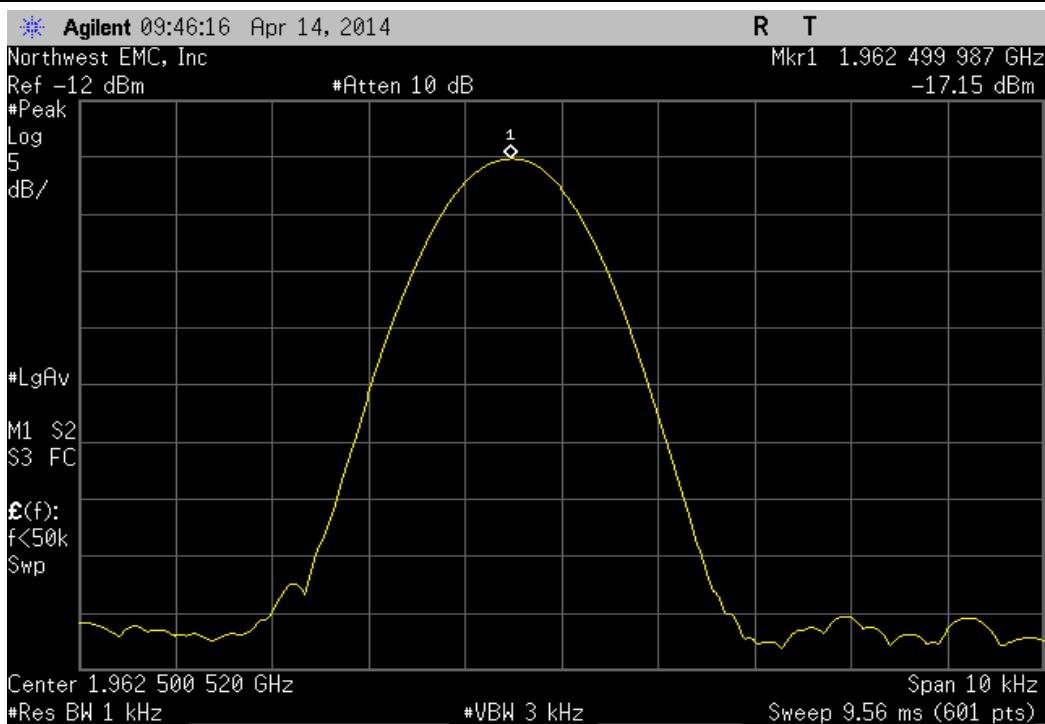


Temperature: +40°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

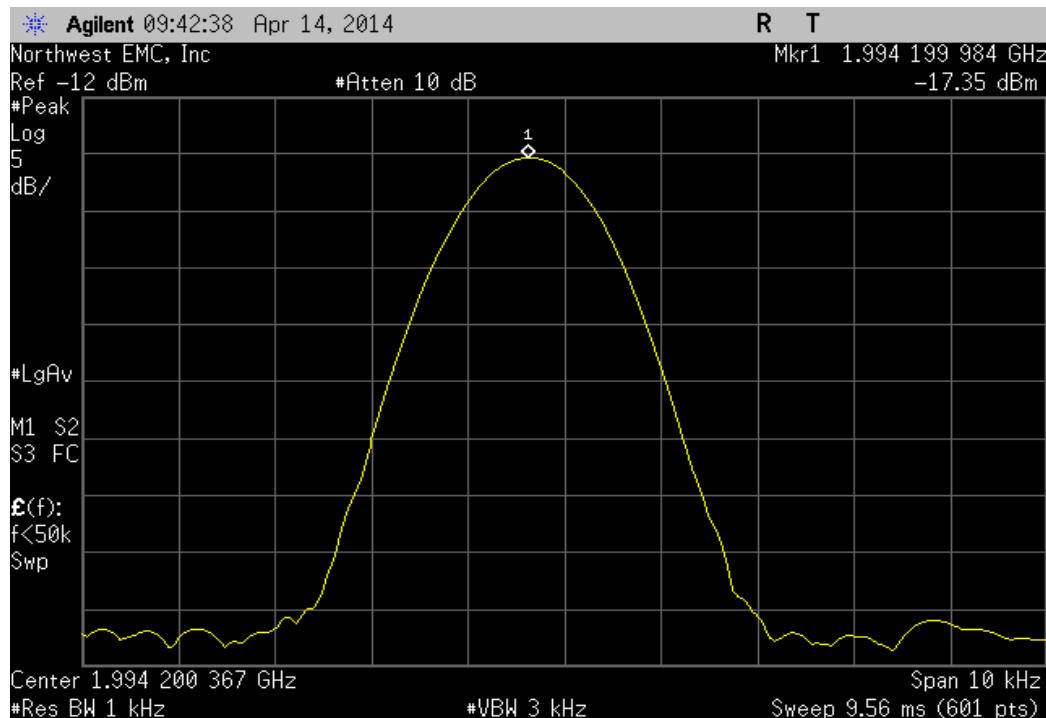


Temperature: +30°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799988	1930.8	0.0062	1	Pass	

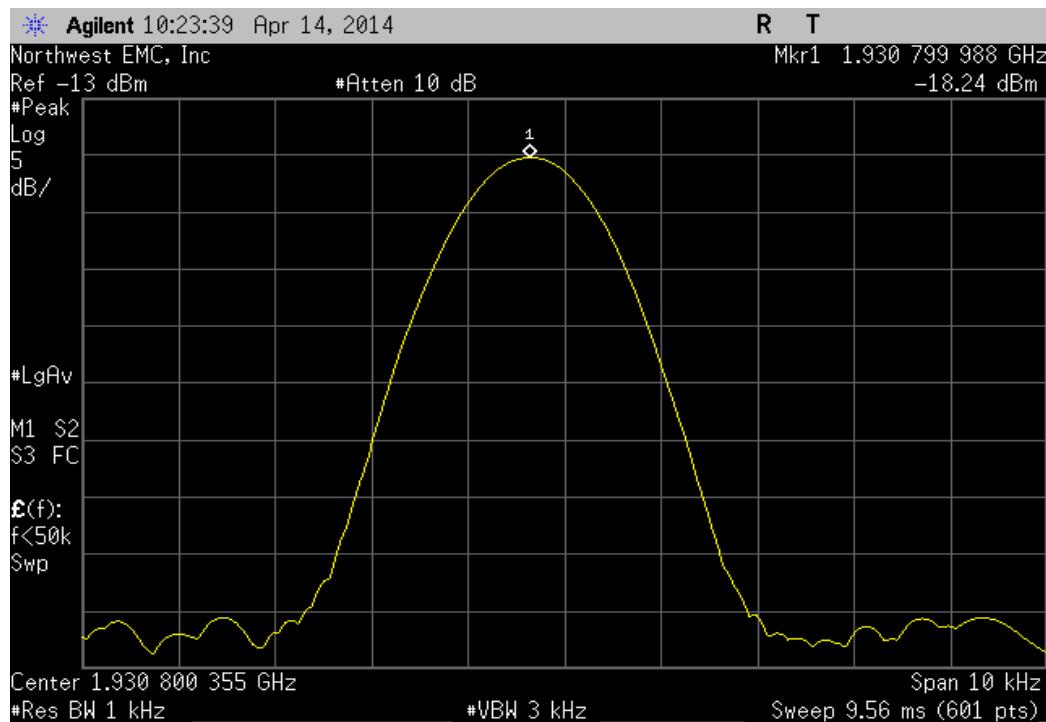


Temperature: +30°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

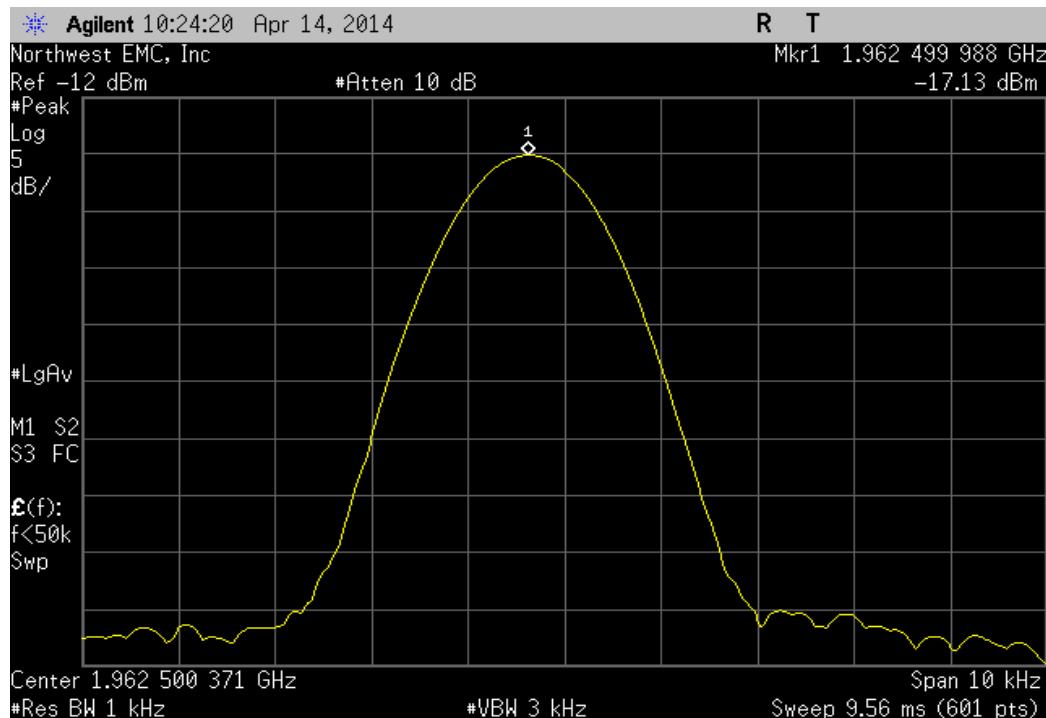


Temperature: +30°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

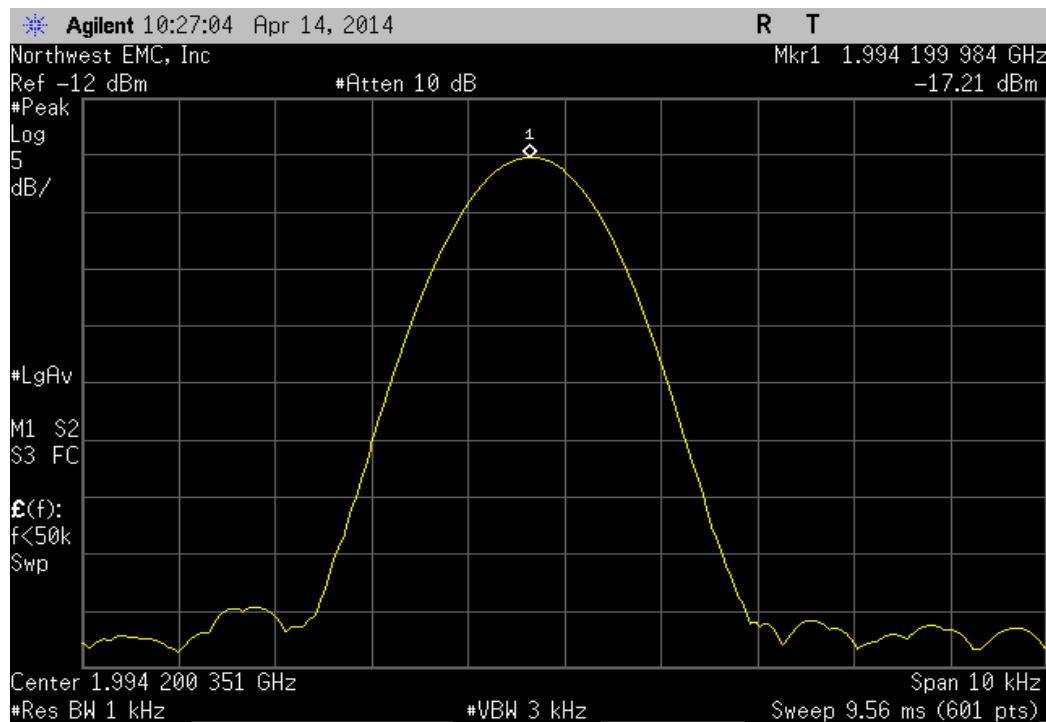


Temperature: +20°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799988	1930.8	0.0062	1	Pass	

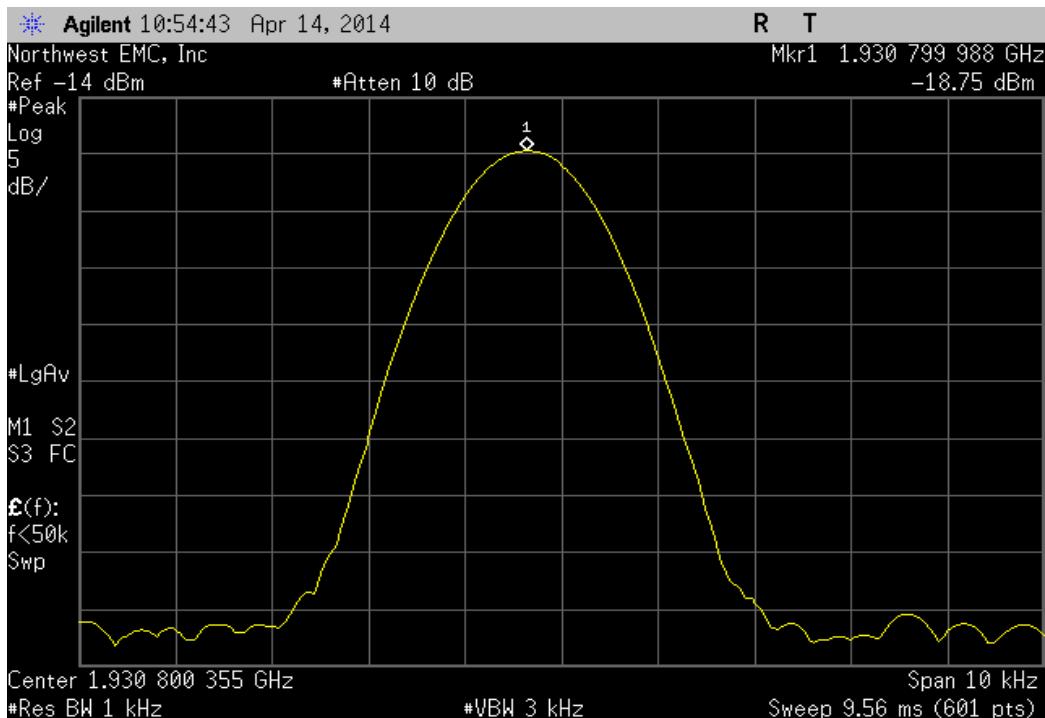


Temperature: +20°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.500003	1962.5	0.0015	1	Pass	

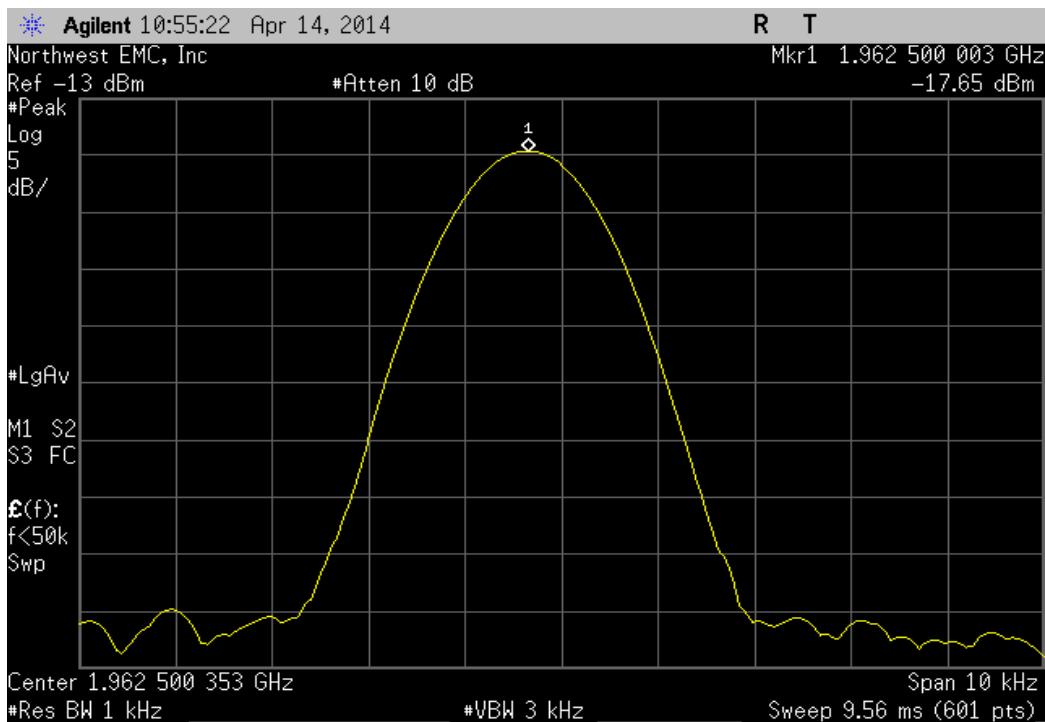


Temperature: +20°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199985	1994.2	0.0075	1	Pass	

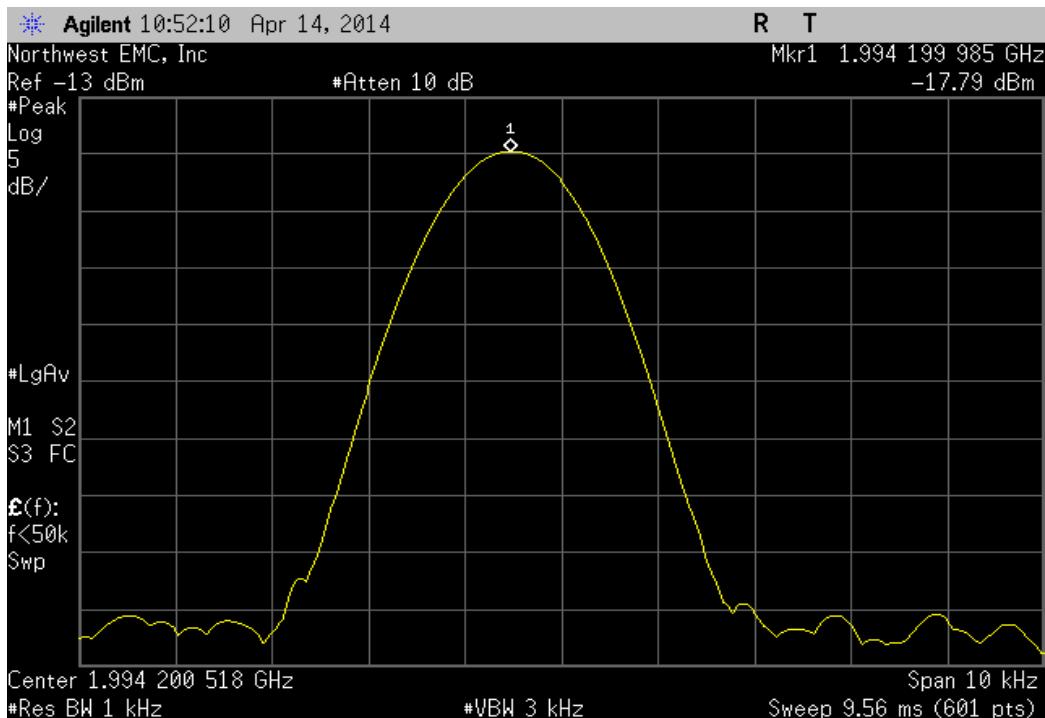


Temperature: +10°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799989	1930.8	0.0057	1	Pass	

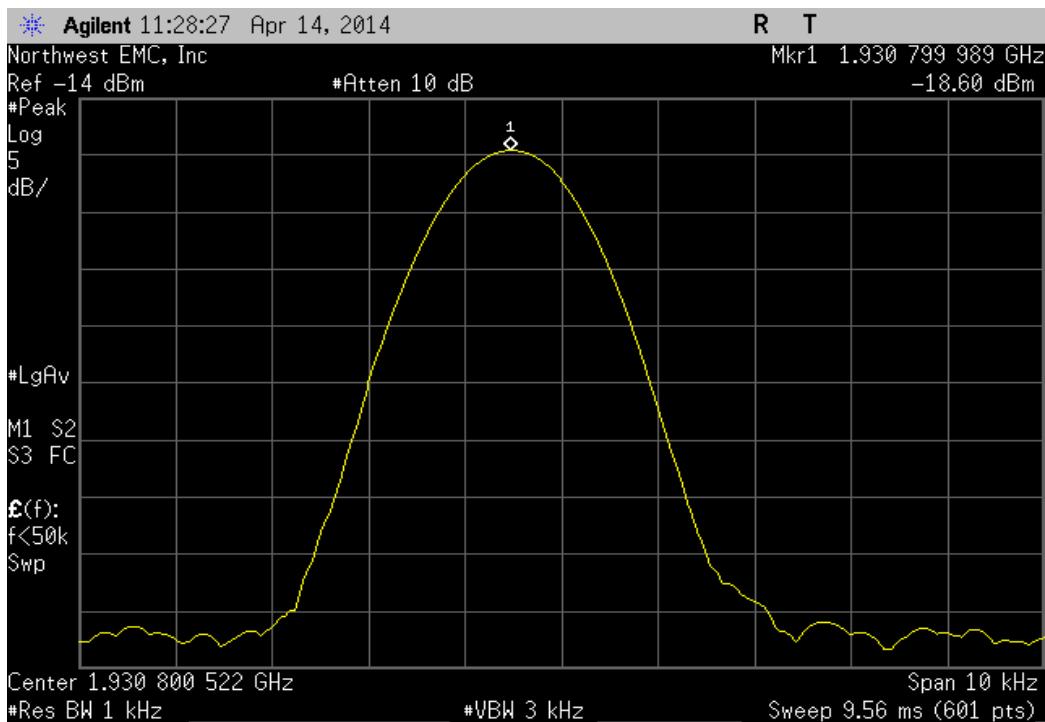


Temperature: +10°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

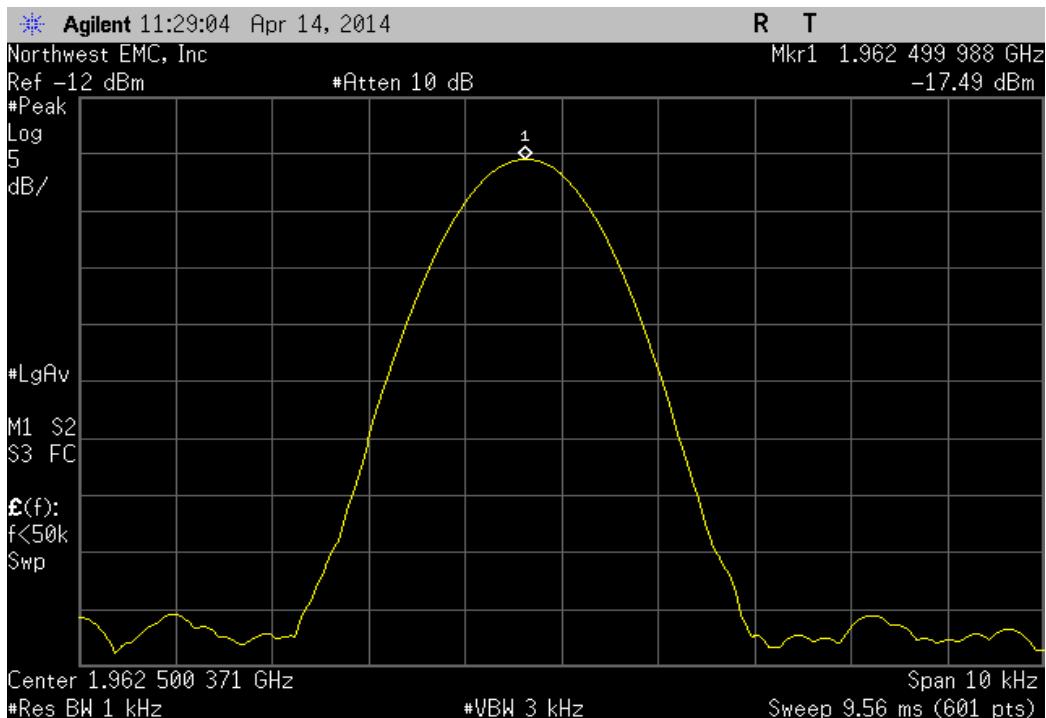


Temperature: +10°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

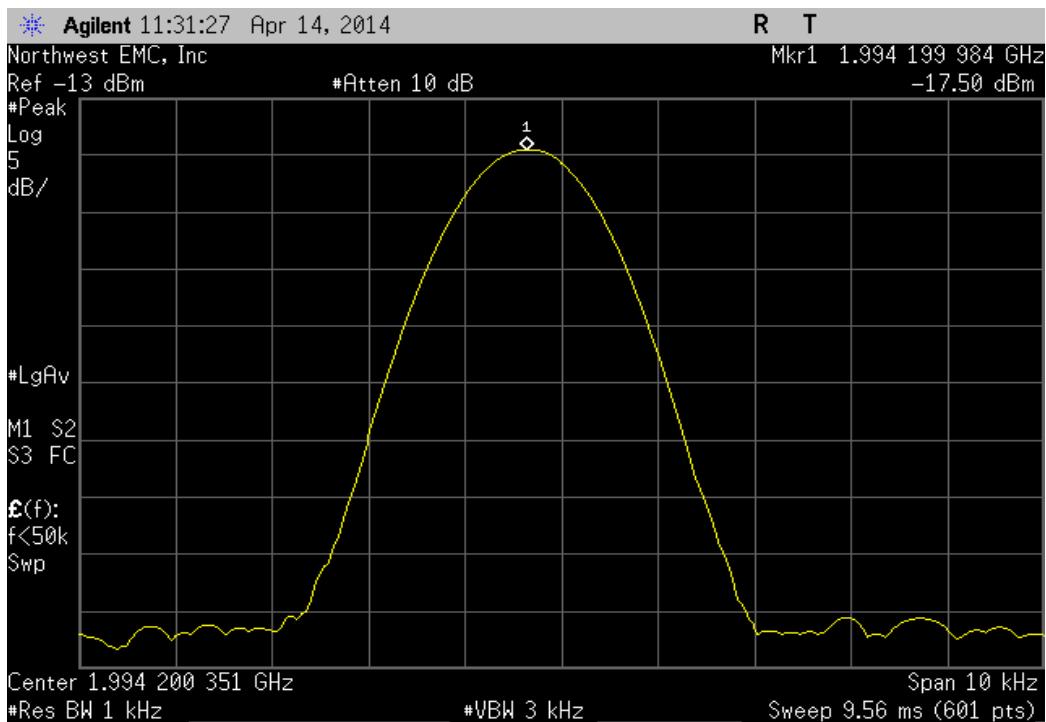


Temperature: 0°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

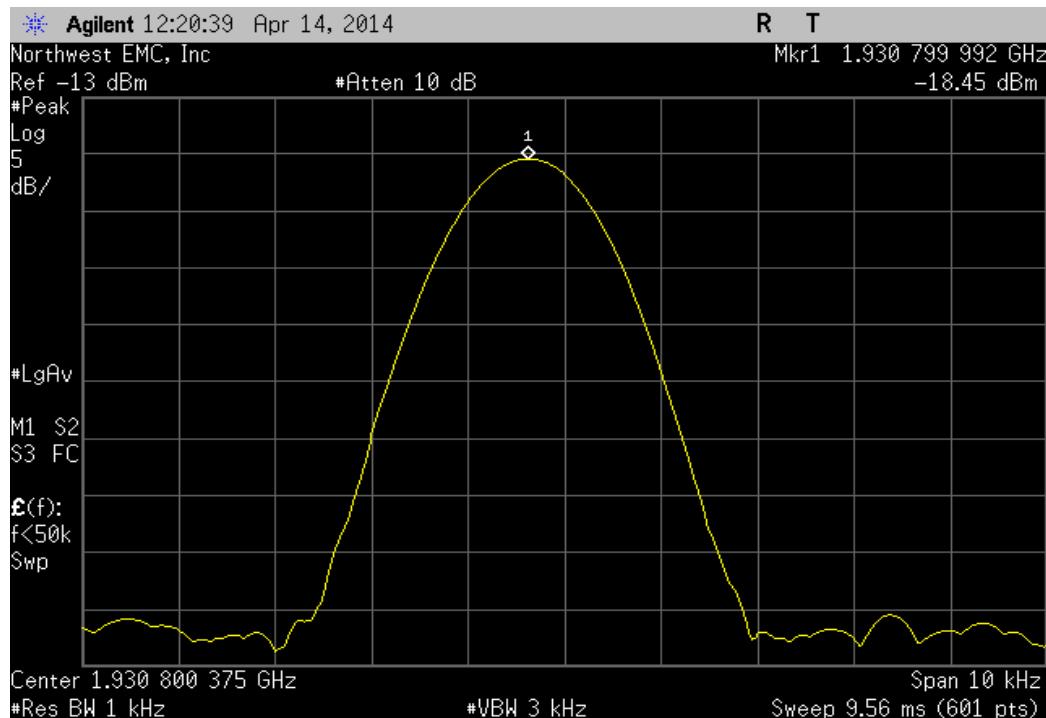


Temperature: 0°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.49998	1962.5	0.0061	1	Pass	

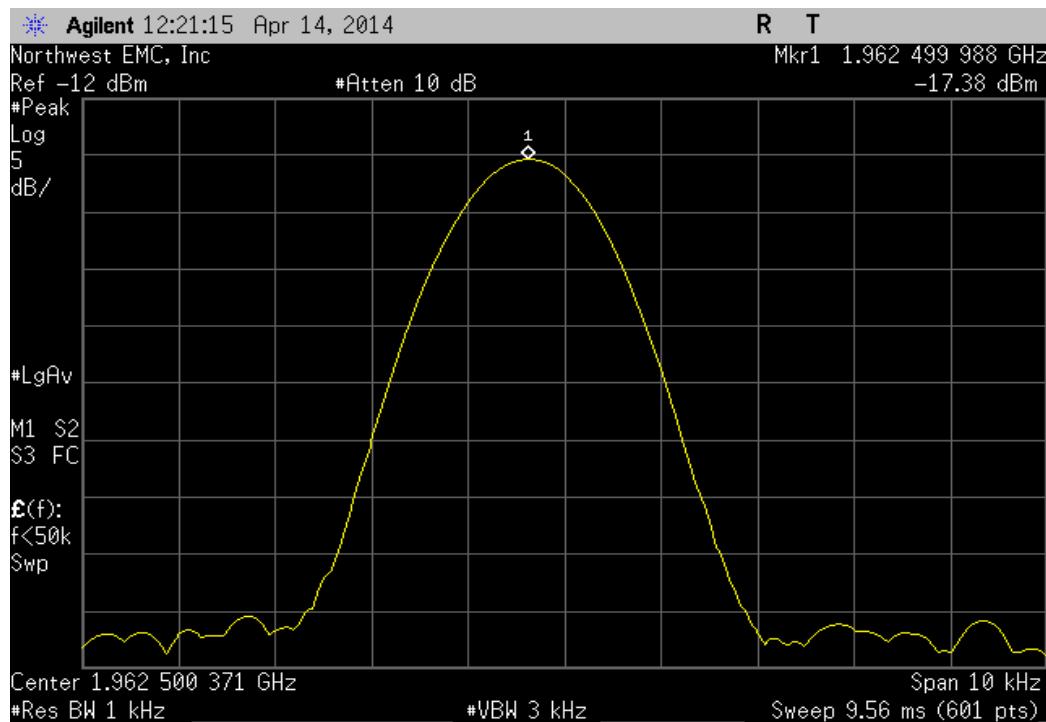


Temperature: 0°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.2	1994.2	0.0000	1	Pass	

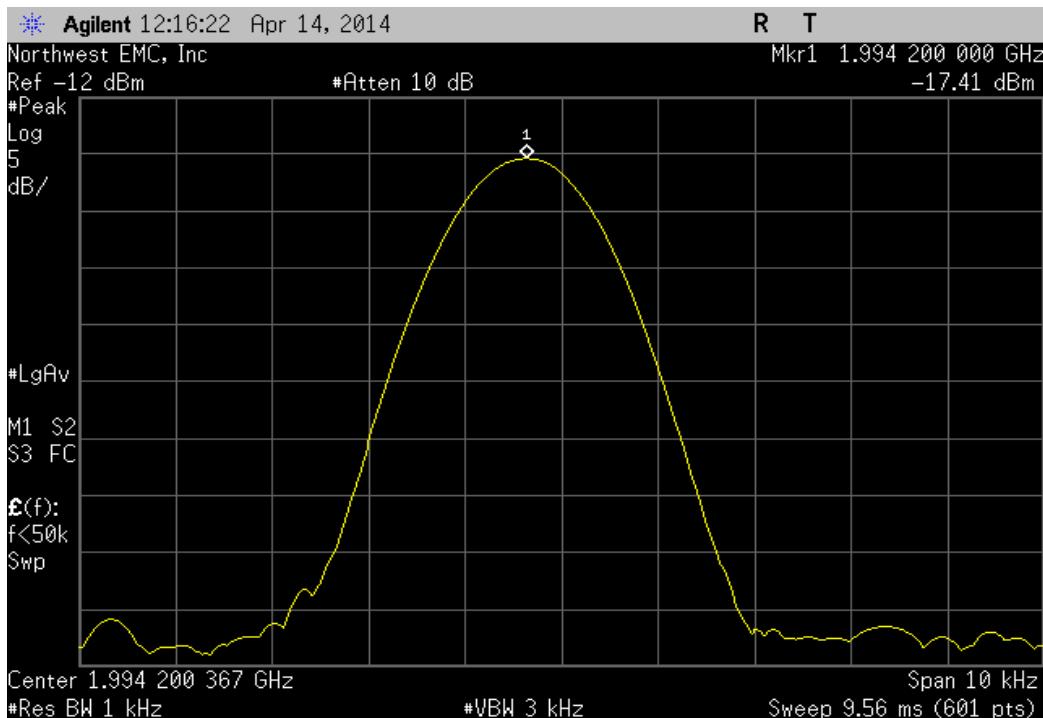


Temperature: -10°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

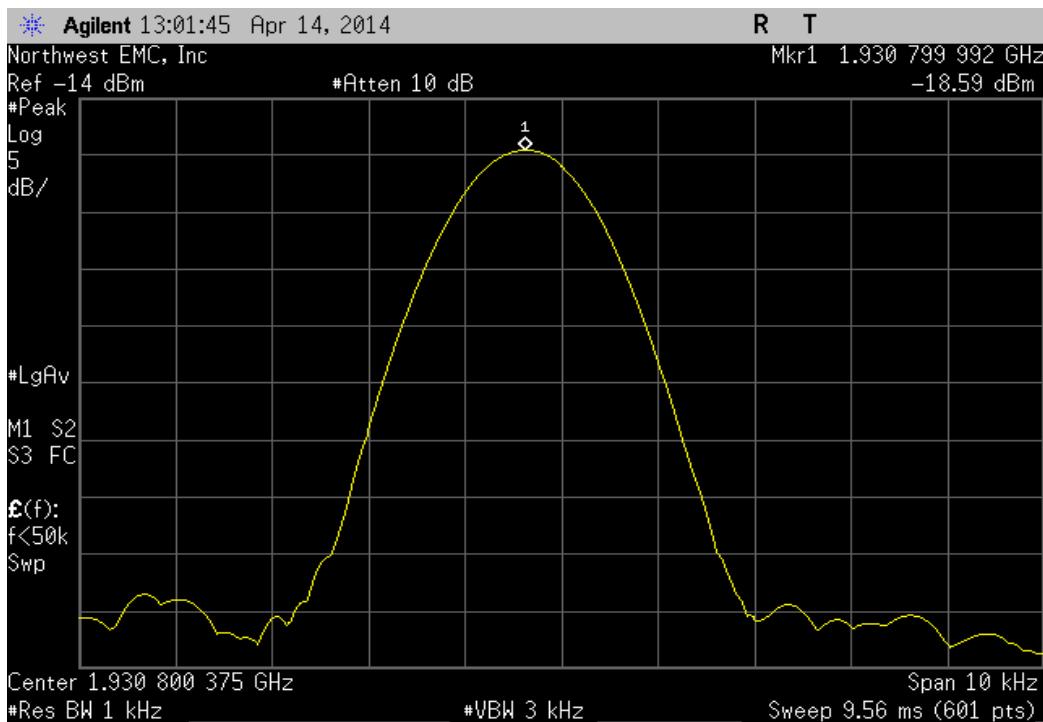


Temperature: -10°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499986	1962.5	0.0071	1	Pass	

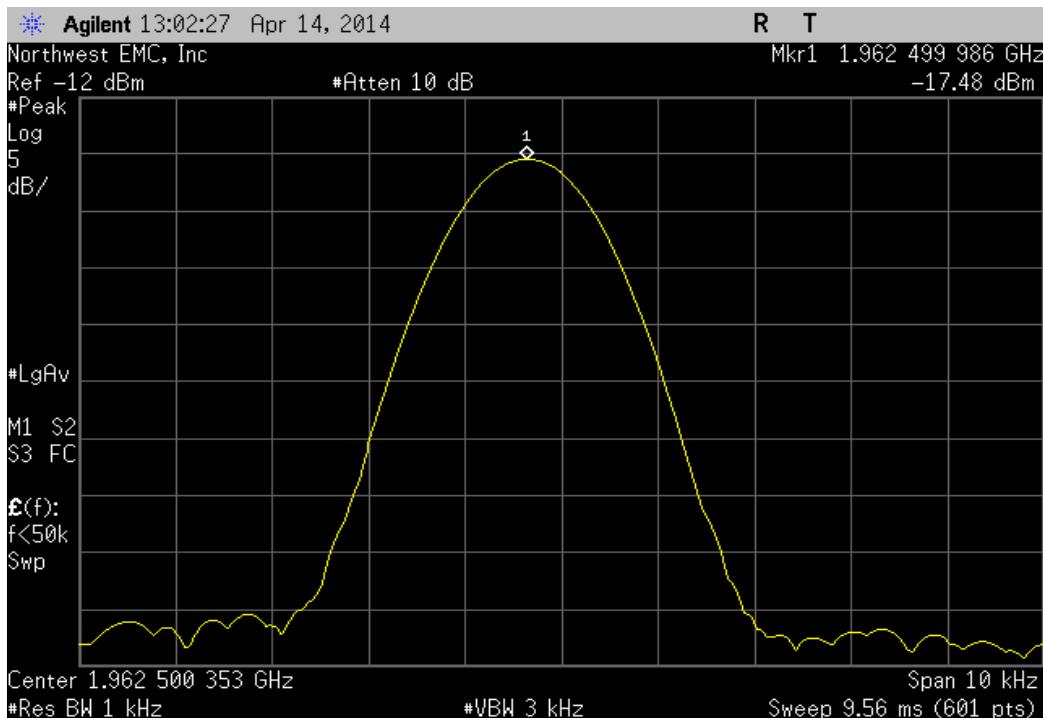


Temperature: -10°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

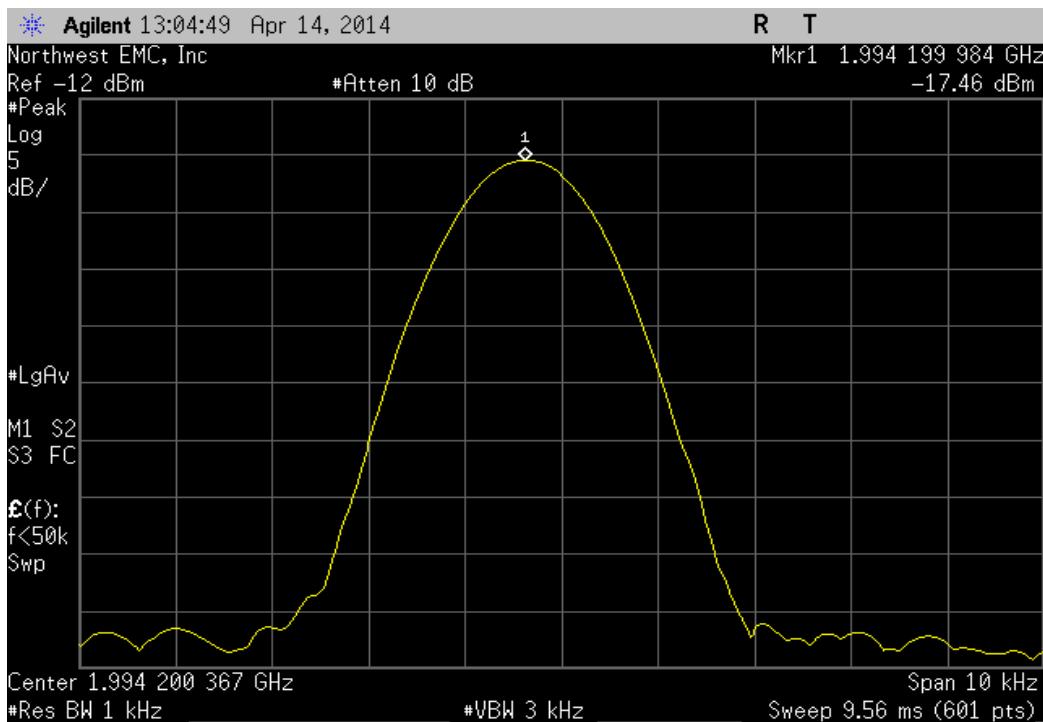


Temperature: -20°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

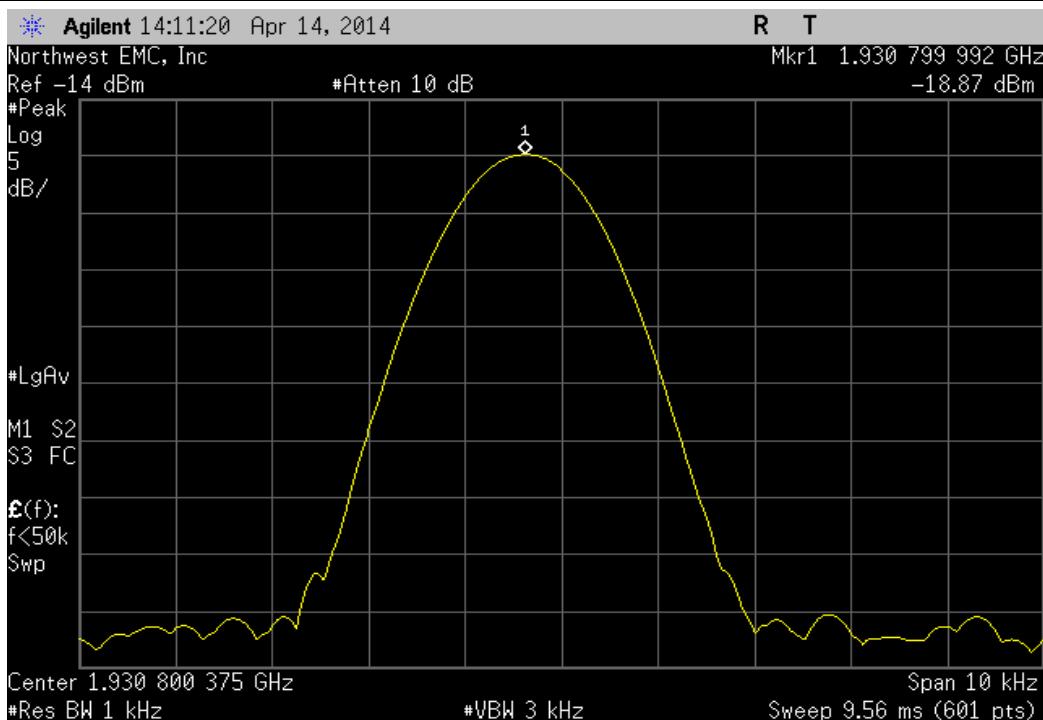


Temperature: -20°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.49998	1962.5	0.0061	1	Pass	

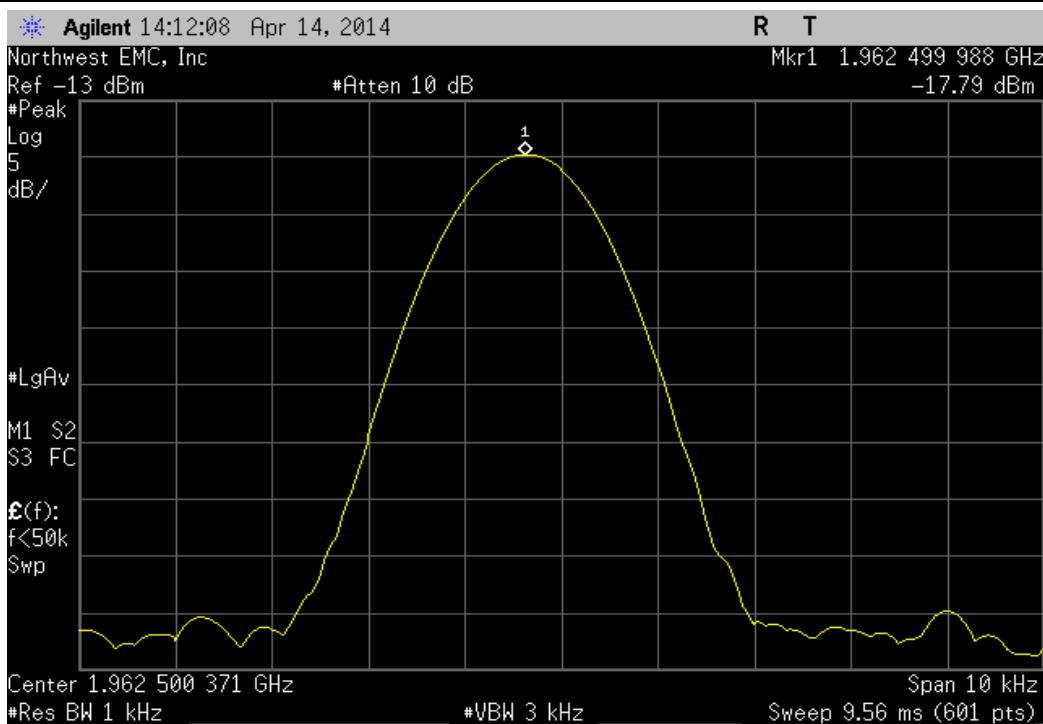


Temperature: -20°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

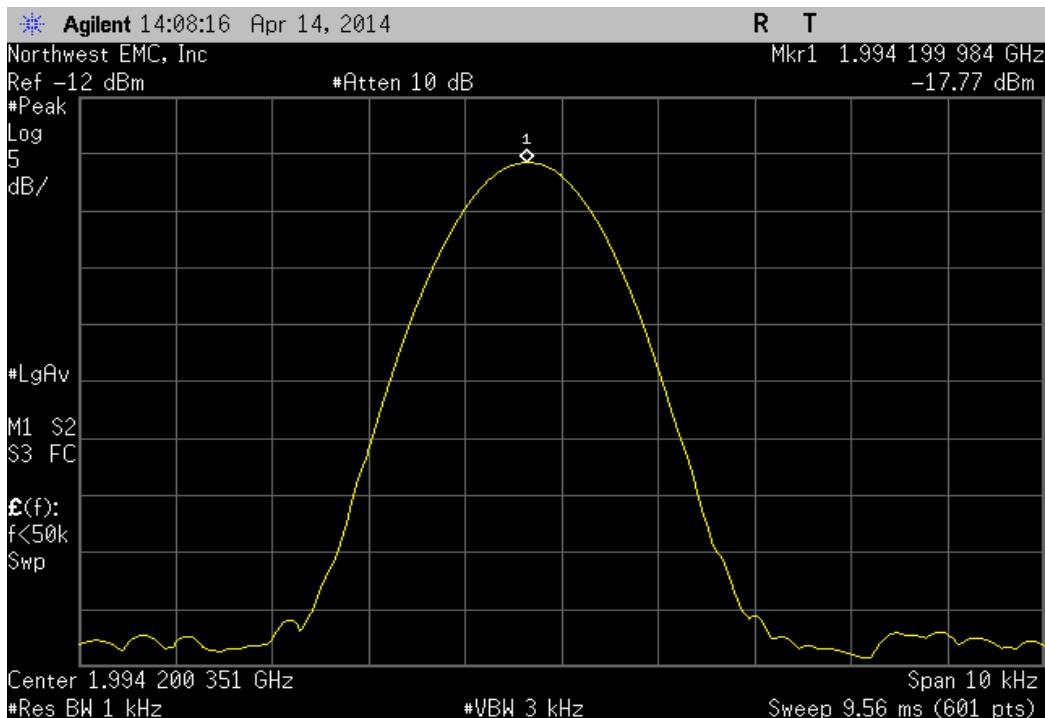


Temperature: -30°, Low Channel, 1930.8 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1930.799992	1930.8	0.0041	1	Pass	

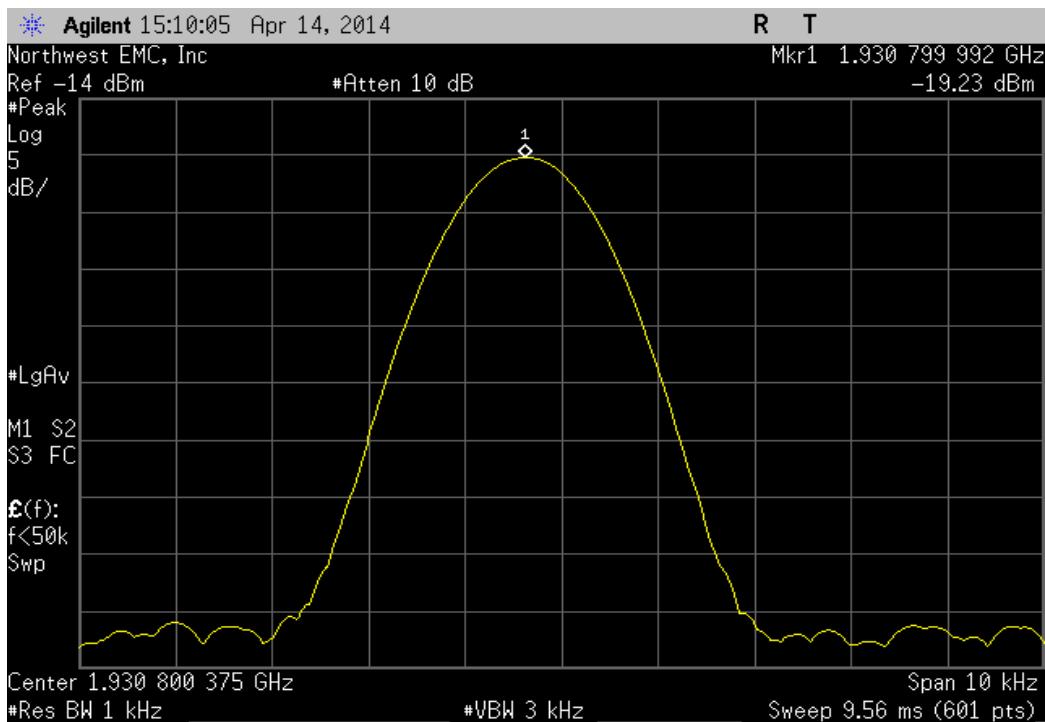

Temperature: -30°, Mid Channel, 1962.5 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1962.499988	1962.5	0.0061	1	Pass	

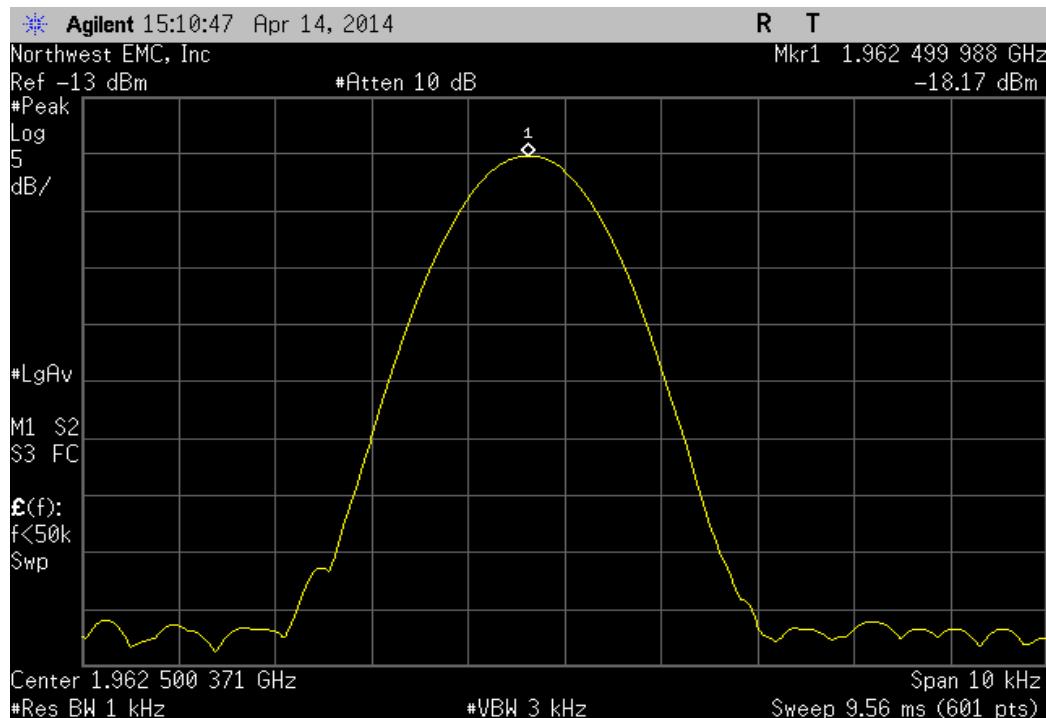

Temperature: -30°, High Channel, 1994.2 MHz					
Measured Value (MHz)	Assigned Value (MHz)	Error (ppm)	Limit (ppm)	Result	
1994.199984	1994.2	0.0080	1	Pass	

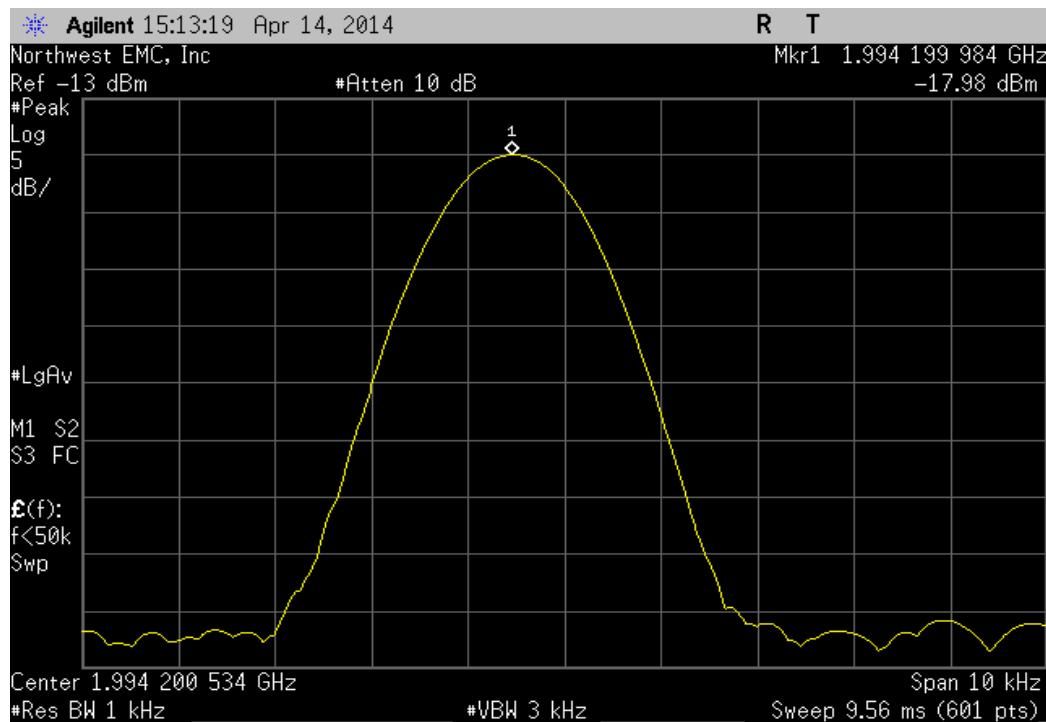

## OCCUPIED BANDWIDTH (26 dB)

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24

### TEST DESCRIPTION

---



The 26 dB occupied bandwidth was measured utilizing the analyzer's peak detector based on the peak output power level measured. A plot was taken to show the occupied bandwidth is contained within the allowable transmit band.



A direct connection was made between the EUT and a spectrum analyzer. The resolution bandwidth was approximately equal to 1% of the 26 dB bandwidth and the video bandwidth was greater than or equal to the resolution bandwidth.



The occupied bandwidth was measured with the EUT configured in the modes called out in the data sheets.



## OCCUPIED BANDWIDTH (26 dB)



EUT: Prism HDM 800 MHz/1900 MHz SISO RF Module		Work Order: TEC0013		
Serial Number: None		Date: 04/09/14		
Customer: TE Connectivity / ADC Telecommunications		Temperature: 24.2°C		
Attendees: None		Humidity: 21%		
Project: None		Barometric Pres.: 1013.5		
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08		
TEST SPECIFICATIONS		Test Method		
FCC 24E:2014	ANSI/TIA/EIA-603-C-2004			
COMMENTS				
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset.				
DEVIATIONS FROM TEST STANDARD				
None				
Configuration #	1	Signature 		
		Value	Limit	Result
CDMA	Low Channel 1930.8 MHz	1.421 MHz	N/A	N/A
	Mid Channel 1962.5 MHz	1.423 MHz	N/A	N/A
	High Channel 1994.8 MHz	1.422 MHz	N/A	N/A
LTE 5 MHz	Low Channel 1932.7 MHz	5.047 MHz	N/A	N/A
	Mid Channel 1962.5 MHz	4.885 MHz	N/A	N/A
	High Channel 1992.4 MHz	5.150 MHz	N/A	N/A
LTE 10 MHz	Low Channel 1935 MHz	9.876 MHz	N/A	N/A
	Mid Channel 1962.5 MHz	9.557 MHz	N/A	N/A
	High Channel 1990 MHz	9.503 MHz	N/A	N/A
Input CDMA	Mid Channel 1962.5 MHz	1.416 MHz	N/A	N/A
Input LTE 5 MHz	Mid Channel 1962.5 MHz	4.852 MHz	N/A	N/A
Input LTE 10 MHz	Mid Channel 1962.5 MHz	9.466 MHz	N/A	N/A

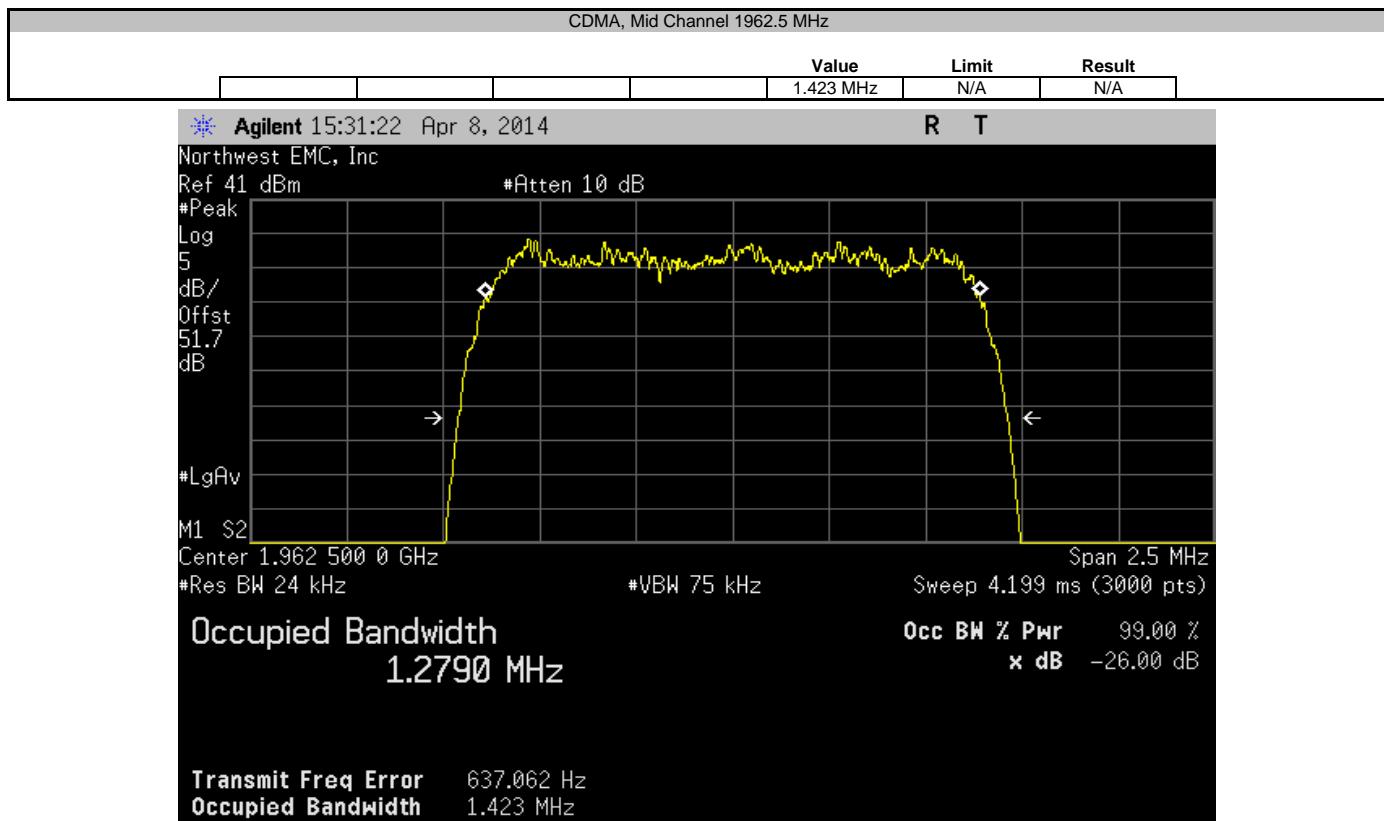
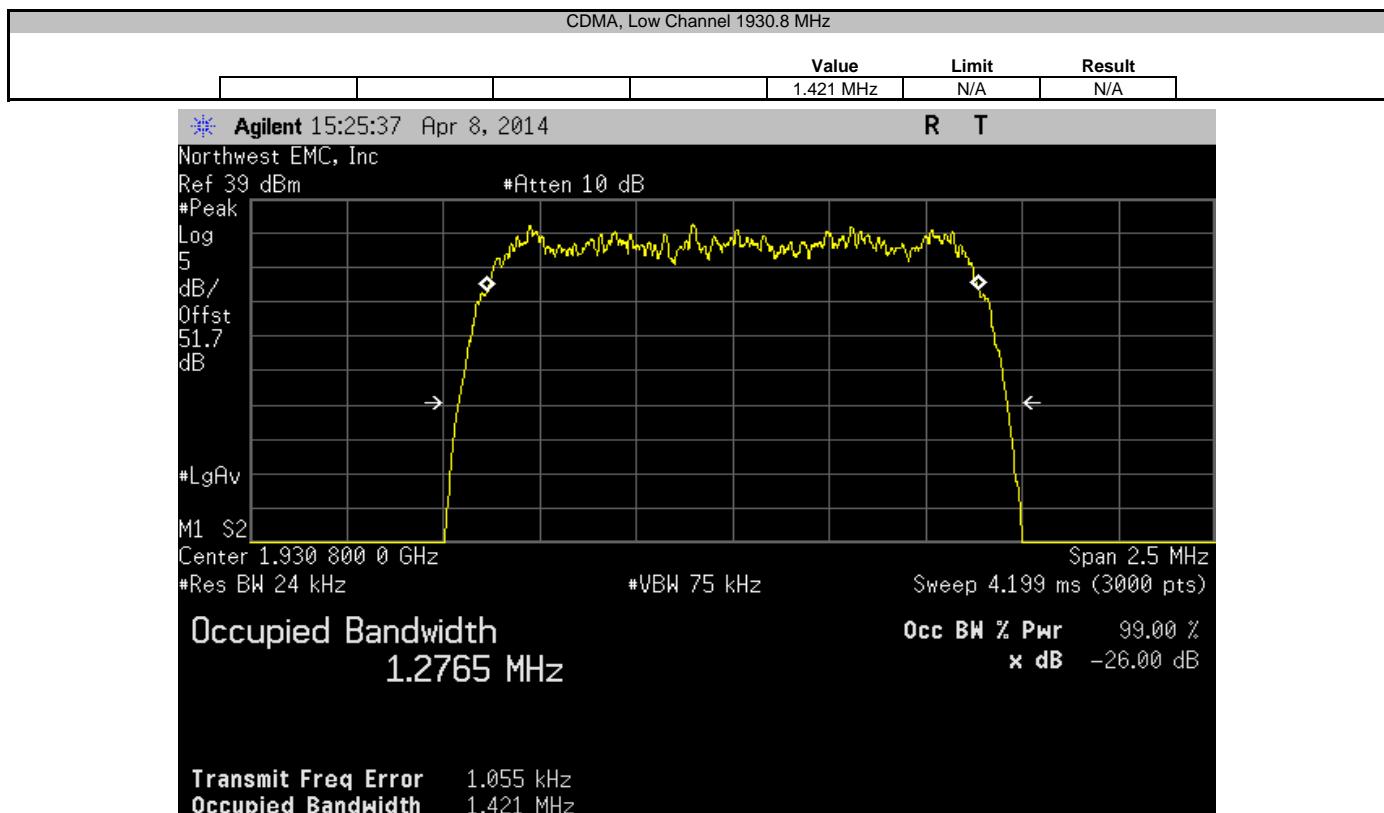


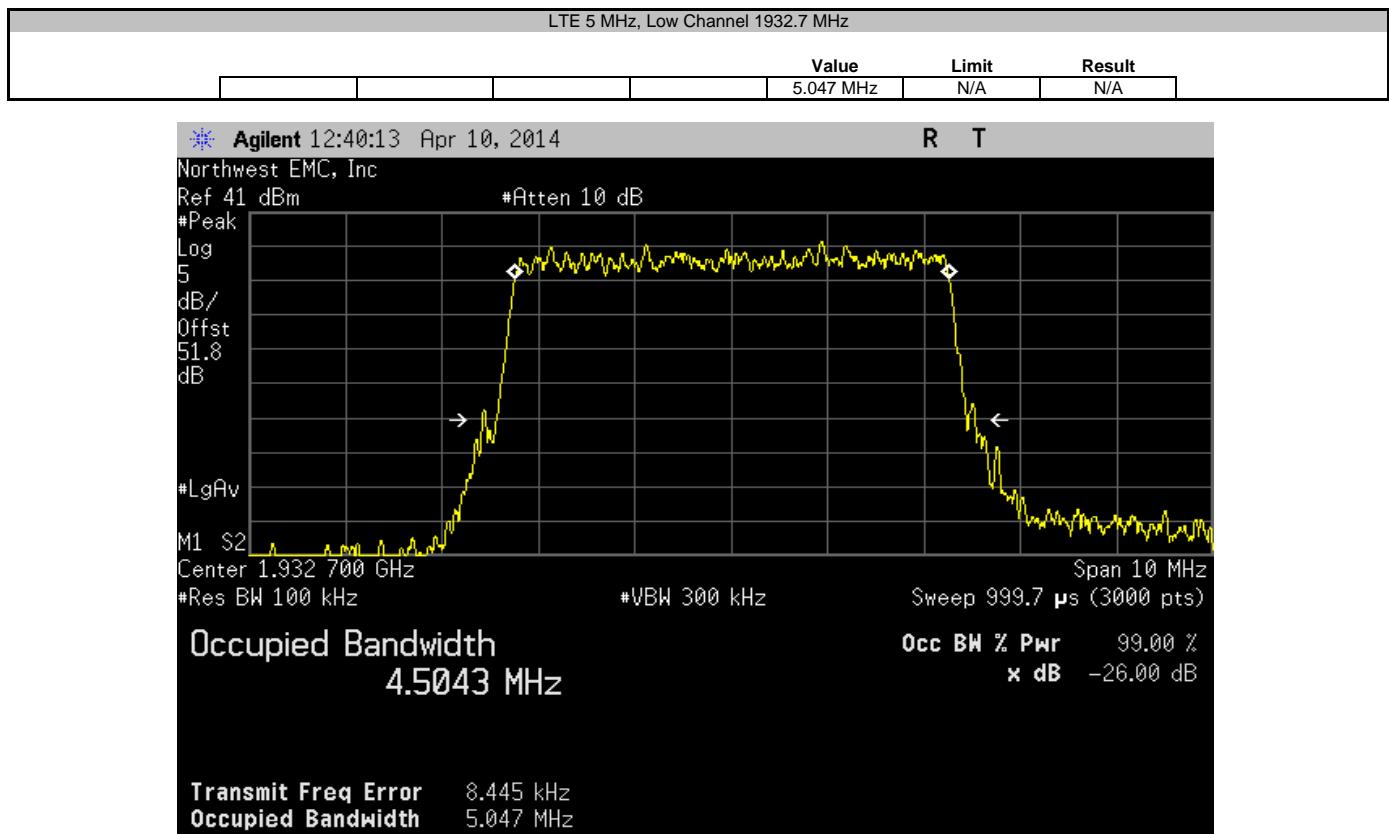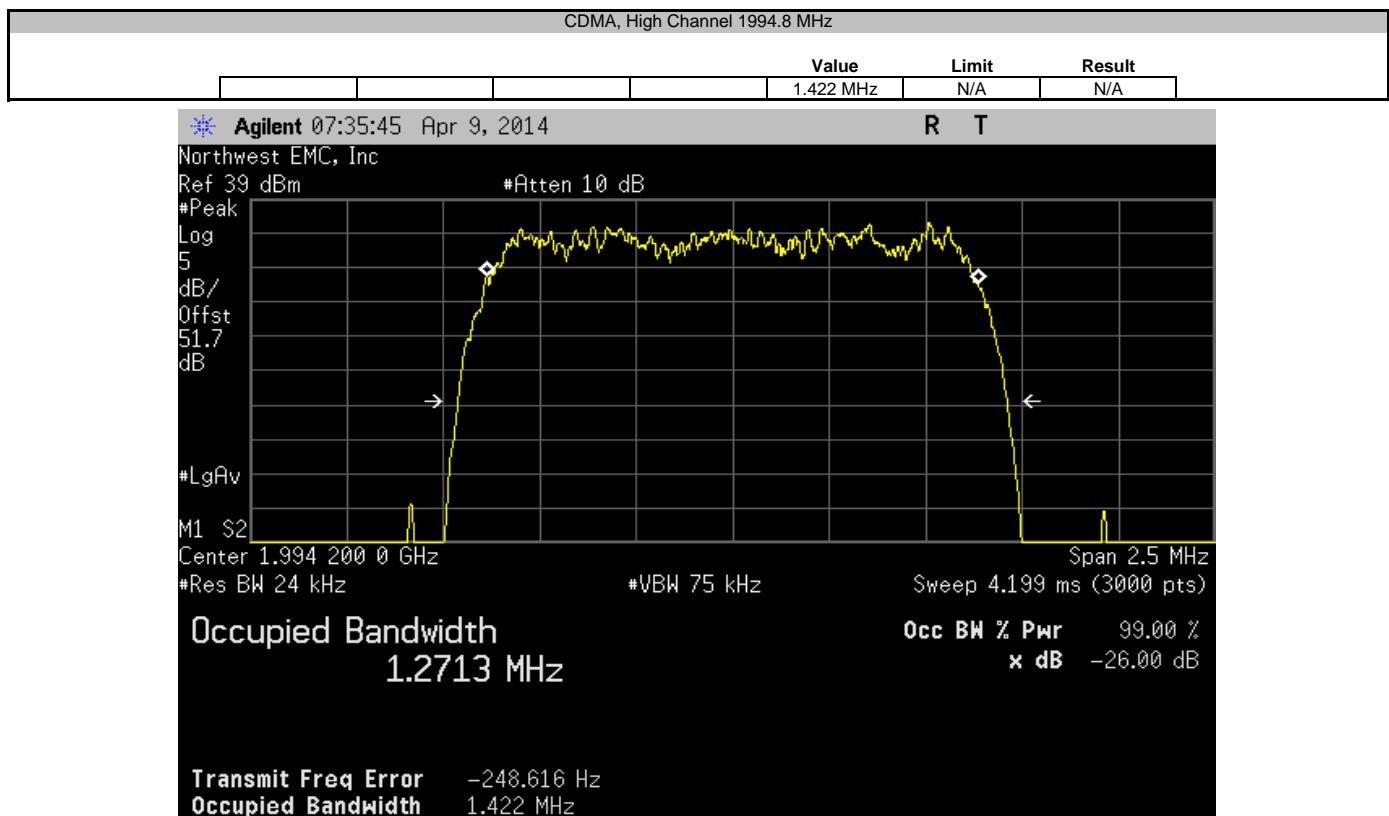

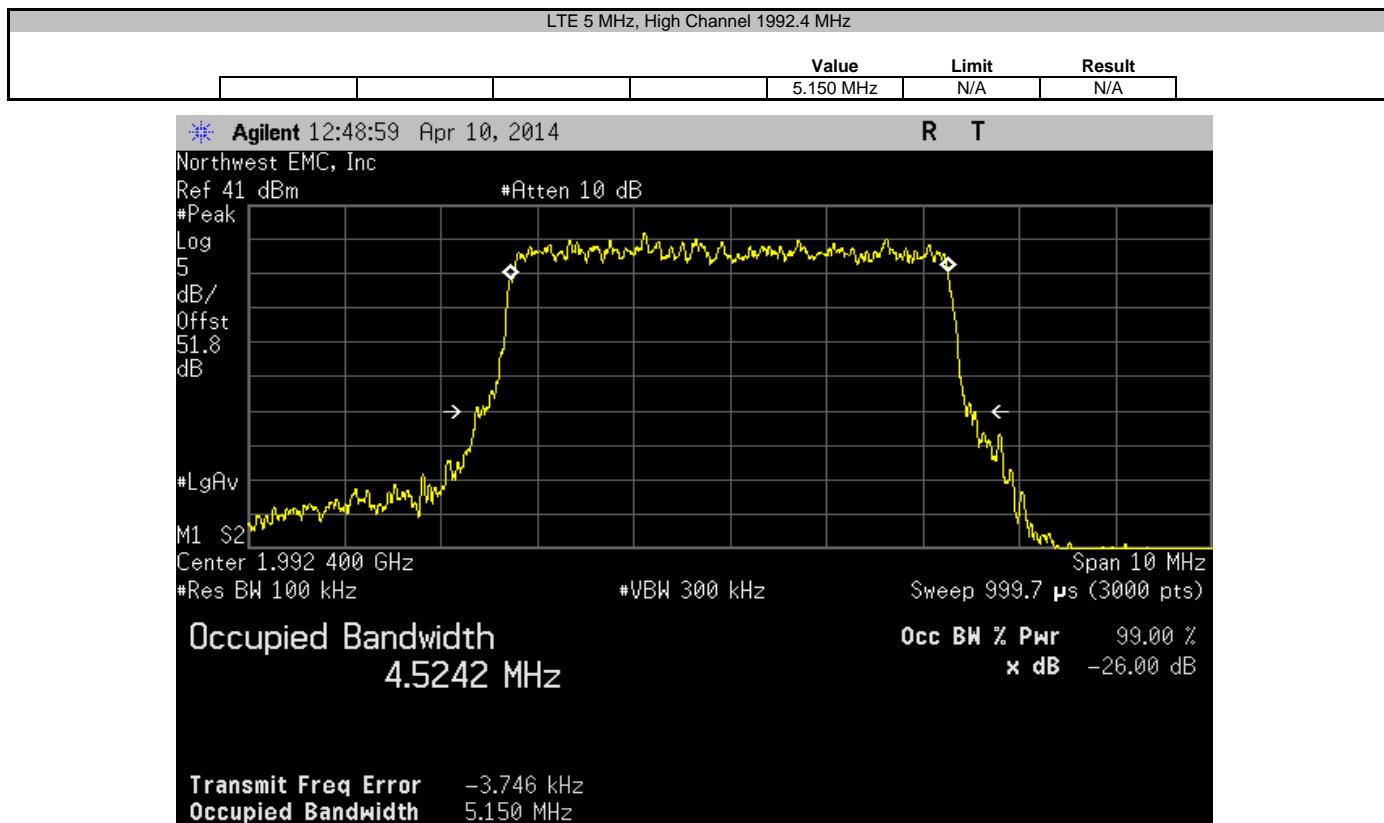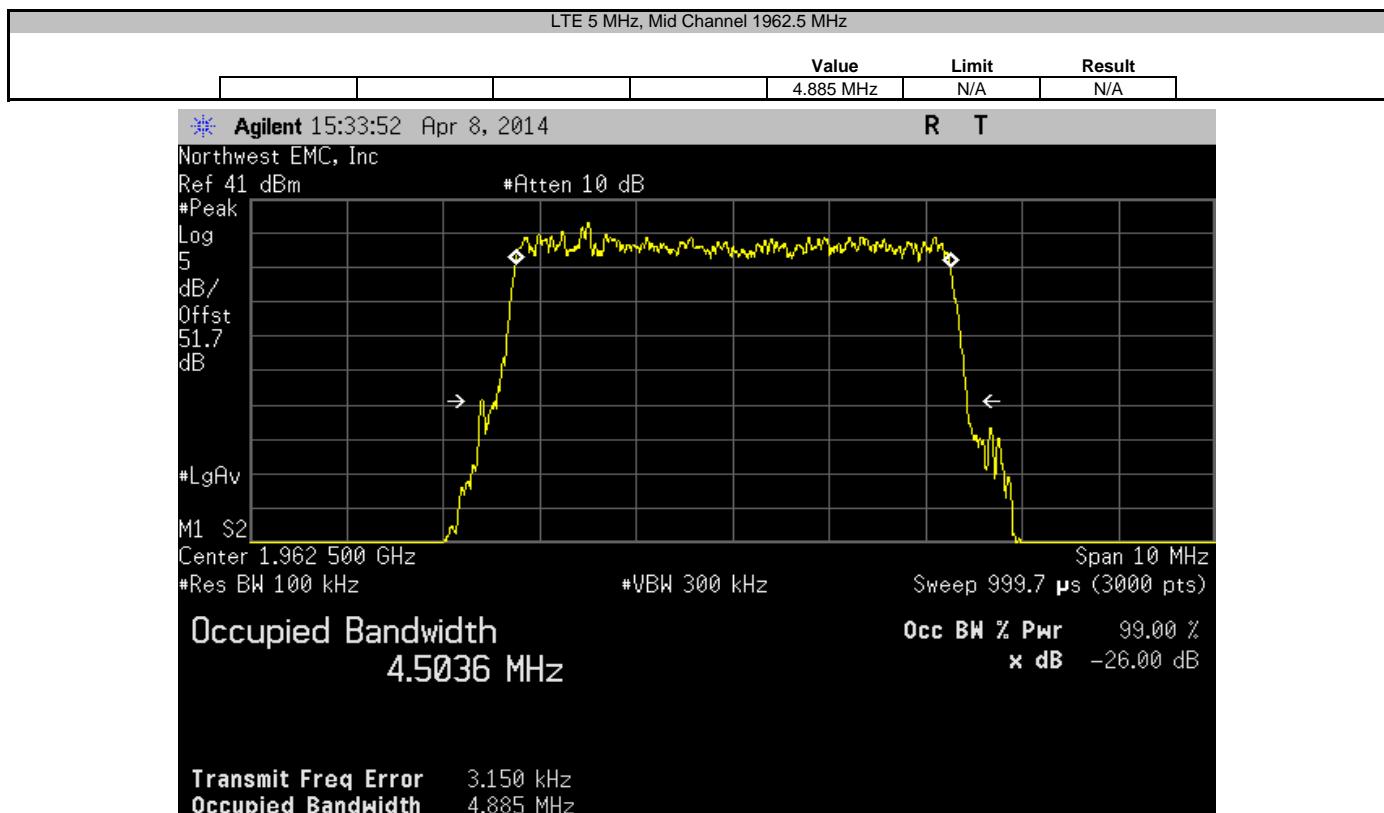

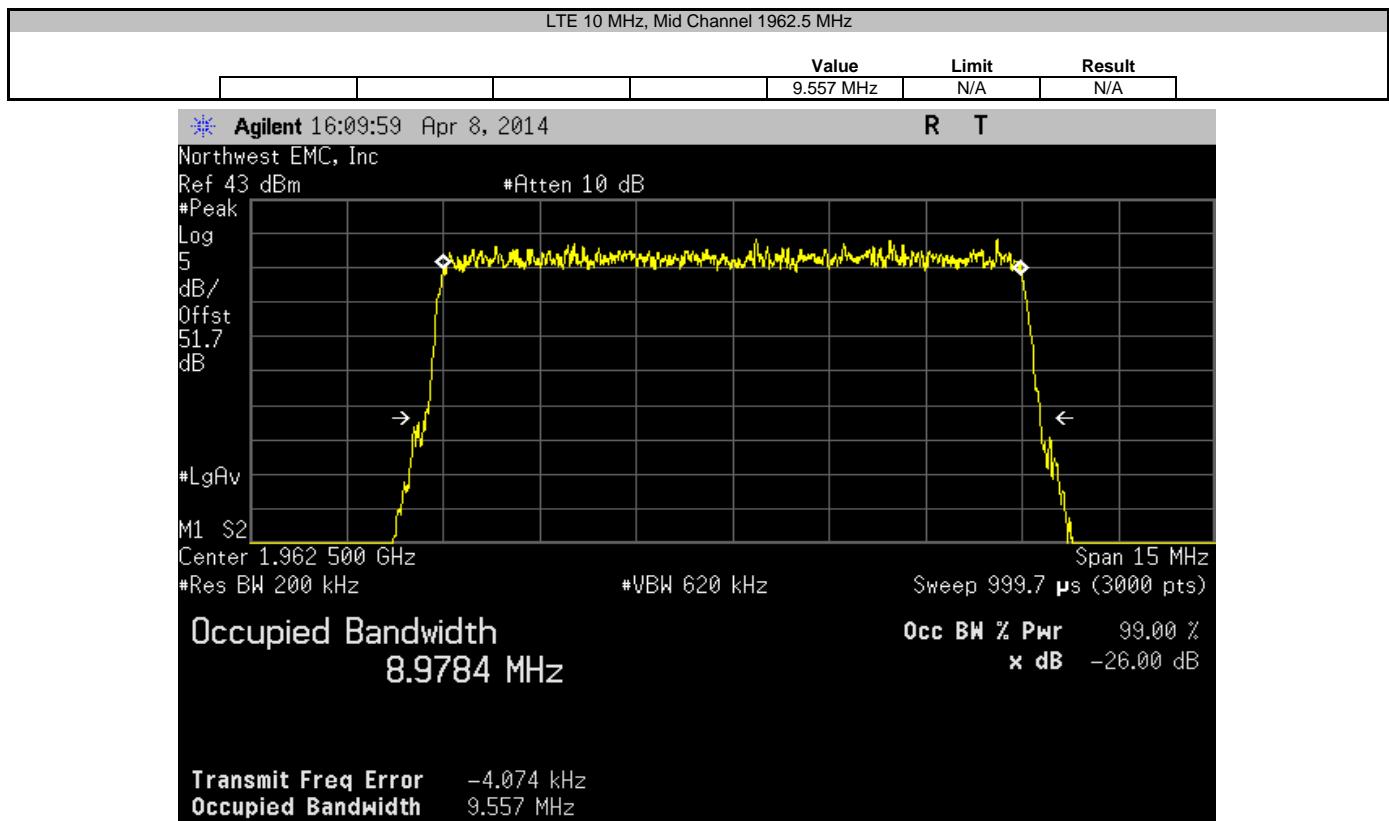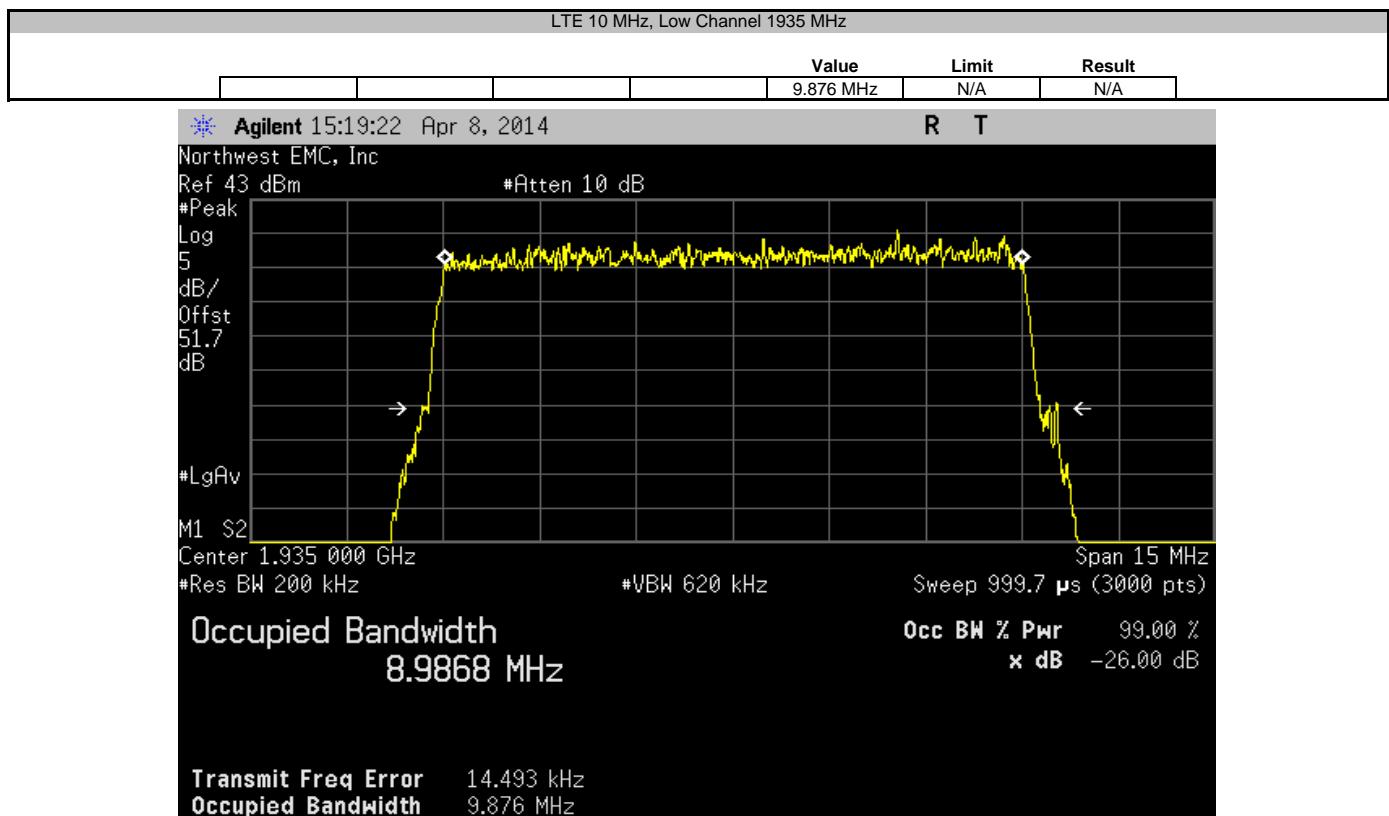

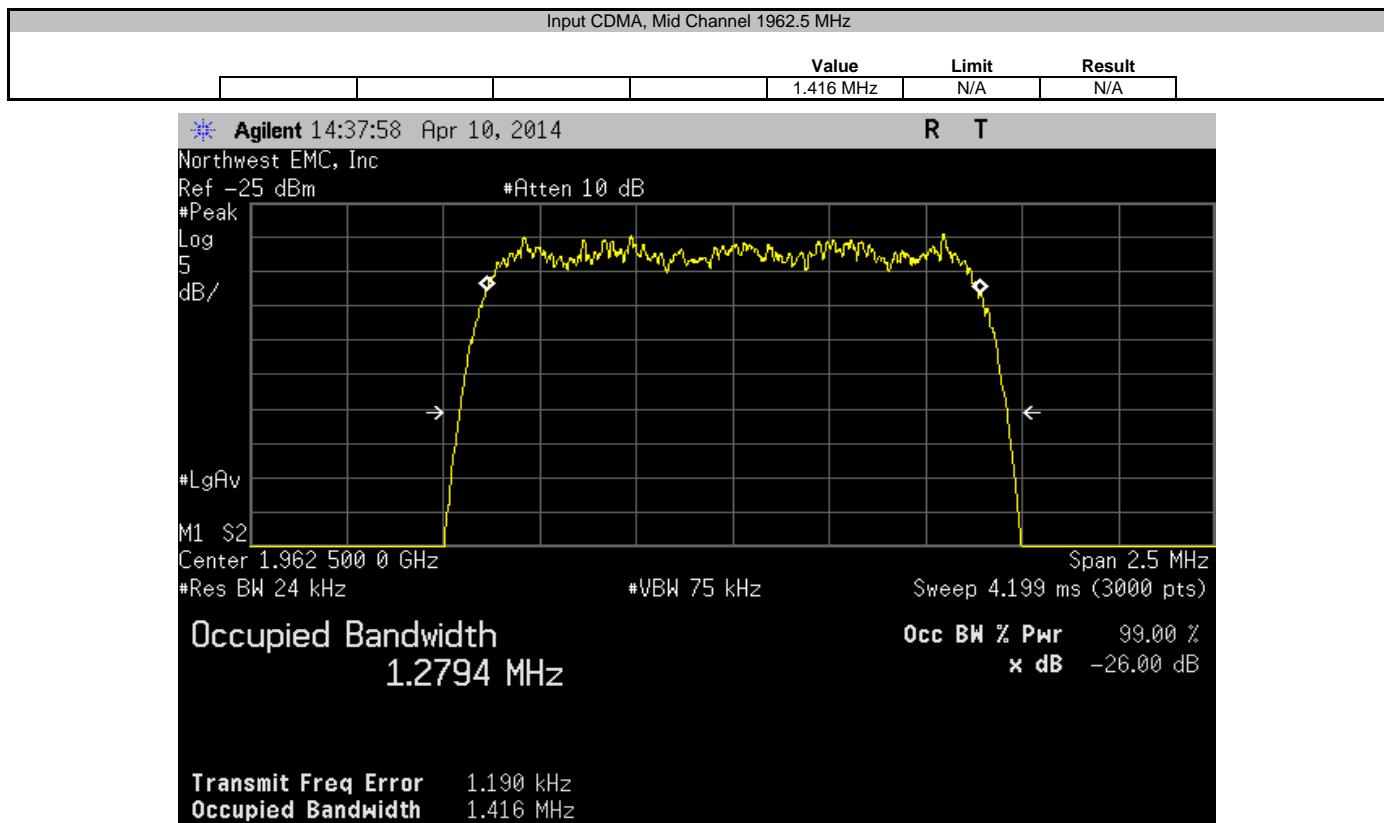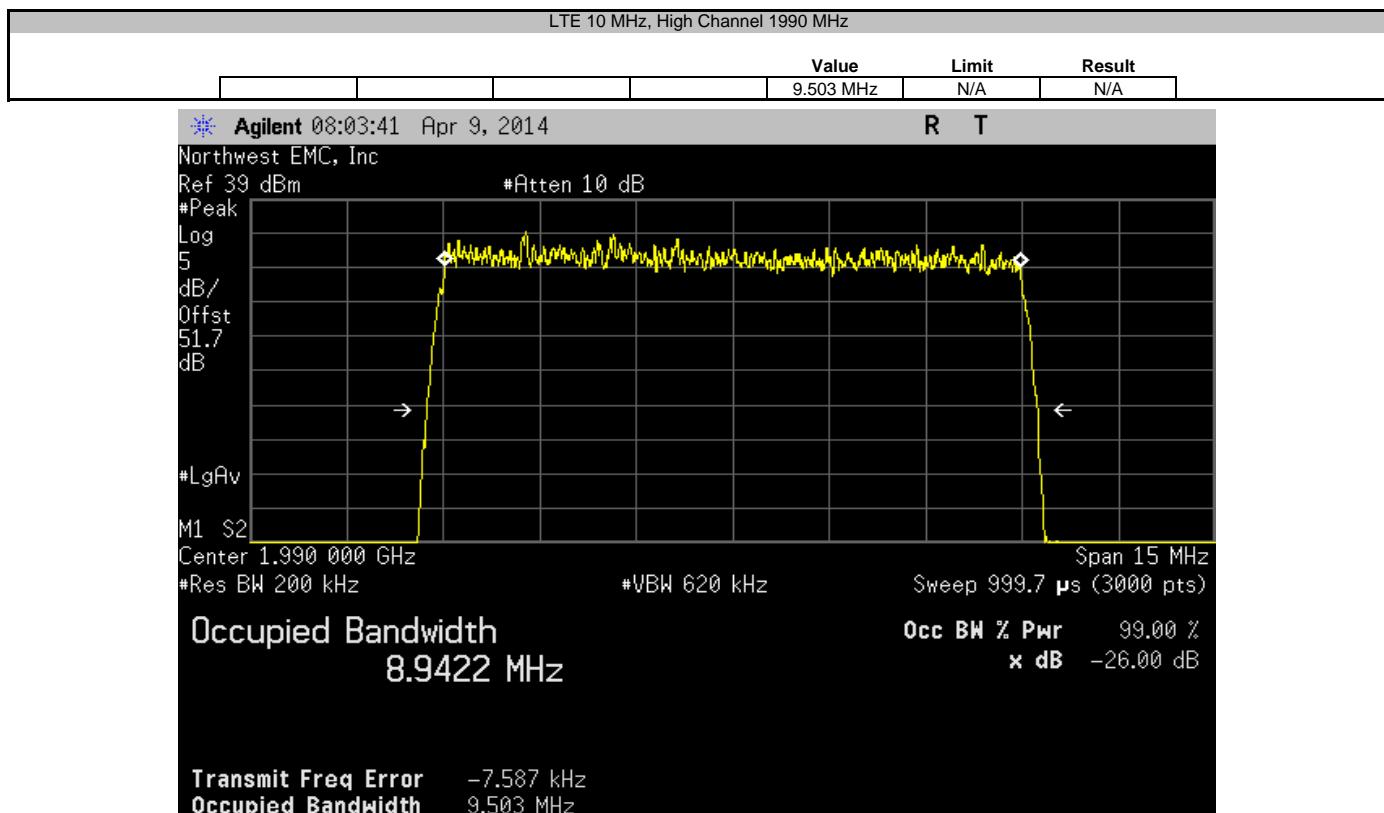

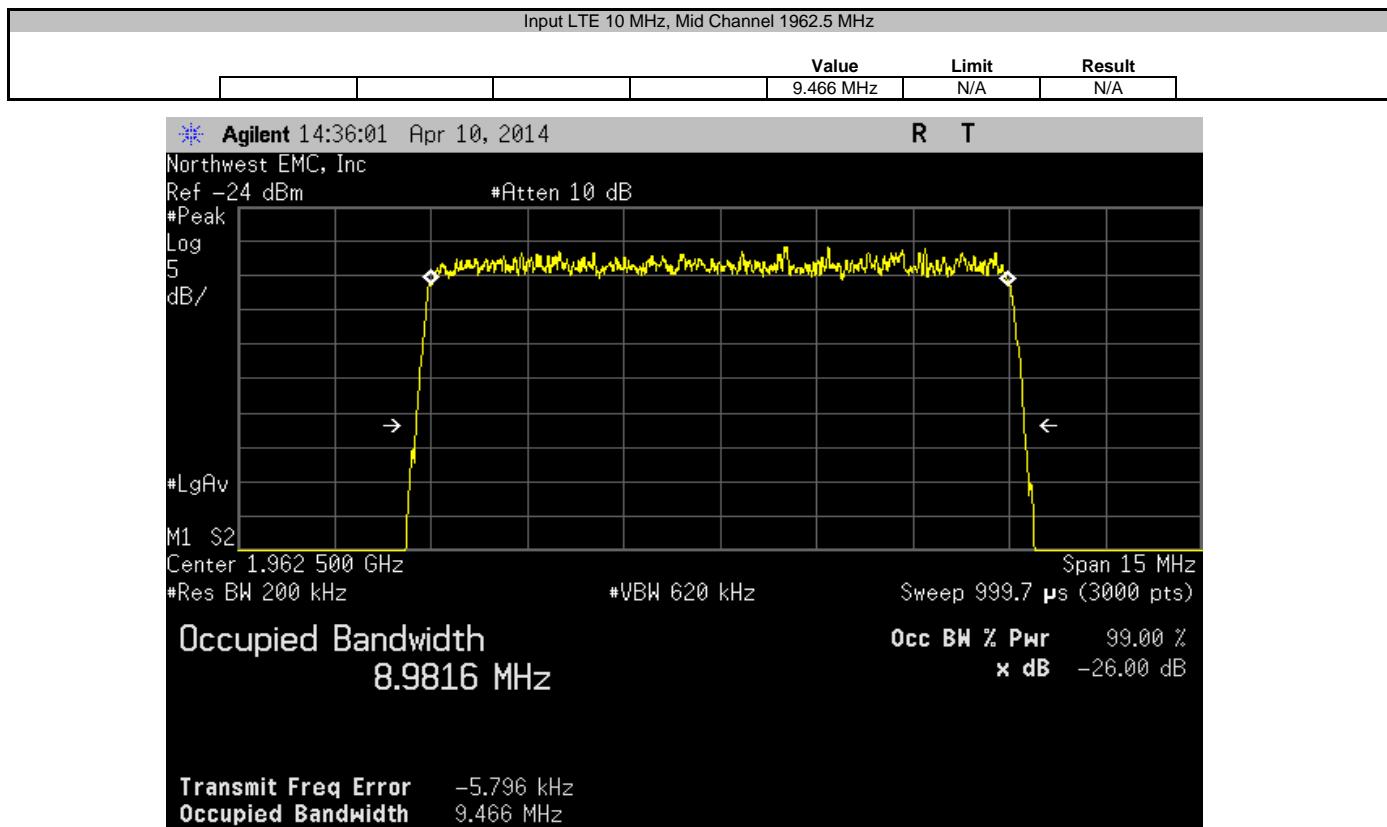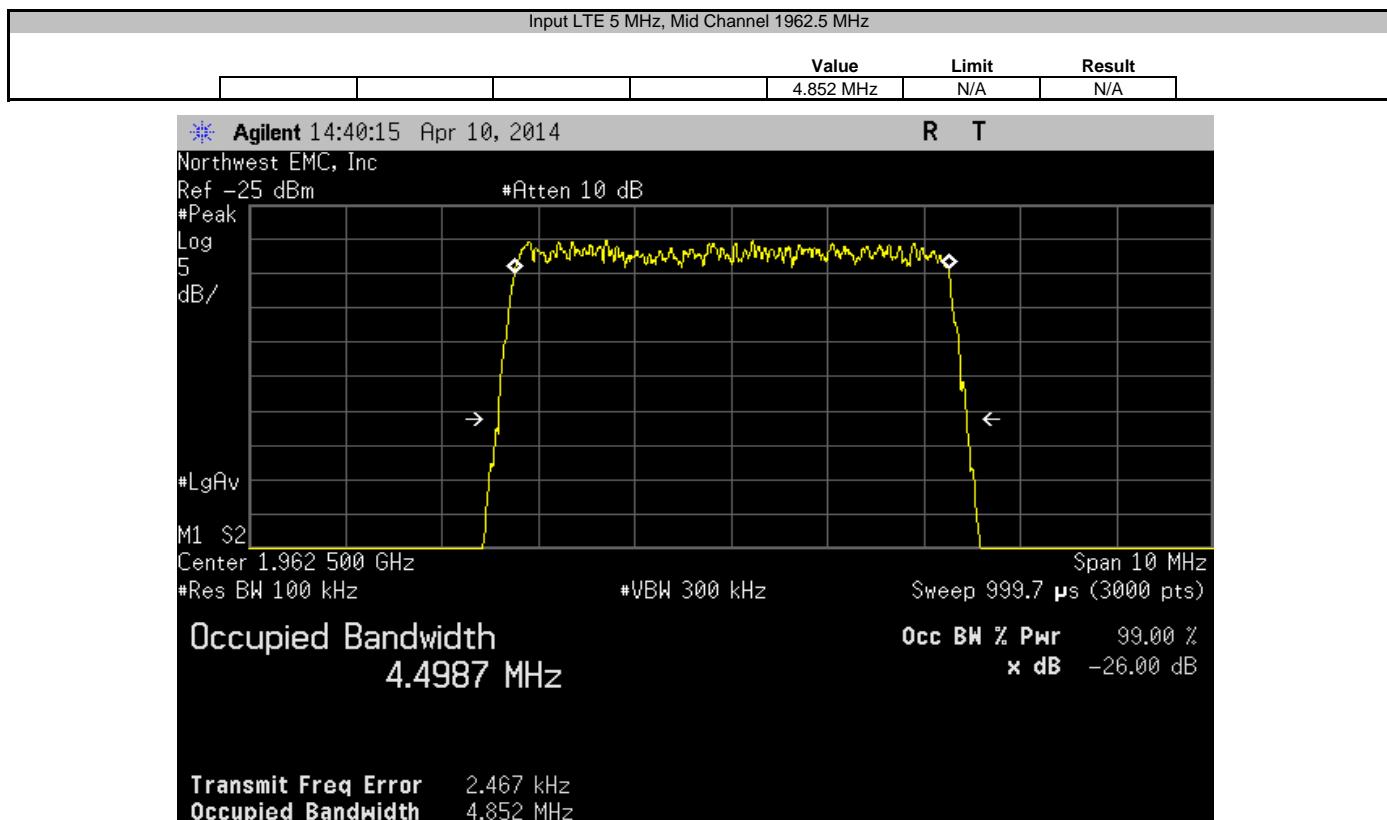

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

## MODES OF OPERATION

Transmitting Low Mid High CDMA: 1930.8, 1962.5, 1994.2 MHz; LTE 5 MHz: 1932.7, 1962.5, 1992.4 MHz; LTE 10 MHz: 1935, 1962.5, 1990 MHz (see comments)

## POWER SETTINGS INVESTIGATED

110VAC/60Hz

## CONFIGURATIONS INVESTIGATED

TECO0013 - 2

## FREQUENCY RANGE INVESTIGATED

Start Frequency	30 MHz	Stop Frequency	20 GHz
-----------------	--------	----------------	--------

## SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

## TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Antenna, Horn	ETS	3115	AJA	5/13/2011	36 mo
Antenna, Dipole	EMCO	3121C-DB4	ADI	12/21/2012	36 mo
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36 mo
Power Sensor	Agilent	N8481A	SQN	8/27/2012	24 mo
Power Meter	Agilent	N1913A	SQL	8/27/2012	24 mo
Low Pass Filter	Micro-Tronics	LPM50004	HGK	5/31/2012	24 mo
Pre-Amplifier	Miteq	JSD4-18002600-26-8P	APU	9/26/2013	12 mo
MN05 Cables	N/A	8-26GHz Standard Gain Horn Cable	MNP	9/26/2013	12 mo
Antenna, Horn	ETS	3160-09	AHG	NCR	0 mo
Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	AVW	3/14/2014	12 mo
Antenna, Horn	ETS Lindgren	3160-08	AIQ	NCR	0 mo
MN05 Cables	ESM Cable Corp.	Standard Gain Horn Cables	MNJ	3/14/2014	12 mo
Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	AVV	3/14/2014	12 mo
Antenna, Horn	ETS	3160-07	AXP	NCR	0 mo
Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	AVX	3/14/2014	12 mo
MN05 Cables	ESM Cable Corp.	Double Ridge Guide Horn Cables	MNI	3/14/2014	12 mo
Antenna, Horn (DRG)	ETS Lindgren	3115	AIP	6/29/2011	36 mo
Pre-Amplifier	Miteq	AM-1616-1000	PAD	3/14/2014	12 mo
MN05 Cables	ESM Cable Corp.	Bilog Cables	MNH	3/14/2014	12 mo
Antenna, Bilog	Teseq	CBL 6141B	AYD	12/17/2013	12 mo
Spectrum Analyzer	Agilent	N9010A	AFI	1/27/2013	24 mo

## MEASUREMENT BANDWIDTHS

Frequency Range (MHz)	Peak Data (kHz)	Quasi-Peak Data (kHz)	Average Data (kHz)
0.01 - 0.15	1.0	0.2	0.2
0.15 - 30.0	10.0	9.0	9.0
30.0 - 1000	100.0	120.0	120.0
Above 1000	1000.0	N/A	1000.0

## TEST DESCRIPTION

The highest gain antenna to be used with the EUT was tested for final measurements. The EUT was configured for the lowest, a middle, and the highest transmit frequency in each operational band. For each configuration, the spectrum was scanned throughout the specified range. While scanning, emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis, and adjusting the measurement antenna height and polarization (per ANSI C63.10:2009). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

For licensed transmitters, the FCC references TIA/EIA-603 as the measurement procedure standard. TIA/EIA-603 Section 2.2.12 describes a method for measuring radiated spurious emissions that utilizes an antenna substitution method:


At an approved test site, the transmitter is placed on a remotely controlled turntable, and the measurement antenna is placed 3 meters from the transmitter. The turntable azimuth is varied to maximize the level of spurious emissions. The height of the measurement antenna is also varied from 1 to 4 meters. The amplitude and frequency of the highest emissions are noted. The transmitter is then replaced with a  $\frac{1}{2}$  wave dipole that is successively tuned to each of the highest spurious emissions for emissions below 1 GHz, and a horn antenna for emissions above 1 GHz. A signal generator is connected to the dipole (horn antenna for frequencies above 1 GHz), and its output is adjusted to match the level previously noted for each frequency. The output of the signal generator is recorded, and by factoring in the cable loss to the antenna and its gain; the power (dBm) into an ideal  $\frac{1}{2}$  wave dipole antenna is determined for each radiated spurious emission.

For the purposes of preliminary measurements, the field strength of the spurious emissions can be measured and compared with a 3 meter limit. The 3 meter limit was calculated to be 82.5 dBuV/m at 3 meters. The final measurements must be made utilizing the substitution method described above




# FIELD STRENGTH OF SPURIOUS EMISSIONS

PSA-ESCI 2014.02.19  
EmiR5 2014.02.04

Work Order:	TECO0013	Date:	04/16/14						
Project:	None	Temperature:	22.7 °C						
Job Site:	MN05	Humidity:	15.5% RH						
Serial Number:	None	Barometric Pres.:	1017.6 mbar	Tested by:	Trevor Buls				
EUT:	Prism HDM 800 MHz/1900 MHz SISO RF Module								
Configuration:	2								
Customer:	TE Connectivity / ADC Telecommunications								
Attendees:	None								
EUT Power:	110VAC/60Hz								
Operating Mode:	Transmitting Low Mid High CDMA: 1930.8, 1962.5, 1994.2 MHz; LTE 5 MHz: 1932.7, 1962.5, 1992.4 MHz; LTE 10 MHz: 1935, 1962.5, 1990 MHz (see comments)								
Deviations:	None								
Comments:	Customer provided a high wattage 30 dB attenuator that was used to terminate the antenna output. Tested in normal upright position as device is always a floorstanding system.								

Test Specifications	Test Method
FCC 24E:2014	ANSI/TIA/EIA-603-C:2004

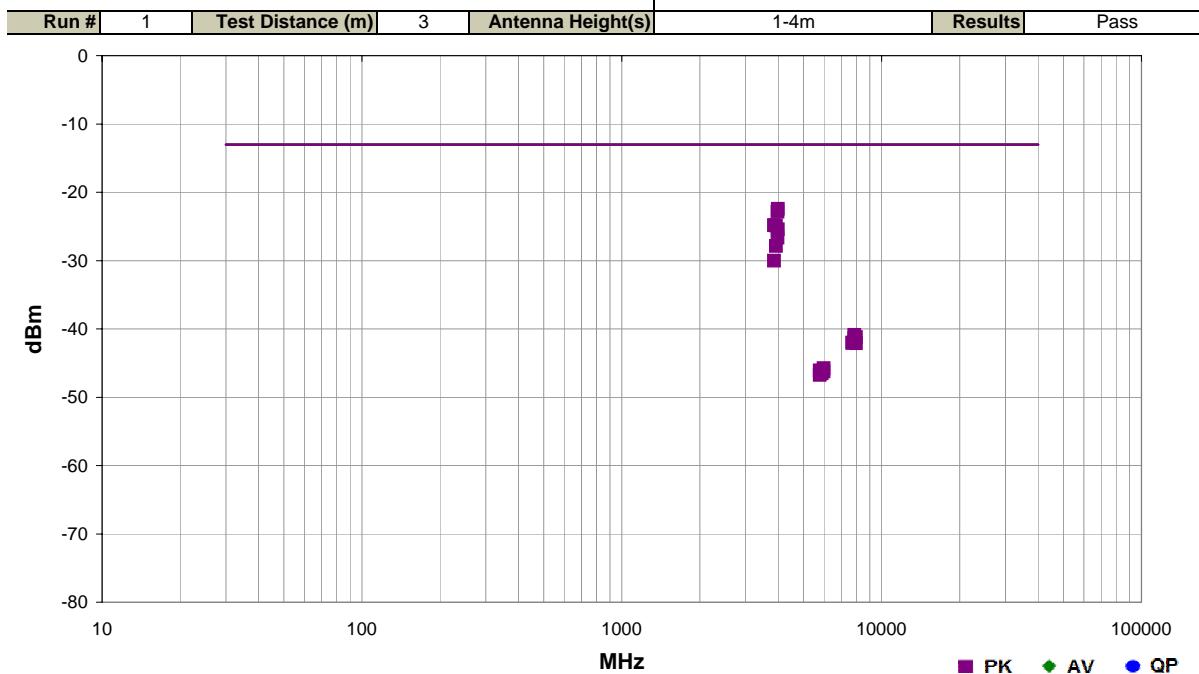

	Freq (MHz)	Antenna Height (meters)	Azimuth (degrees)	Polarity/Transducer Type	Detector	EIRP (Watts)	EIRP (dBm)	Spec. Limit (dBm)	Compared to Spec. (dB)	Comments
3988.167	1.0	307.0	Vert	PK	5.72E-06	-22.4	-13.0	-9.4	High Ch, CDMA	
3984.300	1.0	18.0	Vert	PK	5.17E-06	-22.9	-13.0	-9.9	High Ch, LTE 5MHz	
3861.783	1.0	327.0	Vert	PK	3.28E-06	-24.8	-13.0	-11.8	Low Ch, CDMA	
3924.650	1.5	64.0	Vert	PK	3.26E-06	-24.9	-13.0	-11.9	Mid Ch, CDMA	
3988.533	1.0	16.0	Horz	PK	2.87E-06	-25.4	-13.0	-12.4	High Ch, CDMA	
3983.333	1.0	306.0	Vert	PK	2.15E-06	-26.7	-13.0	-13.7	High Ch, LTE 10MHz	
3925.142	1.0	319.0	Horz	PK	1.63E-06	-27.9	-13.0	-14.9	Mid Ch, CDMA	
3862.017	1.0	297.0	Horz	PK	9.92E-07	-30.0	-13.0	-17.0	Low Ch, CDMA	
7848.025	1.0	169.0	Horz	PK	8.16E-08	-40.9	-13.0	-27.9	Mid Ch, CDMA	
7978.142	1.0	235.0	Vert	PK	7.57E-08	-41.2	-13.0	-28.2	High Ch, CDMA	
7852.025	3.4	183.0	Vert	PK	7.29E-08	-41.4	-13.0	-28.4	Mid Ch, CDMA	
7724.217	1.0	208.0	Horz	PK	6.26E-08	-42.0	-13.0	-29.0	Low Ch, CDMA	
7723.158	1.0	63.0	Vert	PK	6.25E-08	-42.0	-13.0	-29.0	Low Ch, CDMA	
7976.342	1.0	86.0	Horz	PK	6.16E-08	-42.1	-13.0	-29.1	High Ch, CDMA	
5983.833	1.0	298.0	Vert	PK	2.67E-08	-45.7	-13.0	-32.7	High Ch, CDMA	
5790.992	1.7	193.0	Vert	PK	2.47E-08	-46.1	-13.0	-33.1	Low Ch, CDMA	
5984.158	1.0	139.0	Horz	PK	2.38E-08	-46.2	-13.0	-33.2	High Ch, CDMA	
5886.142	1.0	146.0	Vert	PK	2.35E-08	-46.3	-13.0	-33.3	Mid Ch, CDMA	
5885.775	1.0	238.0	Horz	PK	2.24E-08	-46.5	-13.0	-33.5	Mid Ch, CDMA	
5792.300	1.0	180.0	Horz	PK	2.11E-08	-46.8	-13.0	-33.8	Low Ch, CDMA	

## PEAK TO AVERAGE RATIO

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

### TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator - 20db, 'SMA'	SM Electronics	SA26B-20	RFW	4/3/2014	12
40 GHz DC block	Fairview Microwave	SD3379	AMI	9/26/2013	12
Signal Generator MXG	Agilent	N5183A	TIK	6/7/2012	36
Spectrum Analyzer	Agilent	E4440A	AAX	5/15/2012	24

### TEST DESCRIPTION

Because the conducted Output Power was measured using a RMS Average detector, the Peak to Average Ratio was measured to show that the maximum peak-max-hold spectrum to the maximum of the average spectrum does not exceed 13 dBm.

A direct connection was made between the RF output of the EUT and a spectrum analyzer. Attenuation and a DC block were used. The reference level offset on the spectrum analyzer was adjusted to compensate for cable loss and the external attenuation used between the RF output and the spectrum analyzer input.

The spectrum analyzer settings were as follows:

Span set to encompass the entire emission bandwidth, centered on the transmit channel.


The largest difference between the following two screen captures was calculated:

- 1st Screen Capture: The same procedure and settings as was used for conducted Output Power.
- 2nd Screen Capture: Same as Screen capture 1 except using a peak detector and trace max-hold.

## PEAK TO AVERAGE RATIO

EUT: Prism HDM 800 MHz/1900 MHz SISO RF Module		Work Order: TECO0013				
Serial Number: None		Date: 04/09/14				
Customer: TE Connectivity / ADC Telecommunications		Temperature: 24.2°C				
Attendees: None		Humidity: 21%				
Project: None		Barometric Pres.: 1013.5				
Tested by: Trevor Buls	Power: 110VAC/60Hz	Job Site: MN08				
TEST SPECIFICATIONS						
FCC 24E:2014		Test Method: ANSI/TIA/EIA-603-C-2004				
COMMENTS						
Customer provided a high wattage 30 dB attenuator that was added into the reference level offset.						
DEVIATIONS FROM TEST STANDARD						
None						
Configuration #	1	Signature 				
		Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result
CDMA						
Average (RMS)		42.148	N/A	N/A	N/A	N/A
Peak		N/A	48.1	5.952	13	Pass
LTE 5 MHz						
Average (RMS)		42.347	N/A	N/A	N/A	N/A
Peak		N/A	49.71	7.363	13	Pass
LTE 10 MHz						
Average (RMS)		41.84	N/A	N/A	N/A	N/A
Peak		N/A	45.22	3.38	13	Pass


CDMA, Average (RMS)					
Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	
42.148	N/A	N/A	N/A	N/A	N/A

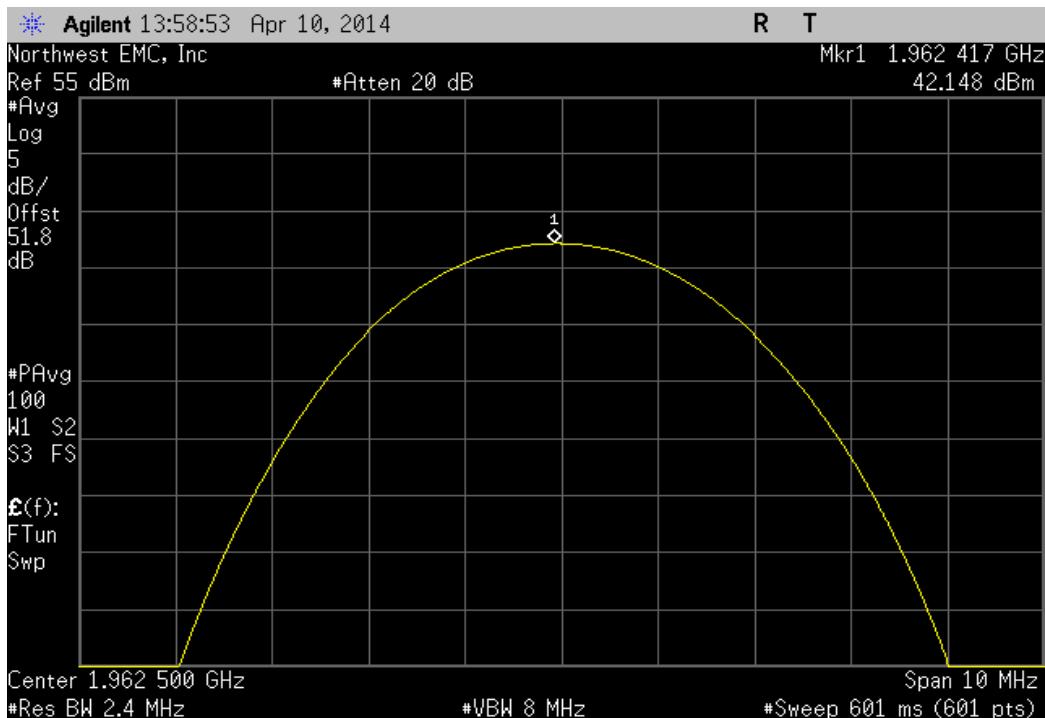

CDMA, Peak					
Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	
N/A	48.1	5.952	13	Pass	



LTE 5 MHz, Average (RMS)					
Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	
42.347	N/A	N/A	N/A	N/A	N/A

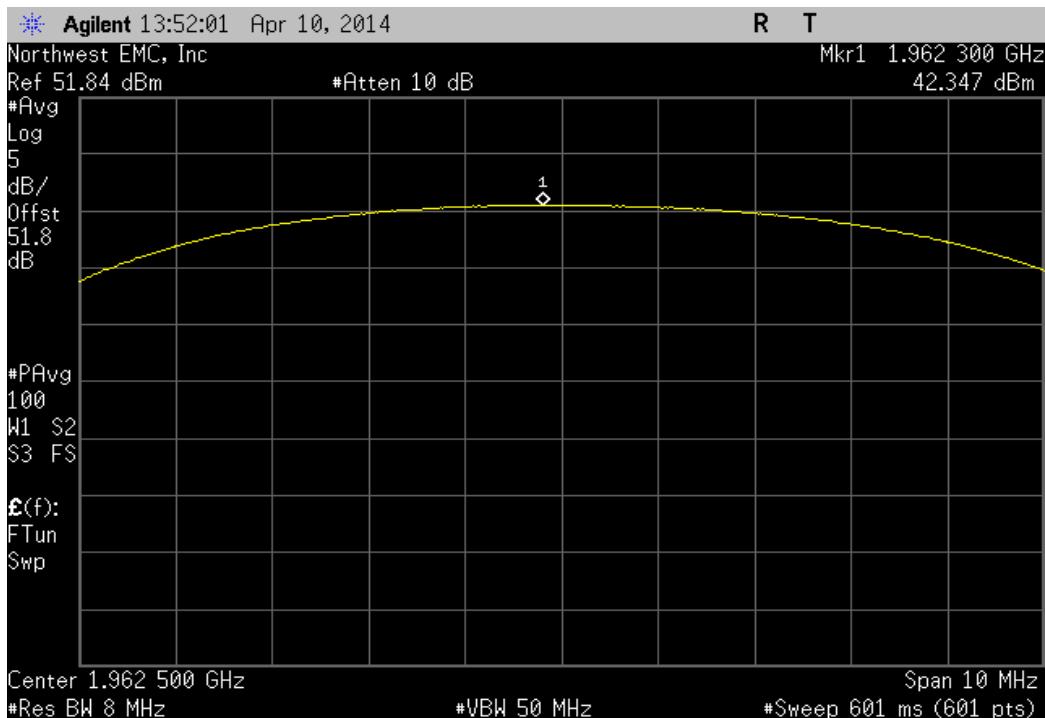

LTE 5 MHz, Peak					
Average Value (dBm)	Peak Value (dBm)	Delta (dB)	Limit (dB)	Result	
N/A	49.71	7.363	13	Pass	

