

Test Report: 1R03659

Applicant: Alcatel Canada Inc.
600 March Road
PO Box 13600
Kanata, Ontario
K2K 2E6

**Equipment Under Test:
(EUT)** RBS 24GHz CoPol Radio

In Accordance With: **FCC Part 101, Subpart C**

Tested By: Nemko Canada Inc.
(Formerly KTL Ottawa Inc.)
3325 River Road, R.R. 5
Ottawa, Ontario K1V 1H2

Authorized By:

R. Grant, Wireless Group Manager

Date:

Total Number of Pages: 30

Table of Contents

Section 1.	Summary of Test Results.....	3
Section 2.	General Equipment Specification	5
Section 3.	RF Power Output	6
Section 4.	Occupied Bandwidth.....	7
Section 5.	Spurious Emissions at Antenna Terminals.....	24
Section 6.	Field Strength of Spurious Emissions	28
Section 7.	Frequency Stability	29
Section 8.	Test Equipment List	30
Annex A	Test Diagrams	A1

EQUIPMENT: RBS 24GHz CoPol Radio

Section 1. Summary of Test Results

General

All measurements are traceable to national standards.

These tests were conducted on a sample of the equipment for the purpose of demonstrating compliance with FCC Part 101, Subpart C.



New Submission




Production Unit



Class II Permissive Change



Pre-Production Unit



Equipment Code

THIS TEST REPORT RELATES ONLY TO THE ITEM(S) TESTED.

THE FOLLOWING DEVIATIONS FROM, ADDITIONS TO, OR EXCLUSIONS FROM THE TEST SPECIFICATIONS HAVE BEEN MADE.

See " Summary of Test Data".



NVLAP LAB CODE: 100351-0

TESTED BY: _____ DATE: _____
Glen Westwell, Technologist

Nemko Canada Inc. authorizes the above named company to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only.

Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties. Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

This report applies only to the items tested.

EQUIPMENT: RBS 24GHz CoPol Radio

Summary Of Test Data

Name Of Test	Para. No.	Result
RF Power Output	101.113	Complies
Occupied Bandwidth	101.111	Complies
Spurious Emissions at Antenna Terminals	101.111	Complies
Field Strength of Spurious Emissions	101.111	Complies
Frequency Stability	101.107	Complies

Footnotes For N/A's:**Test Conditions:**

Indoor Temperature: 24 °C
 Humidity: 40 %

Outdoor Temperature: N/A °C
 Humidity: N/A %

.

Section 2. General Equipment Specification

Manufacturer:	Alcatel Canada Inc.
Model No.:	RBS 24GHz CoPol Radio
Serial No.:	None
Date Received In Laboratory:	March 16, 2001
Nemko Identification No.:	Item #3
Power Input:	-55Vdc
Frequency Range:	Tx: 24.257 – 24.443GHz (14MHz) Tx: 24.264 – 24.436GHz (28MHz)
Modulation:	QPSK 28MHz@40.375Mbps. 14MHz@20.187Mbps
Internal/External Data Source:	External
Emission Designator:	23M8M1D (28MHz) 12M2M1D (14MHz)
Output Impedance:	50Ω
Power Output (Manufacturer's Rating):	17 dBm Max
Channel Spacing:	14 & 28MHz
Power Output Adjustment:	+10 to +17dBm

EQUIPMENT: RBS 24GHz CoPol Radio

Section 3. RF Power Output

Para. No.: 1.1046

Test Performed By: Glen Westwell	Date of Test: April 9, 2001
---	------------------------------------

Minimum Standard: 101.113

Test Results: Complies.

Measurement Data:

Carrier BW	Rated dBm	Measured dBm
14MHz	17.0	17.4
28MHz	17.0	17.1

EQUIPMENT: RBS 24GHz CoPol Radio

Section 4. Occupied Bandwidth

Para. No.: 2.1049


Test Performed By: Glen Westwell	Date of Test: April 9, 2001
---	------------------------------------

Minimum Standard: 101.111


Test Results: Complies.

Test Data: See attached graph(s).


EQUIPMENT: RBS 24GHz CoPol Radio

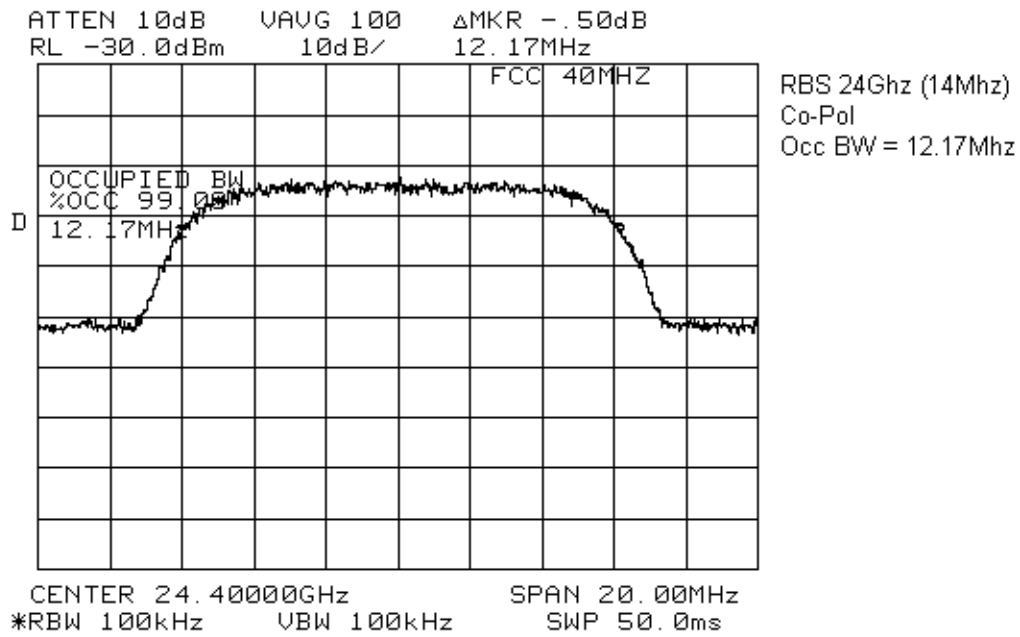

EQUIPMENT: RBS 24GHz CoPol Radio

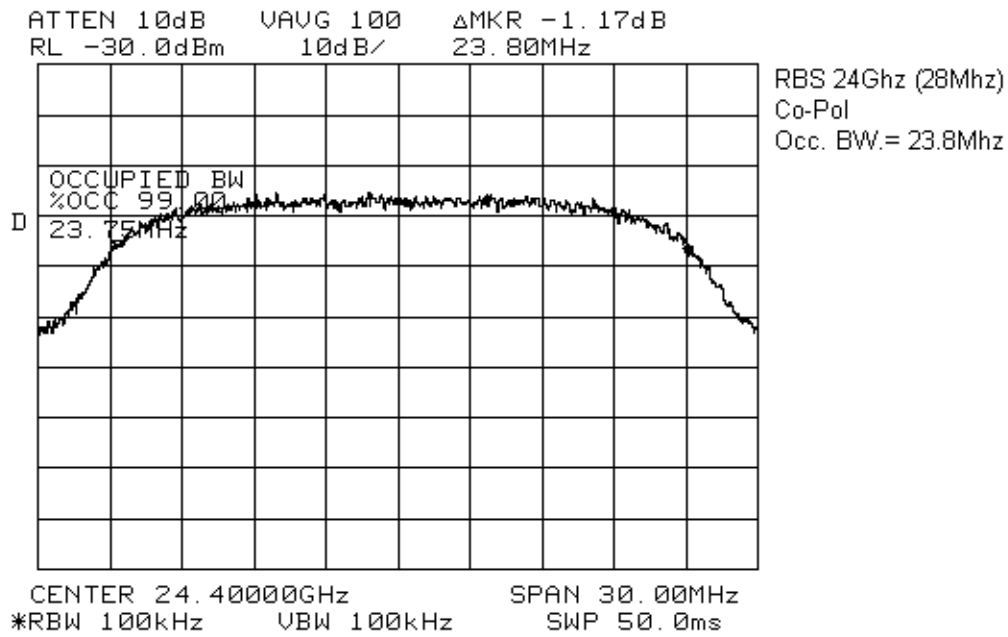


EQUIPMENT: RBS 24GHz CoPol Radio

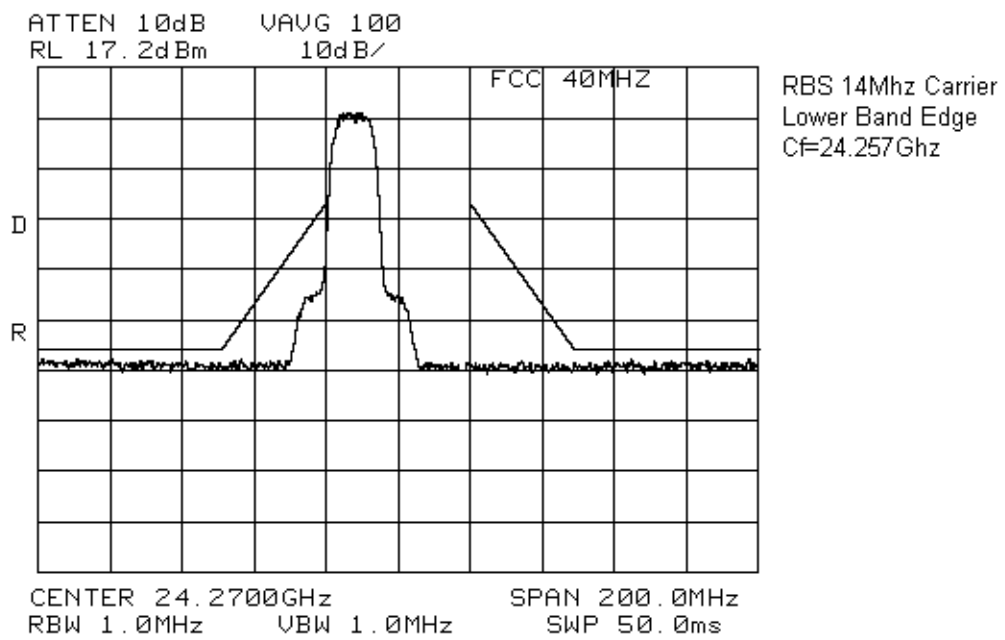


EQUIPMENT: RBS 24GHz CoPol Radio

*ATTEN 0dB VAVG 100
RL 17.2dBm 10dB/

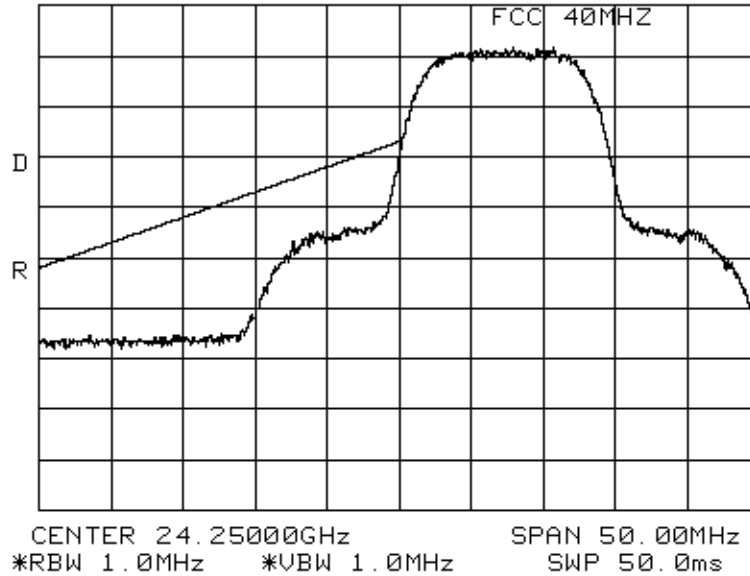


RBS 14Mhz Carrier
Lower Band Edge
Cf=24.257Ghz


EQUIPMENT: RBS 24GHz CoPol Radio

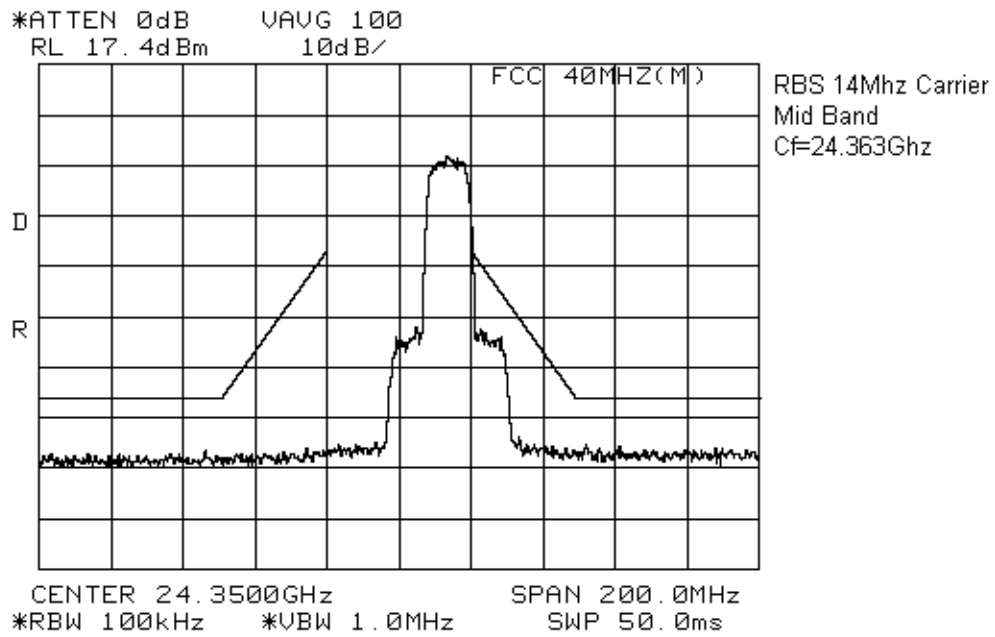


EQUIPMENT: RBS 24GHz CoPol Radio

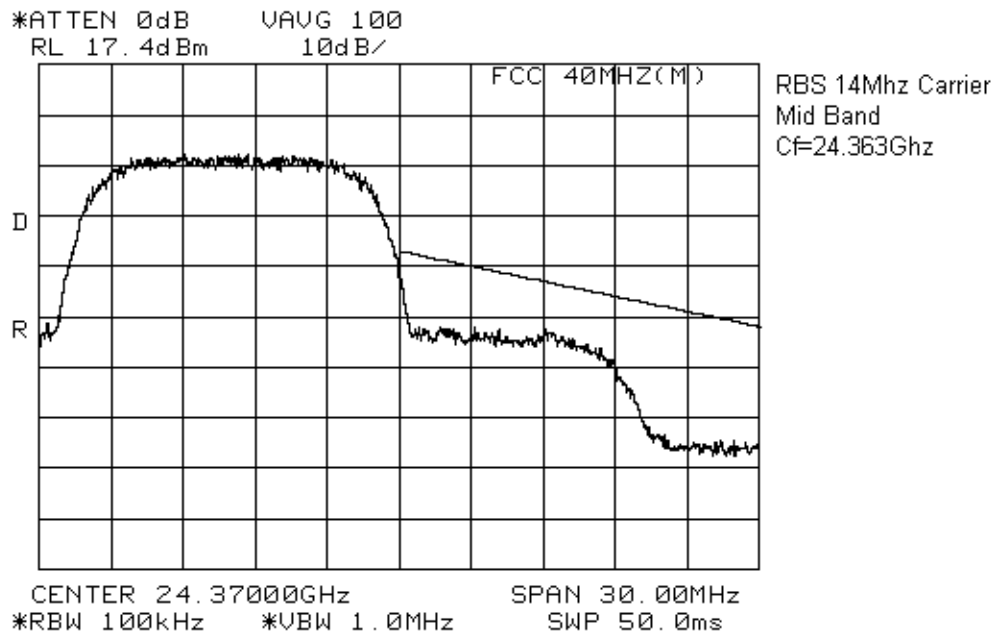


EQUIPMENT: RBS 24GHz CoPol Radio

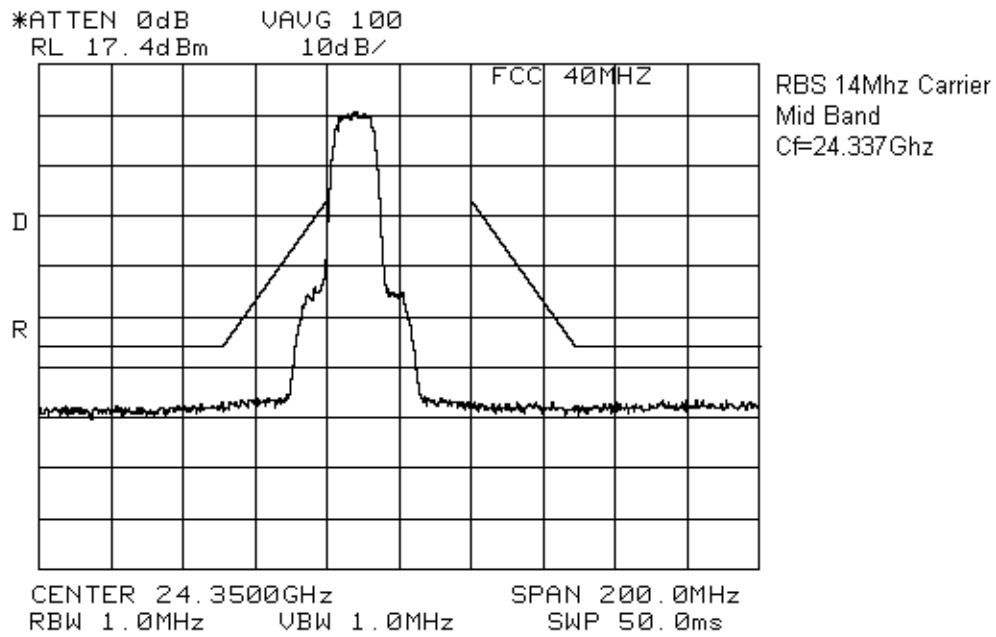


EQUIPMENT: RBS 24GHz CoPol Radio

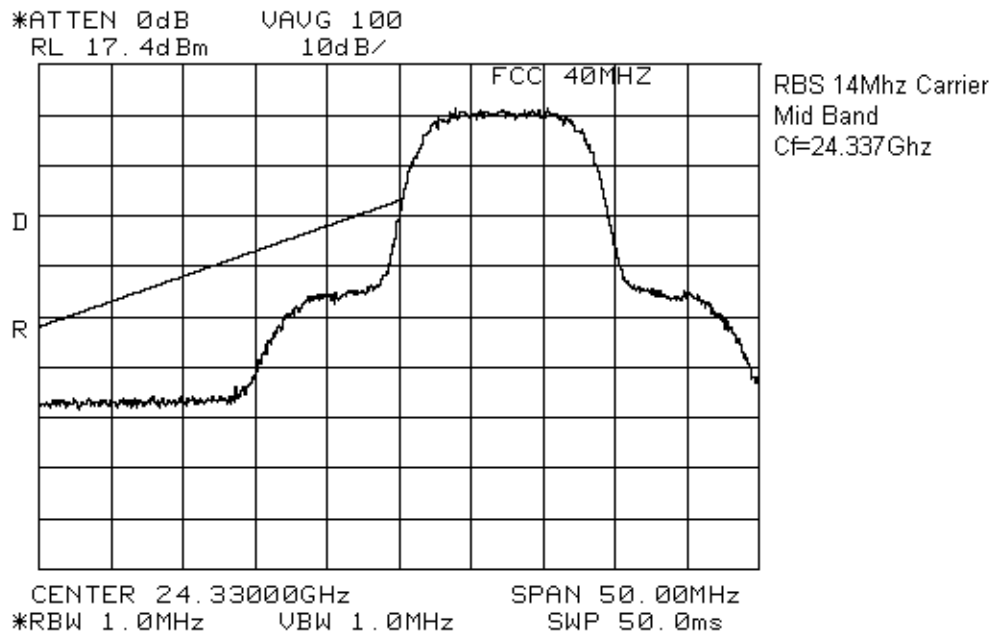


EQUIPMENT: RBS 24GHz CoPol Radio

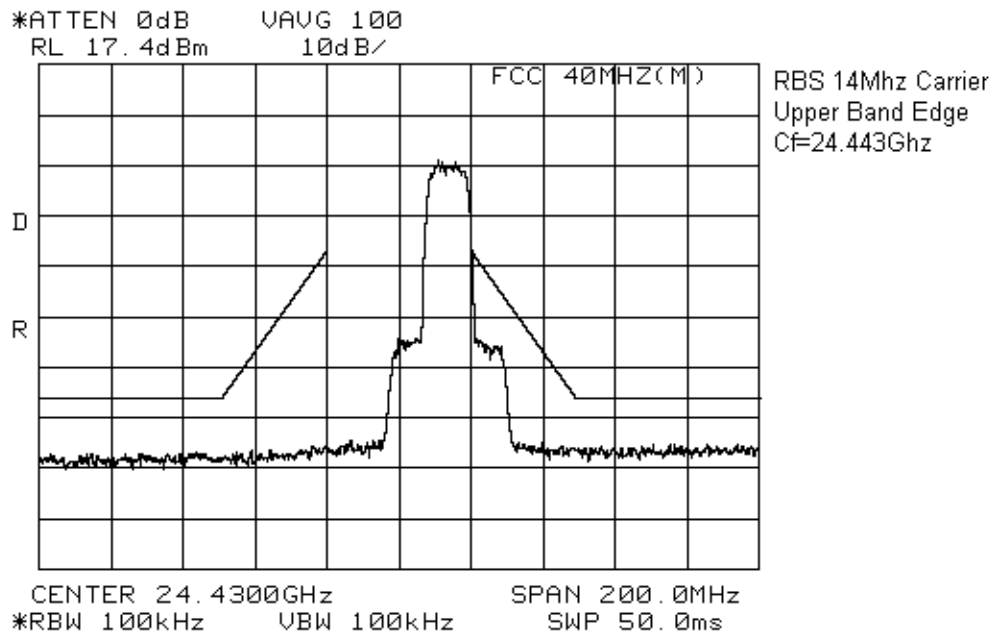


EQUIPMENT: RBS 24GHz CoPol Radio

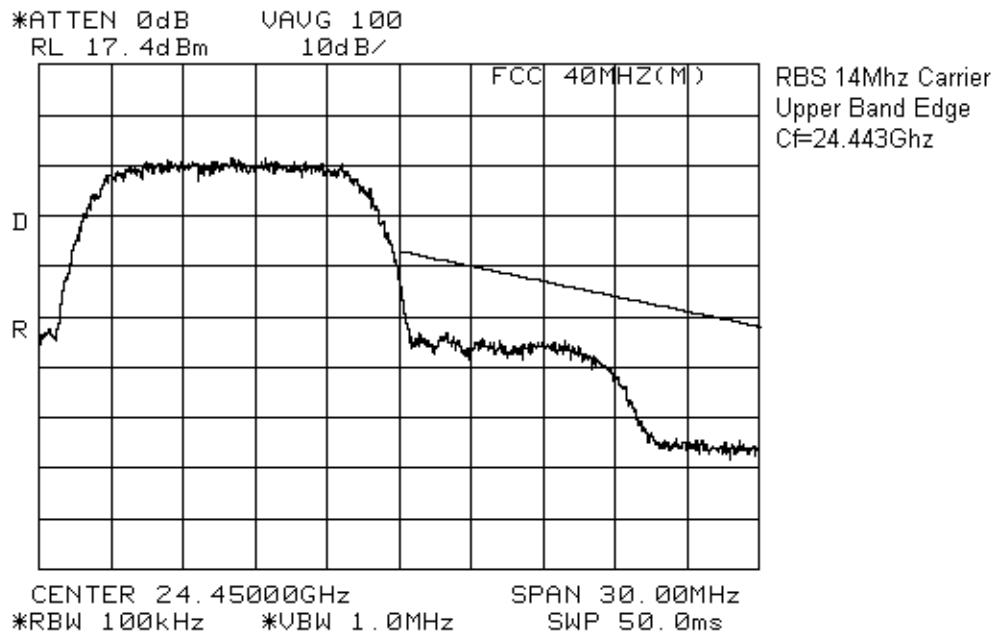


EQUIPMENT: RBS 24GHz CoPol Radio

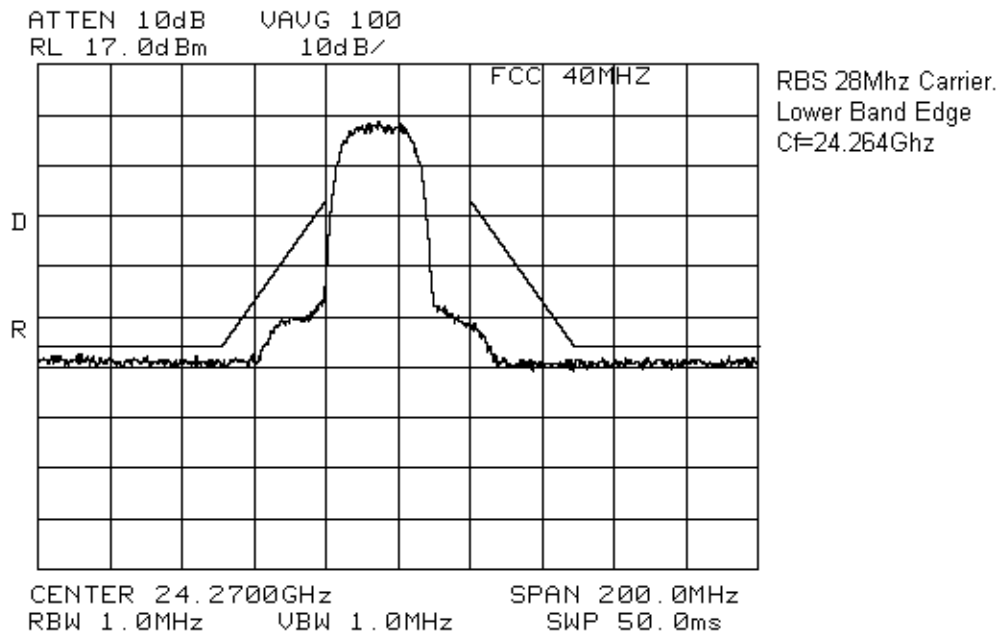


EQUIPMENT: RBS 24GHz CoPol Radio

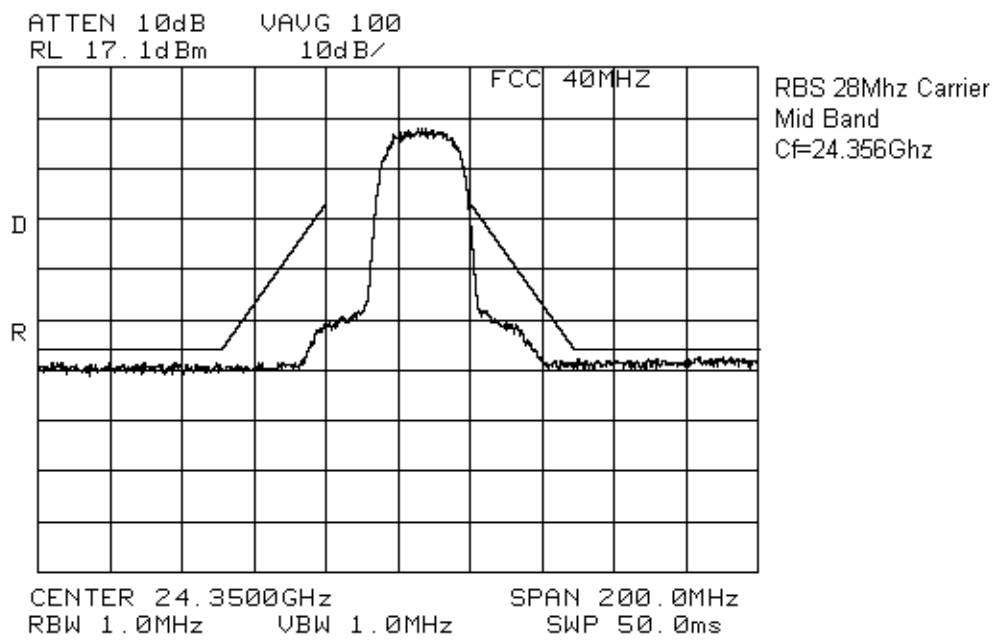


EQUIPMENT: RBS 24GHz CoPol Radio

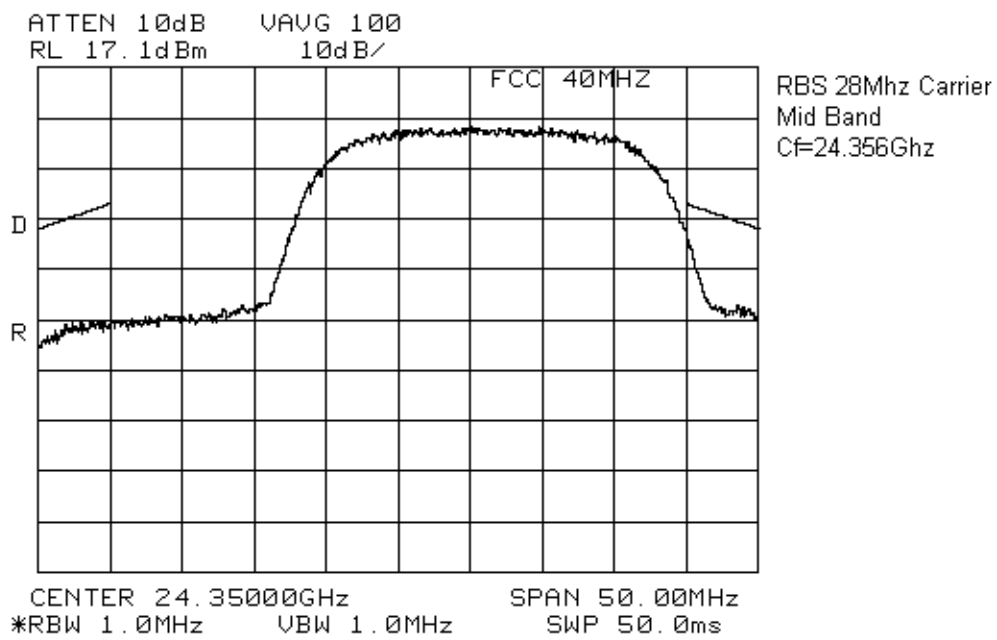


EQUIPMENT: RBS 24GHz CoPol Radio

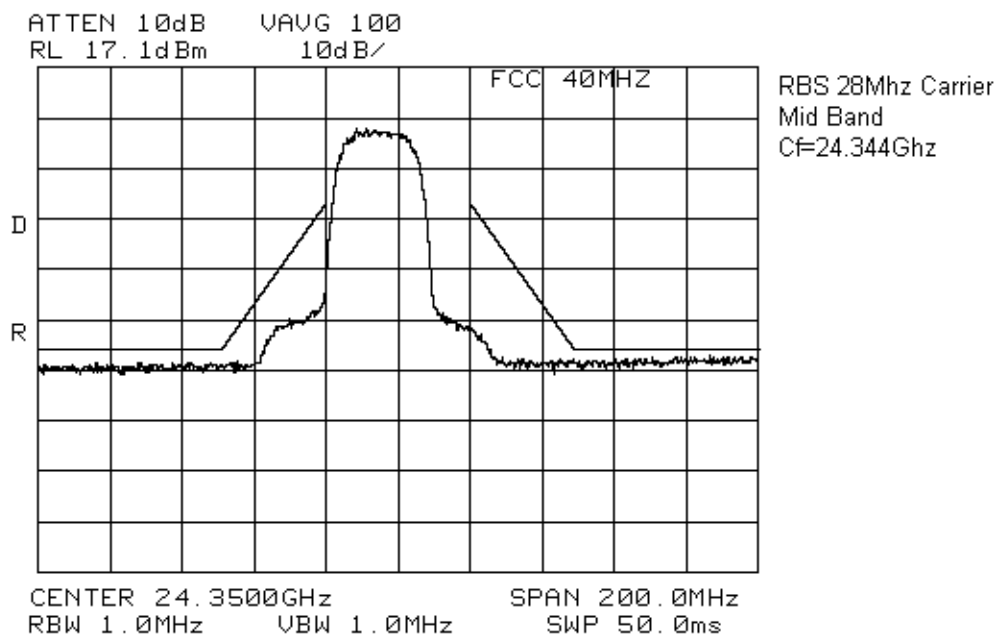

EQUIPMENT: RBS 24GHz CoPol Radio

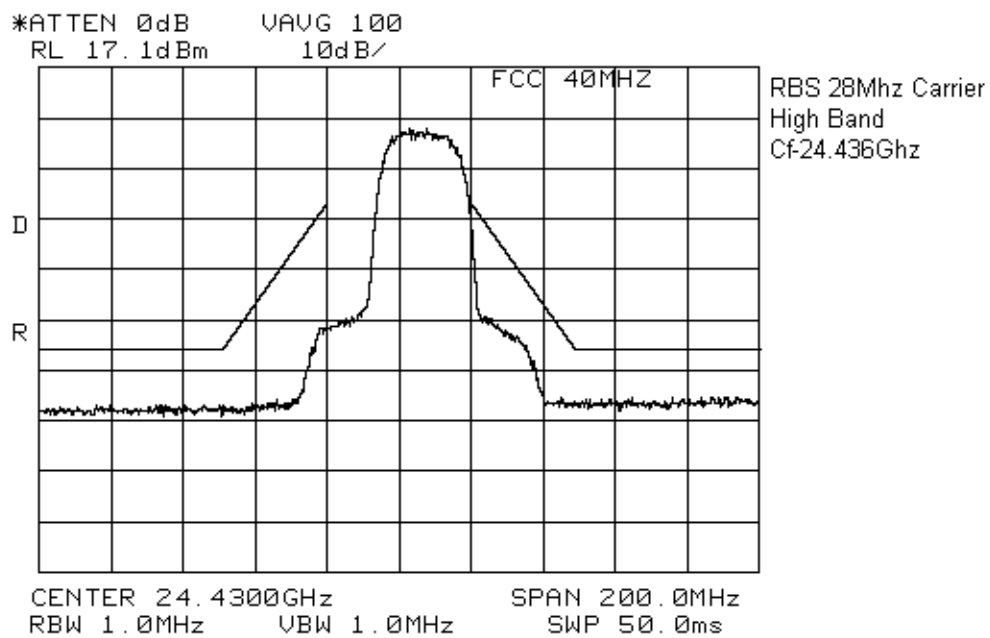

EQUIPMENT: RBS 24GHz CoPol Radio

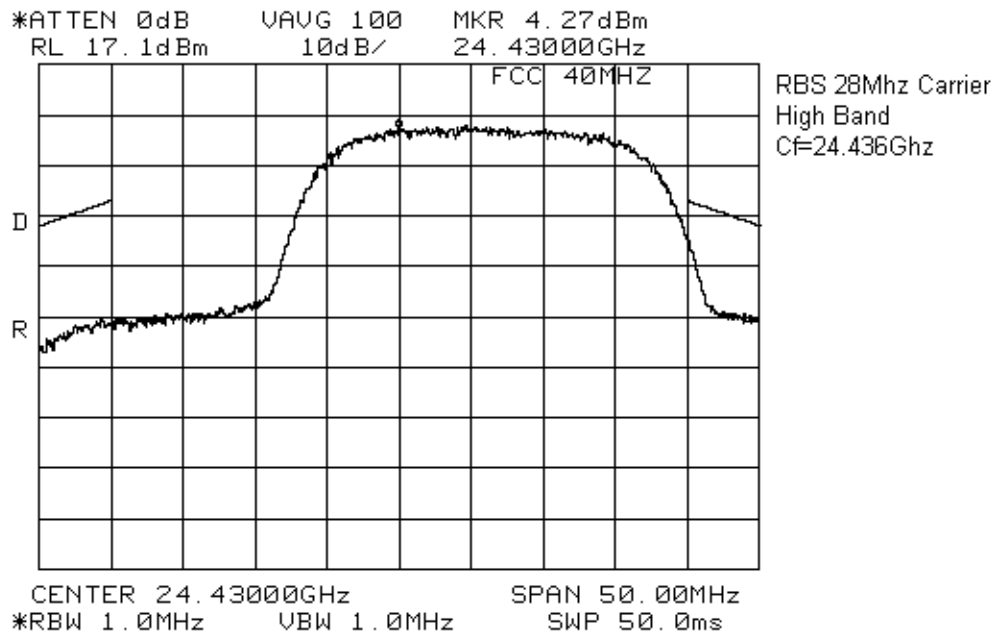

EQUIPMENT: RBS 24GHz CoPol Radio

Section 5. Spurious Emissions at Antenna Terminals

Para. No.: 2.1051

Test Performed By: Glen Westwell	Date of Test: April 9, 2001
---	------------------------------------


Minimum Standard: 101.111 (a)(2)(iii) –13dBm

Test Results: Complies.


No emissions were detected within 20dB of the specification limit.

Test Data: See attached graph(s).


EQUIPMENT: RBS 24GHz CoPol Radio

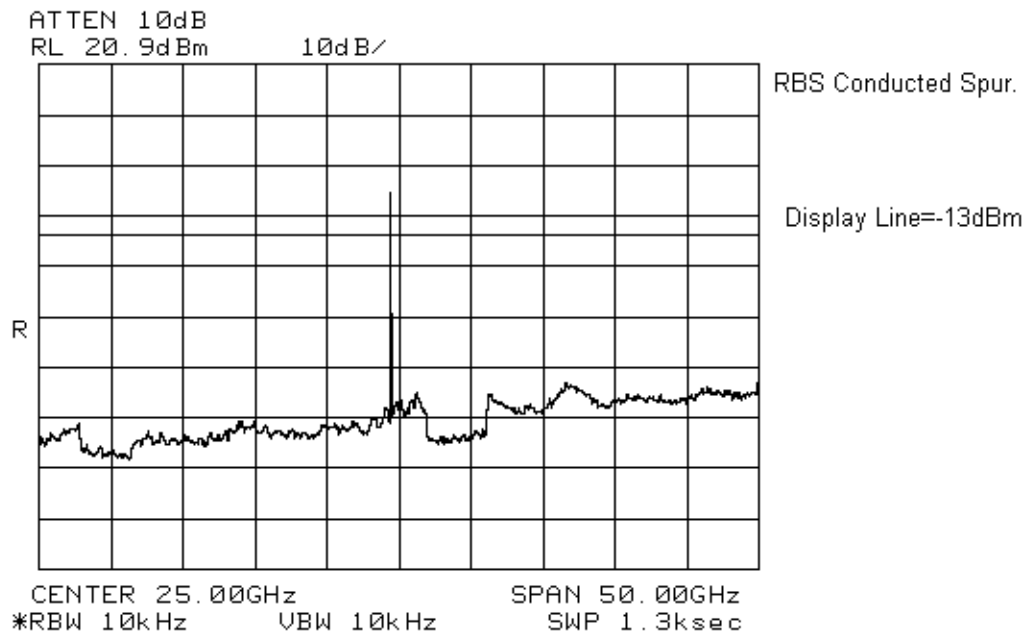

EQUIPMENT: RBS 24GHz CoPol Radio

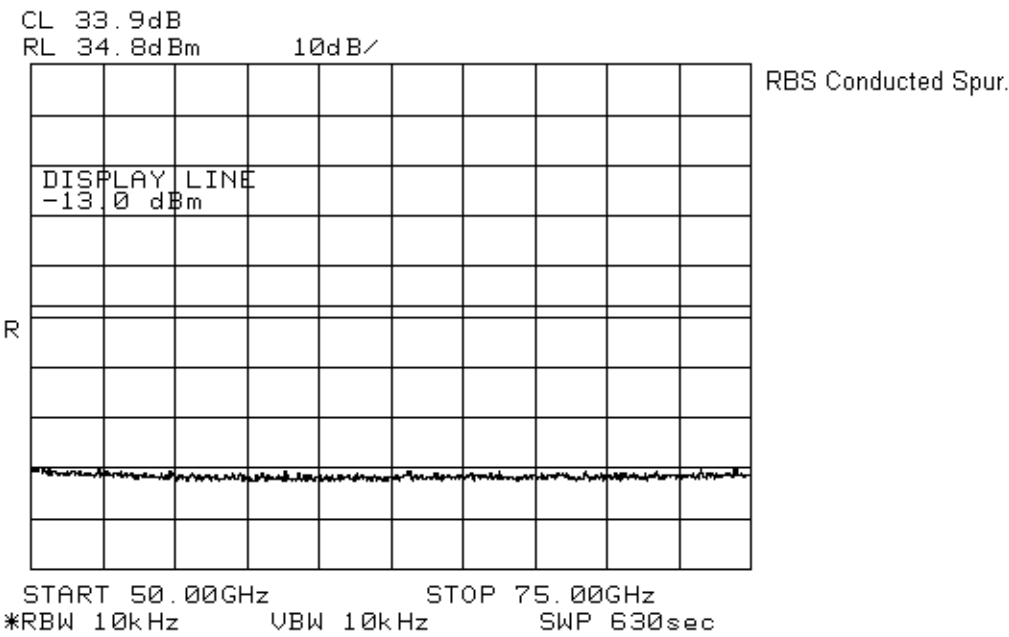

EQUIPMENT: RBS 24GHz CoPol Radio

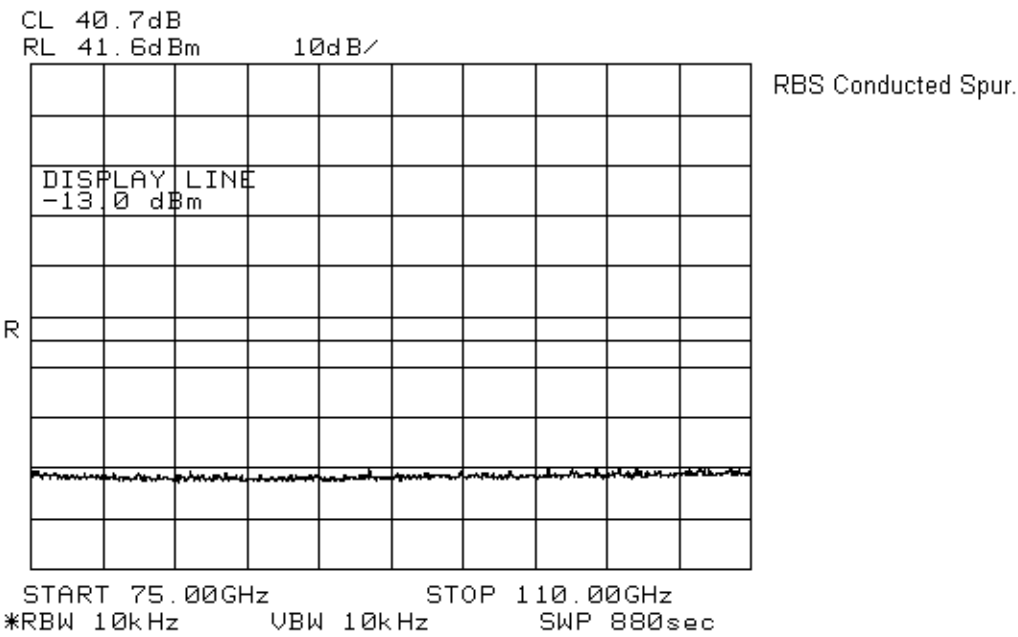

Section 6. Field Strength of Spurious Emissions

Para. No.: 2.1053

Test Performed By: Glen Westwell	Date of Test: April 9, 2001
---	------------------------------------

Minimum Standard: 101.111 (a)(2)(iii) -13dBm

84.4dB μ V/m@3m <1GHz

82.2dB μ V/m@3m >1GHz

Test Results: Complies.

No emissions were detected within 20dB of the specification limit.

Test Data: The spectrum was searched from 100MHz to 110GHz.

No emissions were detected.

Section 7. Frequency Stability

Para. No.: 2.1055

Test Performed By: Glen Westwell	Date of Test: April 3, 2001
---	------------------------------------

Minimum Standard: $\pm 0.03\%$ (7305kHz)

Test Results: Complies.

The maximum frequency drift is 180kHz.
This is 0.00074%.

Measurement Data: Standard Test Voltage: STV: -55Vdc
Standard Test Frequency: 24 350 000 kHz

Test Condition	Frequency (kHz)	Frequency Drift (kHz)
STV	24 349 913	87
115% STV	24 349 910	90
85% STV	24 349 910	90
-30 °C	24 350 153	153
-20 °C	24 350 140	140
-10 °C	24 350 090	90
0 °C	24 350 040	40
+10 °C	24 350 007	7
+30 °C	24 349 910	90
+40 °C	24 349 820	180
+50 °C	24 349 976	24

EQUIPMENT: RBS 24GHz CoPol Radio

Section 8. Test Equipment List

CAL CYCLE	EQUIPMENT	MANUFACTURER	MODEL	SERIAL	LAST CAL.	NEXT CAL.
1 Year	Spectrum Analyzer	Hewlett Packard	8565E	FA000981	June 16/00	June 16/01
1 Year	Climate Chamber	Thermotron	SM-16C	15649-S	COU	COU
1 Year	Horn Antenna	EMCO #2	3115	4336	COU	COU
1 Year	Power Meter	Hewlett Packard	E4418B	FA001413	Nov. 8/99	Jan. 8/02
3 Year	Harmonic Mixer	Hewlett Packard	50-75 GHz	FA001027	Mar. 9/00	Mar. 9/03
3 Year	Harmonic Mixer	Hewlett Packard	75-110 GHz	FA001302	Oct. 13/00	Oct. 13/01
3 Year	Diplexer	Olsen-OML	DPL.20(HP)	—	Mar. 15/00	Mar. 15/03
3 Year	Mixer Antenna 90-140 GHz	Olsen-OML	M05HWA(HP)	—	Mar. 15/00	Mar. 15/03

NA: Not Applicable
NCR: No Cal Required
COU: CAL On Use


EQUIPMENT: RBS 24GHz CoPol Radio

Annex A


Test Diagrams

EQUIPMENT: RBS 24GHz CoPol Radio


Para. No. 2.1046 - R.F. Power Output

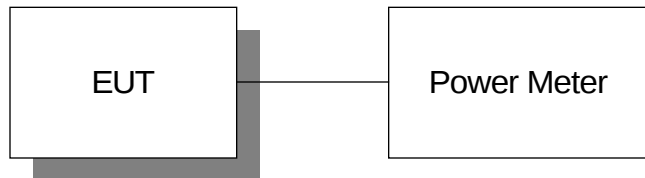


Para. No. 2.1049 - Occupied Bandwidth

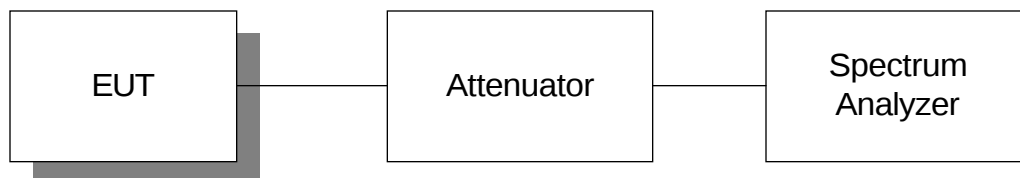

Para. No. 2.1051 - Spurious Emissions at Antenna Terminals

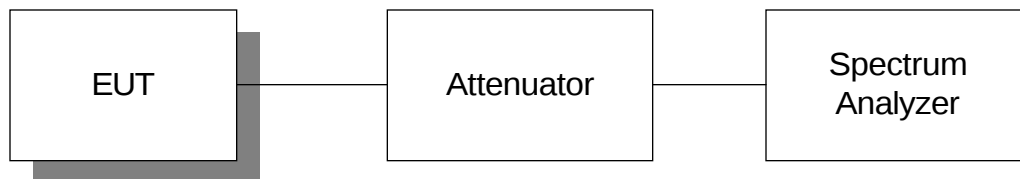

Para. No. 2.1053 - Field Strength of Spurious Radiation

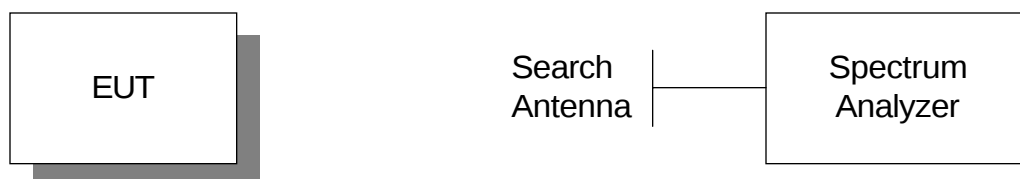

EQUIPMENT: RBS 24GHz CoPol Radio

Para. No. 2.1055 - Frequency Stability

