

EXHIBIT 4  
REPORT OF MEASUREMENTS  
2.1033 (b)(6)



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

## REPORT OF MEASUREMENTS

### GENERAL

Applicant: OPTEX CO., LTD

Device: 10.525 GHz Field Disturbance Sensor

Model: DX-40PLUS

Serial Number: N/A

FCC ID: FA77EW

Input Power Requirements: 9 to 18 VDC, 40 mA (12 VDC Nominal)

Rule Section: Part 15, Subpart C, Section 15.245

### TEST METHODS PERFORMED

- 15.245 (b) Radiated Emissions, Fundamental
- 15.245 (b)(1) Radiated Emissions, Harmonics
- 15.245 (b)(3) Radiated Emissions, Band Edges
- 15.245 (b)(3) Radiated Emissions, Spurious Emissions, 30 MHz to 52.625 GHz

### TEST RESULTS

- 15.245 (a) The device is an intentional radiator used as a field disturbance sensor.
- 15.245 (b) The device operates within the 10.500 to 10.550 GHz frequency band. The field strength of the fundamental emission did not exceed 2500 millivolts per meter, average.
- 15.245 (b)(1) The device does not produce harmonic emissions below 17.7 GHz.
- 15.245 (b)(1)(i) The device is intended to be used only within buildings and the field strength of harmonic emissions did not exceed 25.0 millivolts per meter.
- 15.245 (b)(2) All radiated emissions measurements were extrapolated to the specified 3 meter test distance.



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

15.245 (b)(3) The emissions radiated outside of the specified frequency band of 10.500 to 10.550 GHz did not exceed the general radiated emission limits of 15.209.

15.245 (b)(4) The requirements of 15.35 for averaging pulsed emissions and limiting peak emissions were met.

NOTES

15.31 (a)(b) All measurements were made in accordance with ANSI C63.4:1992.

15.31 (c) The device does not use swept frequency techniques.

15.31 (d) All testing was performed on Retlif Testing Laboratories Ronkonkoma, NY test site which has been listed with the FCC.

15.31 (e) Variation of the radiated signal level of the fundamental frequency component was performed with the supply voltage varied between 85 and 115% of nominal (12 VDC). This was also performed at 85% of the minimum and 115% of the maximum rated input voltage range.

15.31 (f)(1) Where testing was performed at distances other than the specified test distance, the obtained readings were extrapolated to the specified test distance using an inverse linear-distance extrapolation factor (20 dB / decade) for measurements between 30 MHz and 40 GHz. For measurements at frequencies above 40 GHz, an inverse linear-distance squared factor ( 40 dB / decade) was utilized.

15.31 (f)(5) The device was rotated 360° in order to maximize the radiated emissions. The maximum field strength observed has been reported.

15.31 (g) All consumer accessible controls were adjusted in order to maximize emissions (MW Range Control).  
A one meter length of unshielded twisted pair wire was connected to each of the relay and tamper outputs.

15.31 (m) The device operates at a single frequency of 10.525 GHz.

15.31 (o) All emissions within 20 dB of the specified limits have been reported unless otherwise stated.

15.33 (a)(2) The device operates above 10 and below 30 GHz at a frequency of 10.525 GHz. Therefore radiated emissions measurements were made from 30 MHz to 52.625 GHz, the fifth harmonic.



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

### DUTY CYCLE

Forty microsecond (40  $\mu$ Sec) pulses are applied to SD1 at a repetition rate of 1kHz. This yields a duty cycle of 4%, 40  $\mu$ Sec divided by 1 mSec. This duty cycle was applied to the obtained peak readings in order to determine the average value of the emissions.

### TEST DISTANCES

In order to obtain adequate system sensitivity at the harmonic frequencies of interest, it was necessary to perform certain measurements at a distance less than 3 meters. Care was taken to ensure that all measurements were taken in the far field region. The antenna was determined to be in the far field IFF:

$$d \geq 2 D^2 / \lambda$$

Where:  $d$  = Test Distance

$D$  = Largest Antenna Length

$\lambda$  = Wavelength at the Frequency of Interest

Solving for  $d$  yields the minimum test distances shown in the table below. Also shown is the actual test distance utilized.

Frequency GHz	Minimum Test Distance Meters	Actual Test Distance Meters
10.525	2.7	3
21.050	1.5	2
31.575	1.0	1
42.100	0.5	1
52.625	0.7	1



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

## SPECTRUM ANALYZER DESENSITIZATION CONSIDERATIONS

Due to the nature of the emissions being measured, care was taken to ensure that the resolution bandwidth of the spectrum analyzer was adequate to provide accurate peak field strength measurements. The following formula was utilized:

$$\text{Pulse Desensitization } (\delta) = 20 \log (\text{Pulsewidth} * \text{bandwidth} * 1.5)$$

Setting the above equal to zero and utilizing the 40 microsecond pulse width yields a minimum required bandwidth of 33.3 kHz. The 1 MHz bandwidth specified in ANSI C63.4 was utilized for all fundamental and harmonic measurements.



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

TEST DATA  
RADIATED EMISSIONS, FUNDAMENTAL  
15.245 (b)



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor

FCC ID: FA77EW

APPLICANT: OPTEX CO., LTD

TEST METHOD: Radiated Emissions, Fundamental

SPECIFICATION: FCC Part 15, Section 15.245 (b)

PERFORMED BY: D. Cortes

DATE: 4/14/98

### Field Strength of Fundamental

Frequency GHz	Antenna Position H / V	EUT Orientation X / Y/ Z	Meter Reading dBuV	Antenna Factor +dB	Corrected Reading dBuV/m		Converted Reading mV/m	Limit at 3 Meters mV/m
10.525	H	X	100.6	6.1	106.7		216.3	2,500
	V	X	84.9	6.1	91.0		35.5	2,500
	H	Y	88.3	6.1	94.4		52.5	2,500
	V	Y	100.2	6.1	106.3		206.5	2,500
	H	Z	85.7	6.1	91.8		38.9	2,500
	V	Z	87.5	6.1	93.6		47.9	2,500

Detector Function: Peak  
Test Distance: 3 Meters  
Resolution Bandwidth: 1 MHz  
Video Bandwidth: 3 MHz



Retlif Testing Laboratories

Test Report Number R-7488  
FCC ID: FA77EW

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor

FCC ID: FA77EW

APPLICANT: OPTEX CO., LTD

TEST METHOD: Radiated Emissions, Fundamental, Input Voltage Variation

SPECIFICATION: FCC Part 15, Section 15.245 (b), 15.31(e)

PERFORMED BY: D. Cortes

DATE: 4/14/98

### Input Voltage Variation

Frequency GHz	Test Voltage % Nominal	Test Voltage VDC	Meter Reading dBuV	Antenna Factor +dB	Corrected Reading dBuV/m		Converted Reading mV/m	Limit at 3 Meters mV/m
10.525	85% (Vmin)	7.65	100.6	6.1	106.7		216.3	2,500
	100% (Vnom)	12.0	100.6	6.1	106.7		216.3	2,500
	115% (Vmax)	20.7	100.9	6.1	107		223.9	2,500

Detector Function: Peak  
Test Distance: 3 Meters  
Resolution Bandwidth: 1 MHz  
Video Bandwidth: 3 MHz



Retlif Testing Laboratories

Test Report Number R-7488  
FCC ID: FA77EW

TEST DATA  
RADIATED EMISSIONS, HARMONICS  
15.245 (b)(1)



**Retlif Testing Laboratories**  
Test Report Number R-7488  
FCC ID: FA77EW

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor

FCC ID: FA77EW

APPLICANT: OPTEX CO., LTD

TEST METHOD: Radiated Emissions, Harmonics

SPECIFICATION: FCC Part 15, Section 15.245 (b)(1)

PERFORMED BY: D. Cortes

DATE: 4/14/98

Field Strength of Harmonics - Peak

Frequency GHz	Antenna Position & Distance H / V	EUT Orientation X / Y / Z	Meter Reading dBuV	Antenna Factor +dB	Test Distance Correction -dB	Corrected Reading dBuV/m	Converted Reading mV/m	Peak Limit at 3 Meters mV/m
21.050	H - 2	X	47.9	32.5	3.5	76.9	7.0	250.000
	V - 2	X	48.6	32.5	3.5	77.6	7.6	250.000
	H - 2	Y	51.3	32.5	3.5	80.3	10.4	250.000
	V - 2	Y	48.6	32.5	3.5	77.6	7.6	250.000
	H - 2	Z	44.8	32.5	3.5	73.8	4.9	250.000
	V - 2	Z	48.1	32.5	3.5	77.1	7.2	250.000
31.575	H - 1	X	46.7	36.1	9.5	73.3	4.6	250.000
	V - 1	X	52.4	36.1	9.5	79.0	8.9	250.000
	H - 1	Y	51.7	36.1	9.5	78.3	8.2	250.000
	V - 1	Y	49.3	36.1	9.5	75.9	6.2	250.000
	H - 1	Z	44.5	36.1	9.5	71.1	3.6	250.000
	V - 1	Z	41.1	36.1	9.5	67.7	2.4	250.000
42.100	H - 1	X	42.4	39.9	19.1	63.2	1.4	250.000



Retlif Testing Laboratories

Test Report Number R-7488  
FCC ID: FA77EW

	V - 1	X	41.8	39.9	19.1	62.6	1.3	250.000
	H - 1	Y	42.0	39.9	19.1	62.8	1.4	250.000
	V - 1	Y	43.0	39.9	19.1	63.8	1.5	250.000
	H - 1	Z	40.0	39.9	19.1	60.8	1.1	250.000
	V - 1	Z	40.1	39.9	19.1	60.9	1.1	250.000
52.625	H - 1	X	42.2	41.1	19.1	64.2	1.6	250.000
	V - 1	X	44.2	41.1	19.1	66.2	2.0	250.000
	H - 1	Y	43.1	41.1	19.1	65.1	1.8	250.000
	V - 1	Y	45.0	41.1	19.1	67.0	2.2	250.000
	H - 1	Z	41.5	41.1	19.1	63.5	1.5	250.000
	V - 1	Z	41.5	41.1	19.1	63.5	1.5	250.000

\* Denotes Minimum Sensitivity of Measurement System.

#### Field Strength of Harmonics - Average

Frequency GHz	Antenna Position H / V	EUT Orientation X / Y/ Z	Peak Reading uV/m	Duty Cycle %		Average Reading uV/m	Limit at 3 Meters uV/m
21.050	H - 2	X	6998	4.0		279.9	25,000
	V - 2	X	7586	4.0		303.4	25,000
	H - 2	Y	10351	4.0		414.0	25,000
	V - 2	Y	7586	4.0		303.4	25,000
	H - 2	Z	4898	4.0		195.9	25,000
	V - 2	Z	7161	4.0		286.4	25,000



Retlif Testing Laboratories

Test Report Number R-7488  
FCC ID: FA77EW

31.575	H - 1	X	4623	4.0		184.9	25,000
	V - 1	X	8912	4.0		356.5	25,000
	H - 1	Y	8222	4.0		328.9	25,000
	V - 1	Y	6237	4.0		249.5	25,000
	H - 1	Z	3589	4.0		143.6	25,000
	V - 1	Z	2427	4.0		97.1	25,000
42.100	H - 1	X	1445	4.0		57.8	25,000
	V - 1	X	1349	4.0		54.0	25,000
	H - 1	Y	1380	4.0		55.2	25,000
	V - 1	Y	1549	4.0		62.0	25,000
	H - 1	Z	1096	4.0		43.8	25,000
	V - 1	Z	1109	4.0		44.4	25,000
52.625	H - 1	X	1622	4.0		64.9	25,000
	V - 1	X	2042	4.0		81.7	25,000
	H - 1	Y	1799	4.0		72.0	25,000
	V - 1	Y	2239	4.0		89.6	25,000
	H - 1	Z	1496	4.0		59.8	25,000
	V - 1	Z	1496	4.0		59.8	25,000

Detector Function:

Peak / Duty Cycle Applied to Obtain Average Levels

Test Distance:

As Specified for each frequency

Resolution Bandwidth:

1 MHz

Video Bandwidth:

3 MHz



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

TEST DATA  
RADIATED EMISSIONS, BAND EDGES  
15.245 (b)(3)



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor

FCC ID: FA77EW

APPLICANT: OPTEX CO., LTD

TEST METHOD: Radiated Emissions, Band Edges

SPECIFICATION: FCC Part 15, Section 15.245 (b)(3)

PERFORMED BY: D. Cortes

DATE: 4/14/98

The emissions at the band edges (10.500 and 10.550 GHz) were attenuated 50 dB below the level of the fundamental. See attached plot.




**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

R-7488 DX-40 OCC BW 4/13/98 DC  
REF 101.2 dBµV ATTEM 10 dB

10 dB/  
HP

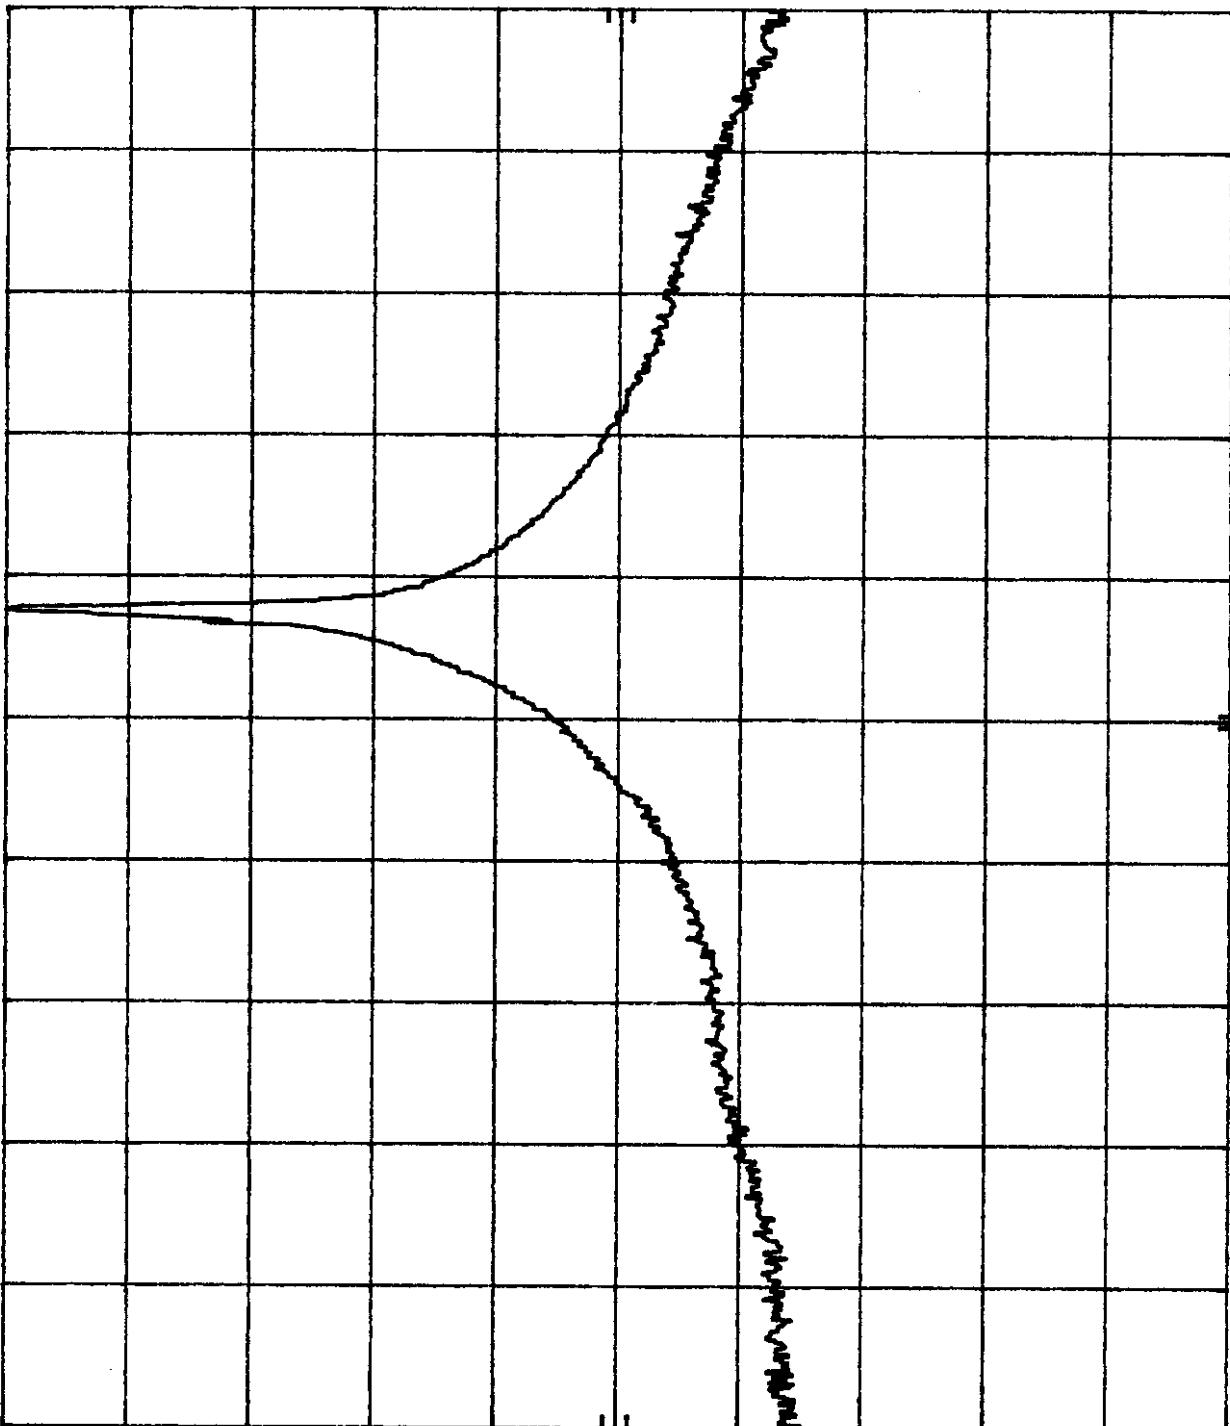

START 10.500 0 GHz  
RES BW 100 kHz VBW 300 kHz  
STOP 10.550 0 GHz  
SWP 20.0 msec

Customer:	Optex CO., LTD.
Test Sample:	Field Disturbance Sensor
Model No.:	DX-40 FCC ID: FA77EW
Test Method:	FCC 15.245 Occupied Bandwidth
Notes:	Emissions > 50 dB from Modulated Carrier at Band Edges

Date: April 13, 1998

Tech: Dennis Cortes

Sheet 1 of 1



Retlif Testing Laboratories

Report No. R-7488

TEST DATA  
RADIATED EMISSIONS, SPURIOUS  
15.245 (b)(3)



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

TEST SAMPLE: 10.525 GHz Field Disturbance Sensor

FCC ID: FA77EW

APPLICANT: OPTEX CO., LTD

TEST METHOD: Spurious Emissions, 30 MHZ to 52.625 GHz

SPECIFICATION: FCC Part 15, Section 15.245 (b)(3)

PERFORMED BY: T. Schneider

DATE: 4/15/98

Frequency GHz	Antenna Distance Meters		Meter Reading dBuV	Antenna Factor +dB	Test Distance Correction -dB	Corrected Reading dBuV/m	Converted Reading uV/m	Limit at 3 Meters uV/m
0.030	3		-					100 QP
0.088	3		-					100 / 150
0.216	3		-					150 / 200
0.960	3		-					200 / 500
1.0	3		-					500
1.0	1		-					5000 Pk 500 Ave
52.625	1		-					5000 Pk 500 Ave

The frequency range was scanned from 30 MHZ to 52.625 GHz. No spurious emissions were observed within 20 dB of the specified limit in the 30 MHZ to 40 GHz range. No spurious emissions were observed within 10 dB of the specified limit above 40 GHz.

For F < 1 GHz

Resolution Bandwidth:

100 kHz

Video Bandwidth:

300 kHz

Detector:

Quasi-Peak

For F > 1 GHz

1 MHz

3 MHz

Peak / Average



Retlif Testing Laboratories

Test Report Number R-7488  
FCC ID: FA77EW

## TEST EQUIPMENT LISTING



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

## EQUIPMENT LIST

### FCC 15.245 Radiated Emissions

EN	Type	Manufacturer	Frequency Range	Model No.	Cal Date	Due Date
067	Open Area Test Site	Retlif	3 Meter	RNY	8/30/97	8/30/99
128C	Double Ridge Guide	Eaton Corporation	1 GHz - 18 GHz	96001	10/6/97	10/6/98
129E	High Gain Horn Antenna	Microlab/FXR	18 GHz - 26.5 GHz	K638A	10/13/97	10/13/98
129H	High Gain Horn Antenna	Microlab/FXR	26.5 GHz - 40 GHz	U638A	10/13/97	10/13/98
133	Broadband Pre-Amplifier	Electro-Metrics	10 kHz - 1 GHz, 26dB	BPA-1000	6/20/97	6/20/98
141	Spectrum Analyzer	Hewlett Packard	100 Hz - 40 GHz	8566B	3/2/98	9/2/98
141A	Graphics Plotter	Hewlett Packard	N/A	7470A	3/4/98	3/4/99
141B	Quasi-Peak Adaptor	Hewlett Packard	100 Hz - 1 GHz	85650A	3/3/98	9/3/98
206B	6.0 dB Attenuator	Texscan	0 - 1.0 GHz	FP-50 - 6 dB	6/20/97	6/20/98
420	Amplifier	Hewlett Packard	2.0 GHz - 18 GHz	11975A	7/3/97	7/3/98
421A	Harmonic Mixer	Hewlett Packard	26.5 GHz - 40 GHz	11970A	1/5/96	1/5/99
421B	Harmonic Mixer	Hewlett Packard	40 GHz - 60 GHz	11970U	3/12/96	3/12/99
523	Biconilog	Electro-Mechanics	26 MHz - 1100 MHz	3143	9/30/97	9/30/98
543	Preamplifier	Hewlett Packard	1.0 GHz - 26.5 GHz	8449B	8/12/97	8/12/98



**Retlif Testing Laboratories**

Test Report Number R-7488  
FCC ID: FA77EW

EXHIBIT 5  
EQUIPMENT PHOTOGRAPHS AND FCC ID LABEL  
2.1033 (b)(7)



**Retlif Testing Laboratories**  
Test Report Number R-7488  
FCC ID: FA77EW