



CHEER ELECTRONICS CORPORATION

彩樂電子股份有限公司 公司：台北市永吉路 186 號

NO. 186, YUNG CHI ROAD, TAIPEI, TAIWAN, R. O. C. TEL:886-2-7474955(30LINES) FAX:886-2-7474945 7680639

NCV.07, 1997

Federal Communications Commission  
Authorization and Evaluation Division  
Equipment Authorization Branch  
7435 Oakland Mills Road  
Columbia, MD 21046

IN

Ref: FCC ID#:FBB-C5D

APR 14 1998

It is acknowledged by CHEER ELECTRONICS CORPORATION that the modification list below will be installed to our Model:CSD in order to comply with FCC Rules for a Class B Computing device. These modifications will be incorporated into each unit sold under the FCC ID:FBB-C5D

MOD#1. ADD A RING CORE TO GROUND LINE OF POWER CORD WITH THREE TURNS.

MOD#2. CONNECT GROUND WIRE FROM CRT LUG TO VIDEO BOARD BRACKET RIGHT-HAND AND LEFT-HAND SIDE.

MOD#3. CONNECT GROUND WIRE FROM METAL CHASSIS TO VIDEO BOARD BRACKET RIGHT-HAND AND LEFT-HAND SIDE.

MOD#4. ADD A GROUND WIRE FROM SIGNAL CABLE BRAID TO METAL CHASSIS.

MOD#5. CONNECT TWO GROUND WIRE FROM MAIN PCB GROUND TO METAL CHASSIS  
RIGHT-HAND AND LEFT-HAND SIDE.

We understand that changes may be made to the product if the product is re-tested and Class I or Class II permissive change (as applicable) is applied for. We understand that the equipment Grant Authorization must be issued before we can market our product.

Sincerely Yours,

4/14/98

-----  
CHEER ELECTRONICS CORPORATION  
MR. WILLIAM LEE/ASSISTANT VICE PRESIDENT

## TABLE OF CONTENTS

## PAGE

1. VERIFICATION OF COMPLIANCE.....	1
2. PRODUCT DESCRIPTION.....	2
3. TESTED SYSTEM DETAILS.....	2
4. TEST FACILITY.....	3
5. ACCREDITATION AND LISTING.....	3
6. MEASUREMENT INSTRUMENTATION.....	3
7. MEASURING INSTRUMENT CALIBRATION.....	4
8. UNITS OF MEASUREMENT.....	4
9. ANTENNAS.....	5
10. CLASSIFICATION OF DIGITAL DEVICE.....	5
11. RADIATED EMISSION LIMITS.....	5
12. CONDUCTED EMISSION LIMITS.....	6
13. CONDUCTED EMISSION TEST PROCEDURE.....	7
14. RADIATED EMISSION TEST PROCEDURE.....	7
15. AMBIENT CONDITIONS.....	8
16. SYSTEM TEST CONFIGURATION.....	8
17. EQUIPMENT MODIFICATIONS.....	9
18. EUT SETUP PHOTOS.....	10
19. TEST EQUIPMENT LIST.....	12
20. CORRECTION FACTOR.....	13
21. TEST RESULT SUMMARY.....	14
APPENDICES .....	16
EXTERNAL I/O CABLE CONSTRUCTION DESCRIPTION	
CONFIGURATION BLOCK DIAGRAM	
CONDUCTED EMISSION PLOT	
RADIATED EMISSION DATA	
EUT PHOTOGRAPHS	

## 1. VERIFICATION OF COMPLIANCE



COMPANY NAME: CHEER ELECTRONICS CORP.  
NO. 186, YUNG CHI ROAD,  
TAIPEI, TAIWAN, R. O. C.

CONTACT PERSON: WILLIAM LEE / ASSISTANT VICE PRESIDENT

TELEPHONE NO: (02) 2747-4955

MODEL NO/NAME: C5D

SERIAL NO: N/A

DATE TESTED: APRIL 01, 1998

TYPE OF EQUIPMENT:	INFORMATION TECHNOLOGY EQUIPMENT (ITE)	
MEASUREMENT DISTANCE:	( ) 3 METER	(X) 10 METER
TECHNICAL LIMIT:	CLASS B	
FCC RULES:	PART 15	
MEASUREMENT PROCEDURE	ANSI C63.4:92 / EN55022	
EQUIPMENT AUTHORIZATION PROCEDURE	CERTIFICATION	
MODIFICATION MADE ON EUT	<input checked="" type="checkbox"/> YES	<input type="checkbox"/> NO
DEVIATIONS FROM MEASUREMENT PROCEDURE	<input type="checkbox"/> YES (refer to section 21 for comments) <input checked="" type="checkbox"/> NO	
RADIATED EMISSION TEST RESULT	-2.6 dB @ 51.92 MHz/ VERTICAL	
CONDUCTED EMISSION TEST RESULT	-10.7 dB @ 12.995 MHz/ L1	

The above equipment was tested by Compliance Engineering Services, Inc. for compliance with the requirements set forth in the FCC CFR 47, PART 15. The results of testing in this report apply to the product/system which was tested only. Other similar equipment will not necessarily produce the same results due to production tolerance and measurement uncertainties.

Approved By

MIKE C.I. KUO / VICE PRESIDENT  
COMPLIANCE ENGINEERING SERVICES

Acknowledged By

WILLIAM LEE / ASSISTANT VICE PRESIDENT  
CHEER ELECTRONICS CORP.

## 2. PRODUCT DESCRIPTION

CHASSIS TYPE	PLASTIC
LIST OF EACH OSC. OR XTAL. FREQ. (FREQ.>=1 MHz)	X701= 8 MHz
CHIPSET BRAND AND PART NO.	VIDEO BOARD:PHILIPPINES, 9712FS MAIN BOARD: MYSON, MTV012N-OTP
NUMBER OF PCB LAYERS	1 LAYER
BOARD REVISION NO.	VIDEO BOARD: REV= 2 MAIN BOARD: REV= 1
POWER REQUIREMENTS	90~260 V AC, 50/60 Hz
POWER SUPPLY/NAME/MODEL/S.N.	BUILT-IN
NO. OF EXTERNAL I/O CONNECTORS	1
MAX. RESOLUTION	1024 X 768 NON-INTERLACED
MAX. HOR/VERT FREQUENCY(KHz/Hz)	54 KHz/ 120 Hz

## 3. TESTED SYSTEM DETAILS

The Model names for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

## Host Computer

Device Type	Manufacturer	Model Number	Serial Number	FCC ID / DoC
HOST COMPUTER	VIVA	VIVA586-133	HS-05	DOC
HARD DRIVE	Maxtor	71336AP	HD-05	N/A
FLOPPY DRIVE	Panasonic	JU-257A606P	FD-05	N/A
VGA CARD	TNC	TRUESPEED S3_968 PCI	CV24	JDF-968PCI-001
I/O CARD	BUILT-IN	N/A	N/A	N/A

## External Peripheral Devices

Device Type	Manufacturer	Model Number	Serial No.	FCC ID / DoC
MONITOR (EUT)	CHEER	C5D	N/A	FBB-C5D
KEYBOARD	Acer	6311-TW	KB-13	JVPKBS-WIN
MODEM	DISCOVERY	2496CF	MD-04	I972496AF
PRINTER	MATSUSHITA	KX-P1080i	PRN-01	ACJ5Z6KX-P1080I

**4. TEST FACILITY**

The open area test sites and conducted measurement facilities used to collect the radiated data are located at No. 199, Chung Sheng Road, Hsin Tien City, Taipei, Taiwan R.O.C. The sites are constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22.

**5. ACCREDITATION AND LISTING**

The test facilities used to perform radiated and conducted emissions tests are accredited by National Voluntary Laboratory Accreditation Program for the specific scope of accreditation under Lab Code:200064-0 to perform Electromagnetic Interference tests according to FCC PART 15 AND CISPR 22 requirements. No part of this report may be used to claim or imply product endorsement by NVLAP or any agency of the US Government. In addition, the test facilities are listed with Federal Communications Commission (reference no: 31040/SIT(1300F2))

**6. MEASUREMENT INSTRUMENTATION**

Radiated emissions were measured with one or more of the following types of linearly polarized antennas: tuned dipole, biconical, log periodic, bi-log, ridged waveguide, liner horn. EMI receivers were used for line conducted readings, spectrum analyzers with pre-selectors and quasi-peak detectors were used to perform radiated measurements. Receiving equipment (i.e., receiver, analyzer, quasi-peak adapter, pre-selector) and LISNs conform to CISPR specification for "Radio Interference Measuring Apparatus and Measurement Methods," Publication 16.

Calibrated wideband preamplifiers, coaxial cables, and coaxial attenuators are also used for making measurements.

## 7. MEASURING INSTRUMENT CALIBRATION

The measuring equipment which was utilized in performing the tests documented herein has been calibrated in accordance with the manufacturer's recommendations for utilizing calibration equipment which is traceable to recognized national standards.

## 8. UNITS OF MEASUREMENT

Measurements of radiated interference are reported in terms of dB(uV/m) at a specified distance. The indicated readings on the spectrum analyzer were converted to dB(uV/m) by use of appropriate conversion factors. Measurements of conducted interference are reported in terms of dB(uV).

The field strength is calculated by adding the Antenna Factor and Cable Factors, then by subtracting the Amplifier Gain from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

AG = Amplifier Gain

Assume a receiver reading of 52.5 dBuV is obtained. The Antenna Factor of 7.4dB/m and a Cable Factor of 1.1dB is added. The Amplifier Gain of 29 dB is subtracted, giving a field strength of 32 dBuV/m. The 32 dBuV/m value was mathematically converted to its corresponding level in uV/m.

$$FS = 52.5 + 7.4 + 1.1 - 29 = 32 \text{ dBuV/m}$$

$$\text{Level in uV/m} = \text{Common Antilogarithm} [(32 \text{ dBuV/m})/20] = 39.8 \text{ uV/m}$$

**9. ANTENNAS**

The calibrated antennas used to sample the radiated field strength are mounted on a non-conductive, motorized antenna mast 10 meters from the leading edge of the turn table.

**10. CLASSIFICATION OF DIGITAL DEVICE**

Class A includes digital devices that are marketed for use in commercial, industrial or business environments, excluding devices which are marketed for use by the general public or are intended to be used in the home.

Class B includes digital devices that are marketed for use in residential environments, notwithstanding use in commercial, business and industrial environments.

Note: The responsible party may also qualify a device intended to be marketed in a commercial, business or industrial environment as Class B device, and in fact is encouraged to do so provided the device complies with the technical specifications for a Class B digital device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B digital device, regardless of its intended use.

**11. RADIATED EMISSION LIMITS**

## FCC PART 15 CLASS B

MEASURING DISTANCE OF 3 METER		
FREQUENCY RANGE (MHz)	FIELD STRENGTH (Microvolts/m)	FIELD STRENGTH (dBuV/m)
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

## FCC CLASS B ALTERNATIVE DISTANCE (CISPR 22:1993)

MEASURING DISTANCE OF 10 METER		
FREQUENCY RANGE (MHz)	FIELD STRENGTH (Microvolts/m)	FIELD STRENGTH (dBuV/m)
30-88	30	29.5
88-216	45	33.0
216-960	60	35.6
960-1000	150	43.5
ABOVE 1000	150	43.5

Note: Limits extrapolated 20dB/decade

## FCC PART 15 CLASS A

MEASURING DISTANCE OF 10 METER		
FREQUENCY RANGE (MHz)	FIELD STRENGTH (Microvolts/m)	FIELD STRENGTH (dBuV/m)
30-88	90	39.1
88-216	150	43.5
216-960	210	46.4
Above 960	300	49.5

## 12. CONDUCTED EMISSION LIMITS

## CLASS B

FREQUENCY RANGE	FIELD STRENGTH (Microvolts)	FIELD STRENGTH (dBuV)
450kHz-30MHz	250	48

## CLASS A

FREQUENCY RANGE	FIELD STRENGTH (Microvolts)	FIELD STRENGTH (dBuV)
450kHz-1.705MHz	1000	60
1.705MHz - 30MHz	3000	69.54

**13. CONDUCTED EMISSION TEST PROCEDURE**

The EUT is located so that the distance between the boundary of the EUT and the closest surface to the LISN is 0.8m.

EUT test configuration is according to Section 7 of ANSI C63.4/1992.

Conducted disturbance shall be measured between the phase lead and the ground, and between the neutral lead and the ground. The frequency 0.450 - 30 MHz shall be investigated.

Set the EMI receiver to PEAK detector setting and sweep continuously over the frequency range to be investigated. Set resolution bandwidth to 9kHz minimum. Connect EMI receiver input cable to LINE 1 RF measurement connection on the LISN. Connect a 50ohm terminator to the unused RF connection on the LISN. For each mode of EUT operation, maximize emissions readings by manipulating cable and wire positions. Record the configuration for each EUT power cord which produces emissions closest to the limit. Repeat the same procedure for LINE 2 of each EUT power cord.

**14. RADIATED EMISSION TEST PROCEDURE**

The EUT and all other support equipment are placed on a wooden table 80 cm above the ground screen. Antenna to EUT distance is either 3 meters or 10 meters (Class B or Class A). During the test, the table is rotated 360 degrees to maximize emissions, and the antenna is positioned from 1 to 4 meters above the ground screen to further maximize emissions. The antenna is polarized in both vertical and horizontal positions.

EUT test configuration is according to Section 8 of ANSI C63.4/1992.

Monitor the frequency range of interest at a fixed antenna height and EUT azimuth. Frequency span should be small enough to easily differentiate between broadcast stations and intermittent ambients. Rotate EUT 360 degrees to maximize emissions received from EUT. If emission increases by more than 1 dB, or if another emission appears that is greater by 1 dB, return to azimuth where maximum occurred and perform additional cable manipulation to further maximize received emission.

Move antenna up and down to further maximize suspected highest amplitude signal. If emission increased by 1 dB or more, or if another emission appears that is greater by 1dB or more, return to antenna height where maximum signal was observed and

manipulate cables to produce highest emissions, noting frequency and amplitude.

### 15. AMBIENT CONDITIONS

The ambient conditions at the time of final tests were as follows:

	Radiated Emission	Conducted Emission
Temperature	18°C	16°C
Humidity	82%	80%

### 16. SYSTEM TEST CONFIGURATION

The equipment under test was configured and operated in a manner which tended to maximize its emission characteristics in a typical application. Power and signal distribution, ground, interconnecting cabling and physical placement of equipment simulated the typical application and usage insofar as practicable.

SOFTWARE USED DURING THE TESTS	
Operating System	<b>MS-DOS</b>
File Name	<b>968VH.EXE</b>
Program Sequence	<ol style="list-style-type: none"> <li><b>1. MS-DOS 6.22 BOOTS SYSTEM.</b></li> <li><b>2. S3968 SOFTWARE DRIVER 968VH.EXE SETS RESOLUTION AND HORIZONTAL REFRESH RATE.</b></li> </ol>

**17. EQUIPMENT MODIFICATIONS**

To achieve compliance to CLASS B levels, the following change(s) were made during compliance testing:

- Mod. #1      ADD A RING CORE TO GROUND LINE OF POWER CORD WITH THREE TURNS.
- Mod. #2      CONNECT GROUND WIRE FROM CRT LUG TO VIDEO BOARD BRACKET RIGHT-HEAD AND LEFT-HEAD SIDE.
- Mod. #3      CONNECT GROUND WIRE FROM METAL CHASSIS TO VIDEO BOARD BRACKET RIGHT-HEAD AND LEFT-HEAD SIDE.
- Mod. #4      ADD A GROUND WIRE FROM SIGNAL CABLE BRAID TO METAL CHASSIS.
- Mod. #5      CONNECT TWO GROUND WIRE FROM MAIN PCB GROUND TO METAL CHASSIS RIGHT-HEAD AND LEFT-HEAD SIDE.

## 19. TEST EQUIPMENT LIST

Equipment	Manuf.	Model No.	Serial No.	Site	Cal Date	Due Date
EMI TEST DISPLAY	ROHDE & SCHWARZ	DSAI-D 804.8932.52	827832/001	D	11/97	11/98
EMI TEST RF UNIT	ROHDE & SCHWARZ	ESBI- RF/1005.4300.52	827832/001	D	11/97	11/98
AMPLIFIER	H.P.	8447E A	272A02379	D	12/97	12/98
ANTENNA	EMC TEST SYSTEMS	3142	1212	D	1/98	1/99
LISN(EUT)	EMCO	3825/2	1435	D	1/98	1/99
LISN	SOLAR	8012-50-R-24-BNC	8305114	D	7/97	7/98
CABLE	TALLEY	HELIX FSJ4-50B	D0301	D	12/97	12/98
CABLE	TIME MICROWAVE	LMR-400-2	D1001	D	12/97	12/98
SPECTRUM ANALYZER	H.P.	8568B	2928A04814	E	2/98	2/99
SPECTRUM DISPLAY	H.P.	85662A	2848A18276	E	2/98	2/99
QUASI-PEAK DETECTOR	H.P.	85650A	2811A01439	E	2/98	2/99
AMPLIFIER	H.P.	8447D B	1644A02328	E	4/97	4/98
ANTENNA	CHASE	CBL6111A	1547	E	10/97	10/98
TEST RECEIVER	ROHDE & SCHWARZ	ESHS20	840455/006	E	2/98	2/99
LISN(EUT)	FISCHER	FCC-LISN-50/250-25-2	107	E	6/97	6/98
LISN	EMCO	3825/2	1371	E	9/97	9/98
CABLE	TIME MICROWAVE	LMR-400-2	E1001	E	4/97	4/98
CABLE	TALLEY	HELIX FSJ4-50B	E0301	E	4/97	4/98

## 20. CORRECTION FACTOR

OATS NO. D

FREQ (MHZ)	ANTENNA 3 METER			ANTENNA 10 METER			SITE D
	HORI.	VERT.	CABLE LOSS (dB)	HORI.	VERT.	CABLE LOSS (dB)	AMP GAIN (dB)
30	19.10	19.10	0.66	17.90	17.90	0.68	22.26
35	16.70	16.70	0.68	15.85	15.85	0.73	22.23
40	14.30	14.30	0.73	13.80	13.80	0.83	22.26
45	12.55	12.55	0.81	12.15	12.15	0.91	22.24
50	10.80	10.80	0.81	10.50	10.50	0.92	22.21
60	8.60	8.60	0.92	8.30	8.30	1.02	22.15
70	7.80	7.80	0.99	7.20	7.20	1.09	22.11
80	7.90	7.90	1.05	7.20	7.20	1.15	22.20
90	8.30	8.30	1.01	7.40	7.40	1.22	22.21
100	8.50	8.50	1.09	7.50	7.50	1.32	22.14
120	8.20	8.20	1.14	7.50	7.50	1.37	22.14
125	8.15	8.15	1.27	7.55	7.55	1.53	22.03
140	8.40	8.40	1.35	8.00	8.00	1.57	22.09
150	8.80	8.80	1.35	8.60	8.60	1.63	22.06
160	9.20	9.20	1.39	9.20	9.20	1.70	22.18
175	9.75	9.75	1.50	9.85	9.85	1.76	22.21
180	9.90	9.90	1.42	10.00	10.00	1.72	22.18
200	10.80	10.80	1.50	10.60	10.60	1.80	22.26
250	12.70	12.70	1.65	12.70	12.70	1.93	22.31
300	14.60	14.60	1.72	13.50	13.50	2.08	22.34
400	16.20	16.20	2.08	16.80	16.80	2.49	22.39
500	18.10	18.10	2.41	18.70	18.70	2.85	22.34
600	20.90	20.90	2.70	20.80	20.80	3.18	22.46
700	22.10	22.10	2.92	22.00	22.00	3.53	22.44
800	22.80	22.80	3.35	23.30	23.30	3.89	22.06
900	23.90	23.90	3.53	25.40	25.40	4.32	21.81
1000	24.40	24.40	3.81	25.60	25.60	4.42	21.12
1100	25.20	25.20	4.04	25.40	25.40		21.32
1200	26.70	26.70	4.77	27.30	27.30		21.30
1300	26.80	26.80	4.90	27.20	27.20		21.01
1400	27.60	27.60	7.80	28.40	28.40		
1500	28.30	28.30	6.63	28.30	28.30		
1600	29.00	29.00	5.33	29.60	29.60		
1700	28.90	28.90	5.48	28.90	28.90		
1800	29.70	29.70	5.64	30.60	30.60		
1900	29.70	29.70	6.22	30.10	30.10		
2000	30.90	30.90	5.74	31.60	31.60		

## 21. TEST RESULT SUMMARY

**Preliminary Radiated Emission Tests** were performed at the 10 meter open area test site. CCS test procedure no:CCSUE2001B and the procedure listed in ANSI C63.4 /1992 section 8.3.1.1. were used. The following preliminary tests were conducted to determine the worst mode of operation and configuration.

Preliminary Radiated Emission Test			
Frequency Range Investigated		30 MHz TO 1000 MHz	
Mode of operation	Date	Data Report No.	Worst Mode
1024 X 768 HF= 48 KHz	04/01/98	980401D1	<input checked="" type="checkbox"/>
800 X 600 HF= 54 KHz	04/01/98	980401D2	<input type="checkbox"/>

**Final Radiated Emission Test** was conducted by operating the worst mode as indicated above.

OATS No: D / 10 M	Data Report No. 980401D1		Date 04/01/1998		Tested By: ERIC LIN							
Six Highest Radiated Emission Readings												
Frequency Range Investigated				30 MHz TO 1000 MHz								
Freq (MHz)	Meter Reading (dBm)	C.F. (dB/m)	Corrected Reading (dBuV)	Limits (dBuV)	Margin (dB)	Reading Type P/Q/A	Pol. H/V					
41.64	-72.5	-8.1	26.4	30	-3.6	Q	V					
45.45	-70.5	-9.3	27.2	30	-2.8	Q	V					
51.92	-68.4	-11.2	27.4	30	-2.6	Q	V					
39.79	-73.9	-7.5	25.6	30	-4.4	P	H					
146.97	-68.4	-12.0	26.6	30	-3.4	P	H					
169.10	-70.2	-10.9	25.9	30	-4.1	P	H					

C.F. (Correction Factor)=Antenna Factor+Cable Loss-Amplifier Gain  
Corrected Reading = Metering Reading + C.F.

Margin=Corrected Reading - Limits

P=Peak Reading

H=Horizontal Polarization/Antenna

Q=Quasi-peak

V=Vertical Polarization/Antenna

A=Average Reading

Comments: **N/A**

**Preliminary Conducted Emission Tests** were performed according to CCS test procedure no:CCSUE2002B and ANSI C63.4/1992 section 7.2.3. The following preliminary tests were conducted to determine the worst mode of operation.

<b>Preliminary Conducted Emission Test</b>			
Frequency Range Investigated	150 kHz TO 30 MHz		
Mode of operation	Date	Data Report/Plot No.	Worst Mode
1024 X 768 HF= 48 KHz	04/01/98	980401E1, 980401E2/ N/A	<input checked="" type="checkbox"/>
800 X 600 HF= 54 KHz	04/01/98	980401EB, 980401EC/ N/A	<input type="checkbox"/>

**Final Conducted Emission Test** was conducted by operating the worst mode as indicated above.

Conducted Room	Plot No		Date		Tested By:							
	N/A		04/01/98		ERIC LIN							
<b>Six Highest Conducted Emission Readings</b>												
Frequency Range Investigated	150 kHz TO 30 MHz											
Freq (MHz)	Meter Reading (dBuV)	C. F. (dB)	Corrected Reading (dBuV)	Limits (dBuV)	Margin (dB)	Reading Type (P/Q/A)	Line (L1/L2)					
0.230	46.9	0	46.9	62.4	-15.5	P	L1					
12.995	49.3	0	49.3	60.0	-10.7	P	L1					
0.235	46.5	0	46.5	62.3	-15.8	P	L2					
0.335	44.5	0	44.5	59.3	-14.8	P	L2					
12.995	49.0	0	49.0	60.0	-11.0	P	L2					
14.075	49.0	0	49.0	60.0	-11.0	P	L2					

C.F. (Correction Factor)=Insertion Loss + Cable Loss

Corrected Reading = Metering Reading + C.F.

Margin=Corrected Reading - Limits

P=Peak Reading

L1=Hot

Q=Quasi-peak

L2=Neutral

A=Average Reading

Comments: **N/A**

**APPENDICES**

EXTERNAL I/O CABLE CONSTRUCTION DESCRIPTION

CONFIGURATION BLOCK DIAGRAM

CONDUCTED EMISSION PLOT

RADIATED EMISSION DATA

EUT PHOTOGRAPHS

### External I/O Cable Construction Description

REPORT NO: 97E6814 DATE: APRIL 29, 1998 FCC ID: FBB-C5D  
 EUT: 15" COLOR MONITOR W/ MAX. RESOLUTIONS OF 1024 X 768 NON-INTERLACED (54 KHz)

This report shall not be reproduced except in full, without the written approval of CCS.

NO.199, CHUNG SHENG ROAD, HSIN TIEN, TAIPEI, TAIWAN R.O.C. TEL: (02)2217-0894/FAX: 2217-1254  
 DOCUMENT NO: CUSTP4002B

CABLE NO: 6, 7, 8	Number of I/O ports of this type: 1	I/O Port: Power Cord	Connector Type: 110 V AC	Capture Type: Snap-in	Type of Cable used: Un-shielded	Cable Length: 1.8 M	Bundled Connector Tests: Molded	Data Traffic Generated: No	Remarks: N/A
-------------------	-------------------------------------	----------------------	--------------------------	-----------------------	---------------------------------	---------------------	---------------------------------	----------------------------	--------------

CABLE NO: 5	Number of I/O ports of this type: 1	I/O Port: Power Cord	Connector Type: 110 V AC	Capture Type: Snap-in	Type of Cable used: Un-shielded	Cable Length: 1.4 M	Bundled Connector Tests: Molded	Data Traffic Generated: No	Remarks: N/A
-------------	-------------------------------------	----------------------	--------------------------	-----------------------	---------------------------------	---------------------	---------------------------------	----------------------------	--------------

CABLE NO: 4	Number of I/O ports of this type: 1	I/O Port: PARALLEL	Connector Type: DB25	Capture Type: Screw-in	Type of Cable used: Shileded	Cable Length: 1.8 M	Bundled Connector Tests: Molded	Data Traffic Generated: No	Remarks: N/A
-------------	-------------------------------------	--------------------	----------------------	------------------------	------------------------------	---------------------	---------------------------------	----------------------------	--------------

CABLE NO: 3	Number of I/O ports of this type: 1	I/O Port: VGA	Connector Type: DB15	Capture Type: Screw-in	Type of Cable used: Shileded	Cable Length: 1.3 M	Bundled Connector Tests: Molded	Data Traffic Generated: Yes	Remarks: A Ferrite bead on the cable of PC end.
-------------	-------------------------------------	---------------	----------------------	------------------------	------------------------------	---------------------	---------------------------------	-----------------------------	---

CABLE NO: 2	Number of I/O ports of this type: 1	I/O Port: RS232 Modem	Connector Type: DB9	Capture Type: Screw-in	Type of Cable used: Shileded	Cable Length: 1.2 M	Bundled Connector Tests: Metal	Data Traffic Generated: No	Remarks: N/A
-------------	-------------------------------------	-----------------------	---------------------	------------------------	------------------------------	---------------------	--------------------------------	----------------------------	--------------

CABLE NO: 1	Number of I/O ports of this type: 1	I/O Port: KB	Connector Type: DIn-5 Pin	Capture Type: Snap-in	Type of Cable used: Shileded	Cable Length: 1.0 M	Bundled Connector Tests: Molded	Data Traffic Generated: No	Remarks: N/A
-------------	-------------------------------------	--------------	---------------------------	-----------------------	------------------------------	---------------------	---------------------------------	----------------------------	--------------

## COMPLIANCE ENGINEERING SERVICES, INC.

01. Apr 98 15:12

## RFI VOLTAGE TEST.

Eric


EUT: C6D  
Manuf: CHEER ELECTRONICS CORP.  
Op Cond: 1024X768 HF-48KHZ  
Operator: ERIC LIN  
Test Spec: EN55022 CLASS B  
Comment: LINE 1 , PEAK (RED) , AVERAGE (BLUE)

## Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	30M	5k	10K	PK+AV	100ms	AUTO	LN	OFF
								50dB

Final Measurement: x GP / + AV

Meas Time: 1 s  
Subranges: 25  
Acc Margin: 2dB

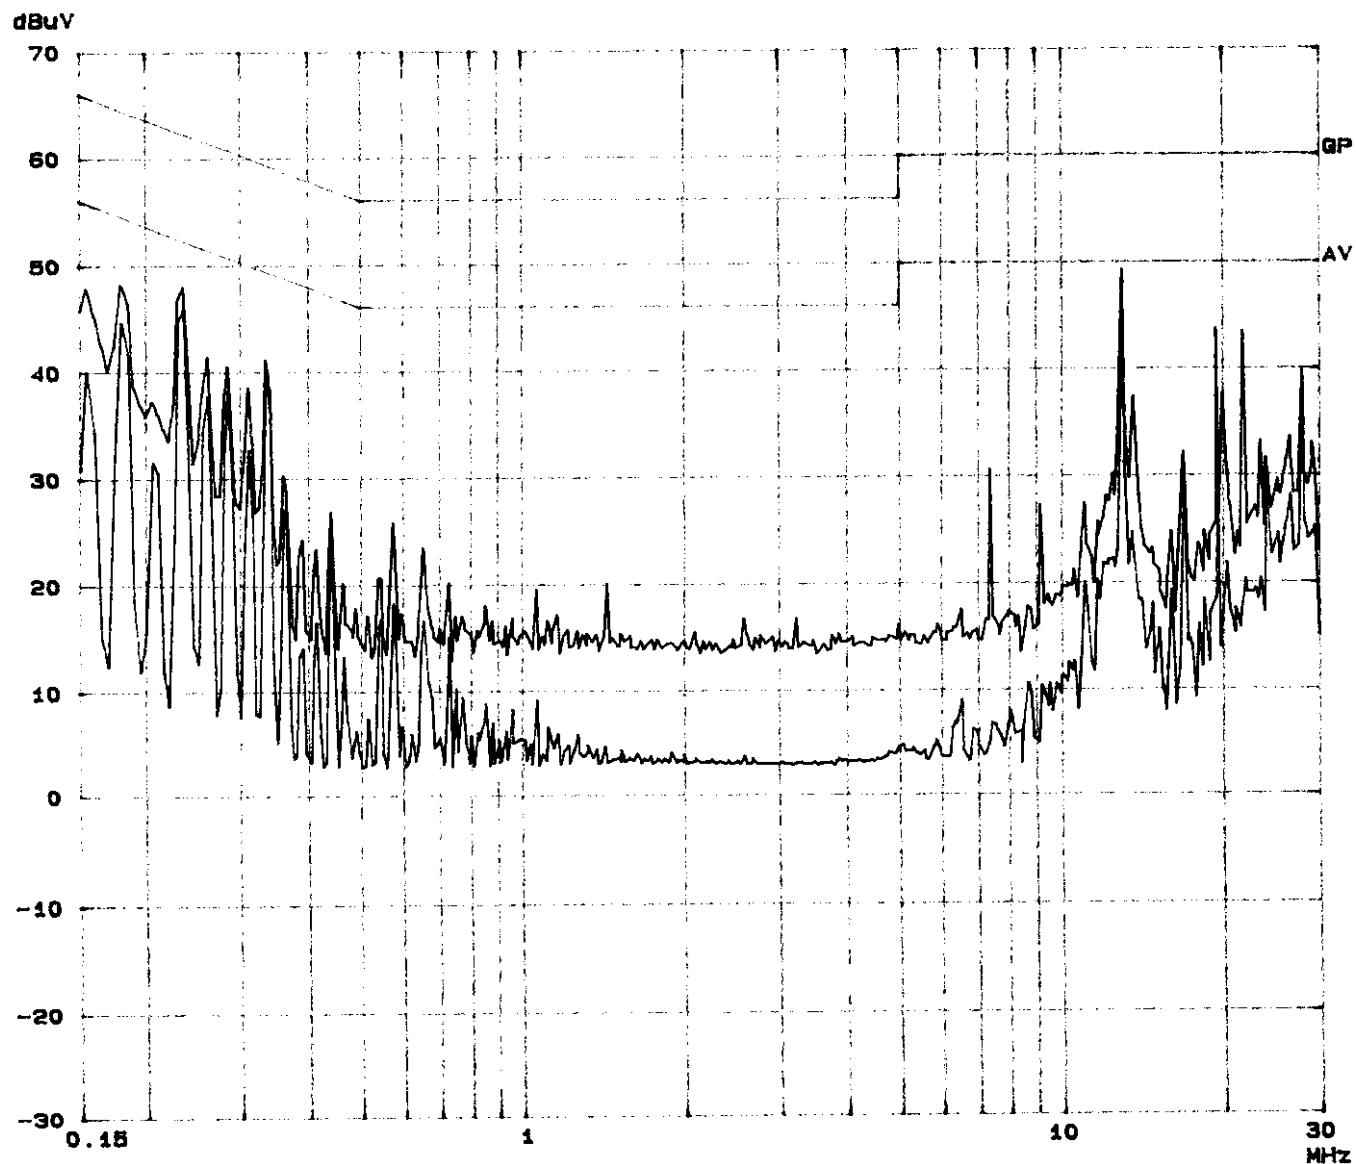

## COMPLIANCE ENGINEERING SERVICES, INC.

01. Apr 98 15:35

## RFI VOLTAGE TEST.

Eric


EUT: C50  
Manuf: CHEER ELECTRONICS CORP.  
Op Cond: 1024X768 HF=48KHZ  
Operator: ERIC LIN  
Test Spec: EN55022 CLASS B  
Comment: LINE 2 ,PEAK (RED) , AVERAGE (BLUE)

## Scan Settings (1 Range)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
180K	30M	5K	10K	PK+AV	100ms	AUTO	LN OFF	80dB

Final Measurement: x QP / + AV

Meas Time: 1 s  
Subranges: 25  
Acc Margin: 2dB

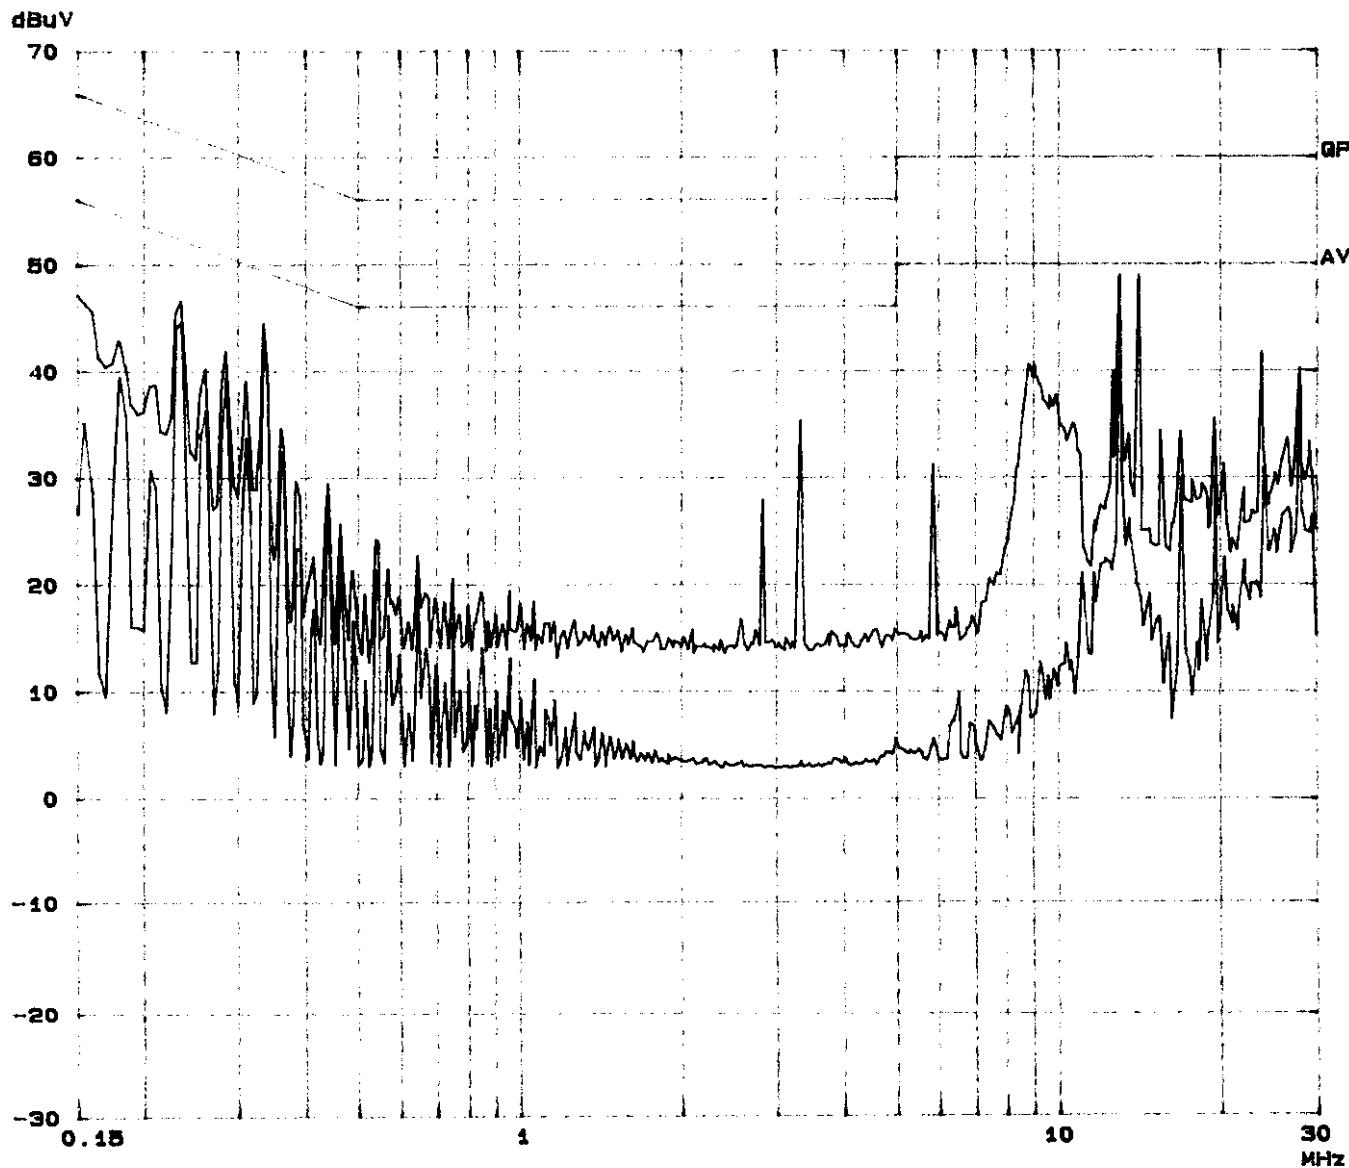

Compliance Engineering Services, Inc.

Report No. : 980401D1  
Date : 04/01/1998  
Time : 09:16  
Test Engr : ERIC LIN

>> 10 M RADIATED EMISSION DATA <<

*Eric*

Company : CHEER ELECTRONICS CORP.

Equipment Under Test : C5D

Test Configuration : EUT/HS05/KB13/MD04/PRN01

Type of Test : EN55022 CLASS B

Mode of Operation : 1024X768 HF=48KHZ

Freq.	dBm	CF (dB)	dBuV	EN55022-A	EN55022-B	EUT-A	EUT-B	Note
QP READING AT 41.64MHZ								
41.64	-72.5	-8.1	26.4	40.0	30.0	-13.6	-3.6	Vertical
QP RAEDING AT 45.45MHZ								
45.45	-70.5	-9.3	27.2	40.0	30.0	-12.8	-2.8	Vertical
QP RAEDING AT 51.92MHZ								
51.92	-68.4	-11.2	27.4	40.0	30.0	-12.6	-2.6	Vertical
116.55	-68.7	-13.3	25.0	40.0	30.0	-15.0	-5.0	Vertical
250.69	-73.6	-7.7	25.7	47.0	37.0	-21.3	-11.3	Vertical
259.67	-70.0	-7.5	29.5	47.0	37.0	-17.5	-7.5	Vertical
376.53	-74.8	-4.0	28.2	47.0	37.0	-18.8	-8.8	Vertical
39.79	-73.9	-7.5	25.6	40.0	30.0	-14.4	-4.4	Horizontal
108.21	-70.4	-13.3	23.3	40.0	30.0	-16.7	-6.7	Horizontal
120.80	-69.2	-13.2	24.6	40.0	30.0	-15.4	-5.4	Horizontal
134.52	-71.0	-12.7	23.3	40.0	30.0	-16.7	-6.7	Horizontal
146.97	-68.4	-12.0	26.6	40.0	30.0	-13.4	-3.4	Horizontal
165.76	-71.6	-11.0	24.4	40.0	30.0	-15.6	-5.6	Horizontal
169.10	-70.2	-10.9	25.9	40.0	30.0	-14.1	-4.1	Horizontal
259.66	-72.9	-7.5	26.6	47.0	37.0	-20.4	-10.4	Horizontal

Total # of data 15

V2.0.a