

ELITE ELECTRONIC ENGINEERING COMPANY  
1516 CENTRE CIRCLE  
DOWNTOWN GROVE, ILLINOIS 60515-1082

ELITE PROJECT: 24949      DATES TESTED: February 7, 1997

TEST PERSONNEL: R. Klouda

TEST SPECIFICATION:      FCC "Code of Federal Regulations" Title 47  
Part 74 and Part 2, Para. 2.993

AMENDMENT TO ENGINEERING TEST REPORT NO. 19167


MEASUREMENT OF FREQUENCY RESPONSE AND OCCUPIED BANDWIDTH FOR  
A MODEL REPLY DL KEYPAD TRANSMITTER

FOR: Fleetwood Electronics  
Holland, Michigan

PURCHASE ORDER NO.: P8540

Report By:   
Neil J. Hurley

Witnessed By:   
Harry Derk  
Fleetwood Electronics

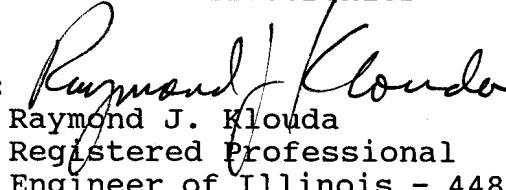Approved By:   
Raymond J. Klouda  
Registered Professional  
Engineer of Illinois - 44894

ENGINEERING TEST REPORT NO. 19167

MEASUREMENT OF FREQUENCY RESPONSE AND OCCUPIED BANDWIDTH FOR  
A MODEL REPLY DL KEYPAD TRANSMITTER

**1.0 INTRODUCTION:**

This amendment describes additional tests which were performed for the Model Reply DL Keypad Transmitter (test item). The frequency response and occupied bandwidth tests were repeated using a acoustic source. The tests were performed at the peak modulating frequency and at  $M = 15$  kHz per the FCC request. The Unit #4 which was set to transmit at 800.2 MHz was used for these tests. The test item was powered by a 9.0 volt DC battery. The tests were performed for Fleetwood Group, Inc. of Holland, Michigan.

**1.2 PURPOSE:** The test series was performed to determine if the test item meets the type acceptance test requirements of the FCC "Code of Federal Regulations" Title 47, Part 74.

**1.3 SUBCONTRACTOR IDENTIFICATION:** This series of tests was performed by the Elite Electronic Engineering Company, radio interference consultants of Downers Grove, Illinois.

**2.0 TEST EQUIPMENT:**

A list of the test equipment used can be found on Table I. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

**3.0 REQUIREMENTS, PROCEDURES AND RESULTS:**

**3.1 AUDIO FREQUENCY RESPONSE MEASUREMENTS:**

**3.1.1 REQUIREMENTS:** This measurement determines the audio frequency response characteristics up to 15 kHz using an acoustic source.

**3.1.2 PROCEDURES:** The audio frequency response was measured

ENGINEERING TEST REPORT NO. 19167

by establishing a constant sound pressure level at the transmitter's microphone and measuring the FM deviation on the output RF signal.

An acoustic source was setup approximately 30 cm from the input microphone. The sound level was adjusted for a mid-range FM deviation at the audio frequency of maximum deviation. The sound pressure level required to achieve this level was measured with a sound pressure level meter. Next, while maintaining the same sound pressure level, the frequency was varied. The FM deviation was measured and recorded at several frequencies across the range in order to determine the frequency response.

**3.1.3 RESULTS:** The data from the audio frequency response measurements are presented on Data Page A-101. The frequency where the maximum response occurred was determined to be 3.5 kHz. The frequency response at 15 kHz was approximately 13 dB below the response at 3.5 kHz.

**3.2 OCCUPIED BANDWIDTH MEASUREMENTS:**

**3.2.1 REQUIREMENTS:** In accordance with paragraph 74.209(c); The mean power of any emission shall be attenuated below the mean output power in accordance with the following schedule:

- (1) On any frequency removed from the assigned frequency by more than 50 percent, but not more than 100 percent of the authorized bandwidth of 200 kHz: at least 25 decibels;
- (2) On any frequency removed from the assigned frequency by more than 100 percent, but not more than 250 percent of the authorized bandwidth of 200 kHz: at least 35 decibels;
- (3) On any frequency removed from the assigned frequency by more than 250 percent: at least 43 plus 10 log (mean output power in

watts) decibels or 80 decibels, whichever is the lesser attenuation.

**3.2.2 PROCEDURES:** The measurement receiver was connected to a probe antenna which was placed near the test item. The unit was set to transmit continuously. The transmitter was modulated from an acoustic source at an audio frequency of maximum deviation at a level which produced maximum deviation. The spectrum analyzer display was adjusted to show the occupied BW which was then plotted. The acoustic source was turned off. The unmodulated RF signal was plotted on the same graph to established the reference level for the BW mask. The measurement was repeated with the modulated level at 50% and then at 16 dB greater than 50% of the maximum deviation point. The test was repeated with the modulating frequency changed to 15 kHz. The same 16 dB greater than 50% of the maximum deviation sound pressure level established for the maximum deviation frequency measurement was used for the 15kHz measurement. The sound pressure level was set with the sound level meter.

**3.2.3 RESULTS:** The plots of the emissions near the fundamental frequency of 800MHz are presented on data pages A-102 through A-105. As can be seen from these data pages, the transmitter met the occupied bandwidth requirements.

**4.0 CONCLUSION:**

It was found that the Fleetwood Electronics Model Reply DL Keypad Transmitter, did comply with the audio frequency response requirements and the occupied bandwidth requirements of the FCC "Code of Federal Regulations" Title 47, Part 74.

## ENGINEERING TEST REPORT NO. 19167

**5.0 CERTIFICATION:**

Elite Electronic Engineering Company certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specification.

TABLE I: TEST EQUIPMENT LIST

ELITE ELECTRONIC ENGINEERING							Page: 1	
Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Cal Inv	Due Date
<b>Equipment Type: AMPLIFIERS</b>								
AAA1	AUDIO AMPLIFIER	MCINTOSH	M75	---	0.02-100KHZ		NOTE 1	
<b>Equipment Type: ANTENNAS</b>								
NLA1	3' LOOP ANTENNA	STODDART	MX936/VRM	---	0.15-1000MHZ		I/O	
<b>Equipment Type: CONTROLLERS</b>								
CDAO	COMPUTER	HEWLETT PACKARD	9836	2143A00699	---		N/A	
<b>Equipment Type: METERS</b>								
MYDO	SOUND LEVEL METER	BRUEL & KJAER	2209	699280	0.002-70KHZ		NOTE 1	
<b>Equipment Type: PRINTERS AND PLOTTERS</b>								
HLIO	X-Y PLOTTER W/ HPIB	HEWLETT PACKARD	7440A	2929L08284	---		N/A	
<b>Equipment Type: RECEIVERS</b>								
RAAO	SPECTRUM ANALYZER	HEWLETT PACKARD	3585A	1750A03840	20HZ-40MHZ	01/28/97 12		01/28/98
RAEO	SPECTRUM ANALYZER	HEWLETT PACKARD	8566A	1904A00175	100HZ-22GHZ	01/30/97 12		01/30/98
RYAO	MODULATION METER	RADIOMETER	AFM3	238195	7-1000MHZ	05/03/96 24		05/03/98
<b>Equipment Type: SIGNAL GENERATORS</b>								
GAD2	SIGNAL GENERATOR	HEWLETT PACKARD	650A	4194	9HZ-10MHZ	09/11/96 6		03/11/97

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

## ENGINEERING TEST REPORT NO. 19167

## DATA SHEET

MANUFACTURER : Fleetwood Electronics  
TEST ITEM : Transmitter  
MODEL : Reply DL Keypad  
SERIAL NUMBER : None Assigned  
TEST PERFORMED : FCC Part 74 Frequency Response  
DATE TESTED : February 7, 1997

AUDIO RESPONSE - FREQUENCY VS. OUTPUT:Acoustic Sound Pressure Level = 66 dB re 20uPa/cm<sup>2</sup>

Freq (kHz)	FM Deviation (kHz)	Change Relative to Freq. of Max. Dev. (dB)
1.0	28	-1.5
3.5*	40	0.0
10.0	21	-5.6
15.0	9	-13.0

\* - Frequency of max. deviation. Acoustic level set to produce an FM deviation just above the mid-range.


FLEETWOOD 2-7-97  
KEYPAD UNIT#4

MOD FREQ = 3.5 kHz  
ACOUSTIC LEVEL TO PRODUCE MAX. DEVIATION

MKR 800.199 5 MHz

-29.20 dBm

REF -17.2 dBm ATTEN 10 dB

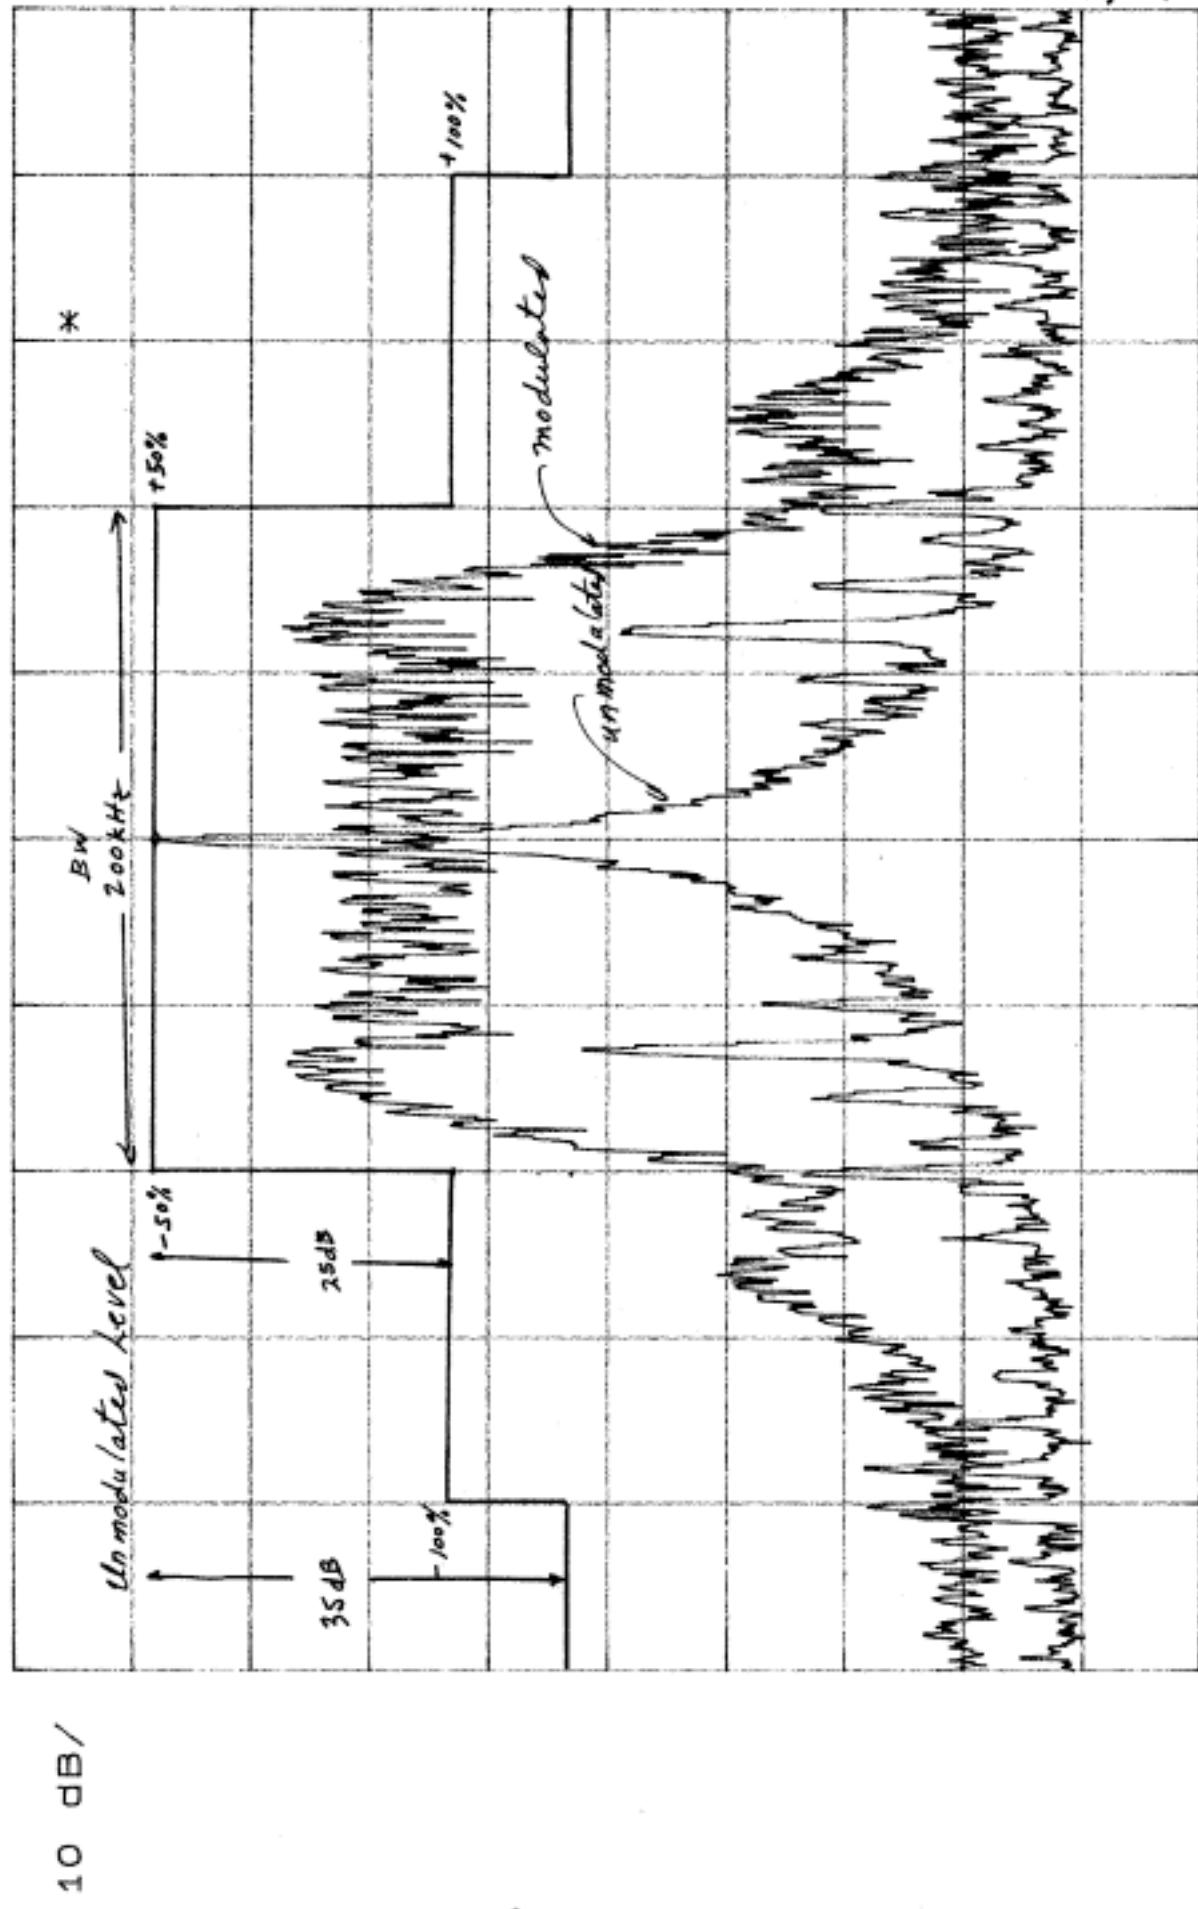


A102

FLEETWOOD 2-7-97  
KEYPAD UNIT #4

MOD FREQ = 3.5 kHz

ACOUSTIC LEVEL TO PRODUCE 50% MAX. DEVIATION

REF -17.2 dBm ATTEN 10 dB

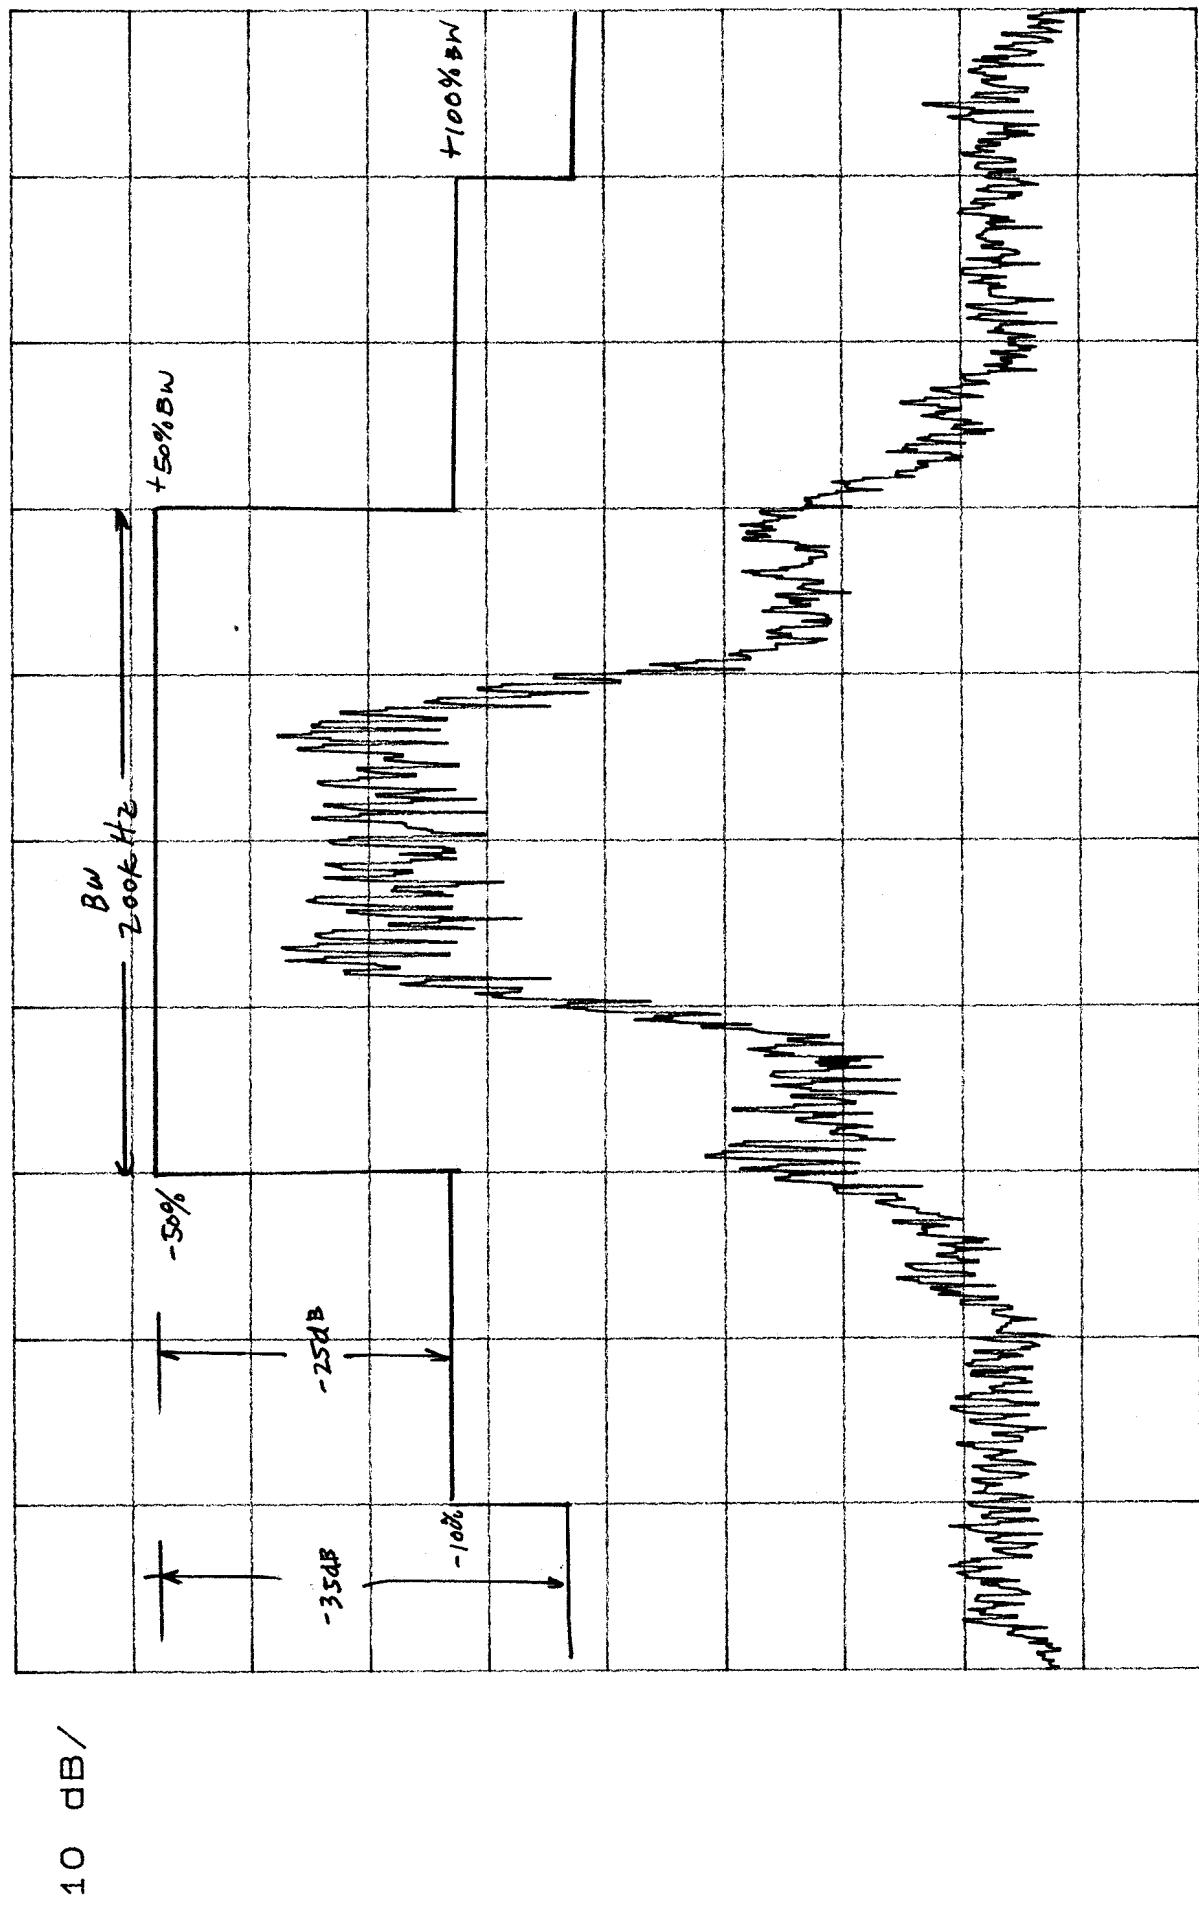

CENTER 800.200 MHz  
RES BW 300 Hz

VBW 100 Hz


SPAN 500 kHz  
SWP 50.0 sec

A 103

ETR 19167A


FLSETWOOD 2-7-97  
KEY PAD UNIT #4

MOD FREQ = 3.5 kHz  
ACOUSTIC LEVEL TO PRODUCT +16 dB above 50% max deviation.

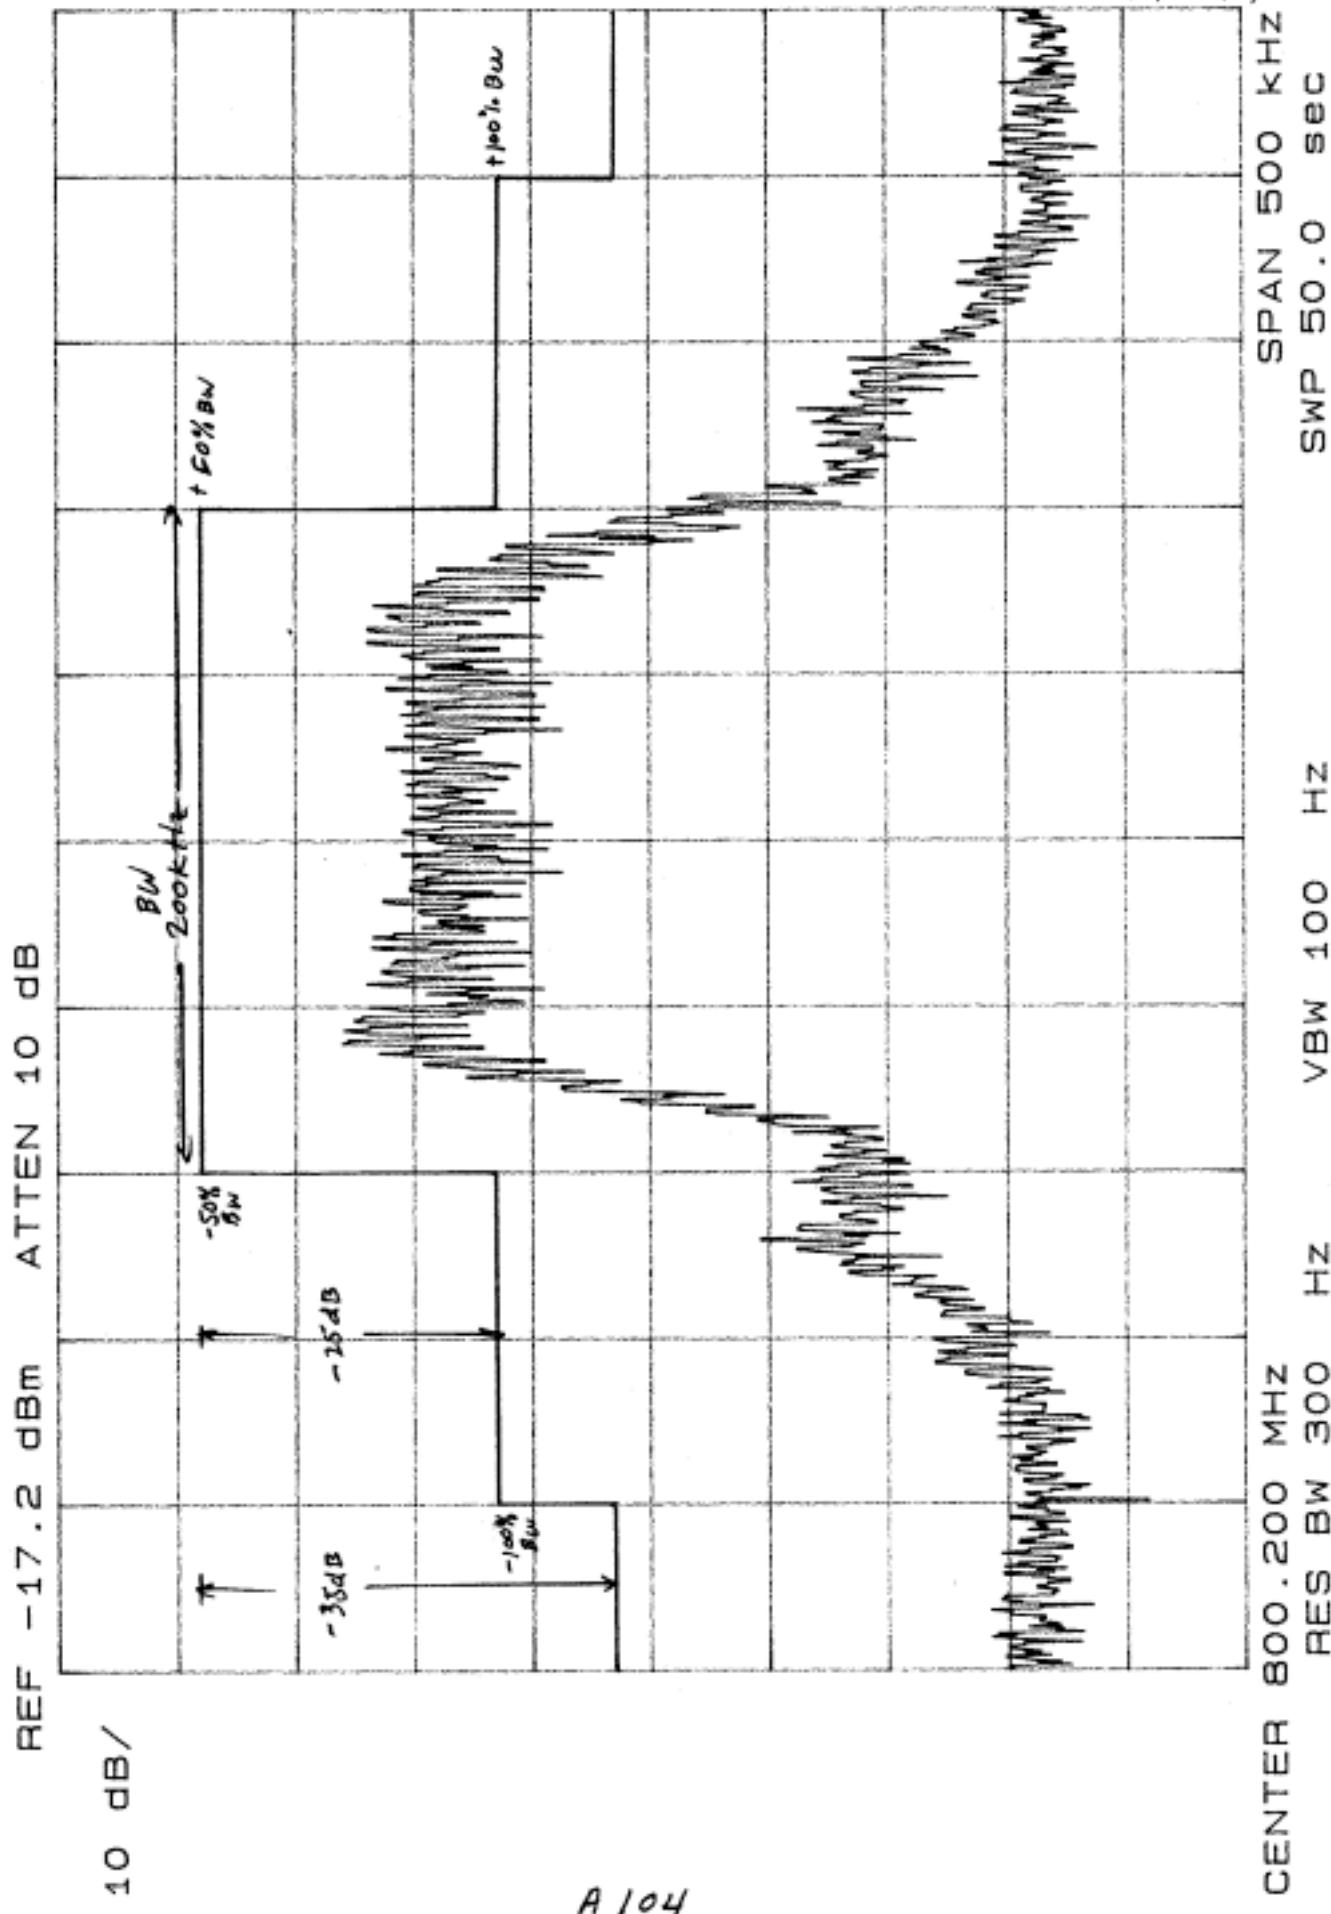

FLEET WOOD 2-7-97  
KEYPAD UNIT #4  
REF -19.6 dBm

Mod Freq = 15 kHz  
Acoustic Level Set to +16 dB ABOVE 50% Max. deviation  
ATTEN 10 dB  
Based on 3.5 kHz measure ment.

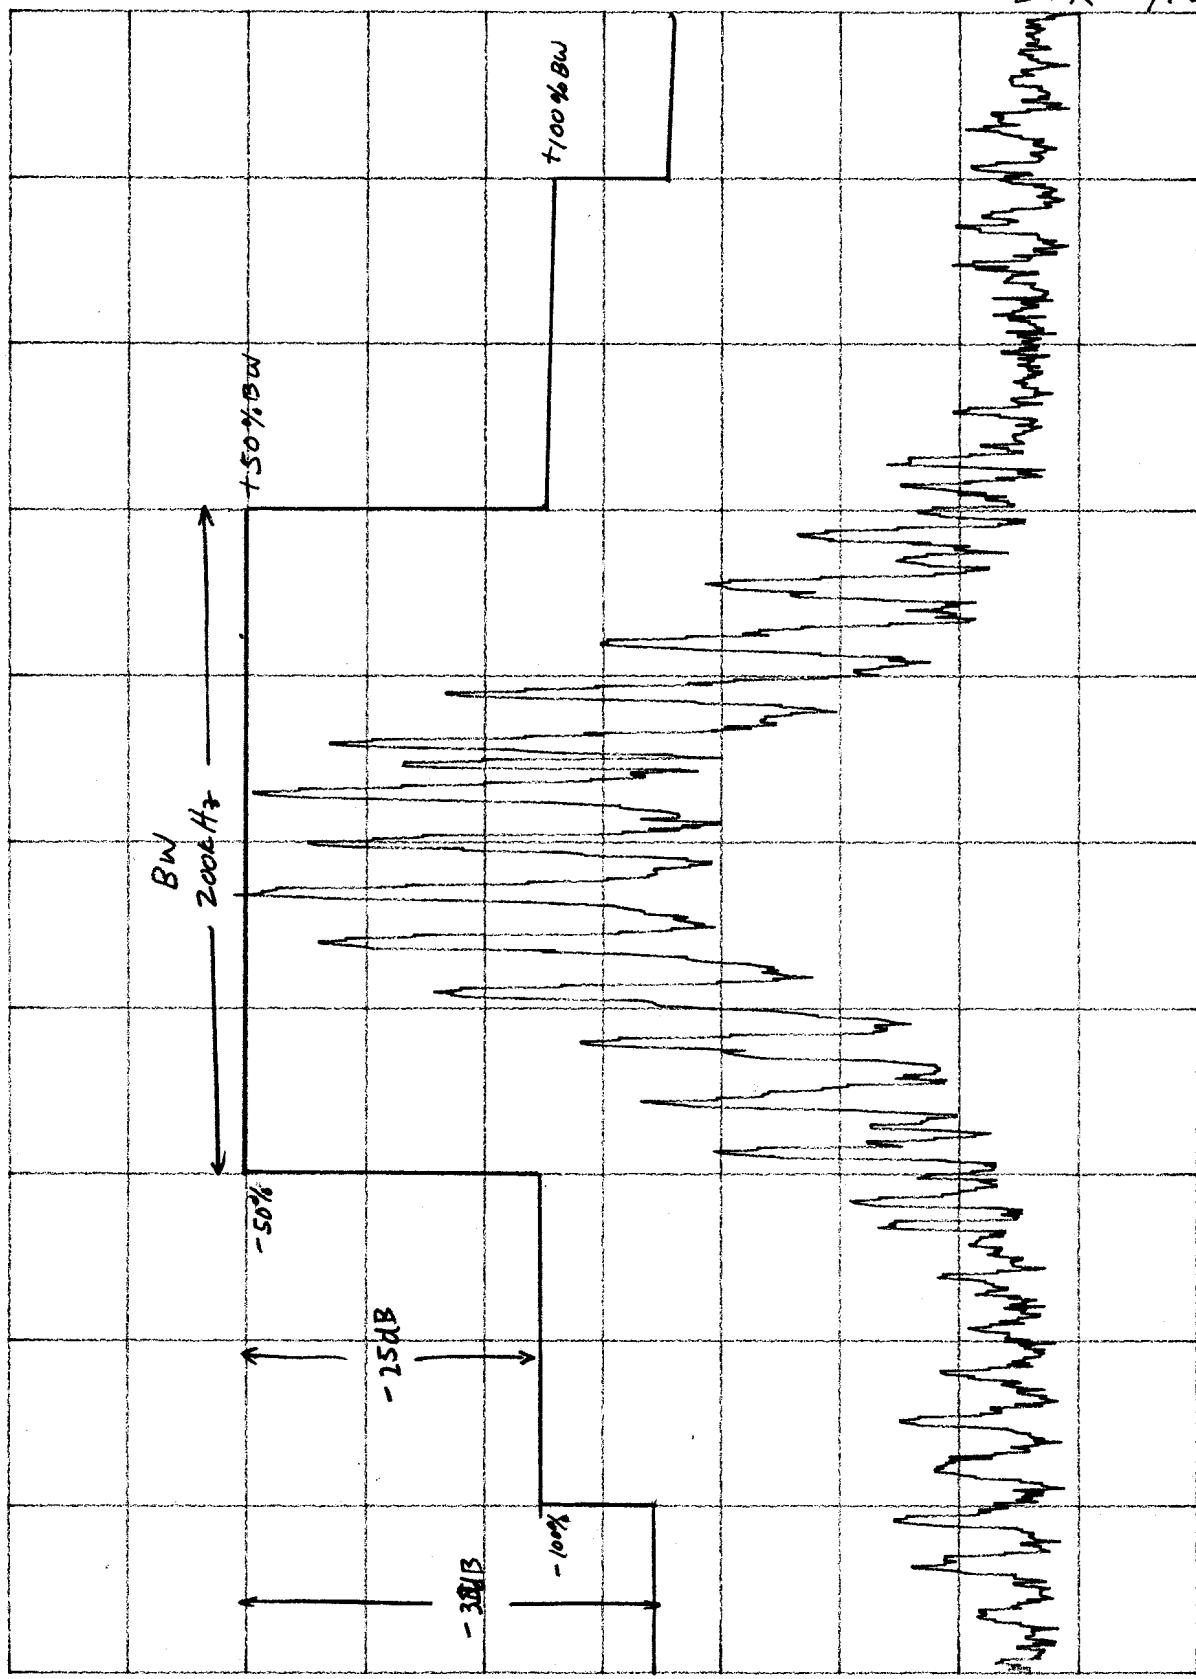

A 105

ETR 19167A

SPAN 500 kHz  
SWP 50.0 sec

CENTER 800.200 MHz  
RES BW 300 Hz  
VBW 100 Hz