



## Measurement of RF Interference from a Model DS6MA Digicall Spectrum System Student Transceiver

For : Fleetwood Group, Inc.  
Holland, MI

P.O. No. : P53152-00

Date Received: August 17, 2006

Date Tested : August 17, 2006 and August 18, 2006

Test Personnel: Mark E. Longinotti, NARTE® Certified EMC Test  
Engineer, ATL-0154-E

Specification : FCC "Code of Federal Regulations" Title 47  
Part 15, Subpart B and Subpart C, Section 15.249  
for Intentional Radiators Operating within the  
902MHz to 928MHz band

Test Report By

*MARK E. LONGINOTTI*

Mark E. Longinotti  
NARTE® Certified EMC Test  
Engineer, ATL-0154-E

Approved By

*Raymond J. Klouda*

Raymond J. Klouda  
Registered Professional Engineer  
of Illinois - 44894

**TABLE OF CONTENTS**

<u>PARAGRAPH</u>	<u>DESCRIPTION OF CONTENTS</u>	<u>PAGE NO.</u>
1.0 INTRODUCTION .....		4
1.1 Description of Test Item.....		4
1.2 Purpose.....		4
1.3 Deviations, Additions and Exclusions .....		4
1.4 Applicable Documents.....		4
1.5 Subcontractor Identification .....		4
1.6 Laboratory Conditions.....		4
2.0 TEST ITEM SETUP AND OPERATION.....		4
2.1 Power Input .....		5
2.2 Grounding.....		5
2.3 Peripheral Equipment.....		5
2.4 Interconnect Cables.....		5
2.5 Operational Mode .....		5
2.6 Test Item Modifications.....		5
3.0 TEST EQUIPMENT .....		5
3.1 Test Equipment List.....		5
3.2 Calibration Traceability.....		5
3.3 Measurement Uncertainty.....		5
4.0 REQUIREMENTS, PROCEDURES AND RESULTS .....		6
4.1 Powerline Conducted Emissions .....		6
4.1.1 Receiver.....		6
4.1.1.1 Requirements .....		6
4.1.1.2 Procedures.....		Error! Bookmark not defined.
4.1.1.3 Results.....		Error! Bookmark not defined.
4.1.2 Transmitter .....		6
4.1.2.1 Requirements .....		6
4.1.2.2 Procedures.....		Error! Bookmark not defined.
4.1.2.3 Results.....		Error! Bookmark not defined.
4.2 Radiated Measurements.....		6
4.2.1 Receiver.....		6
4.2.1.1 Requirements .....		6
4.2.1.2 Procedures.....		6
4.2.1.3 Results.....		7
4.2.2 Transmitters.....		8
4.2.2.1 Requirements .....		8
4.2.2.2 Procedures.....		8
4.2.2.3 Results.....		9
4.3 Occupied Bandwidth Measurements .....		9
4.3.1 Requirement .....		9
4.3.2 Procedures.....		10
4.3.3 Results .....		10
5.0 CONCLUSIONS .....		10
6.0 CERTIFICATION .....		10
7.0 ENDORSEMENT DISCLAIMER .....		10

**THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL,  
WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INC.**



**THIS REPORT SHALL NOT BE REPRODUCED, EXCEPT IN FULL,  
WITHOUT THE WRITTEN APPROVAL OF ELITE ELECTRONIC ENGINEERING INC.**

**REVISION HISTORY**

Revision	Date	Description
—	September 7, 2006	Initial release

## Measurement of RF Emissions from a Model No. DS6MA Digicall Spectrum System Student Transceiver

### **1.0 INTRODUCTION:**

**1.1 Description of Test Item** - This document presents the results of the series of radio interference measurements performed on a Model No. DS6MA Digicall Spectrum System Student Transceiver, Unit #2 (hereinafter referred to as the test item). The test item was designed to transmit in the frequency range of 902.55MHz to 908.75MHz using an internal antenna integrated on the circuit board. The test item was designed to receive in the frequency range of 921.25MHz to 927.45MHz using the same internal antenna used to transmit. The LO of the receiver was two times the tuned frequency. The test item was submitted for testing by Fleetwood Group, Inc. located in Holland, MI.

**1.2 Purpose** - The test series was performed to determine if the test item meets the conducted and radiated RF emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109, and Subpart C, Sections 15.207 and 15.249 for Intentional Radiators Operating within the 902MHz -928MHz band. Testing was performed in accordance with ANSI C63.4-2003.

**1.3 Deviations, Additions and Exclusions** - There were no deviations, additions to, or exclusions from the test specification during this test series.

**1.4 Applicable Documents** - The following documents of the exact issue designated form part of this document to the extent specified herein:

Federal Communications Commission "Code of Federal Regulations", Title 47, Part 15, dated 1 October 2005

ANSI C63.4-2003, "American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz"

**1.5 Subcontractor Identification** - This series of tests was performed by Elite Electronic Engineering Incorporated of Downers Grove, Illinois. The laboratory is accredited by the National Institute of Standards and Technology (NIST) under the National Voluntary Laboratory Accreditation Program (NVLAP). NVLAP Lab Code: 100278-0.

**1.6 Laboratory Conditions** The temperature at the time of the test was 23°C and the relative humidity was 47%.

### **2.0 TEST ITEM SET-UP AND OPERATION:**

The test item is a Model No. DS6MA Digicall Spectrum System Student Transceiver. A block

diagram of the test item set-up is shown as Figure 1.

**2.1 Power Input** - The test item was powered with 3VDC via 2 "C" batteries internal to the test item.

**2.2 Grounding** - The test item was not grounded for all tests.

**2.3 Peripheral Equipment** - The test item was submitted for testing with headphones with built in microphone.

**2.4 Interconnect Cables** - The test item was connected to the headphones with built in microphone via a 90cm long cable.

**2.5 Operational Mode** - For all tests, the test item was placed on an 80cm high non-conductive stand. The test item was energized. In order to make the test item transmit or receive continuously, a Model ECM984 Dicicall Spectrum System Console transceiver was placed in the corner of the test chamber and was used to communicate with the test item during testing. The console was programmed so that the test item would receive continuously at 921.25MHz and 927.45MHz. The console was programmed so that the test item would transmit continuously at 904.545MHz and 908.75MHz.

**2.6 Test Item Modifications** - No modifications were required for compliance to the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109, and Subpart C, Sections 15.207 and 15.249 requirements.

### **3.0 TEST EQUIPMENT:**

**3.1 Test Equipment List** - A list of the test equipment used can be found on Table I. All equipment was calibrated per the instruction manuals supplied by the manufacturer.

**3.2 Calibration Traceability** Test equipment is maintained and calibrated on a regular basis. All calibrations are traceable to the National Institute of Standards and Technology (NIST).

**3.3 Measurement Uncertainty** - All measurements are an estimate of their true value. The measurement uncertainty characterizes, with a specified confidence level, the spread of values which may be possible for a given measurement system.

The measurement uncertainty budgets were based on guidelines in "ISO Guide to the Expression of Uncertainty in Measurements" and NAMAS NIS81 "The Treatment of Uncertainty in EMC Measurements".

The measurement uncertainty for these tests is presented below:

Conducted Emission Measurements		
Combined Standard Uncertainty	1.07	-1.07
Expanded Uncertainty (95% confidence)	2.1	-2.1

Radiated Emission Measurements		
Combined Standard Uncertainty	2.26	-2.18
Expanded Uncertainty (95% confidence)	4.5	-4.4

## **4.0 REQUIREMENTS, PROCEDURES AND RESULTS:**

### **4.1 Powerline Conducted Emissions**

#### **4.1.1 Receiver**

**4.1.1.1 Requirements** - Since the test item was powered by internal batteries, no conducted emissions tests are required.

#### **4.1.2 Transmitter**

**4.1.2.1 Requirements** - Since the test item was powered by internal batteries, no conducted emissions tests are required.

### **4.2 Radiated Measurements**

#### **4.2.1 Receiver**

**4.2.1.1 Requirements** - All emanations from a receiver shall be below the levels shown on the following table:

#### **RADIATION LIMITS FOR CLASS B DEVICE**

Frequency MHz	Distance between Test Item And Antenna in Meters	Field Strength uV/m	Field Strength dBuV/m
30-88	3	100	40
88-216	3	150	43.5
216-960	3	200	46
Above 960	3	500	54

Note: The tighter limit shall apply at the edge between the two frequency bands.

**4.2.1.2 Procedures** - All tests were performed in a 32ft. x 20ft. x 18ft. hybrid

ferrite-tile/anechoic absorber lined test chamber. The walls and ceiling of the shielded chamber are lined with ferrite tiles. Anechoic absorber material is installed over the ferrite tile. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4 2003 for site attenuation.

The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads.

Since quasi-peak and average measurements require long integration times, it is not practical to automatically sweep through the quasi-peak or average levels. Therefore, radiated emissions from the test item were first scanned using a peak detector and automatically plotted. The frequencies where significant emission levels were noted were then remeasured using the quasi-peak or average detector.

For preliminary radiated emissions sweeps from 30MHz to 10GHz, the broadband measuring antenna was positioned at a 3 meter distance from the test item. The frequency range from 30MHz to 10GHz was investigated using a peak detector function with the bilog antenna below 1GHz and the double-ridged waveguide antenna above 1GHz. The maximum levels were plotted.

Final radiated emissions were performed on all significant broadband and narrowband emissions found in the preliminary sweeps using the following methods:

- 1) Measurements below 1GHz were made using a quasi-peak detector and a tuned dipole antenna. Measurements above 1GHz were made using an average detector and a double ridged waveguide antenna.
- 2) To ensure that maximum or worst case, emission levels were measured, the following steps were taken:
  - a. The test item was rotated so that all of its sides were exposed to the receiving antenna.
  - b. Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
  - c. The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.

**4.2.1.3 Results** - The preliminary plots with the test item set to receive continuously at 921.25MHz are presented on pages 15 and 16. The plots are presented for a reference only, and are not used to determine compliance. The final radiated levels are presented on page 17. As can be seen from the data, all emissions measured from the test item were within the specification limits

for receivers. The emissions level closest to the limit (worst case) occurred at 9212.5MHz. The emissions level at this frequency was 11.0dB within the limit. Photographs of the test configuration which yielded the highest or worst case, radiated emission levels are shown on Figures 2a and 2b.

The preliminary plots with the test item set to receive continuously at 927.45MHz are presented on pages 18 and 19. The plots are presented for a reference only, and are not used to determine compliance. The final radiated levels are presented on page 20. As can be seen from the data, all emissions measured from the test item were within the specification limits for receivers. The emissions level closest to the limit (worst case) occurred at 9274.5MHz. The emissions level at this frequency was 11.2dB within the limit. Photographs of the test configuration which yielded the highest or worst case, radiated emission levels are shown on Figures 2a and 2b.

#### 4.2.2 Transmitters -

**4.2.2.1 Requirements** - The test item must comply with the requirements of FCC "Code of Federal Regulations Title 47", Part 15, Subpart C, Section 15.205 et seq.

Paragraph 15.249(a) has the following radiated emission limits:

Fundamental Frequency MHz	Field Intensity mV/m @ 3 meters	Field Strength Harmonics and Spurious uV/m @ 3 meters
902 to 928	50	500

**4.2.2.2 Procedures** - All measurements were performed in a 32ft. x 20ft. x 14ft. high shielded enclosure. The shielded enclosure prevents emissions from other sources, such as radio and TV stations from interfering with the measurements. All powerlines and signal lines entering the enclosure pass through filters on the enclosure wall. The powerline filters prevent extraneous signals from entering the enclosure on these leads. The floor of the chamber is used as the ground plane. The chamber complies with ANSI C63.4-2003 for site attenuation.

A preliminary radiated emissions test was performed to determine the emission characteristics of the test item. For the preliminary test, a broadband measuring antenna was positioned at a 3 meter distance from the test item. The entire frequency range from 30MHz to 10GHz was investigated using a peak detector function. The data was then processed by the computer to calculate equivalent field intensity.

The final emission tests were then manually performed over the frequency range of 30MHz to

9.1GHz. Between 30MHz and 1000MHz, a tuned dipole antenna was used as the pick-up device. A broadband double ridged waveguide antenna was used as the pick-up device for all frequencies above 1GHz. All significant broadband and narrowband signals were measured and recorded.

To ensure that maximum or worst case, emission levels were measured, the following steps were taken:

- (1) The test item was rotated so that all of its sides were exposed to the receiving antenna.
- (2) Since the measuring antenna is linearly polarized, both horizontal and vertical field components were measured.
- (3) The measuring antenna was raised and lowered from 1 to 4 meters for each antenna polarization to maximize the readings.

**4.2.2.3 Results** - The preliminary plots, with the test item transmitting at 904.545MHz, are presented on data pages 21 and 22. The plots are presented for a reference only, and are not used to determine compliance. The final radiated levels, with the test item transmitting at 904.545MHz, are presented on data page 23. As can be seen from the data, all emissions measured from the test item were within the specification limits. The emissions level closest to the limit (worst case) occurred at 904.545MHz. The emissions level at this frequency was 0.1dB within the limit. Photographs of the test configuration which yielded the highest or worst case, radiated emission levels are shown on Figures 2a and 2b.

The preliminary plots, with the test item transmitting at 908.75MHz, are presented on data pages 24 and 25. The plots are presented for a reference only, and are not used to determine compliance. The final radiated levels, with the test item transmitting at 908.75MHz, are presented on data page 26. As can be seen from the data, all emissions measured from the test item were within the specification limits. The emissions level closest to the limit (worst case) occurred at 908.75MHz. The emissions level at this frequency was 5.0dB within the limit. Photographs of the test configuration which yielded the highest or worst case, radiated emission levels are shown on Figures 2a and 2b.

### 4.3 Occupied Bandwidth Measurements

**4.3.1 Requirement** - In accordance with paragraph 15.249(d), all emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuate by at least 50dB below the level of the fundamental or to the general radiated emissions limits in 15.209, which ever is the lesser attenuation.

**4.3.2 Procedures** - The test item was placed on an 80cm high non-conductive stand. The unit was set to transmit continuously at 904.545MHz. With an antenna positioned nearby, occupied bandwidth emissions were displayed on the spectrum analyzer. The resolution bandwidth was set to 30 kHz and span was set to 10MHz. The frequency spectrum near the fundamental was plotted.

**4.3.3 Results** - The plot of the emissions near the fundamental frequency is presented on data page 27. As can be seen from this data page, the transmitter met the occupied bandwidth requirements.

## **5.0 CONCLUSIONS:**

It was determined that the Fleetwood Group, Inc. Model No. DS6MA Digicall Spectrum System Student Transceiver, Unit #2, did fully meet the conducted and radiated emission requirements of the FCC "Code of Federal Regulations" Title 47, Part 15, Subpart B, Sections 15.107 and 15.109 for receivers, and Subpart C, Sections 15.207 and 15.249 for Intentional Radiators Operating within the 902MHz -928MHz band, when tested per ANSI C63.4-2003.

## **6.0 CERTIFICATION:**

Elite Electronic Engineering Incorporated certifies that the information contained in this report was obtained under conditions which meet or exceed those specified in the test specifications.

The data presented in this test report pertains to the test item at the test date. Any electrical or mechanical modification made to the test item subsequent to the specified test date will serve to invalidate the data and void this certification.

## **7.0 ENDORSEMENT DISCLAIMER:**

This report must not be used to claim product endorsement by NVLAP or any agency of the US Government.



TABLE I: TEST EQUIPMENT LIST

ELITE ELECTRONIC ENG. INC.							Page: 1	
Eq ID	Equipment Description	Manufacturer	Model No.	Serial No.	Frequency Range	Cal Date	Cal Inv	Due Date
<b>Equipment Type: ACCESSORIES, MISCELLANEOUS</b>								
XZG4	ATTENUATOR/SWITCH DRIVER	HEWLETT PACKARD	11713A	2223A01683	---		N/A	
<b>Equipment Type: AMPLIFIERS</b>								
APK4	PREAMPLIFIER OPT H02	HEWLETT PACKARD	8449B	3008A00329	1-26.5GHZ	01/31/06	12	01/31/07
<b>Equipment Type: ANTENNAS</b>								
NDQ1	TUNED DIPOLE ANTENNA	EMCO	3121C-DB4	313	400-1000MHZ	03/10/06	12	03/10/07
NTA1	BILOG ANTENNA	CHASE EMC LTD.	BILOG CBL611	2054	0.03-2GHZ	05/23/06	12	05/23/07
NWHO	RIDGED WAVE GUIDE	TENSOR	4105	2081	1-12.4GHZ	10/01/05	12	10/01/06
<b>Equipment Type: ATTENUATORS</b>								
T1N1	10DB 20W ATTENUATOR	NARDA	766-10		DC-4GHZ	09/07/05	12	09/07/06
<b>Equipment Type: CONTROLLERS</b>								
CDS2	COMPUTER	GATEWAY	MFATXPNT NMZ	0028483108	1.8GHZ		N/A	
<b>Equipment Type: PROBES; CLAMP-ON &amp; LISNS</b>								
PLL9	50UH LISN 462D	ELITE	462D/70A	010	0.01-400MHZ	03/06/06	12	03/06/07
PLLA	50UH LISN 462D	ELITE	462D/70A	011	0.01-400MHZ	03/06/06	12	03/06/07
<b>Equipment Type: PRINTERS AND PLOTTERS</b>								
HRE1	LASER JET 5P	HEWLETT PACKARD	C3150A	USHB061052	---		N/A	
<b>Equipment Type: RECEIVERS</b>								
RACA	RF PRESELECTOR	HEWLETT PACKARD	85685A	2926A00980	20HZ-2GHZ	02/11/06	12	02/11/07
RAEC	SPECTRUM ANALYZER	HEWLETT PACKARD	8566B	3014A06690	100HZ-22GHZ	02/10/06	12	02/10/07
RAF5	QUASIPeAK ADAPTOR W/ RECEI	HEWLETT PACKARD	85650A	2043A00151	0.01-1000MHZ	02/11/06	12	02/11/07
<b>Equipment Type: SIGNAL GENERATORS</b>								
GWG2	DDS FUNCTION GENERATOR	WAVETEK	29	079190	0.0001HZ-10MHZ	08/11/06	12	08/11/07

Cal. Interval: Listed in Months I/O: Initial Only N/A: Not Applicable

Note 1: For the purpose of this test, the equipment was calibrated over the specified frequency range, pulse rate, or modulation prior to the test or monitored by a calibrated instrument.

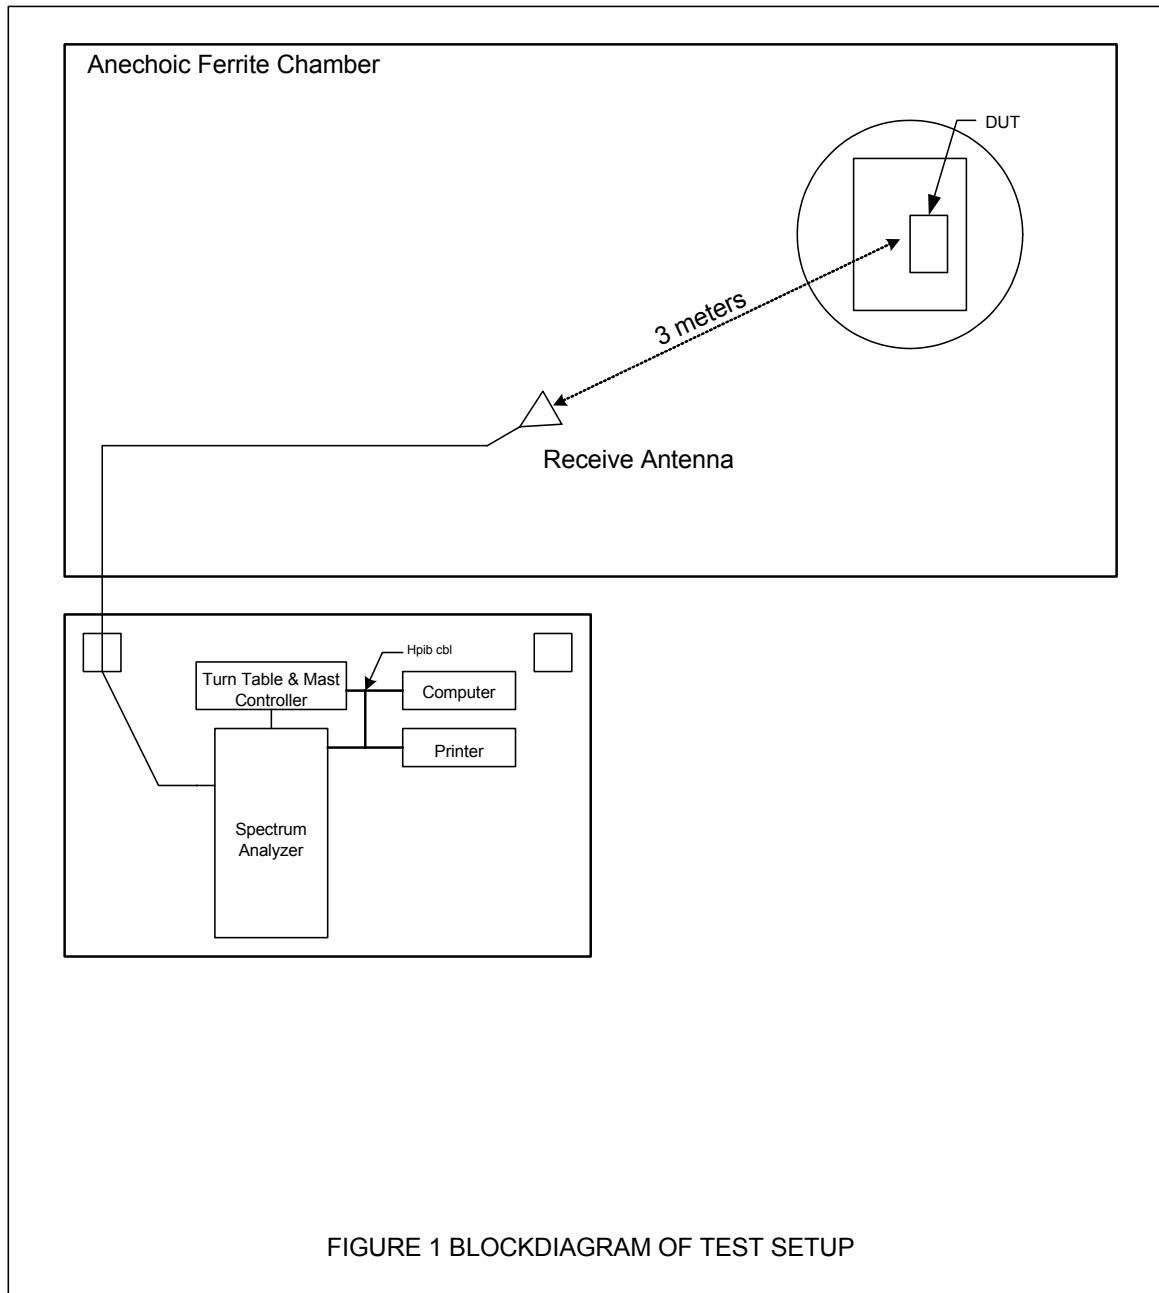


Figure 2a



Test Setup for Radiated Emissions, 904MHz to 927MHz – Horizontal Polarization



Test Setup for Radiated Emissions, 904MHz to 927MHz – Vertical



Polarization


Figure 2b




Test Setup for Radiated Emissions, 1GHz to 10GHz – Horizontal Polarization



Test Setup for Radiated Emissions, 1GHz to 10GHz – Vertical Polarization

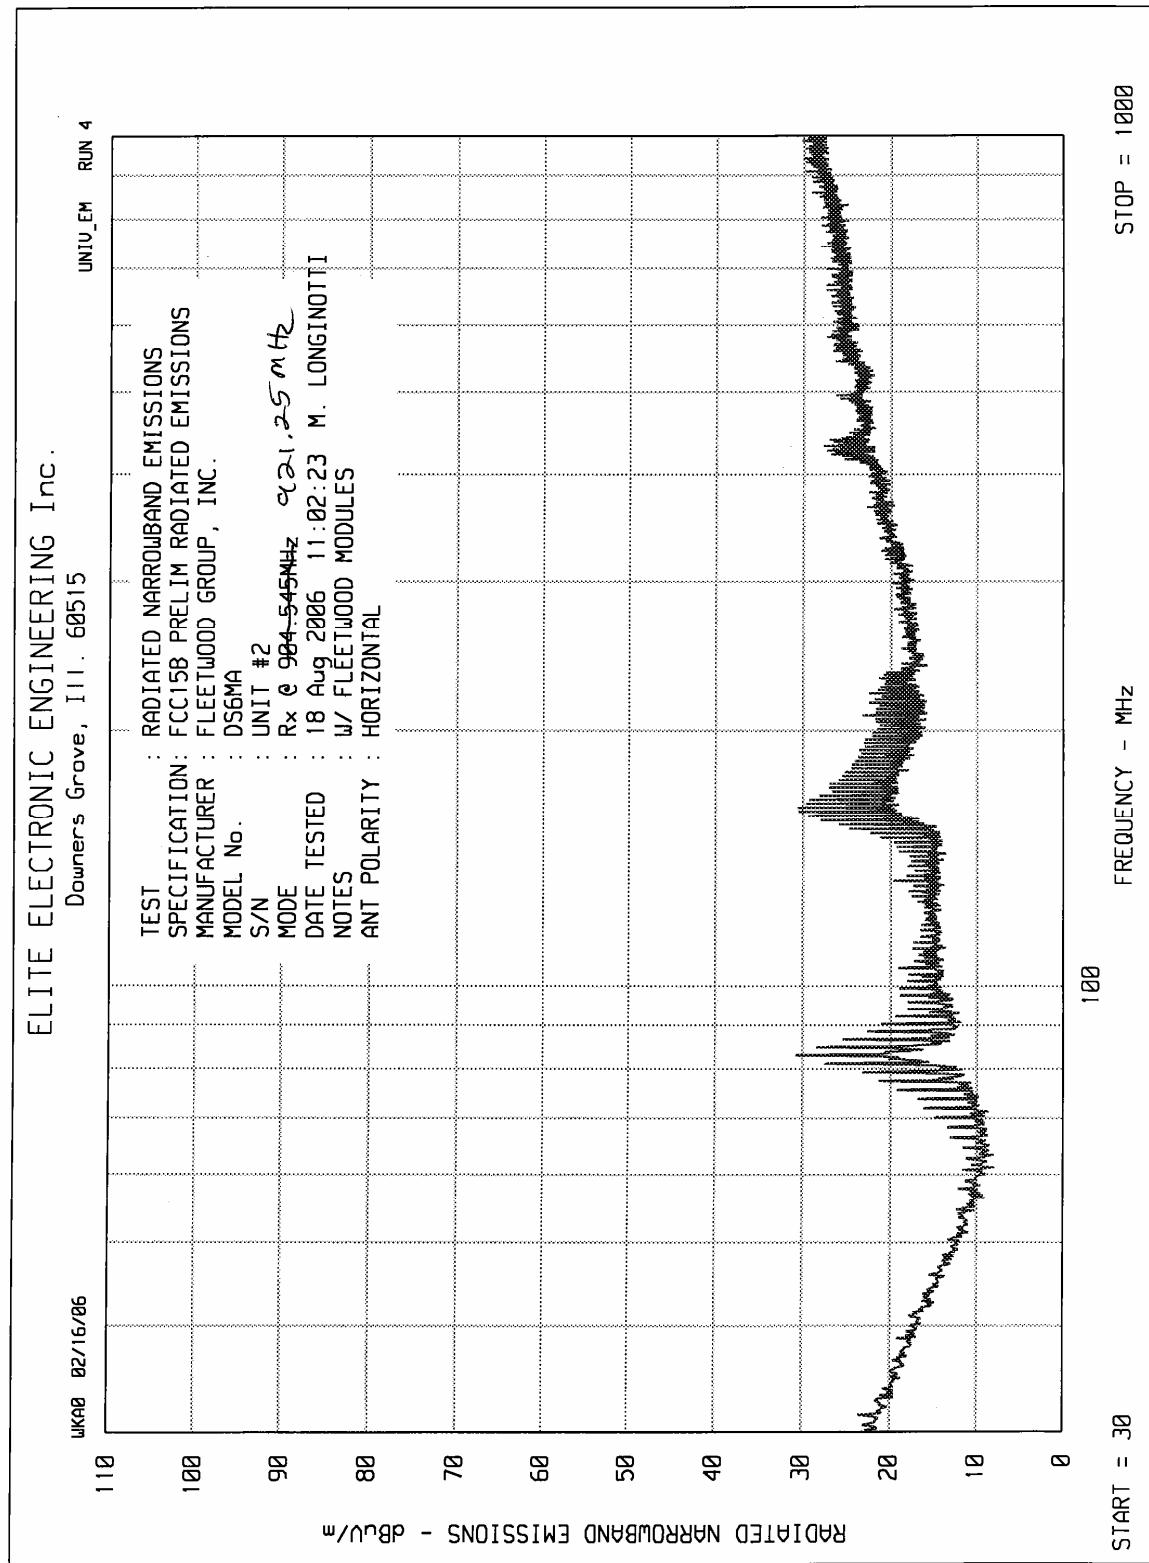

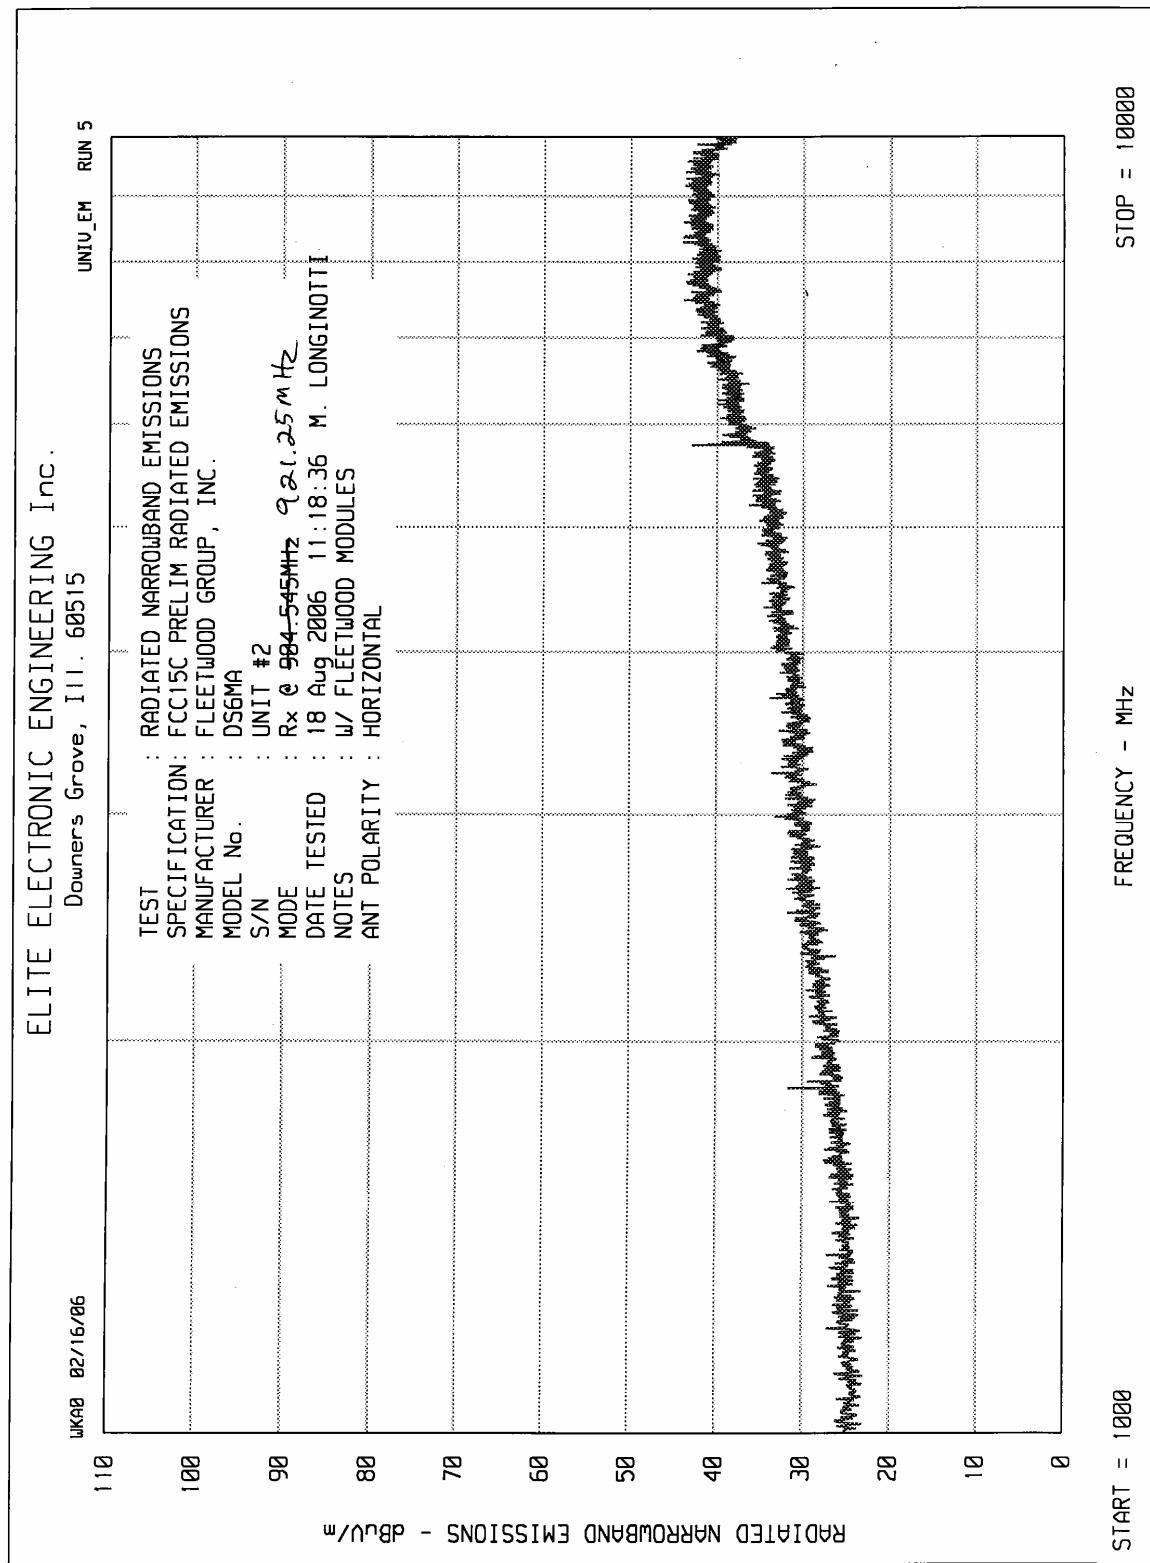

MANUFACTURER : Fleetwood Group, Inc.  
TEST ITEM : Transceiver  
MODEL NO. : DS6MA Digicall Spectrum System Student Transceiver  
SERIAL NO. : Unit #2  
TEST SPECIFICATION : FCC 15.109(a), Radiated Emissions  
MODE : Receive @ 921.25MHz  
TEST DATE : August 17 and 18, 2006  
TEST DISTANCE : 3 meters


Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Preamp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
1842.5	H	28.9	Ambient	2.9	28.2	-33.8	26.2	20.4	500.0
1842.5	V	28.9	Ambient	2.9	28.2	-33.8	26.2	20.4	500.0
3685.0	H	26.9	Ambient	4.4	32.6	-33.4	30.5	33.5	500.0
3685.0	V	26.7	Ambient	4.4	32.6	-33.4	30.3	32.7	500.0
5527.5	H	25.6	Ambient	5.3	35.5	-31.8	34.5	53.2	500.0
5527.5	V	25.7	Ambient	5.3	35.5	-31.8	34.6	53.8	500.0
7370.0	H	28.9	Ambient	6.7	37.9	-31.5	42.0	126.2	500.0
7370.0	V	28.8	Ambient	6.7	37.9	-31.5	41.9	124.8	500.0
9212.5	H	29.2	Ambient	7.5	38.1	-31.8	43.0	140.7	500.0
9212.5	V	29.2	Ambient	7.5	38.1	-31.8	43.0	140.7	500.0


H – Horizontal

V = Vertical

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked By : MARK E. LONGINOTTI

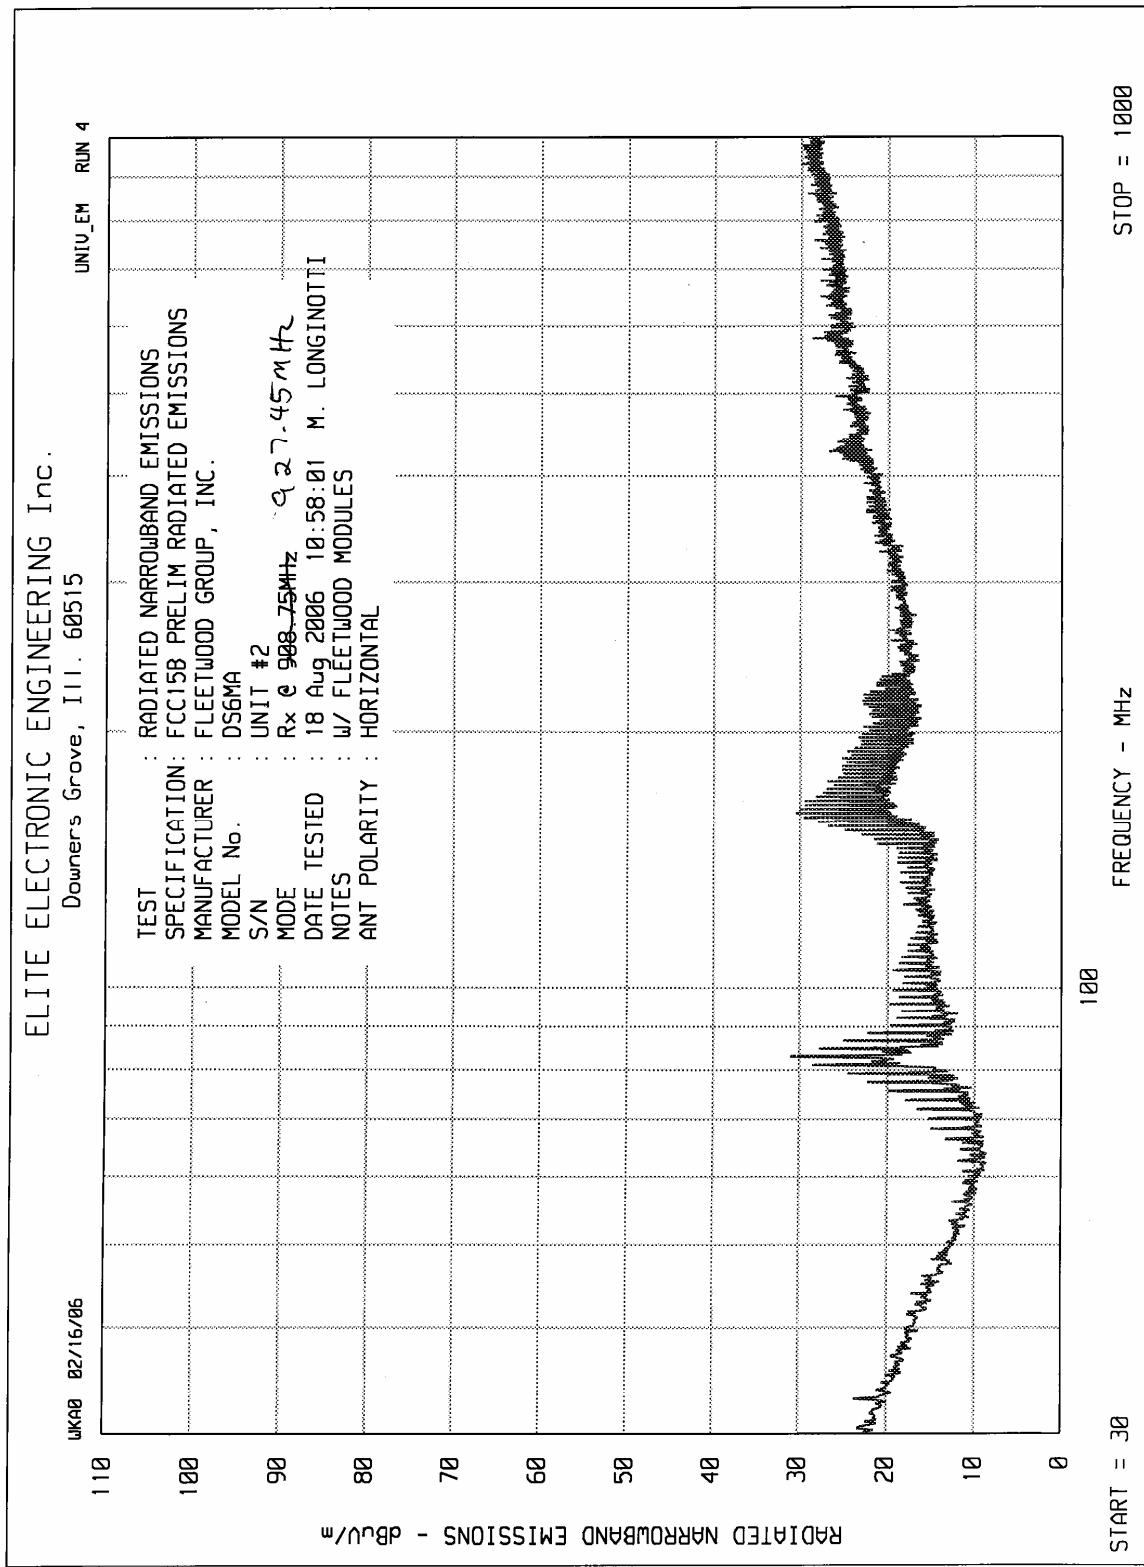

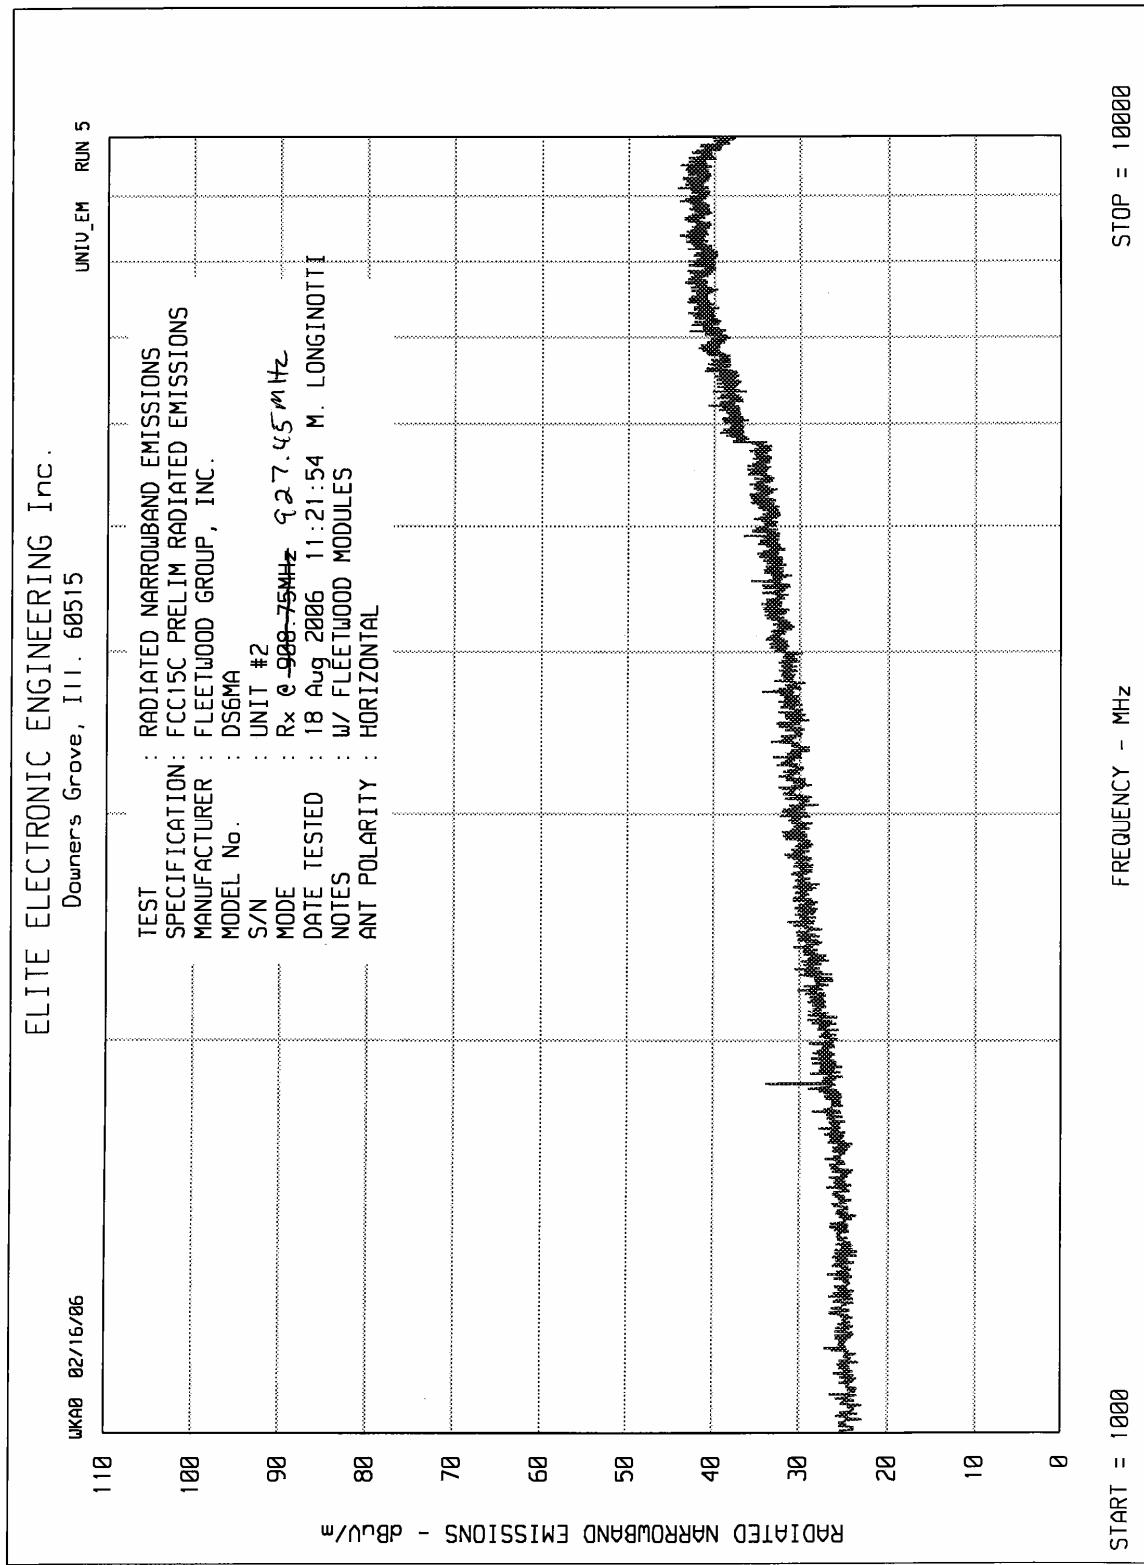

MANUFACTURER : Fleetwood Group, Inc.  
TEST ITEM : Transceiver  
MODEL NO. : DS6MA Digicall Spectrum System Student Transceiver  
SERIAL NO. : Unit #2  
TEST SPECIFICATION : FCC 15.109(a), Radiated Emissions  
MODE : Receive @ 927.45MHz  
TEST DATE : August 17 and 18, 2006  
TEST DISTANCE : 3 meters


Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Preamp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
1854.9	H	28.8	Ambient	2.9	28.2	-33.8	26.1	20.3	500.0
1854.9	V	28.8	Ambient	2.9	28.2	-33.8	26.1	20.3	500.0
3709.8	H	27.8	Ambient	4.4	32.6	-33.3	31.5	37.6	500.0
3709.8	V	27.9	Ambient	4.4	32.6	-33.3	31.6	38.1	500.0
5564.7	H	25.3	Ambient	5.3	35.5	-31.8	34.3	51.8	500.0
5564.7	V	25.7	Ambient	5.3	35.5	-31.8	34.7	54.3	500.0
7419.6	H	28.4	Ambient	6.7	38.0	-31.5	41.7	120.9	500.0
7419.6	V	28.5	Ambient	6.7	38.0	-31.5	41.8	122.3	500.0
9274.5	H	29.0	Ambient	7.5	38.2	-31.9	42.8	138.3	500.0
9274.5	V	29.0	Ambient	7.5	38.2	-31.9	42.8	138.3	500.0


H – Horizontal

V = Vertical

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked By : MARK E. LONGINOTTI

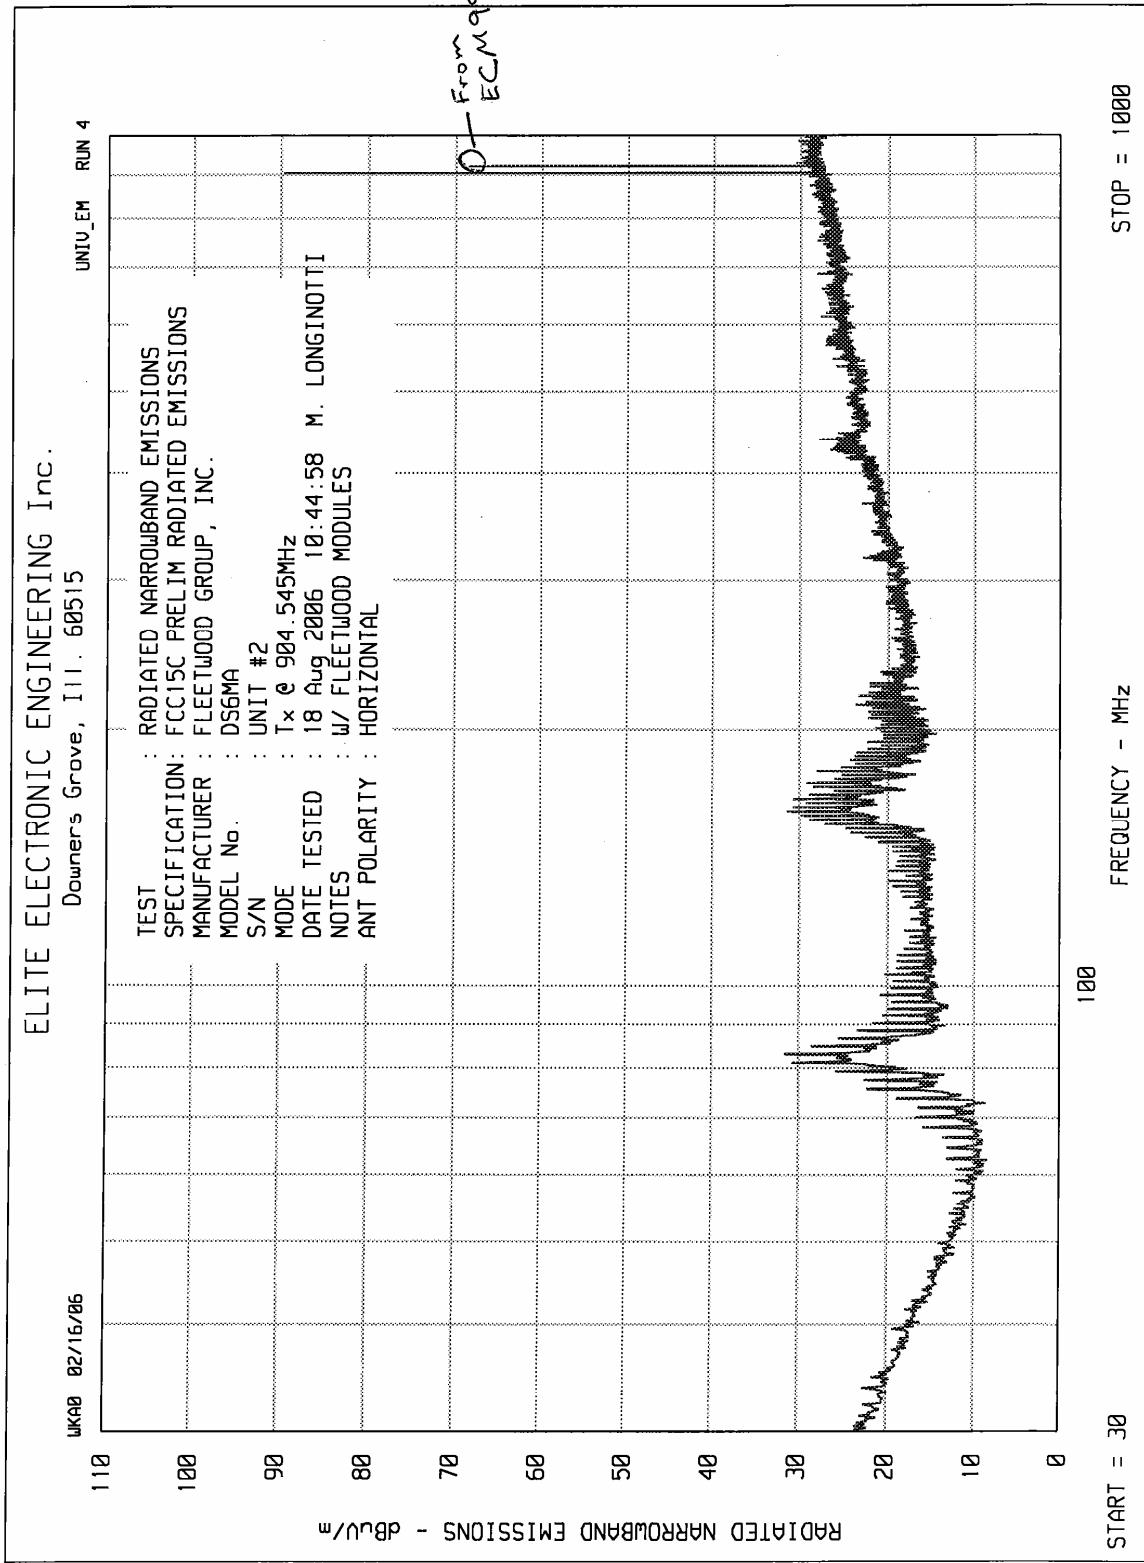

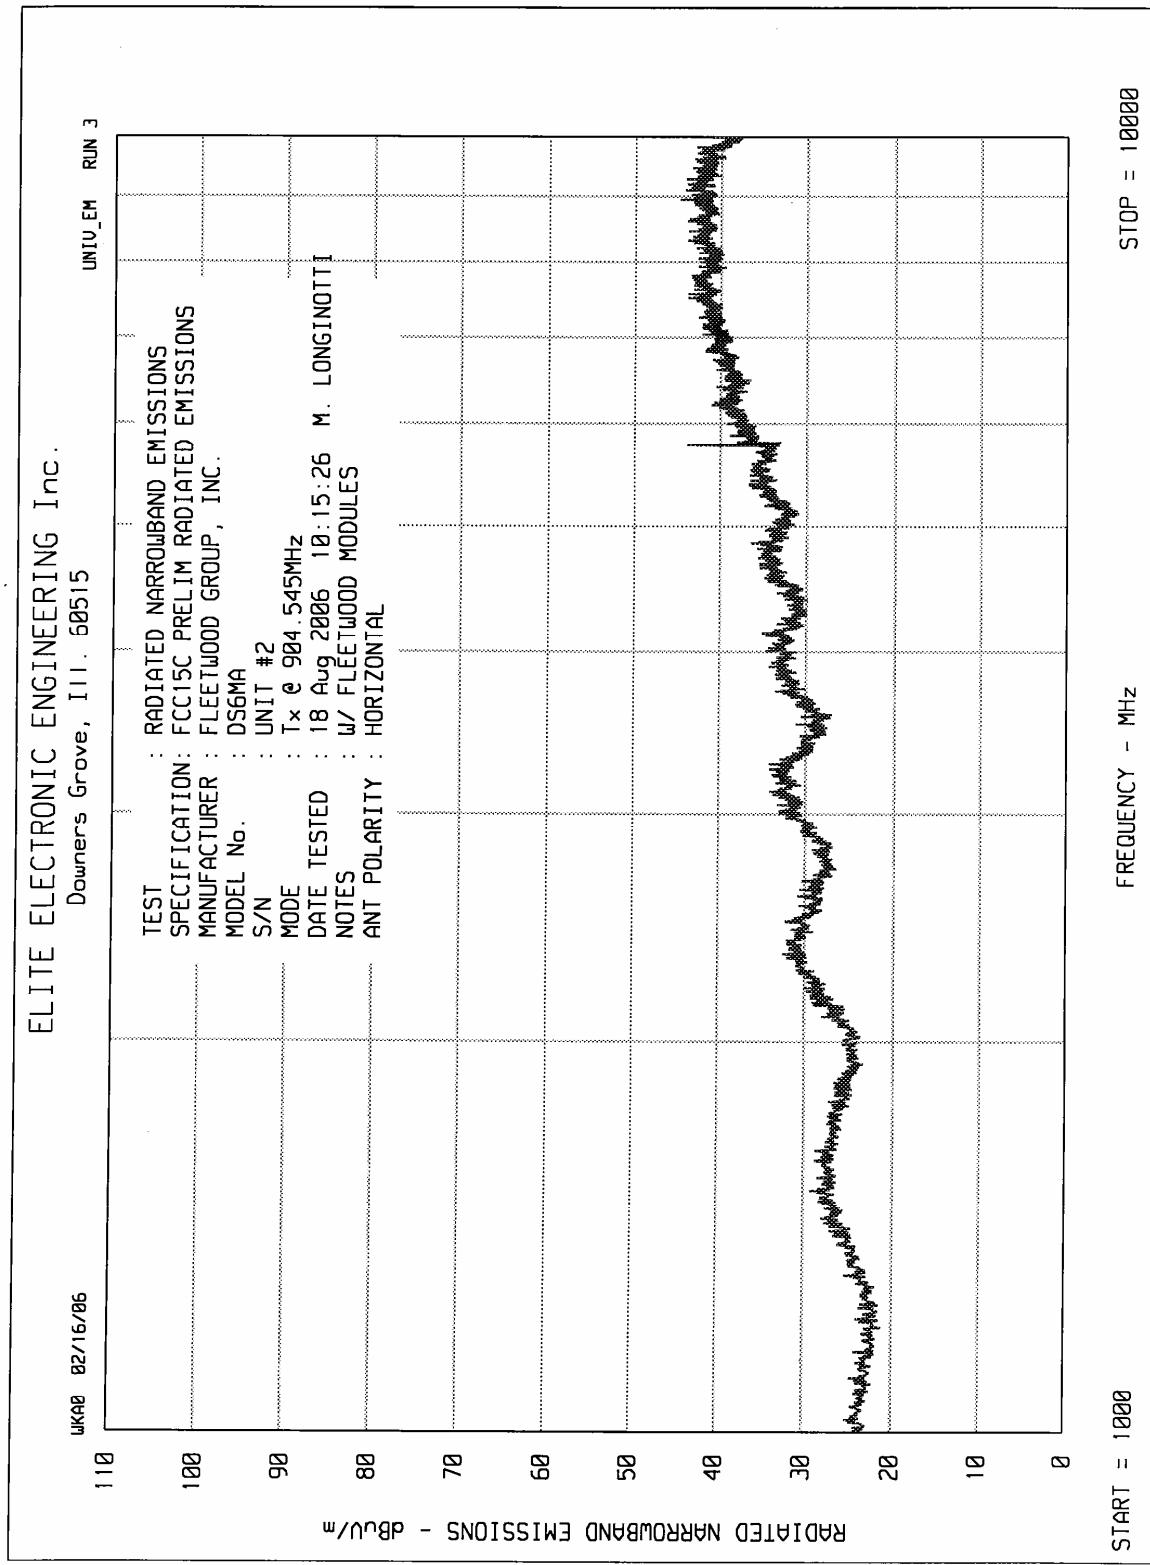



MANUFACTURER : Fleetwood Group, Inc.  
TEST ITEM : Transceiver  
MODEL NO. : DS6MA Digicall Spectrum System Student Transceiver  
SERIAL NO. : Unit #2  
TEST SPECIFICATION : FCC 15.249(a), Radiated Emissions  
MODE : Transmit @ 904.545MHz  
TEST DATE : August 17 and 18, 2006  
TEST DISTANCE : 3 meters


Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Preamp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
904.5	H	64.4		1.9	27.5	0.0	93.9	49292.2	50000.0
904.5	V	53.0		1.9	27.5	0.0	82.5	13265.5	50000.0
1809.1	H	29.0	Ambient	2.9	28.0	-33.8	26.1	20.3	500.0
1809.0	V	29.0	Ambient	2.9	28.0	-33.8	26.1	20.3	500.0
2713.6	H	29.4	Ambient	3.8	31.4	-33.4	31.1	35.8	500.0
2713.5	V	27.5	Ambient	3.8	31.4	-33.4	29.2	28.8	500.0
3618.2	H	26.6	Ambient	4.4	32.5	-33.6	29.9	31.1	500.0
3618.0	V	26.4	Ambient	4.4	32.5	-33.6	29.7	30.4	500.0
4522.7	H	27.4	Ambient	4.8	32.9	-32.2	32.8	43.8	500.0
4522.5	V	27.2	Ambient	4.8	32.9	-32.2	32.6	42.8	500.0
5427.3	H	26.1	Ambient	5.2	35.3	-31.9	34.7	54.5	500.0
5427.0	V	25.4	Ambient	5.2	35.3	-31.9	34.0	50.3	500.0
6331.8	H	29.2	Ambient	5.8	36.1	-31.6	39.6	95.4	500.0
6331.5	V	29.2	Ambient	5.8	36.1	-31.6	39.6	95.4	500.0
7236.4	H	28.5	Ambient	6.6	37.6	-31.4	41.3	115.8	500.0
7236.0	V	28.7	Ambient	6.6	37.6	-31.4	41.5	118.5	500.0
8140.9	H	28.3	Ambient	7.1	37.6	-31.7	41.3	116.5	500.0
8140.5	V	28.3	Ambient	7.1	37.6	-31.7	41.3	116.5	500.0
9045.5	H	28.7	Ambient	7.5	37.9	-31.8	42.3	130.7	500.0
9045.0	V	28.7	Ambient	7.5	37.9	-31.8	42.3	130.7	500.0


H – Horizontal

V = Vertical

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked By : MARK E. LONGINOTTI

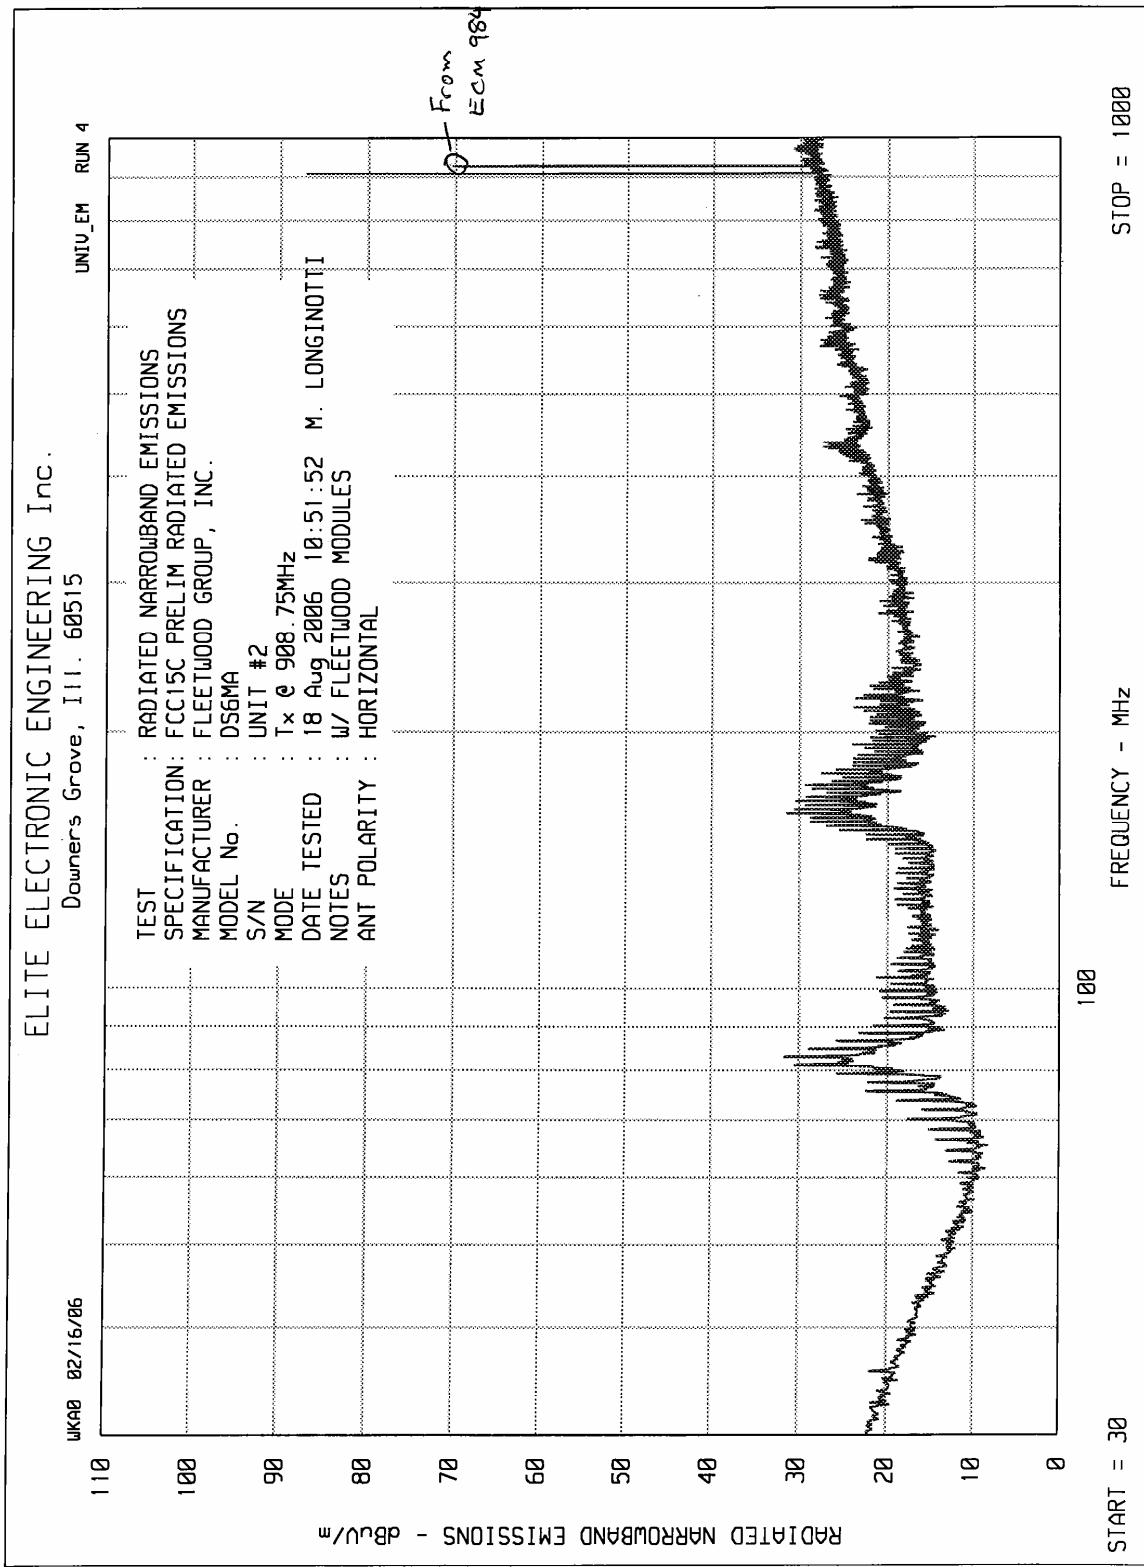

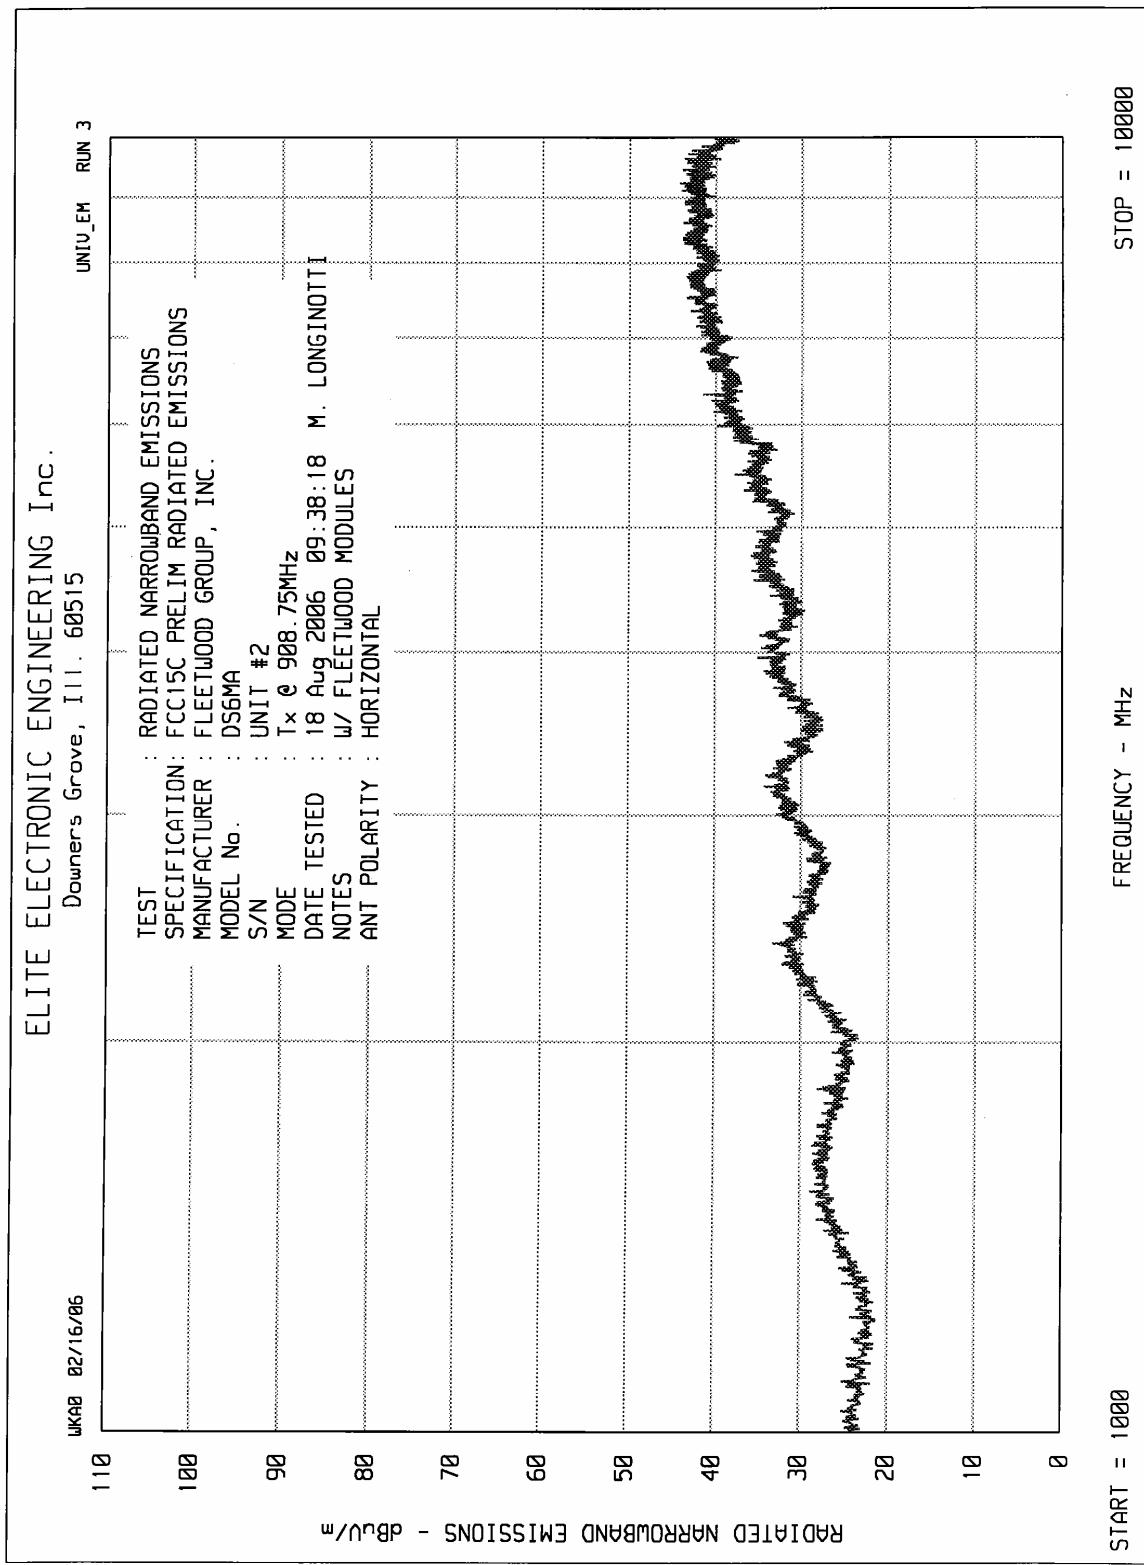



MANUFACTURER : Fleetwood Group, Inc.  
TEST ITEM : Transceiver  
MODEL NO. : DS6MA Digicall Spectrum System Student Transceiver  
SERIAL NO. : Unit #2  
TEST SPECIFICATION : FCC 15.249(a), Radiated Emissions  
MODE : Transmit @ 908.75MHz  
TEST DATE : August 17 and 18, 2006  
TEST DISTANCE : 3 meters

Frequency MHz	Antenna Polarity	Meter Reading dBuV	Ambient	Cable Loss dB	Antenna Factor dB	Preamp Gain dB	Total dBuV/m	Total uV/m	Limit uV/m
908.7	H	59.4		1.9	27.6	0.0	89.0	28052.5	50000.0
908.7	V	50.7		1.9	27.6	0.0	80.3	10303.2	50000.0
1817.5	H	28.8	Ambient	2.9	28.1	-33.8	26.0	19.9	500.0
1817.5	V	28.9	Ambient	2.9	28.1	-33.8	26.1	20.1	500.0
2726.2	H	28.1	Ambient	3.8	31.4	-33.4	29.8	31.1	500.0
2726.2	V	28.0	Ambient	3.8	31.4	-33.4	29.7	30.7	500.0
3635.0	H	26.7	Ambient	4.4	32.5	-33.6	30.0	31.8	500.0
3635.0	V	26.6	Ambient	4.4	32.5	-33.6	29.9	31.4	500.0
4543.7	H	28.0	Ambient	4.8	32.9	-32.2	33.5	47.4	500.0
4543.7	V	27.6	Ambient	4.8	32.9	-32.2	33.1	45.3	500.0
5452.4	H	26.4	Ambient	5.2	35.3	-31.9	35.1	56.9	500.0
5452.4	V	25.0	Ambient	5.2	35.3	-31.9	33.7	48.5	500.0
6361.2	H	28.7	Ambient	5.9	36.1	-31.6	39.1	90.6	500.0
6361.2	V	28.9	Ambient	5.9	36.1	-31.6	39.3	92.8	500.0
7269.9	H	28.7	Ambient	6.6	37.7	-31.4	41.6	119.7	500.0
7269.9	V	28.8	Ambient	6.6	37.7	-31.4	41.7	121.1	500.0
8178.7	H	28.6	Ambient	7.1	37.7	-31.7	41.7	121.1	500.0
8178.7	V	28.6	Ambient	7.1	37.7	-31.7	41.7	121.1	500.0
9087.4	H	29.3	Ambient	7.5	38.0	-31.8	43.0	140.6	500.0
9087.4	V	29.4	Ambient	7.5	38.0	-31.8	43.1	142.2	500.0

H – Horizontal

V = Vertical

Total = Meter Reading + Cable Loss + Antenna Factor + Preamp Gain

Checked By : MARK E. LONGINOTTI

